

- 10

REMOVE PAINT AND UNDERCOATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT. TORQUE TO 25.0 NM ±2.5 NM.
- 9

SUPPLIED WITH CHASSIS.
- 8

COVER SHARP EDGES WHERE WIRE CROSSES FRAME RAILS.
- 7

CUT CHASSIS SUPPLIED POSITIVE BATTERY CABLE 150 MM FROM BATTERY TERMINAL END,DISCARD TERMINAL END AND SEPARATE WIRES. ADD TERMINAL 8348-01-000 AND HEAT SHRINK 176567-04-000 TO RED CABLE (CHASSIS STARTER) AND COMBINE YELLOW (CHASSIS POWER DISTRIBUTION) AND BLACK/ORANGE (CHASSIS ALTERNATOR) WIRES TOGETHER AND ADD TERMINAL 8348-01-000 AND HEAT SHRINK 176567-02-000. COIL EXCESS CABLE ALONG FRAME RAIL JUST BEHIND RADIATOR AND TIE UP WITH TIE-WIRE 8343-04-000.
- 6

SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5

CLAMP 83610-01-000, SCREW G11-10-16U.
- 4

SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
3.

ALL DIMENSIONS ARE FROM DATUM UNLESS OTHERWISE SPECIFIED.
2.

SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1.

WIRE TIE 8343-04-000. FASTEN EVERY 600MM MINIMUM.

52B

GEN-5.5KW RVMP LP/GAS

52W

GEN-5.5KW RVMP CARB

52K

GENERATOR,CARB COMPLIANT

52L

GENERATOR,NON-CARB COMPLIANT

40N

GEN-4KW-ONAN GAS-MICROQUIET

12D

ELECTRICAL SYSTEM 30 AMP

073

COOLING UPGRADE PACKAGE

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

WINNEBAGO

COPYRIGHT 2024 WINNEBAGO INDUSTRIES, INC.

DSNR:

DFTR:

UNSPECIFIED TOLERANCES:

WHOLE DIM (X) ± 3

ONE-PLACE (X.X) ± 1.5

TWO-PLACE (X.XX) ± 0.50

ANGLE ± 1°

ALL DIMENSIONS ARE IN MILLIMETERS

MATERIAL:

WEIGHT: (LBS)

FIRST USED:

22 E29NP

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

DESCRIPTION:

WIRING INSTL-CHASSIS


SHEET: 1 OF 2


ITEM/PART NO: 000234825 / 34530801000

REV


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

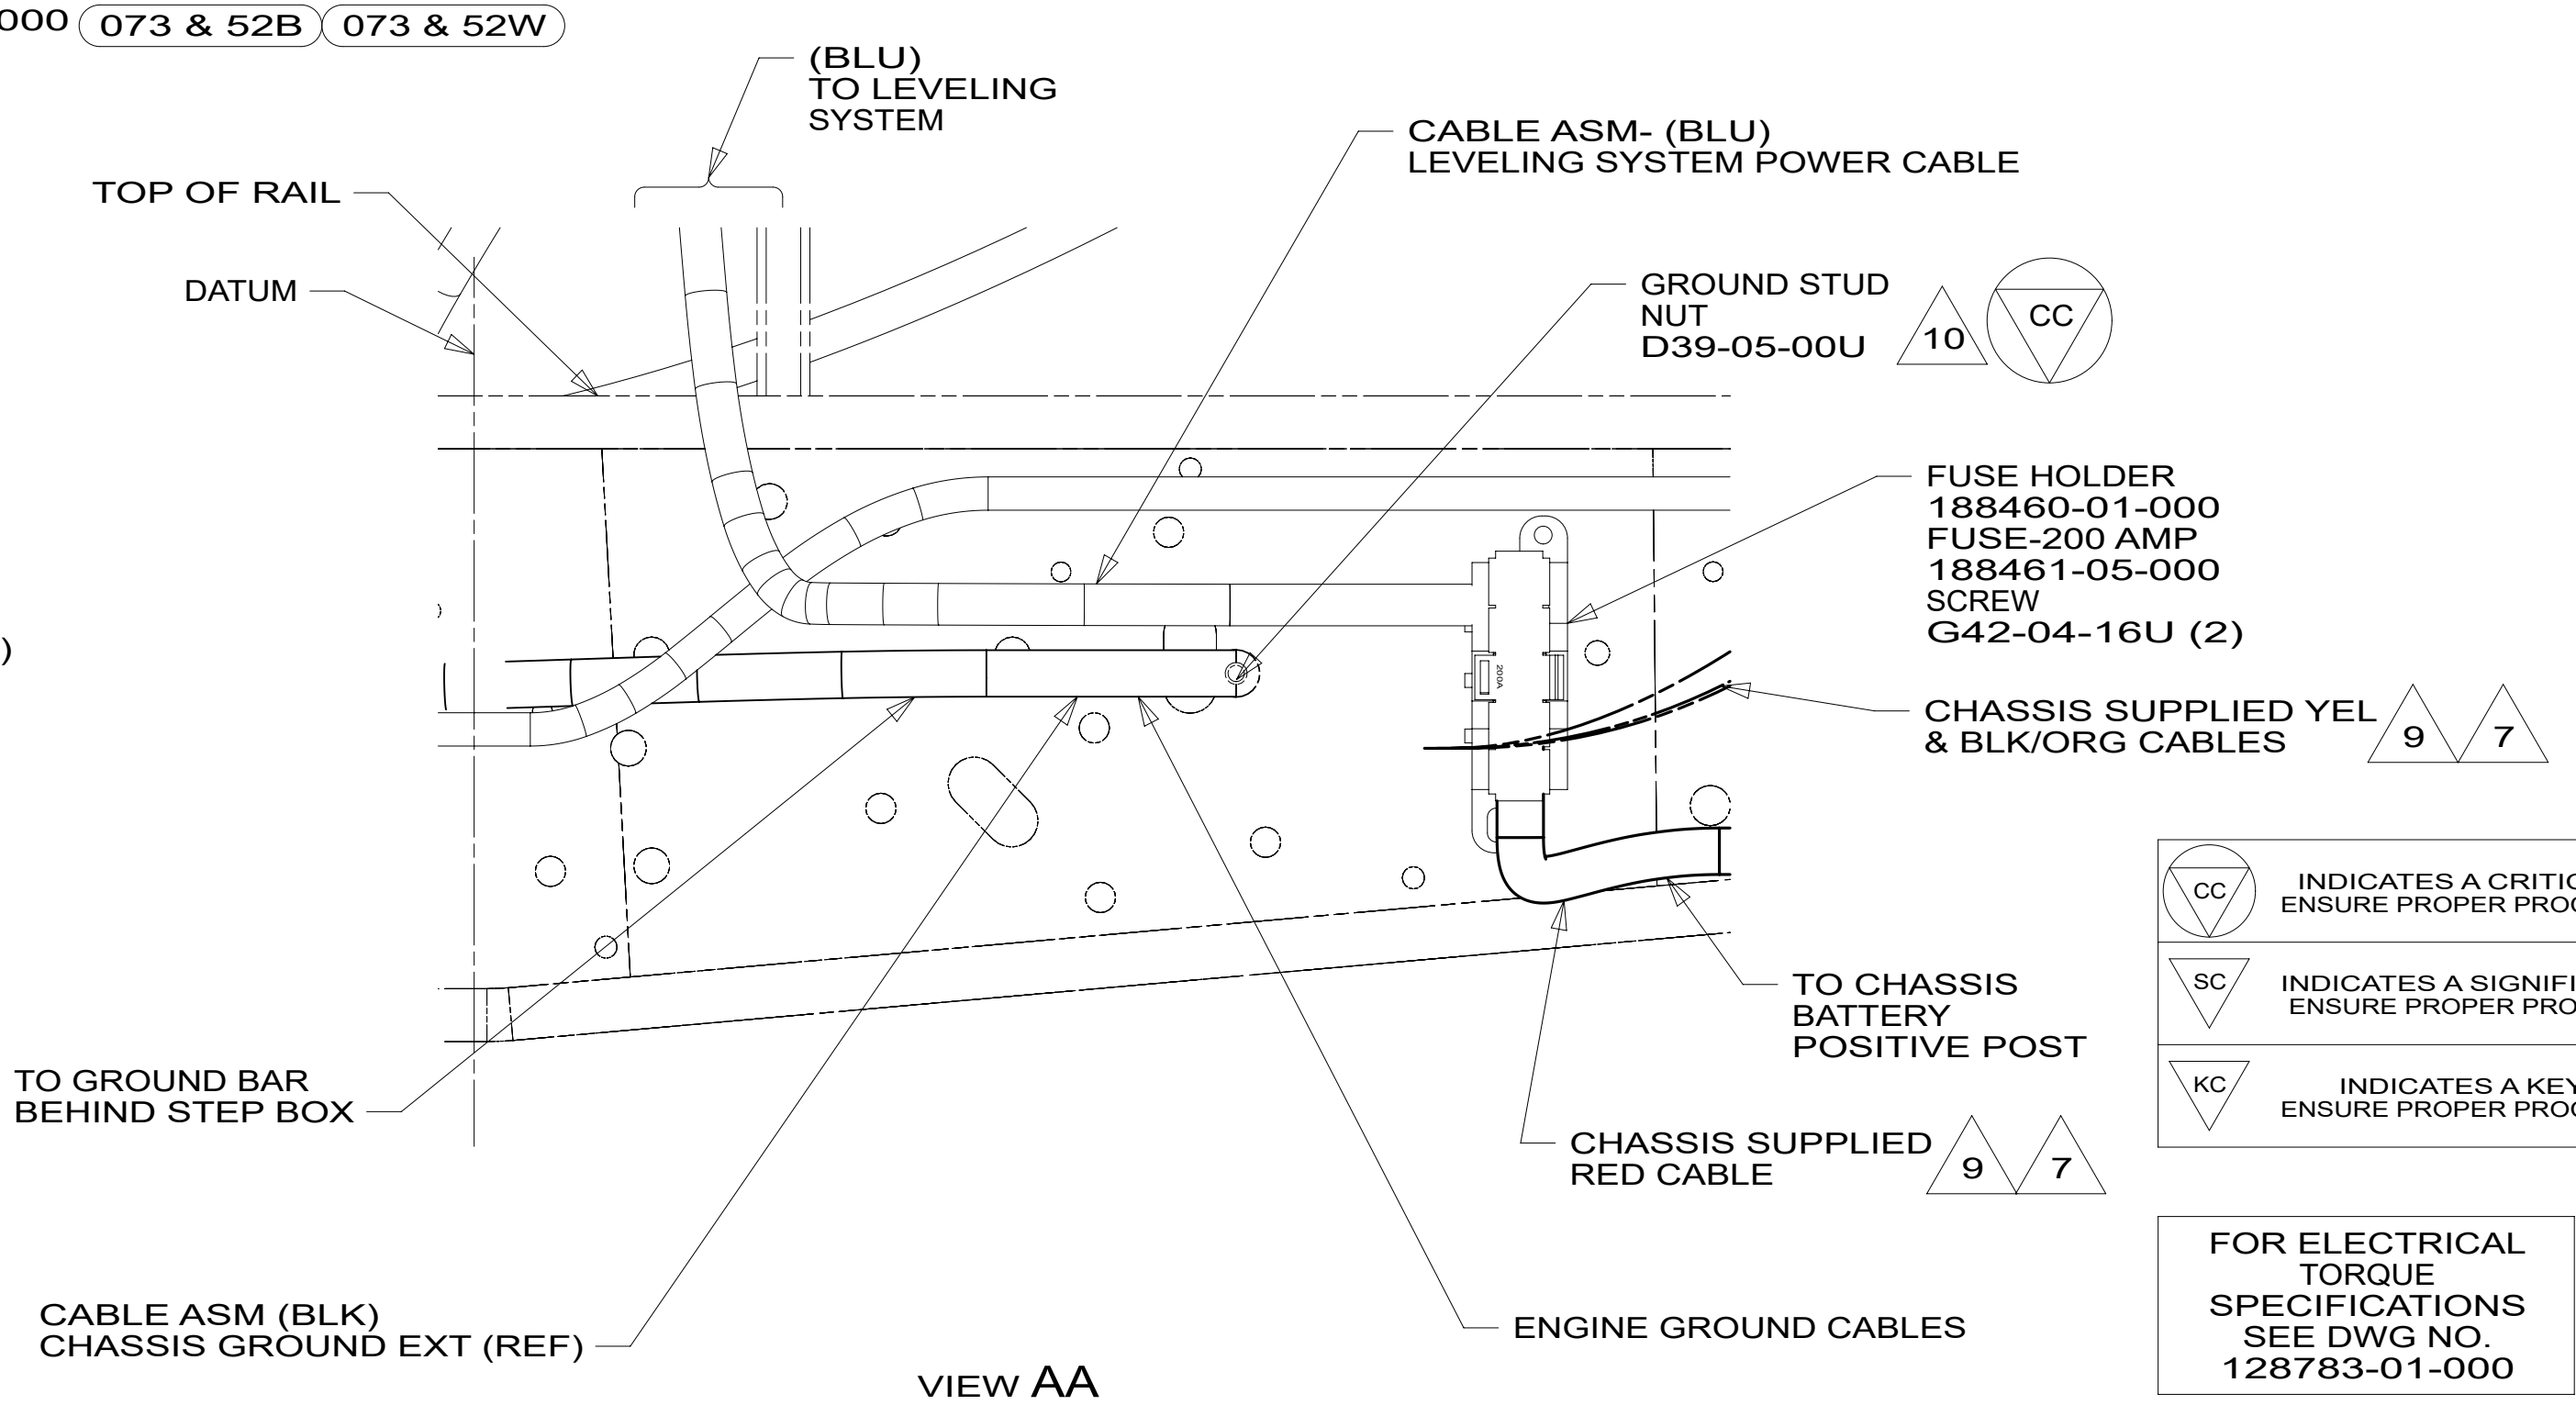

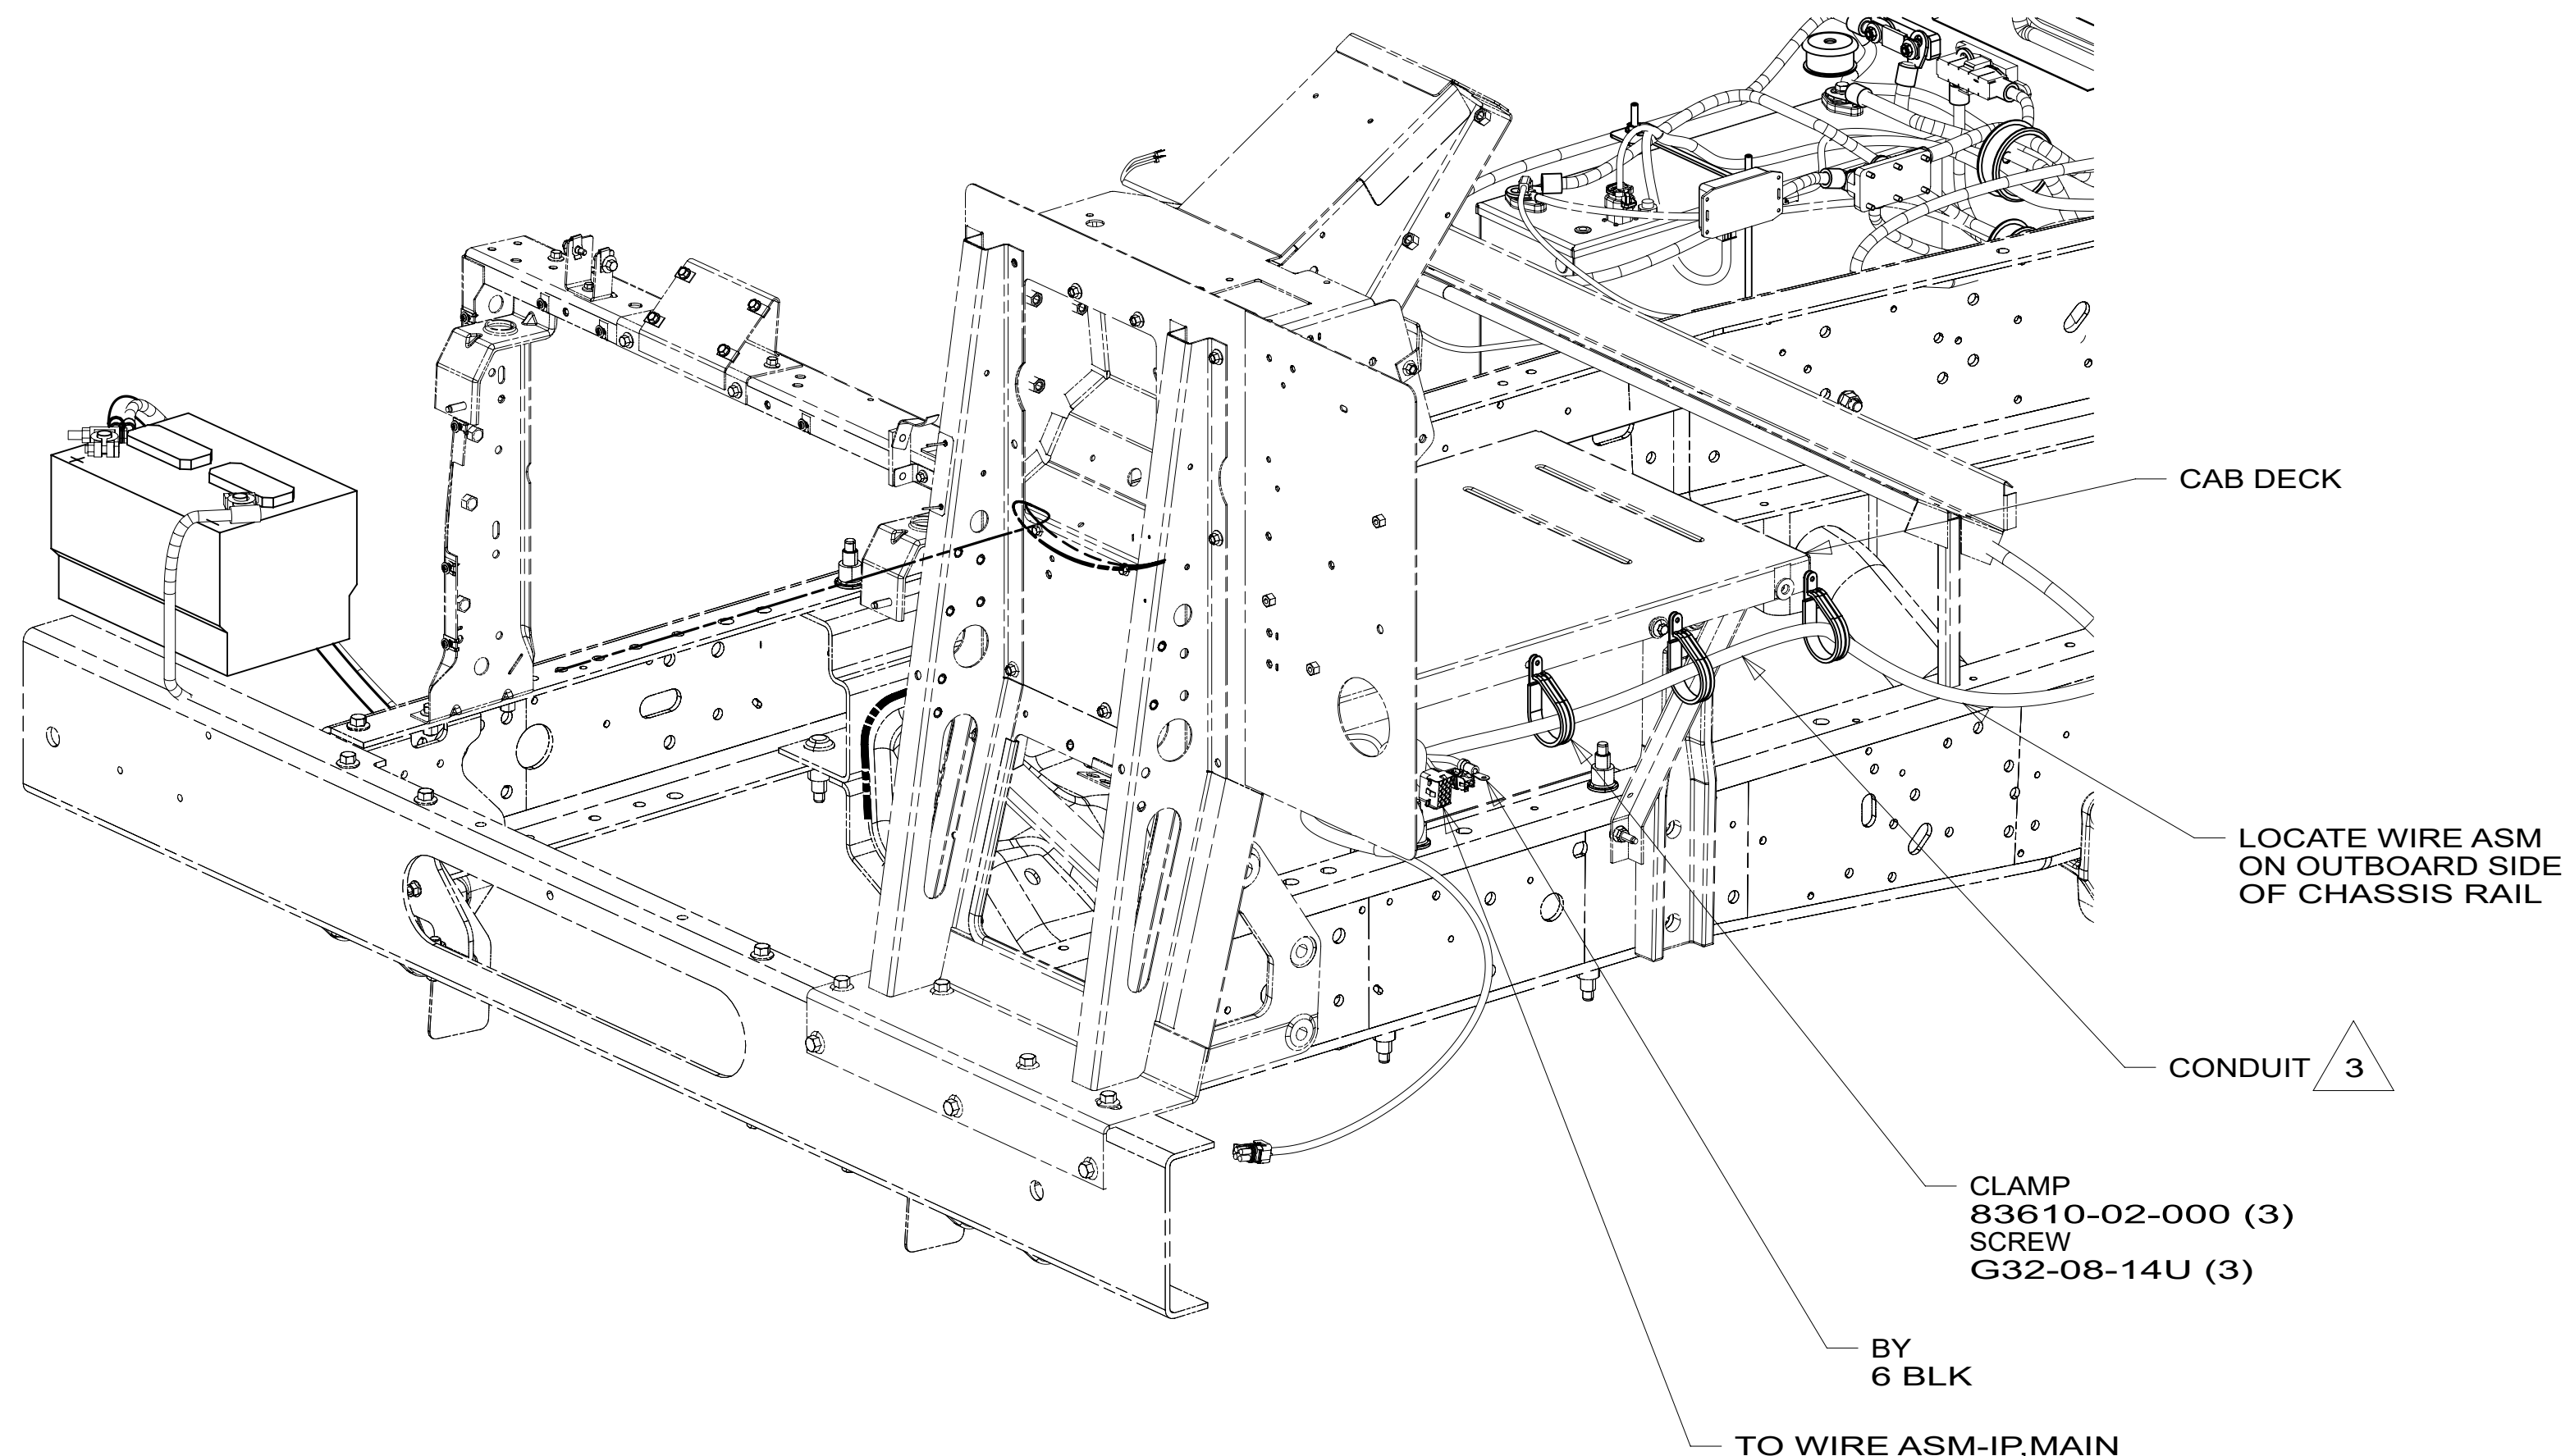

VIEW BA

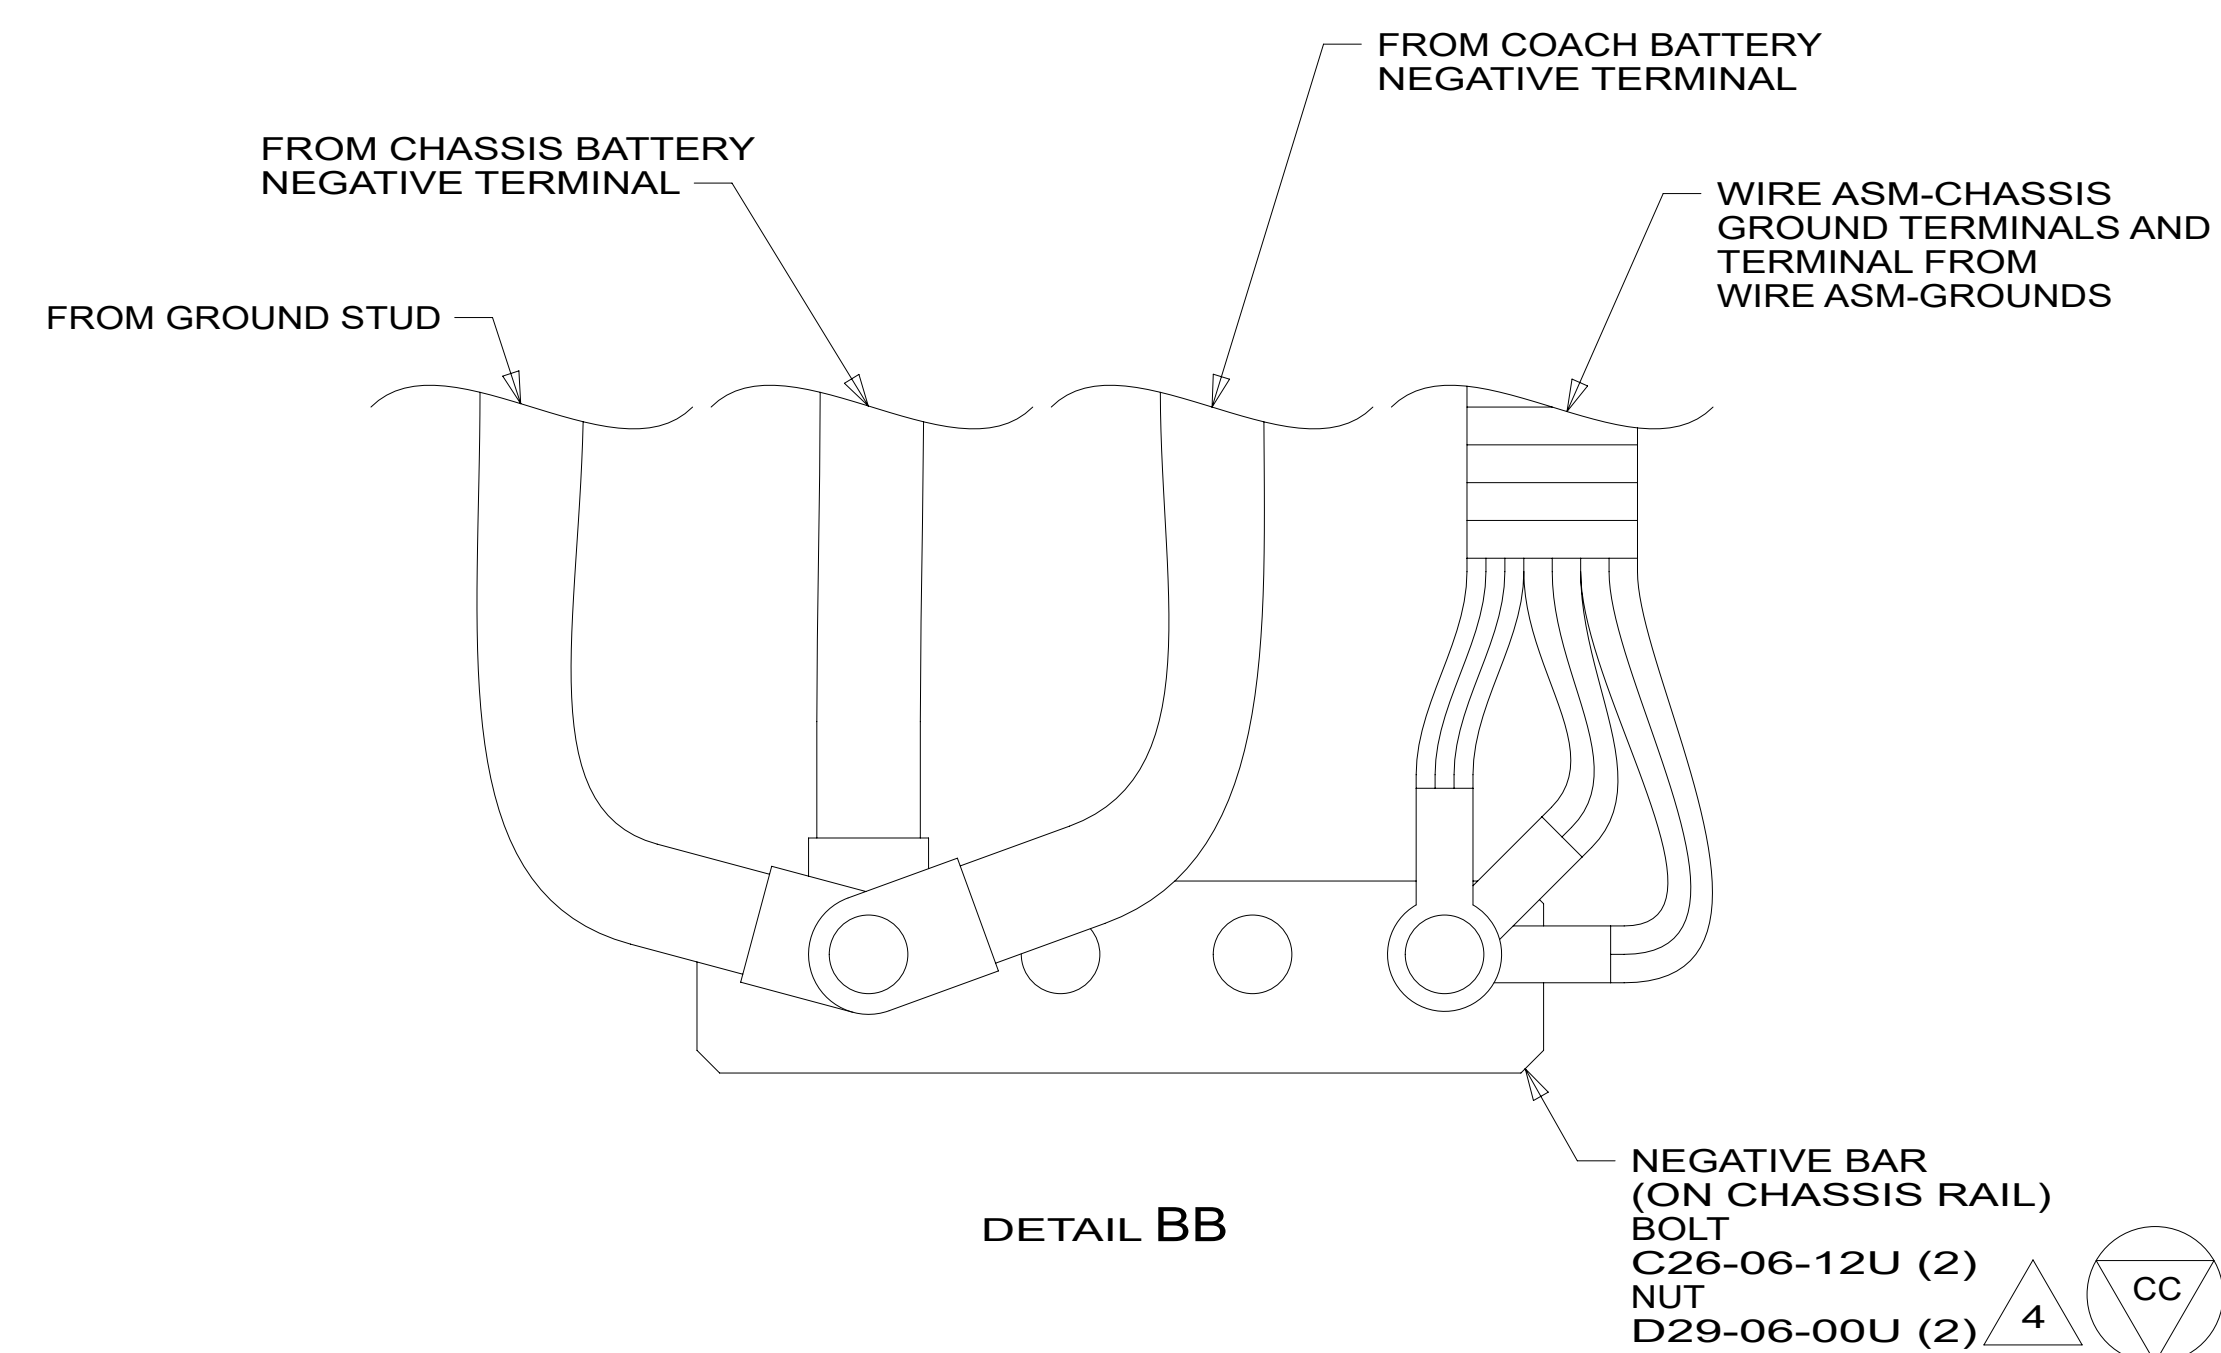

DETAIL BB

- 4 TORQUE TO 25.0 NM \pm 2.5 NM.
- 3 COVER WITH CONDUIT 41953-10-000 AND 41953-11-000 AS REQUIRED.

2. CONNECT CABLES TO COACH SIDE OF BATTERY DISCONNECT WHEN BATTERY DISCONNECT IS USED.
1. CUT OFF EXCESS END OF WIRE TIE.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

DESCRIPTION:		
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
2 OF 2	000234825 / 34530801000	