



D

D

C

C

B

B

A

A

CABLE ASM-CHASSIS GND EXT (BLK)	133566-12-013
CABLE ASM-CHASSIS BATTERY DISCONNECT SUPPLY (RED)	141415-32-038
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)	141416-52-042
CABLE ASM-COACH BATTERY GND (BLK)	000249257_00800 / 348934-01-008
CABLE ASM-CHASSIS BATTERY DISCONNECT RETURN (PUR)	141415-12-034
CABLE ASM-GENERATOR (GRN)	141415-42-107
CABLE ASM-GENERATOR GND (BLK)	133566-12-008
LEVELING SYSTEM POWER CABLE (BLU)	141415-29-026
LEVELING SYSTEM GND CABLE (BLK)	133566-12-008
CABLE ASM-STARTER (RED)	141416-32-011
CABLE ASM-COACH BATTERY FUSE	141416-52-006
CABLE ASM-CHASSIS BATTERY FUSE	141415-32-006
CABLE ASM (ORG) FROM COACH BATTERY TO INVERTER FUSE	000284735_00400 / 357068-01-004
CABLE ASM (ORG) FROM INVERTER FUSE TO INVERTER BATT DISCONNECT	000284735_00200 / 357068-01-020
CABLE ASM (ORG) FROM BATTERY DISCONNECT TO POSITIVE POST ON INVERTER	000284735_00900 / 357068-01-009
CABLE ASM (BLK) FROM COACH BATTERY TO INVERTER NEGATIVE TERMINAL	000284714_02200 / 357066-01-022
CABLE ASM-TEMPERATURE	
CABLE ASM (YEL) JUMPER BETWEEN POSITIVE POSTS ON COACH BATTERY	000284707_00200 / 357060-01-002 (2)
CABLE ASM (BLK) JUMPER BETWEEN NEGATIVE POSTS ON COACH BATTERY	000284631_00200 / 357056-01-002 (2)
CABLE ASM-INVERTER GROUND (GRN)	136145-01-020
CABLE ASM (YEL) JUMPER BETWEEN POSITIVE POSTS ON COACH BATTERY	000284707_00400 / 357060-01-004
CABLE ASM (BLK) JUMPER BETWEEN NEGATIVE POSTS ON COACH BATTERY	000284631_00400 / 357056-01-004

52B

52W

60M

60M

52B GEN-5.5KW RVMP LP/GAS

52W GEN-5.5KW RVMP CARE

60M HYDRAULIC LEVEL JACKS-AUTO

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1

265



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS			
DFT:					
UNSPECIFIED TOLERANCES:		MATERIAL:			
WHOLE DIM (X)	± 3				
ONE-PLACE (X.X)	± 1.5				
TWO-PLACE (X.XX)	± 0.50				
ANGLE	± 1°				
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)		FIRST USED:	
				22 F36Z	
DESCRIPTION:					
BATTERY INSTL					
SHEET:		ITEM/PART NO:			REV
1 OF 4		000244135 / 34740601000			

	INDICATES A CRITICAL CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
	INDICATES A SIGNIFICANT CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
	INDICATES A KEY CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000

A triangle with the number 1 inside it.

CABLE ASM-TEMPERATURE IS PART OF WIRE ASM-CHASSIS.

NOTES:



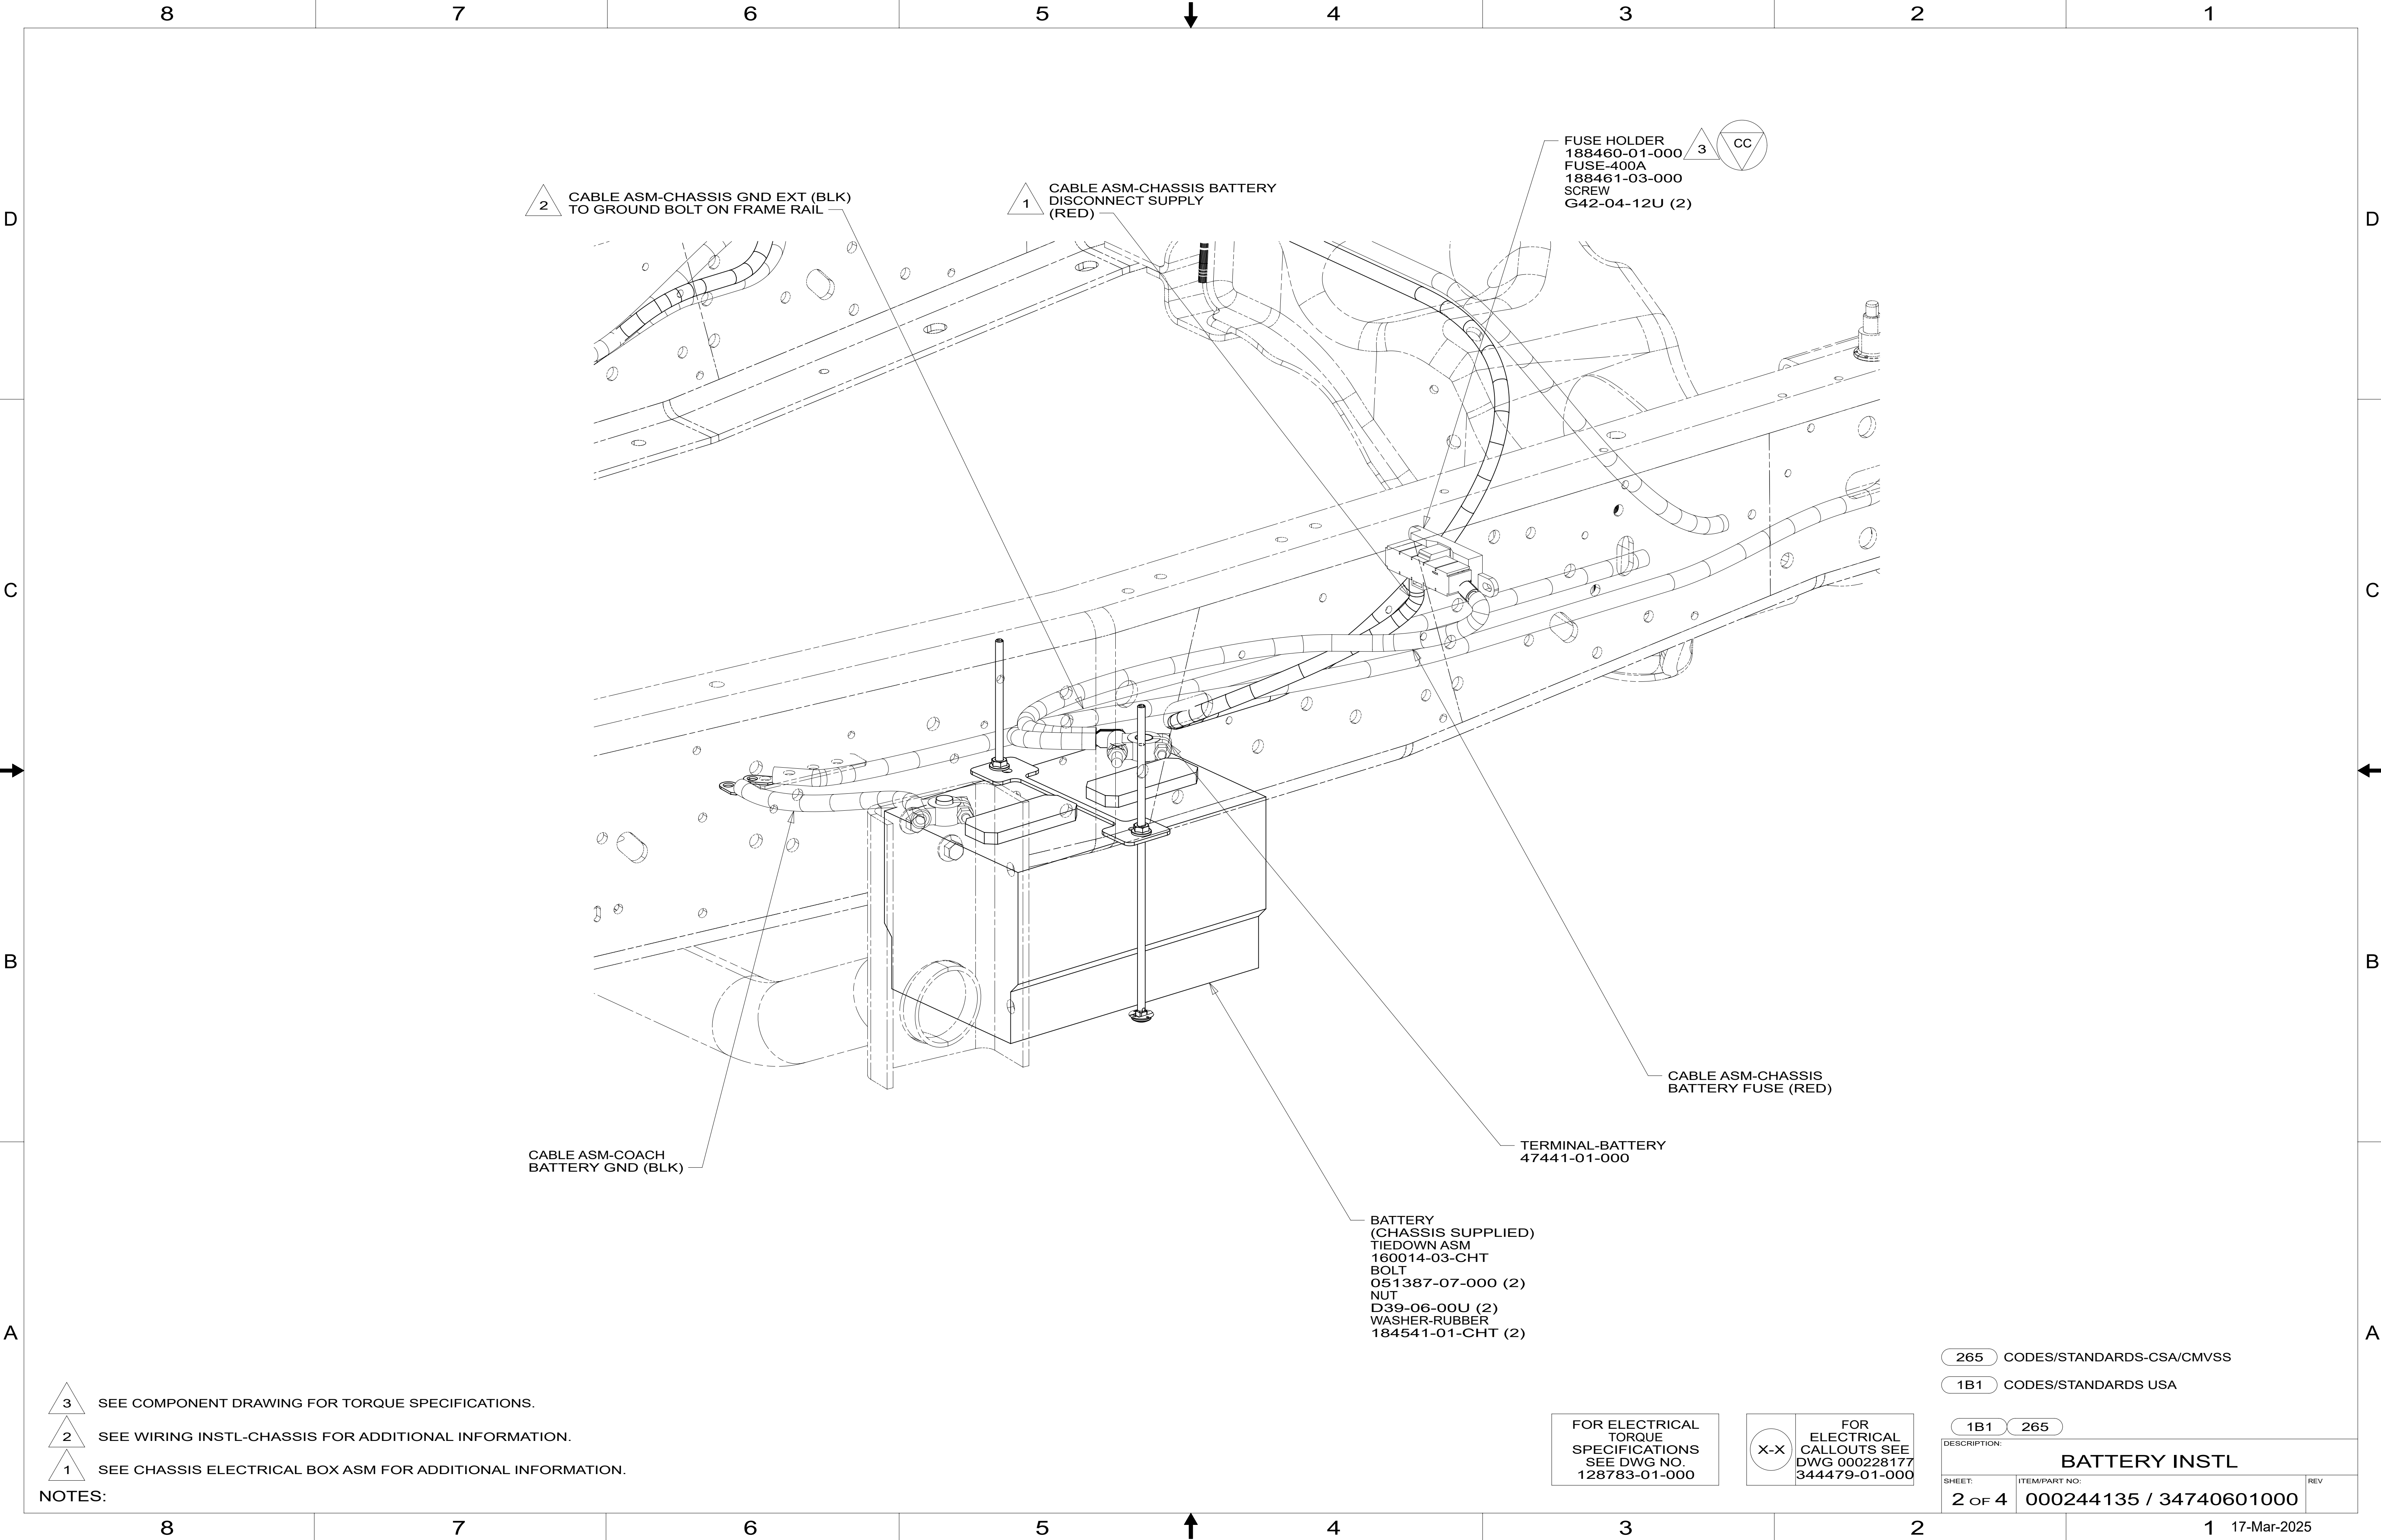

- 3 SEE COMPONENT DRAWING FOR TORQUE SPECIFICATIONS.
- 2 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 1 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:		
BATTERY INSTL		
SHEET:	ITEM/PART NO:	REV
2 OF 4	000244135 / 34740601000	

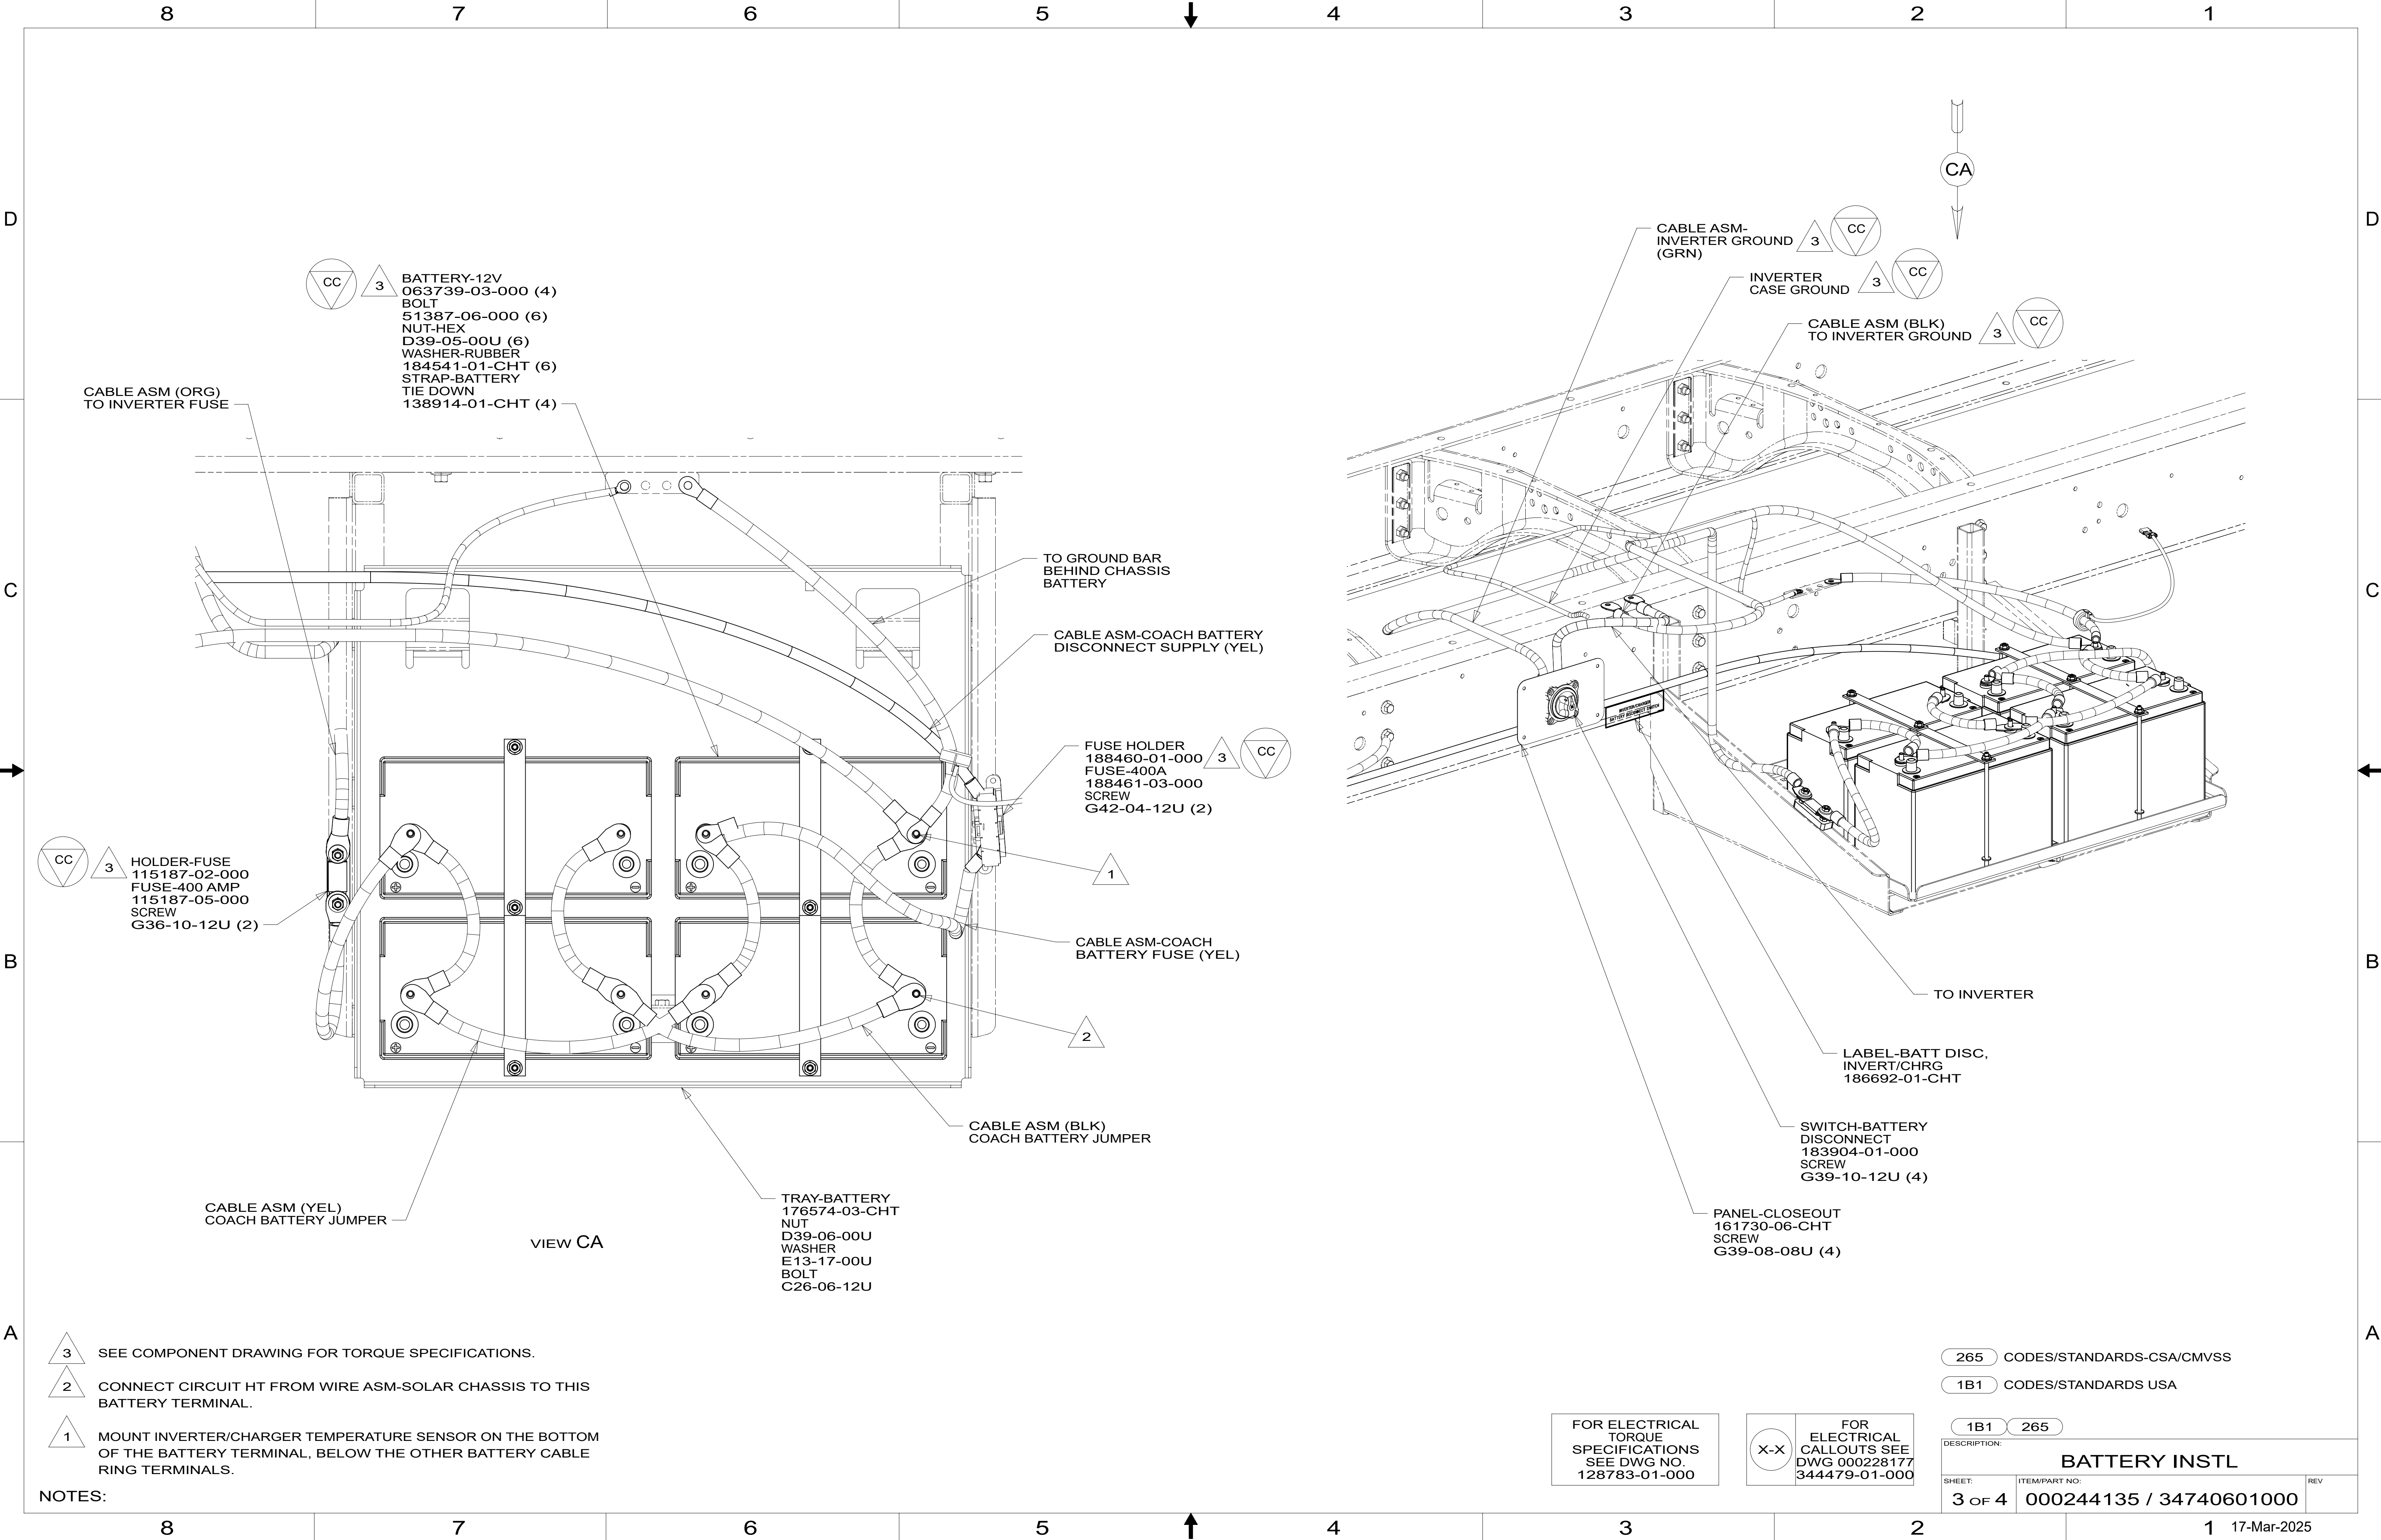

3 BATTERY-12V
063739-03-000 (4)
BOLT
51387-06-000 (6)
NUT-HEX
D39-05-00U (6)
WASHER-RUBBER
184541-01-CHT (6)
STRAP-BATTERY
TIE DOWN
138914-01-CHT (4)

CABLE ASM (ORG)
TO INVERTER FUSE

TO GROUND BAR
BEHIND CHASSIS
BATTERY

CABLE ASM-COACH BATTERY
DISCONNECT SUPPLY (YEL)

FUSE HOLDER
188460-01-000 3
FUSE-400A
188461-03-000
SCREW
G42-04-12U (2)

CABLE ASM-COACH
BATTERY FUSE (YEL)

CABLE ASM (BLK)
COACH BATTERY JUMPER

TRAY-BATTERY
176574-03-CHT
NUT
D39-06-00U
WASHER
E13-17-00U
BOLT
C26-06-12U

VIEW CA

CABLE ASM (YEL)
COACH BATTERY JUMPER

CABLE ASM-
INVERTER GROUND
(GRN)

INVERTER
CASE GROUND

CABLE ASM (BLK)
TO INVERTER GROUND

TO INVERTER

LABEL-BATT DISC,
INVERT/CHRG
186692-01-CHT

SWITCH-BATTERY
DISCONNECT
183904-01-000
SCREW
G39-10-12U (4)

PANEL-CLOSEOUT
161730-06-CHT
SCREW
G39-08-08U (4)

- 3 SEE COMPONENT DRAWING FOR TORQUE SPECIFICATIONS.
- 2 CONNECT CIRCUIT HT FROM WIRE ASM-SOLAR CHASSIS TO THIS BATTERY TERMINAL.
- 1 MOUNT INVERTER/CHARGER TEMPERATURE SENSOR ON THE BOTTOM OF THE BATTERY TERMINAL, BELOW THE OTHER BATTERY CABLE RING TERMINALS.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:

BATTERY INSTL

SHEET:


ITEM/PART NO:

REV

3 OF 4

000244135 / 34740601000

17-Mar-2025

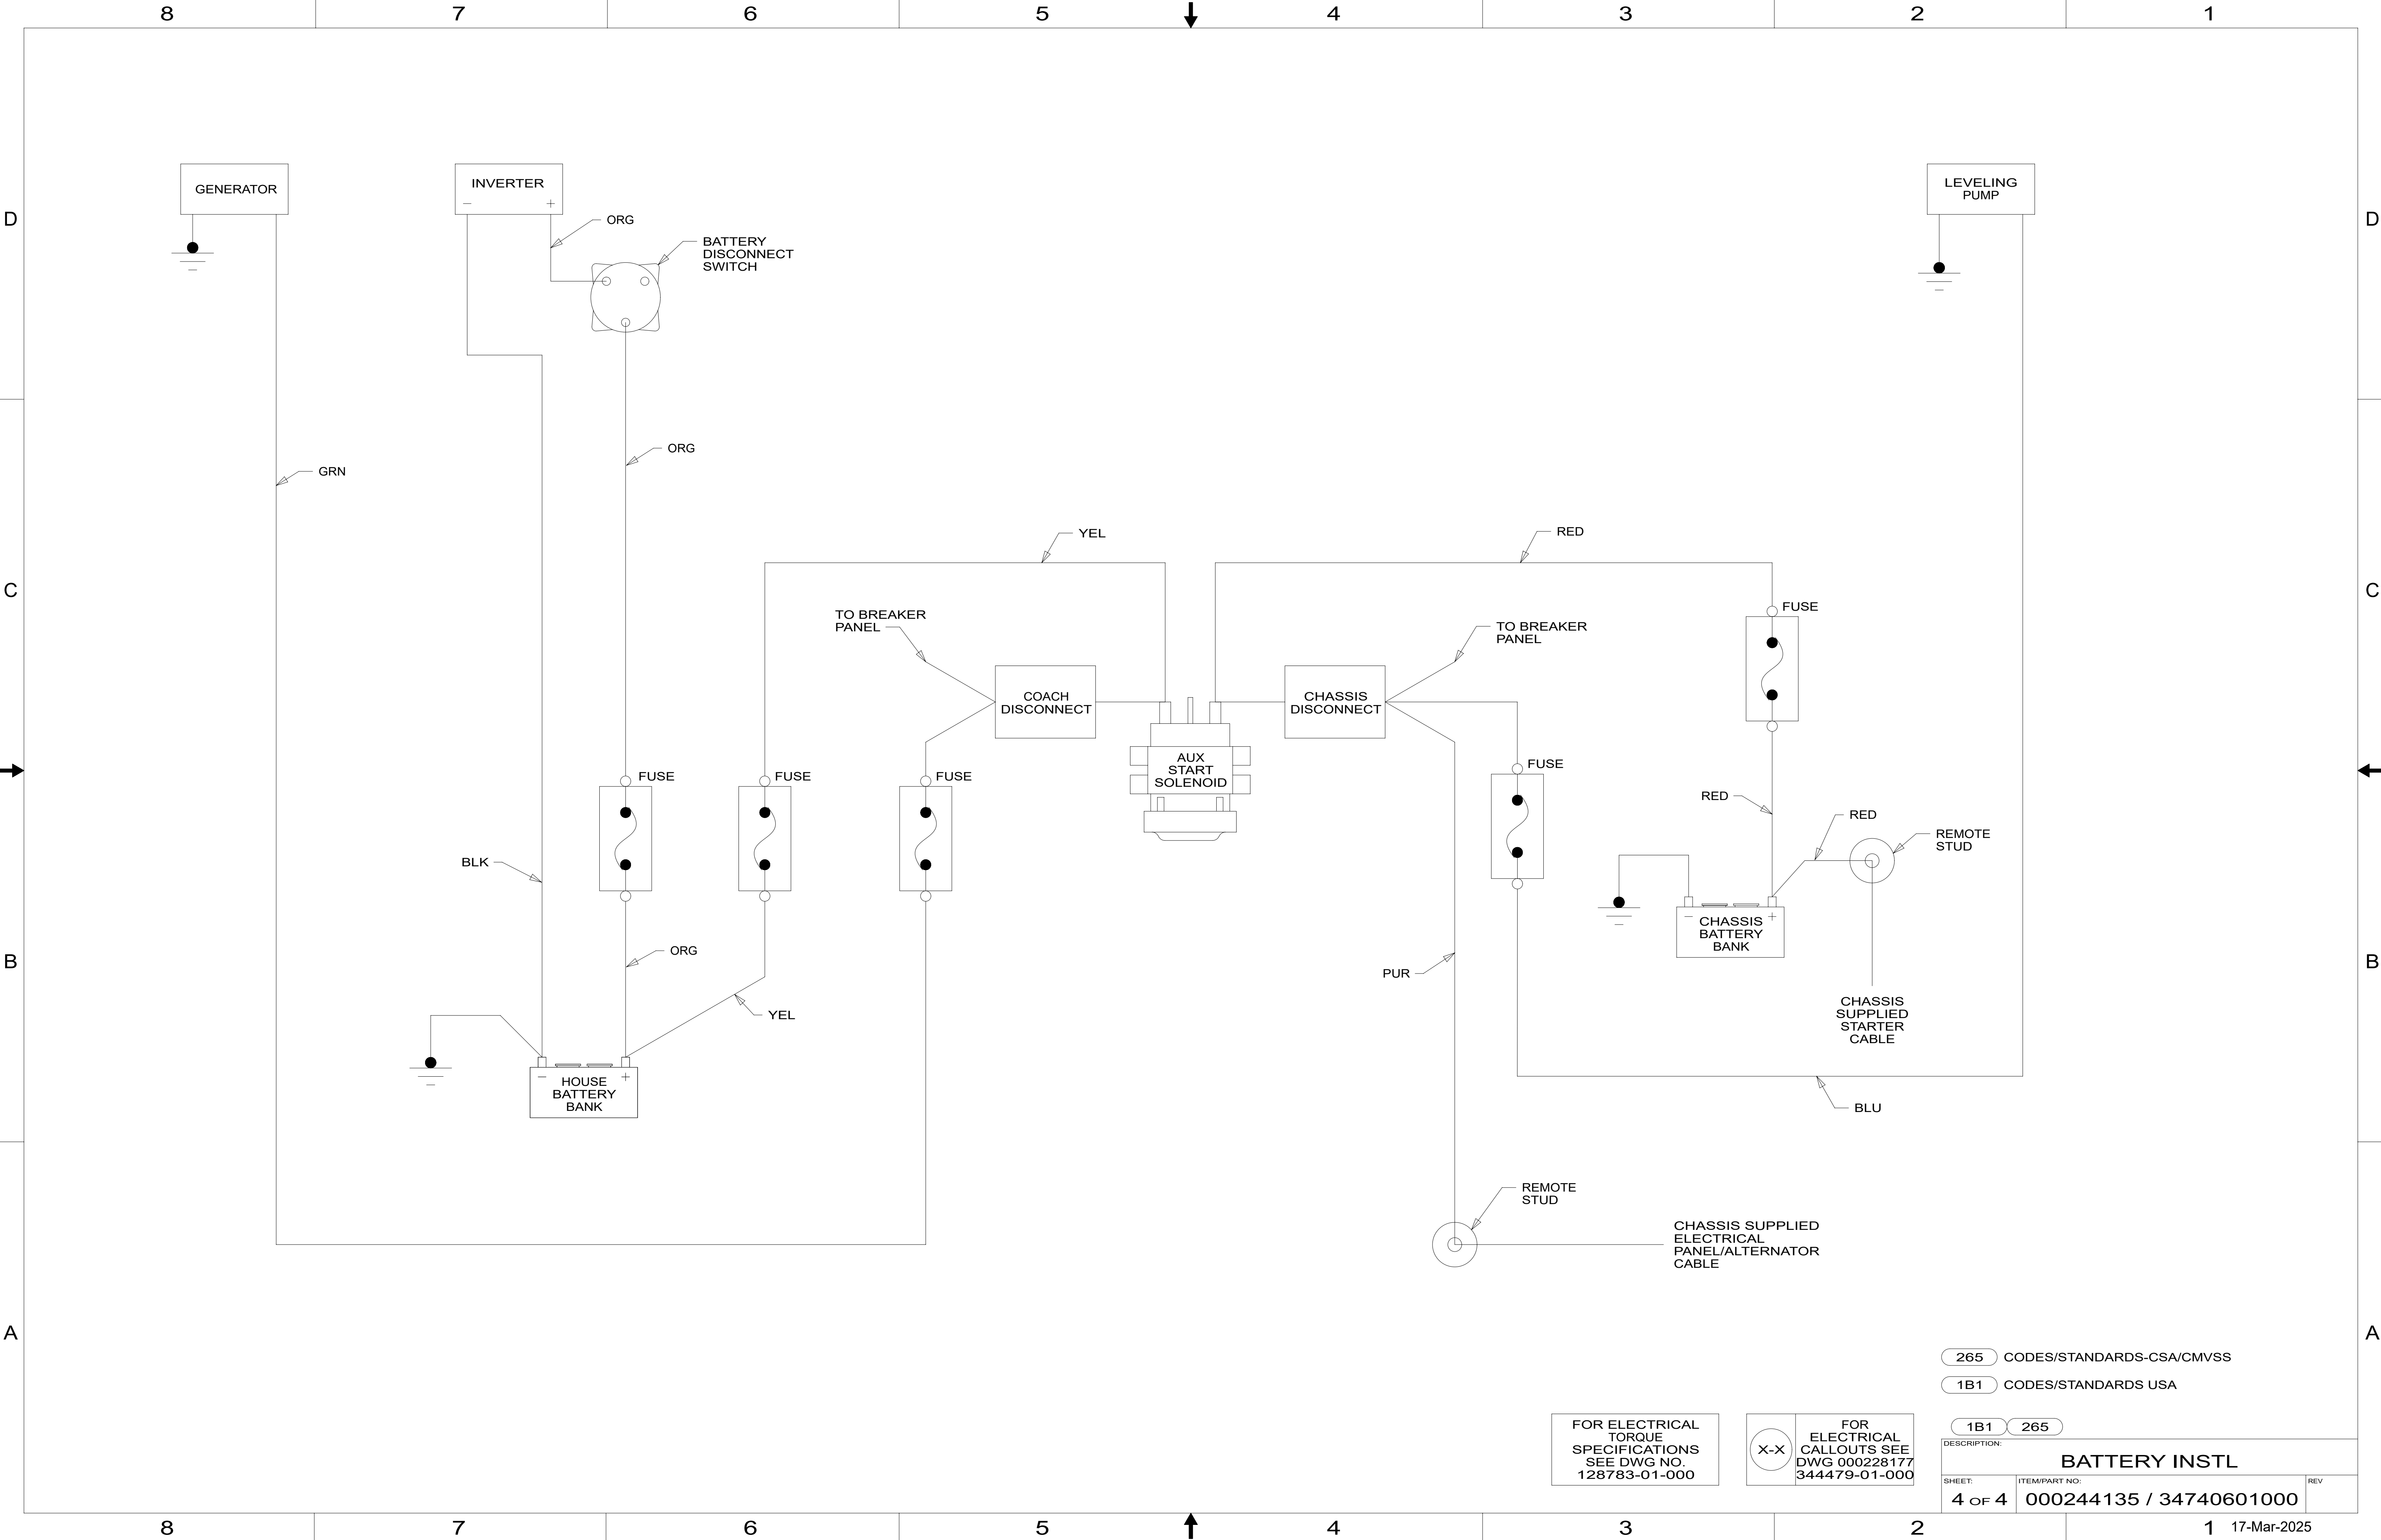

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000

DESCRIPTION:		
BATTERY INSTL		
SHEET:	ITEM/PART NO:	REV
4 OF 4	000244135 / 34740601000	