


DETAIL AA

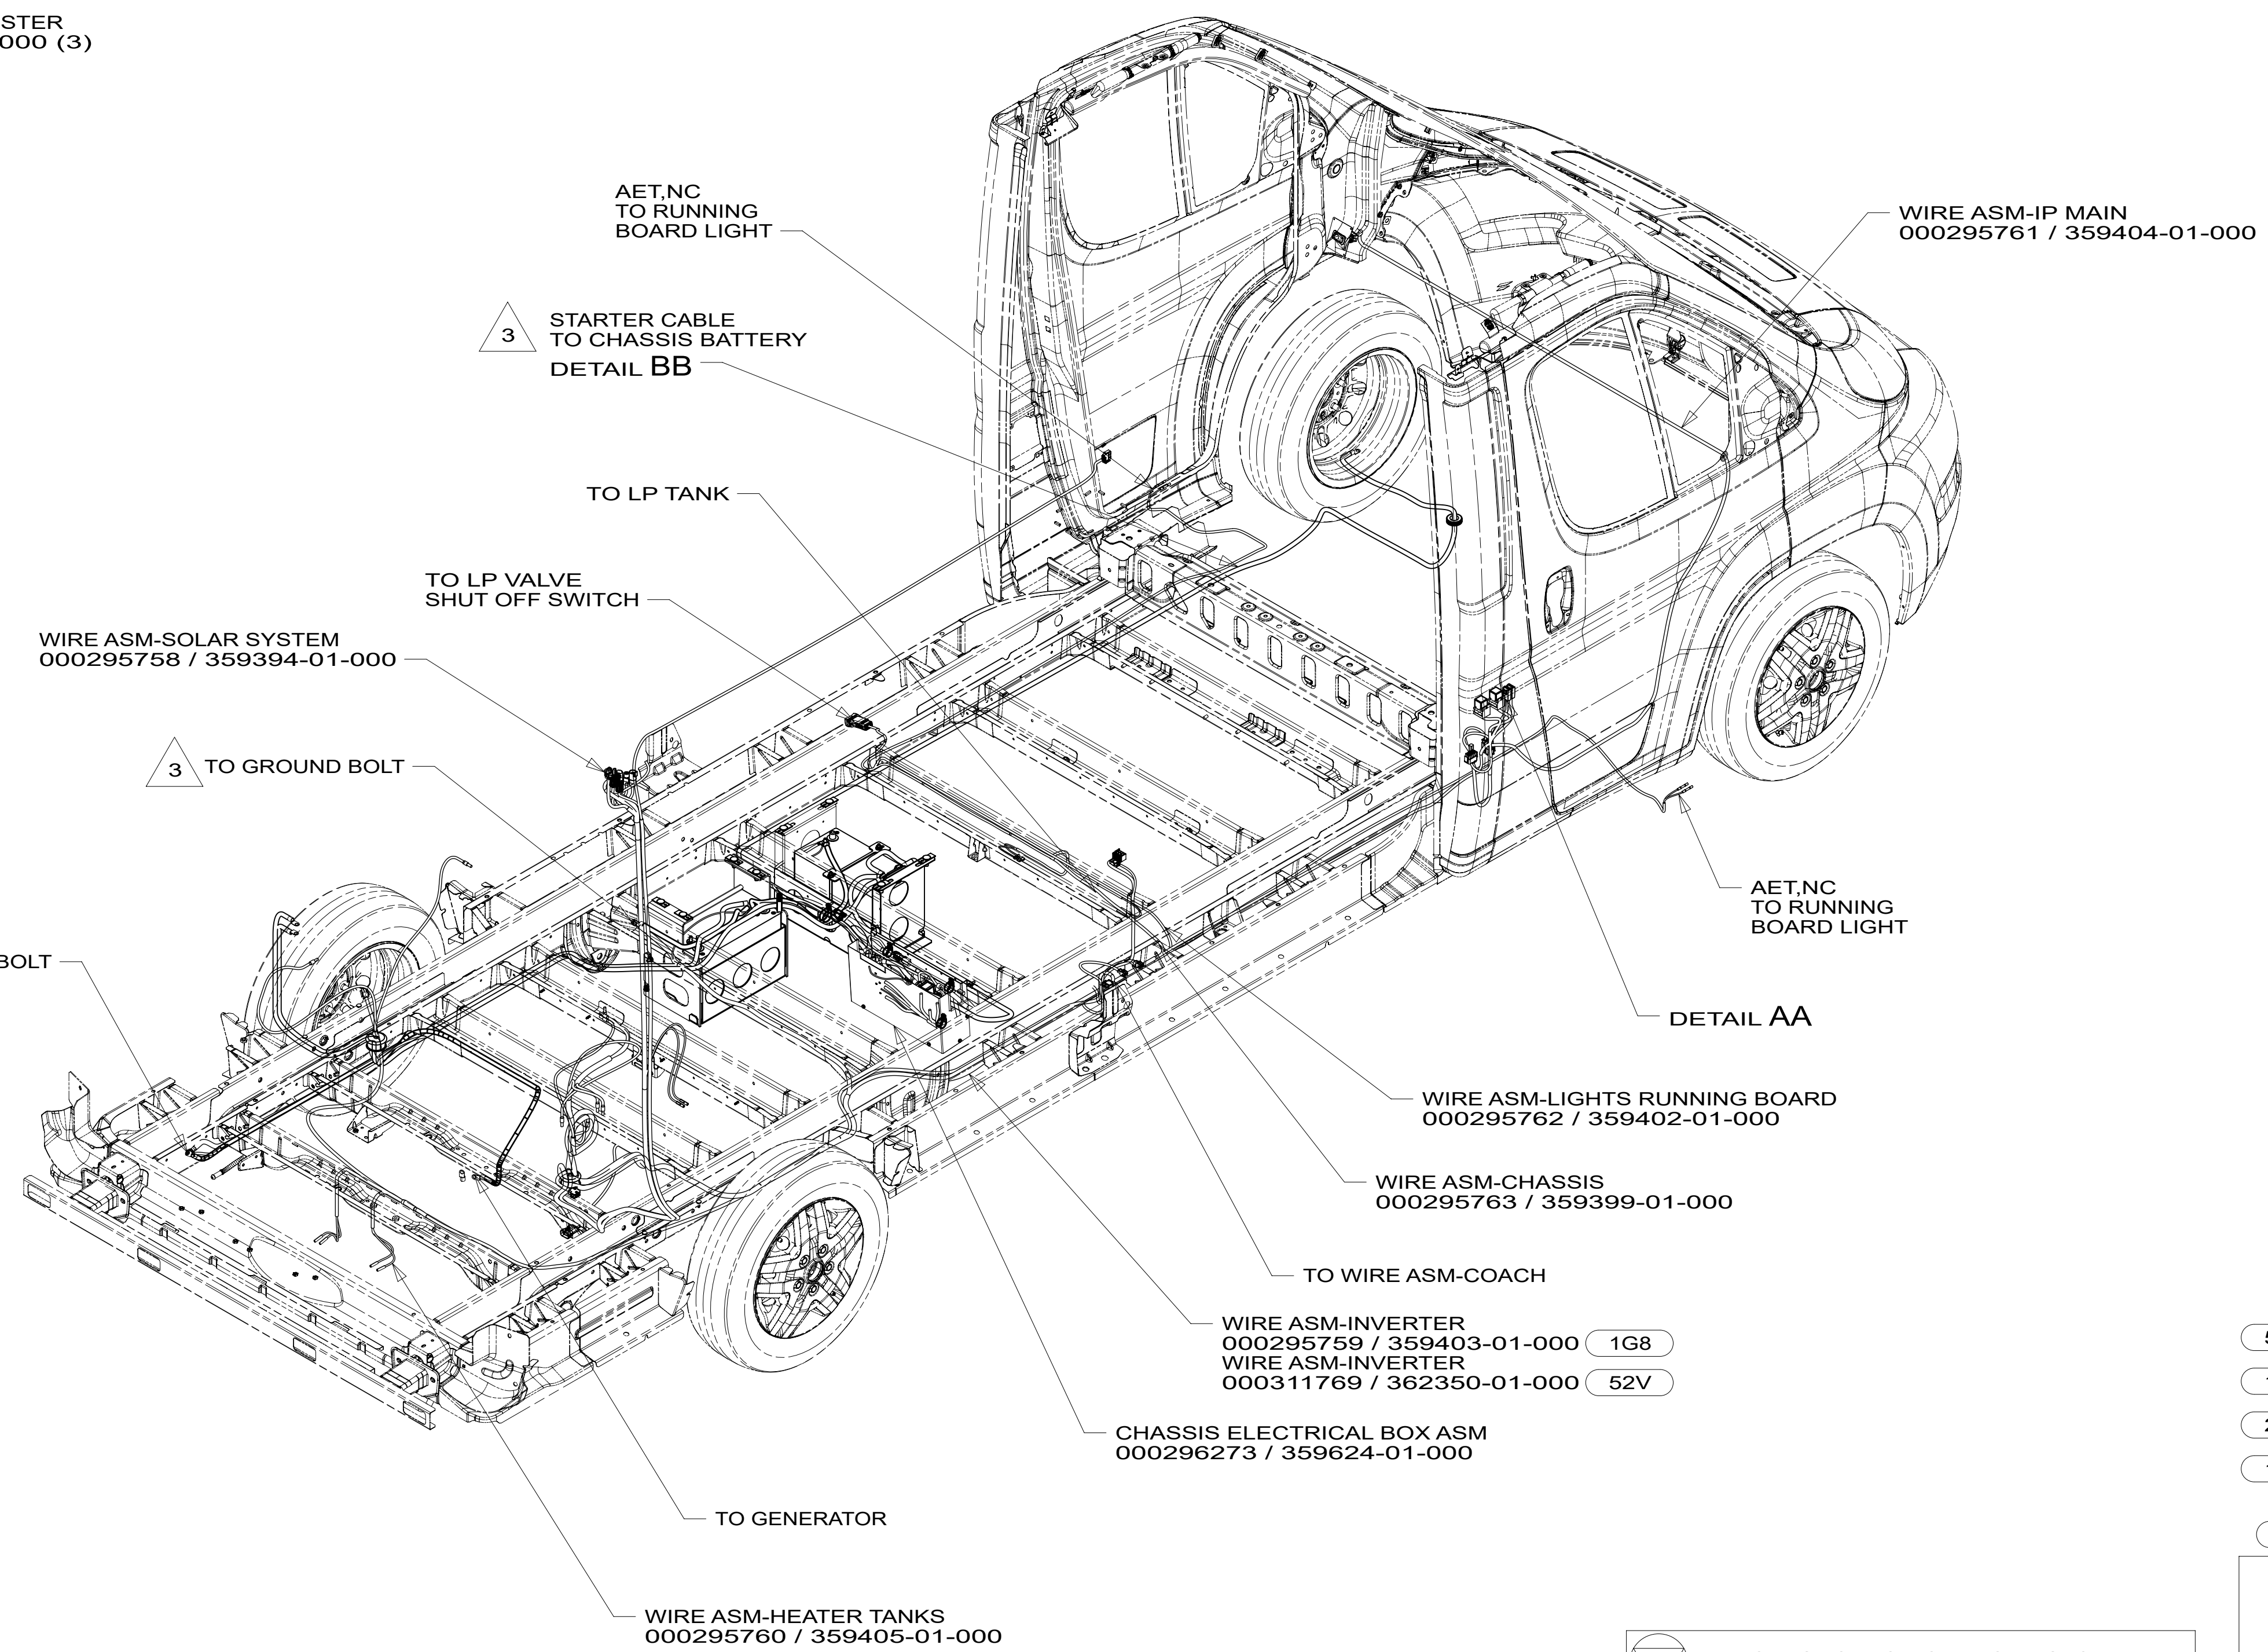

4 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.

3 SEE SHEET 3 FOR ADDITIONAL INFORMATION.

2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

CC	INDICATES A CRITICAL CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
SC	INDICATES A SIGNIFICANT CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
KC	INDICATES A KEY CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

- 52V GEN-2.8KW LP/GAS CARB
- 1G8 GEN-2.8KW ONAN GAS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


WINNEBAGO
 COPYRIGHT 2024 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 25 259K
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 1 OF 3	ITEM/PART NO: 000295721 / 35934201000



8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

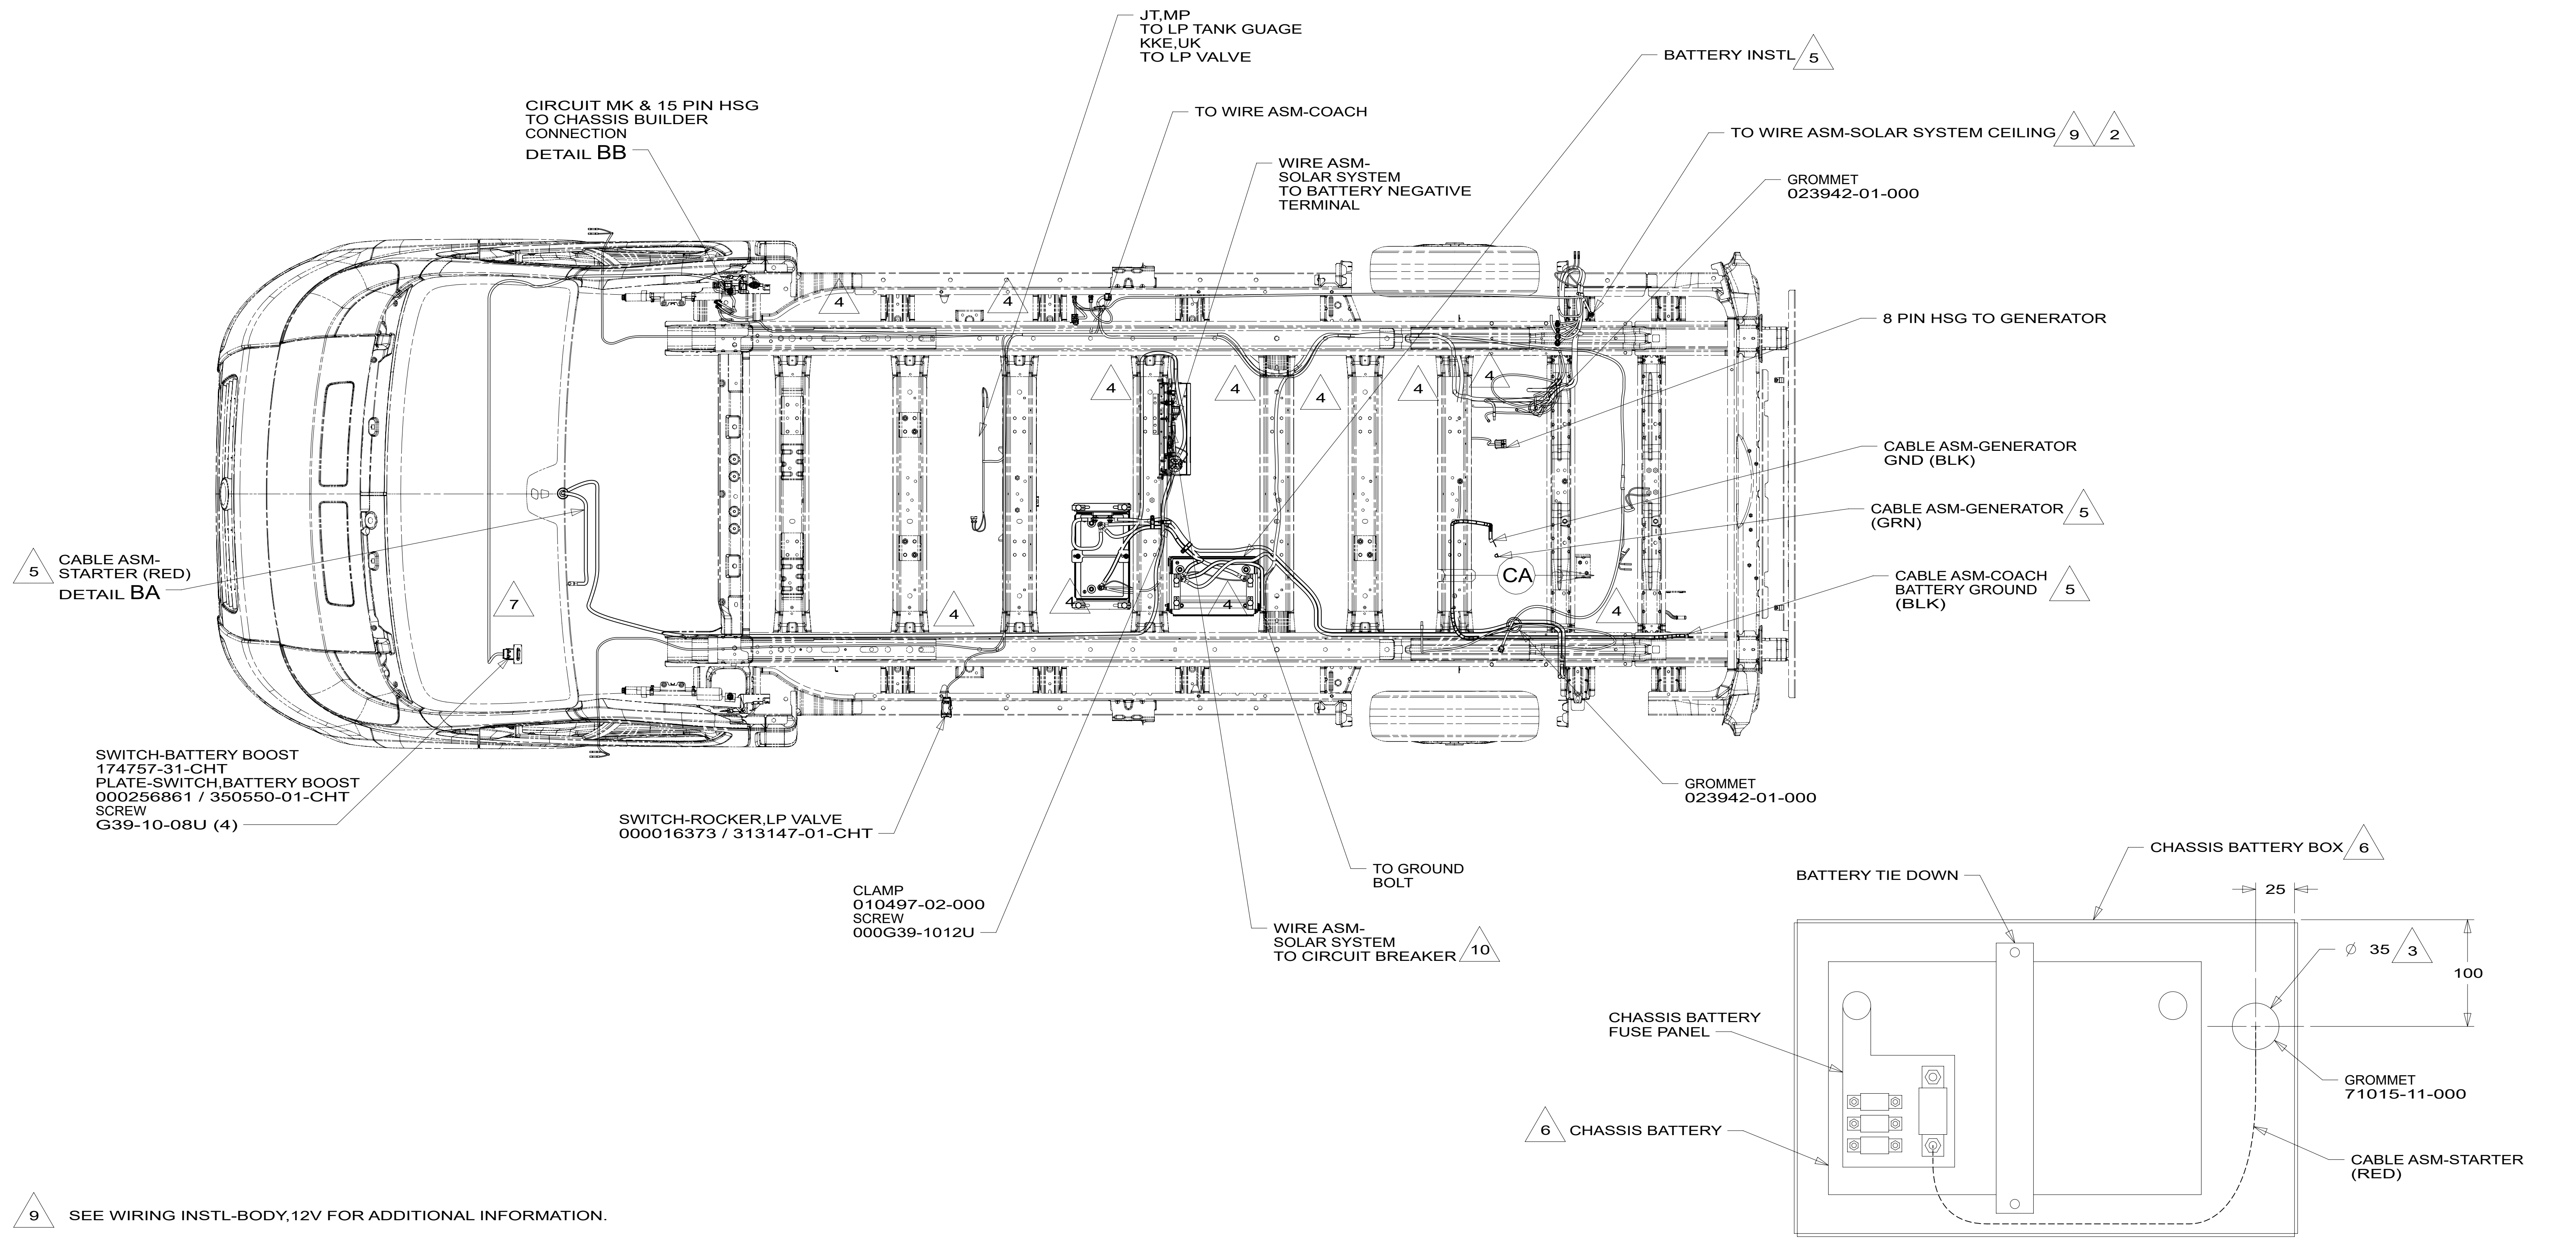

- 9 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 8. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 7 SECURE WIRE HARNESS WITH CABLE TIE 008343-02-000.
- 6 LOCATED IN CAB FLOOR.
- 5 SEE SHEET 3 FOR ADDITIONAL INFORMATION.
- 4 CLAMP 83610-02-000, SCREW G39-08-12U.
- 3 DRILL HOLE IN BOTTOM OF PLASTIC BATTERY BOX.
- 2 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

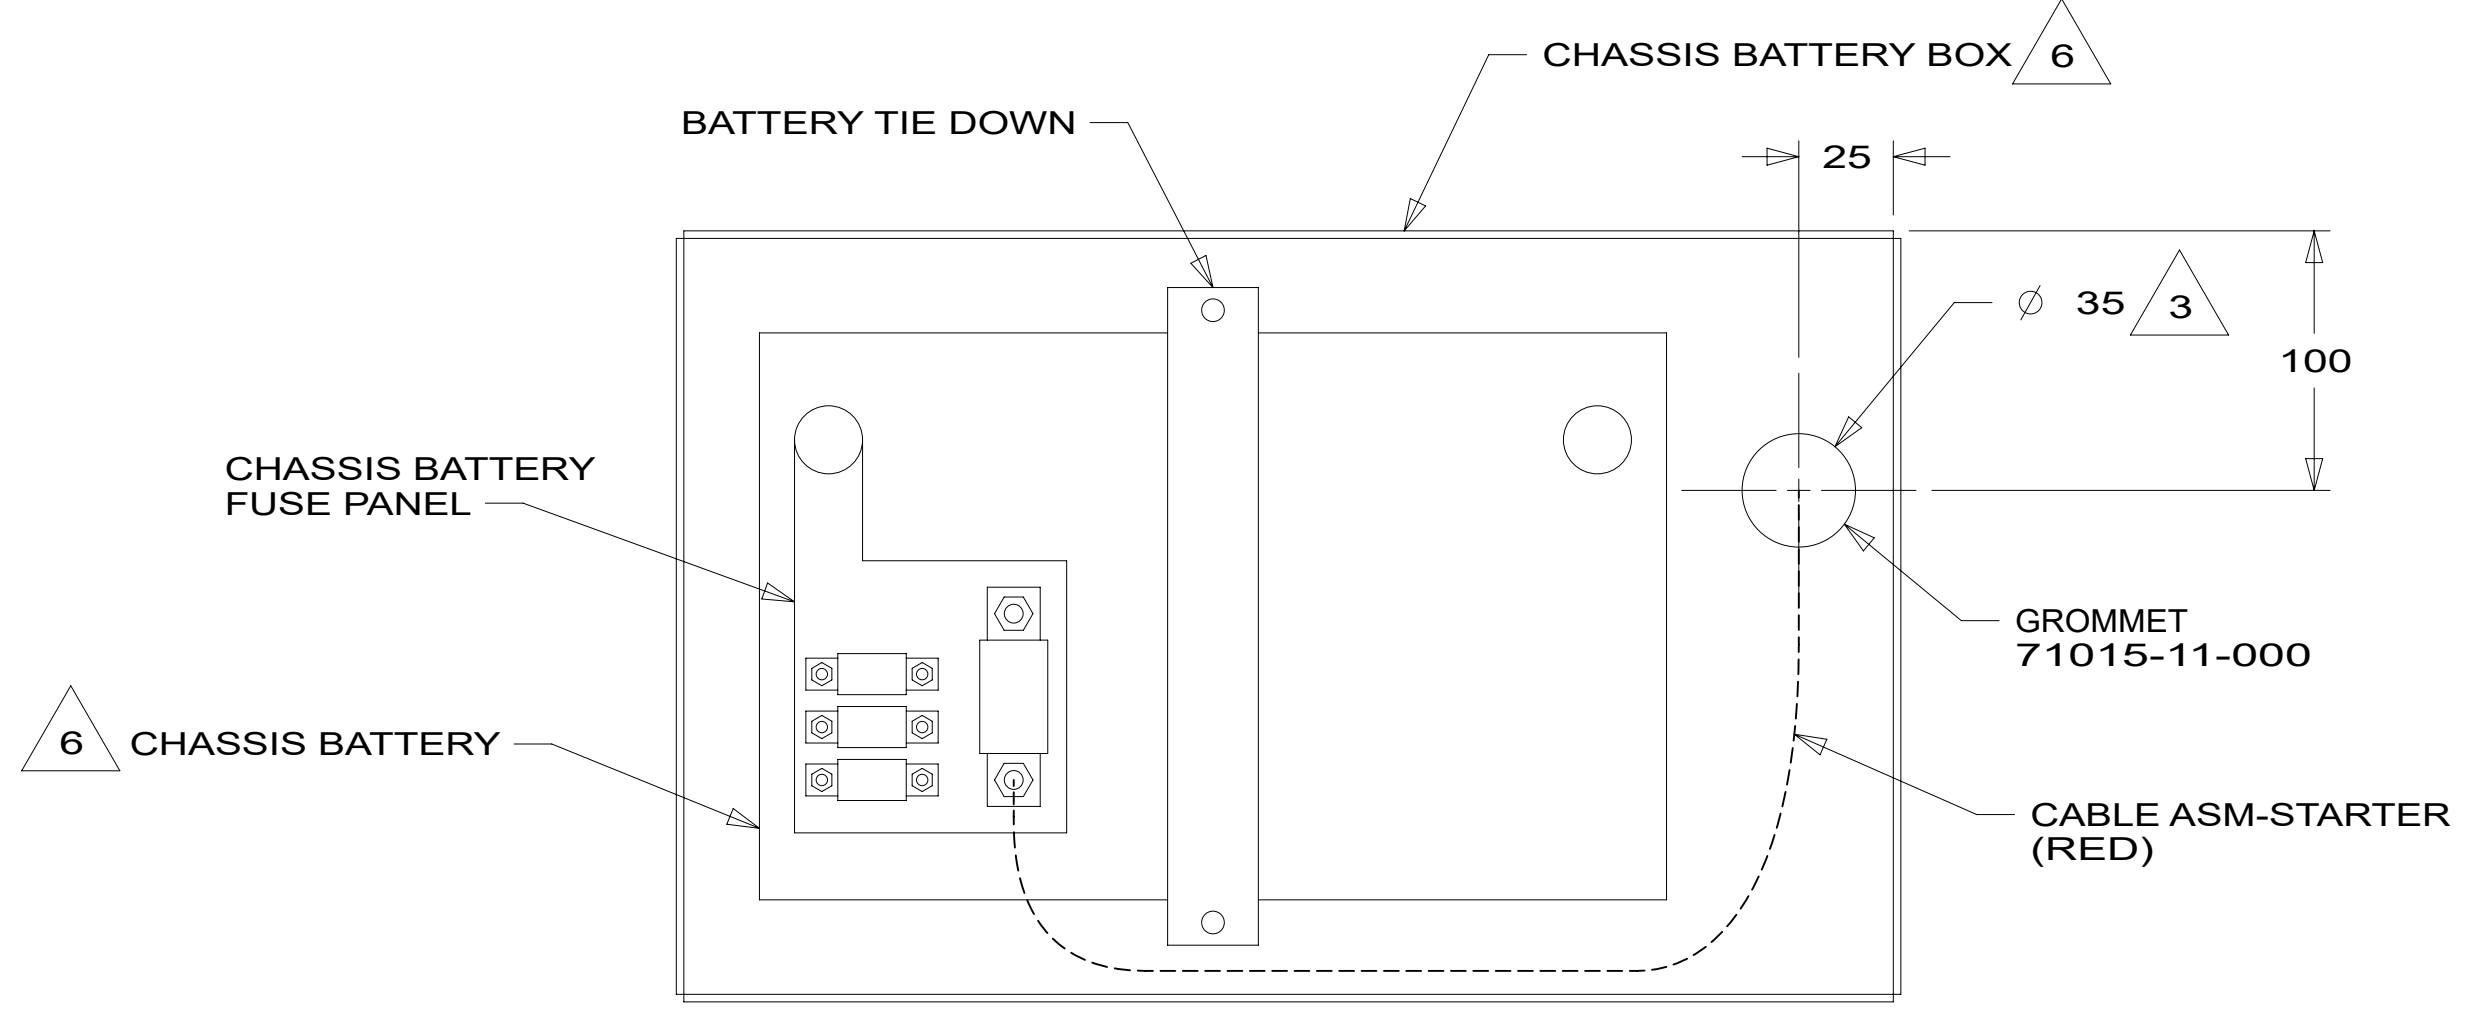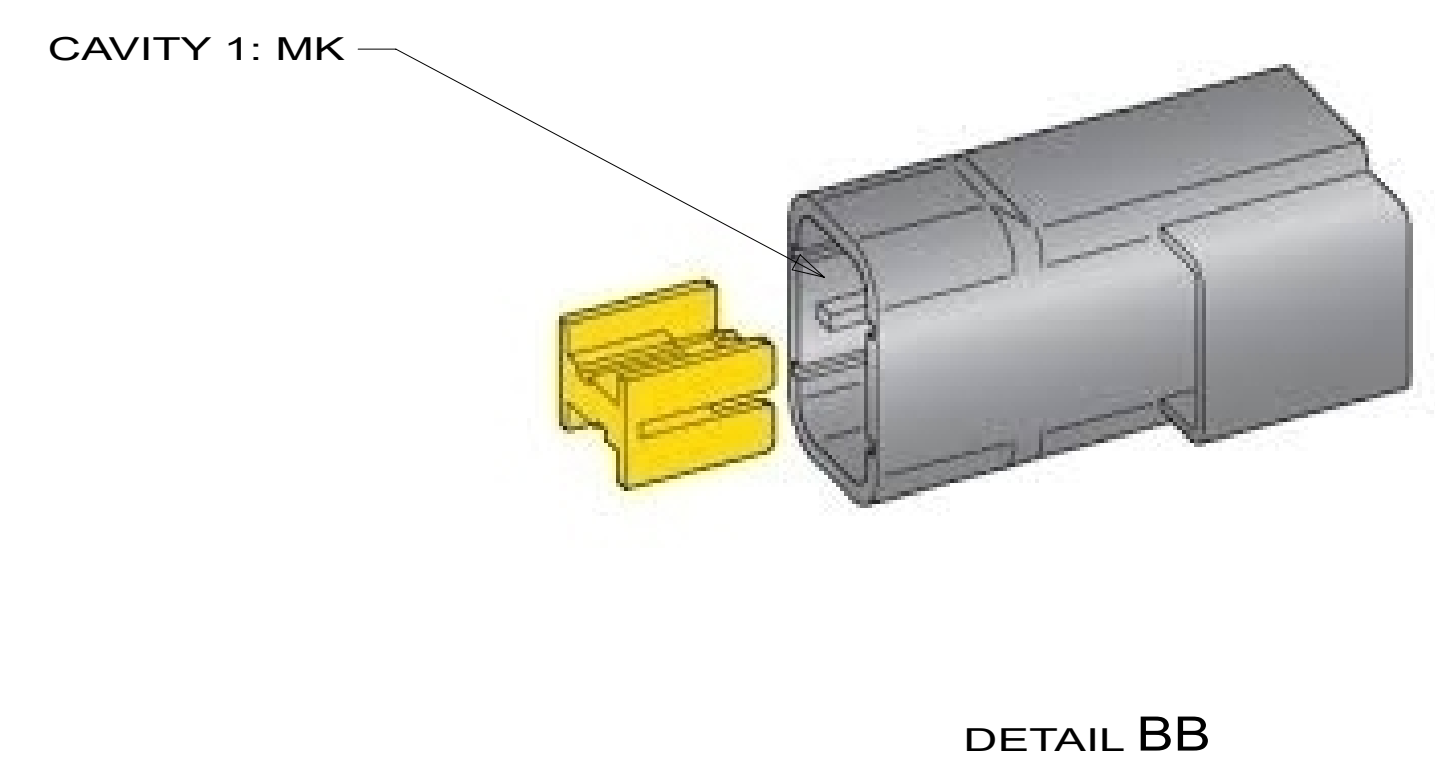


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 2 OF 3	ITEM/PART NO: 000295721 / 35934201000
REV 1 21-Jan-2026	

8 7 6 5 4 3 2 1

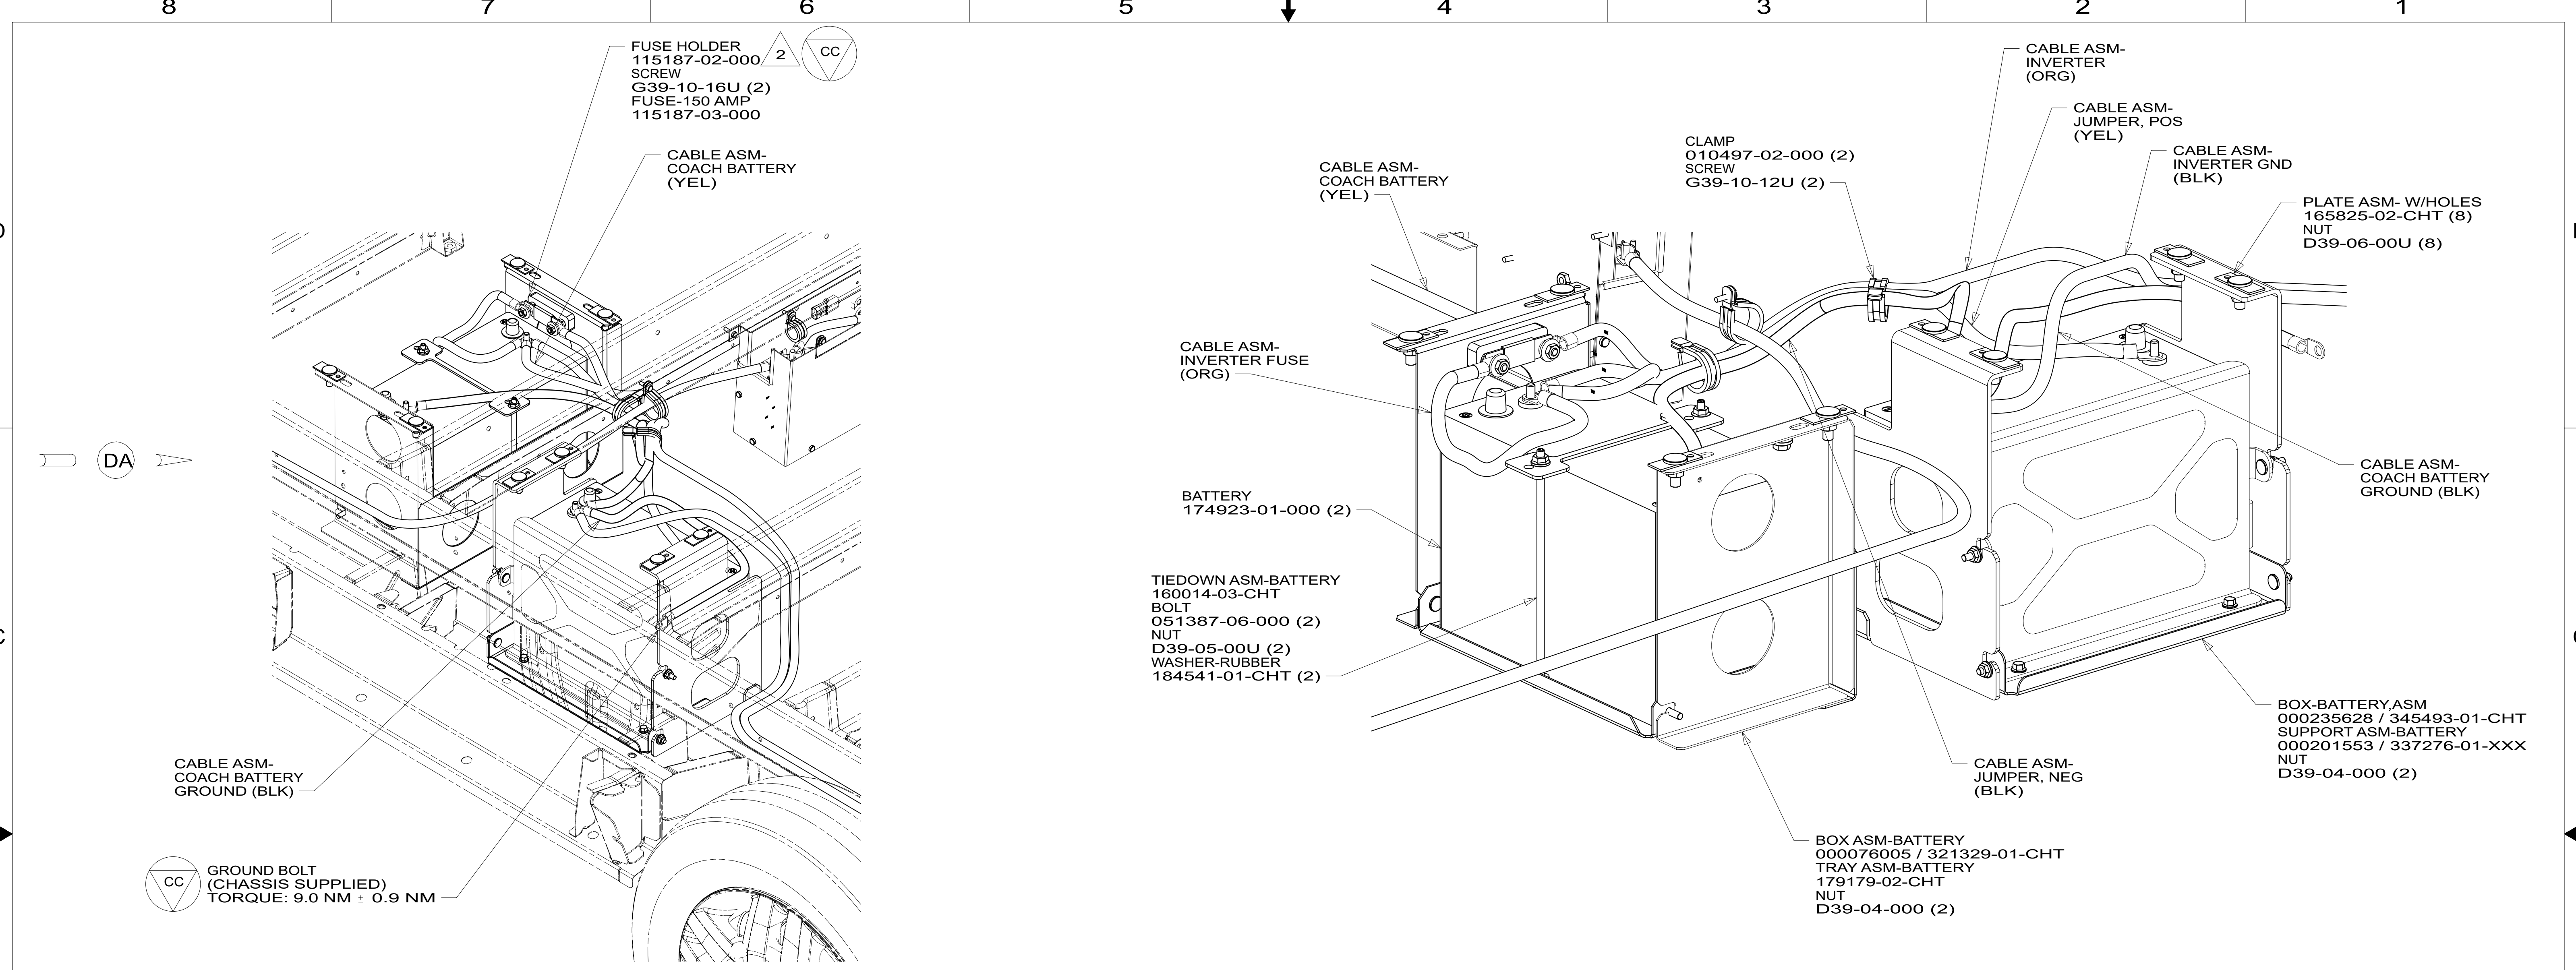

VIEW DA

CABLE ASM-STARTER (RED)	185087-01-043
CABLE ASM-COACH BATTERY (YEL)	141415-52-008
CABLE ASM-COACH BATTERY GND (BLK)	133566-17-006
CABLE ASM-GENERATOR (GRN)	141415-42-022
CABLE ASM-GENERATOR GND (BLK)	133566-17-014
CABLE ASM-JUMPER, POS	141415-52-009
CABLE ASM-JUMPER, NEG	133566-17-007
CABLE ASM-INVERTER FUSE (ORG)	141415-61-004
CABLE ASM-INVERTER (ORG)	141415-62-029
CABLE ASM-INVERTER GND (BLK)	133566-12-025

2 SEE COMPONENT DRAWING FOR TORQUE SPECIFICATIONS.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

1B1 265

DESCRIPTION: **WIRING INSTL-CHASSIS**

SHEET: 3 OF 3 ITEM/PART NO: 000295721 / 35934201000 REV