




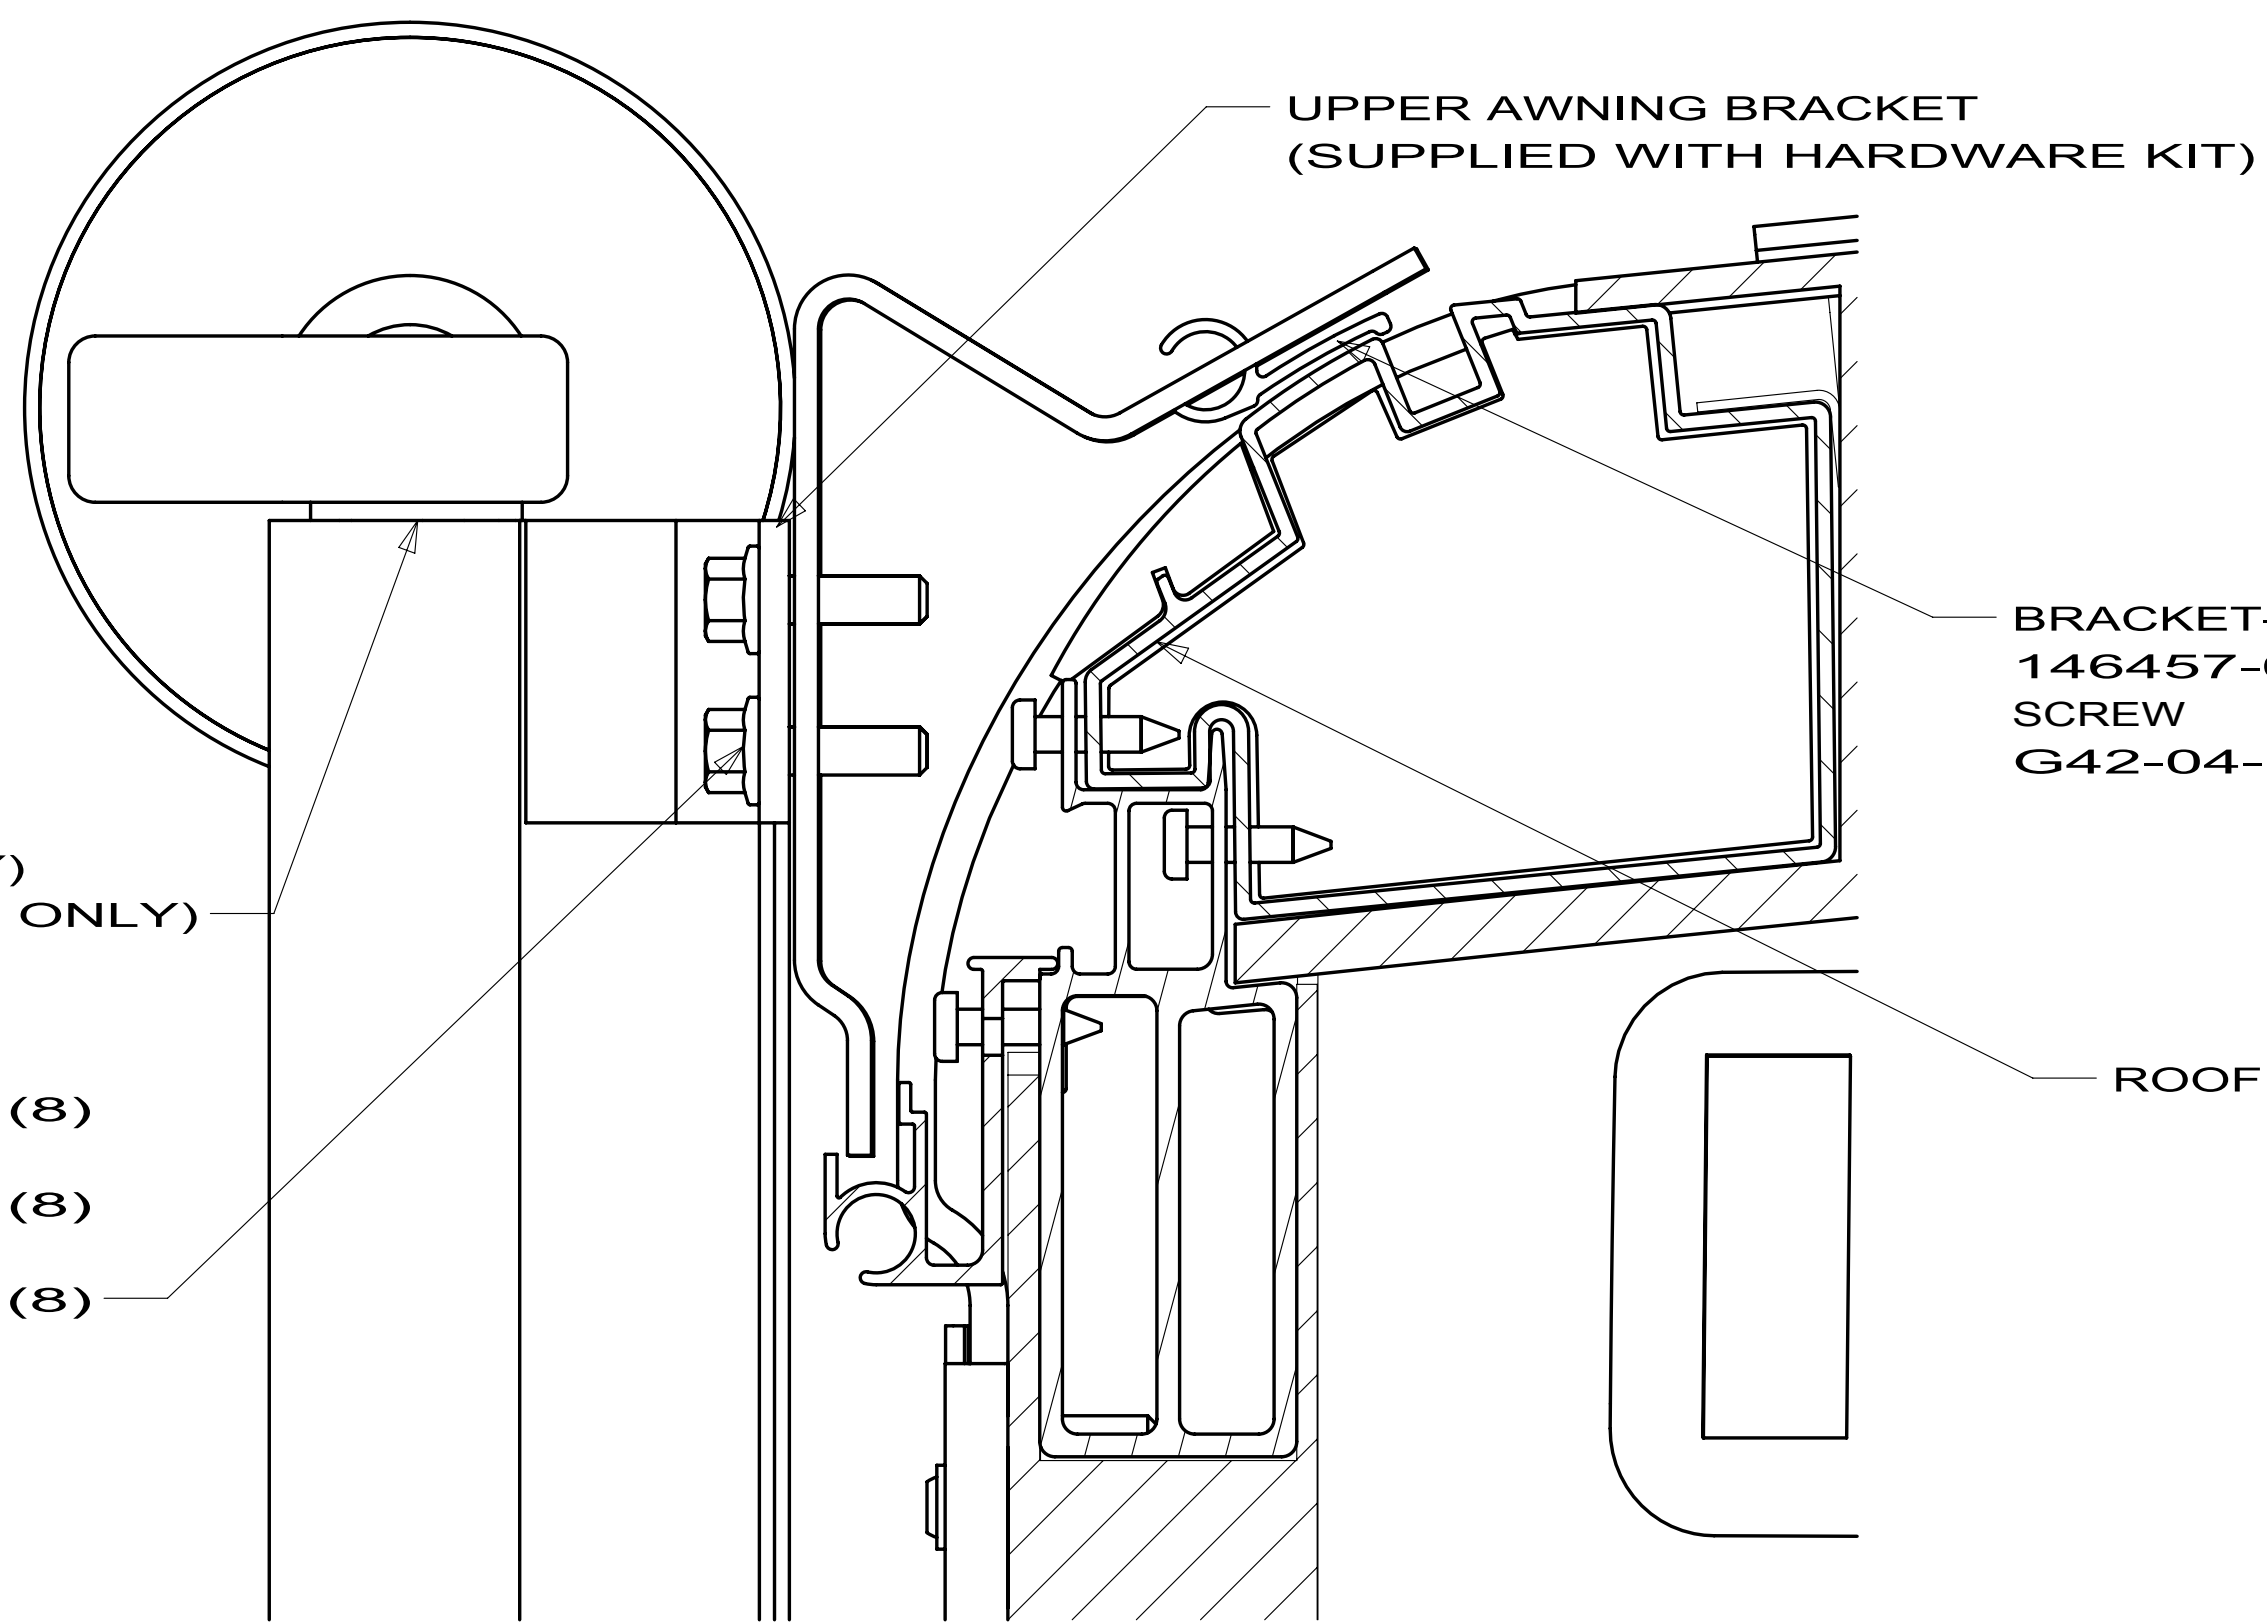

SECTION A-A

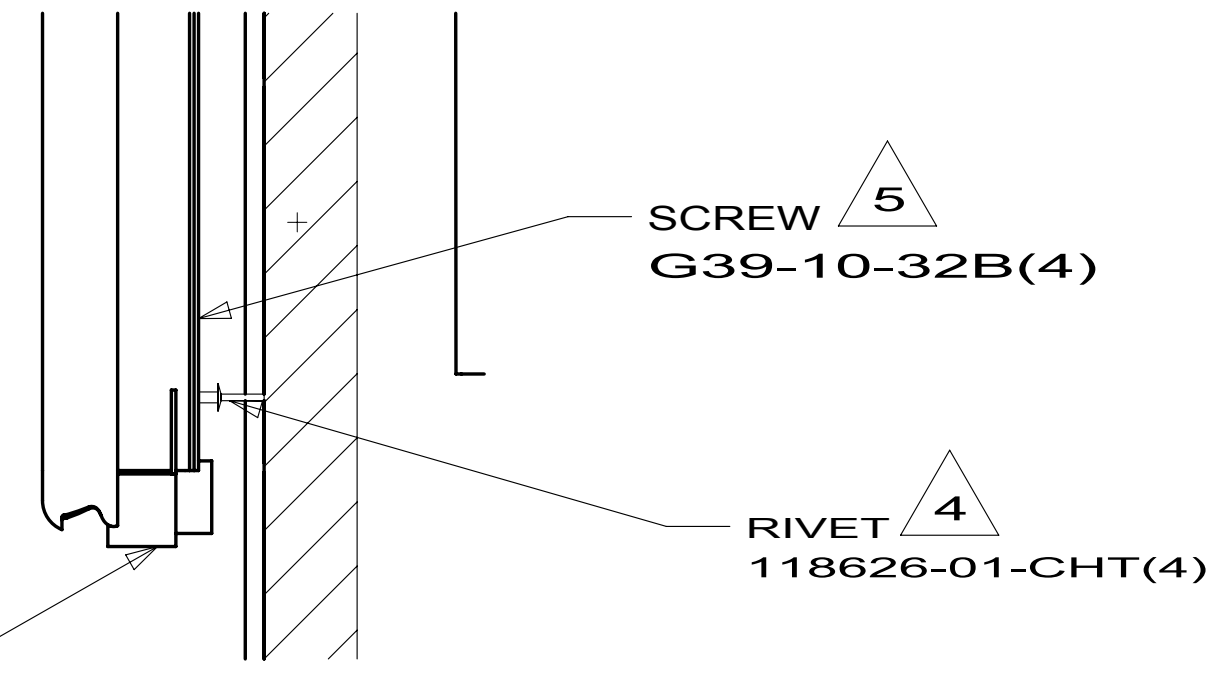

SECTION B-B

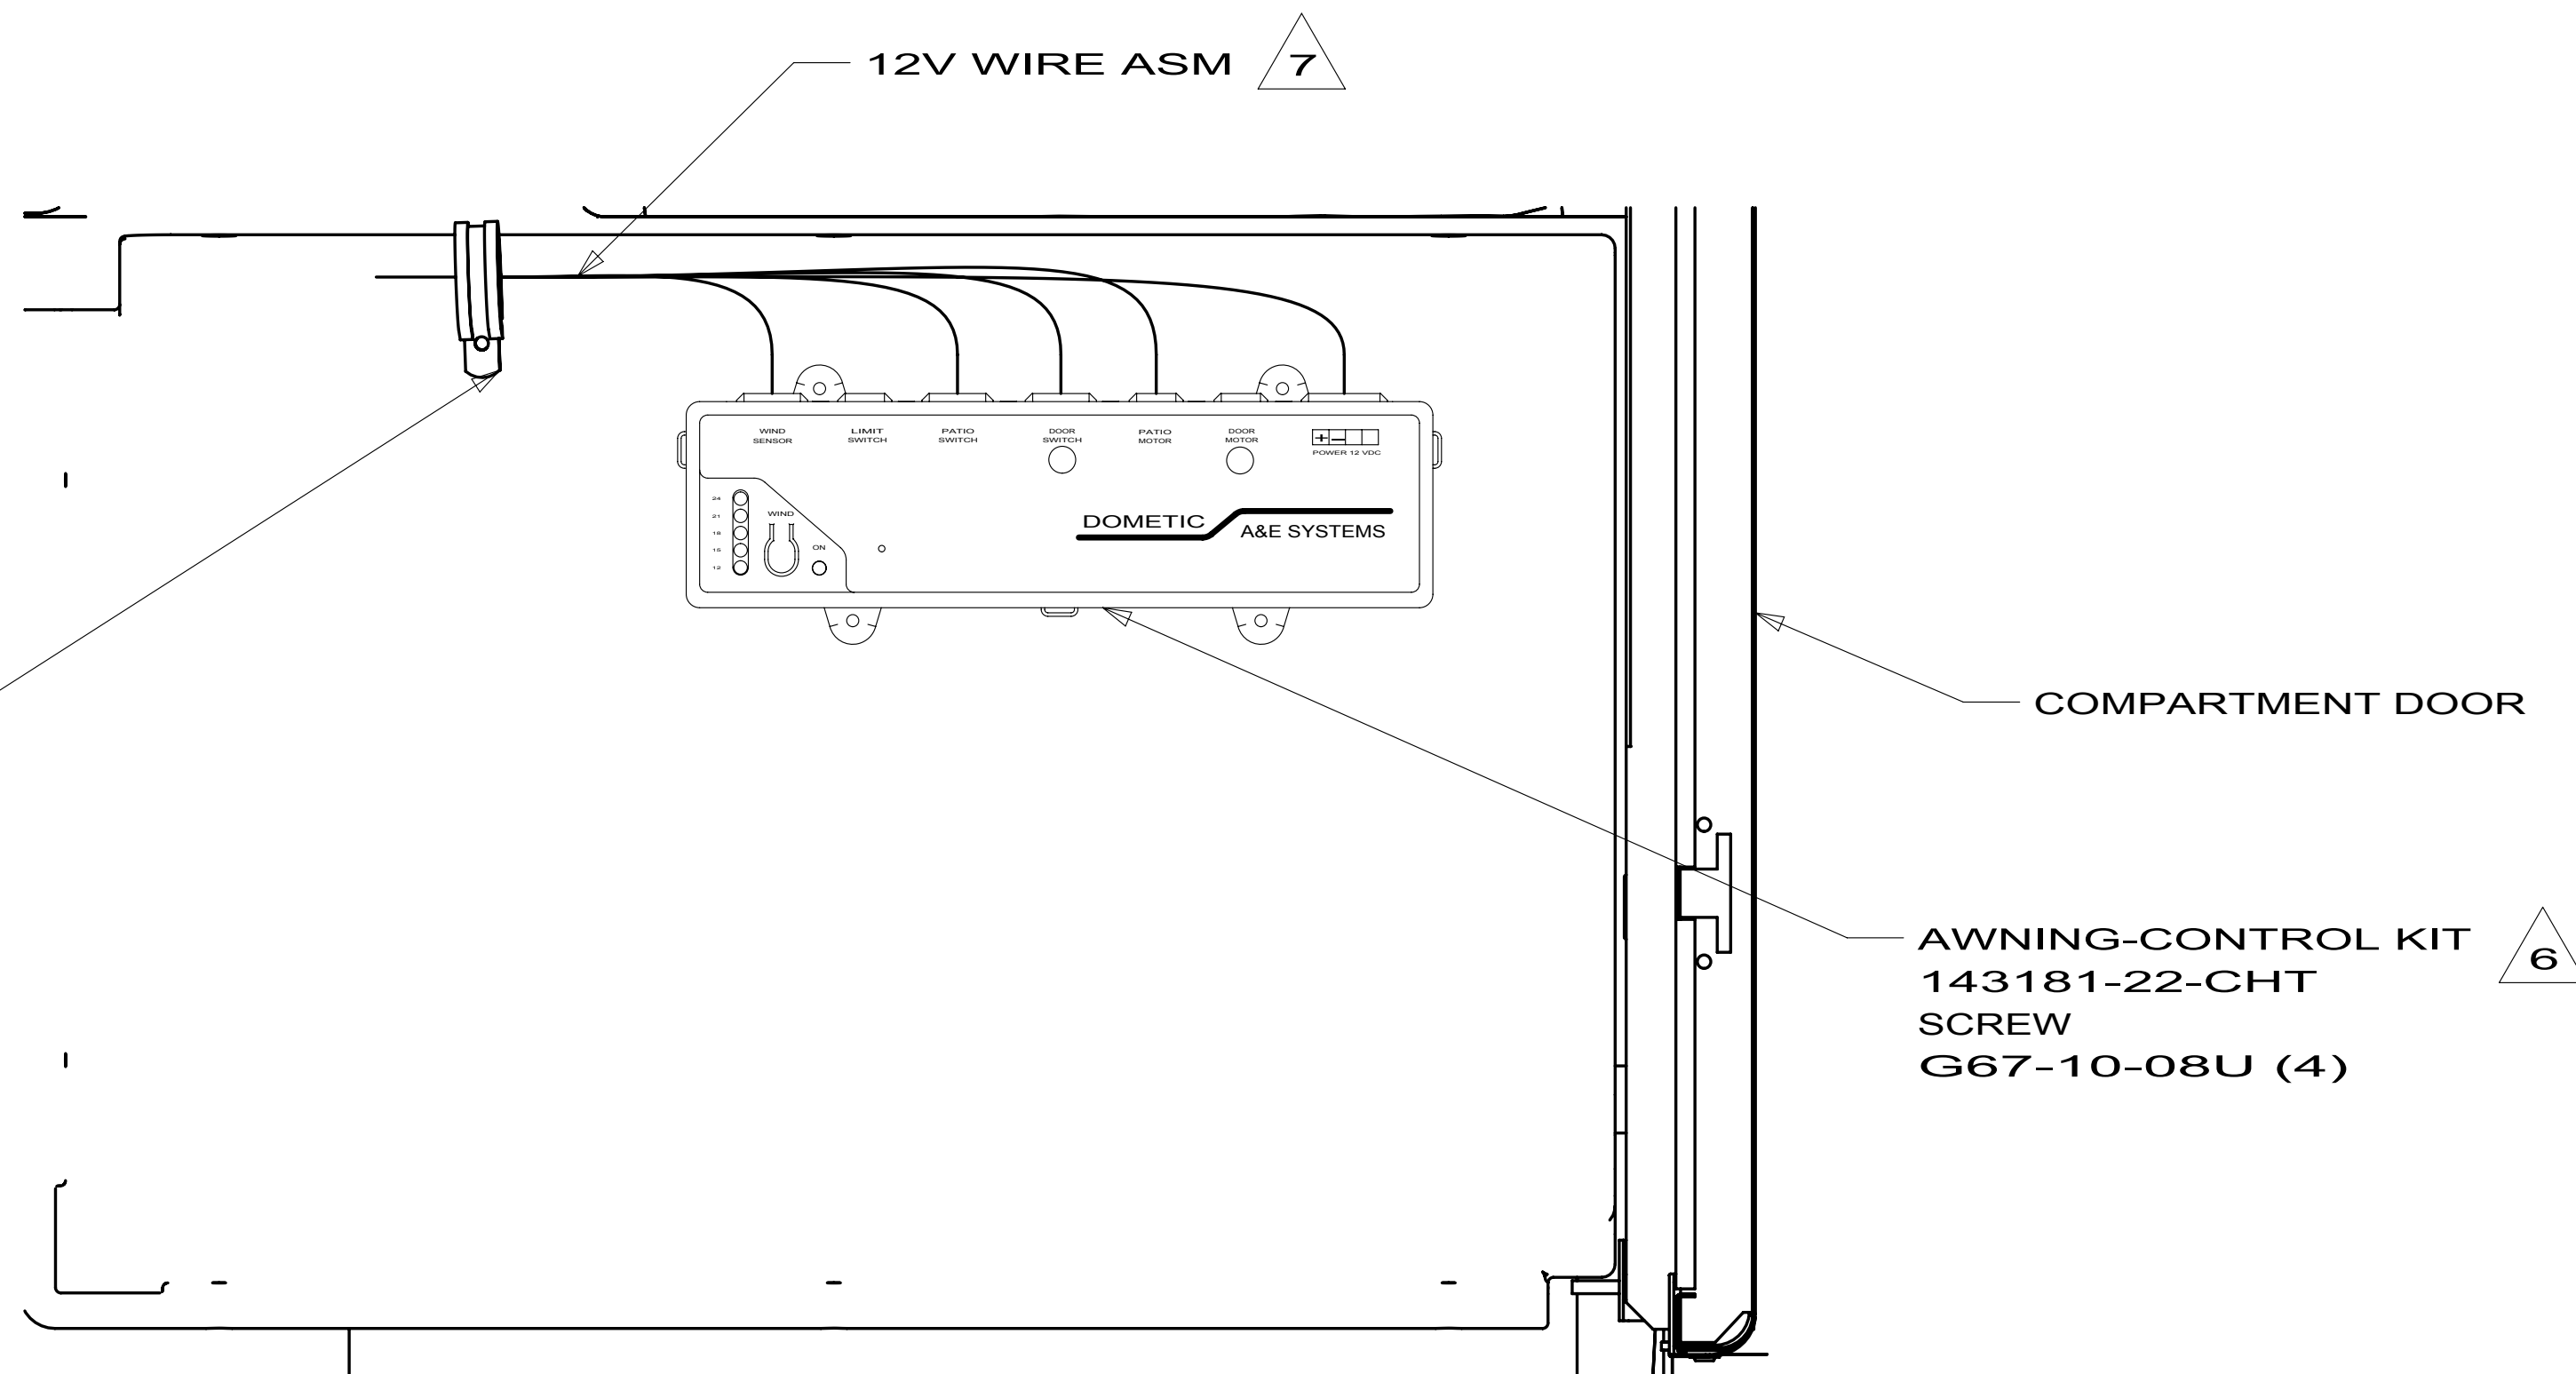


SECTION C-C

J35P
J37F
J38N

FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
AWNING INSTL J-SERIES		
SHEET 2	PART NO	REV
	170828	

J37F

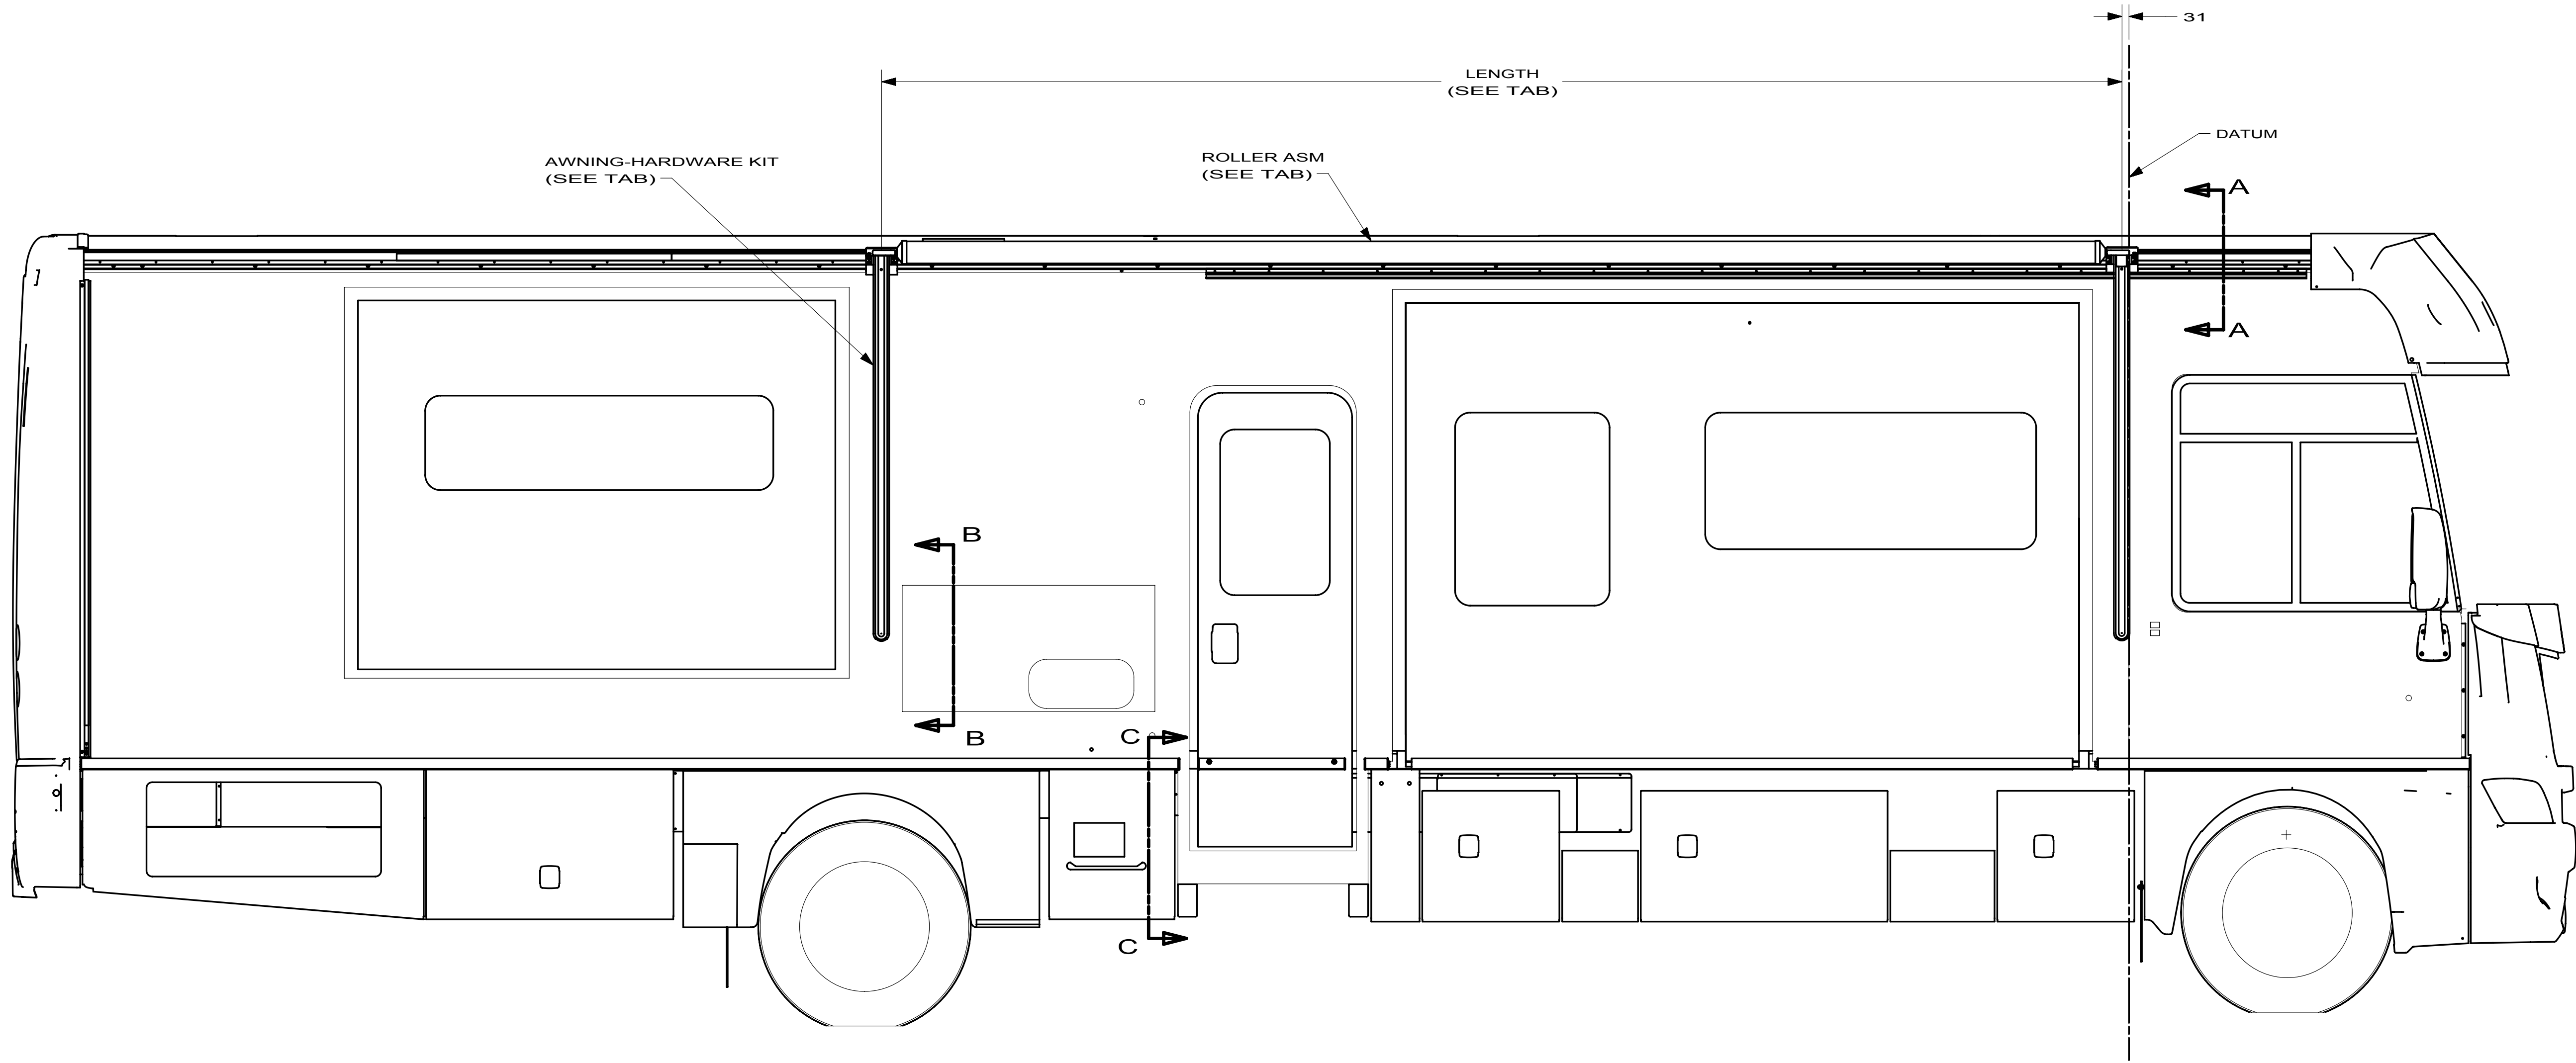


DOMETIC A&E AWNING WEATHER PRO

52N

FIRST USED			10 J37F
DO NOT SCALE DRAWING			
TITLE: AWNING INSTL J-SERIES			
SHEET 8	PART NO	170828	REV








J37F

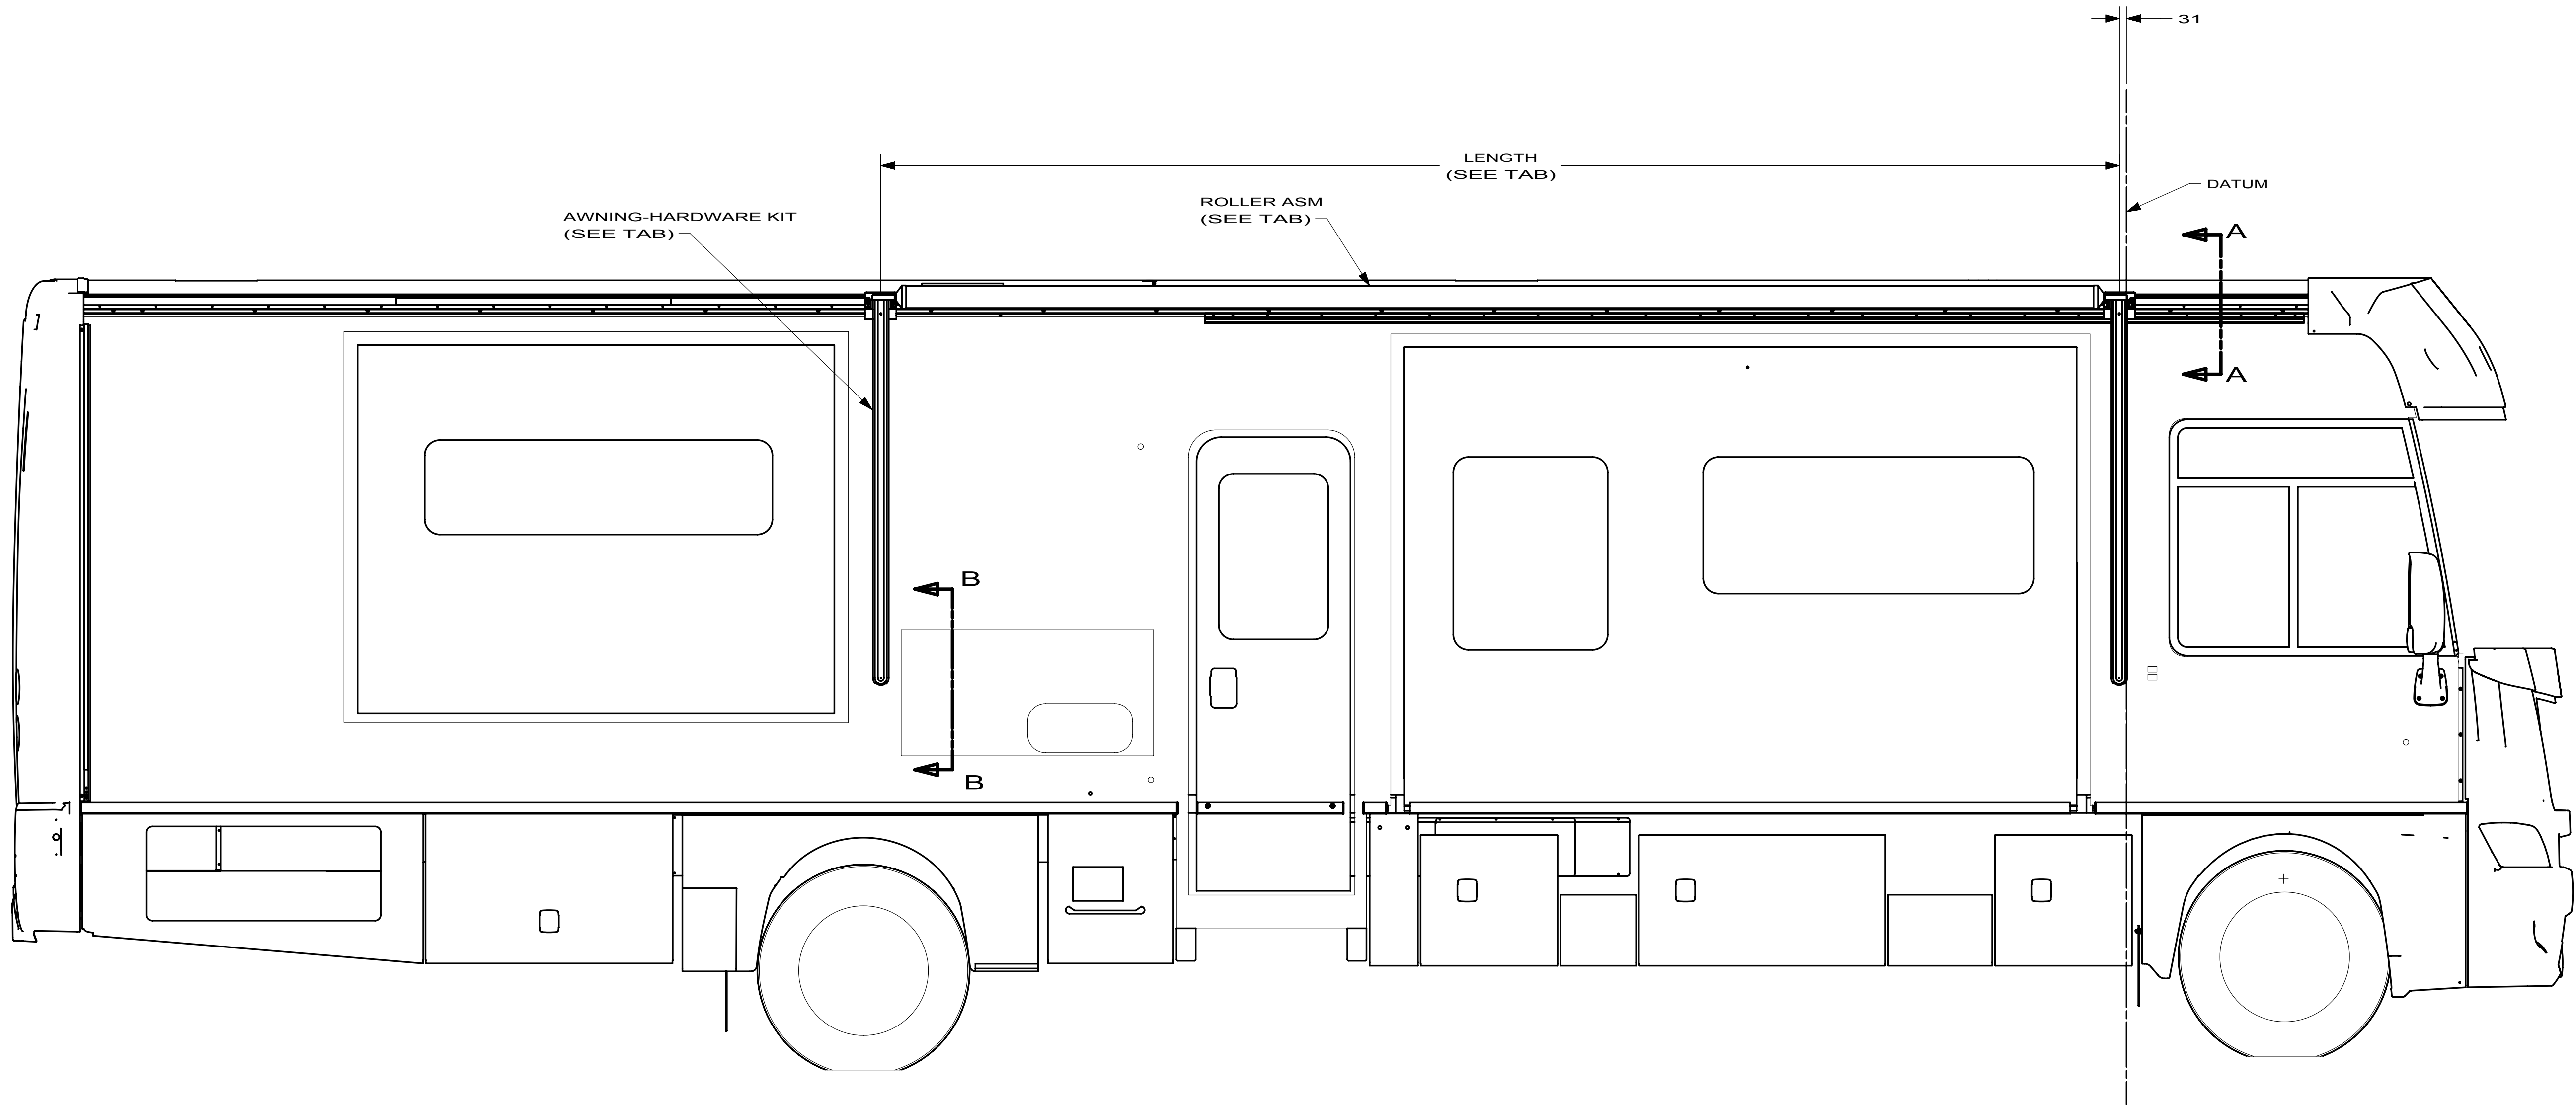

DOMETIC A&E AWNING 2-STEP

52F


FIRST USED			10 J37F
DO NOT SCALE DRAWING			
TITLE:			AWNING INSTL J-SERIES
SHEET 9	PART NO	170828	REV

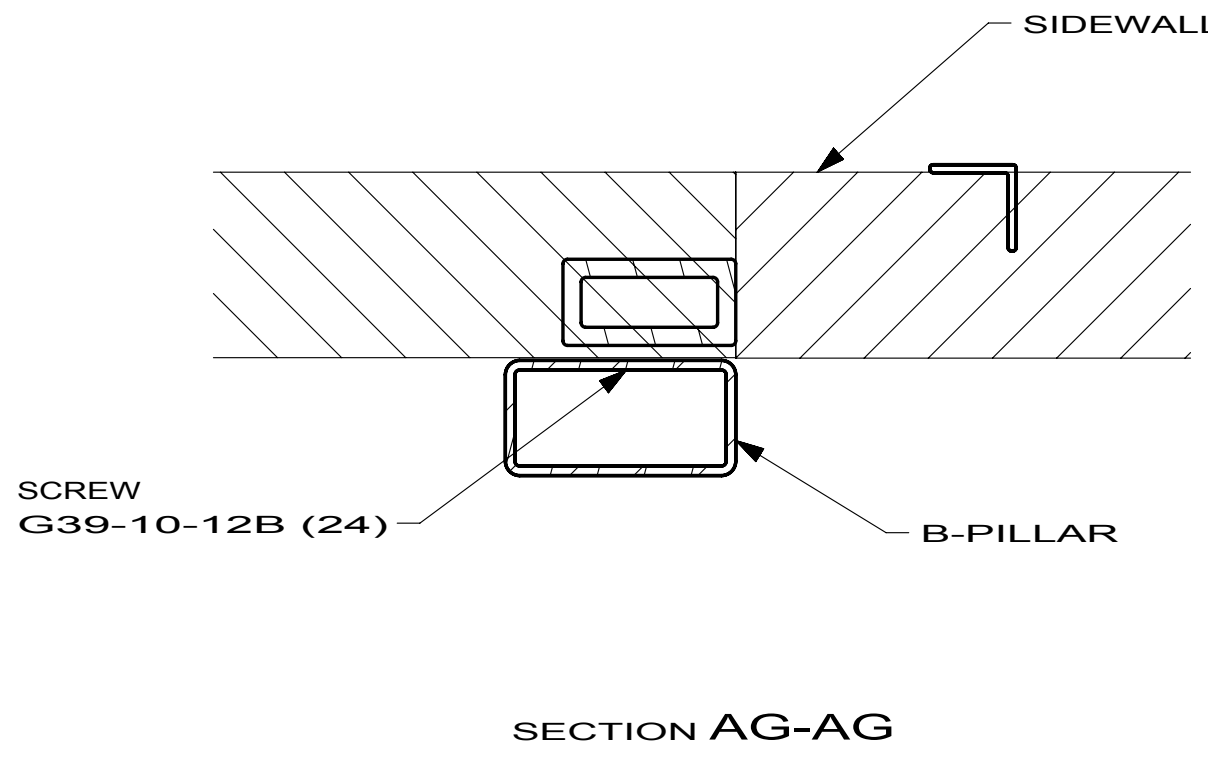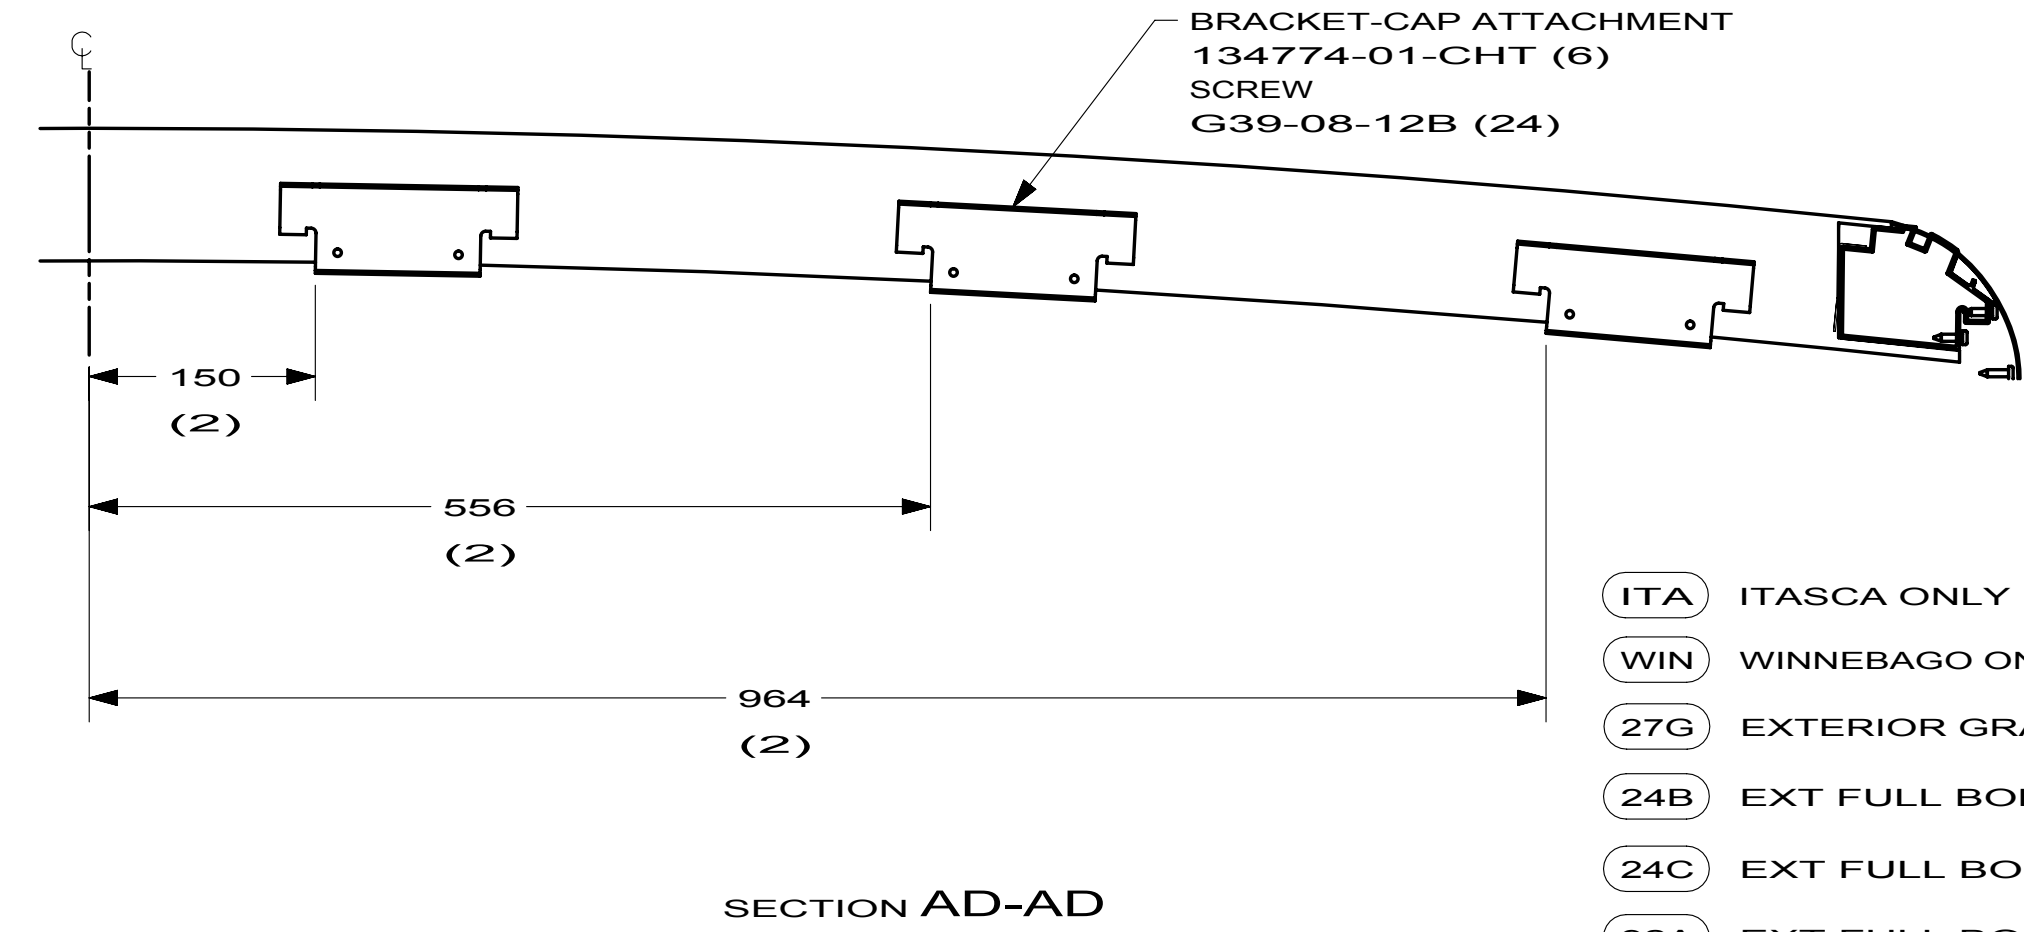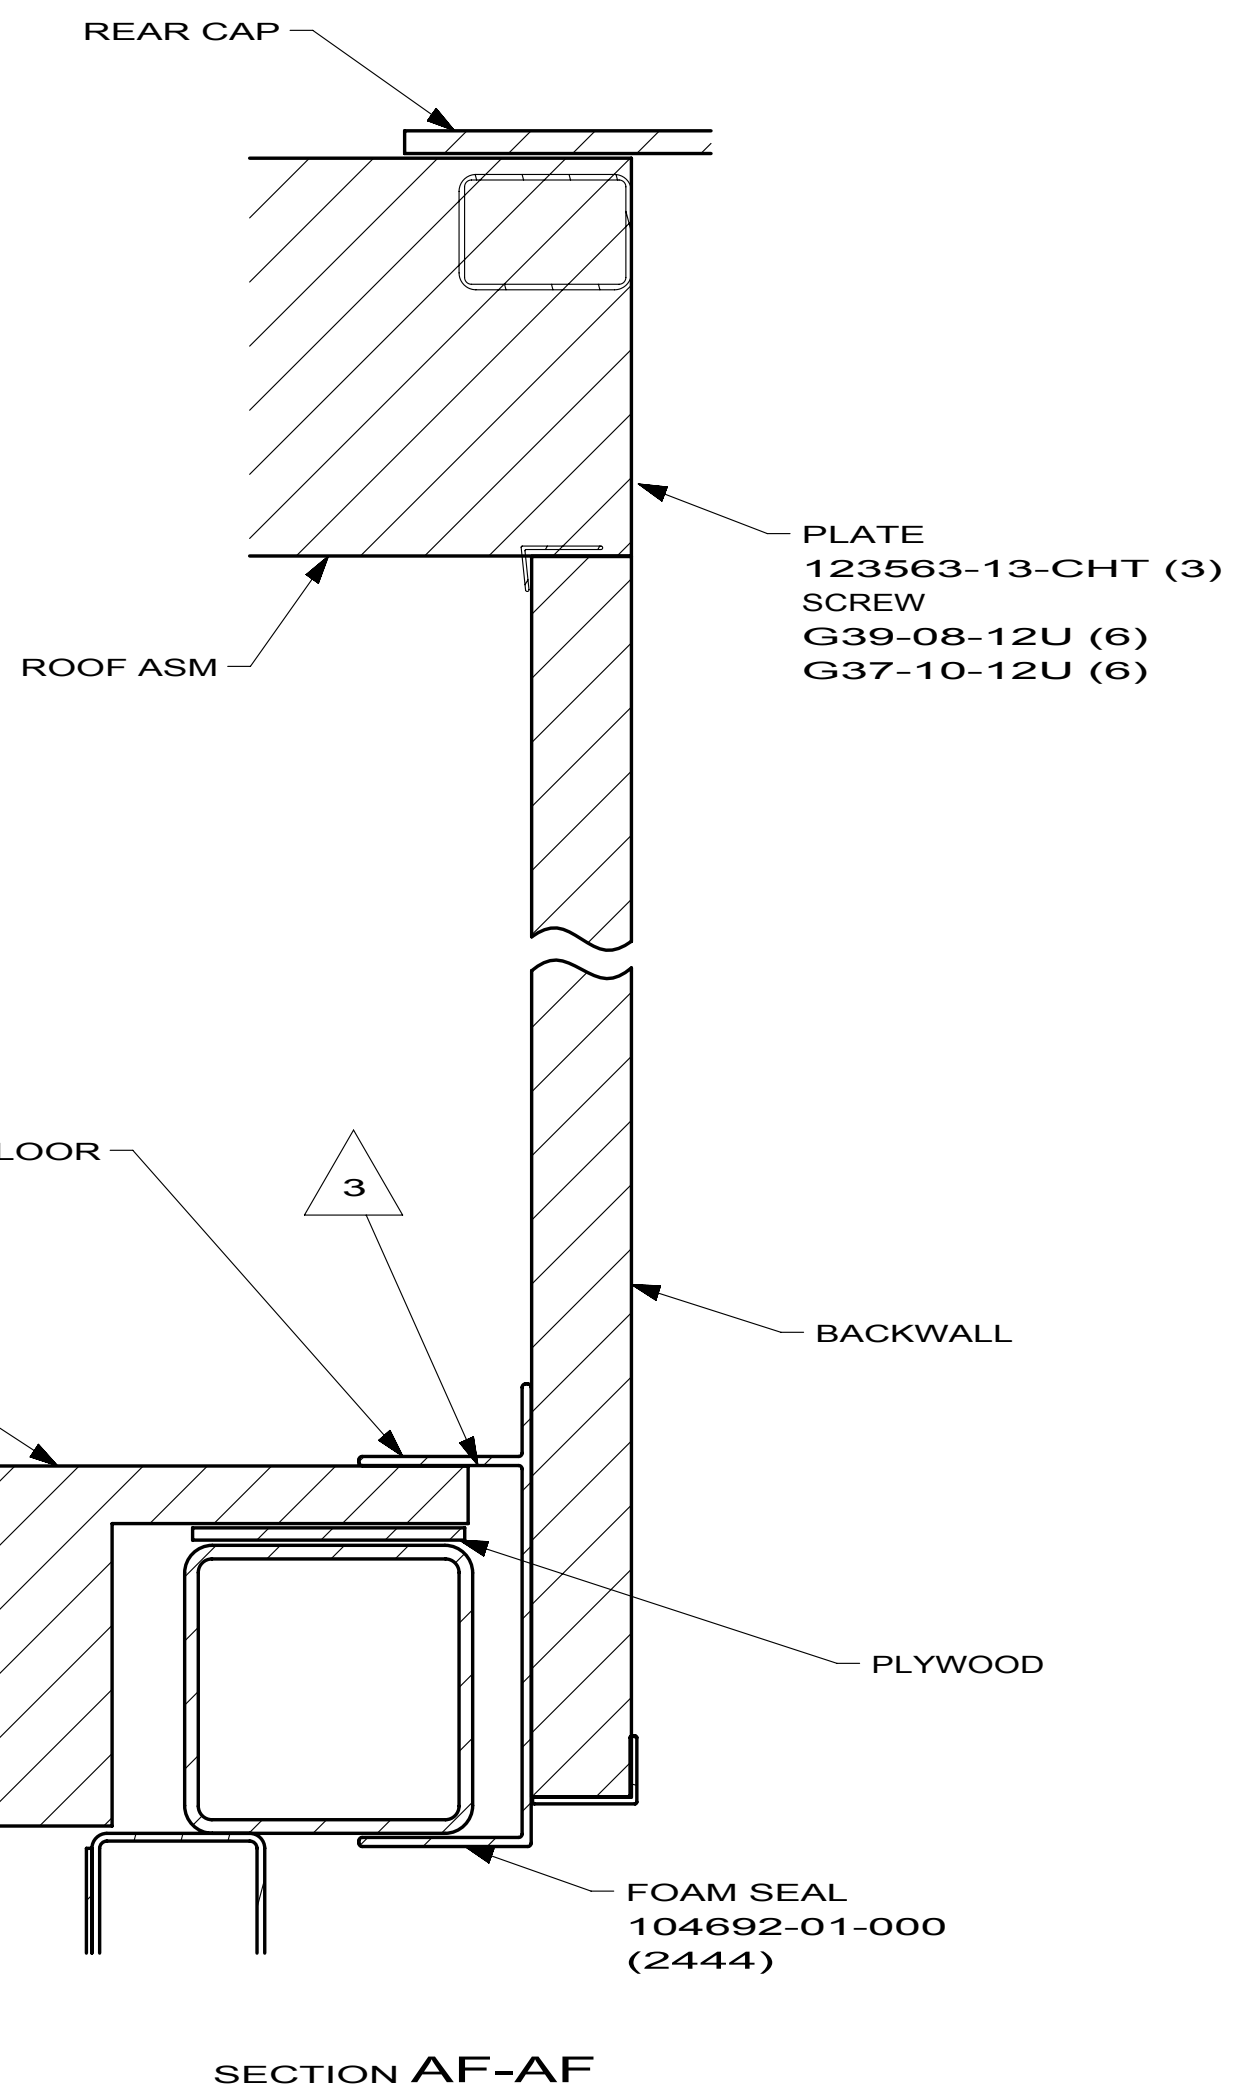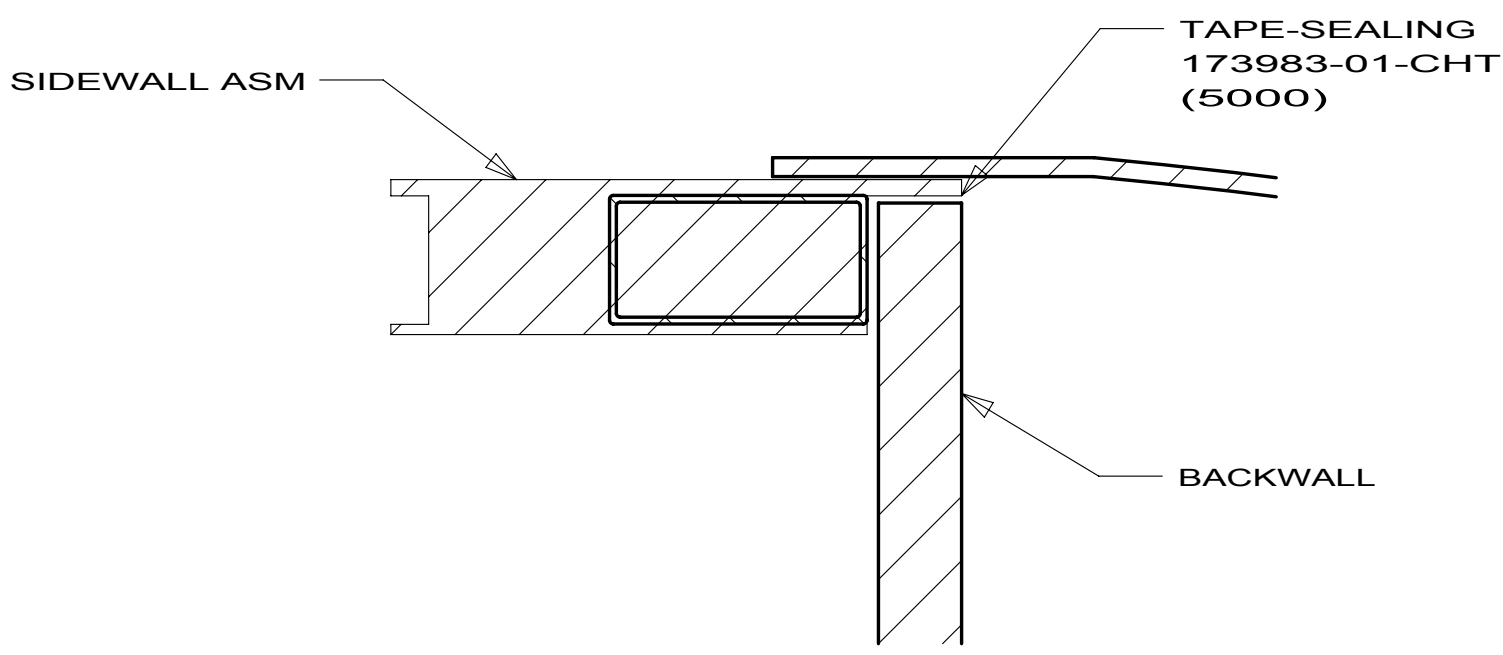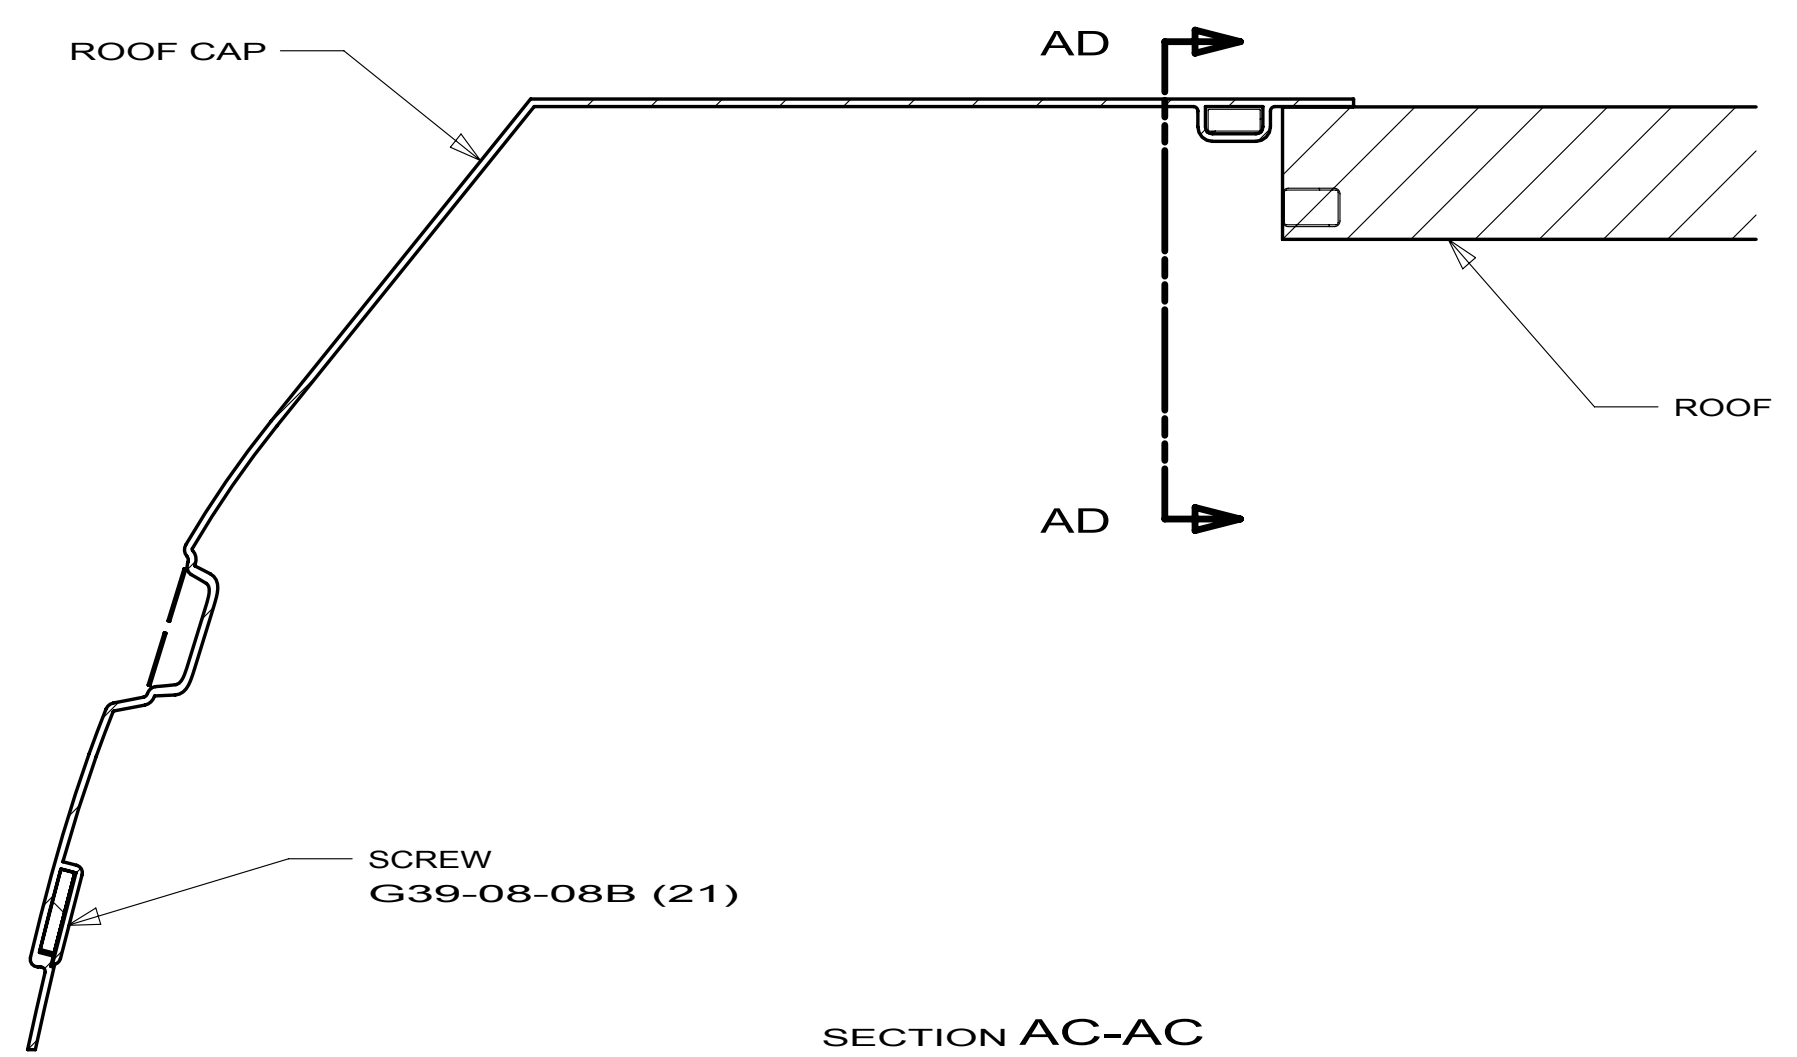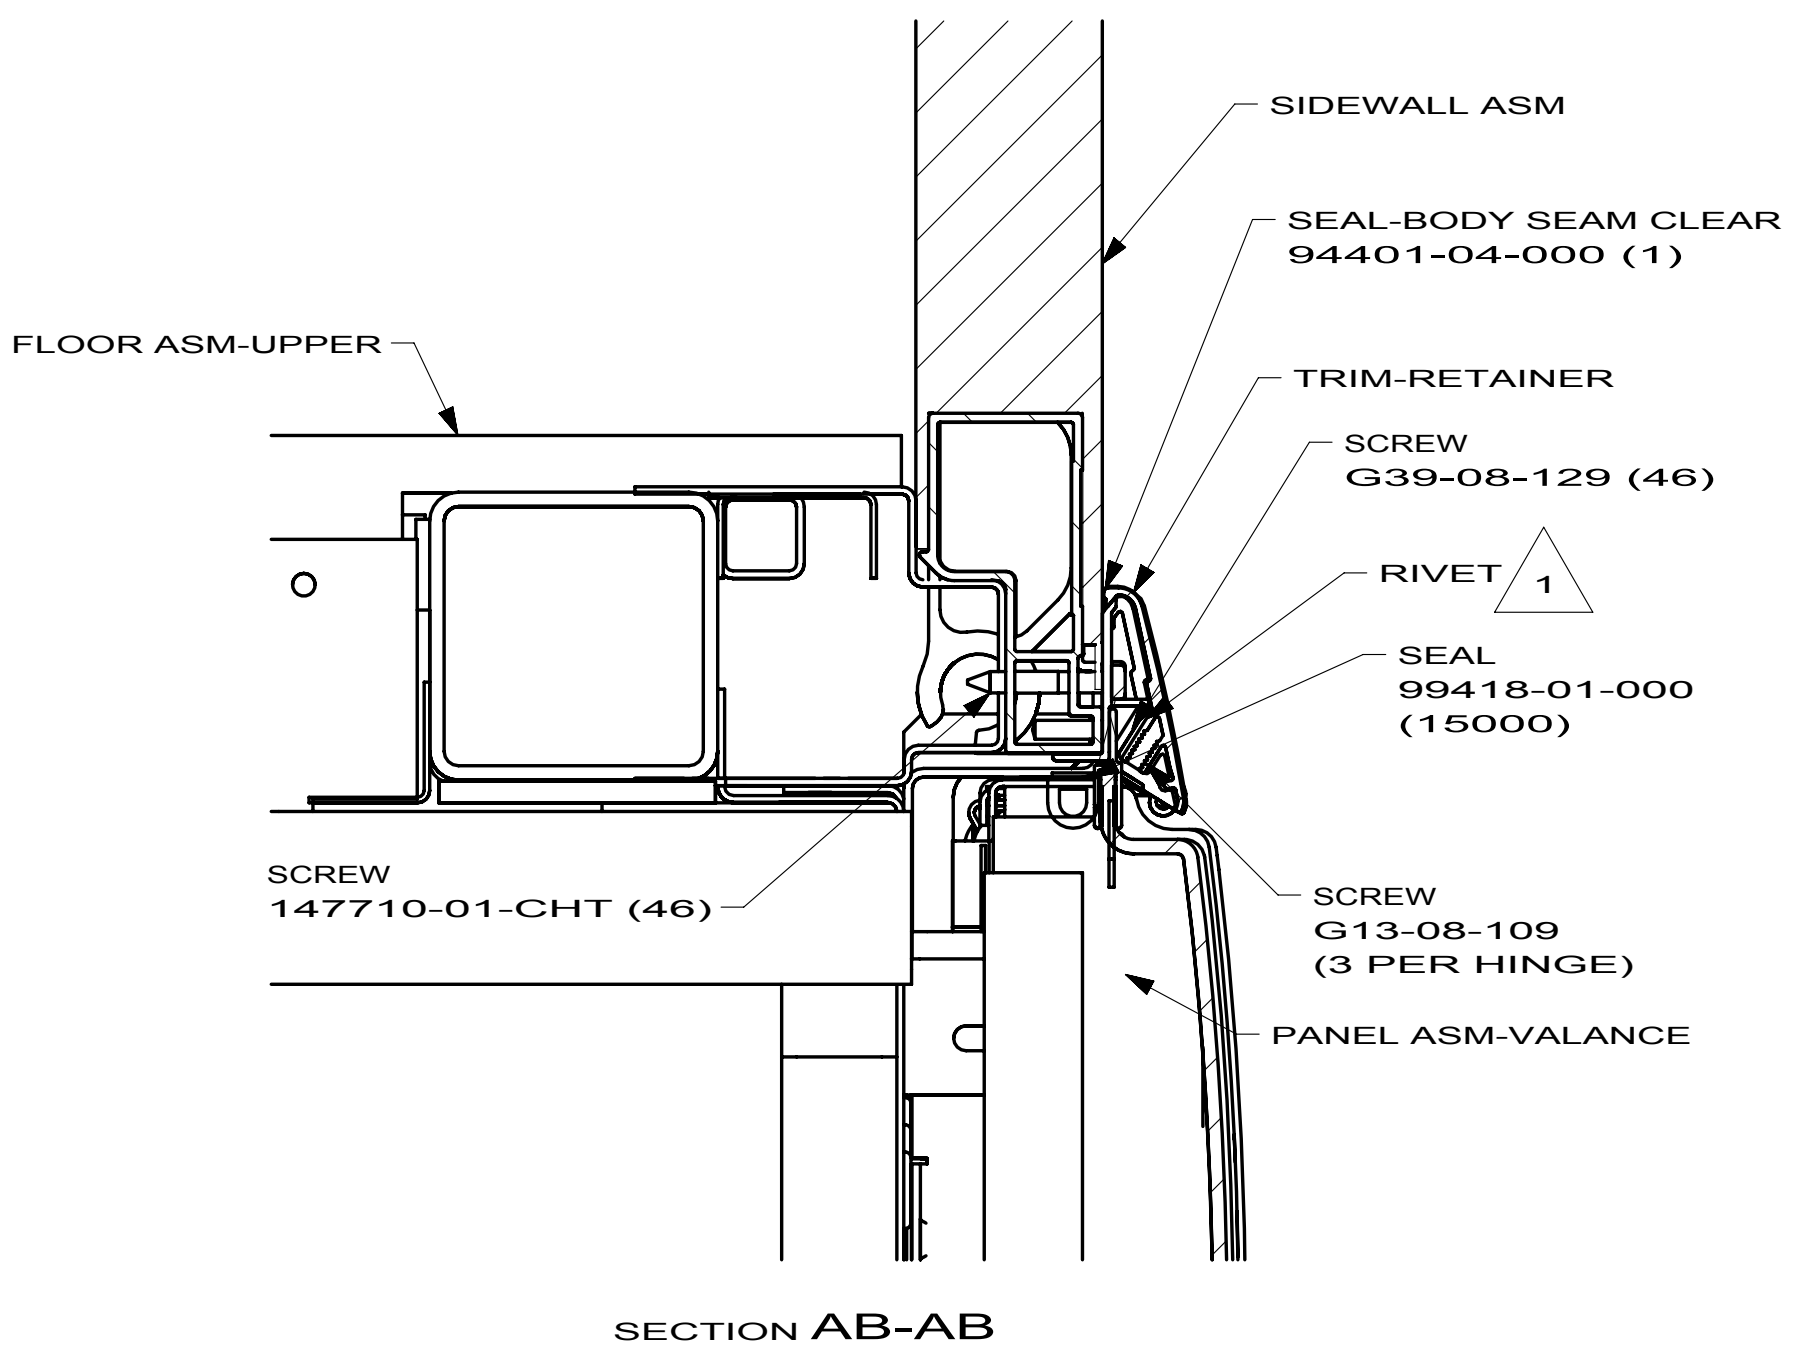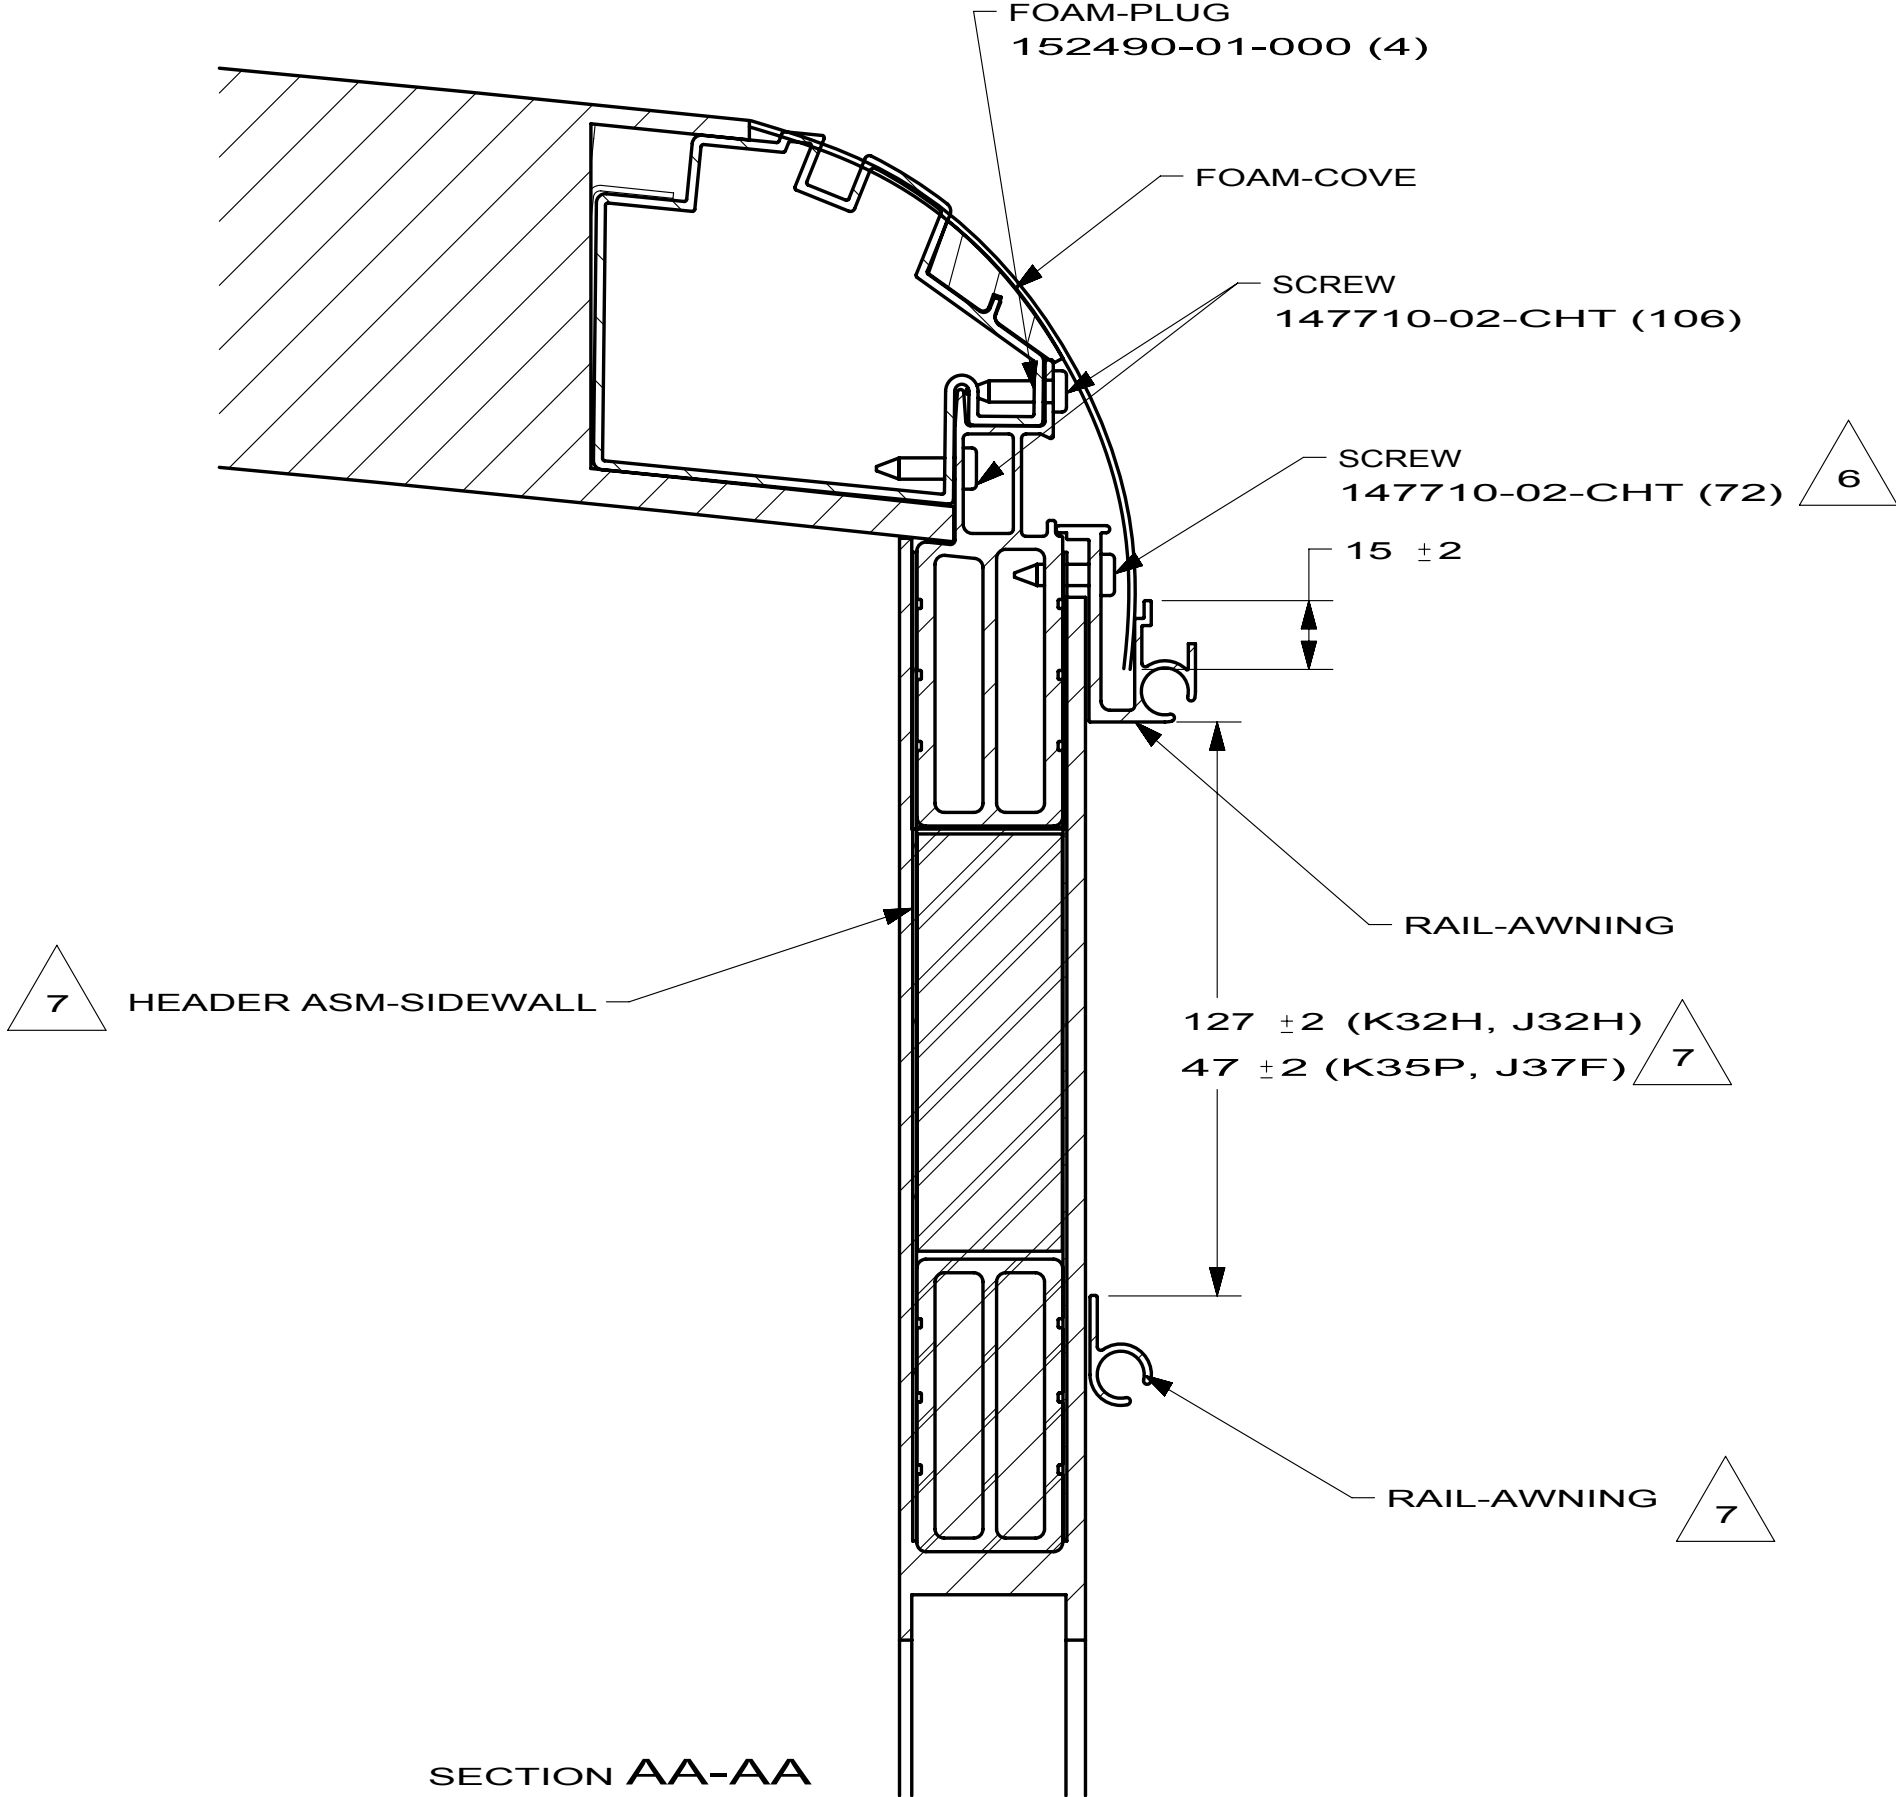

8. VIEW TYPICAL FOR ALL SIDE HINGE DOORS.
7. LEFT SIDEWALL ONLY.
6. SCREW MUST BE LOCATED WITHIN 50 mm OF RAIL-AWNING SPLICE. DRILL ADDITIONAL HOLES AND ADD SCREWS AS REQUIRED.
5. THIS IS A NOMINAL DIMENSION. ADJUST AS REQUIRED SUCH THAT DOORS LINE UP IN THE OPEN POSITION.
4. DIMENSIONS ARE FROM THE EDGE OF THE DOOR CUTOUT AND THE TOP OF THE FEATURE STRIP TO THE UPPER HOLE OF THE LOWEST SET OF HOLES CLOSEST TO THE DOOR.
3. SEE ES0061 FOR CARPET ATTACHMENT AT BACKWALL.
2. USE VENDOR SUPPLIED SCREWS.
1. DRILL A 4.88-4.98 DIA HOLE USING THE HOLES LOCATED EITHER SIDE OF THE TOOLING HOLES AS A TEMPLATE. INSTALL RIVET 142980-01-CHT (46).


- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY
- 27G EXTERIOR GRAPHICS PACKAGE #1
- 24B EXT FULL BODY PAINT PKG #4
- 24C EXT FULL BODY PAINT PKG #3
- 92A EXT FULL BODY PAINT PKG #2
- 27A EXT FULL BODY PAINT PKG #1

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
INDUSTRIES	
DTFR	ORIG. DATE
CHRR	
P.E.	ALL DIMENSIONS ARE IN MILLIMETERS
M.E.	FIRST USED
DSNR	10J32H/10K32H
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: BODY INSTL-SECTIONS	
SHEET 1 of 4	PART NO 169434
REF:	1

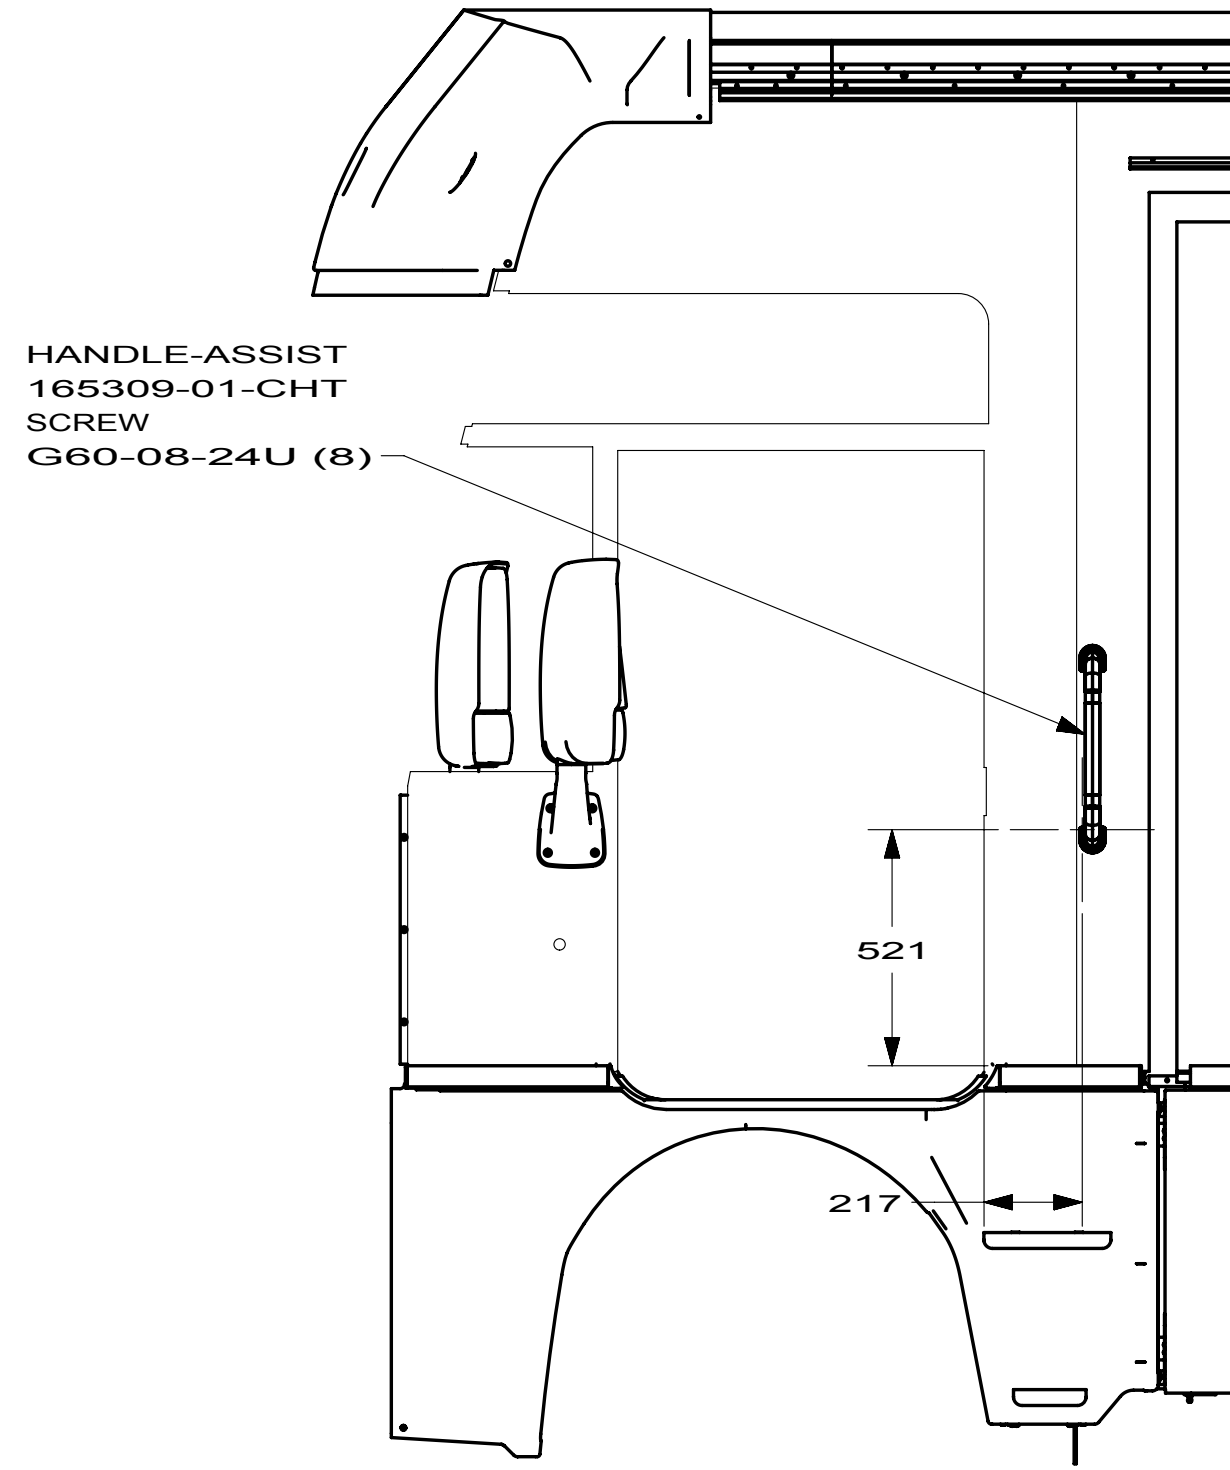


SECTION AH-AH 4

24B 24C 27A 92A

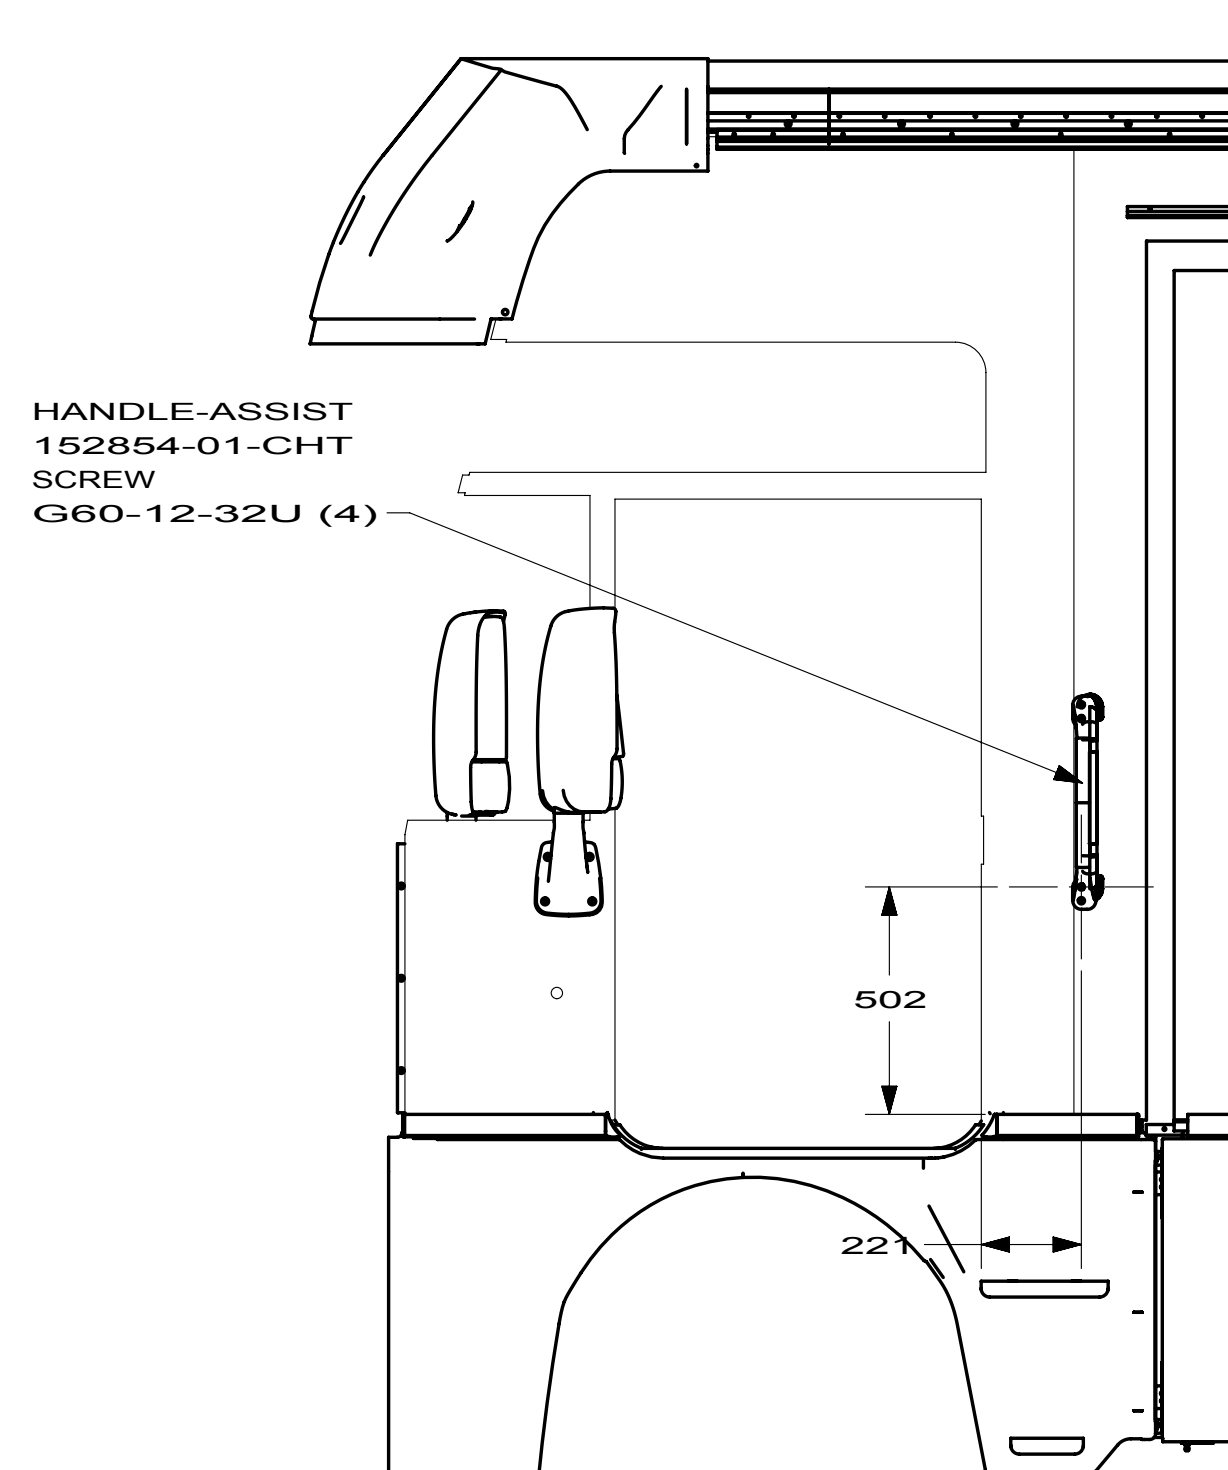


SECTION AH-AH 4


27G

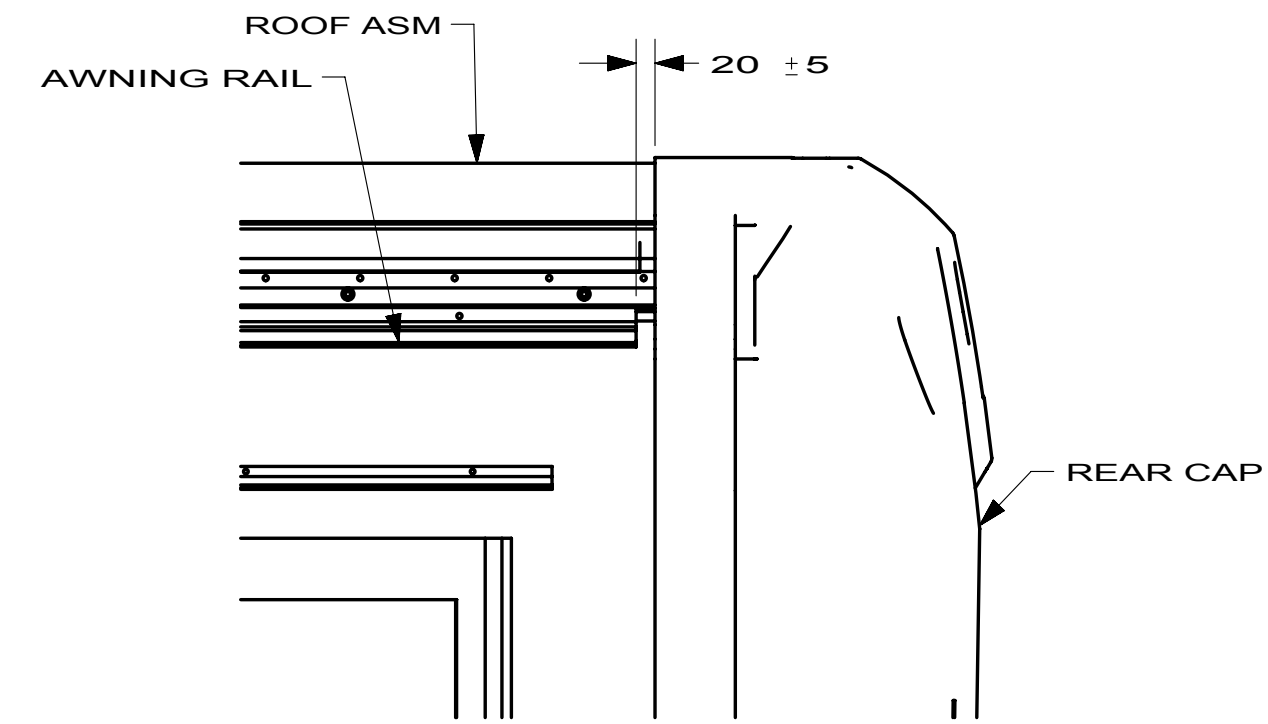

VIEW AJ-AJ

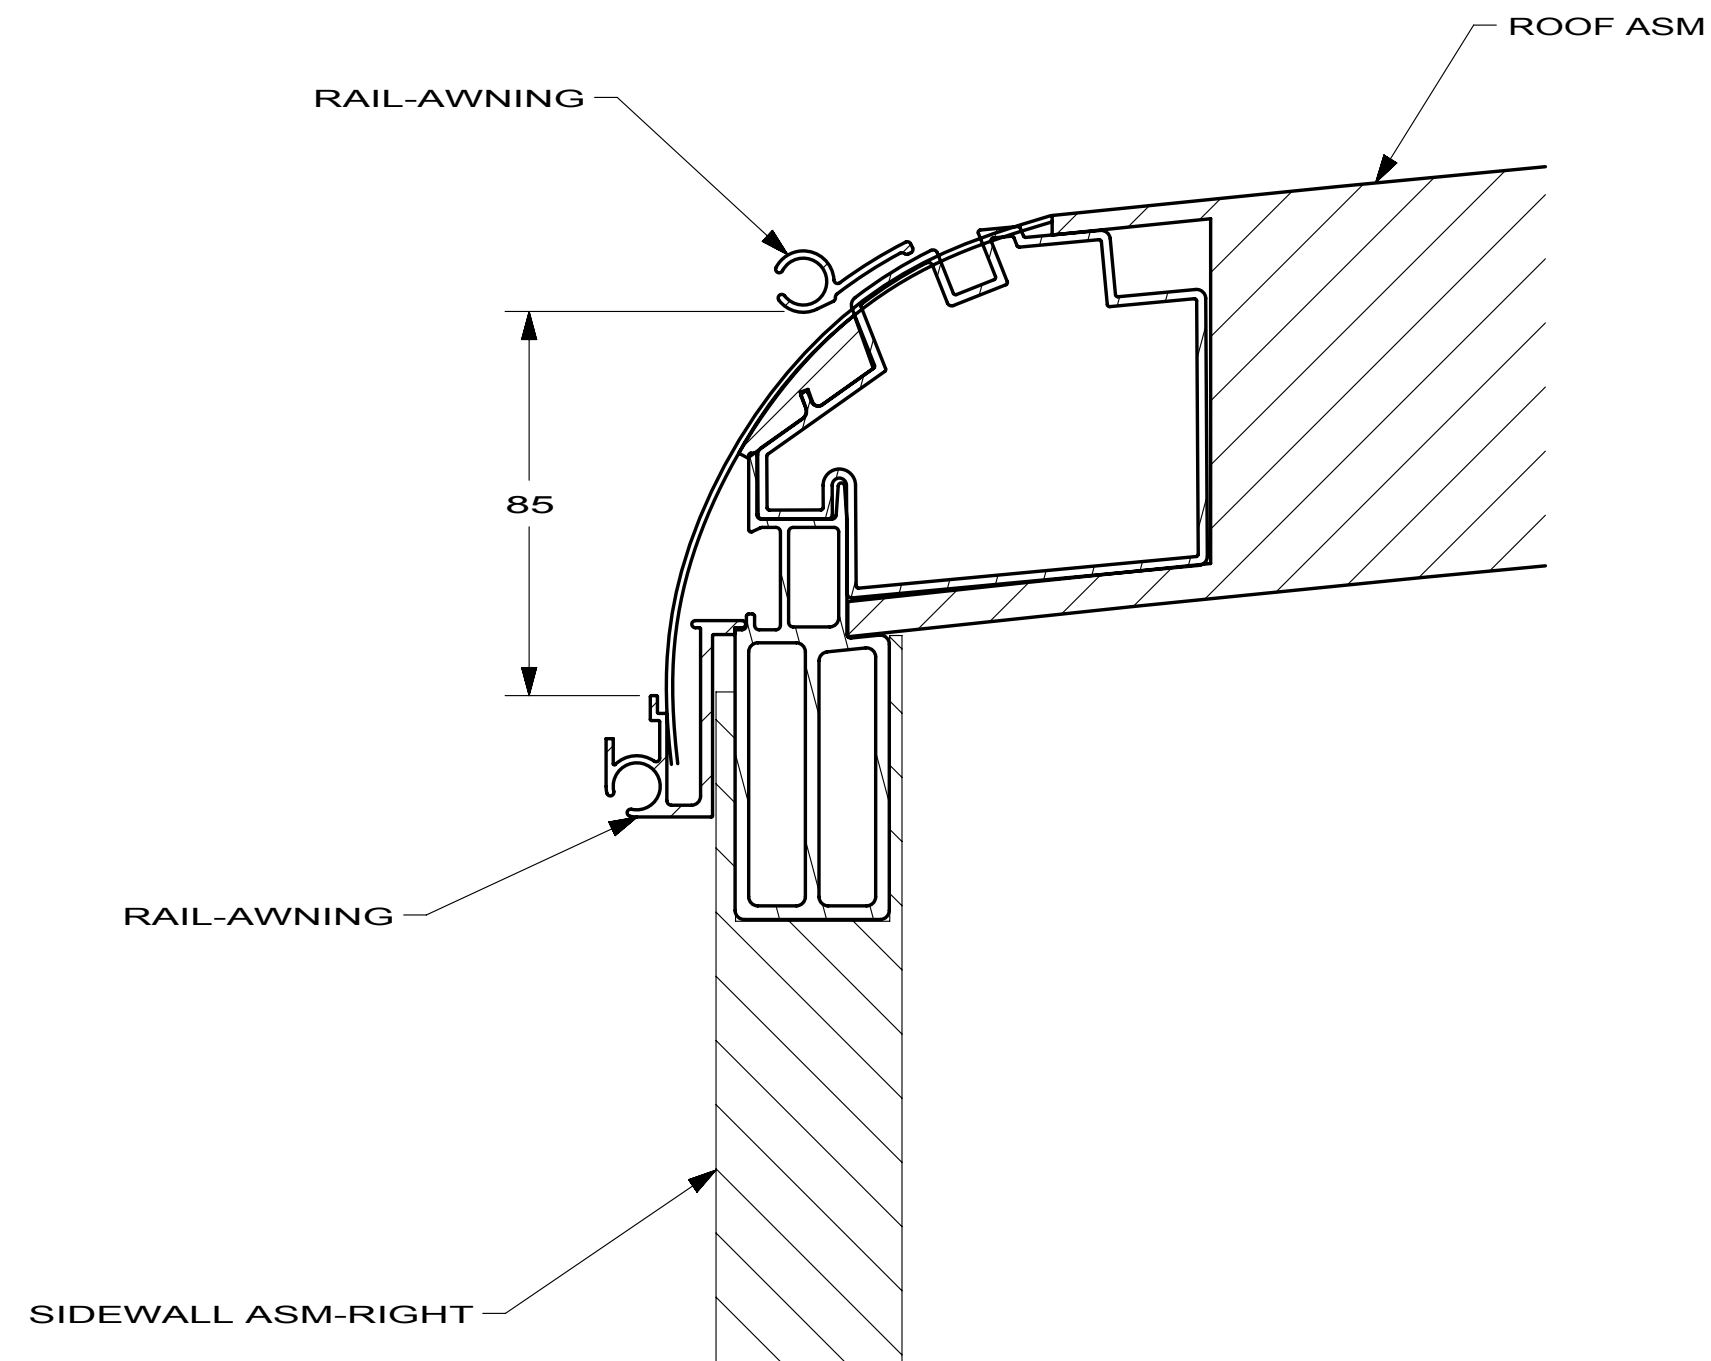


SECTION AL-AL

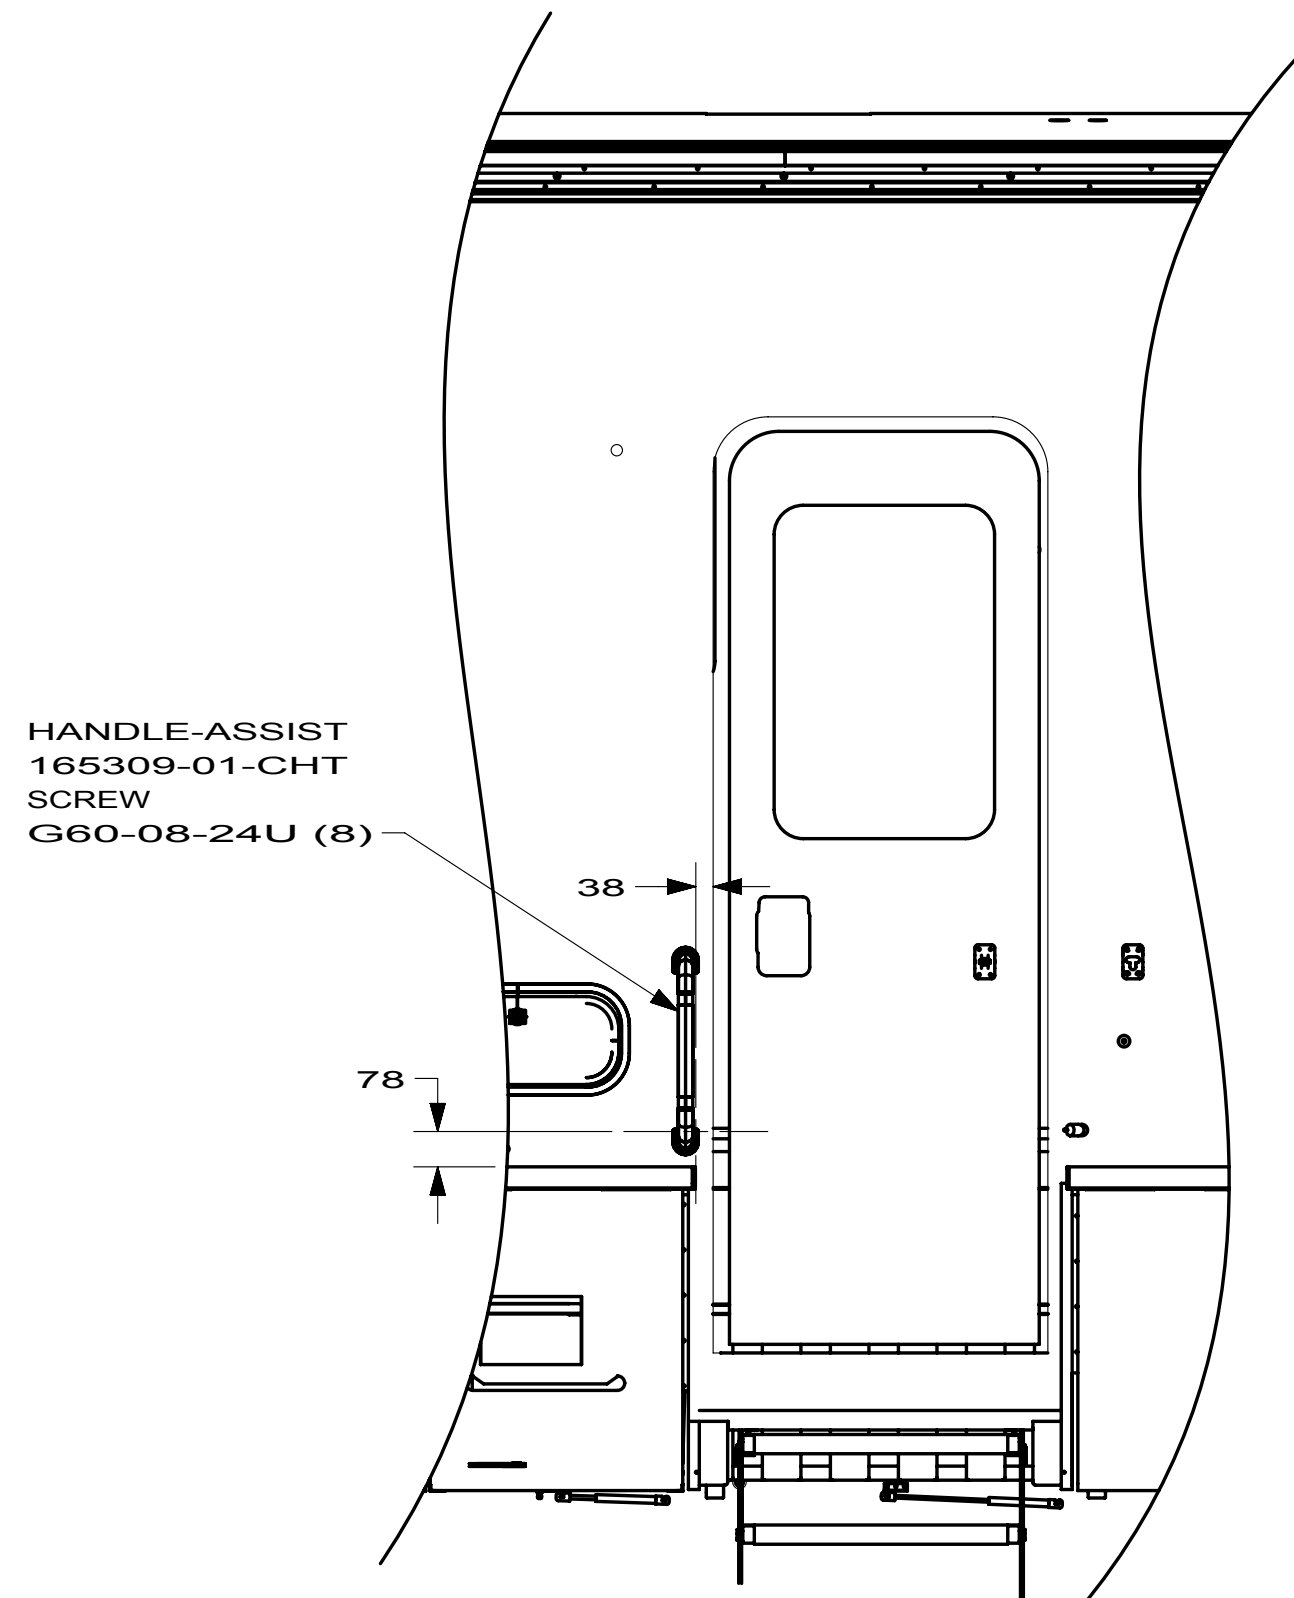

VIEW AK-AK 4

WIN ITA 24B 24C 27A 92A




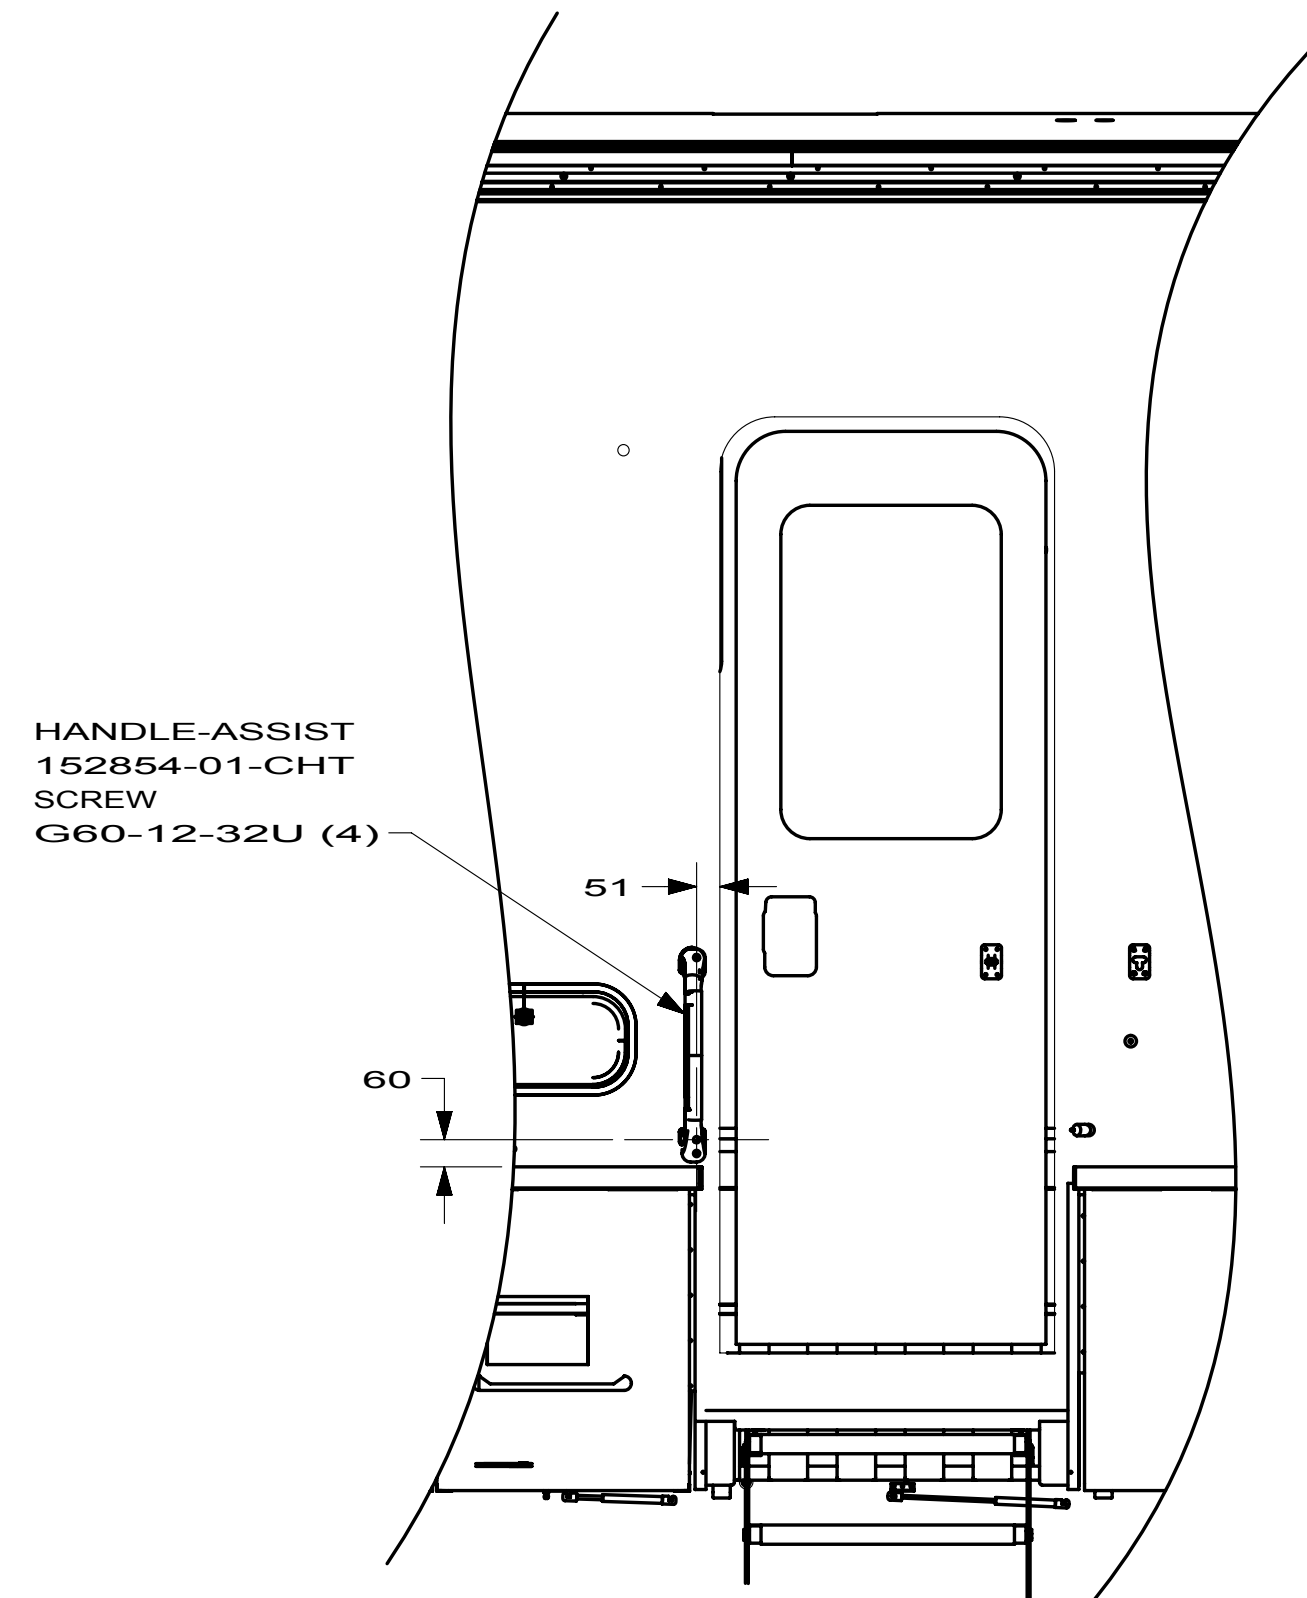


VIEW AK-AK 4


WIN 27G

- 27G EXTERIOR GRAPHICS PACKAGE #1
- 92A EXT FULL BODY PAINT PKG # 2
- 27A EXT FULL BODY PAINT PKG #1
- 24C EXT FULL BODY PAINT PKG # 3
- 24B EXT FULL BODY PAINT PKG #4
- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY


FIRST USED		
10J32H/10K32H		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 2	PART NO 169434	REV

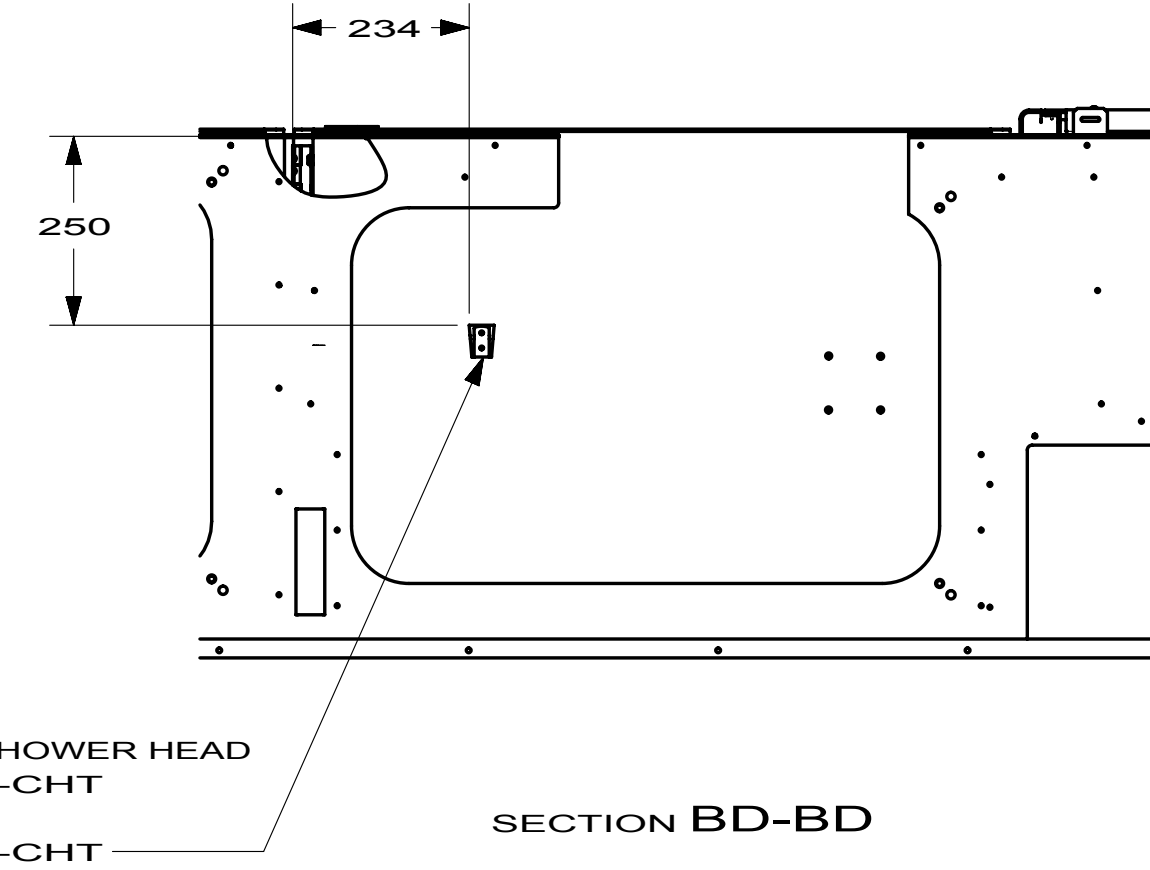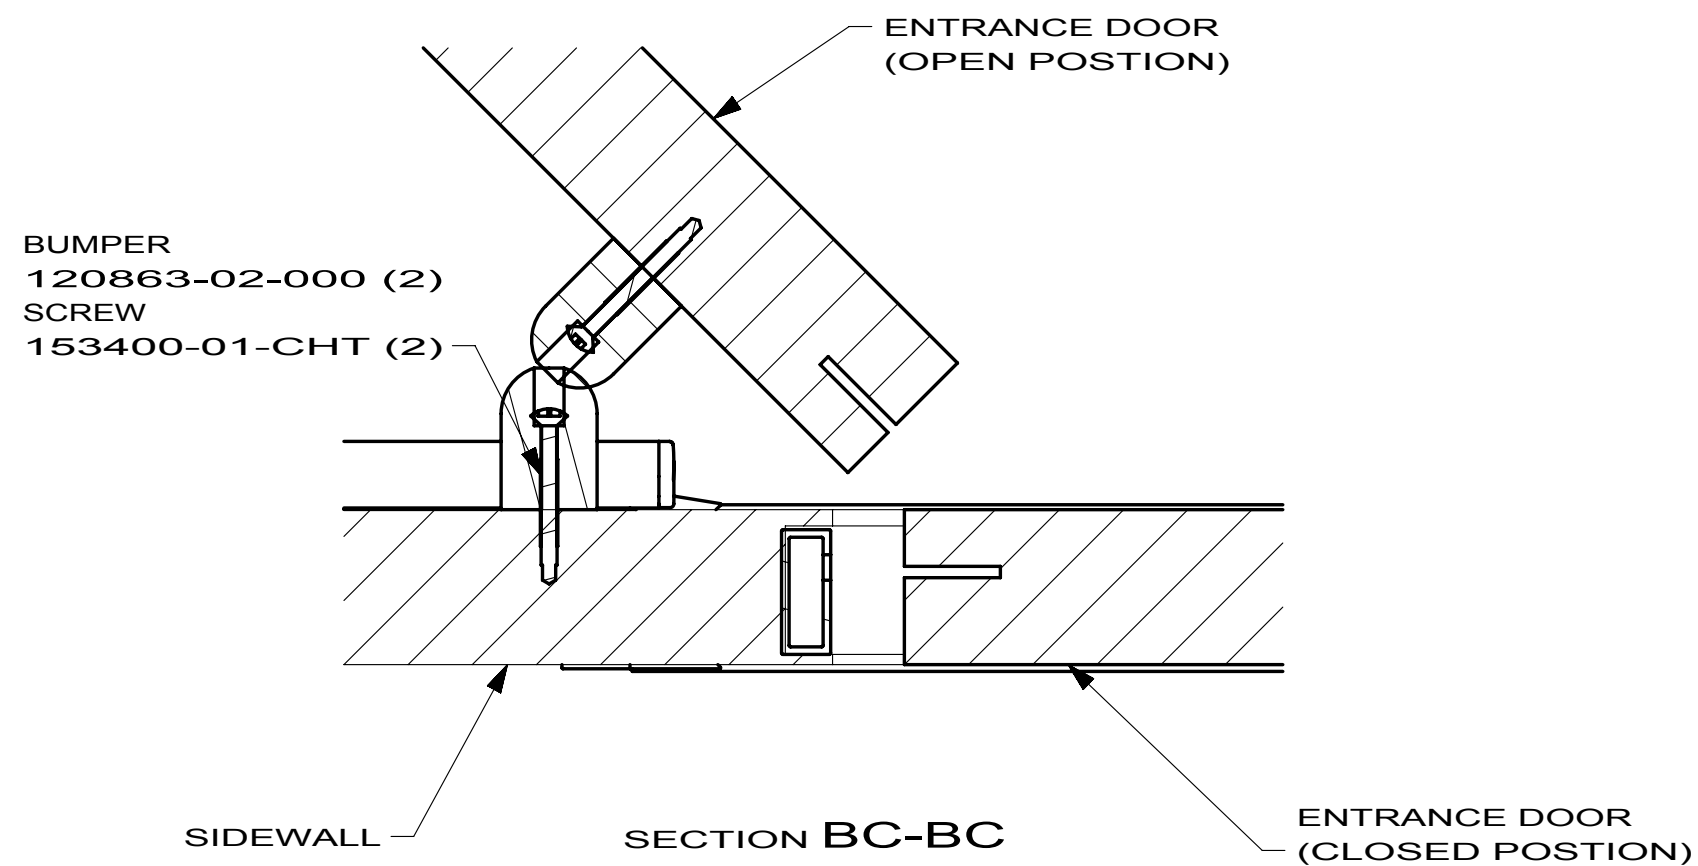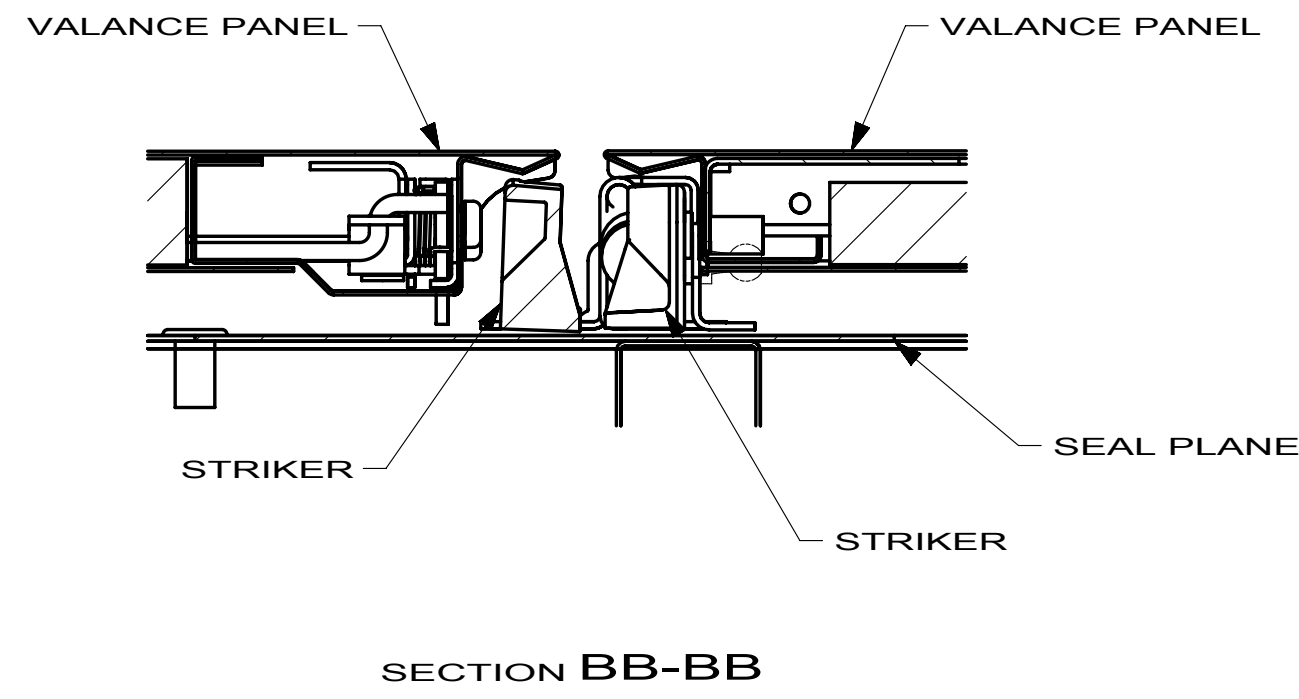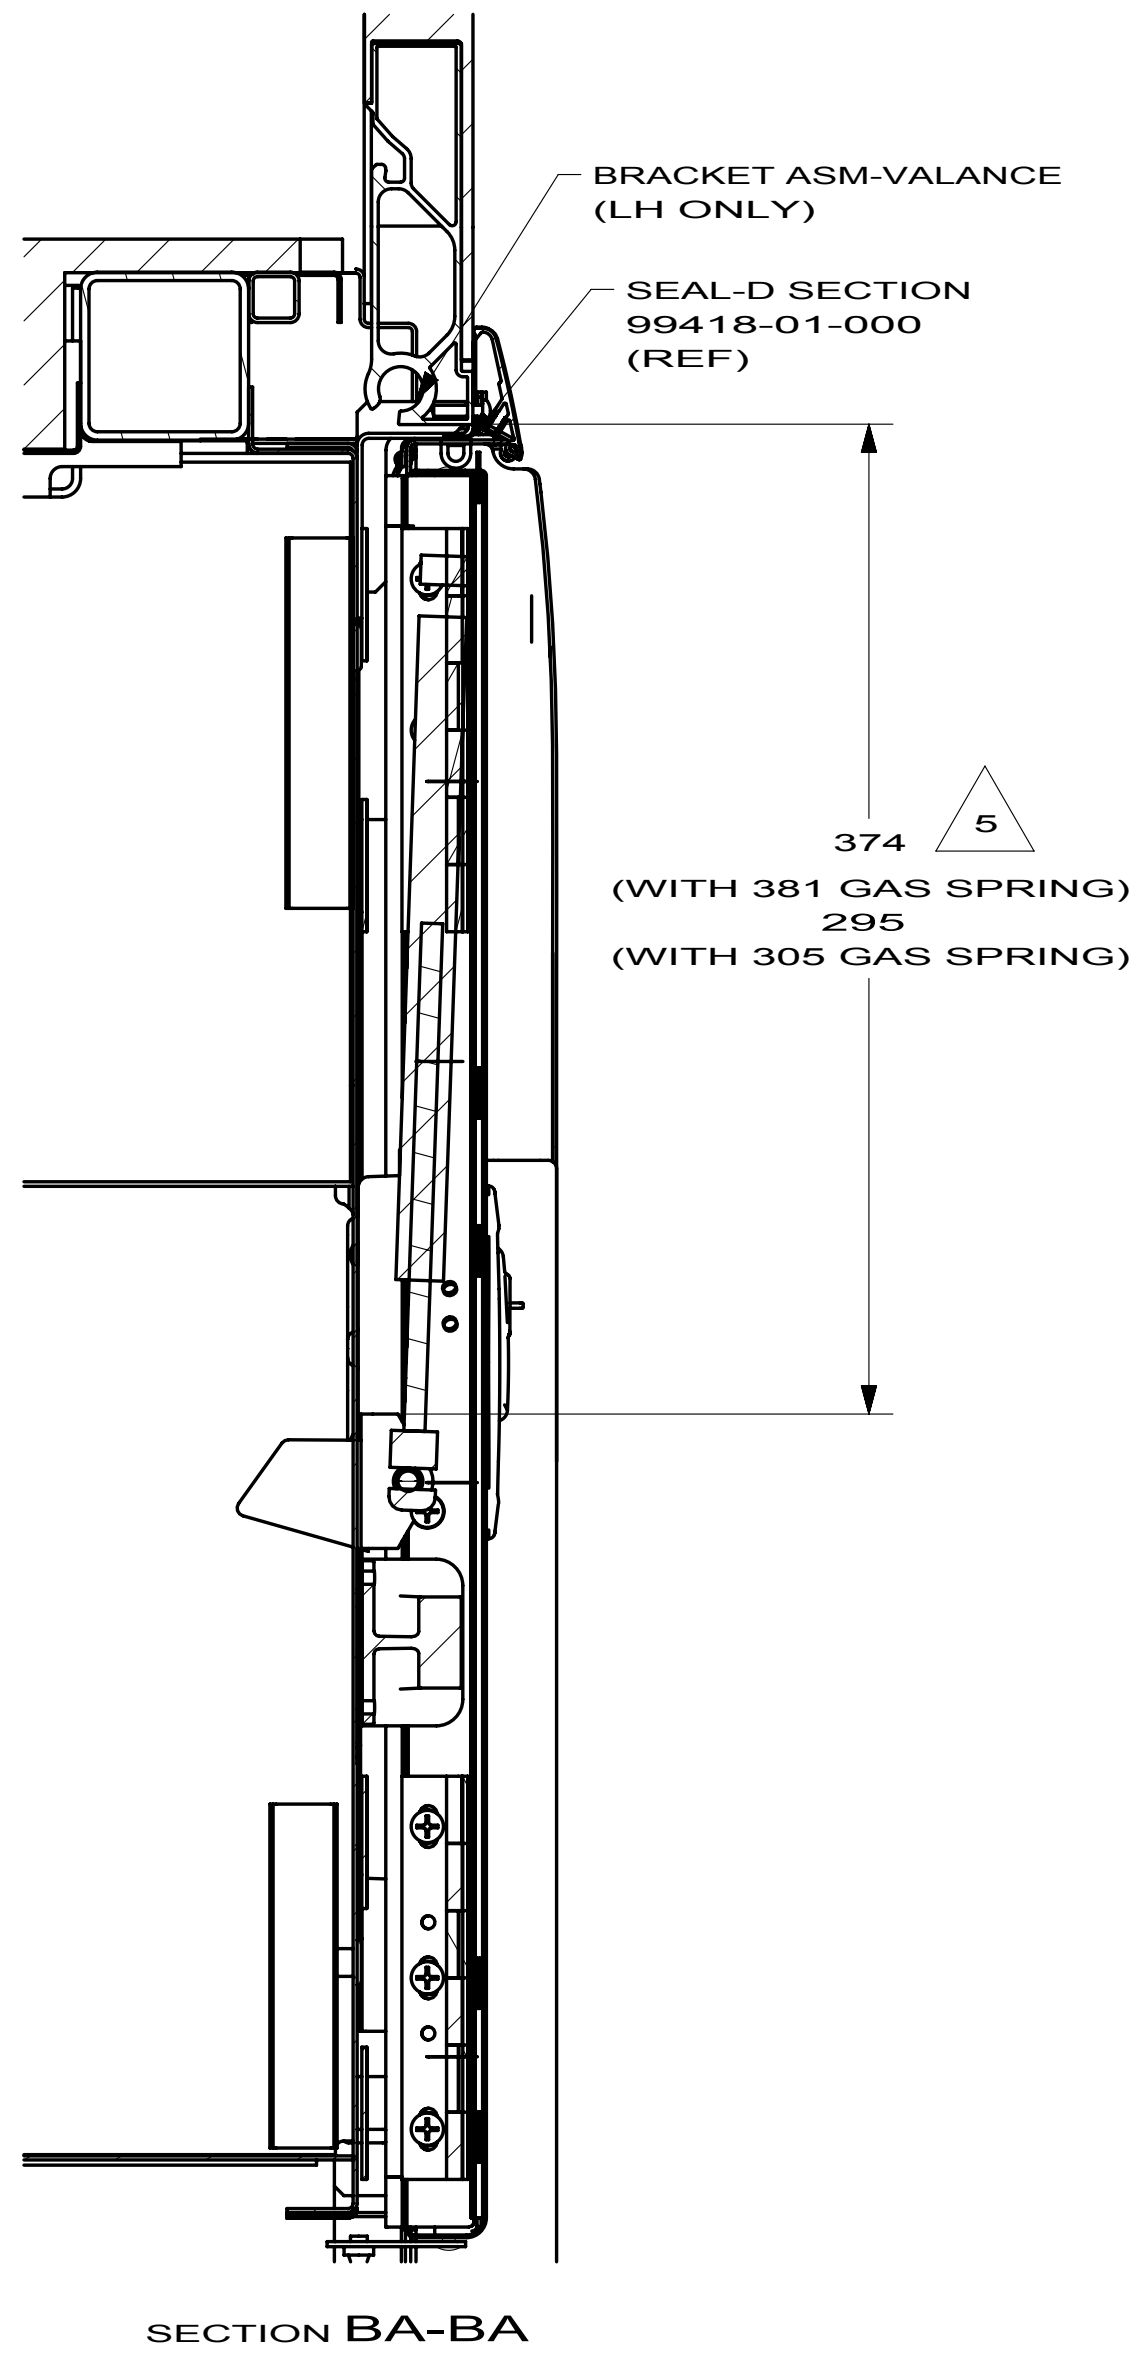


FIRST USED		
10J32H/10K32H		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 3	PART NO 169434	REV

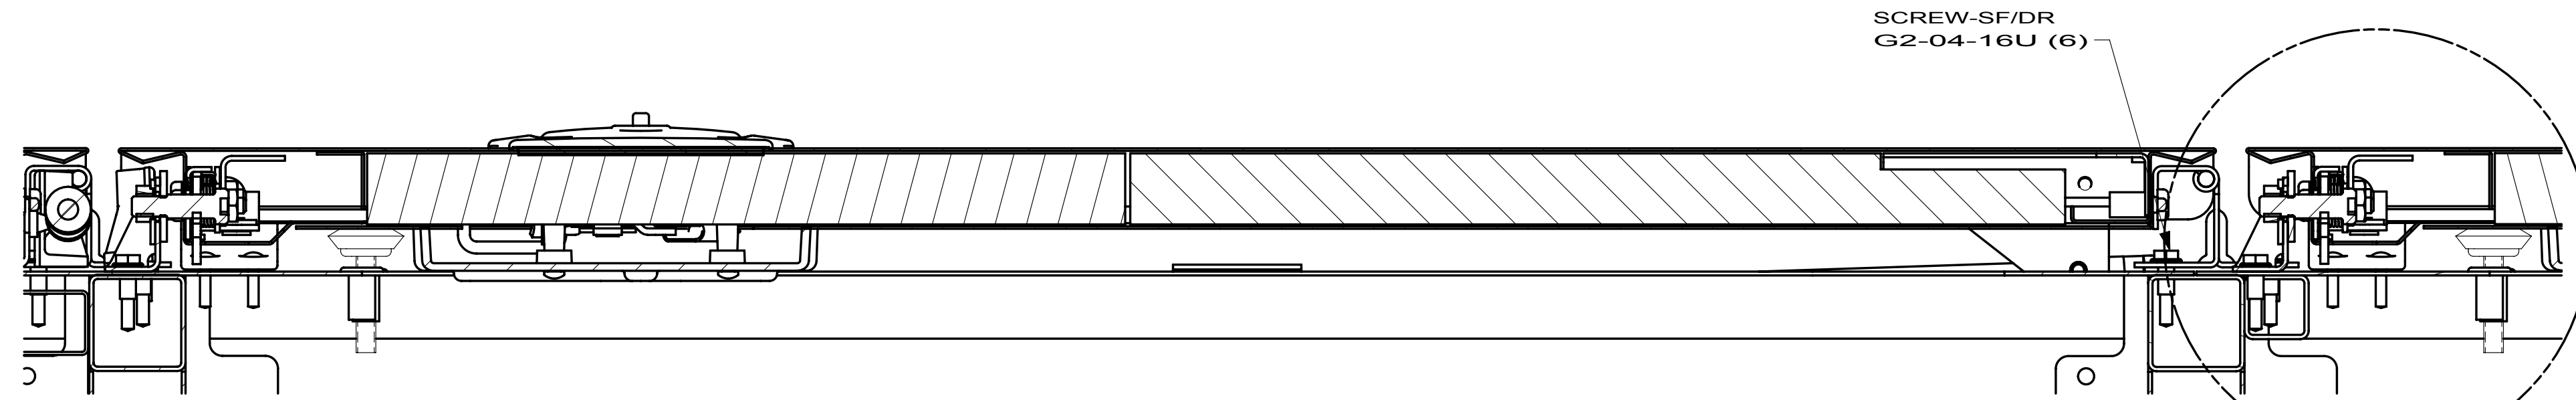


SECTION BG-BG 8

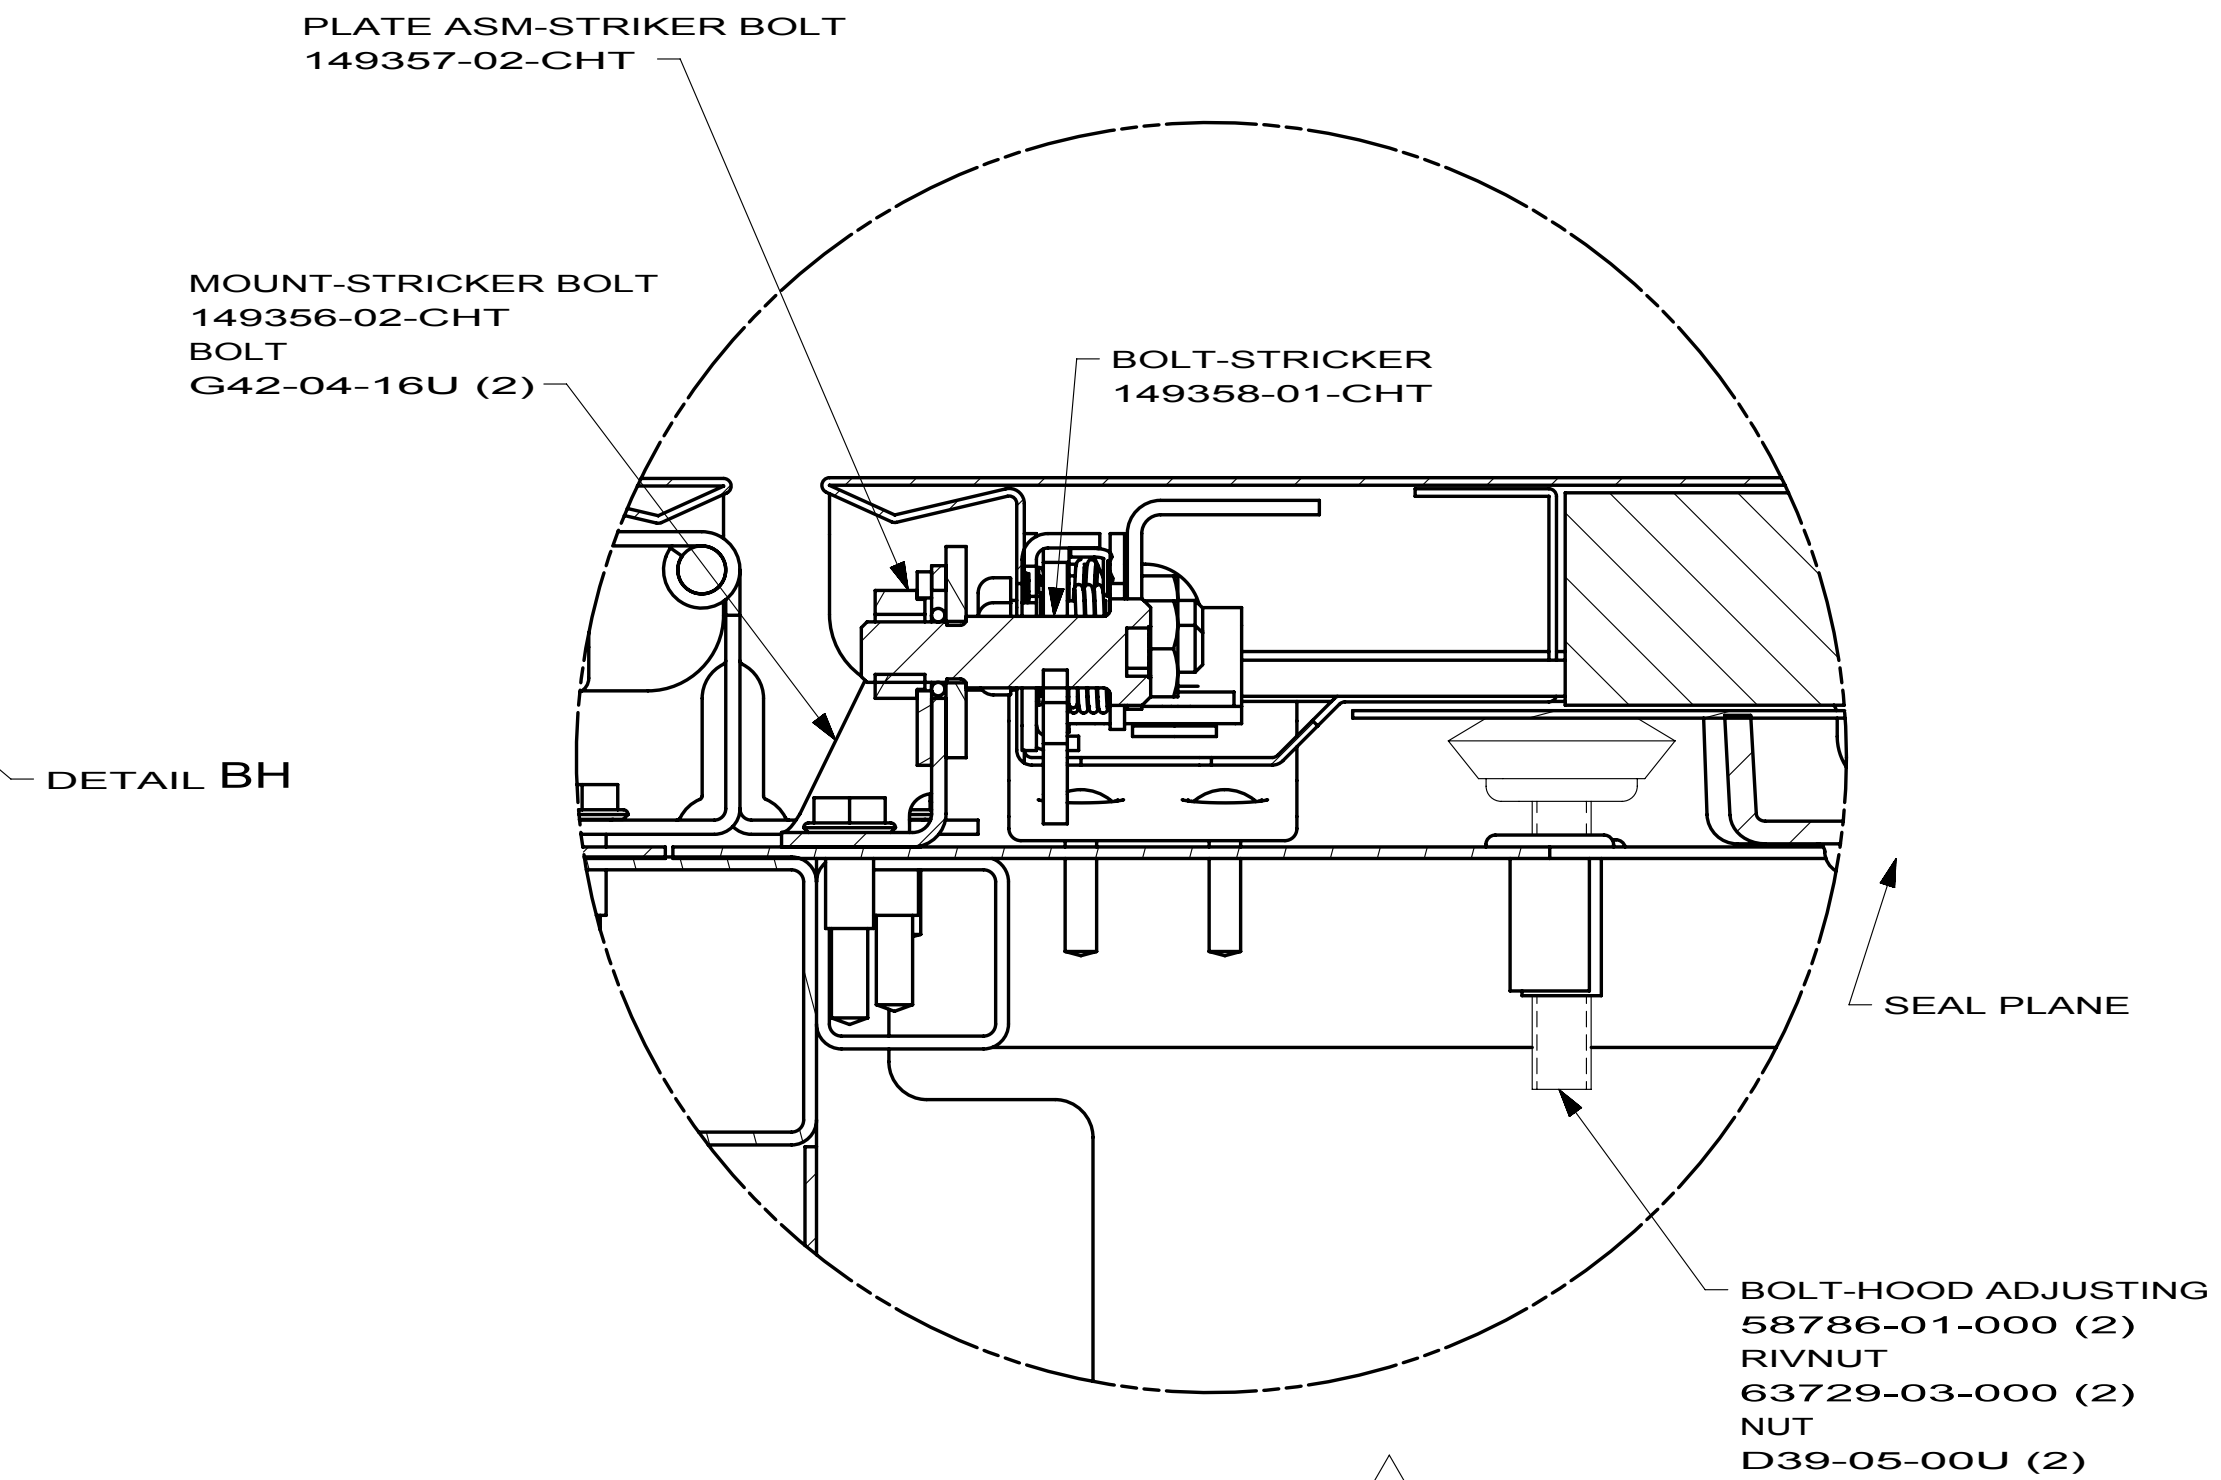

DETAIL BH 8

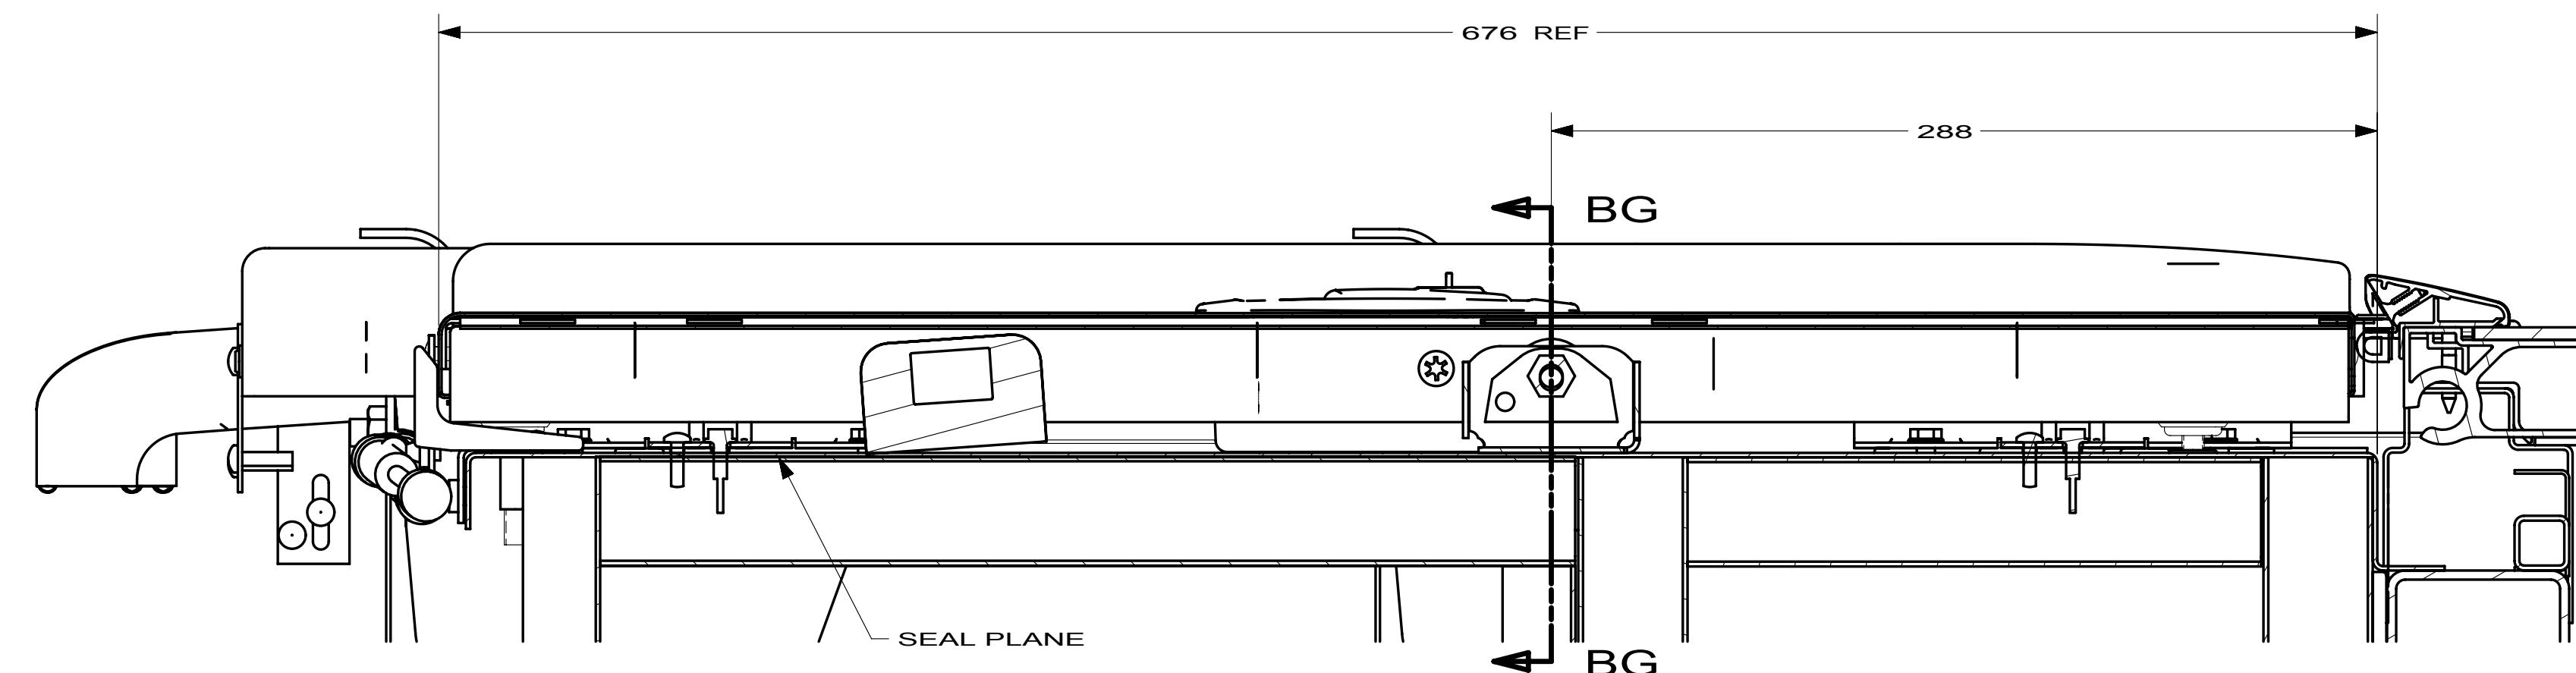


SECTION BF-BF 8

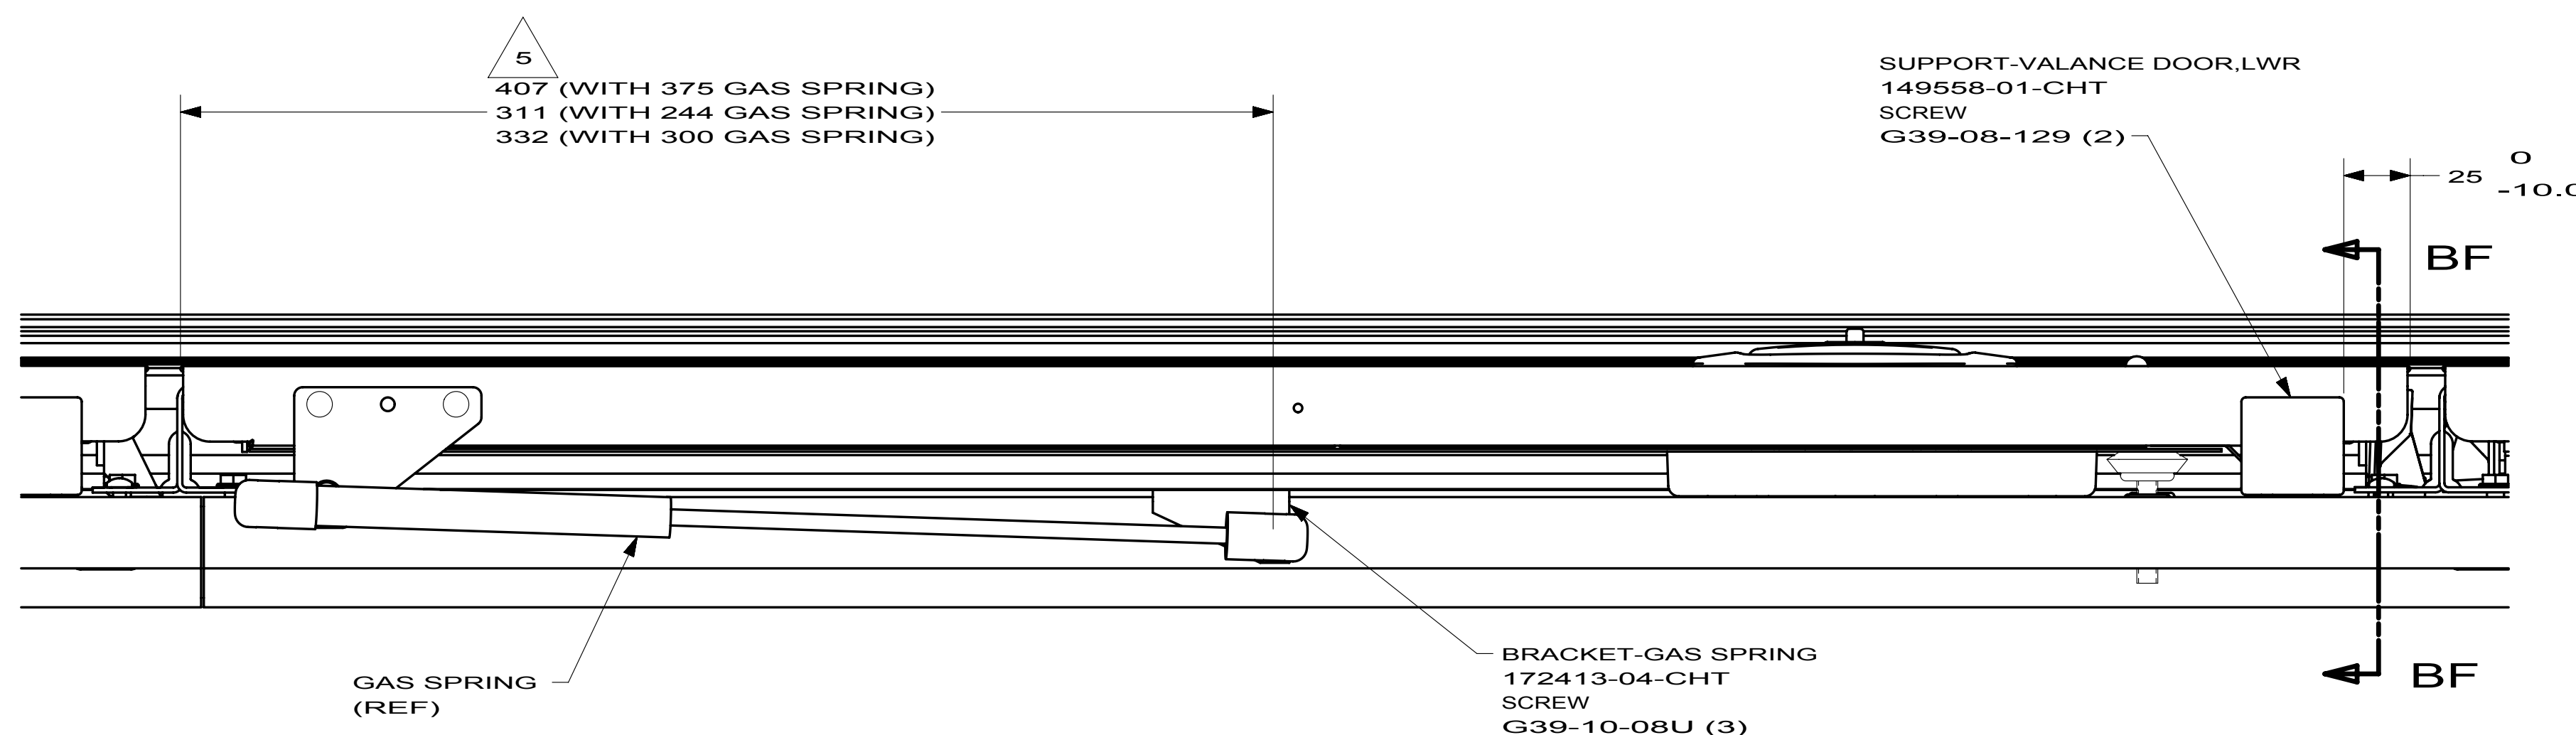




SECTION BE-BE 8

FIRST USED		
10J32H/10K32H		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-SECTIONS		
SHEET 4	PART NO 169434	REV

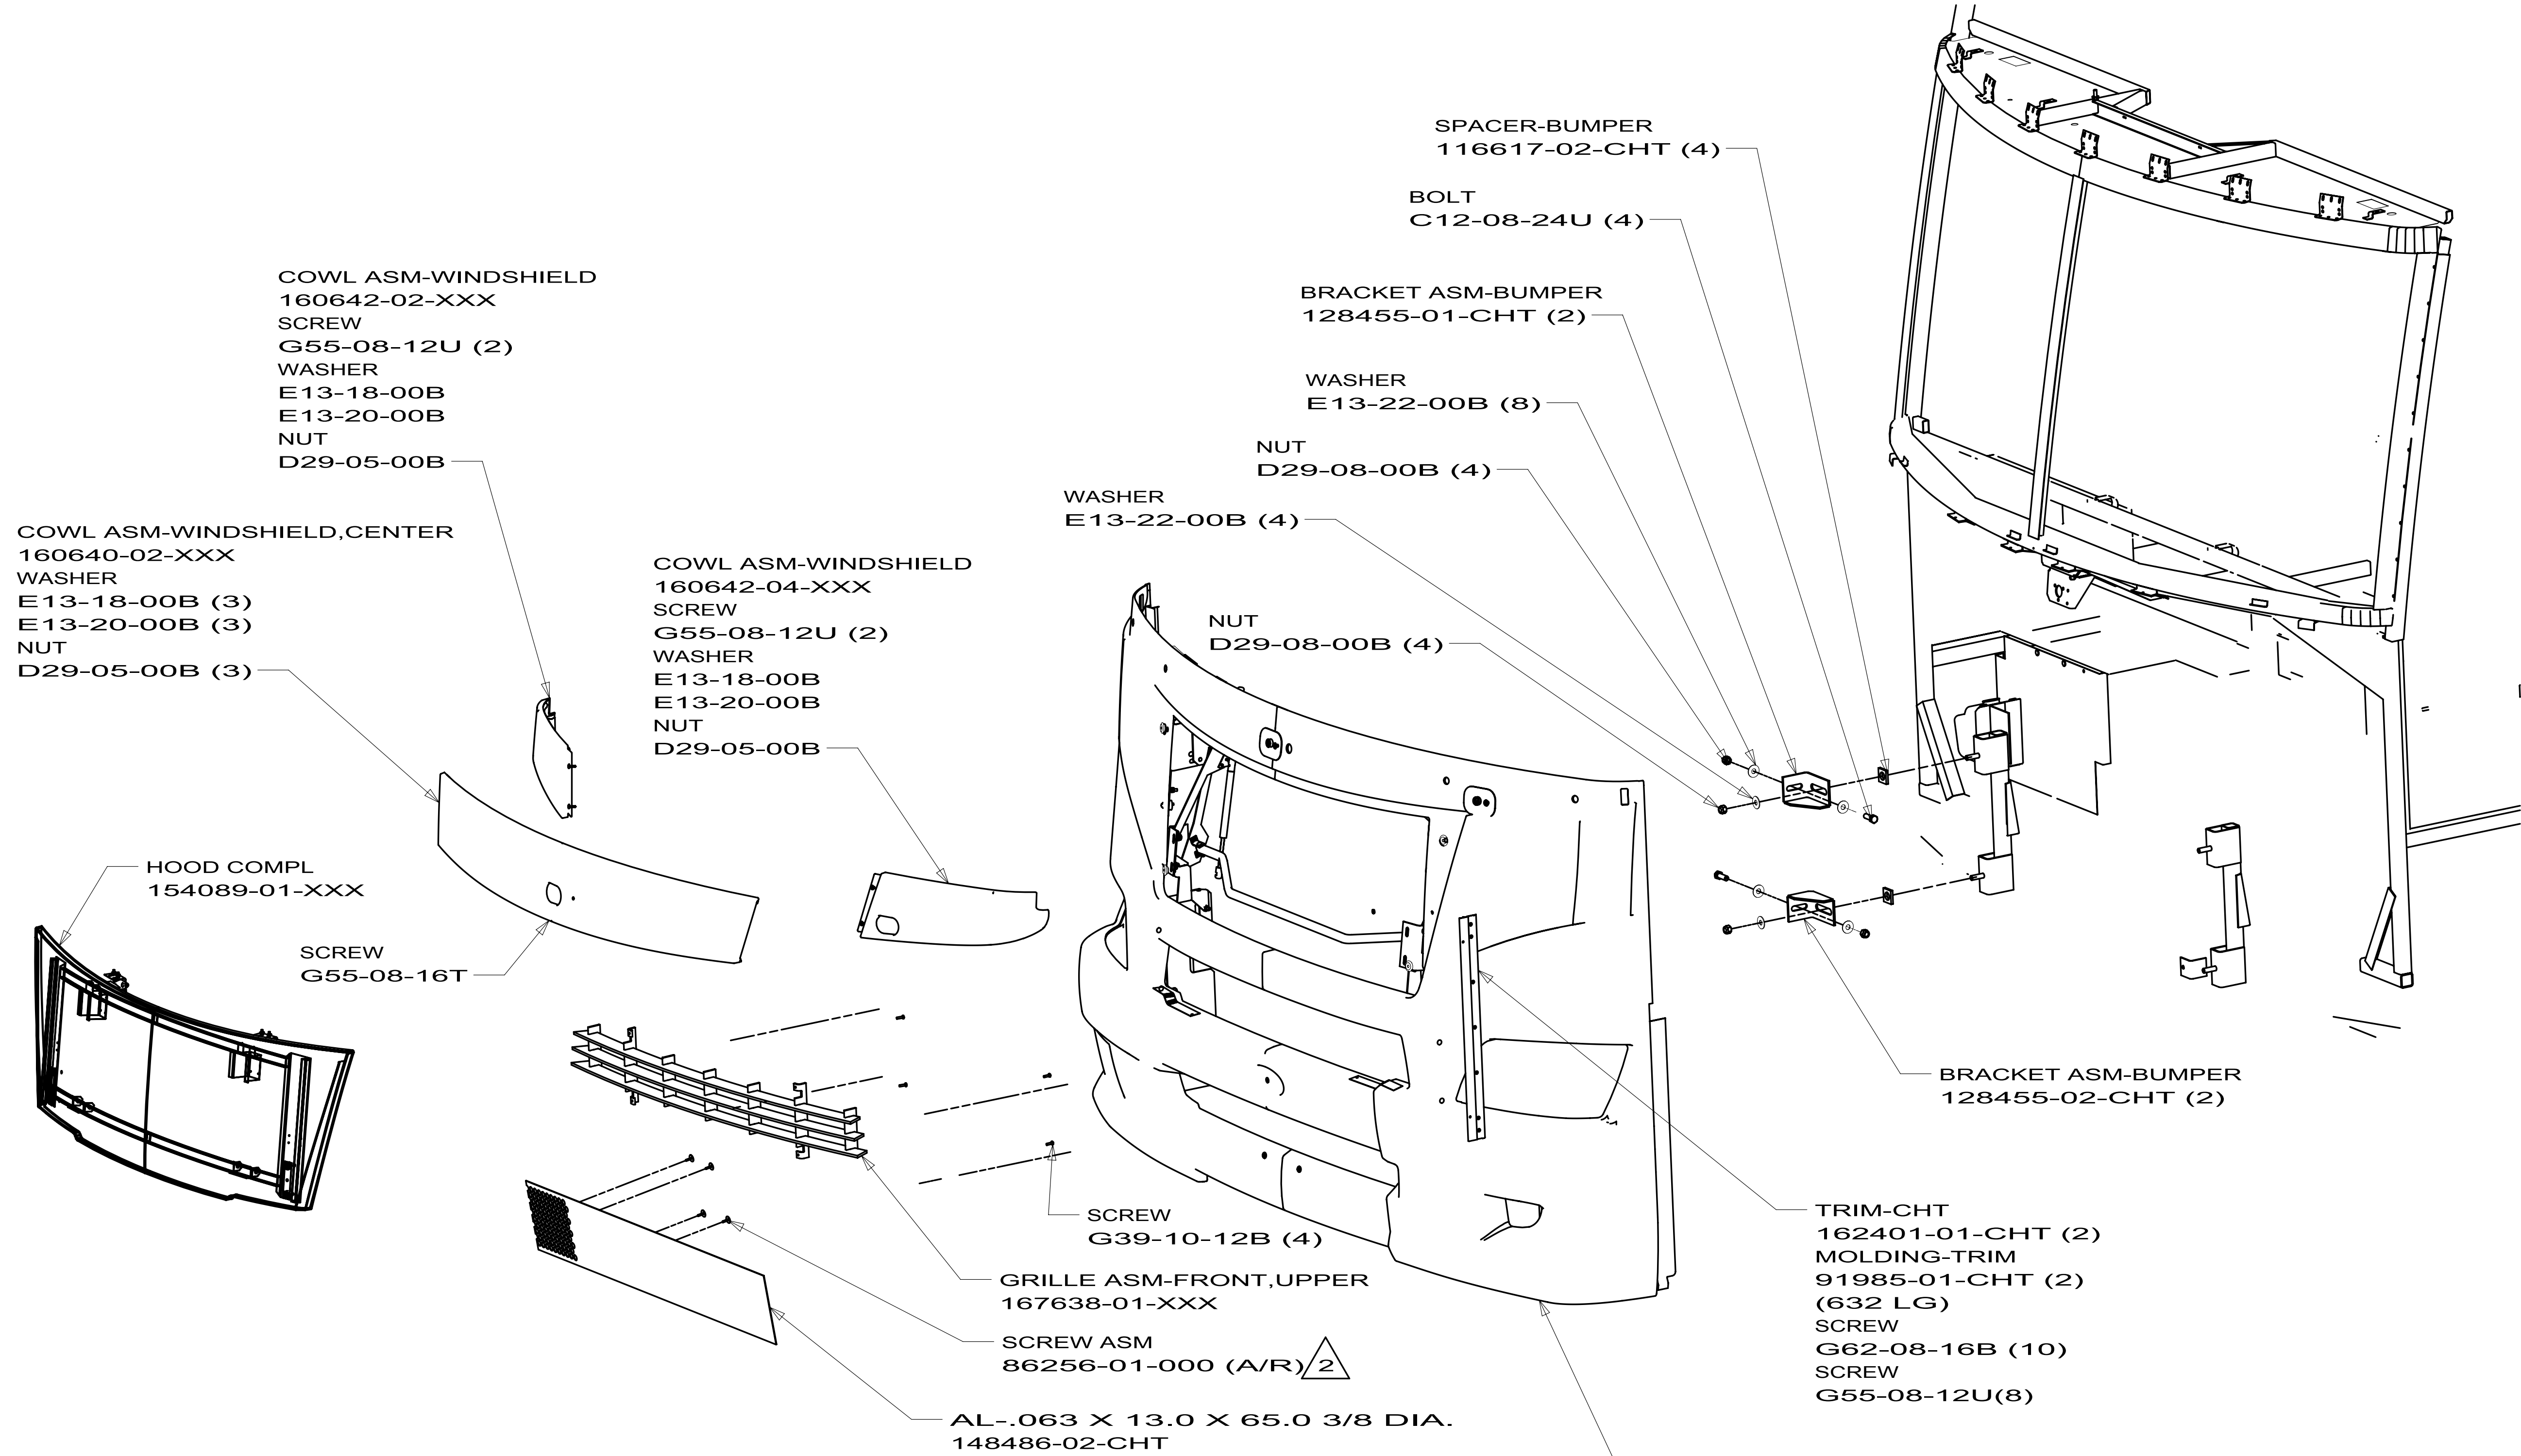

5. BUMPER MUST CONTACT HOOD IN THE CLOSED POSITION.
4. DRIVER SIDE BUMPER TO BE REMOVED WHEN USED WITH FORD CHASSIS.
3. AFTER HOOD ADJUSTMENT, THE BUMPER MUST CONTACT HINGE LINK IN THE CLOSED POSITION.
2. MINIMUM 2 SCREWS PER MOUNTING FLANGE WITH A SCREW WITHIN 20.0 EF EACH FLANGE END.
1. TOP OF PANEL ASM-FRONT, LOWER TO BE ALIGNED WITH BOTTOM EDGE OF WINDSHIELD.

WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT:R		ORIG. DATE	
CHK:R		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.:		FIRST USED	
M.E.:		09 J-SERIES	
DSNR		MATERIAL:	
UNSPECIFIED TOLERANCES ARE:		THIRD ANGLE PROJECTION	
WHOLE DIM (X) : 3		DO NOT SCALE DRAWING	
ONE-PLACE (X.X) : 1.5		TITLE: BODY PANEL INSTL-FRONT	
TWO-PLACE (X.XX) : 0.50		SHEET 1 of 4	
ANGLE : 1°		PART NO 164444	
		REF: 1	

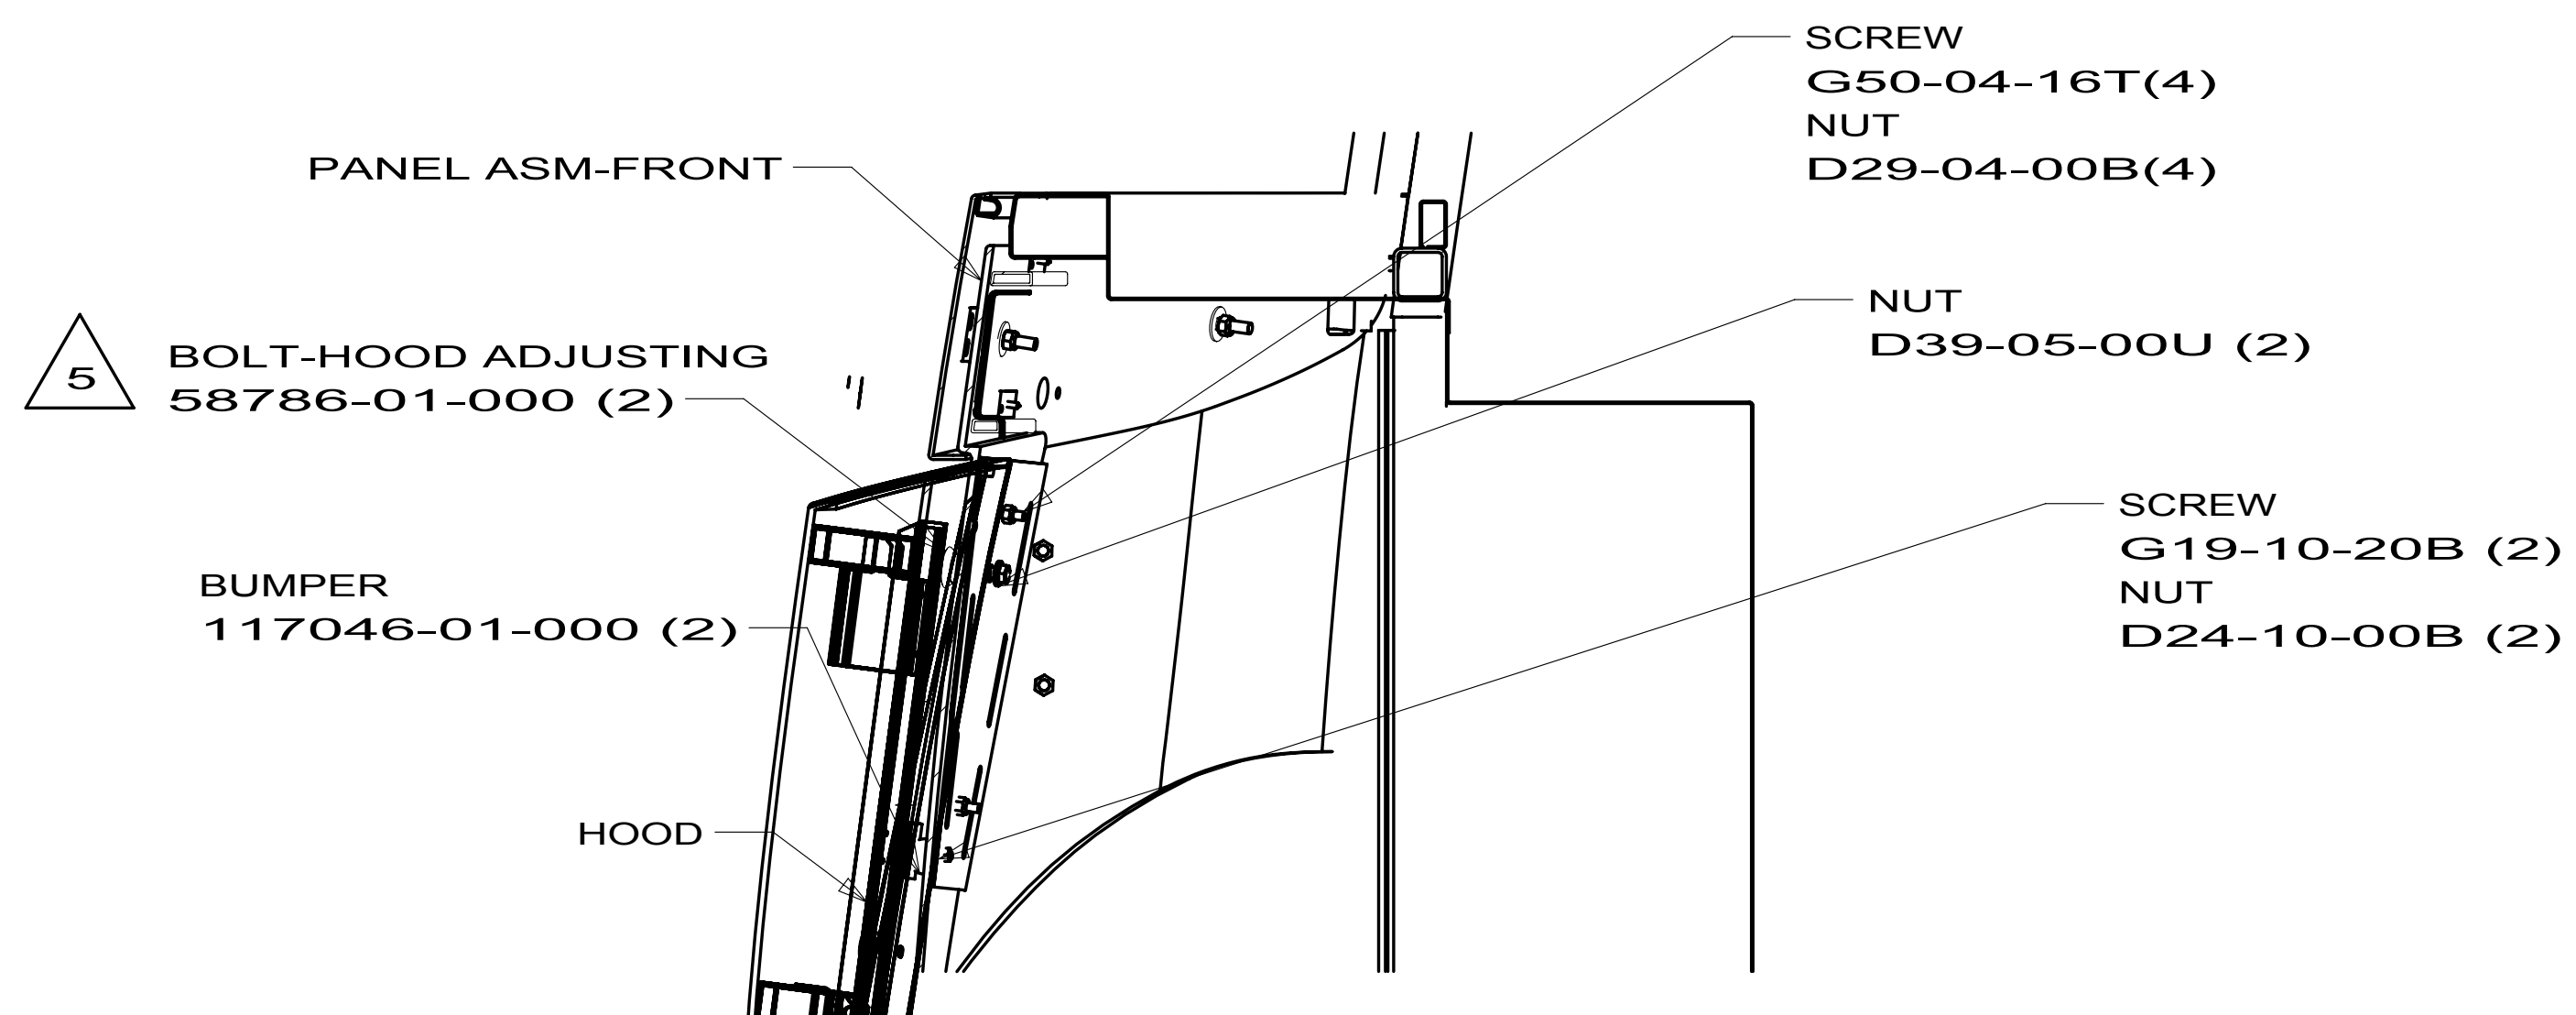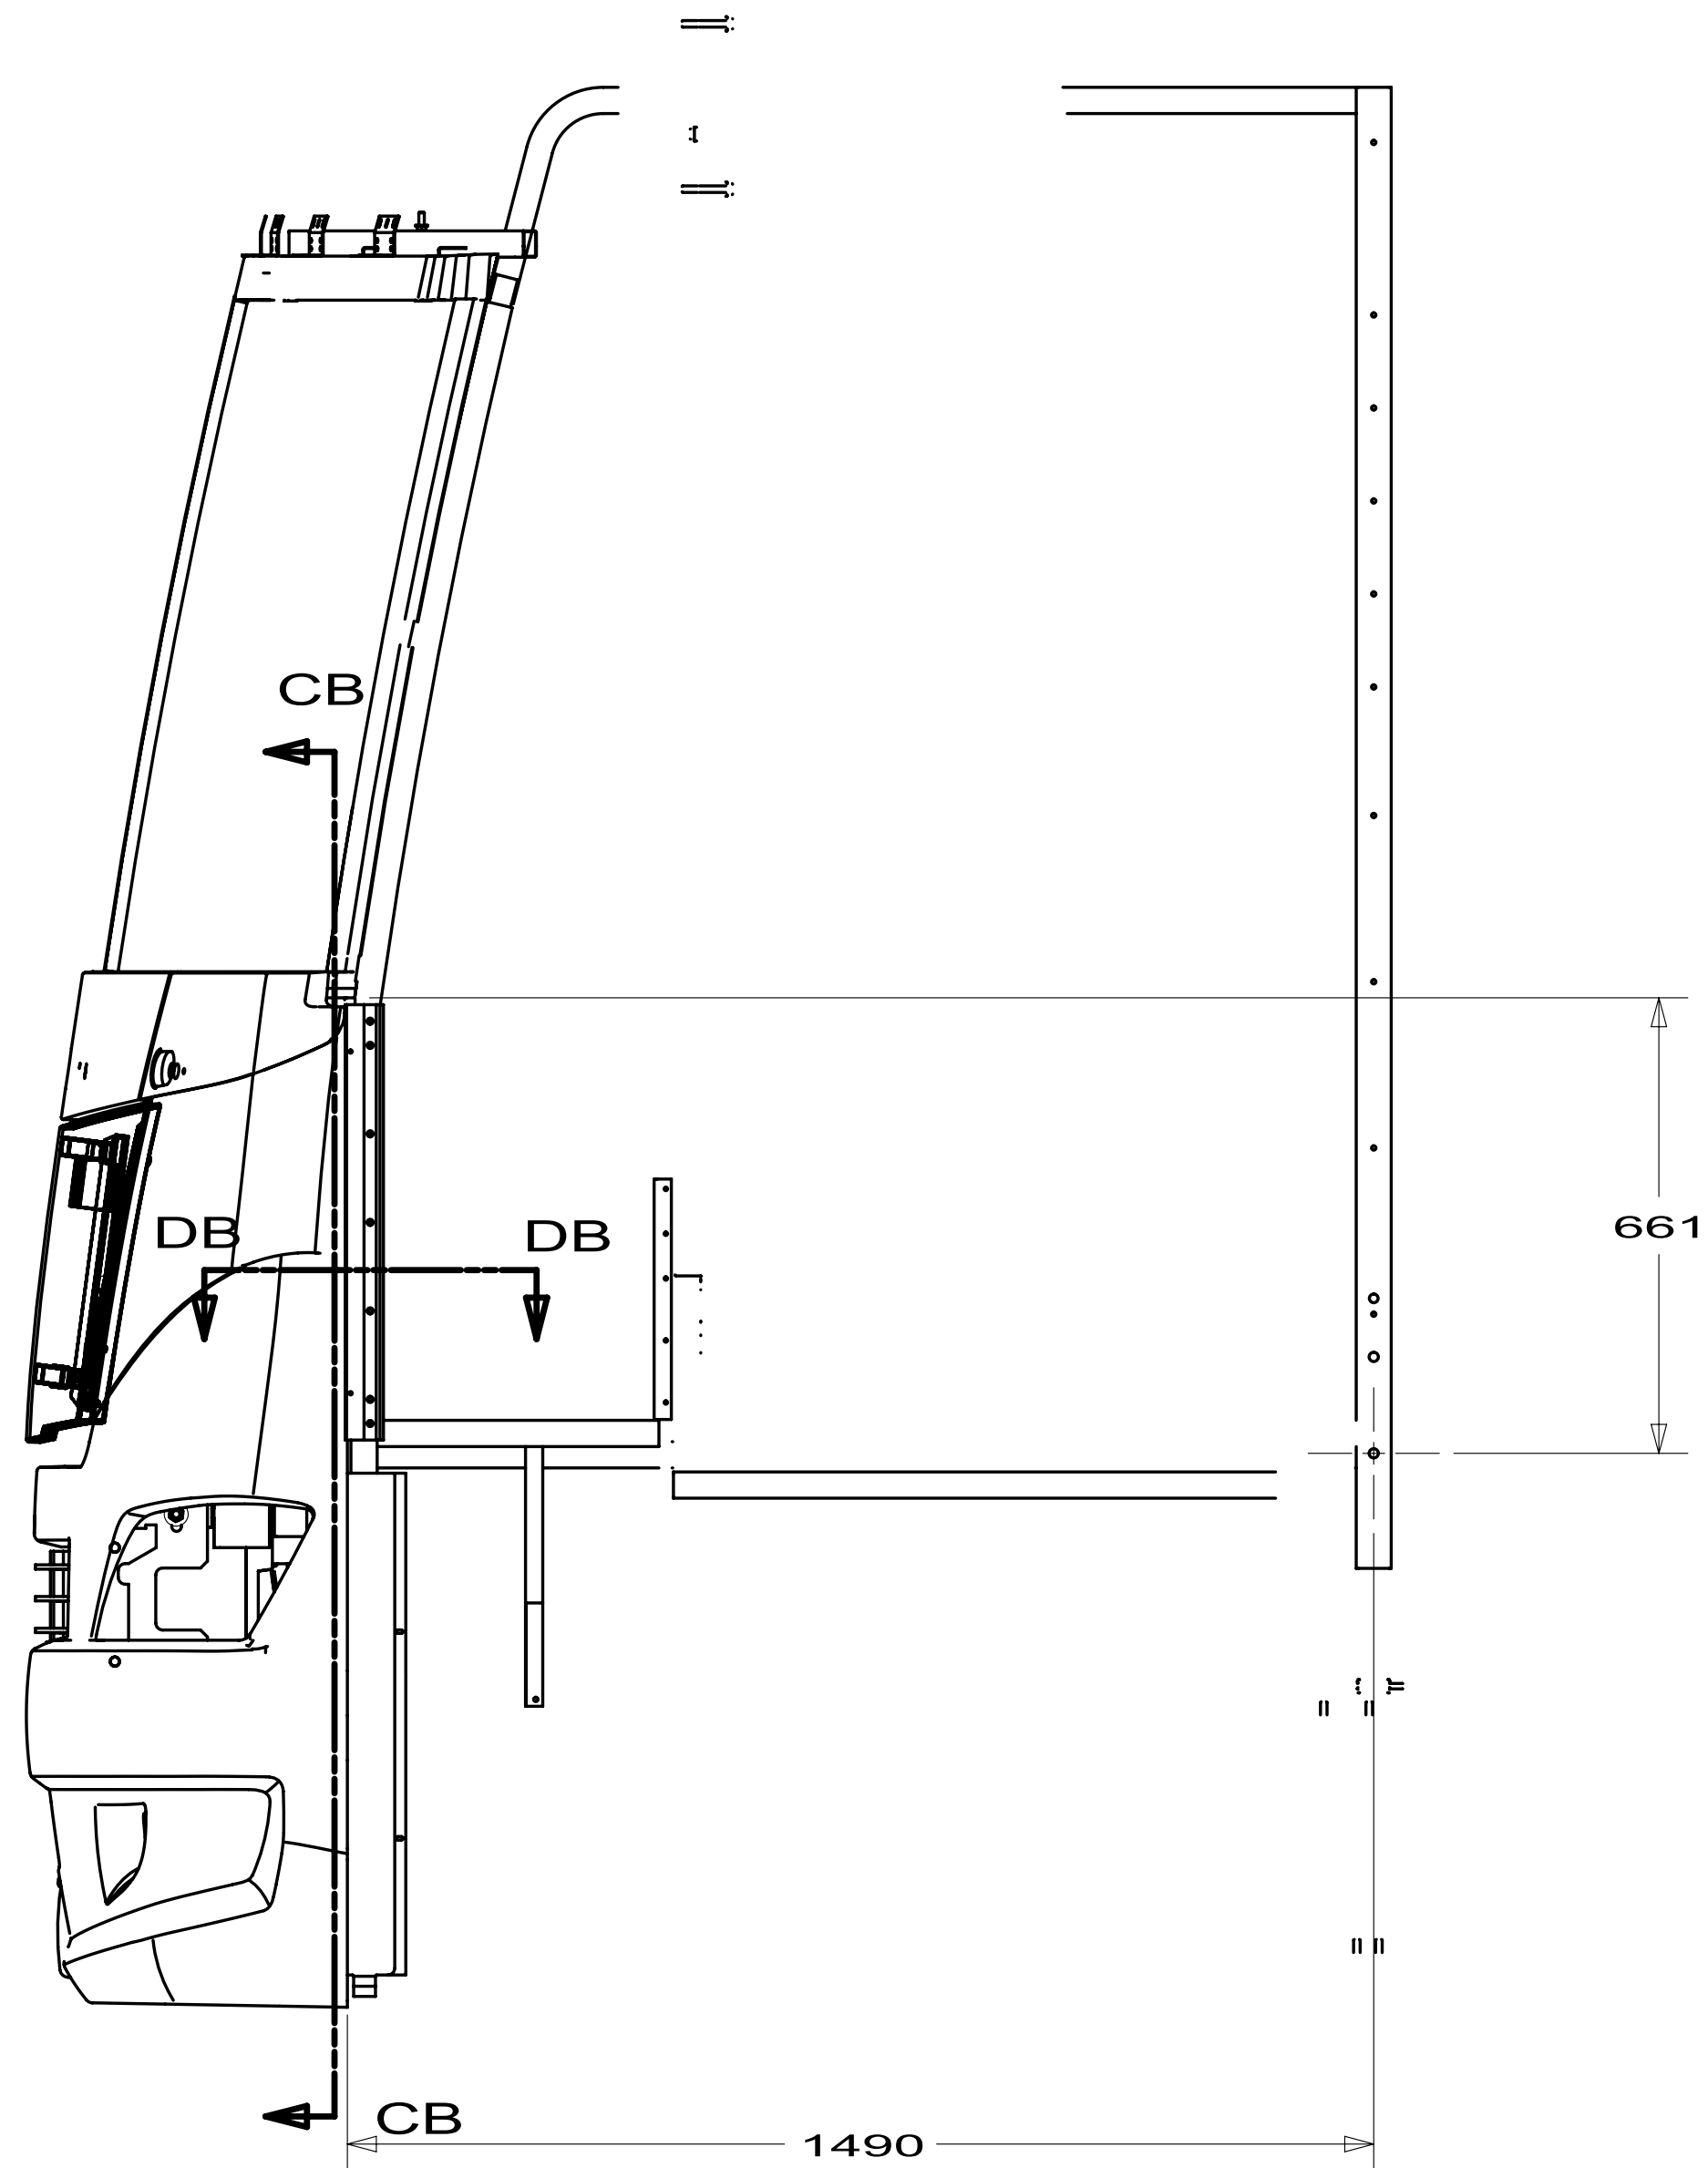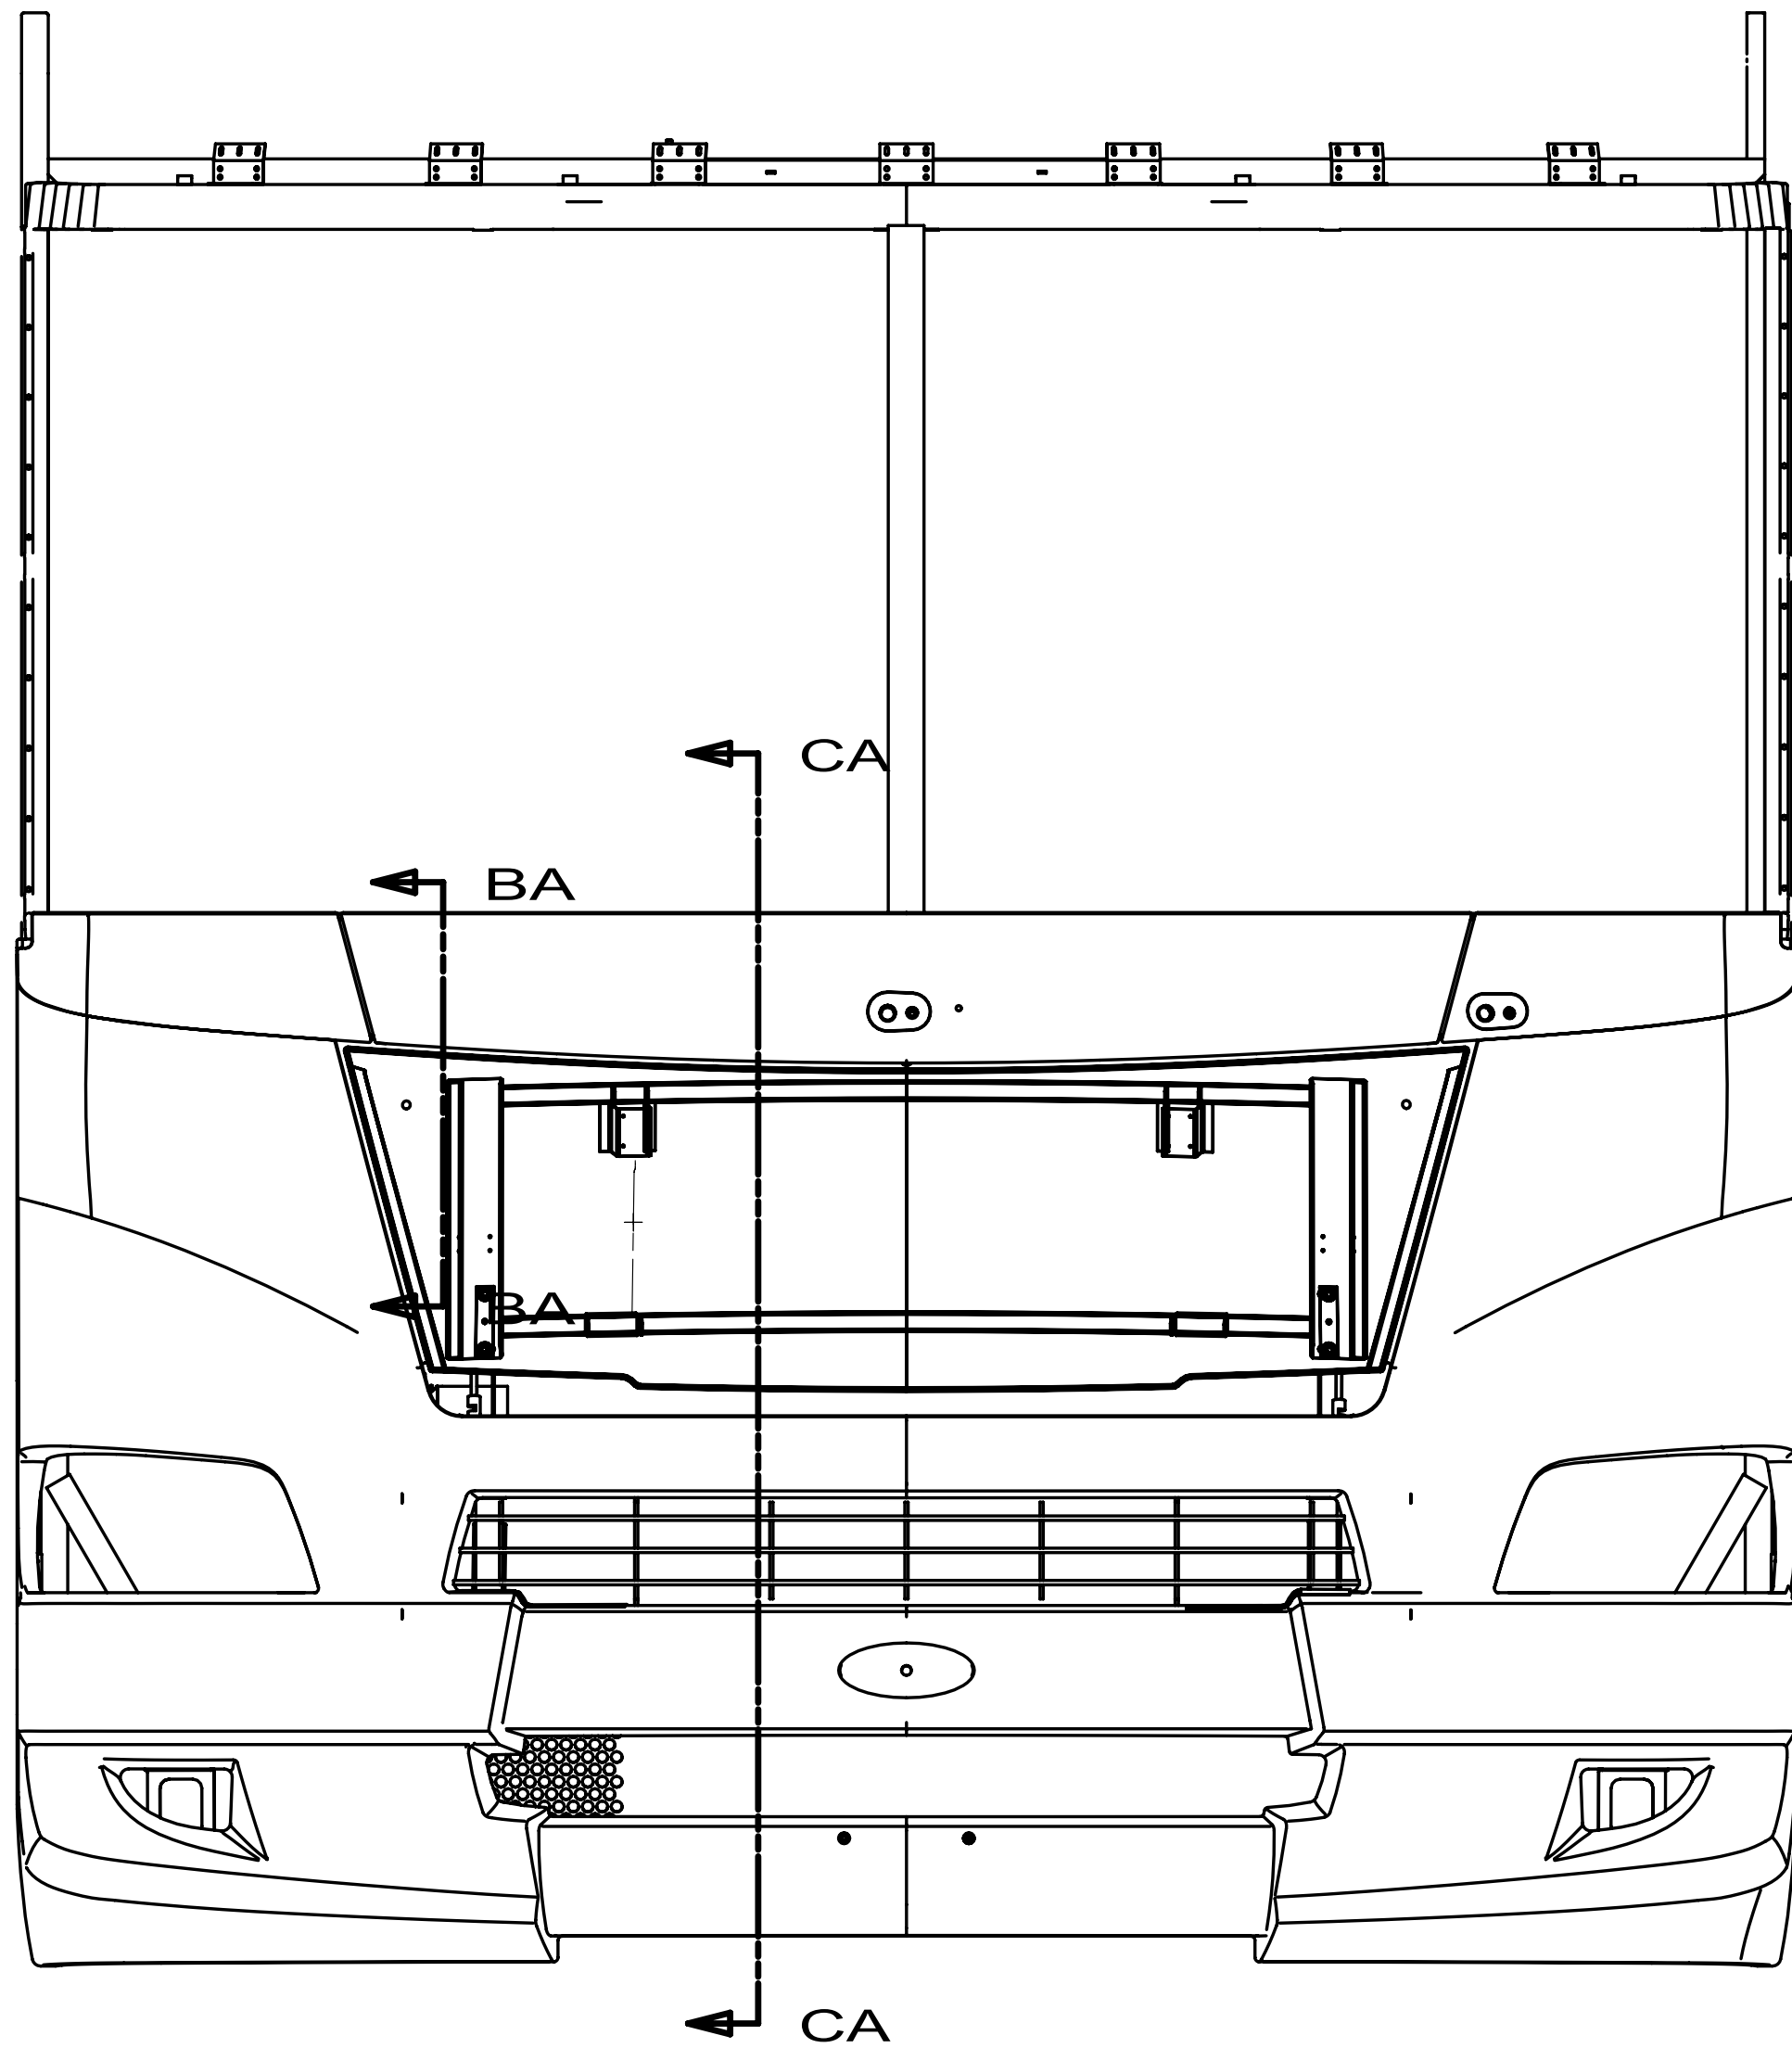

SECTION BA-BA

FIRST USED		
09 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 2	PART NO 164444	REV

BRACKET-SUPPORT,STRIKER
156216-04-CHT
SCREW
G39-10-12T (2)

TUBE-TIMING,HOOD
154091-03-CHT
SCREW-MACH
G16-04-24B (2)
NUT
D29-04-00B (2)

BRACKET-SUPPORT,STRIKER
156216-03-CHT
SCREW
G39-10-12T(2)

HINGE-ASM
137072-09-CHT (RH)
137072-10-CHT (LH)

ANGLE-STRIKER,HOOD
144209-02-CHT (2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

STRIKER-DOOR,LUGGAGE
130053-01-CHT (2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

VIEW CC


SECTION CB-CB

SECTION CA-CA

WINDSHIELD

PANEL ASM
-FRONT,
LOWER

FIRST USED		
09 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 3	PART NO 164444	REV

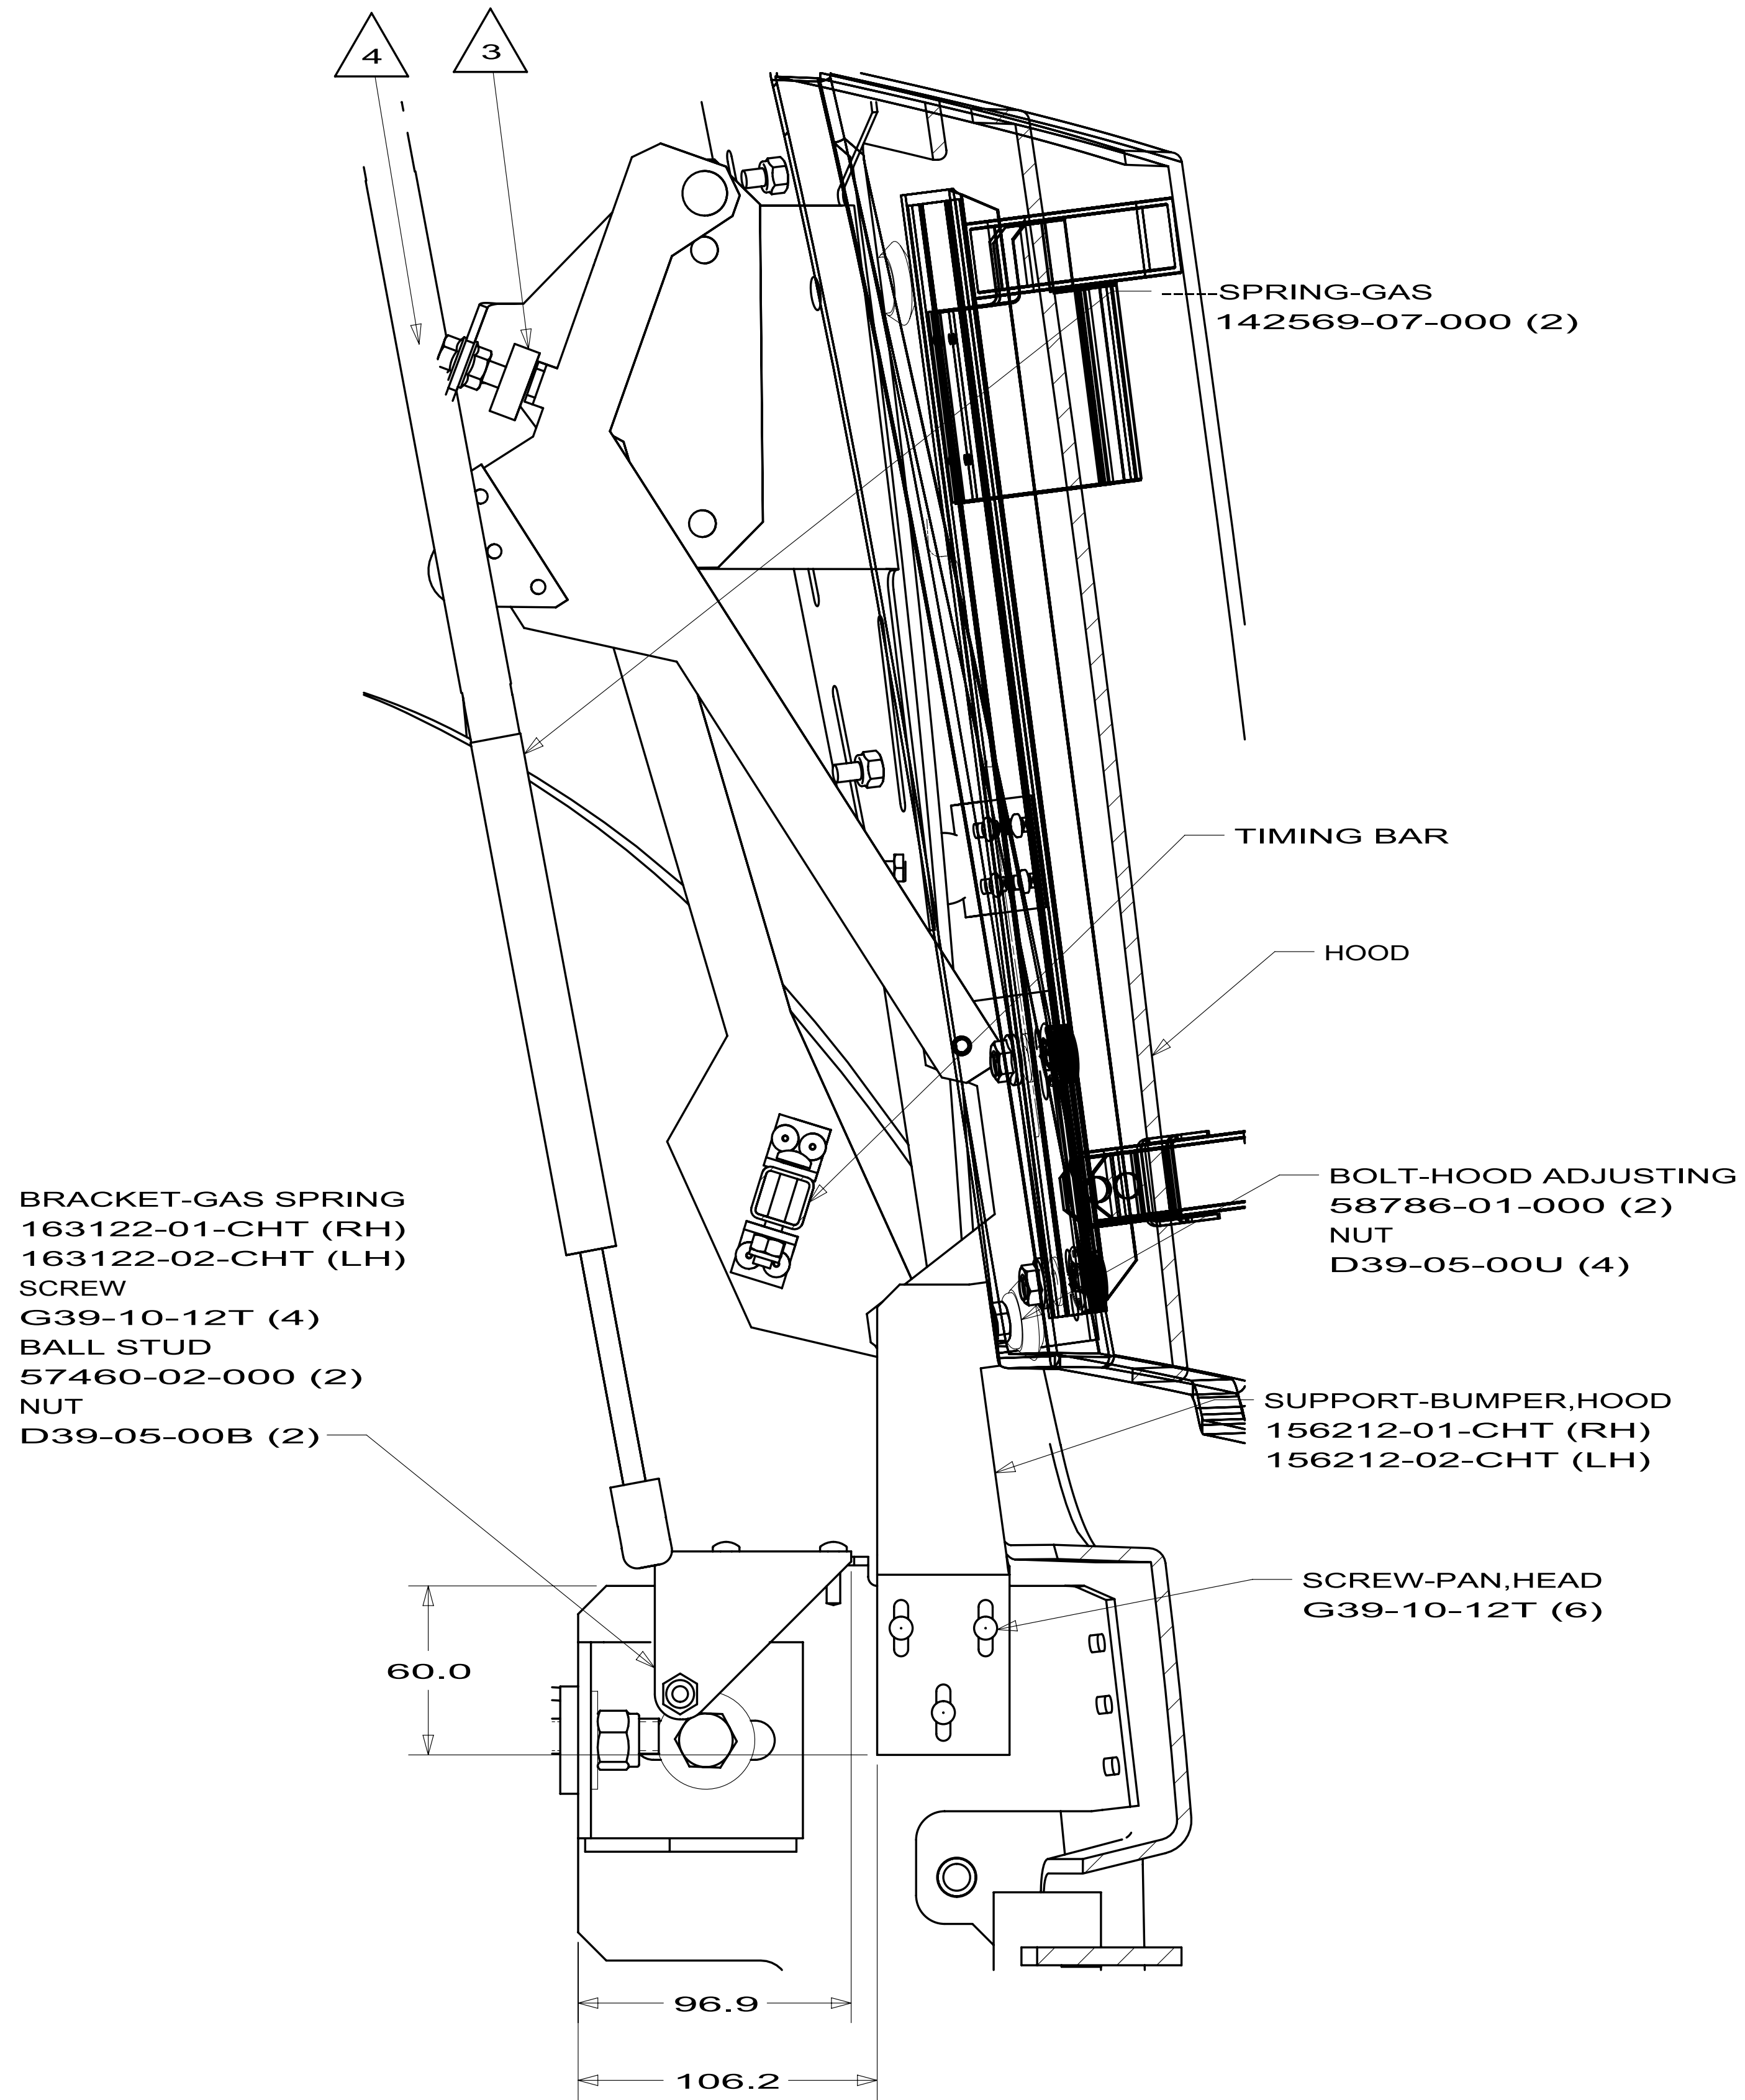

SECTION DA-DA


PANEL ASM-FRONT

SCREW-PAN,HEAD G39-10-12T (6)

A-PILLAR

SECTION DB-DB




FIRST USED		
09 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 4	PART NO 164444	REV

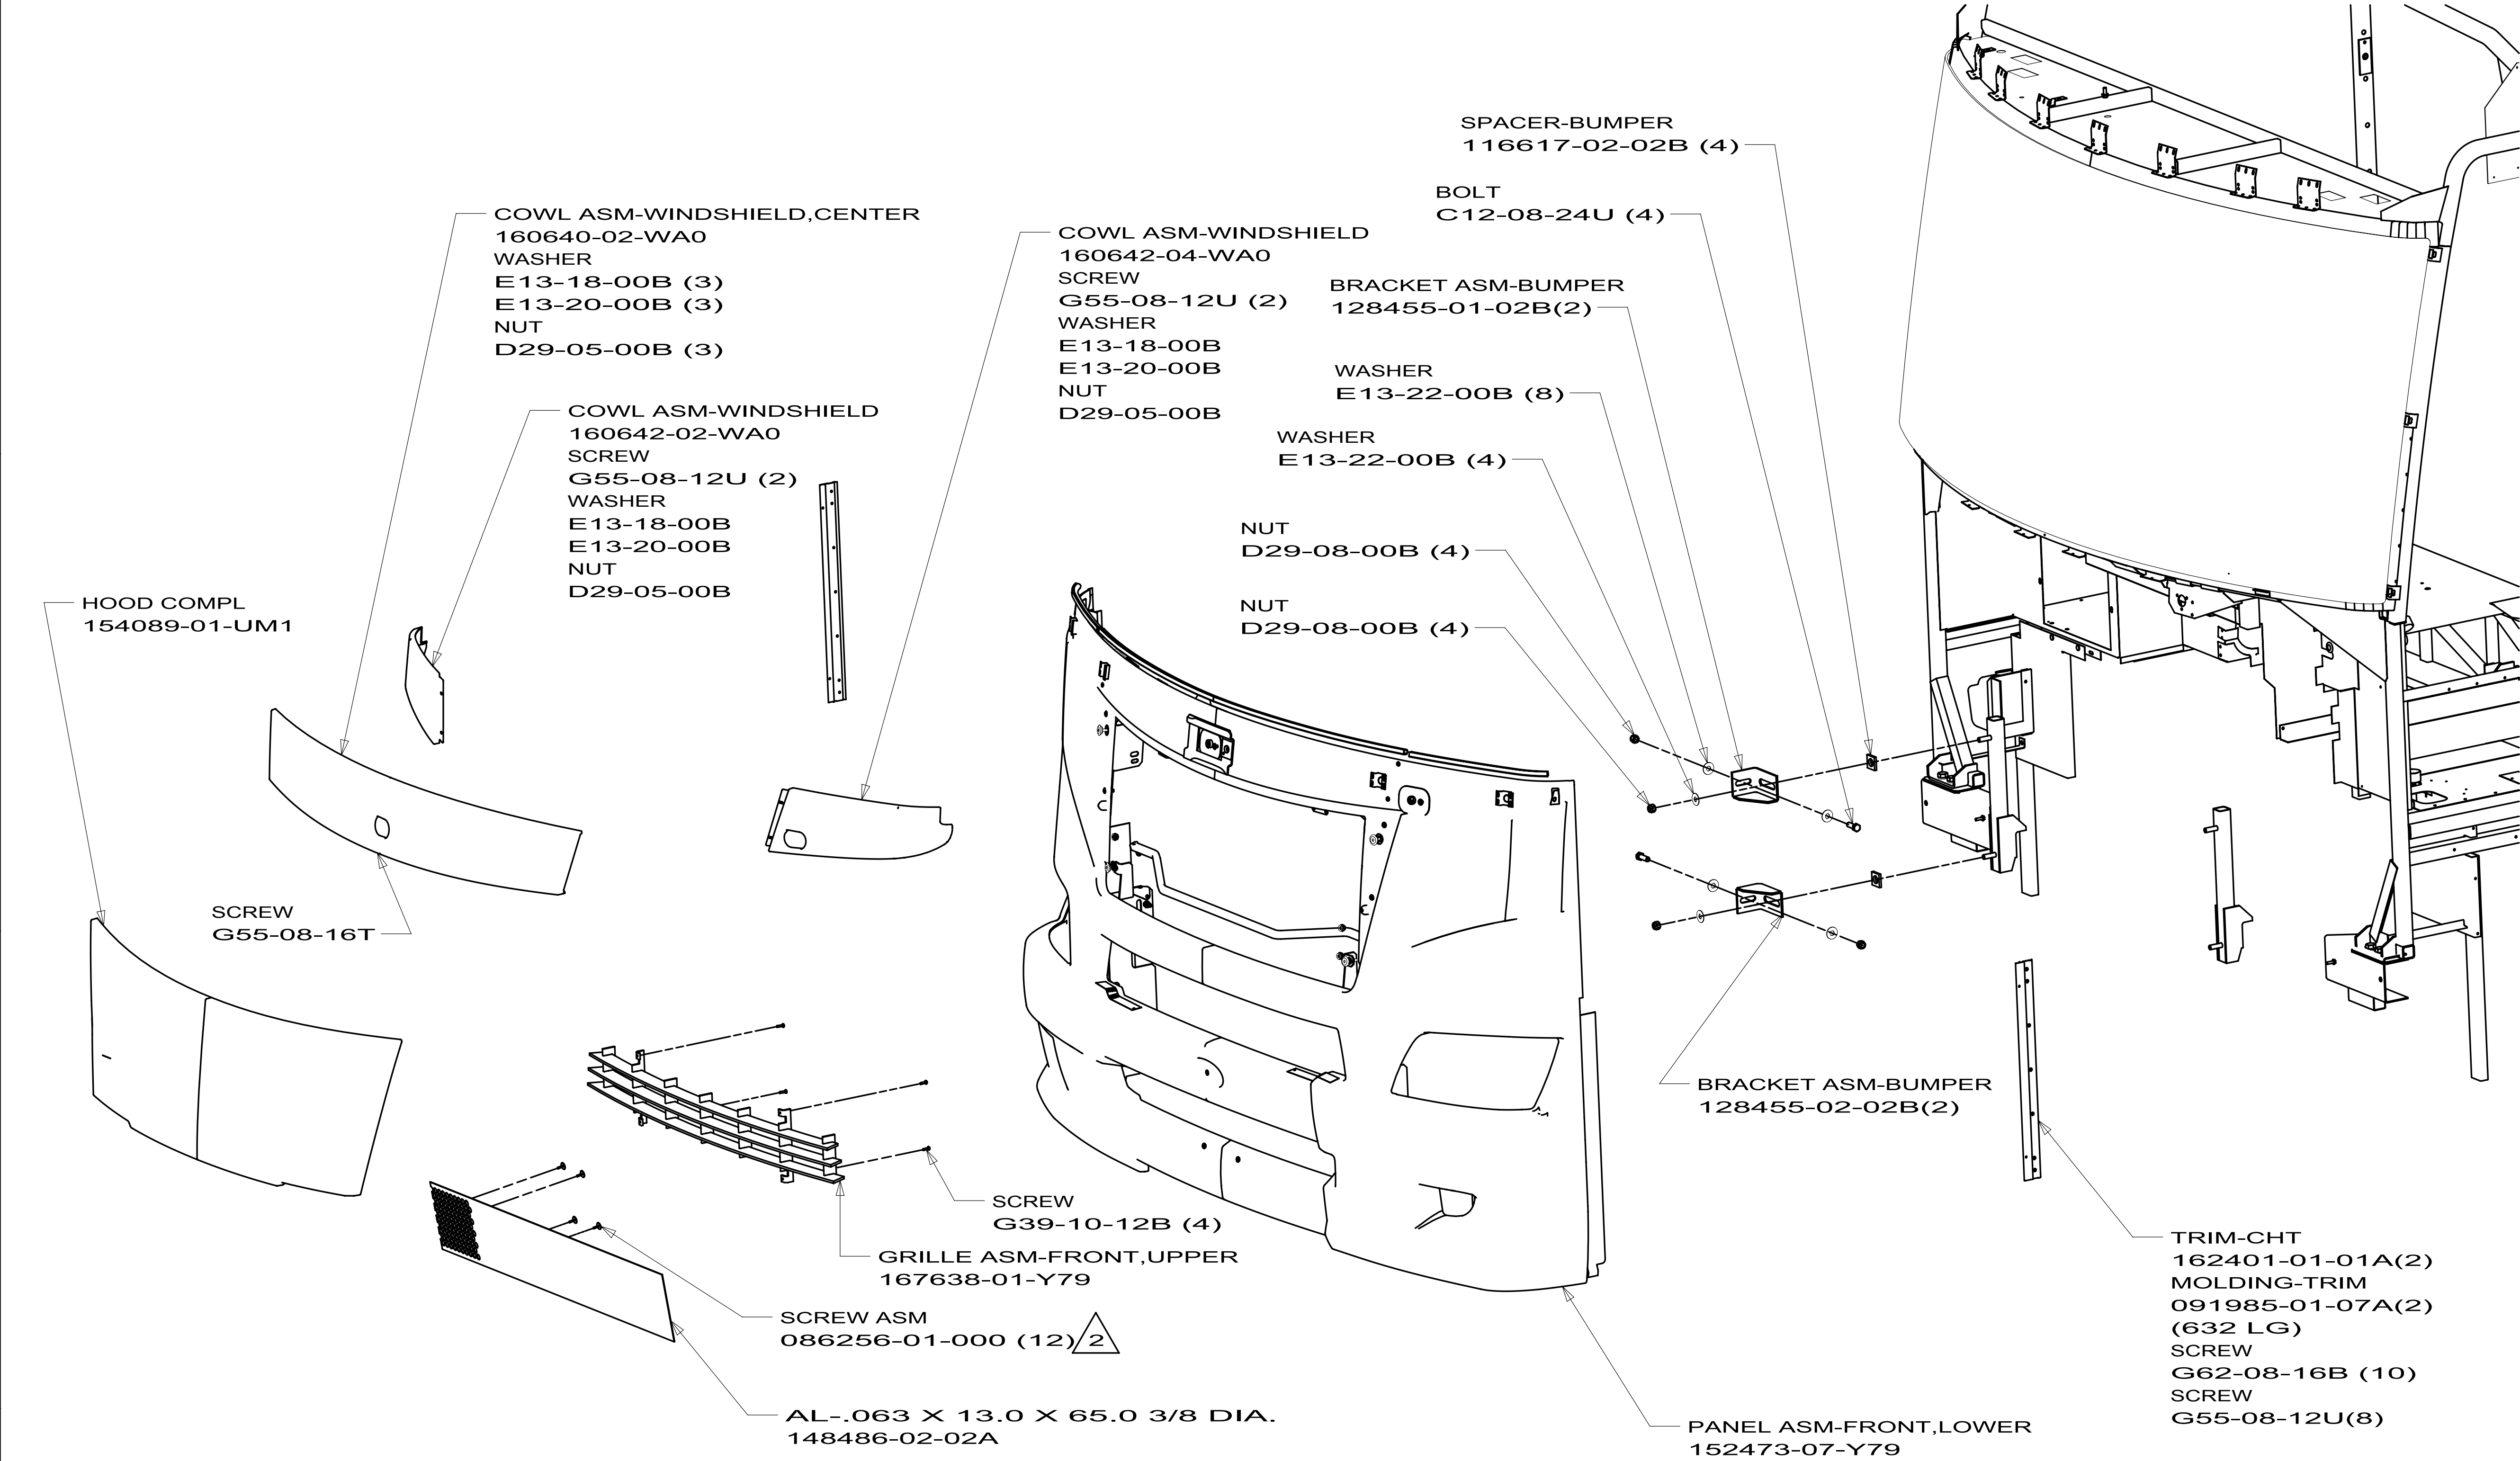

5. BUMPER MUST CONTACT HOOD IN THE CLOSED POSITION.
4. DRIVER SIDE BUMPER TO BE REMOVED WHEN USED WITH FORD CHASSIS.
3. AFTER HOOD ADJUSTMENT, THE BUMPER MUST CONTACT HINGE LINK IN THE CLOSED POSITION.
2. MINIMUM 2 SCREWS PER MOUNTING FLANGE WITH A SCREW WITHIN 20.0 EF EACH FLANGE END.
1. TOP OF PANEL ASM-FRONT, LOWER TO BE ALIGNED WITH BOTTOM EDGE OF WINDSHIELD.

NOTES:

WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTD		ORIG. DATE	
CHRR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		09 J-SERIES,FL	
DSNR		MATERIAL:	
UNSPECIFIED TOLERANCES ARE:		THIRD ANGLE PROJECTION	
WHOLE DIM (X) : 3		DO NOT SCALE DRAWING	
ONE-PLACE (X.X) : 1.5		TITLE: BODY PANEL INSTL-FRONT	
TWO-PLACE (X.XX) : 0.50		SHEET 1 OF 4	
ANGLE : 1°		PART NO 169237	
		REV	

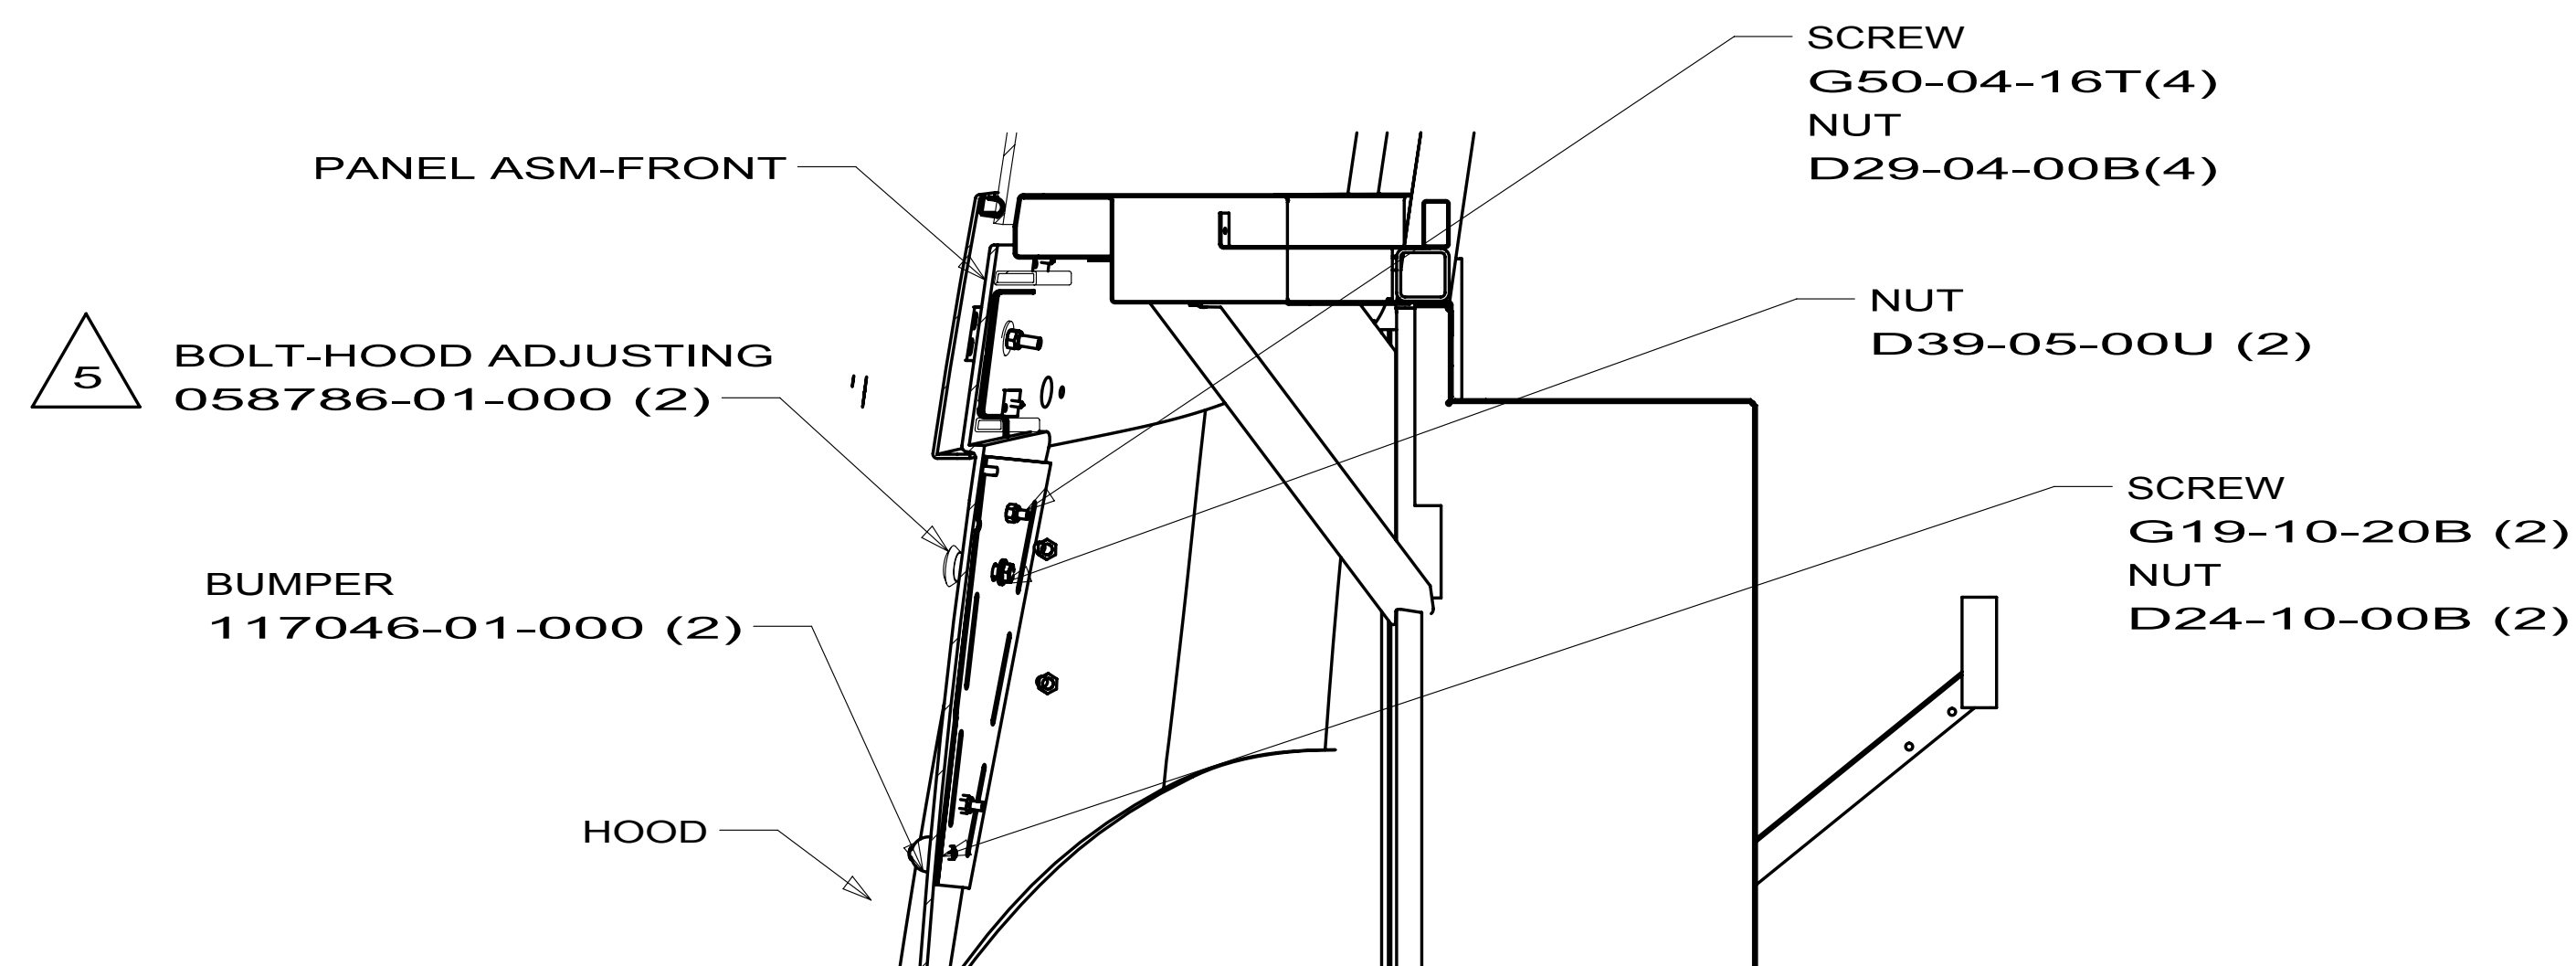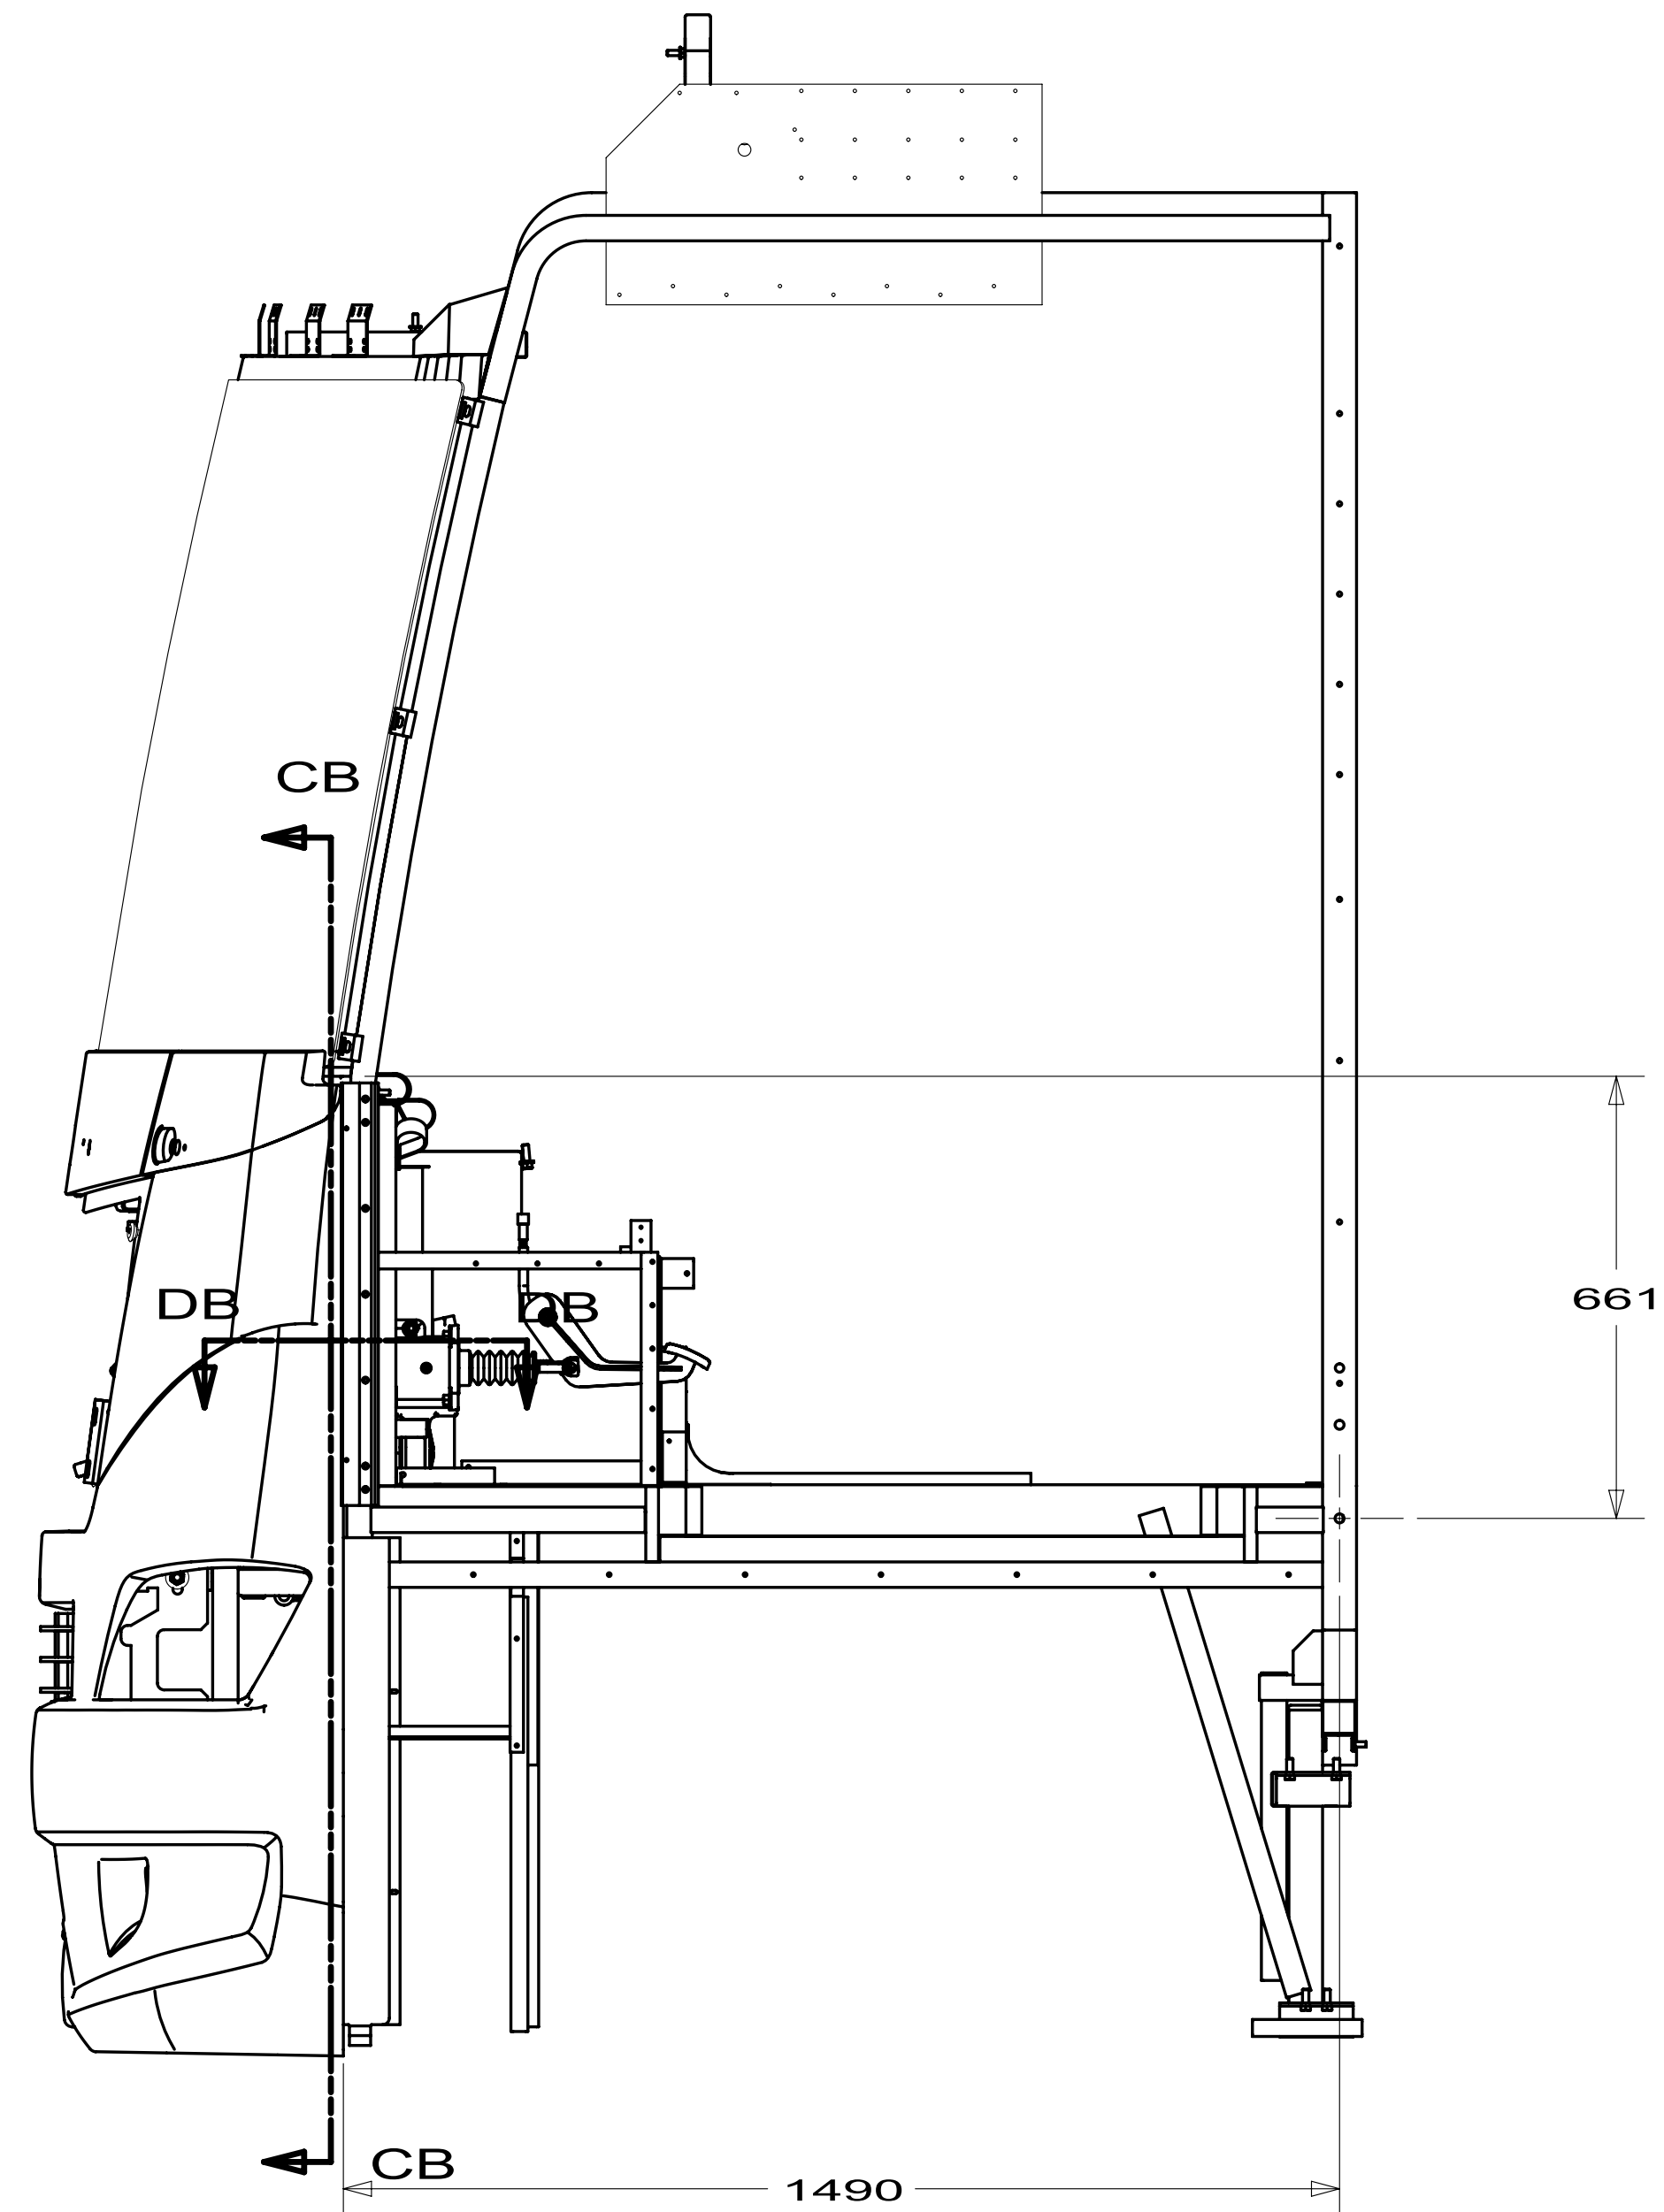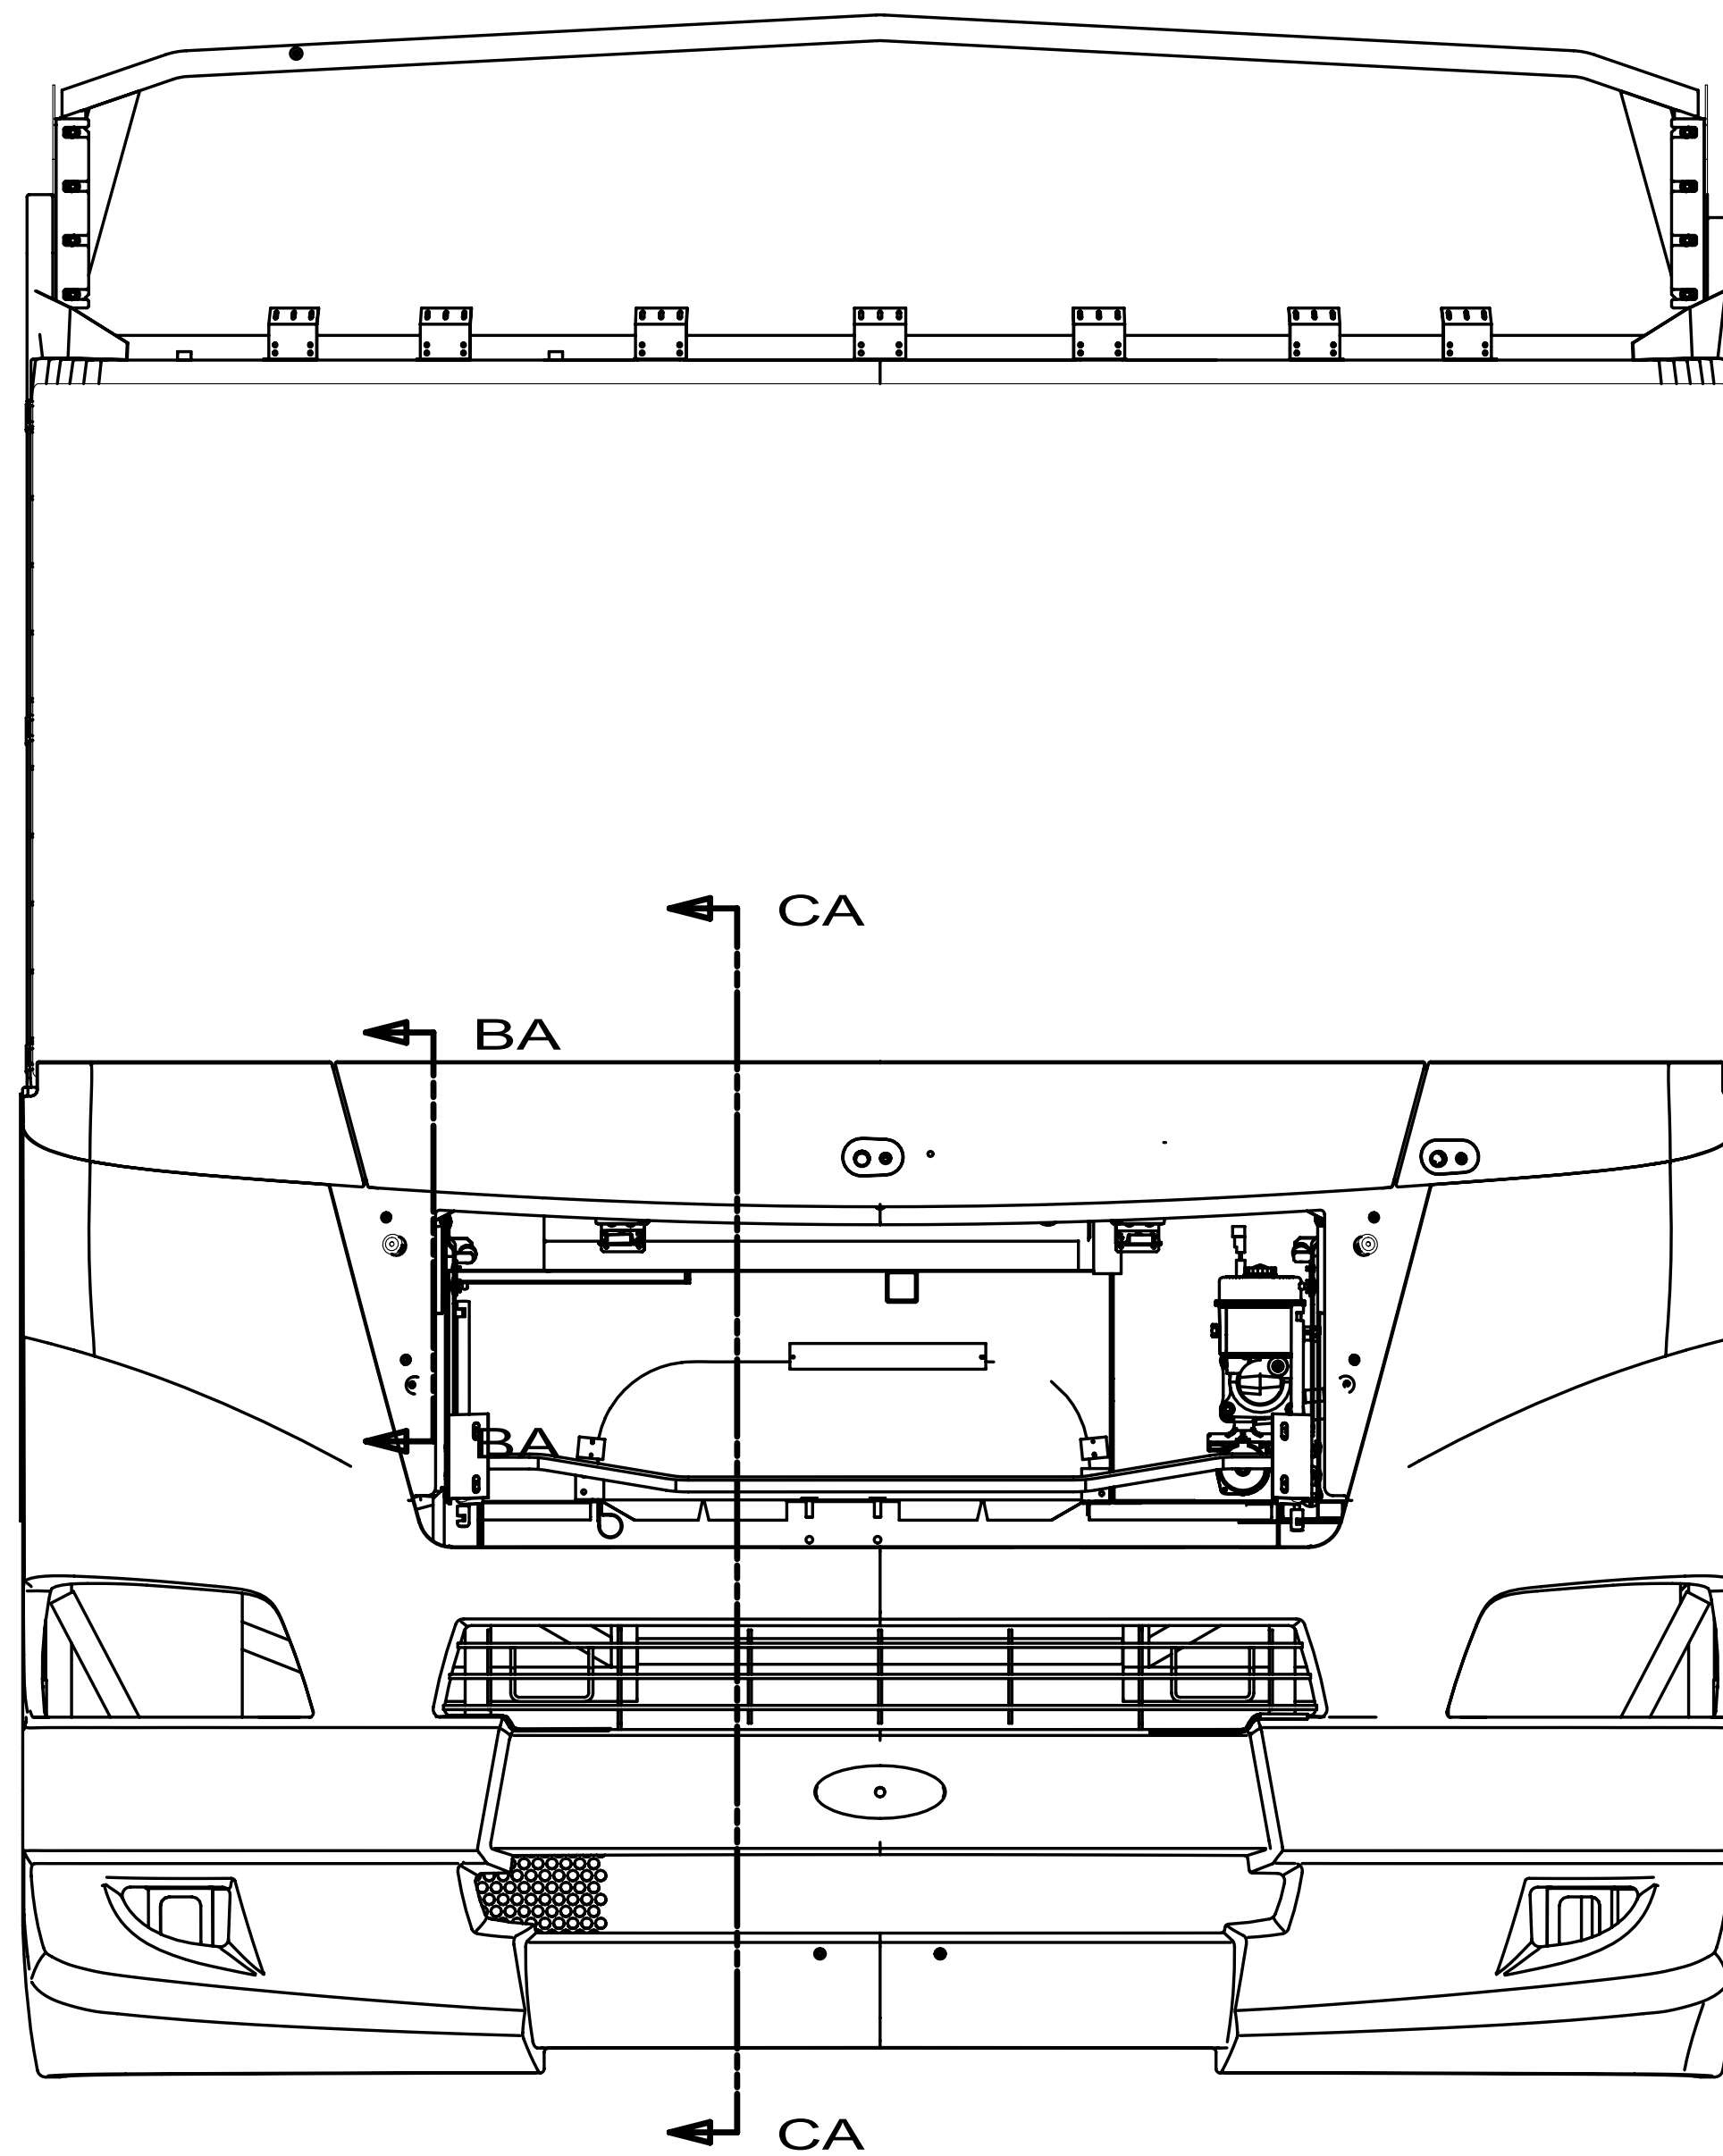

FIRST USED		
09 J-SERIES,FL		
DO NOT SCALE DRAWING		
TITLE:		
BODY PANEL INSTL-FRONT		
SHEET 2	PART NO 169237	REV

BRACKET-SUPPORT,STRIKER
156216-04-02B
SCREW
G39-10-12T (2)

TUBE-TIMING,HOOD
154091-03-CHT
SCREW-MACH
G16-04-24B (2)
NUT
D29-04-00B (2)

BRACKET-SUPPORT,STRIKER
156216-03-02B
SCREW
G39-10-12T(2)

HINGE-ASM
137072-15-01A(RH)
137072-16-01A(LH)

ANGLE-STRIKER,HOOD
144209-02-02B(2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

STRIKER-DOOR,LUGGAGE
130053-01-01A(2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

VIEW CC

SECTION CB-CB

SECTION CA-CA

WINDSHIELD

PANEL ASM
-FRONT,
LOWER

FIRST USED		
09 J-SERIES,FL		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 3	PART NO 169237	REV

BRACKET-GAS SPRING
163122-03-02B(RH)
163122-04-02B(LH)
SCREW
G39-10-12T (4)
BALL STUD
057460-02-000 (2)
NUT
D39-05-00B (2)

SPRING-GAS
142569-28-000 (2)

TIMING BAR

BOLT-HOOD ADJUSTING
058786-01-000 (2)
NUT
D39-05-00U (4)

SUPPORT-BUMPER,HOOD
156212-01-02B(RH)
156212-02-02B(LH)

SCREW-PAN,HEAD
G39-10-12T (6)

PANEL ASM-FRONT

SCREW-PAN,HEAD
G39-10-12T (6)

A-PILLAR

SECTION DB-DB

60.0

96.9

106.2


SECTION DA-DA

FIRST USED		
09 J-SERIES,FL		
DO NOT SCALE DRAWING		
TITLE:		
BODY PANEL INSTL-FRONT		
SHEET 4	PART NO 169237	REV

FORD/WH
152473-06

24	15703802XXX	SUPPORT ASM.	1
23	12356324CHT	PLATE-W/HOLE	4
22	15708001CHT	BOOT-COWL	2
21	15399806CHT	SUPPORT-HING	1
20	15955001CHT	REINFORCEMEN	2
19	15542301CHT	ANGLE-SUPPOR	2
18	14356106CHT	BRACKET ASM.	1
17	14356105CHT	BRACKET ASM.	1
16	13286401CHT	SUPPORT-FRON	2
15	08723401000	NUT-JACK	2
14	000G500412U	SCREW	2
13	15394313CHT	ANGLE-SUPPOR	2
12	15394303CHT	ANGLE-SUPPOR	1
11	15394305CHT	ANGLE-SUPPOR	3
10	15394304CHT	ANGLE-SUPPOR	2
9	15394301CHT	ANGLE-SUPPOR	2
8	15317802CHT	NOT DEFINED	1
7	15401601CHT	SUPPORT-FRON	1
6	15399808CHT	SUPPORT ASM.	1
5	15401602CHT	SUPPORT-FRON	1
4	15305704CHT	SUPPORT ASM.	1
3	15317801CHT	BRACKET-FOGL	1
2	15305702CHT	SUPPORT ASM.	1
1	15247305CHT	PANEL-FRONT	1
ITEM	PART NUMBER	DESCRIPTION	QTY

FIRST USED		
09 J SERIES		
DO NOT SCALE DRAWING		
TITLE: PANEL-FRONT,LOWER		
SHEET 1	PART NO 152473	REV

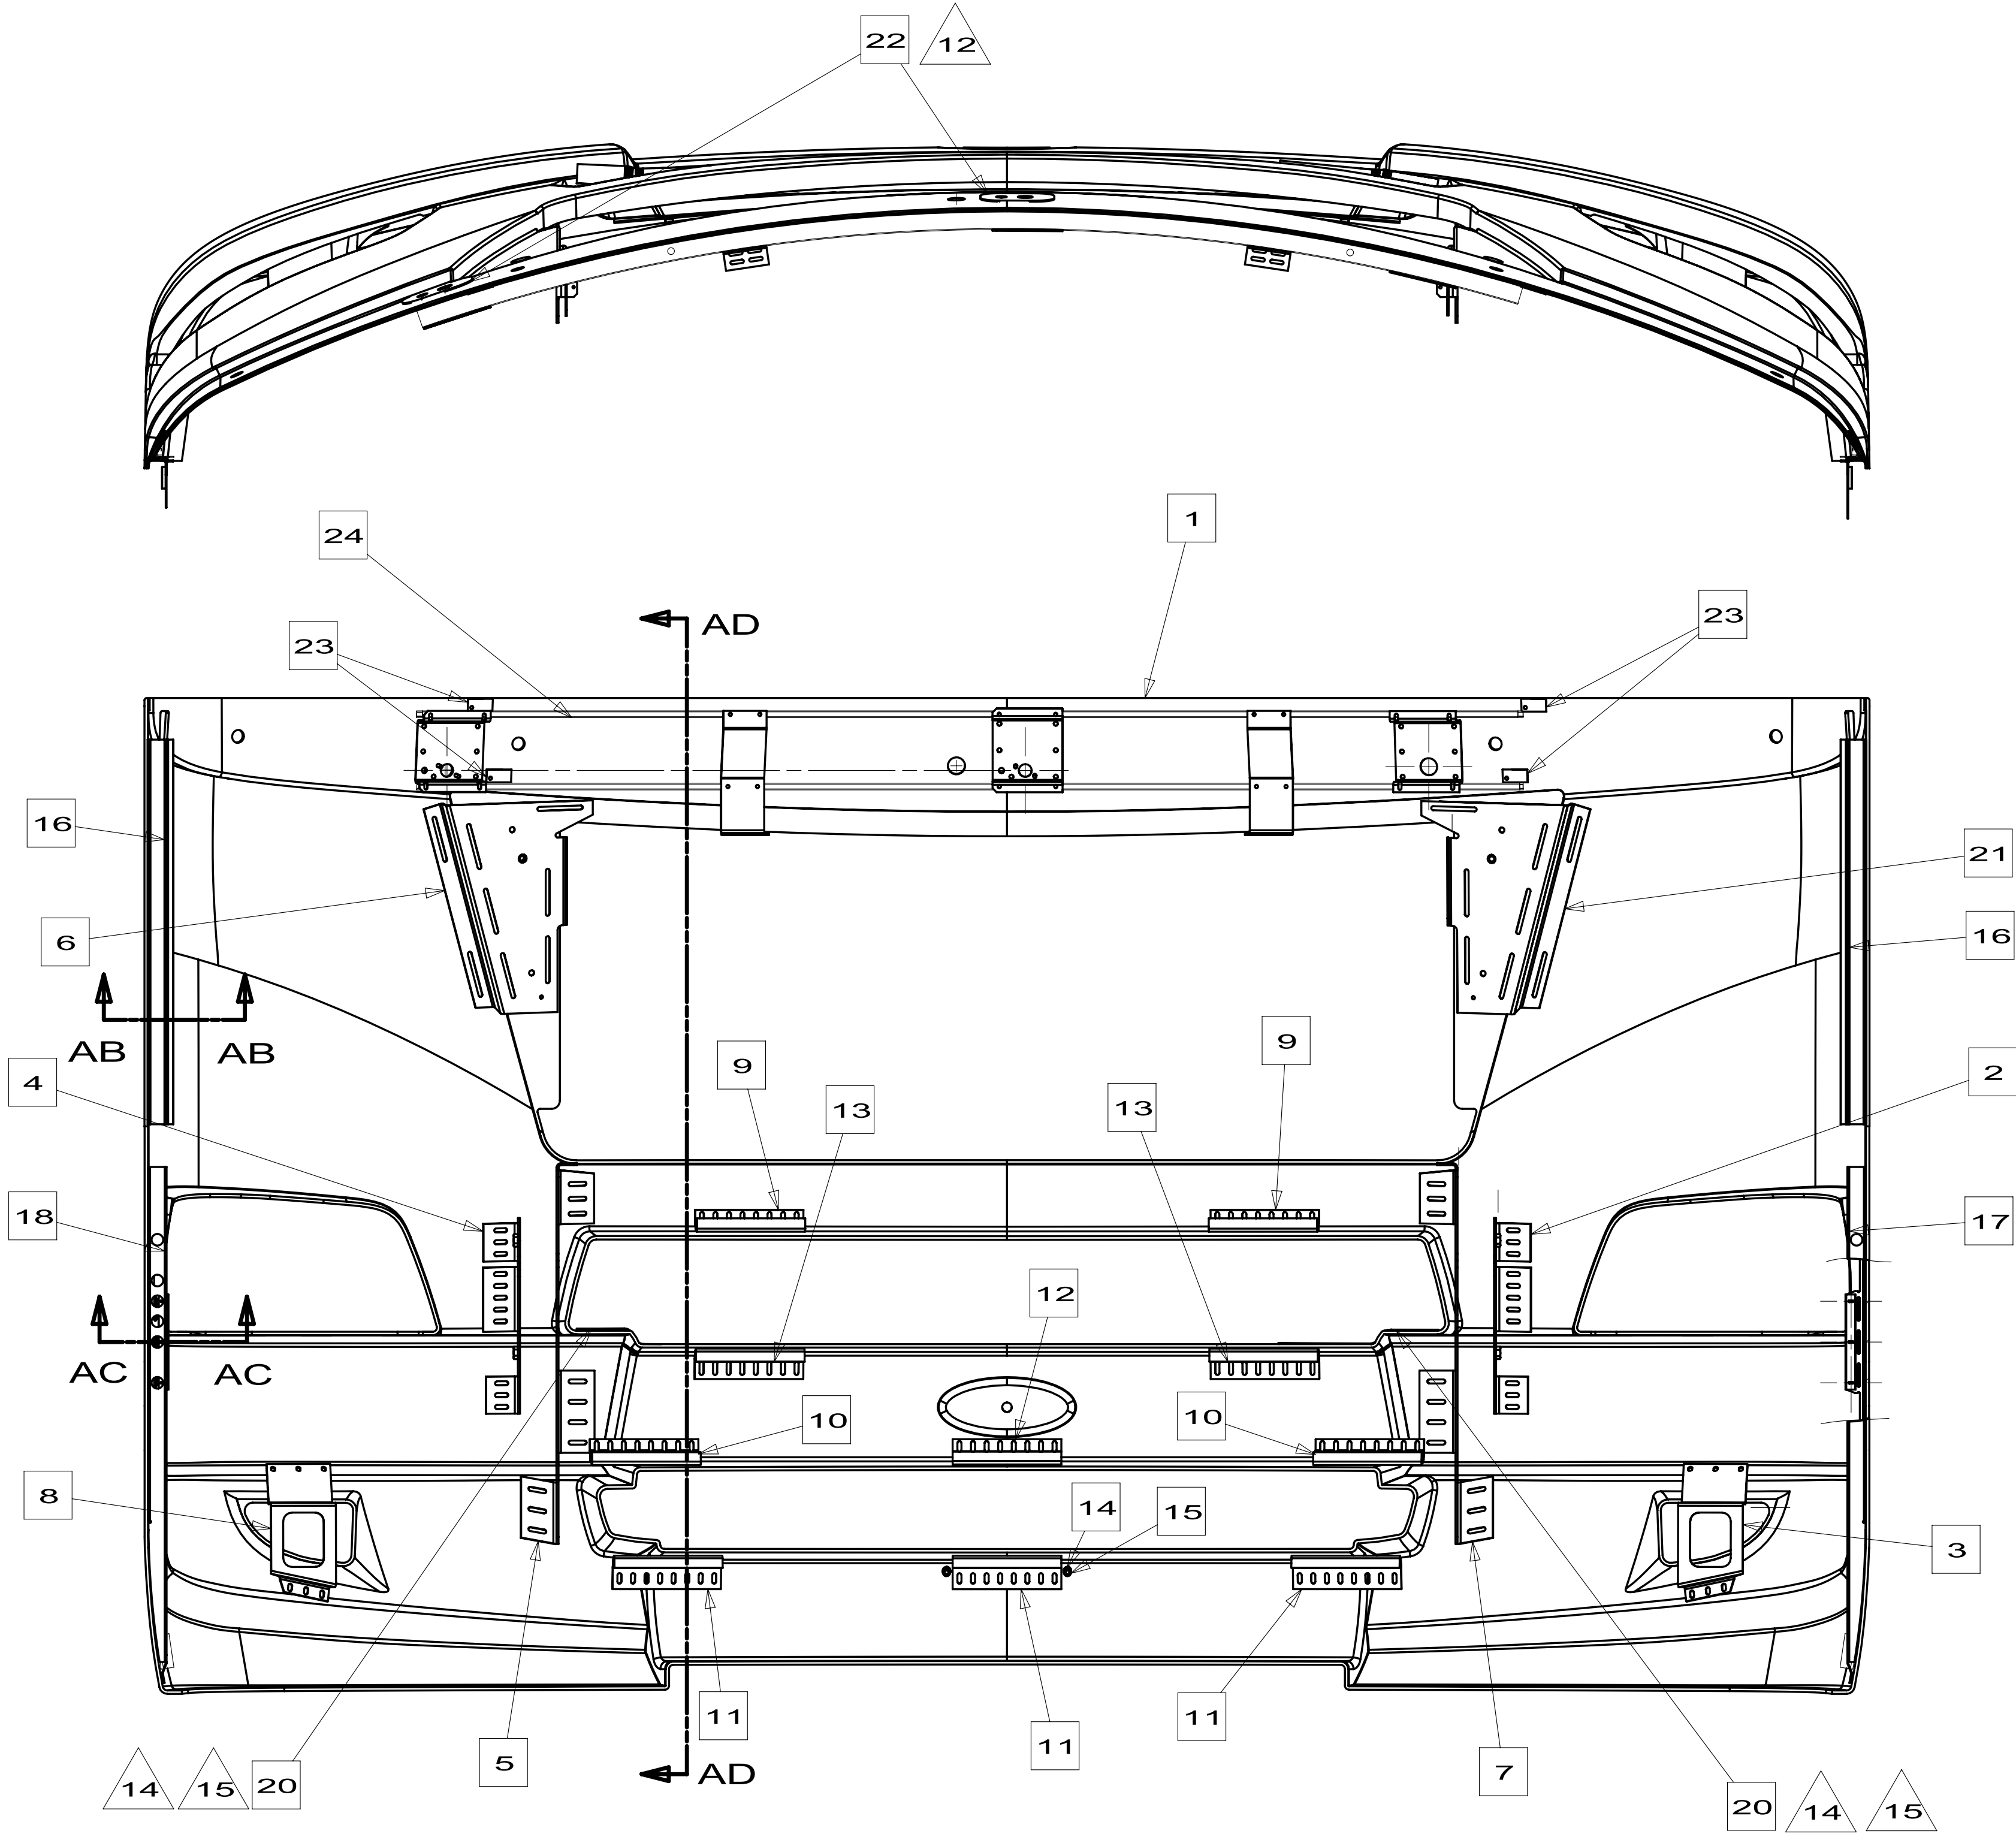

SECTION AB-AB
2 PLACES


SECTION AC-AC
2 PLACES

SECTION AD-AD

FREIGHTLINER
152473-07

24	15401603CHT	SUPPORT-FRON	1
23	15703802XXX	SUPPORT ASM.	1
22	12356324CHT	PLATE-W/HOLE	4
21	15708001CHT	BOOT-COWL	2
20	15399806CHT	SUPPORT-HING	1
19	15955001CHT	REINFORCEMEN	2
18	15542301CHT	ANGLE-SUPPOR	2
17	14356106CHT	BRACKET ASM.	1
16	14356105CHT	BRACKET ASM.	1
15	13286401CHT	SUPPORT-FRON	2
14	08723401000	NUT-JACK	2
13	000G500412U	SCREW-MACH	2
12	15394313CHT	ANGLE-SUPPOR	2
11	15394303CHT	ANGLE-SUPPOR	1
10	15394305CHT	ANGLE-SUPPOR	3
9	15394304CHT	ANGLE-SUPPOR	2
8	15394301CHT	ANGLE-SUPPOR	2
7	15317802CHT	NOT DEFINED	1
6	15399808CHT	SUPPORT ASM.	1
5	15401602CHT	SUPPORT-FRON	1
4	15305704CHT	SUPPORT ASM.	1
3	15317801CHT	BRACKET-FOGL	1
2	15305702CHT	SUPPORT ASM.	1
1	15247305CHT	PANEL-FRONT	1
ITEM	PART NUMBER	DESCRIPTION	QTY




FIRST USED			
09 J SERIES			
DO NOT SCALE DRAWING			
TITLE:			
PANEL-FRONT,LOWER			
SHEET 2	PART NO	152473	REV

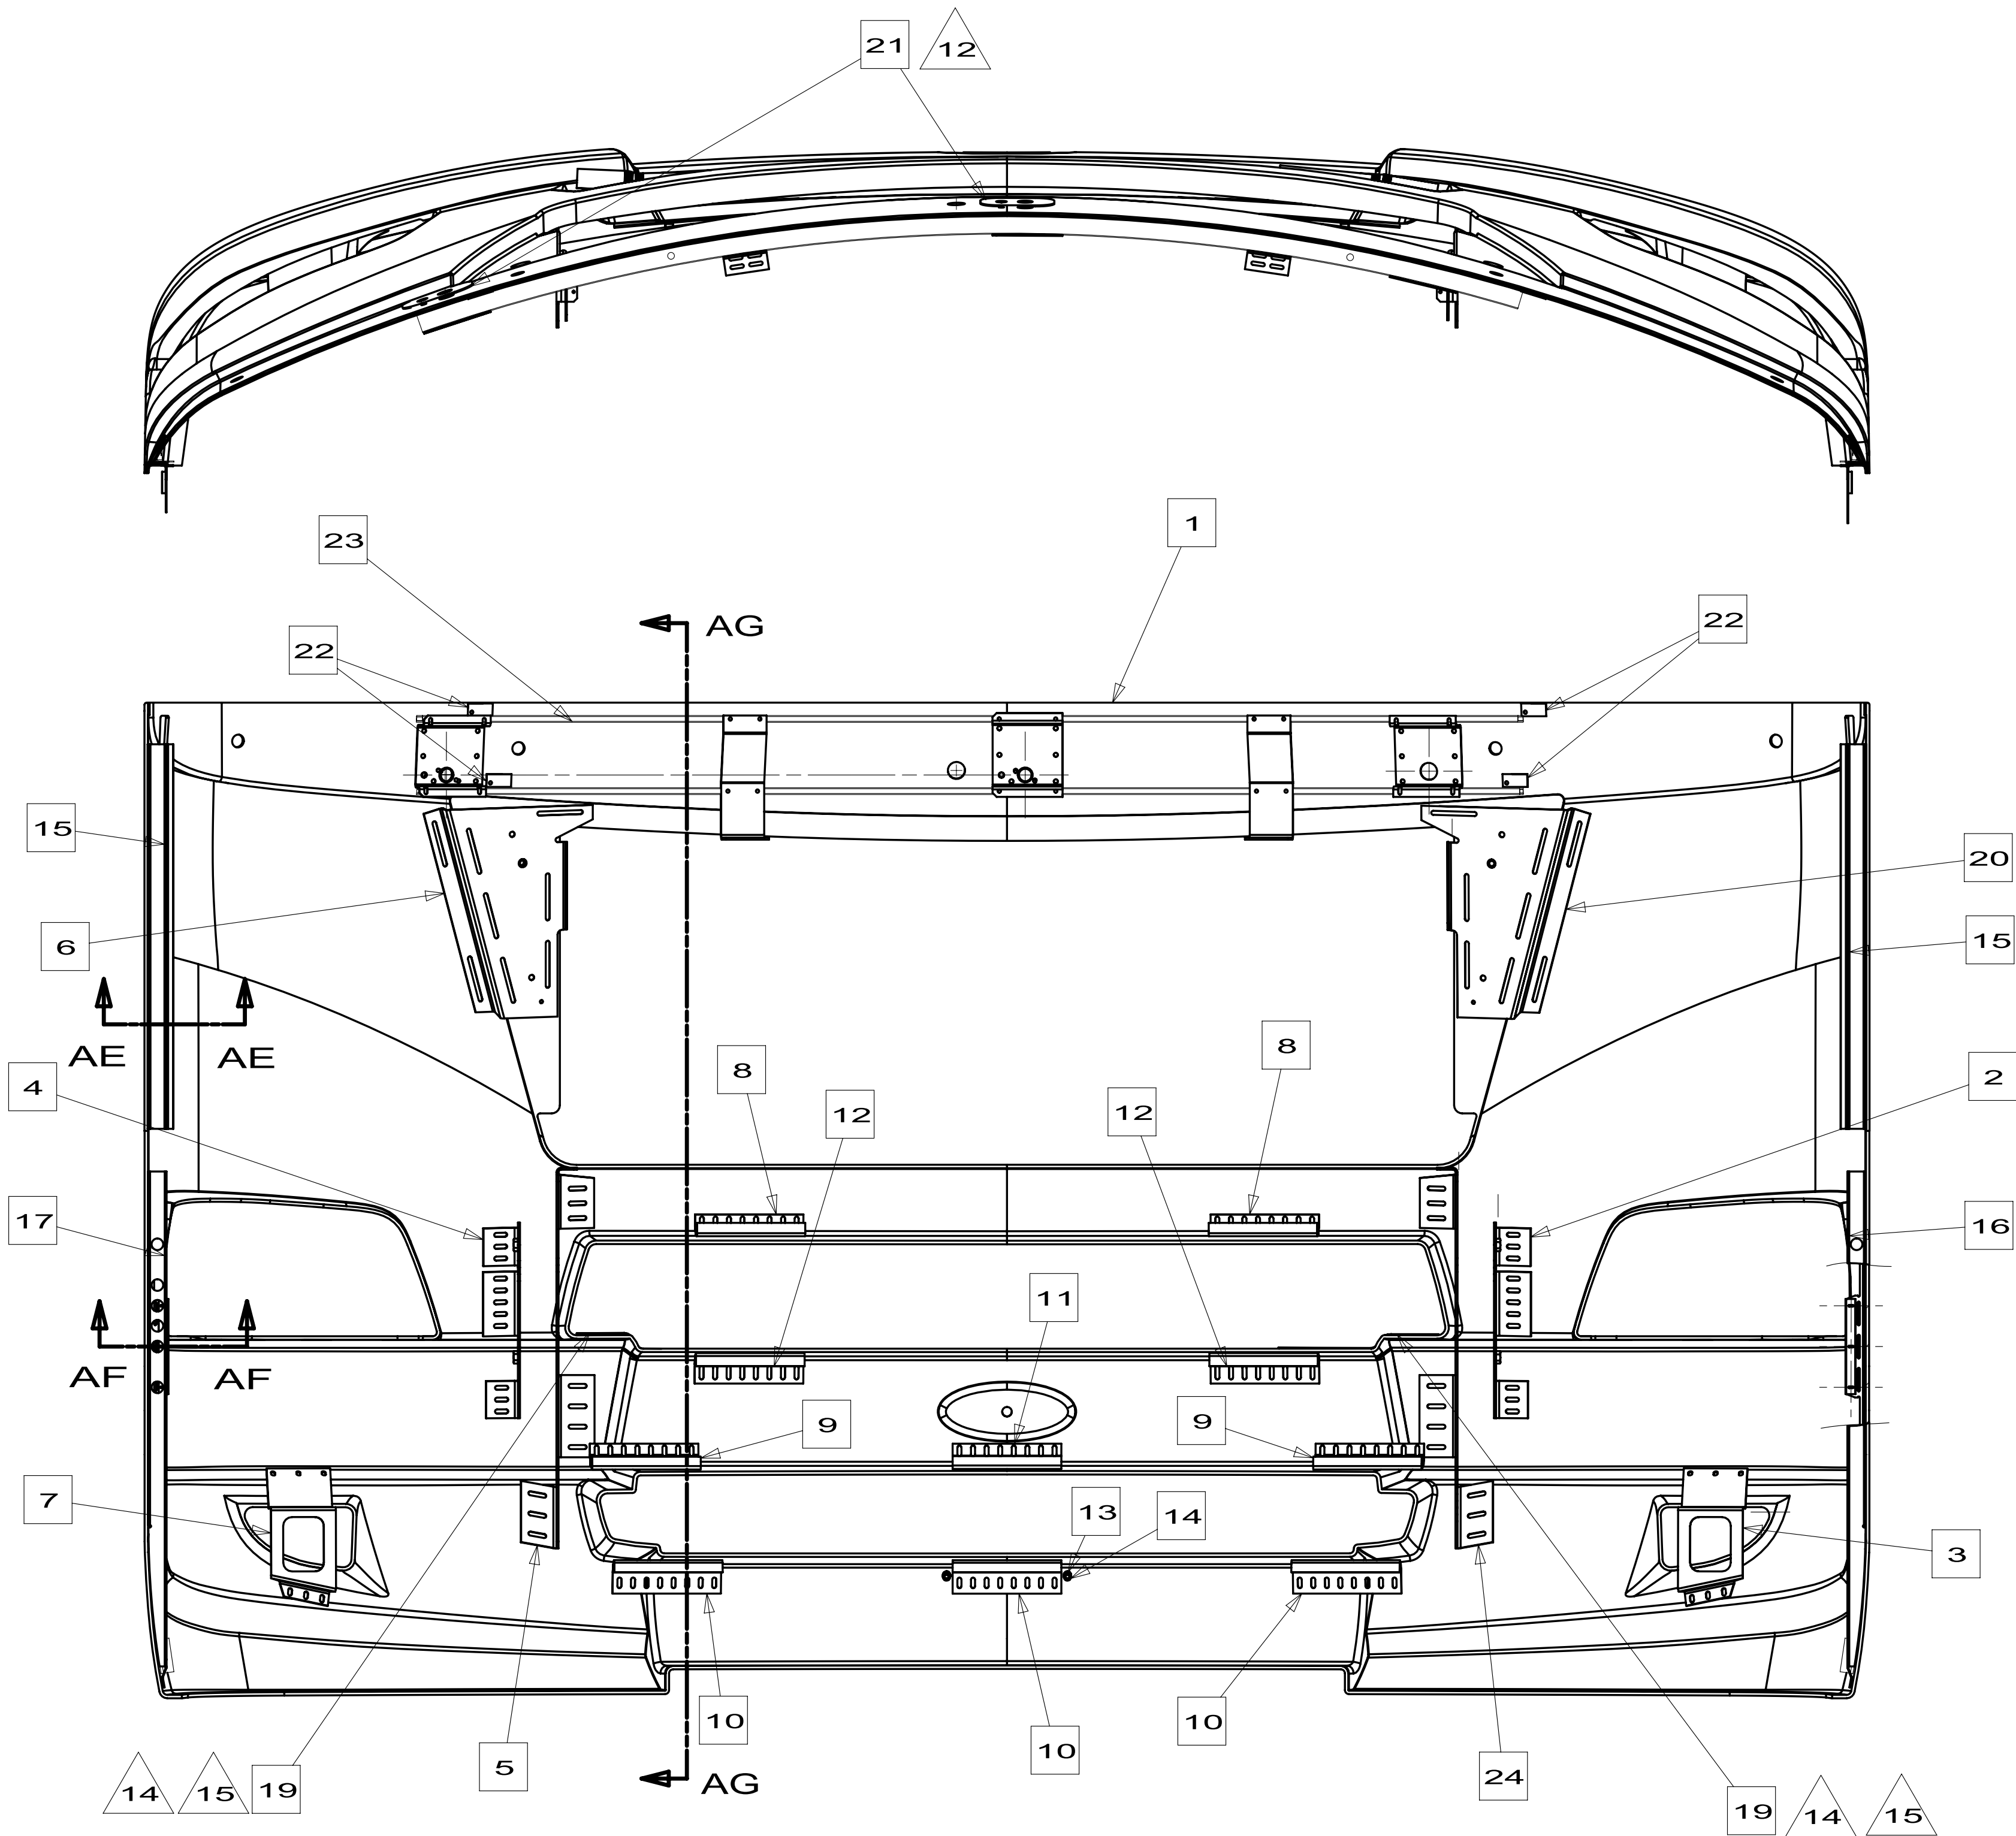

SECTION AE-AE
2 PLACES

SECTION AF-AF
2 PLACES

SECTION AG-AG

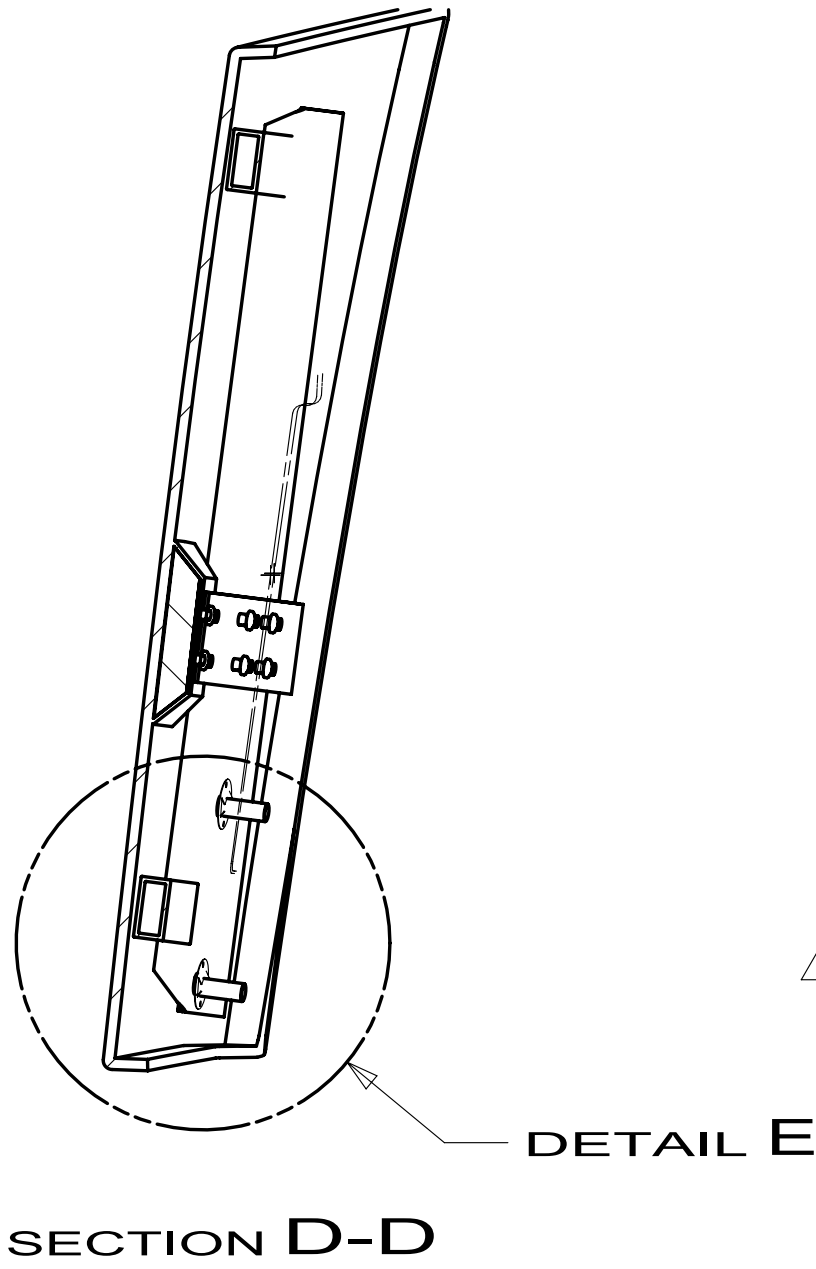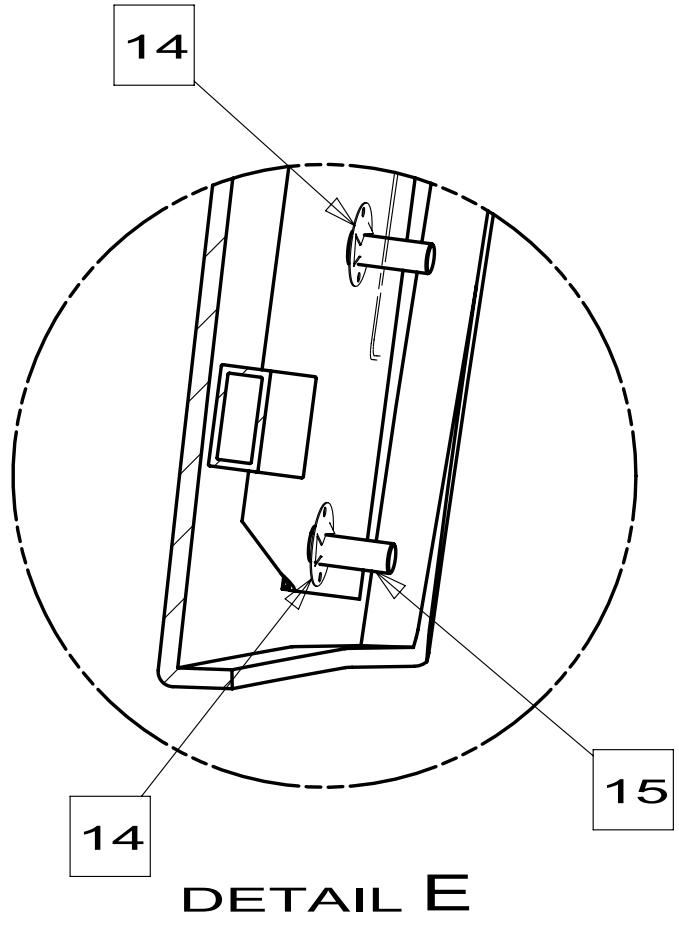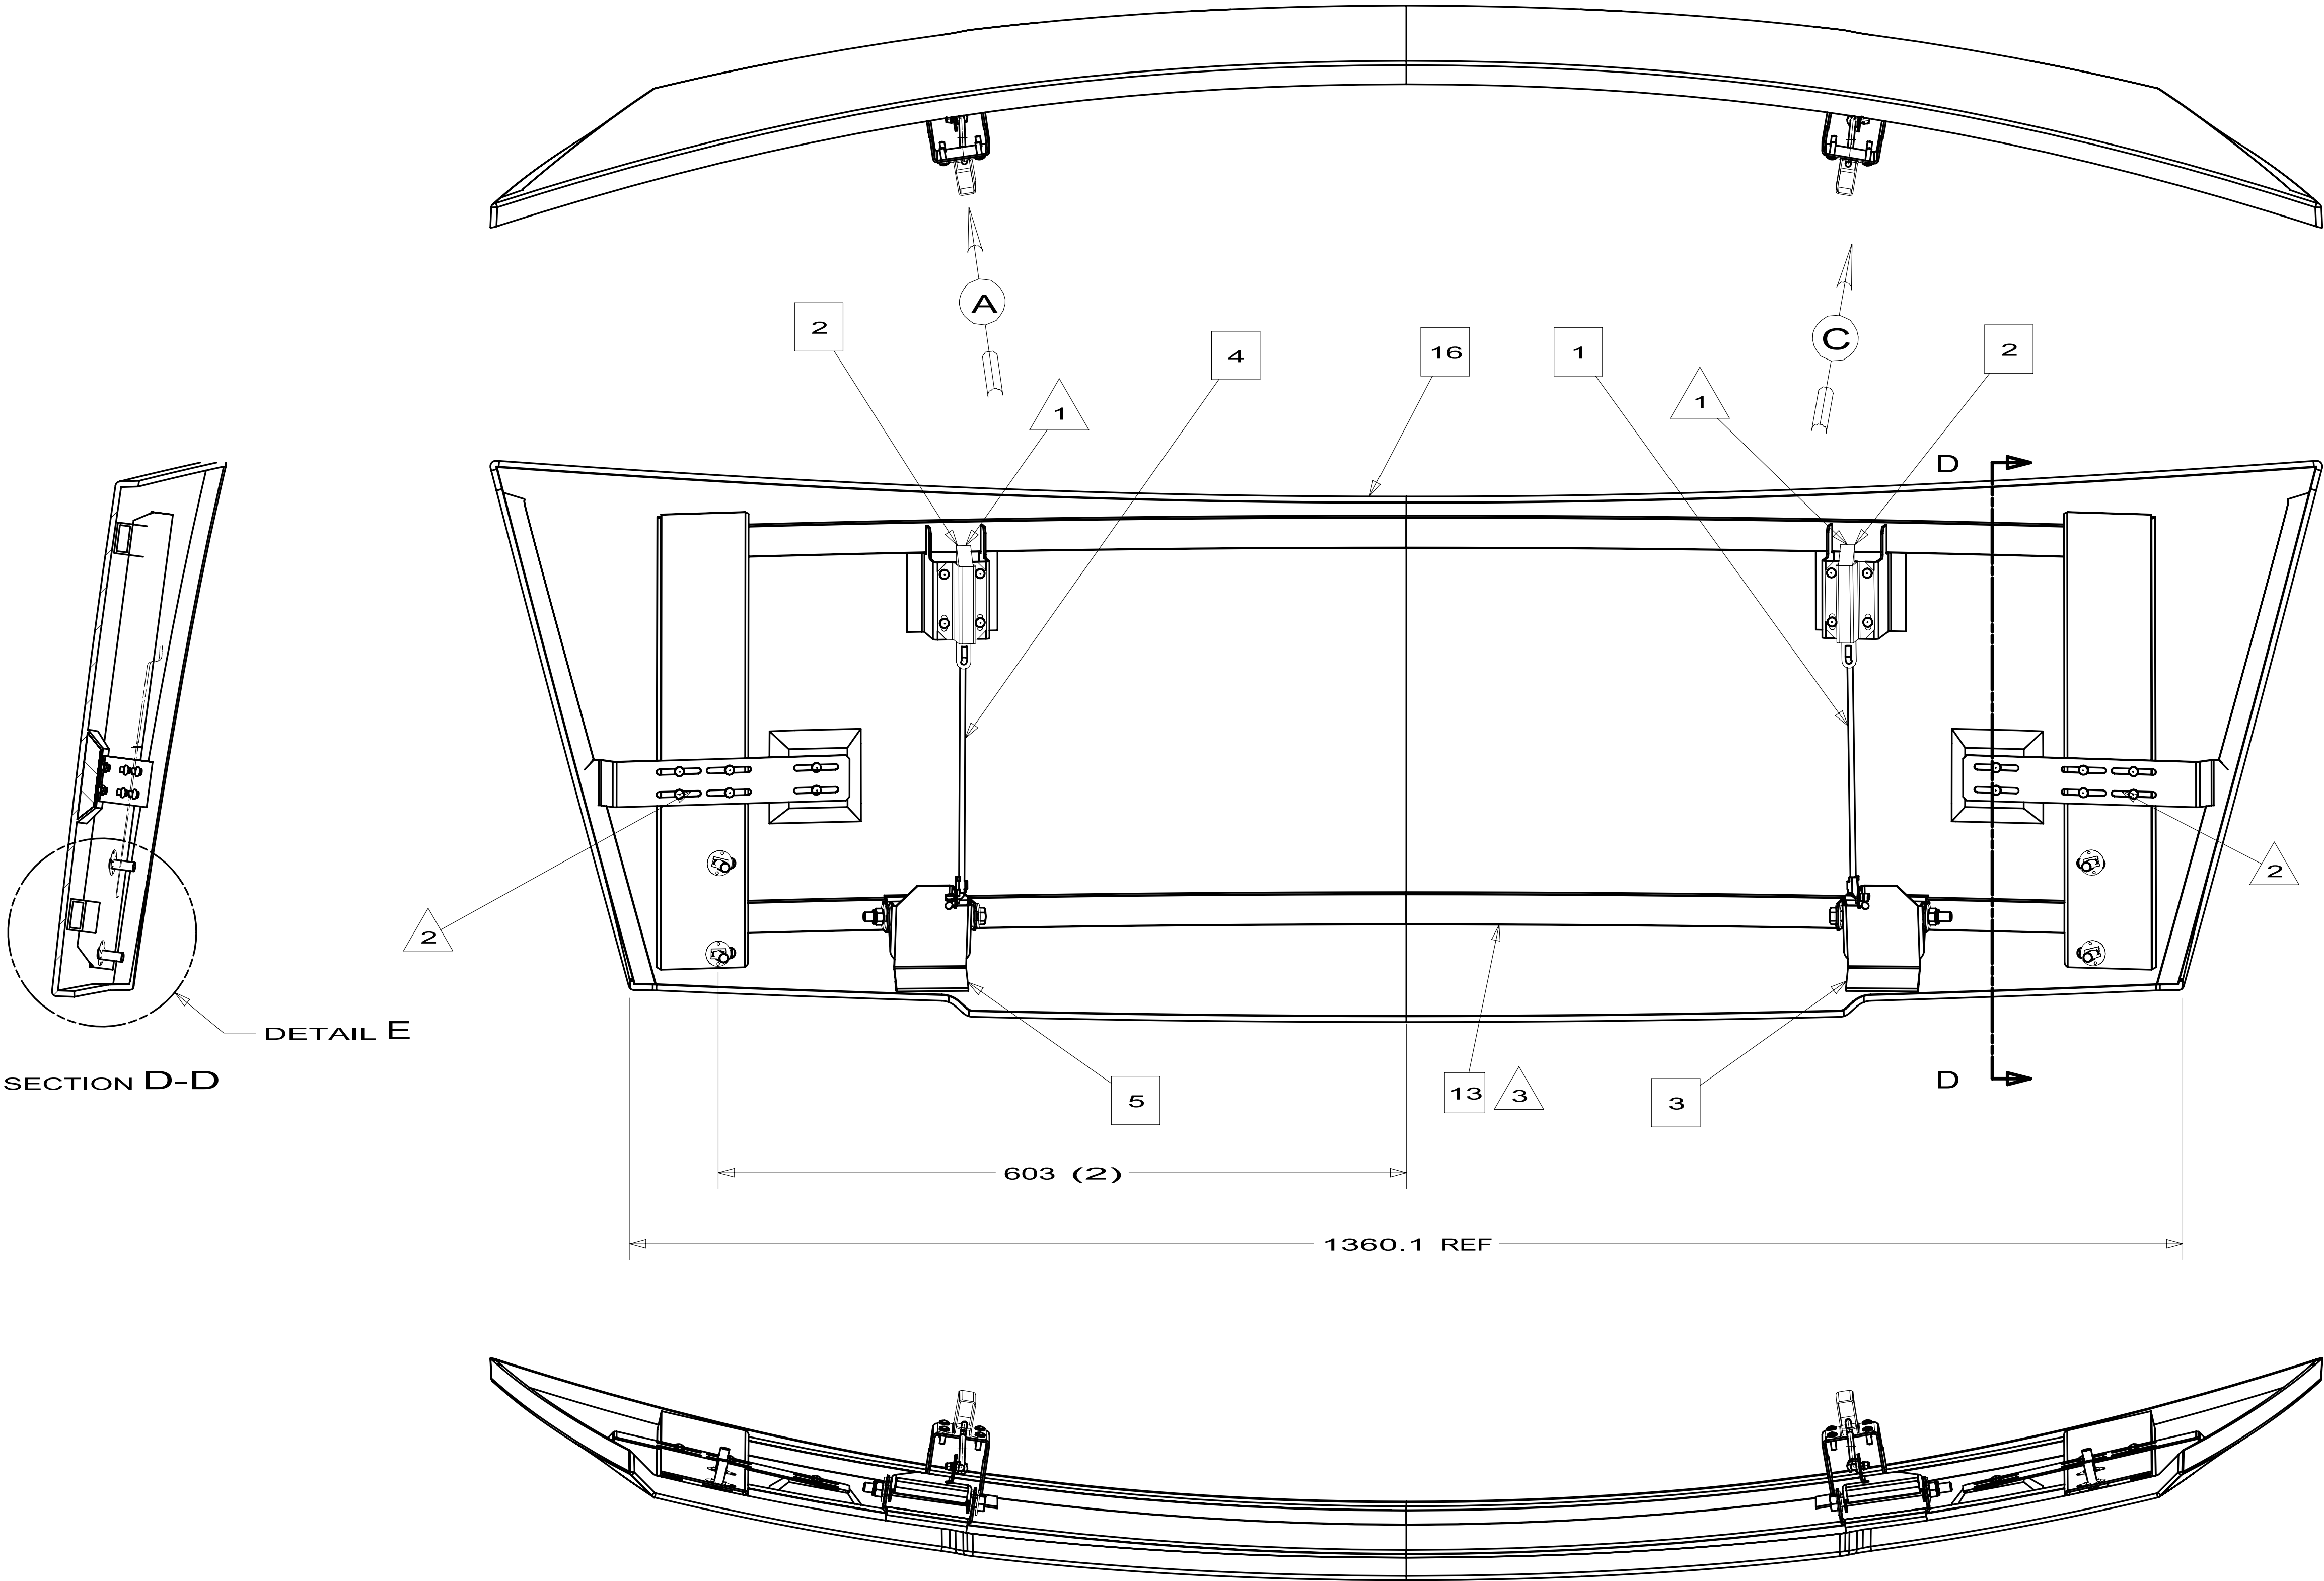

16	15338501CHT	PANEL-HOOD,C	1
15	14634710CHT	PLATE-STUD	2
14	04436402000	NUT-SPEED, F	4
13	15408801CHT	HOOD ASM-INN	1
12	15620001CHT	ADJUSTER-HOC	2
11	10226501000	CLIP-ROD END	2
10	05871602000	WASHER-FLAT	4
9	000E131600U	WASHER	4
8	000C120564U	BOLT	2
7	000D290500A	NUT	2
6	000G390808U	SCREW-PAN,HE	24
5	14738801CHT	LATCH-PADDLE	1
4	14552105CHT	ROD-HOOD,LAT	1
3	14738802CHT	LATCH-PADDLE	1
2	11390802000	PLUNGER ASM	2
1	14552106CHT	ROD-HOOD,LAT	1
ITEM	PART NUMBER	DESCRIPTION	QTY

WINNEBAGO

INDUSTRIES

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFTR

ORIG. DATE

CHKR

ALL DIMENSIONS ARE
IN MILLIMETERS

P.E.

FIRST USED

M.E.

06 G-SERIES,W

DSNR

UNSPECIFIED TOLERANCES ARE:

WHOLE DIM (X) : 3

ONE-PLACE (X.X) :

TWO-PLACE (X.XX) :

ANGLE :

MATERIAL:

THIRD ANGLE
PROJECTION

DO NOT SCALE DRAWING

TITLE:

HOOD COMPL-FRONT

SHEET 1 OF 2

PART NO 154089

REV

REF:

1




NOTES:

3. USE ADHESIVE-RESIN 112481-03-000 AND
ADHESIVE-CURATIVE 112481-04-000 FOR BONDING PARTS.

2. DO NOT APPLY GLUE.

1. LUBRICATE WITH WHITE LITHIUM GREASE.



SEE CHART
FOR COLOR VARIATIONS
OF THIS PART

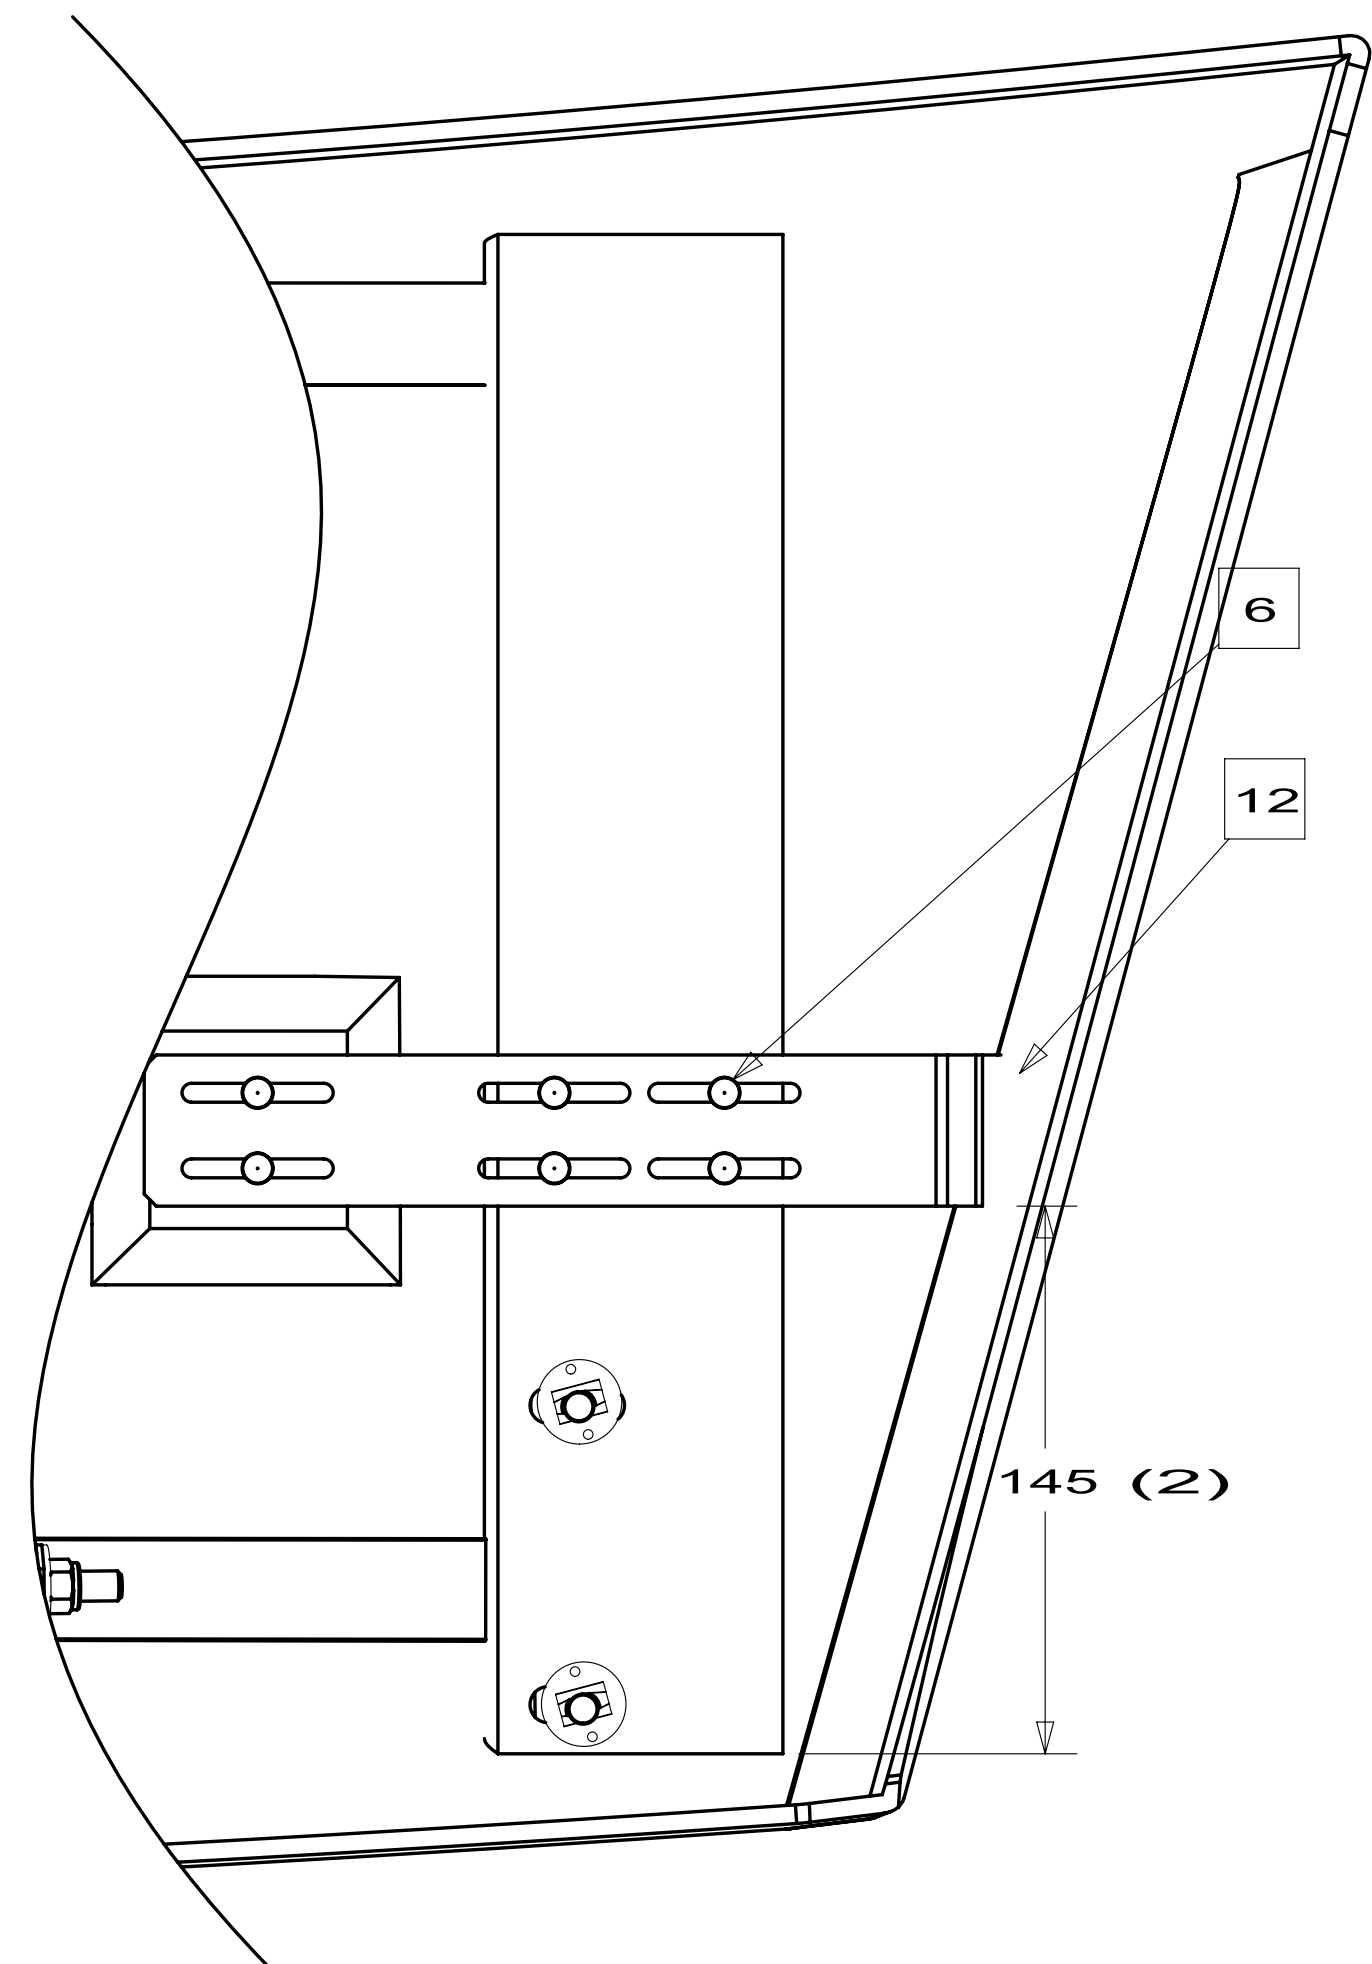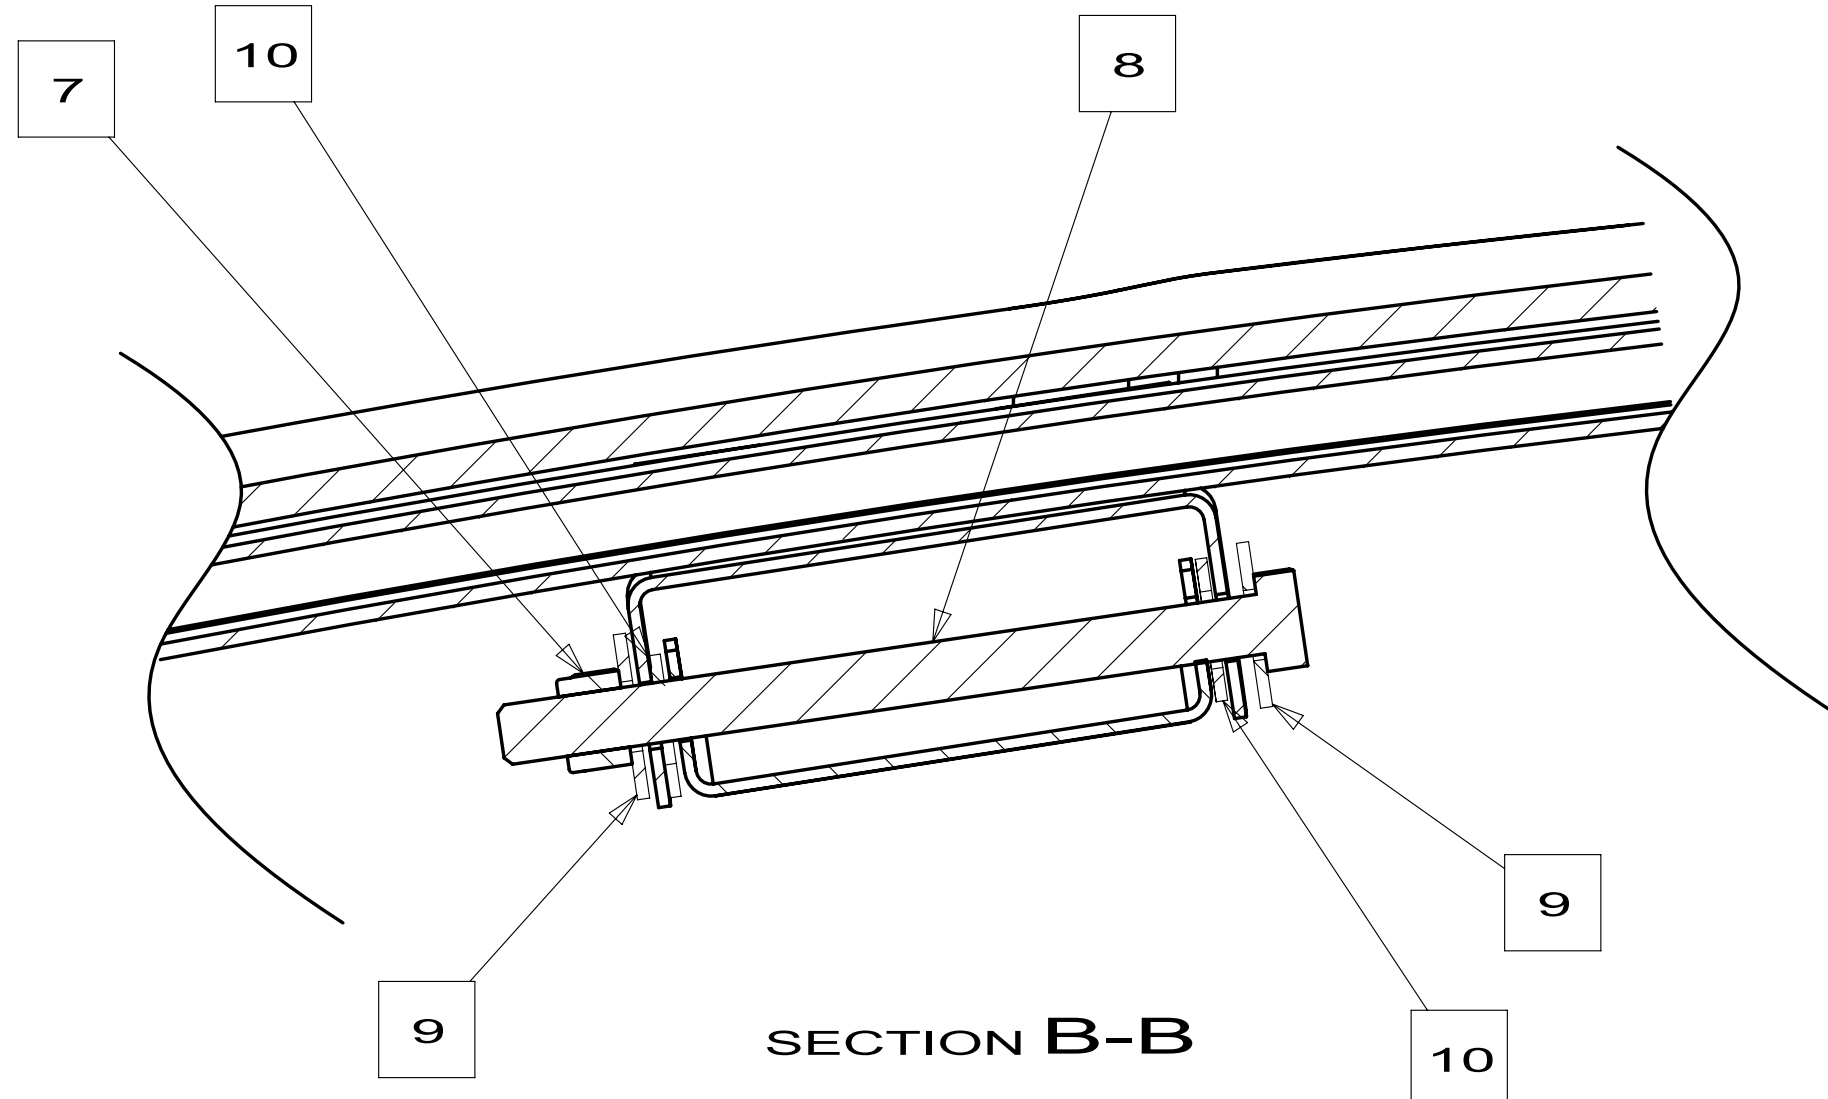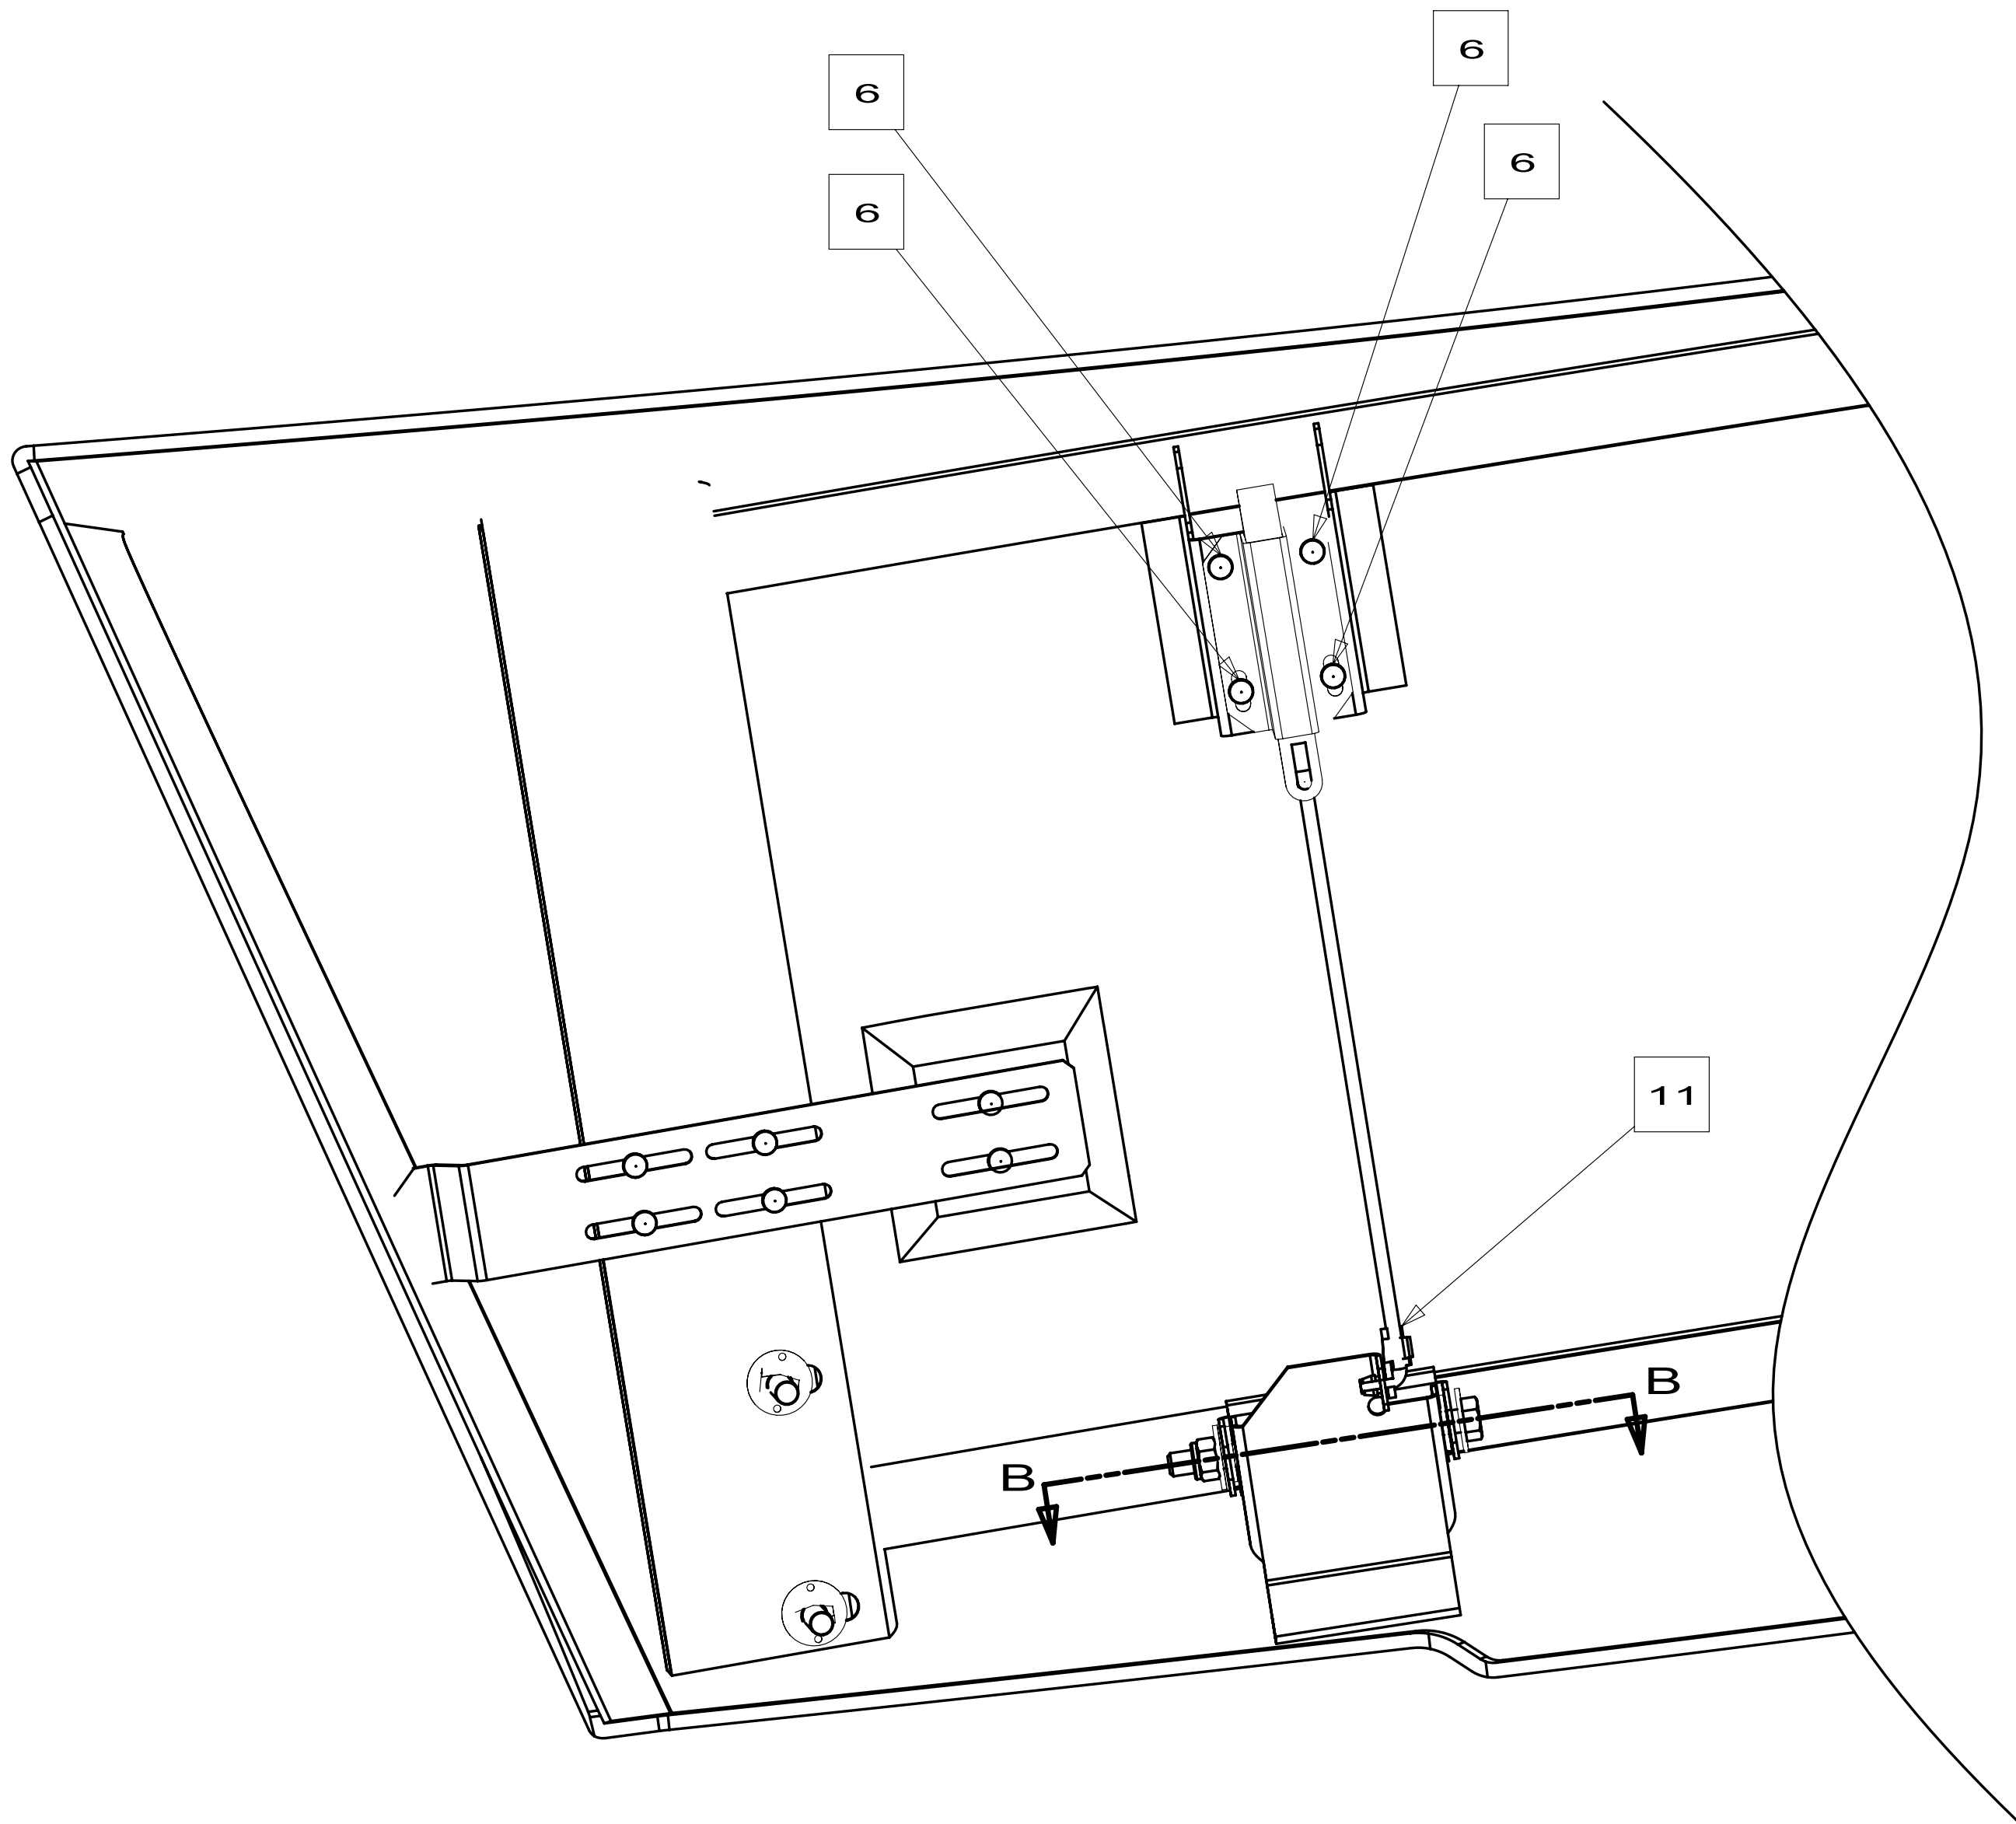

FIRST USED			06 G-SERIES,W		
DO NOT SCALE DRAWING					
TITLE:			HOOD COMPL-FRONT		
SHEET 2	PART NO	154089	REV		

8		7			
DWG NO	UNIT	A	B	C	D
171260-01	J32H	990	1000	3310	3180
171260-02	J35P	---	---	---	---
171260-03	J37F	1090	1015	3650	3900

1		2		3		4		5		6		7		8	
RELEASE	REV	DATE	DWG NO	171260											
REV	ZONE	REVISION RECORD		DATE	DATE	171260									

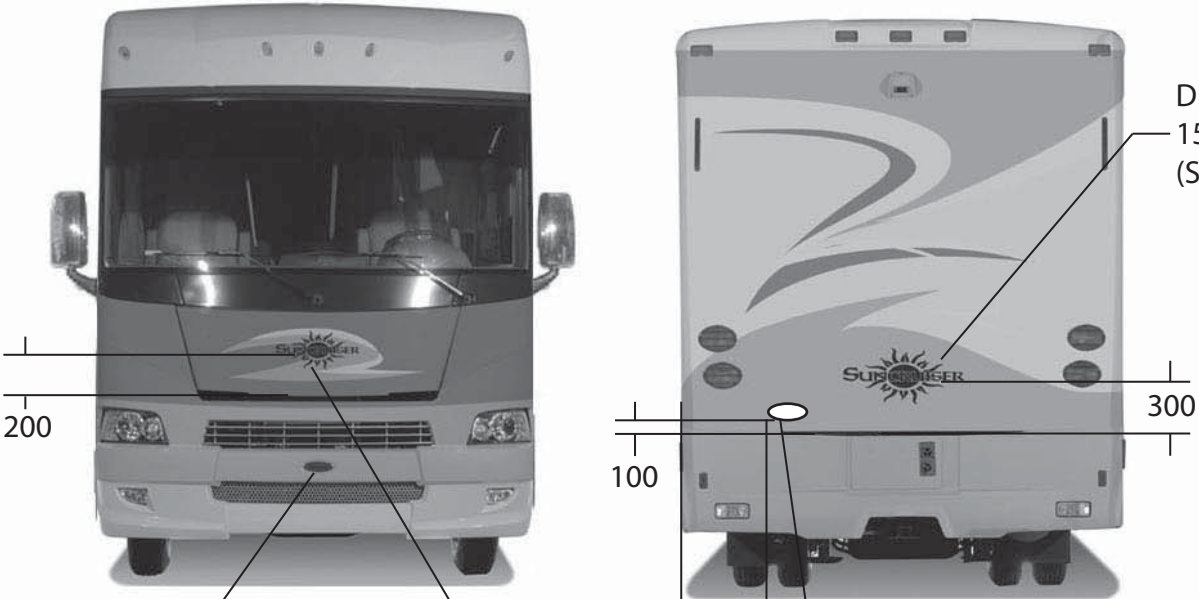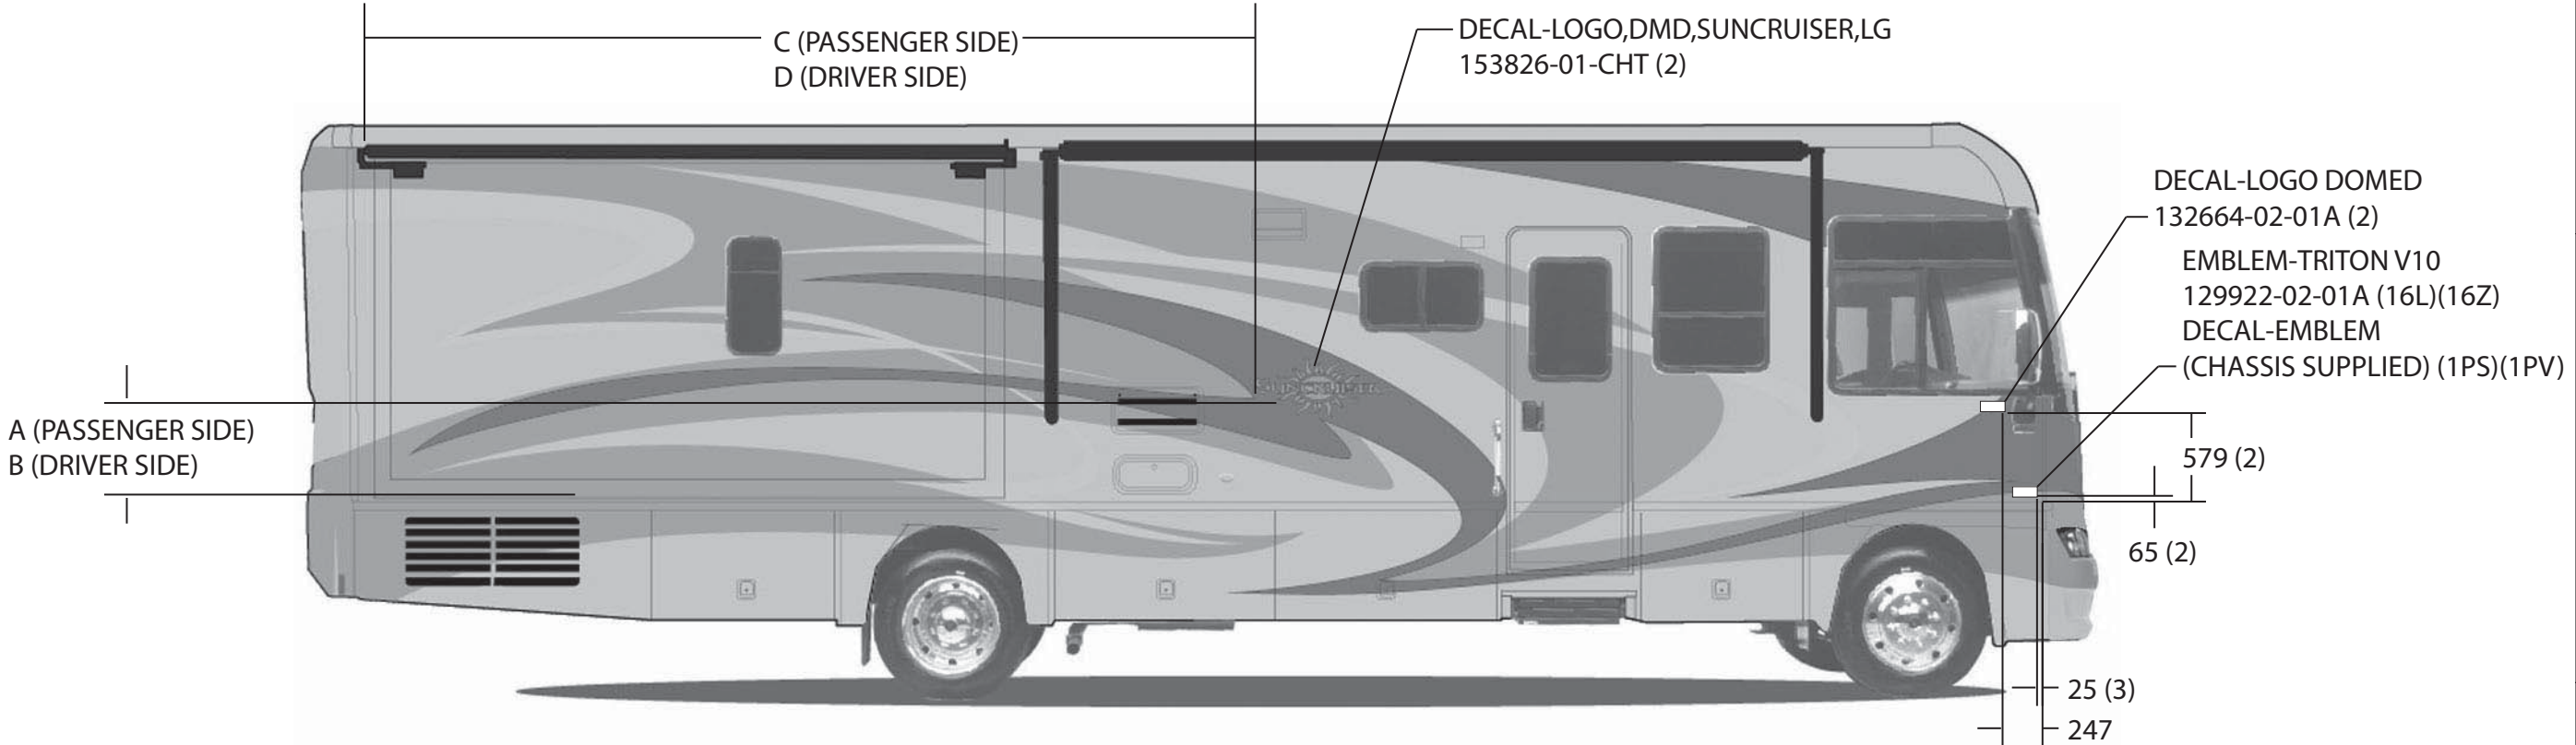

△ CENTER ON UNIT.

1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.
2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.
3. TOLERANCE FOR DIMENSIONS IS +/-20mm.
LOGO IS TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).
4. CLEAR COAT TO BE APPLIED ON ENTIRE UNIT TO PROTECT PAINT.
5. USE 174664-01-000 (100 FT) TO COVER UNSEALED ROOF SEAMS.
6. APPLY SEALER BODY SEAM CLEAR 94401-04-000 TO HELP SECURE EDGES.
7. END PANELS OF SLIDEOUT ROOMS WILL BE PAINTED WITH BASECOAT AND CLEAR COAT ONLY. THERE WILL BE NO COLORED DESIGN GRAPHIC ELEMENTS PAINTED ON THE END PANELS.
8. PASSENGER SIDE OF UNIT SHOWN, DRIVER'S SIDE OPPOSITE.
9. DIE CUT ACRYLIC FILM TO PROTECT UNIT (KIT-PAINT PROTECTION 157825-02-000)

- (16L) FORD 22,000#-22.5 AL WHL
(16Z) FORD 24,000#-22.5 ALUM WHEEL
(1PS) WORKHORSE 22,000#-22.5 TIRE
(1PV) WORKHORSE 24,000#-22.5 TIRE
(24P) MASK FRONT EXT PROTECTIVE
(27A) EXT FULL BODY PAINT PKG #1
(92A) EXT FULL BODY PAINT PKG #2
(24C) EXT FULL BODY PAINT PKG #3
(24B) EXT FULL BODY PAINT PKG #4


		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
		ORIG. DATE	09/05/08
		FIRST USED	10 J SERIES
			SUNCRUISER
		MATERIAL:	
SPECIFICATION PRINT DO NOT SCALE			
TITLE:			
GRAPHICS INSTL - FBP			
SHEET	1	OF	2
PART NO		REV	
171260			



DECAL-SUNCRUISER, DOMED, SML
153826-02-05A (DK.CHARCOAL/KHAKI)

DECAL-SUNCRUISER, DOMED, LG
153826-01-05A (DK.CHARCOAL/KHAKI)

(27A)
2010 SUNCRUISER - IRON GRAY

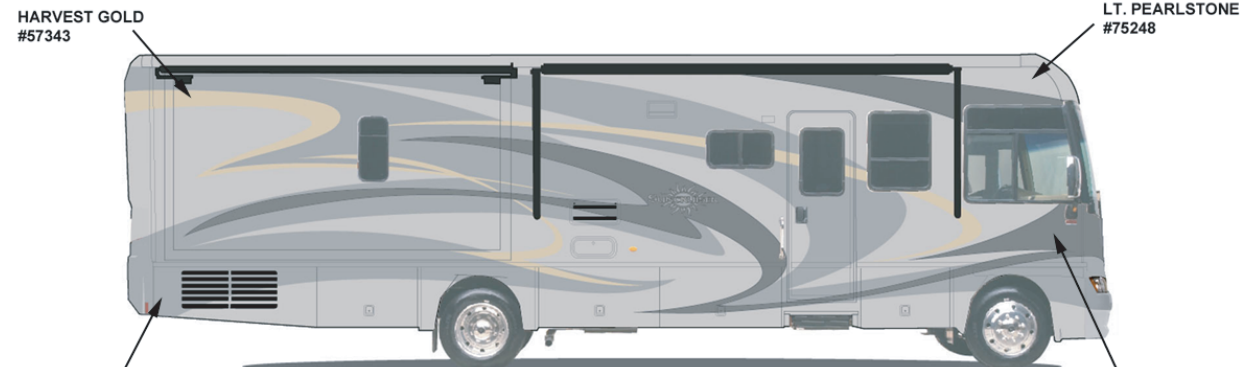

DECAL-SUNCRUISER, DOMED, SML
153826-02-05A (DK.CHARCOAL/KHAKI)

DECAL-SUNCRUISER, DOMED, LG
153826-01-05A (DK.CHARCOAL/KHAKI)

(92A)
2010 SUNCRUISER - PEARLSTONE



DECAL-SUNCRUISER, DOMED, SML
153826-02-05A (DK.CHARCOAL/KHAKI)

DECAL-SUNCRUISER, DOMED, LG
153826-01-05A (DK.CHARCOAL/KHAKI)

(24C)
2010 SUNCRUISER - SILVER PLUM





DECAL-SUNCRUISER, DOMED, SML
153826-02-05A (DK.CHARCOAL/KHAKI)

DECAL-SUNCRUISER, DOMED, LG
153826-01-05A (DK.CHARCOAL/KHAKI)

(24B)
2010 SUNCRUISER - SAILFIN BLUE
Rev. A

FIRST USED		
2010 J-SERIES (SUNCRUISER)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	PART NO	REV
2	171260	

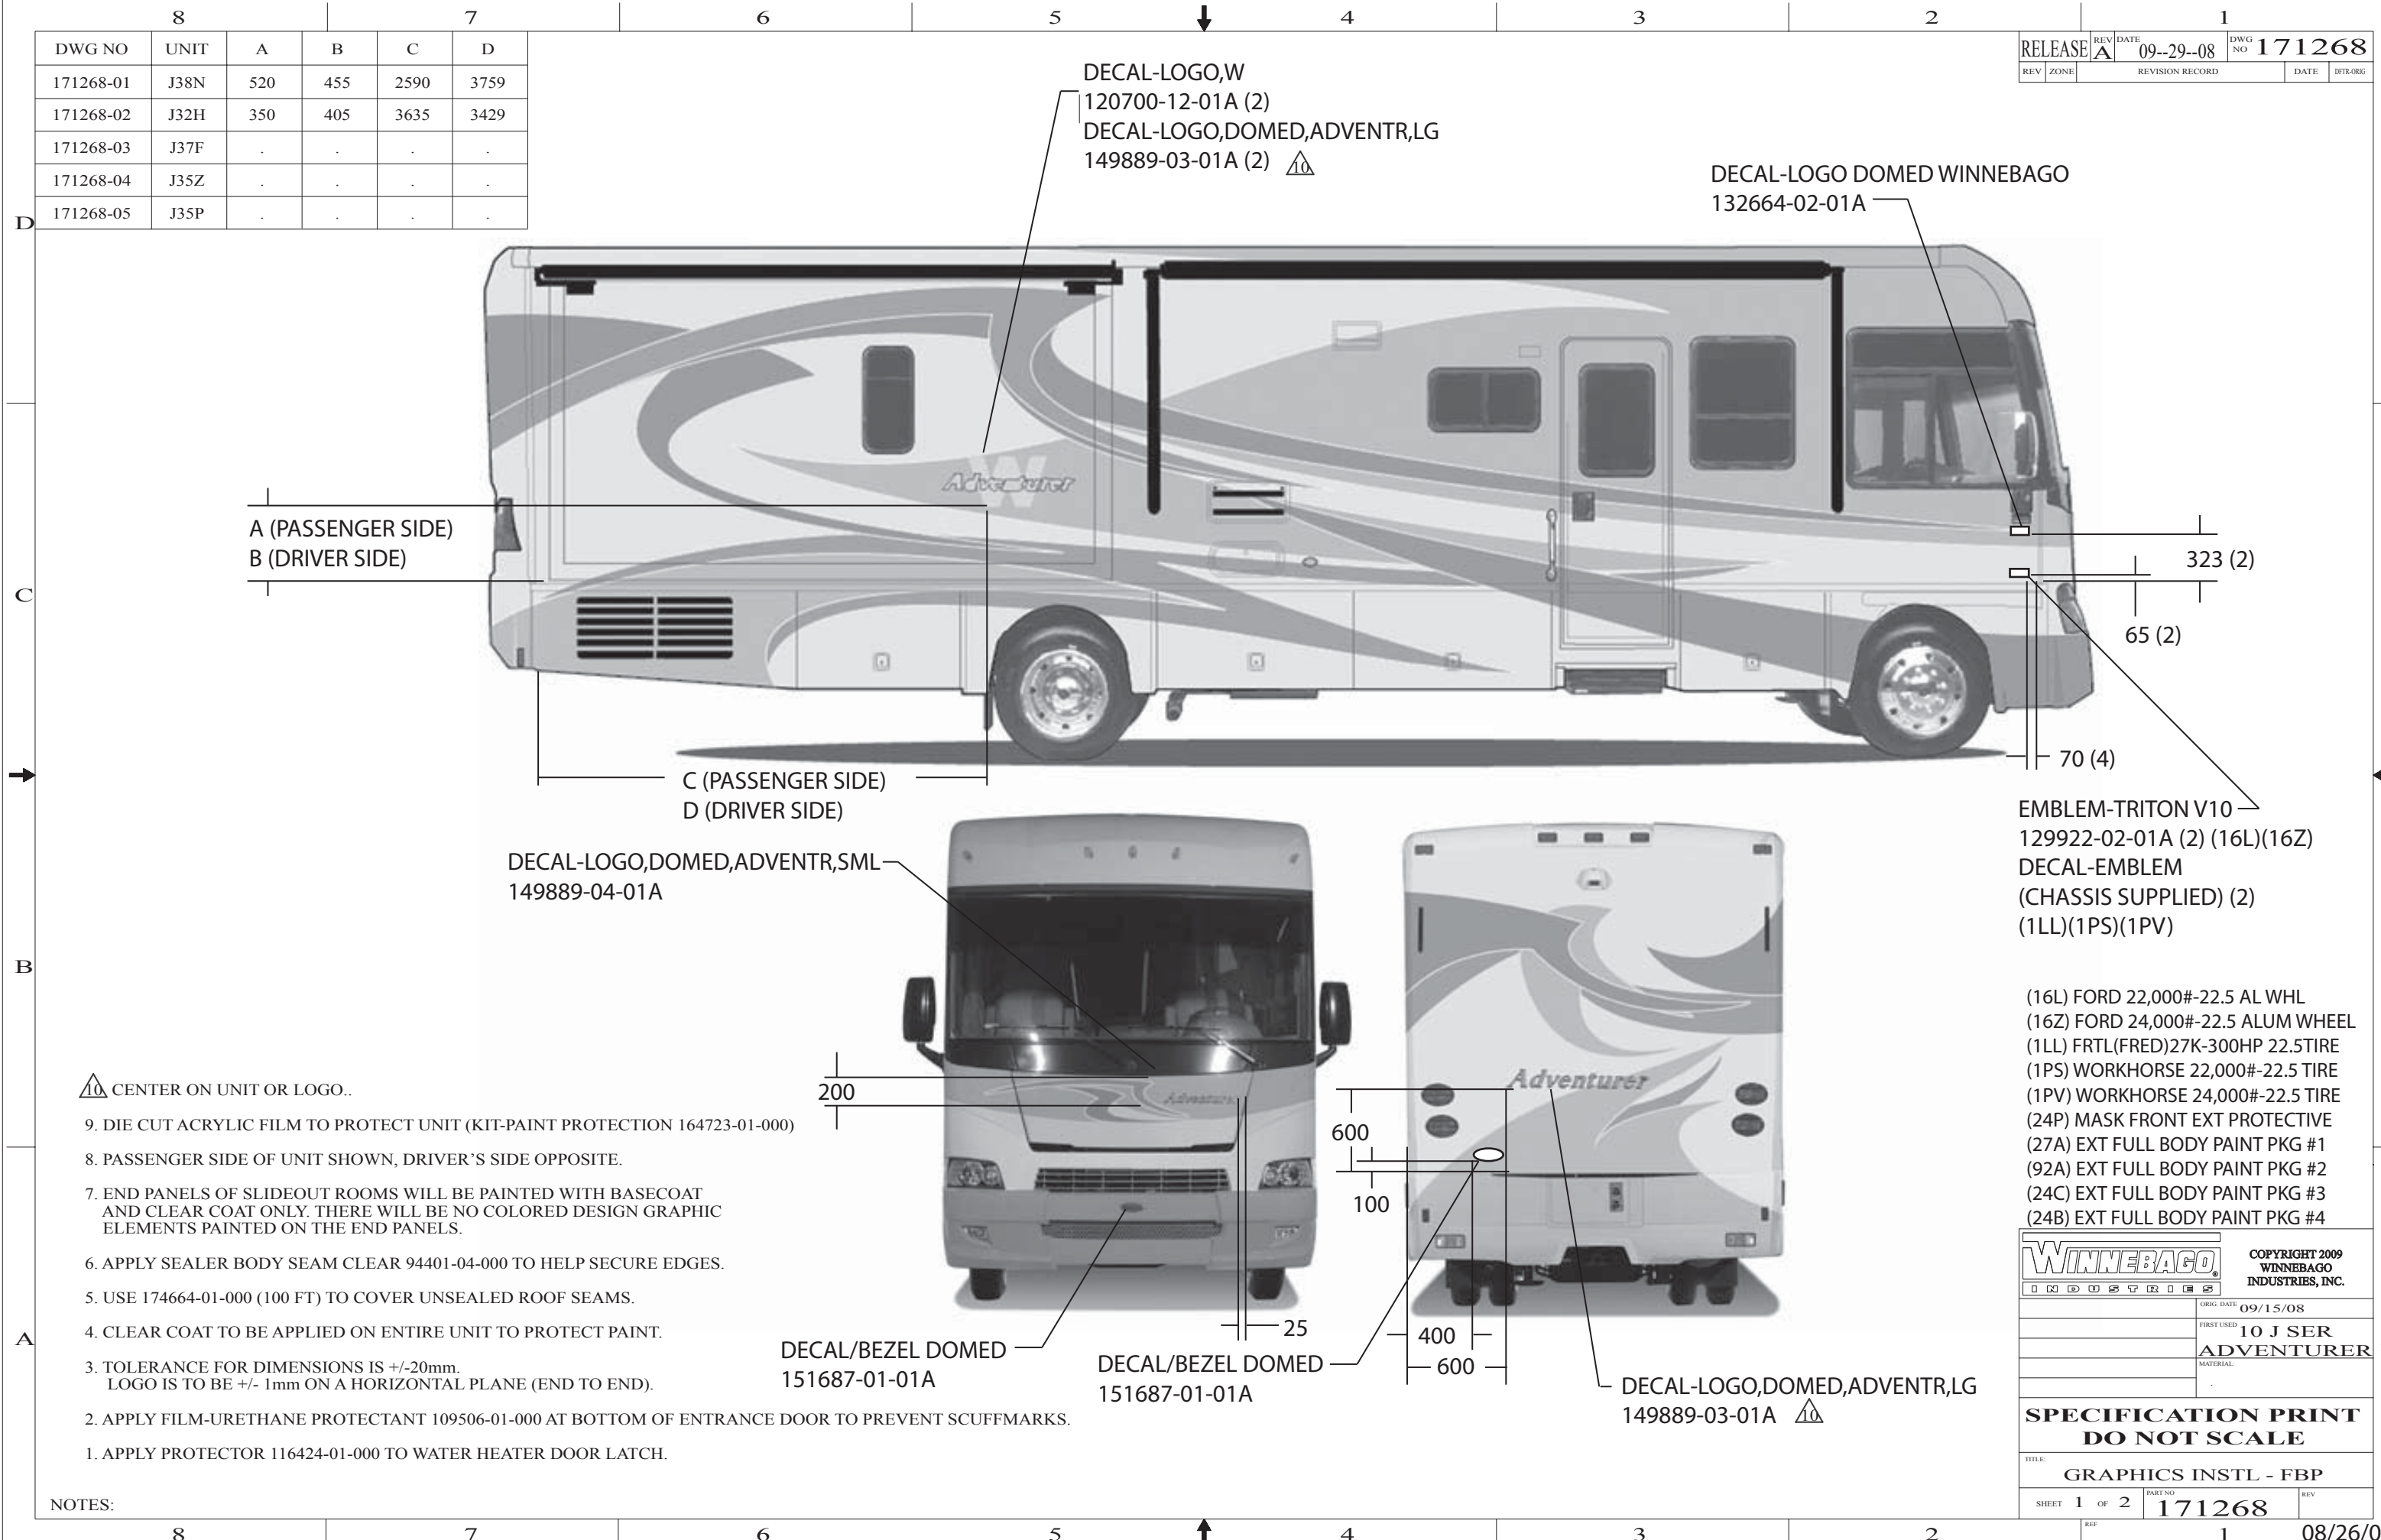

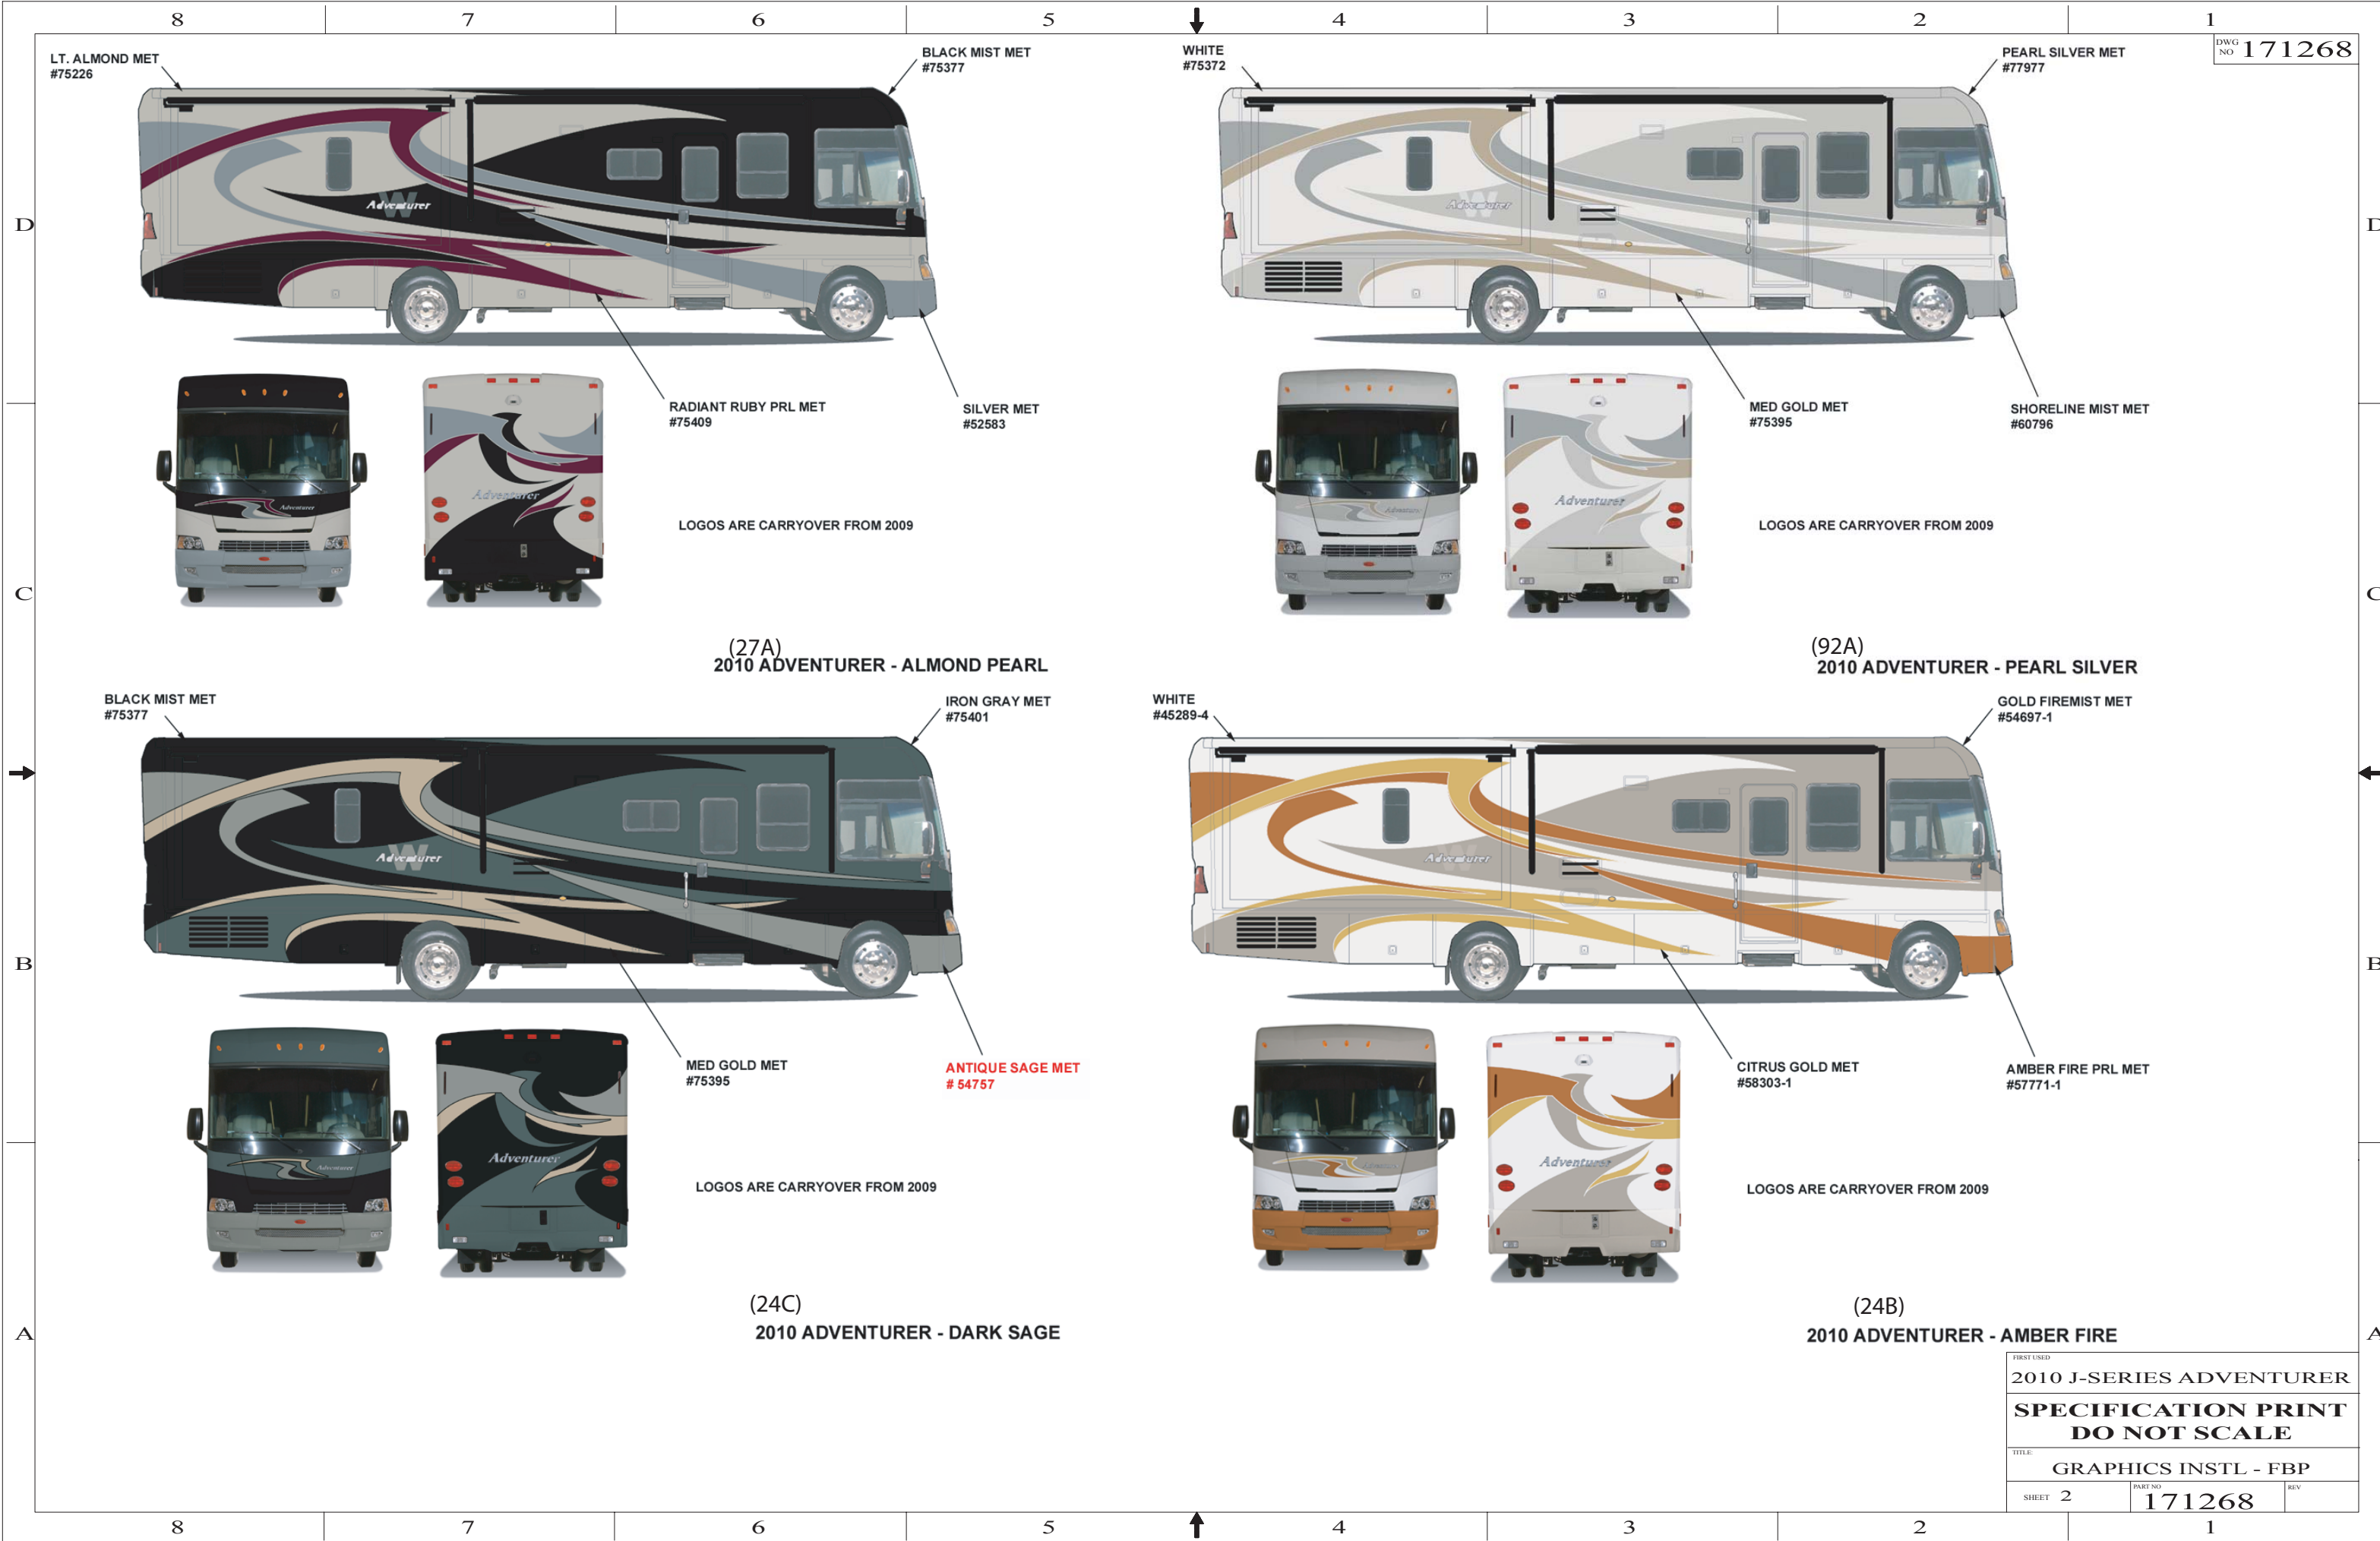


(27A)
2010 ADVENTURER - ALMOND PEARL

(92A)
2010 ADVENTURER - PEARL SILVER


(24C)
2010 ADVENTURER - DARK SAGE


(24B)
2010 ADVENTURER - AMBER FIRE

FIRST USED		
2010 J-SERIES ADVENTURER		
SPECIFICATION PRINT		
DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	2	PART NO
		171268
		REV

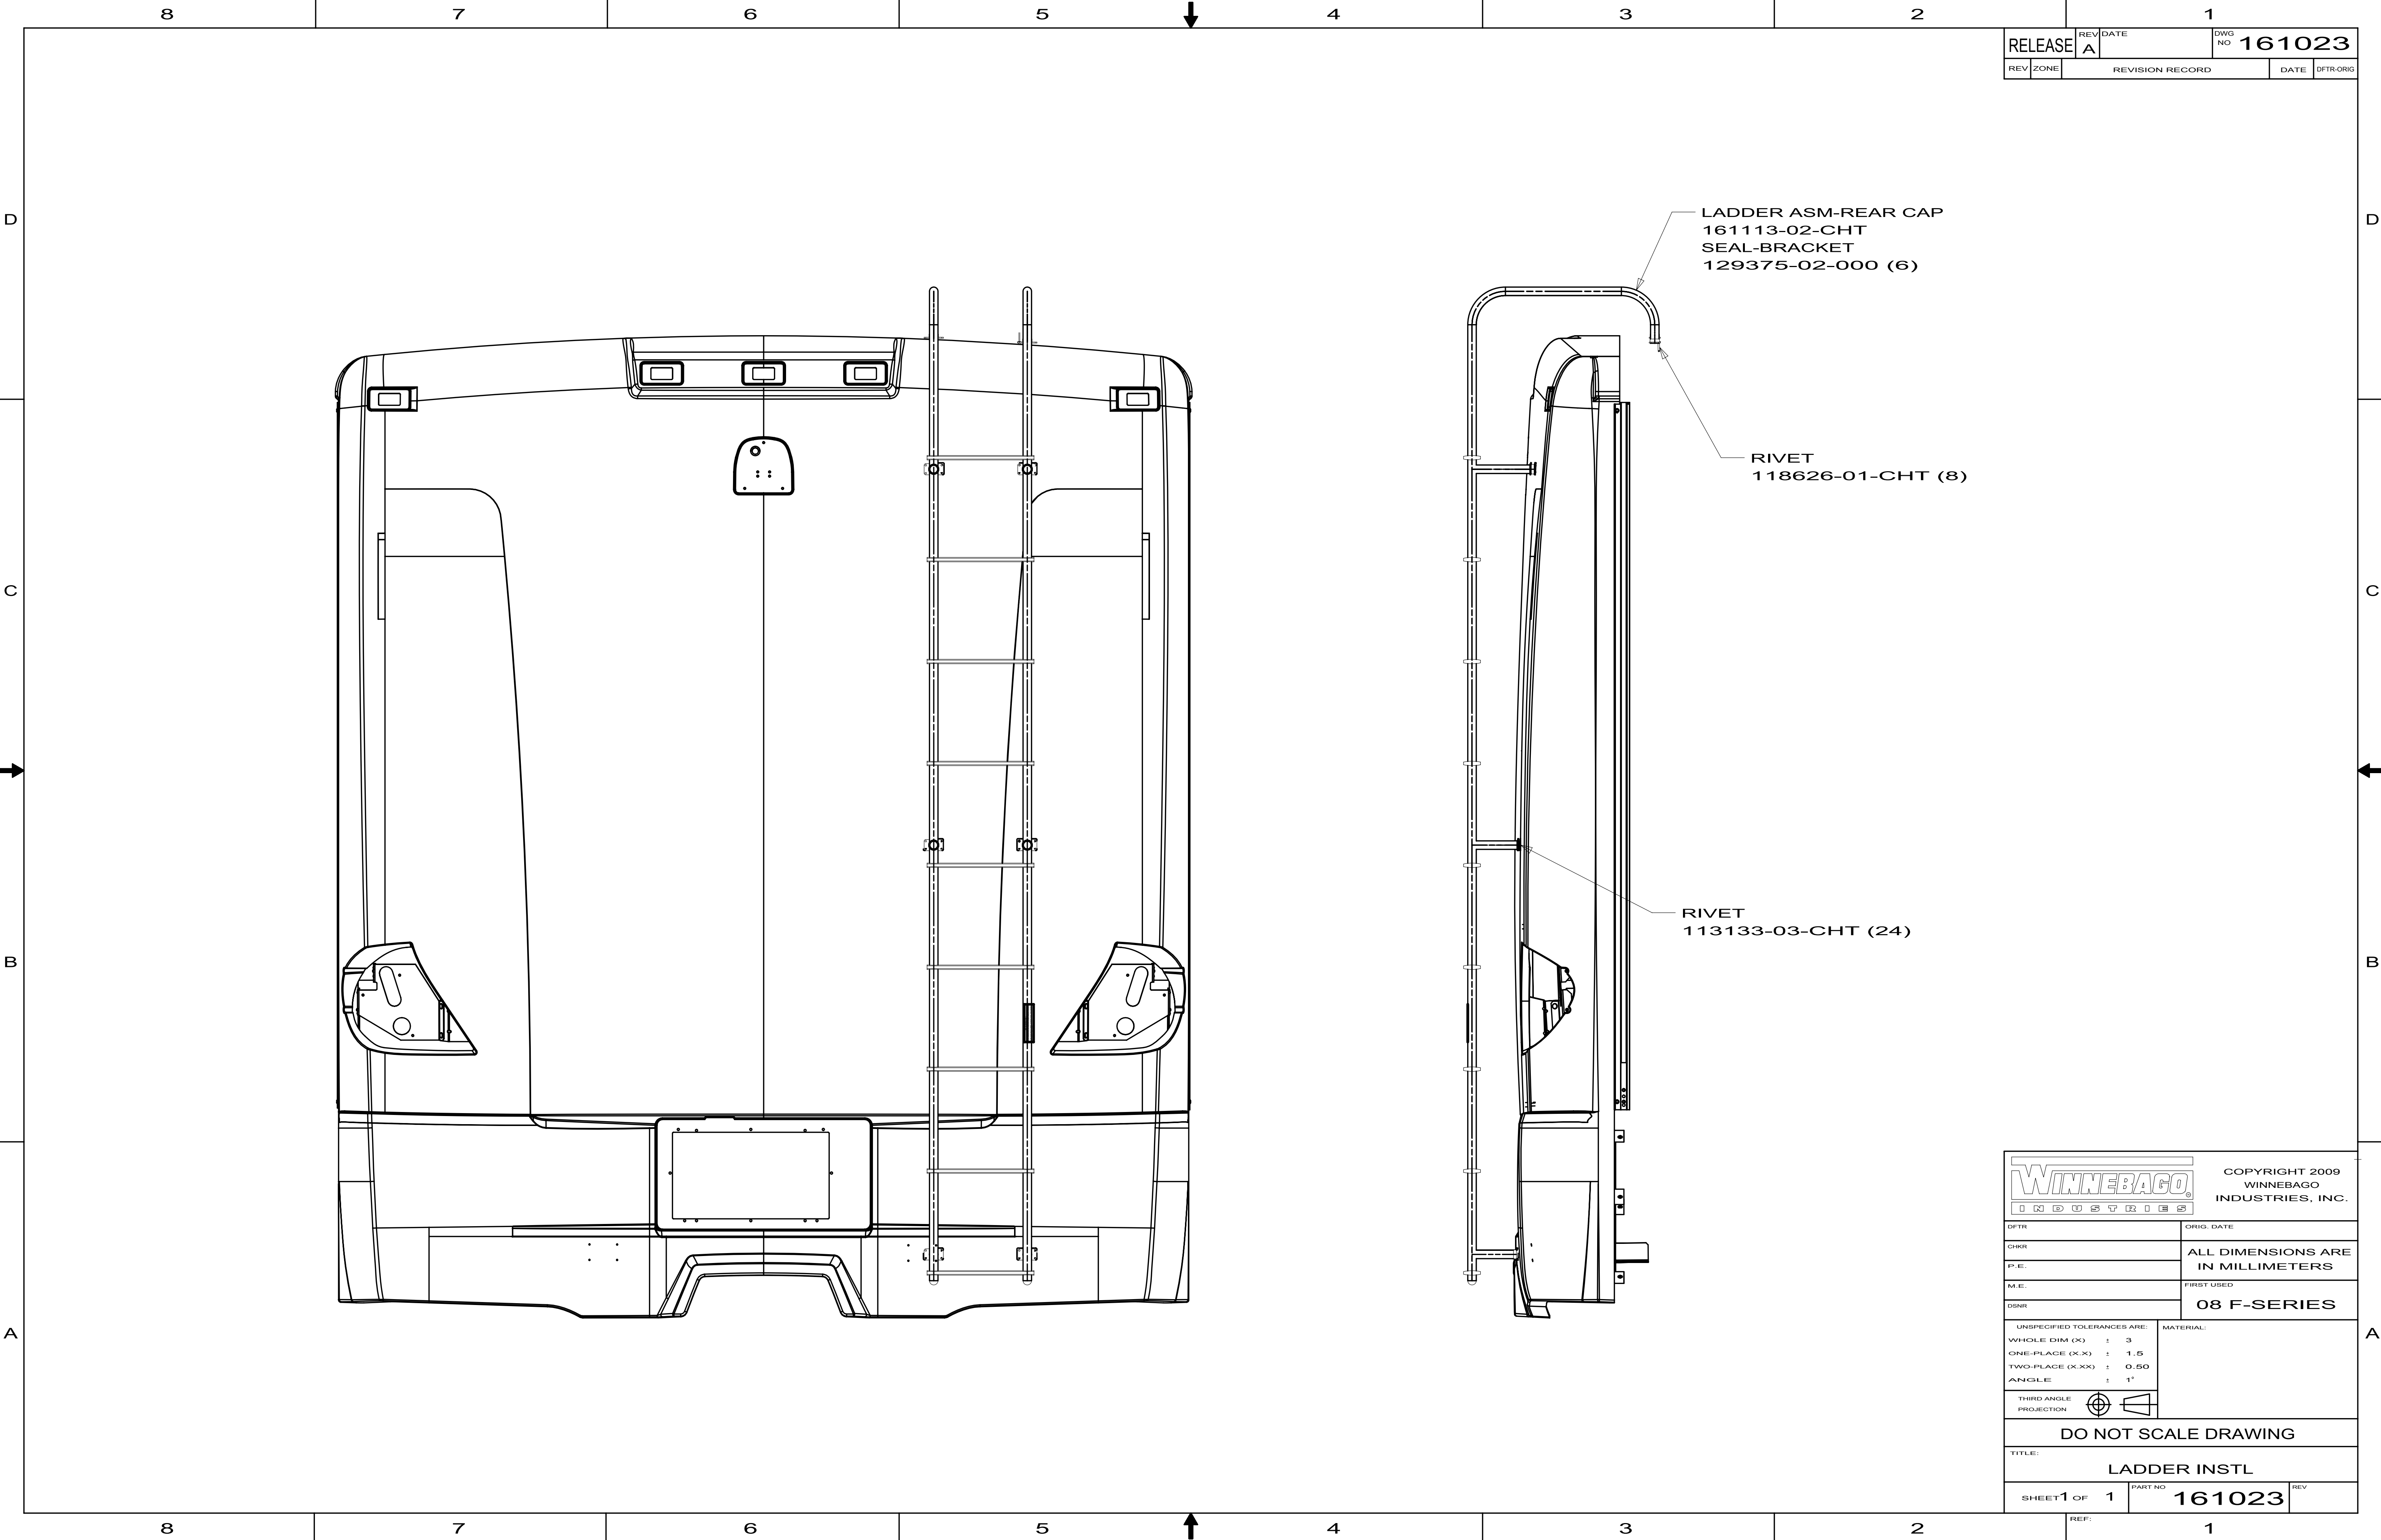

RELEASE		REV	DATE	DWG	NO	161023
REV	ZONE	REVISION RECORD			DATE	DTFR-ORIG


WINNEBAGO® INDUSTRIES, INC.		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DTFR		ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DSNR		08 F-SERIES	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
LADDER INSTL			
SHEET 1 OF 1		PART NO	REV
1		161023	

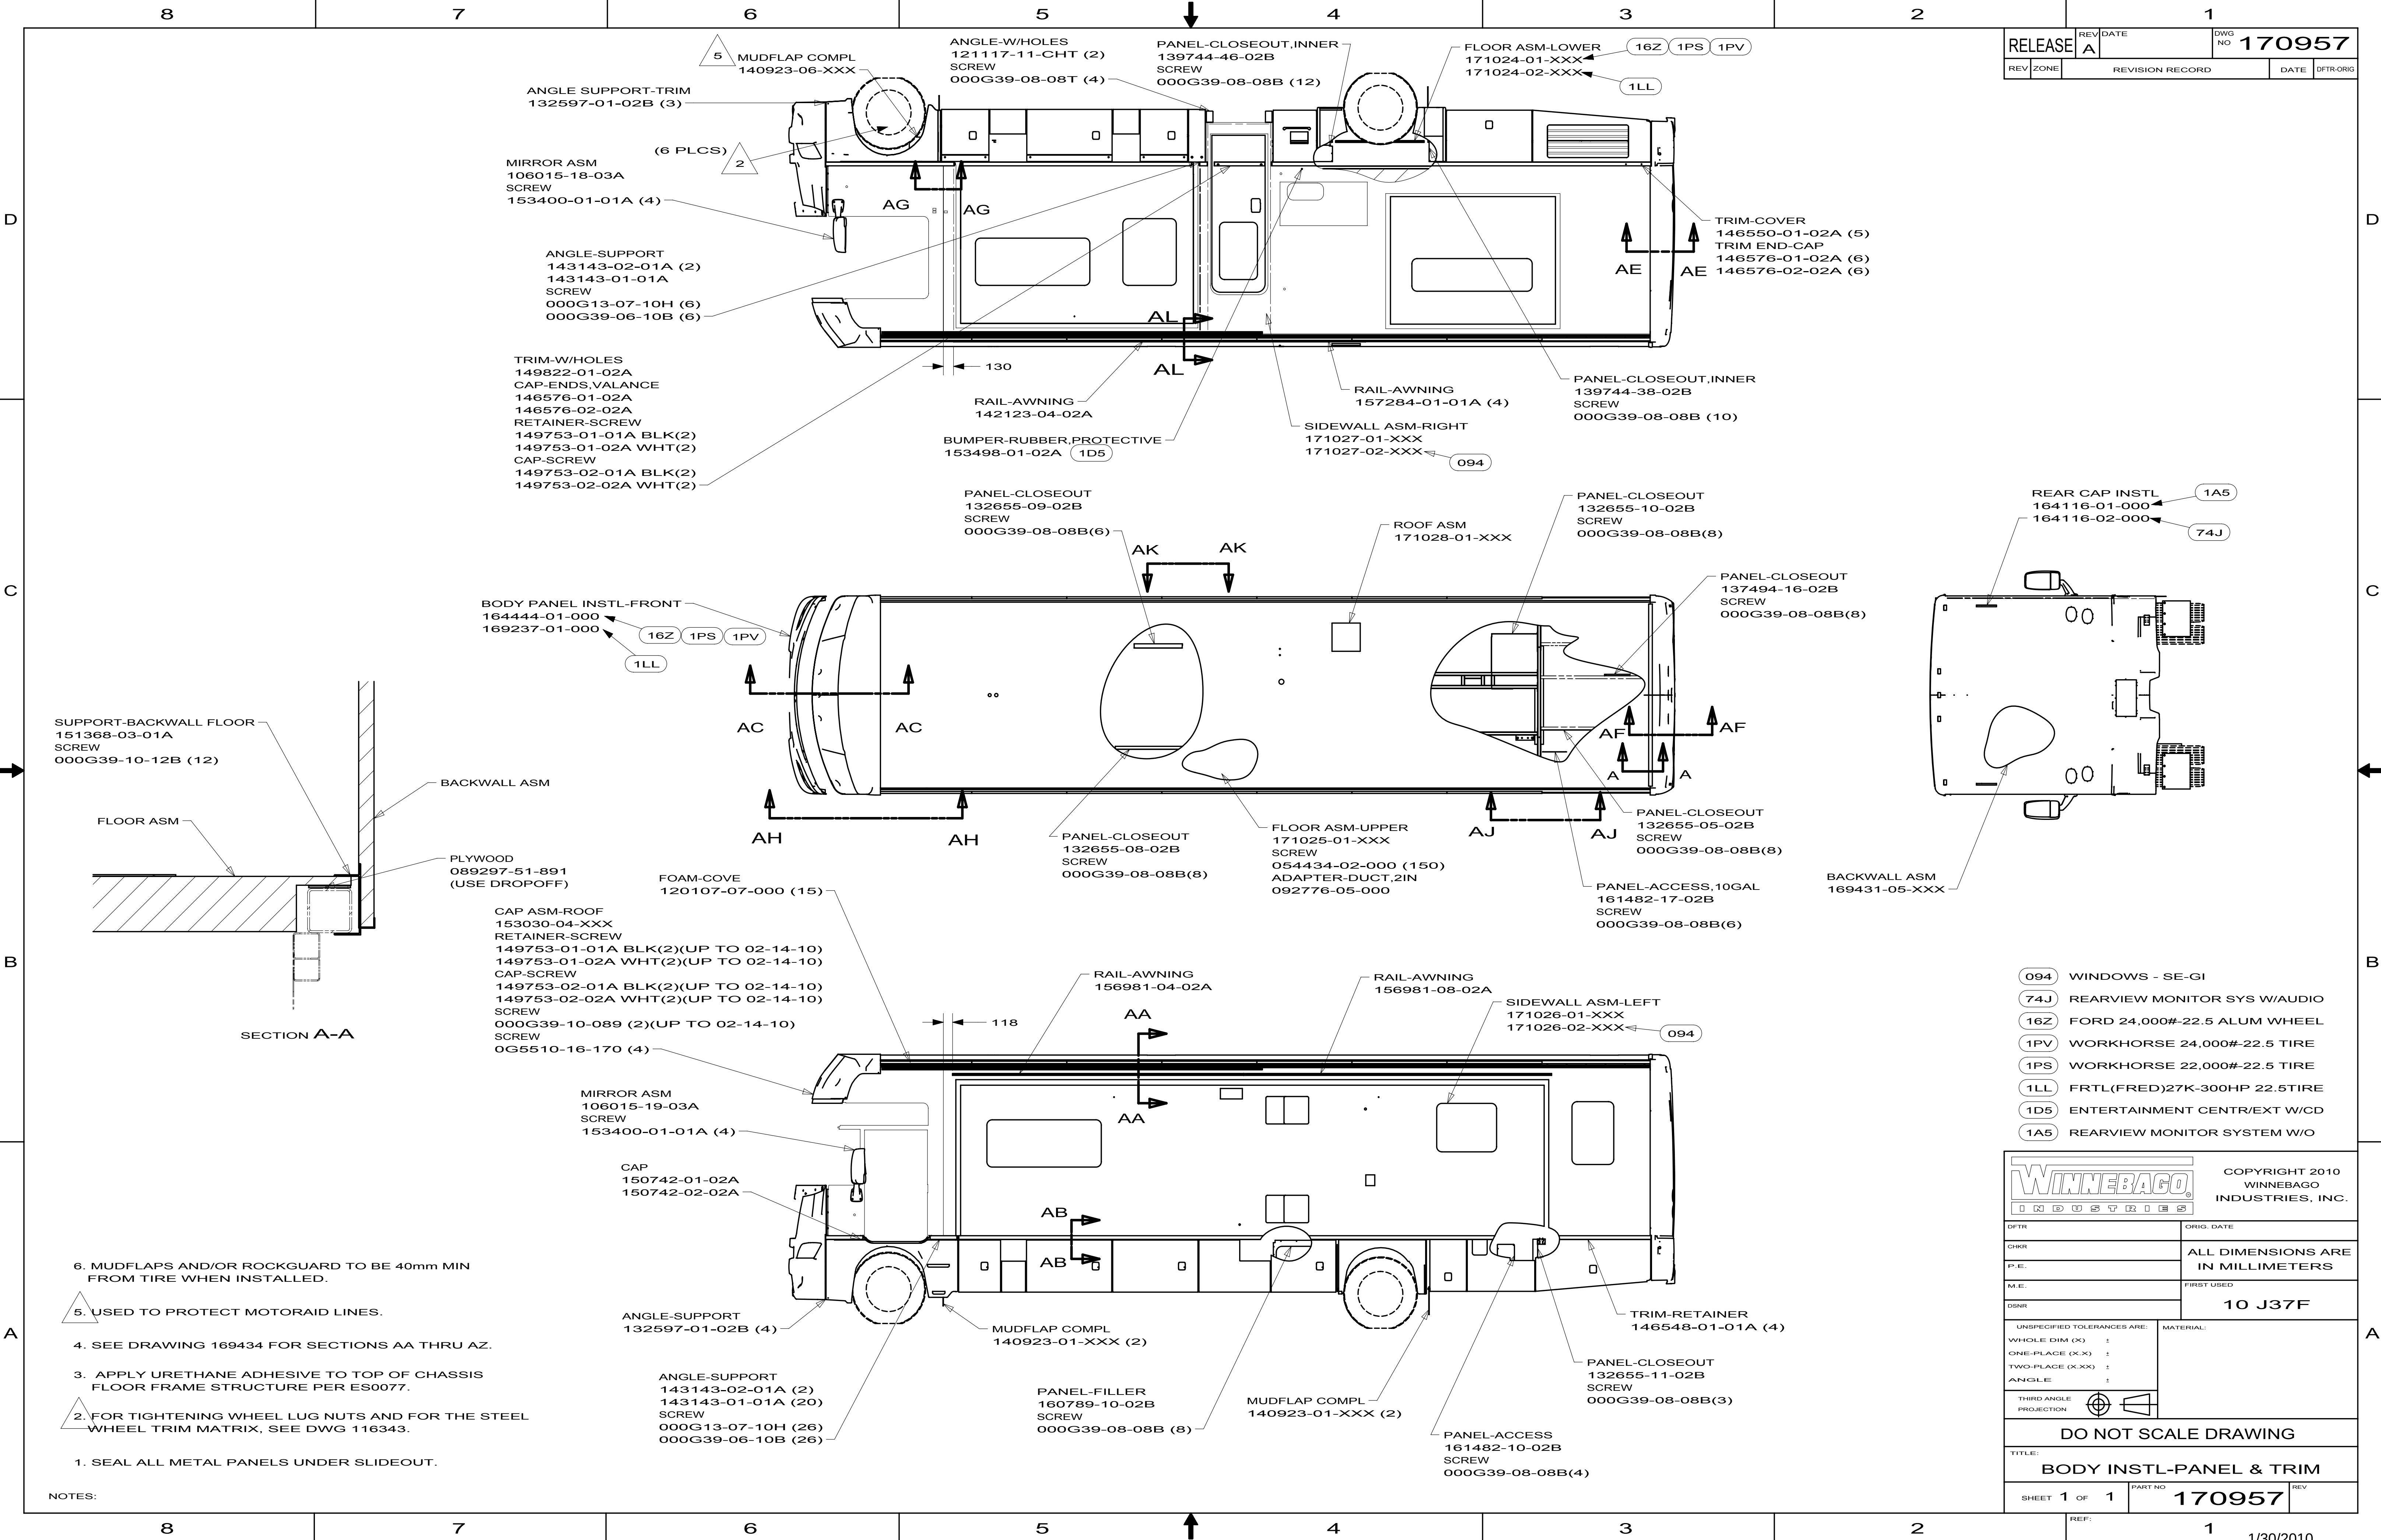


RELEASE		REV DATE	DWG NO 170957	
REV	ZONE	REVISION RECORD		DATE

REAR CAP INSTL
164116-01-000
164116-02-000

- 094 WINDOWS - SE-GI
- 74J REARVIEW MONITOR SYS W/AUDIO
- 16Z FORD 24,000#-22.5 ALUM WHEEL
- 1PV WORKHORSE 24,000#-22.5 TIRE
- 1PS WORKHORSE 22,000#-22.5 TIRE
- 1LL FRTL(FRED)27K-300HP 22.5TIRE
- 1D5 ENTERTAINMENT CENTR/EXT W/CD
- 1A5 REARVIEW MONITOR SYSTEM W/O

WINNEBAGO® INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DISTR		ORIG. DATE	
CHGR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		10 J37F	
DSNR			
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ±		THIRD ANGLE PROJECTION 	
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
DO NOT SCALE DRAWING			
TITLE:			
BODY INSTL-PANEL & TRIM			
SHEET 1 OF 1		PART NO	REV
		170957	

- NOTES:
- SEAL ALL METAL PANELS UNDER SLIDEOUT.
 - FOR TIGHTENING WHEEL LUG NUTS AND FOR THE STEEL WHEEL TRIM MATRIX, SEE DWG 116343.
 - APPLY URETHANE ADHESIVE TO TOP OF CHASSIS FLOOR FRAME STRUCTURE PER ES0077.
 - SEE DRAWING 169434 FOR SECTIONS AA THRU AZ.
 - USED TO PROTECT MOTORAIL LINES.
 - MUDFLAPS AND/OR ROCKGUARD TO BE 40mm MIN FROM TIRE WHEN INSTALLED.

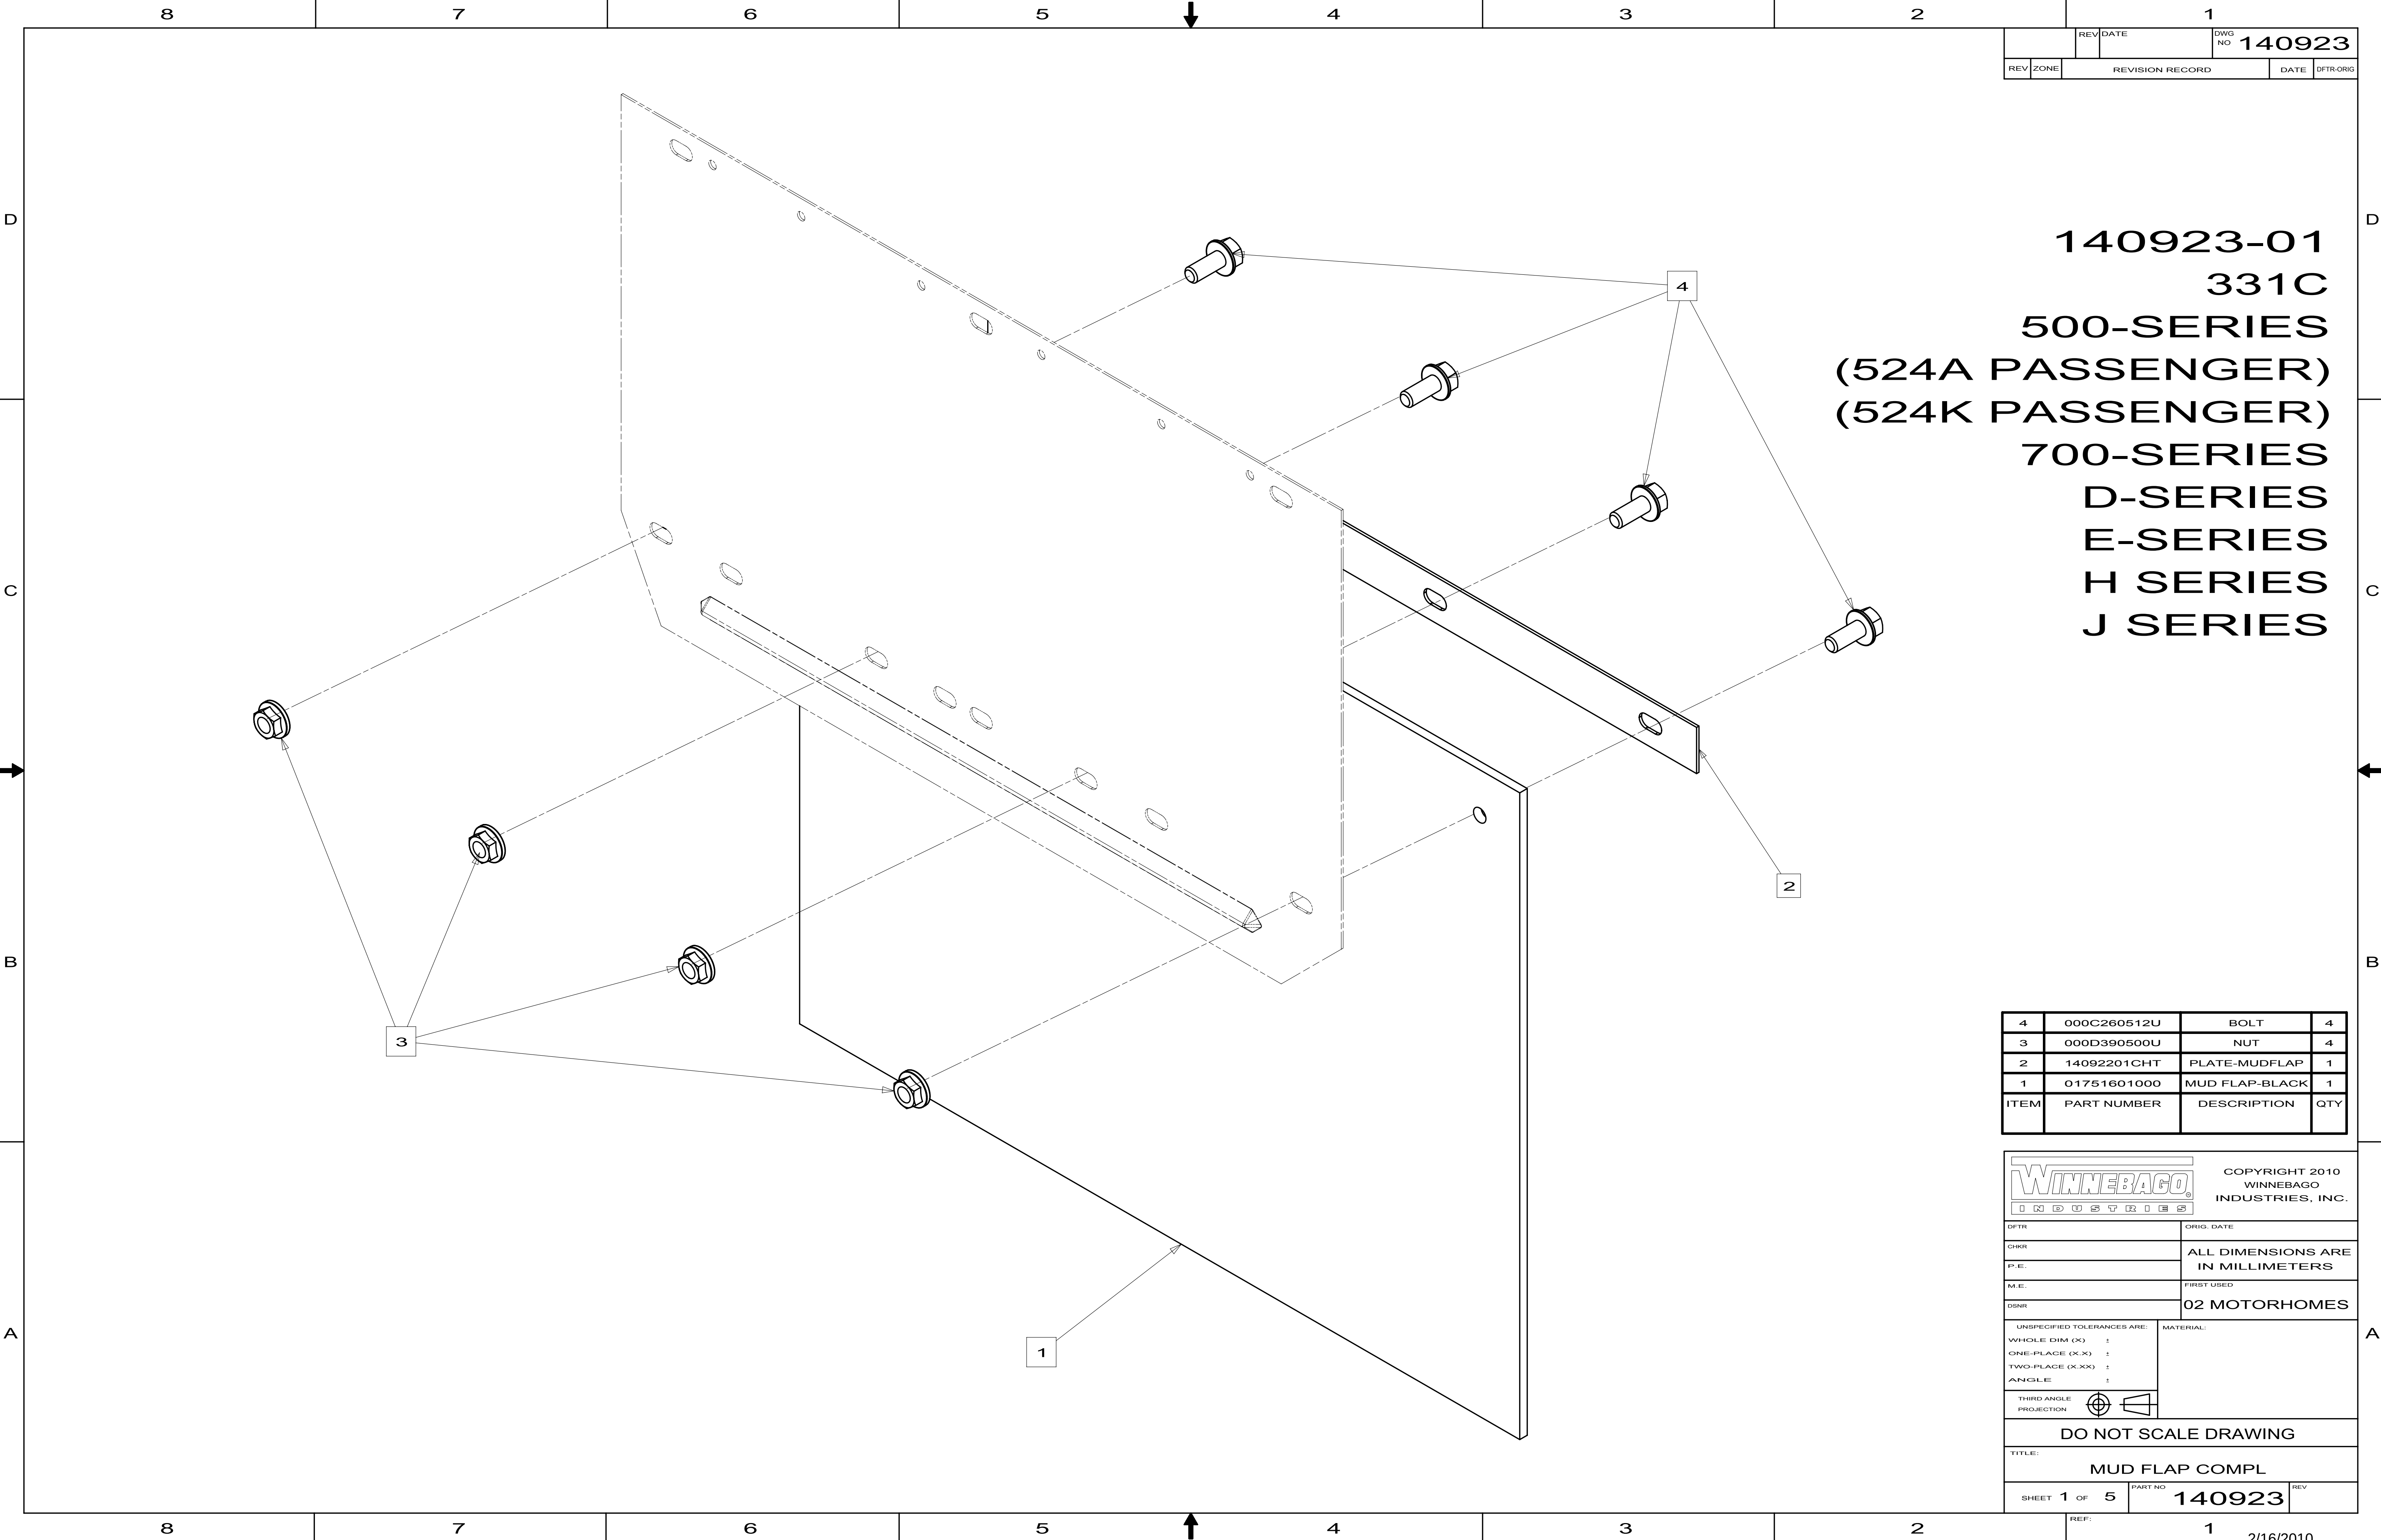


140923-01
331C
500-SERIES
(524A PASSENGER)
(524K PASSENGER)
700-SERIES
D-SERIES
E-SERIES
H SERIES
J SERIES

4	000C260512U	BOLT	4
3	000D390500U	NUT	4
2	14092201CHT	PLATE-MUDFLAP	1
1	01751601000	MUD FLAP-BLACK	1
ITEM	PART NUMBER	DESCRIPTION	QTY

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	02 MOTORHOMES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	:
ONE-PLACE (X.X)	:
TWO-PLACE (X.XX)	:
ANGLE	:
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: MUD FLAP COMPL	
SHEET 1 OF 5	PART NO 140923 REV

REF: 1 2/16/2010

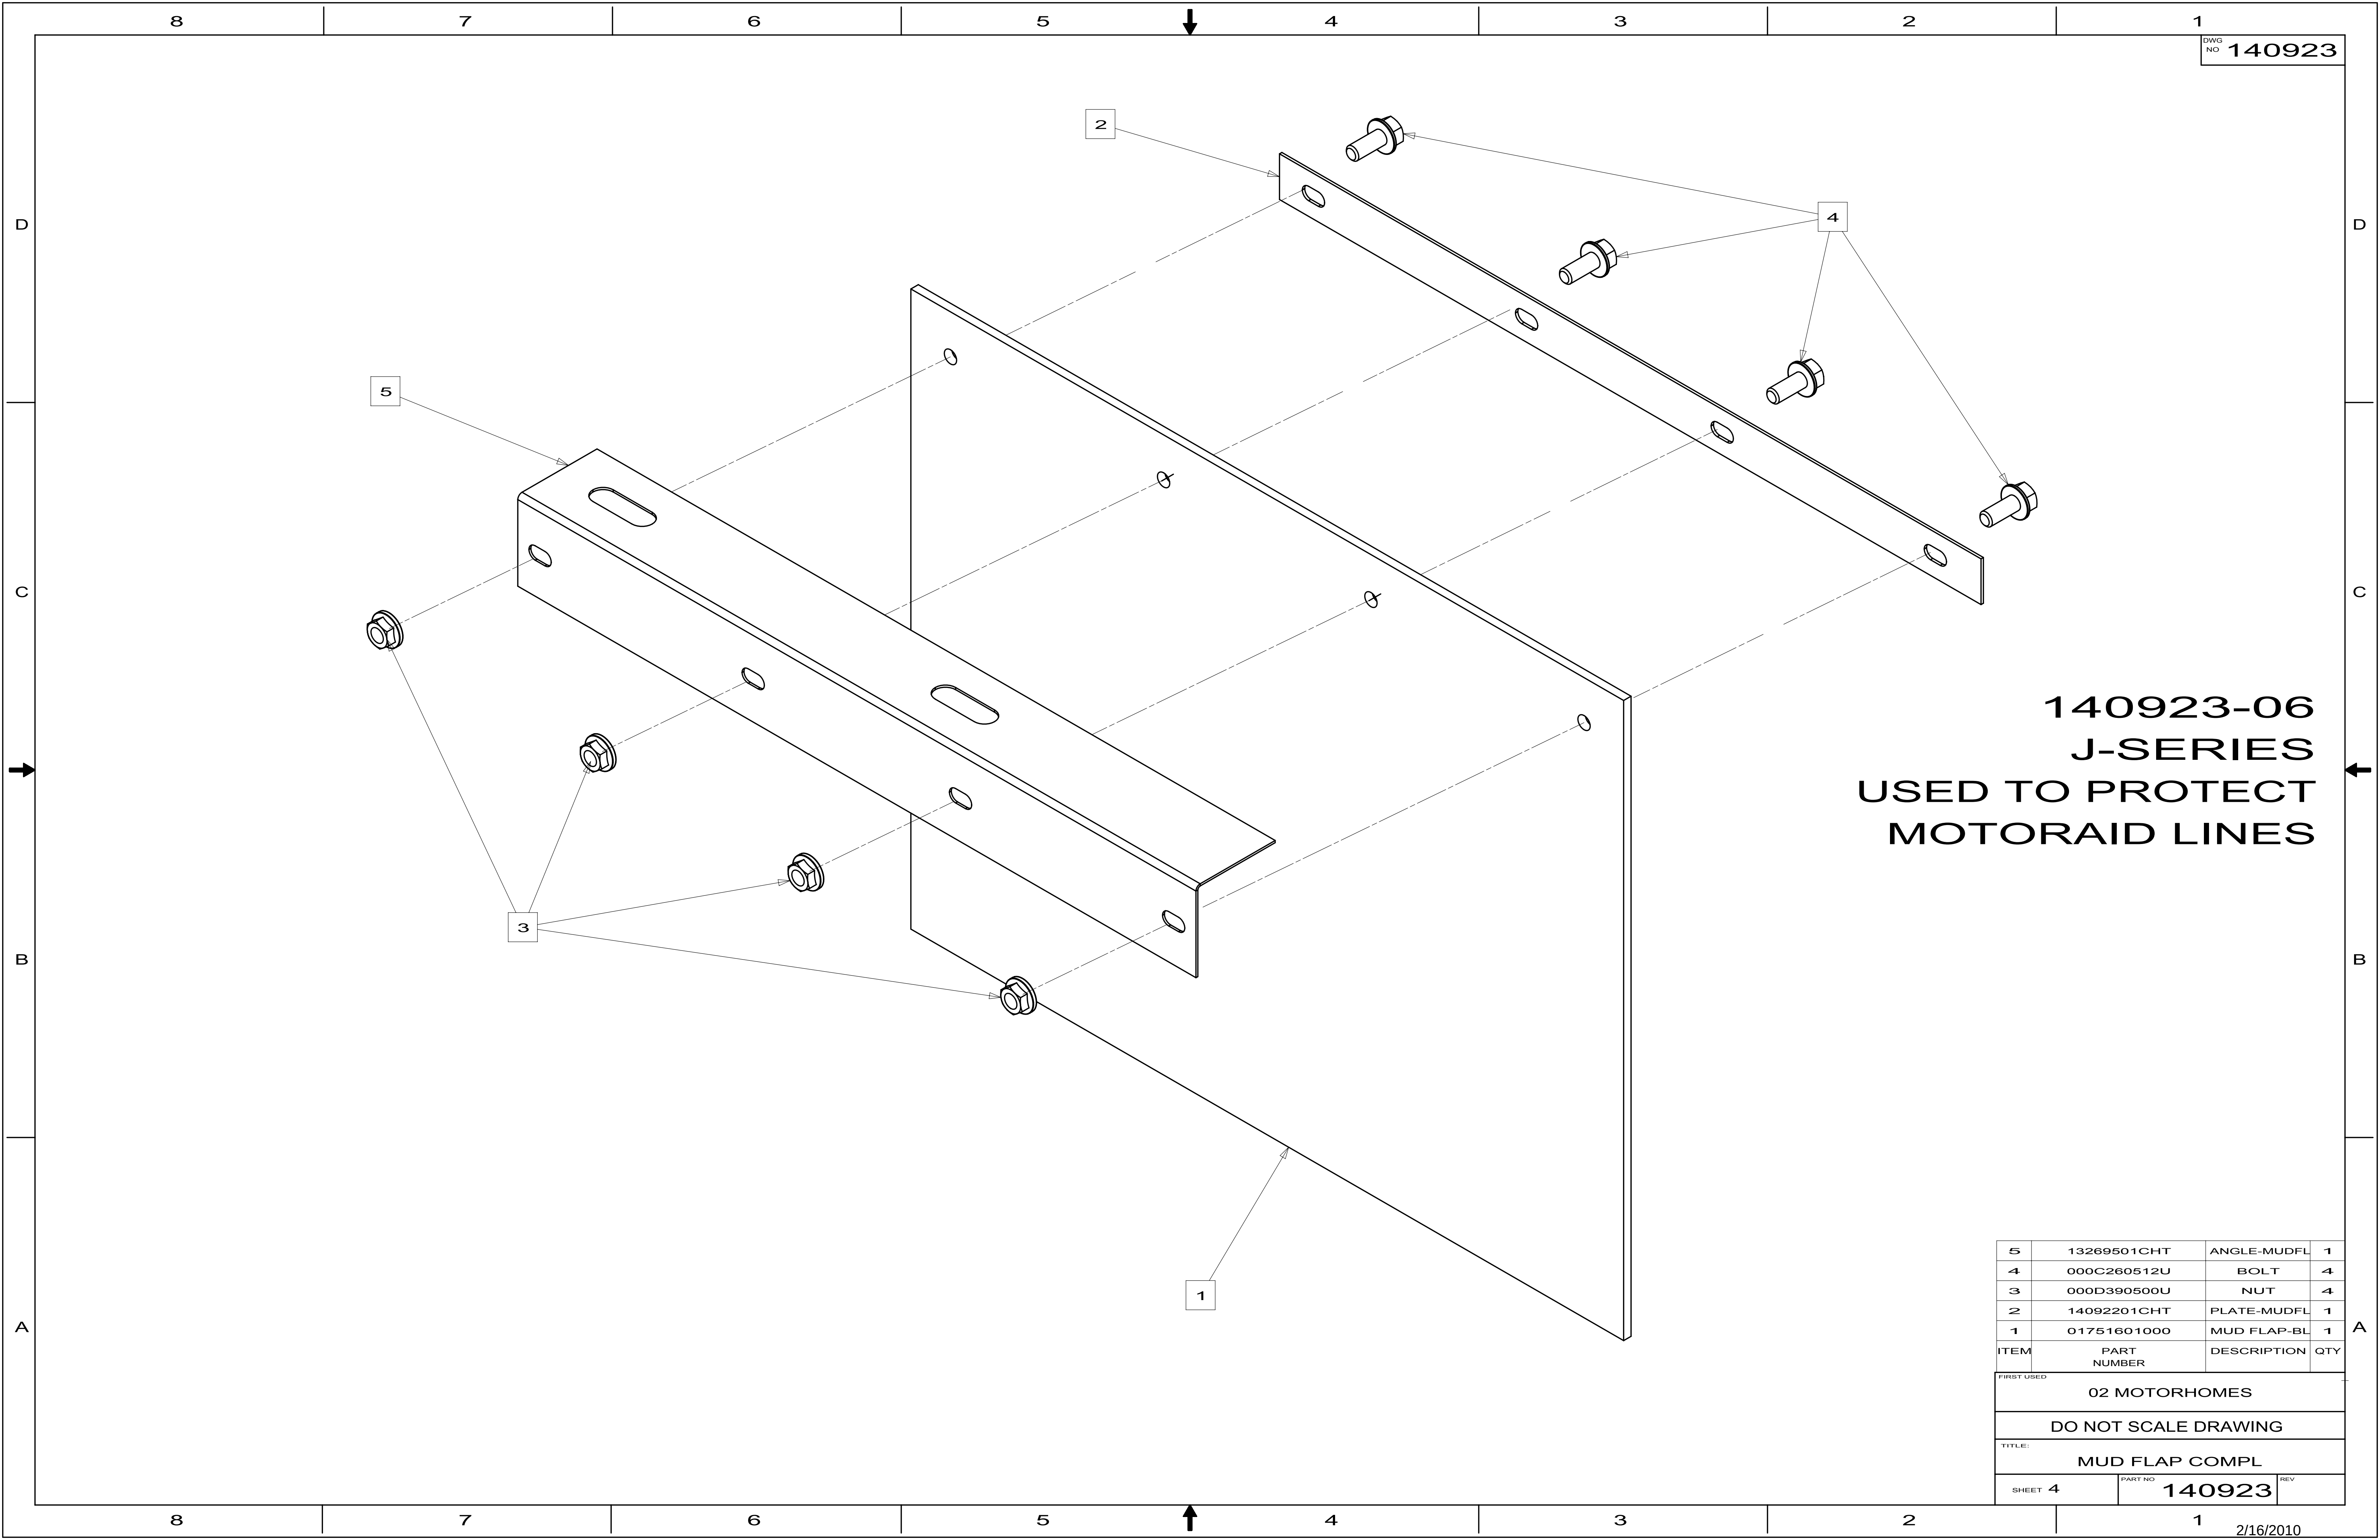


DWG NO	PANEL ASM
164116-01	164035-03-XXX
164116-02	164035-04-XXX


1A5
74J 19R

RELEASE	REV DATE	DWG NO	164116
REV ZONE	REVISION RECORD	DATE	DFTR.Orig

D
C
B
A

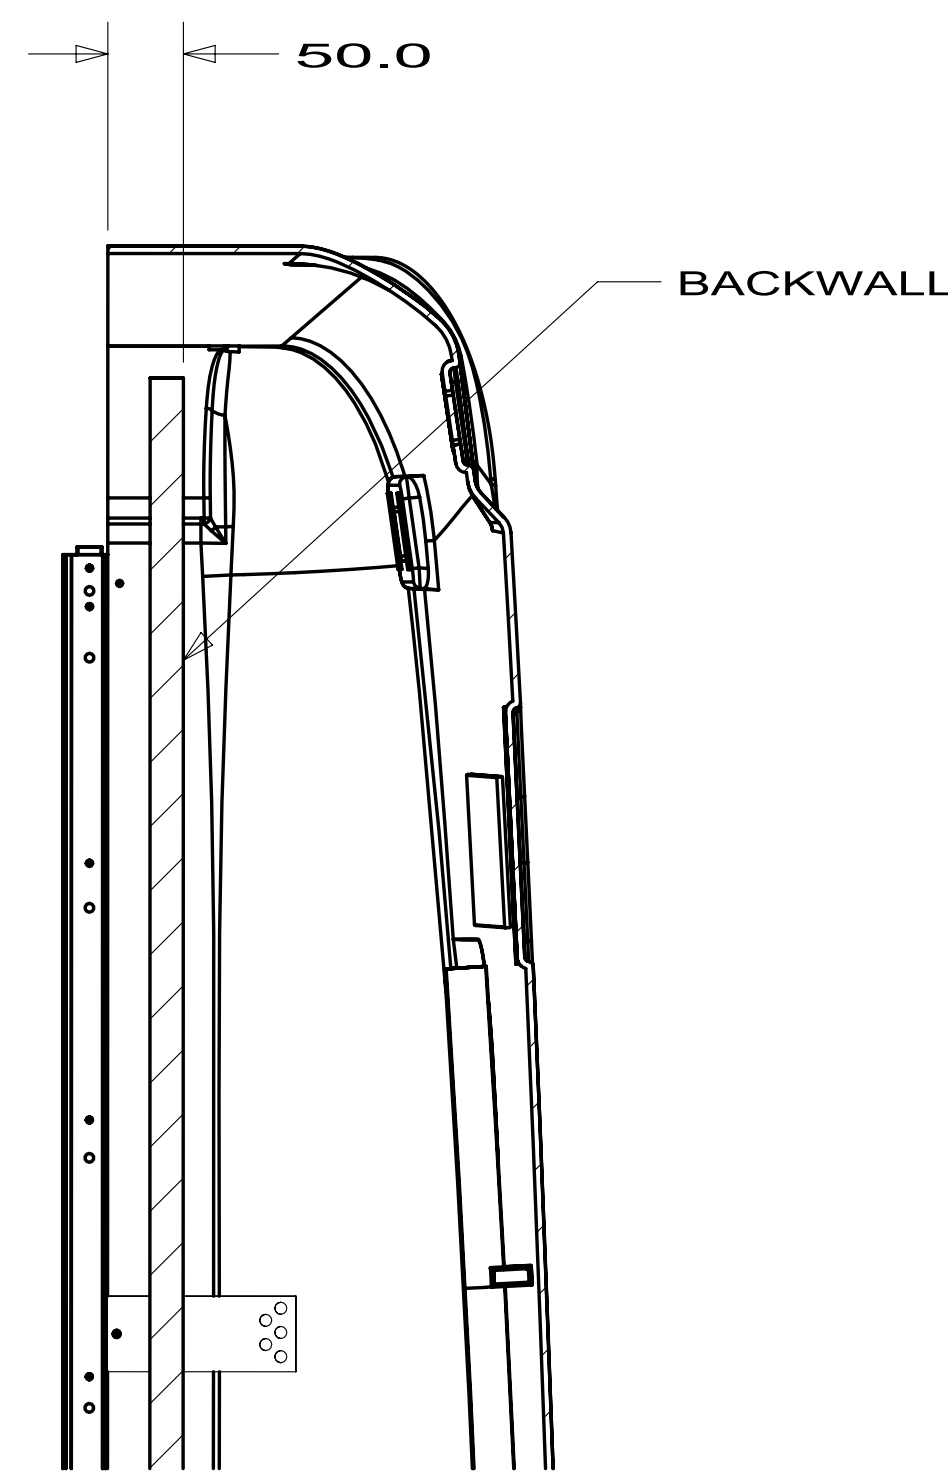

SECTION A-A

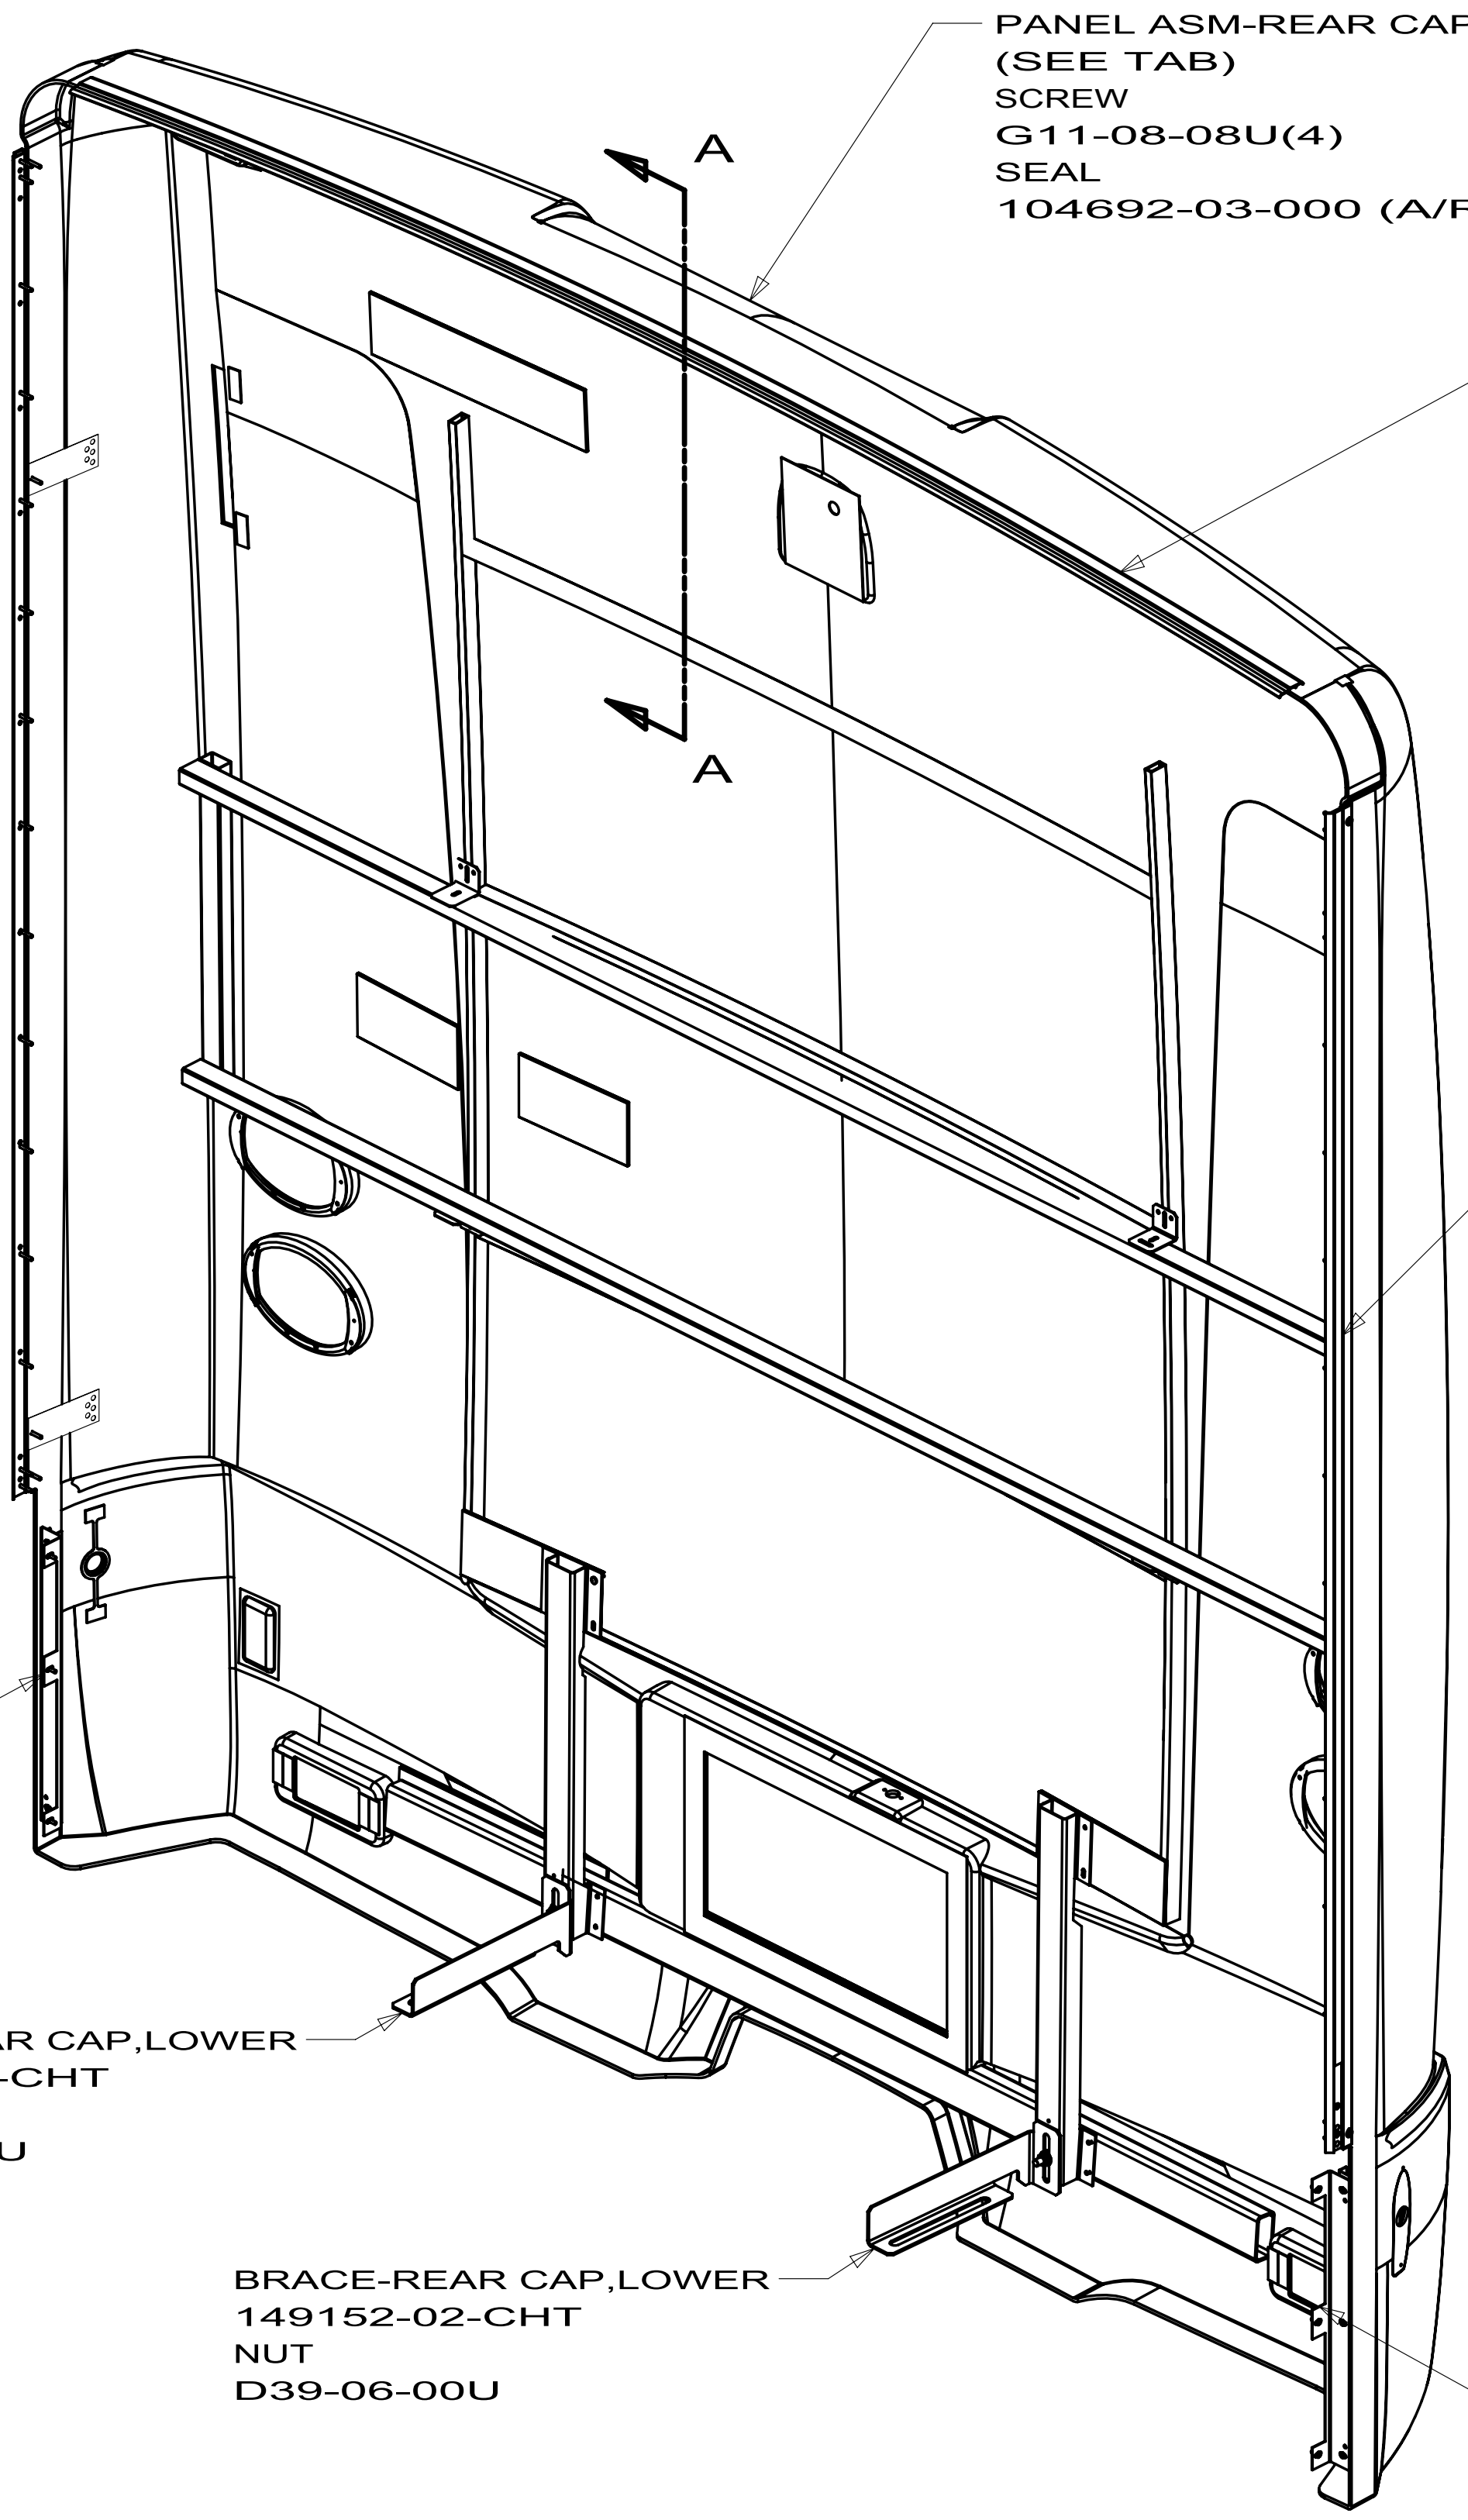

PANEL ASM-REAR CAP
(SEE TAB)
SCREW
G11-08-08U(4)
SEAL
104692-03-000 (A/R)

TRIM-CAP,ROOF
174826-02-CHT
SCREW
G12-08-12U (26)

TRIM-REAR, CAP TO SDW
92041-01-CHT (2)
MOLDING TRIM
91985-01-CHT (2)
(REF LENGTH 2112 EA)
SCREW
G62-08-08A (30)
SCREW
G55-08-16U (4)

ANGLE
150703-01-CHT
SCREW
G39-08-08B (6)

BRACE-REAR CAP,LOWER
149152-01-CHT
NUT
D39-06-00U

BRACE-REAR CAP,LOWER
149152-02-CHT
NUT
D39-06-00U

ANGLE
138789-01-CHT
SCREW
G39-08-08B (6)

- 19R RADIO/REARVIEW MONITOR SYS
- 1A5 REAR MONITOR SYS W/O
- 74J REAR VIEW MONITOR SYSTEM




1. RE-TORQUE BOLTS TO 75 FT-LBS AFTER ATTACHING THE REAR CAP BRACE TO THE REAR CLIP.

NOTES:

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	09 F-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	: 3
ONE-PLACE (X.X)	: 1.5
TWO-PLACE (X.XX)	: 0.50
ANGLE	: 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: REAR CAP INSTL	
SHEET 1 of 1	PART NO 164116 REV
REF:	1

D
C
B
A

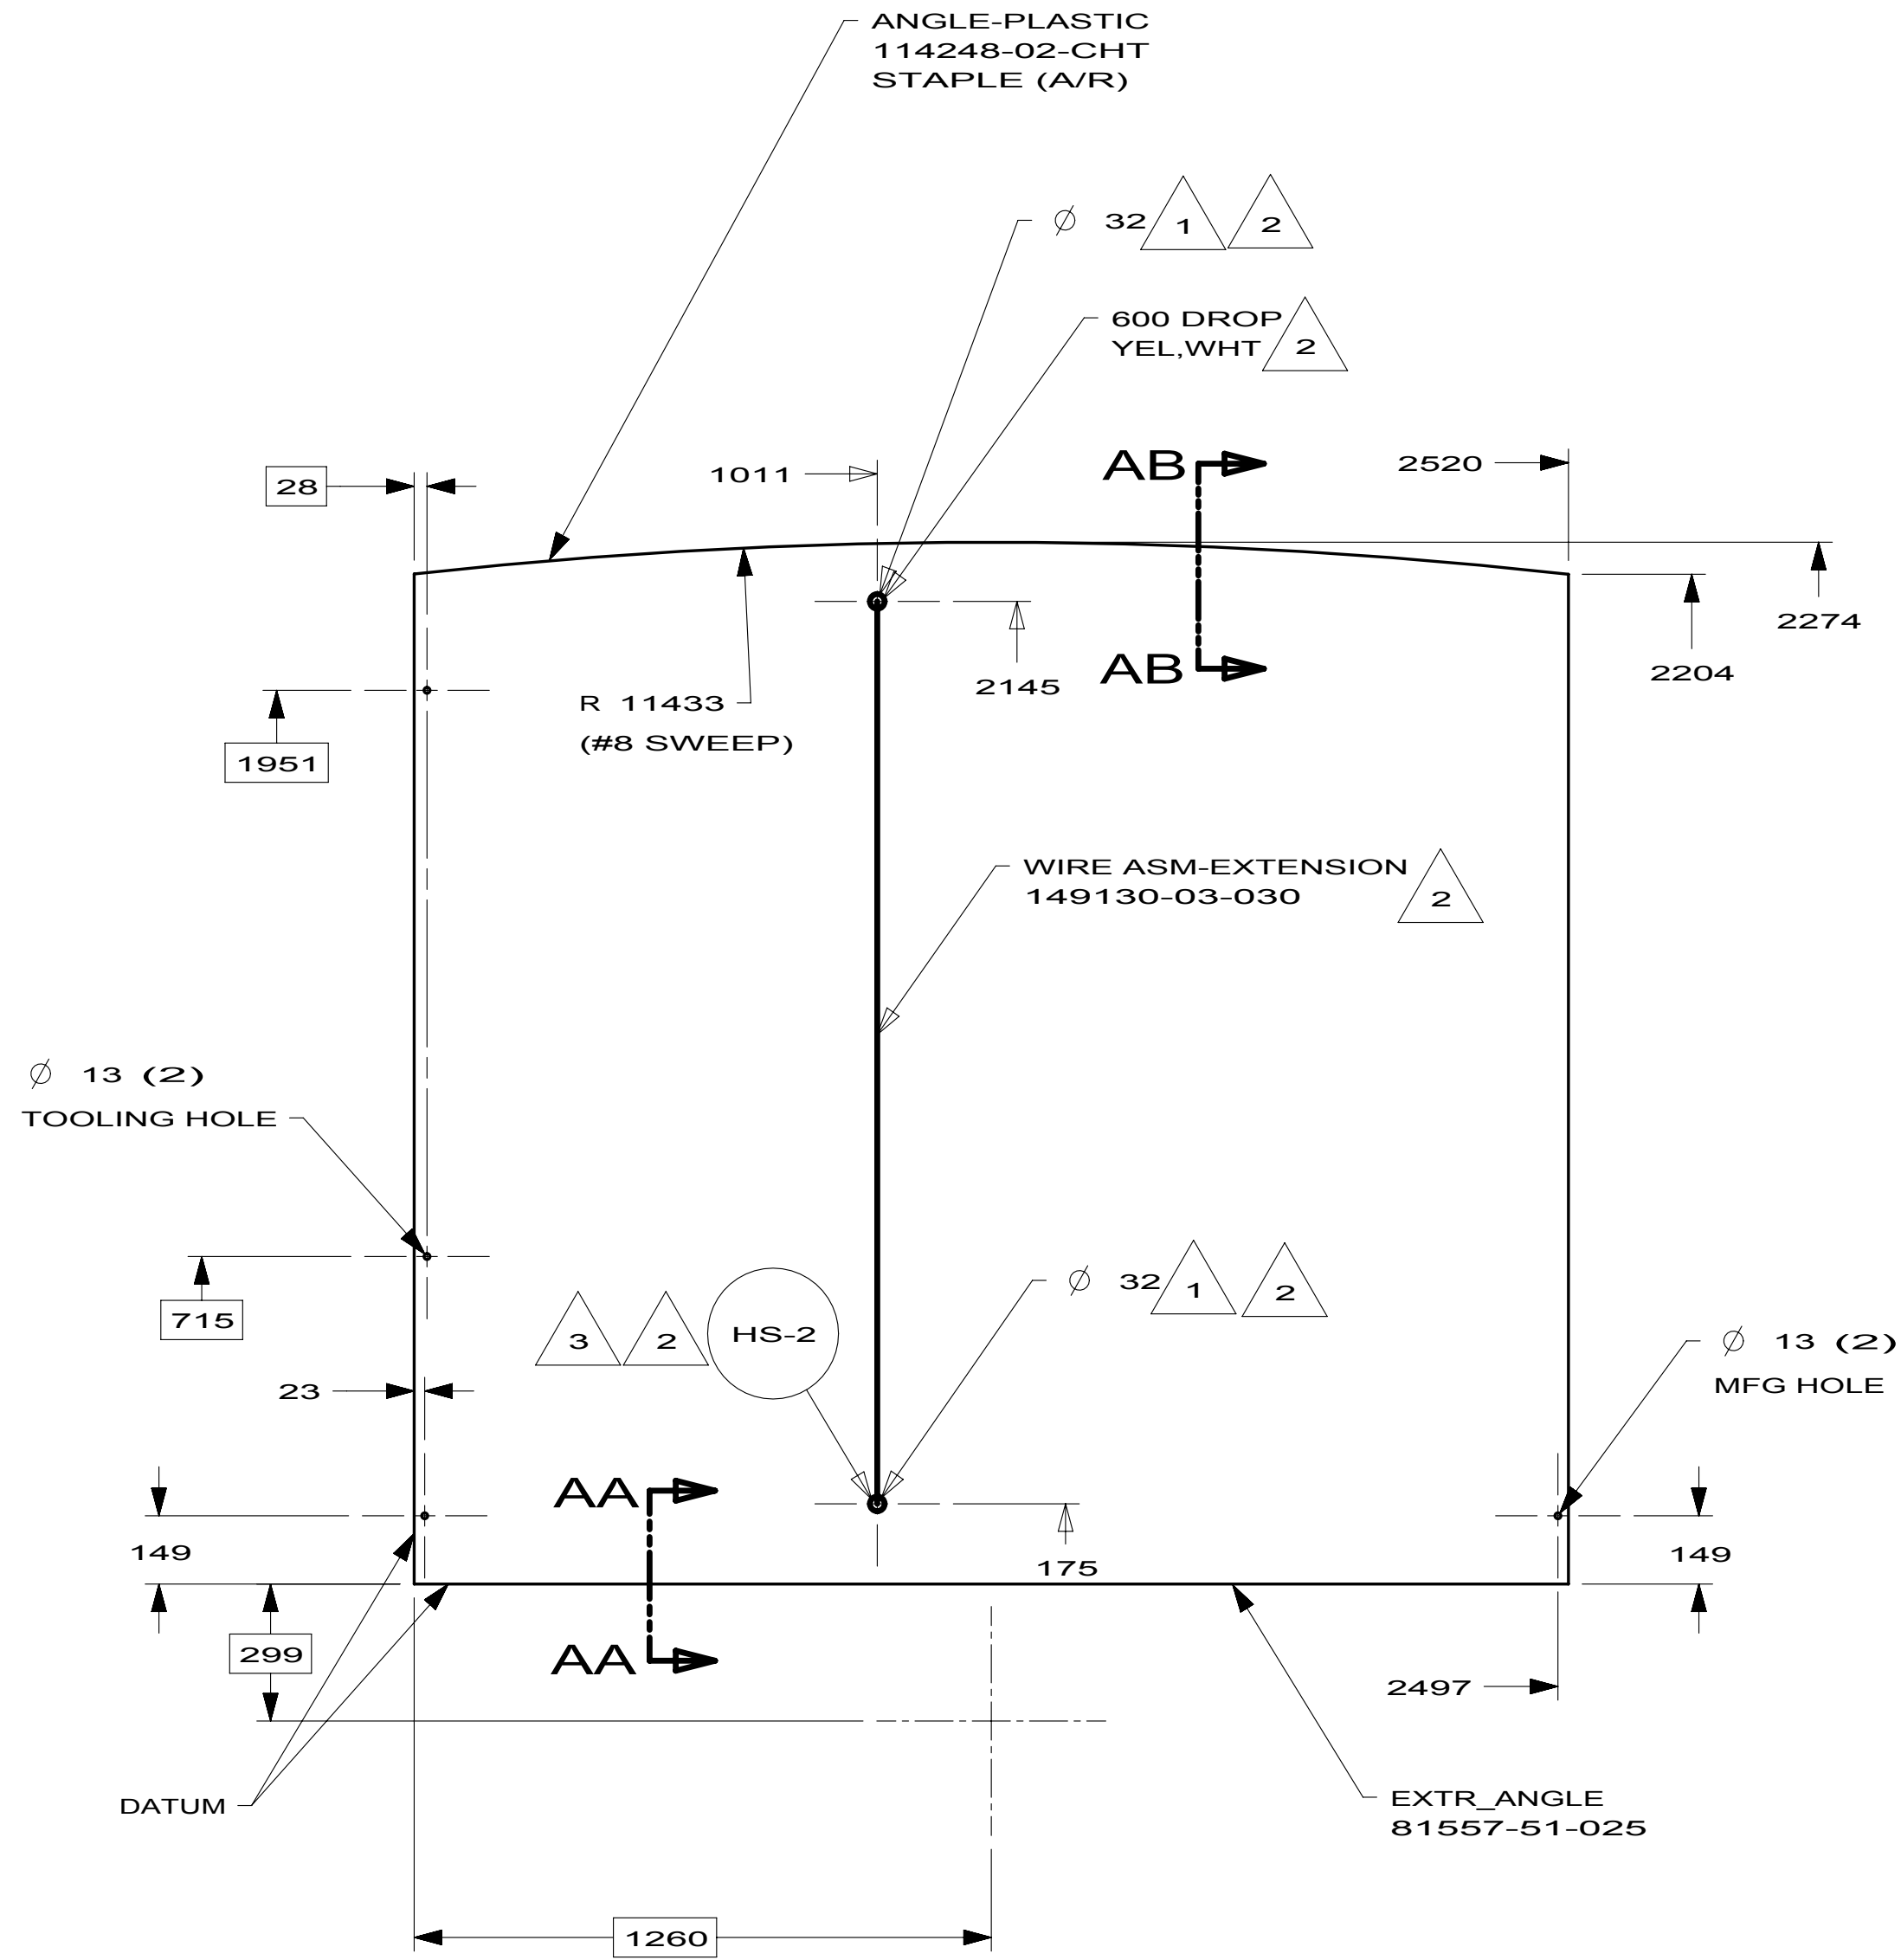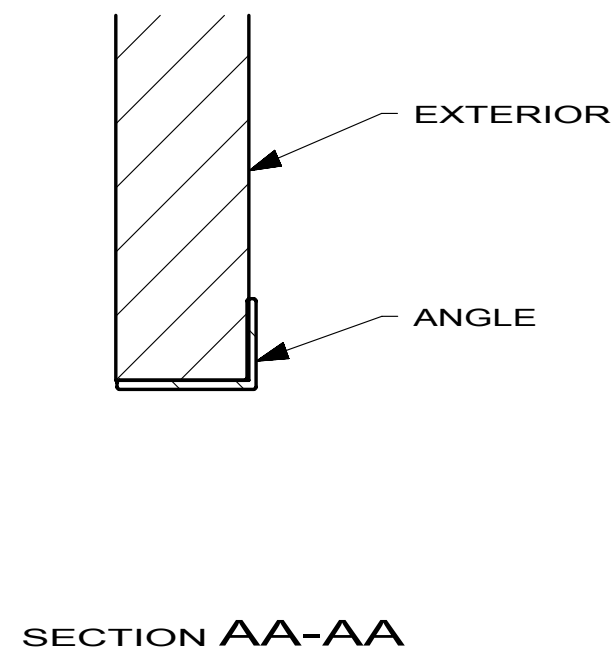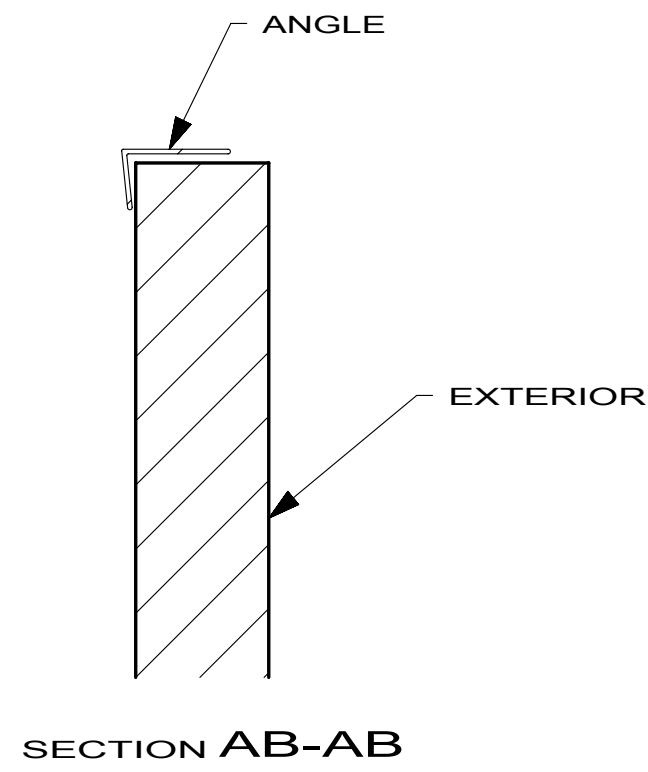

3. 300 DROP. ADD 2 PIN HOUSING TO WIRE-ASM EXTENSION AFTER LAYUP
(YEL) CIRCUIT IN POSITION 1, (WHT) CIRCUIT IN POSITION 2


2. USED ON -05 ONLY

1. THROUGH INTERIOR SURFACE AND FOAM

NOTES:






FIRST USED		10 J/K SERIES	
DO NOT SCALE DRAWING			
TITLE: BACKWALL ASM			
SHEET1		PART NO	REV
		169431	

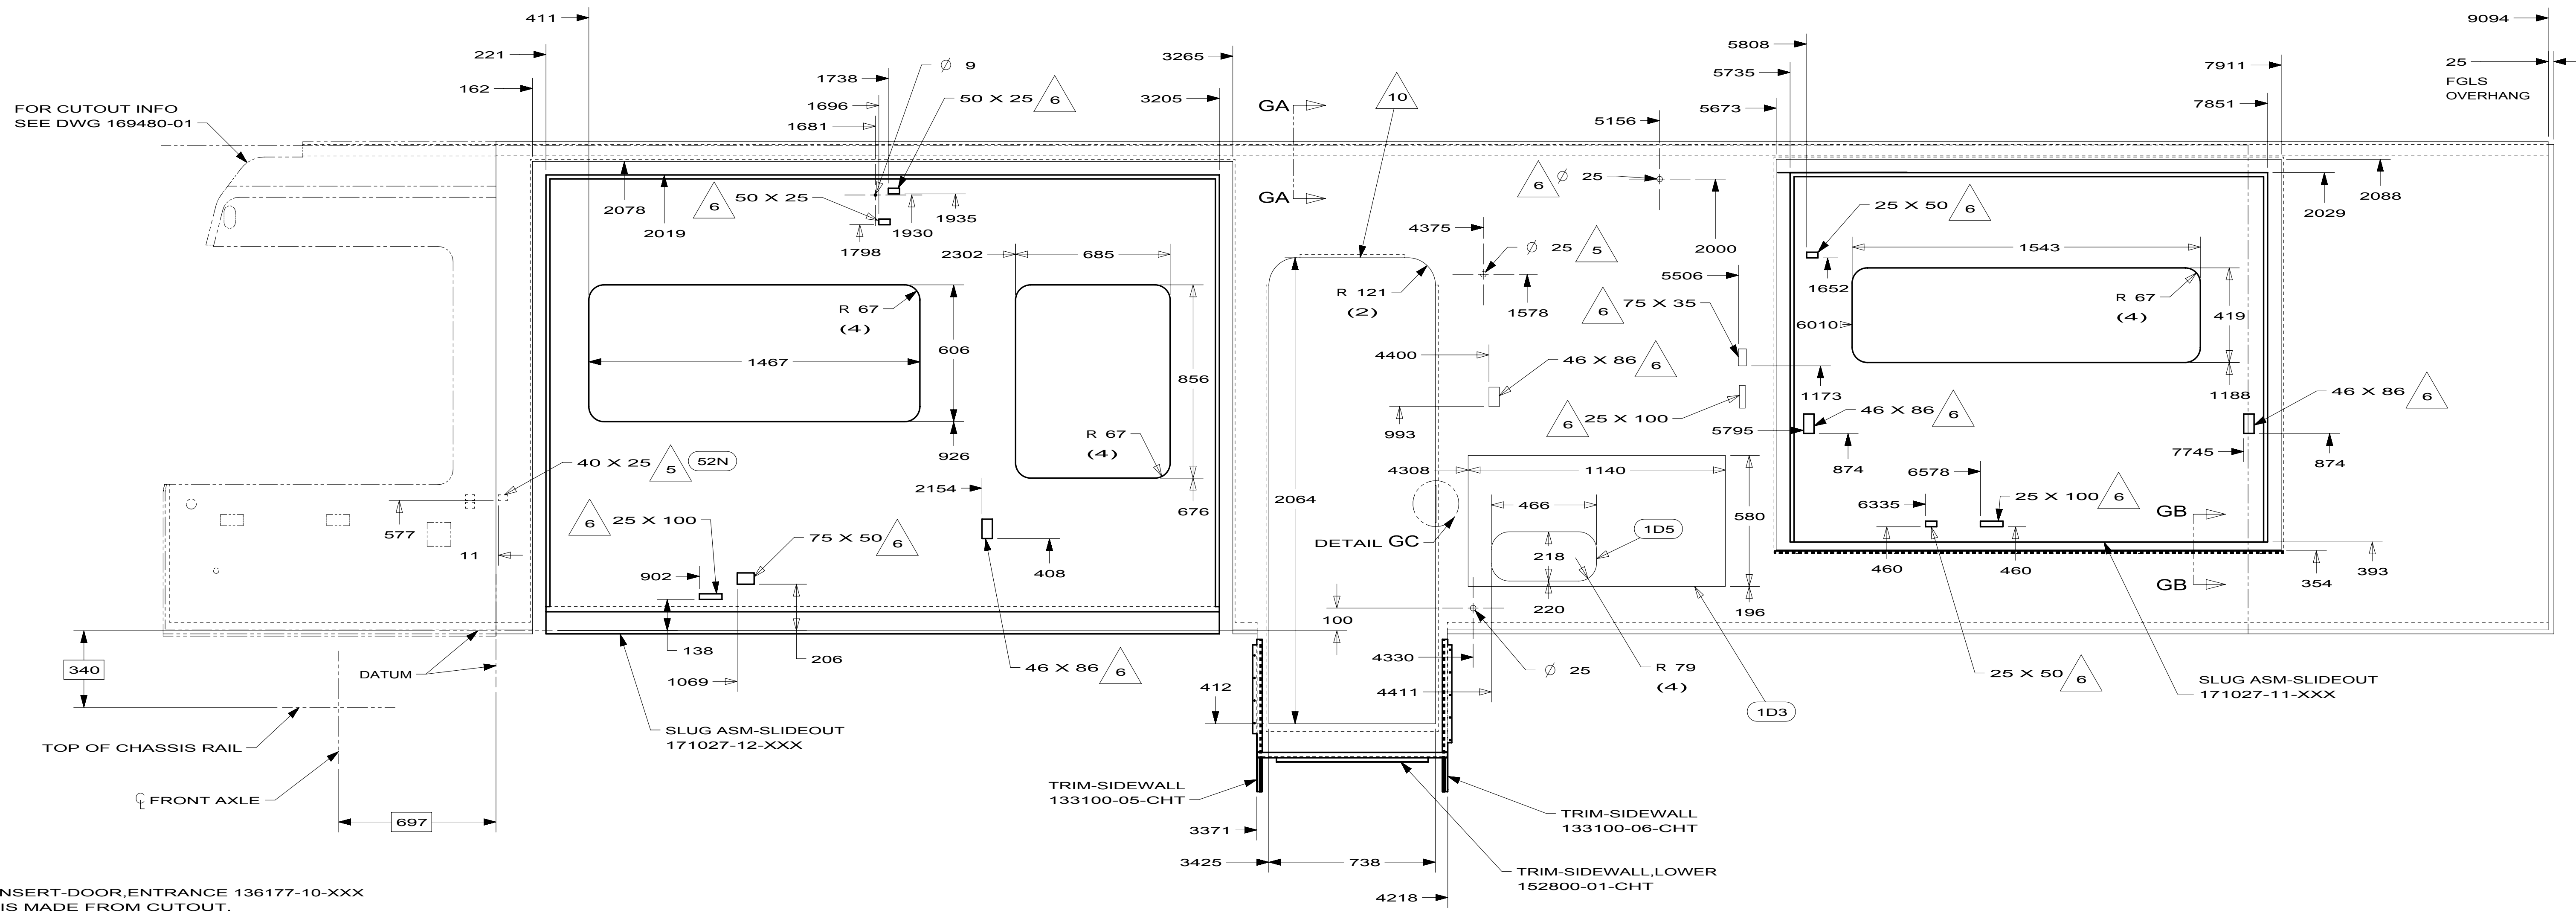

10. INSERT-DOOR, ENTRANCE 136177-10-XXX
IS MADE FROM CUTOUT.
9. ATTACH AFTER INSTALTION OF SIDEWALLS
8. SAW CUT THRU FIBERGLASS
7. INSTALL AFTER FINAL ROUTE.
6. THROUGH INTERIOR SURFACE AND FOAM ONLY.
5. THRU EXTERIOR SURFACE AND FOAM.
4. CUTOUT THRU INNER PANELING ONLY.
3. ALL RADII 9.5 UNLESS OTHERWISE SPECIFIED.
2. PANEL SHOWN FROM INTERIOR SIDE.
1. TOLERANCE FOR CUTOUT ± 1.5 .

NOTES:

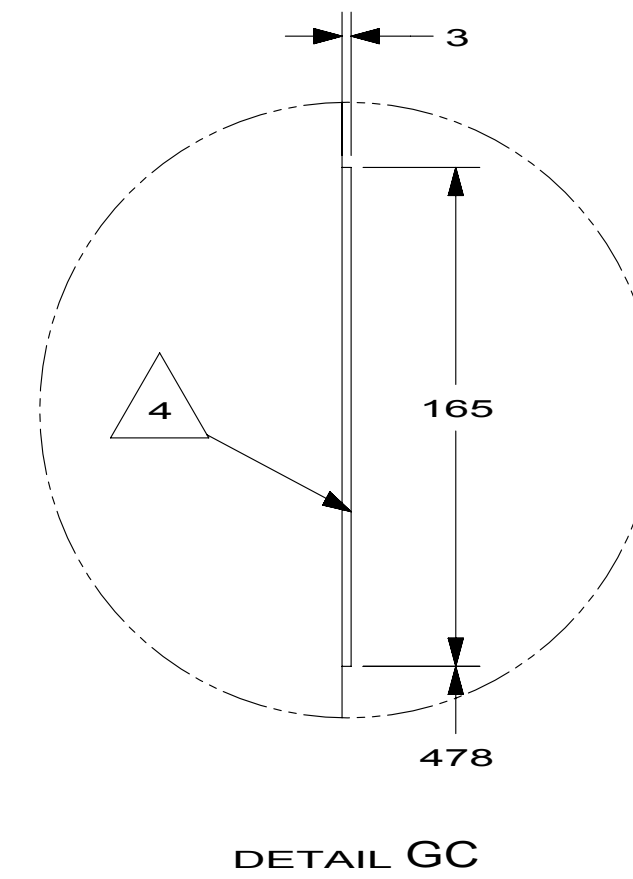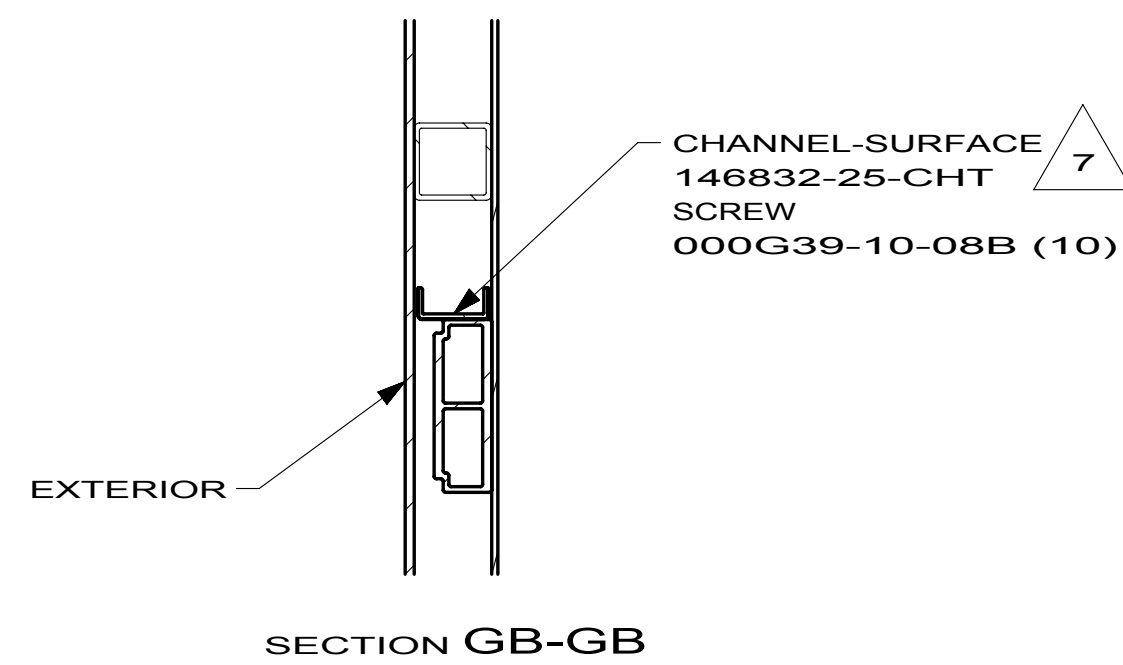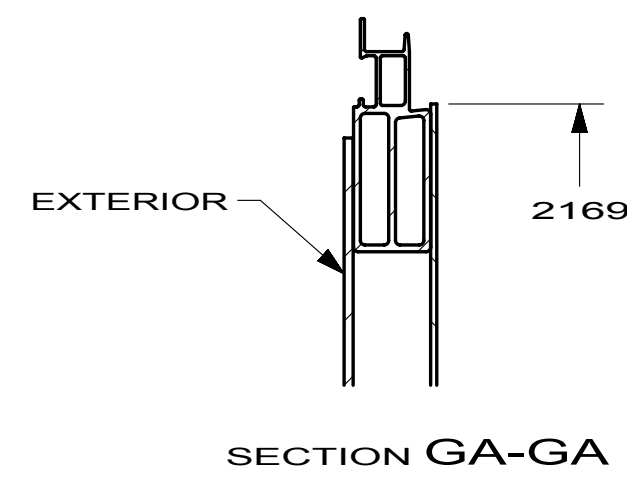

- 1D5 EXTERIOR ENTERTAINMENT CENTR - W/CD
- 1D3 EXTERIOR ENTERTAINMENT CENTR - W/TV & DVD
- 52N AWNING - PATIO, ELECTRIC

NOTICE

CHANGES TO THIS SHEET
MAY AFFECT OTHERS

FIRST USED			10 J37F		
DO NOT SCALE DRAWING					
TITLE: SIDEWALL ASM-RIGHT					
SHEET 1		PART NO 171027		REV	

D

C

B

A

16. MAXIMUM RUNNING AMPS NOT TO EXCEED 20 AMPS WITHOUT SLIDEROOM COVER AND 25 AMPS WITH COVER AT 65° F.

15. SCREW BULB SEAL TO BOTTOM OF FLOOR ASM-UPPER THRU REAR LEG OF SEAL.

14. LOCATE FOAM OVER DRAIN HOLES IN EXTRUSION.

13. FOR MANUAL RETRACT DISCONNECT 12V WIRING TO THE MOTOR AND RELEASE THE MOTOR BRAKE, AND RETRACT USING A 3/4" SOCKET AT THIS LOCATION.

12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED. (SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	8 (FT-LBS)
5/16 - 18 (.3125)	17 (FT-LBS)
3/8 - 16 (.375)	31 (FT-LBS)
7/16 - 14 (.4375)	50 (FT-LBS)
1/2 - 13 (.500)	76 (FT-LBS)

11. USE POLY-CLEAR 047034-07-000 AND ATTACH IT USING WASHER 044533-01-000 TO PROTECT THE SLIDEOUT FLOOR.

10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST INNER TRIM.

9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.

8. USE SCREW 000G39-08-08S TO HOLD EACH END OF TRIM.

7. SEE SEALANT MANUAL..

6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

5. LOOSEN JAM NUTS AND ADJUST BOLT TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.


4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED AS REQUIRED FROM THERE.

3. THE RETRACTED LENGTH IS ADJUSTED BY THREADING THE STOP BOLT IN OR OUT UNTIL THE OUTSIDE WALL OF THE ROOM SEALS AGAINST THE SIDEWALL.

2. THE EXTENDED LENGTH IS ADJUSTED BY TURNING THE LOCK NUTS ON THE PISTON RODS IN OR OUT UNTIL THE SLIDEOUT ROOM SEALS AGAINST THE SIDEWALL.

1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.


NOTES:

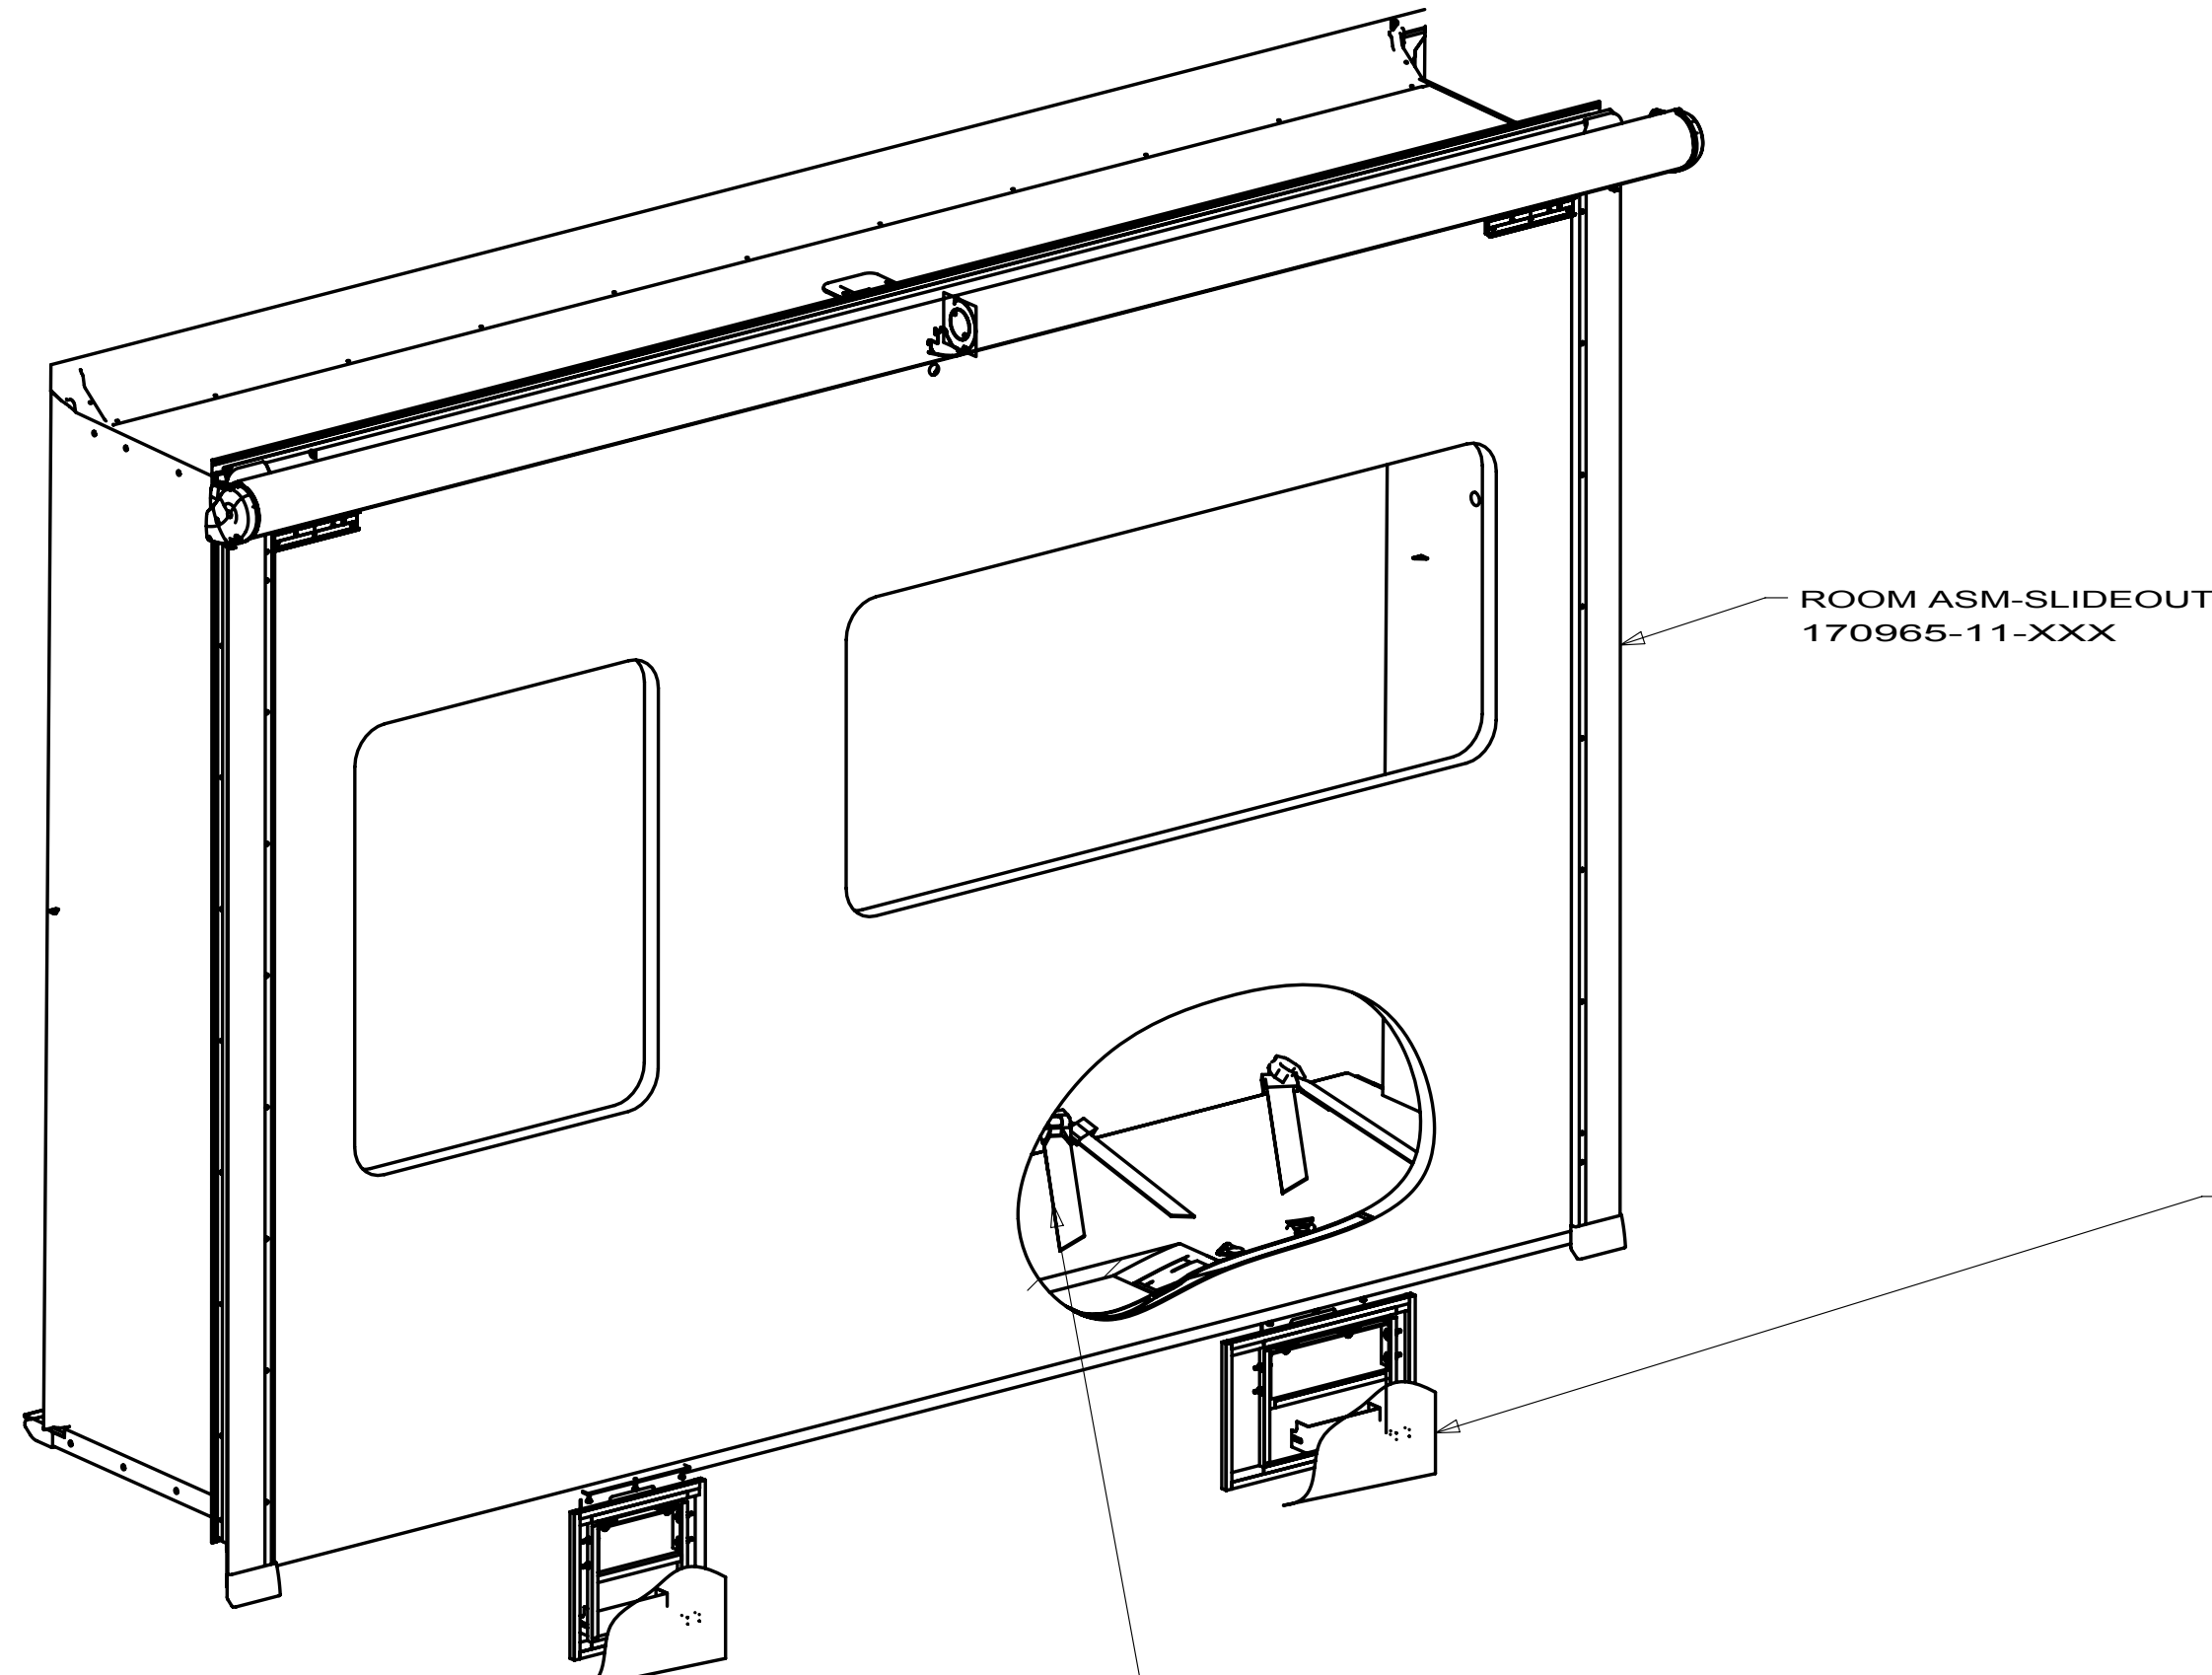

COVER ASM
138077-48-XXX
SCREW
000G39-08-08U (4)
WASHER
077071-01-000 (4)
FRAME ASM-RAM COVER
160523-11-XXX
SCREW
000G19-10-20U(4)
NUT
000D24-10-00U(4)
BRACKET-COVER, RAM
160519-10-CHT
BOLT
000C12-04-10U(2)
NUT
000D39-04-00U(2)
BRACKET-COVER, RAM
160519-09-CHT
SCREW
000G39-10-10U(3)
BRACKET-COVER RAM
161304-04-CHT

SEAT BELT INSTL
159417-39-XXX
159417-23-XXX

COVER ASM
138077-46-XXX
SCREW
000G39-08-08U (4)
WASHER
077071-01-000 (4)
FRAME ASM-RAM COVER
160523-09-XXX
SCREW
000G19-10-20U(4)
NUT
000D24-10-00U(4)
BRACKET-COVER, RAM
160519-08-CHT
BOLT
000C12-04-10U(2)
NUT
000D39-04-00U(2)
BRACKET-COVER, RAM
160519-09-CHT
SCREW
000G39-10-10U(3)
BRACKET-COVER RAM
161304-04-CHT

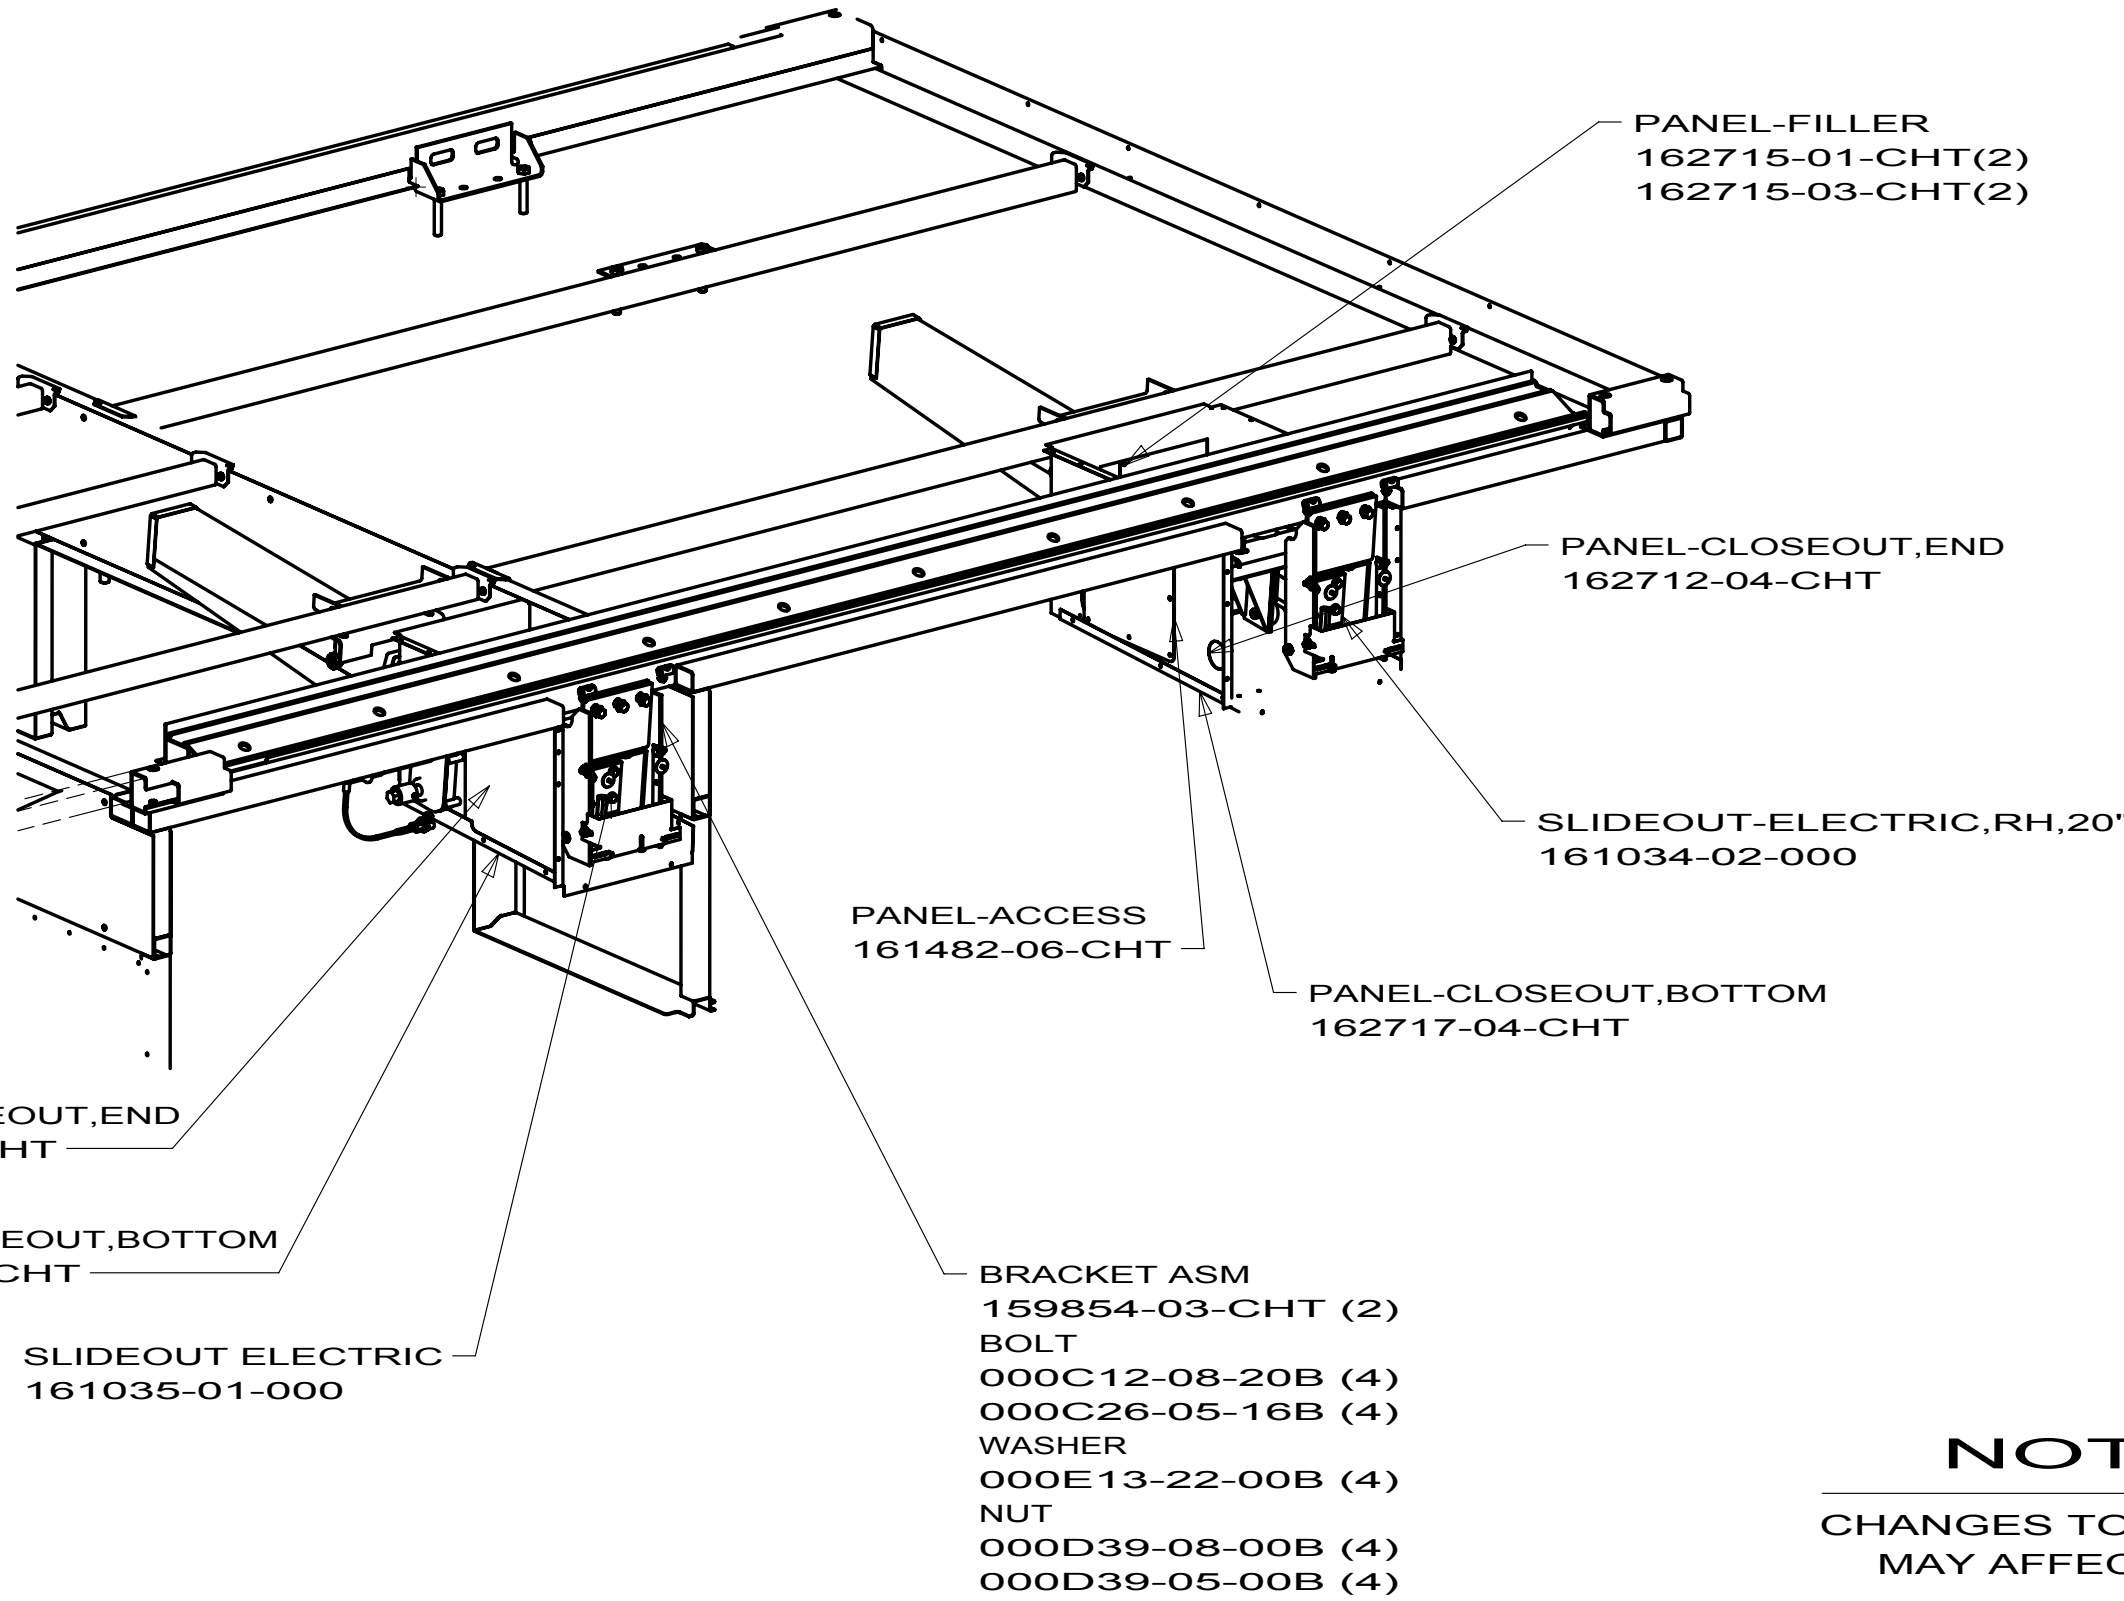

PANEL-FILLER
162715-01-CHT(2)
162715-03-CHT(2)

PANEL-CLOSEOUT, END
162712-04-CHT

SLIDEOUT-ELECTRIC, RH, 20"
161034-02-000

PANEL-CLOSEOUT, BOTTOM
162717-04-CHT

PANEL-ACCESS
161482-06-CHT

PANEL-CLOSEOUT, END
162712-05-CHT

PANEL-CLOSEOUT, BOTTOM
162717-05-CHT

SLIDEOUT ELECTRIC
161035-01-000







BRACKET ASM
159854-03-CHT (2)
BOLT
000C12-08-20B (4)
000C26-05-16B (4)
WASHER
000E13-22-00B (4)
NUT
000D39-08-00B (4)
000D39-05-00B (4)

NOTICE

CHANGES TO THIS SHEET
MAY AFFECT OTHERS

- 42H REST EASY-DUAL CONTROL
- 41F REST EASY MULTI POS LOUNGE
- 41H REST EASY, ULTRALEATHER
- 41Z RESTEASY DUAL CTL ULTRALE RH
- 42Z LOUNGE SEATING-THEATER STYLE


COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
ALL DIMENSIONS ARE IN MILLIMETERS	
10 J37F	
DO NOT SCALE DRAWING	
SLIDEOUT COMPL-FT, RH	
170965	
10/10/2009	

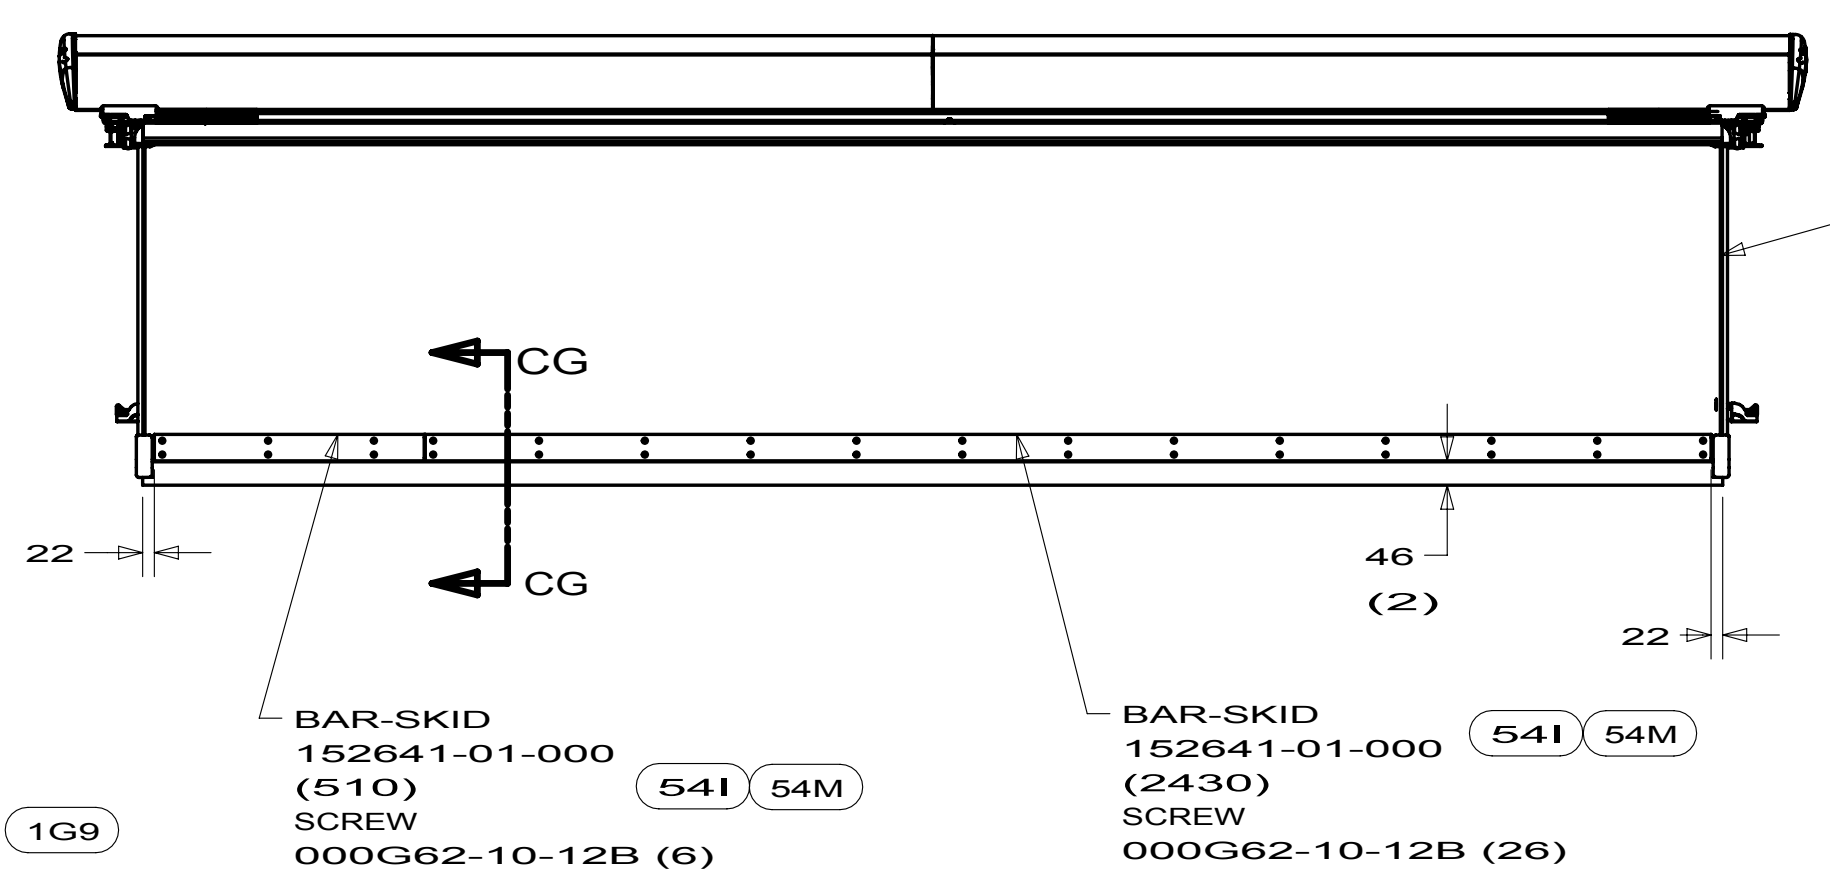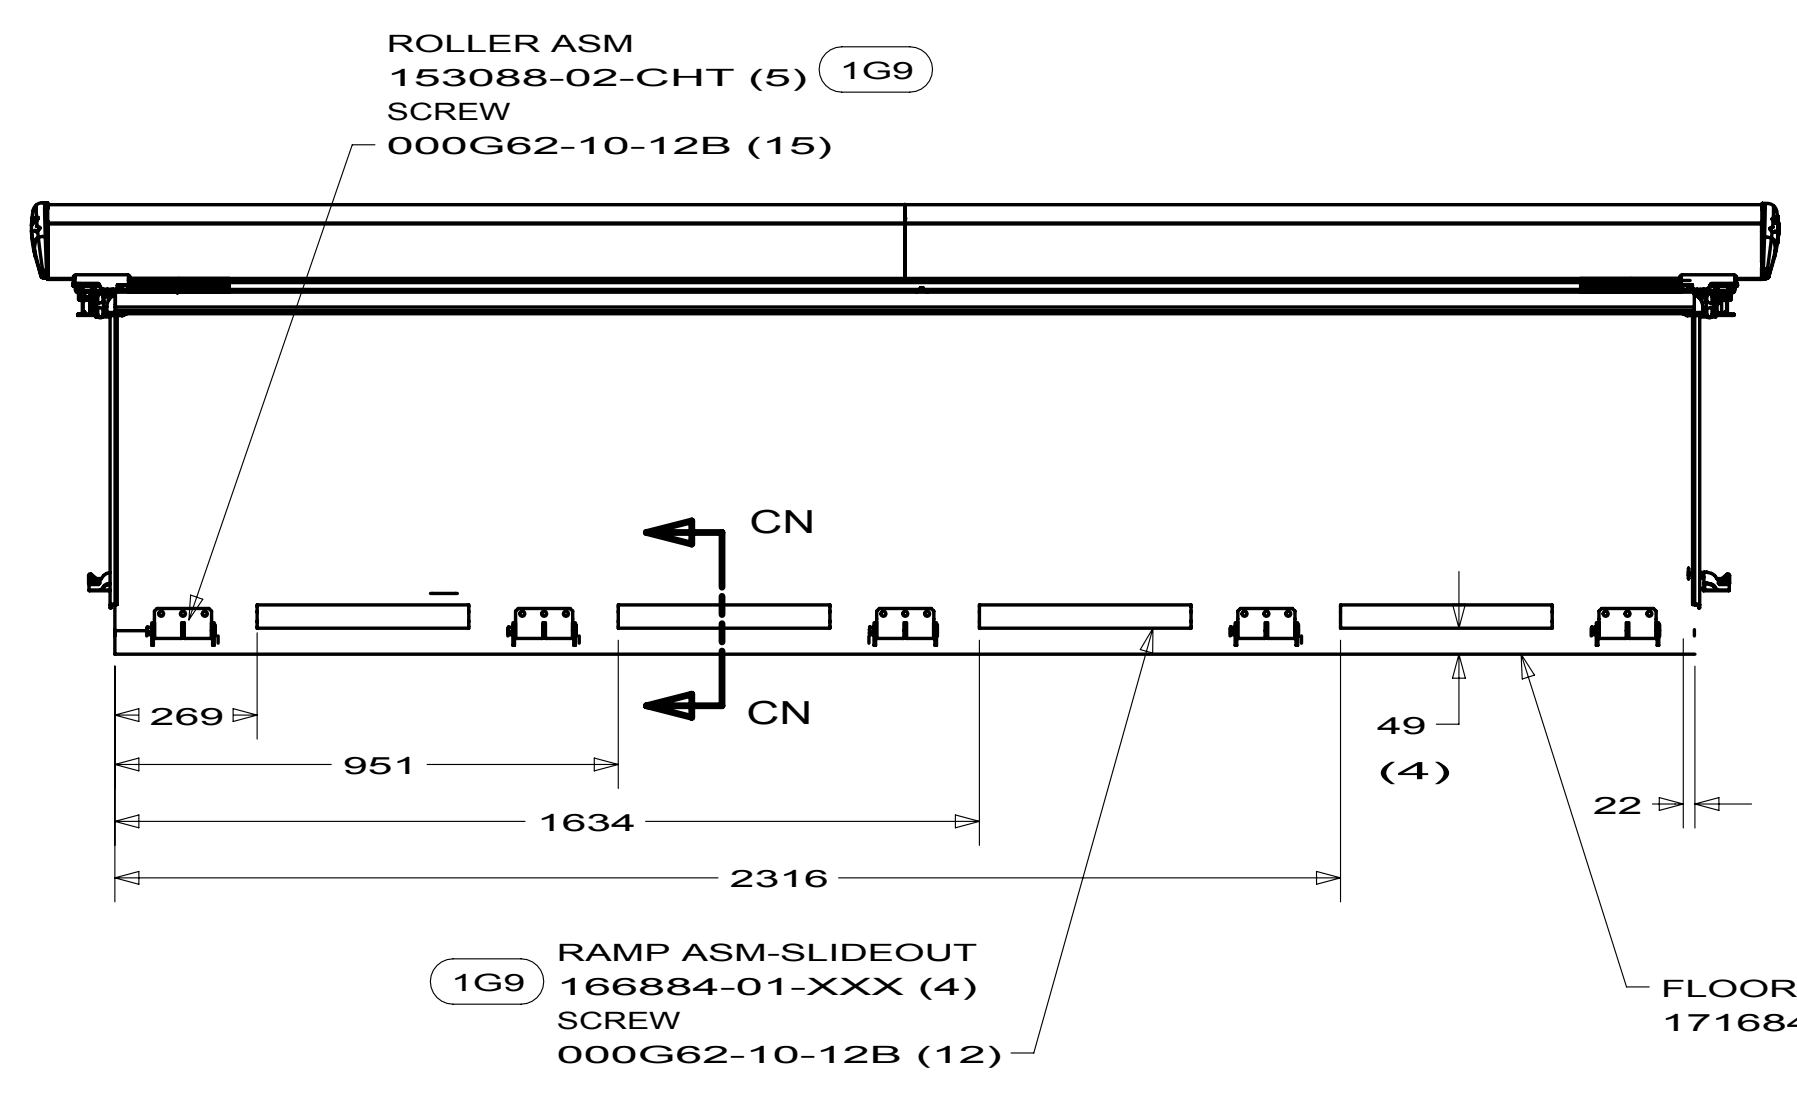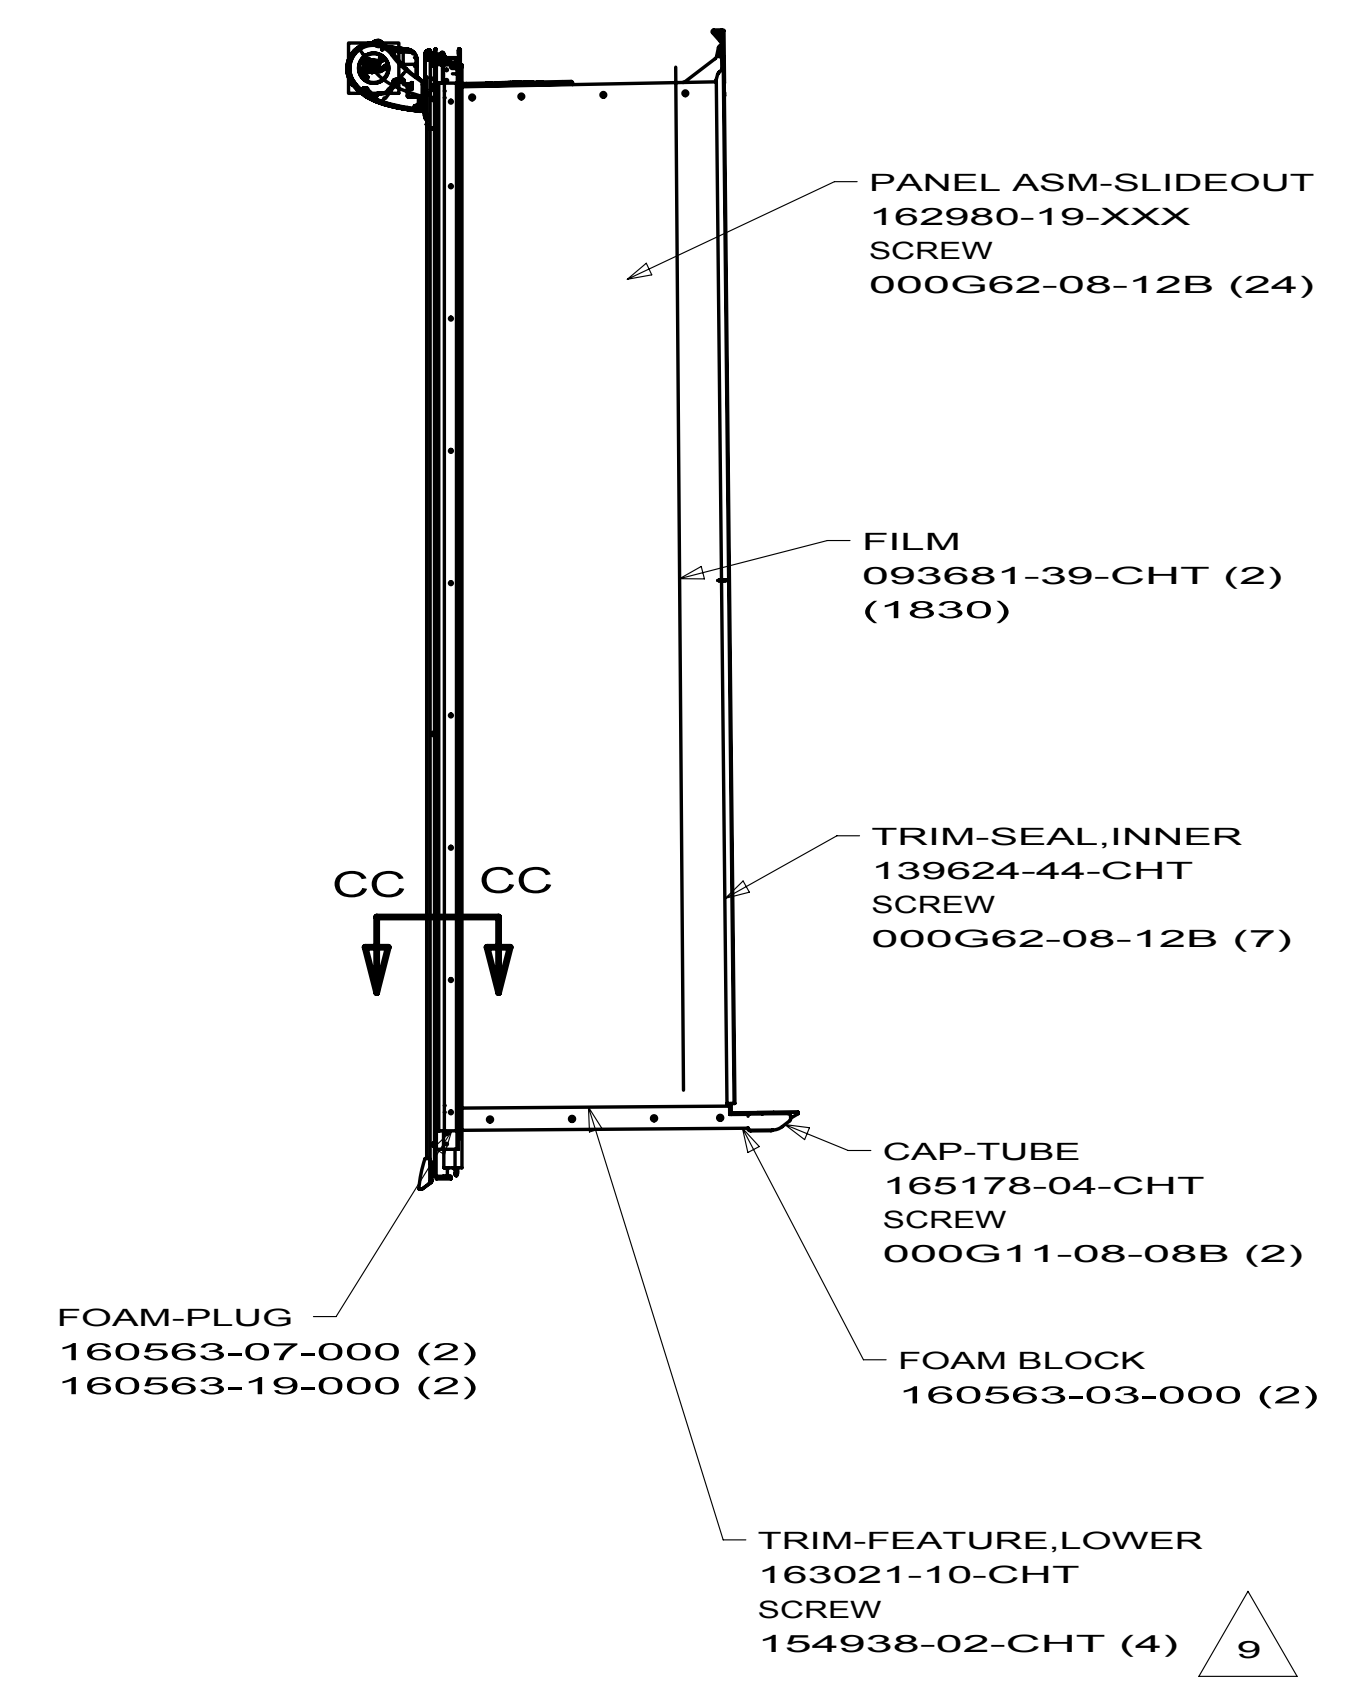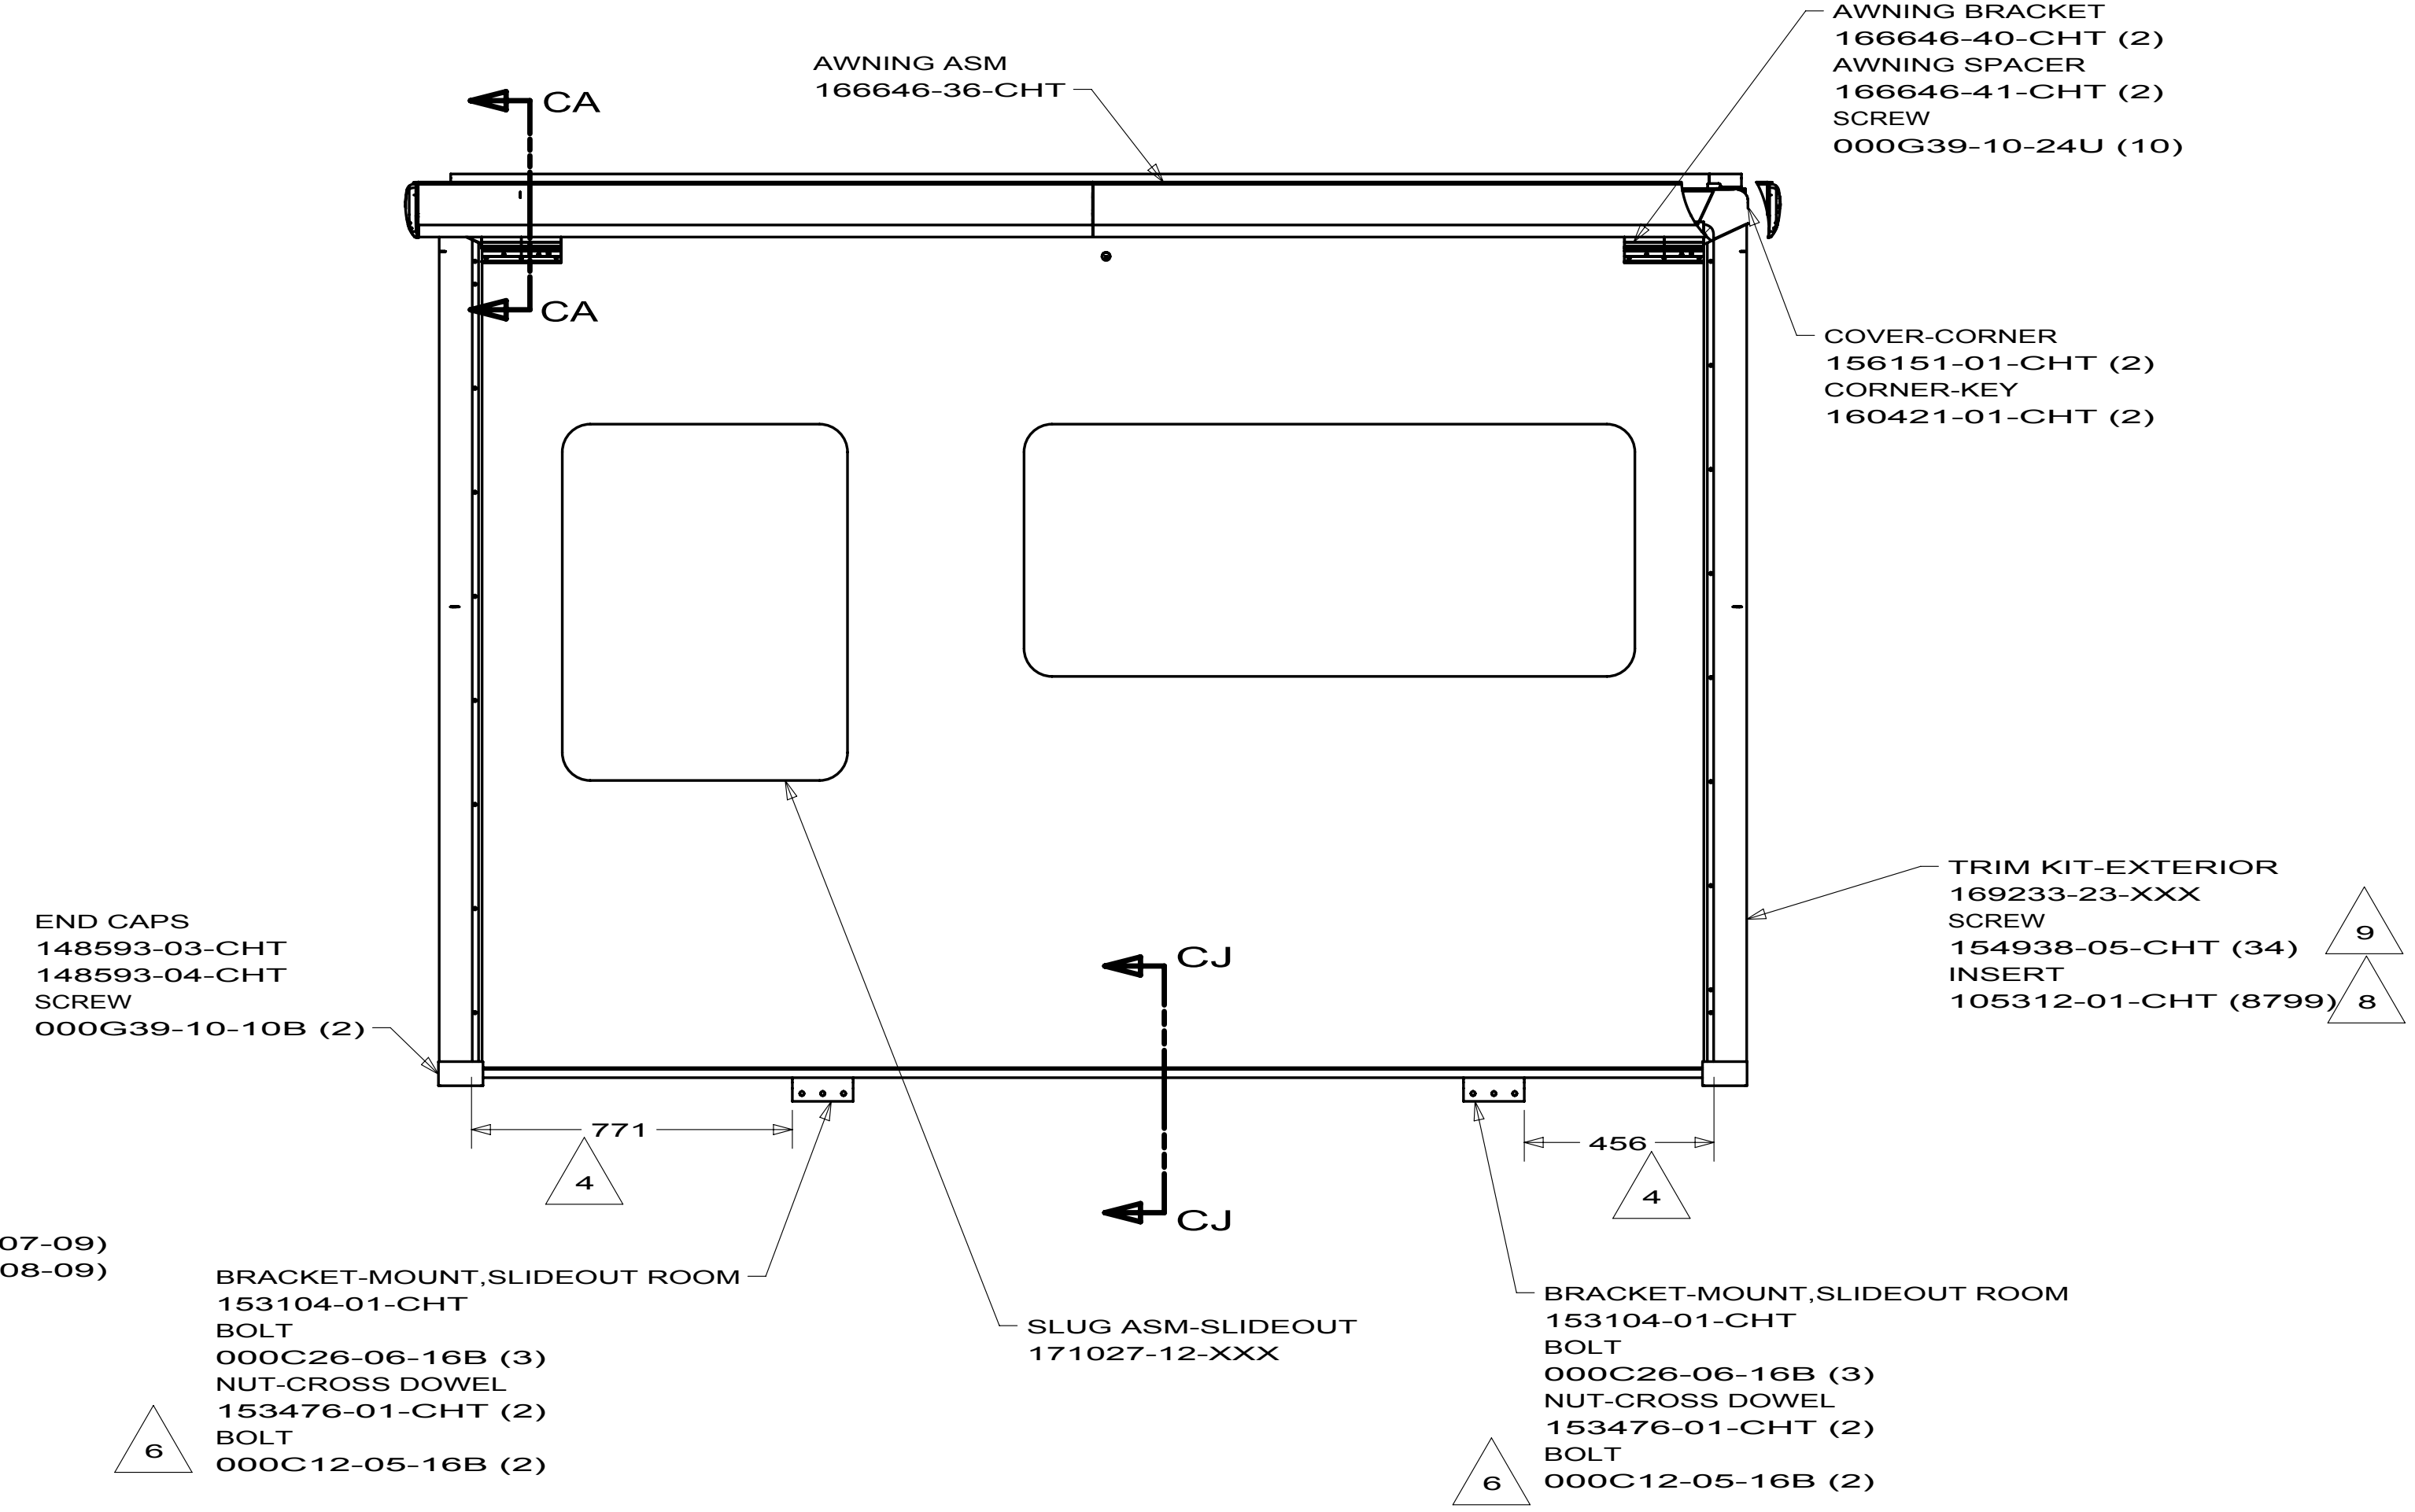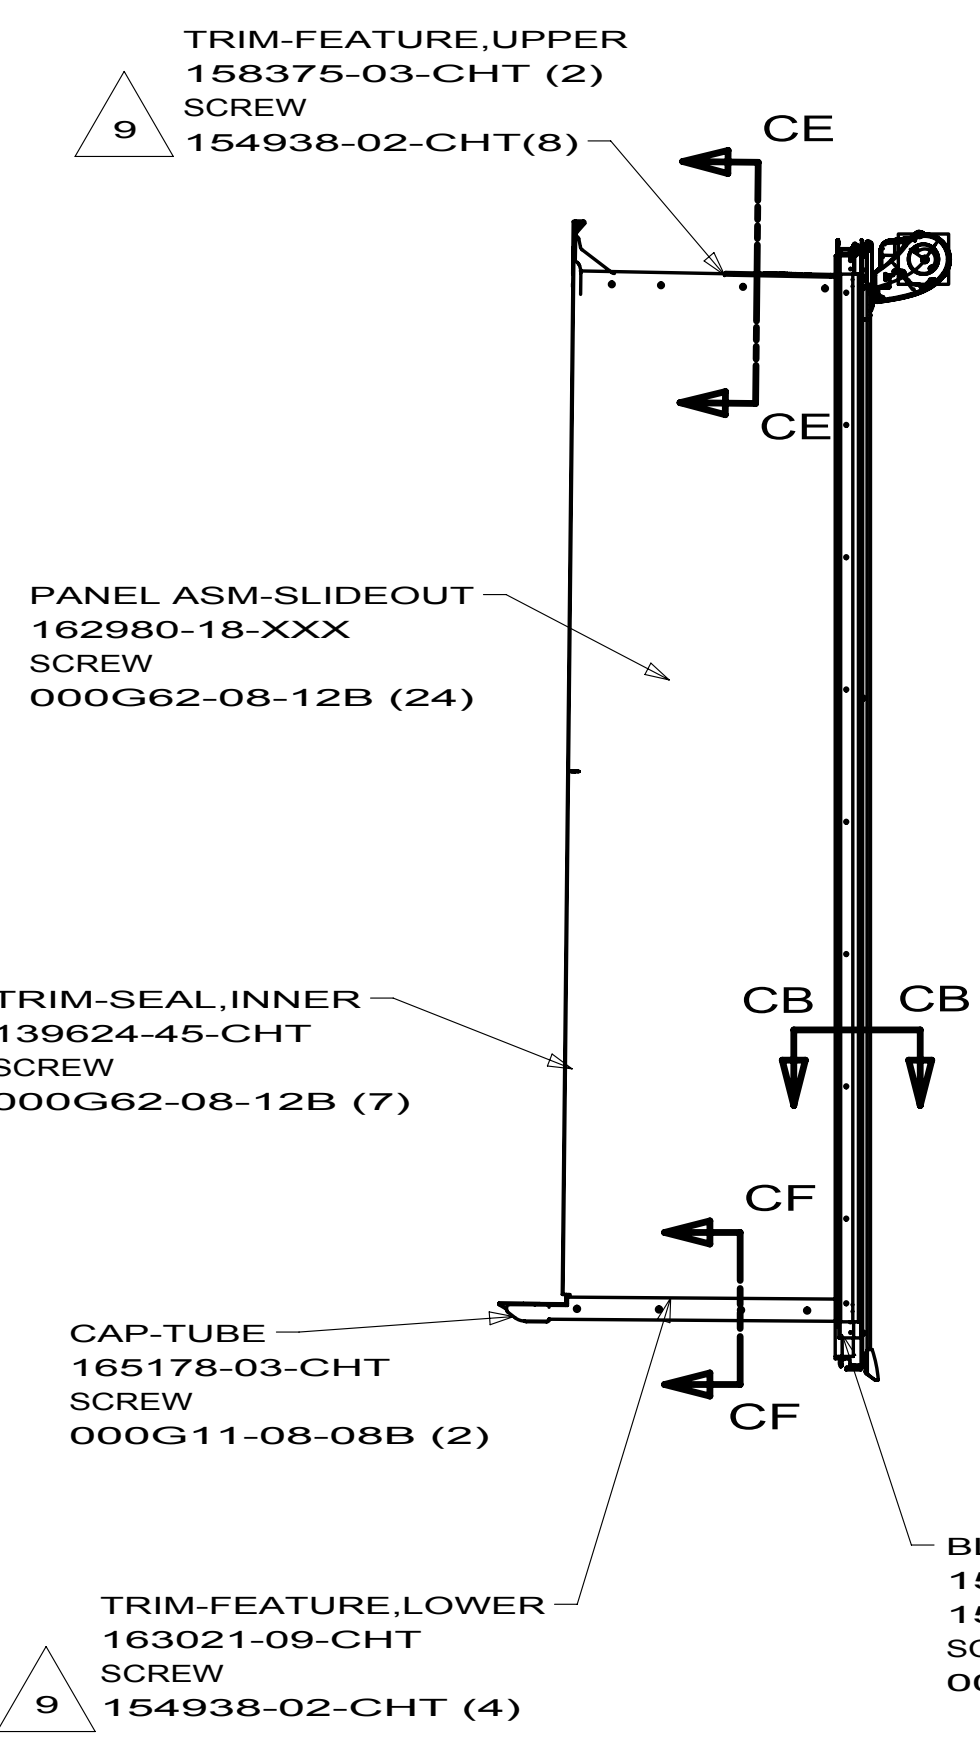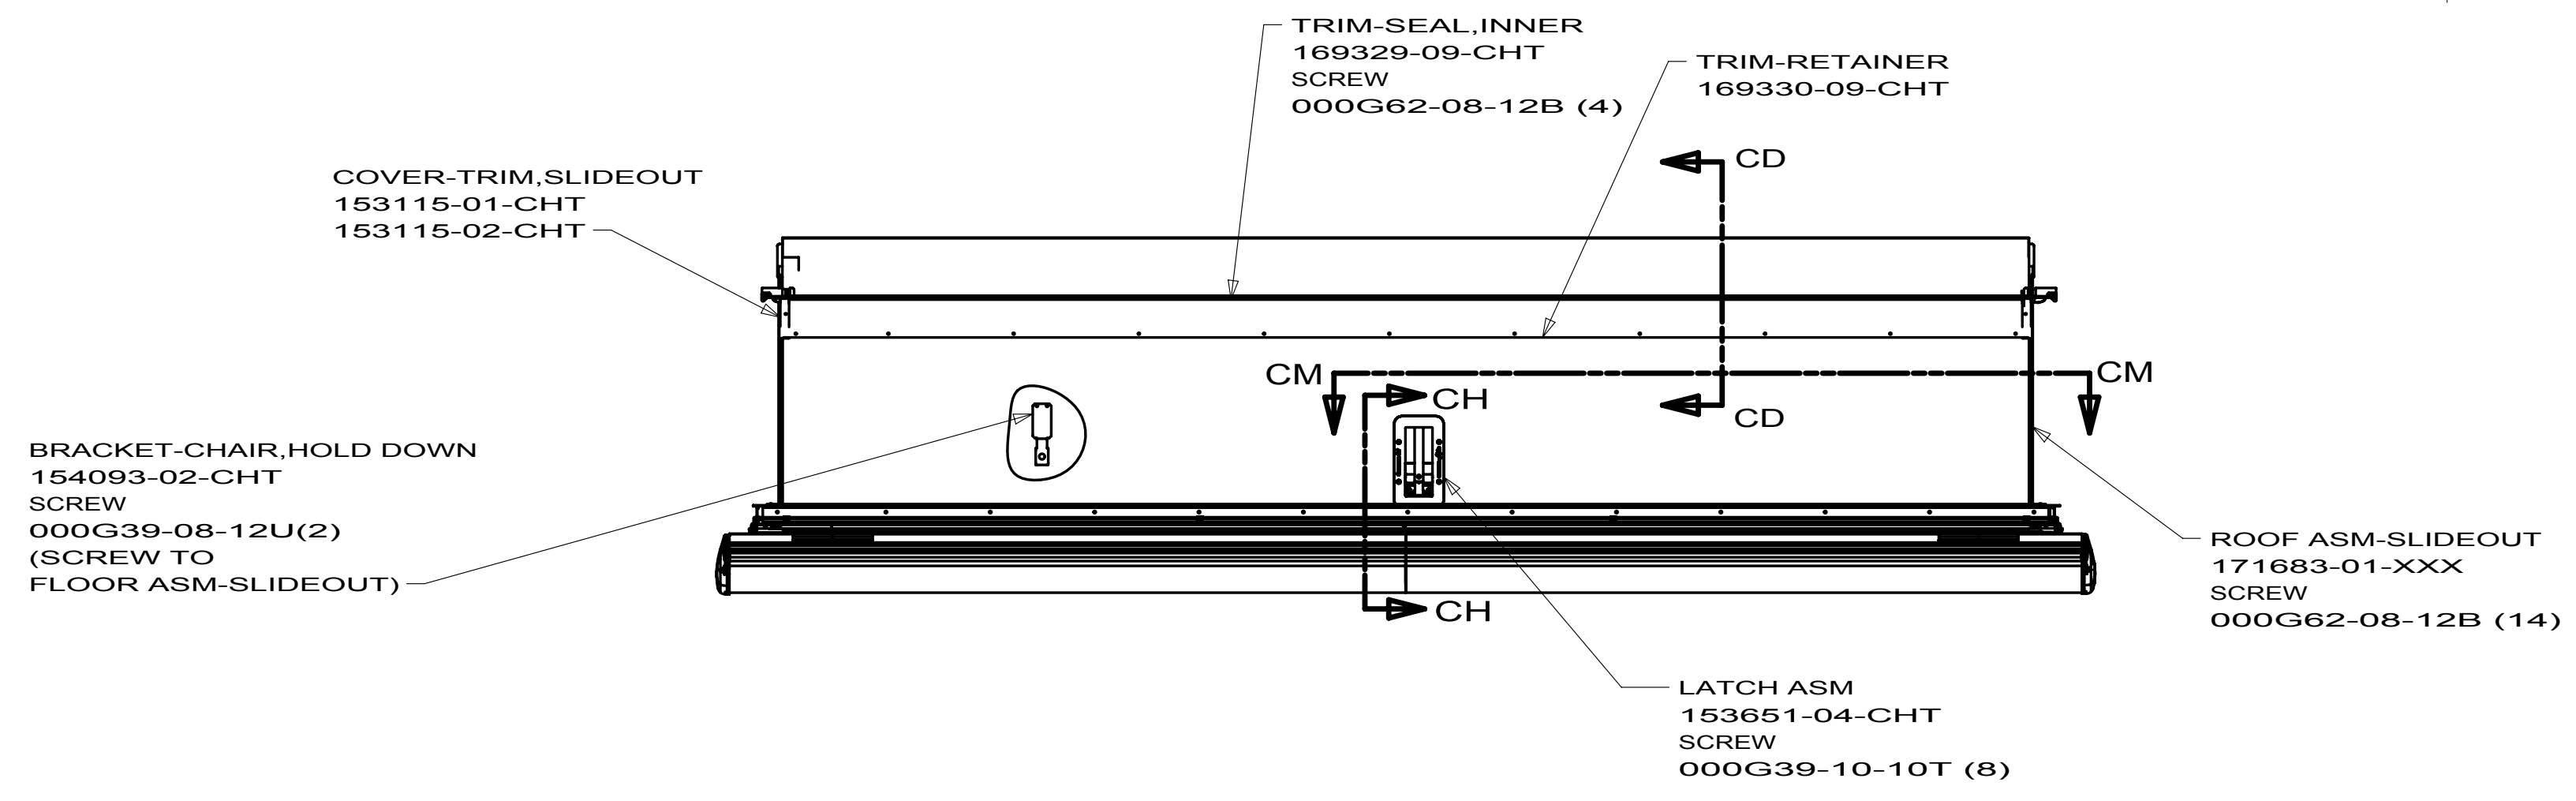


NOTICE
CHANGES TO THIS SHEET
MAY AFFECT OTHERS

- (54M) FLOOR COVERING CARPET W/PAD
- (54I) FLOOR-GALLEY/VINYL TILE
- (1G9) FLOORCOVERING-VINYL-FRONT


ROOM ASM-SLIDEOUT 170965-11-XXX		
FIRST USED 10 J37F		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FT,RH		
SHEET 2	PART NO 170965	REV

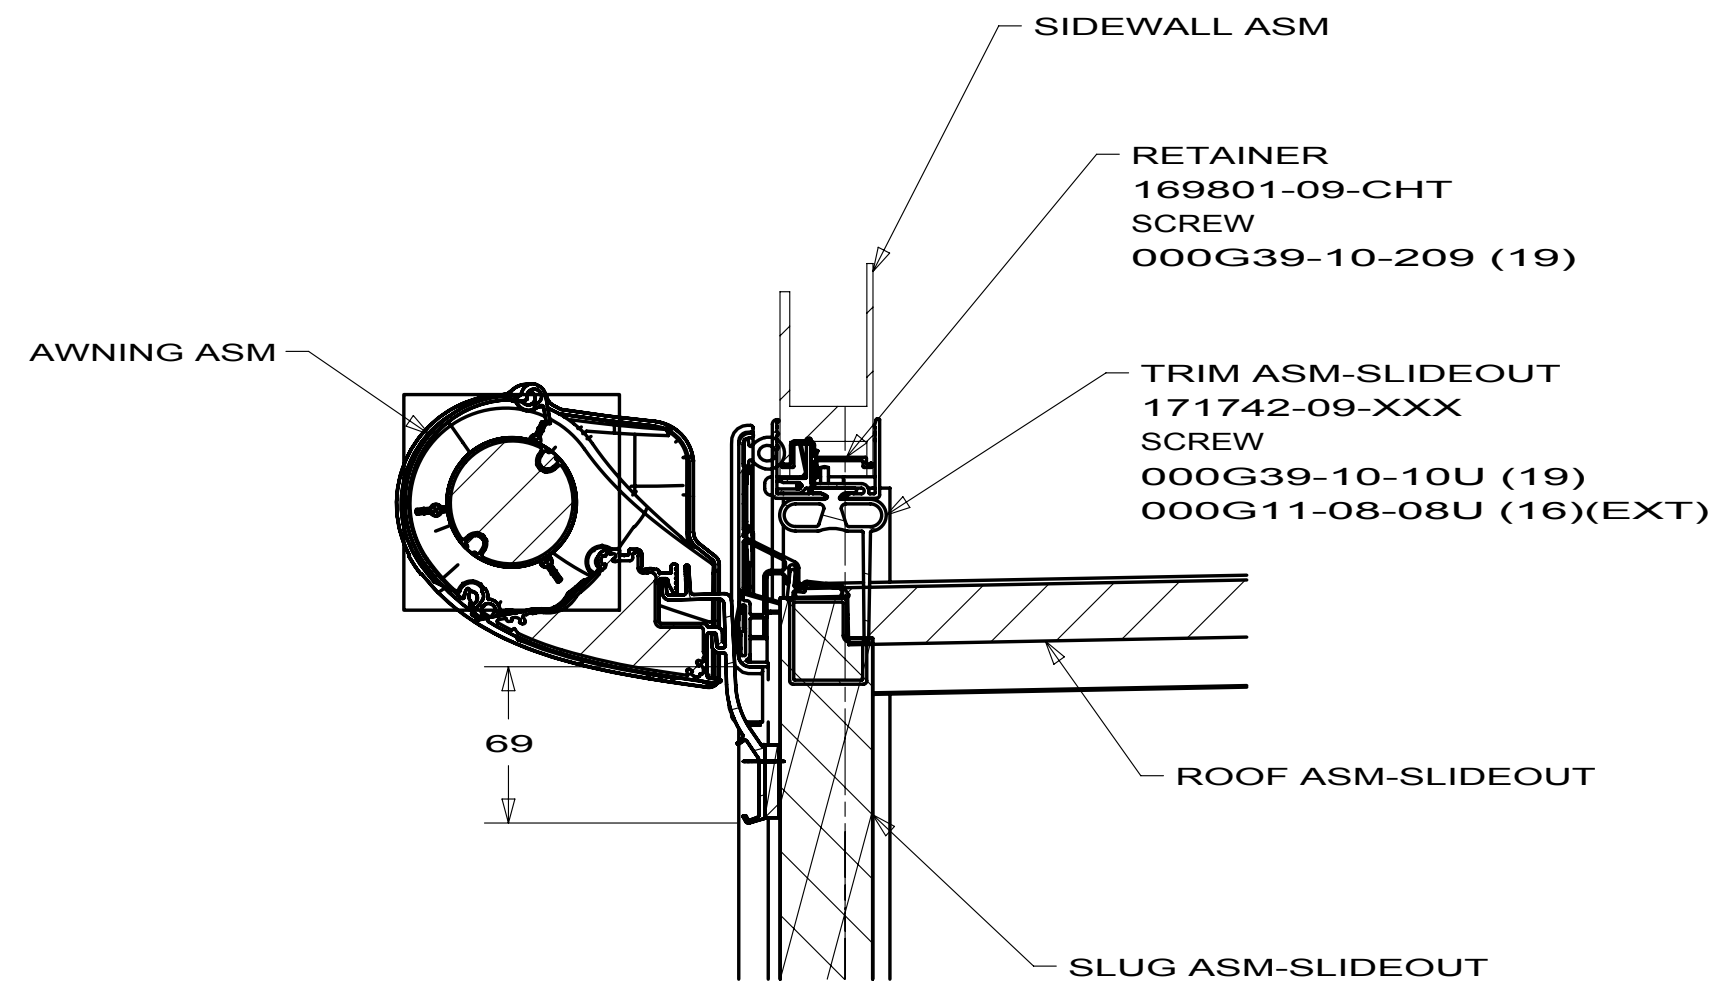


SECTION CA-CA

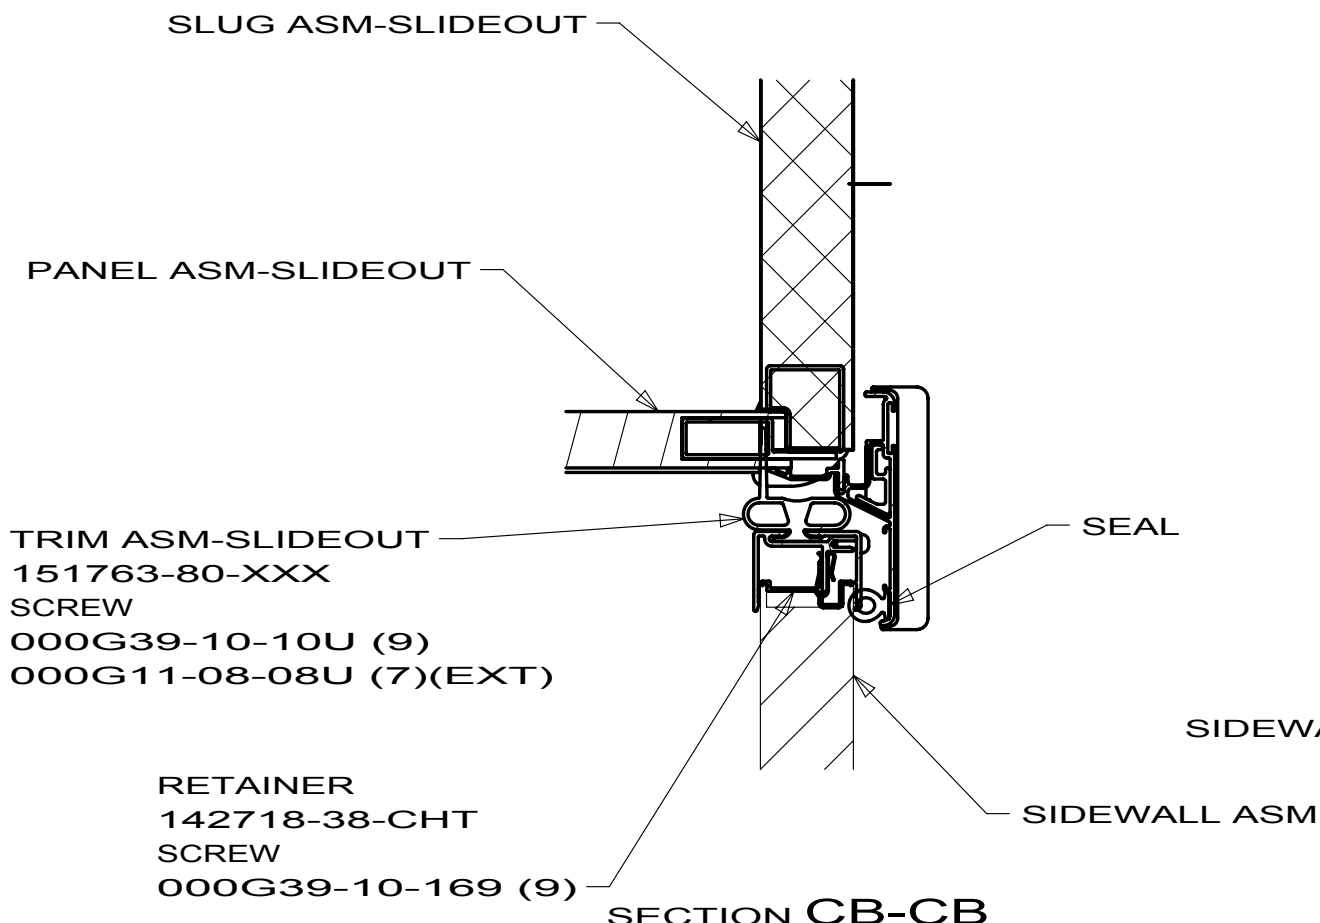


SECTION CB-CB

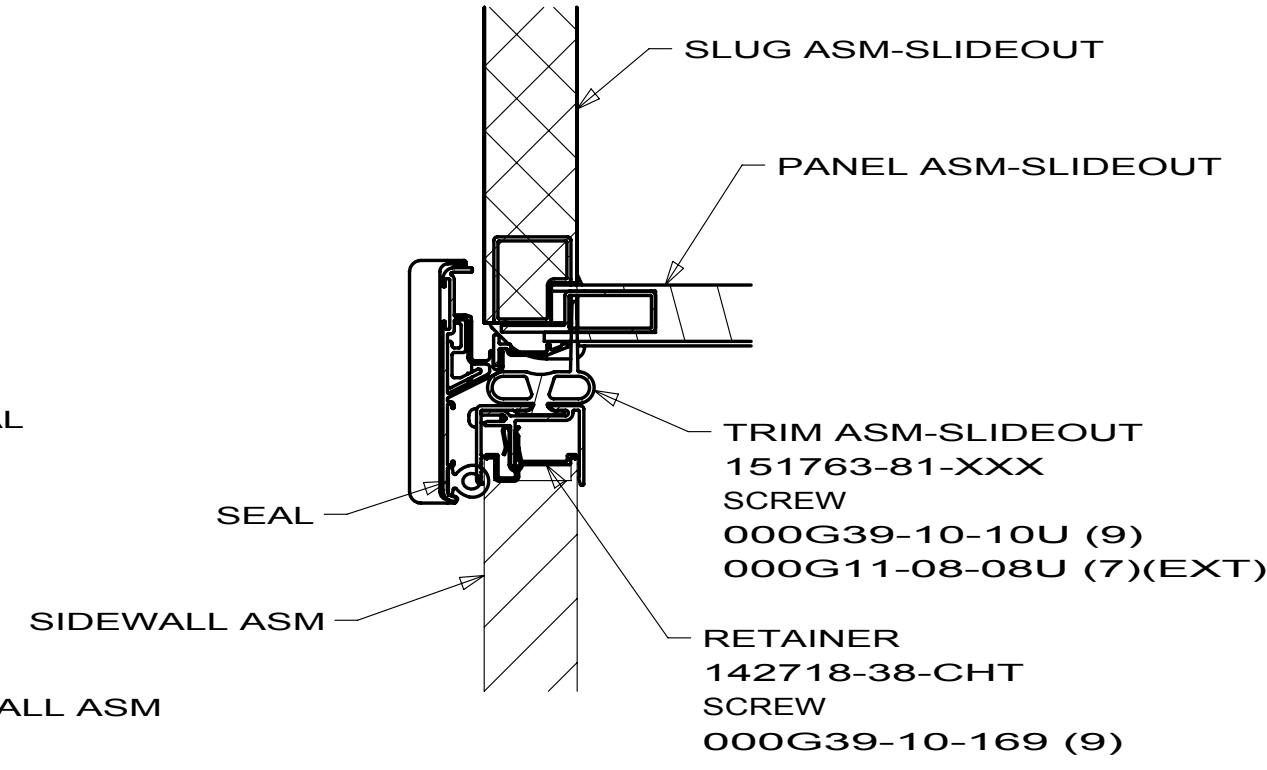


SECTION CC-CC

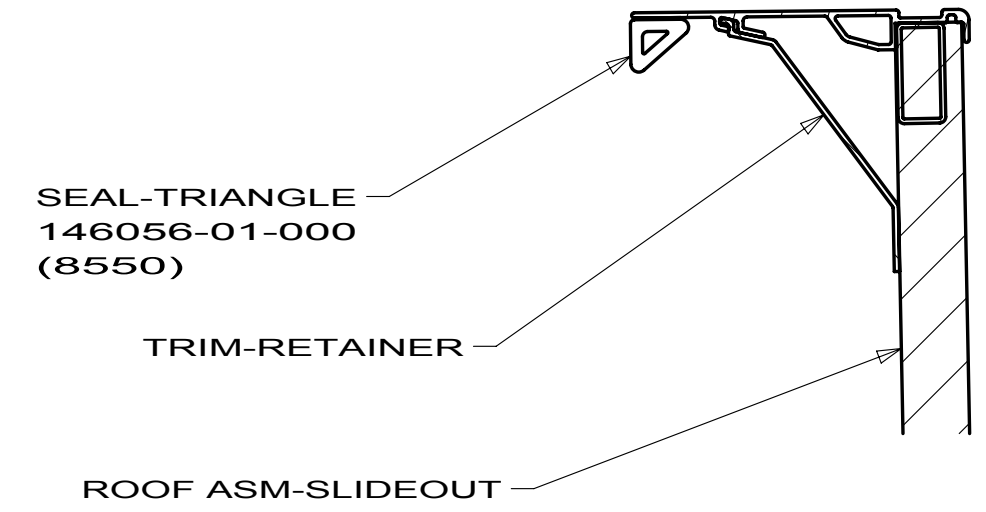


SECTION CD-CD

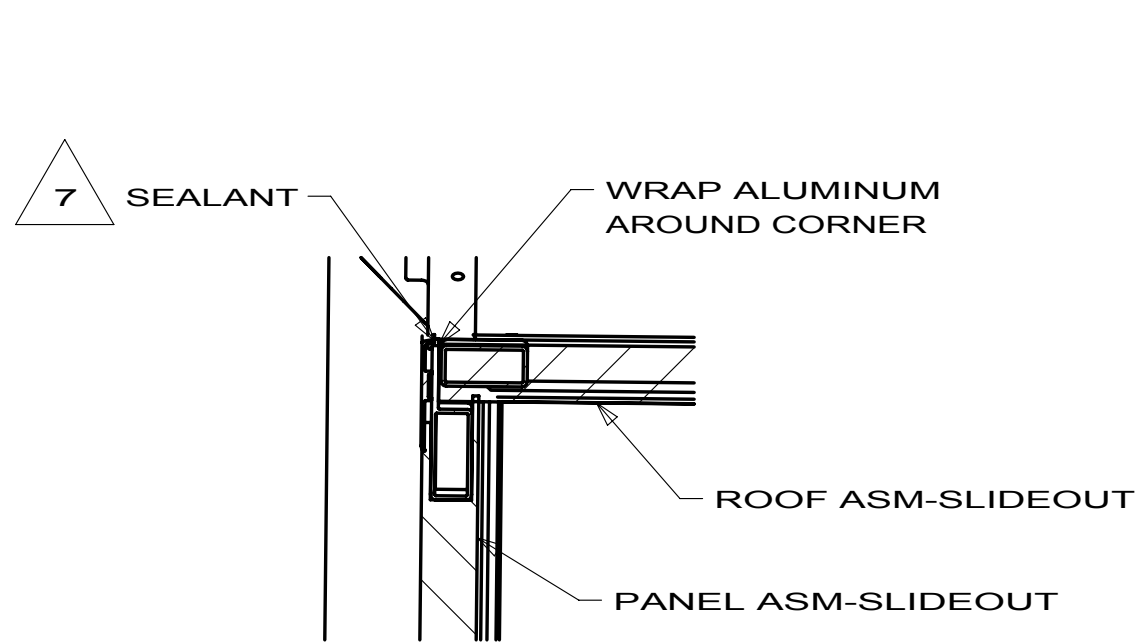


SECTION CE-CE

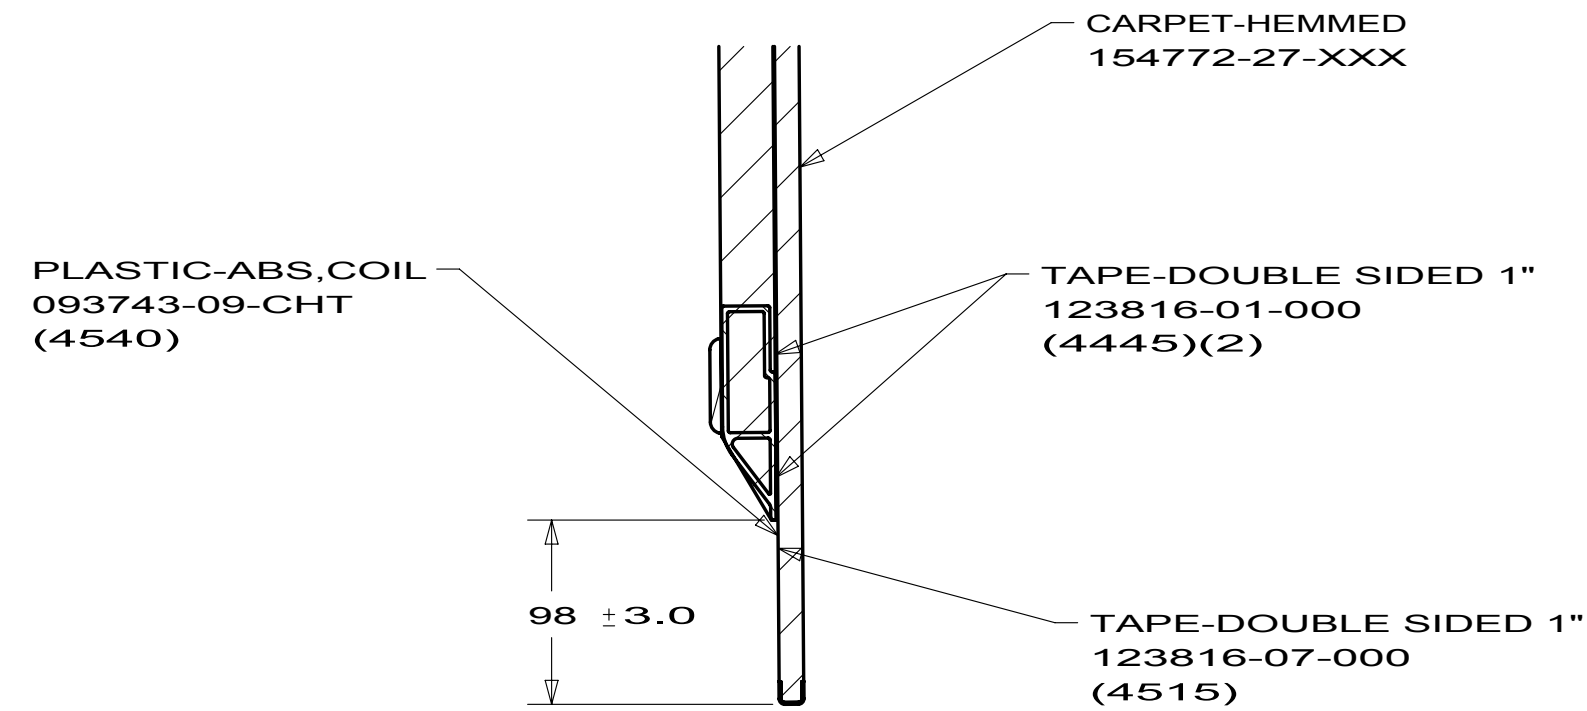


SECTION CG-CG

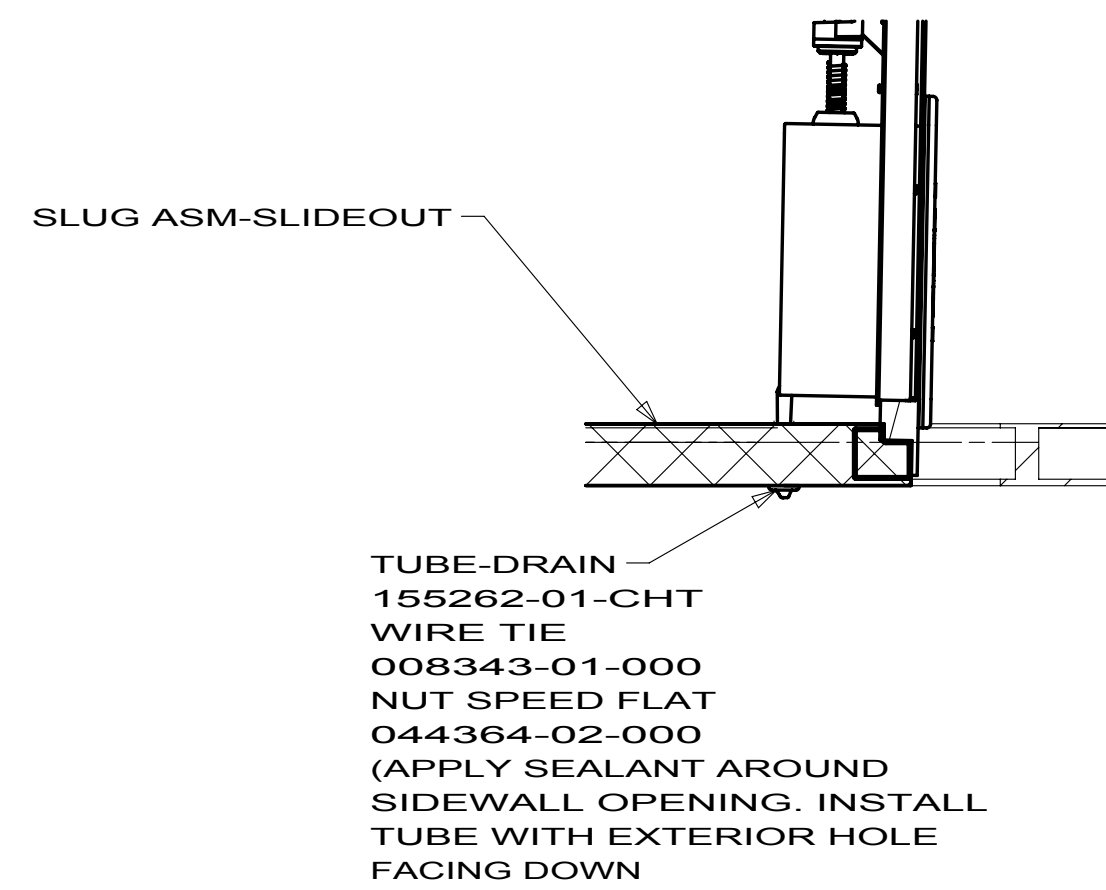


SECTION CH-CH

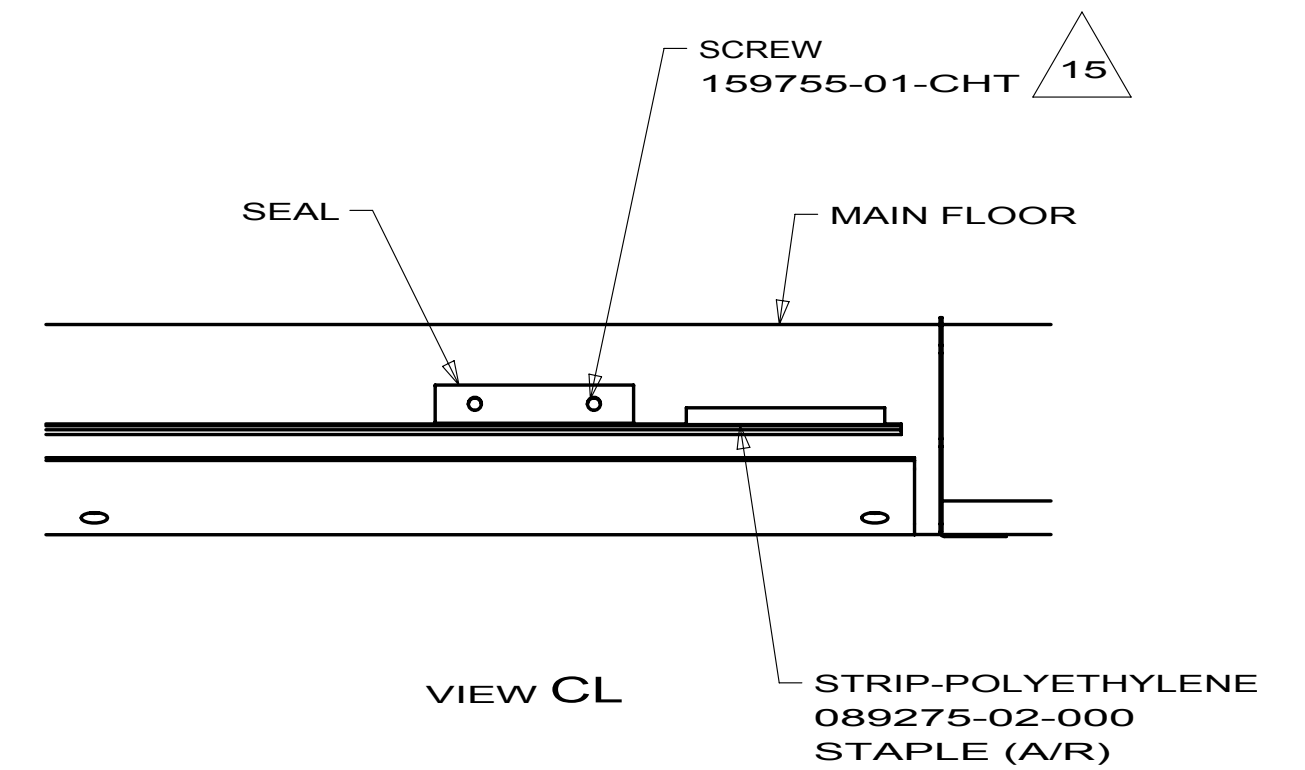


VIEW CL

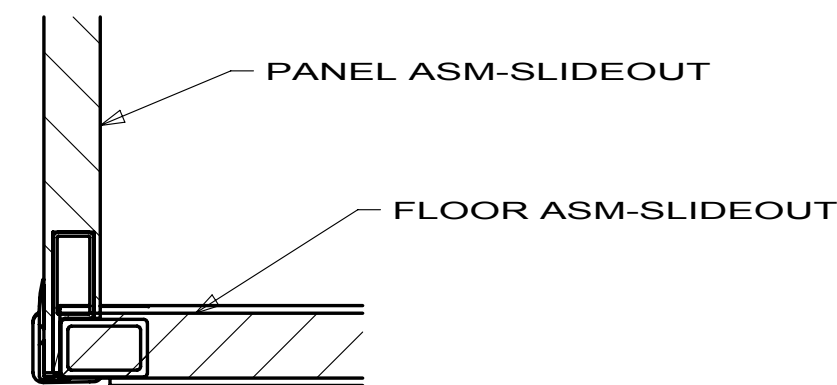


SECTION CF-CF

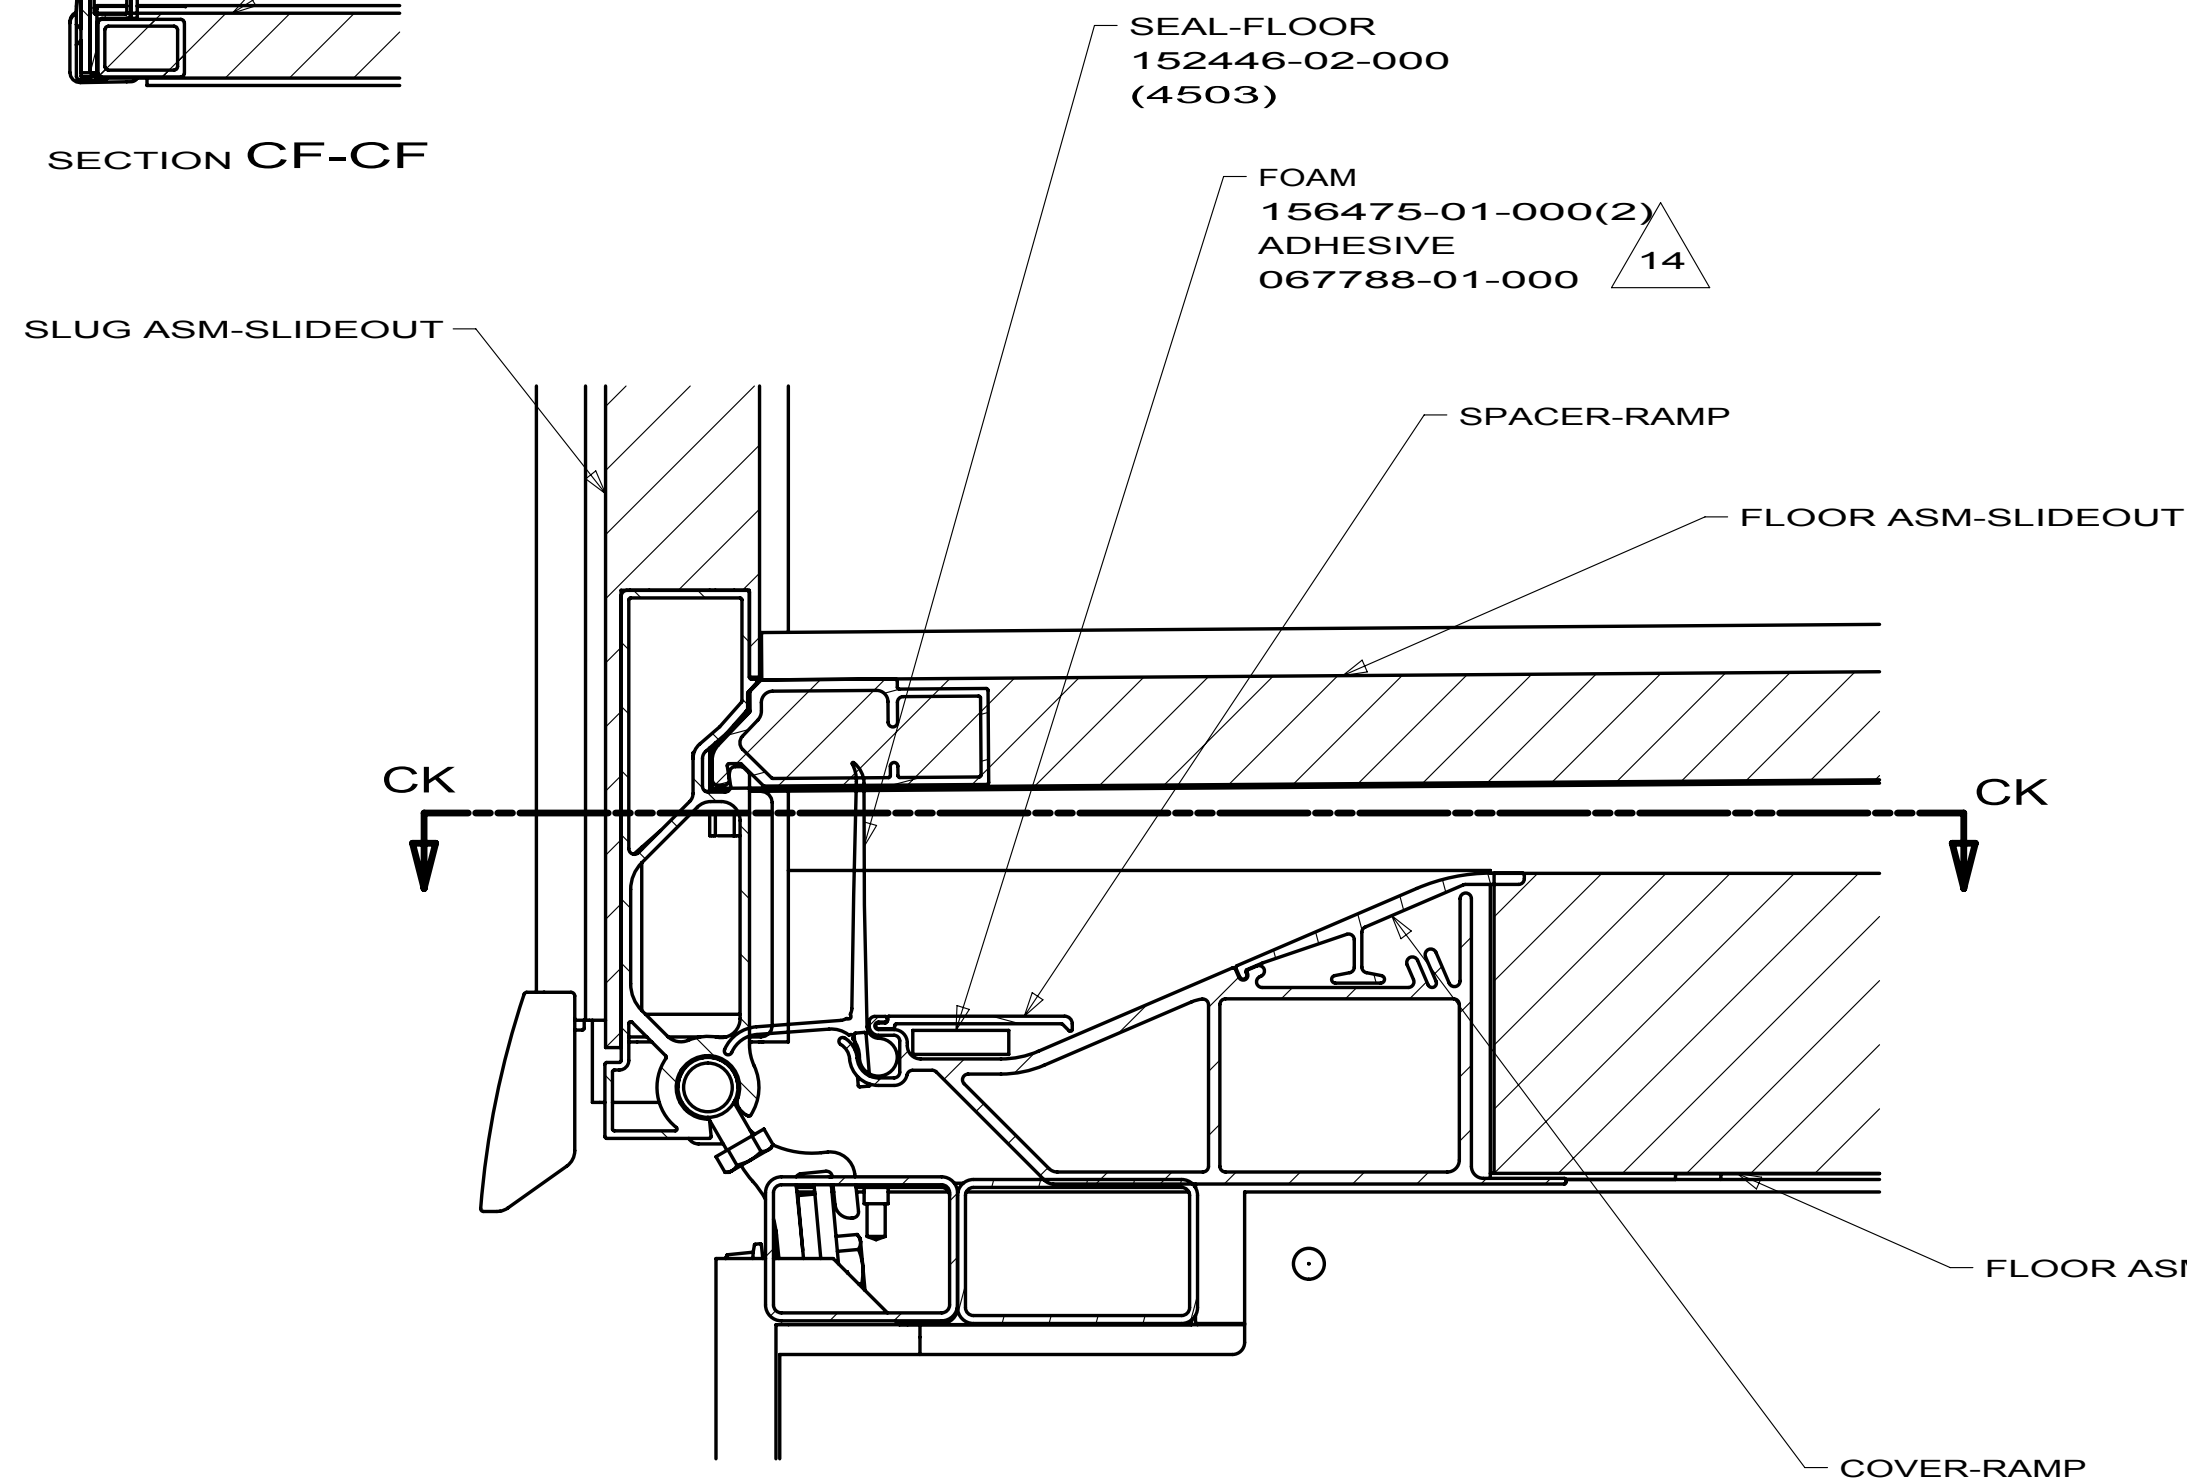


SECTION CJ-CJ

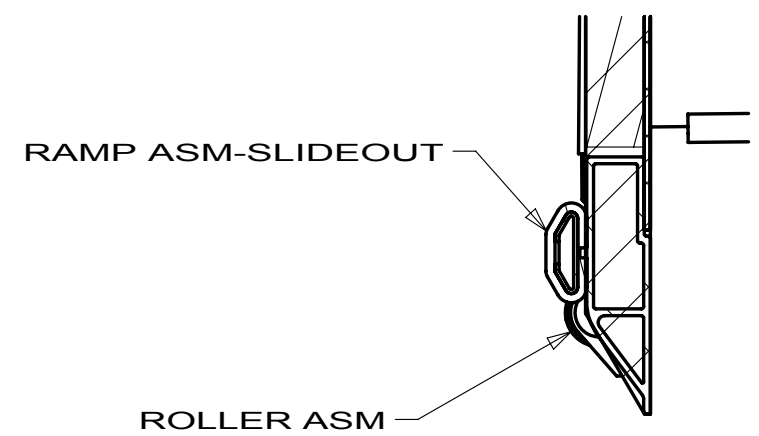

SECTION CN-CN

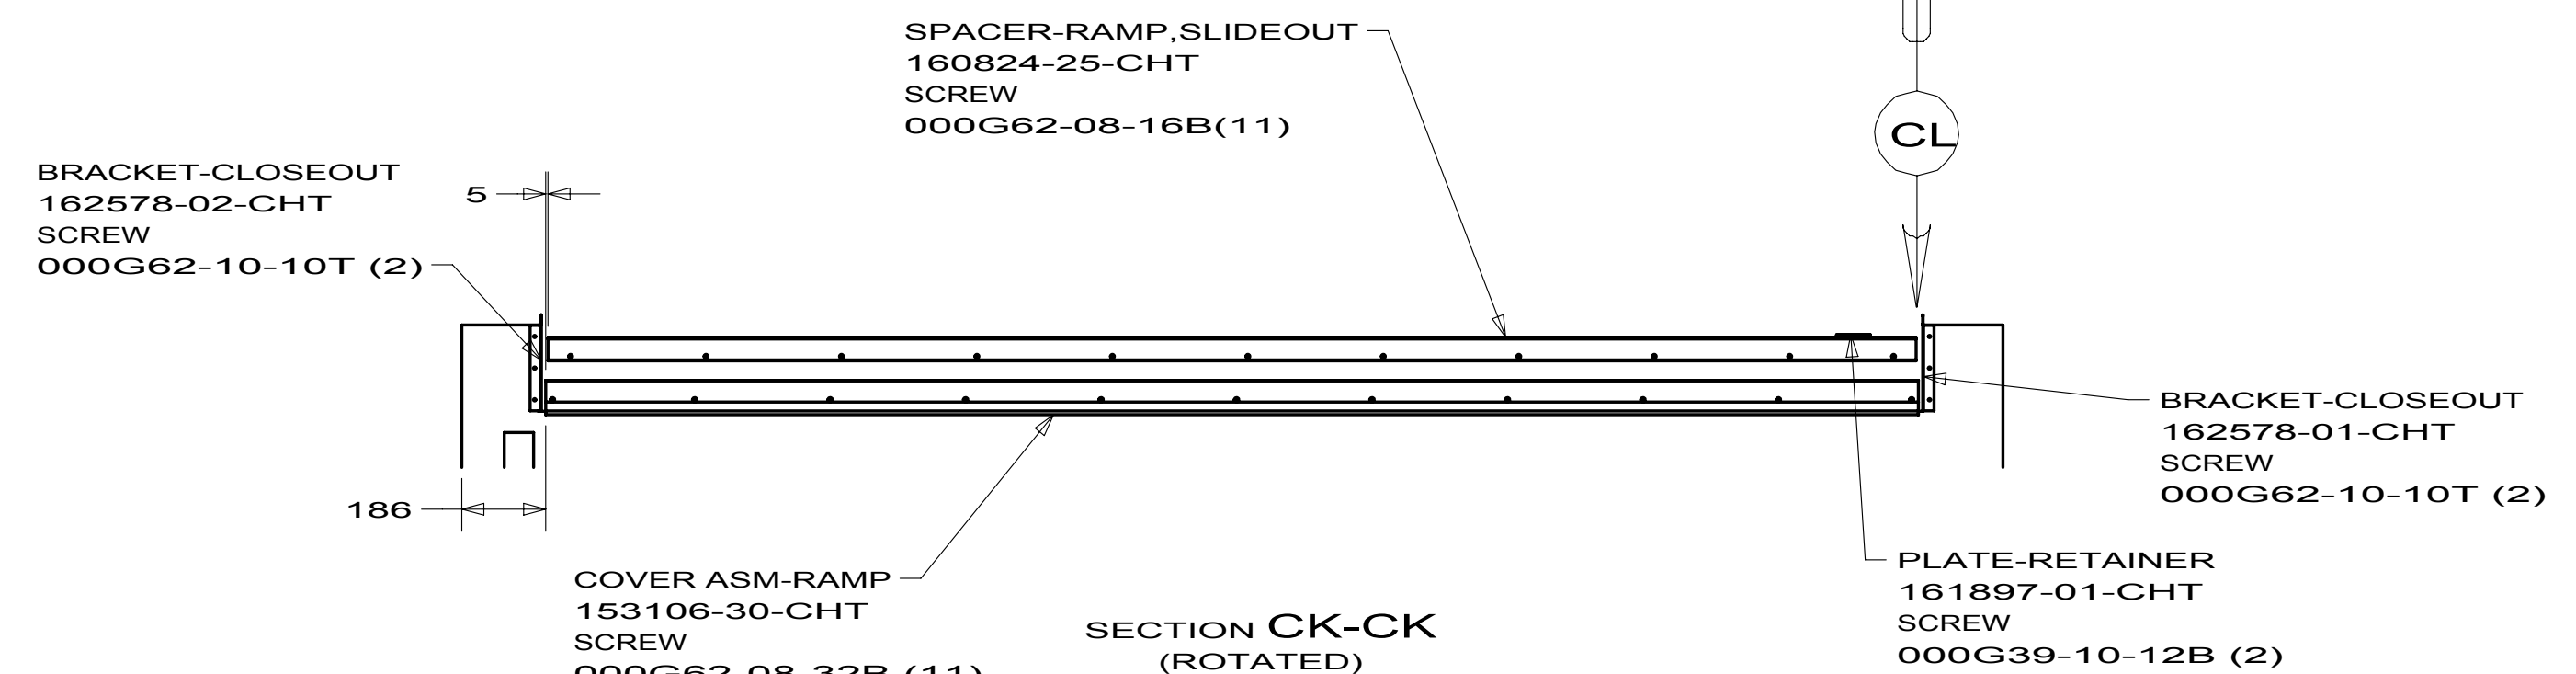

SECTION CK-CK
(ROTATED)

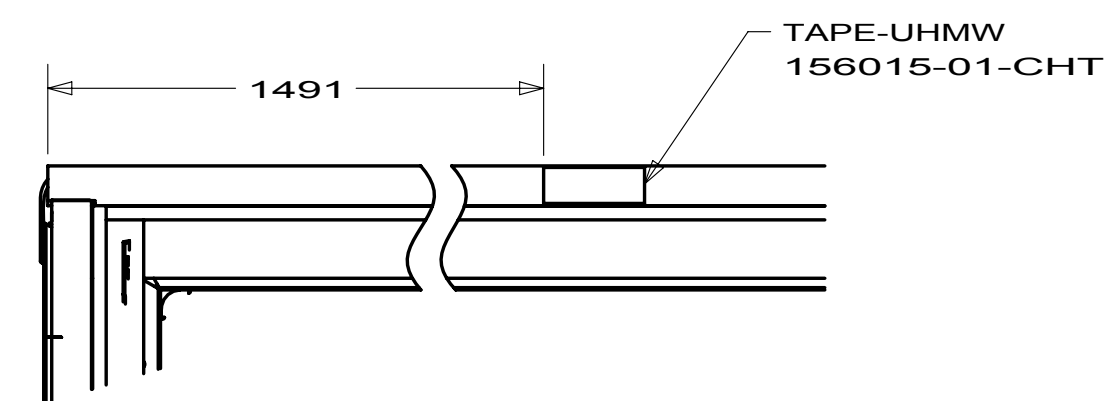

SECTION CM-CM
(ROTATED)

- 54I FLOOR-GALLEY/VINYL TILE
- 54M FLOOR COVERING CARPET W/PAD

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-FT,RH		
SHEET 3	PART NO	REV
	170965	

8

7

6



5

4

3



2

1

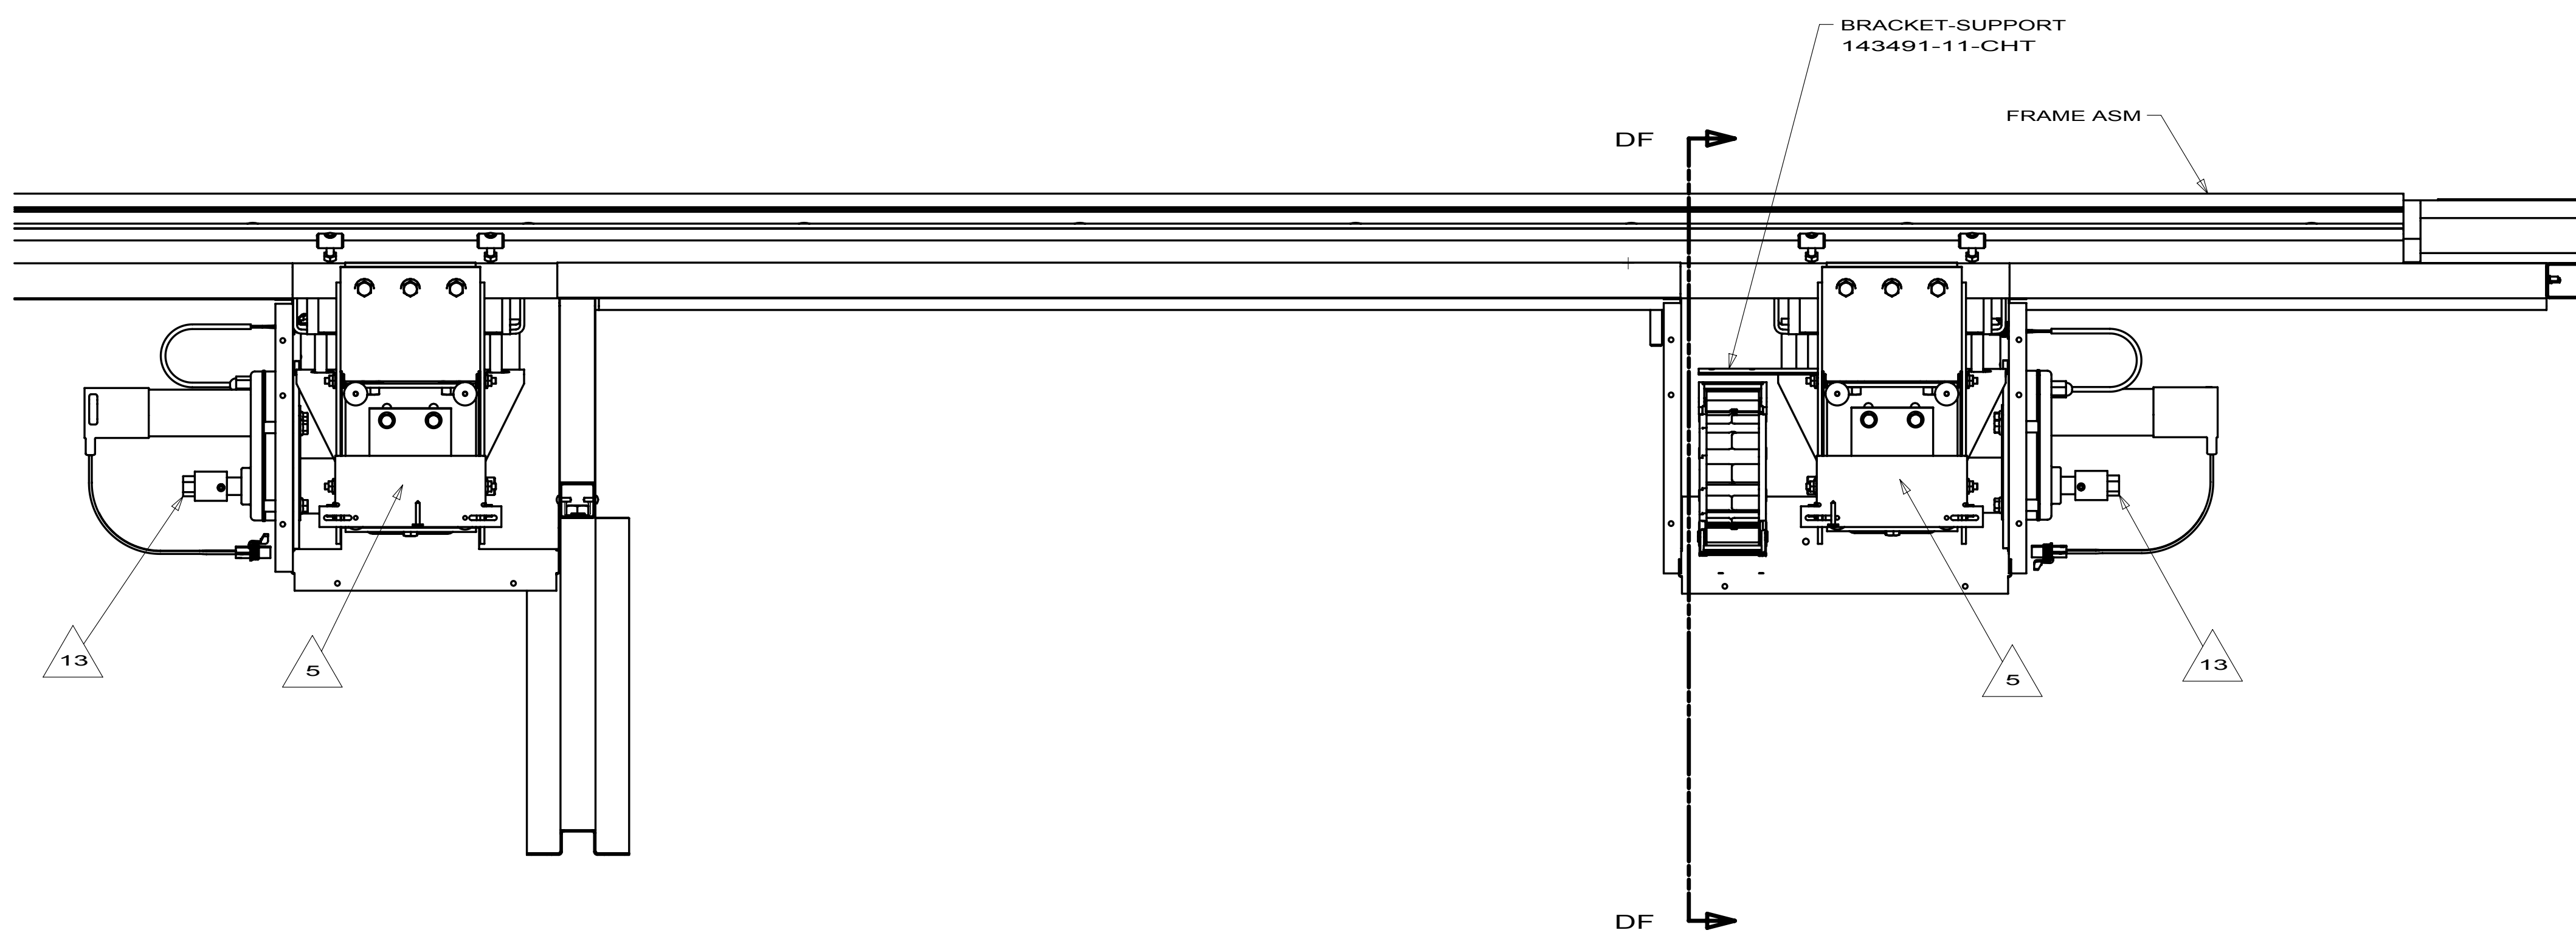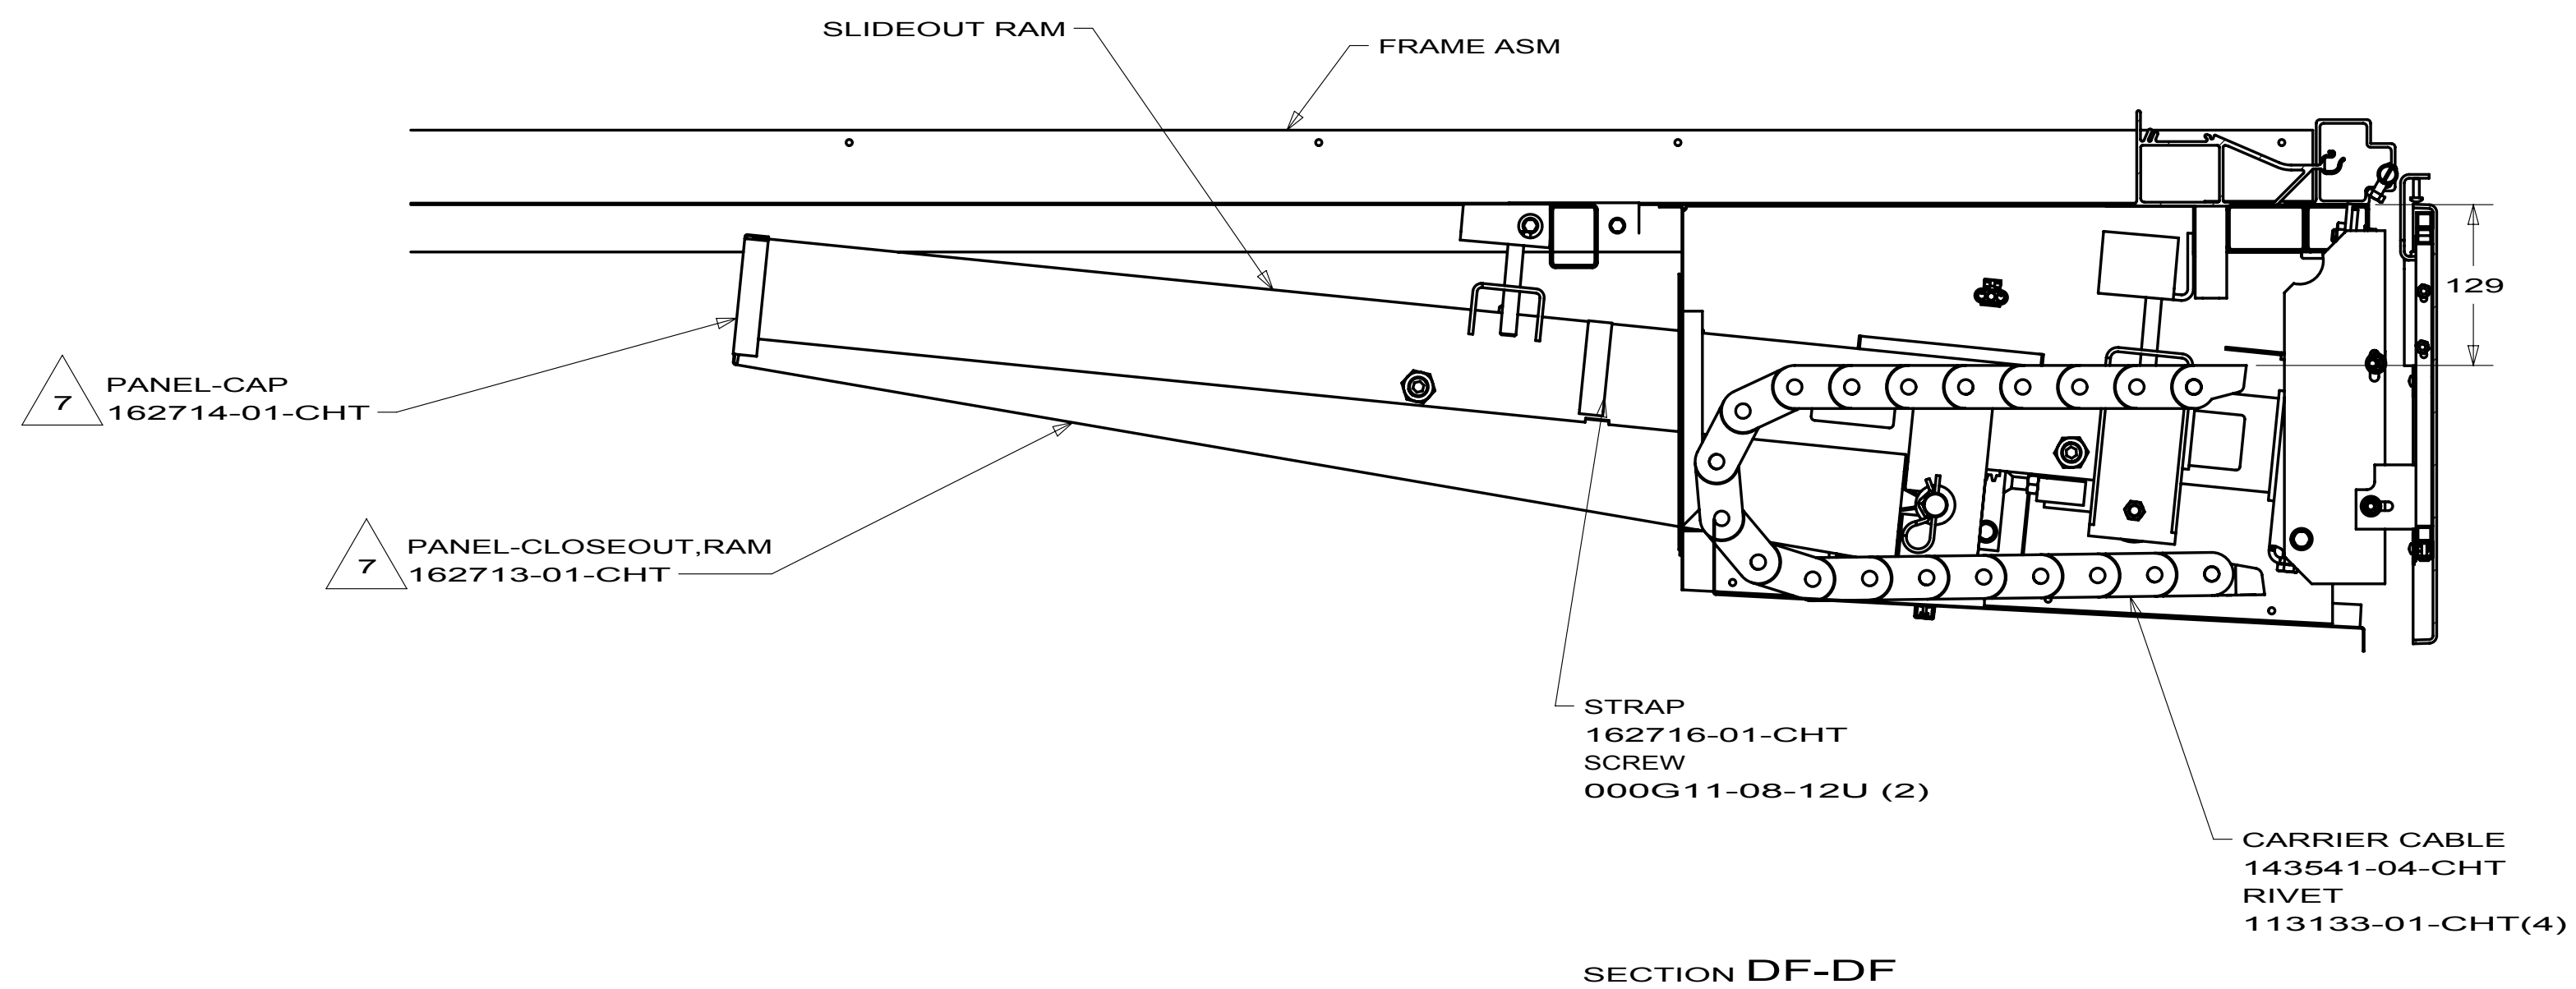
DWG
NO **170965**


FIRST USED		10 J37F	
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-FT,RH			
SHEET 4	PART NO	170965	REV


10/10/2009

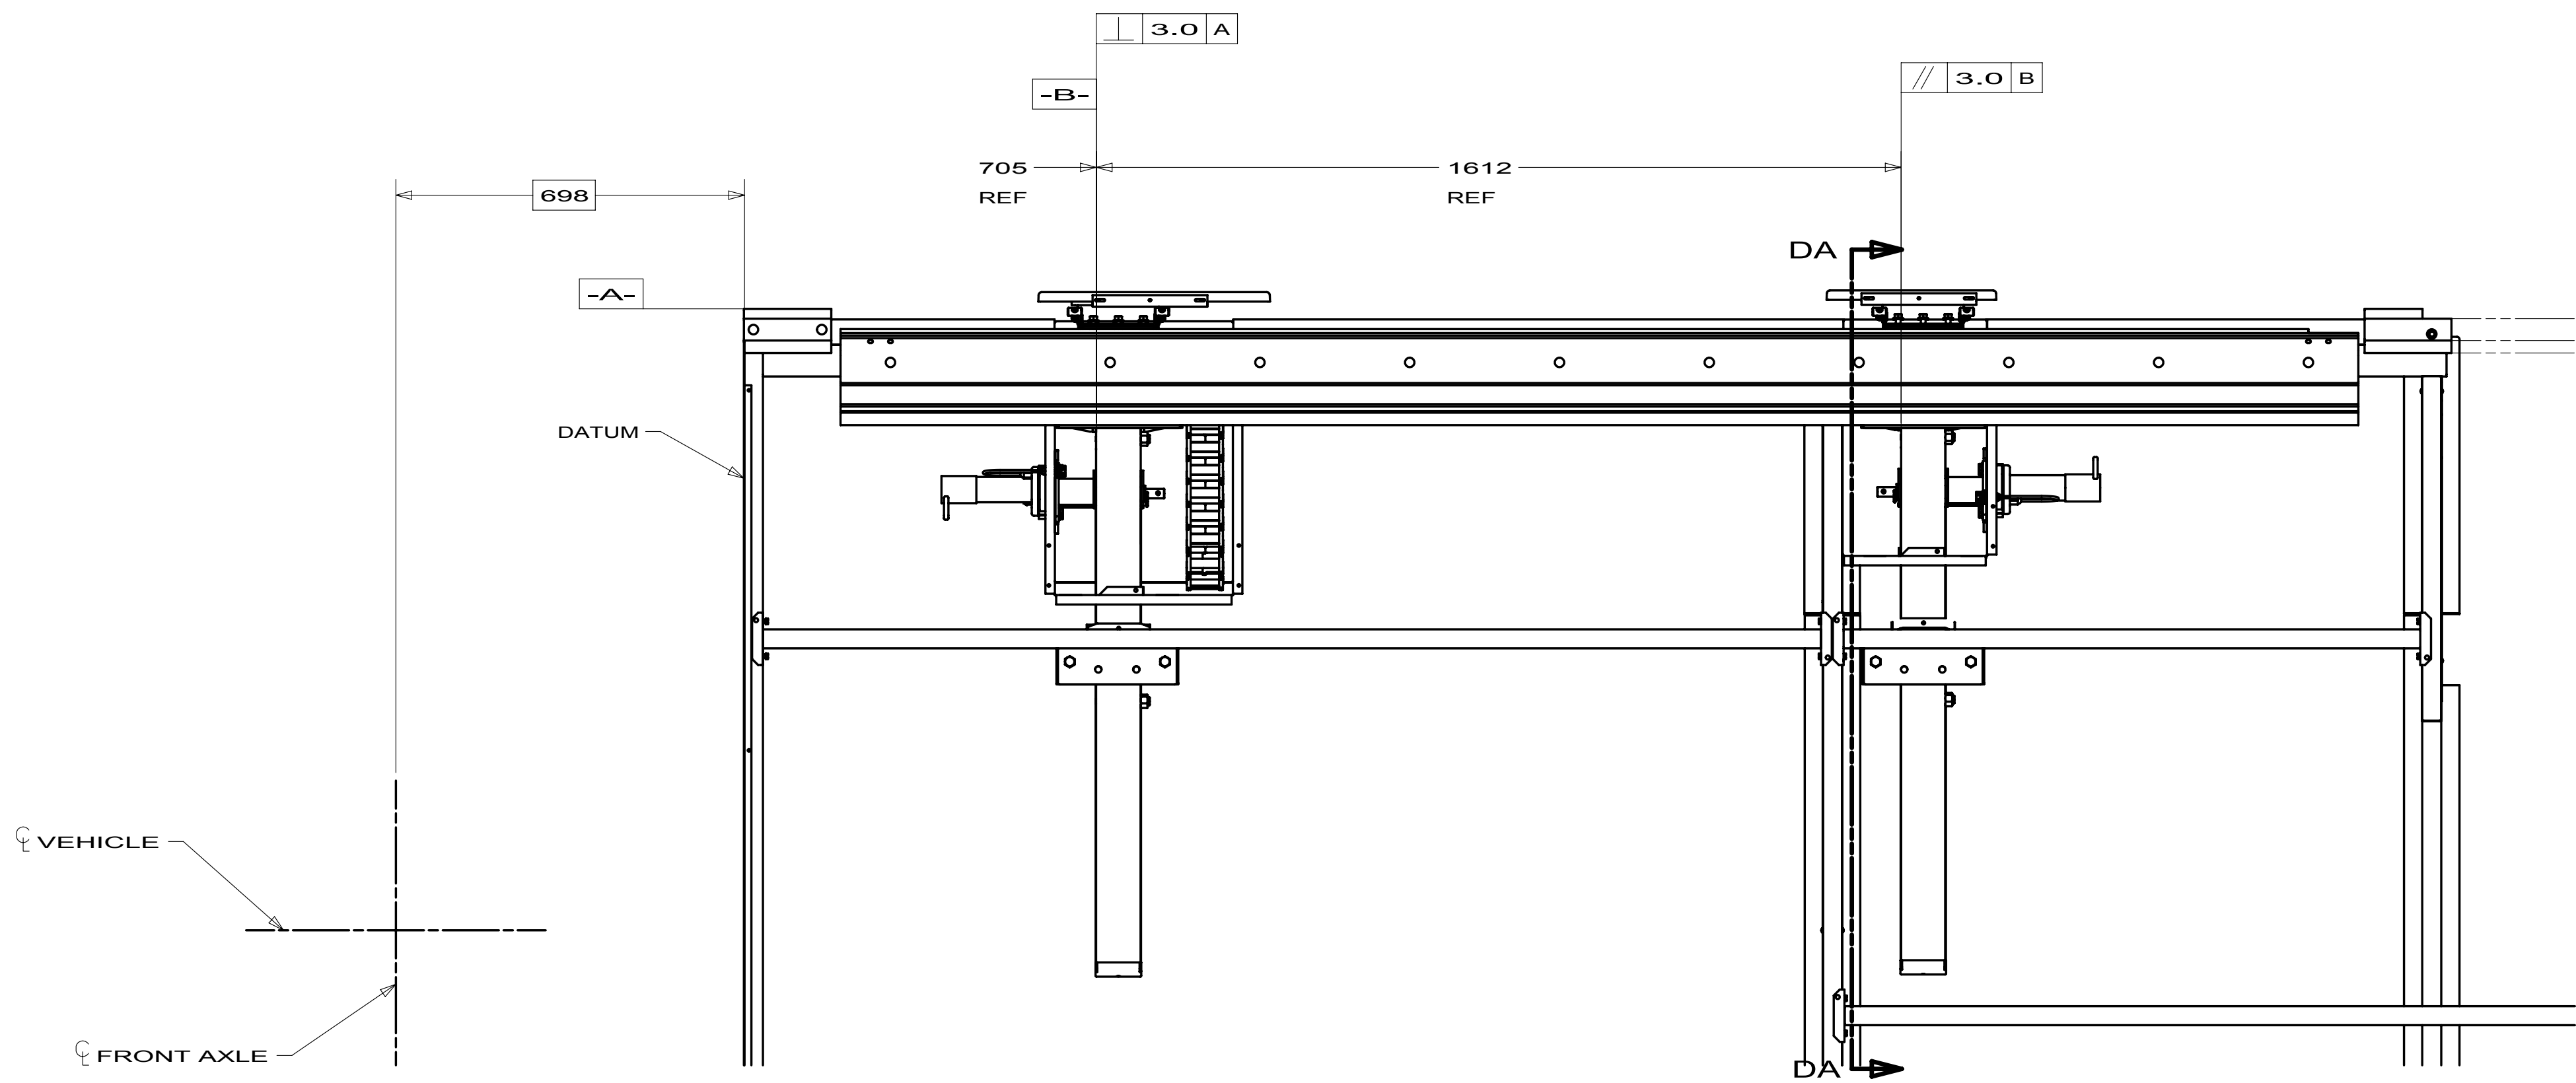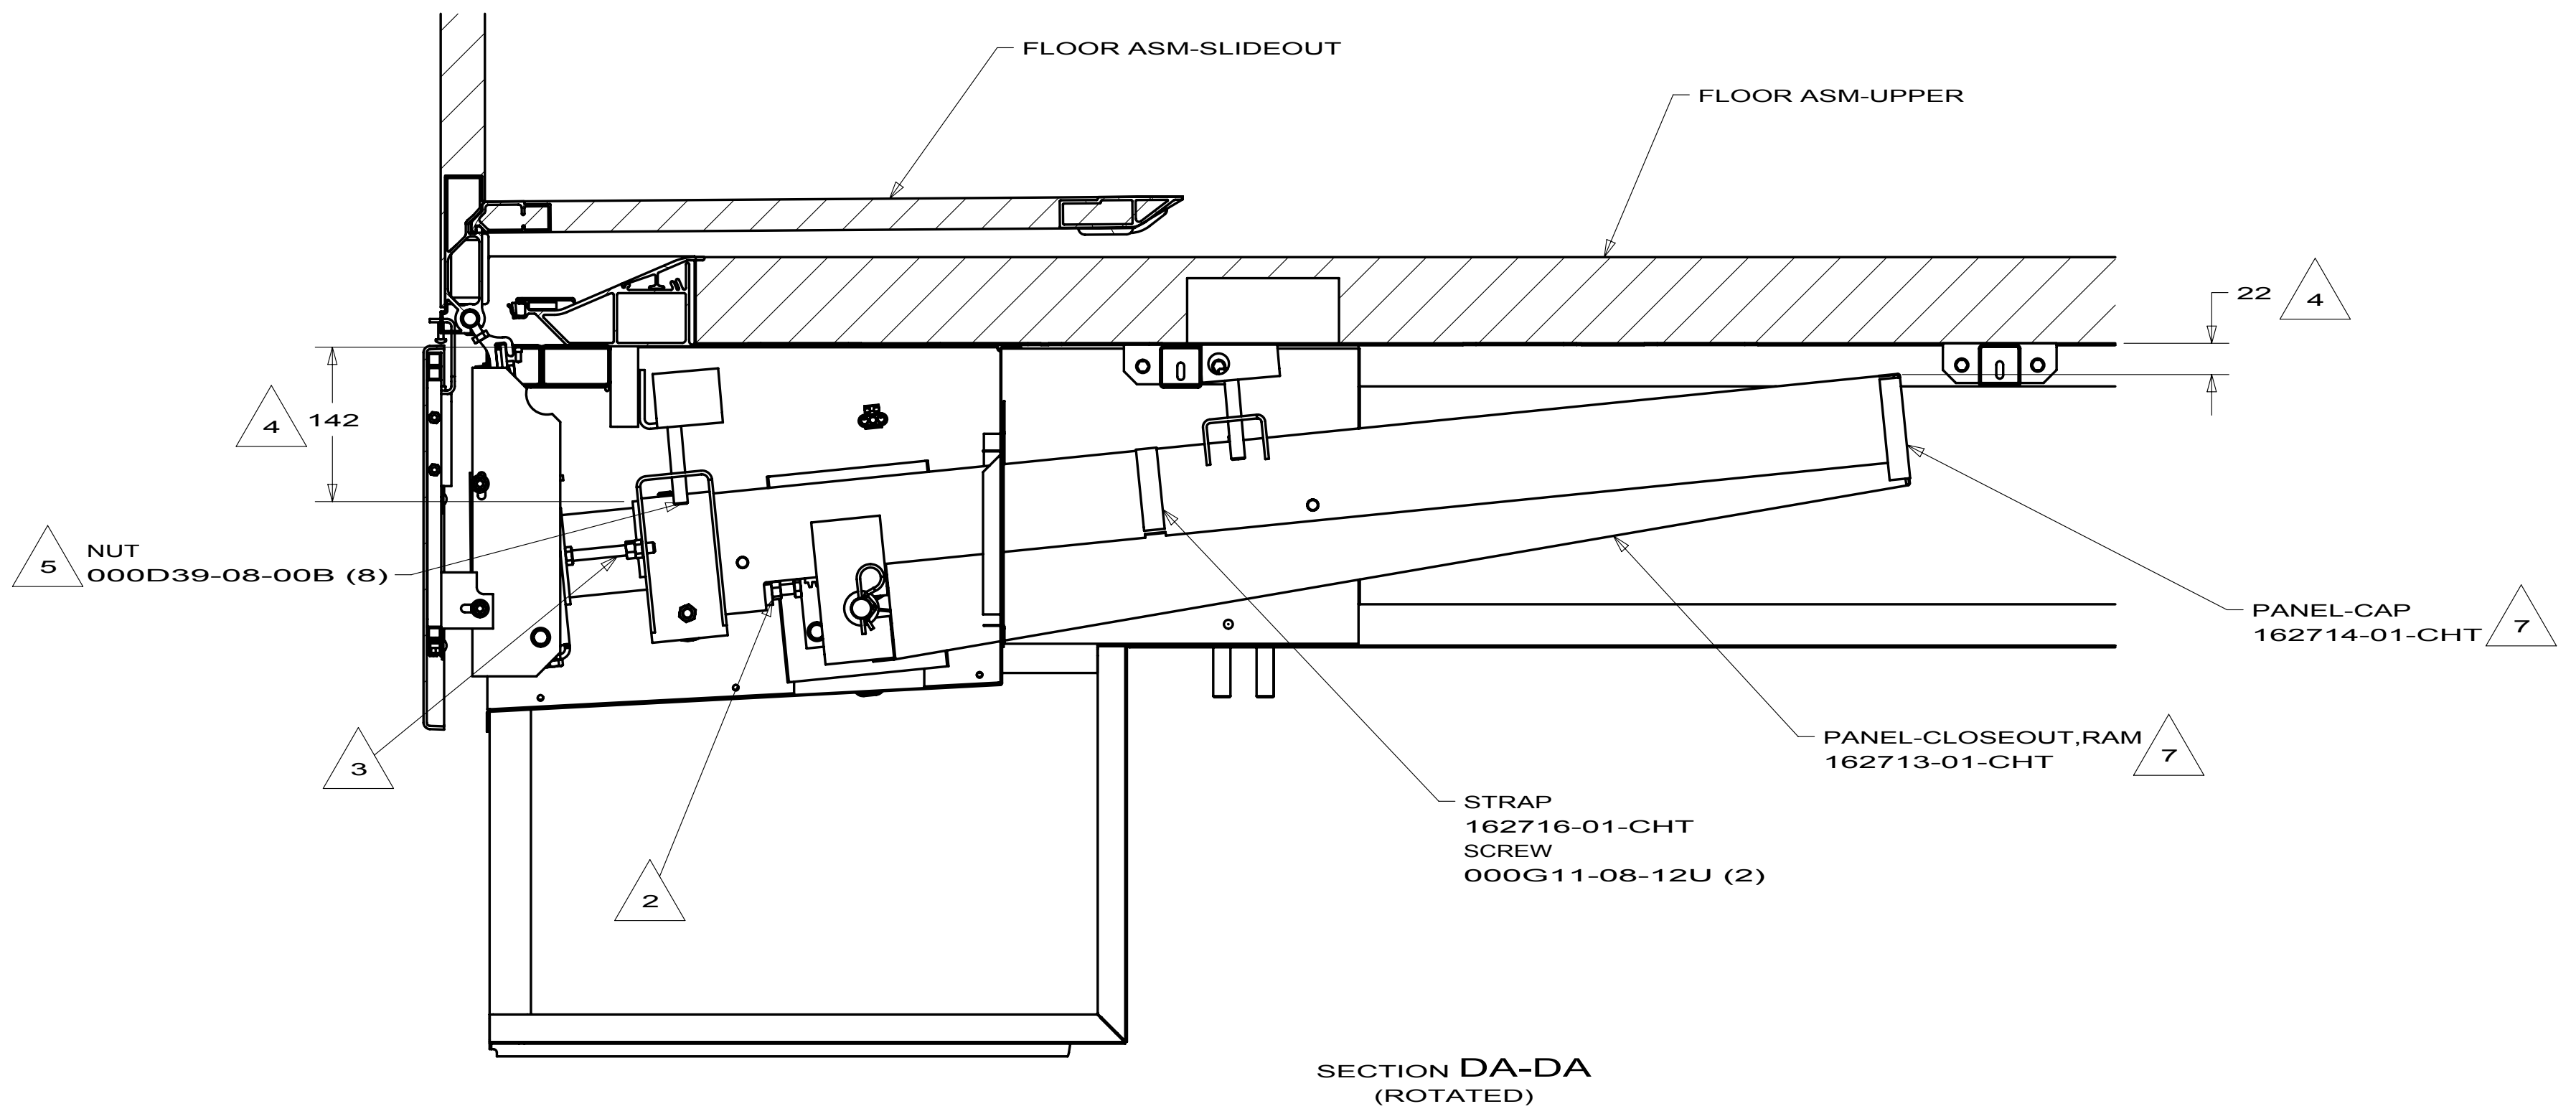


FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-FT,RH		
SHEET 5	PART NO 170965	REV

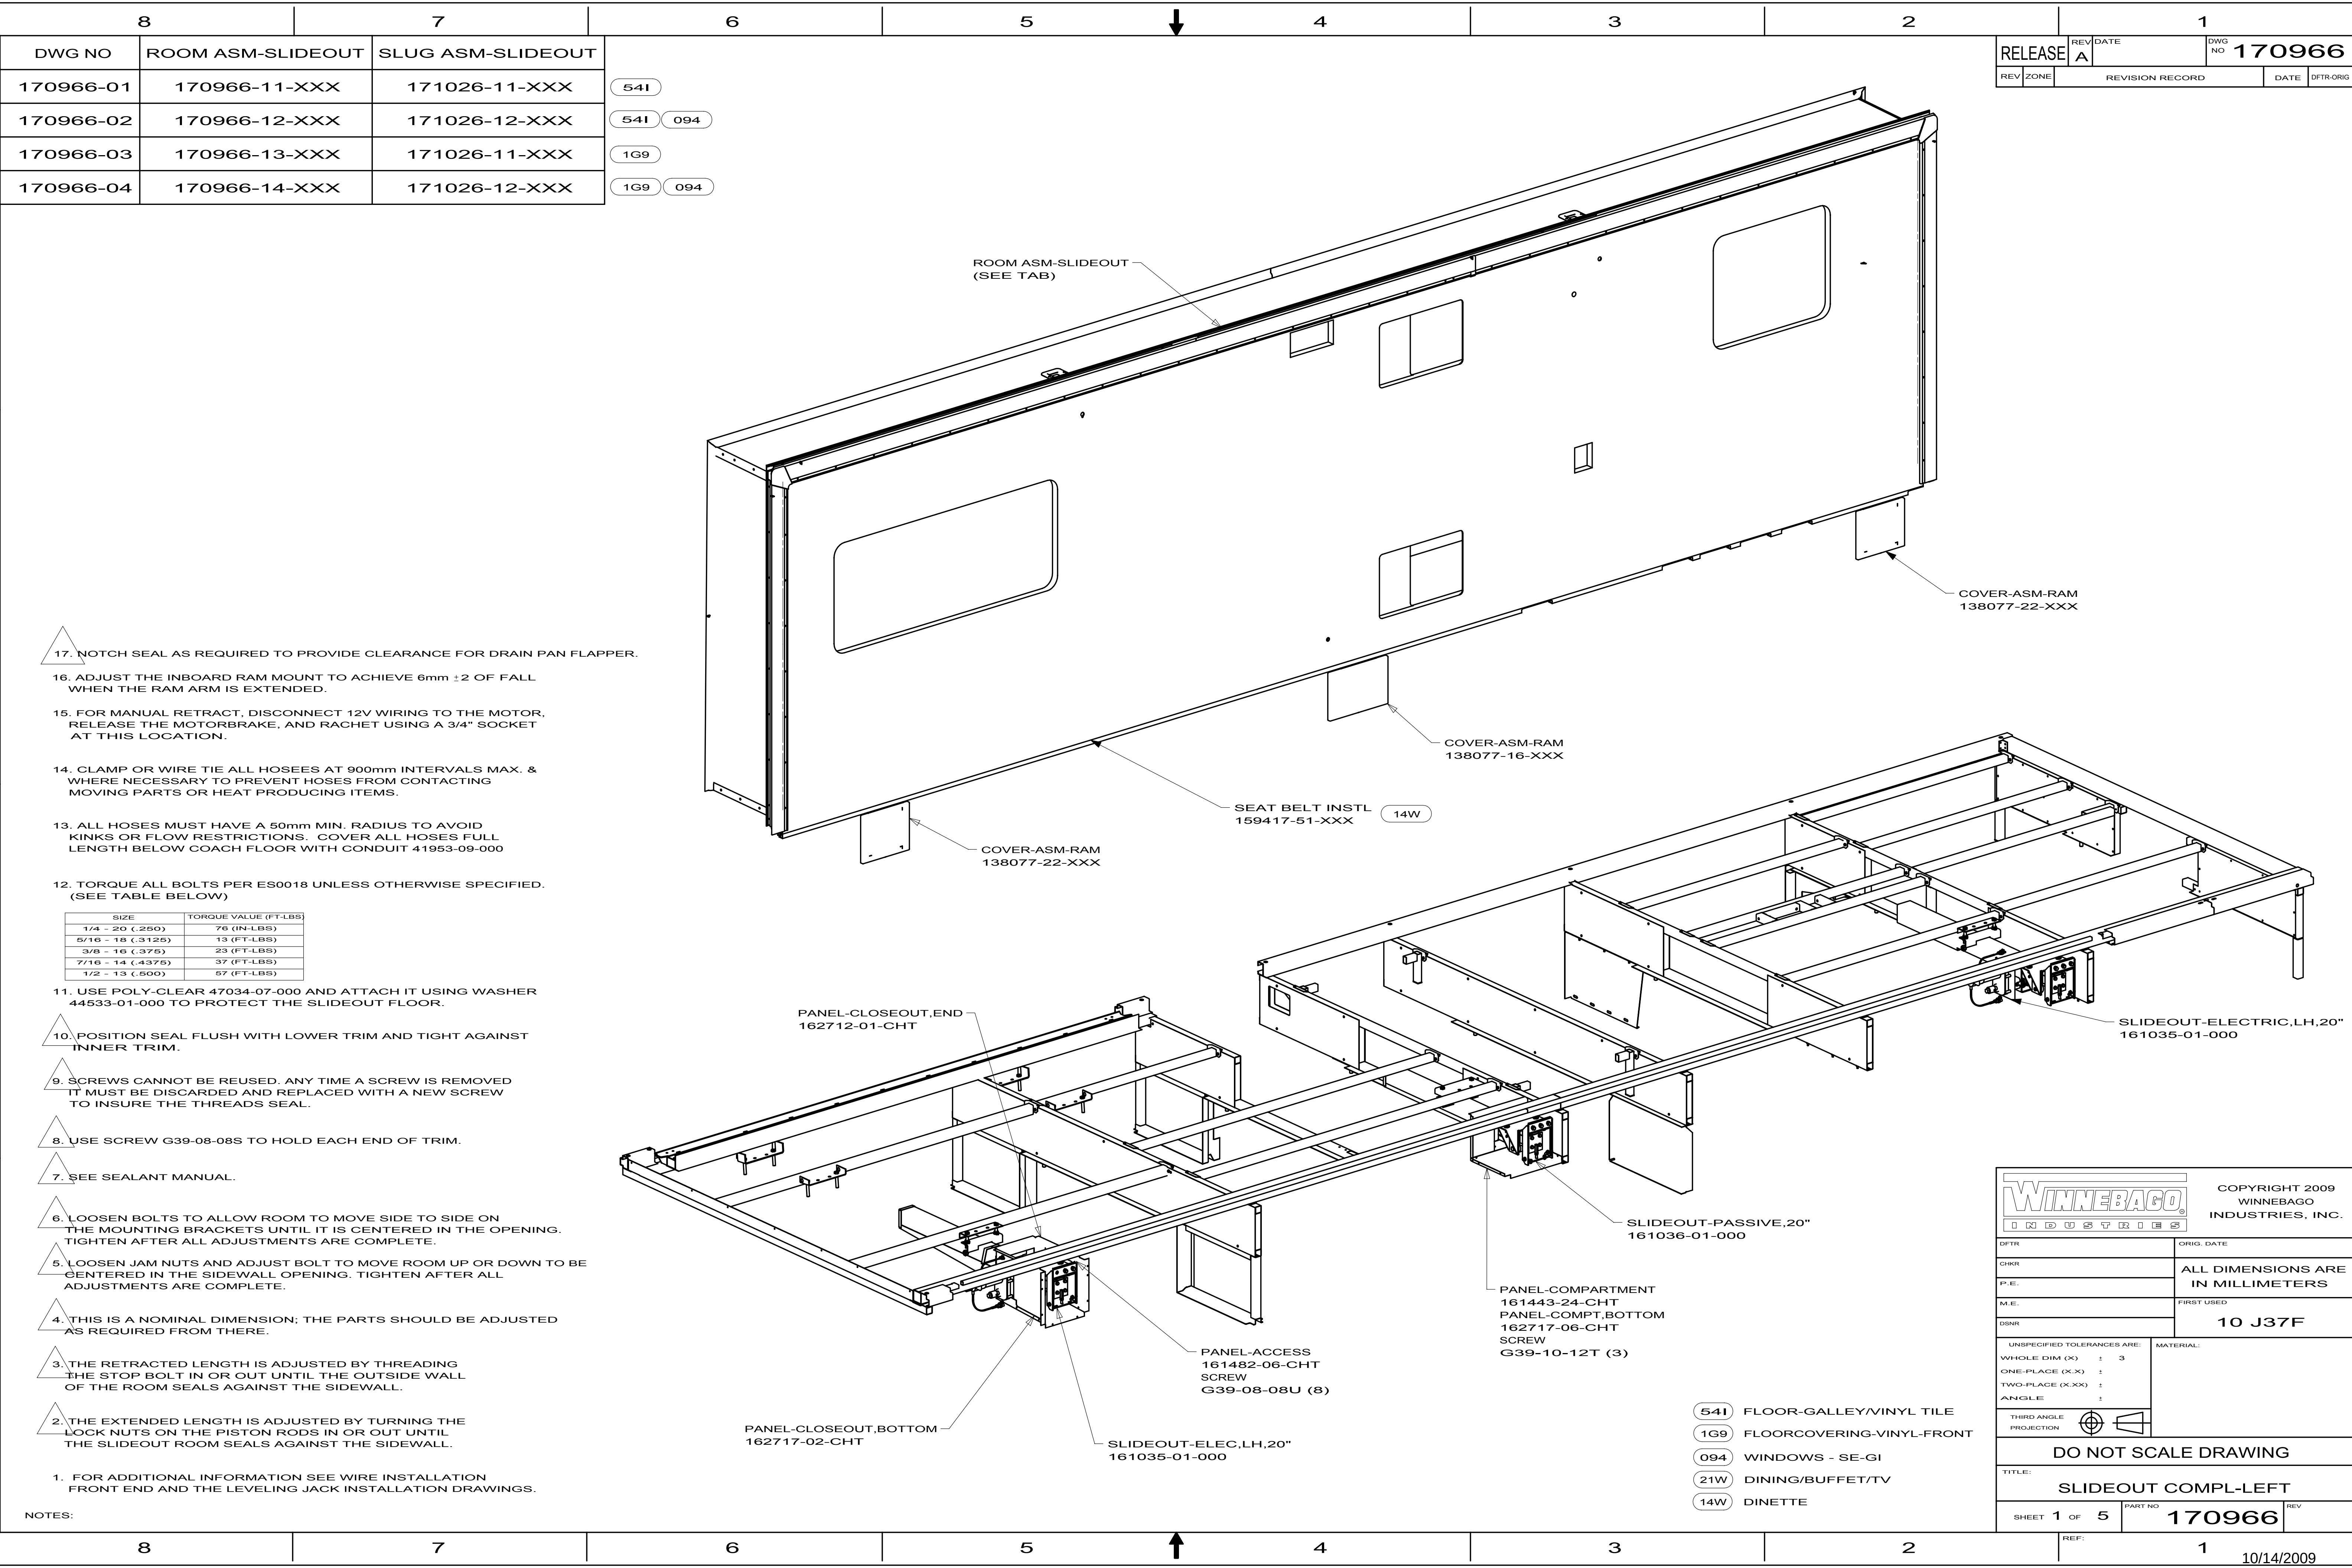

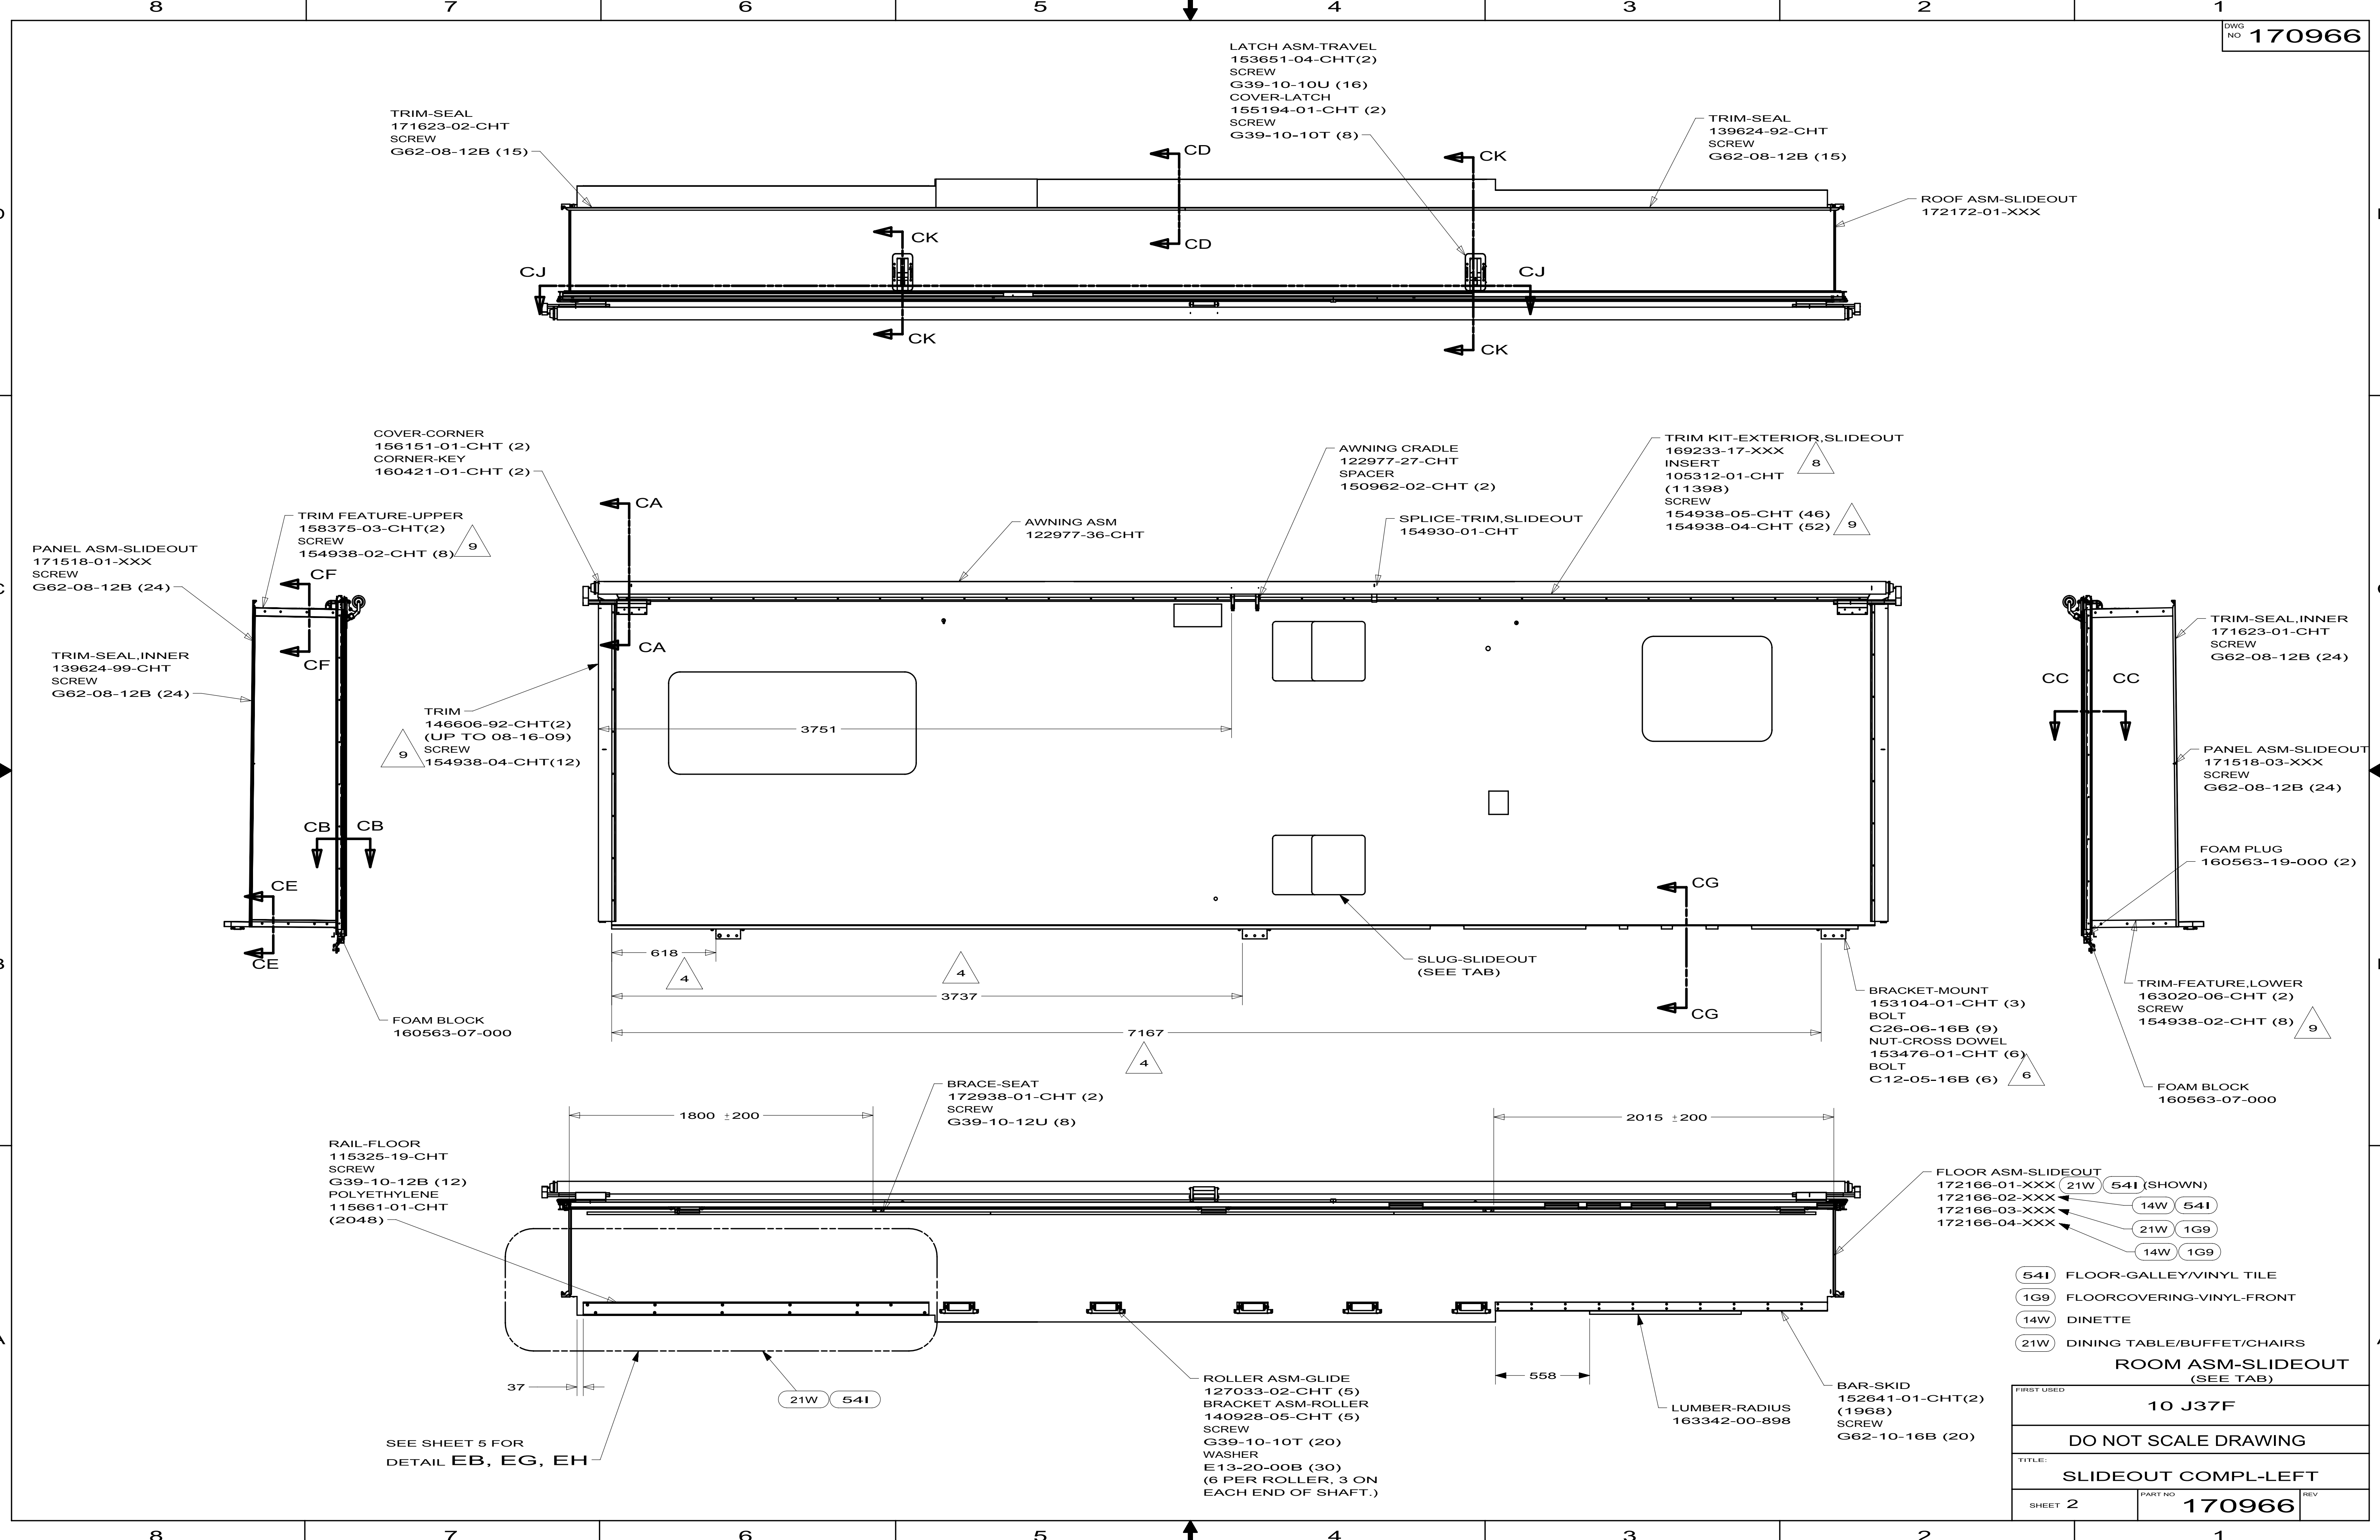

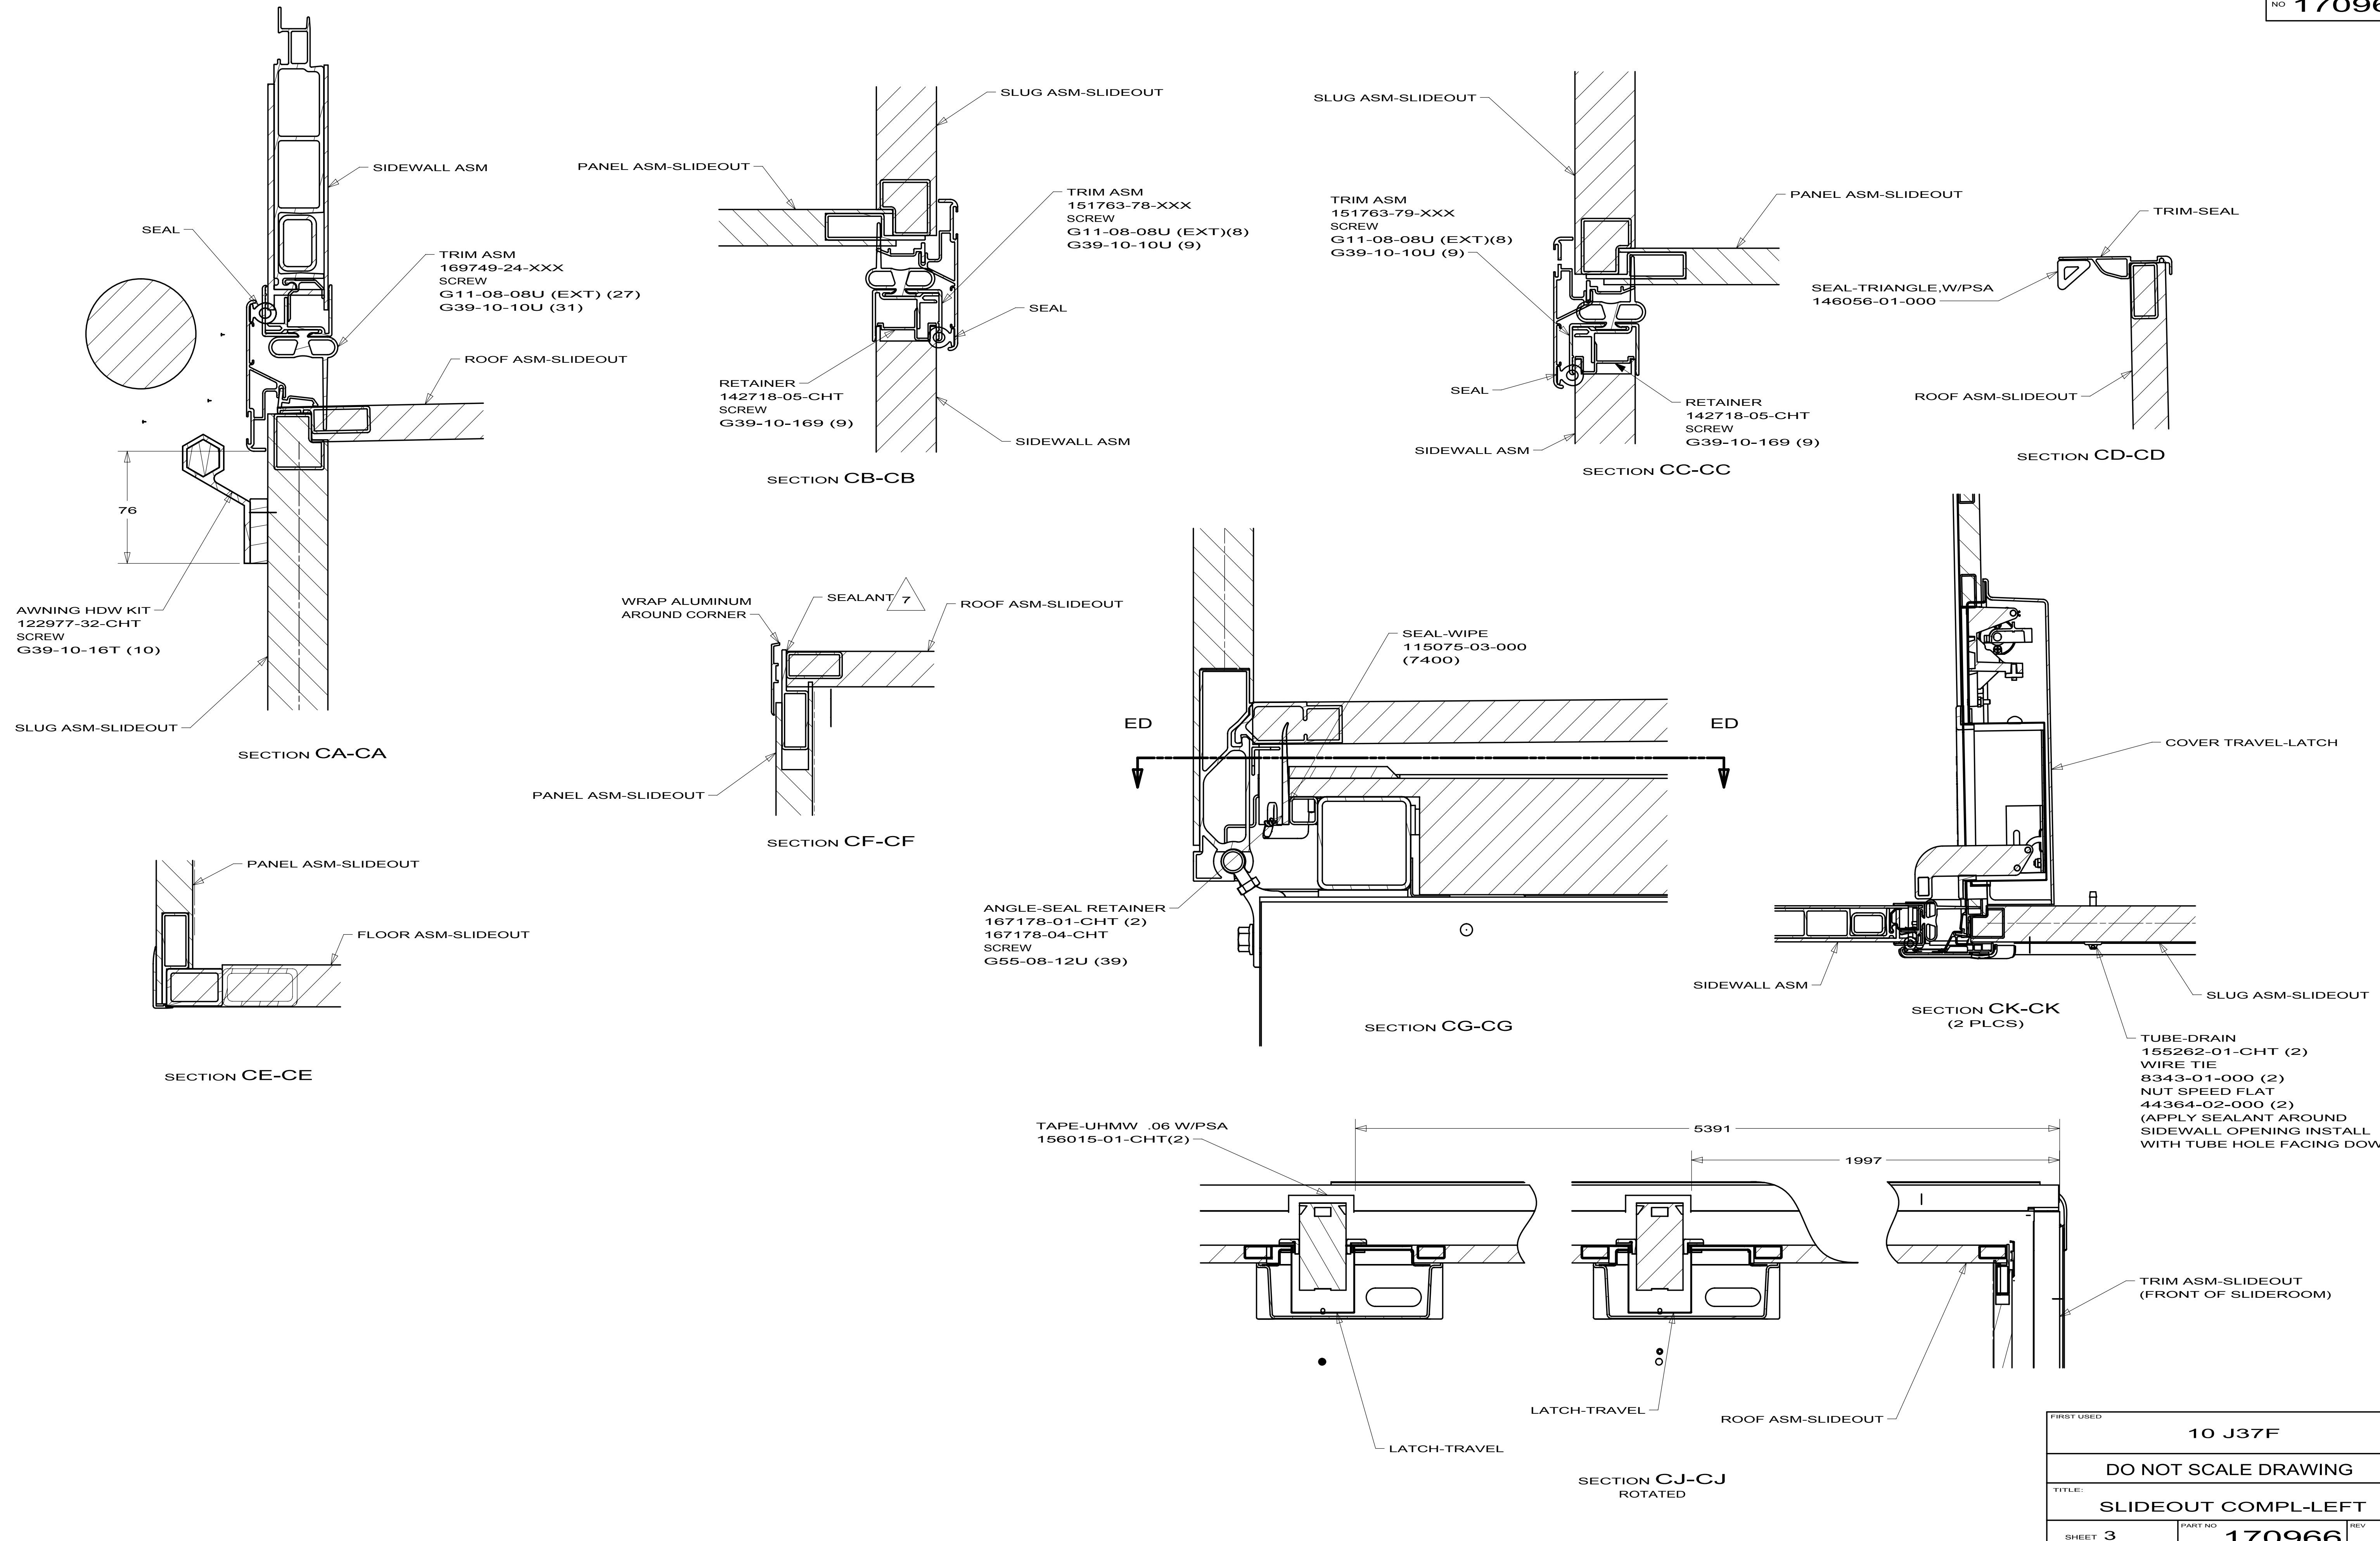

FIRST USED			10 J37F
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-LEFT			
SHEET 3	PART NO	170966	REV

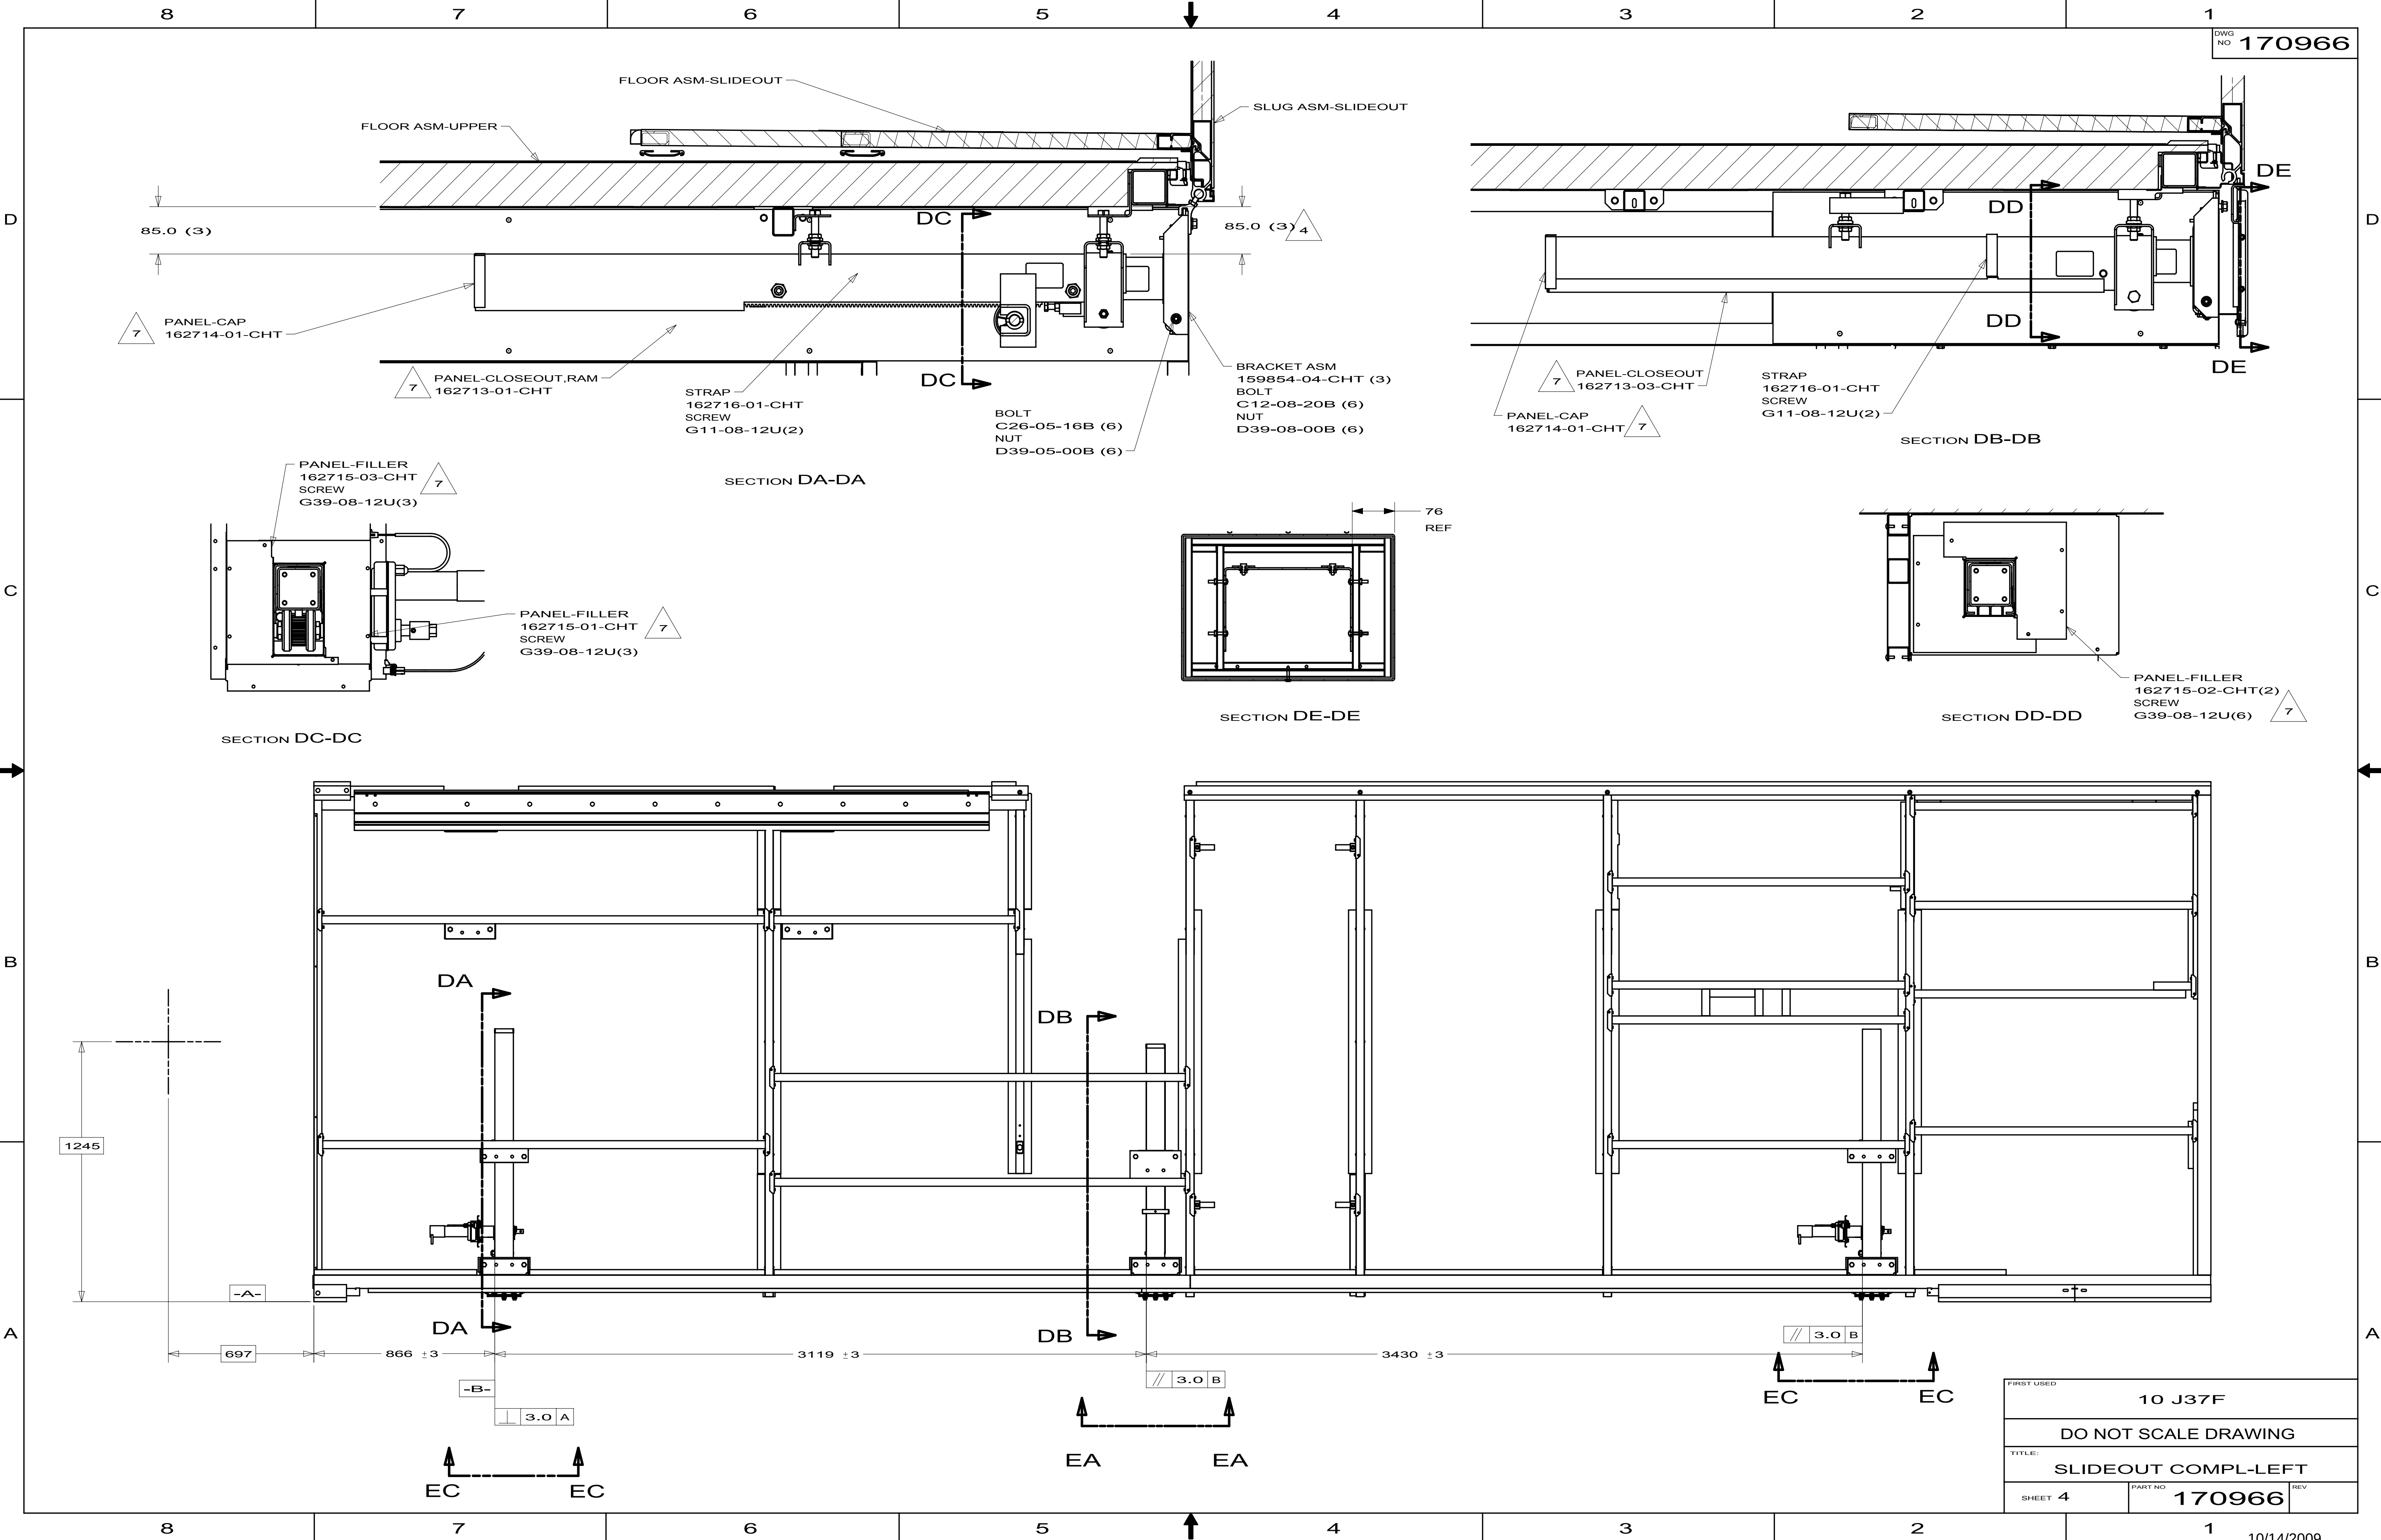

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-LEFT		
SHEET 4	PART NO 170966	REV

7615

SECTION ED-ED

DRAIN PAN-FLOOR,RH,SLIDEOUT
160471-01-CHT
SCREW
G39-08-16T (2)

LUMBER-BEVELED
76699-K2-007(3)

LUMBER-BEVELED
76699-K2-021

FLOOR ASM

DRAIN PAN-FLOOR,RH,SLIDEOUT
160471-02-CHT
SCREW
G39-08-16T

RAIL-FLOOR
115325-05-CHT (2)
SCREW
G39-10-12B (20)
POLYETHYLENE
115661-01-CHT (2)
(1850)

FLOOR ASM-SLIDEOUT
172166-02-XXX (REF)

ROLLER ASM-GLIDE
127033-02-CHT (4)
BRACKET ASM-ROLLER
140928-05-CHT (4)
SCREW
G39-10-10T (16)
WASHER
E13-20-00B (24)
(6 PER ROLLER, 3 ON
EACH END OF SHAFT.)

FLOOR ASM-SLIDEOUT
172166-03-XXX (REF)

ROLLER ASM-GLIDE
127033-02-CHT (4)
BRACKET ASM-ROLLER
140928-05-CHT (4)
SCREW
G39-10-10T (16)
WASHER
E13-20-00B (24)
(6 PER ROLLER, 3 ON
EACH END OF SHAFT.)

FLOOR ASM-SLIDEOUT
172166-04-XXX (REF)

SLIDEOUT RAM
COVER-RAM
BRACKET-SUPPORT
164199-01-CHT
BOLT
C12-04-10U (2)
NUT
D39-04-00U (2)
SCREW
G39-10-10U (2)

SECTION EE-EE
(3 PLACES)

DETAIL EB
14W 54I

DETAIL EG
21W 1G9

DETAIL EH
14W 1G9

LUMBER-RADIUS
163342-02-070

LUMBER-RADIUS
163342-00-338

LUMBER-RADIUS
163342-02-070

LUMBER-RADIUS
163342-00-338

BRACKET-COVER, RAM
160519-03-CHT
SCREW
G39-10-10U (8)

BOLT
C12-04-10U (2)
NUT
D39-04-00U (2)

FRAME ASM-RAM COVER
160523-01-XXX
TAPE
76322-25-000 (500mm)

BRACKET-COVER, RAM
160519-02-CHT
SCREW
G19-10-20B (4)
NUT
D24-10-00B (4)

SCREW-PAN, HEAD
G55-08-16U

SECTION EA-EA

BRACKET-COVER, RAM
160519-06-CHT
SCREW
G39-10-10U (8)

BOLT
C12-04-10U (2)
NUT
D39-04-00U (2)

FRAME ASM-RAM COVER
160523-04-XXX
TAPE
76322-25-000 (500mm)

BRACKET-COVER, RAM
160519-05-CHT
SCREW
G19-10-20B (4)
NUT
D24-10-00B (4)

SCREW-PAN, HEAD
G55-08-16U

SECTION EC-EC
(2 PLACES)

SCREW-PAN, HEAD
G39-10-08T(5)
(USED IN EACH ACCESSIBLE
CORNER TO LOCK BOTH
FRAMES TOGETHER)

DETAIL EF


54I FLOOR-GALLEY/VINYL TILE
1G9 FLOORCOVERING-VINYL-FRONT
14W DINETTE
21W DINING/BUFFET/TV

FIRST USED			10 J37F
DO NOT SCALE DRAWING			
TITLE:			SLIDEOUT COMPL-LEFT
SHEET 5	PART NO	170966	REV

8		7	
DWG NO	ROOM ASM-SLIDEOUT	SLUG ASM-SLIDEOUT	
170967-01	170967-11-XXX	171027-11-XXX	
170967-02	170967-12-XXX	171027-13-XXX	

094

		1									
RELEASE		REV A	DATE				DWG NO	170967			
REV	ZONE	REVISION RECORD						DATE		DFT-ORIG	

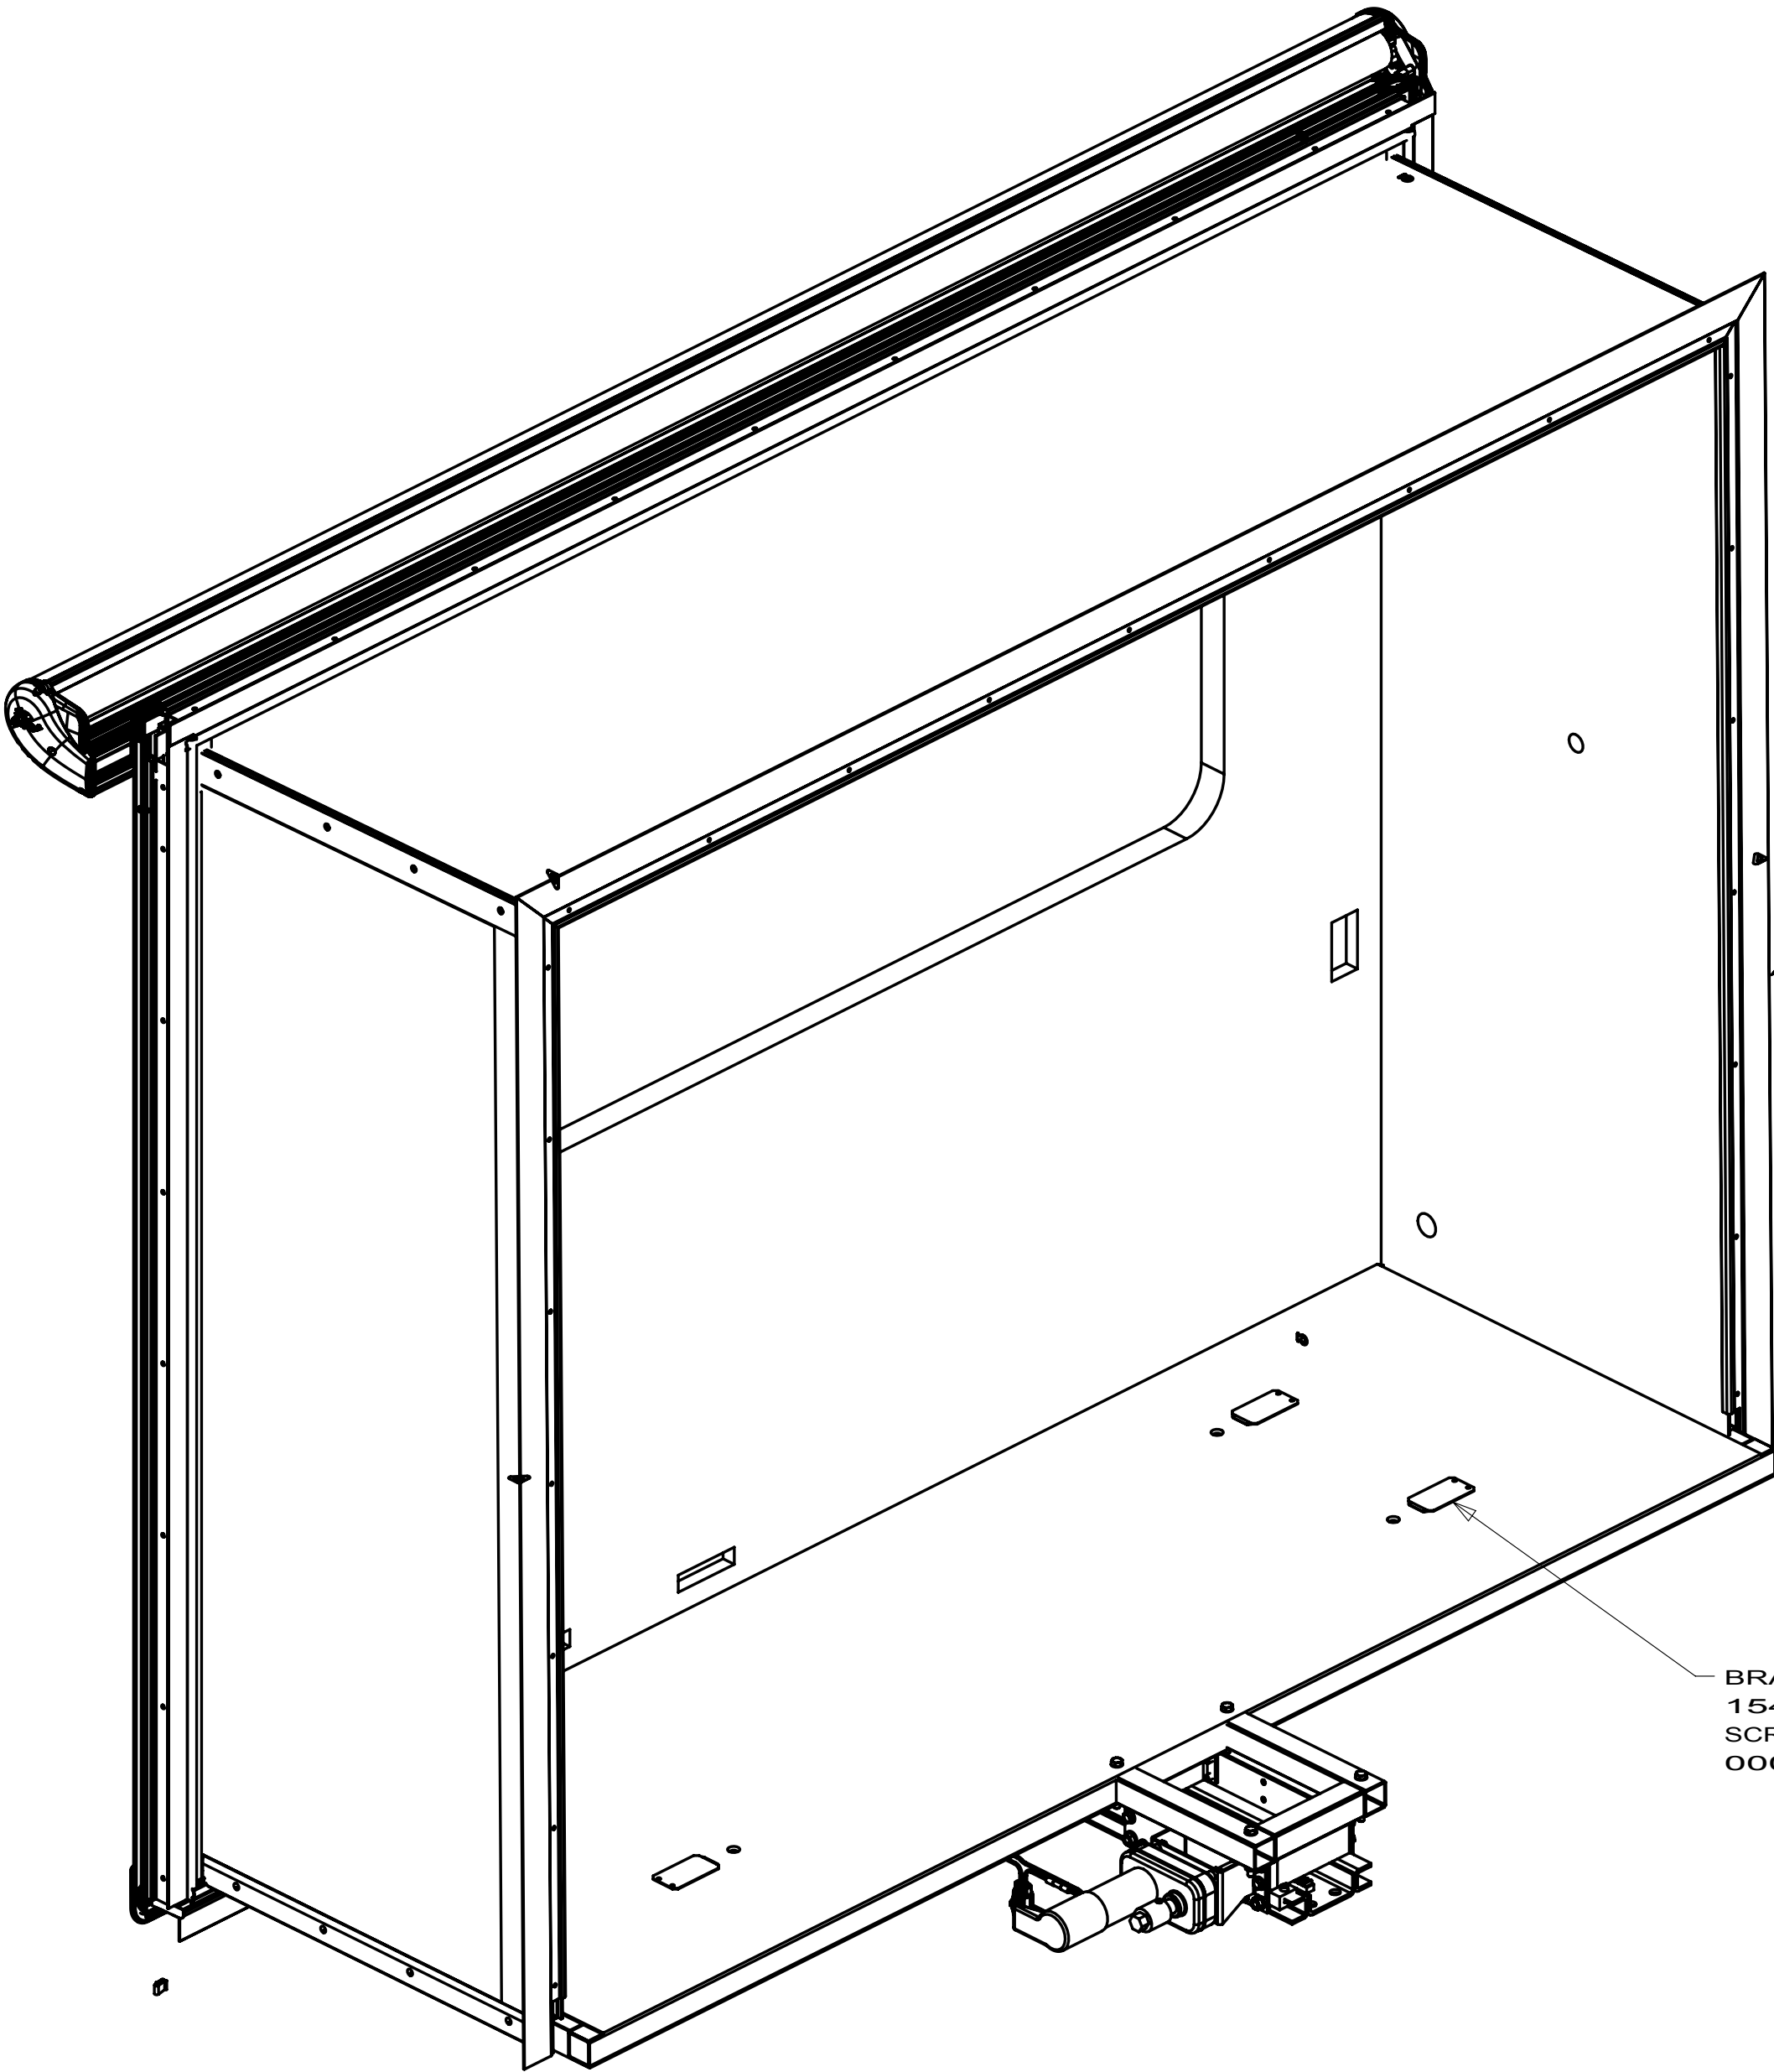

15. TORQUE TO 30 FT-lb.

14. ADJUST BUMPER HEIGHT SO THAT BED WILL OPERATE SMOOTHLY

13. ADJUST SO THAT BED FRAME IS FLAT.

12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED. (SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	76 (IN-LBS)
5/16 - 18 (.3125)	13 (FT-LBS)
3/8 - 16 (.375)	23 (FT-LBS)
7/16 - 14 (.4375)	37 (FT-LBS)
1/2 - 13 (.500)	57 (FT-LBS)

11. USE POLY-CLEAR 47034-07-000 AND ATTACH IT USING WASHER 44533-01-000 TO PROTECT THE SLIDEOUT FLOOR.

10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST INNER TRIM.

9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.

8. USE SCREW G39-08-08S TO HOLD EACH END OF TRIM.

7. SEE SEALANT MANUAL.

6. LOOSEN NUTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

5. ADJUST NUTS TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED AS REQUIRED FROM THERE.

3. THE RETRACTED LENGTH IS ADJUSTED UNTIL THE OUTSIDE TRIM OF THE ROOM SEALS AGAINST THE OUTSIDE OF THE SIDEWALL.

2. THE EXTENDED LENGTH IS ADJUSTED UNTIL THE INSIDE TRIM OF THE ROOM SEALS AGAINST THE INSIDE OF THE SIDEWALL.

1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:

23B FRAME ASM-SLIDEOUT,REAR
169620-09-CHT(UP TO 09-27-09)
23B 169620-19-CHT(AFTER 09-28-09)
23A 169620-19-CHT
SCREW
000G39-10-12U (4)






SLIDEOUT-HYD,PAD
128599-03-000 (4)
SUPPORT ASM-ROLLER
126313-02-CHT (4)
BOLT
000C26-06-20B (4)

SLIDEOUT MECHANISM
170306-01-000

094 WINDOWS - SE-GI


93A EXTERIOR PAINT-CDI

WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHKR			
P.E.			
M.E.	FIRST USED		
DSNR	10 J37F		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-REAR,RH			
SHEET 1 OF 4	PART NO 170967	REV	
REF:		1	

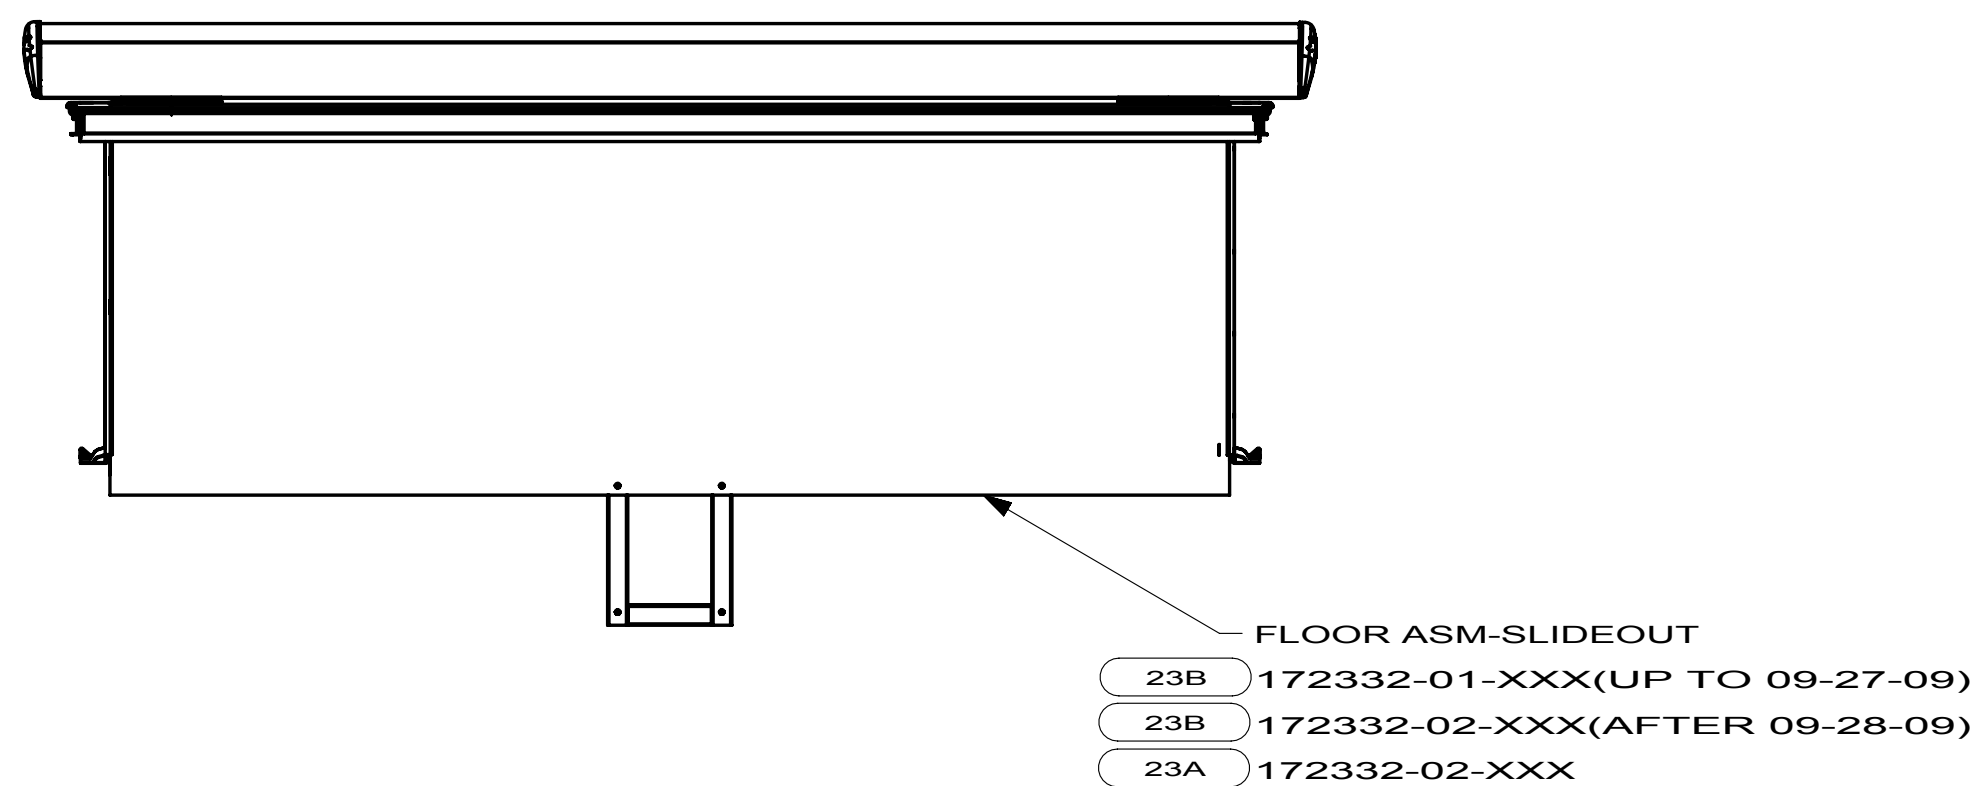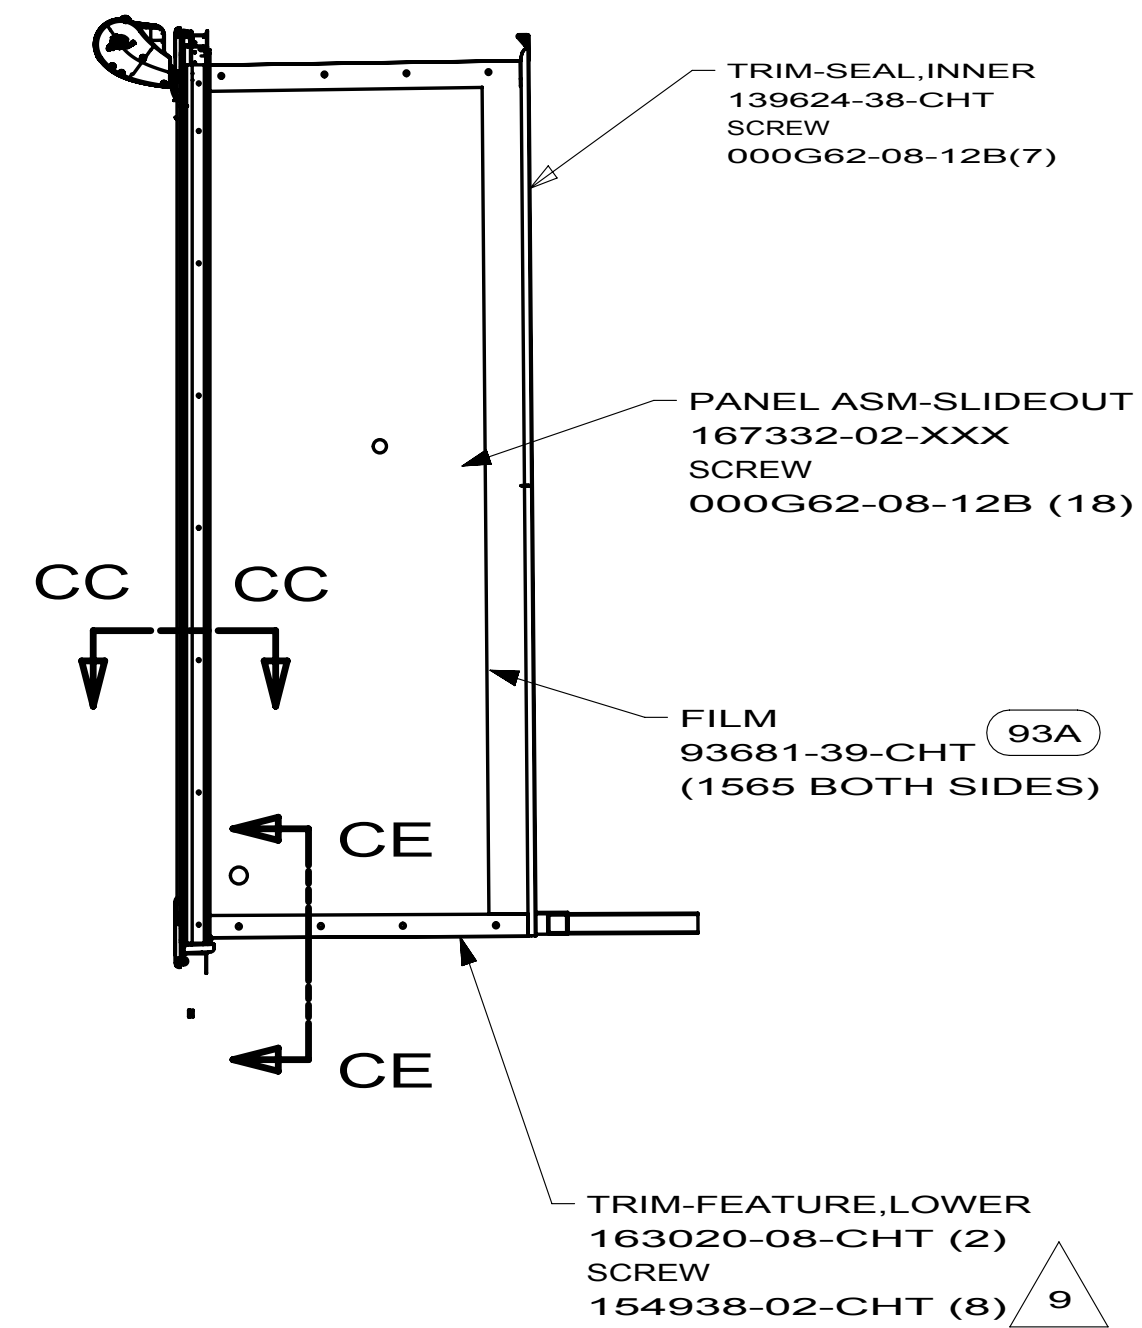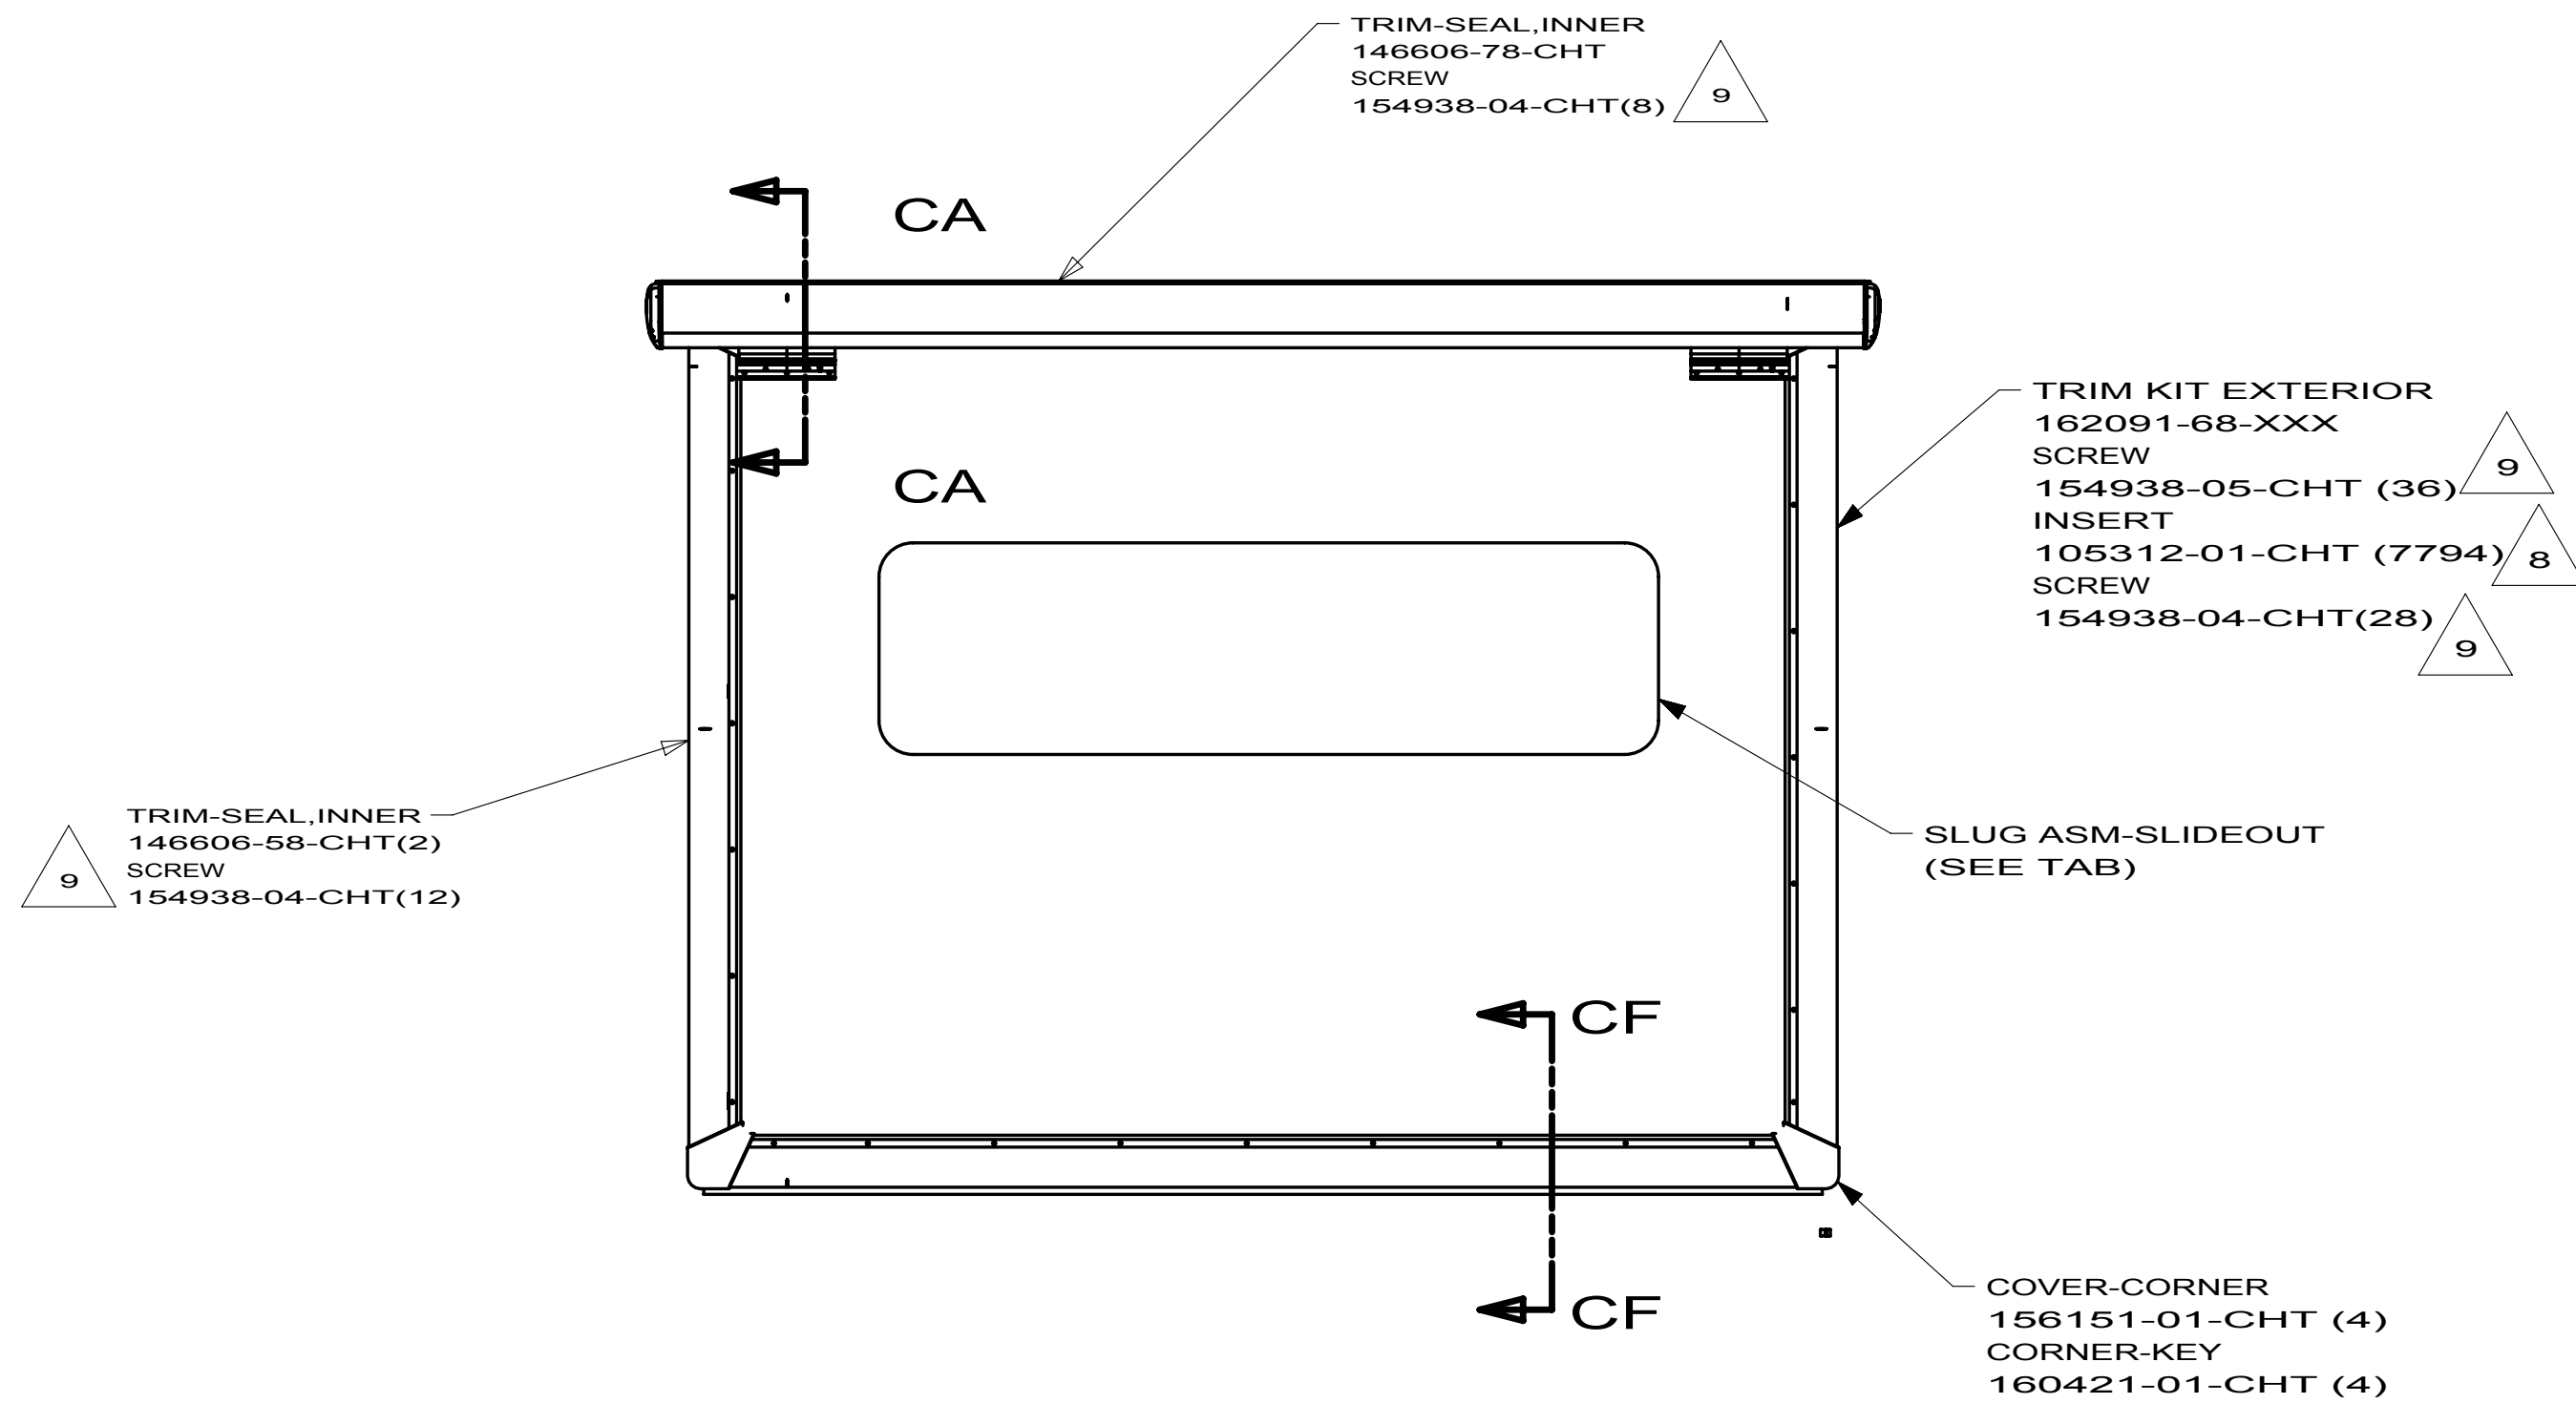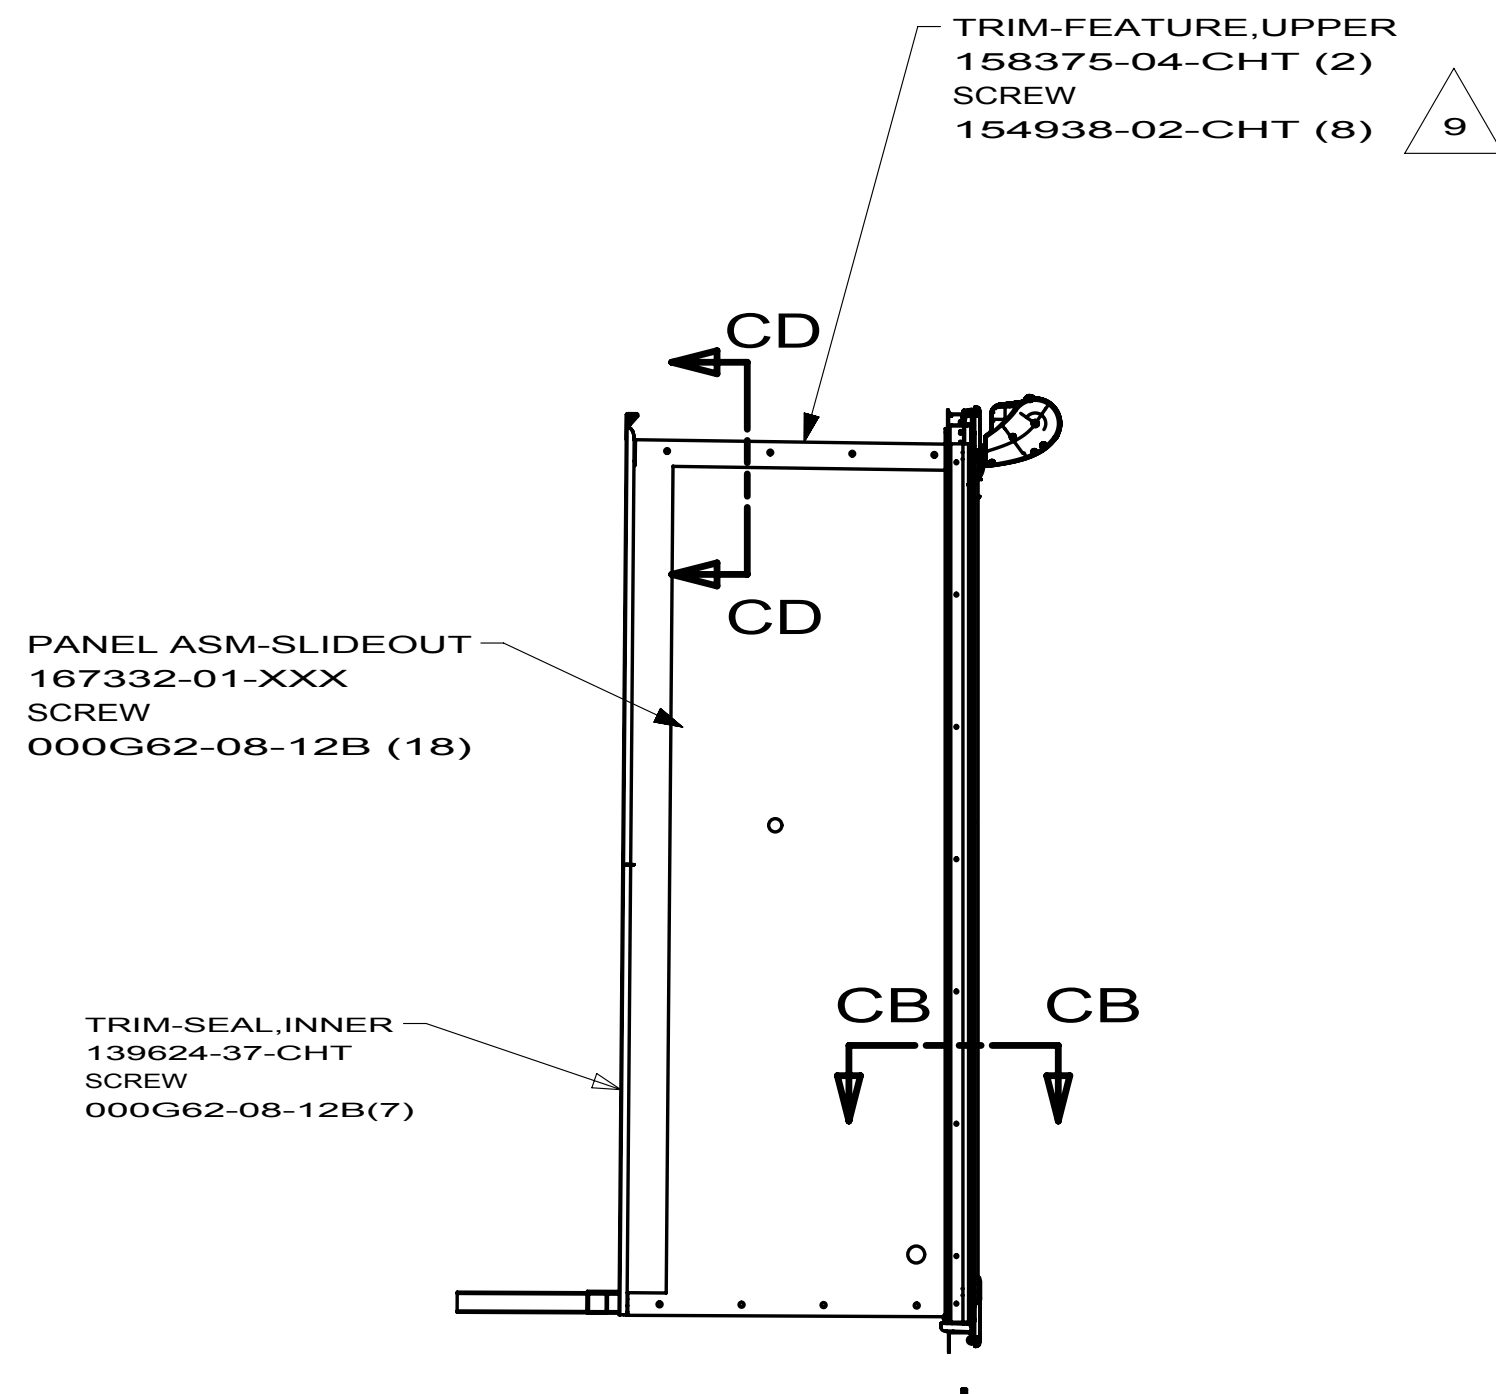
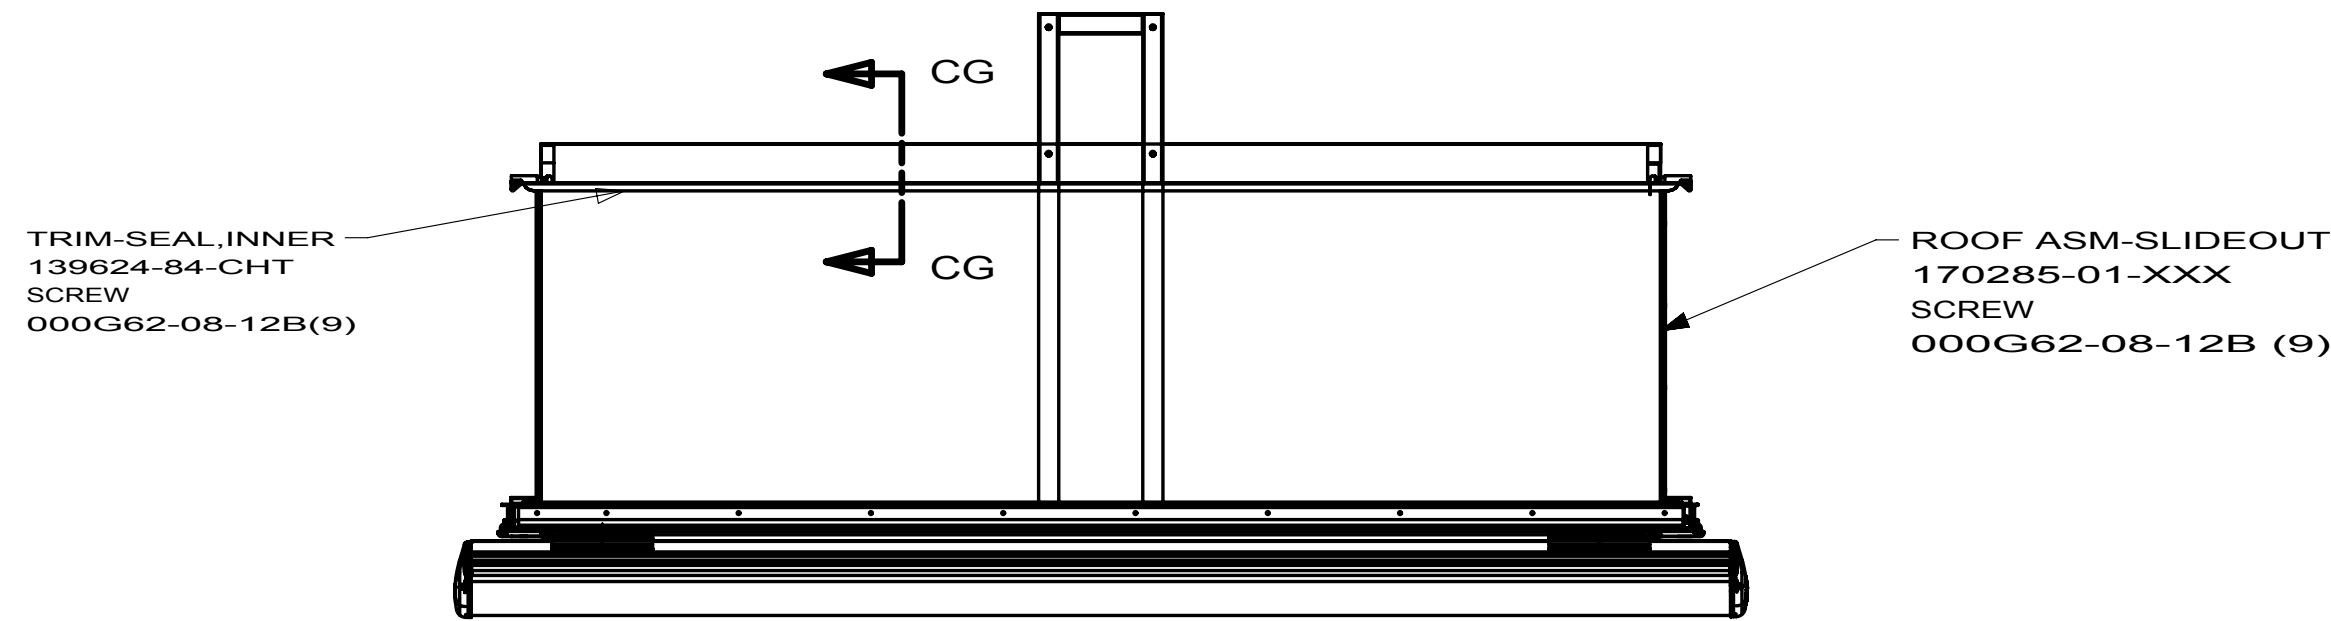


ROOM ASM-SLIDEOUT
(SEE TAB)

FIRST USED			10 J37F
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-REAR,RH			
SHEET 2	PART NO	170967	REV



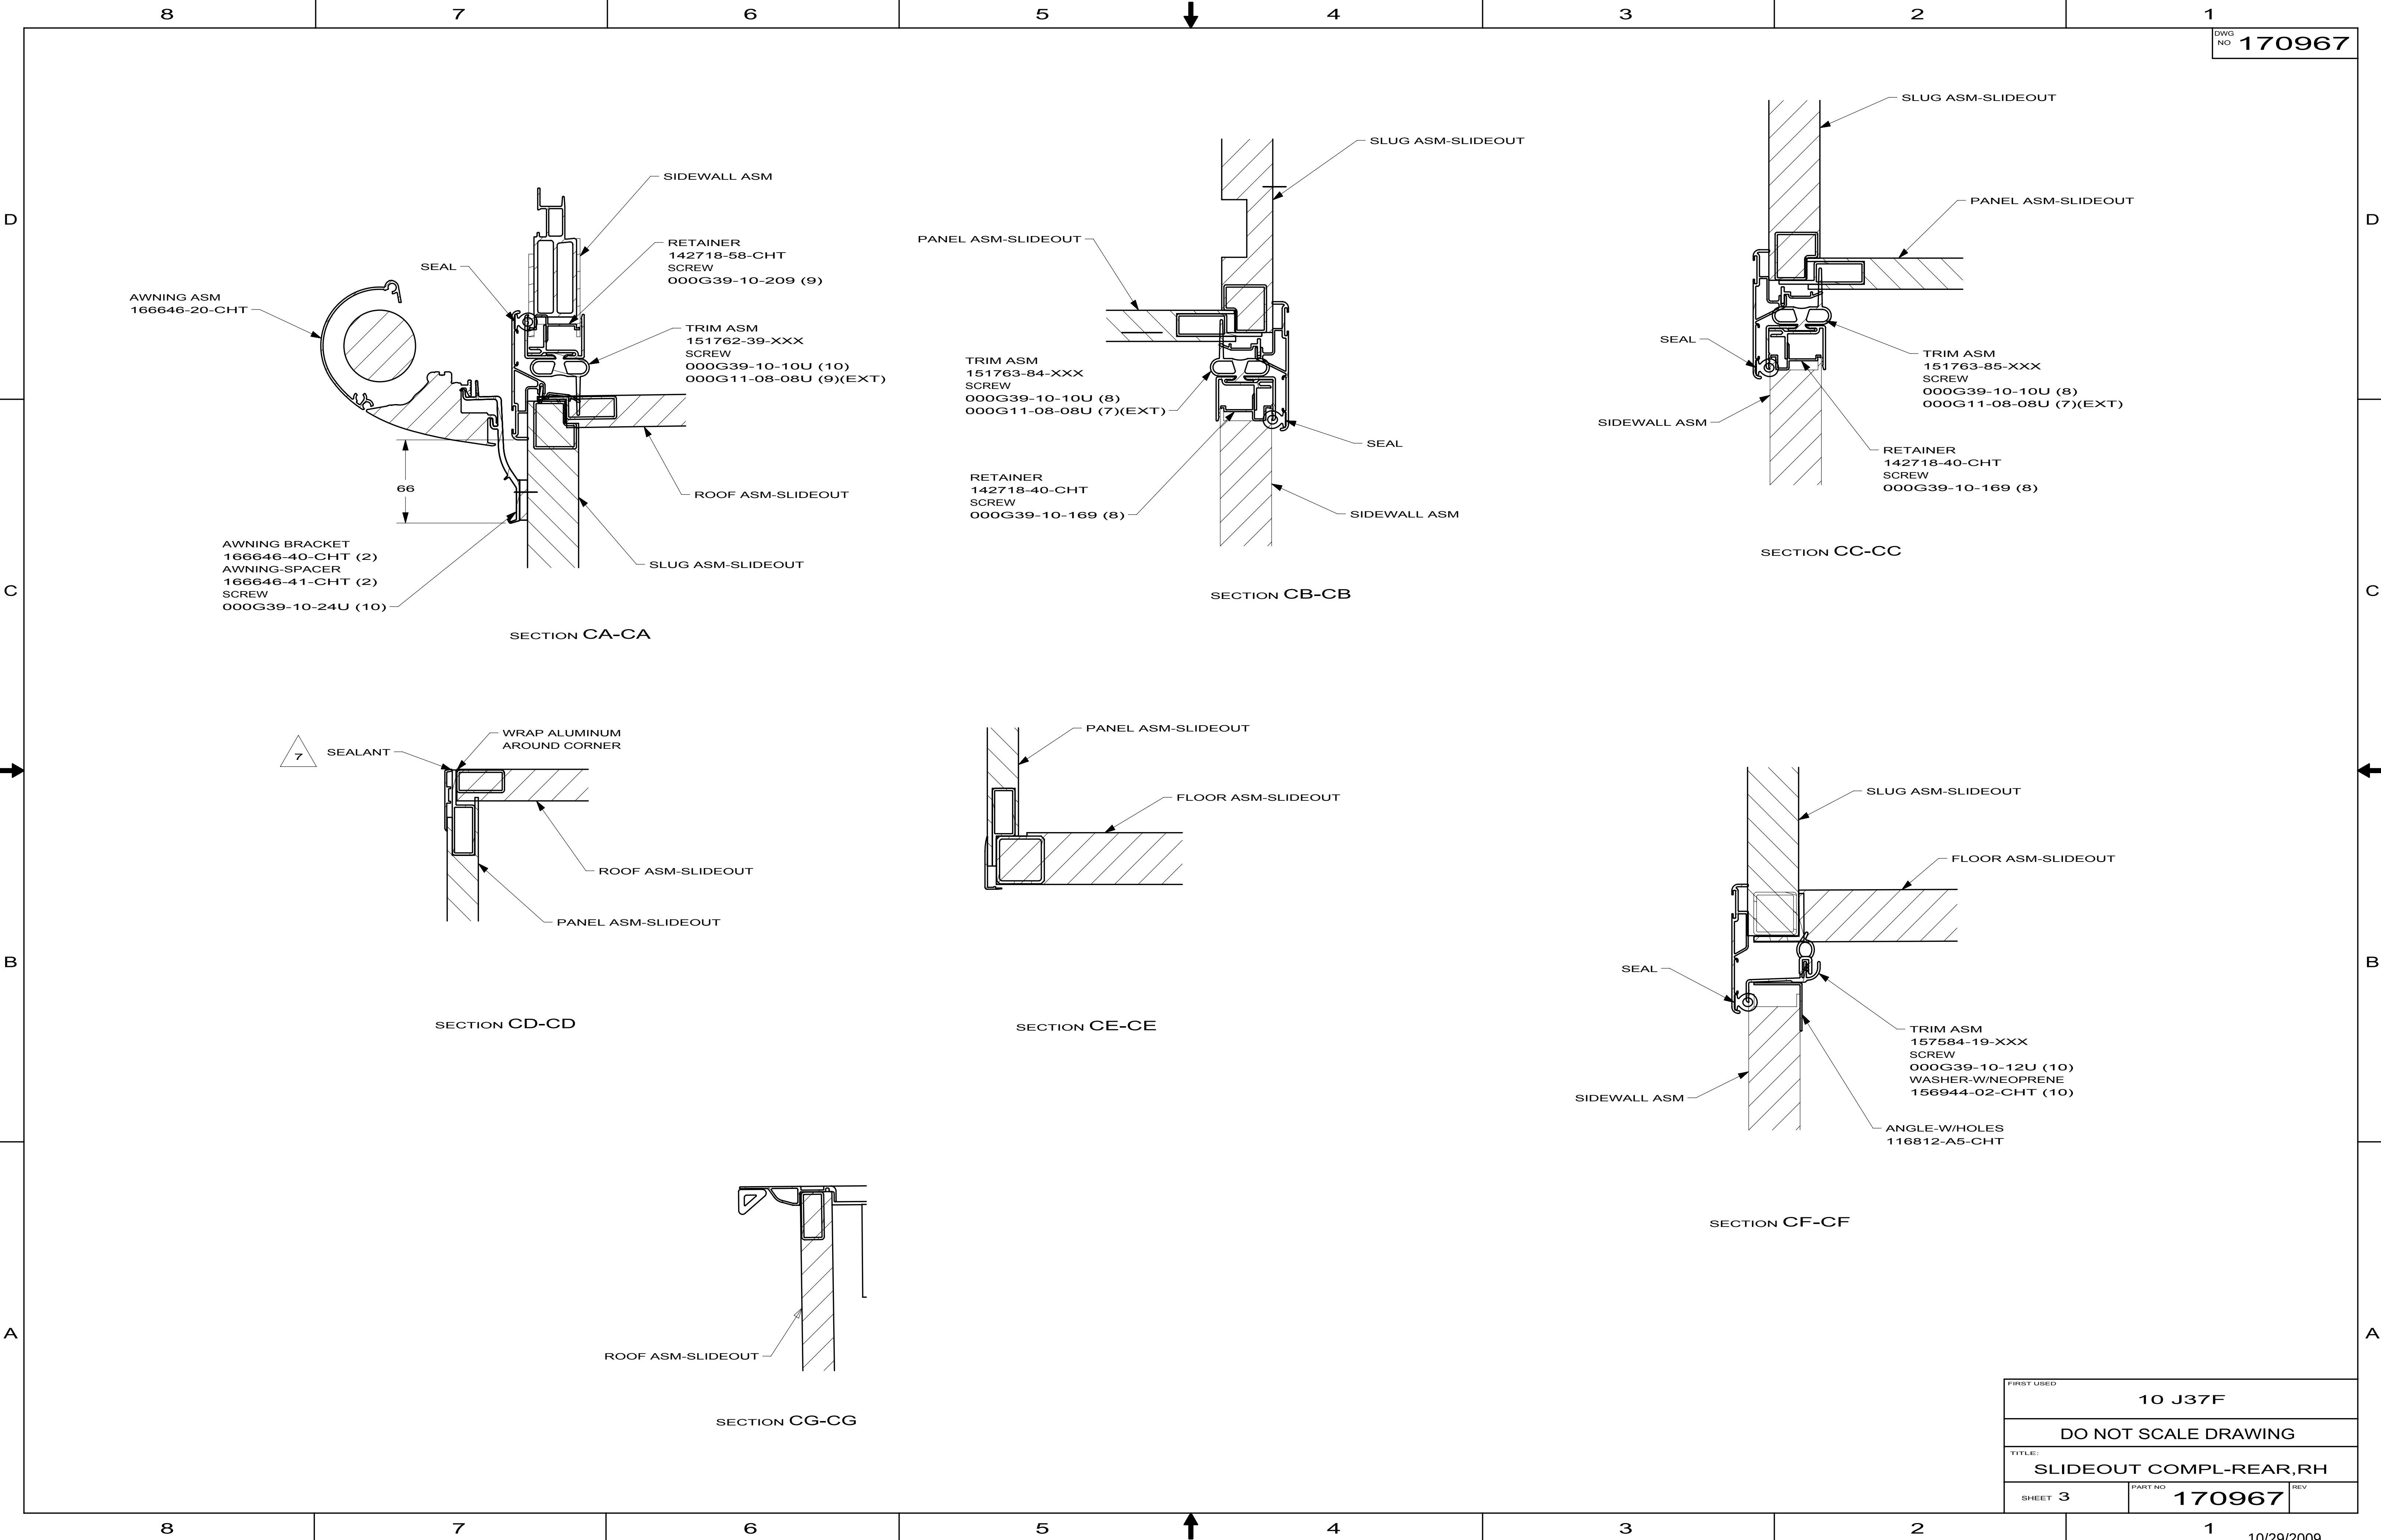


FIRST USED			10 J37F
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-REAR,RH			
SHEET 3	PART NO	170967	REV


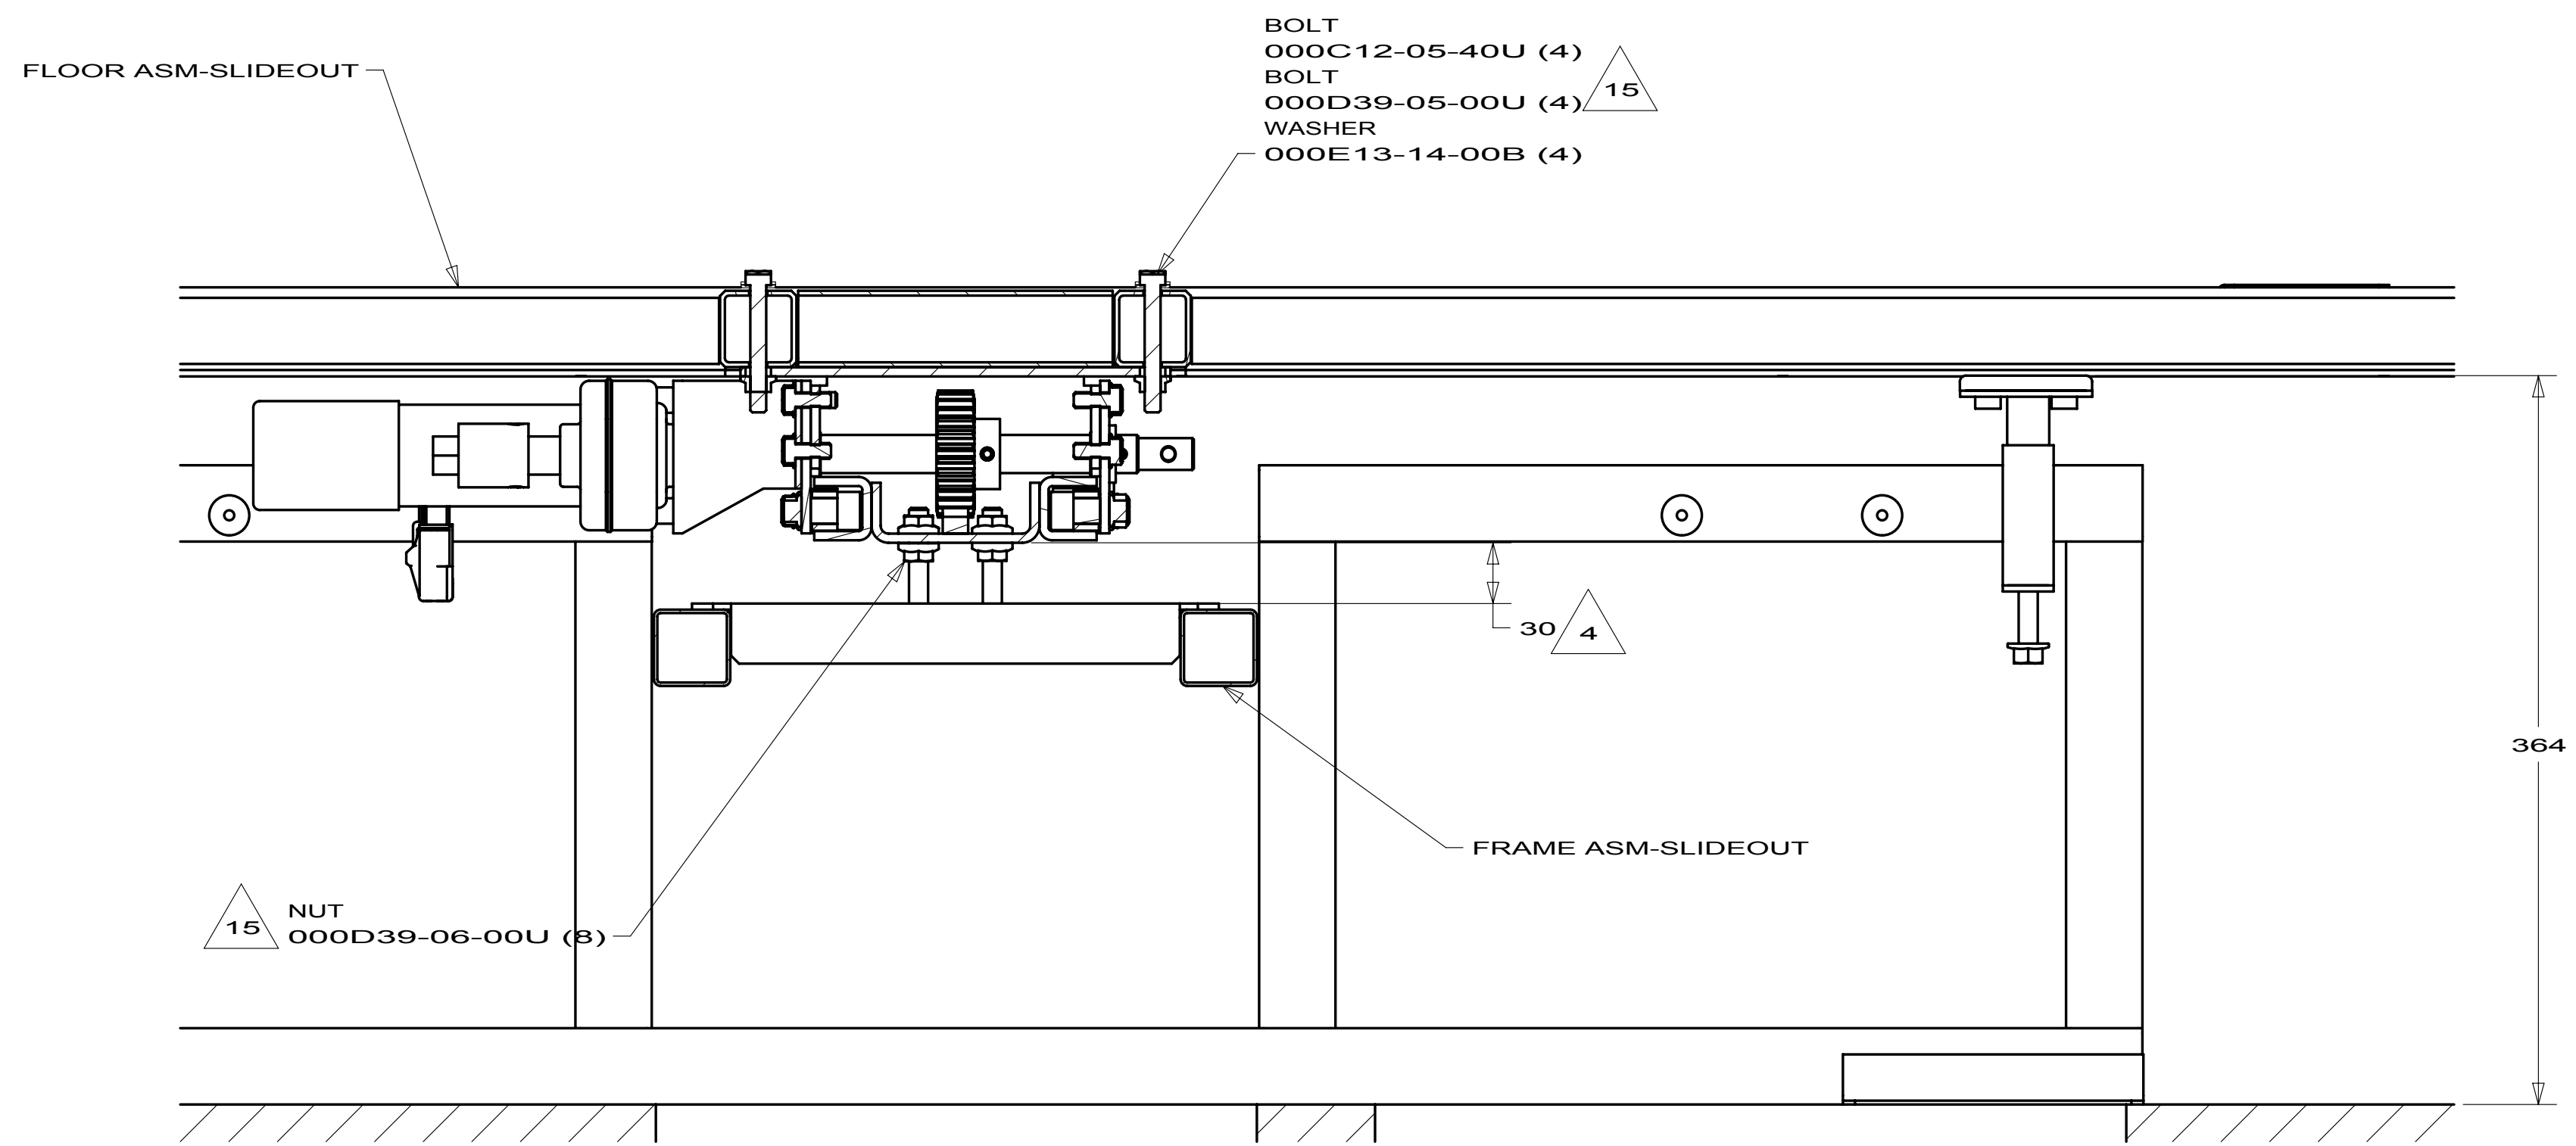
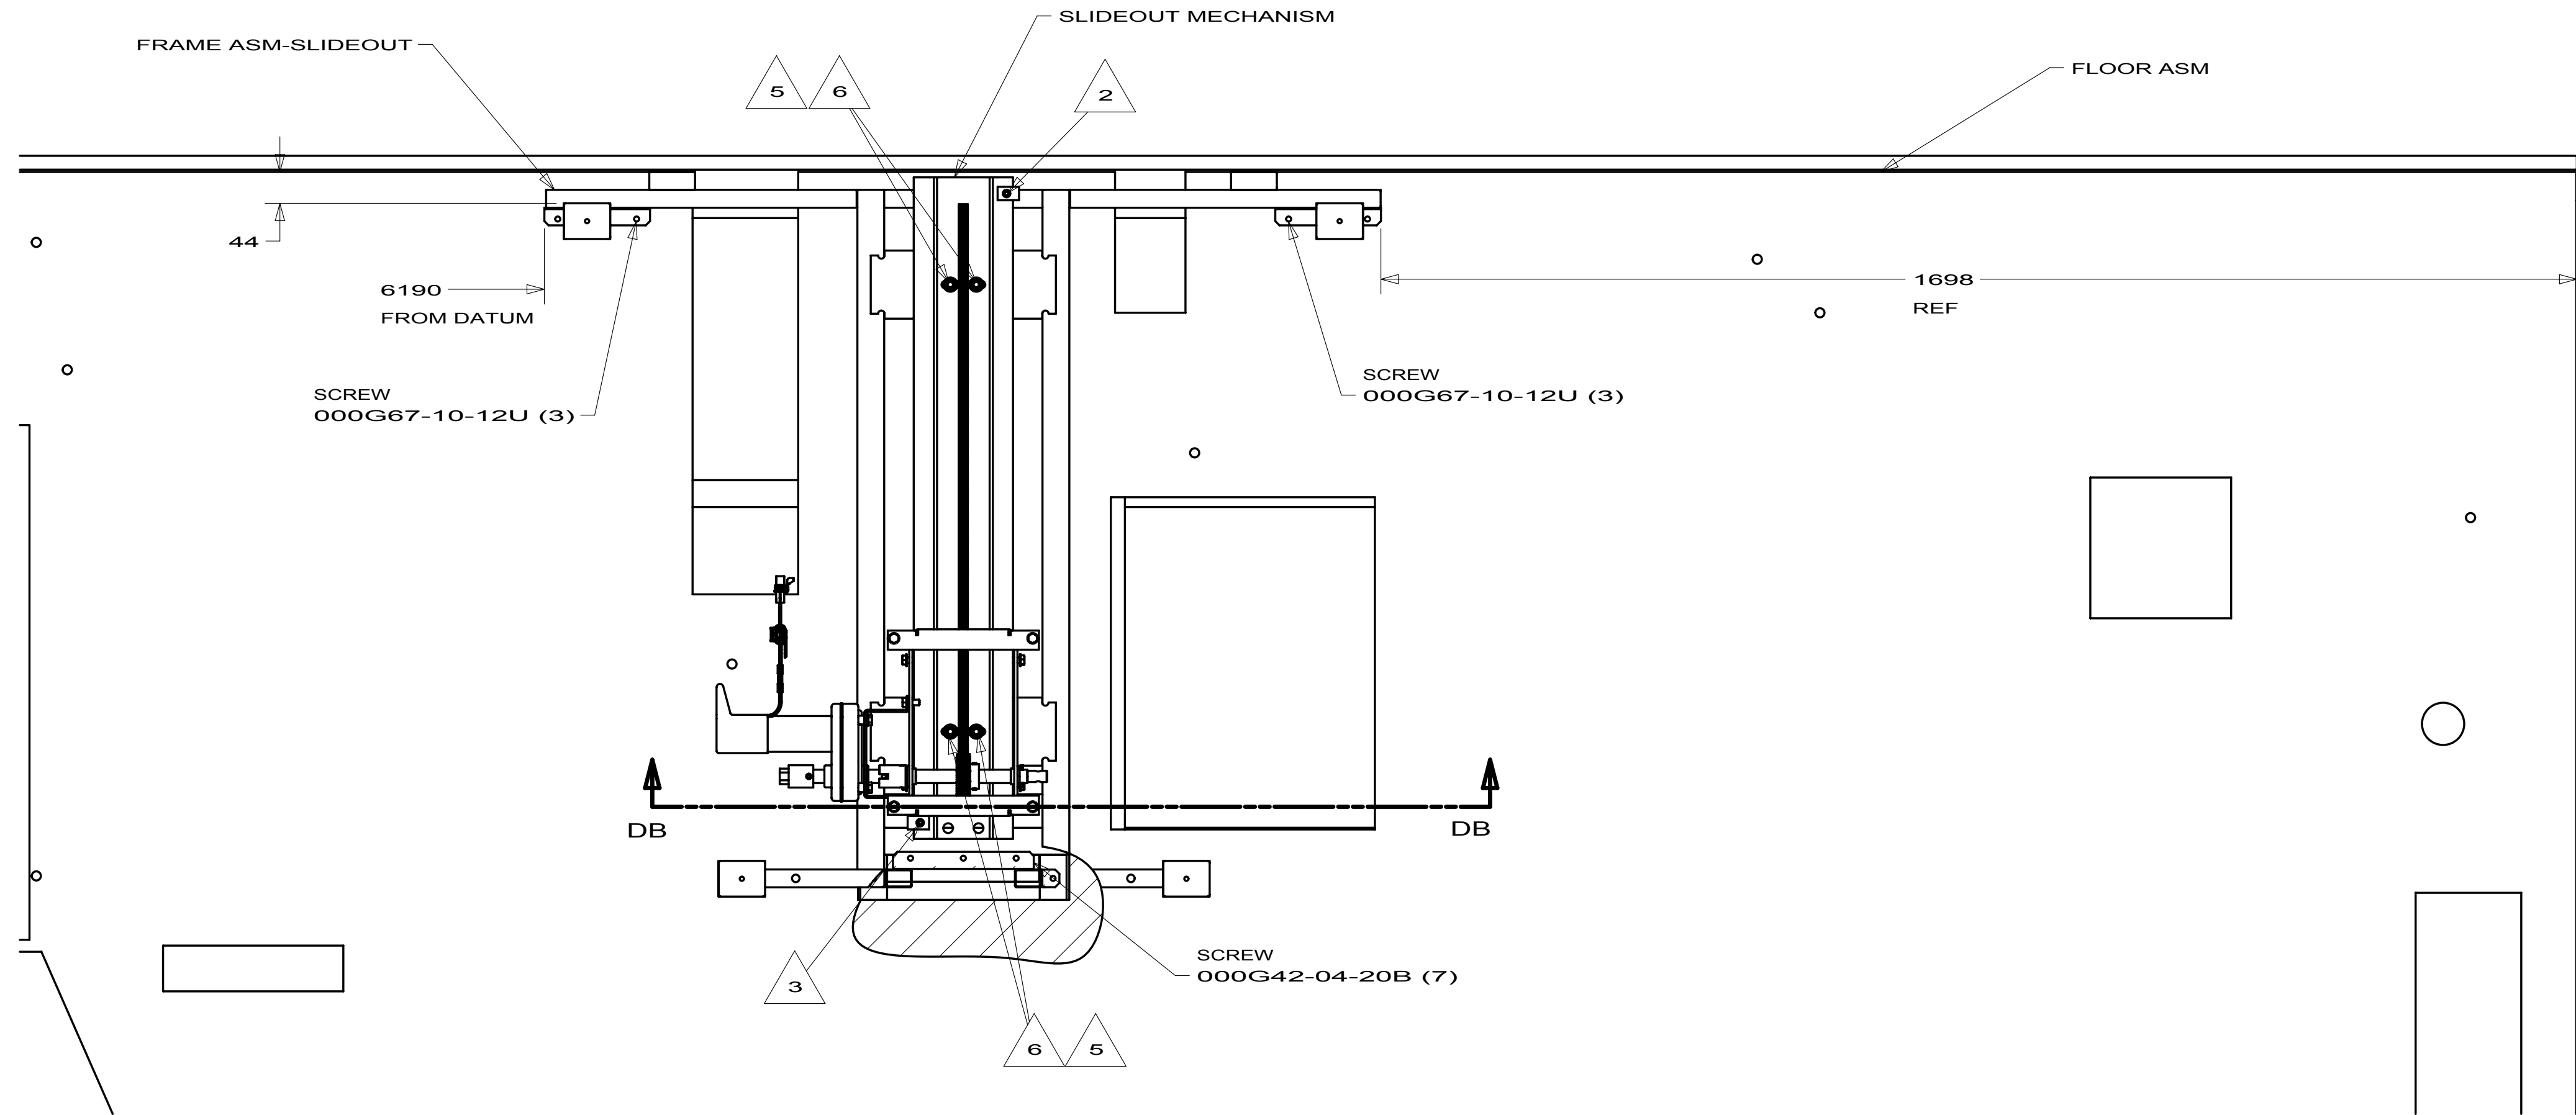


SECTION DB-DB

FIRST USED			10 J37F
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-REAR,RH			
SHEET 4	PART NO	170967	REV

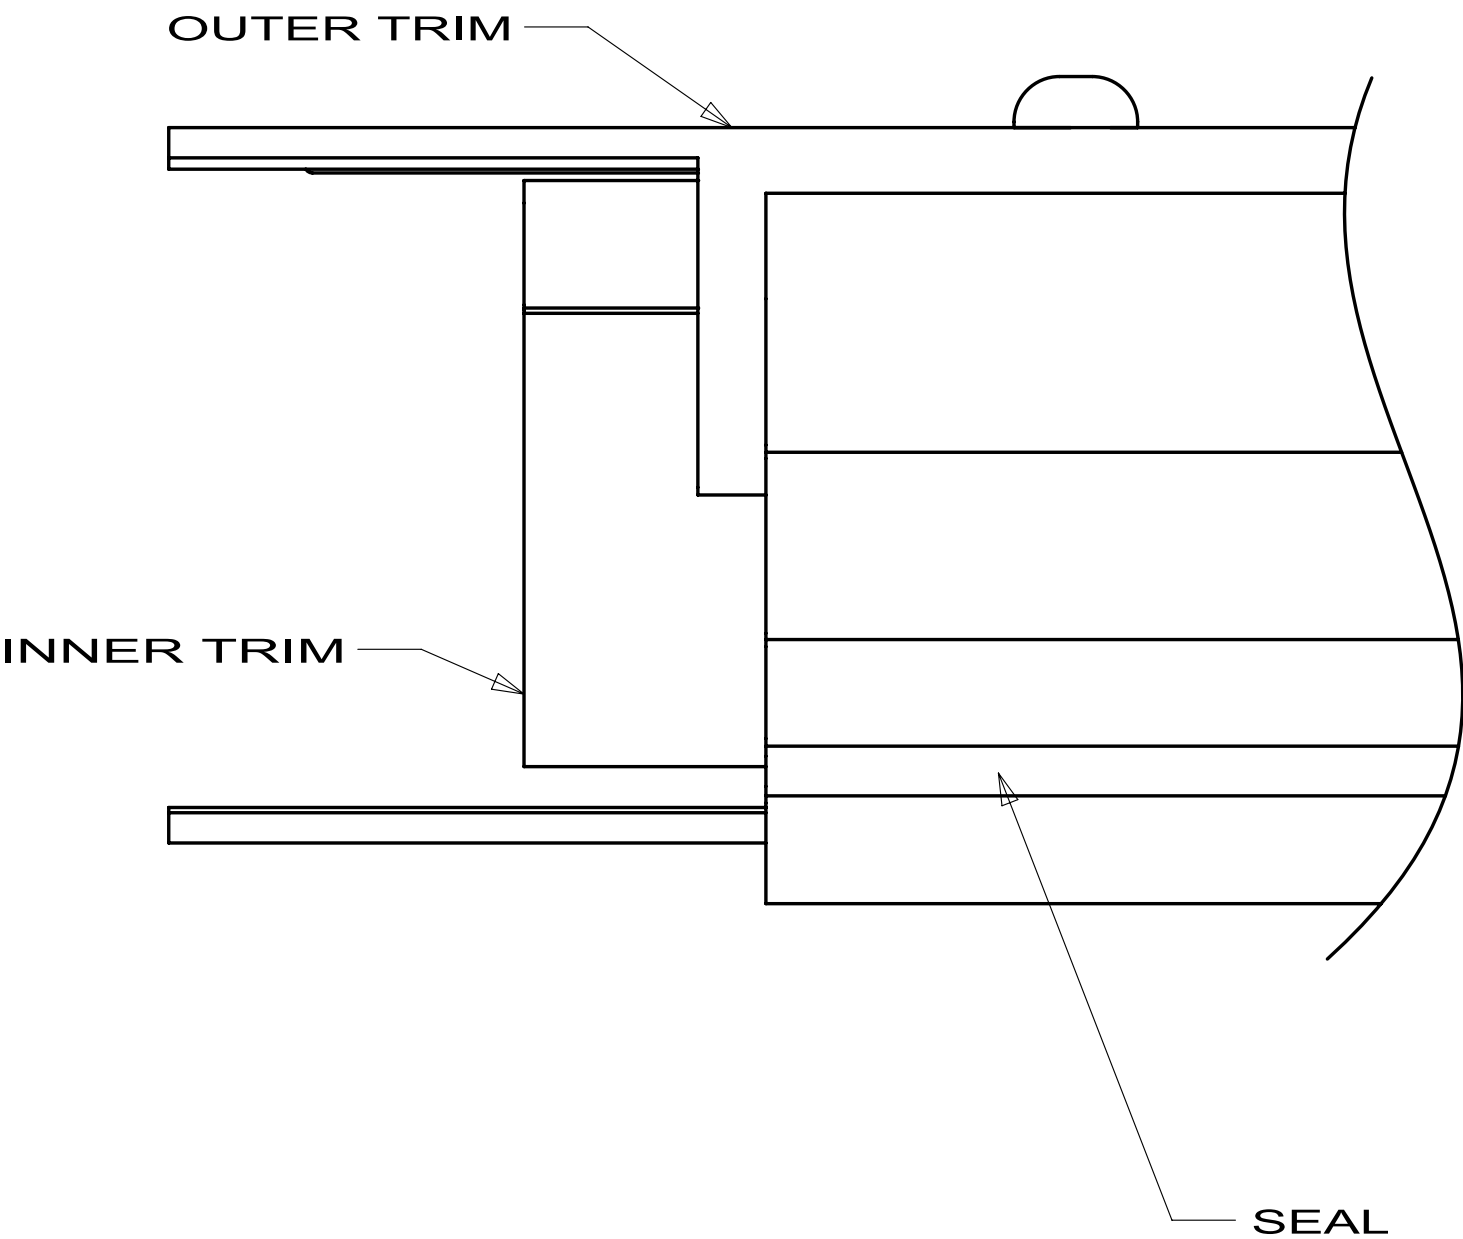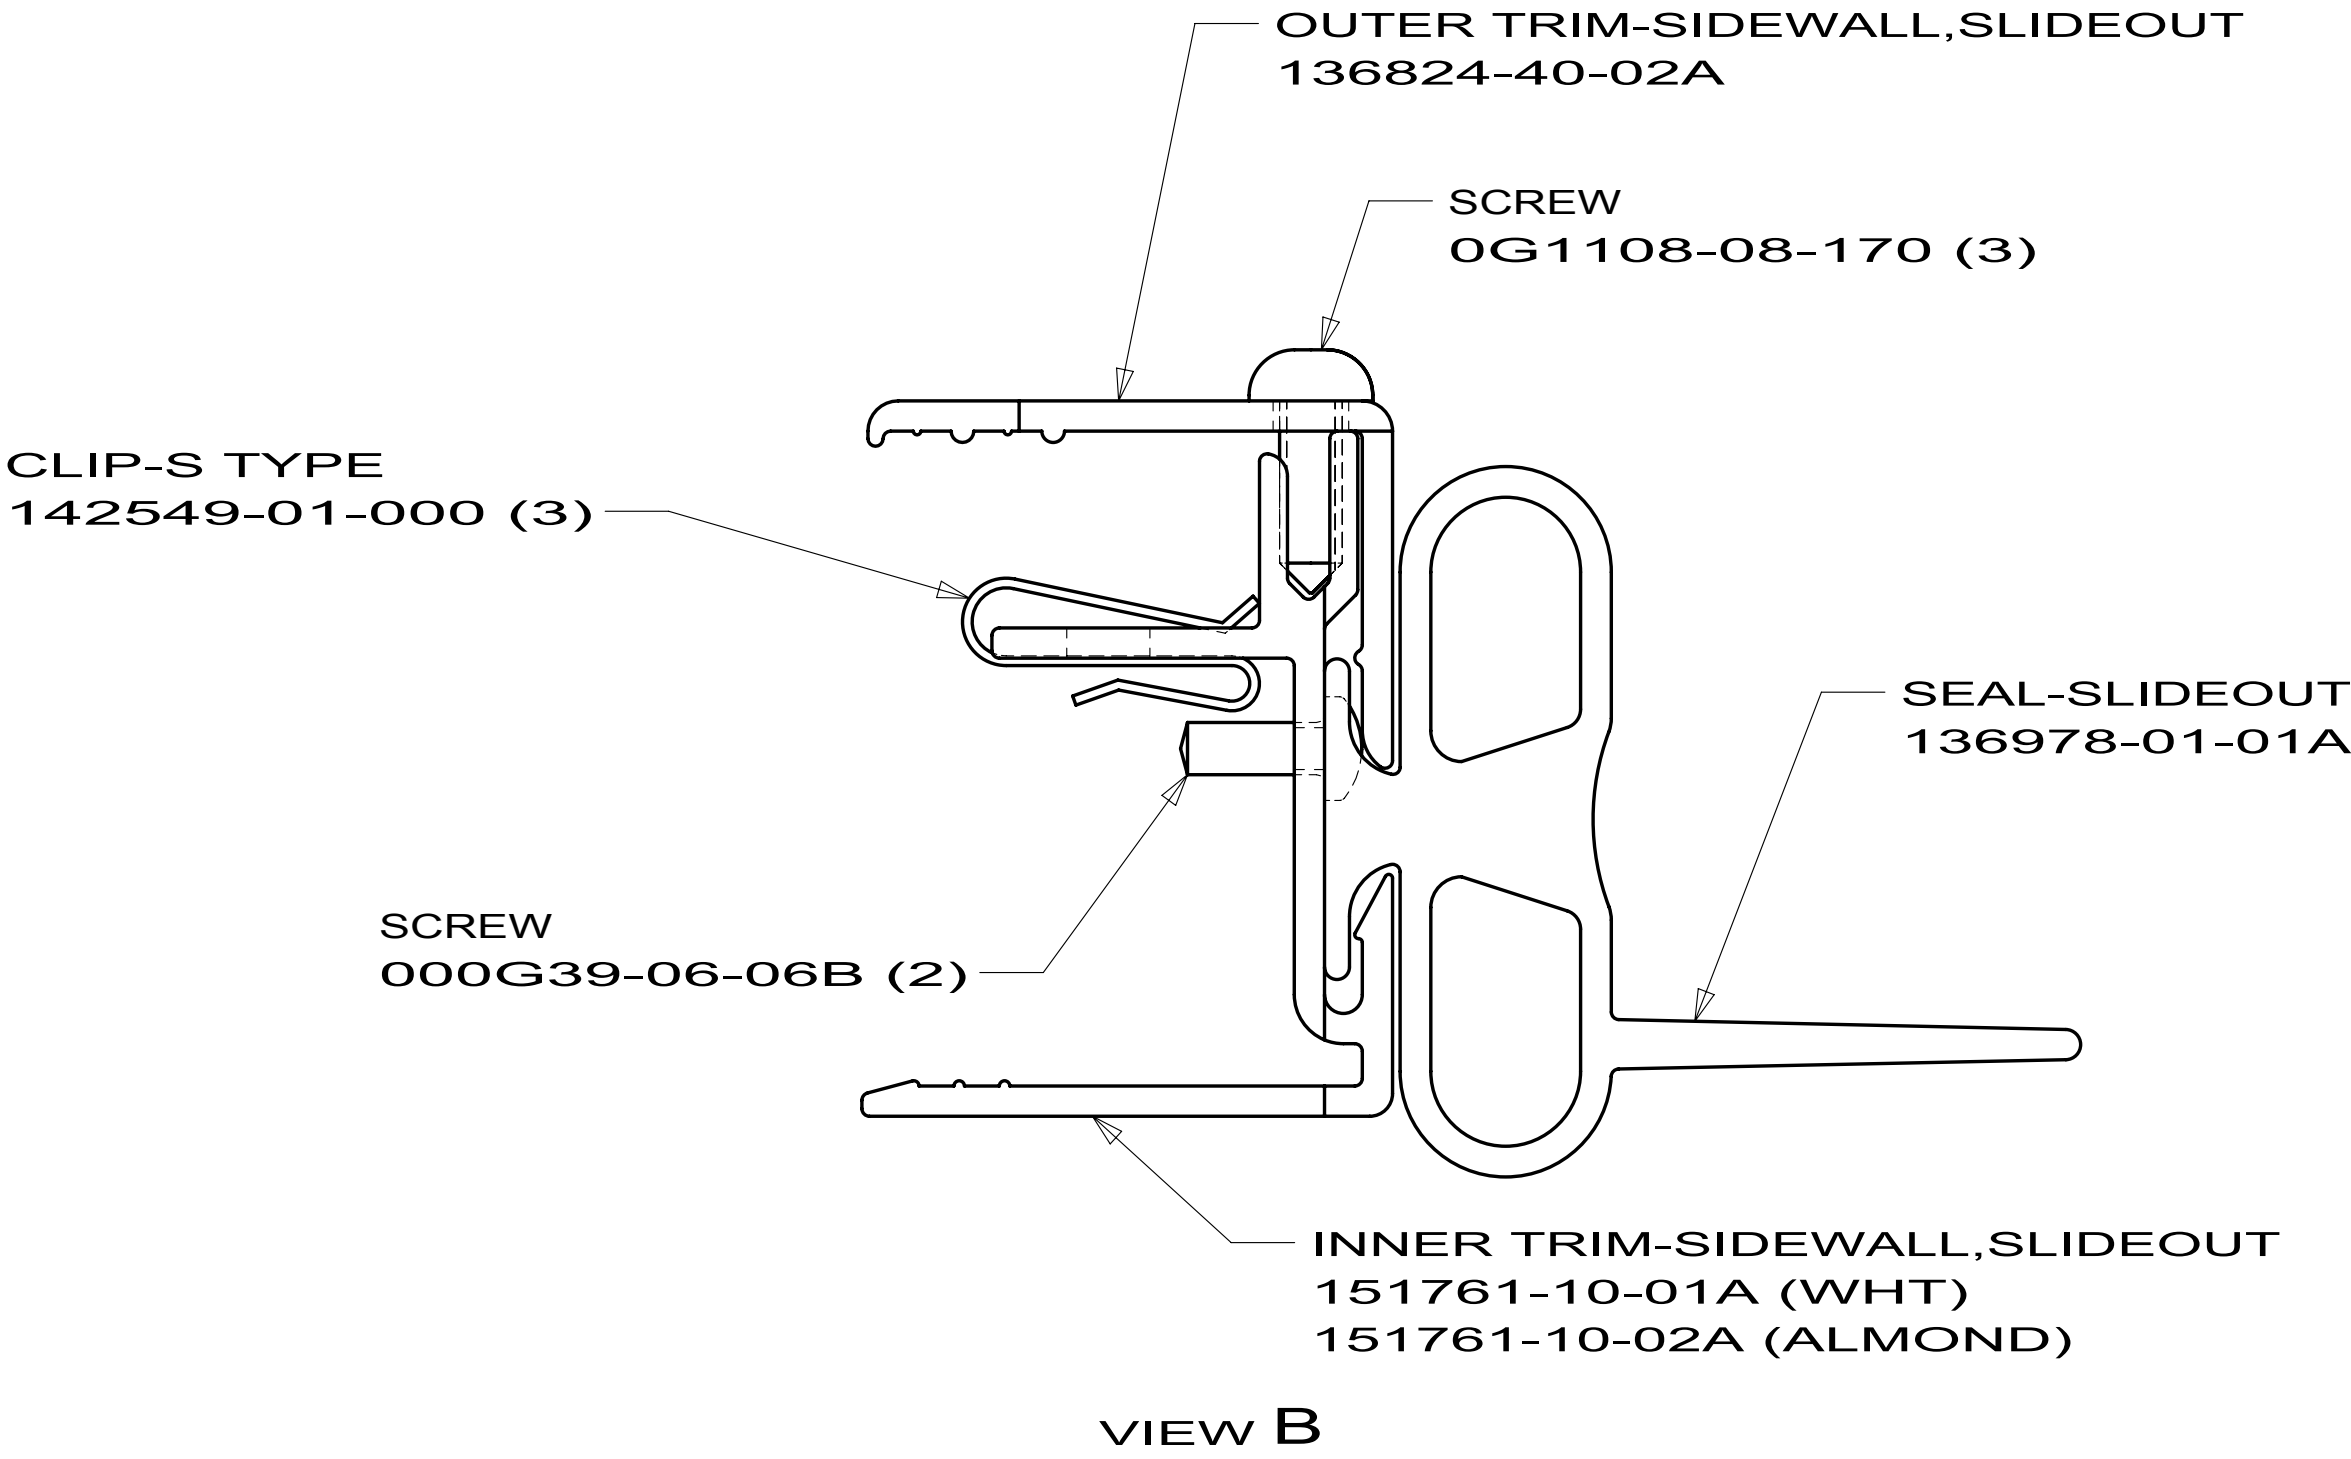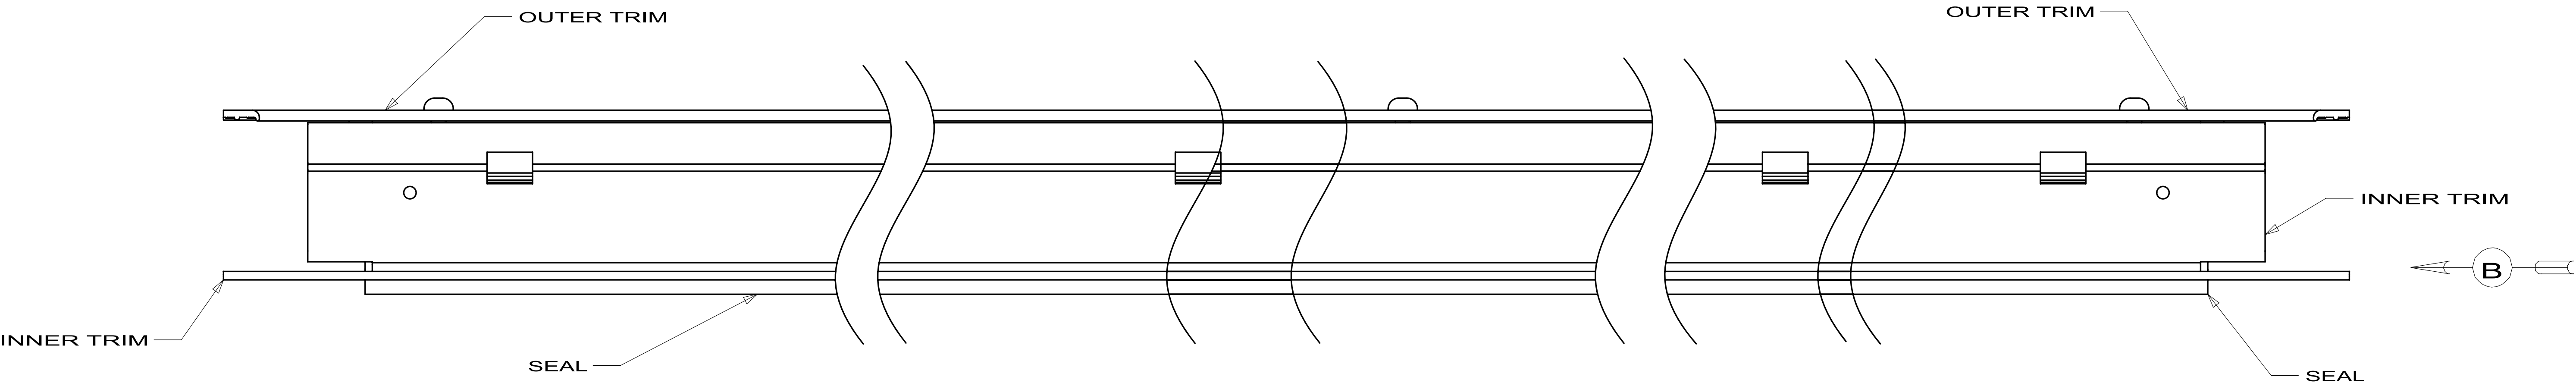

FABWELL SDW

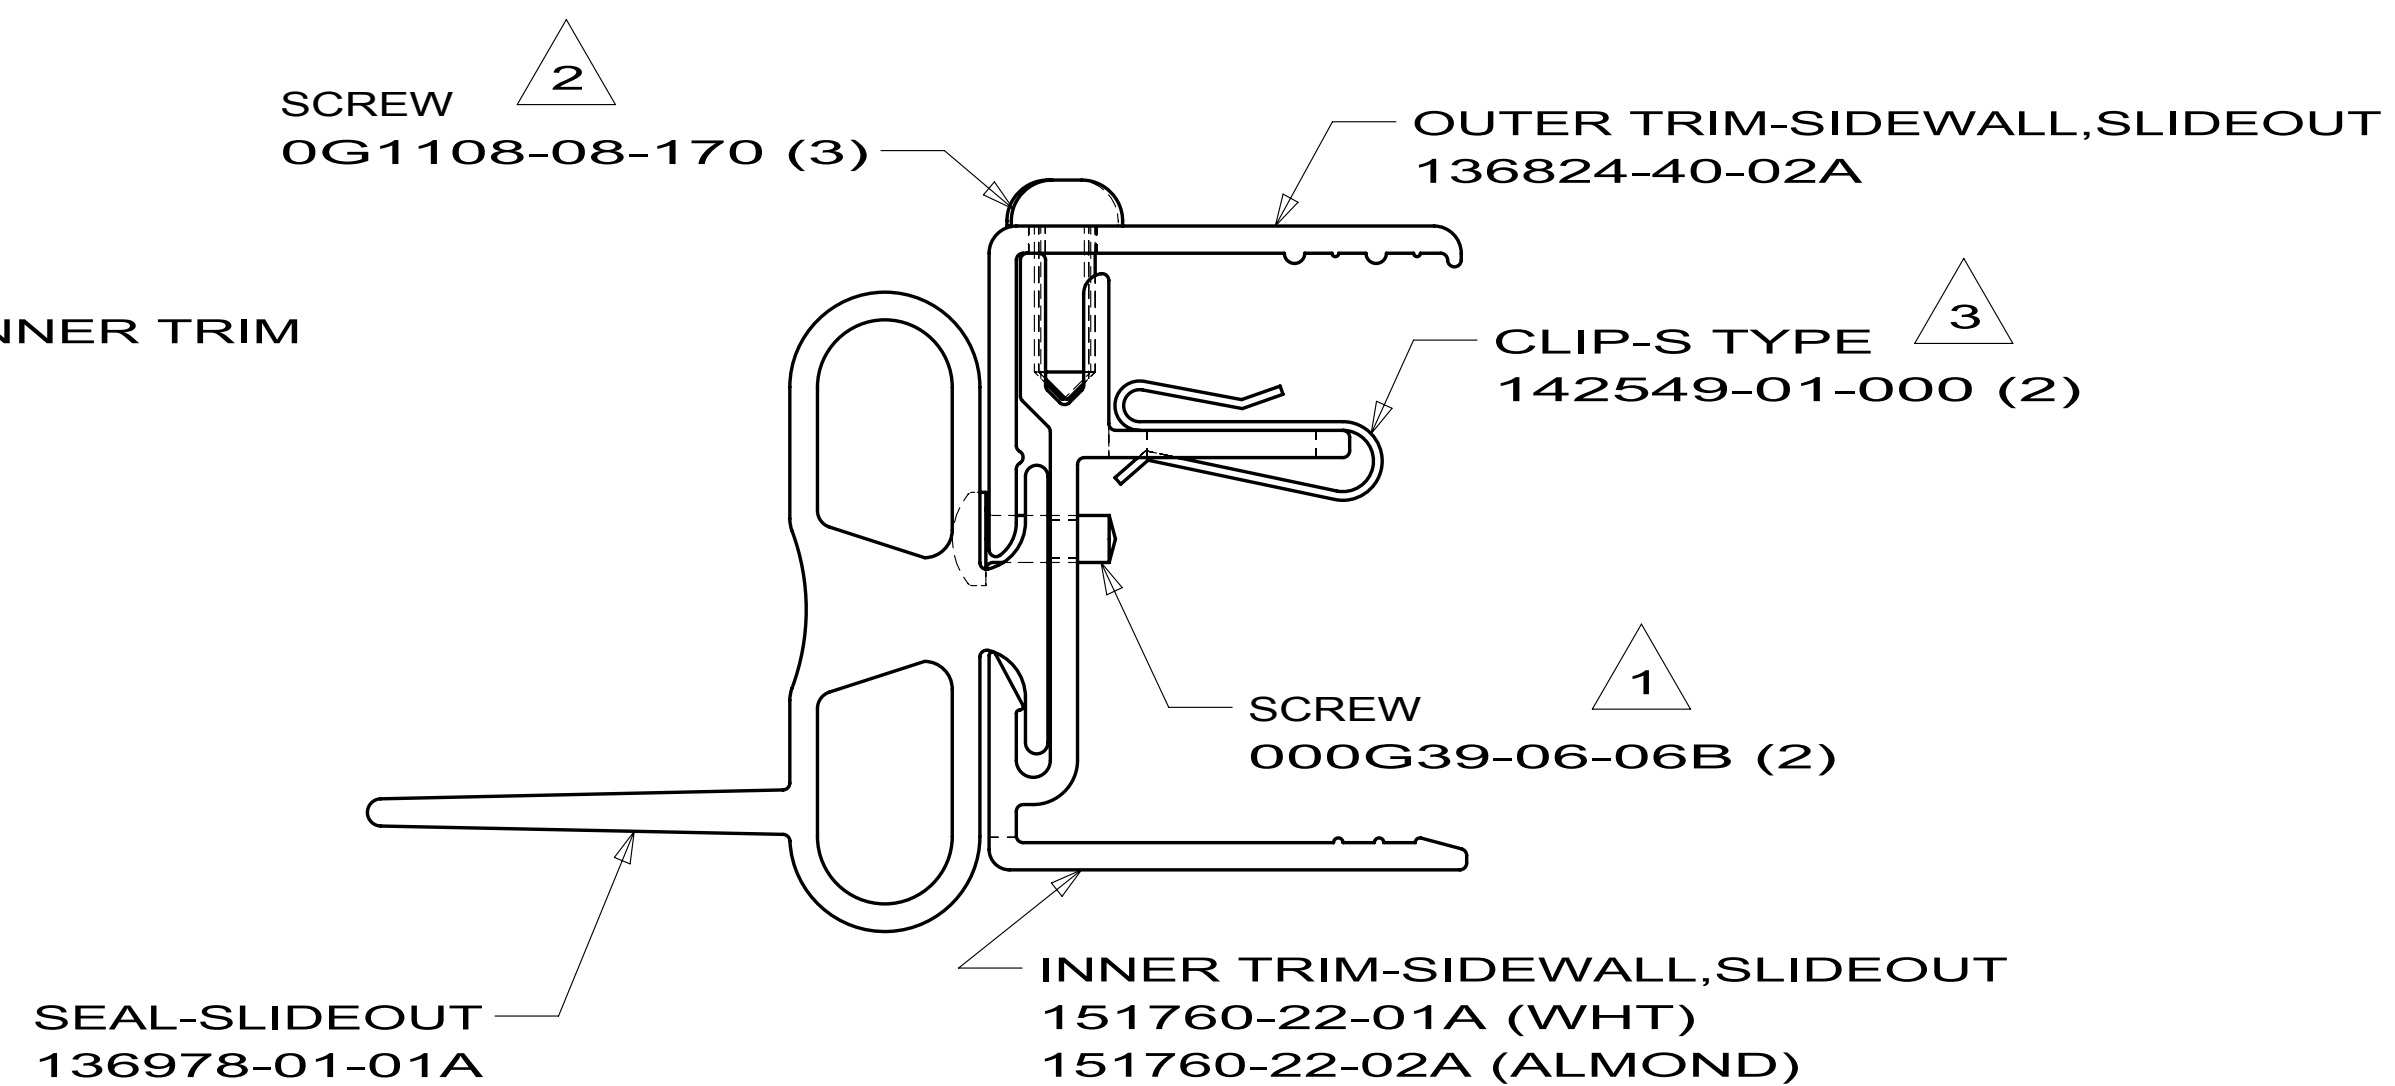
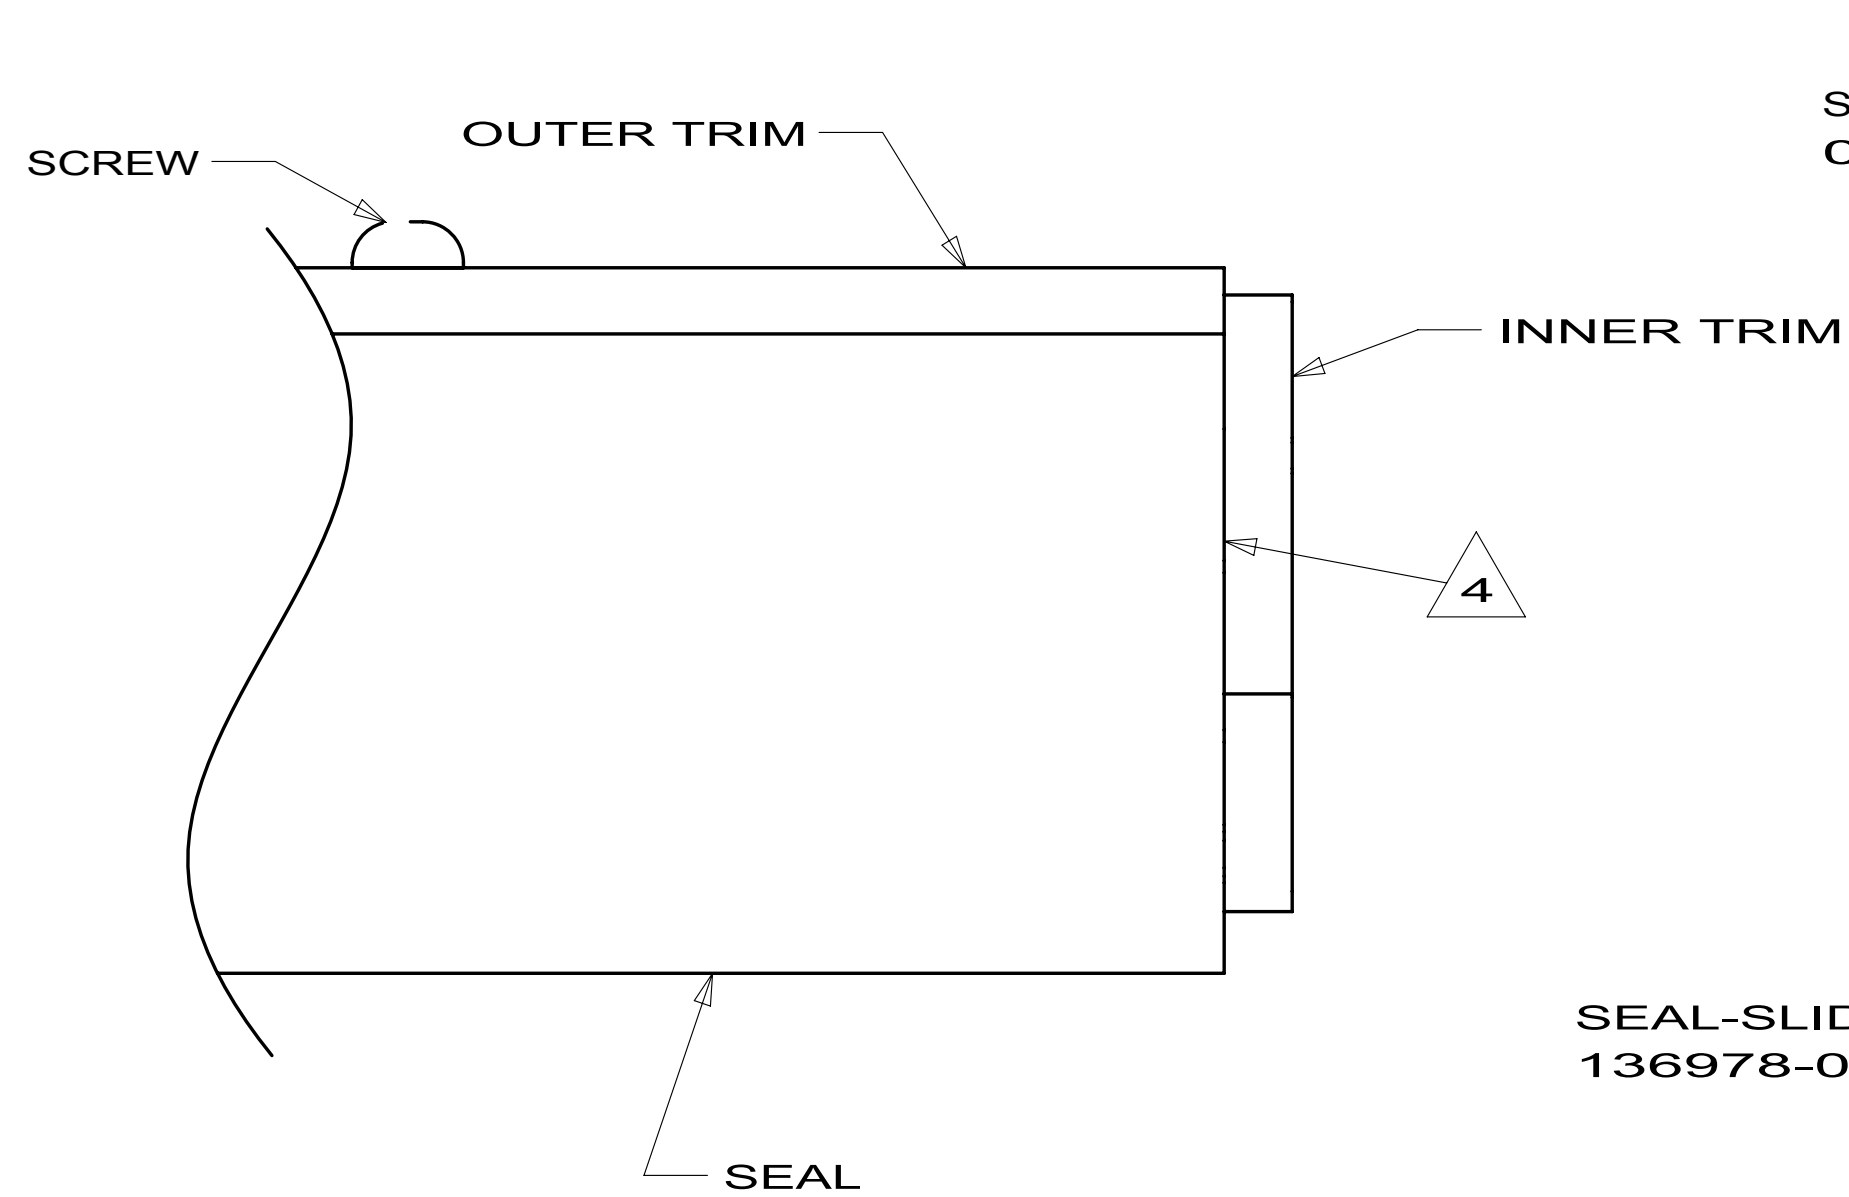
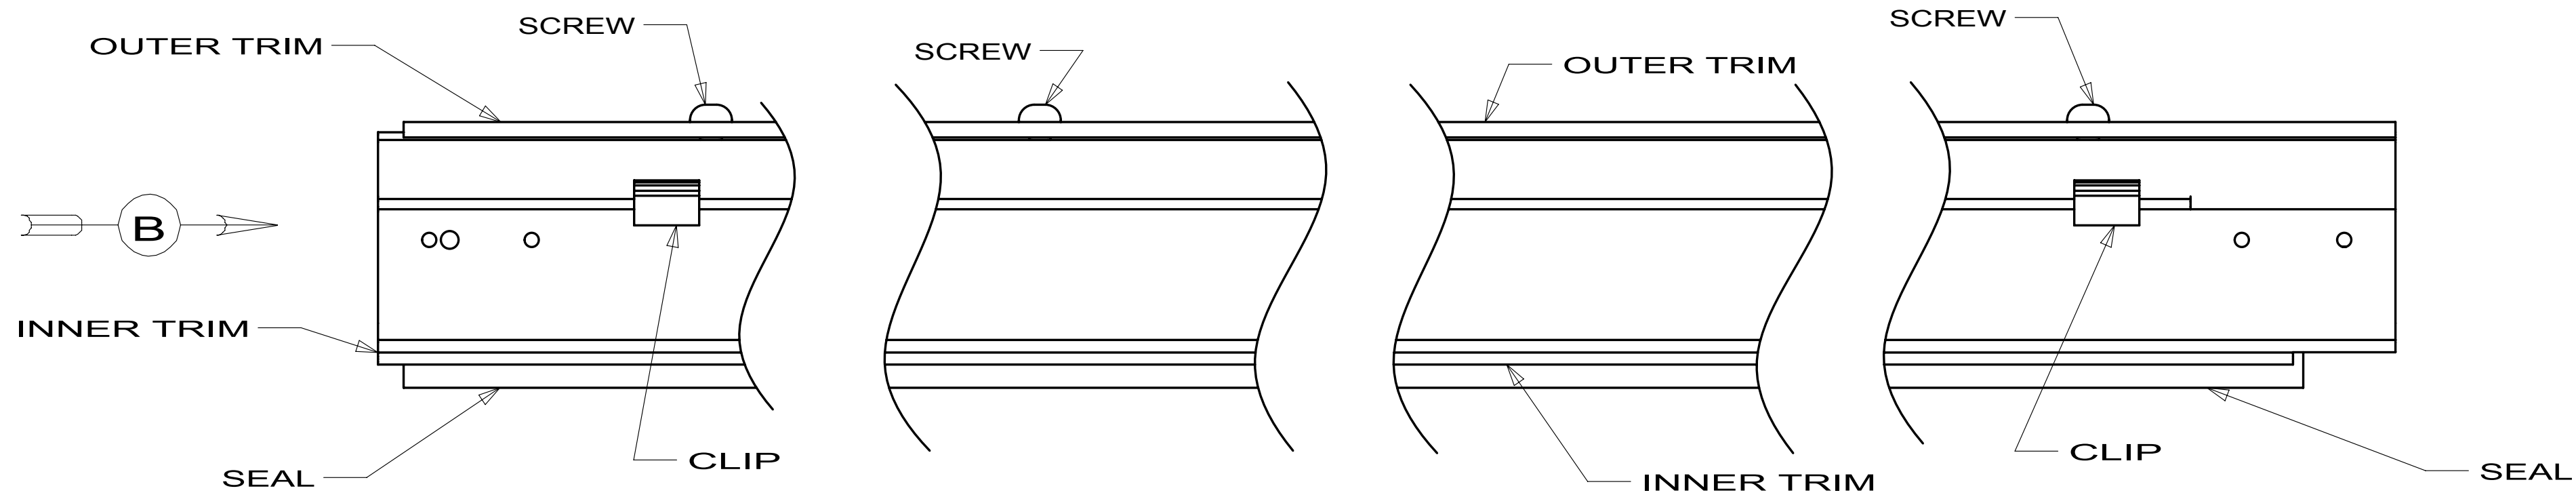


- 4 SEAL TO BE FLUSH WITH OUTER TRIM.
 3 TOLERANCE ON THE CLIP SPACING IS ± 100.0 MM.
 2 APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 1 APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.

NOTES:


FABWELL SDW

TRIM ASM-SLIDEOUT,SIDE
1 2 **151763**

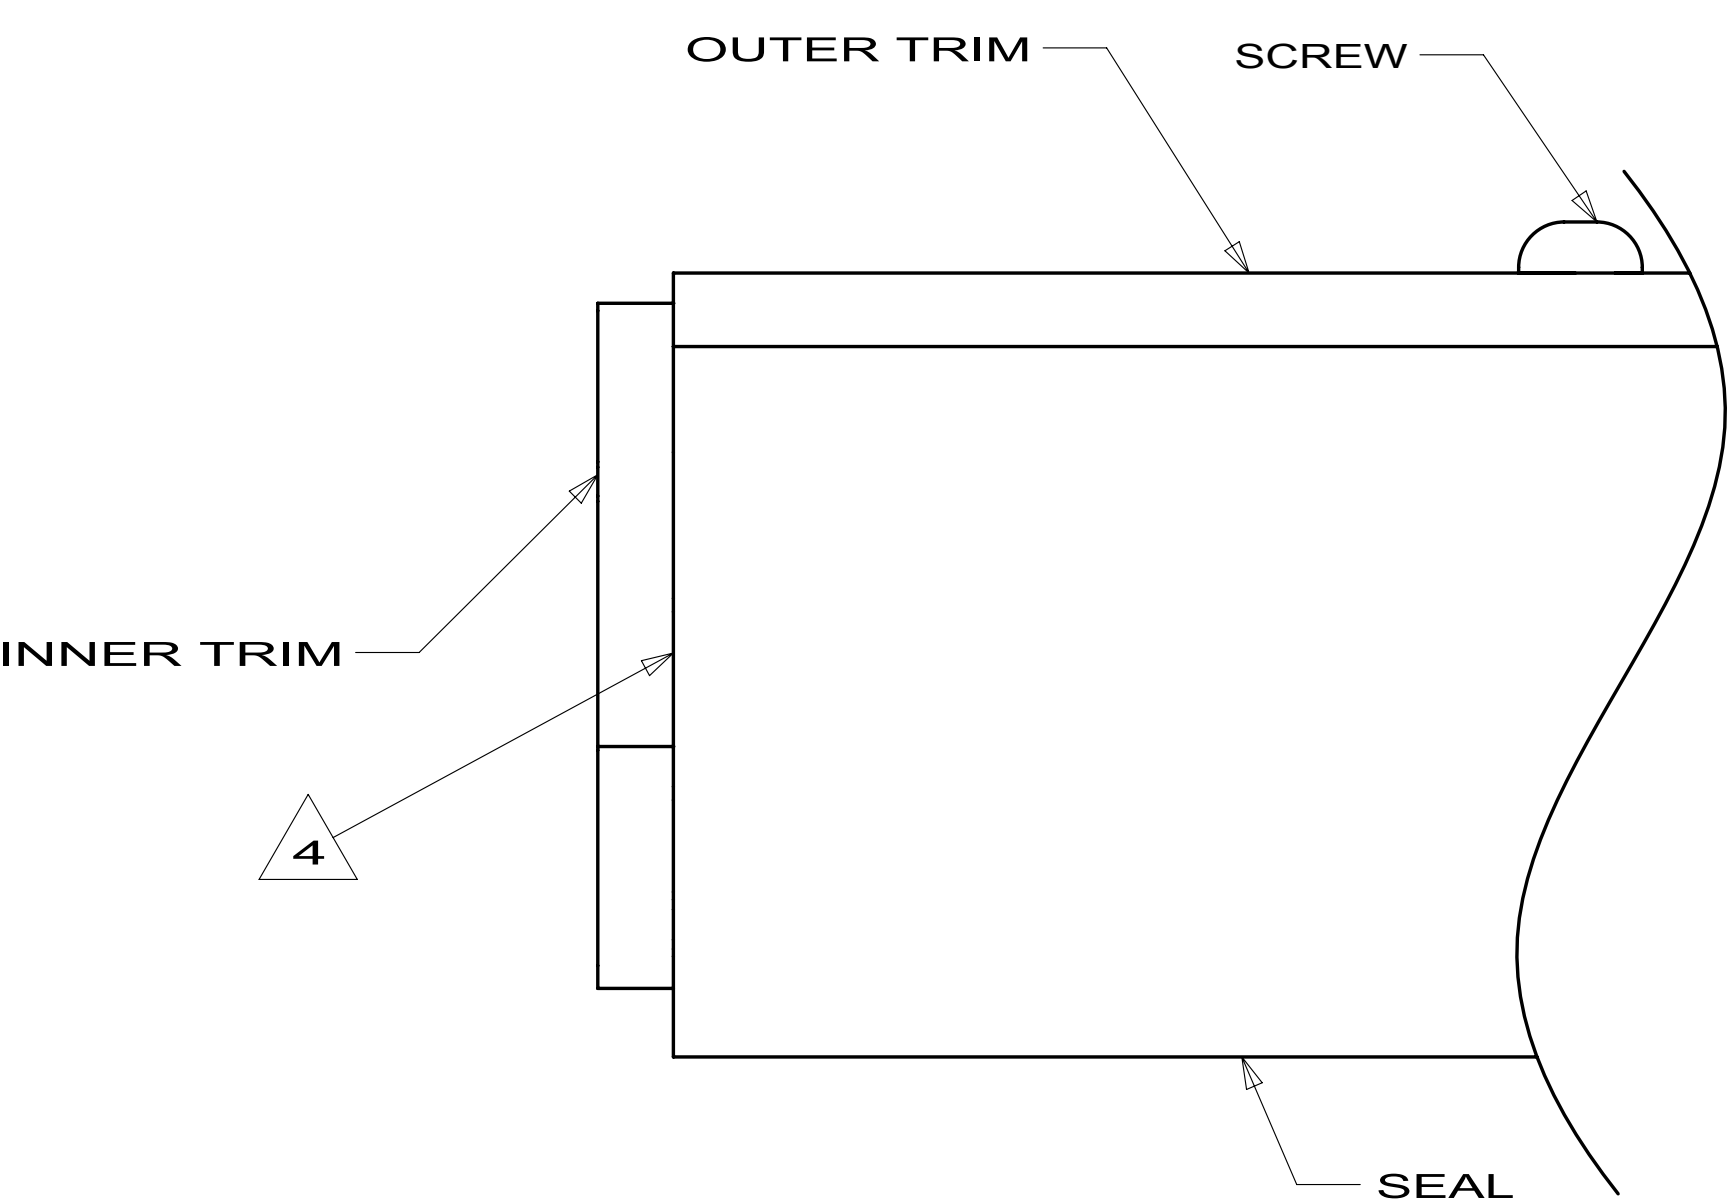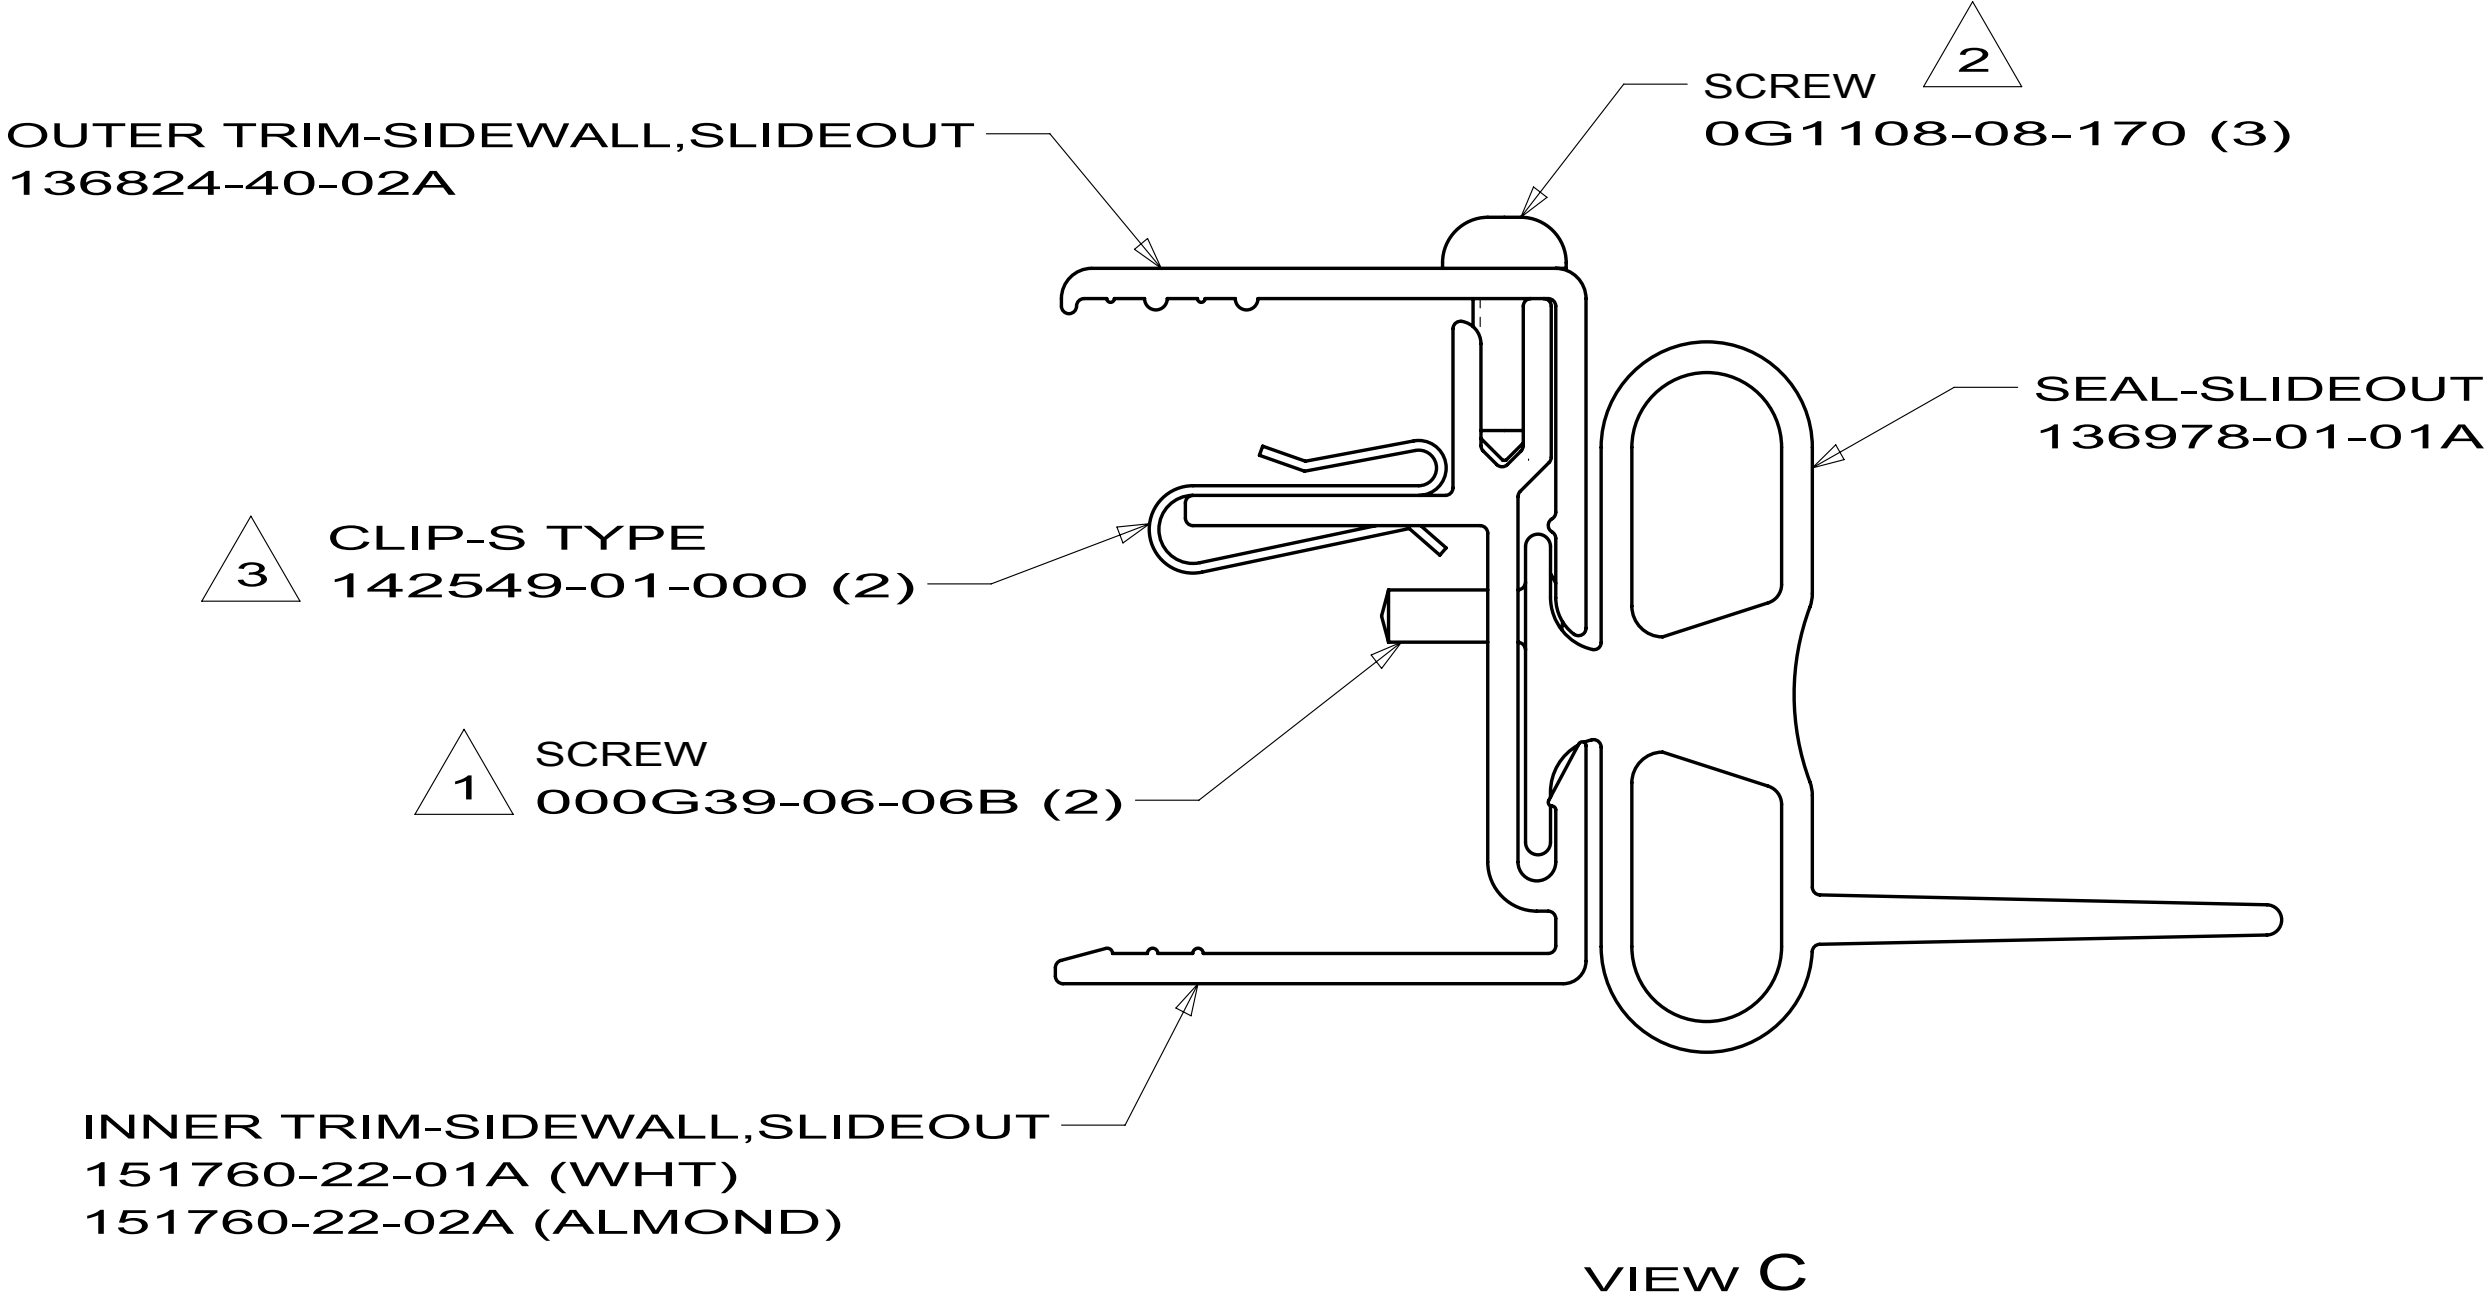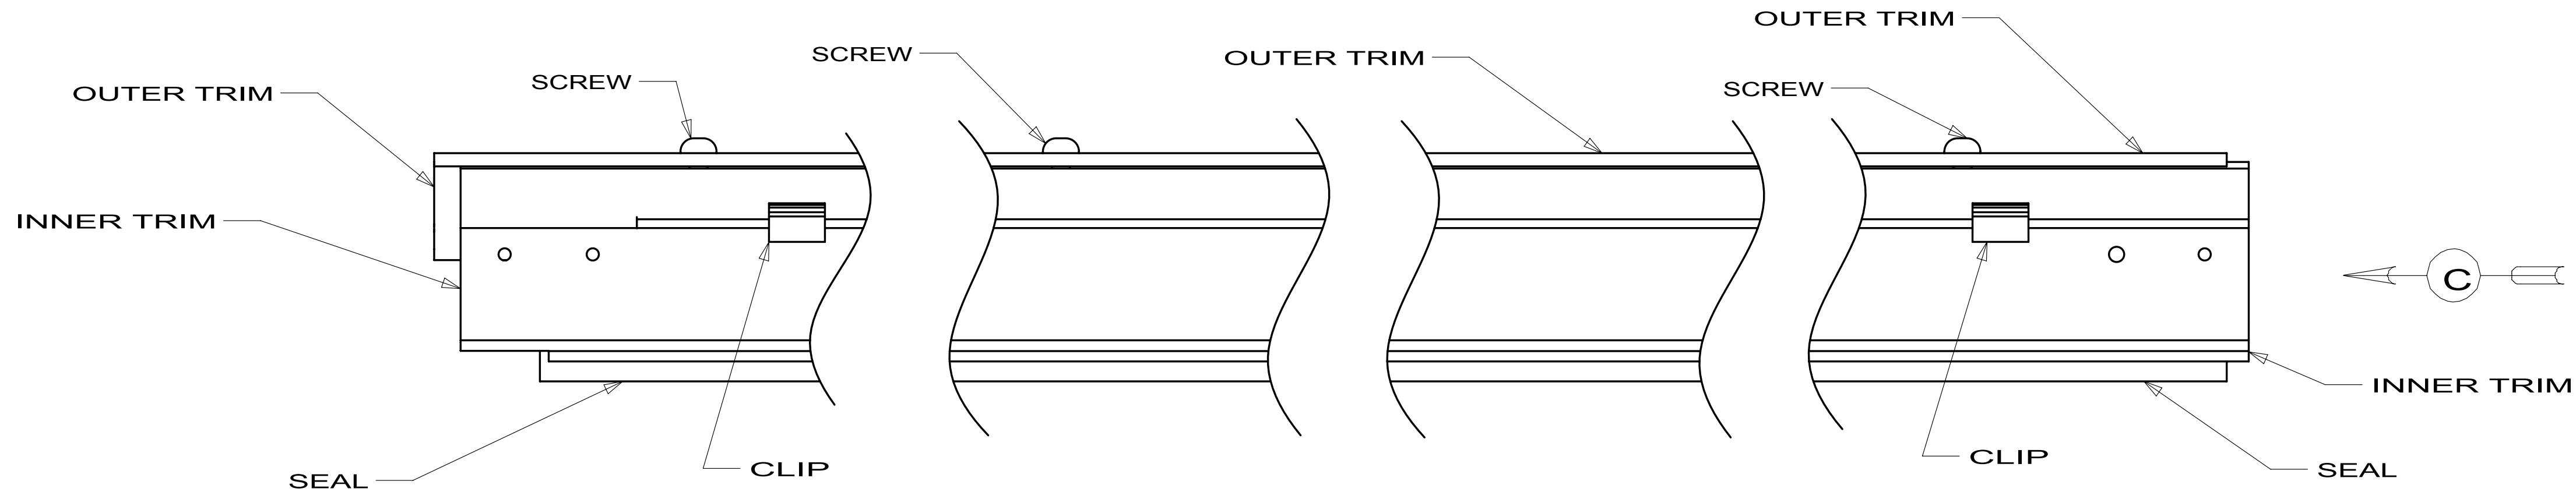

153651-02-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT - SWITCH	1812996
	153651-01-702	EA COVER/BOOT - SEAL	1612011
	153651-02-700	EA MOTOR/LH - F/TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223

153651-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT SWITCH	1812996
	153651-02-700	EA MOTOR "R" - F/LH TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223
	153651-04-700	EA COVER/BOOT - SEAL	1612012
	153651-04-701	EA BEZEL F/MAIN HOUSING	1612567

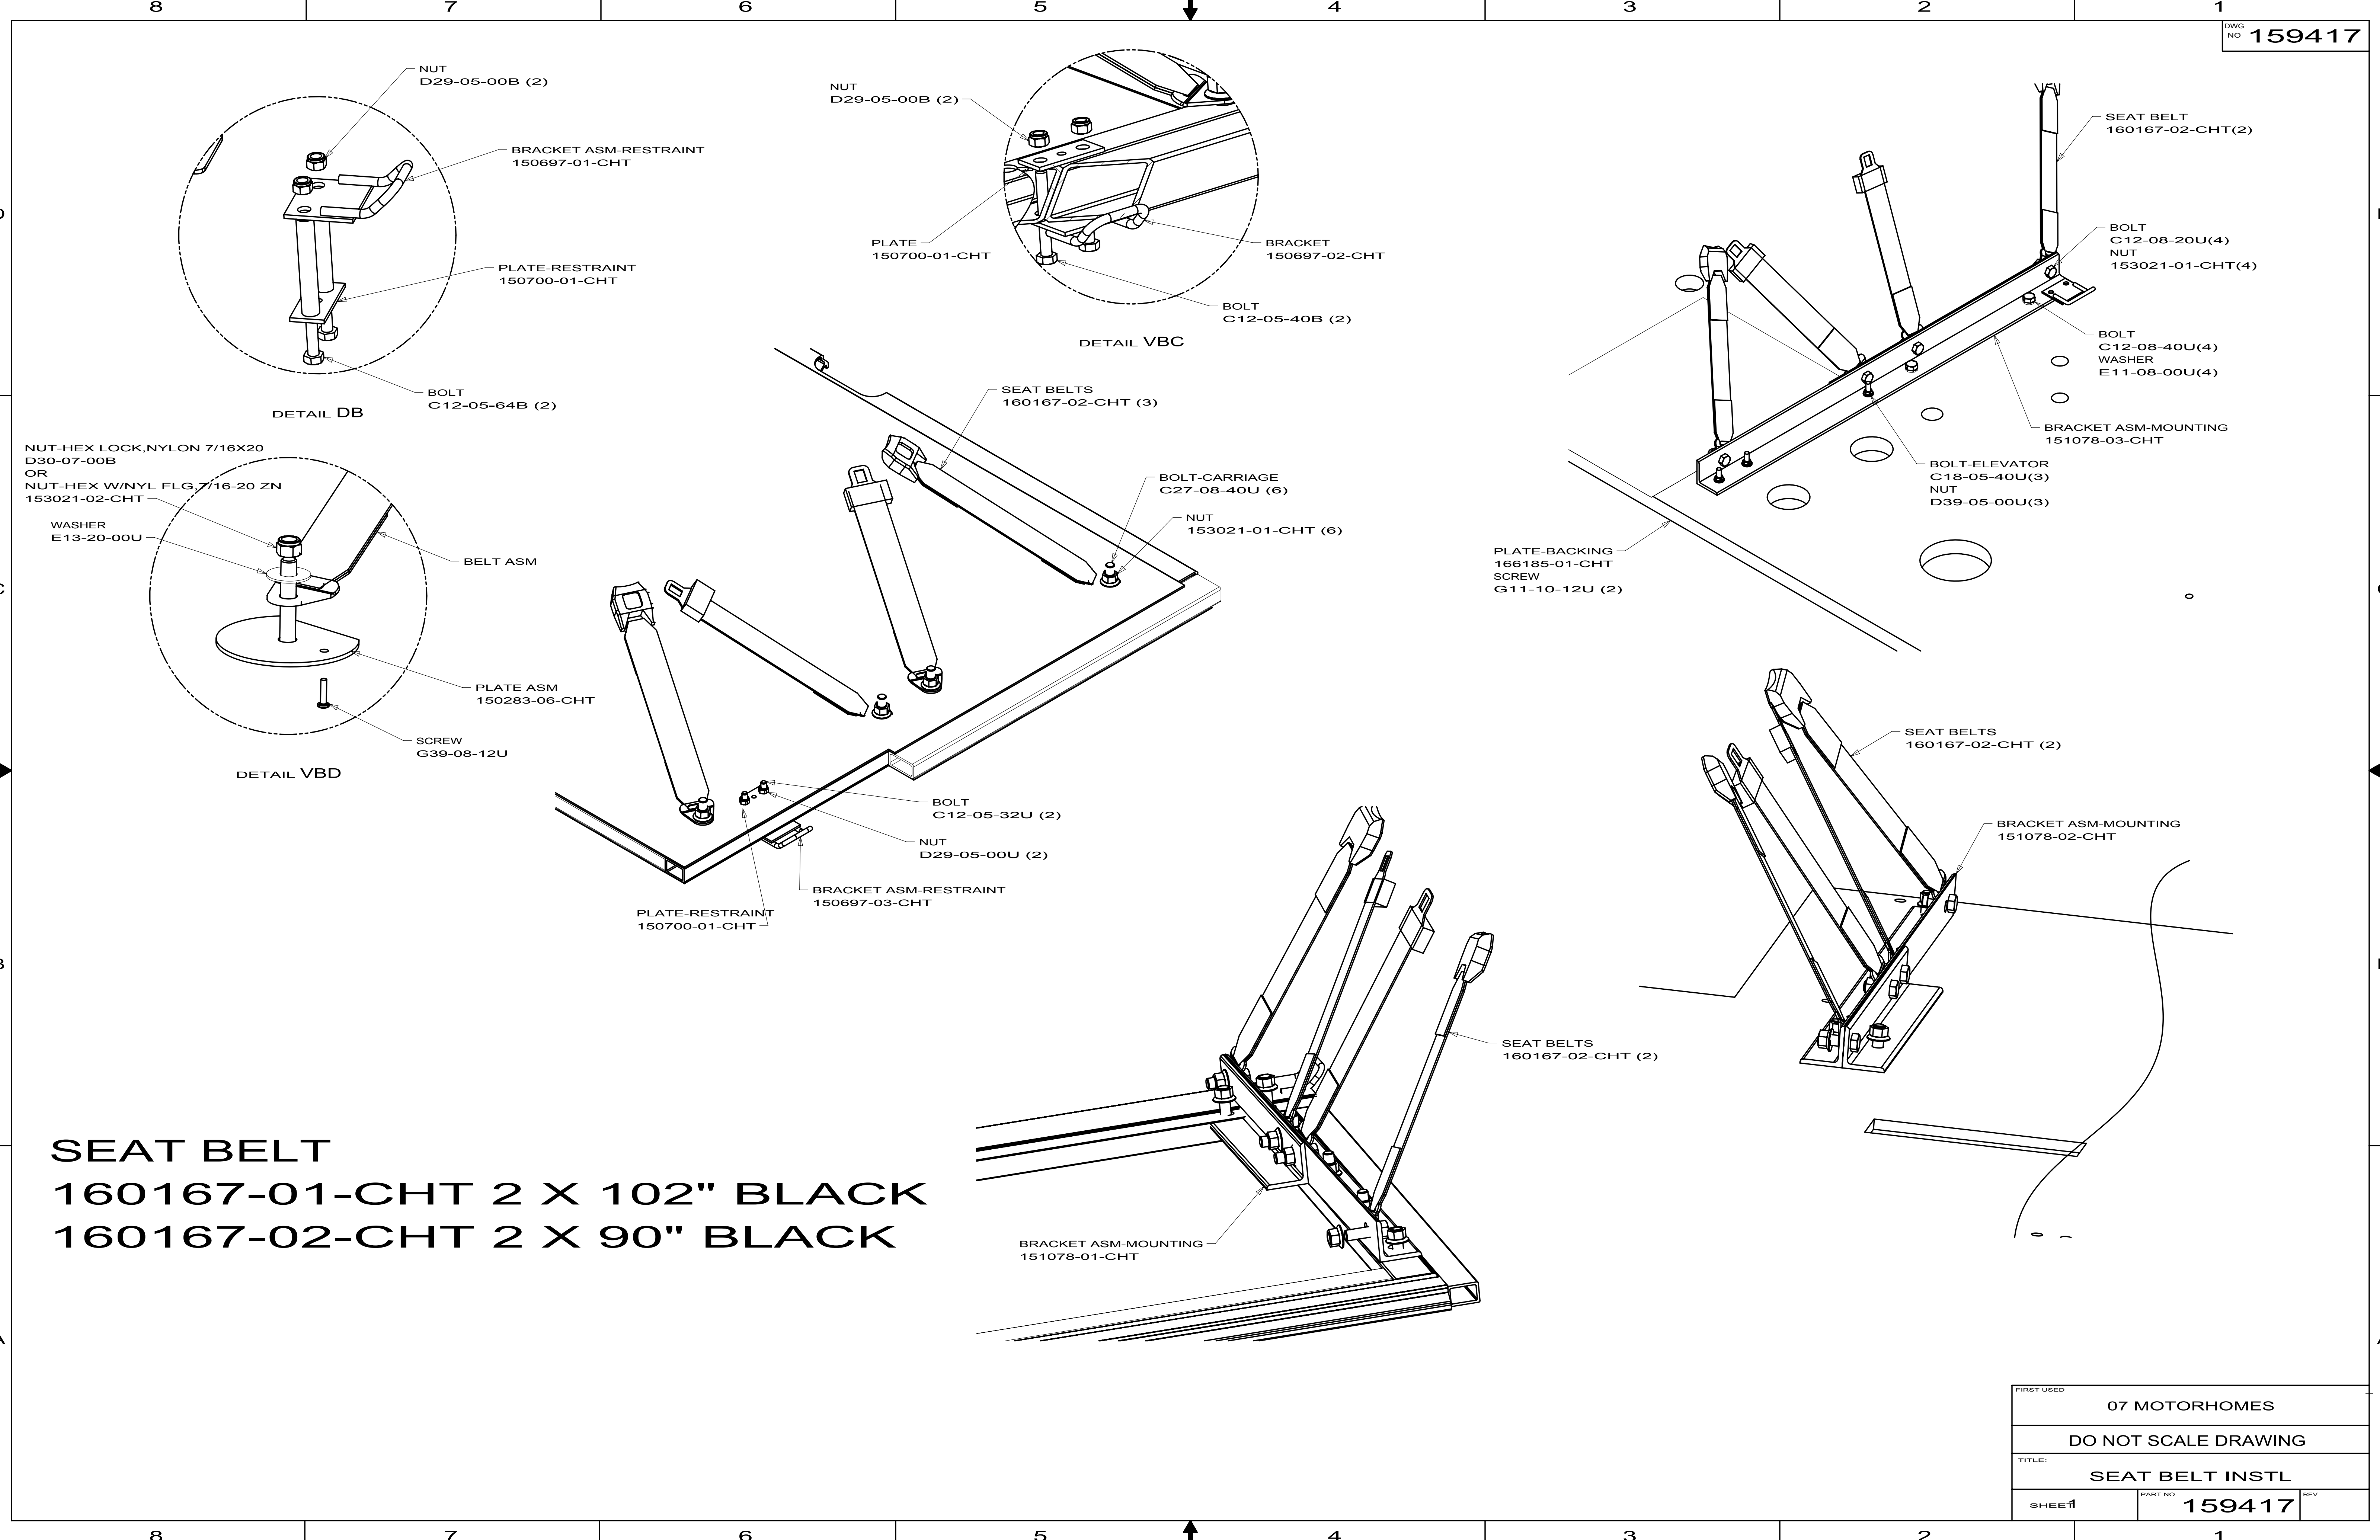


SEAT BELT
160167-01-CHT 2 X 102" BLACK
160167-02-CHT 2 X 90" BLACK

FIRST USED		
07 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
SEAT BELT INSTL		
SHEET 1	PART NO 159417	REV

161034-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	161662-01-703	EA ROLLER - 2"	510022
	161662-01-704	EA PAD/WEAR	DN10936
	161662-01-705	EA BEARING/FLANGE - 3/4" X 1"	2010000049
	161662-01-706	EA GEAR/SPUR - 3/4"ID X 2"OD	3010000400
	161662-01-707	EA KEY/WOODRUFF - #606	521336
	161662-01-708	EA SHAFT W/COUPLER- 3/4 X 6 7/8	1010000402
	161662-01-709	EA WEAR PAD - ROUND	320-0056
	161662-01-710	EA MOTOR ASM - RH	1010000211
	161662-01-711	EA ROLLER/PLASTIC - 3/4" X 2.9"	3010000401



161035-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	161662-01-700	EA ROL PIN - 1/8" X 1 1/4"	18-1036
	161662-01-701	EA CLIP PIN - 1/8"	18-1032
	161662-01-702	EA BOLT/SHOULDER -1/2" X 7/8"	15-1378
	161662-01-703	EA ROLLER - 2"	510022
	161662-01-704	EA PAD/WEAR	DN10936
	161662-01-705	EA BEARING/FLANGE - 3/4" X 1"	2010000049
	161662-01-706	EA GEAR/SPUR - 3/4"ID X 2"OD	3010000400
	161662-01-707	EA KEY/WOODRUFF - #606	521336
	161662-01-708	EA SHAFT W/COUPLER- 3/4 X 6 7/8	1010000402
	161662-01-709	EA WEAR PAD - ROUND	320-0056
	161662-01-711	EA ROLLER/PLASTIC - 3/4" X 2.9"	3010000401
	161662-01-712	EA SPACER	531164
	161662-02-700	EA MOTOR ASM - LH	1010000037

161036-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	161036-01-700	EA FELT PAD- 25MM X 10MM X 20MM	DN12437-002
	161036-01-701	EA STOP	524303
	161036-01-703	EA ROLLER - 2"	510022
	161036-01-704	EA PAD/WEAR	DN10936
	161036-01-709	EA WEAR PAD - ROUND	320-0056

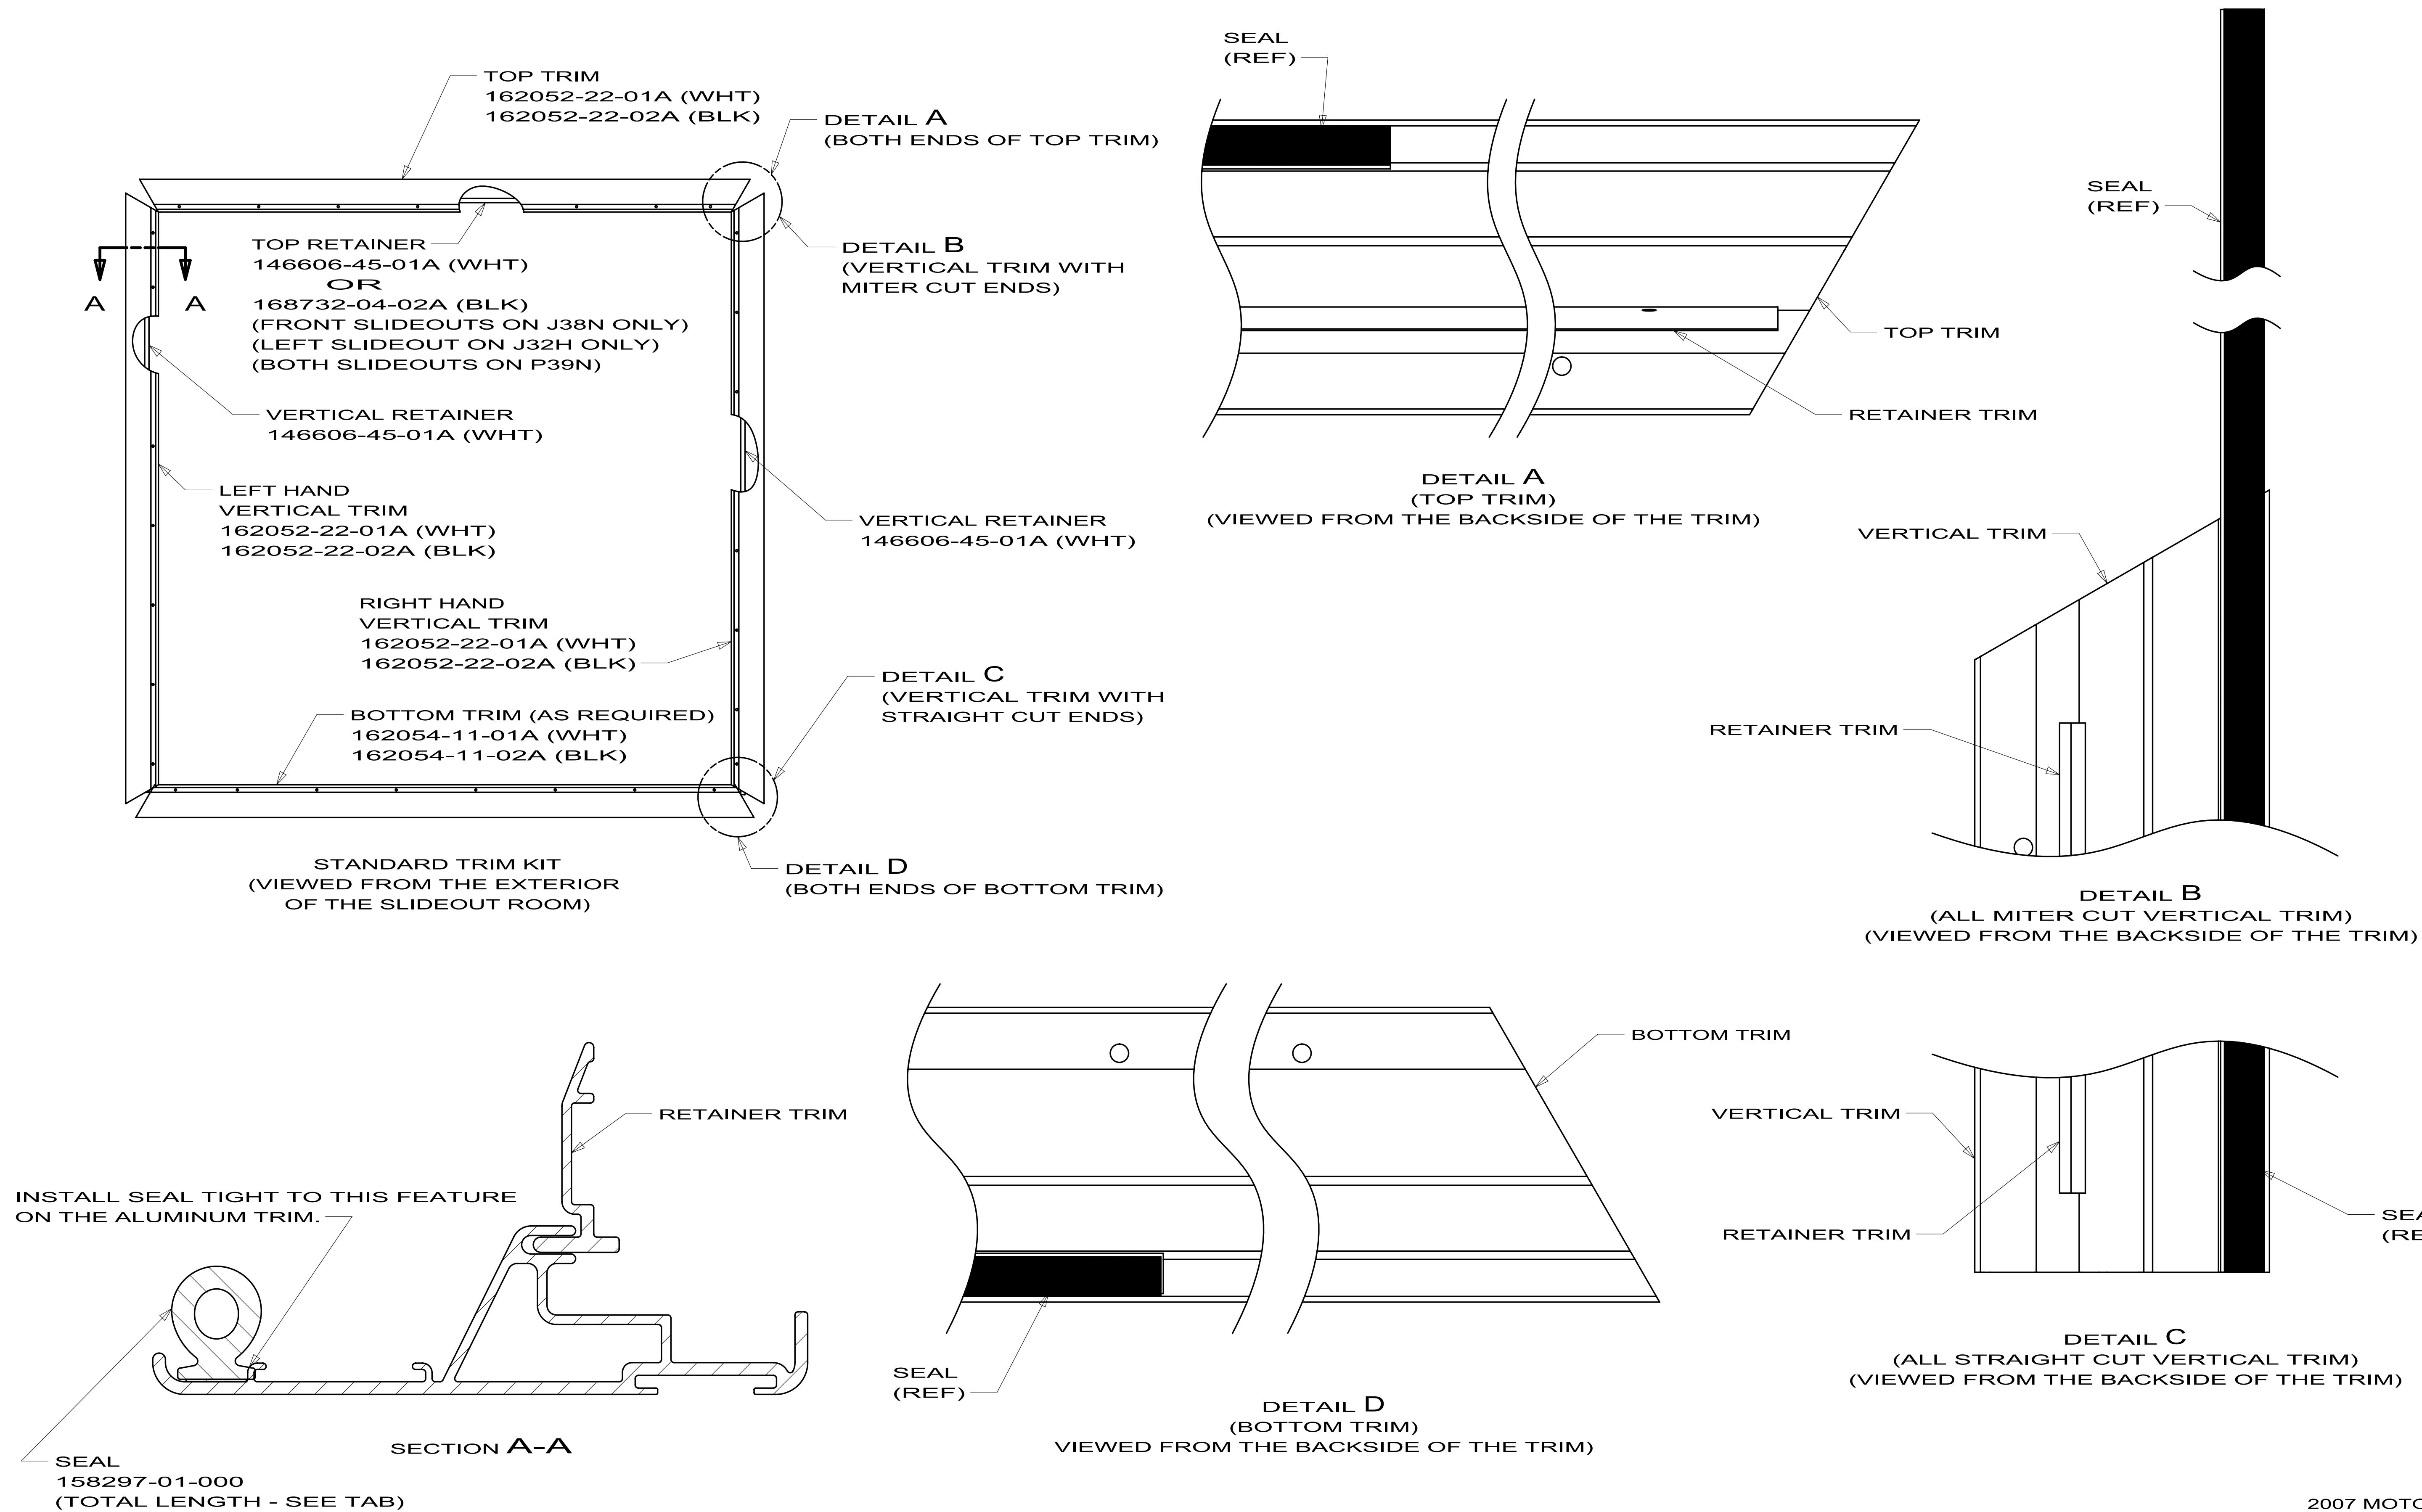



2007 MOTORHOMES

TRIM KIT-EXTERIOR,SLIDEOUT

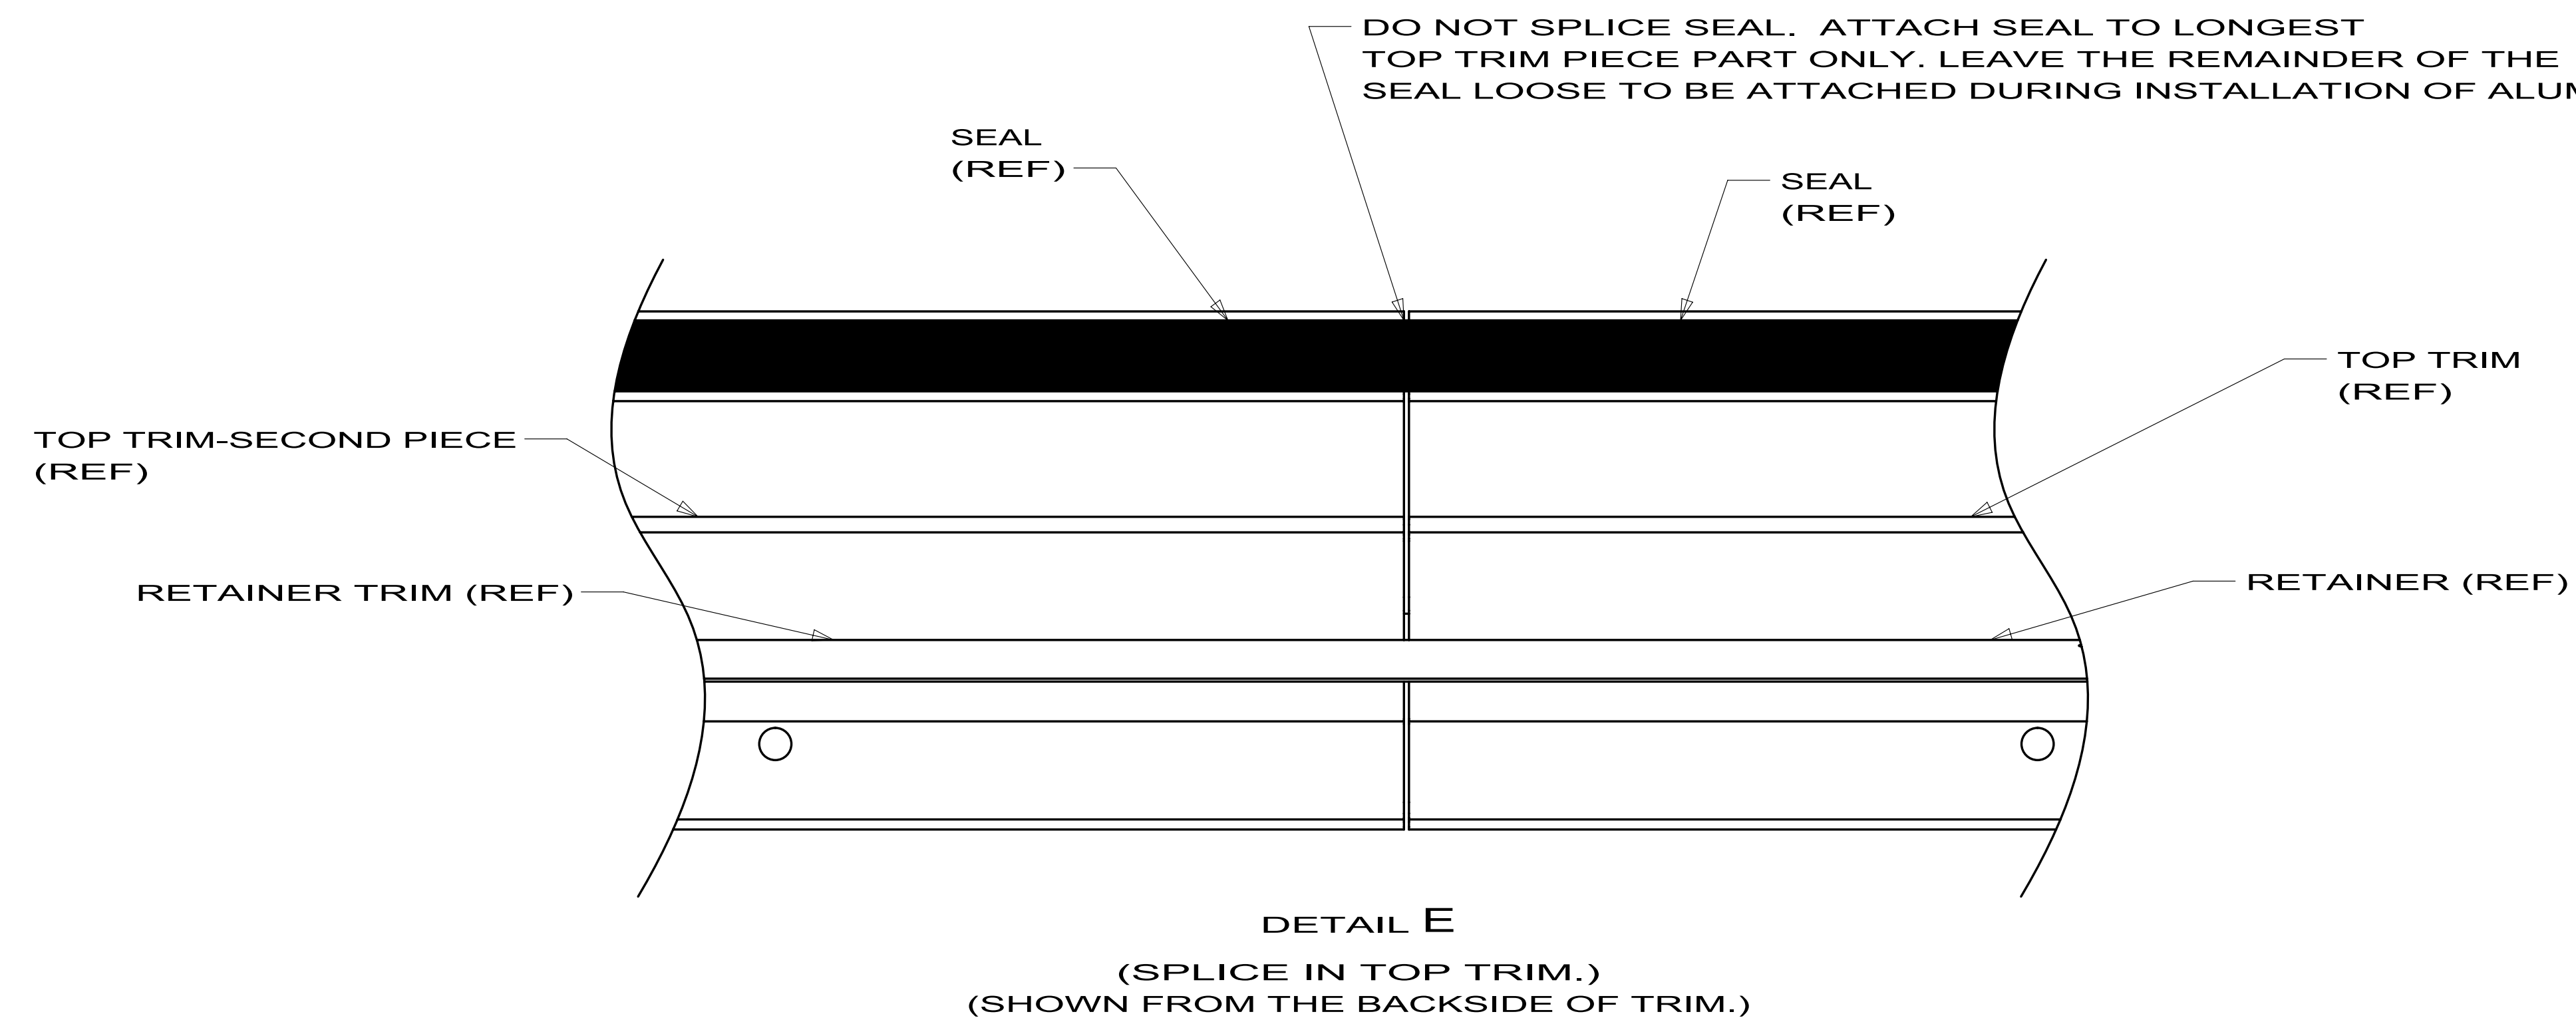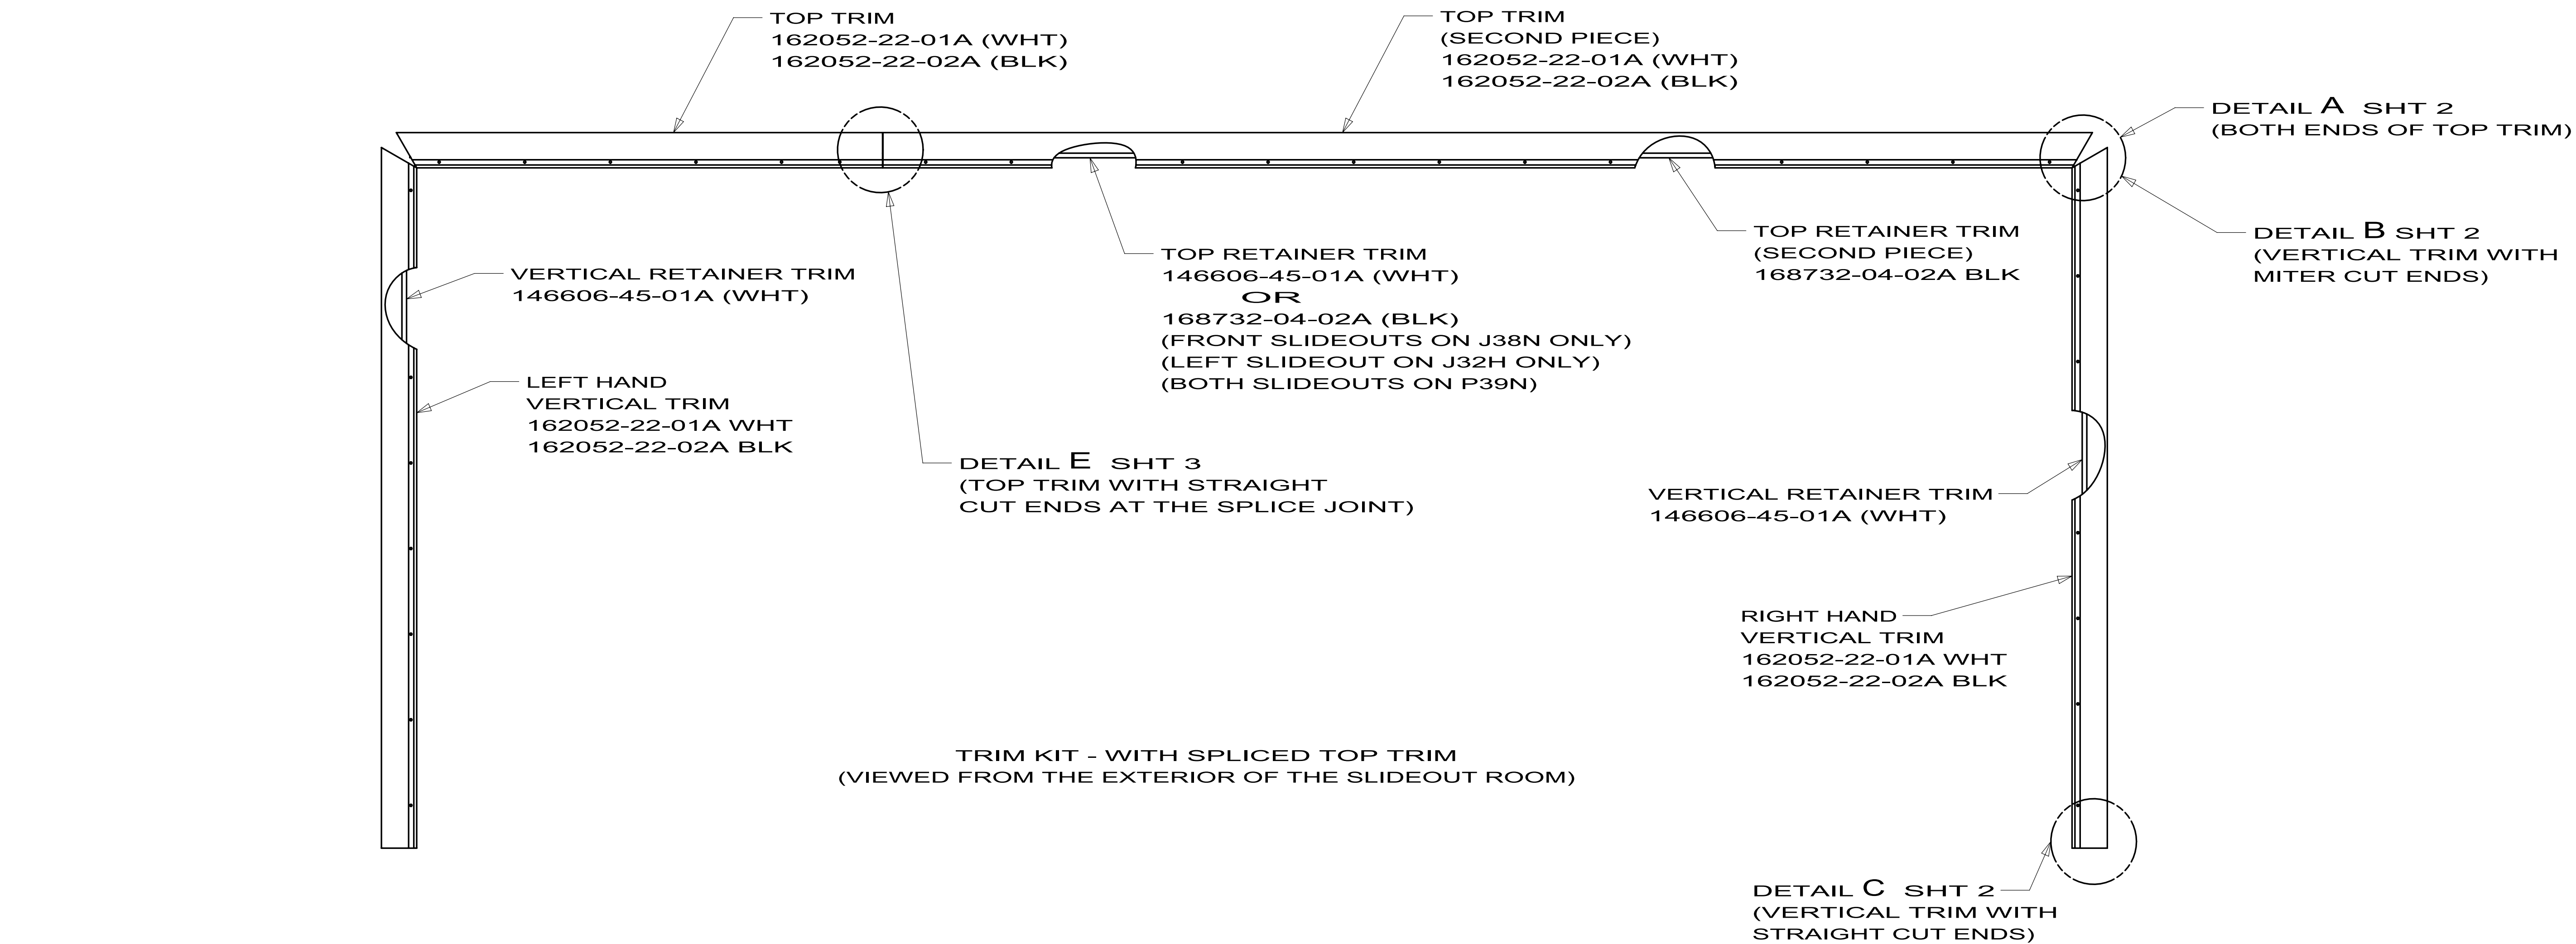


KEY	PART NUMBER	U/M	DESCRIPTION
	162495-01-700	EA	BUTTON-DBL. PLAS. SNAP

162495-01-01A, 162495-02-01A
VENDOR NO.
DP130

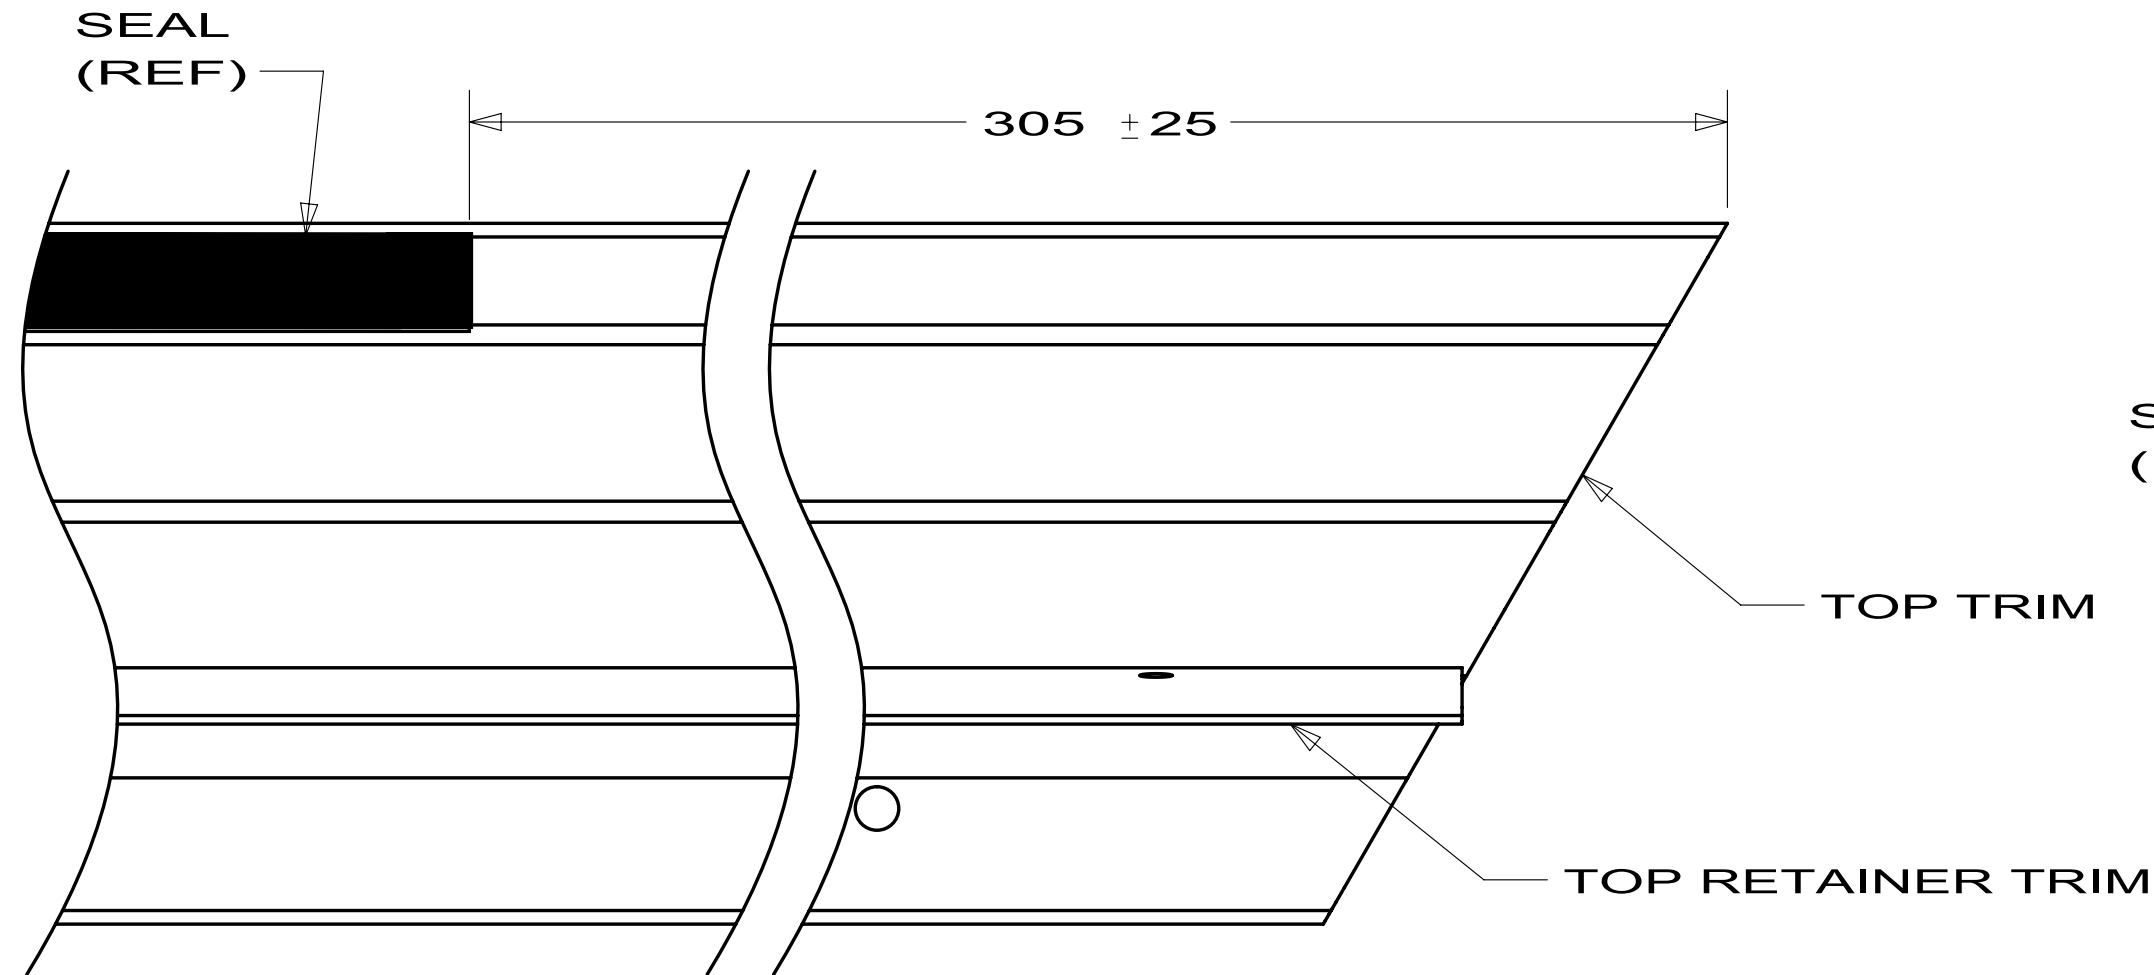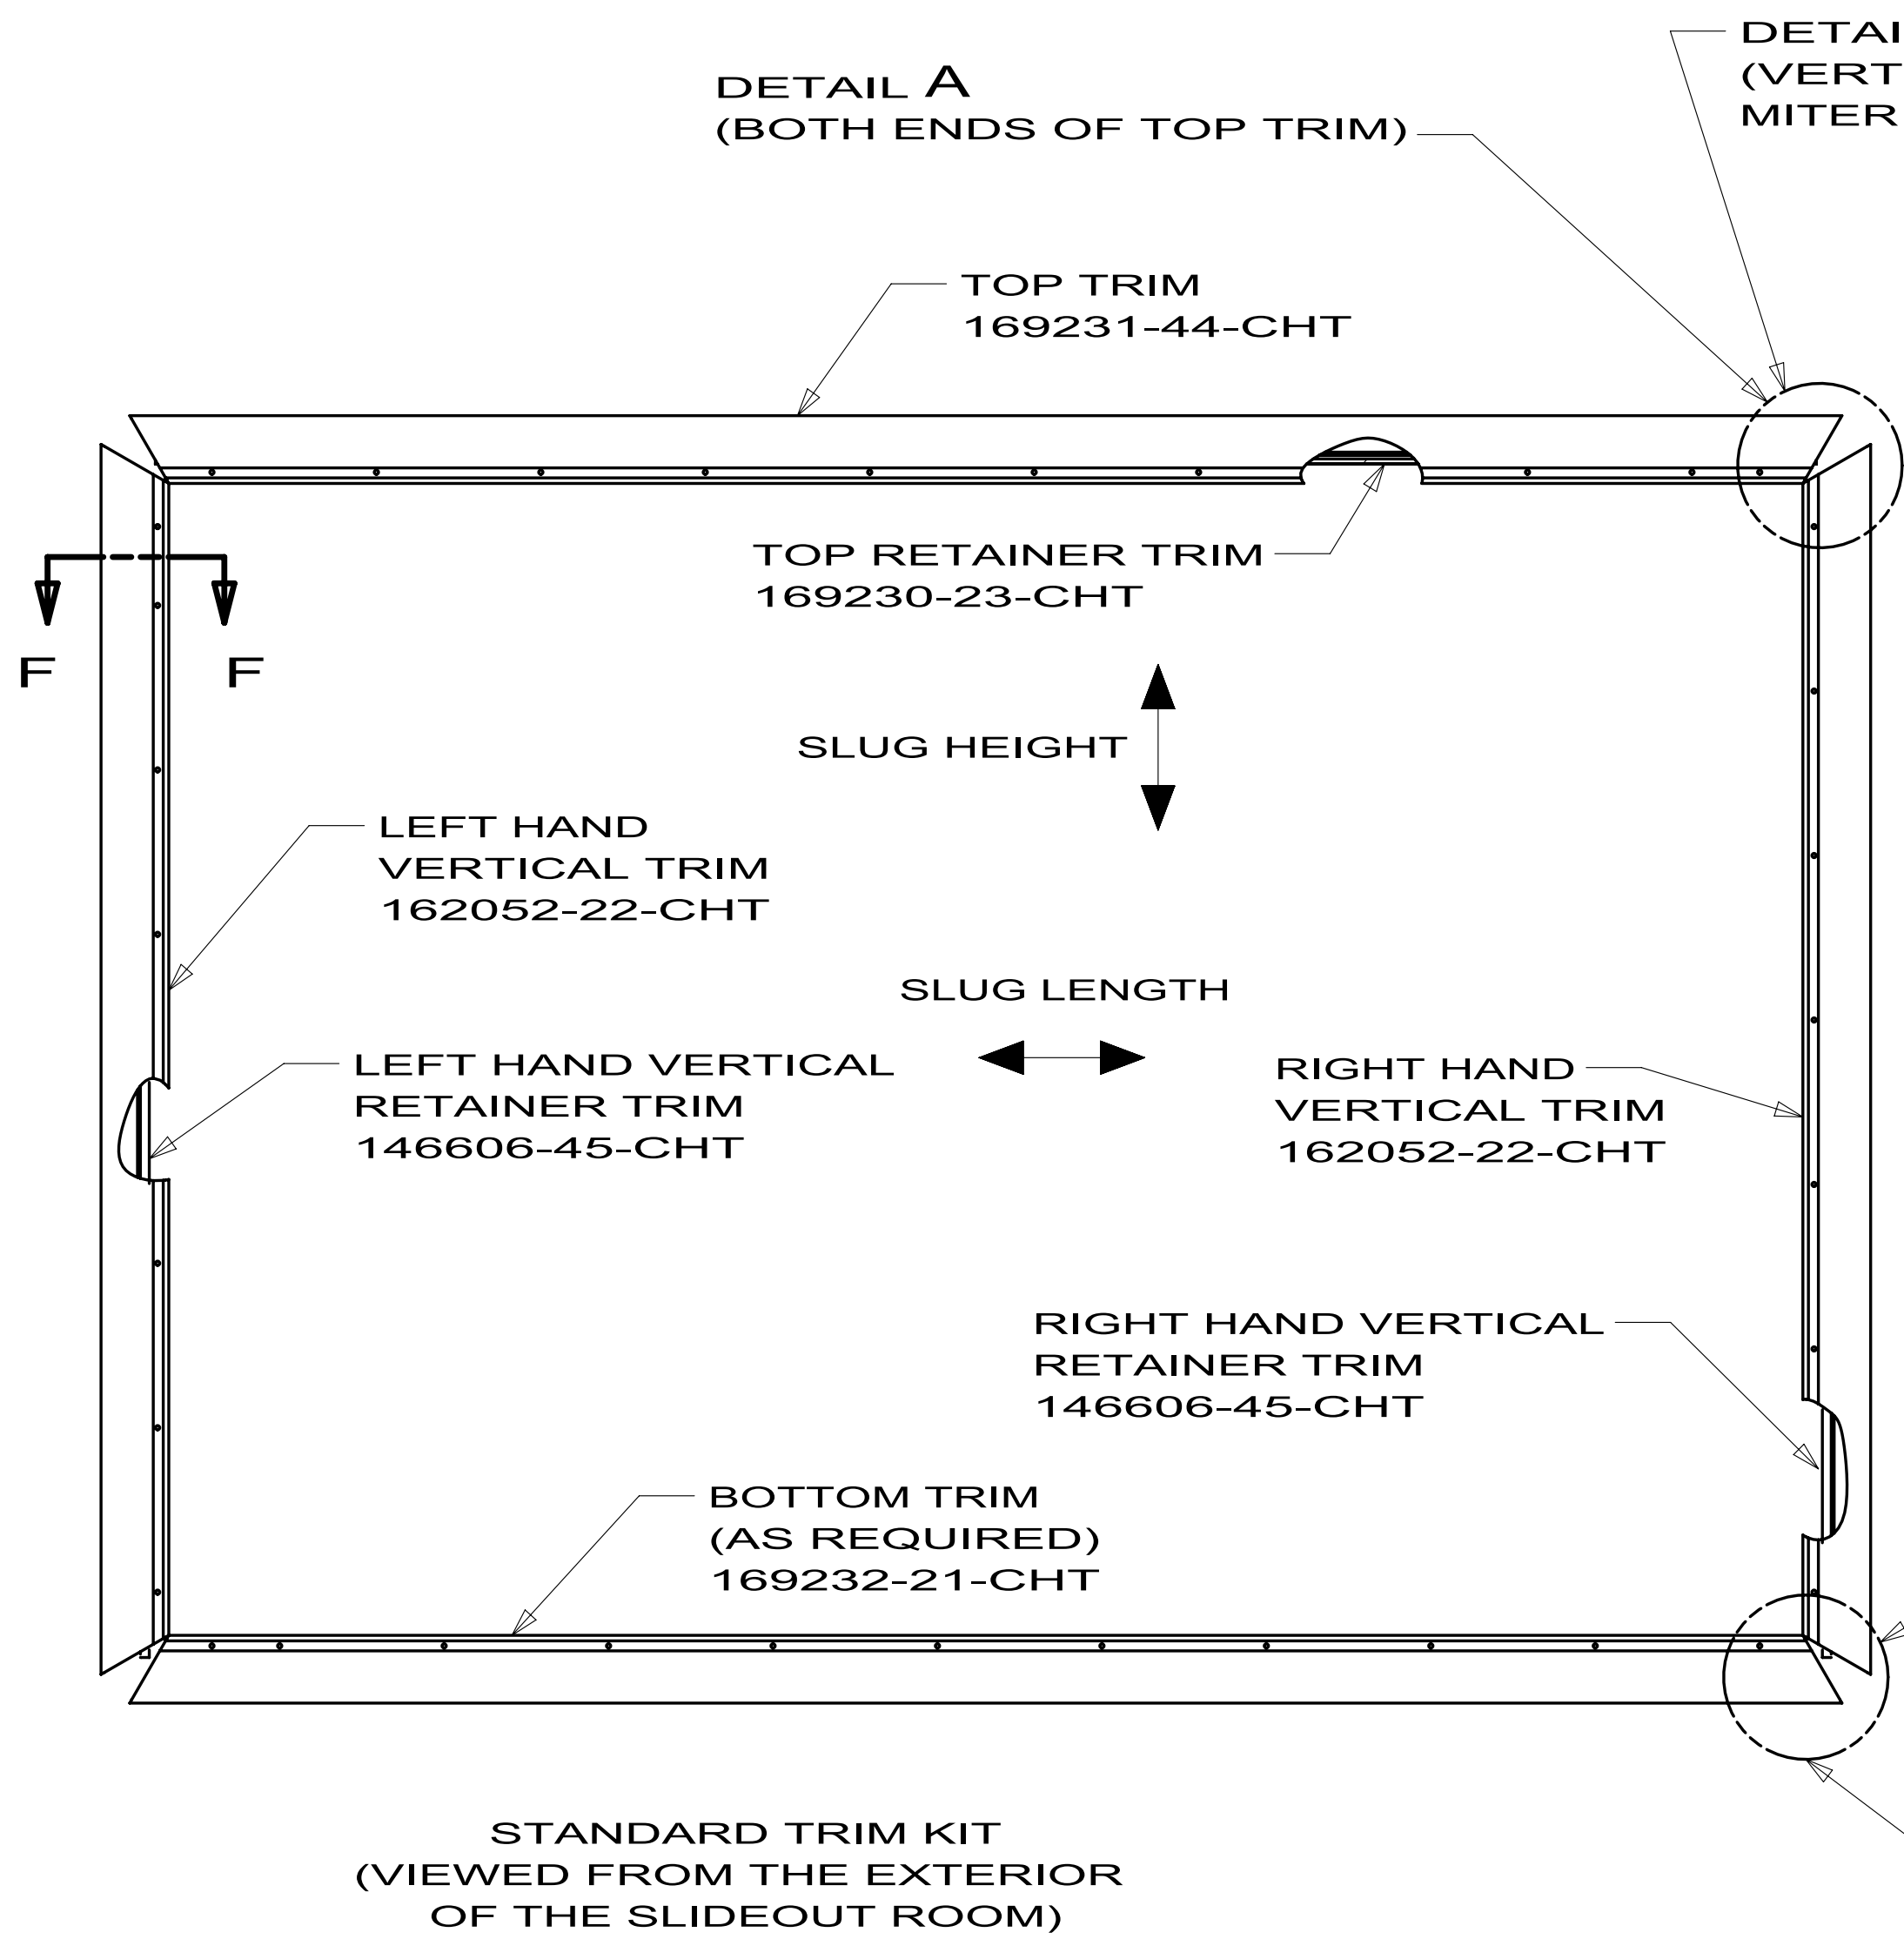

DETAIL A
(TOP TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

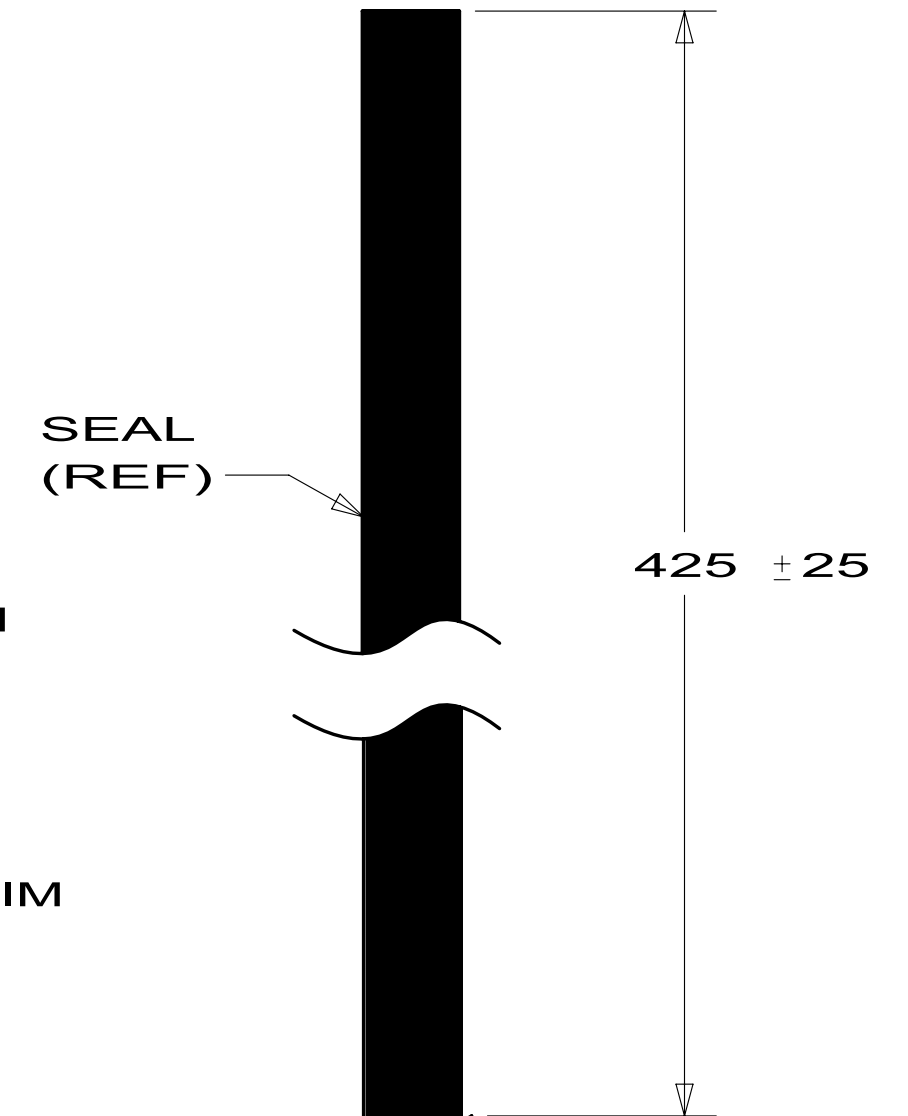

DETAIL B
(ALL MITER CUT VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)



VERTICAL RETAINER TRIM

VERTICAL RETAINER TRIM

VERTICAL TRIM



SEAL
(REF)

DETAIL C
(ALL STRAIGHT CUT VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)



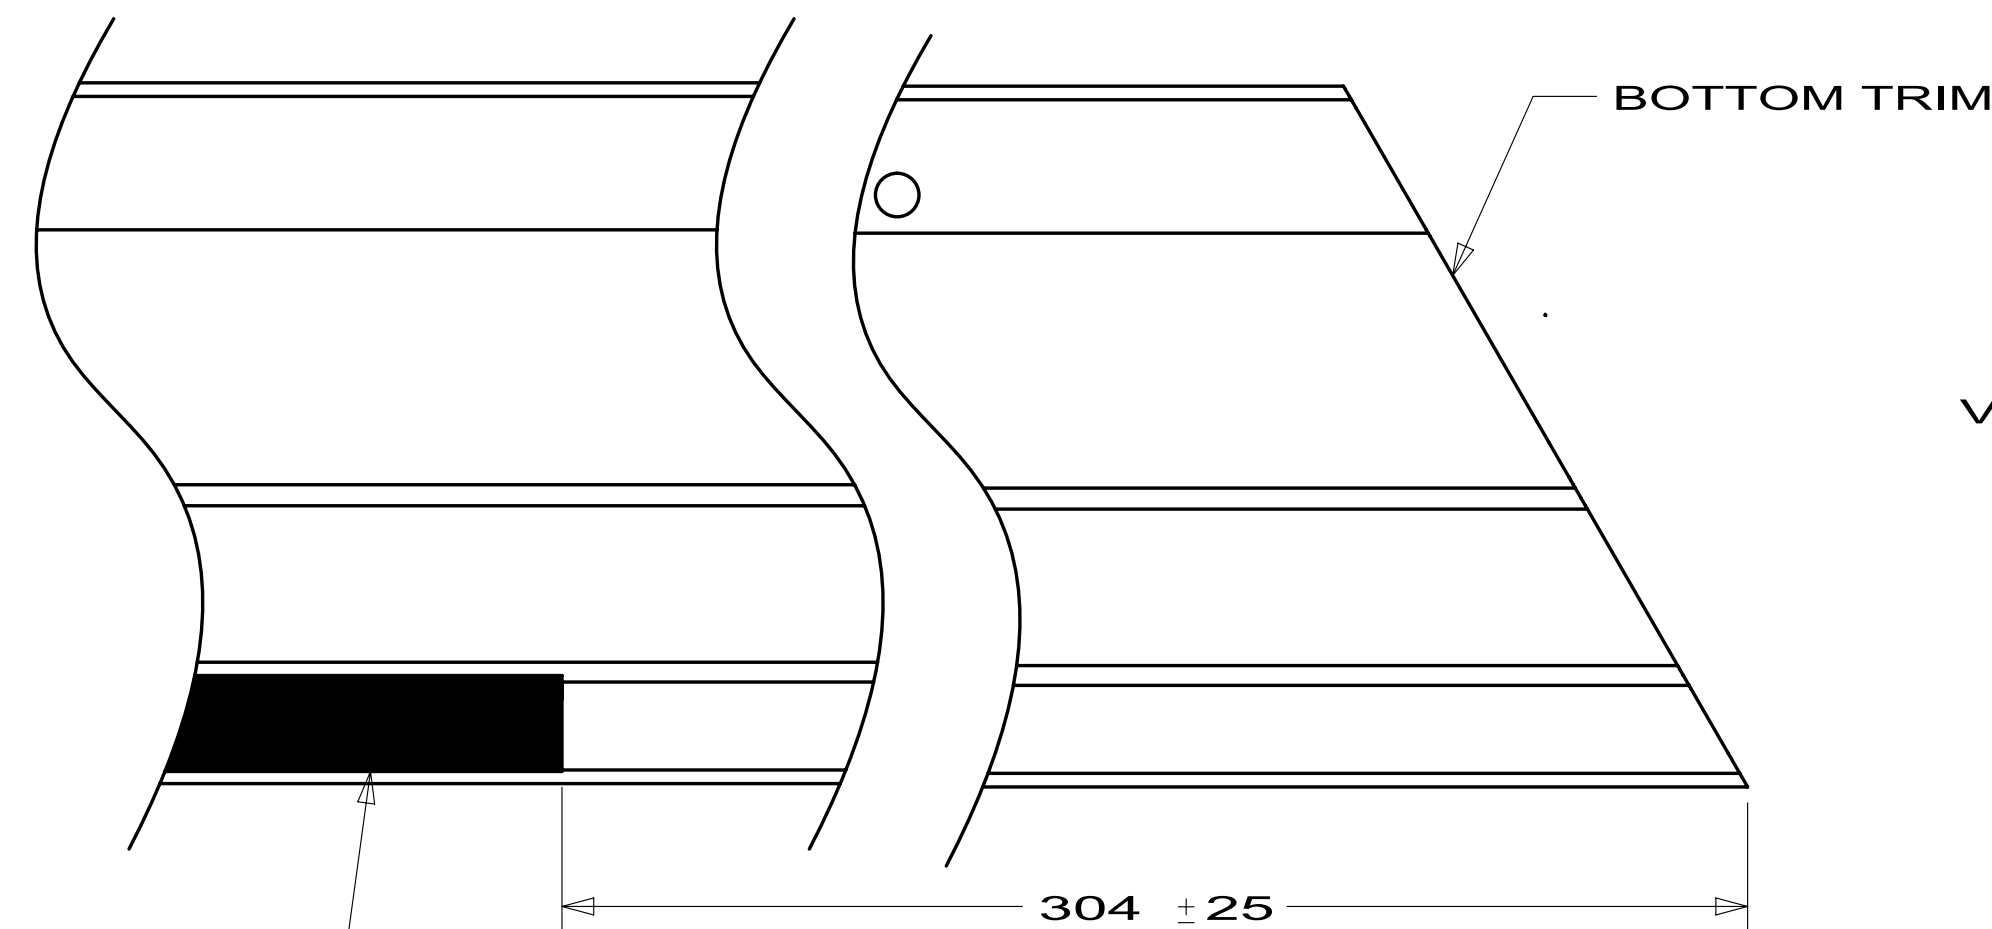
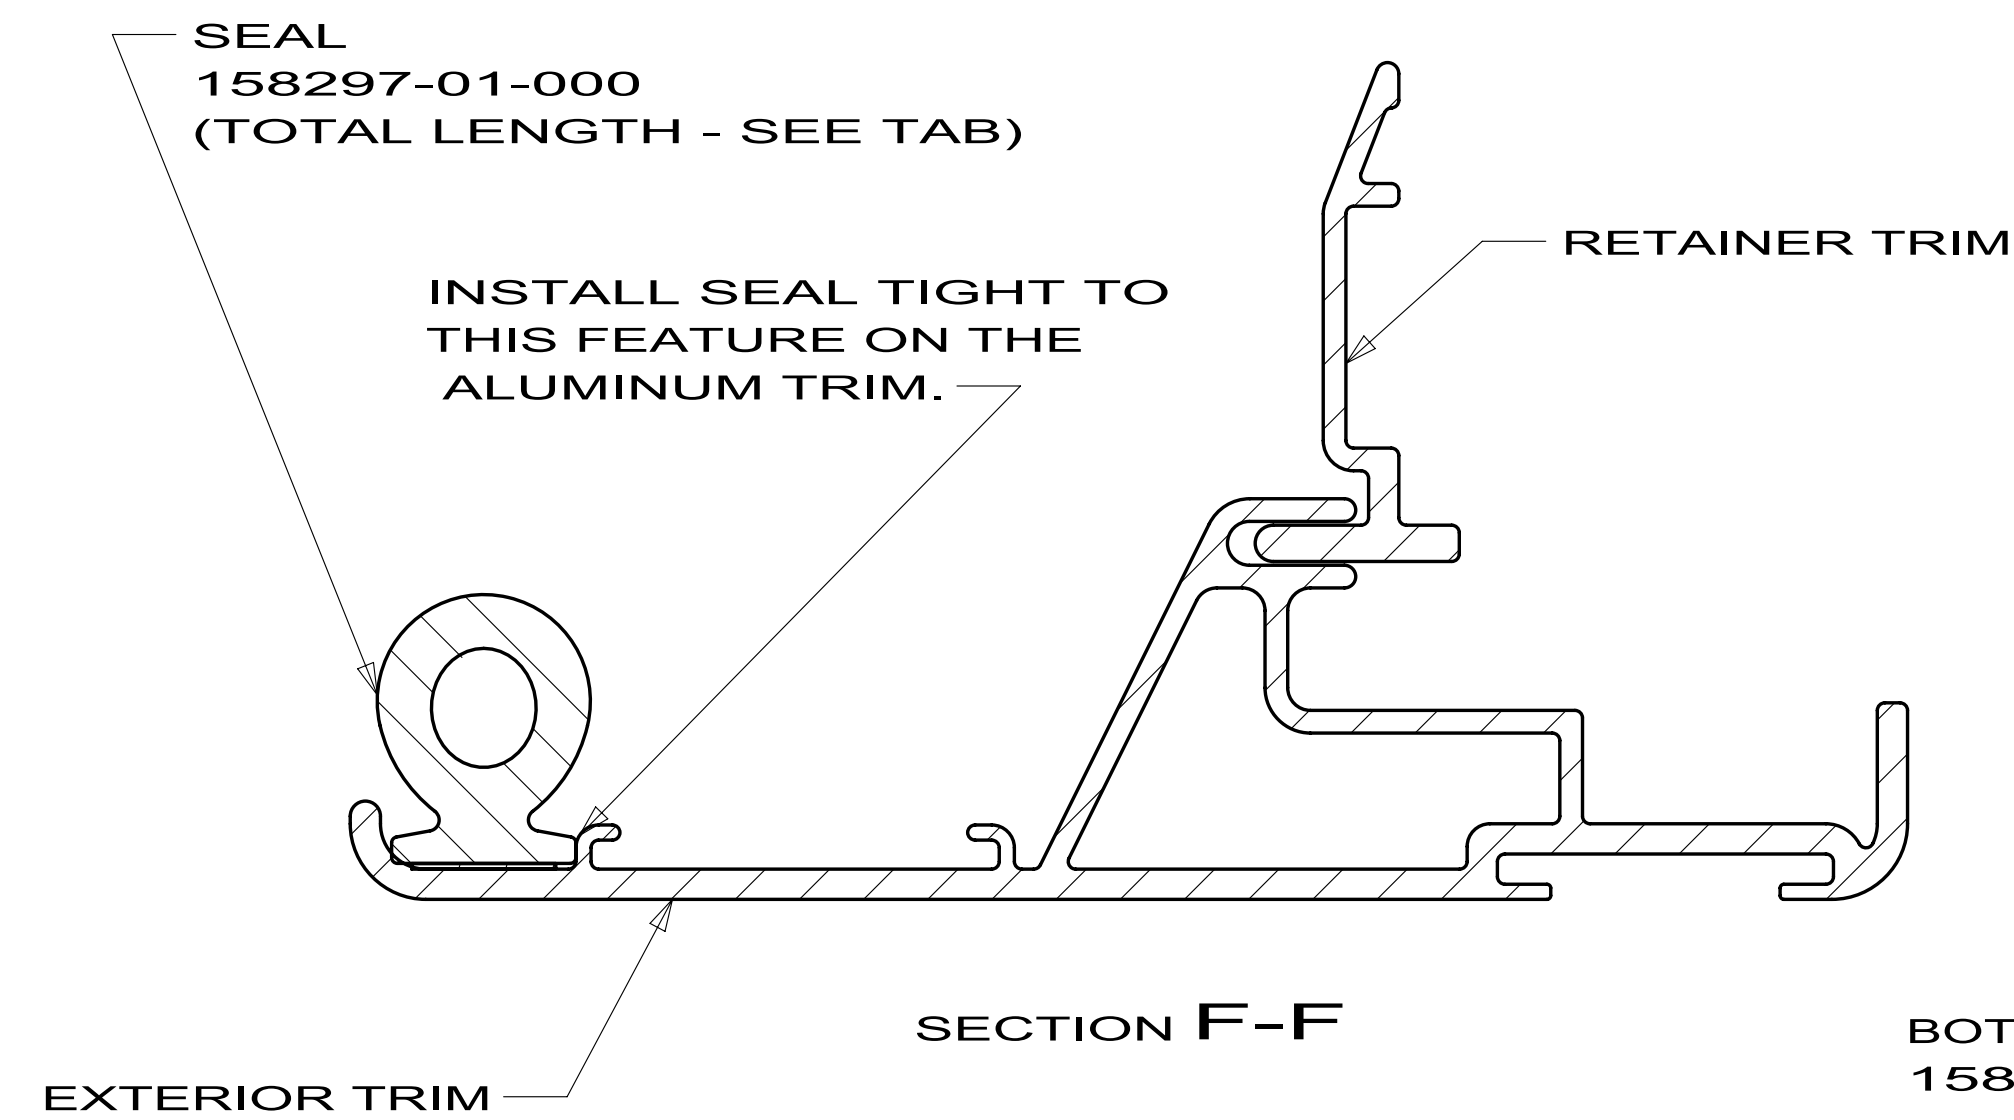


DETAIL D
(BOTTOM TRIM)
VIEWED FROM THE BACKSIDE OF THE TRIM

FIRST USED		2010 MOTORHOMES	
DO NOT SCALE DRAWING			
TITLE: TRIM KIT-EXTERIOR,SLIDEOUT			
SHEET 1	PART NO	169233	REV

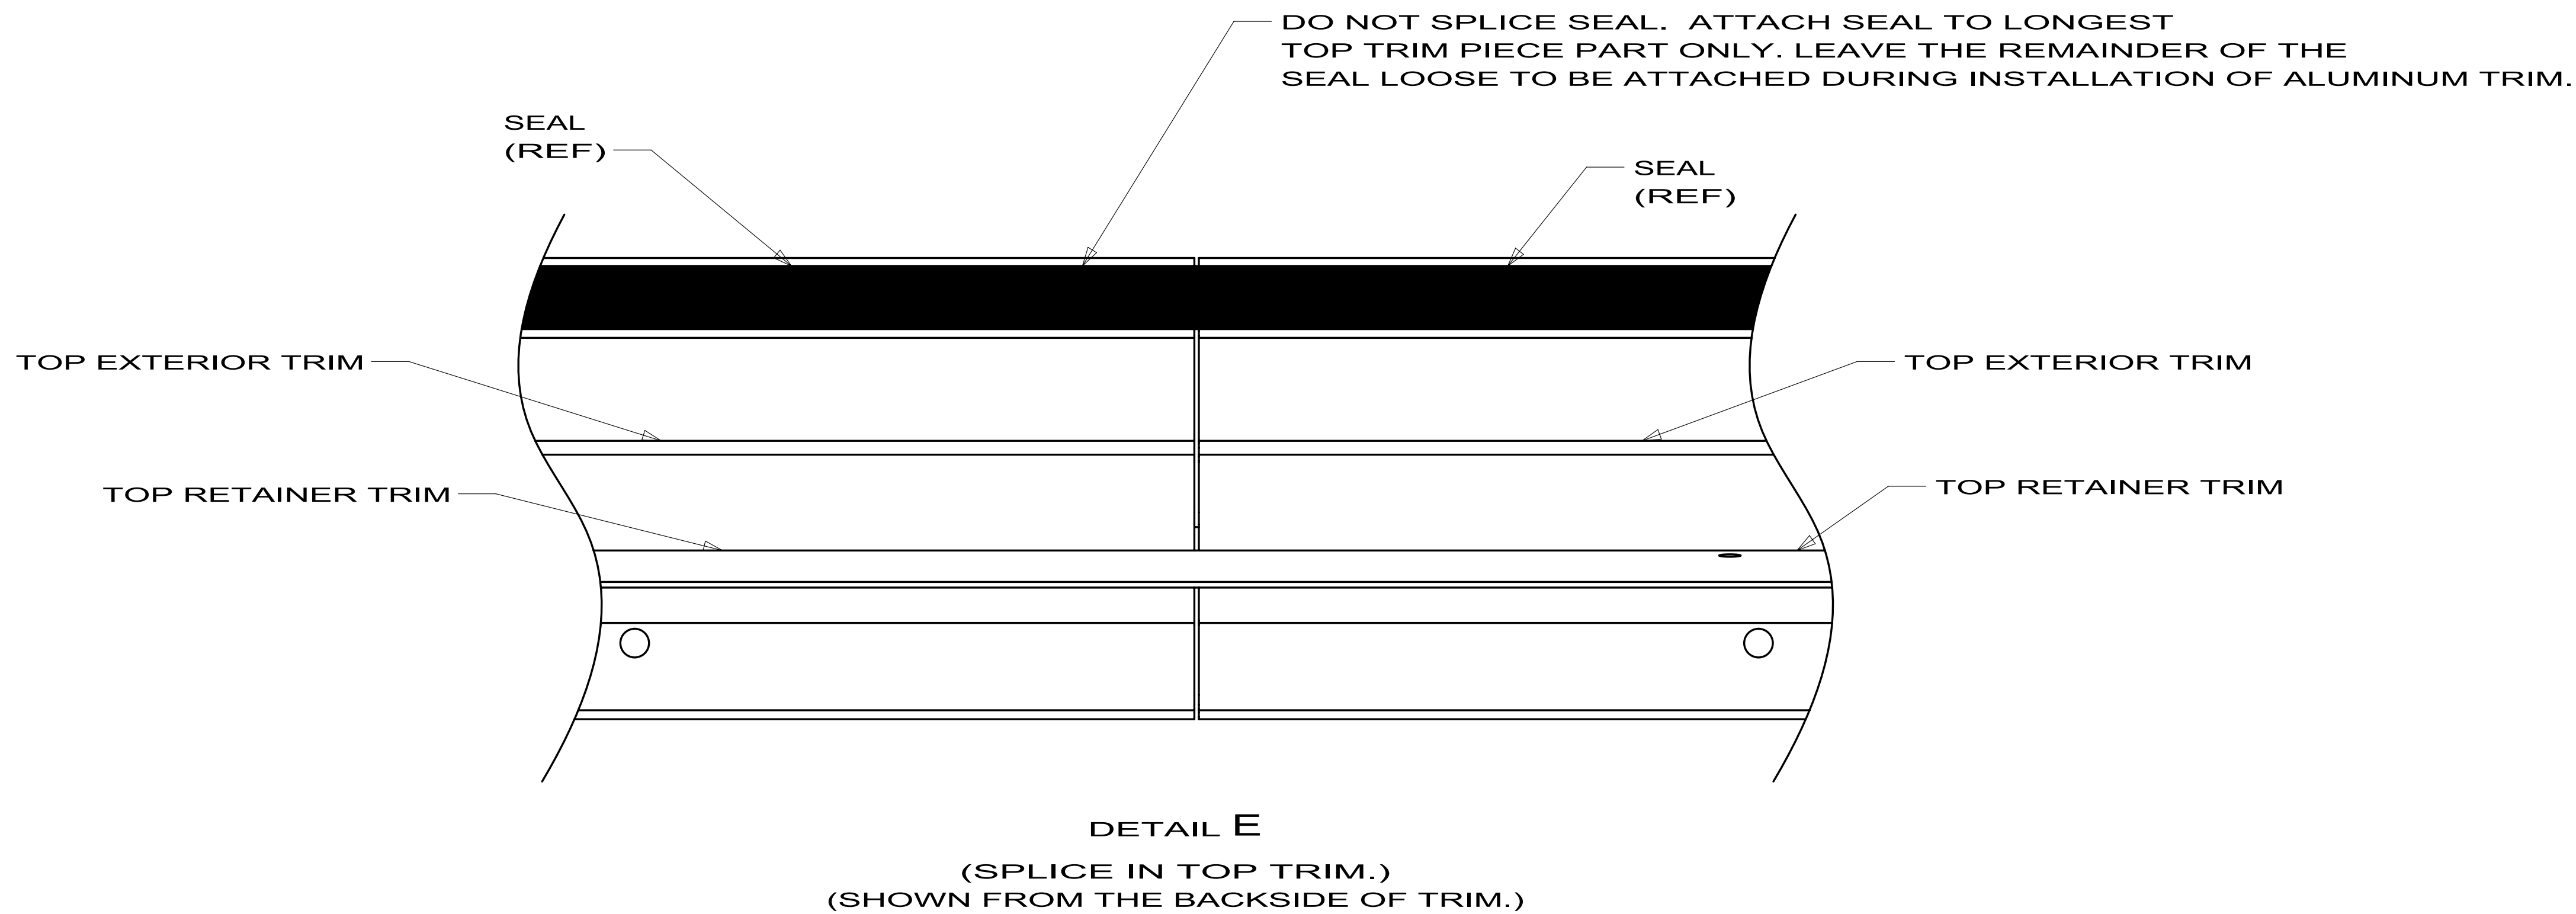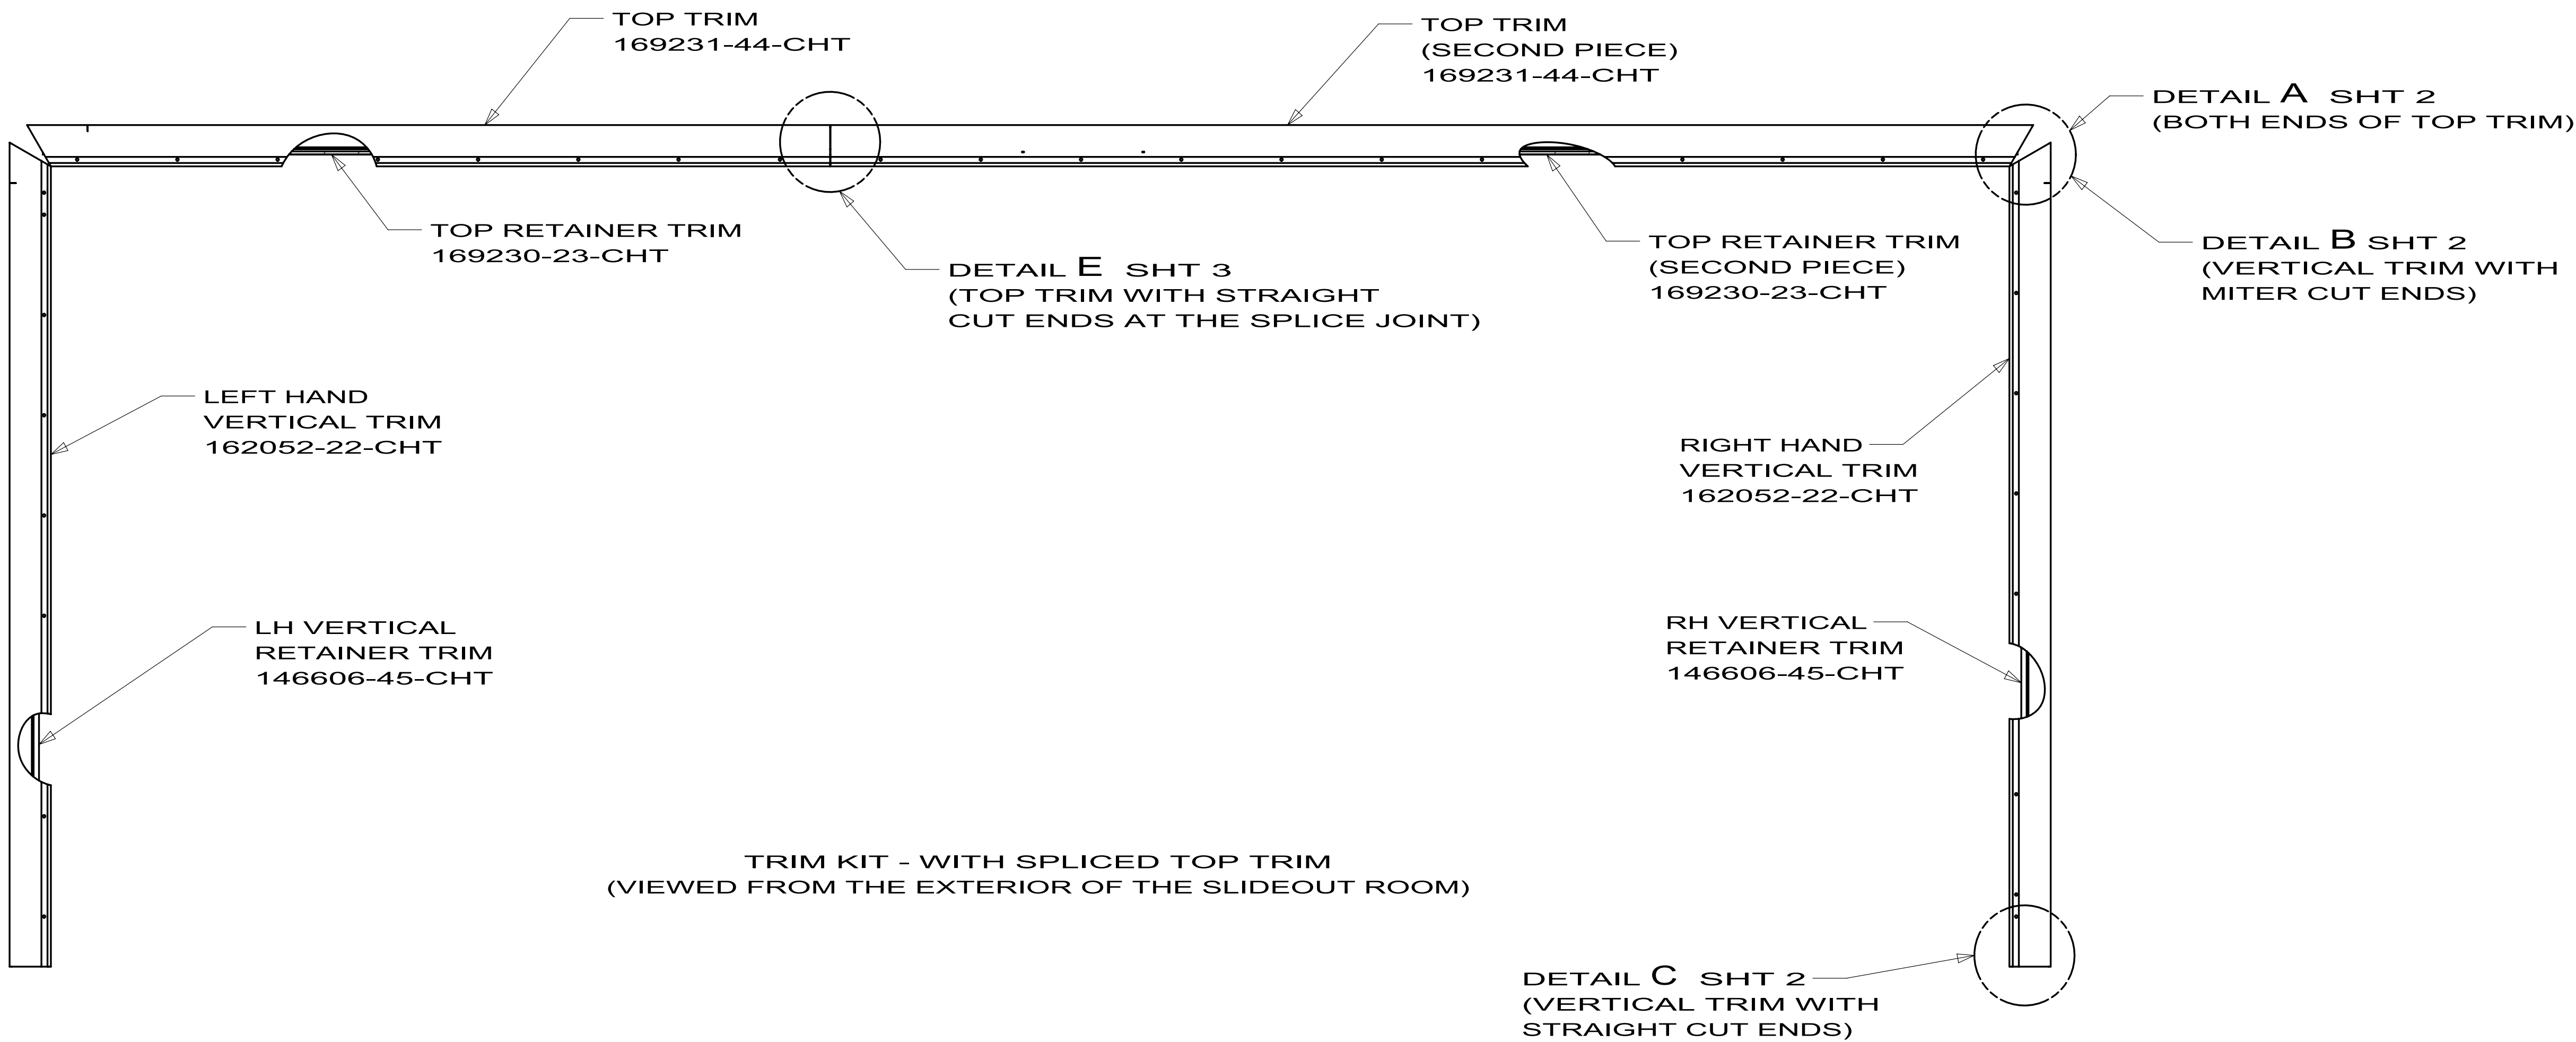



FIRST USED		
2010 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
TRIM KIT-EXTERIOR,SLIDEOUT		
SHEET 4	PART NO 169233	REV

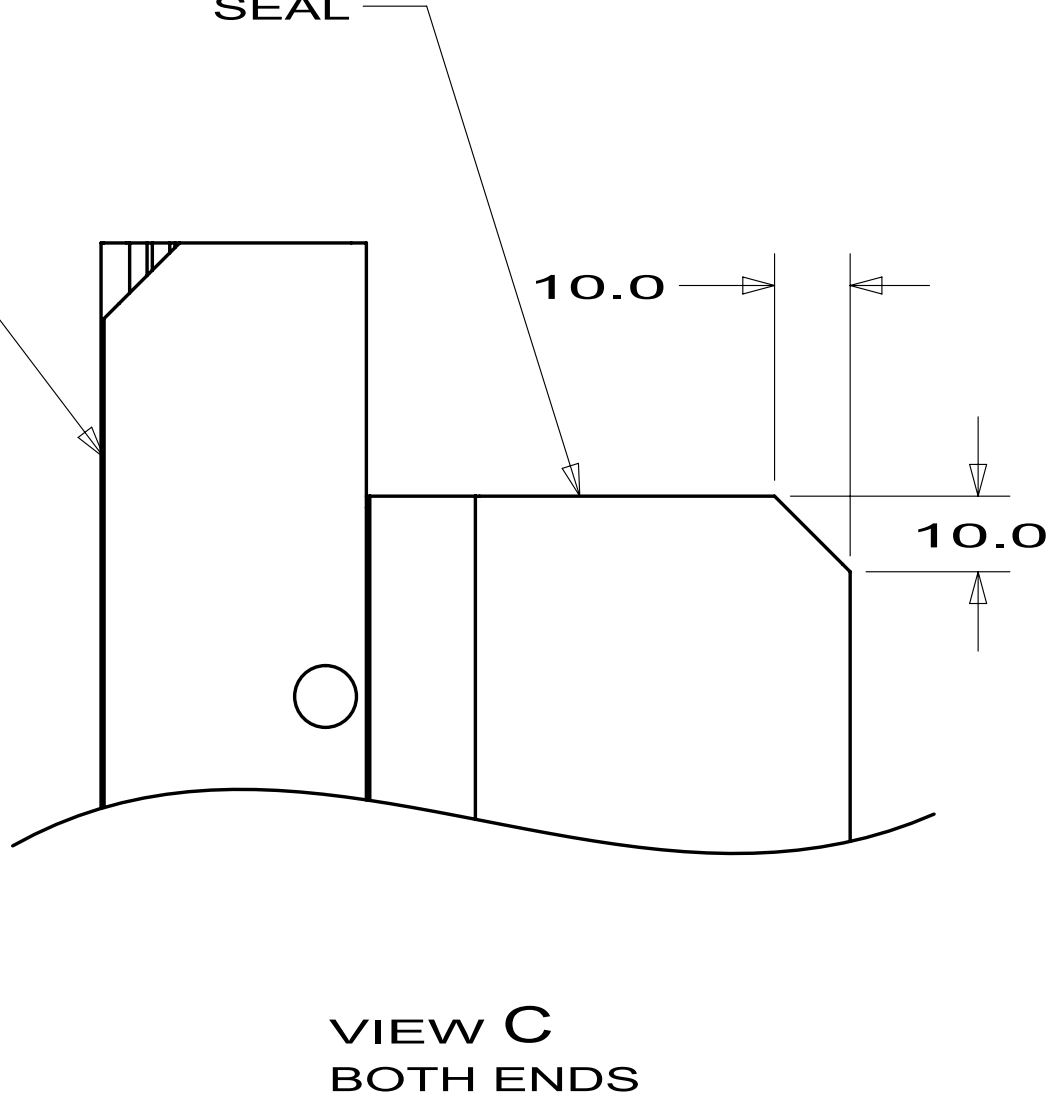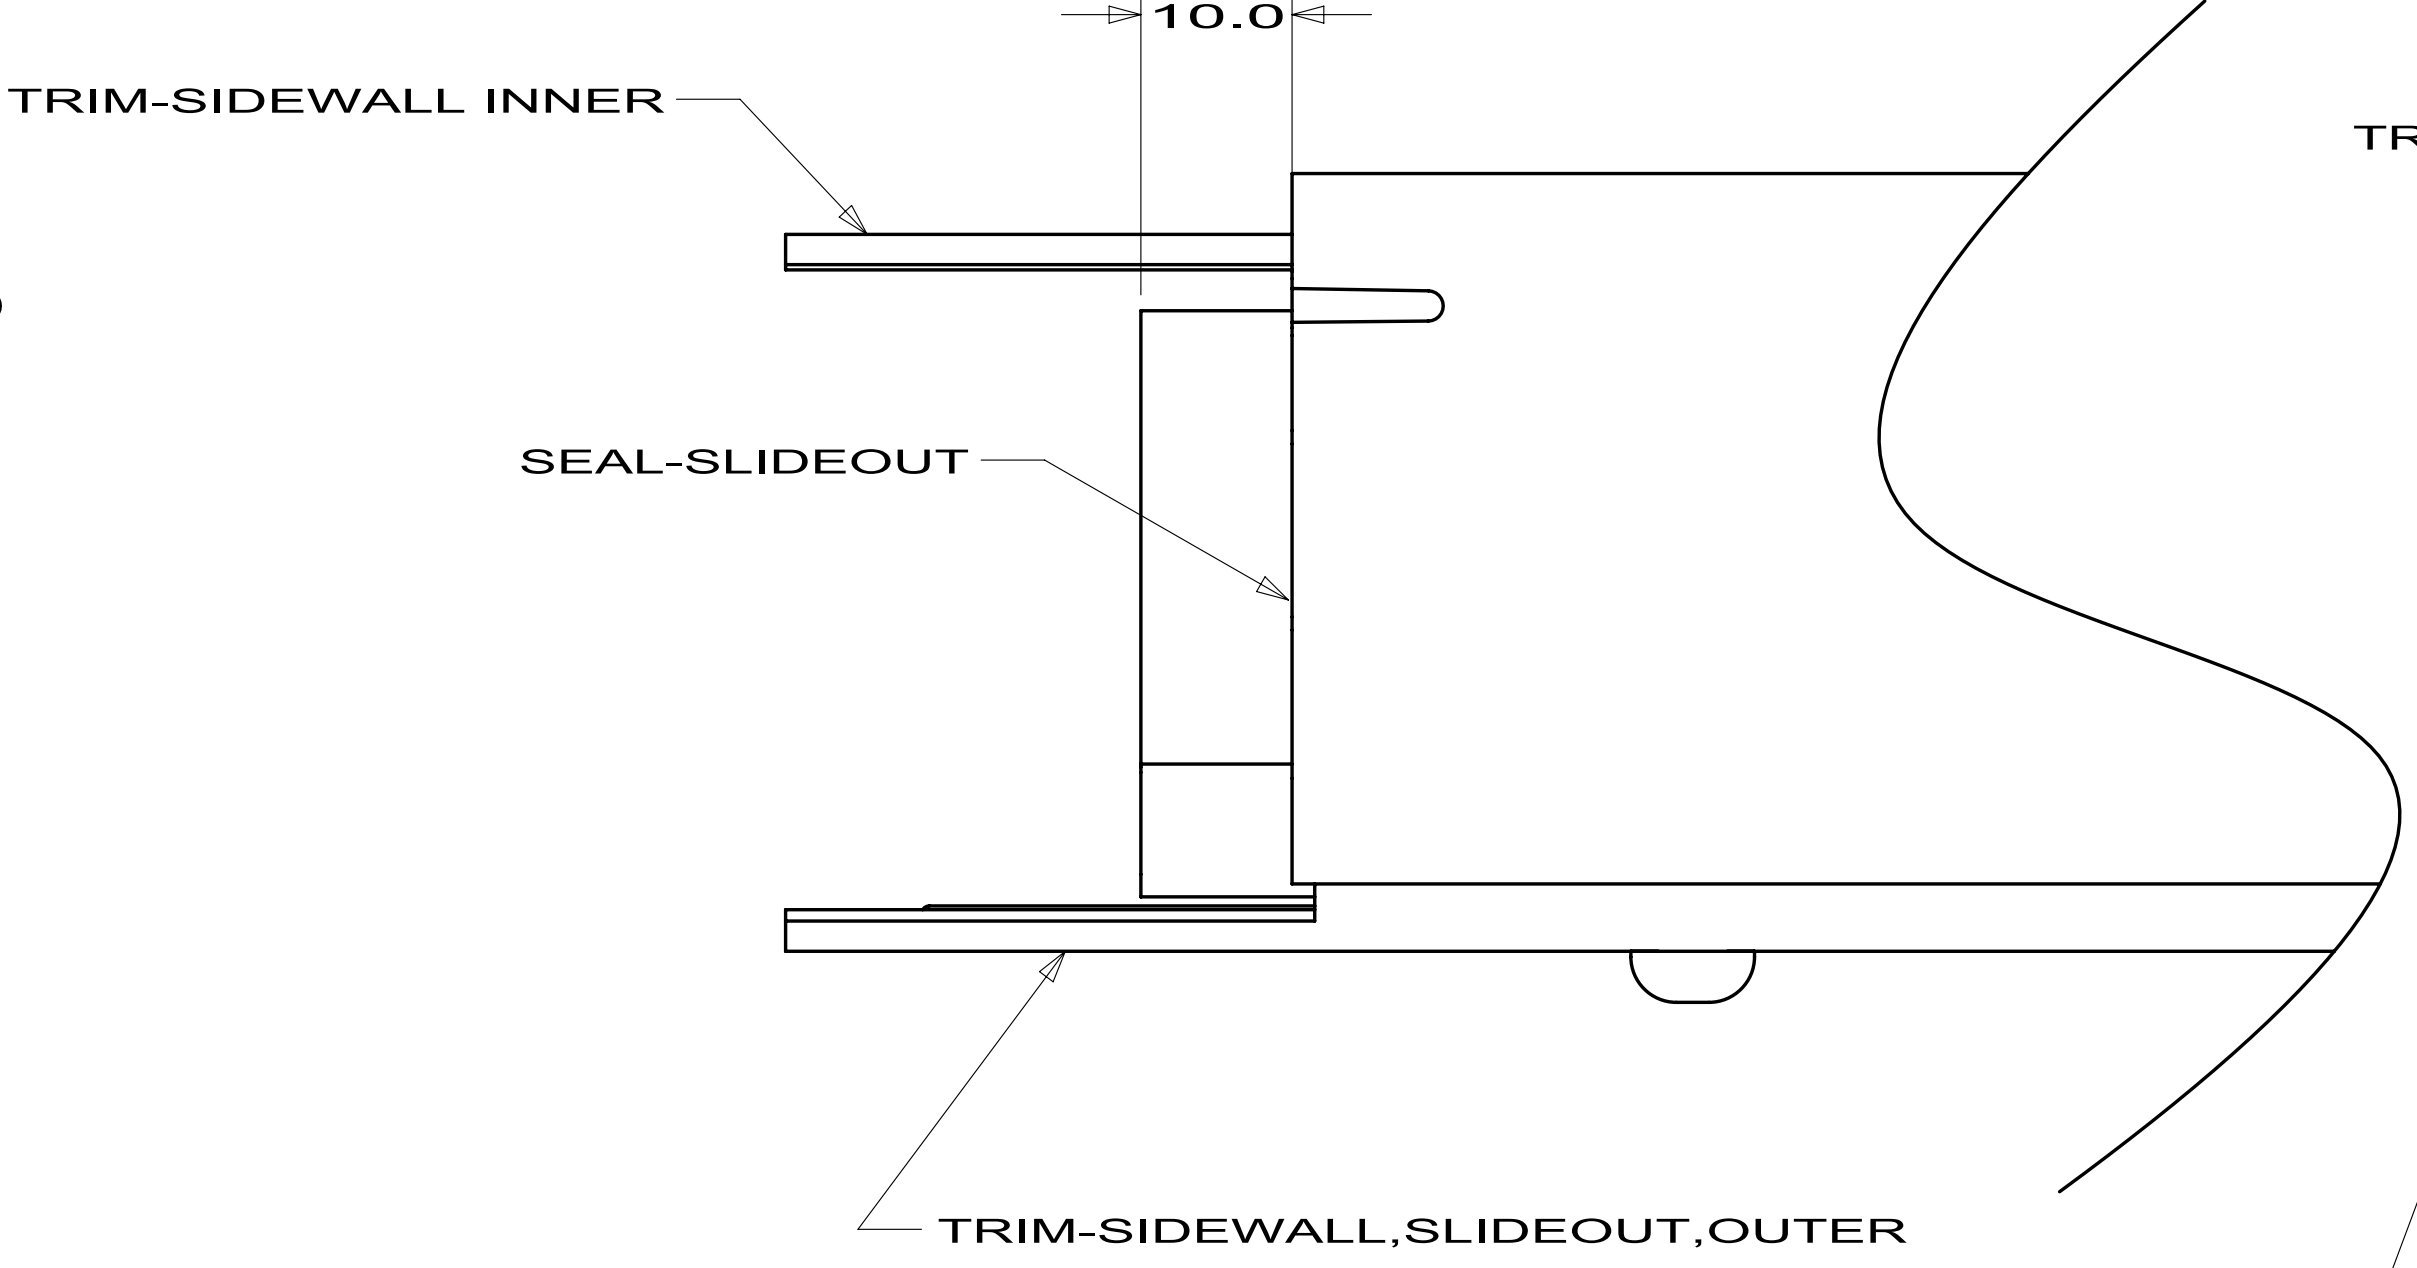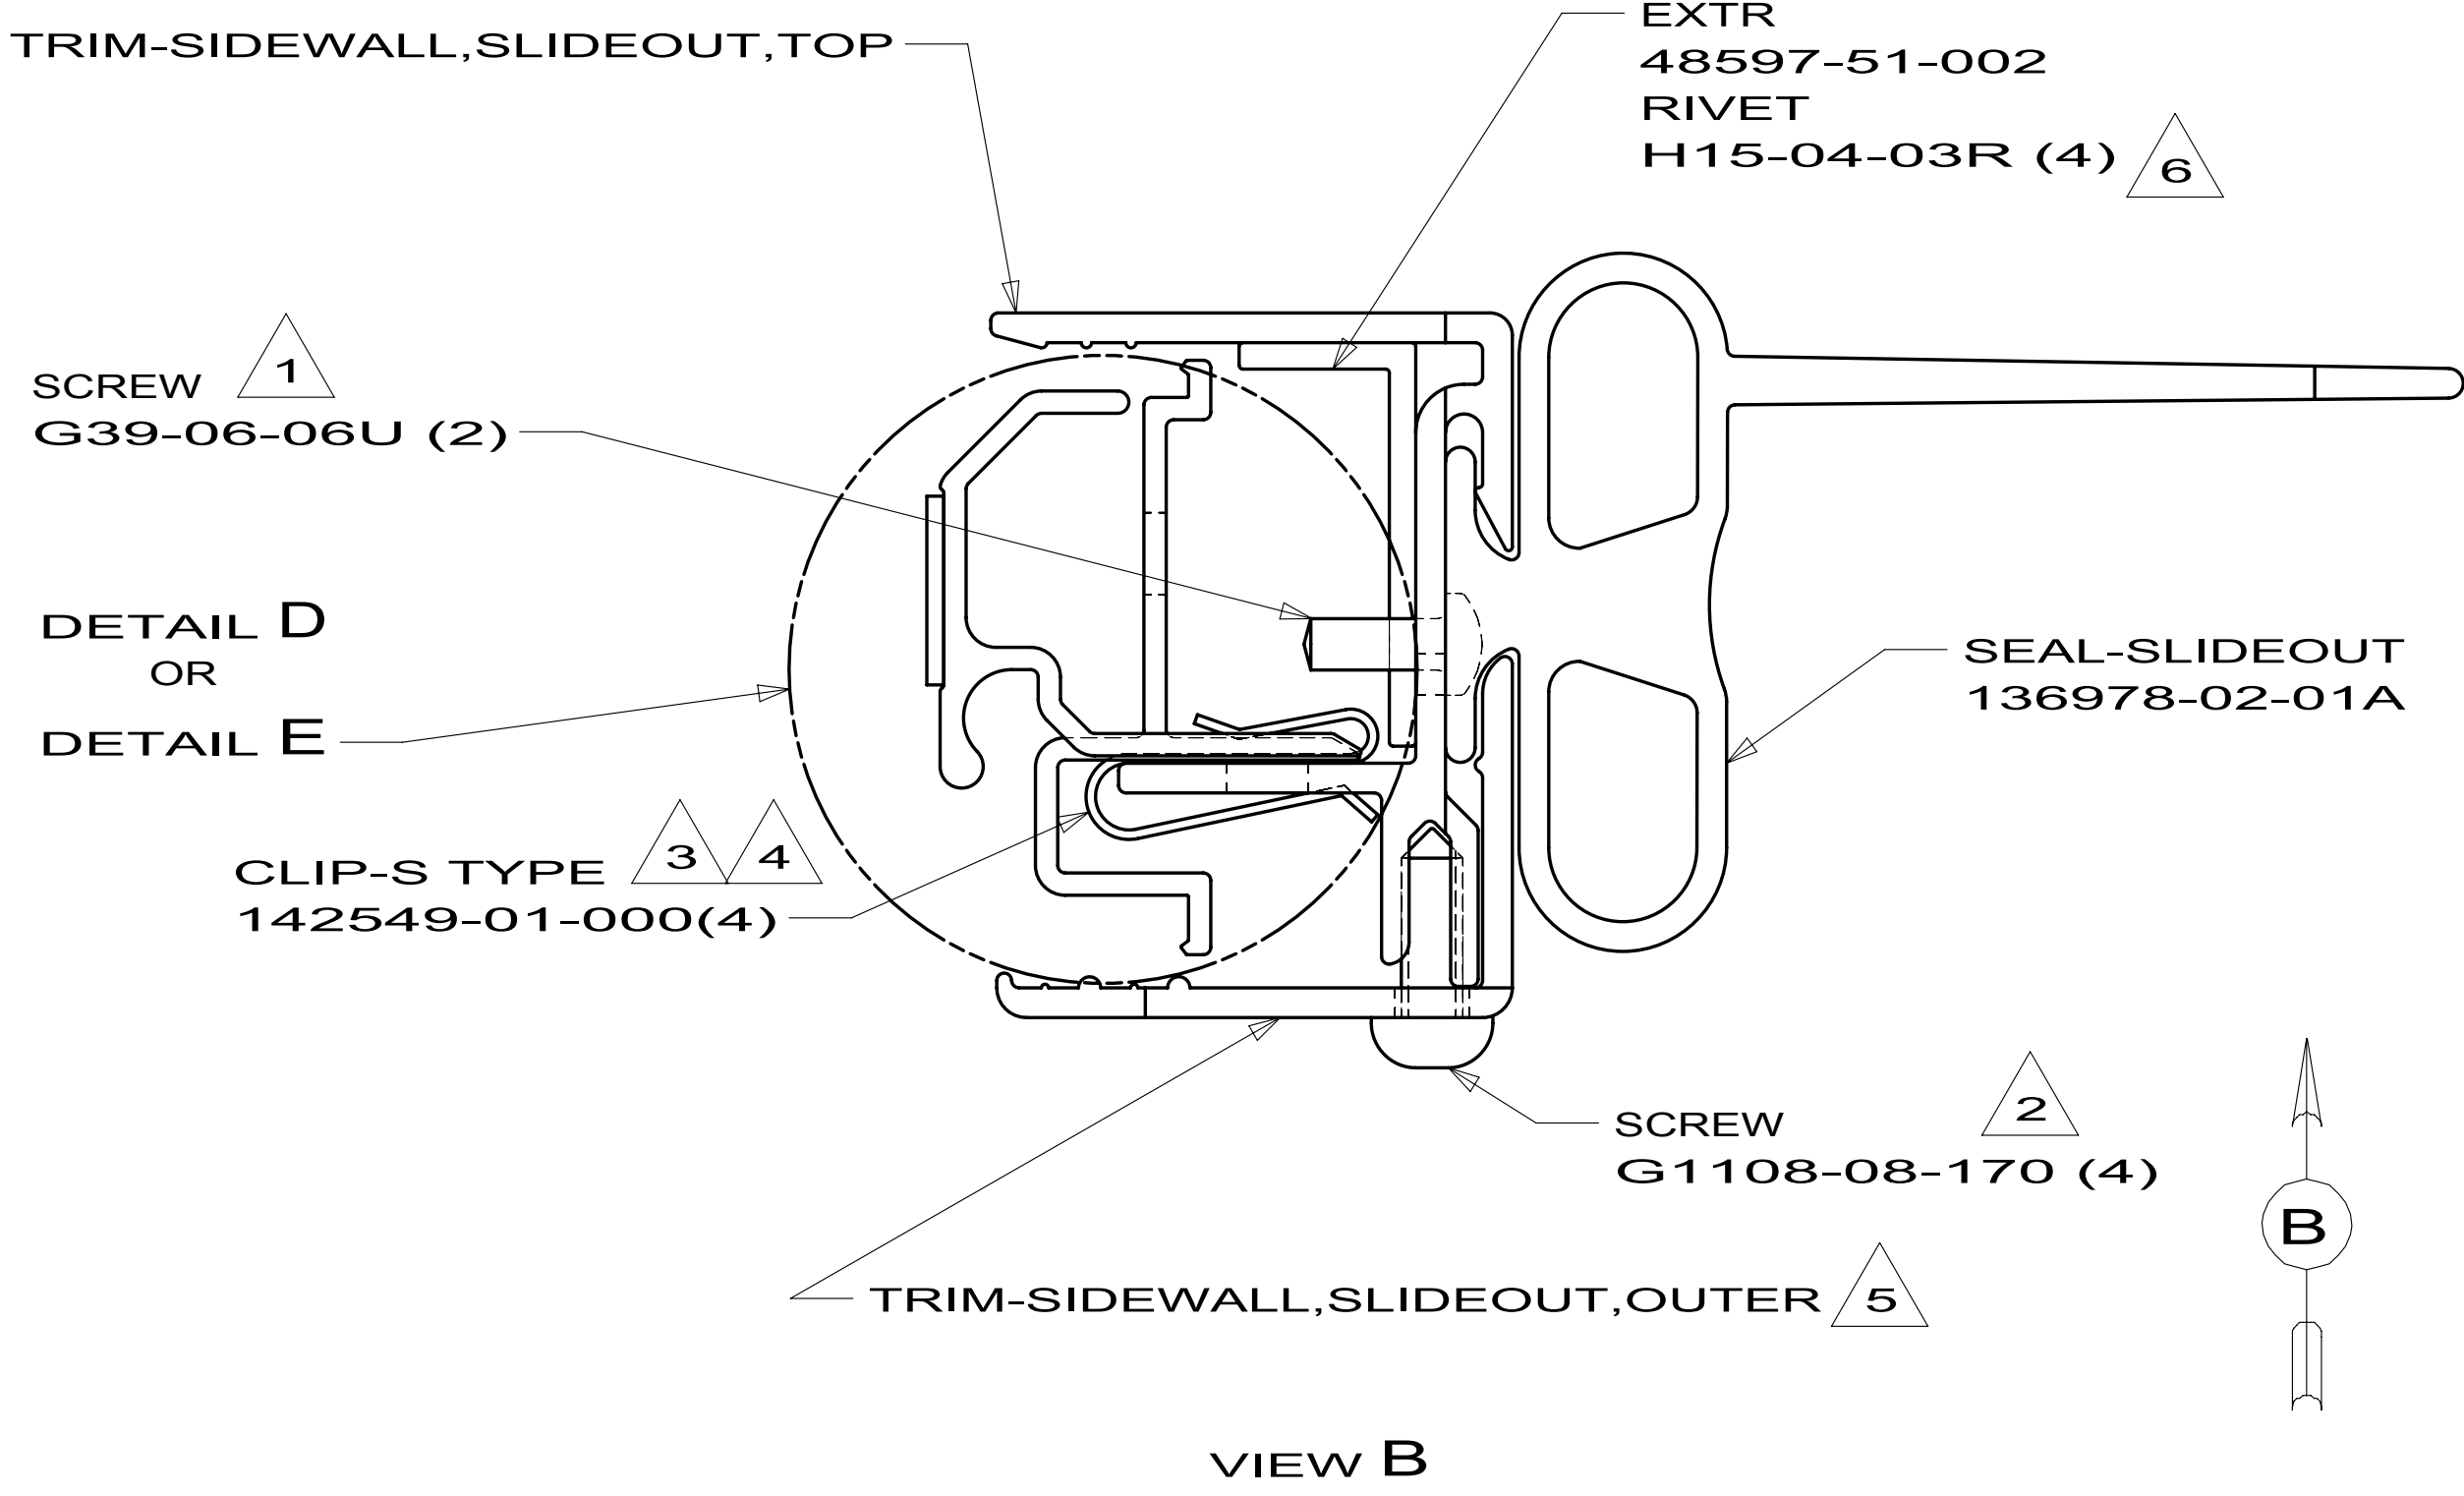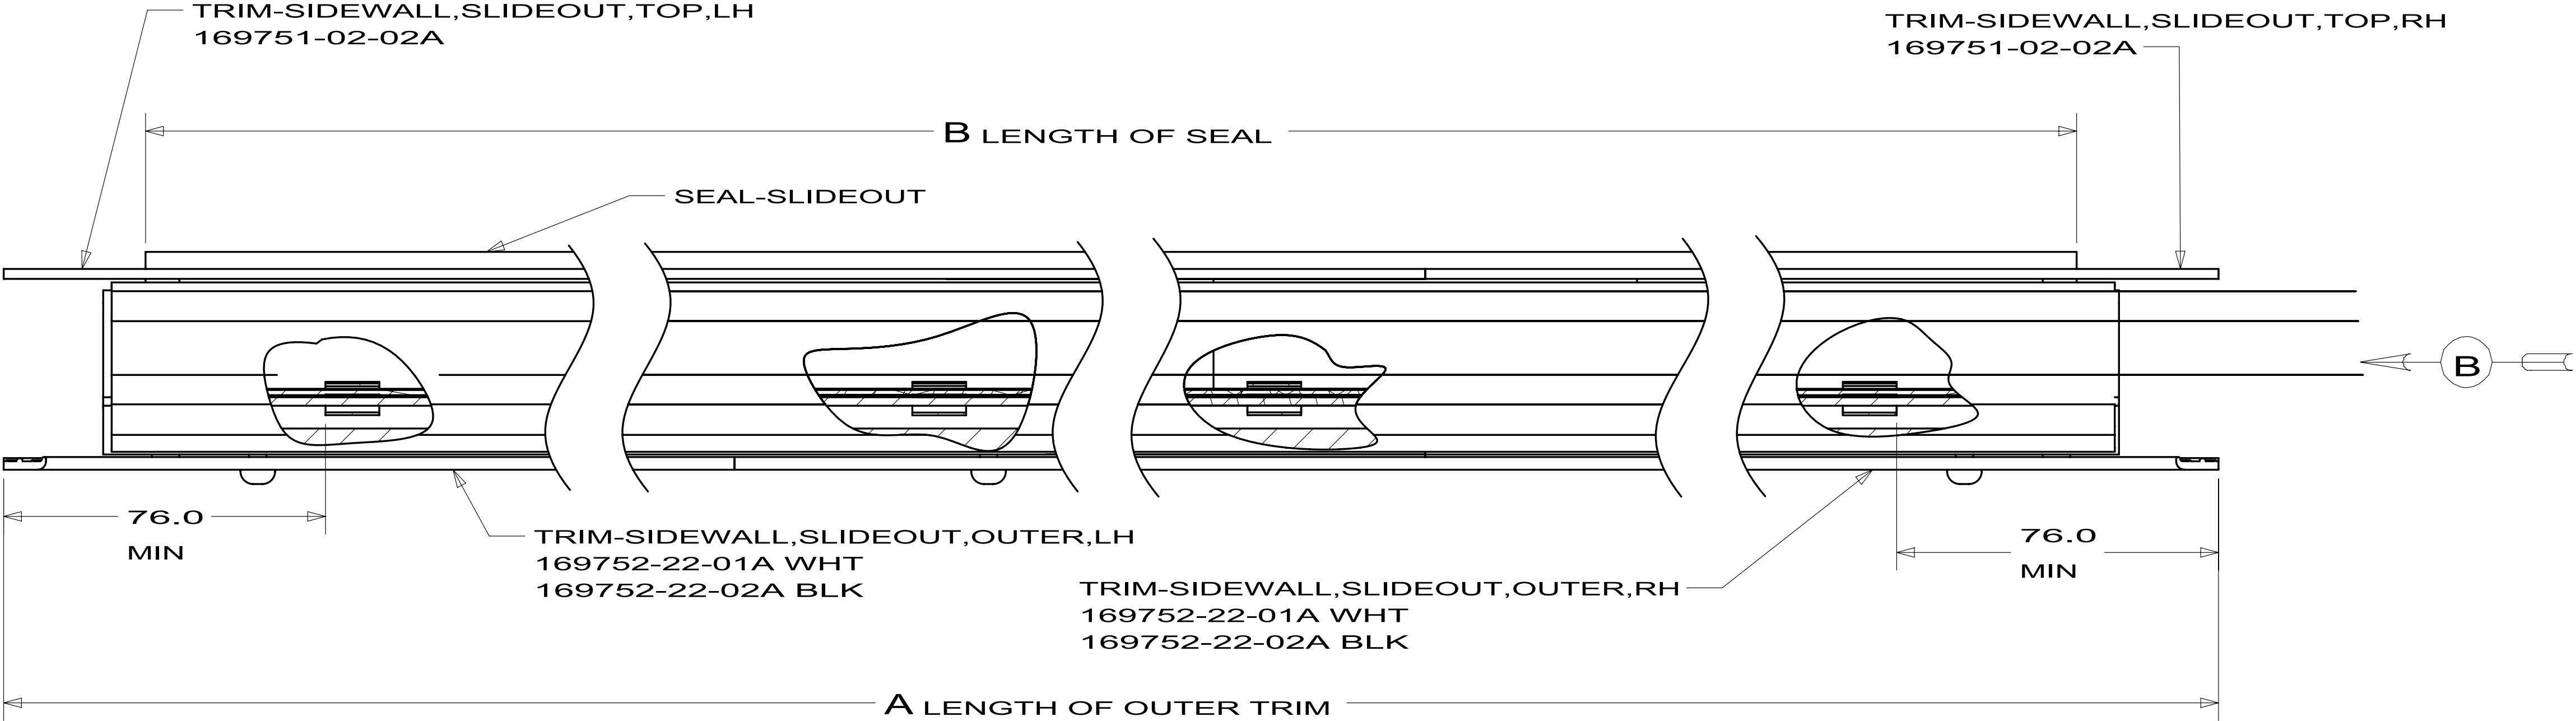

RETAINER-SIDEWALL
169801-21-01A
(USED ON 169749 TABS 01 THRU 21)


RETAINER (3)
169305-01-000
(USED ON 169749 TABS 22 THRU 35)




- NOTES:
1. APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.
 2. APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 3. LOCATE CLIPS AT EACH END AND SPACED EQUALLY ALONG THE INNER TRIM.
 4. TOLERANCE ON THE CLIP SPACING IS ± 100.0 mm.
 5. OUTER TRIM MUST BE CENTERED ON THE INNER TRIM WITHIN ± 3.0 .
 6. CENTER EXTRUSION ACROSS SPLICE IN TOP TRIM, DRILL FOUR 3.28 MM(.129 INCH) HOLES AS REQUIRED AND RIVET TOGETHER

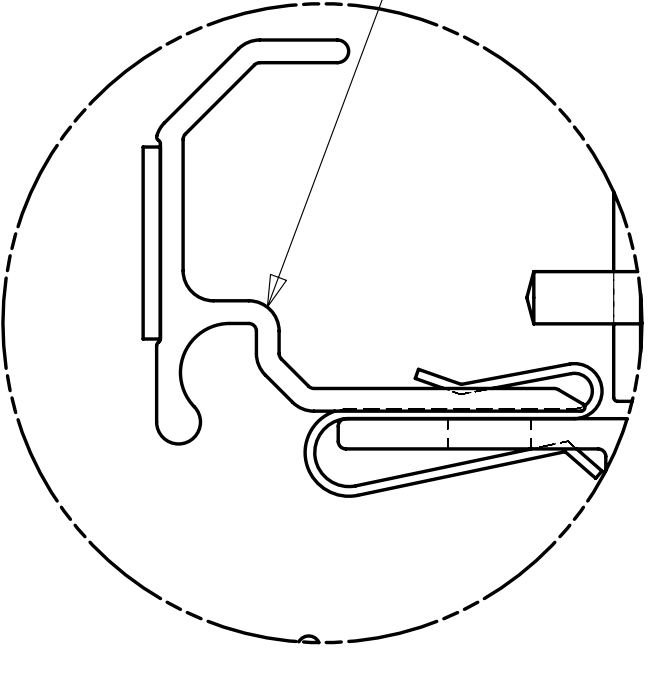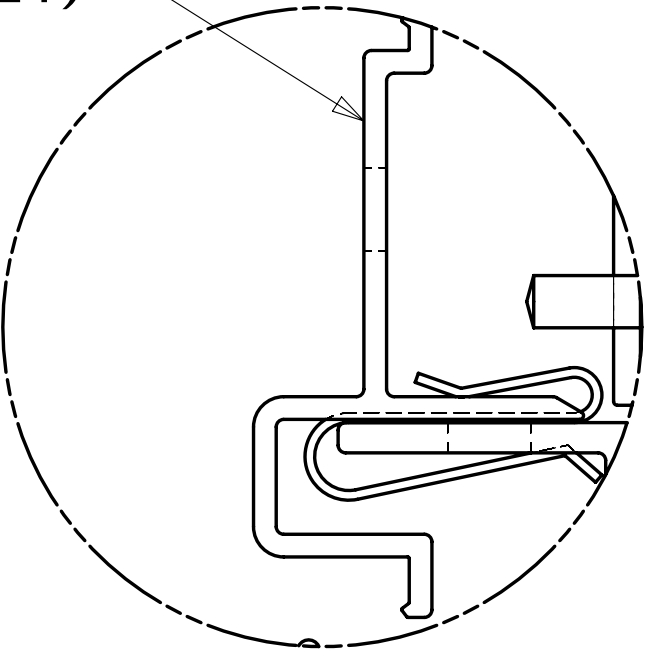

DETAIL D

DETAIL E

WINNEBAGO® INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DTFR		ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.			
DSNR		FIRST USED	
		10 MH	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	
TITLE:			
TRIM ASM-SLIDEOUT, TOP			
SHEET 1 OF 1	PART NO	169749	REV

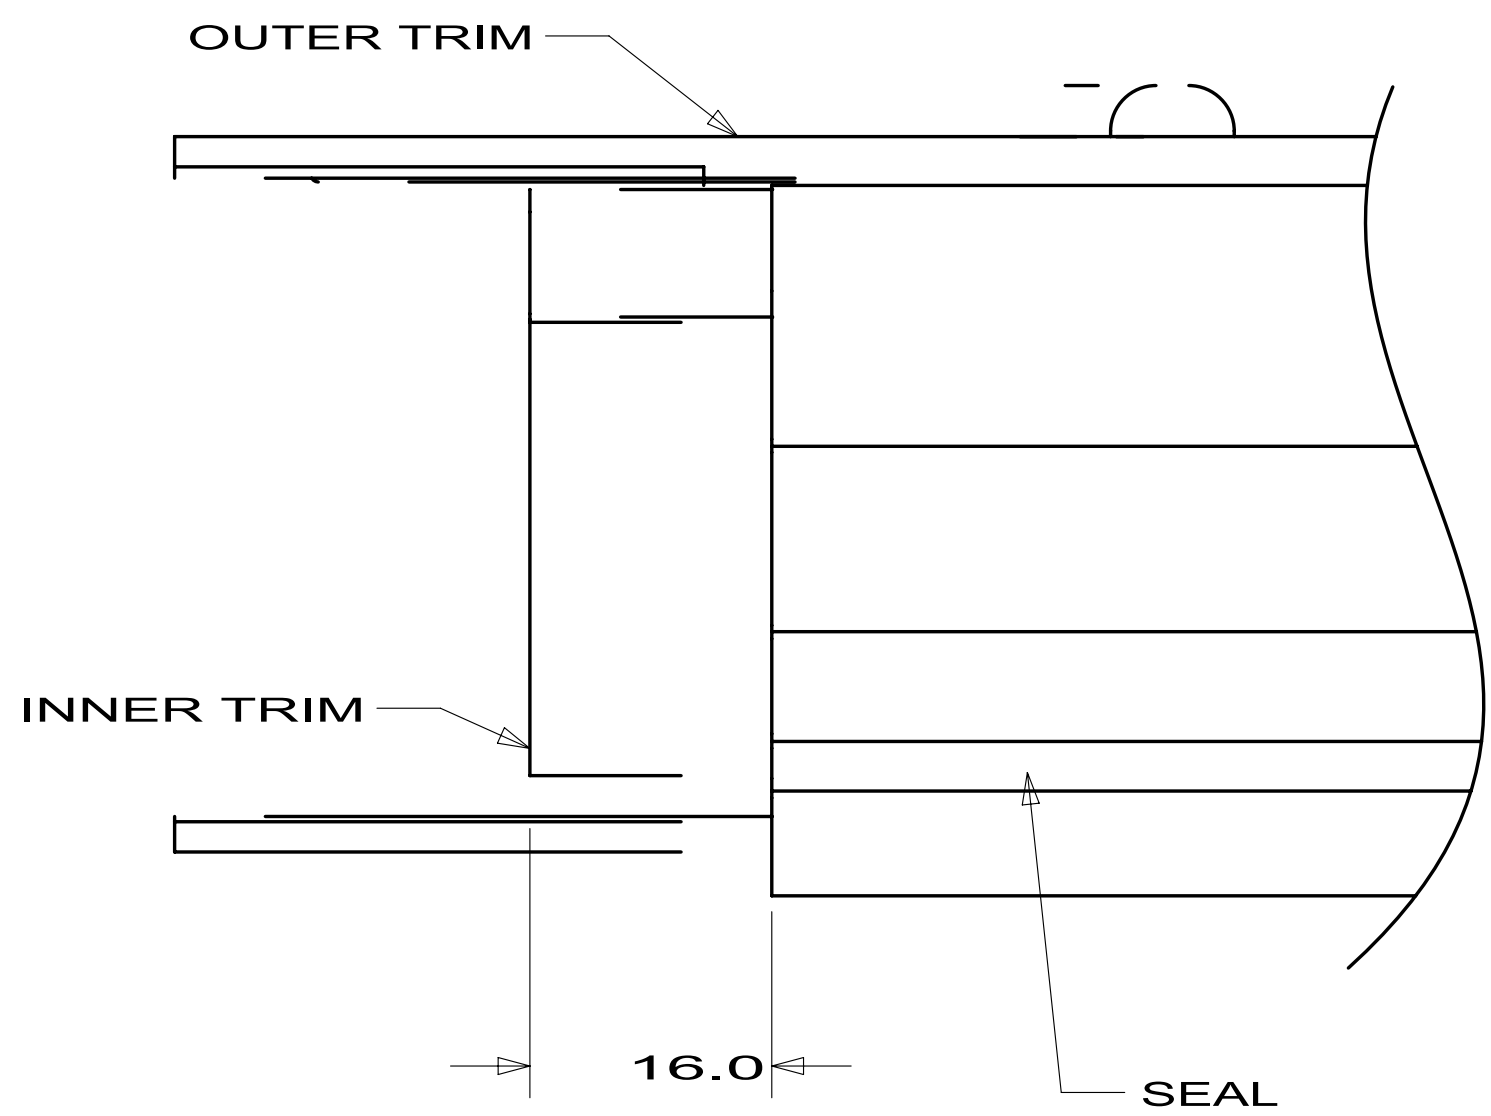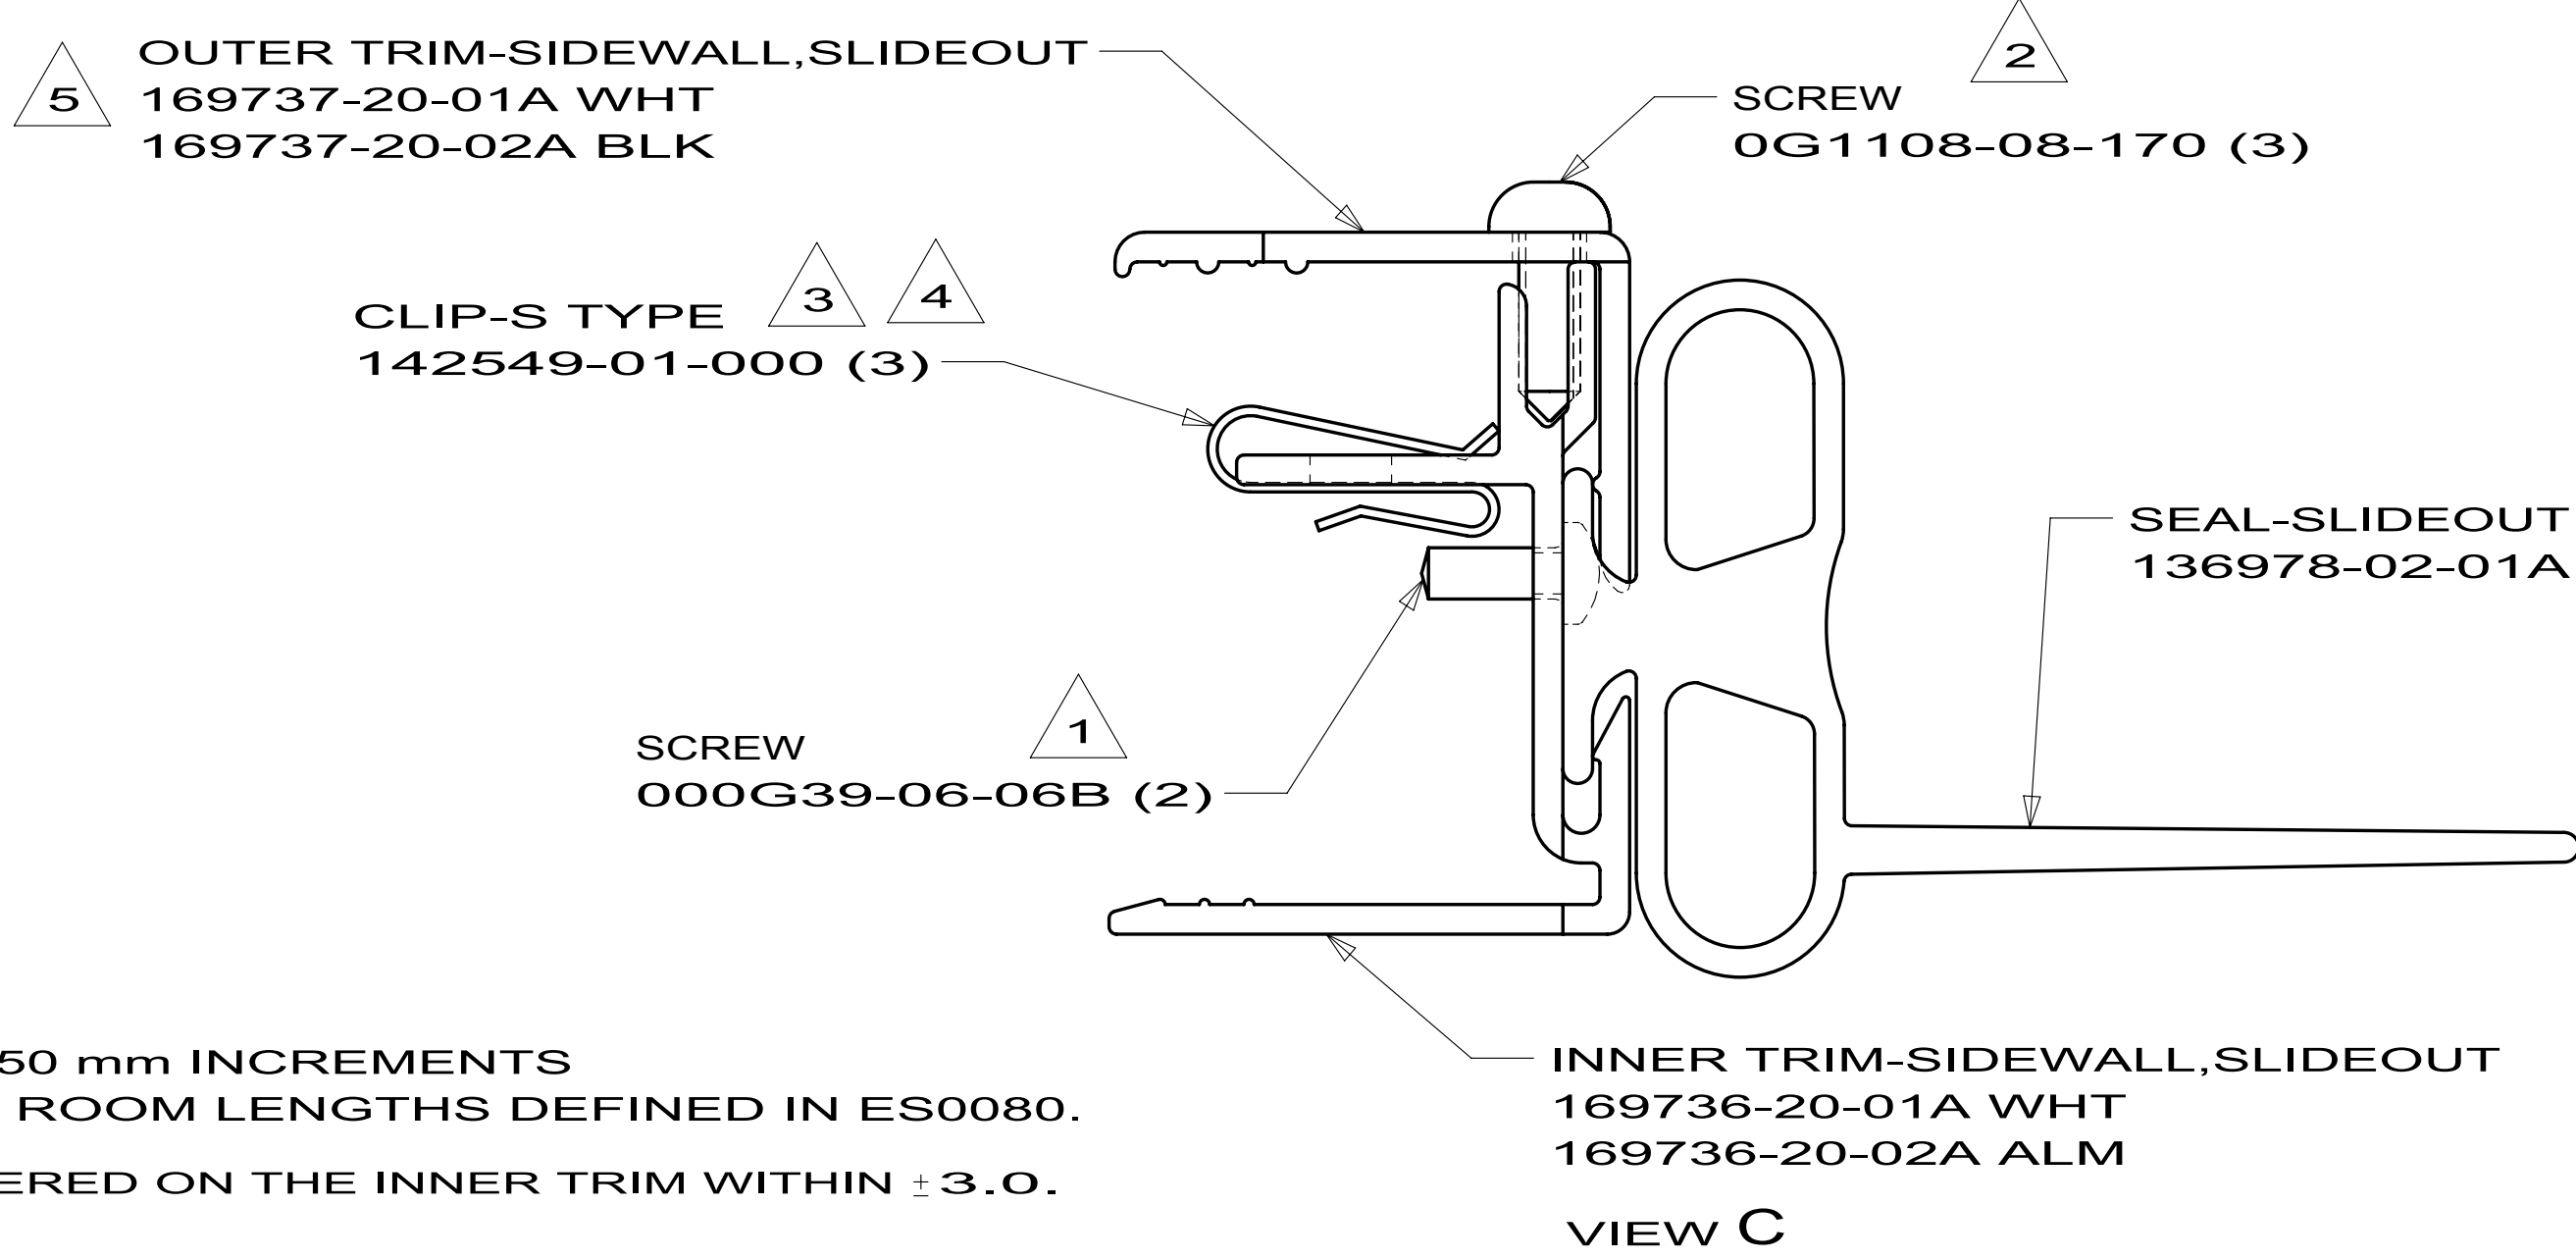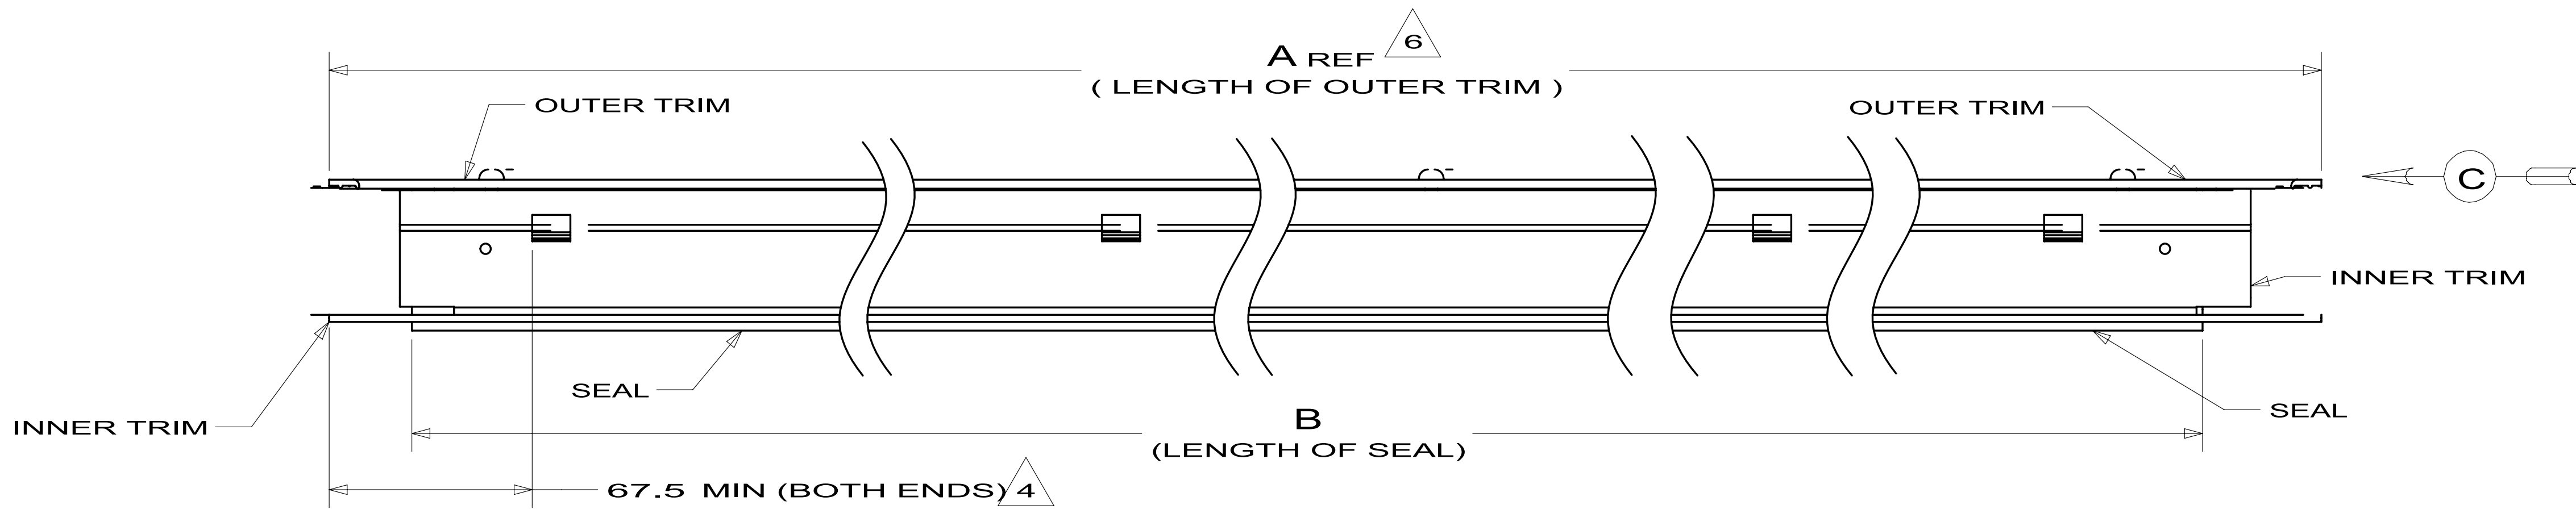

- NOTES:
- 6 LENGTHS SHOULD BE IN 150 mm INCREMENTS PER STANDARD SLIDEOUT ROOM LENGTHS DEFINED IN ES0080.
 - 5 OUTER TRIM MUST BE CENTERED ON THE INNER TRIM WITHIN ± 3.0 .
 - 4 TOLERANCE ON THE CLIP SPACING IS ± 100.0 MM.
 - 3 LOCATE CLIPS AT EACH END AND SPACED EQUALLY ALONG THE INNER TRIM.
 - 2 APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 - 1 APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.