


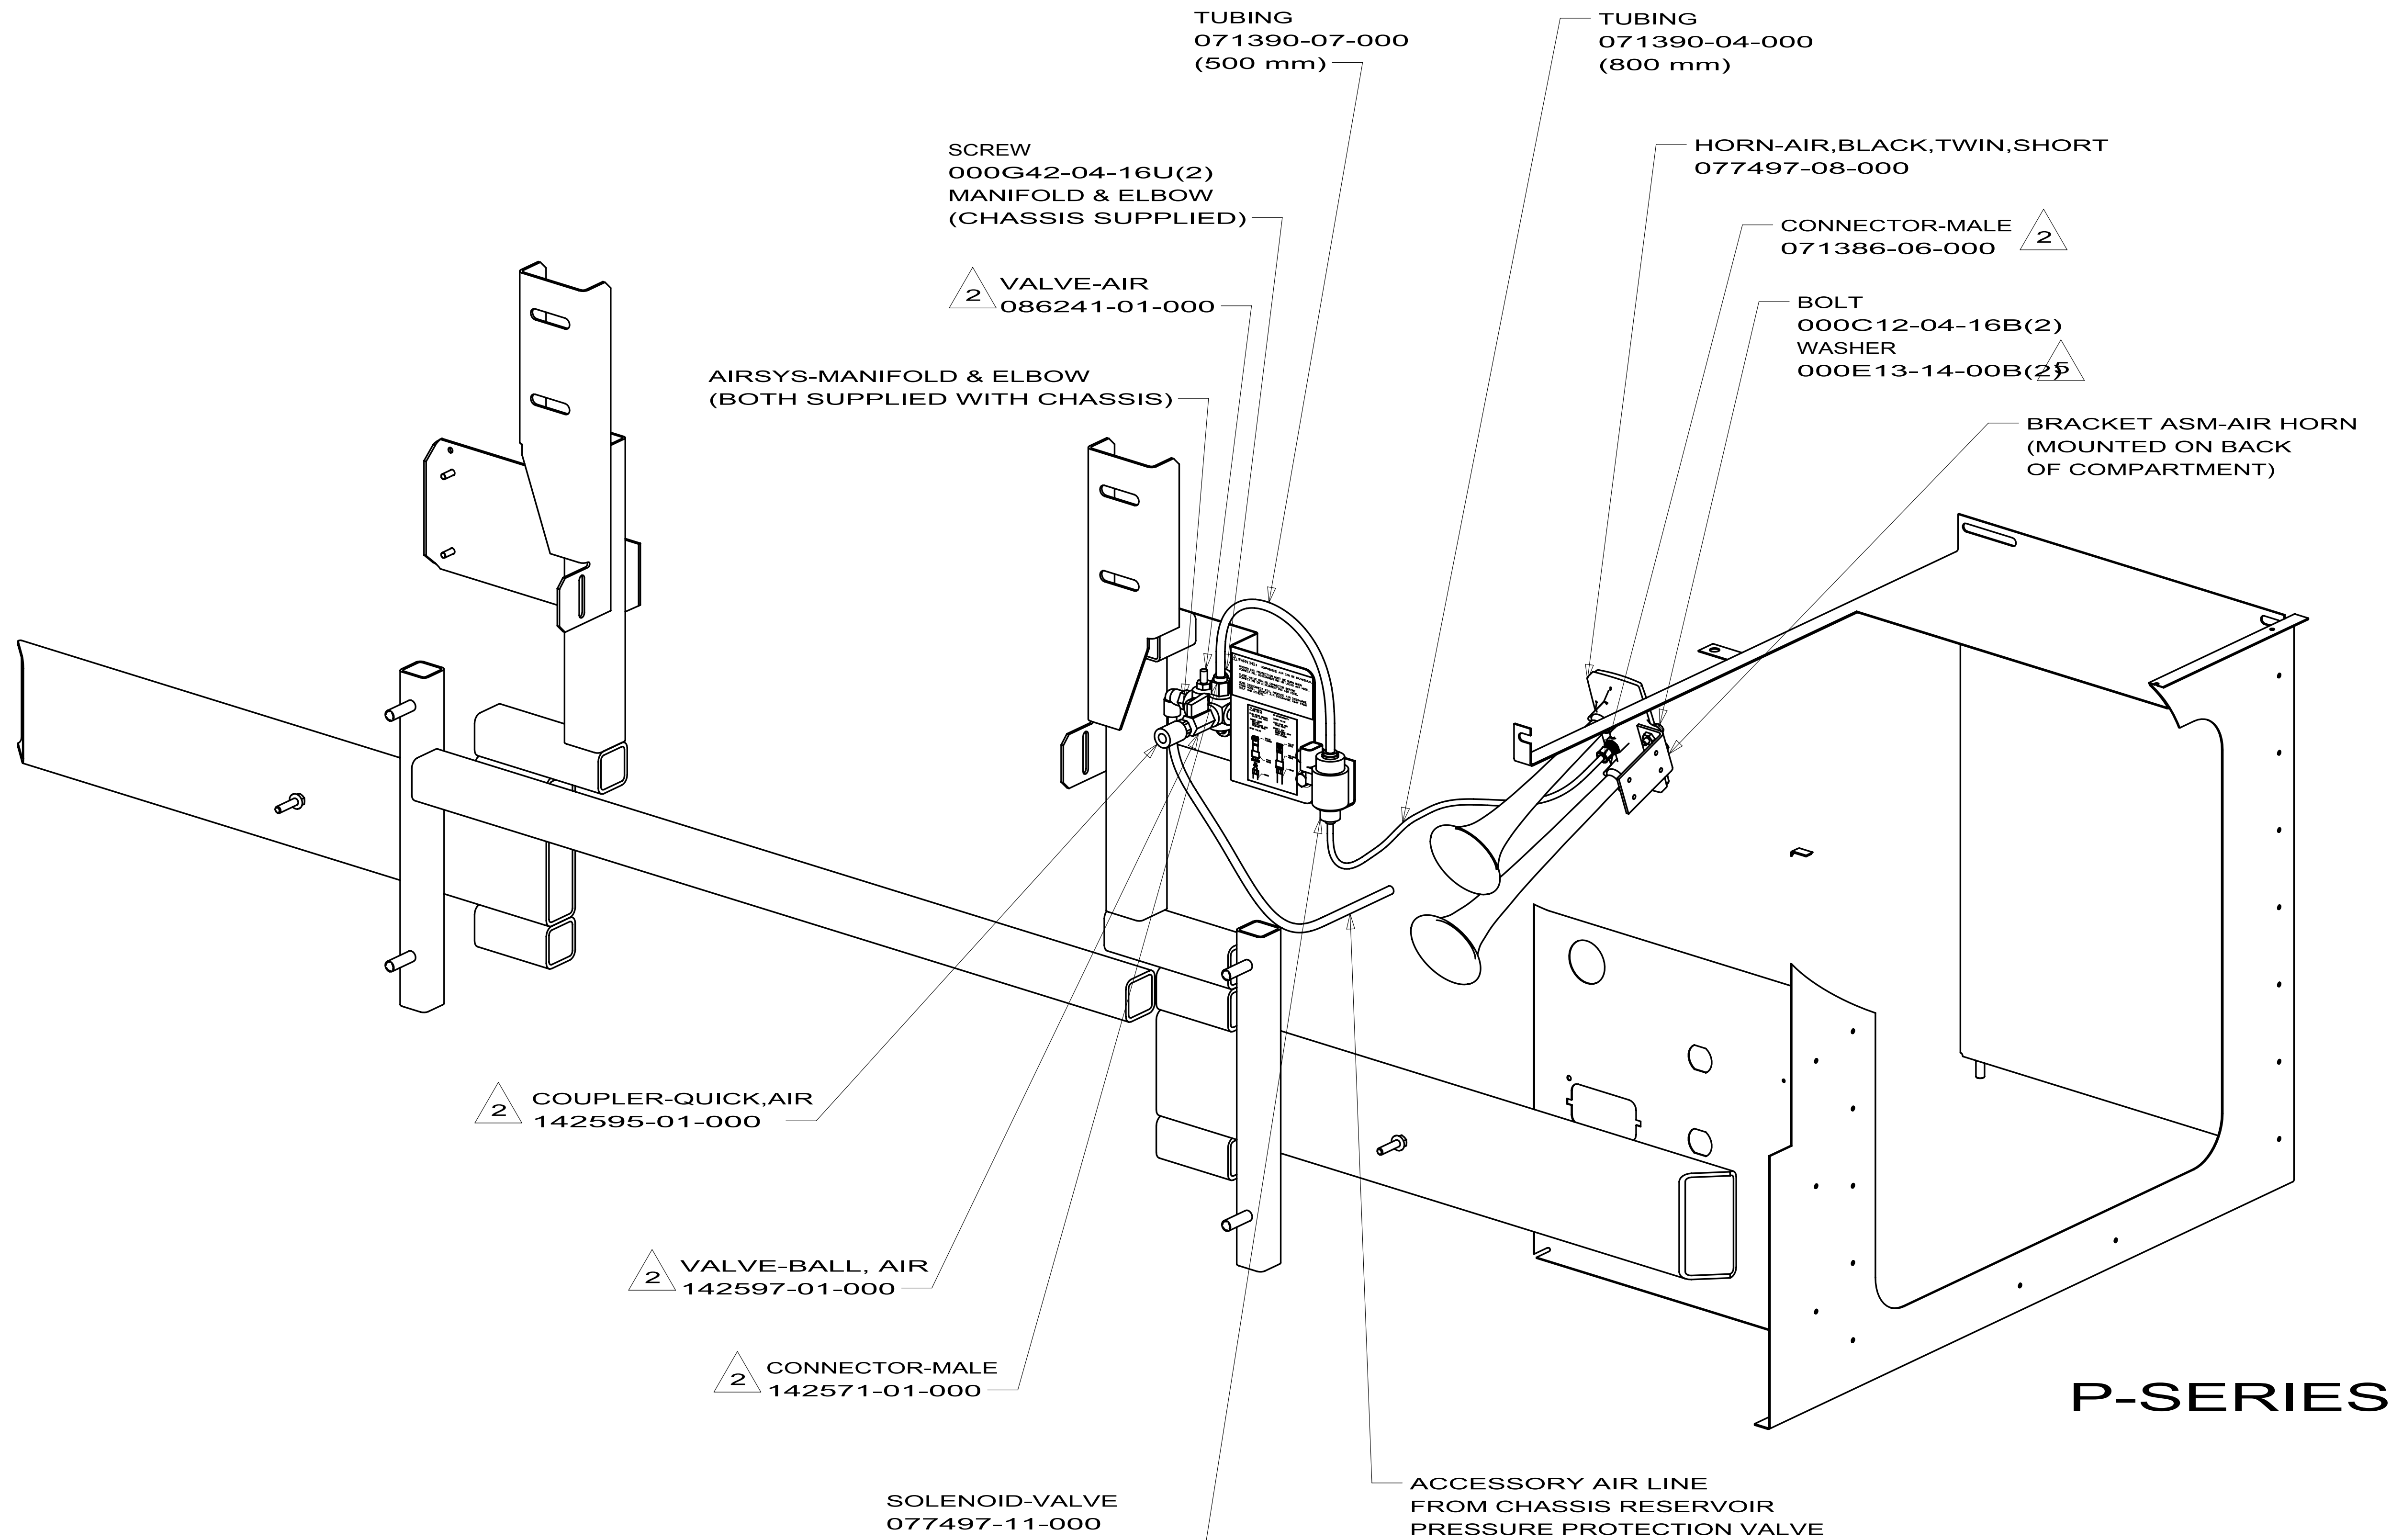
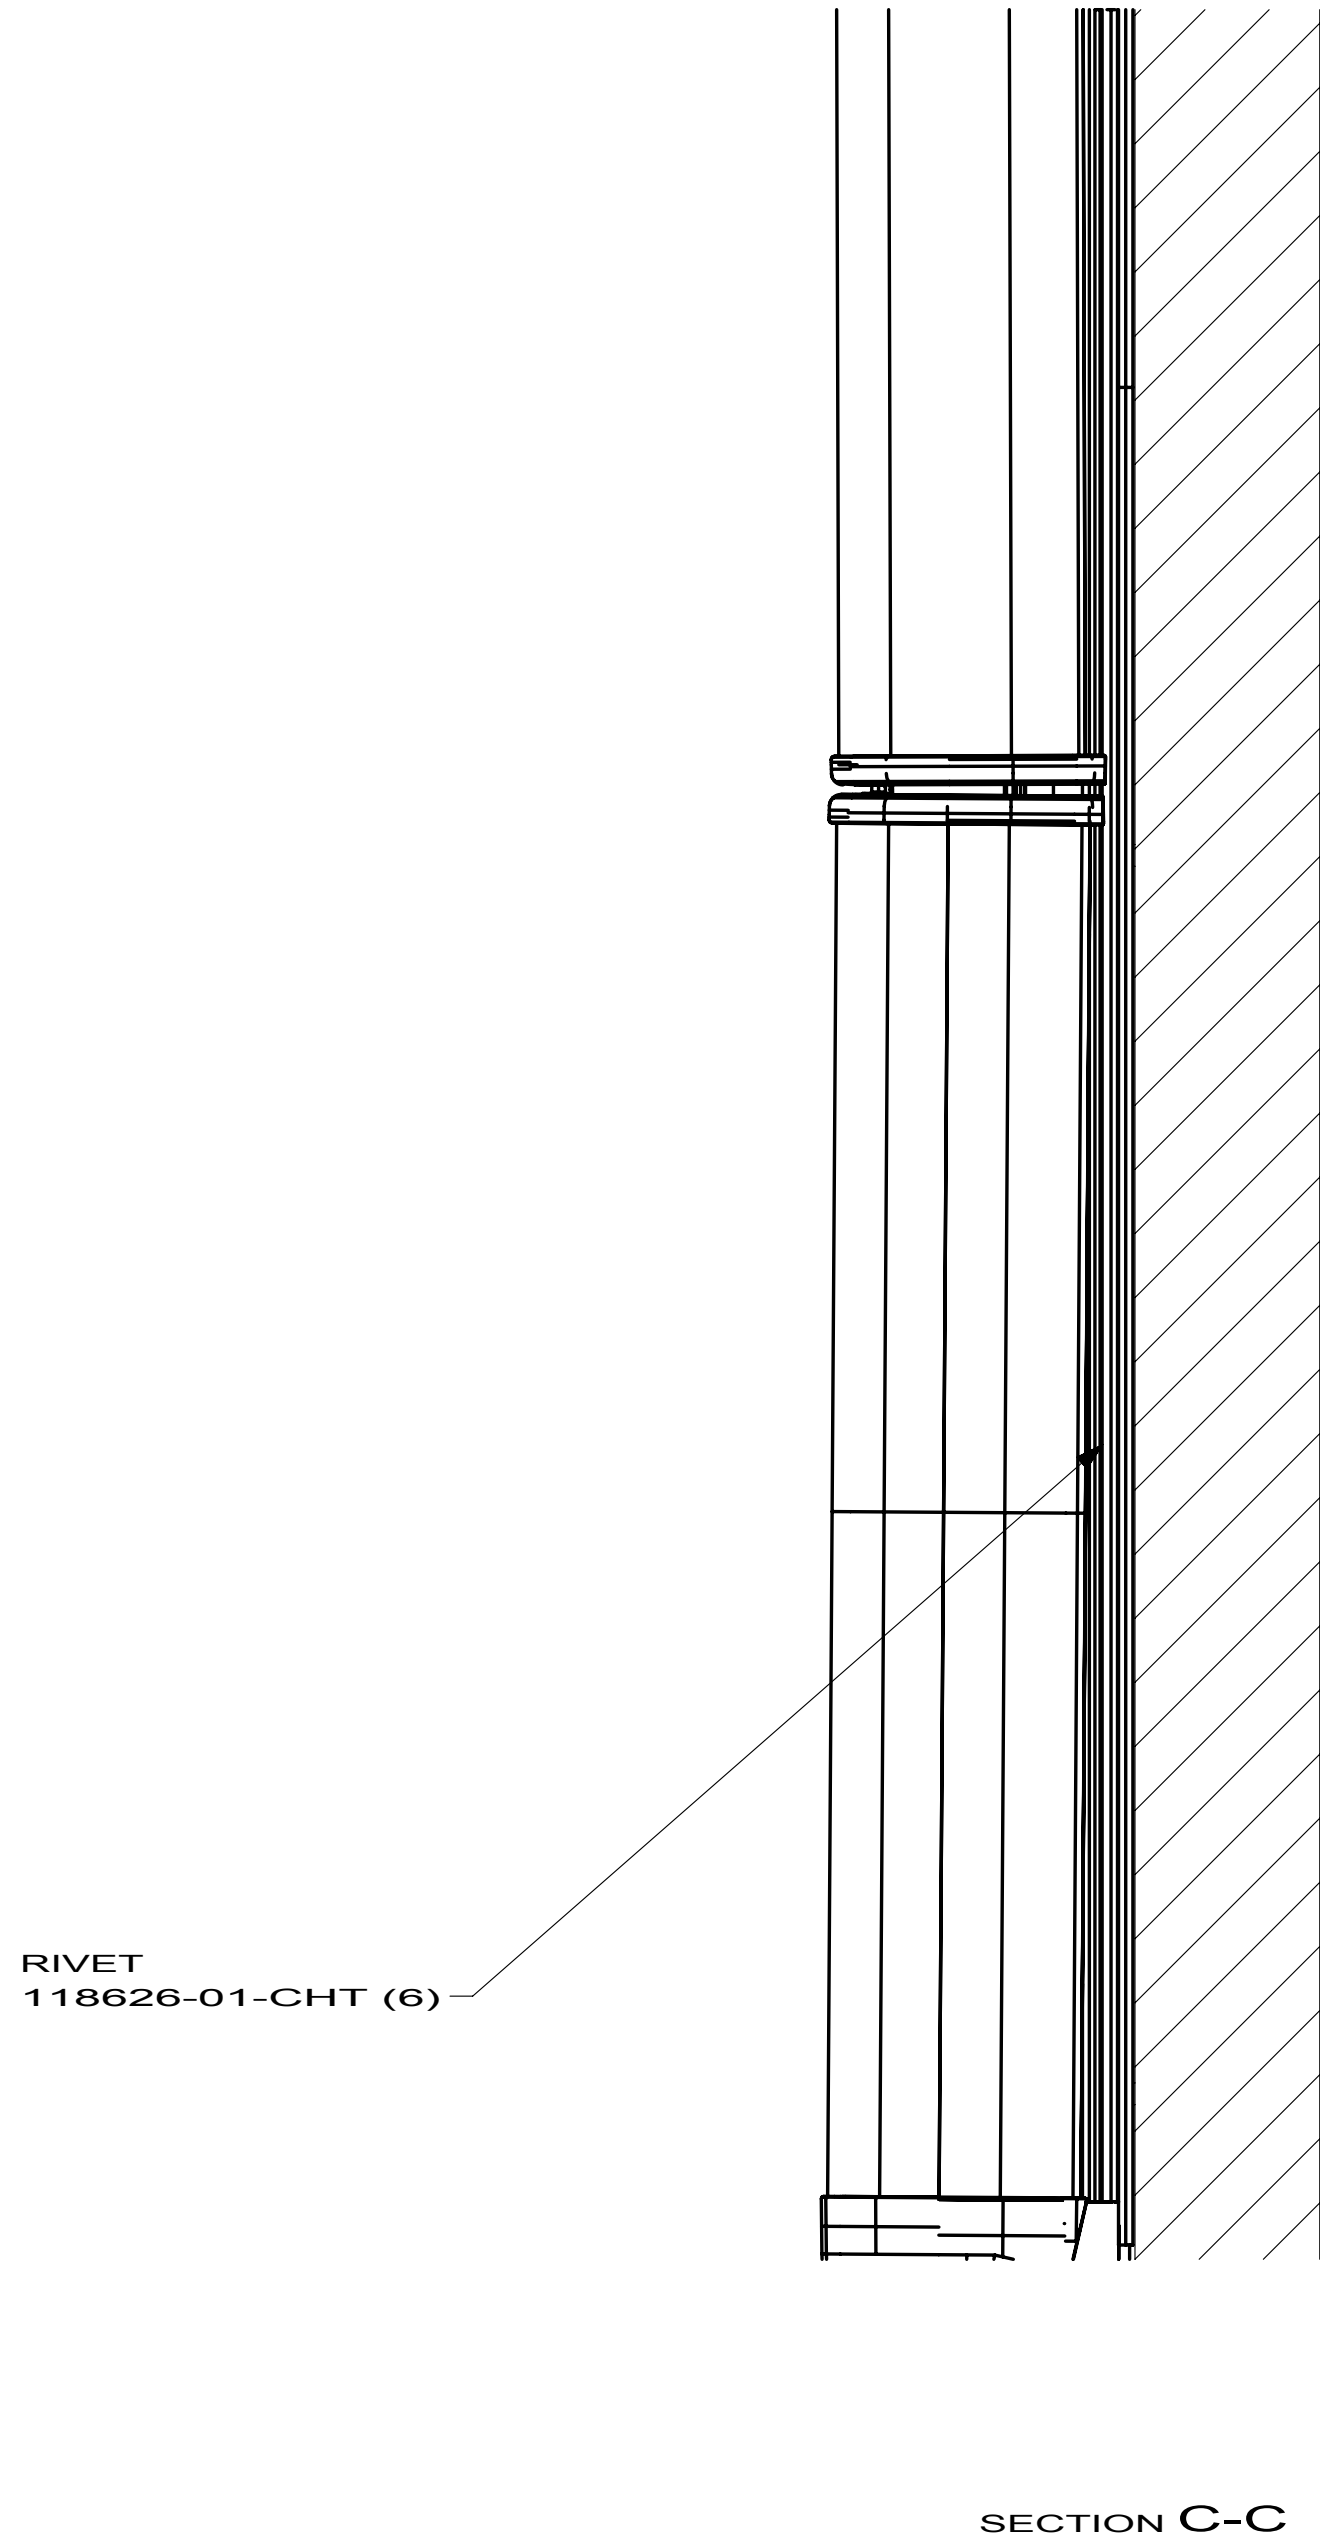


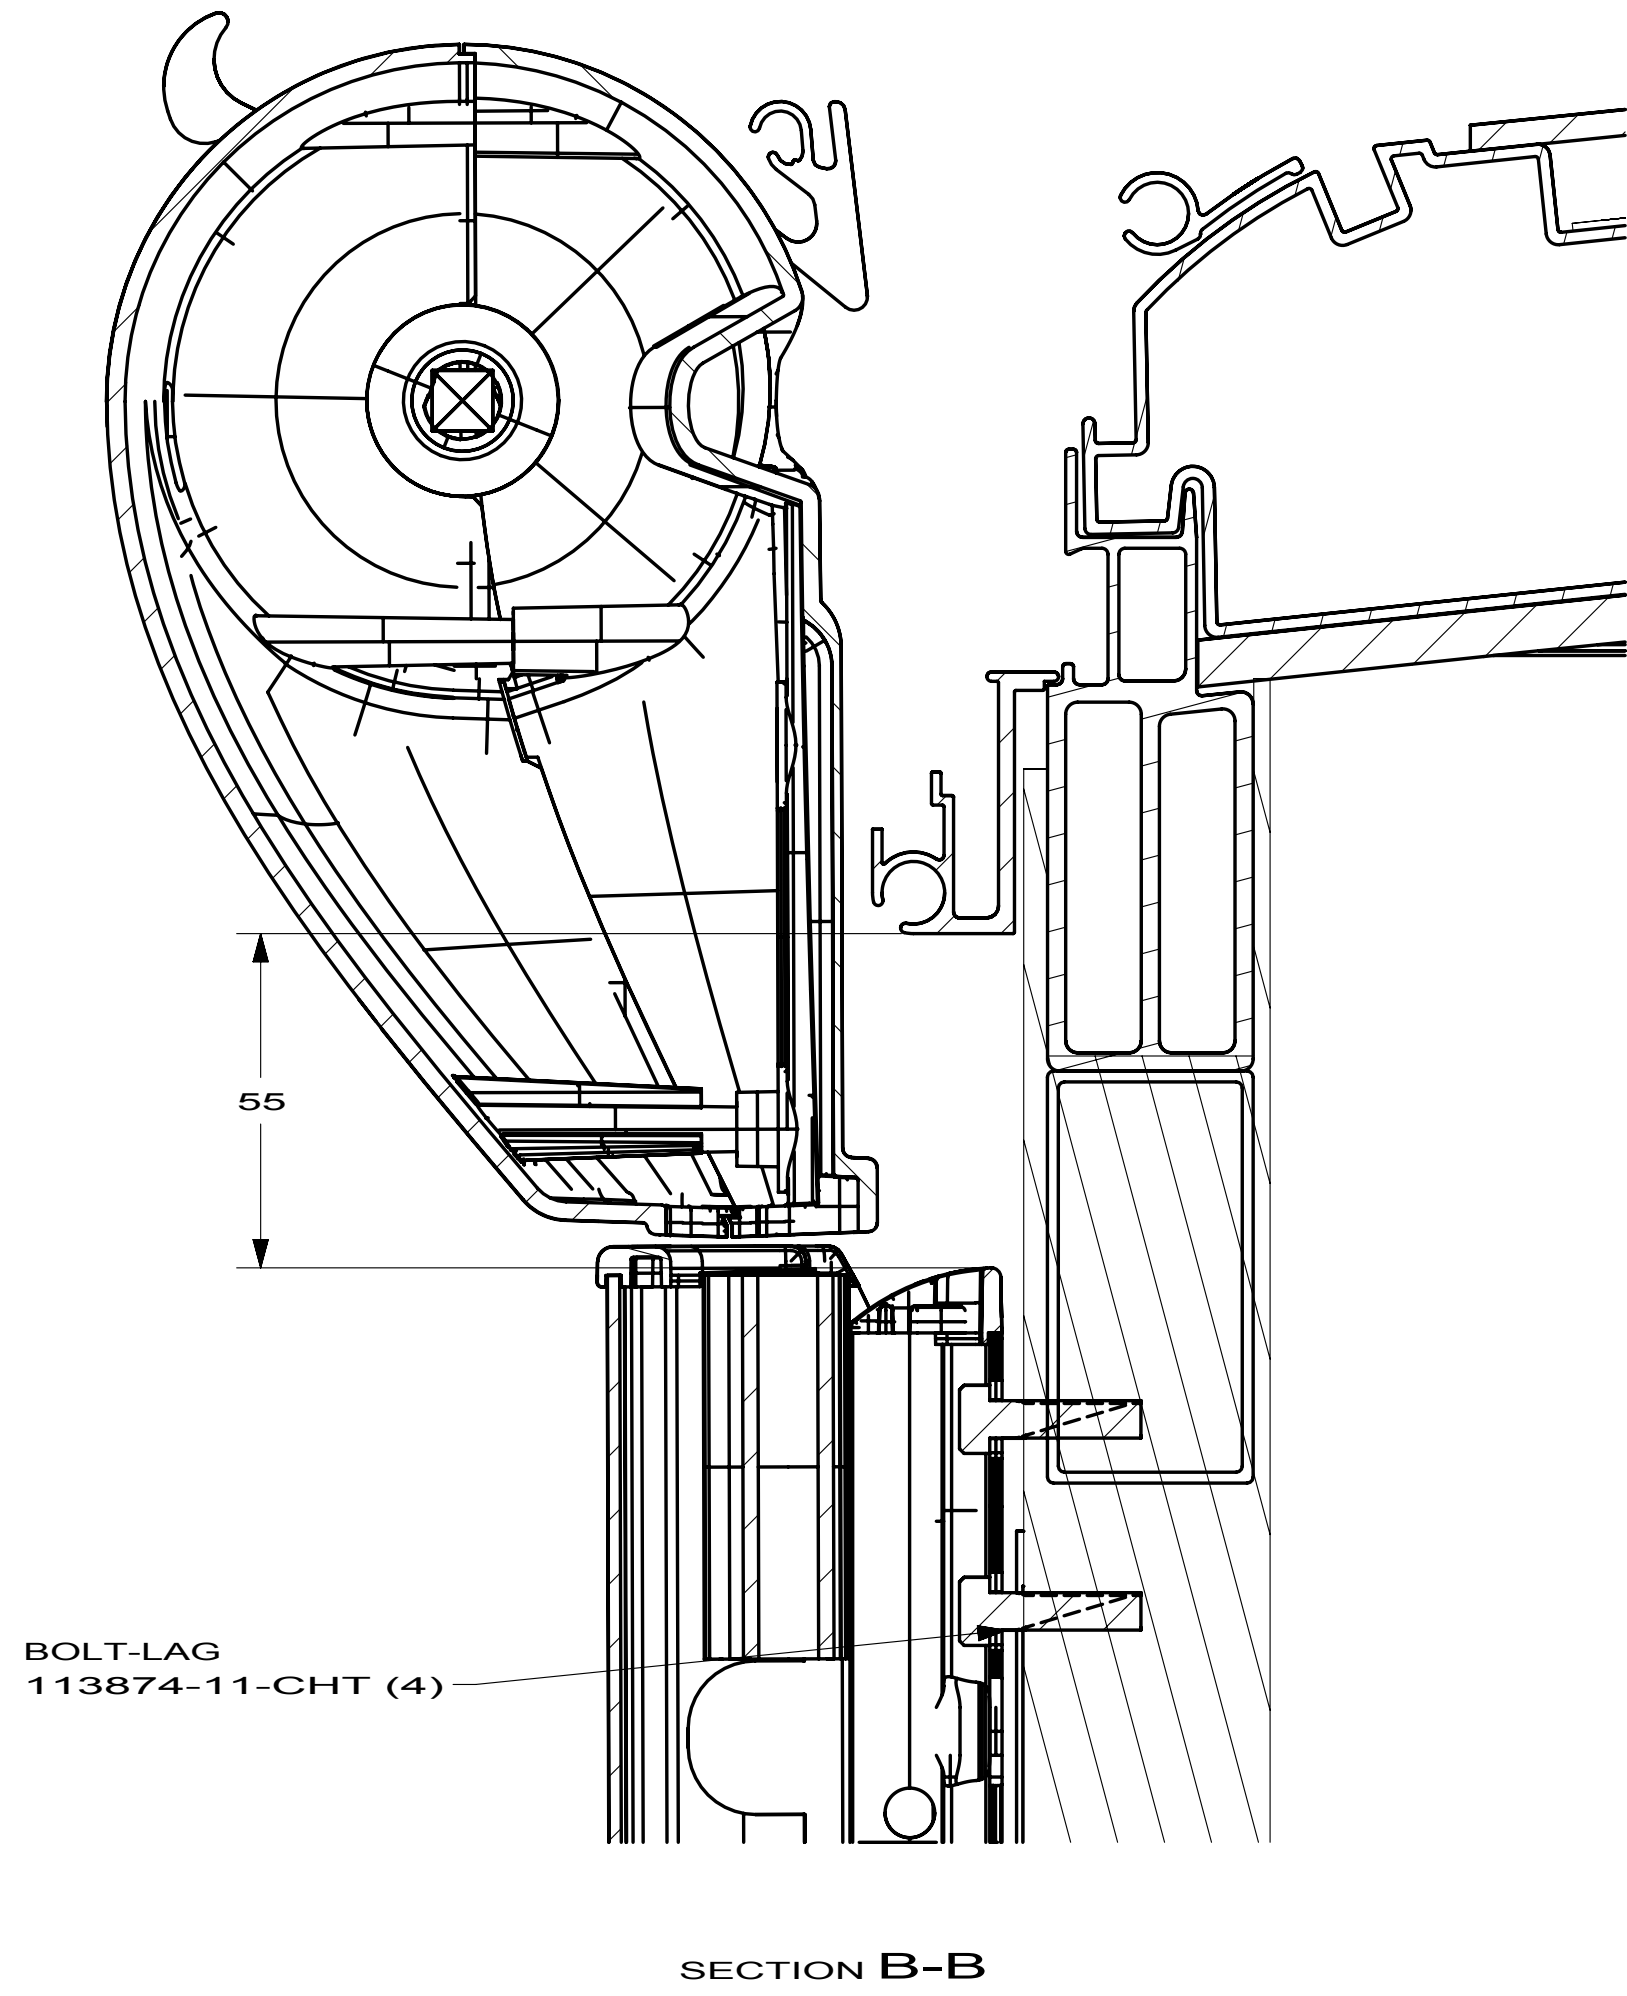

FIRST USED		
08 M-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
SUPPLY INSTL		
SHEET 1	PART NO 143049	REV

FIRST USED			09 P-SERIES		
			DO NOT SCALE DRAWING		
TITLE:			AWNING INSTL P-SERIES		
SHEET	1	PART NO	167670	REV	

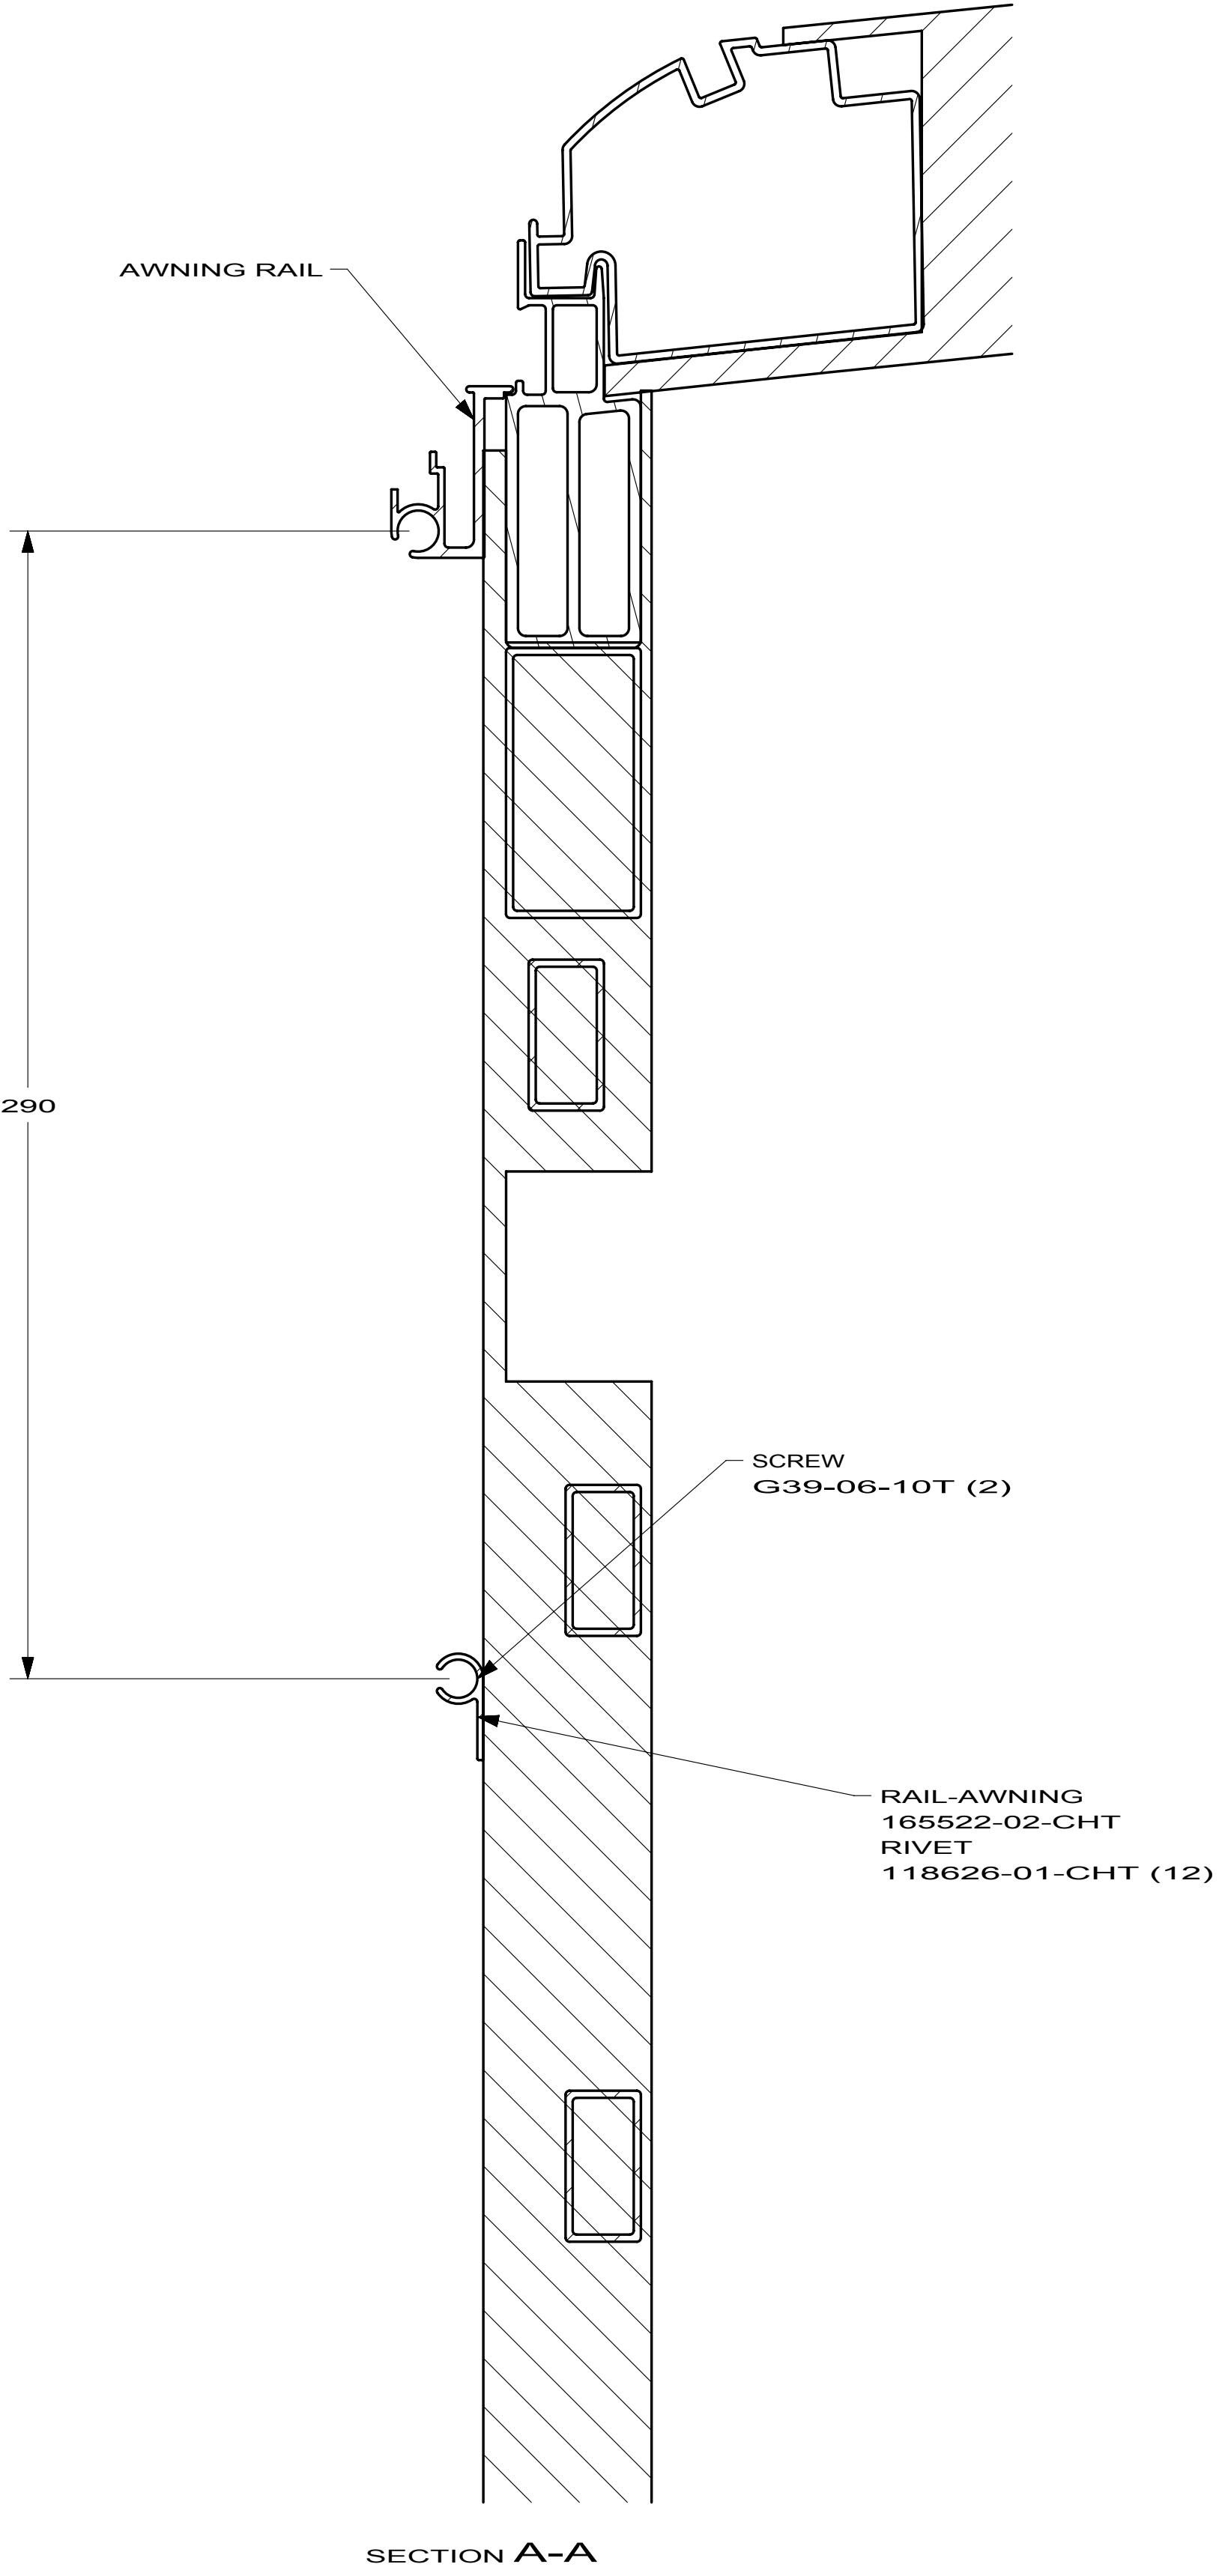

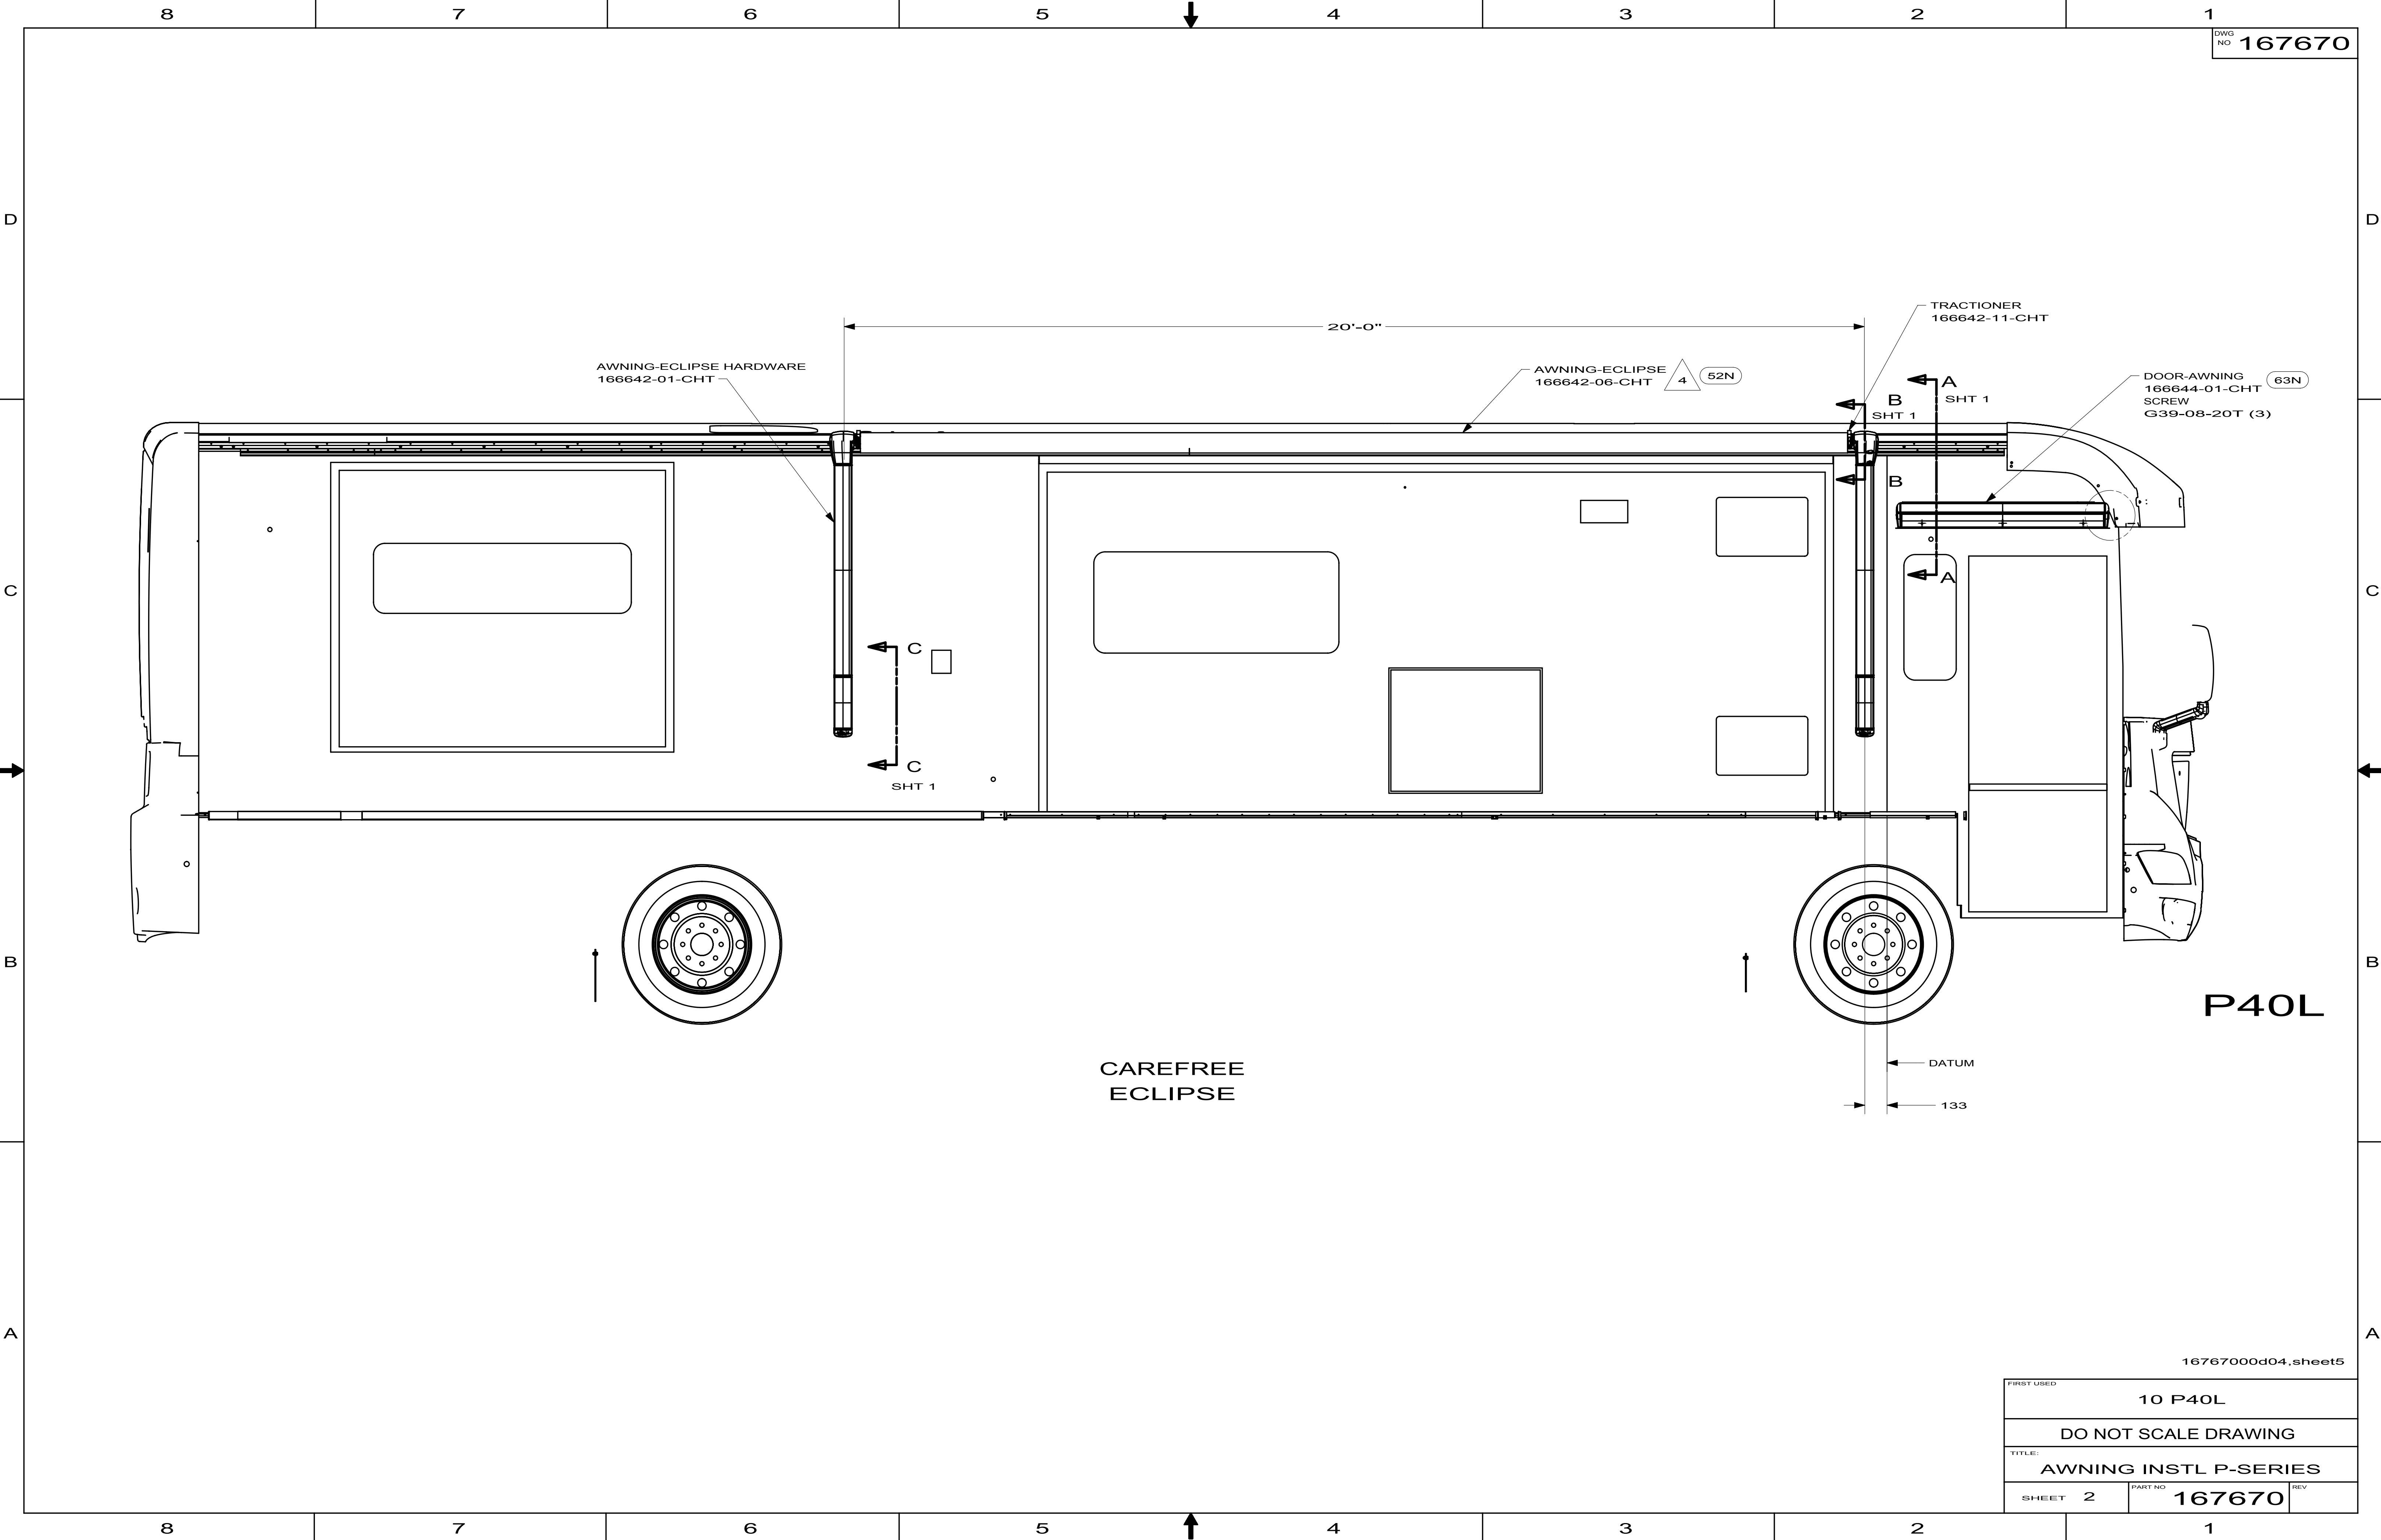


P40L

CAREFREE
ECLIPSE

16767000d04,sheet5

FIRST USED			10 P40L
TITLE:			DO NOT SCALE DRAWING
TITLE:			AWNING INSTL P-SERIES
SHEET	2	PART NO	167670
		REV	

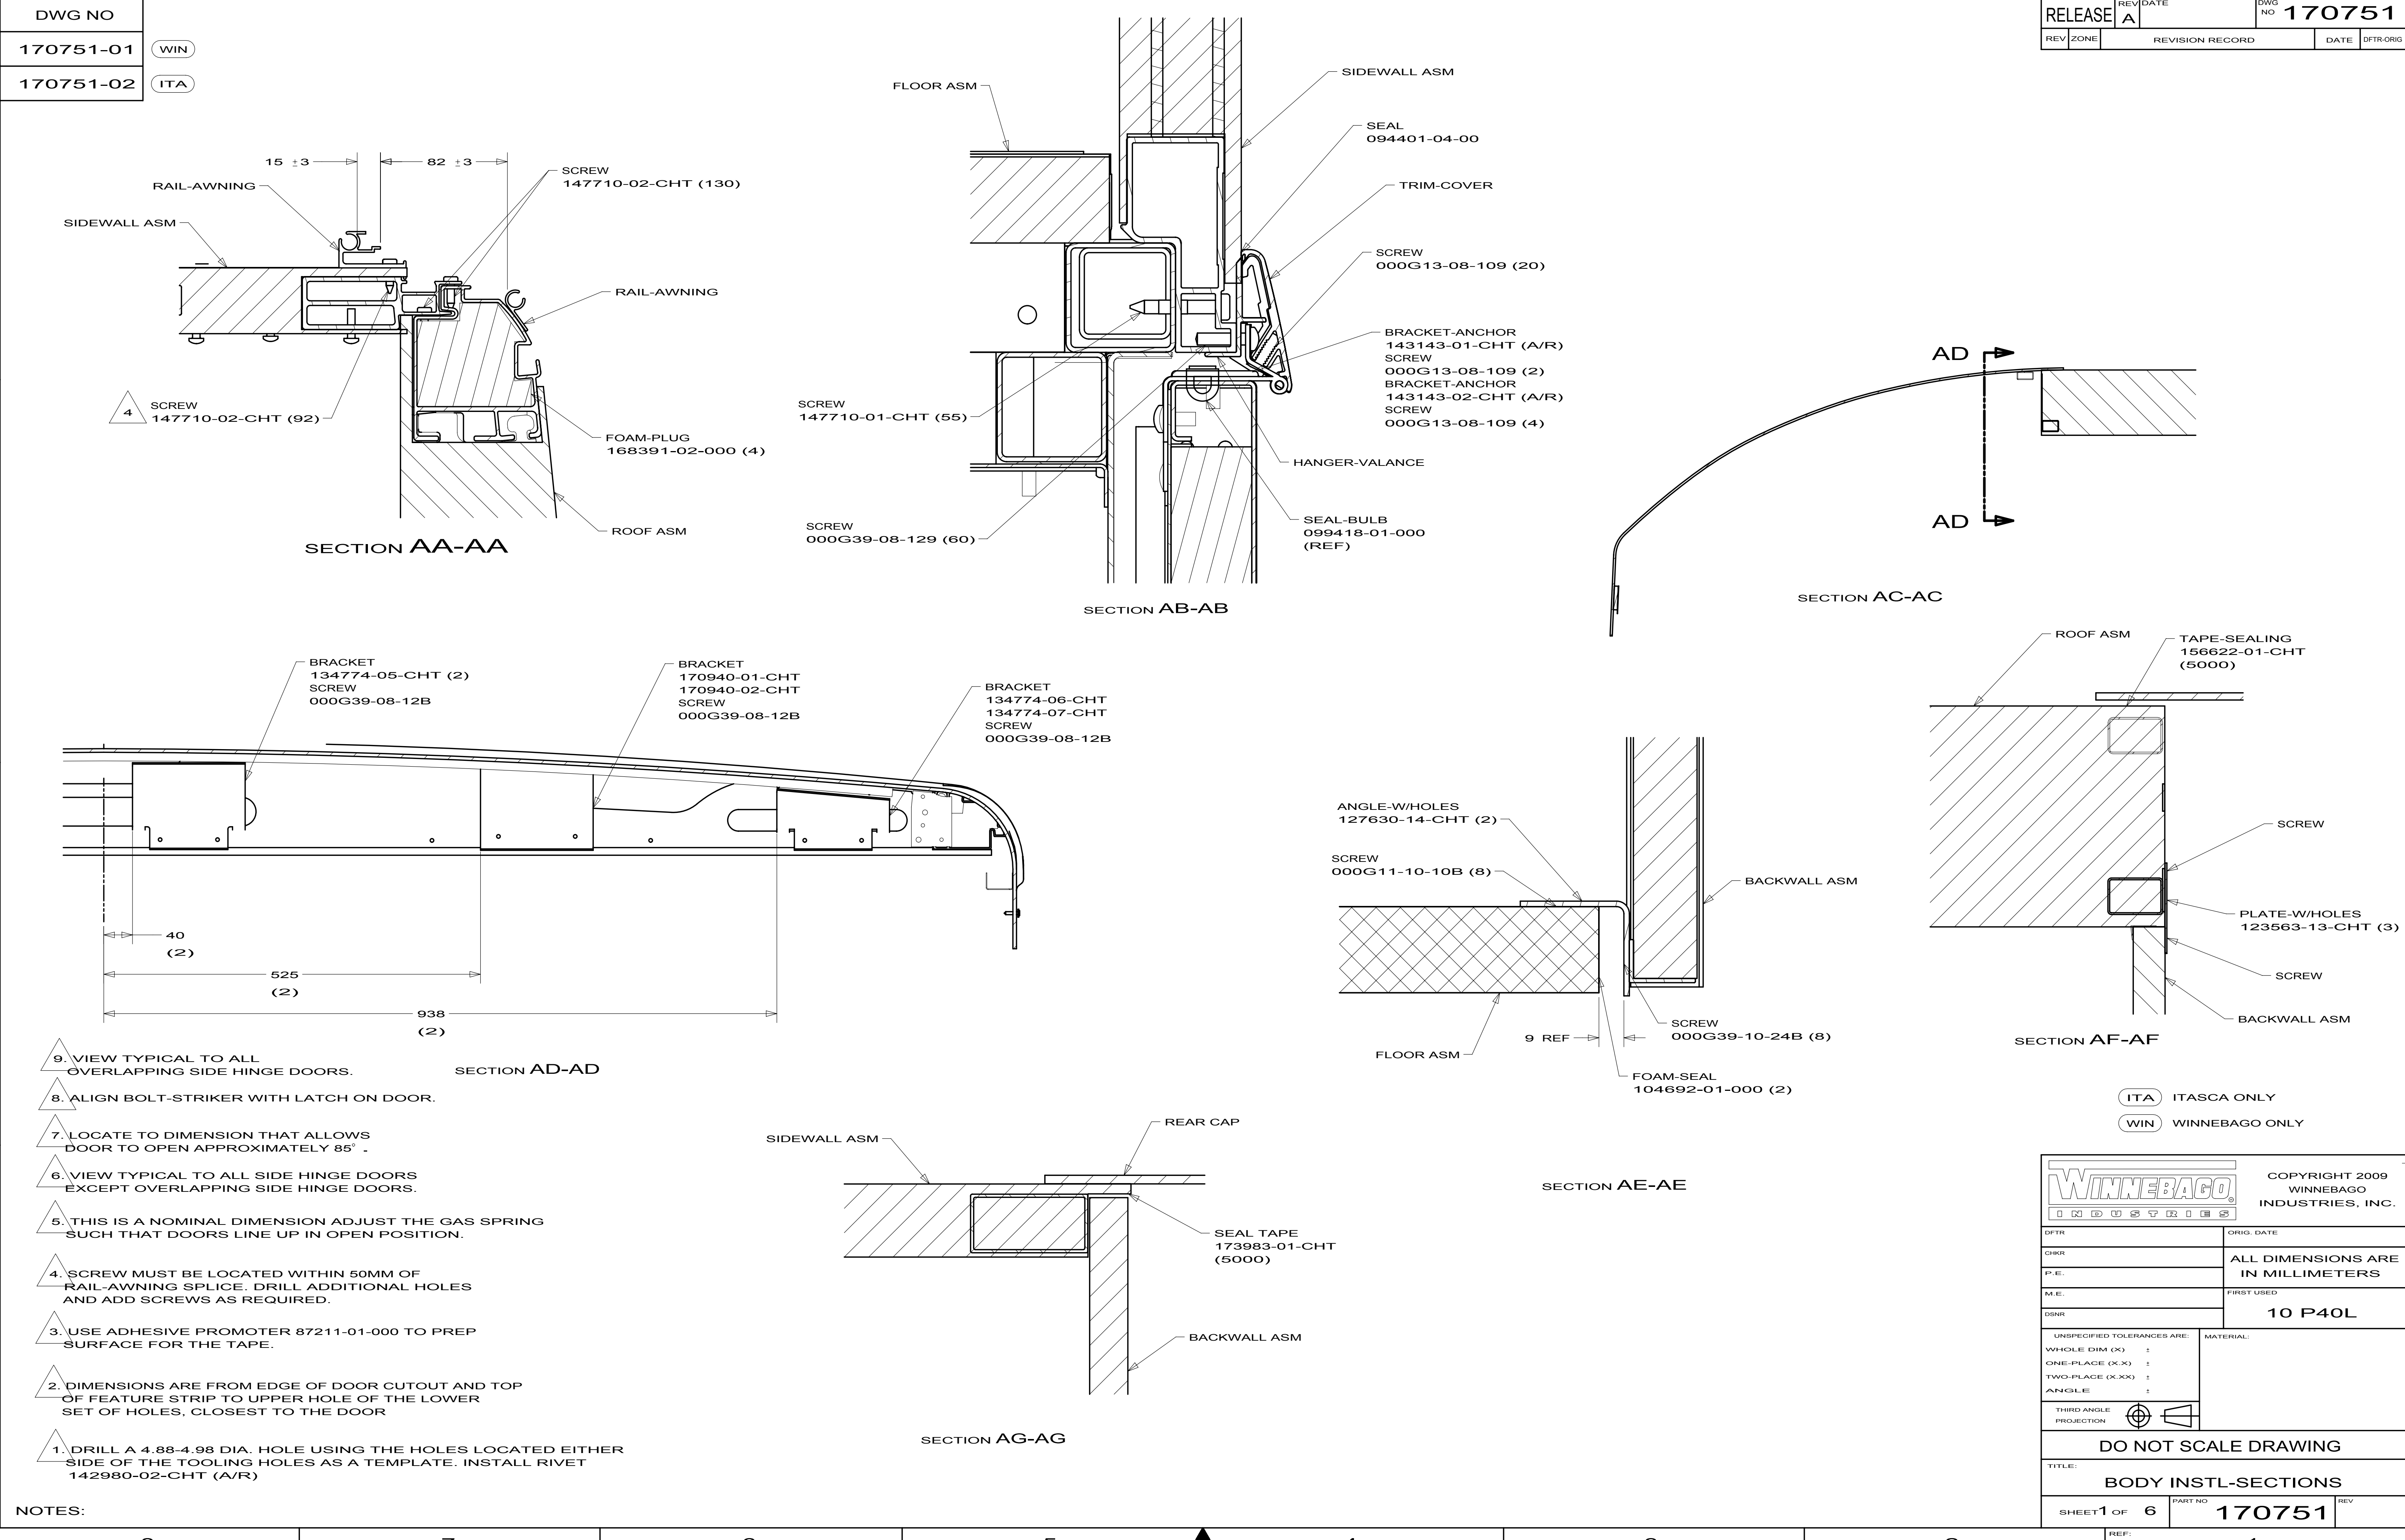

Winnebago Industries

COPYRIGHT 2009
WINNEBAGO INDUSTRIES, INC.






DFTG	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	
FIRST USED	
10 P40L	
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	MATERIAL:
ONE-PLACE (X.X)	
TWO-PLACE (X.XX)	
ANGLE	
THIRD ANGLE PROJECTION	

DO NOT SCALE DRAWING

TITLE:
BODY INSTL-SECTIONS



SHEET1 OF 6PART NO 170751REV

REF:1

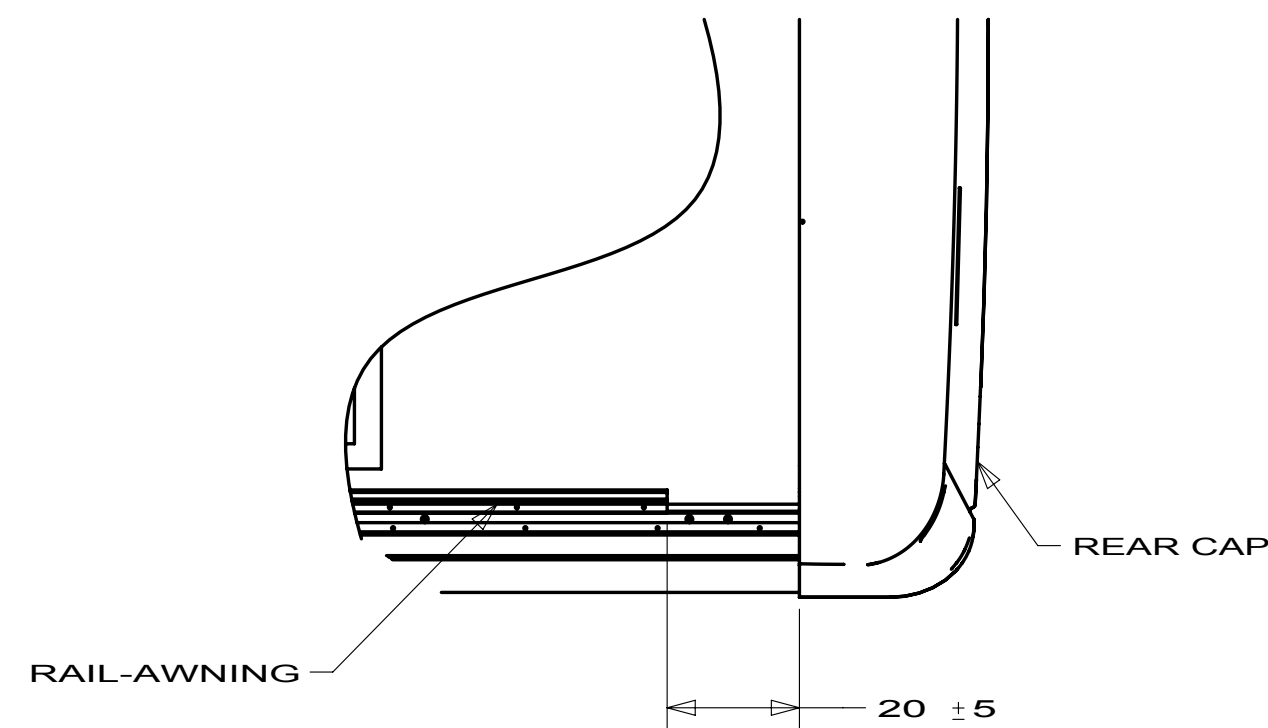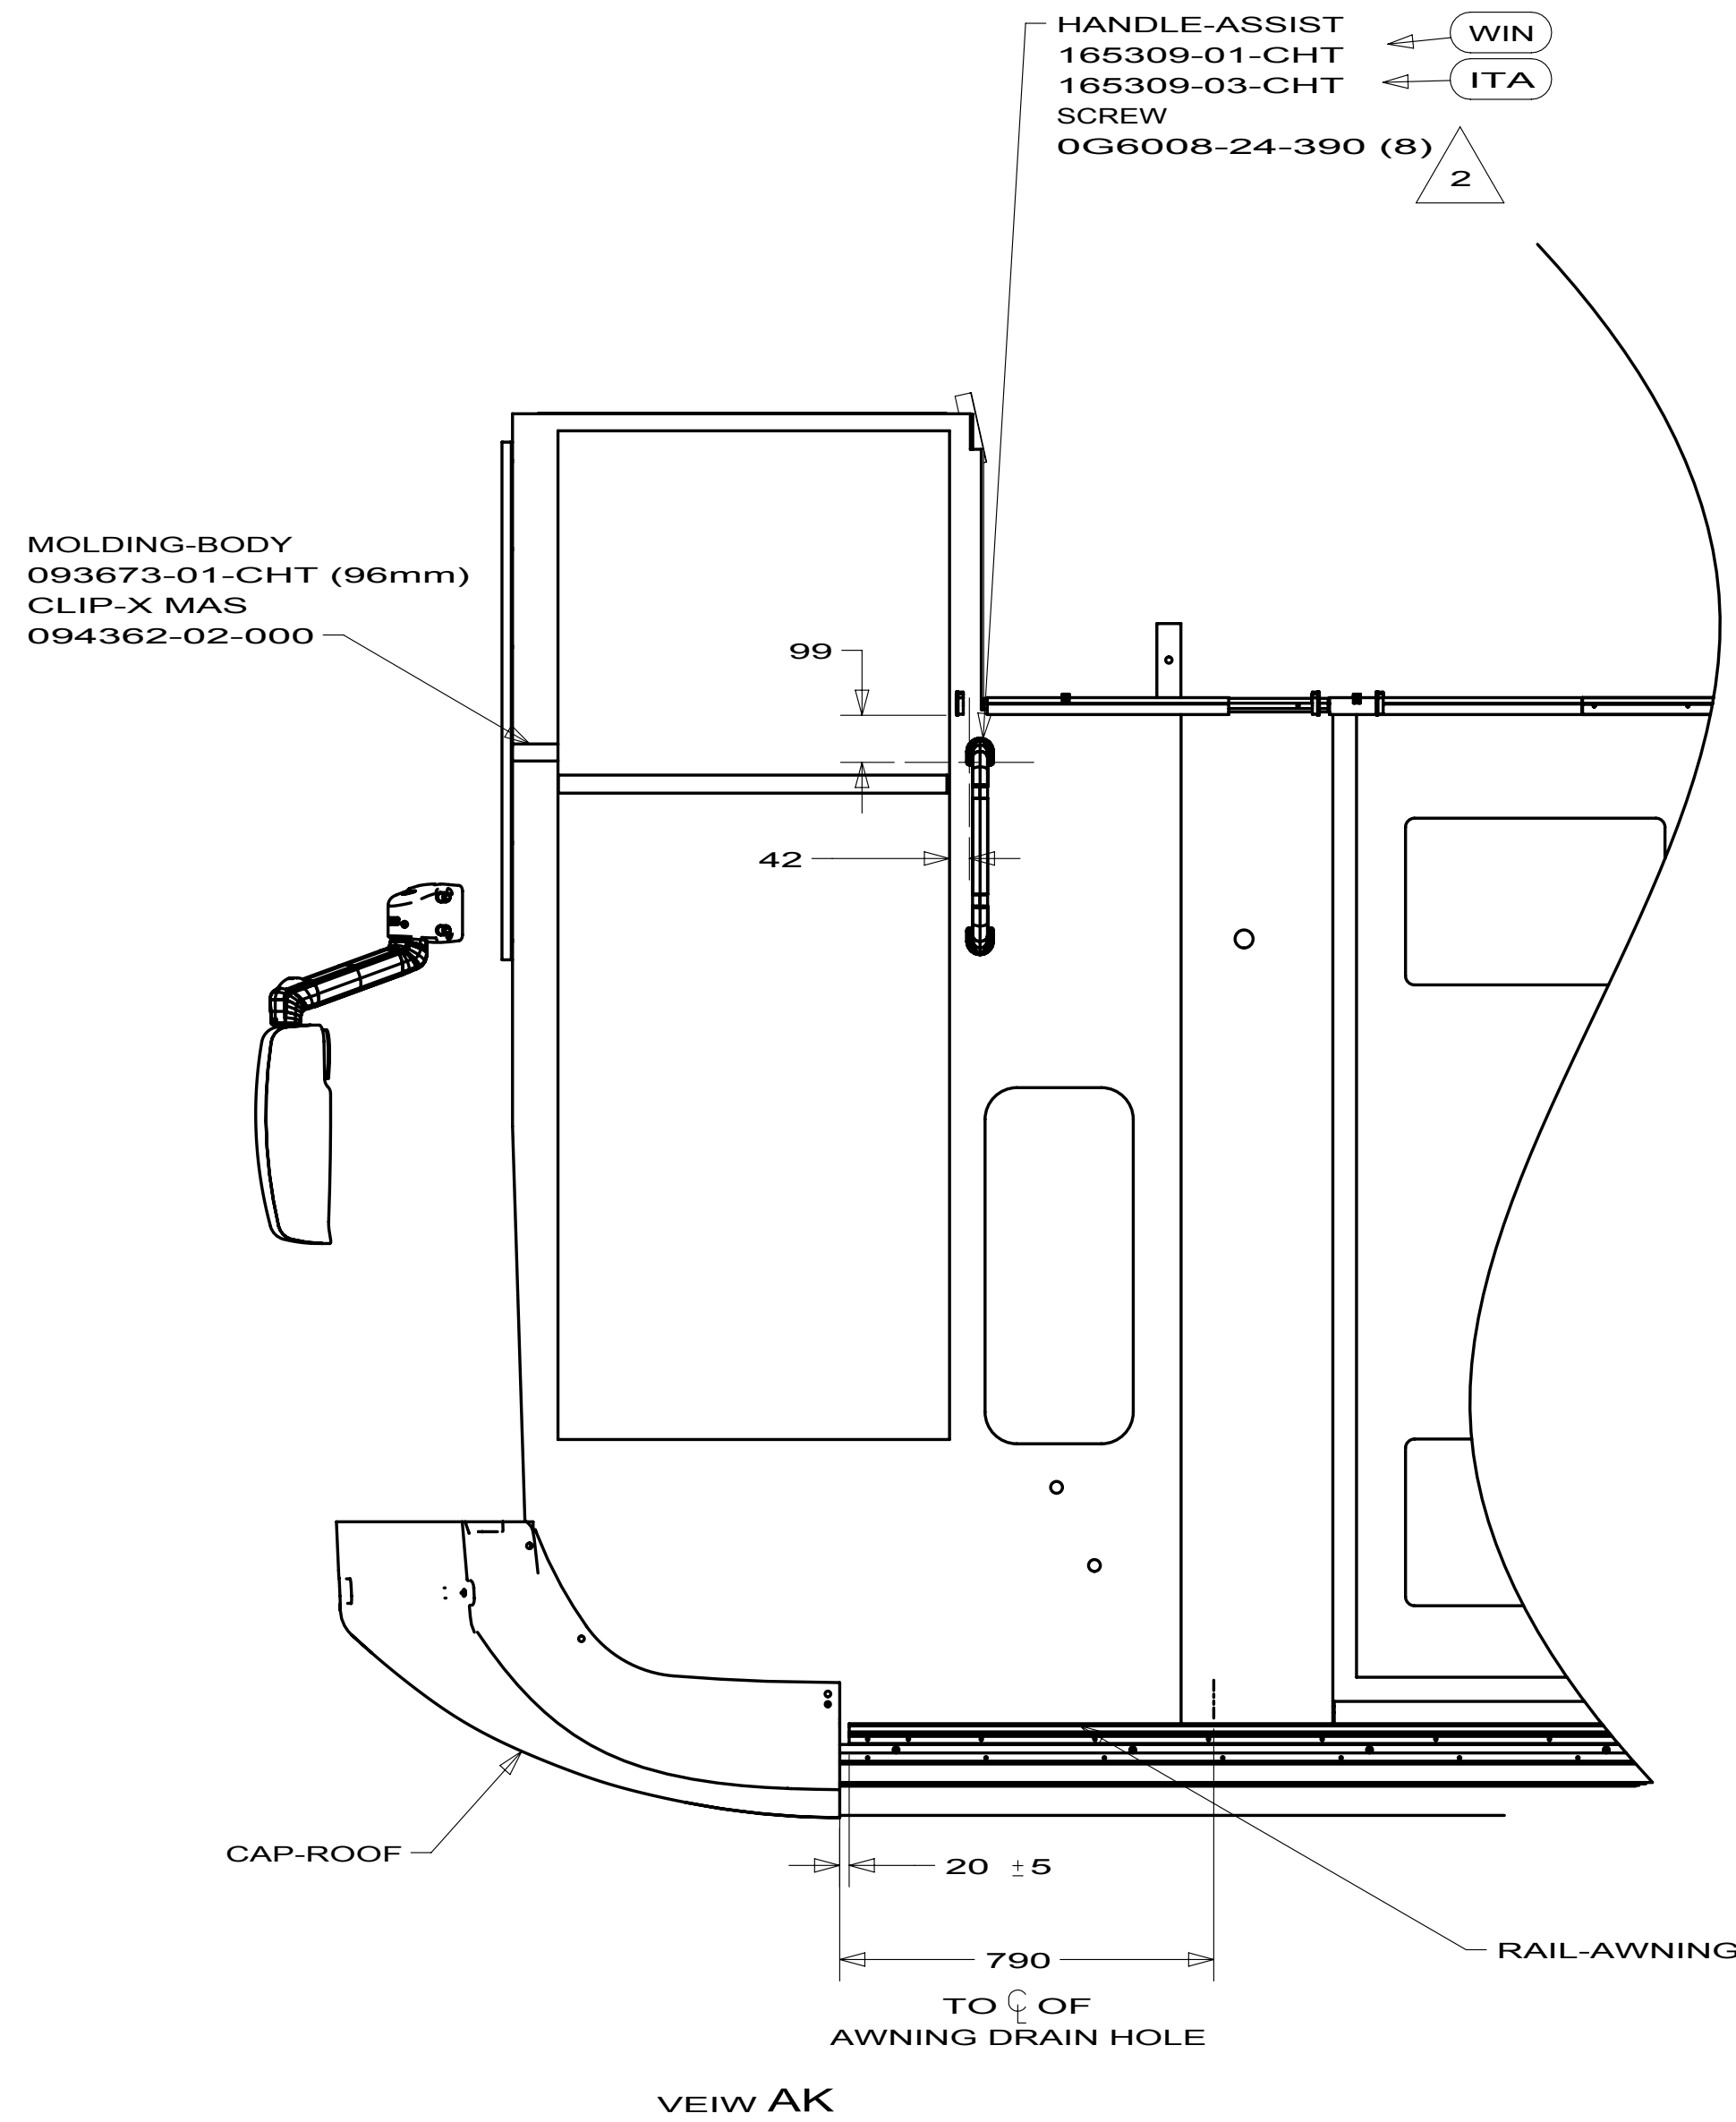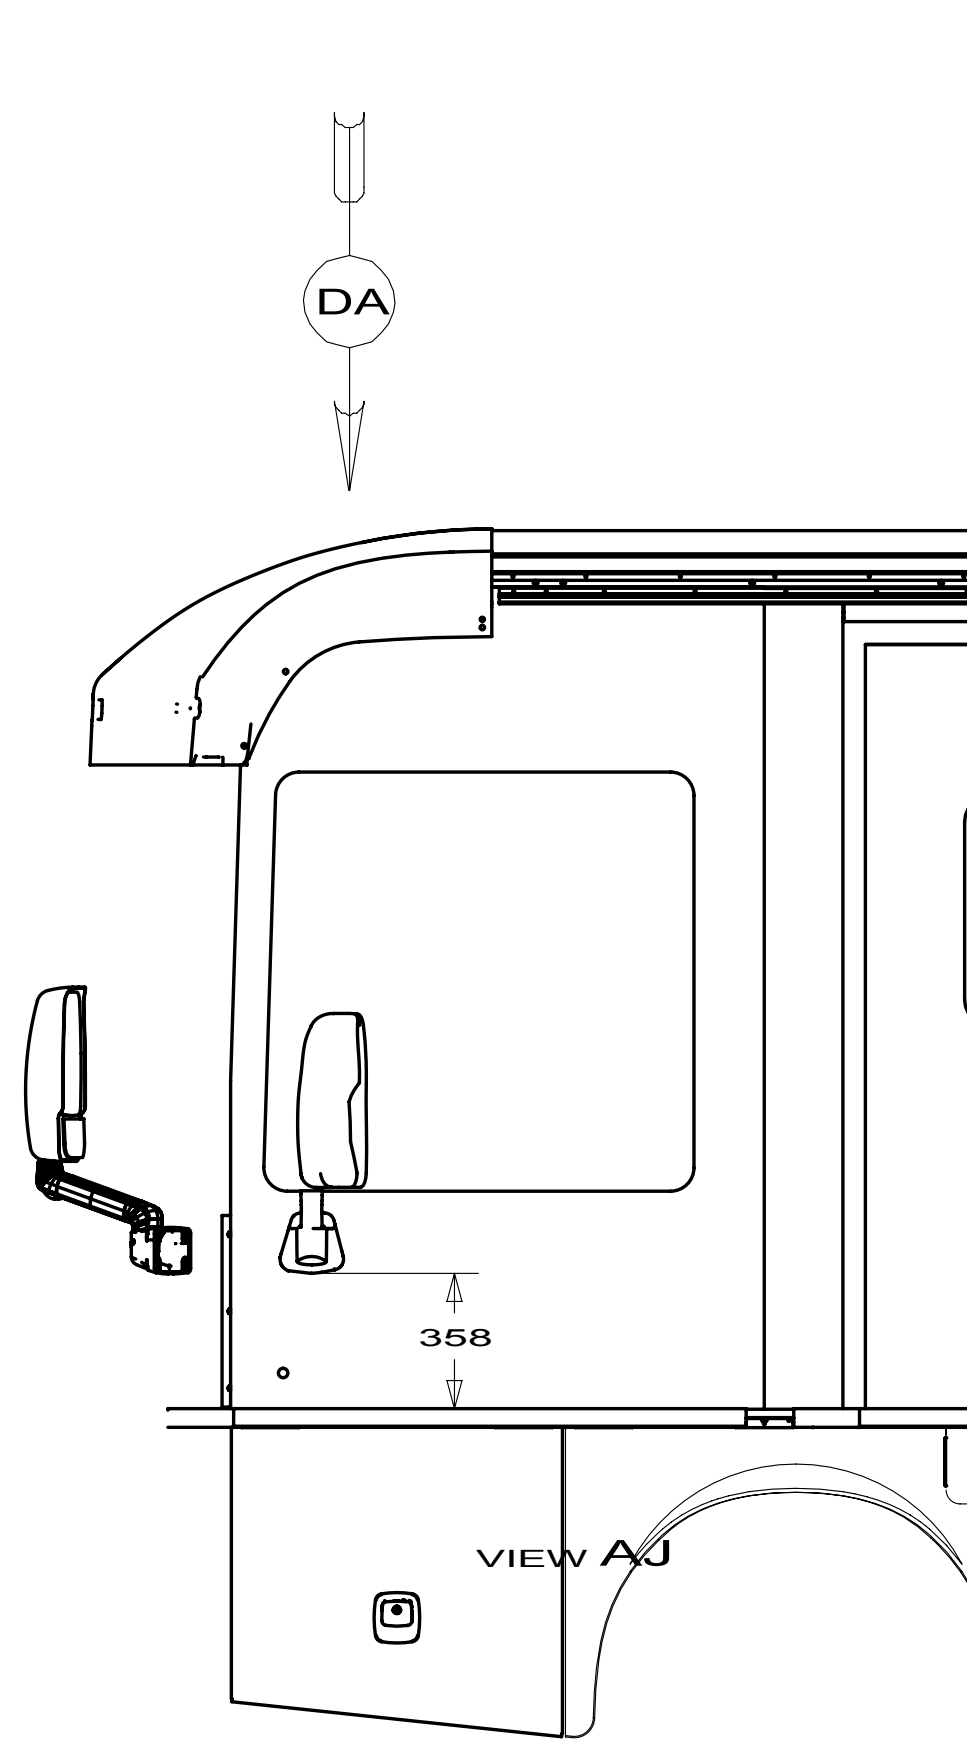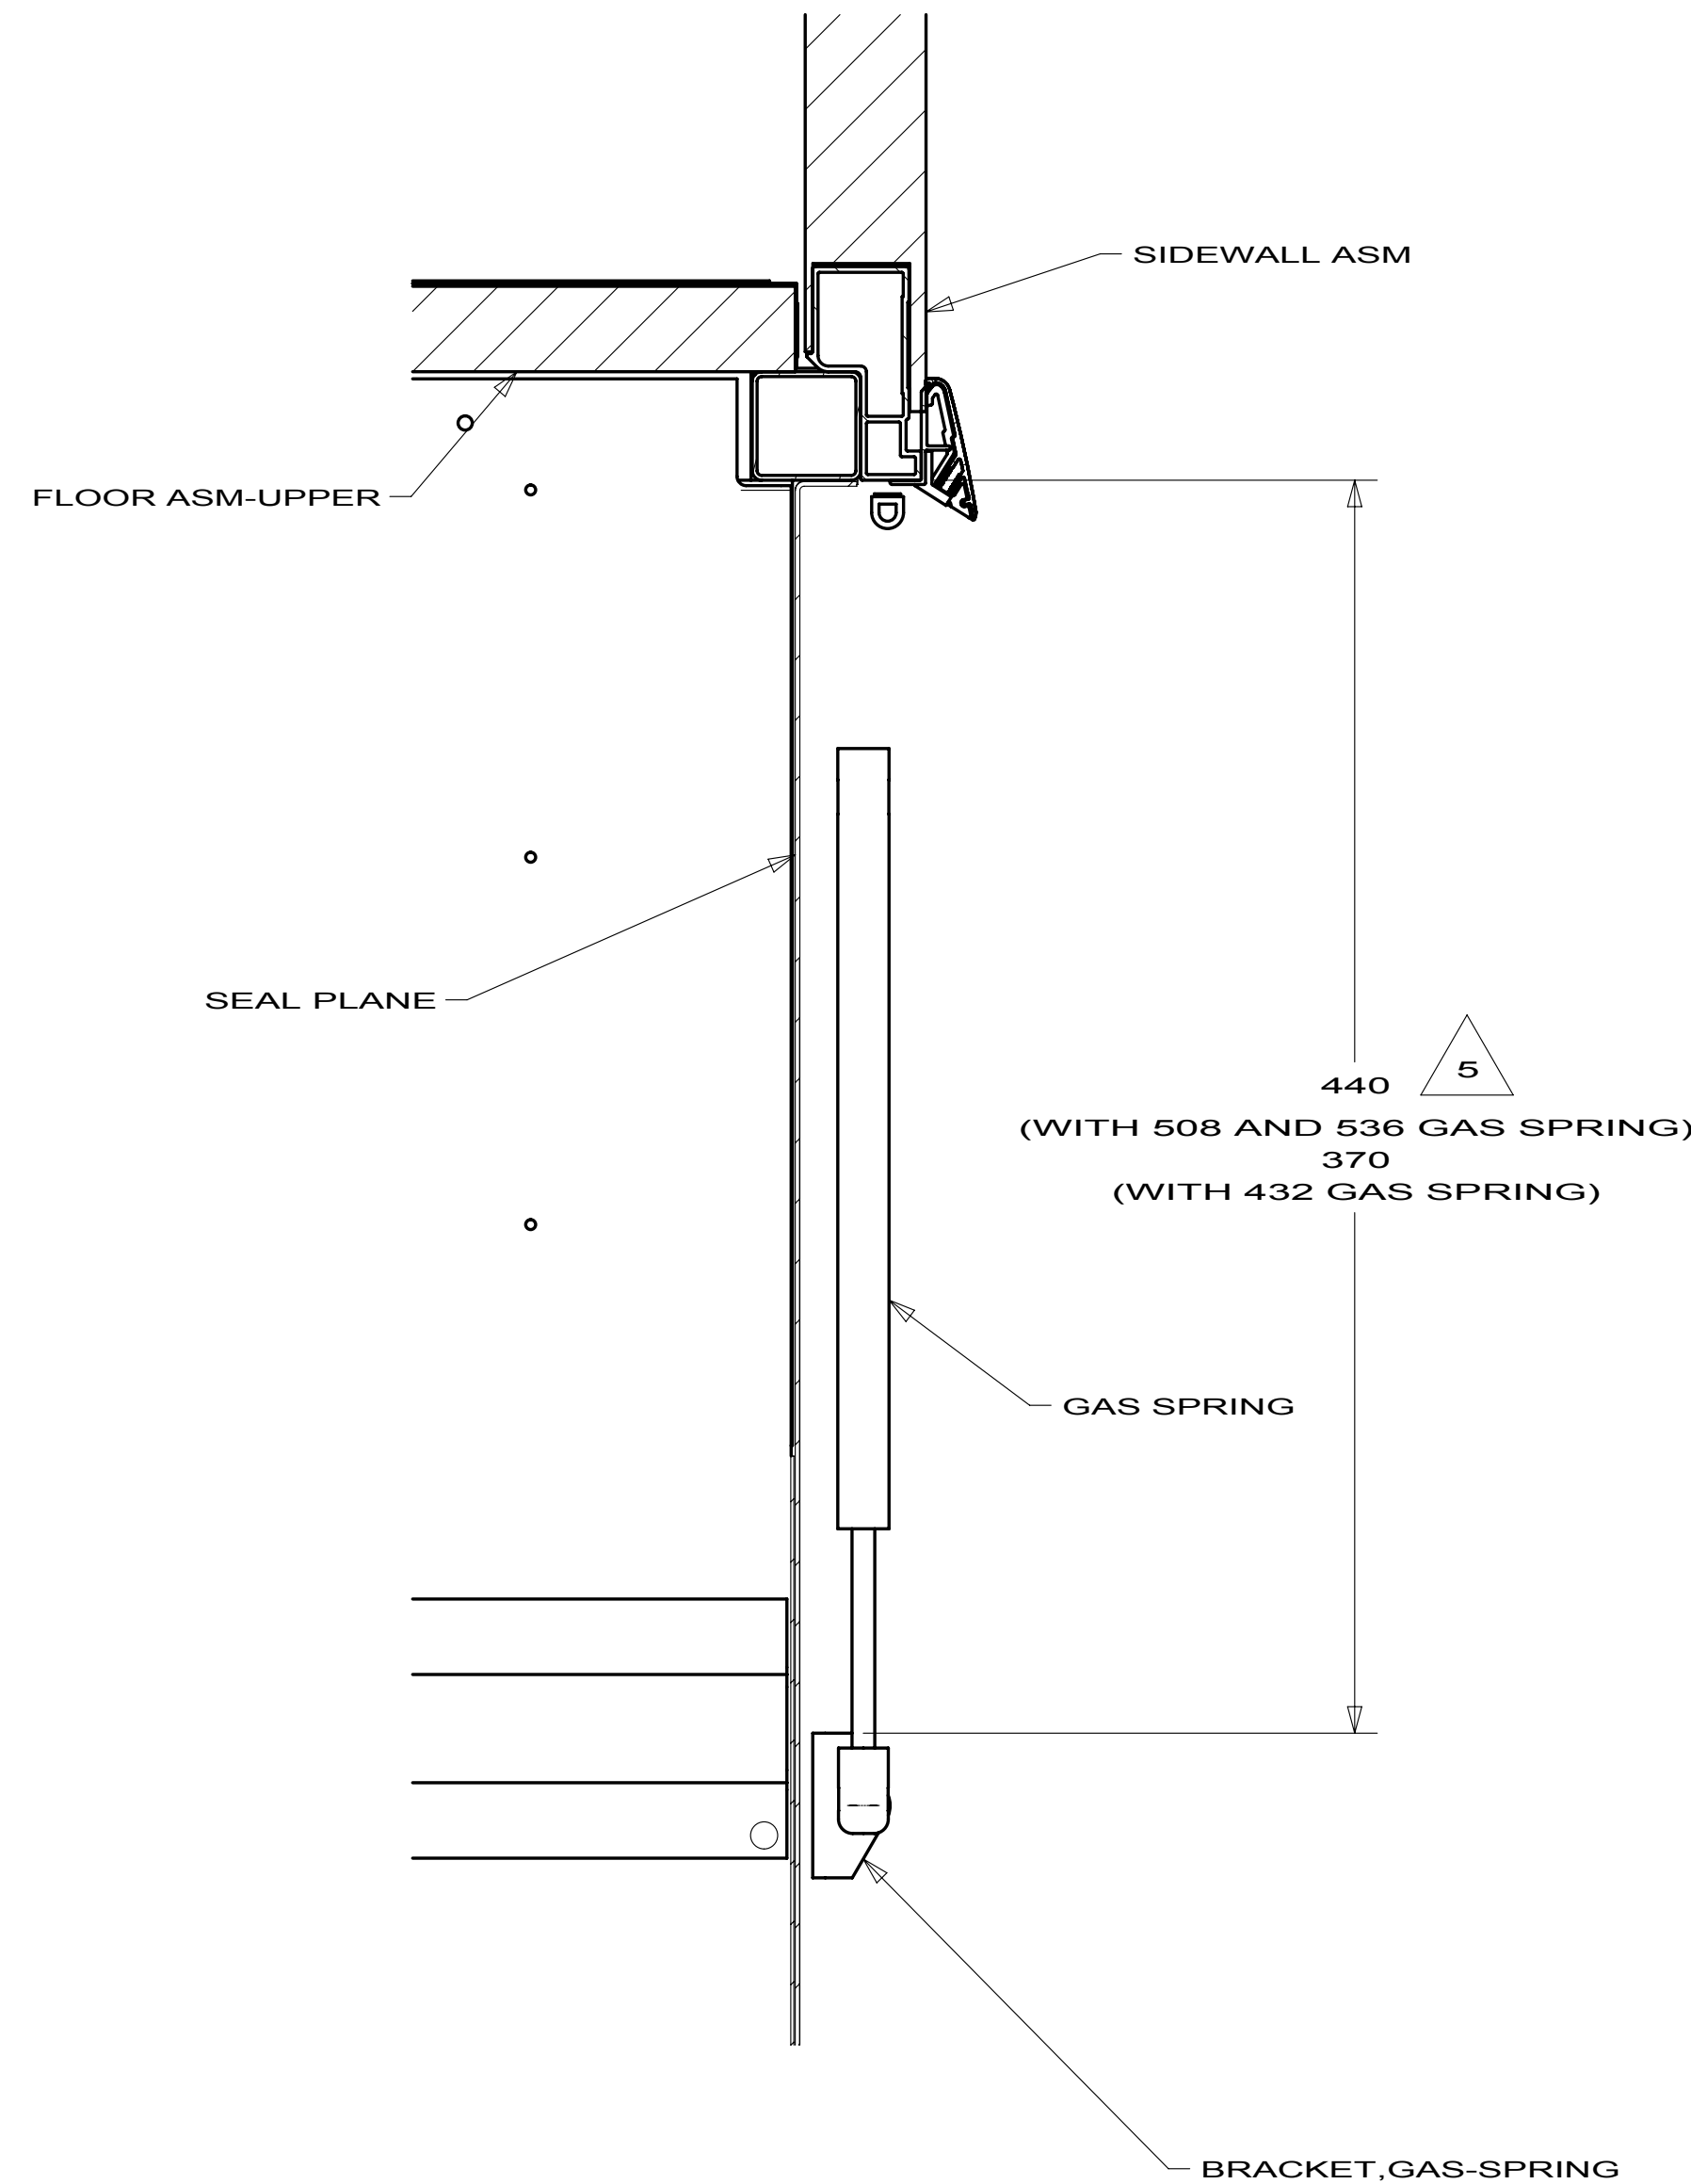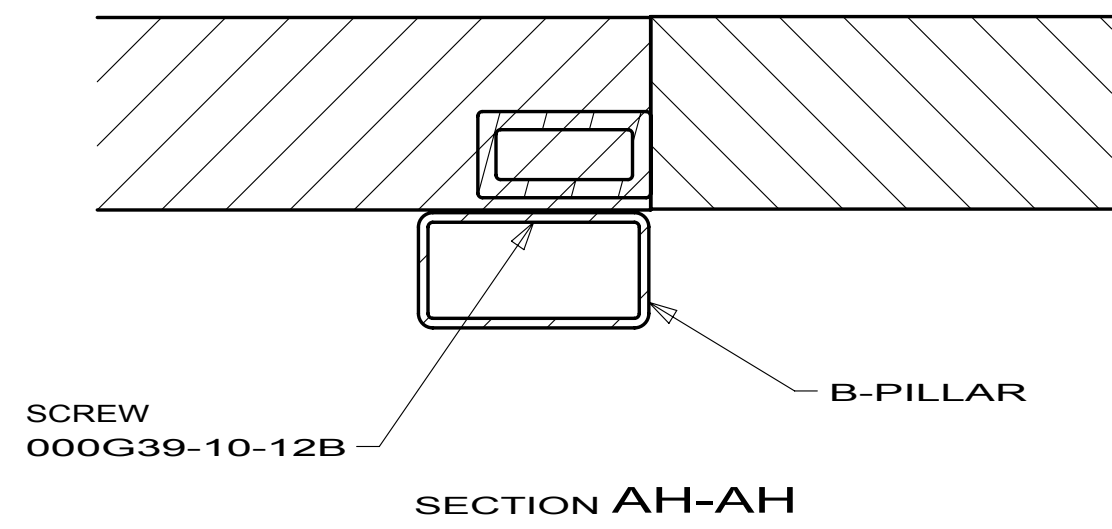


ITA ITASCA ONLY
WIN WINNEBAGO ONLY


FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-SECTIONS		
SHEET 2	PART NO 170751	REV

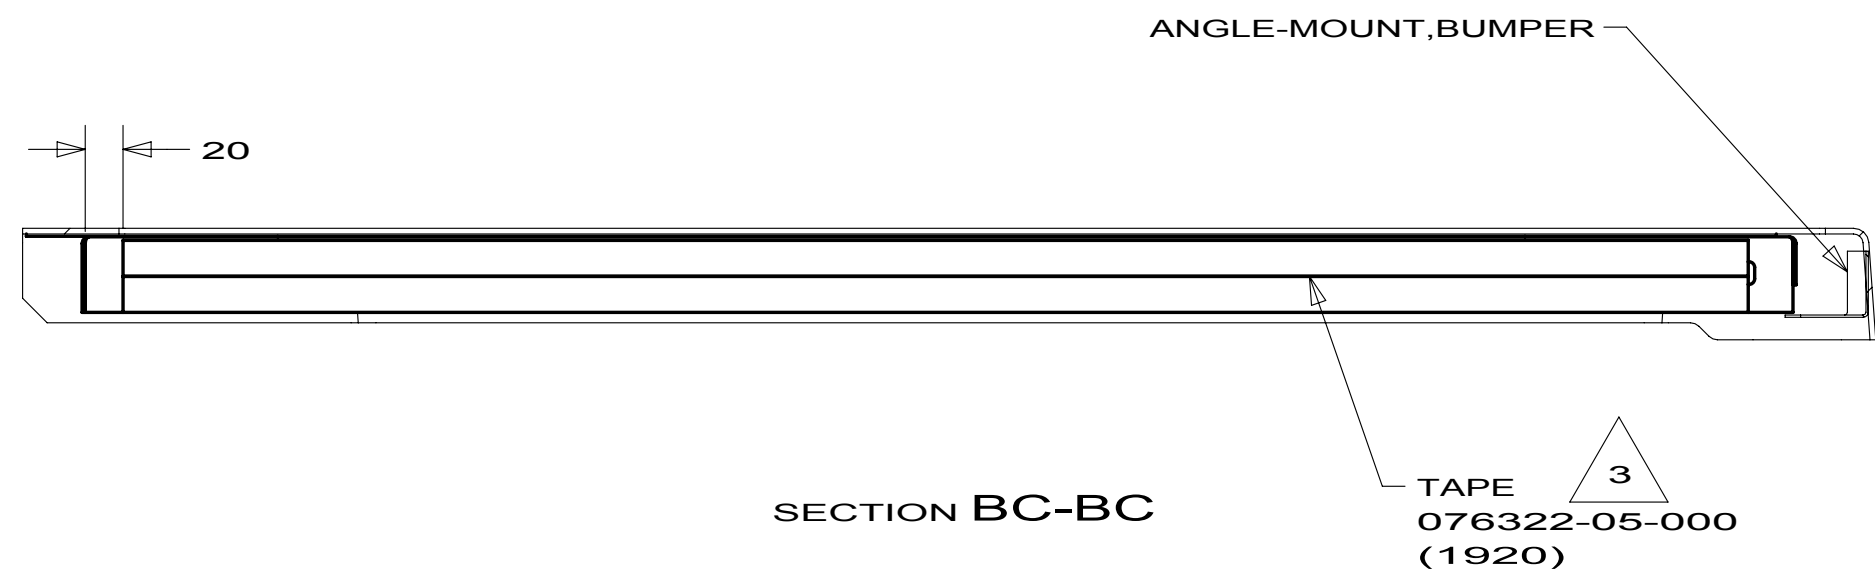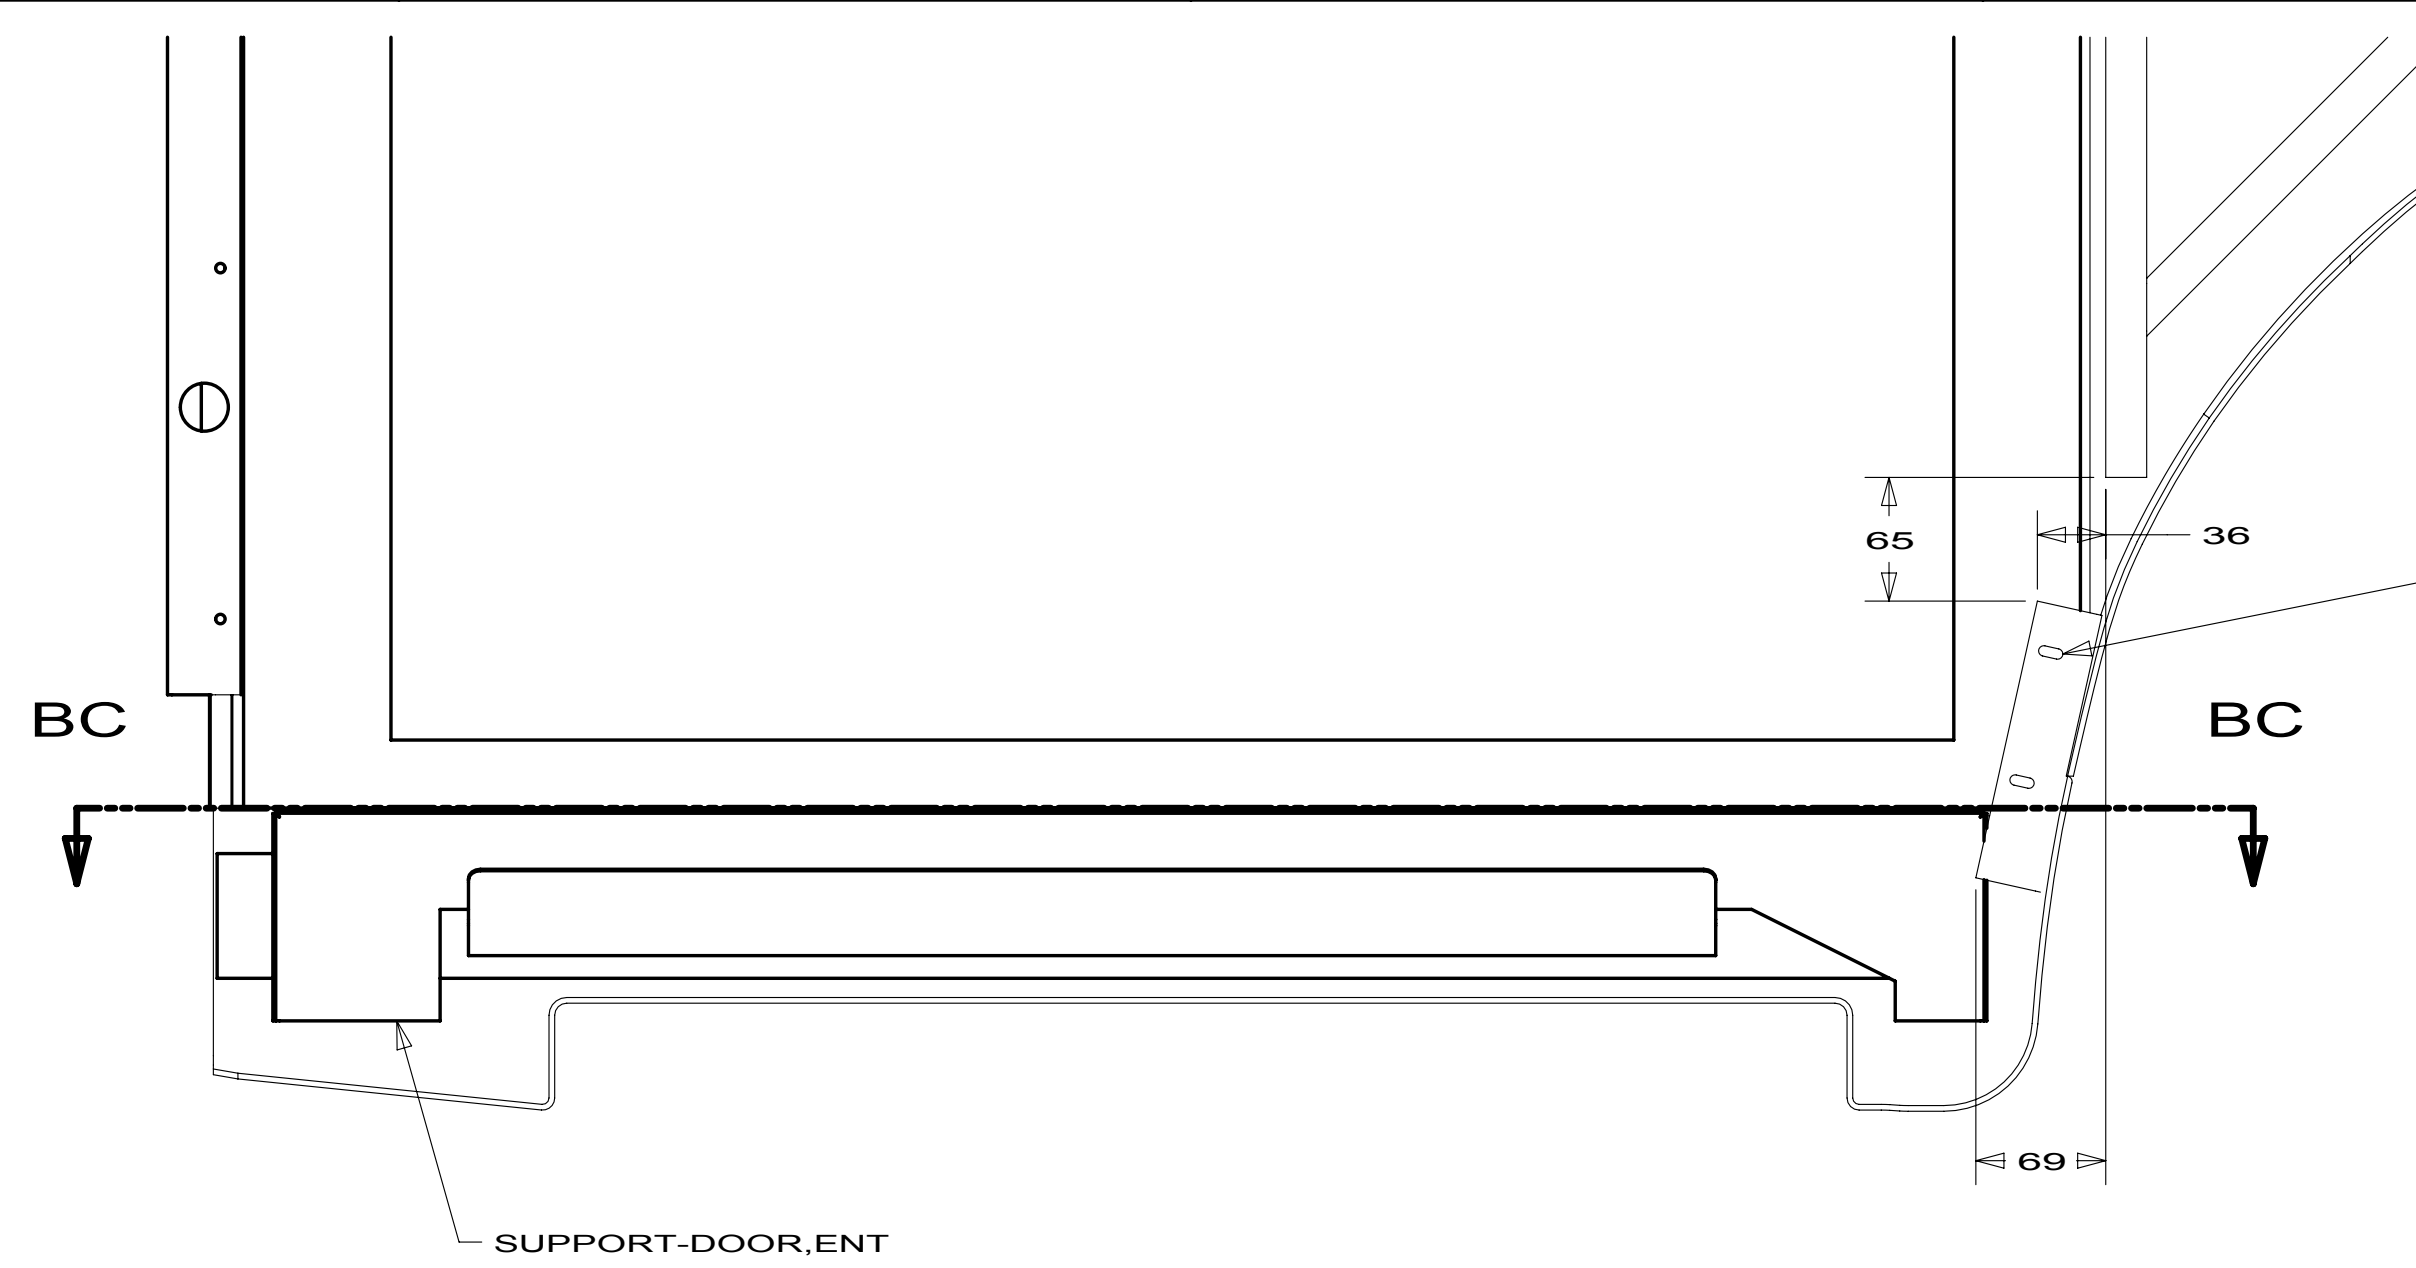


VIEW BB-BB

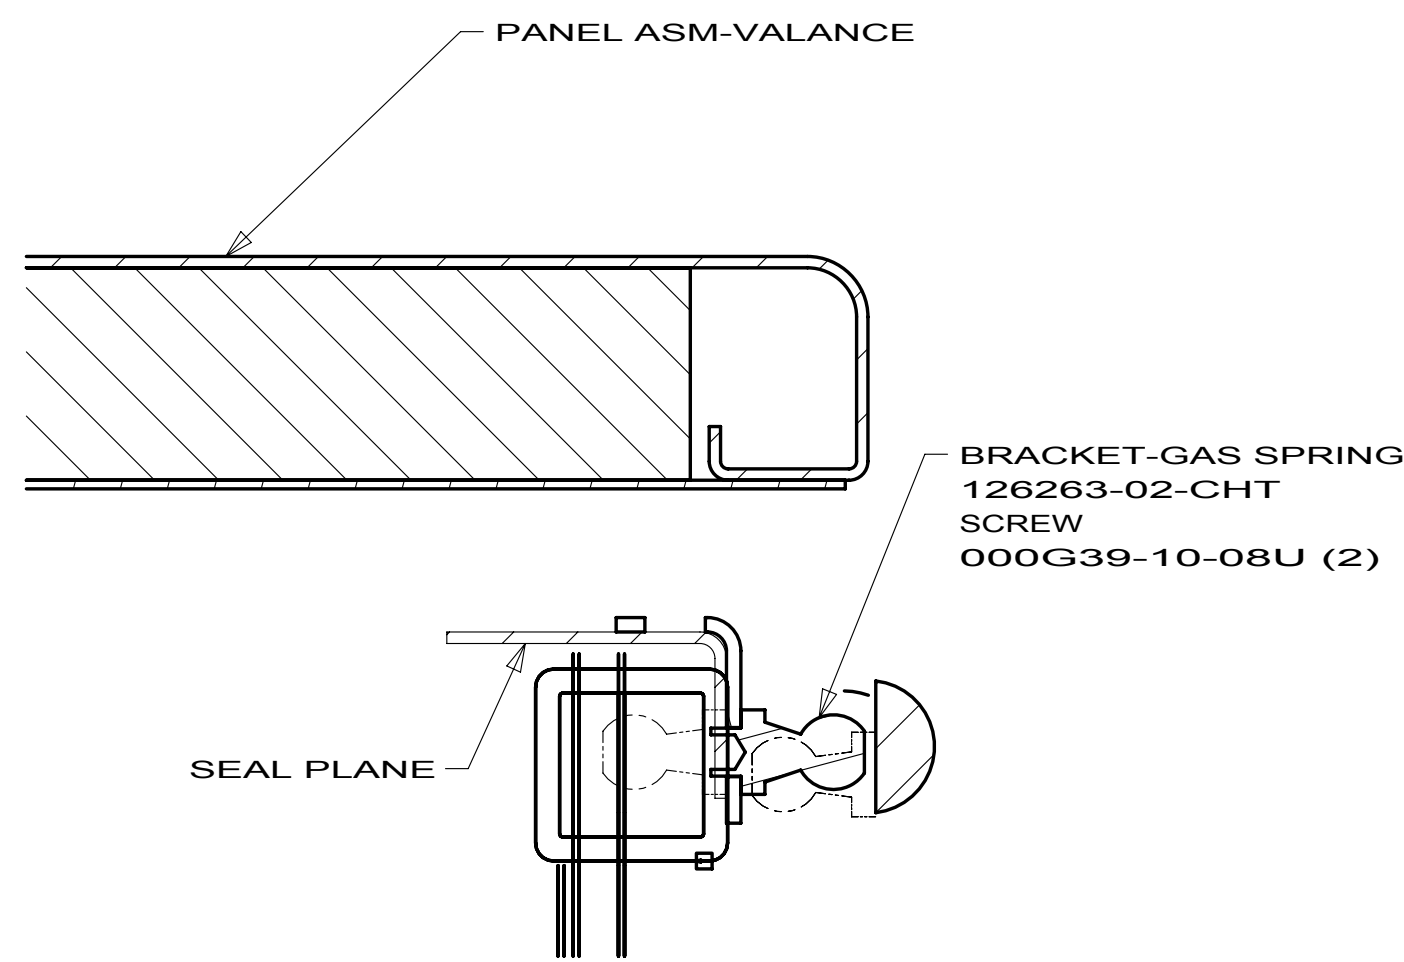

SECTION BF-BF 6

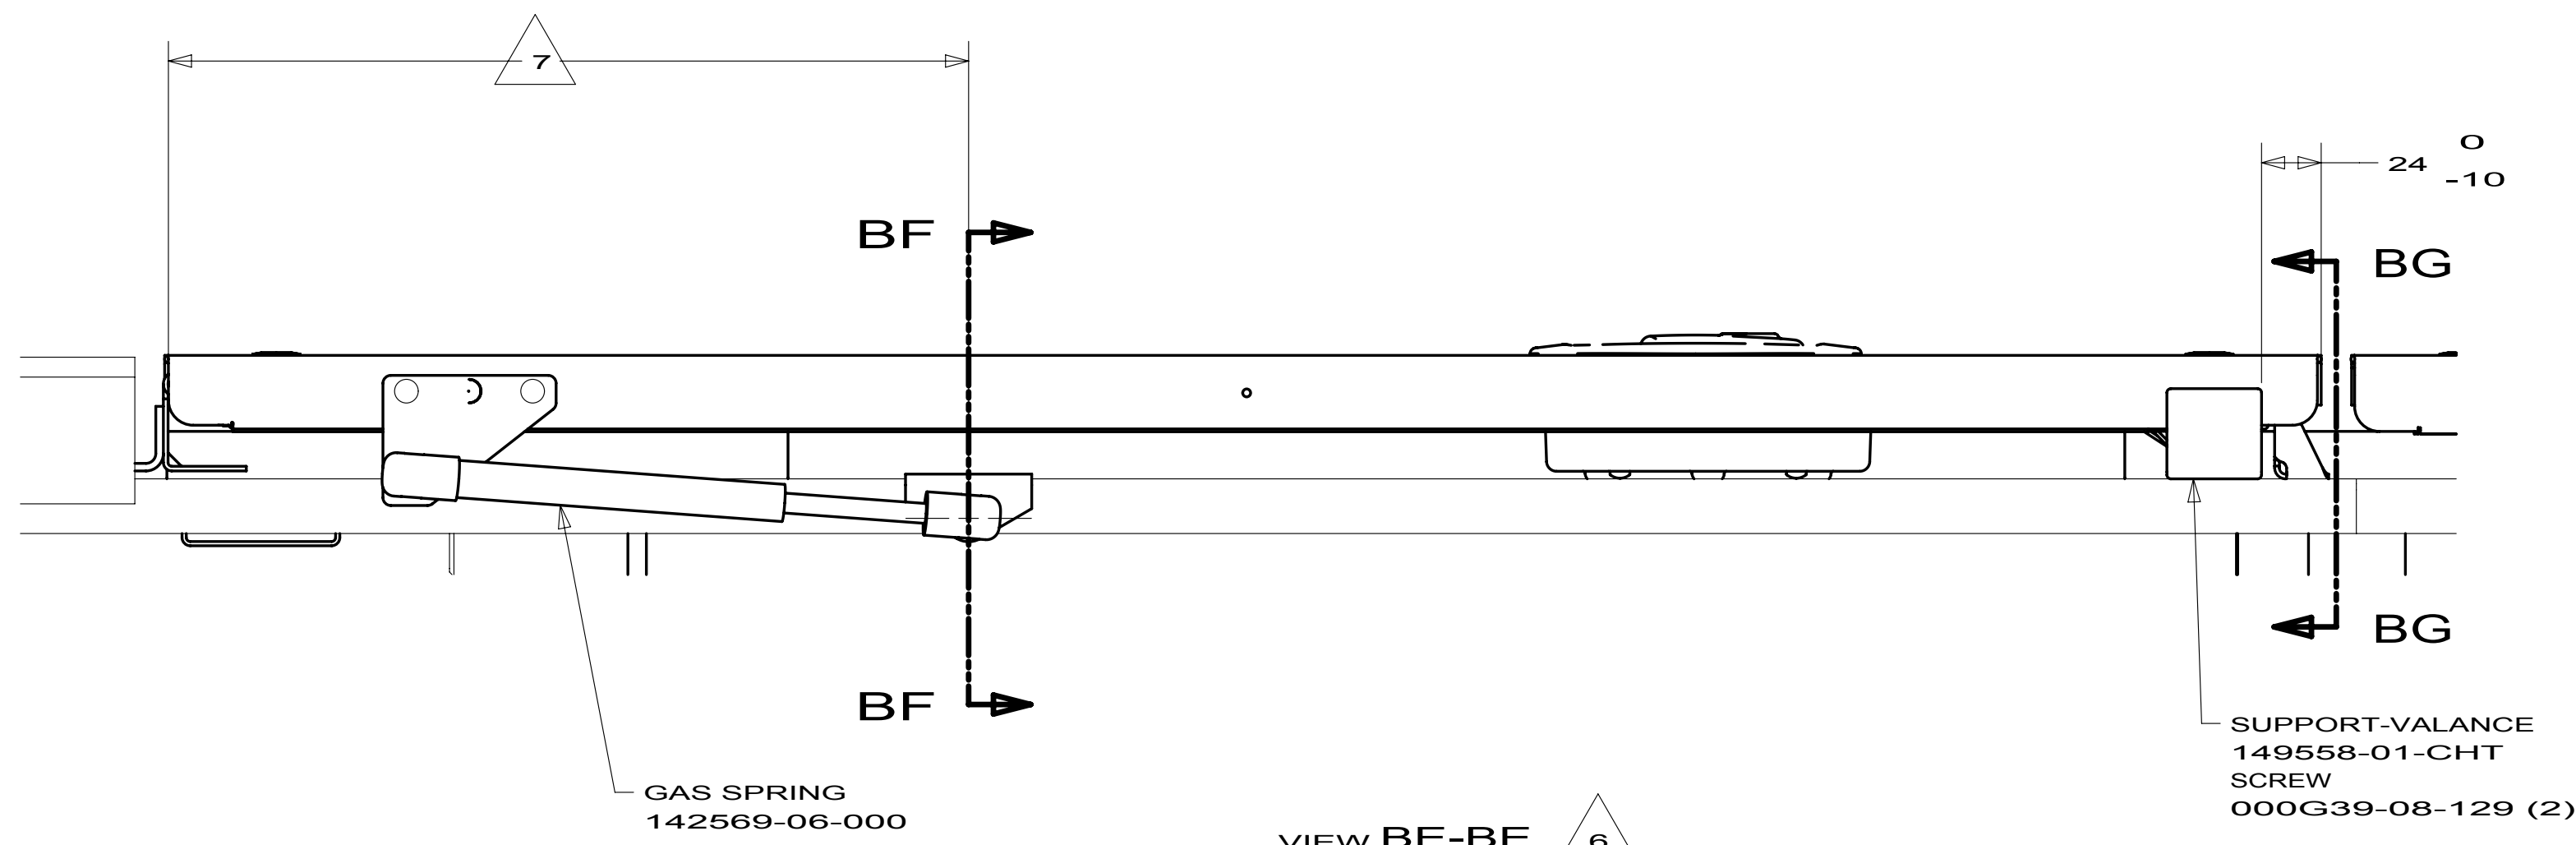


VIEW BE-BE 6

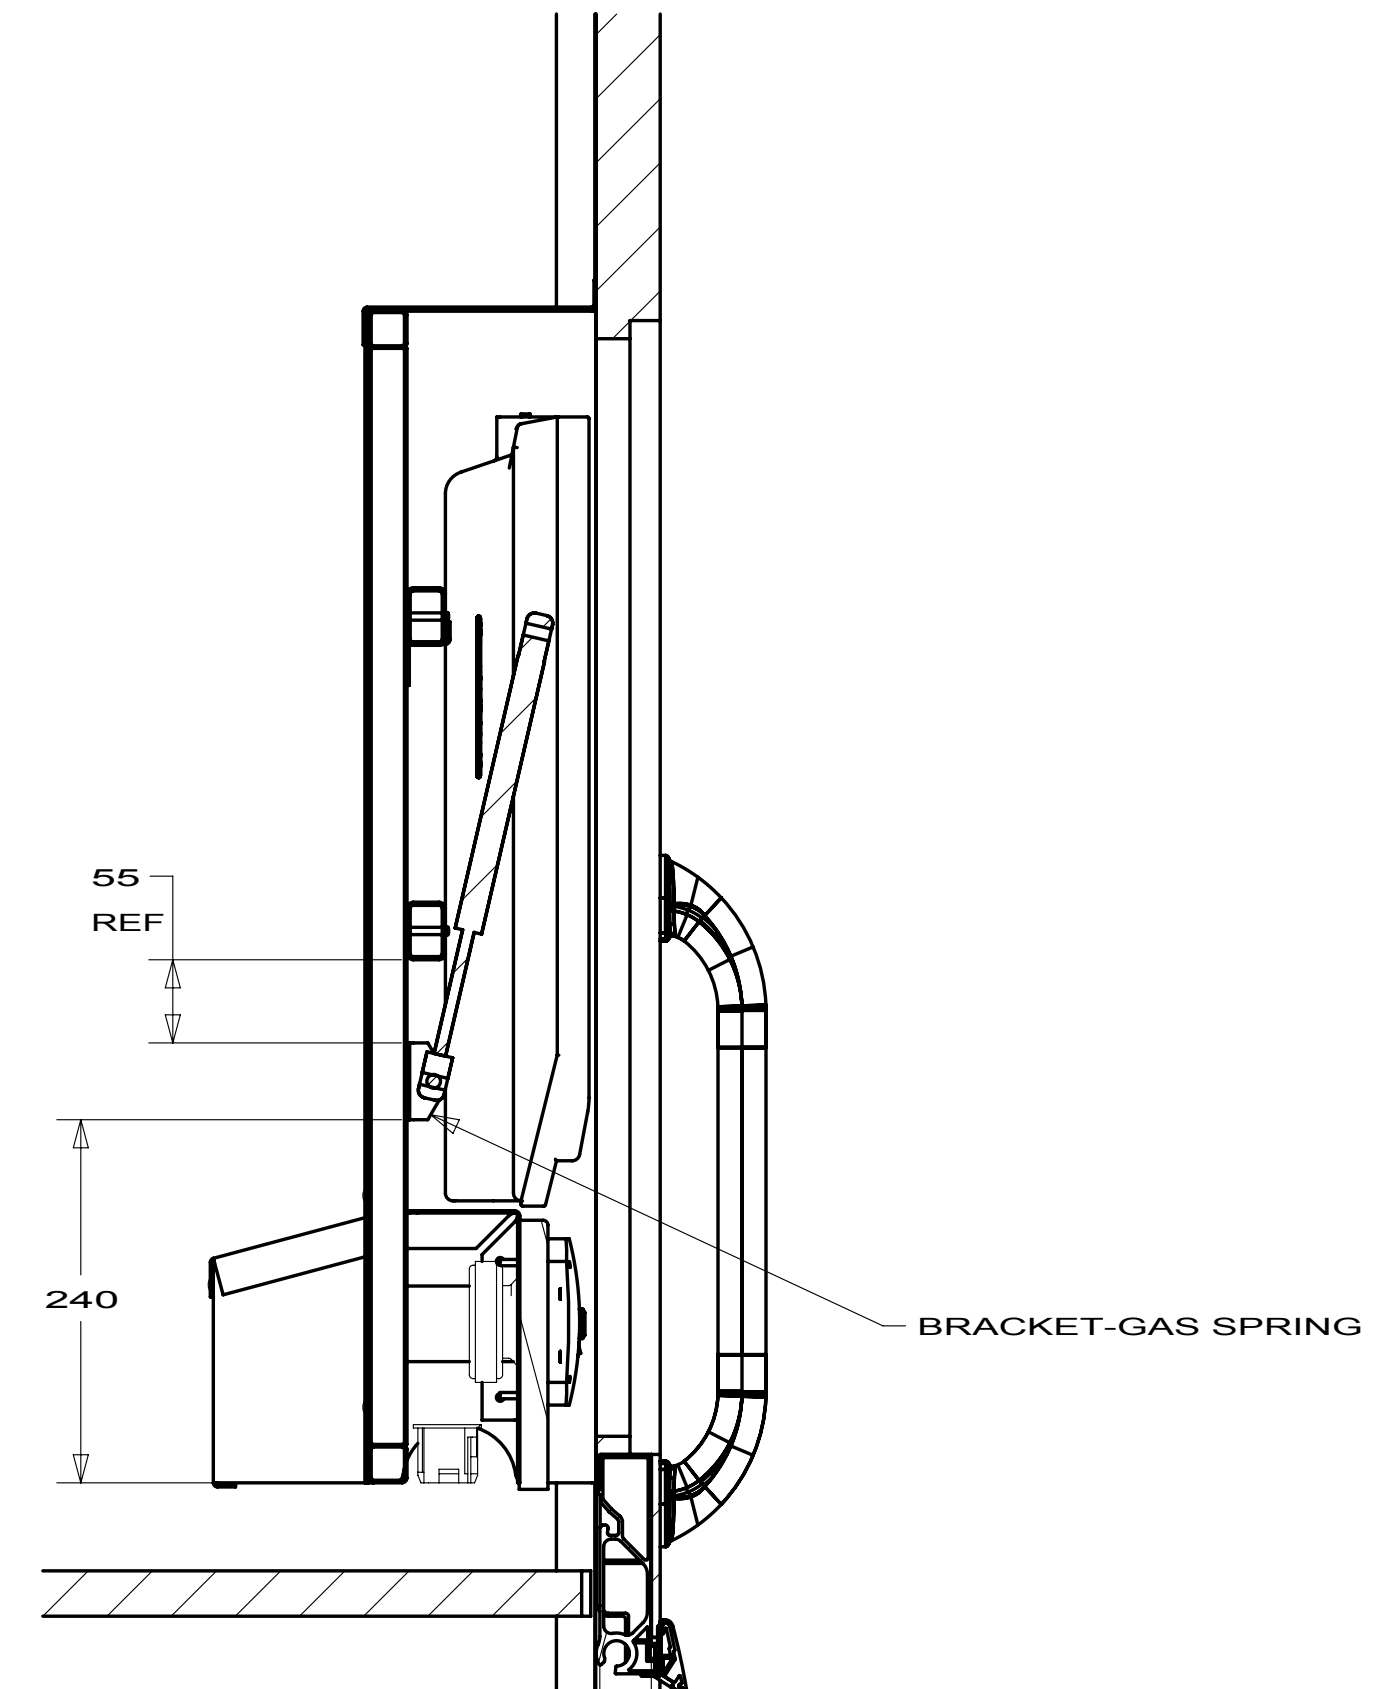


SECTION BD-BD (ROTATED 180°)


FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-SECTIONS		
SHEET 3	PART NO 170751	REV

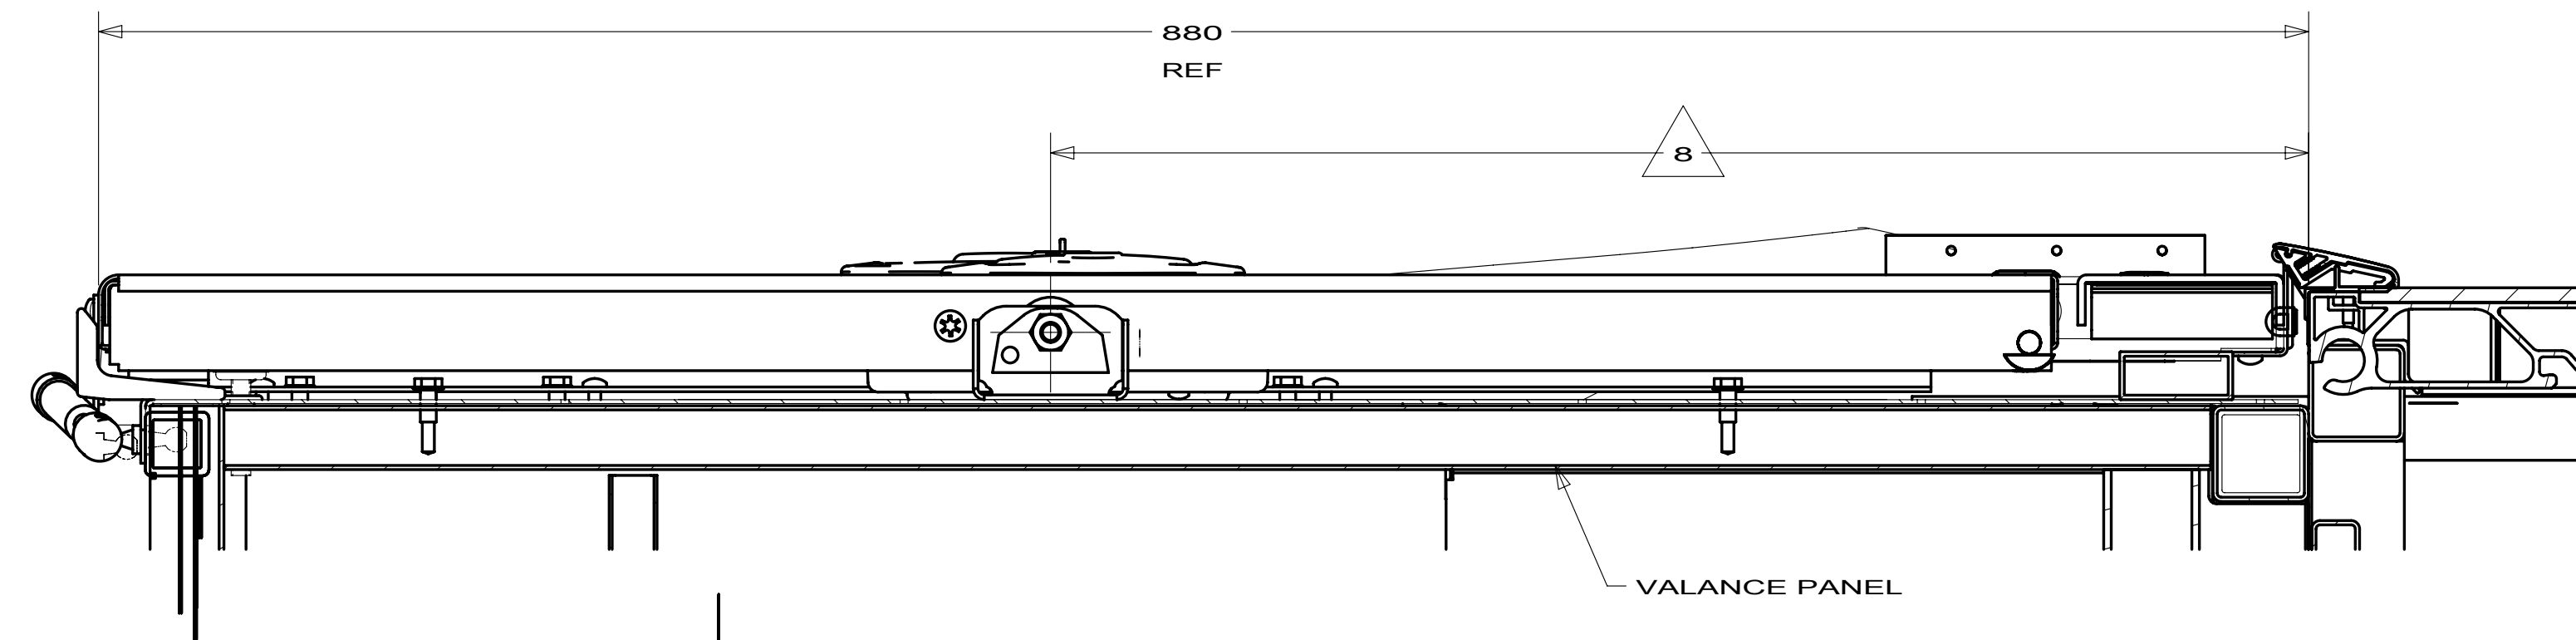


SECTION BG-BG 6

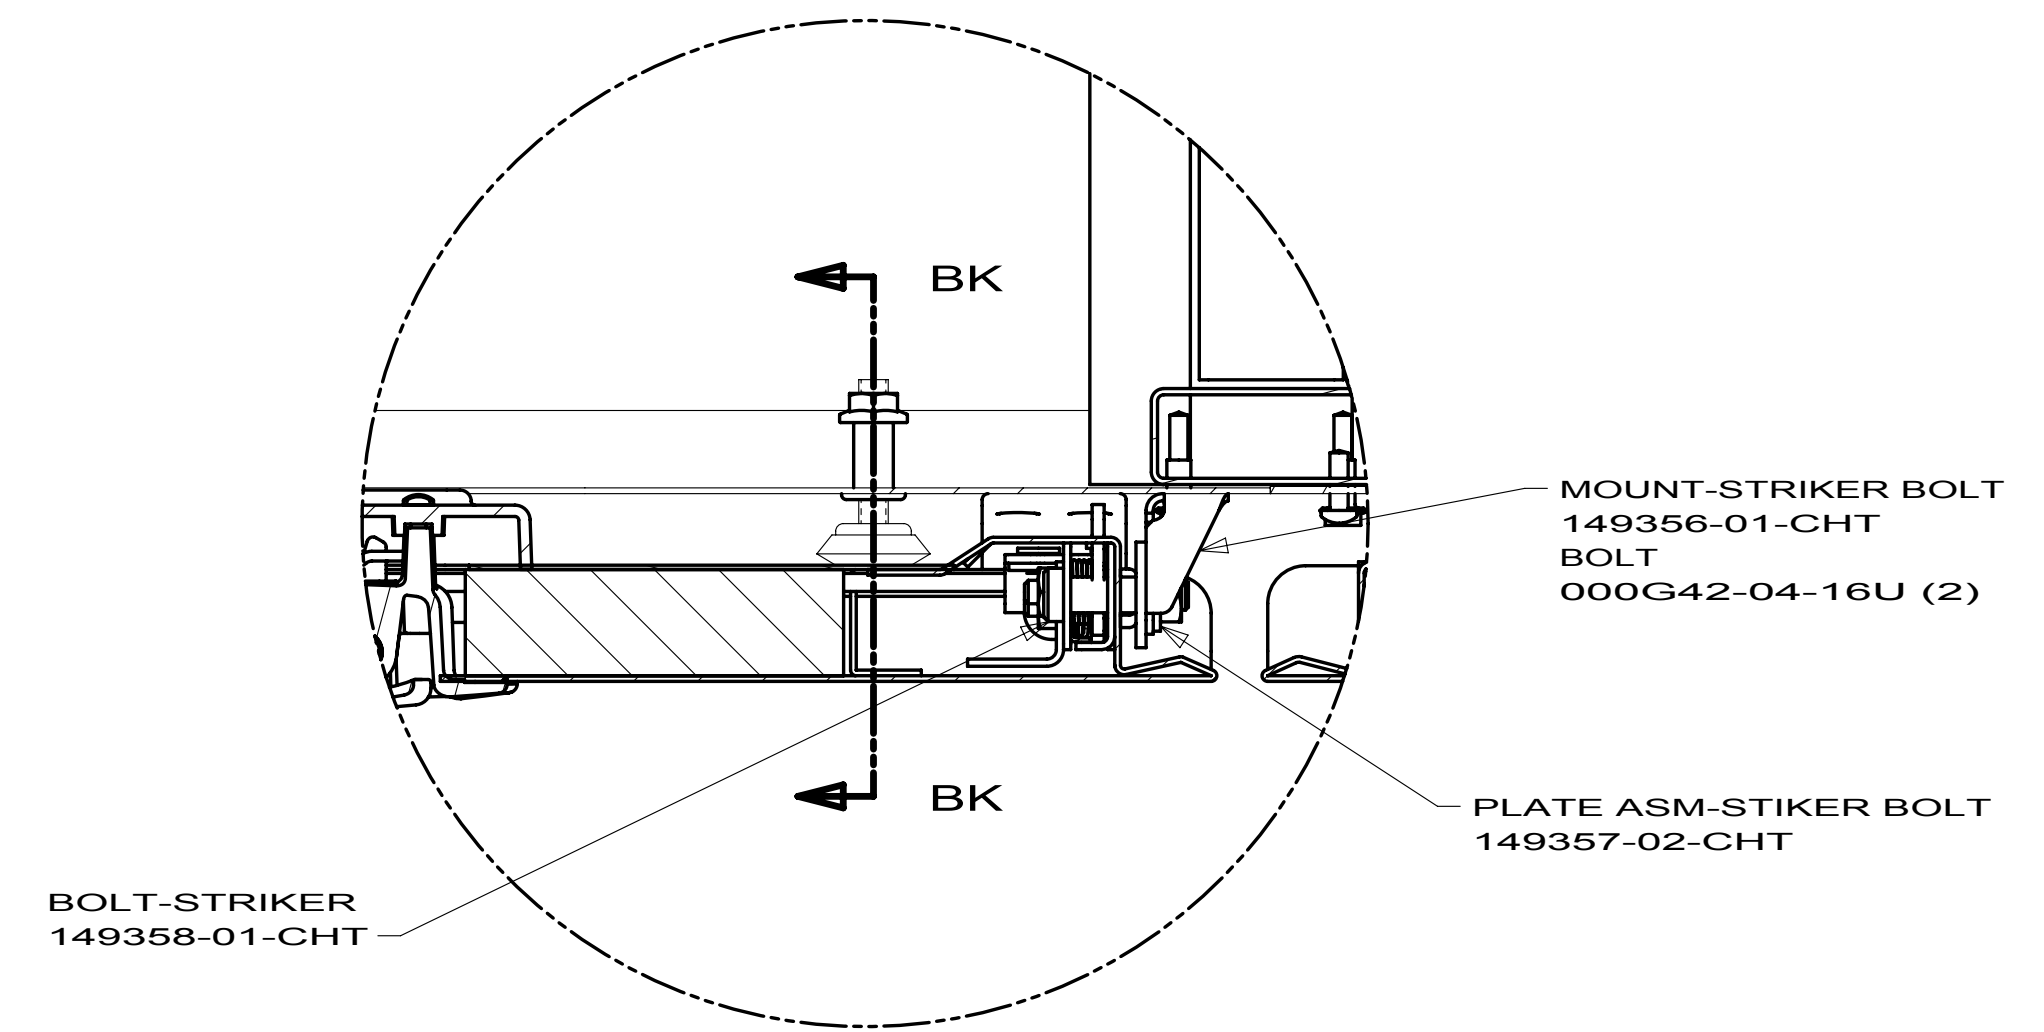


DETAIL BJ 6

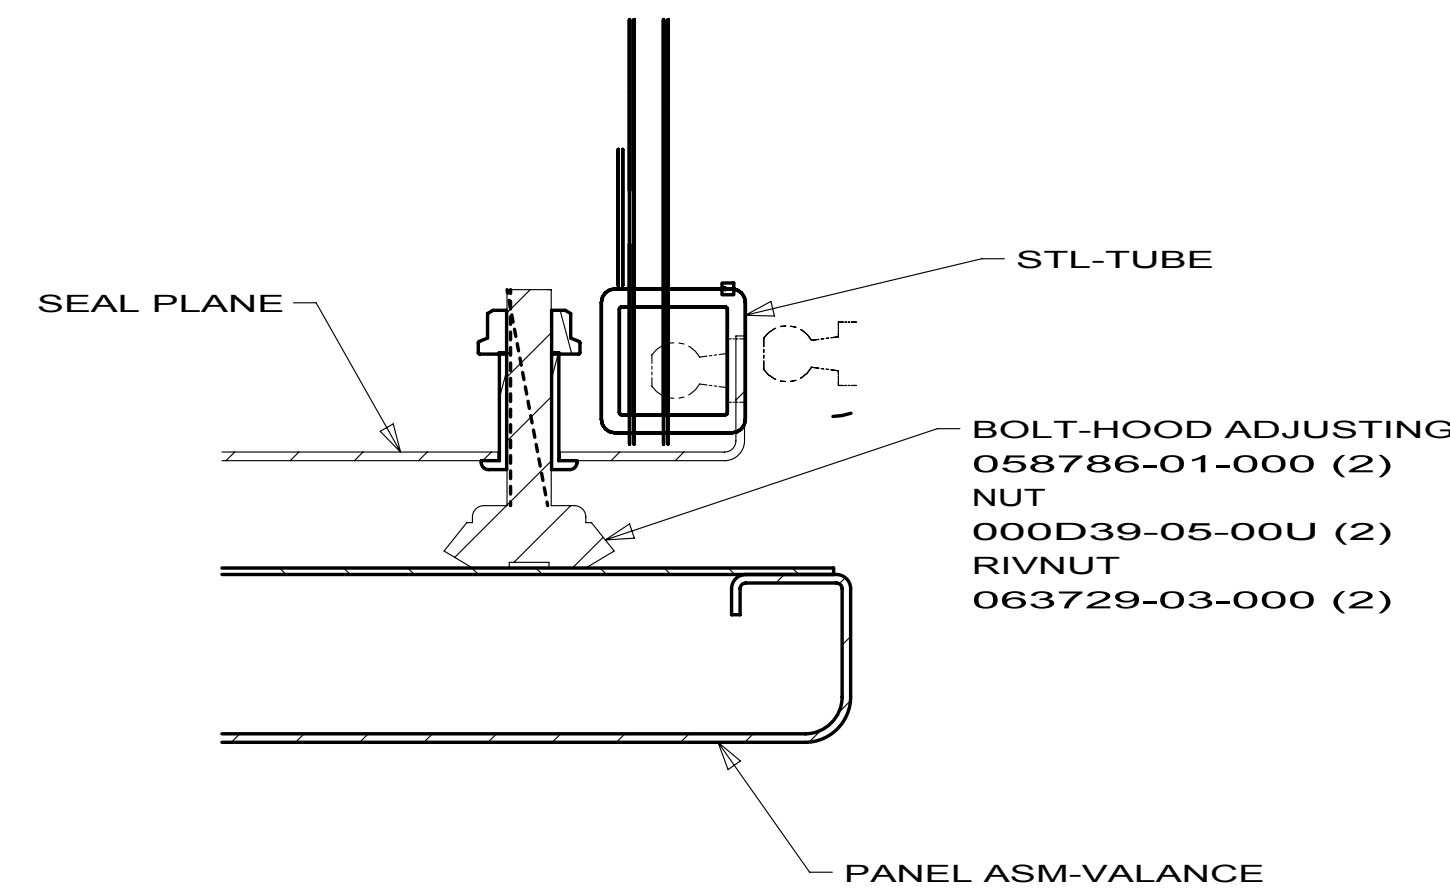


SECTION BK-BK 6

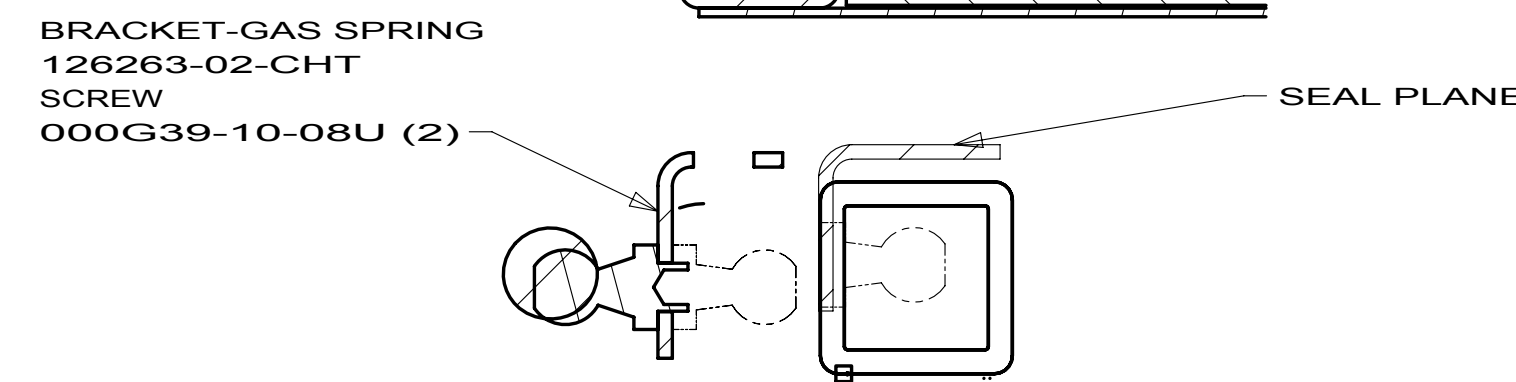


SECTION BN-BN 9

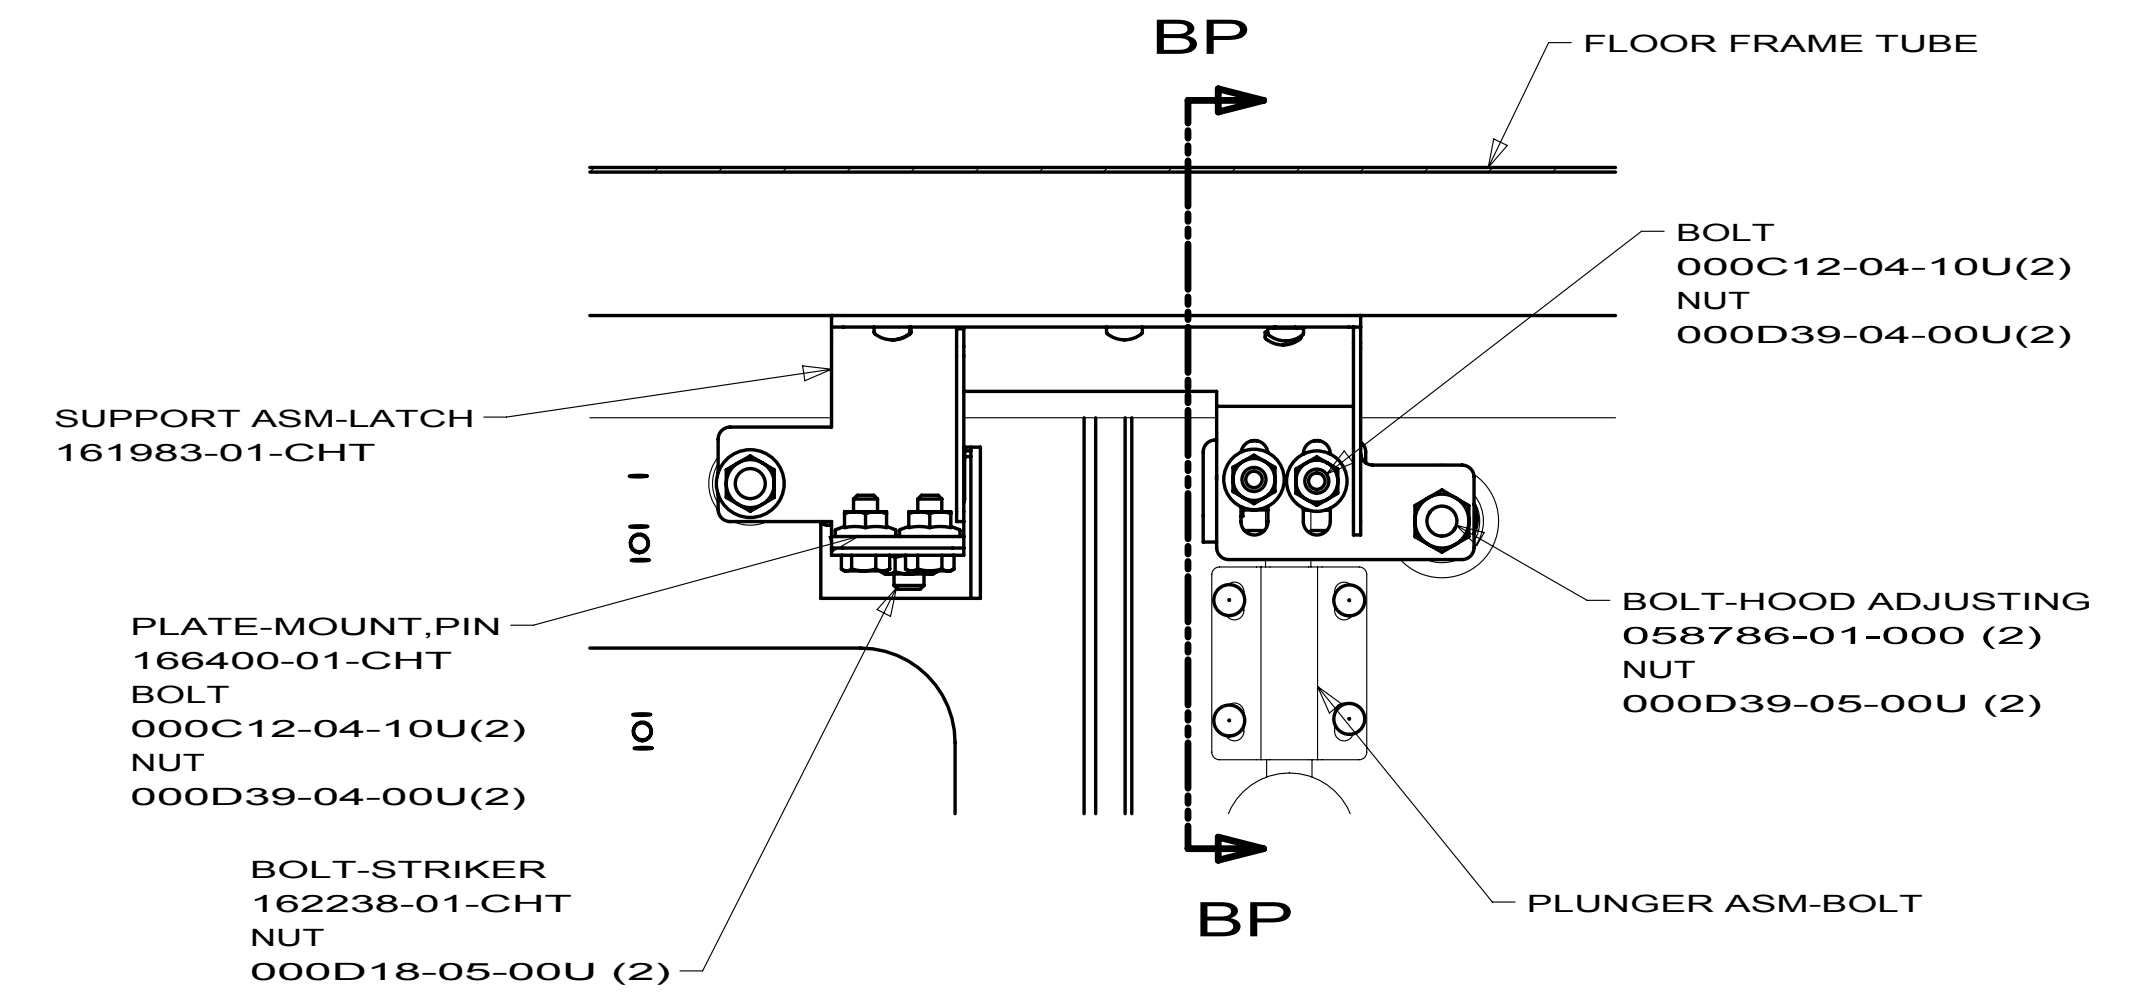

SECTION BM-BM




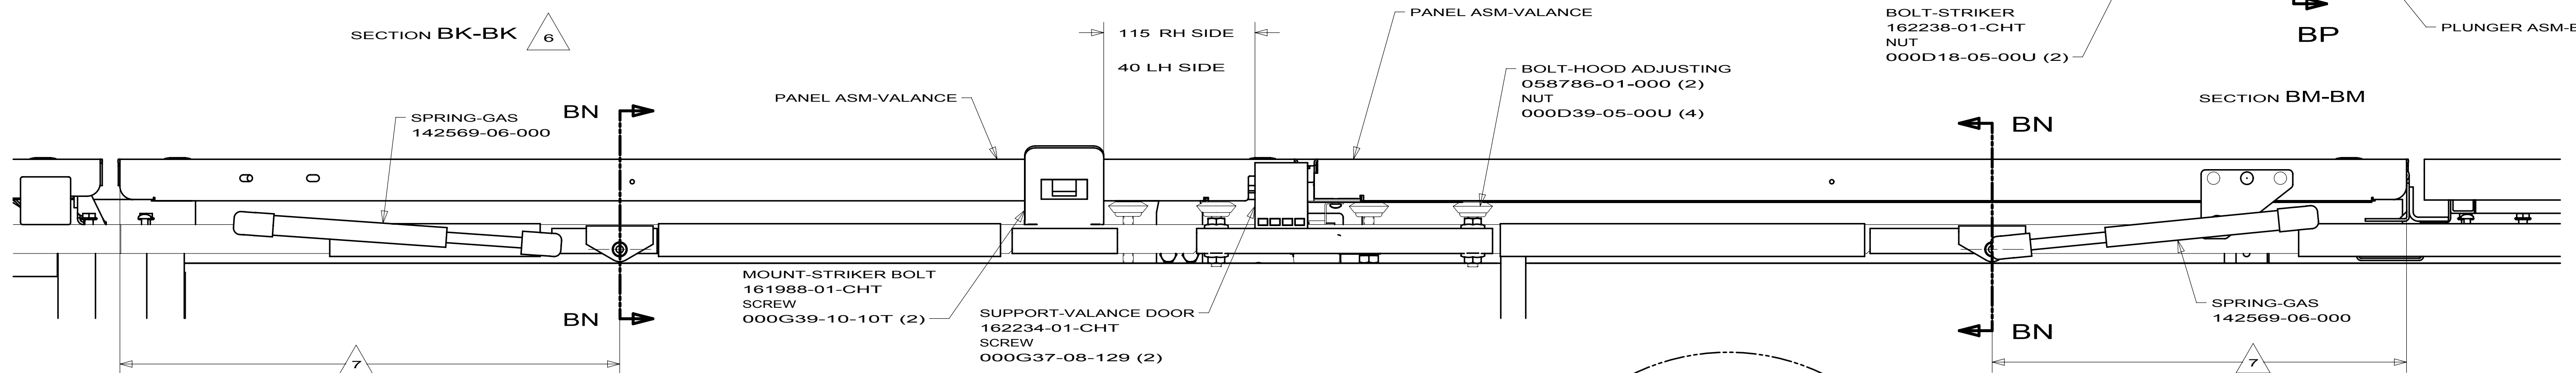


VIEW BL-BL 9

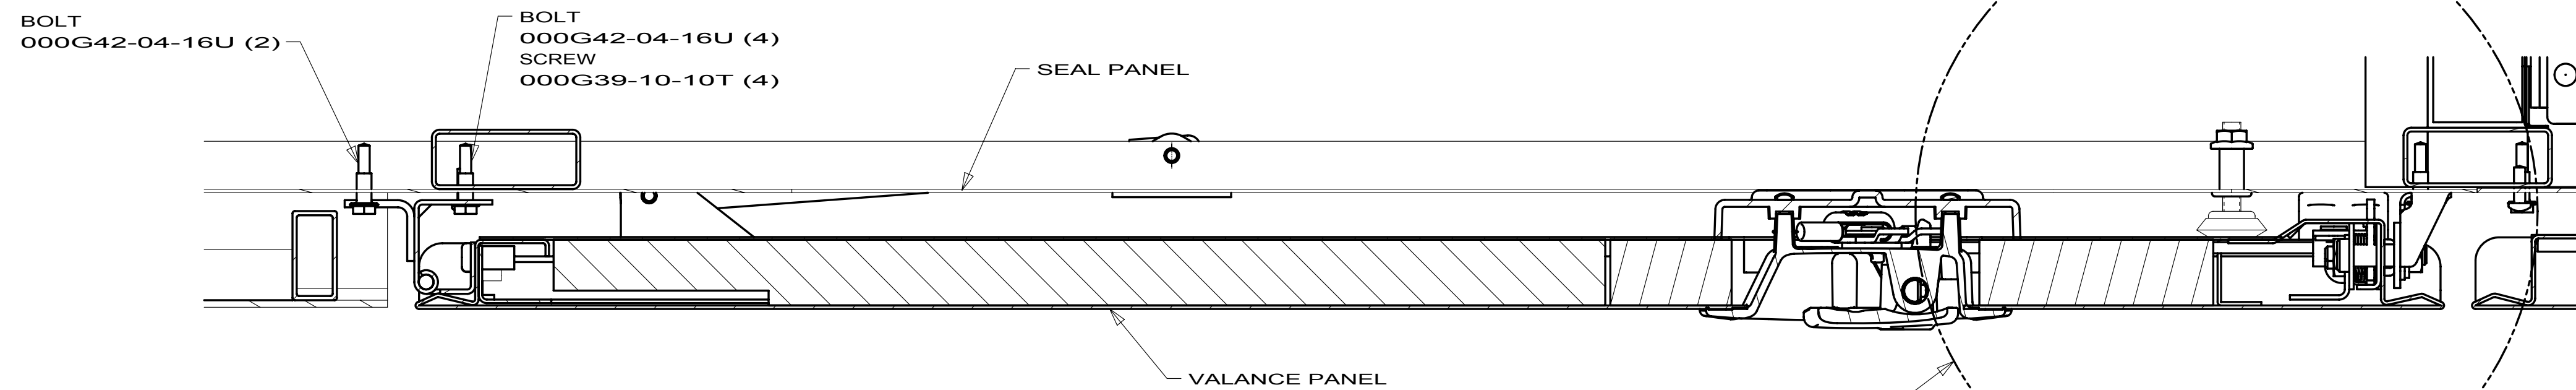


SECTION BH-BH 6


FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 4	PART NO	REV
	170751	

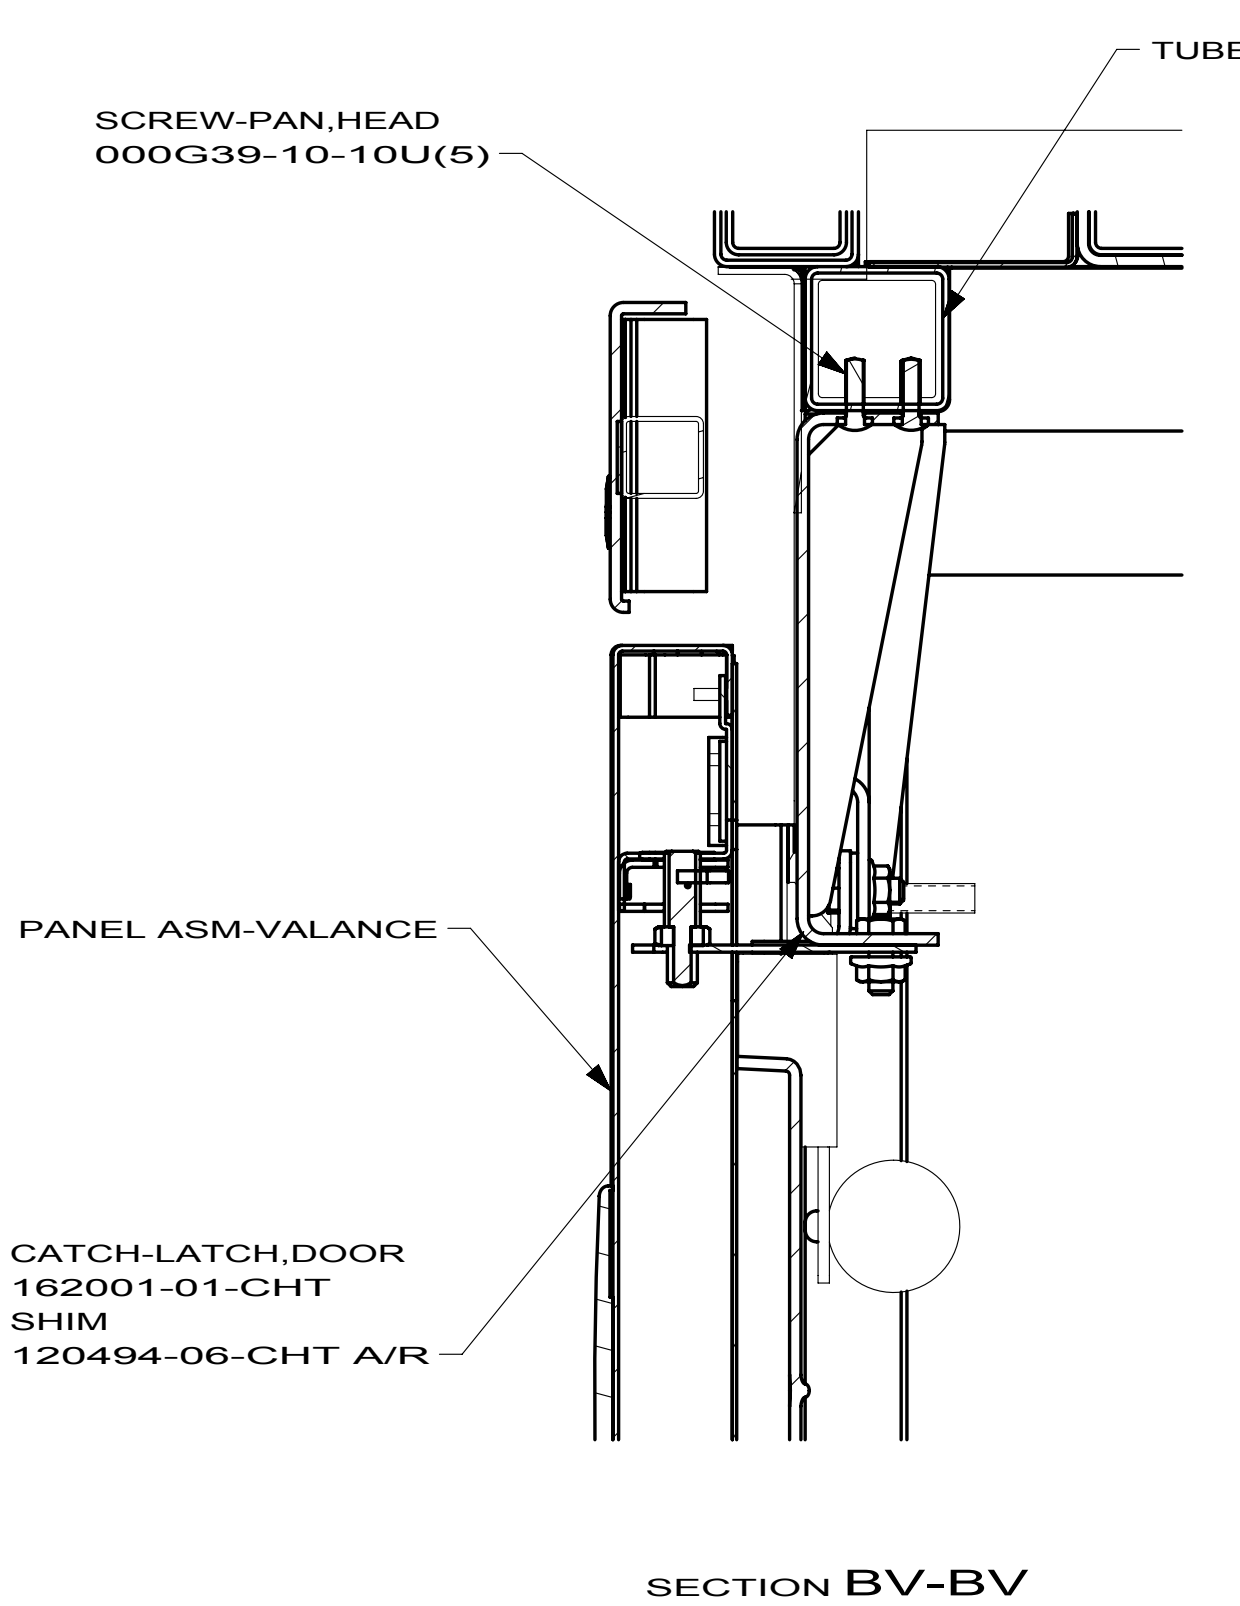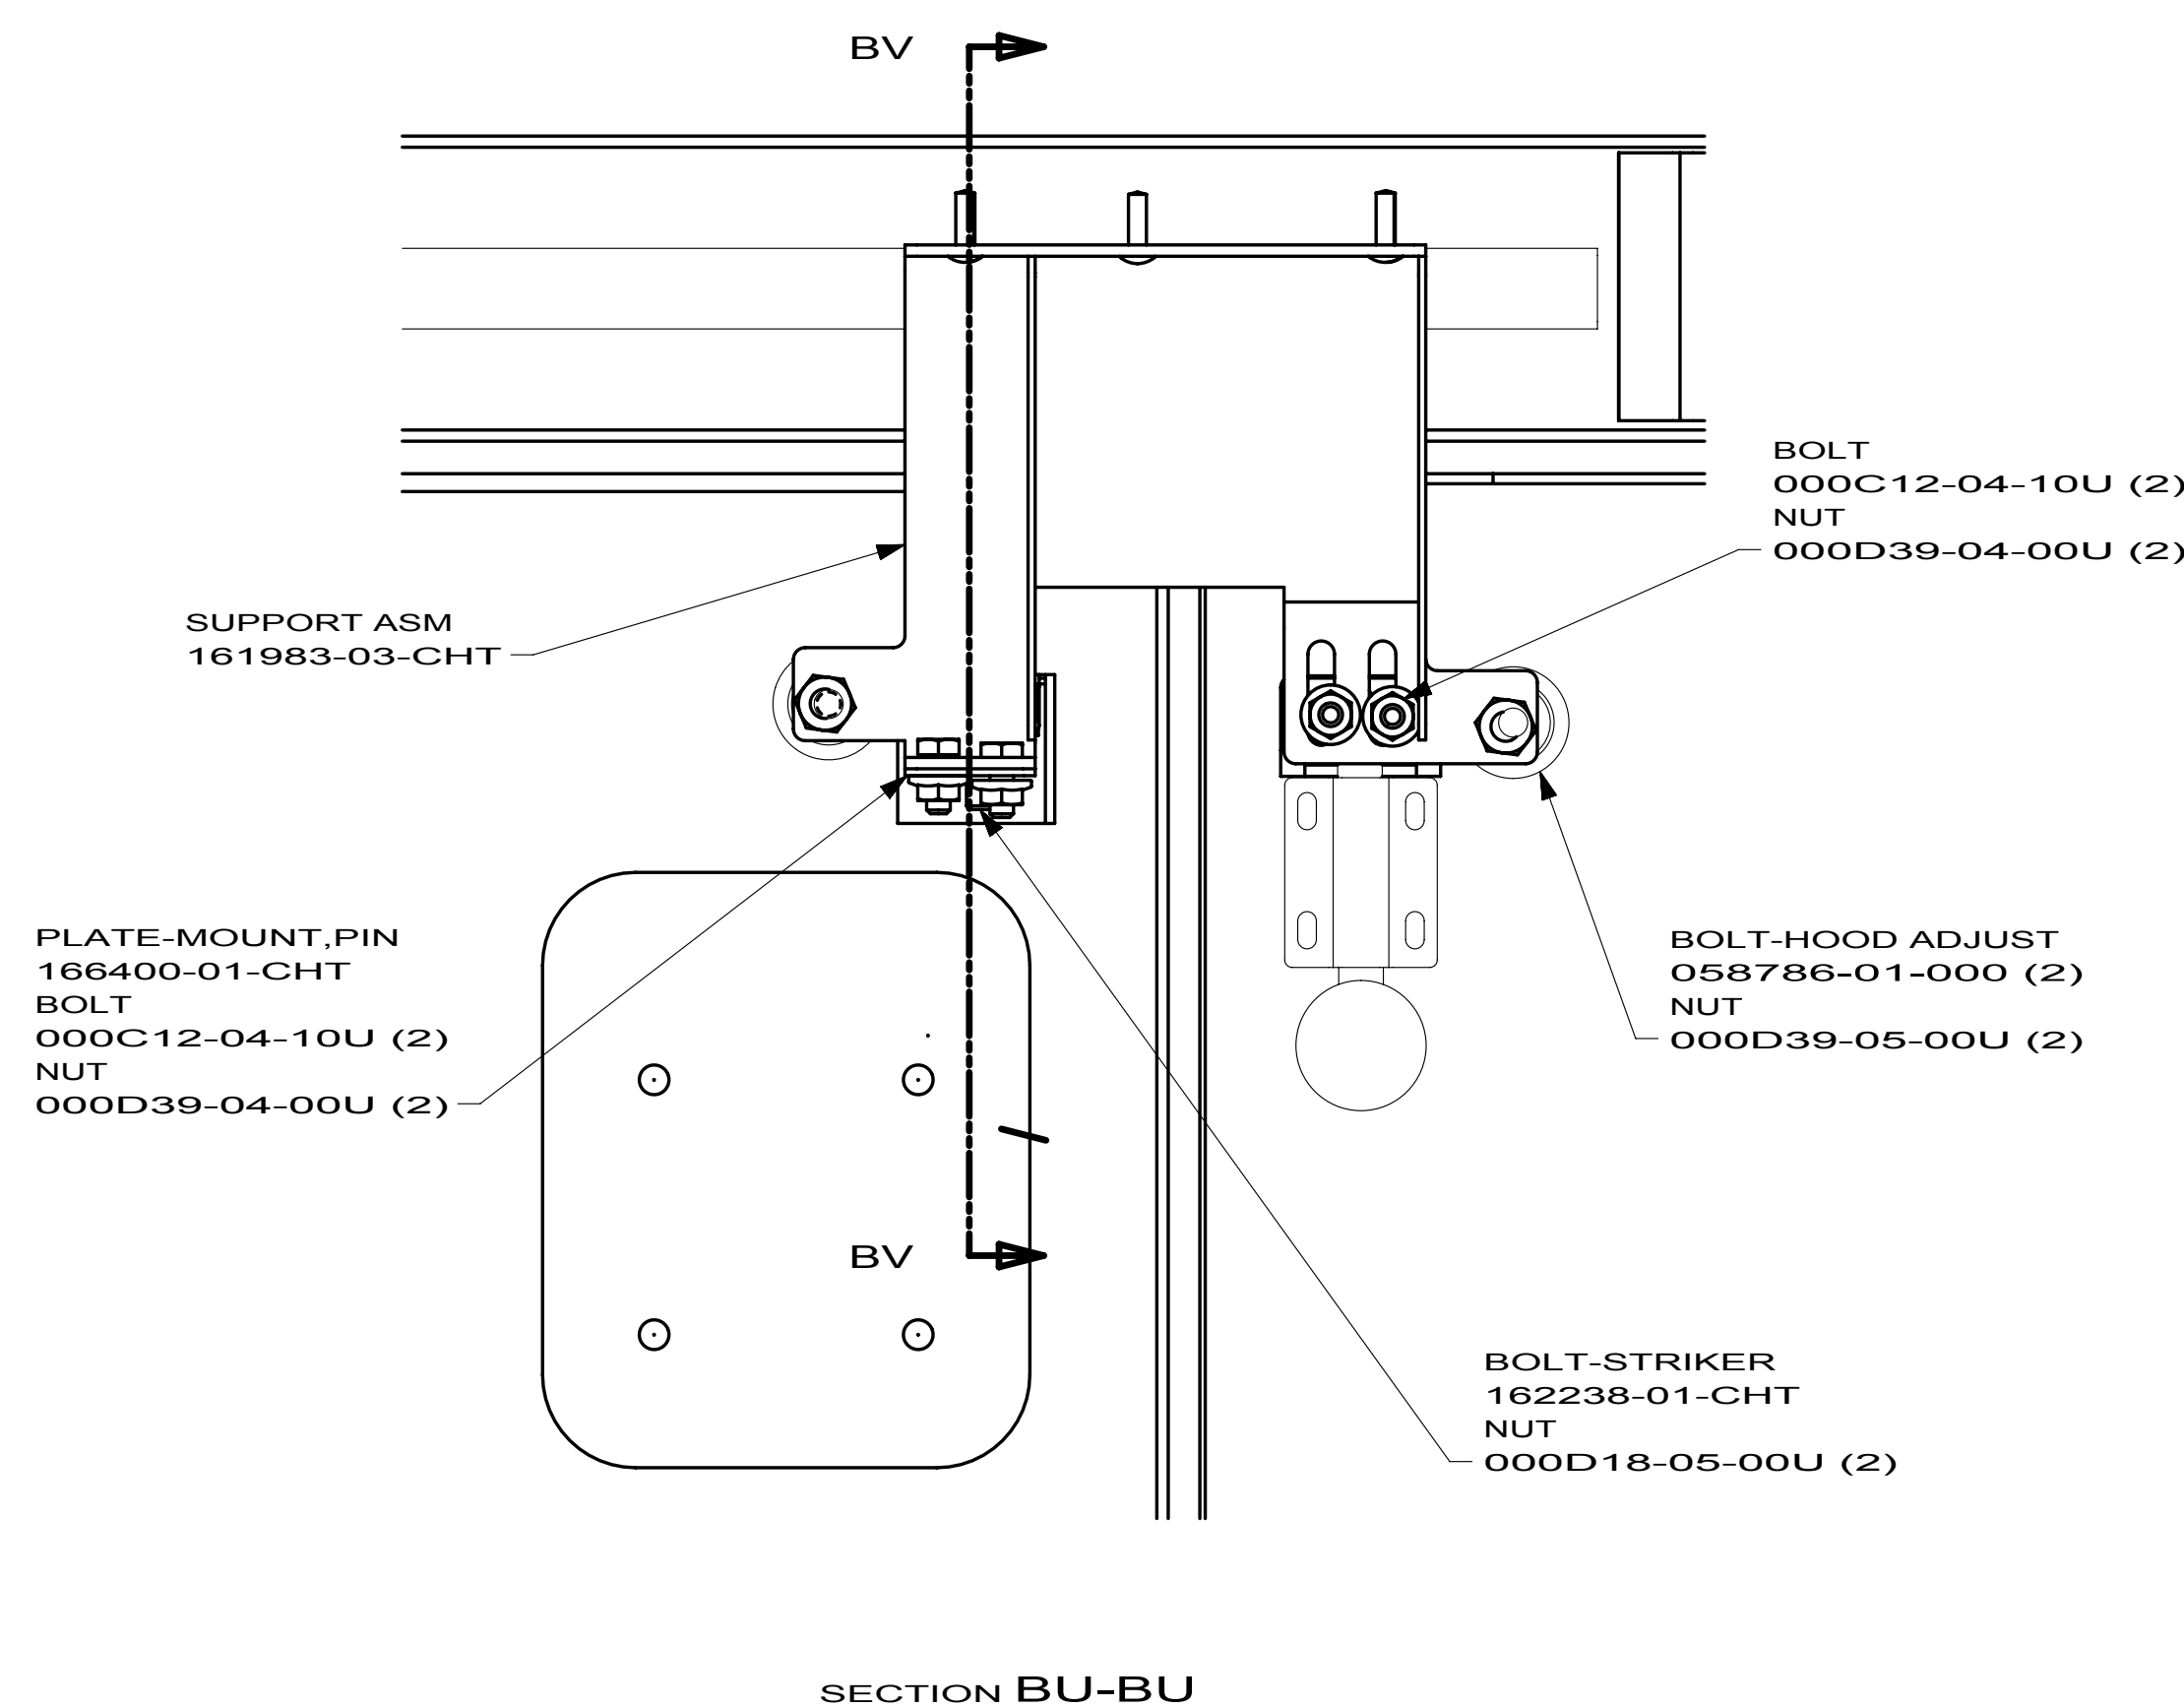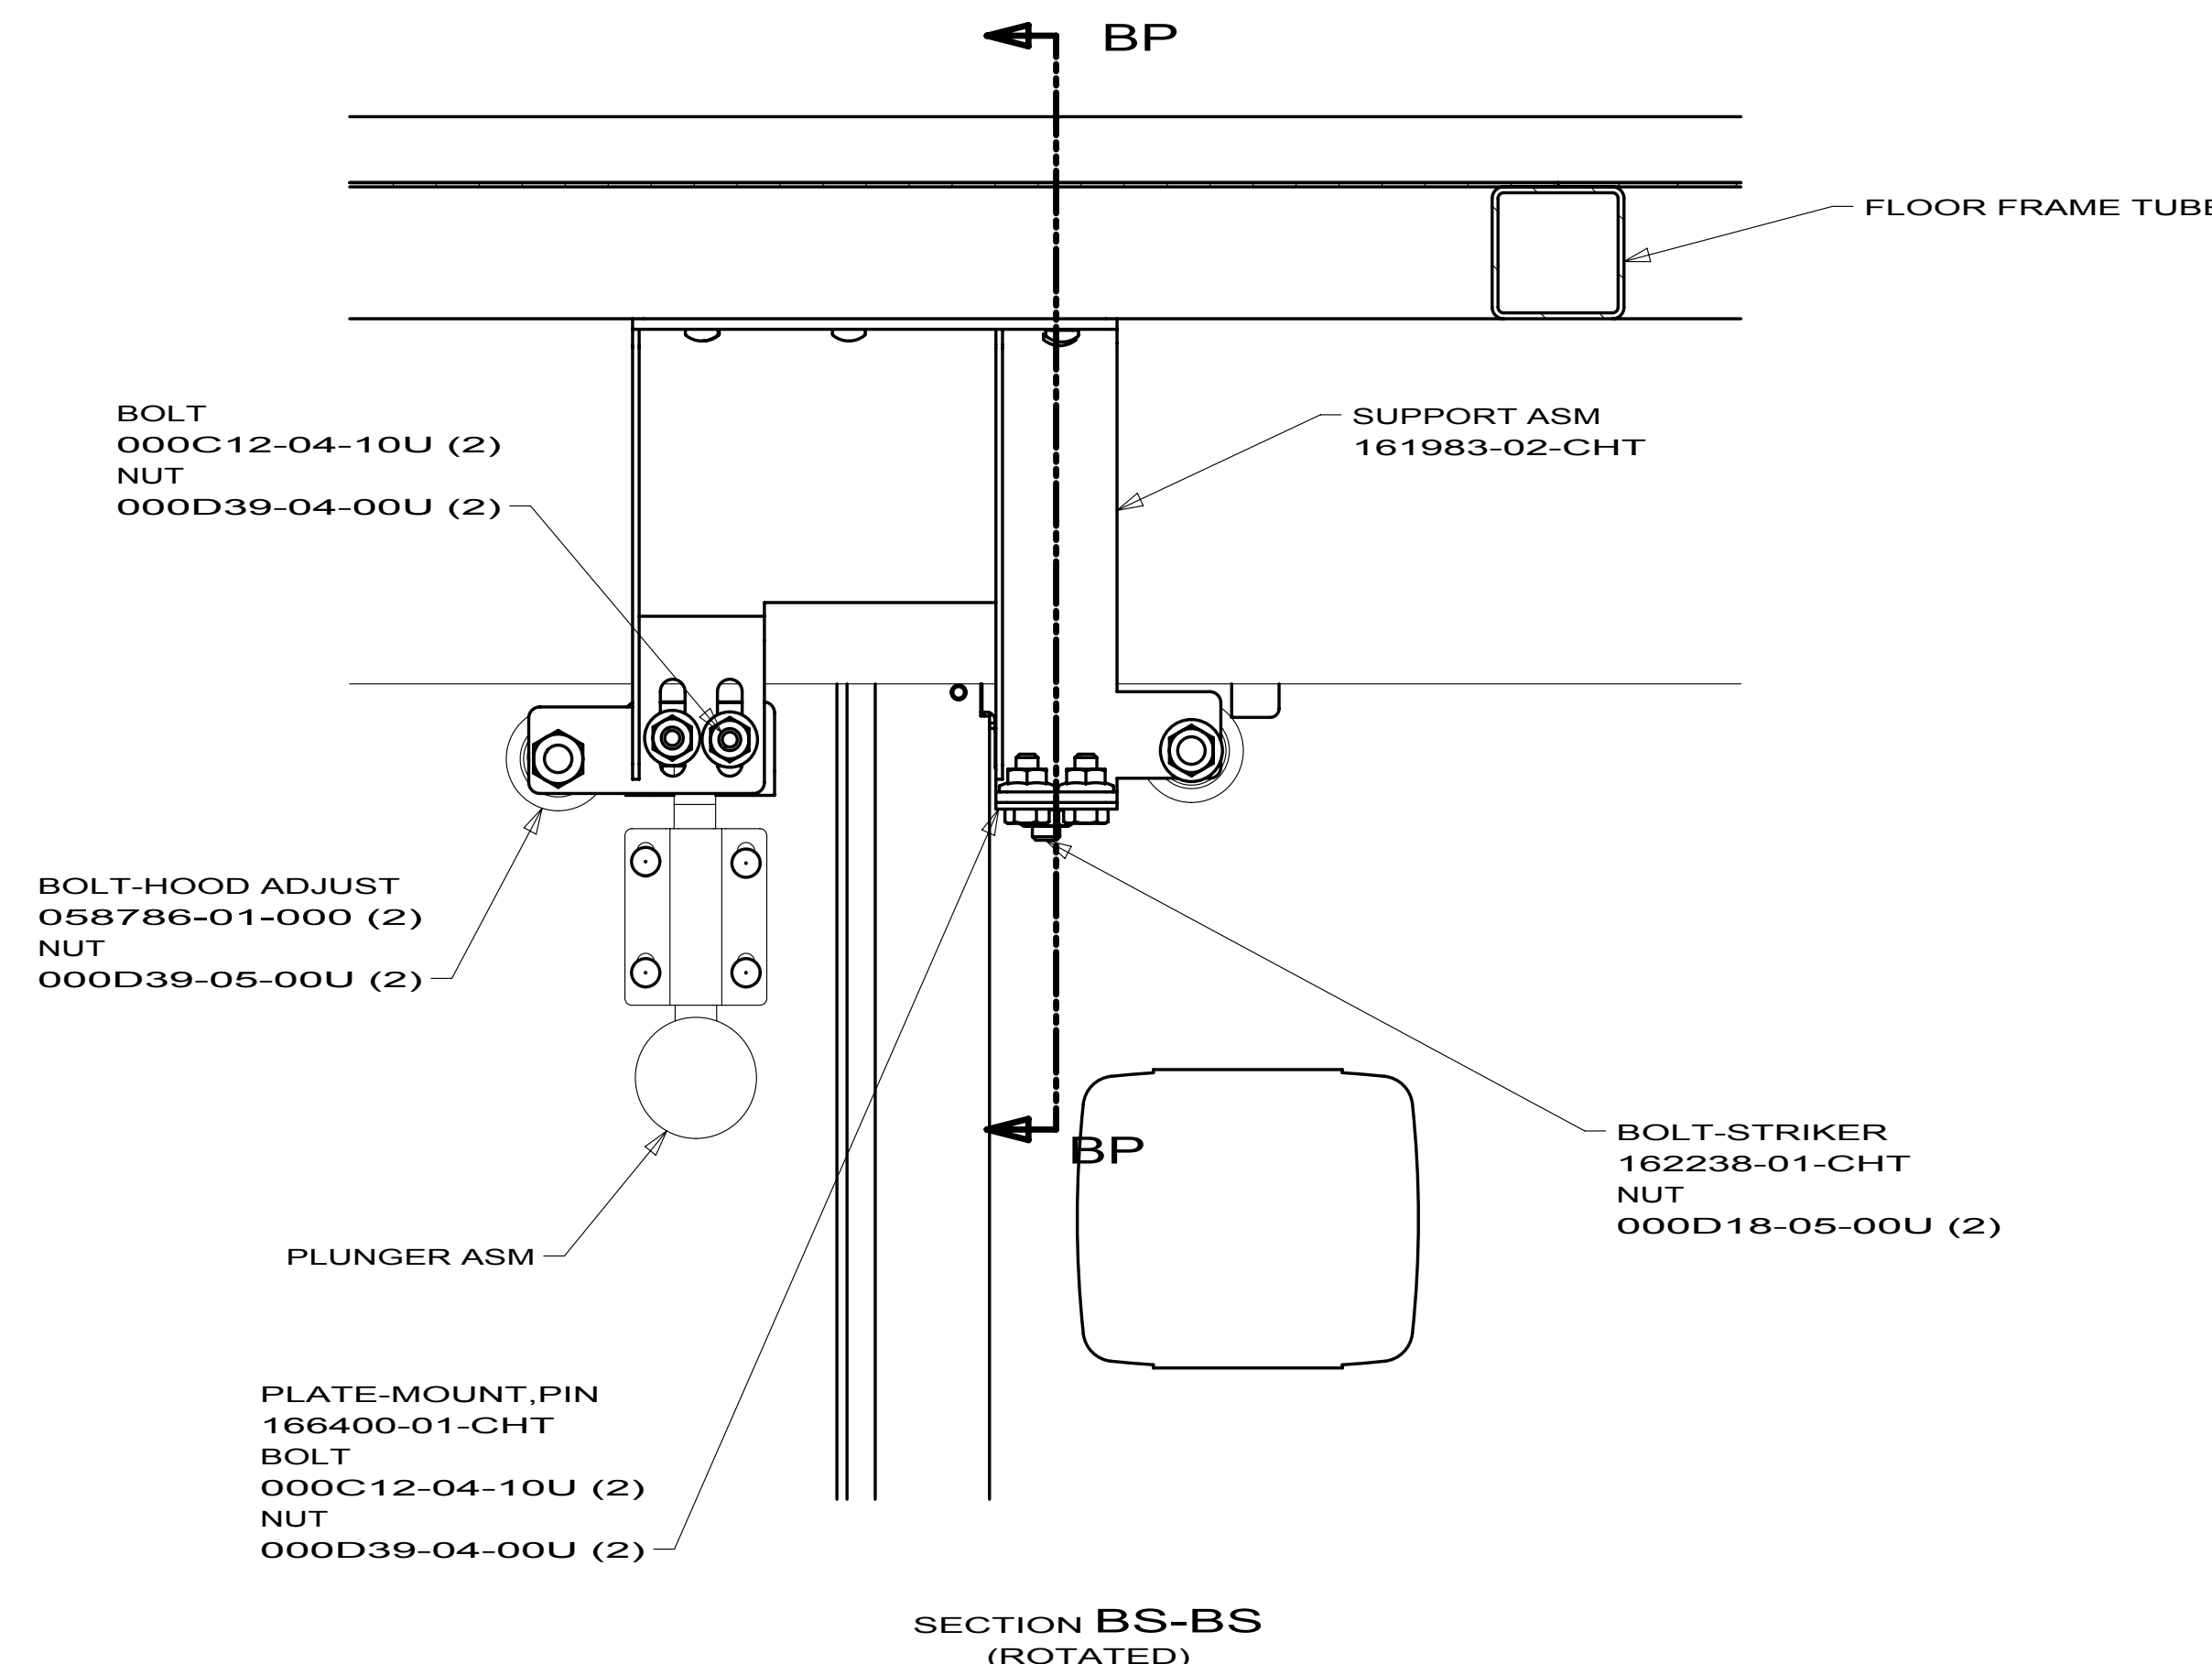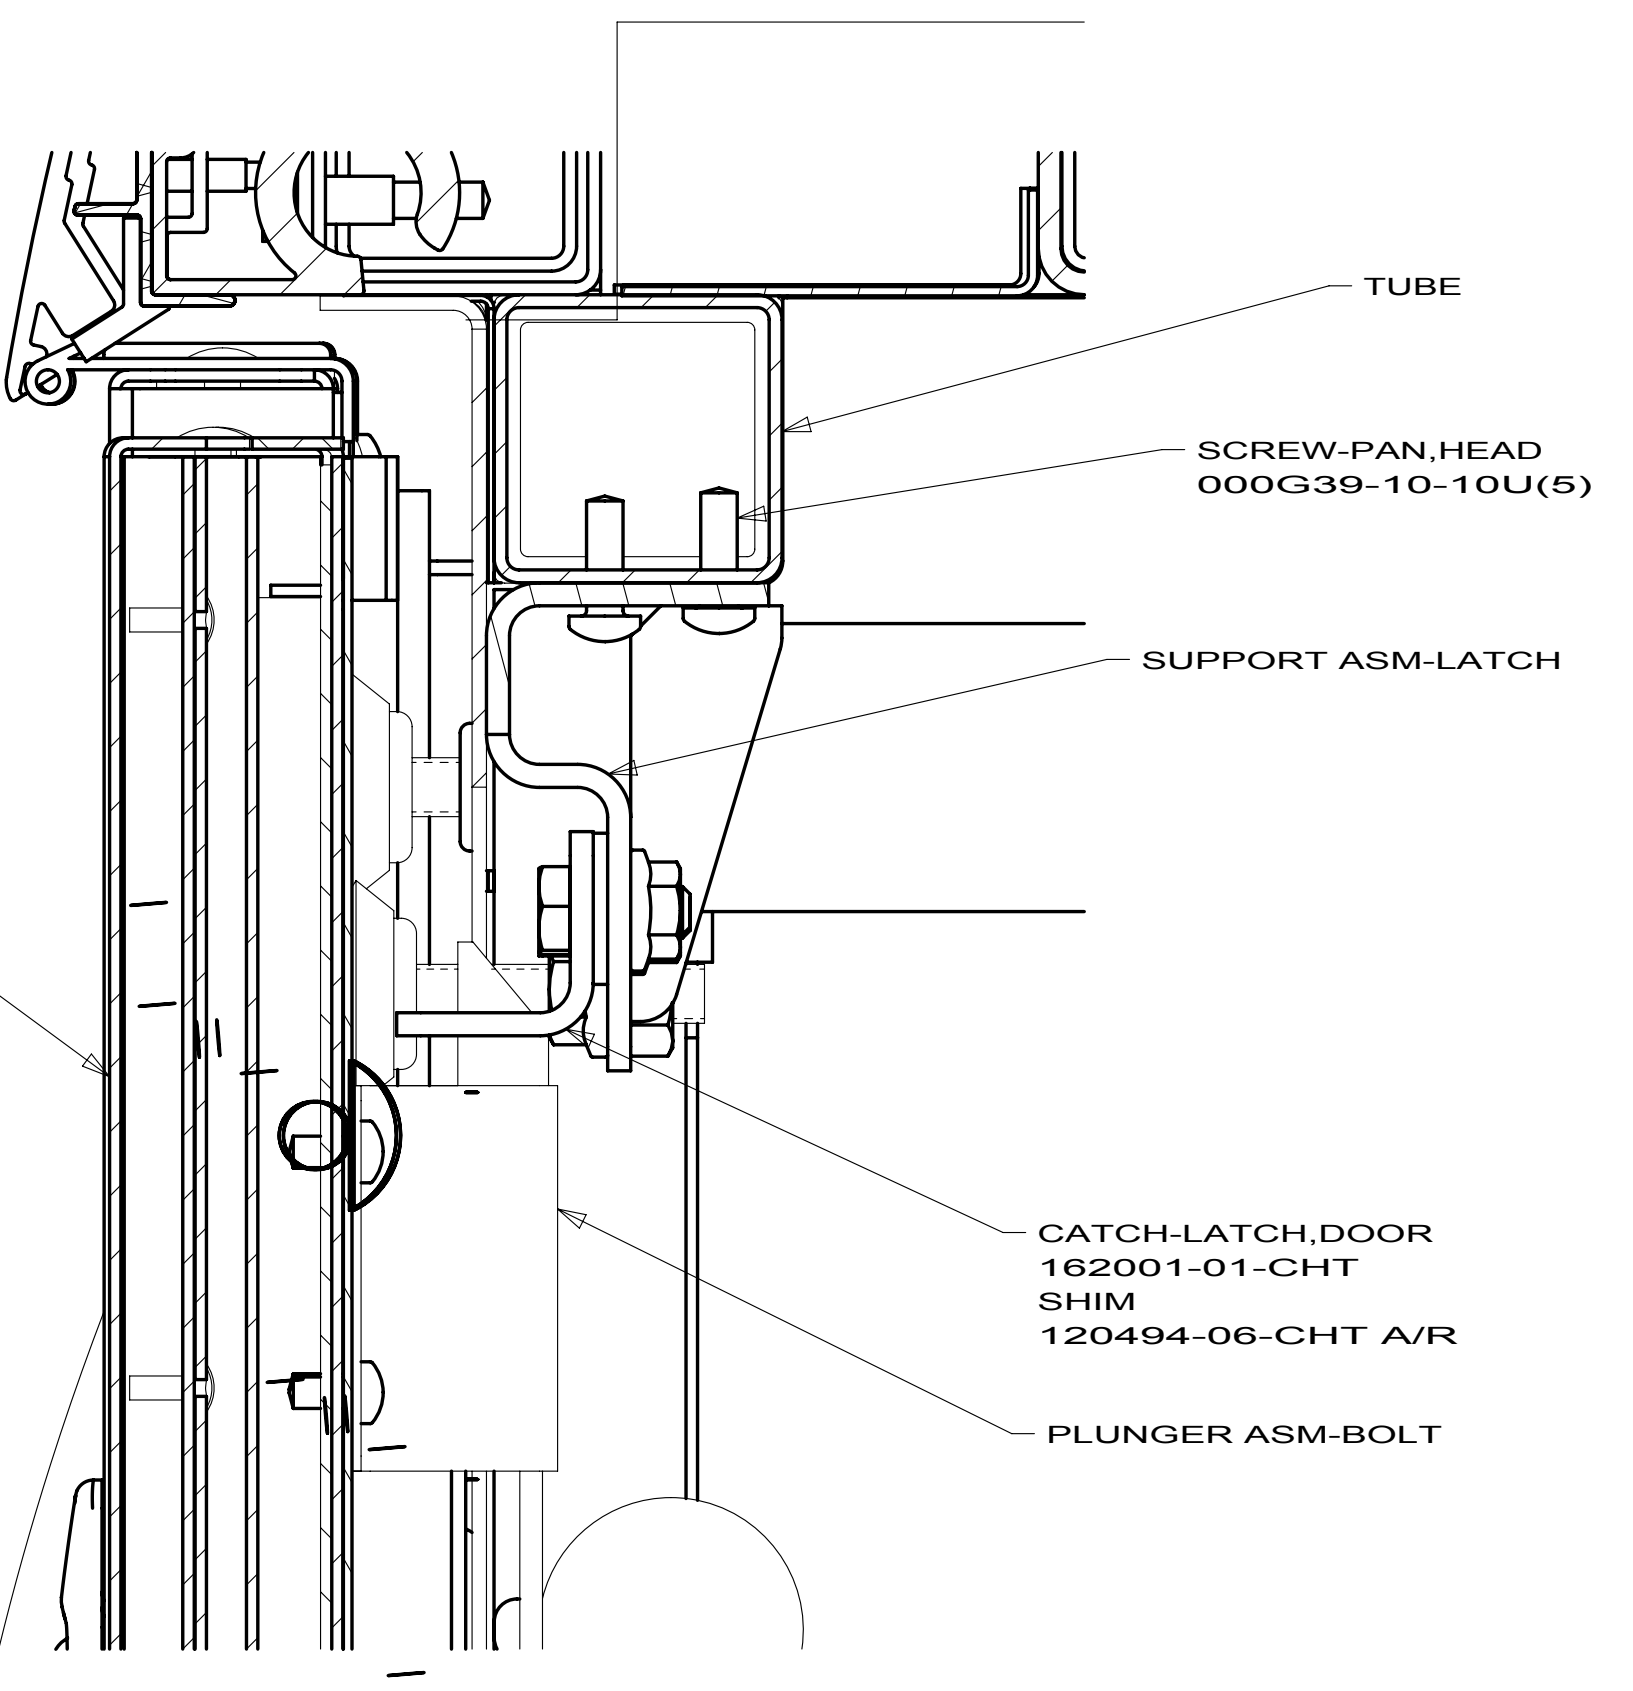


FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 5	PART NO	REV
	170751	

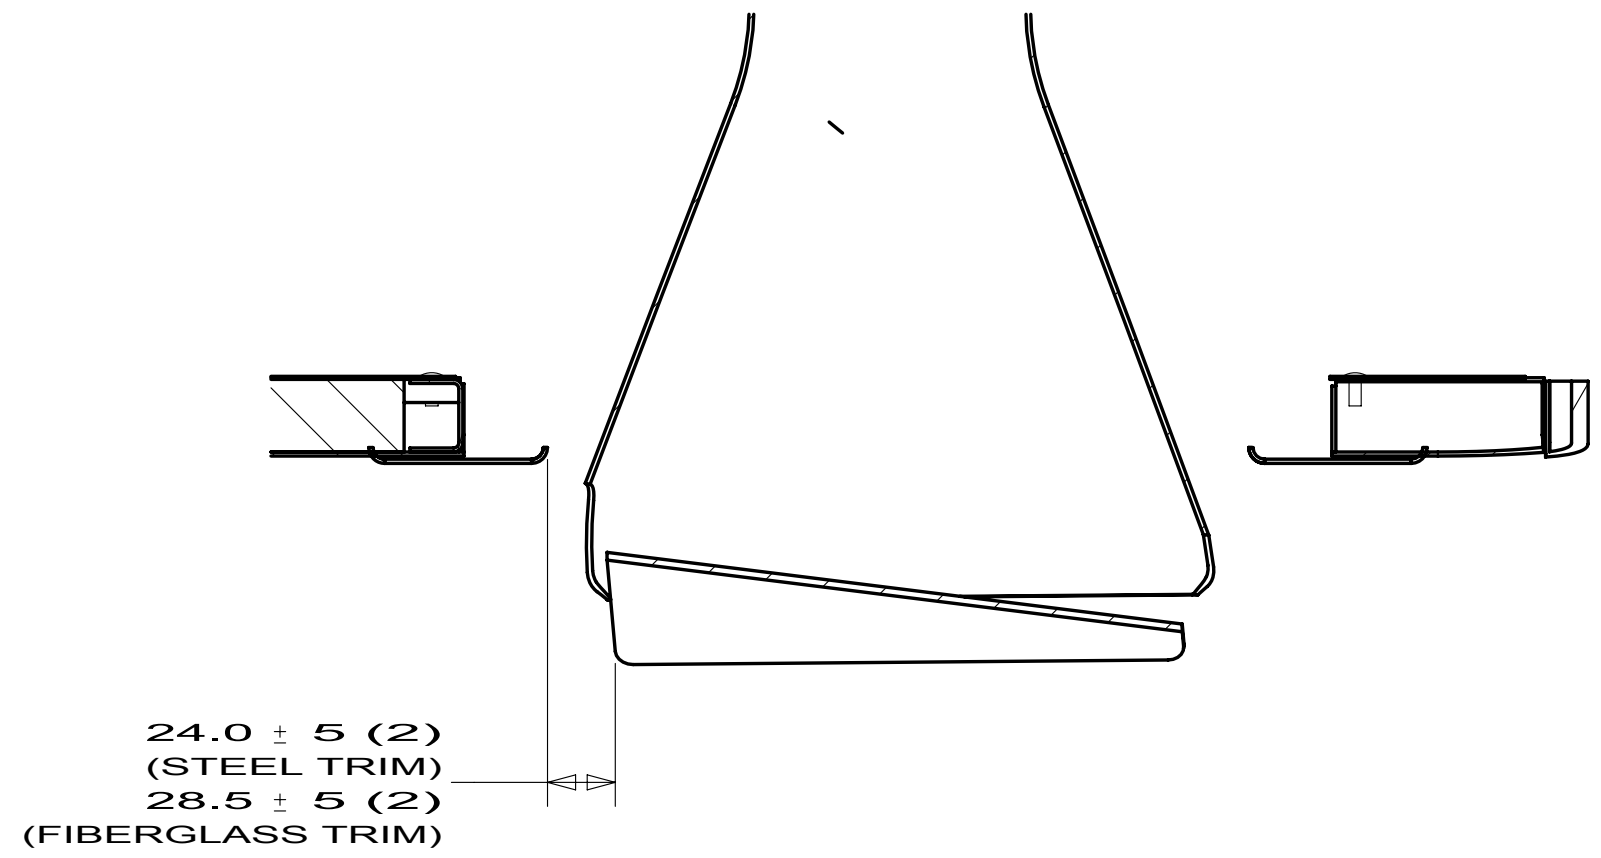


SECTION BW-BW

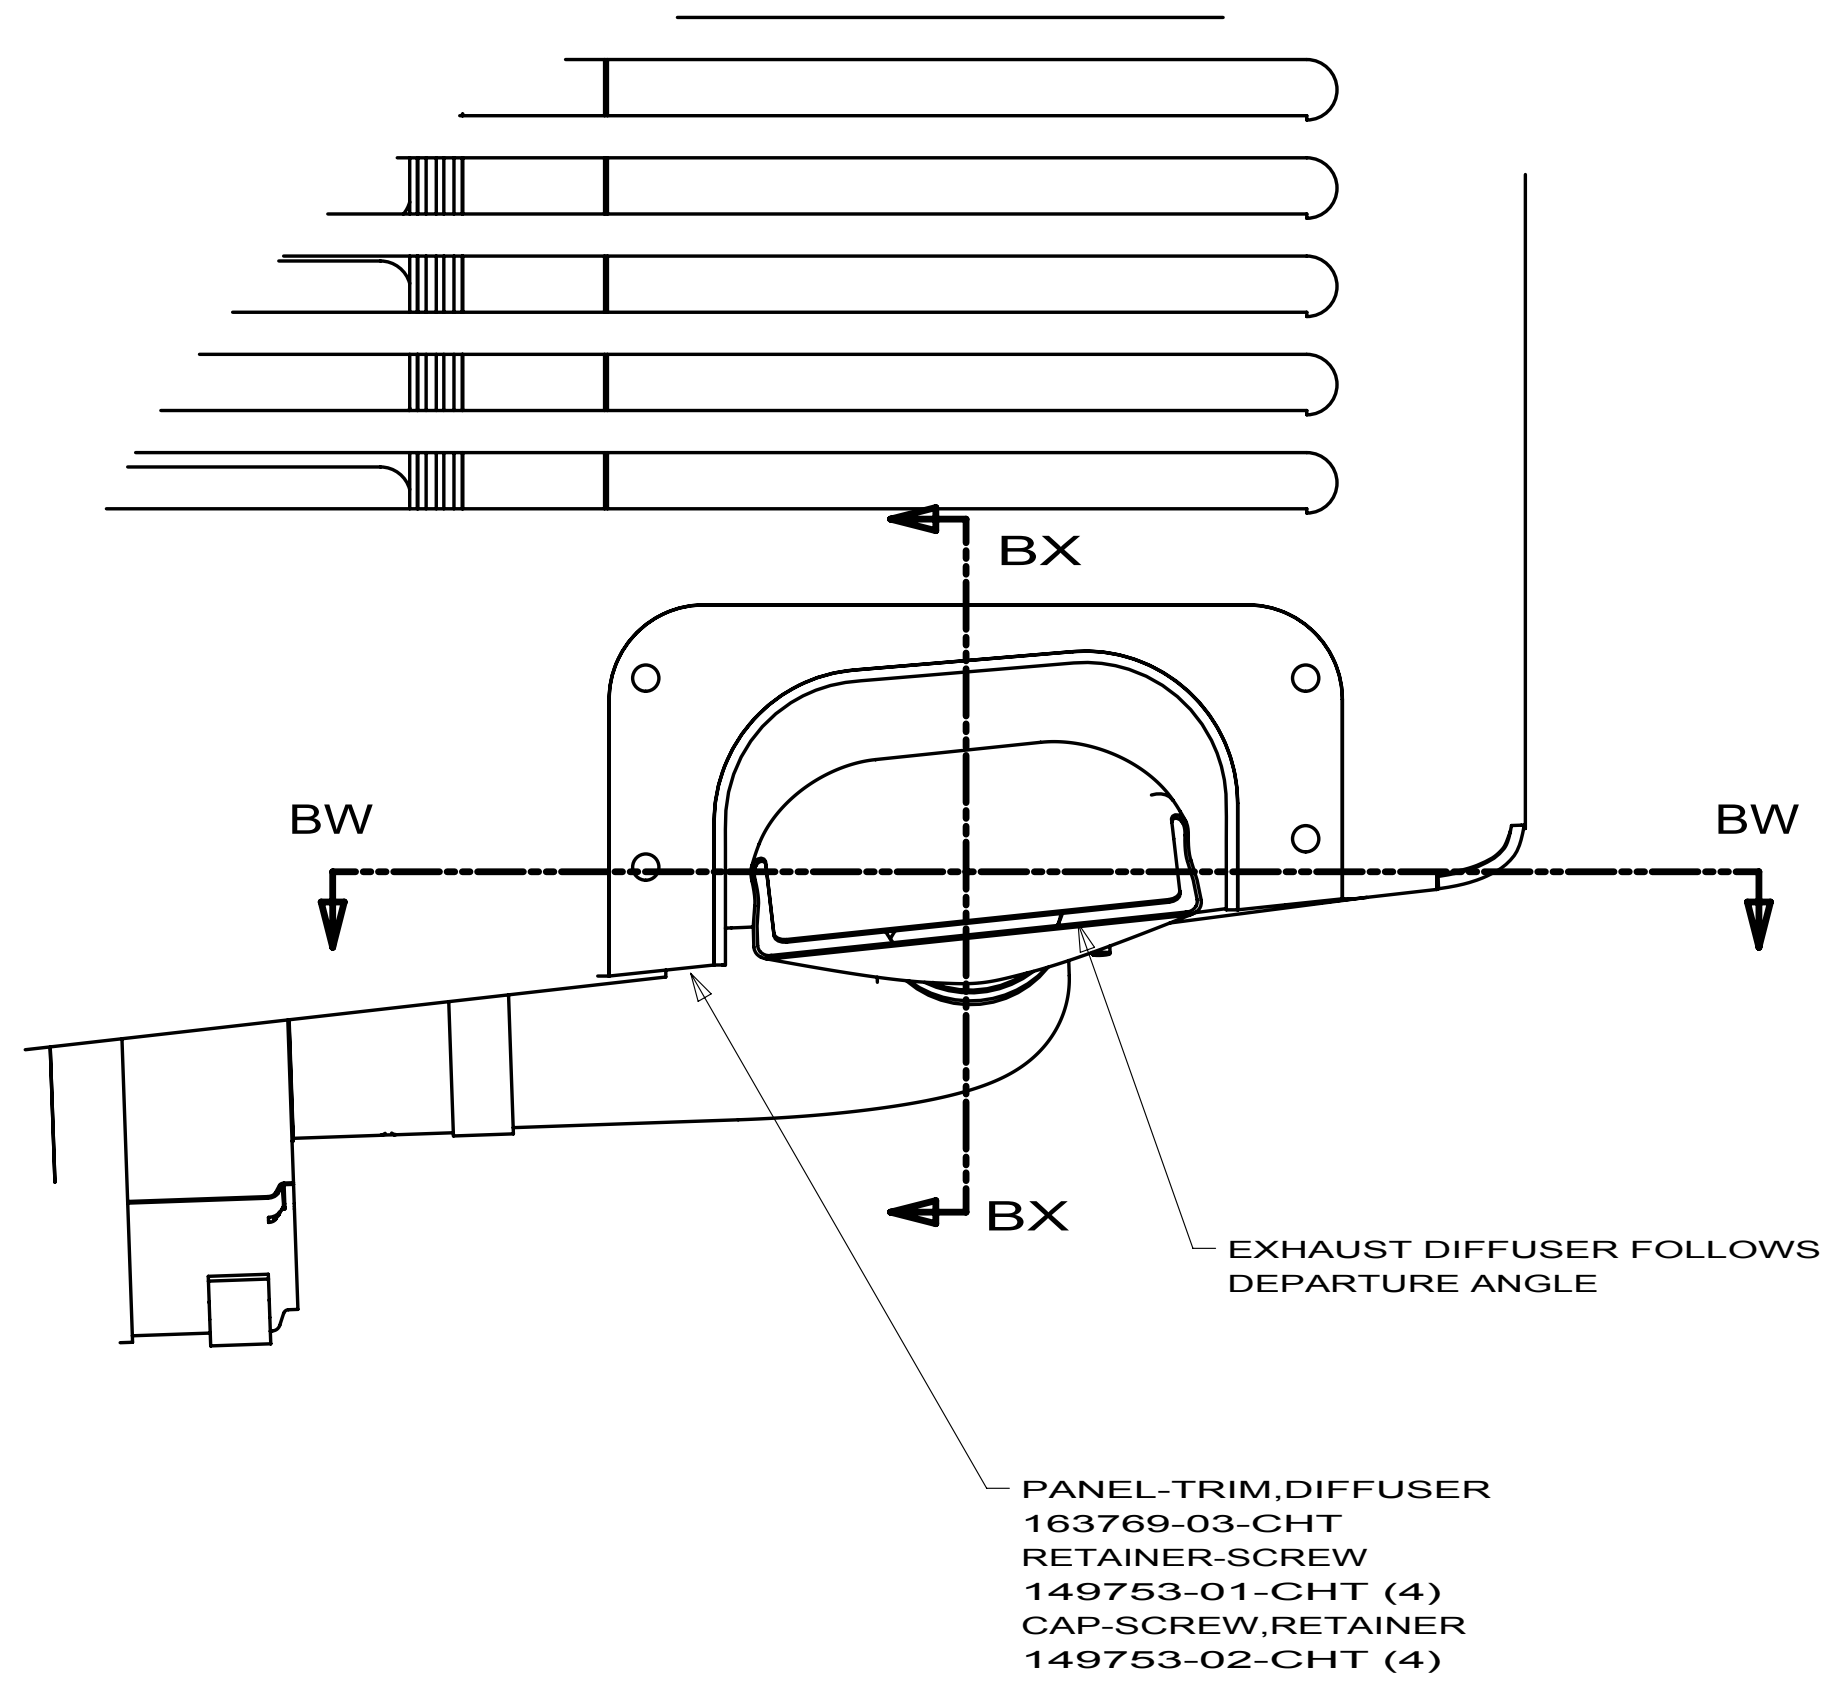


DETAIL BT

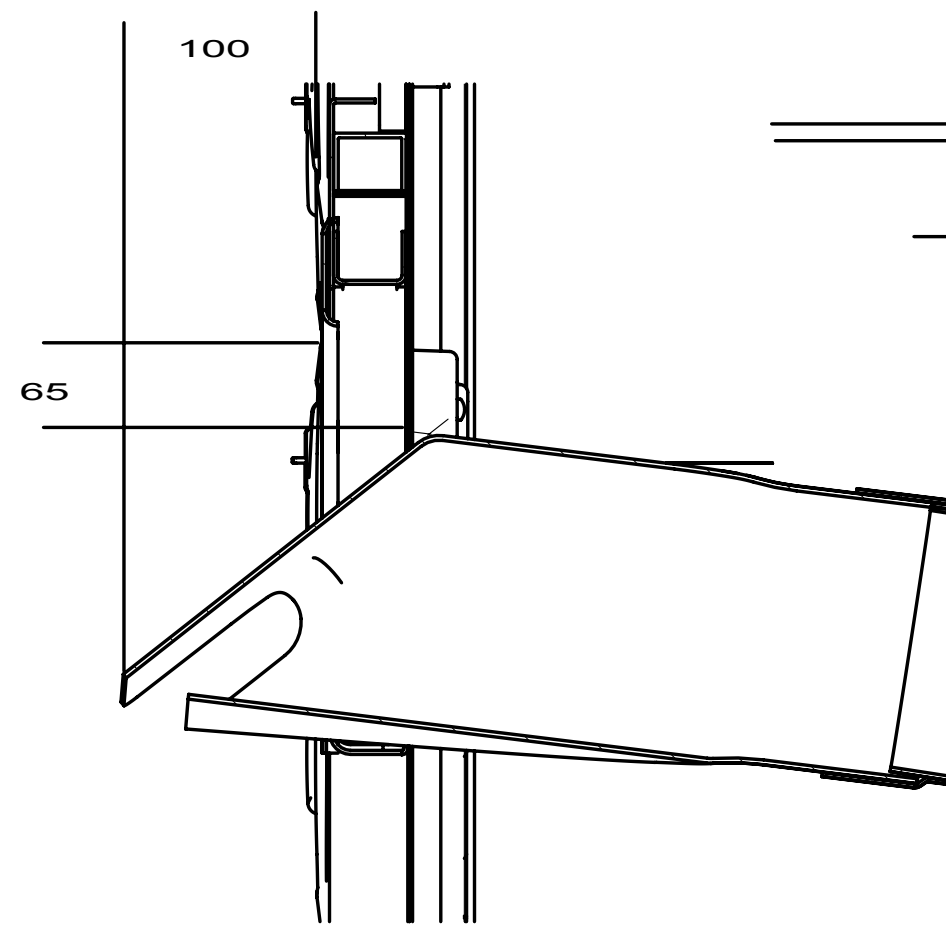

SECTION BX-BX

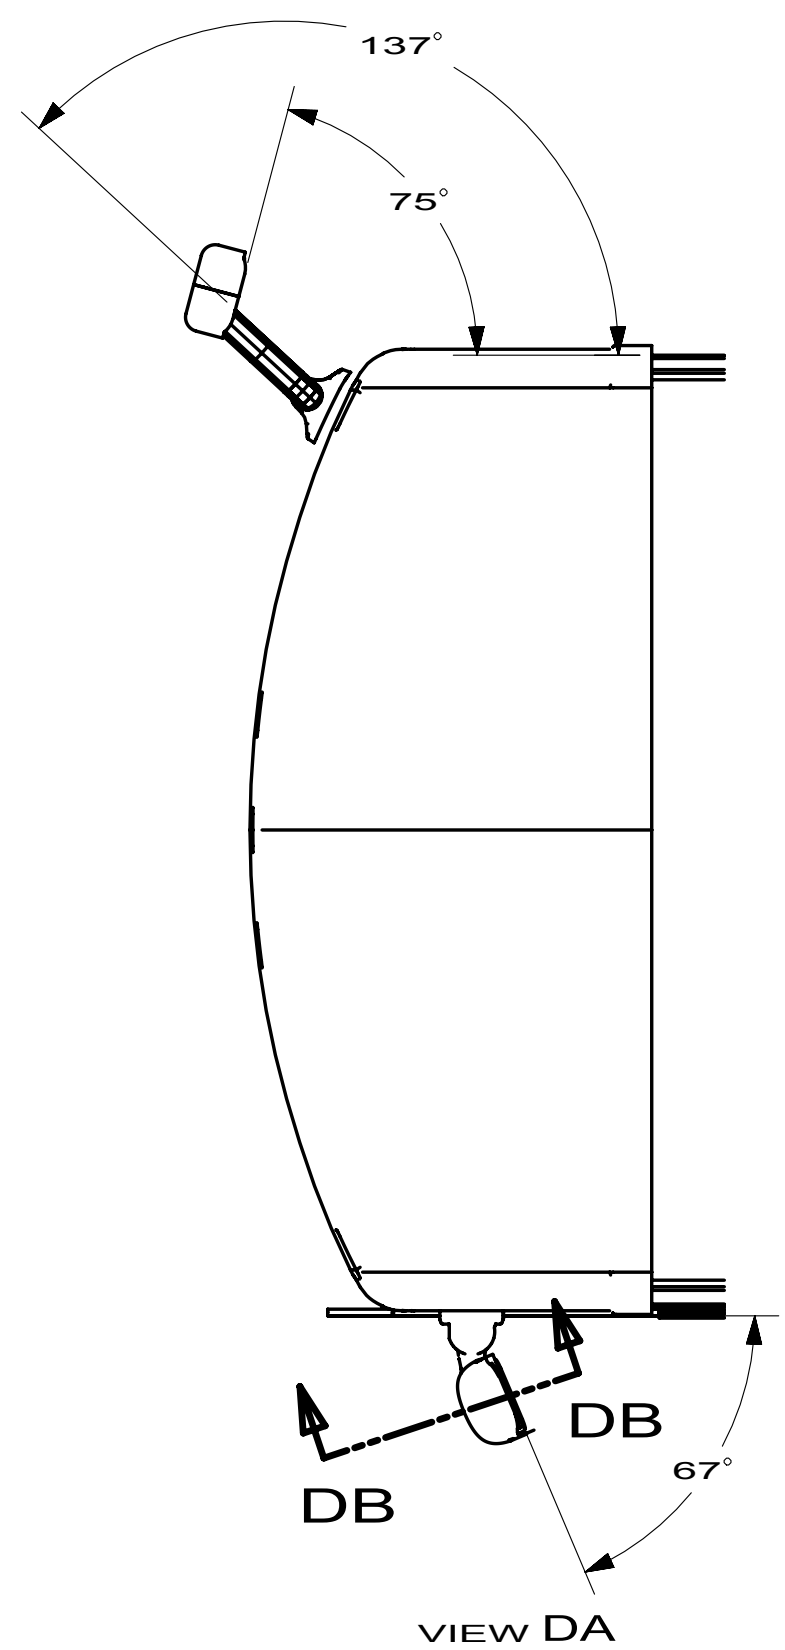

VIEW DA

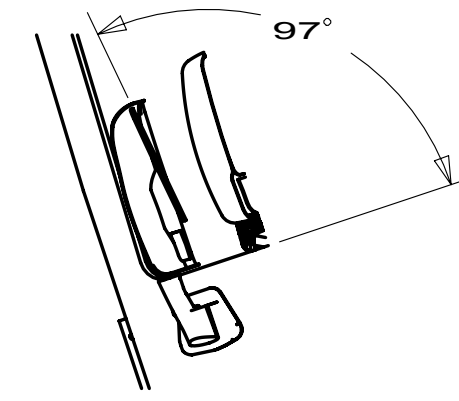

SECTION DB-DB

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-SECTIONS		
SHEET 6	PART NO 170751	REV

STRAP-ATTACHMENT,FRONT END
147496-01-02B
RIVET
000H15-06-03R (3)

ANGLE-MOUNT,FRONT END
147498-01-02B
SCREW
000G39-08-08U (2)

SECTION F-F

SCREW
000G42-04-12B(7)

ANGLE-SUPPORT,MIRROR
169815-01-02B(2)

BOLT
000C26-04-10B(4)

SECTION E-E

BRACKET ASM-BUMPER
128455-02-02B
BOLT
000C12-08-24B
WASHER
000E13-22-00B(2)
NUT
000D29-08-00B

BOLT
000C12-08-24B (4)
NUT
000D39-08-00B (4)
WASHER
000E13-22-00B (4)
NUT-BOLT RETAINER
164954-01-01A (4)

BRACKET ASM-BUMPER
128455-01-02B
BOLT
000C12-08-24B
WASHER
000E13-22-00B(2)
NUT
000D29-08-00B

HOOD COMPT-FRONT
168071-01-Y71

PANEL ASM-FRONT,LOWER
168056-04-YS1

TRIM-PANEL,FIBERGLASS
140447-07-02A
SCREW-PANHEAD
000G60-08-16E (3)

SPACER-BUMPER
116617-02-02B (4)

BRACKET ASM-BUMPER
128455-02-02B
BOLT
000C12-08-24B
WASHER
000E13-22-00B(2)
NUT
000D29-08-00B




BRACKET ASM-BUMPER
128455-01-02B
BOLT
000C12-08-24B
WASHER
000E13-22-00B(2)
NUT
000D29-08-00B

3 USE WITH P37Y & P39N


2 USE WITH P40L & P40T

1 KEY 102328-01-000 TO BE INSTALLED ON KEY RING IN MOTORHOME PLANT.


FIRST USED		09 M39 N	
DO NOT SCALE DRAWING			
TITLE: BODY PANEL INSTL-FRONT			
SHEET	1	PART NO	168055
		REV	

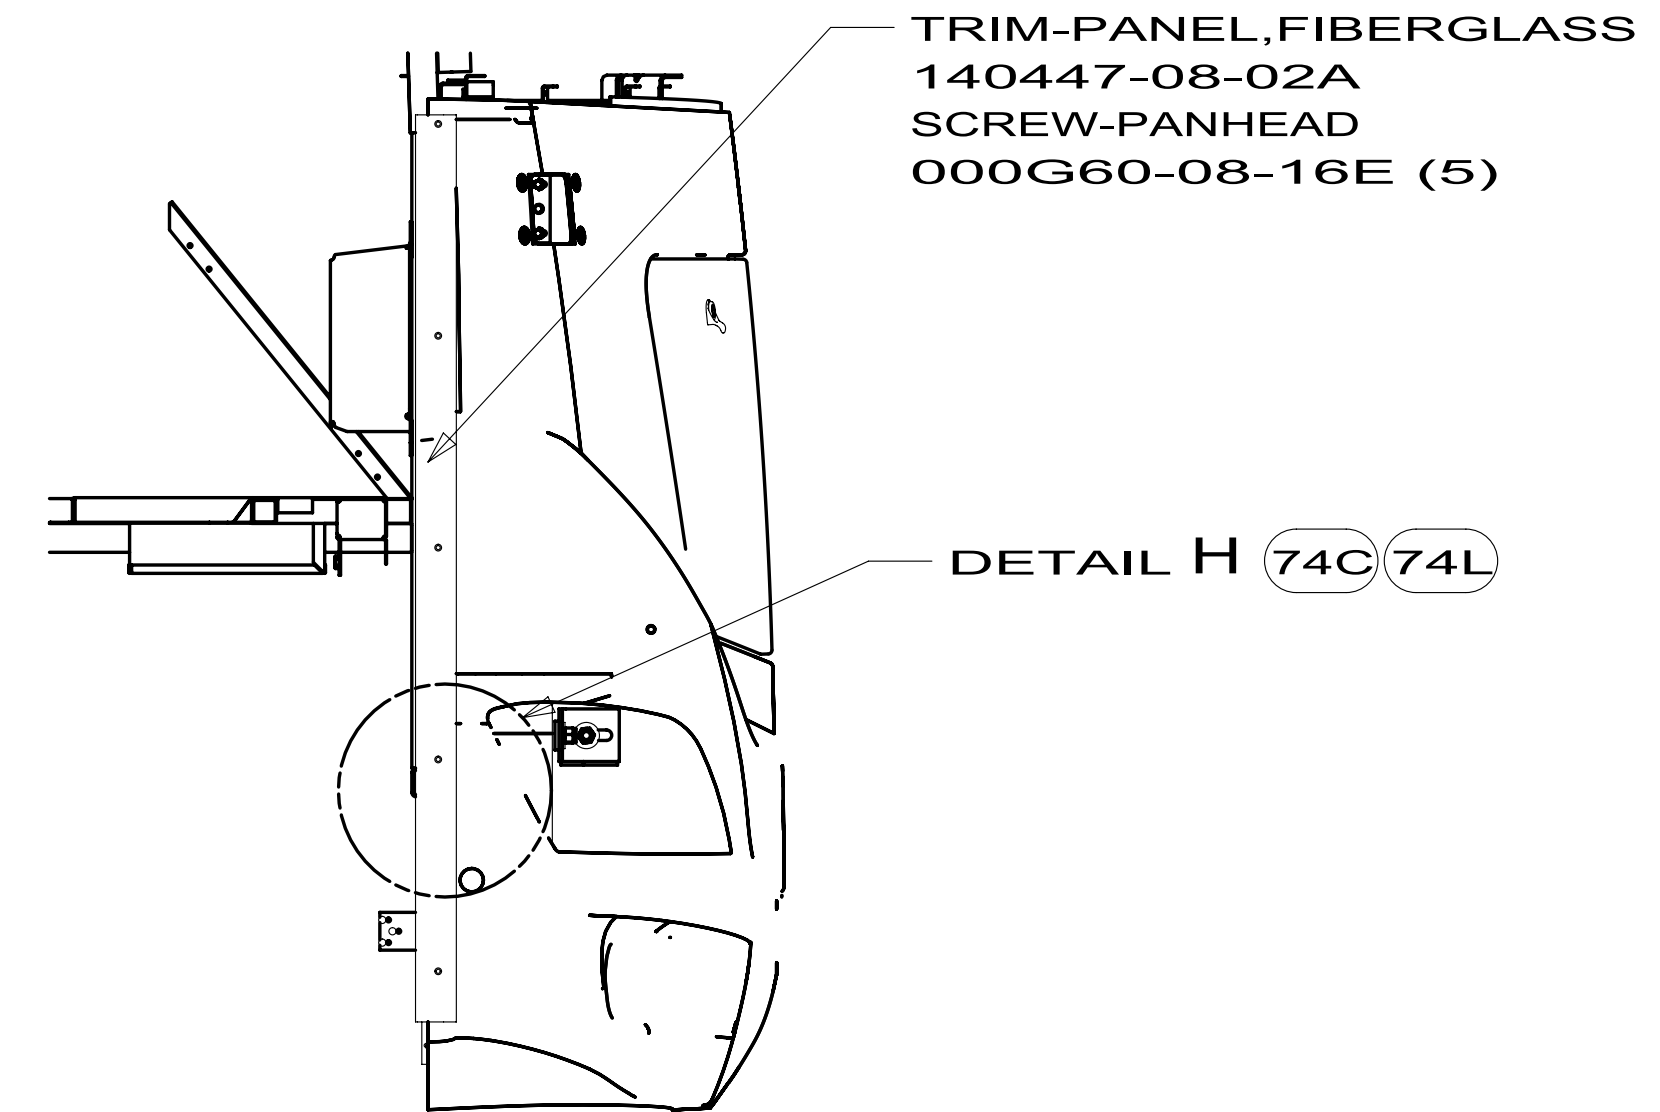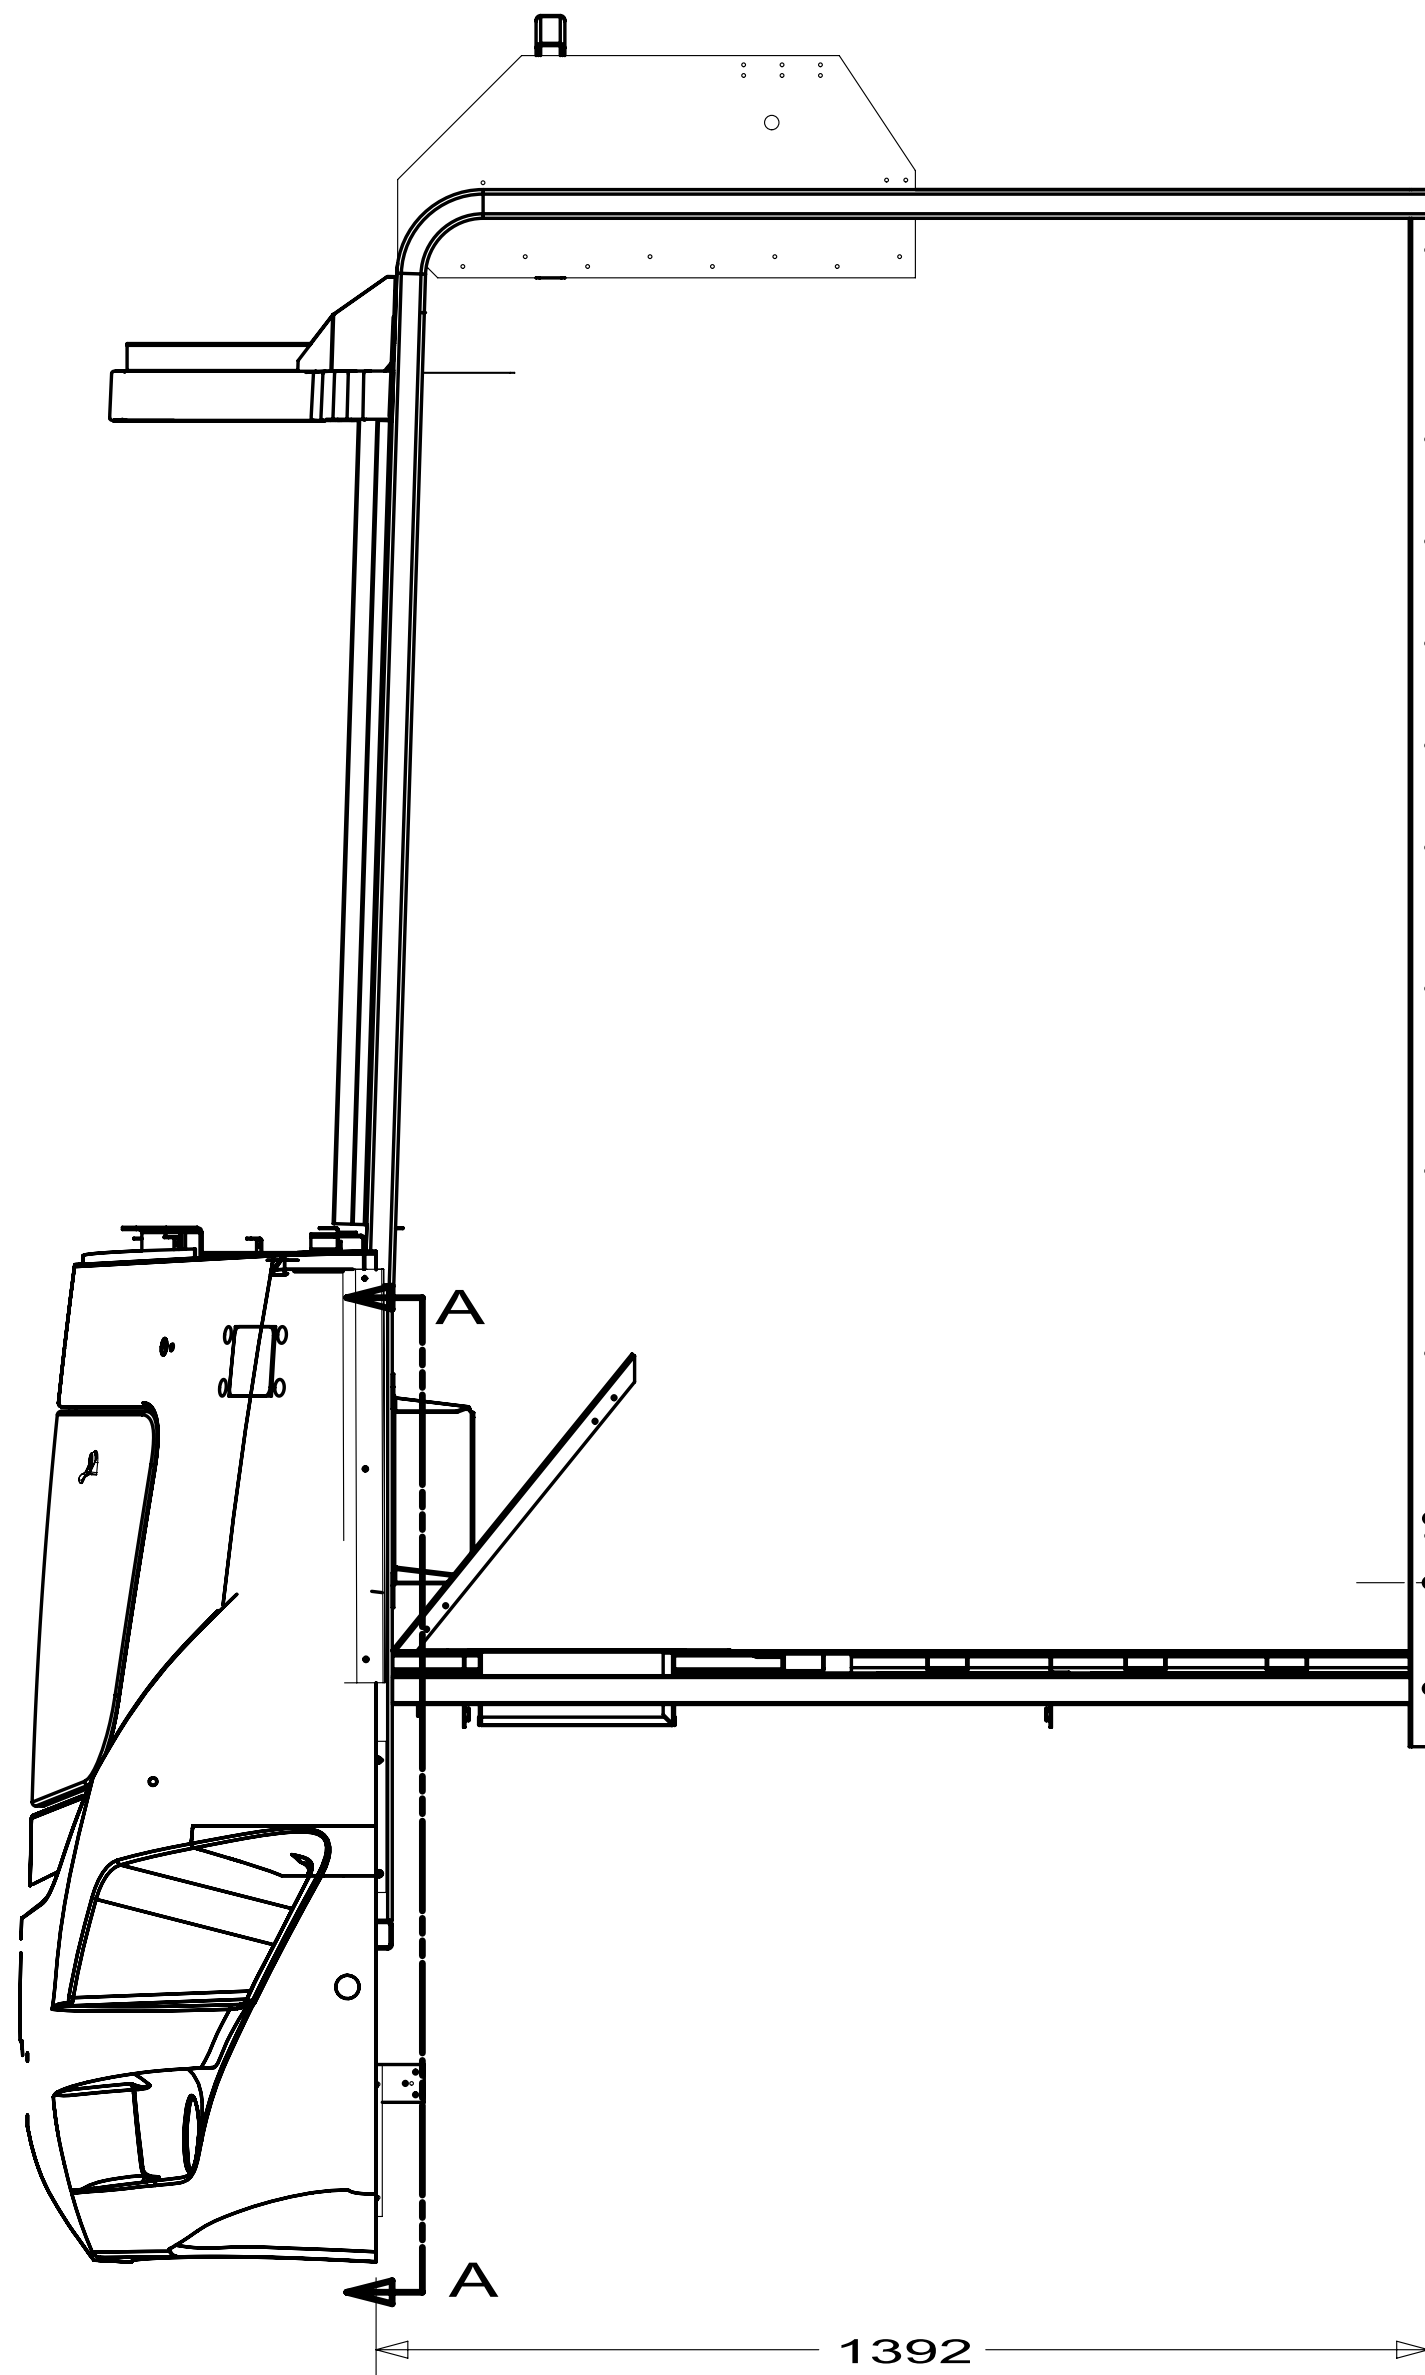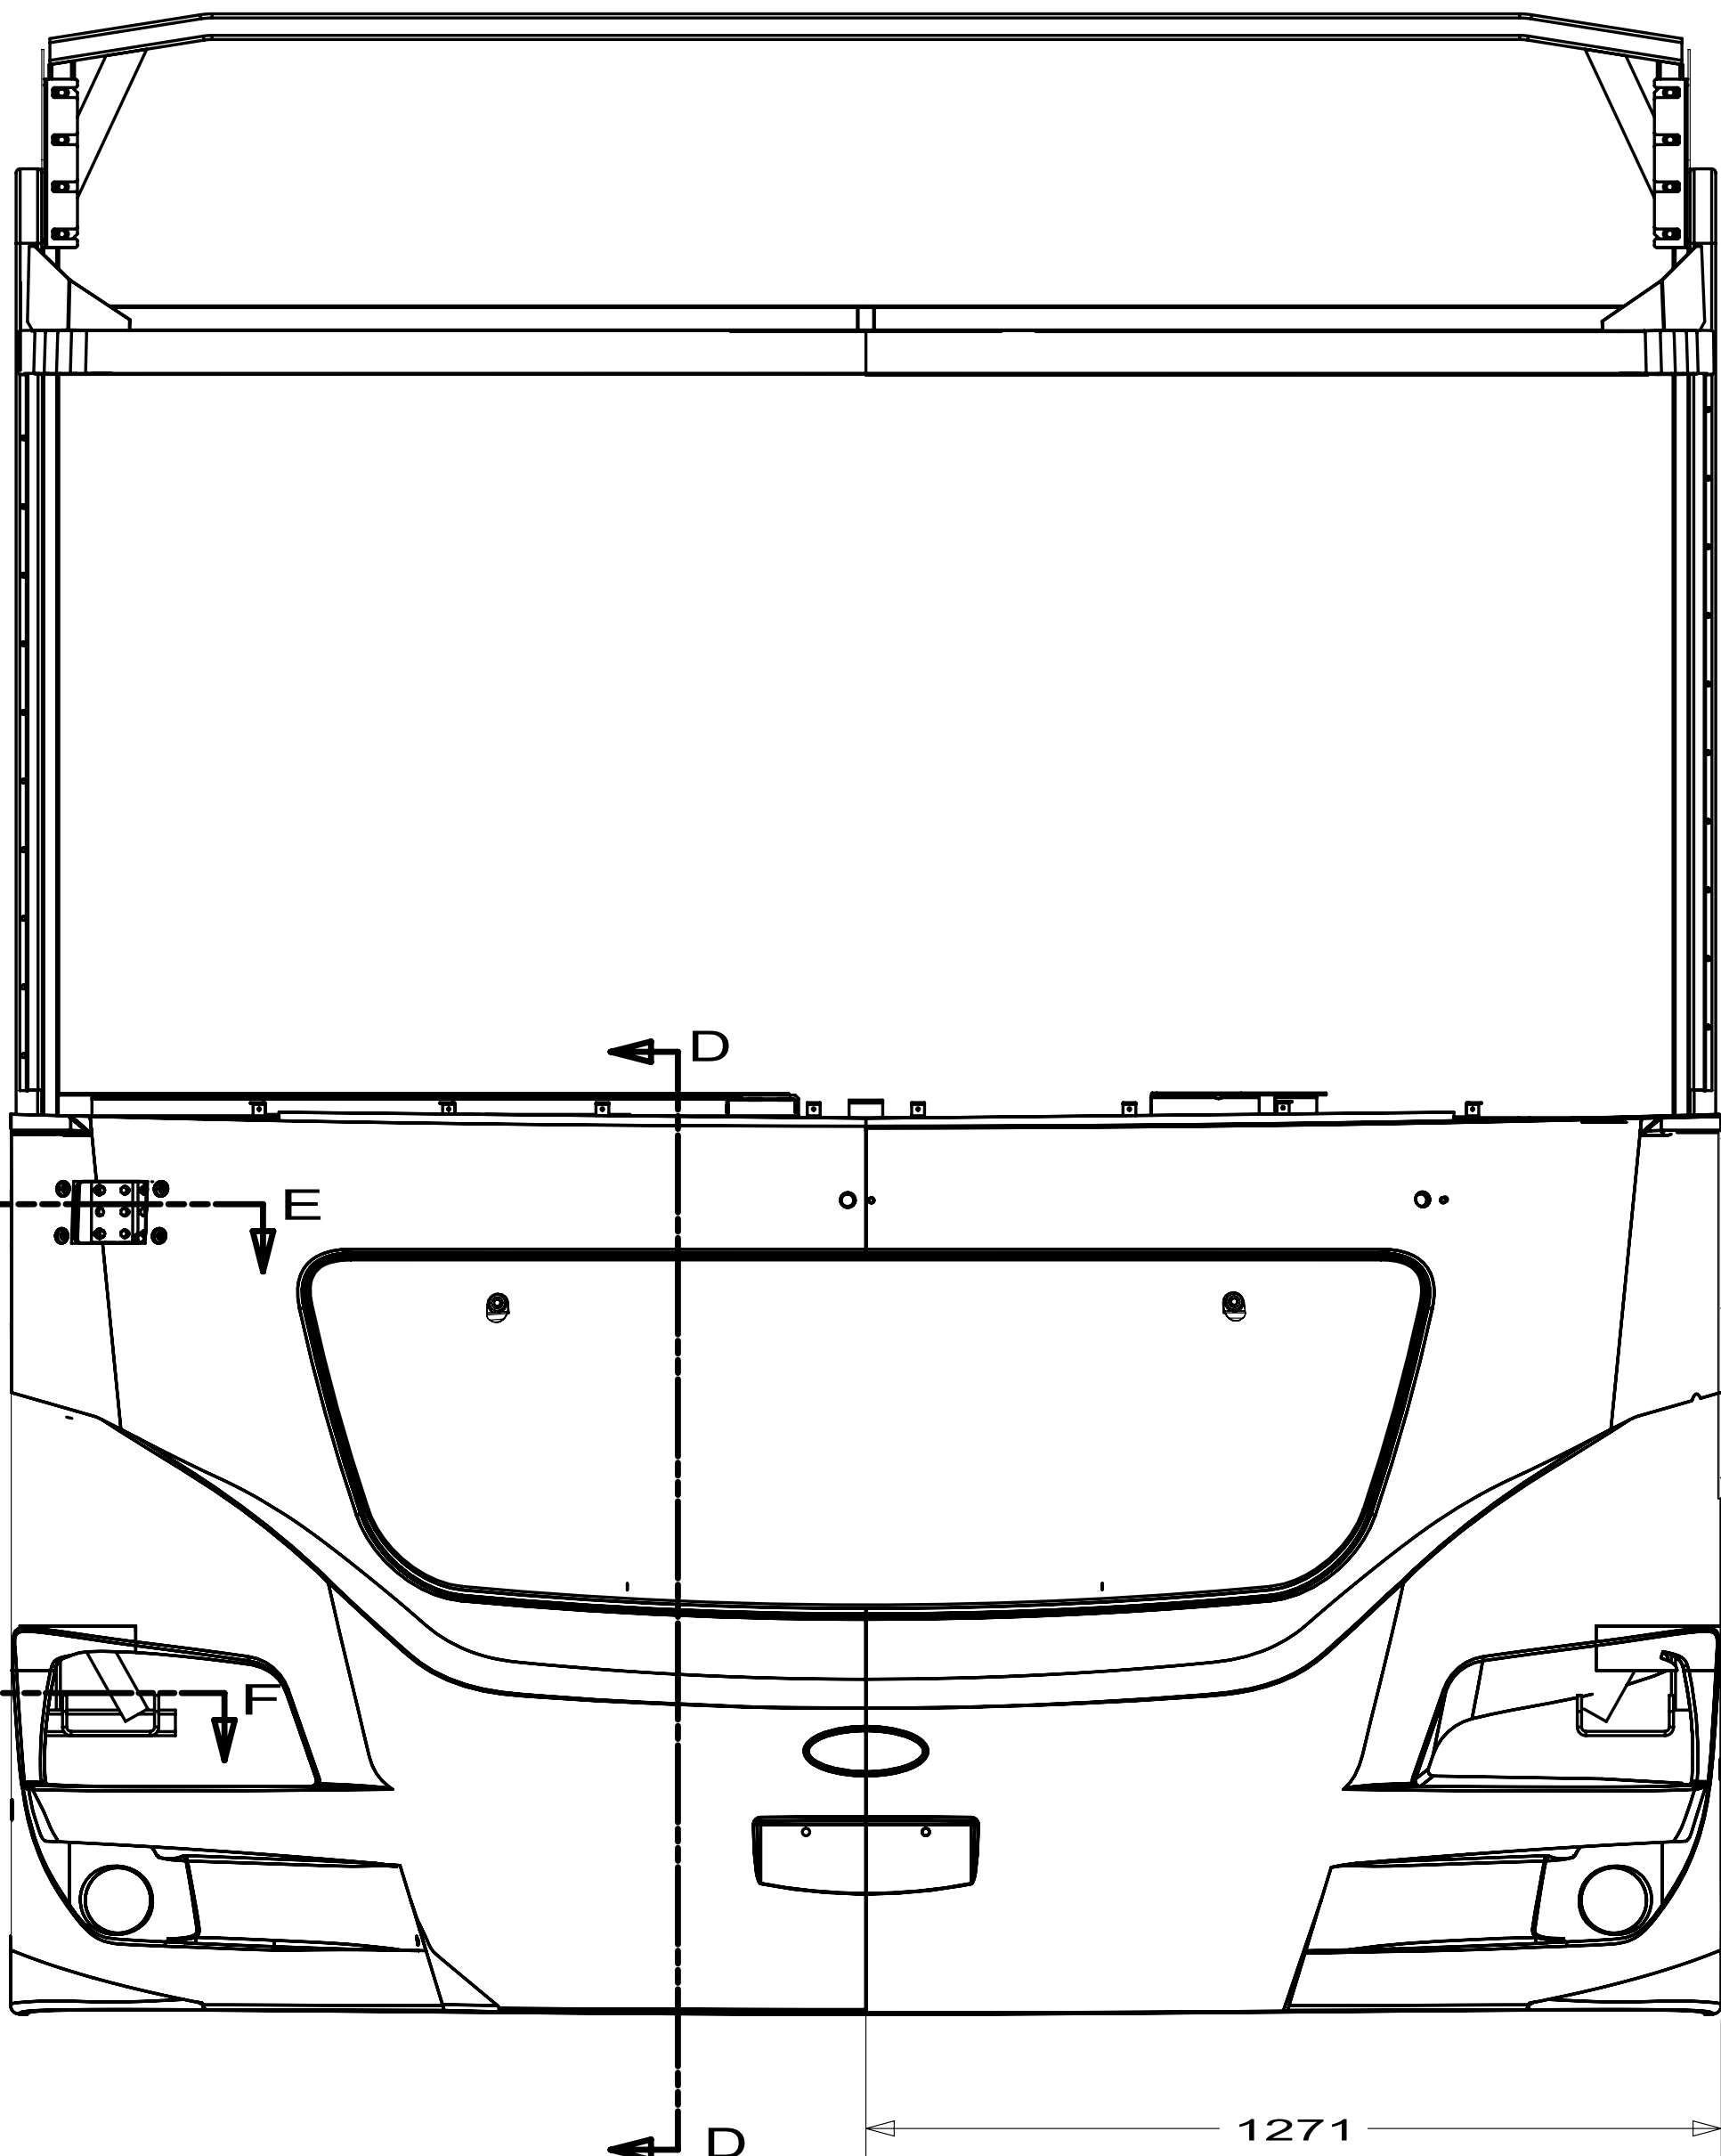


SECTION G-G

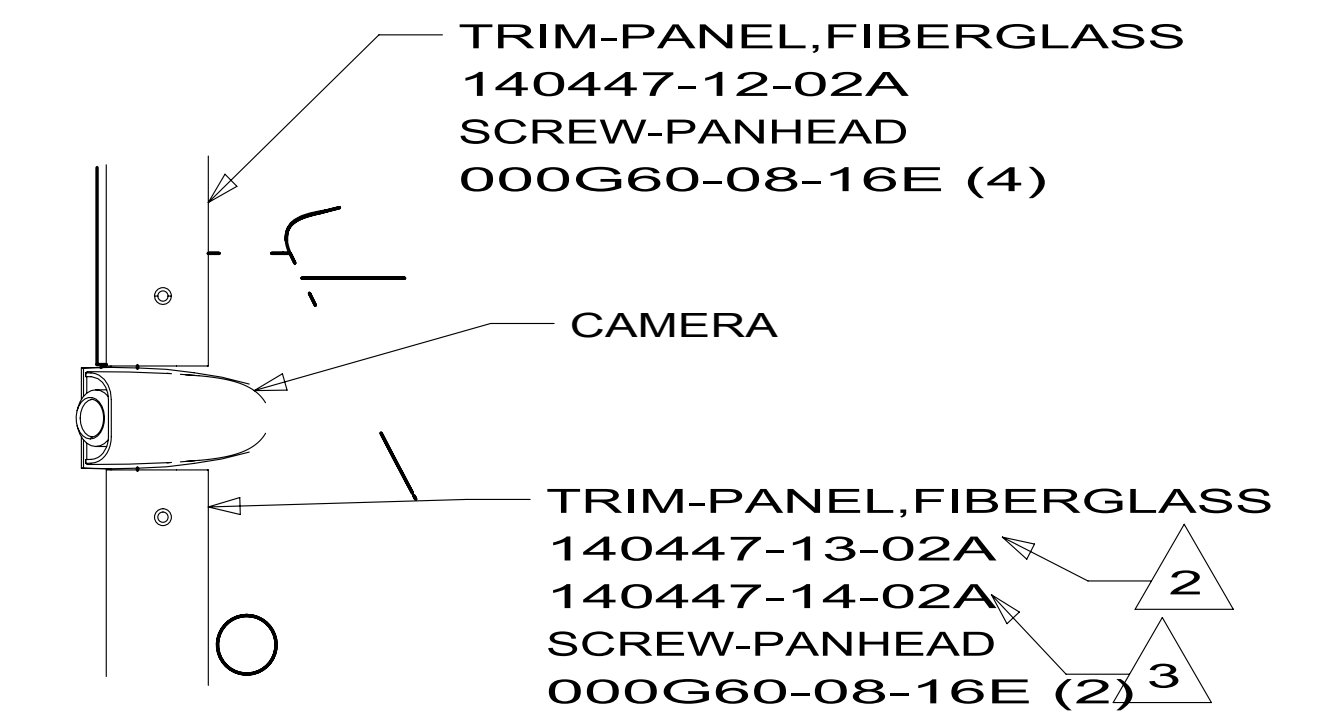


DETAIL H
(74C) (74L)

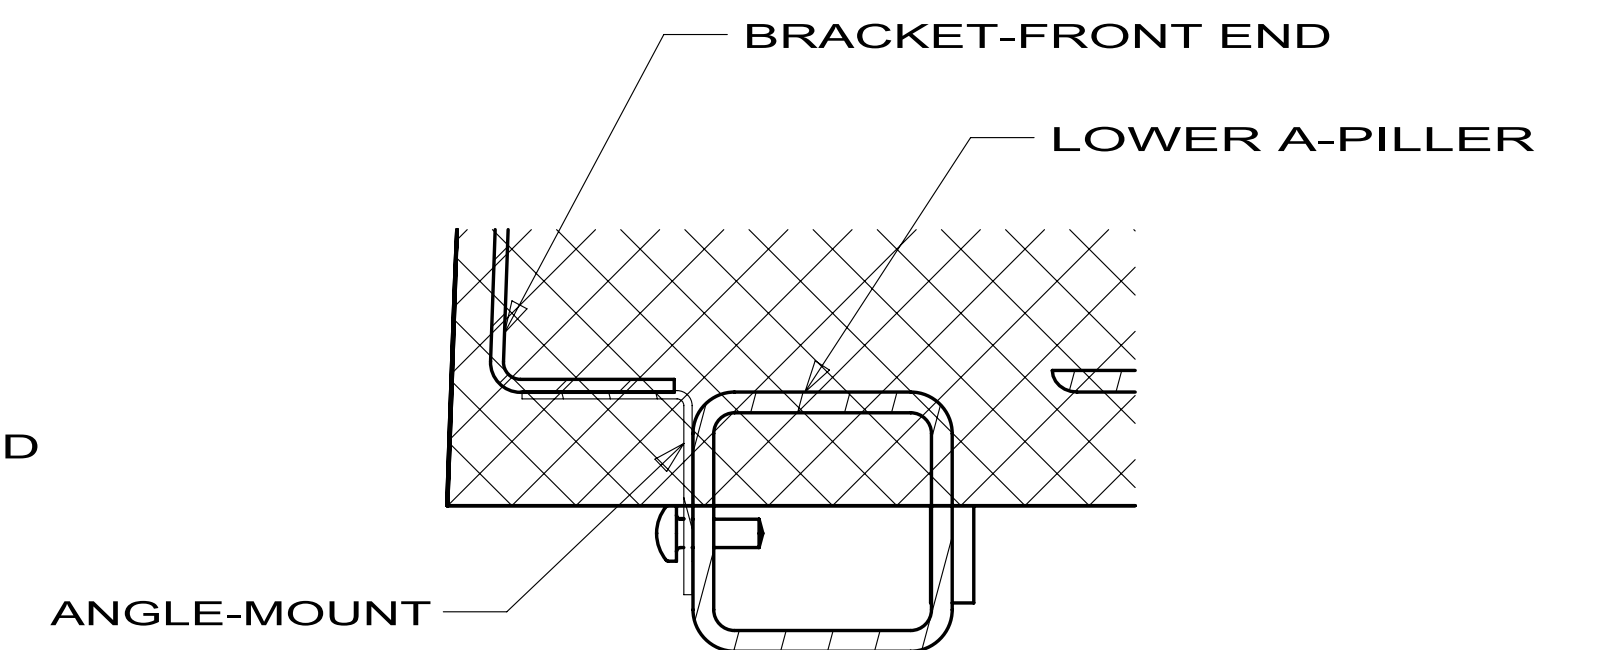


SECTION B-B

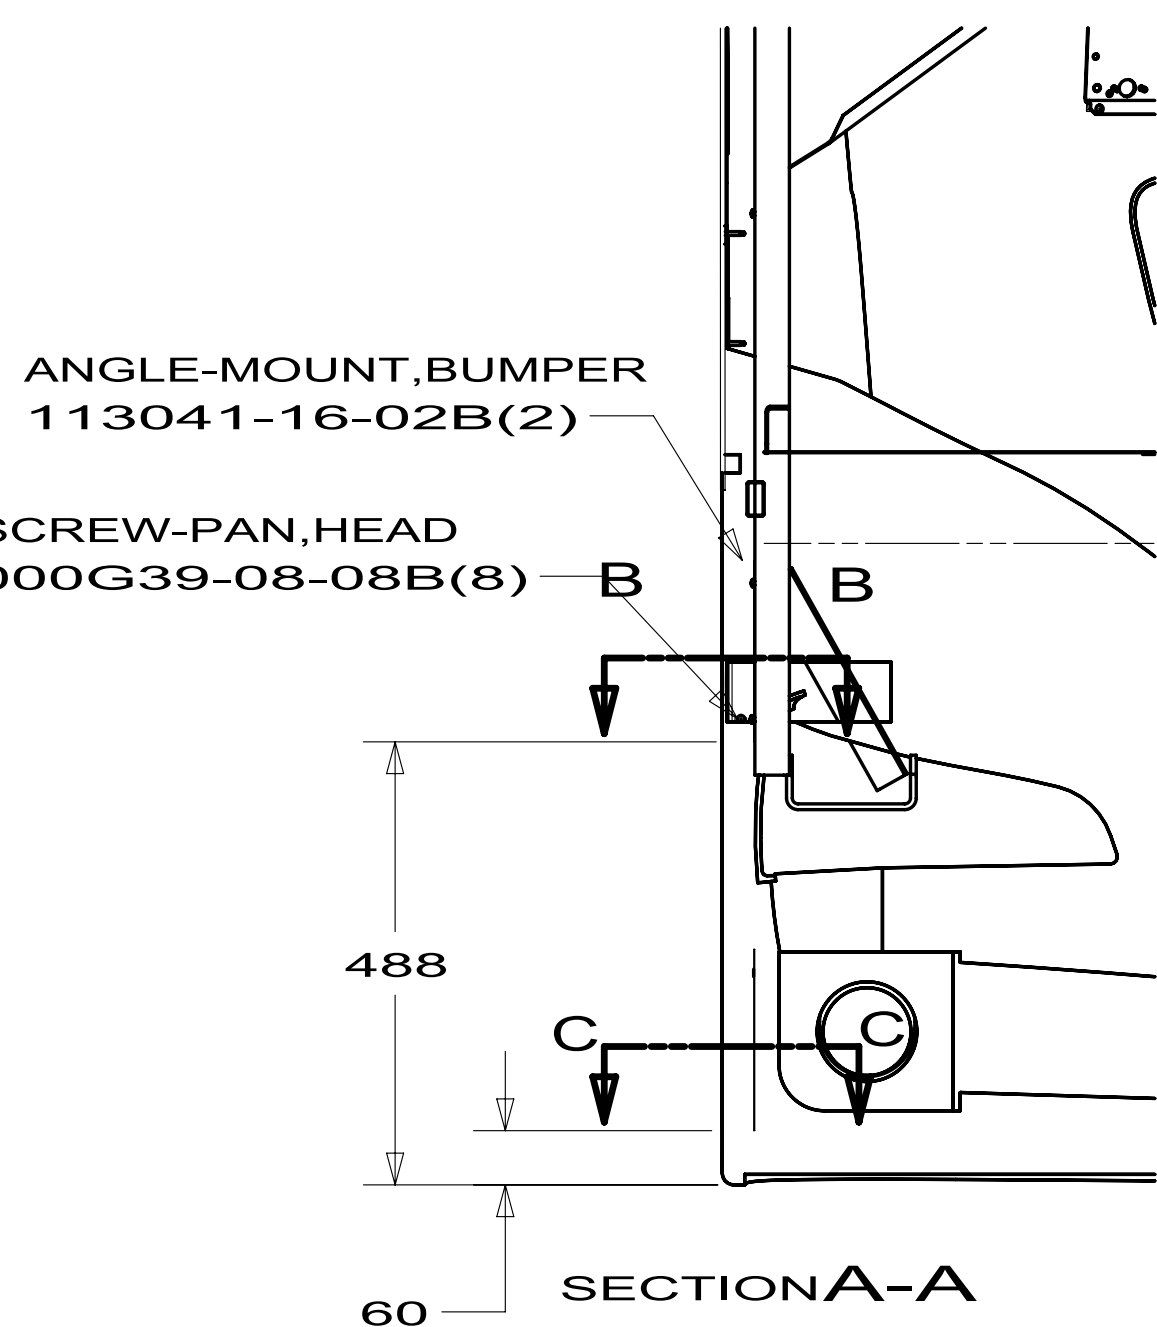

SECTION A-A

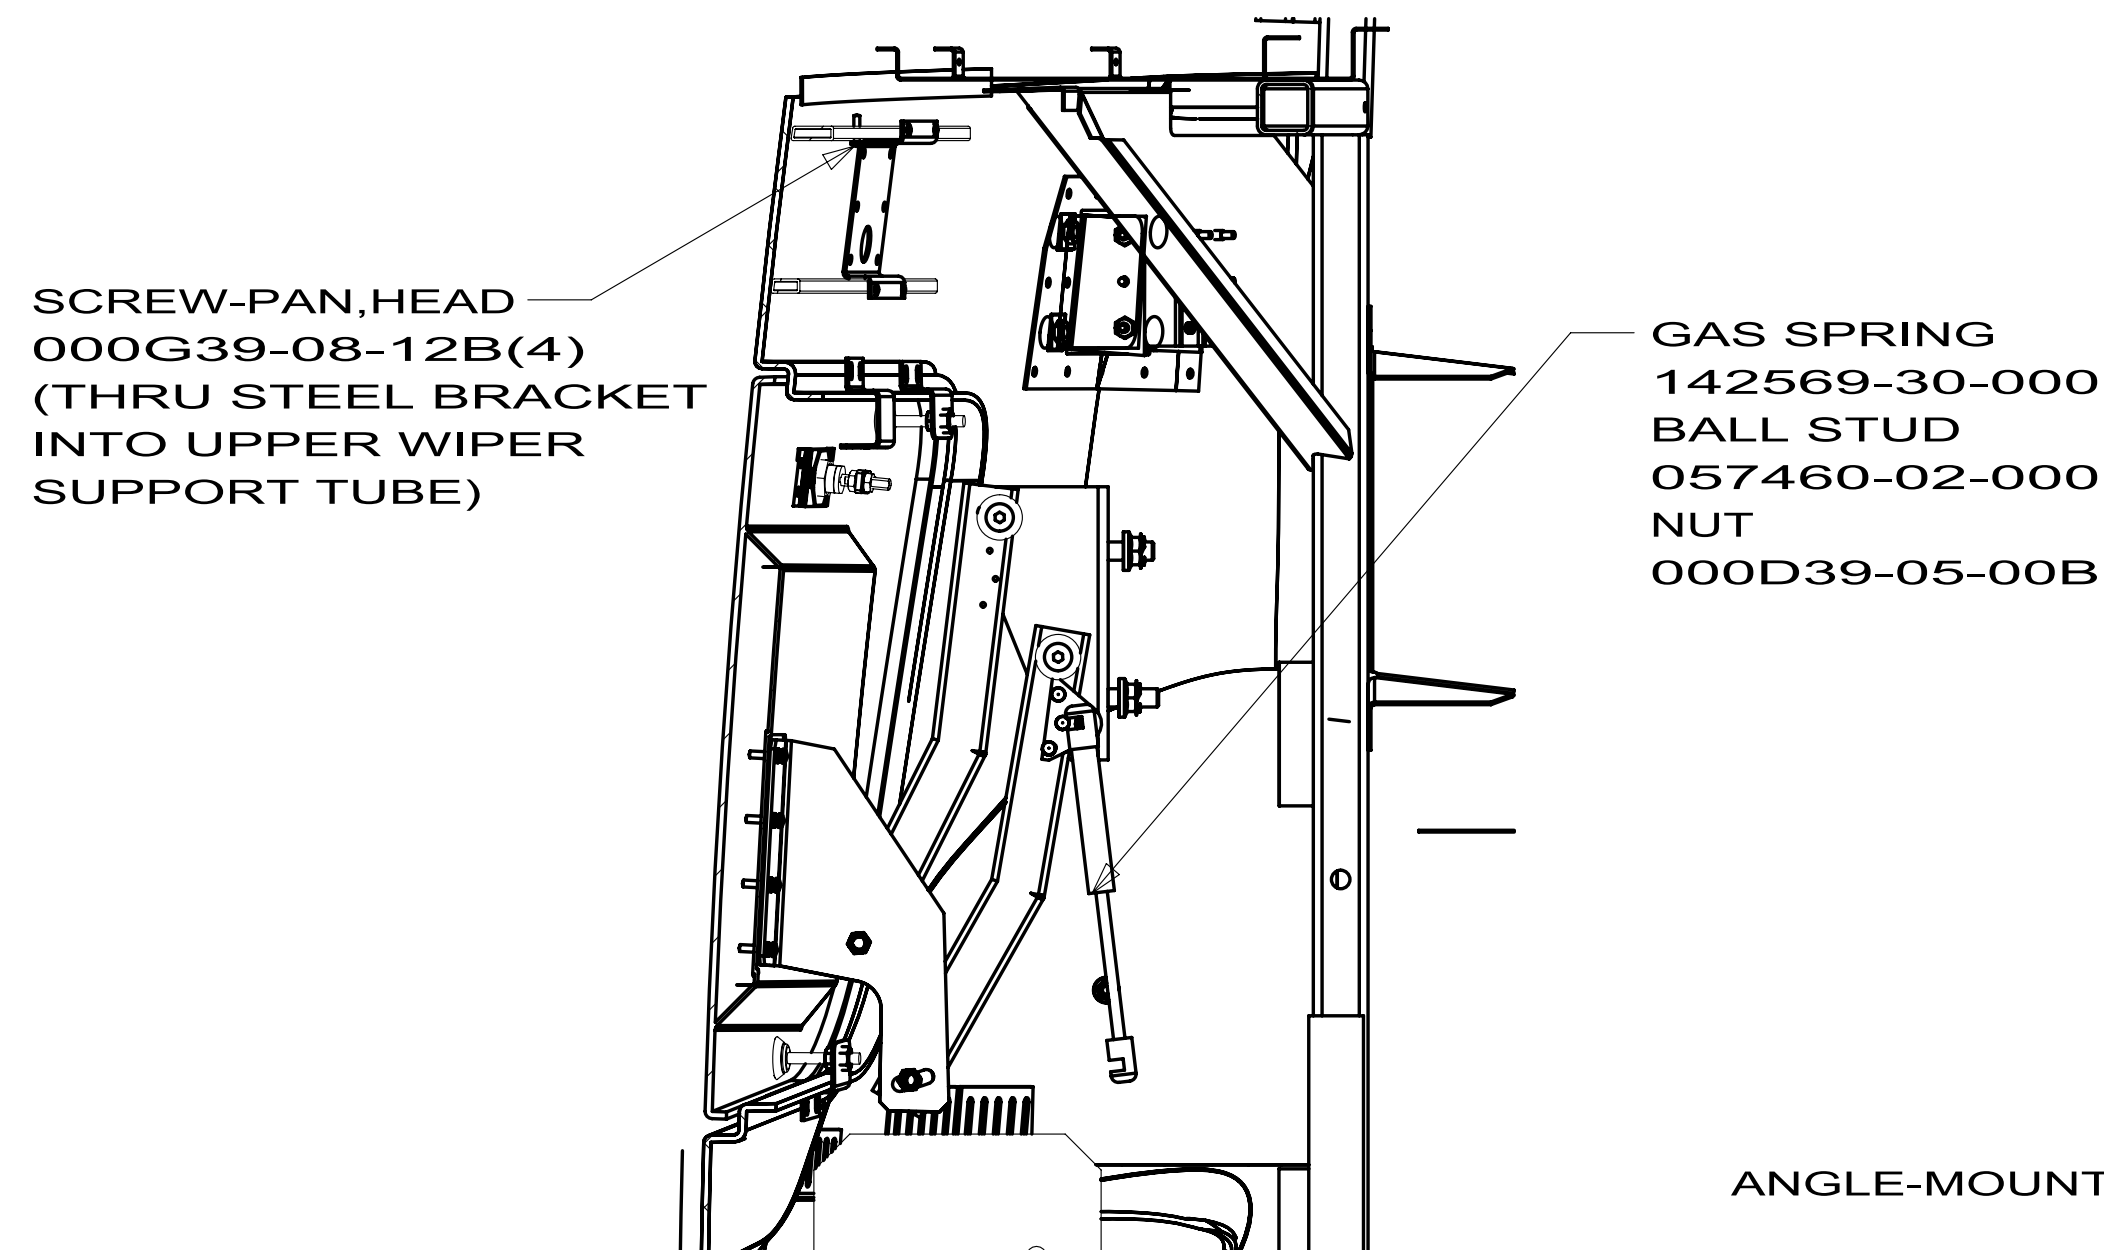

SECTION D-D
(2PLCS)

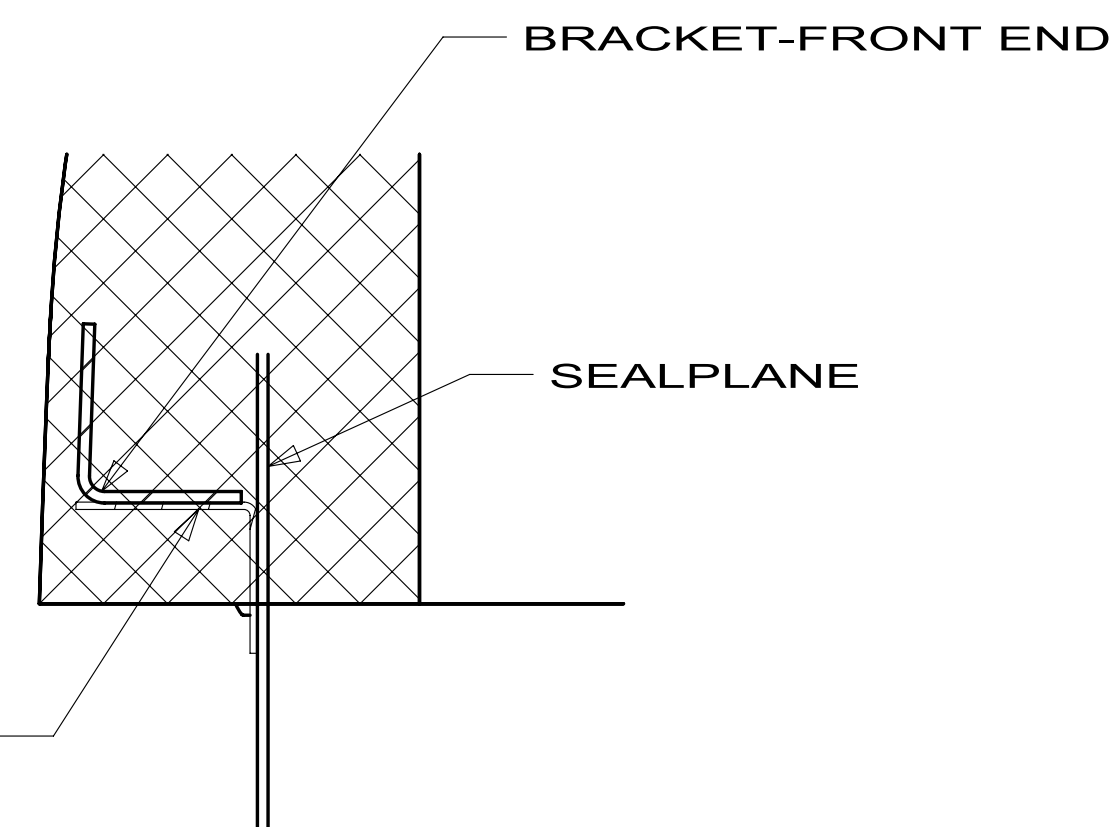

SECTION C-C

(74L) VIDEO CAMERA SYS W/COLOR MON
(74C) VIDEO CAMERA SYSTEM

FIRST USED		
09 M39 N		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 2	PART NO 168055	REV

PANEL-FRONT,LOWER
168056-03-01A

SUPPORT ASM-WIPER
157038-04-Y71

LATCH-HOOD,FRONT END
160247-01-02B(2)

BOLT-HOOD ADJUSTING
058786-04-000(4)
NUT
000D39-05-00U (4)

BRACKET-BUMPER,HOOD
160210-06-02B(4)

PLATE ASM-SUPPORT,MIRROR
169799-02-02B

BRACKETHEADLAMP,ADJUSTER,RH
168699-02-02B

BRACKET ASM-MTG,HDLP,UPR,RH
168582-02-02B

BRACKET ASM-MTG,HDLP,LWR,RH
168583-02-02B

BRACKET ASM-FOGLAMP,RH
168001-02-02B

BRACKETHEADLAMP,ADJUSTER,LH
168699-04-02B

BRACKET ASM-MTG,HDLP,UPR,LH
168582-04-02B

BRACKET ASM-FOGLAMP,LH
168001-04-02B

BRACKET ASM-MTG,HDLP,LWR,LH
168583-04-02B

SUPPORT ASM-FRONT
160130-03-02B

19 TO TOP OF
TOP TUBE

244

565

1027 (2)

516

503

666

666

516

516

240 (2)

269 (2)

70 (2)

FIRST USED			09 M39 N
DO NOT SCALE DRAWING			
TITLE:			PANEL-FRONT,LOWER
SHEET	1	PART NO	168056
			REV

D


C

B


A

PLATE-FRONT END,ATTACHMENT
125817-06-02B(2)

ANGLE-SUPPORT
147489-01-02B

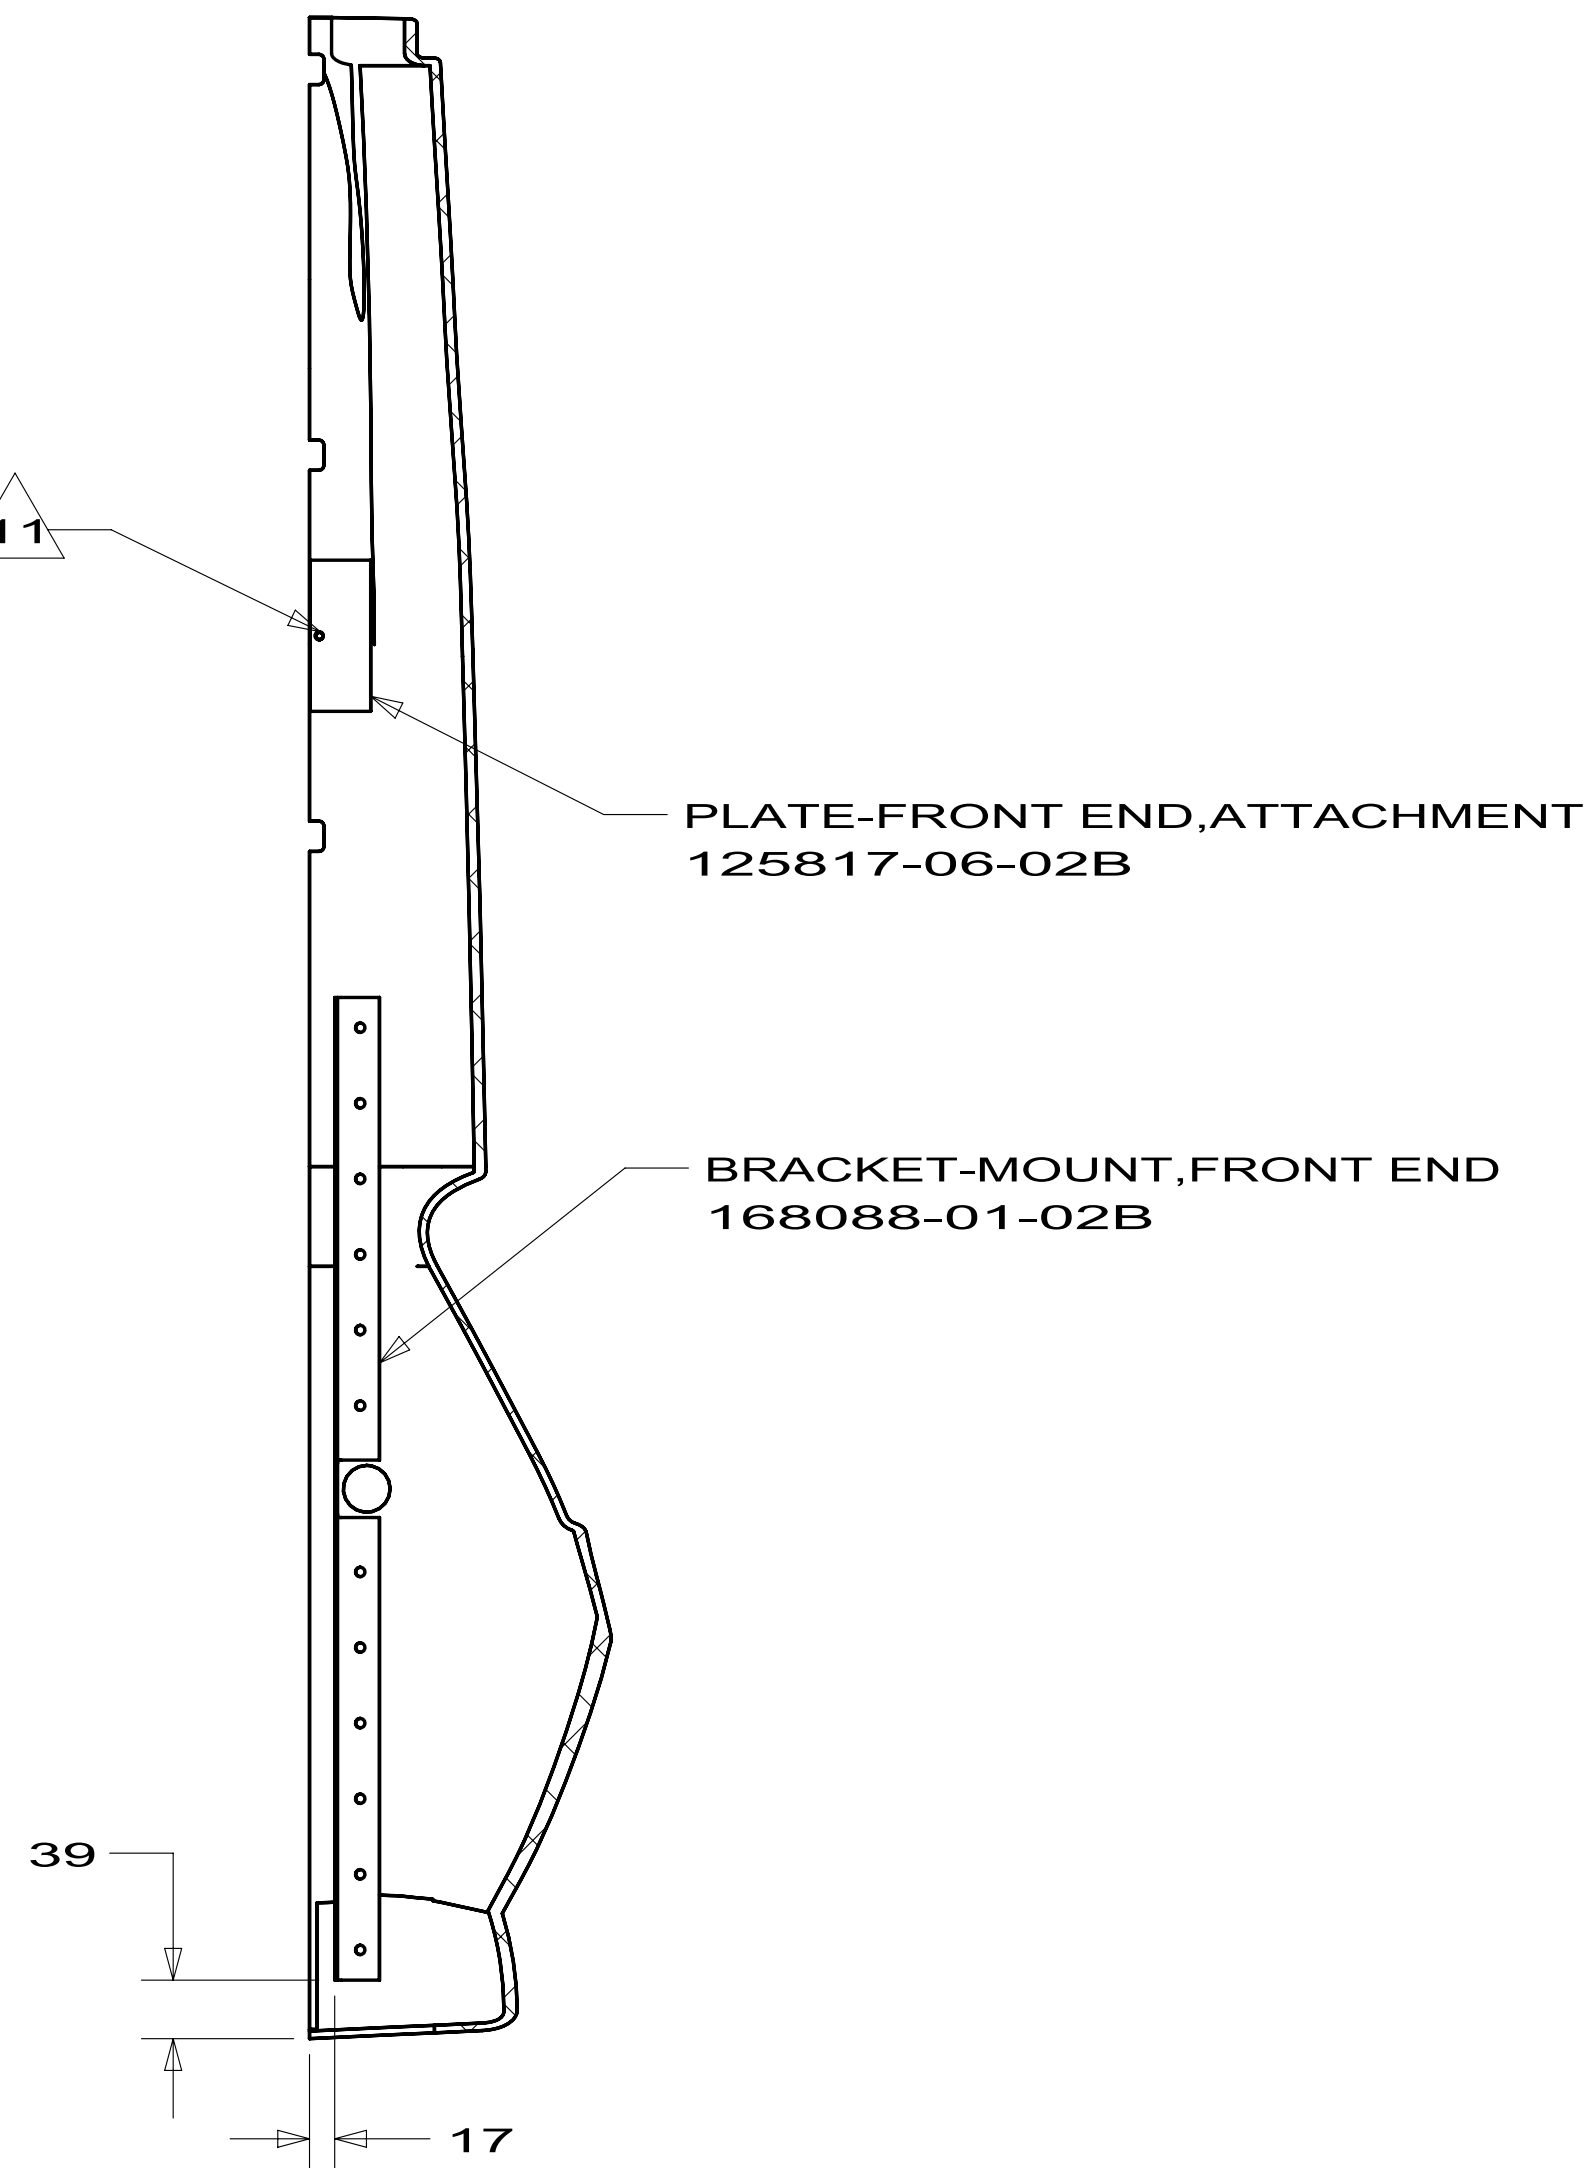


SECTION DG-DG

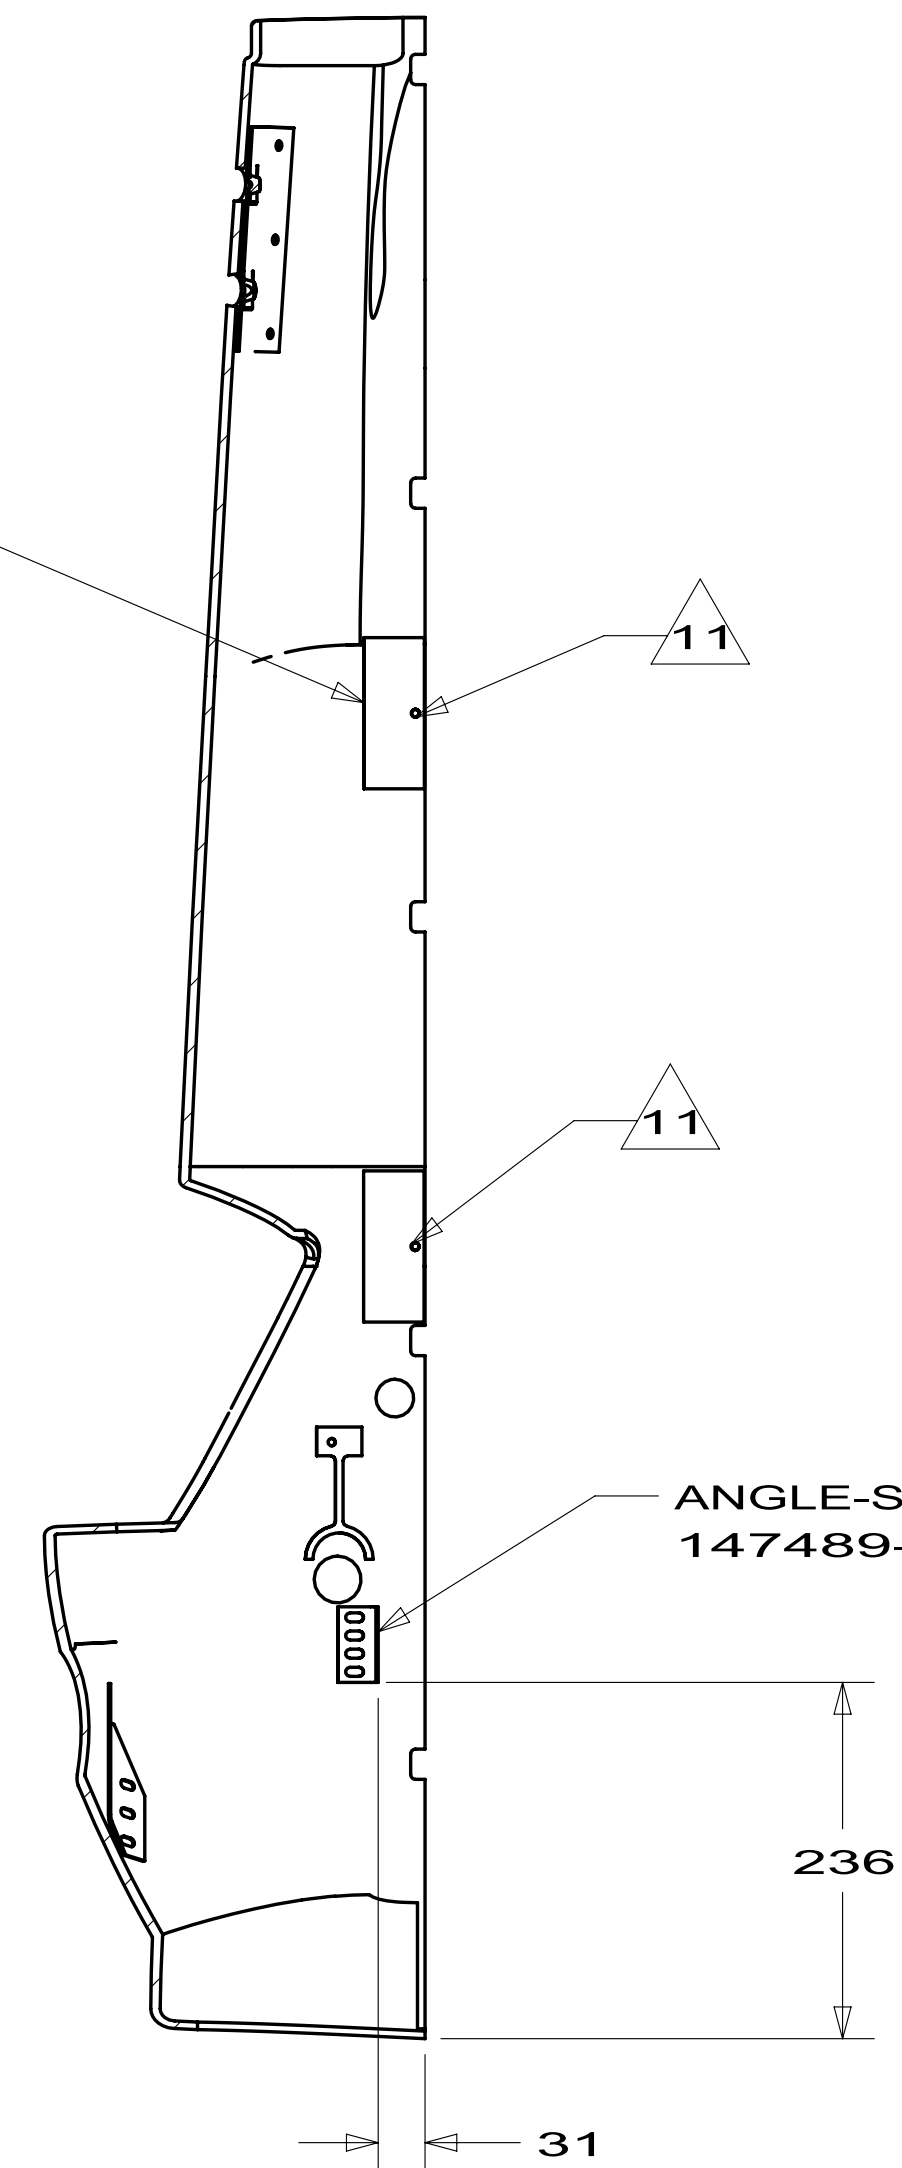


SECTION DF-DF

FIRST USED		09 M39N	
DO NOT SCALE DRAWING			
TITLE: PANEL-FRONT,LOWER			
SHEET 2		PART NO 168056	REV

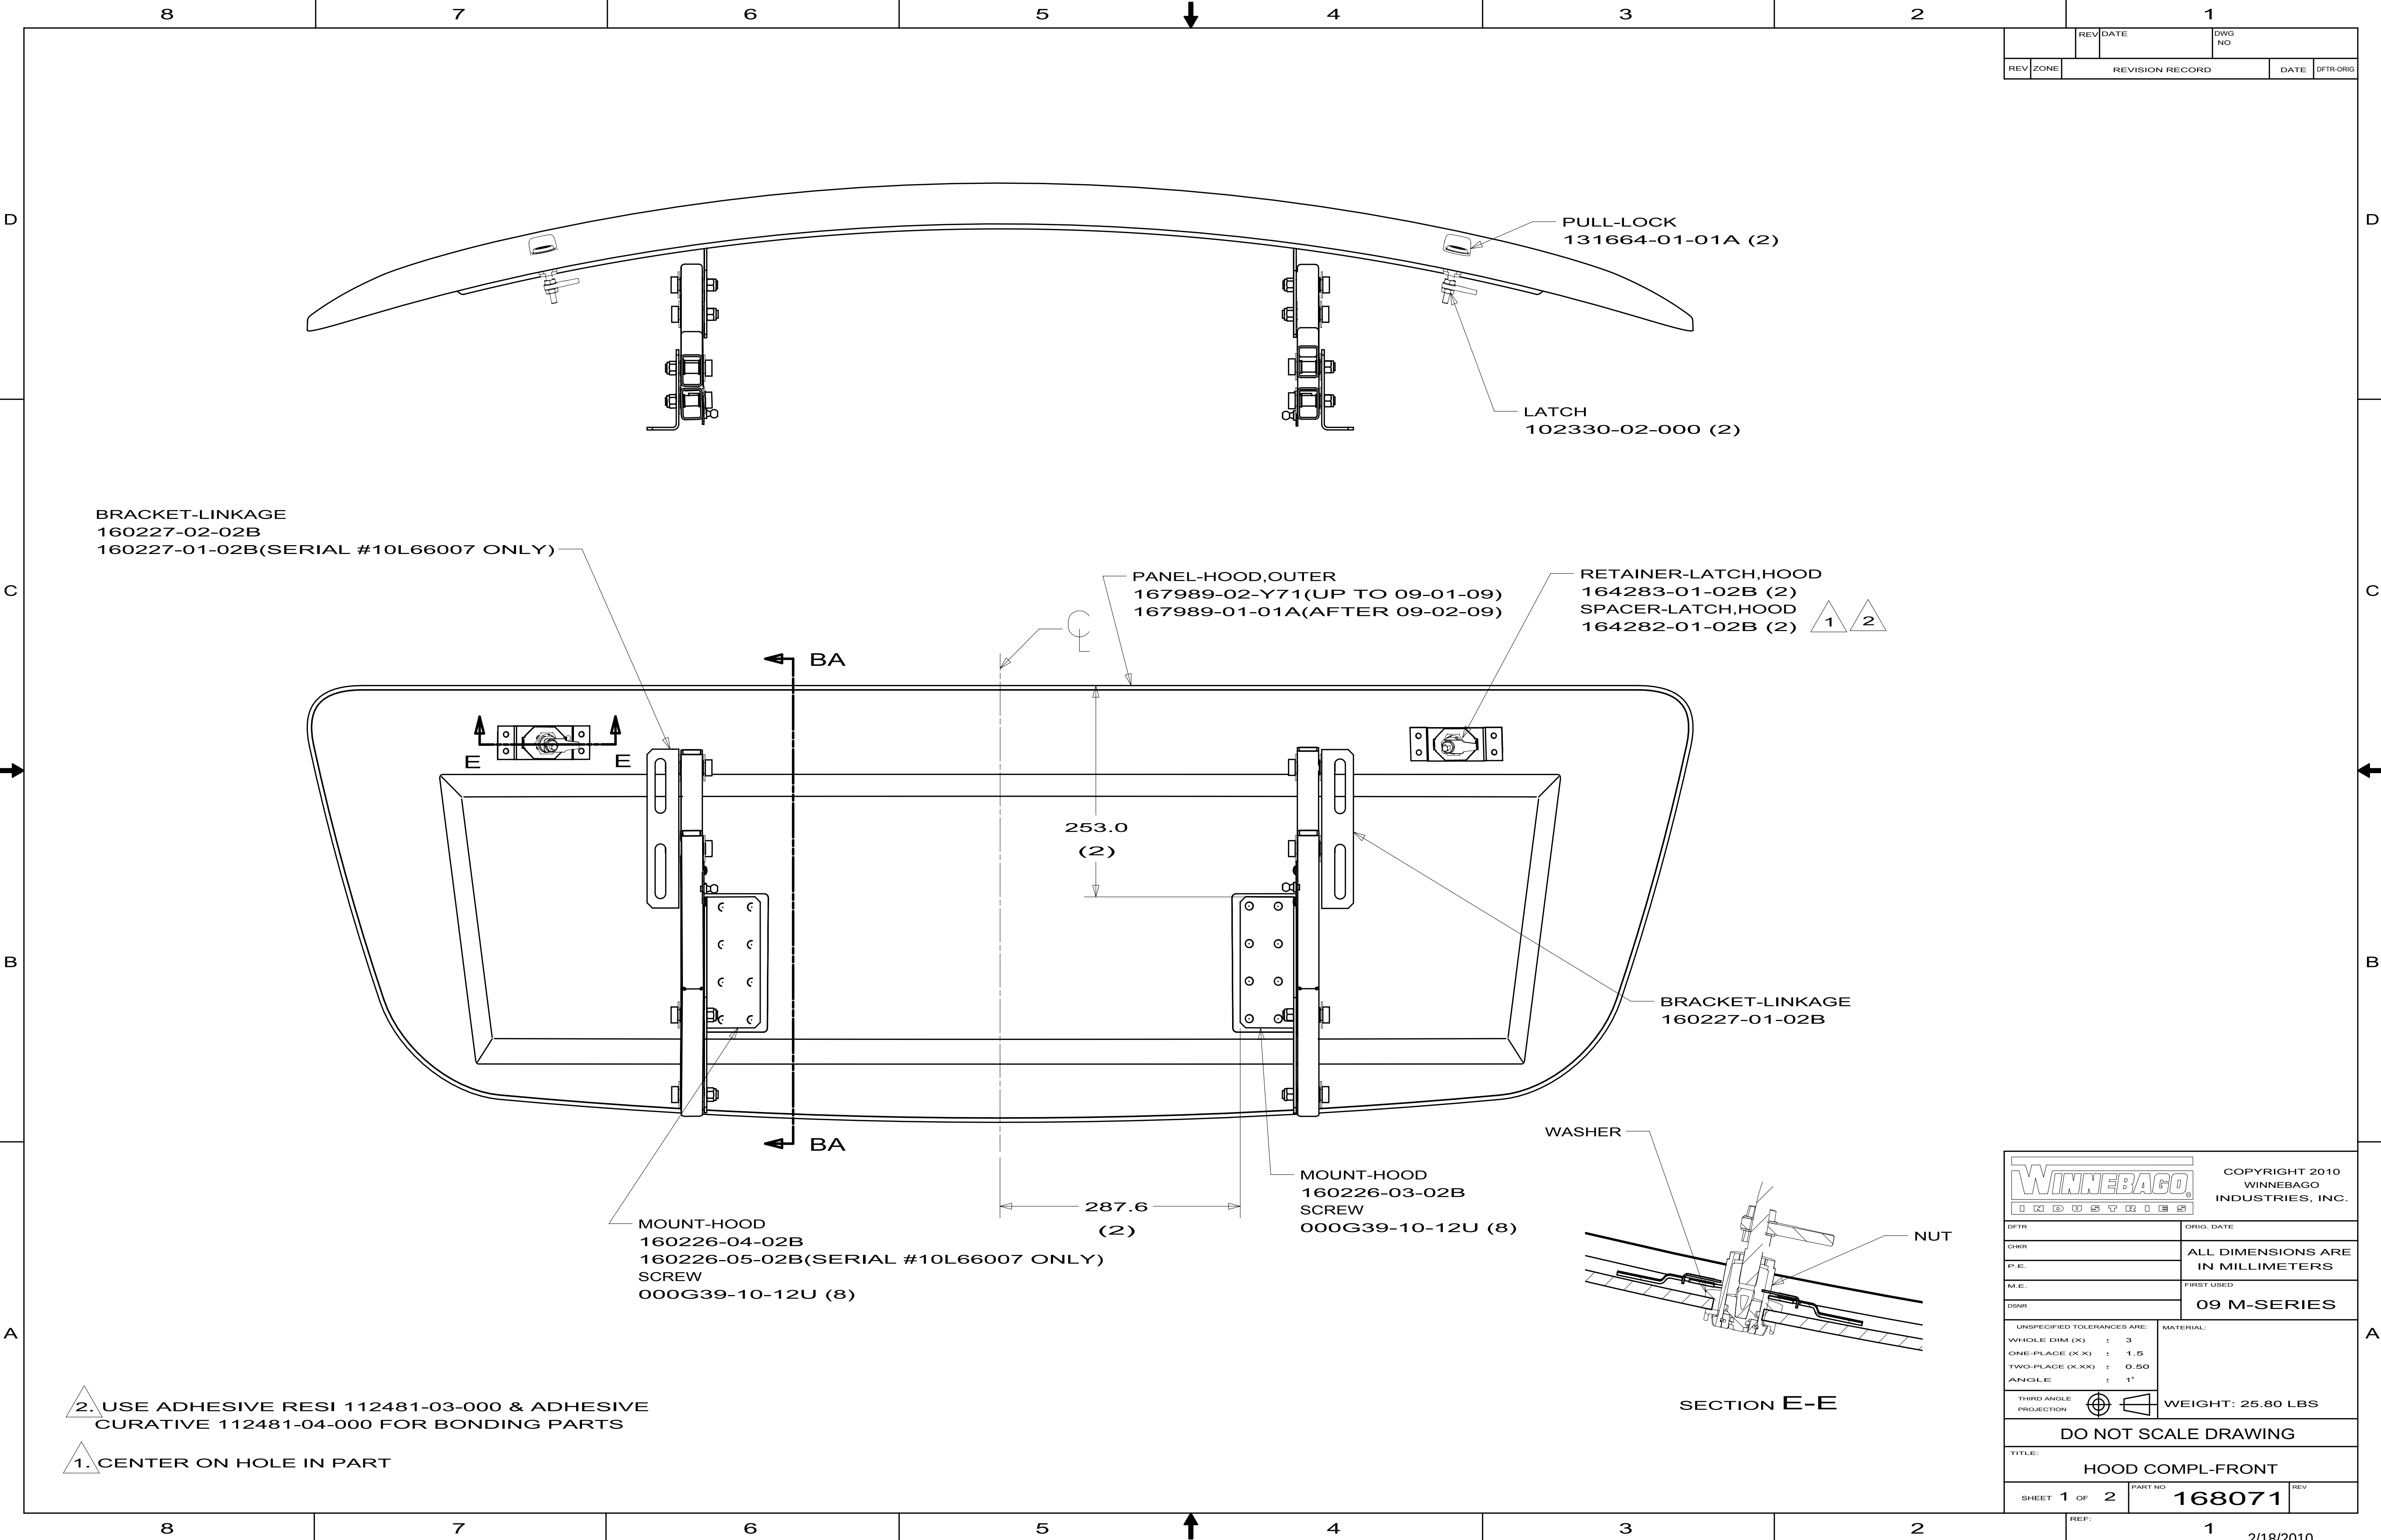

REV		DATE	DWG NO	
REV	ZONE	REVISION RECORD		DATE
				DATE
				DATE

WINNEBAGO® I N D U S T R I E S		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DISTR		ORIG. DATE	
CHGR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DSNR		09 M-SERIES	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3		WEIGHT: 25.80 LBS	
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
HOOD COMPL-FRONT			
SHEET 1 OF 2		PART NO	
		168071	
REF:		1	

2. USE ADHESIVE RESI 112481-03-000 & ADHESIVE CURATIVE 112481-04-000 FOR BONDING PARTS
1. CENTER ON HOLE IN PART

BRACKET-GAS SPRING
126263-08-02B(2)
SCREW-PAN,HEAD
000G39-10-12U (6)

TUBE-LINKAGE
160224-04-02B(4)


17.2
34.9

SECTION BA-BA
(2 SIDES)

WASHER
000E13-20-00U
BOLT-SHOULDER,HEX
155007-01-01A
BEARING-CLIP
155042-01-01A
WASHER
000E13-20-00U
NUT
000D29-06-00U
BEARING-CLIP
155042-01-01A
SECTION BB-BB
(2 PLCS)

BEARING-CLIP
155042-01-01A
BOLT-SHOULDER,HEX SOCKET
155007-01-01A
WASHER
000E13-20-00U
NUT
000D29-06-00U
WASHER
000E13-20-00U
SECTION BC-BC
(2 PLCS)

FIRST USED		
09 M-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
HOOD COMPL-FRONT		
SHEET 2	PART NO 168071	REV

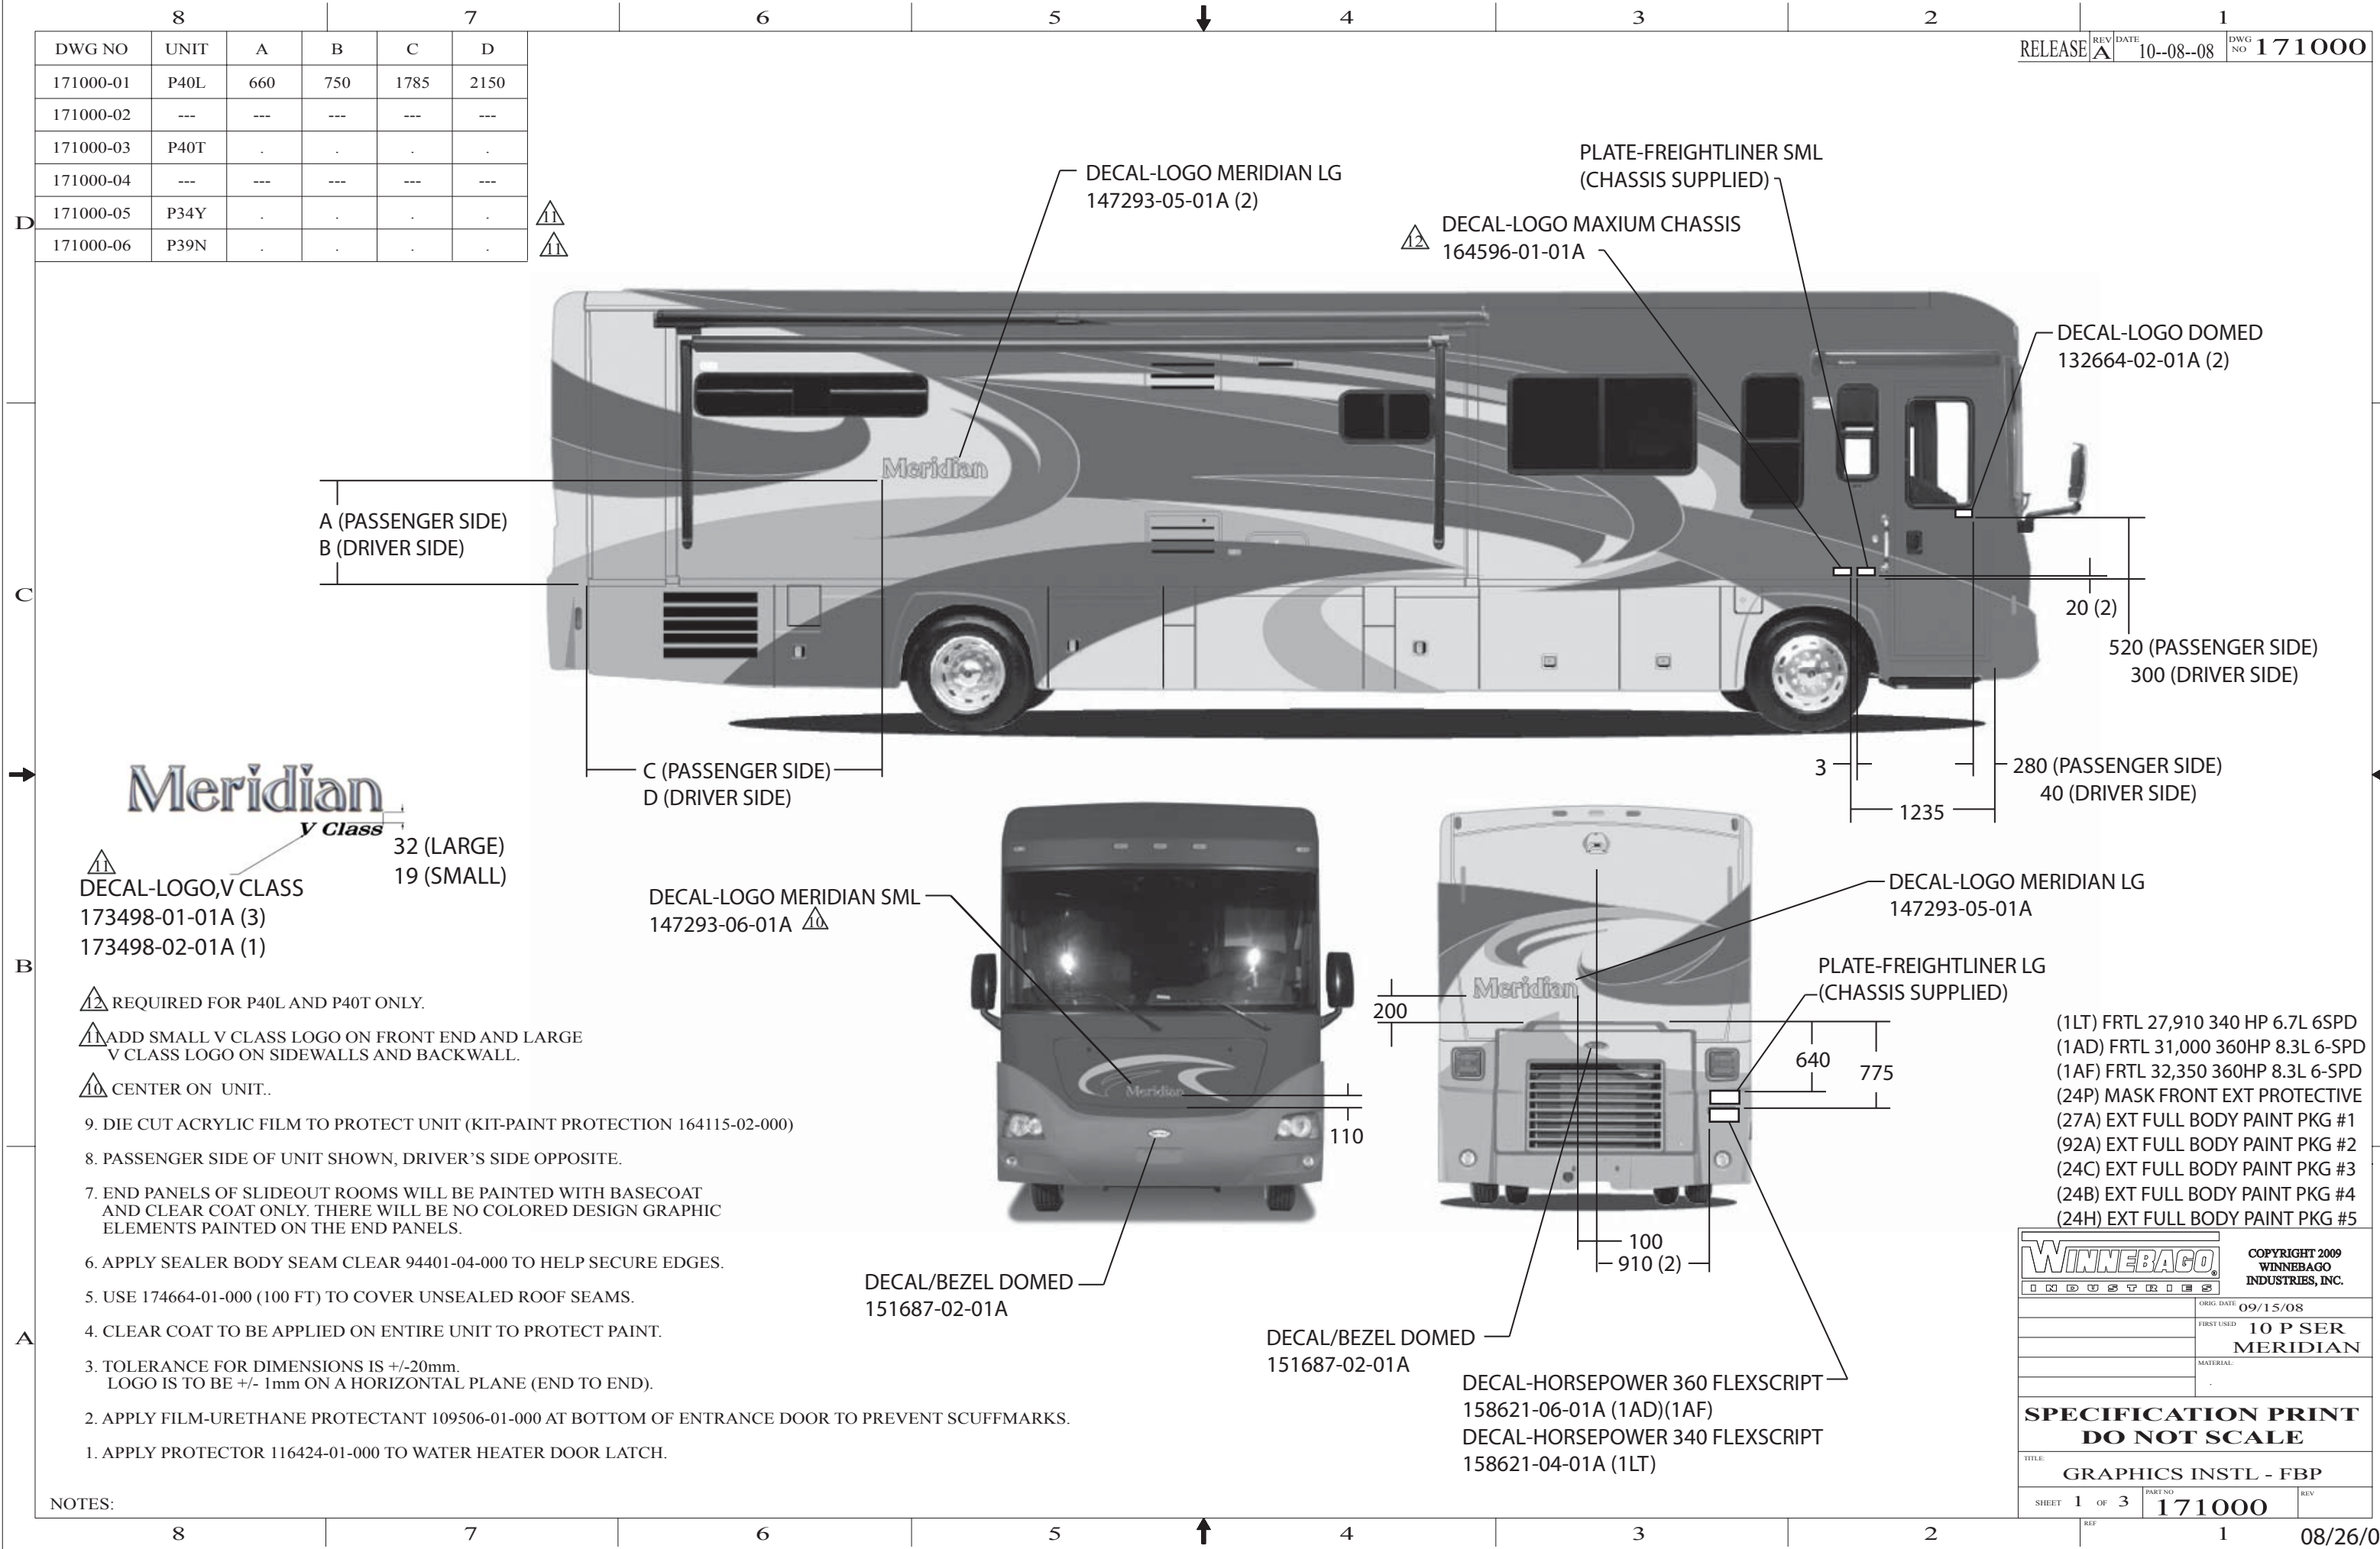

8

7

6

5

4

3

2

1

DWG
NO 171000

SILVER MET
#49680

CADET BLUE MET
#78164

ED GOLD MET
75395

BLACK MIST MET
#75377

SILVER SKY MET
#62444

MED PLATINUM MET
#44094

DK TOREADOR RED MET
#75387

LT PEARLSTONE MET
#75248

LOGOS CARRYOVER FROM 2009

LOGOS CARRYOVER FROM 2009

(27A)
2010 MERIDIAN - SILVER CLIFF

(92A)
2010 MERIDIAN - BLACK CHERRY

BLACK MIST MET
#75377

MINERAL GRAY MET
#60588

SAND MICA MET
#50381

SOLID GOLD MET
#64548

LOGOS CARRYOVER FROM 2009

(24C)
2010 MERIDIAN - HARVEST NIGHT

FIRST USED		
2010 P-SERIES (MERIDIAN)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	2	PART NO
		171000
		REV

8

7

6


5


4

3

2

1

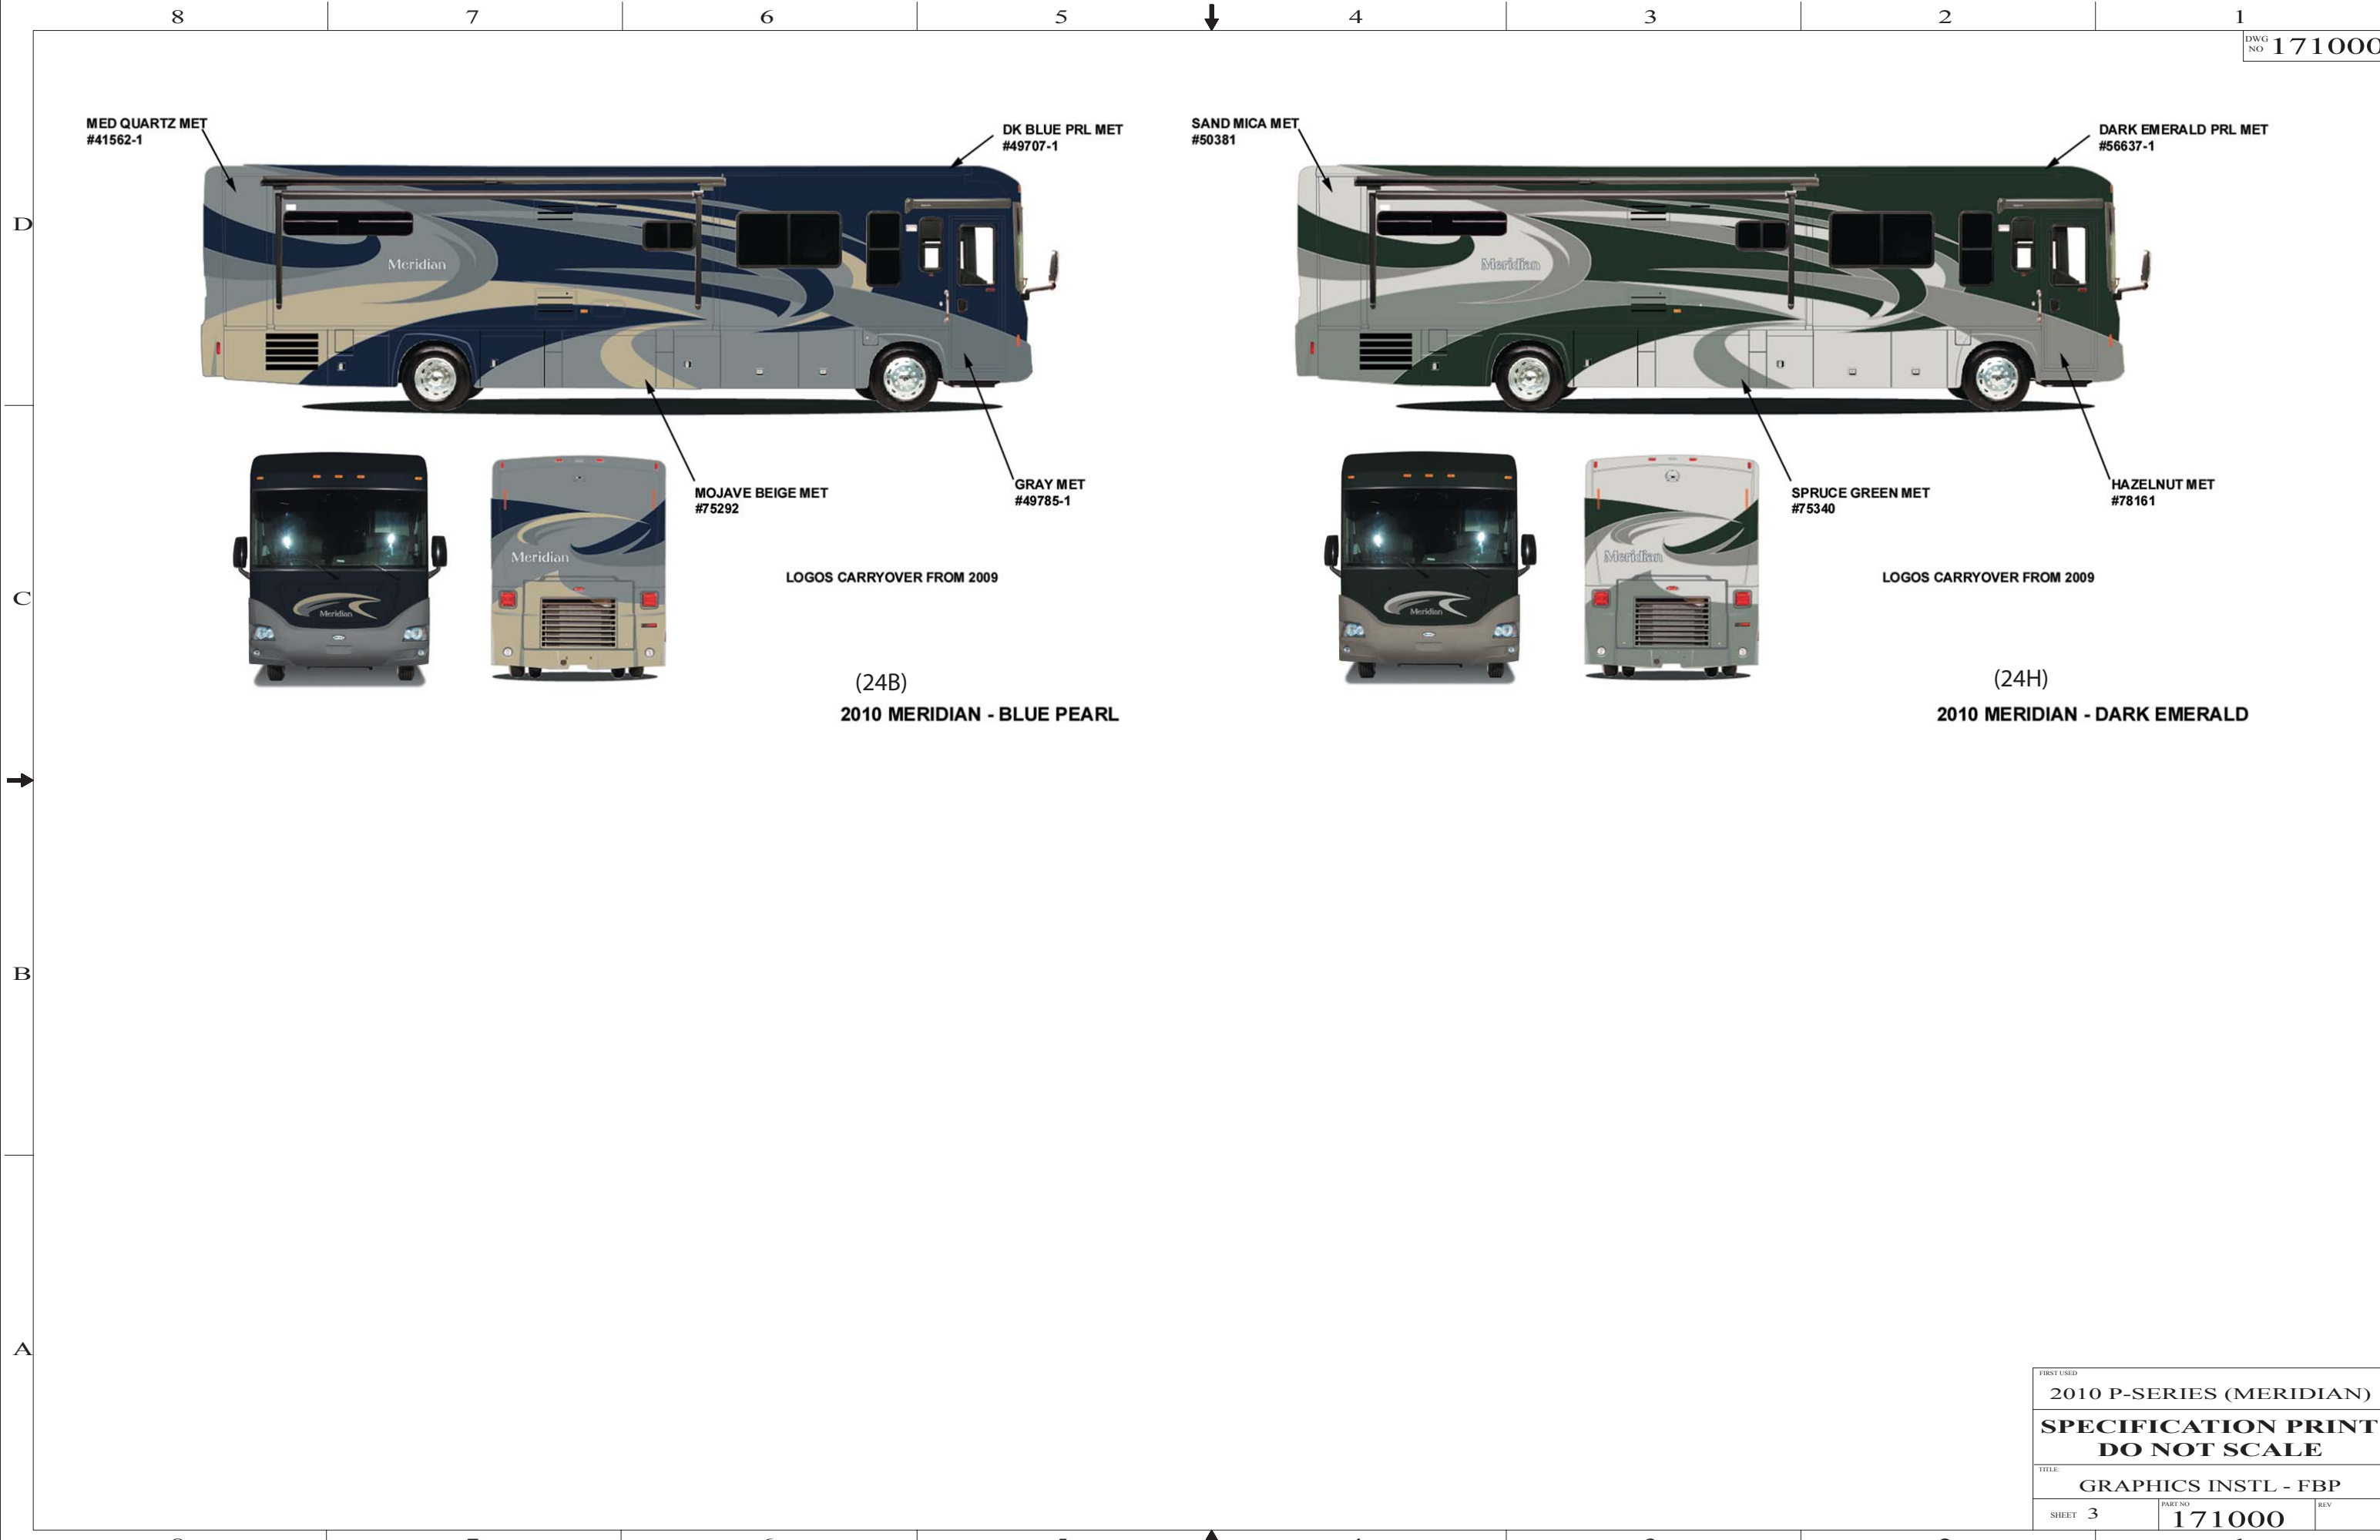

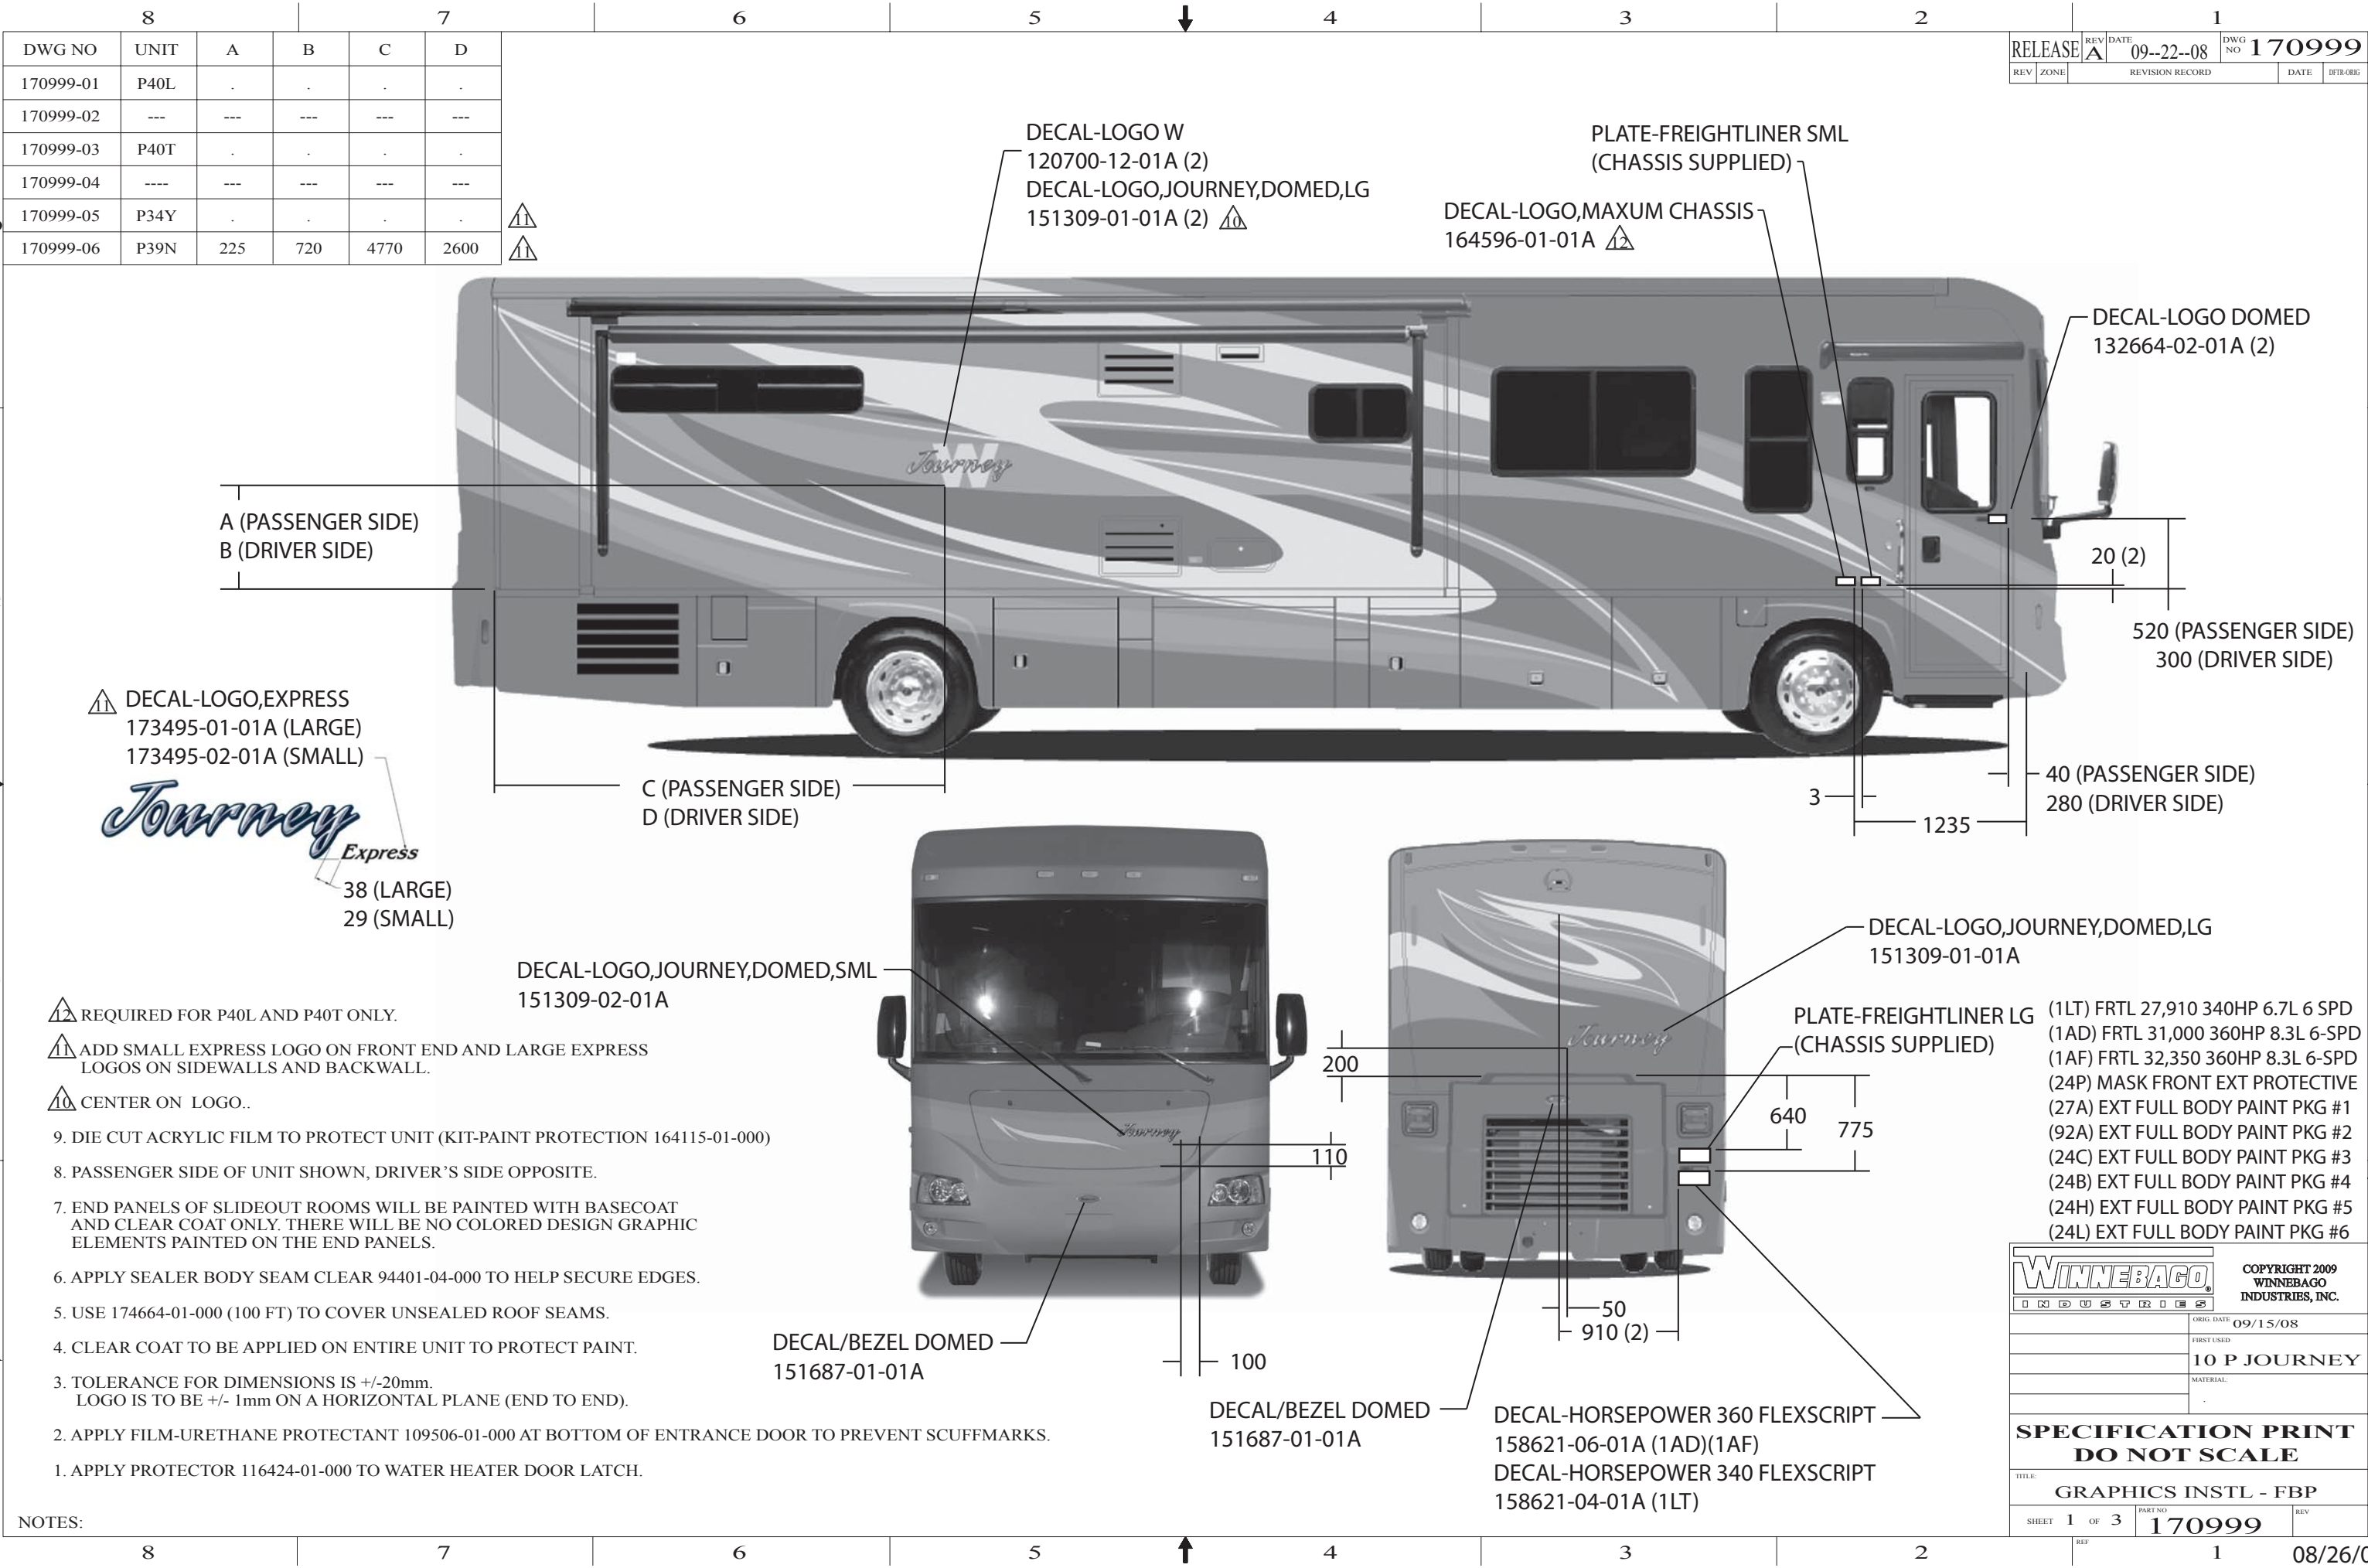

8

7

6

5

4

3

2

1

DWG
NO 170999FORD SILVER MET
#75341BRIGHT PLATINUM MET
#48823-3IRK GRAY MET
4255ESPRESSO BROWN MET
#75411RADIANT RUBY PEARL
#75409BLACK MIST MET
#75377WHITE
#75372AUTUMNWOOD MET
#48507-1

LOGOS CARRYOVER FROM 2009

LOGOS CARRYOVER FROM 2009

(27A)
2010 JOURNEY - PLATINUM(92A)
2010 JOURNEY - WALNUT GROVELIGHT BRONZE MET
#75392BRONZED GRAY MET
#75400WHITE
#45289-4MED GOLD MET
#75395

LOGOS CARRYOVER FROM 2009

(24C)
2010 JOURNEY - TAUPE PEARL

FIRST USED		
2010 P-SERIES (JOURNEY)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	2	PART NO
		170999
		REV

8

7

6

5

4

3

2

1

CADET BLUE MET
#78164

DEEP NAVY BLUE MET
#51368

.VER MET
2583

IRON GRAY MET
#42839



HARVEST GOLD MET
#57343

STEEL BLUE MET
#63302

LOGOS CARRYOVER FROM 2009

(24B)
2010 JOURNEY - DEEP NAVY



SOLID GOLD MET
#64548

BLACK MIST MET
#75377

LOGOS CARRYOVER FROM 2009

(24H)
2010 JOURNEY - CHARCOAL

SANDSTONE BEIGE MET
#43482-3

BLACK MIST MET
#75377



MED RED MICA MET
#61432

WHITE
#75372

LOGOS CARRYOVER FROM 2009



(24L)
2010 JOURNEY - RED MICA



FIRST USED		
2010 P-SERIES (JOURNEY)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE		
GRAPHICS INSTL - FBP		
SHEET	PART NO	REV
3	170999	

DWG NO	SHEET
162024-01	1
162024-02	2


RELEASE	REV DATE	DWG NO	162024
REV ZONE	REVISION RECORD	DATE	03/14/07
C	SHT1 SHT2	UPDATE GEOMETRY LADDER ASM 161990-05 WAS -02	1153

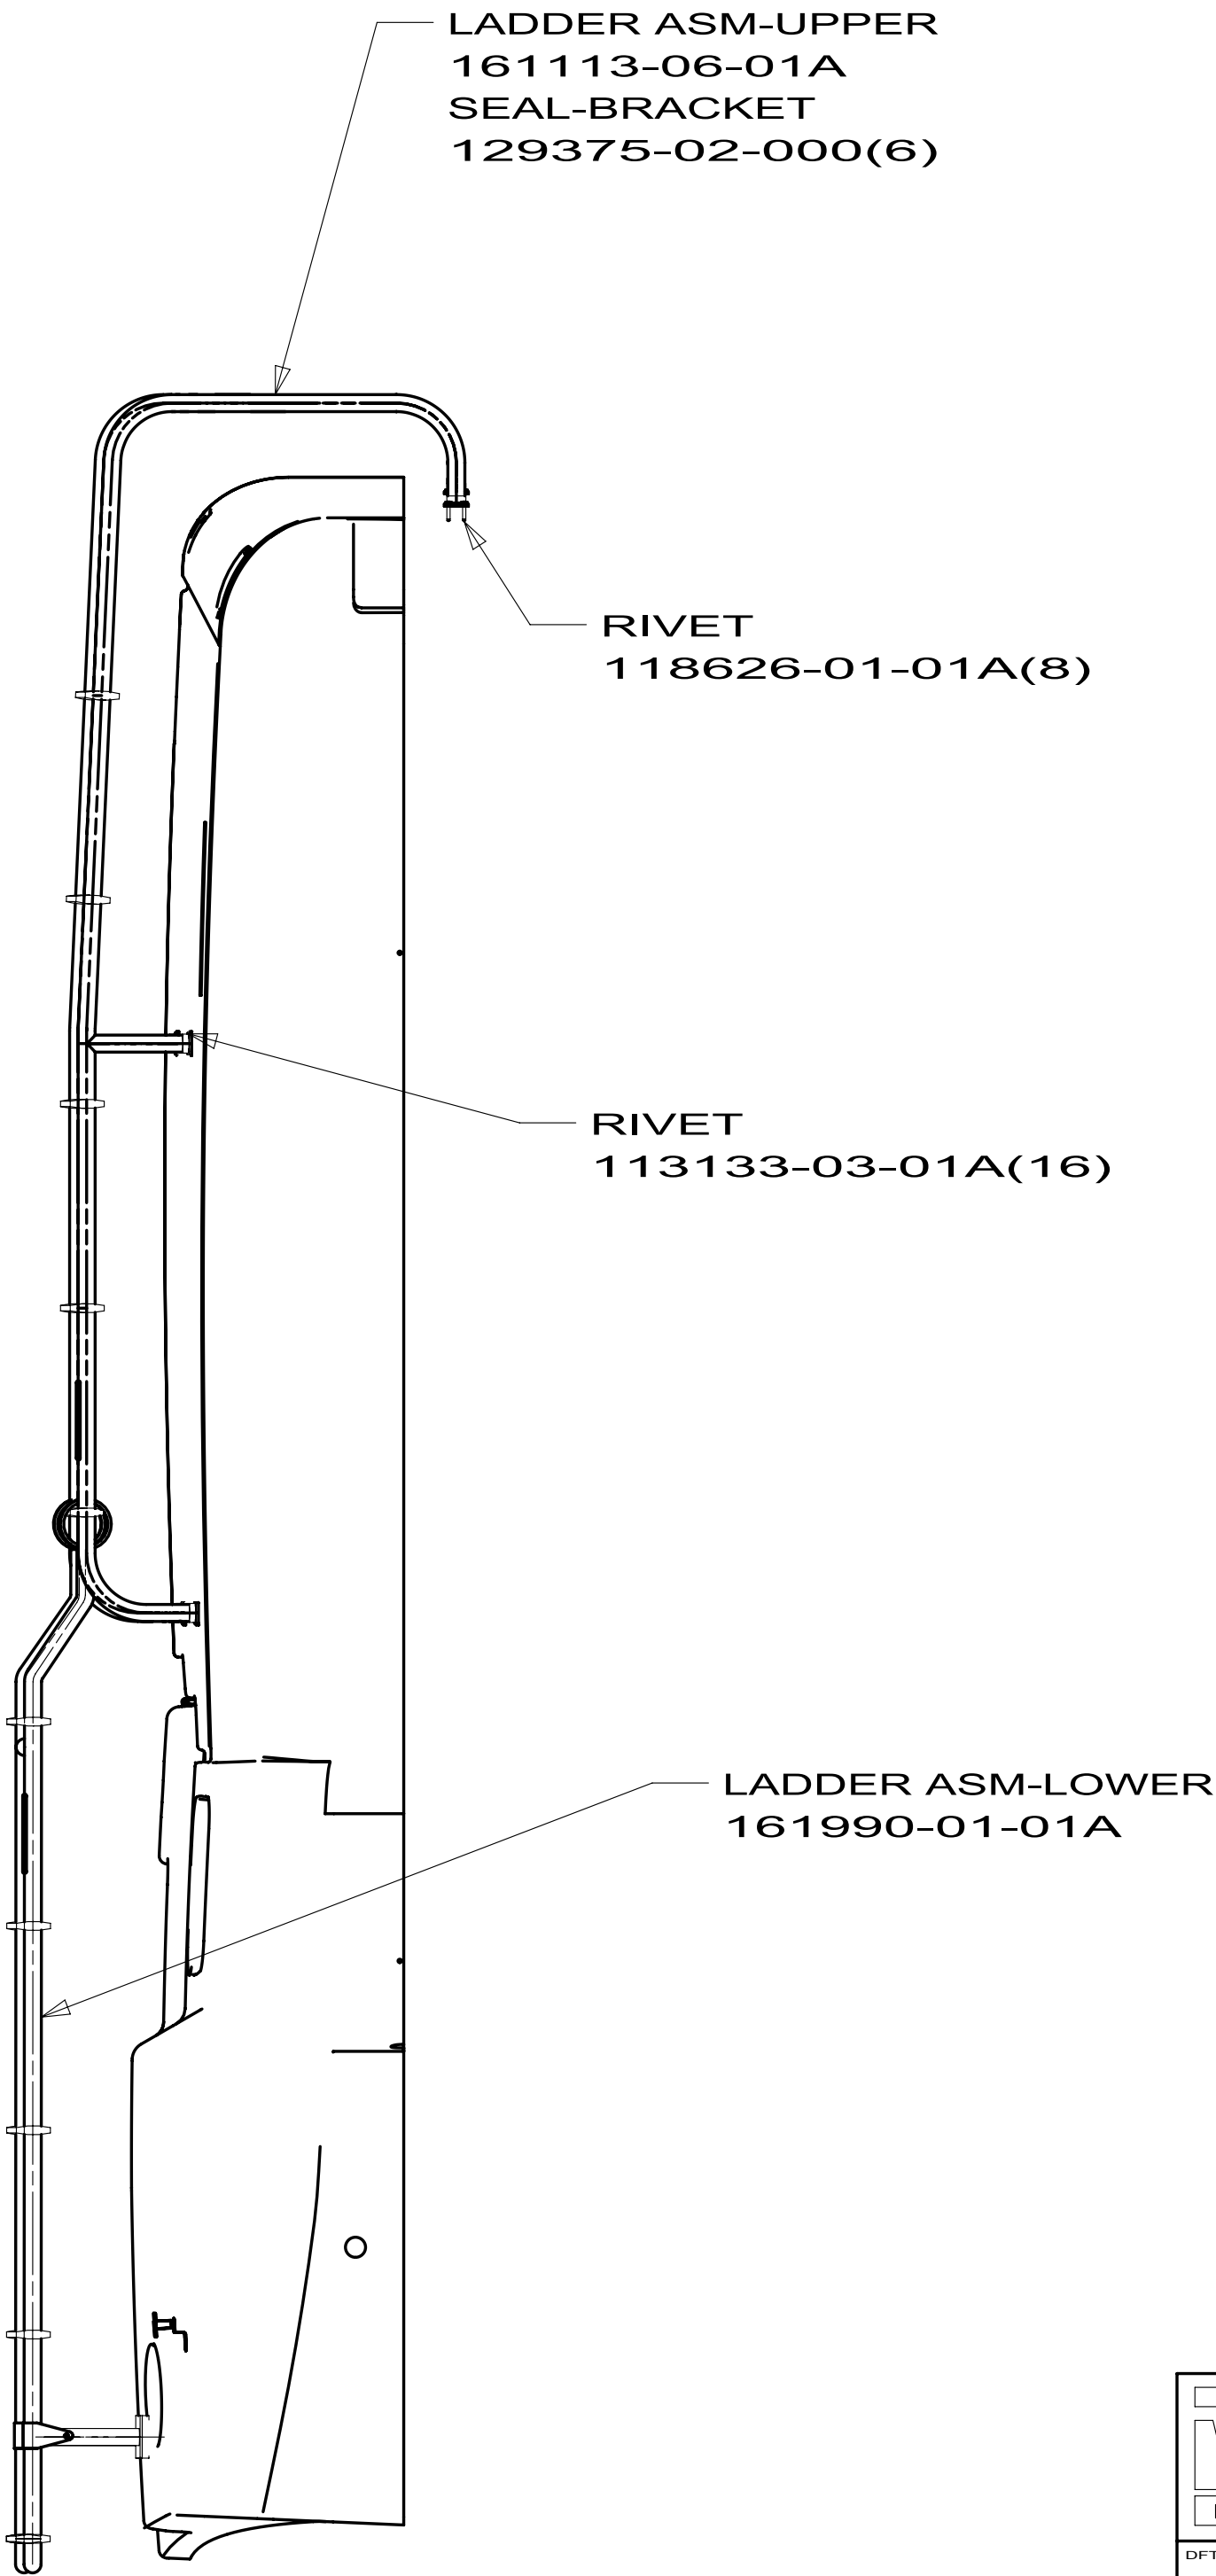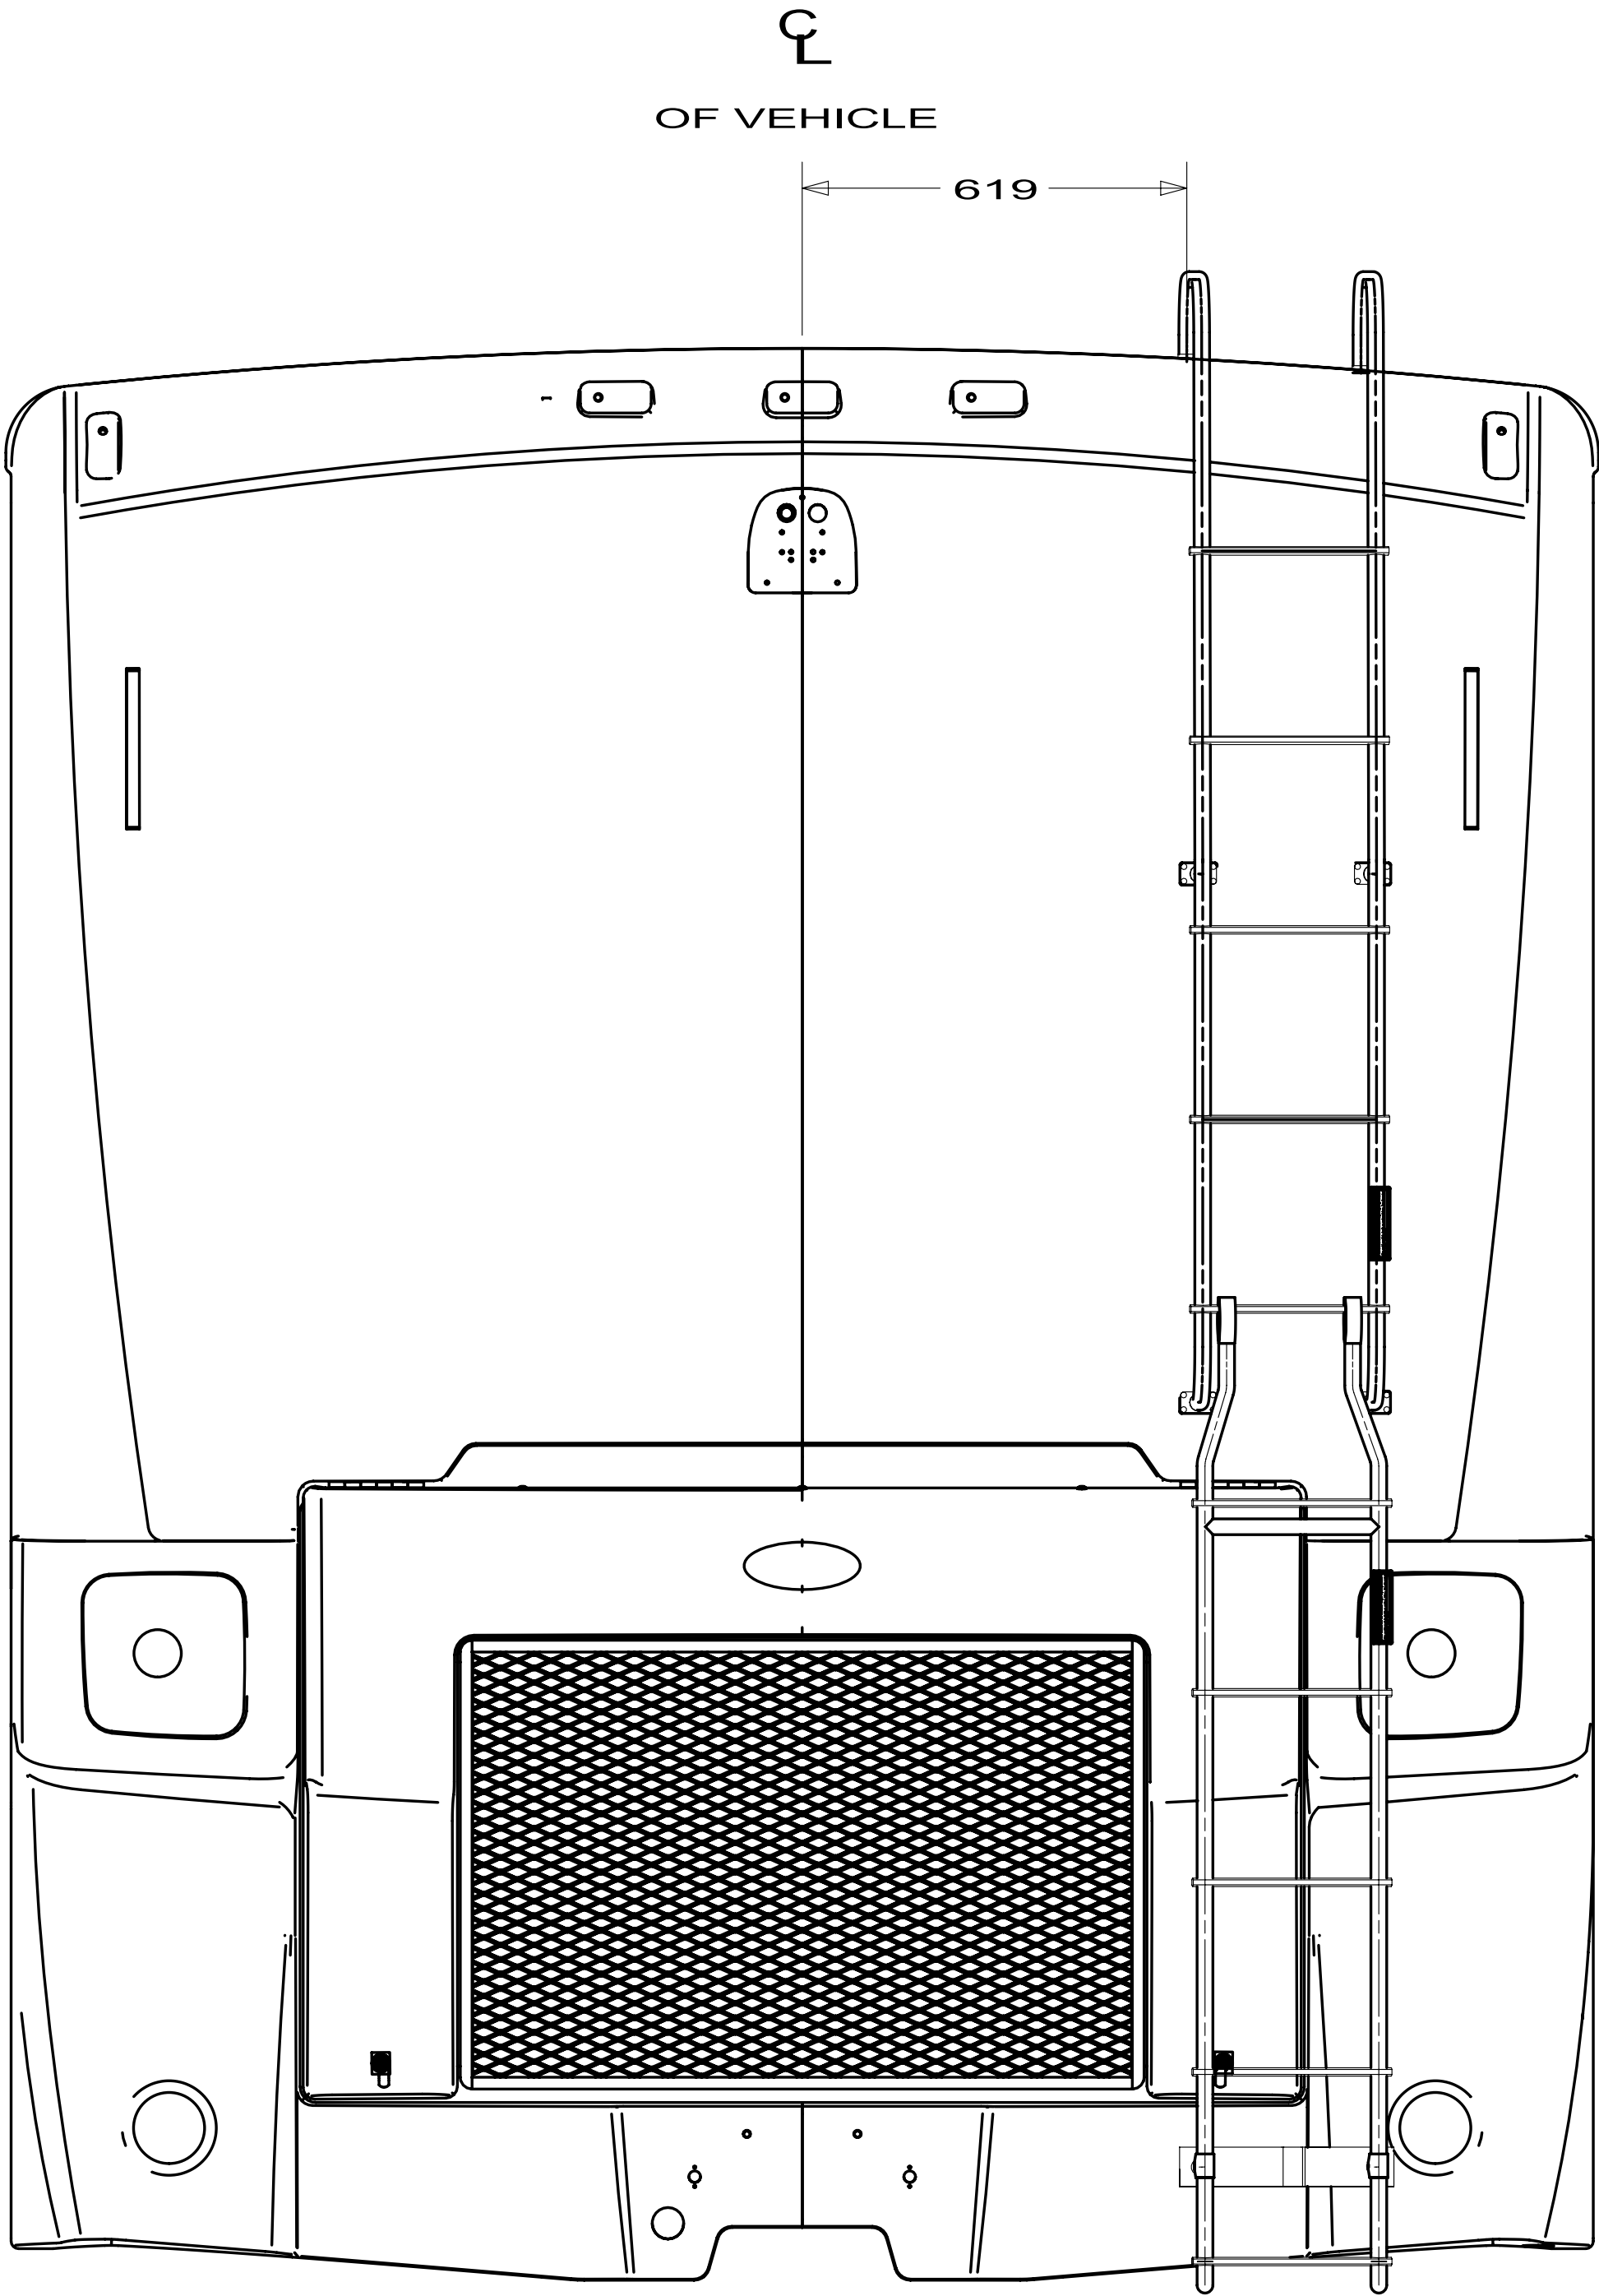

FREIGHTLINER



COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DFTD	ORIG. DATE
CHKD	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	FIRST USED
08 M-SERIES	
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE:	
LADDER INSTL	
SHEET 1 OF 2	PART NO 162024

8

7

6

5

4

3


2

1

DWG
NO **162024**

CL
OF VEHICLE

619

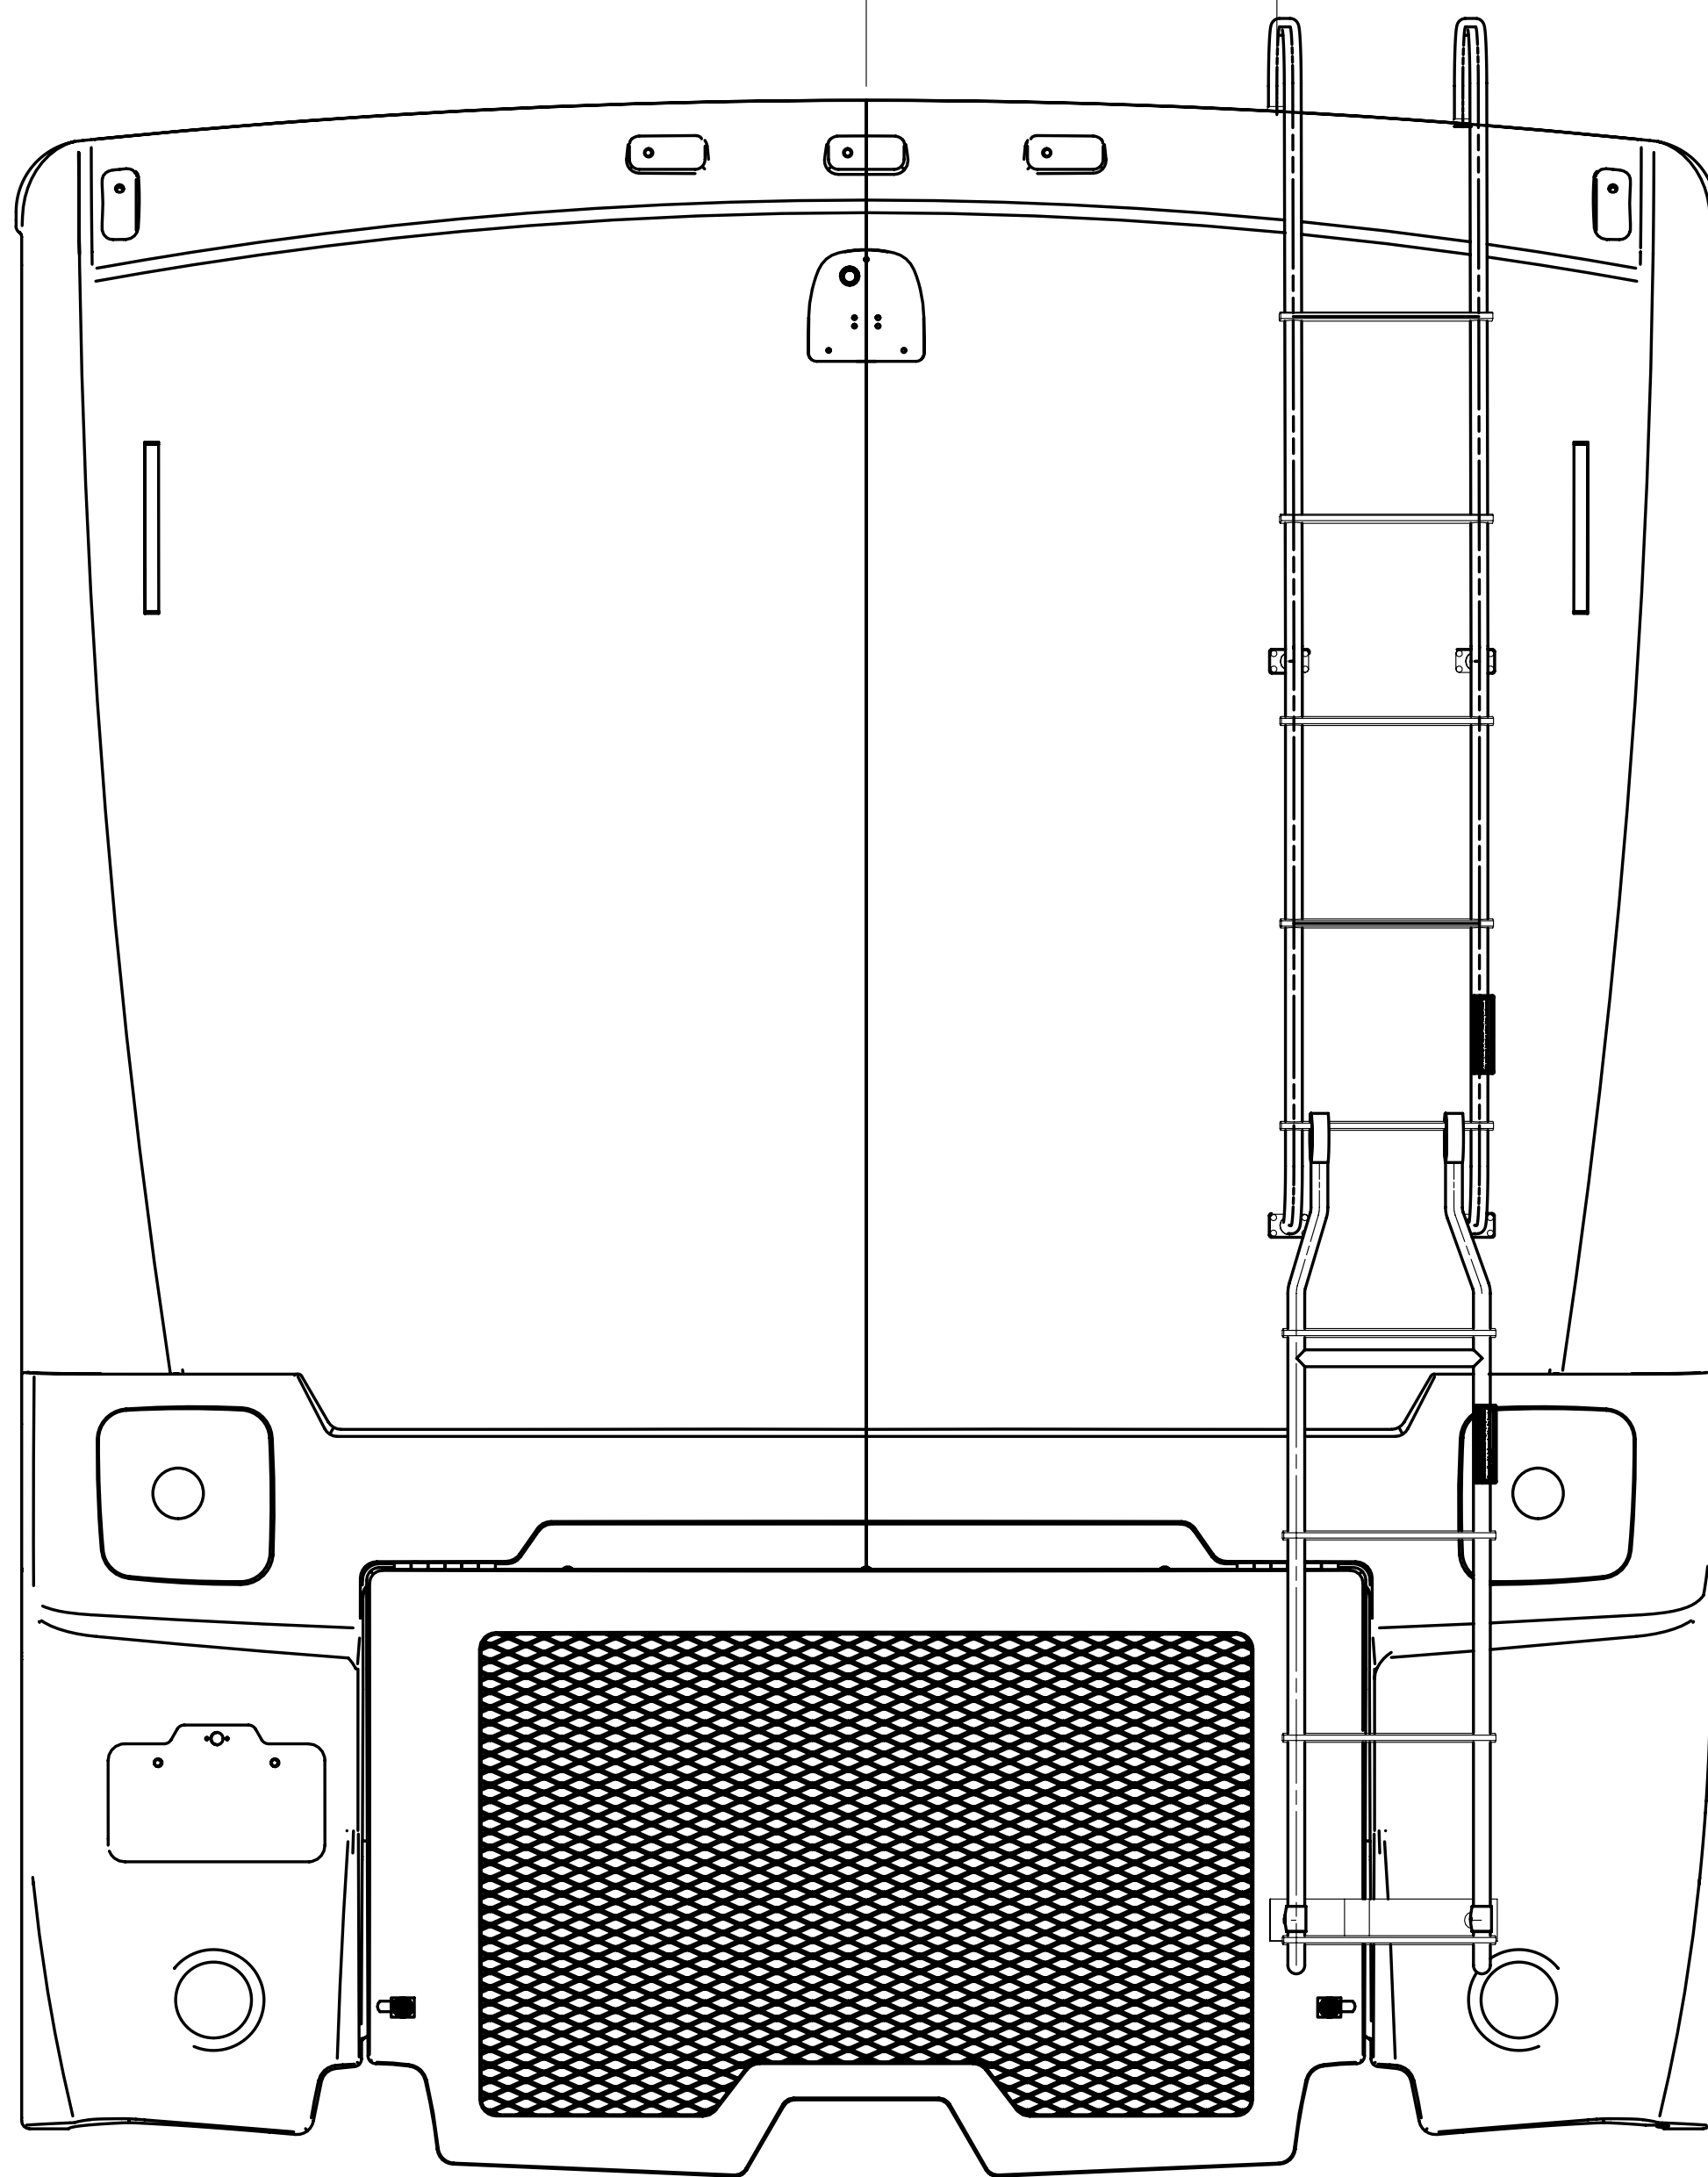

LADDER ASM-UPPER
161113-06-01A
SEAL-BRACKET
129375-02-000(6)

RIVET
118626-01-01A(8)


RIVET
113133-03-01A(16)

LADDER ASM-LOWER
161990-05-01A

WORKHORSE

FIRST USED			08 M-SERIES		
			DO NOT SCALE DRAWING		
TITLE:			LADDER INSTL		
SHEET	2	PART NO	162024	REV	

12/1/2009

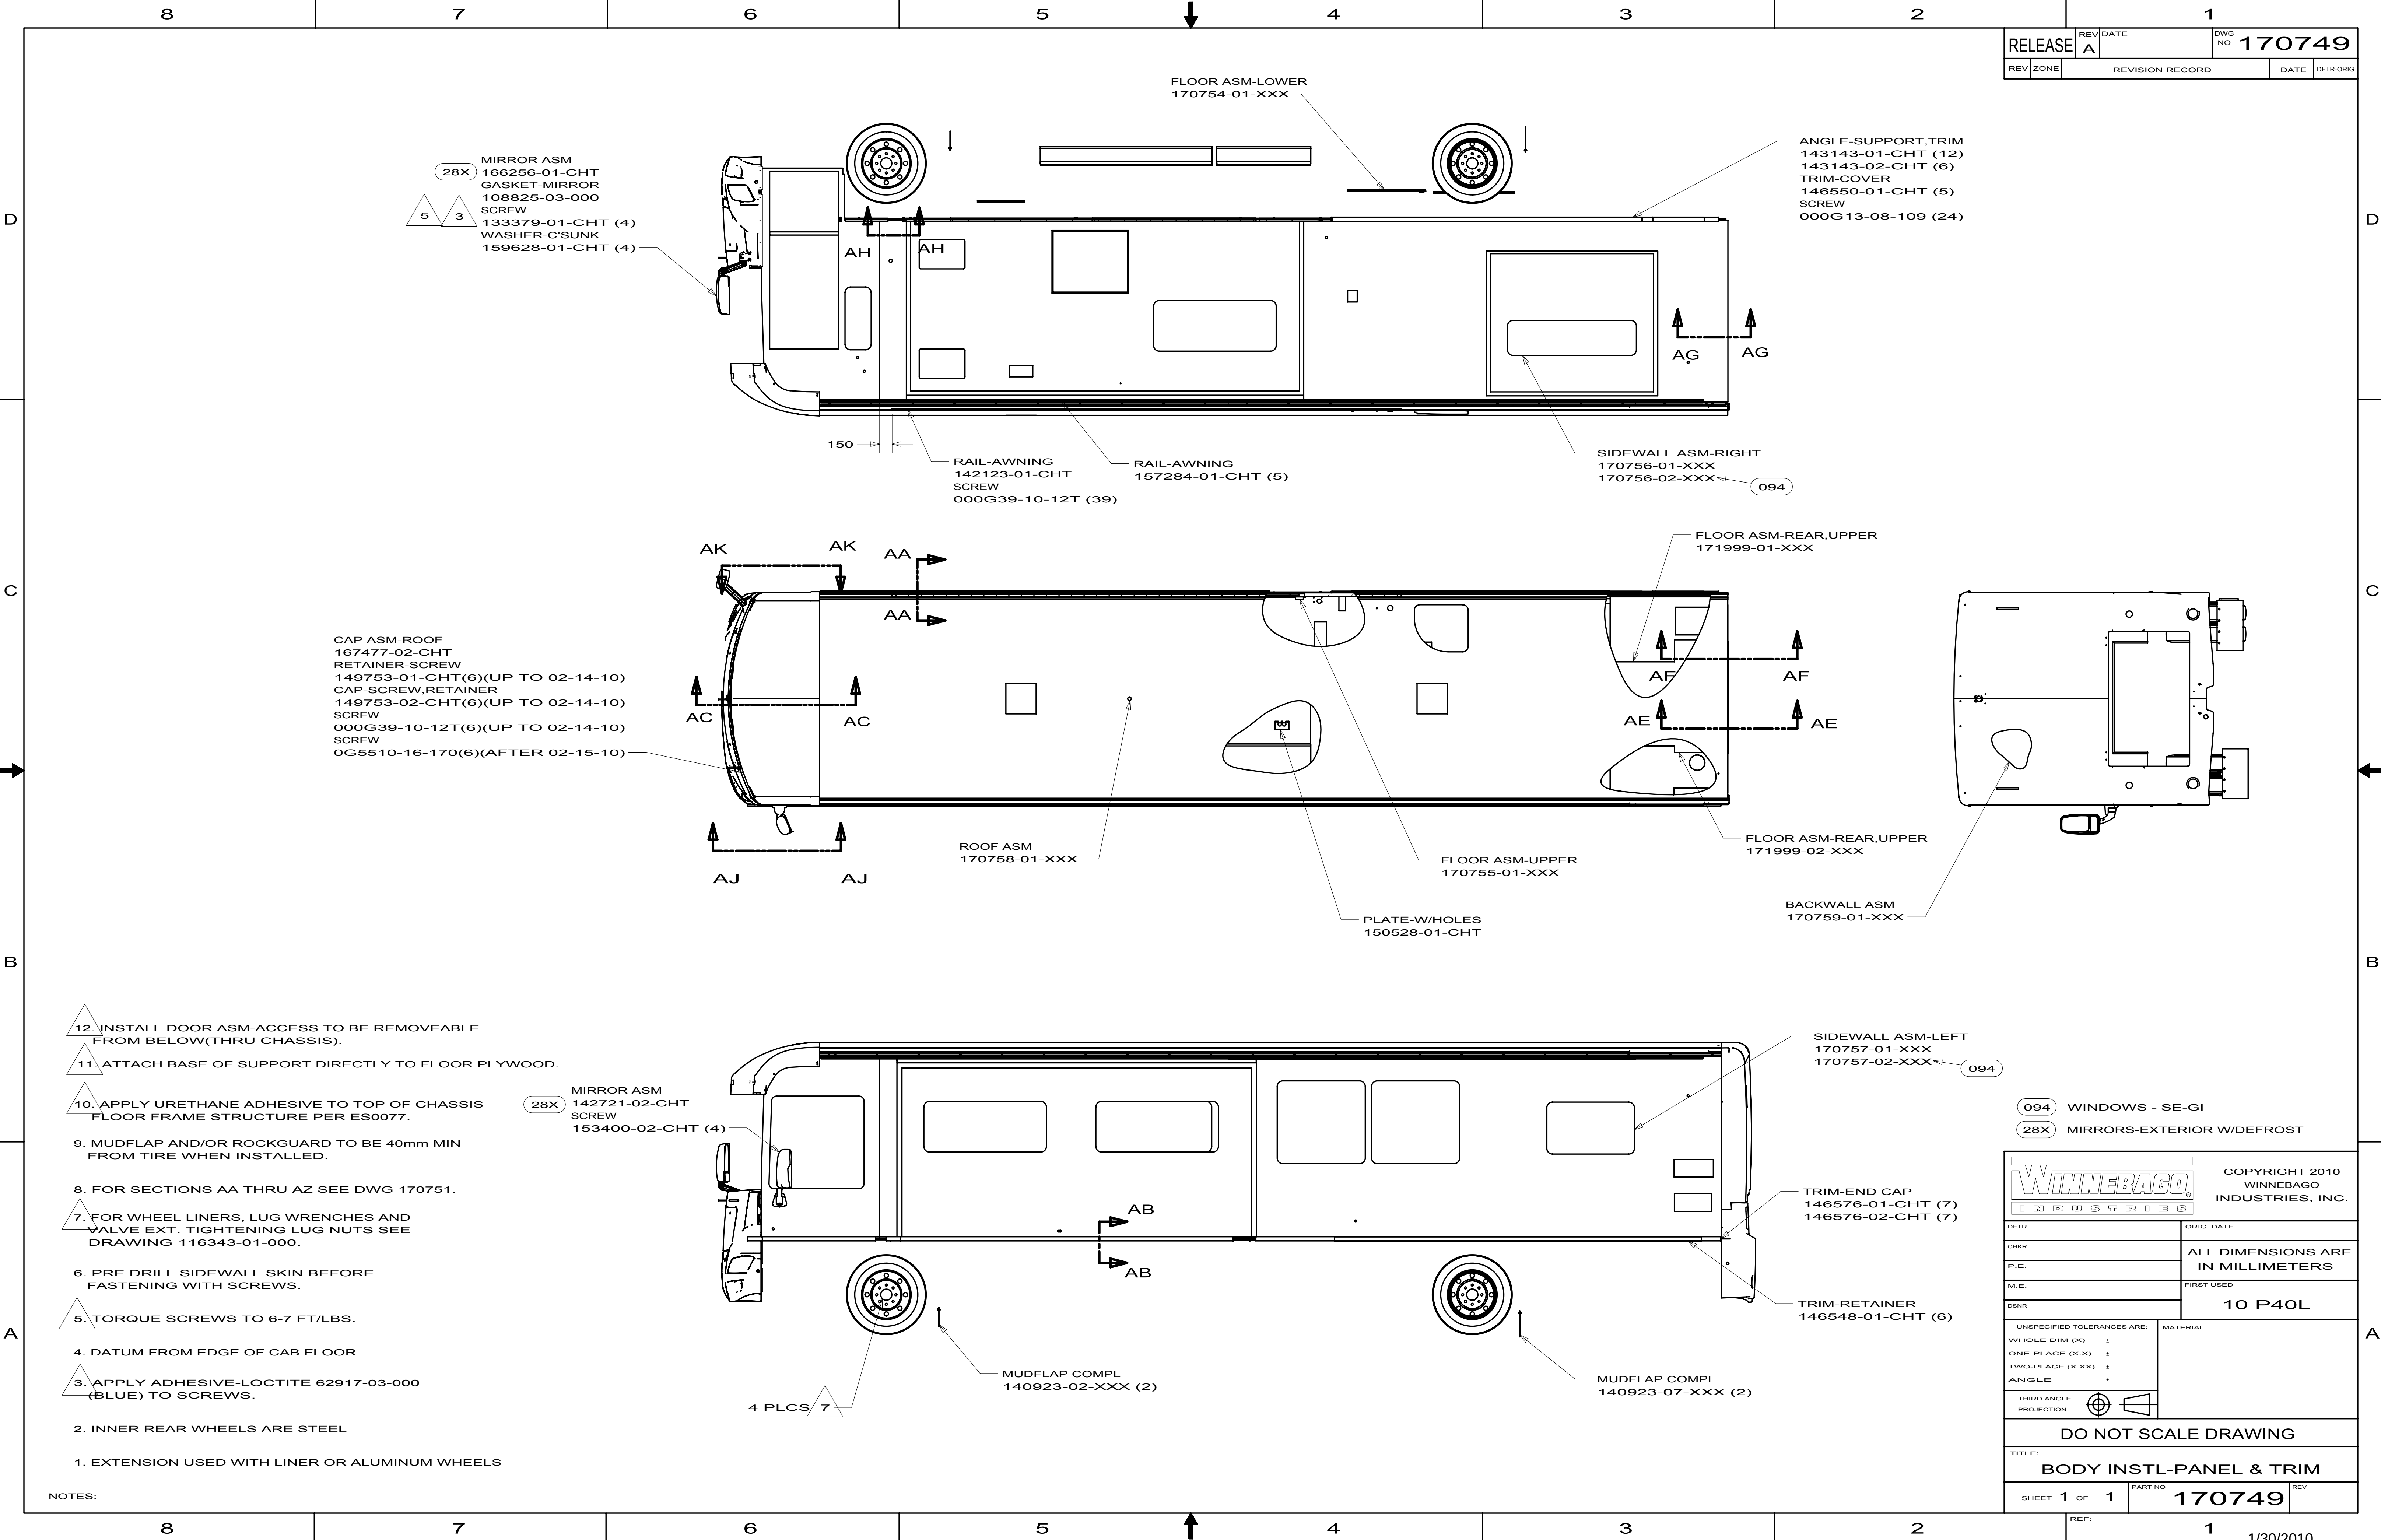

MIRROR ASM
166256-01-CHT
GASKET-MIRROR
108825-03-000
SCREW
133379-01-CHT (4)
WASHER-C'SUNK
159628-01-CHT (4)

FLOOR ASM-LOWER
170754-01-XXX

ANGLE-SUPPORT,TRIM
143143-01-CHT (12)
143143-02-CHT (6)
TRIM-COVER
146550-01-CHT (5)
SCREW
000G13-08-109 (24)

RAIL-AWNING
142123-01-CHT
SCREW
000G39-10-12T (39)

RAIL-AWNING
157284-01-CHT (5)

SIDEWALL ASM-RIGHT
170756-01-XXX
170756-02-XXX

094

CAP ASM-ROOF
167477-02-CHT
RETAINER-SCREW
149753-01-CHT(6)(UP TO 02-14-10)
CAP-SCREW,RETAINER
149753-02-CHT(6)(UP TO 02-14-10)
SCREW
000G39-10-12T(6)(UP TO 02-14-10)
SCREW
0G5510-16-170(6)(AFTER 02-15-10)

FLOOR ASM-REAR,UPPER
171999-01-XXX

AF
AE

FLOOR ASM-REAR,UPPER
171999-02-XXX

ROOF ASM
170758-01-XXX

FLOOR ASM-UPPER
170755-01-XXX

PLATE-W/HOLES
150528-01-CHT

BACKWALL ASM
170759-01-XXX

12. INSTALL DOOR ASM-ACCESS TO BE REMOVEABLE FROM BELOW(THRU CHASSIS).

11. ATTACH BASE OF SUPPORT DIRECTLY TO FLOOR PLYWOOD.

10. APPLY URETHANE ADHESIVE TO TOP OF CHASSIS FLOOR FRAME STRUCTURE PER ES0077.

9. MUDFLAP AND/OR ROCKGUARD TO BE 40mm MIN FROM TIRE WHEN INSTALLED.

8. FOR SECTIONS AA THRU AZ SEE DWG 170751.

7. FOR WHEEL LINERS, LUG WRENCHES AND VALVE EXT. TIGHTENING LUG NUTS SEE DRAWING 116343-01-000.

6. PRE DRILL SIDEWALL SKIN BEFORE FASTENING WITH SCREWS.

5. TORQUE SCREWS TO 6-7 FT/LBS.

4. DATUM FROM EDGE OF CAB FLOOR

3. APPLY ADHESIVE-LOCTITE 62917-03-000 (BLUE) TO SCREWS.

2. INNER REAR WHEELS ARE STEEL

1. EXTENSION USED WITH LINER OR ALUMINUM WHEELS

MIRROR ASM
142721-02-CHT
SCREW
153400-02-CHT (4)

SIDEWALL ASM-LEFT
170757-01-XXX
170757-02-XXX

094


TRIM-END CAP
146576-01-CHT (7)
146576-02-CHT (7)

TRIM-RETAINER
146548-01-CHT (6)

MUDFLAP COMPL
140923-02-XXX (2)

MUDFLAP COMPL
140923-07-XXX (2)

094 WINDOWS - SE-GI
28X MIRRORS-EXTERIOR W/DEFROST

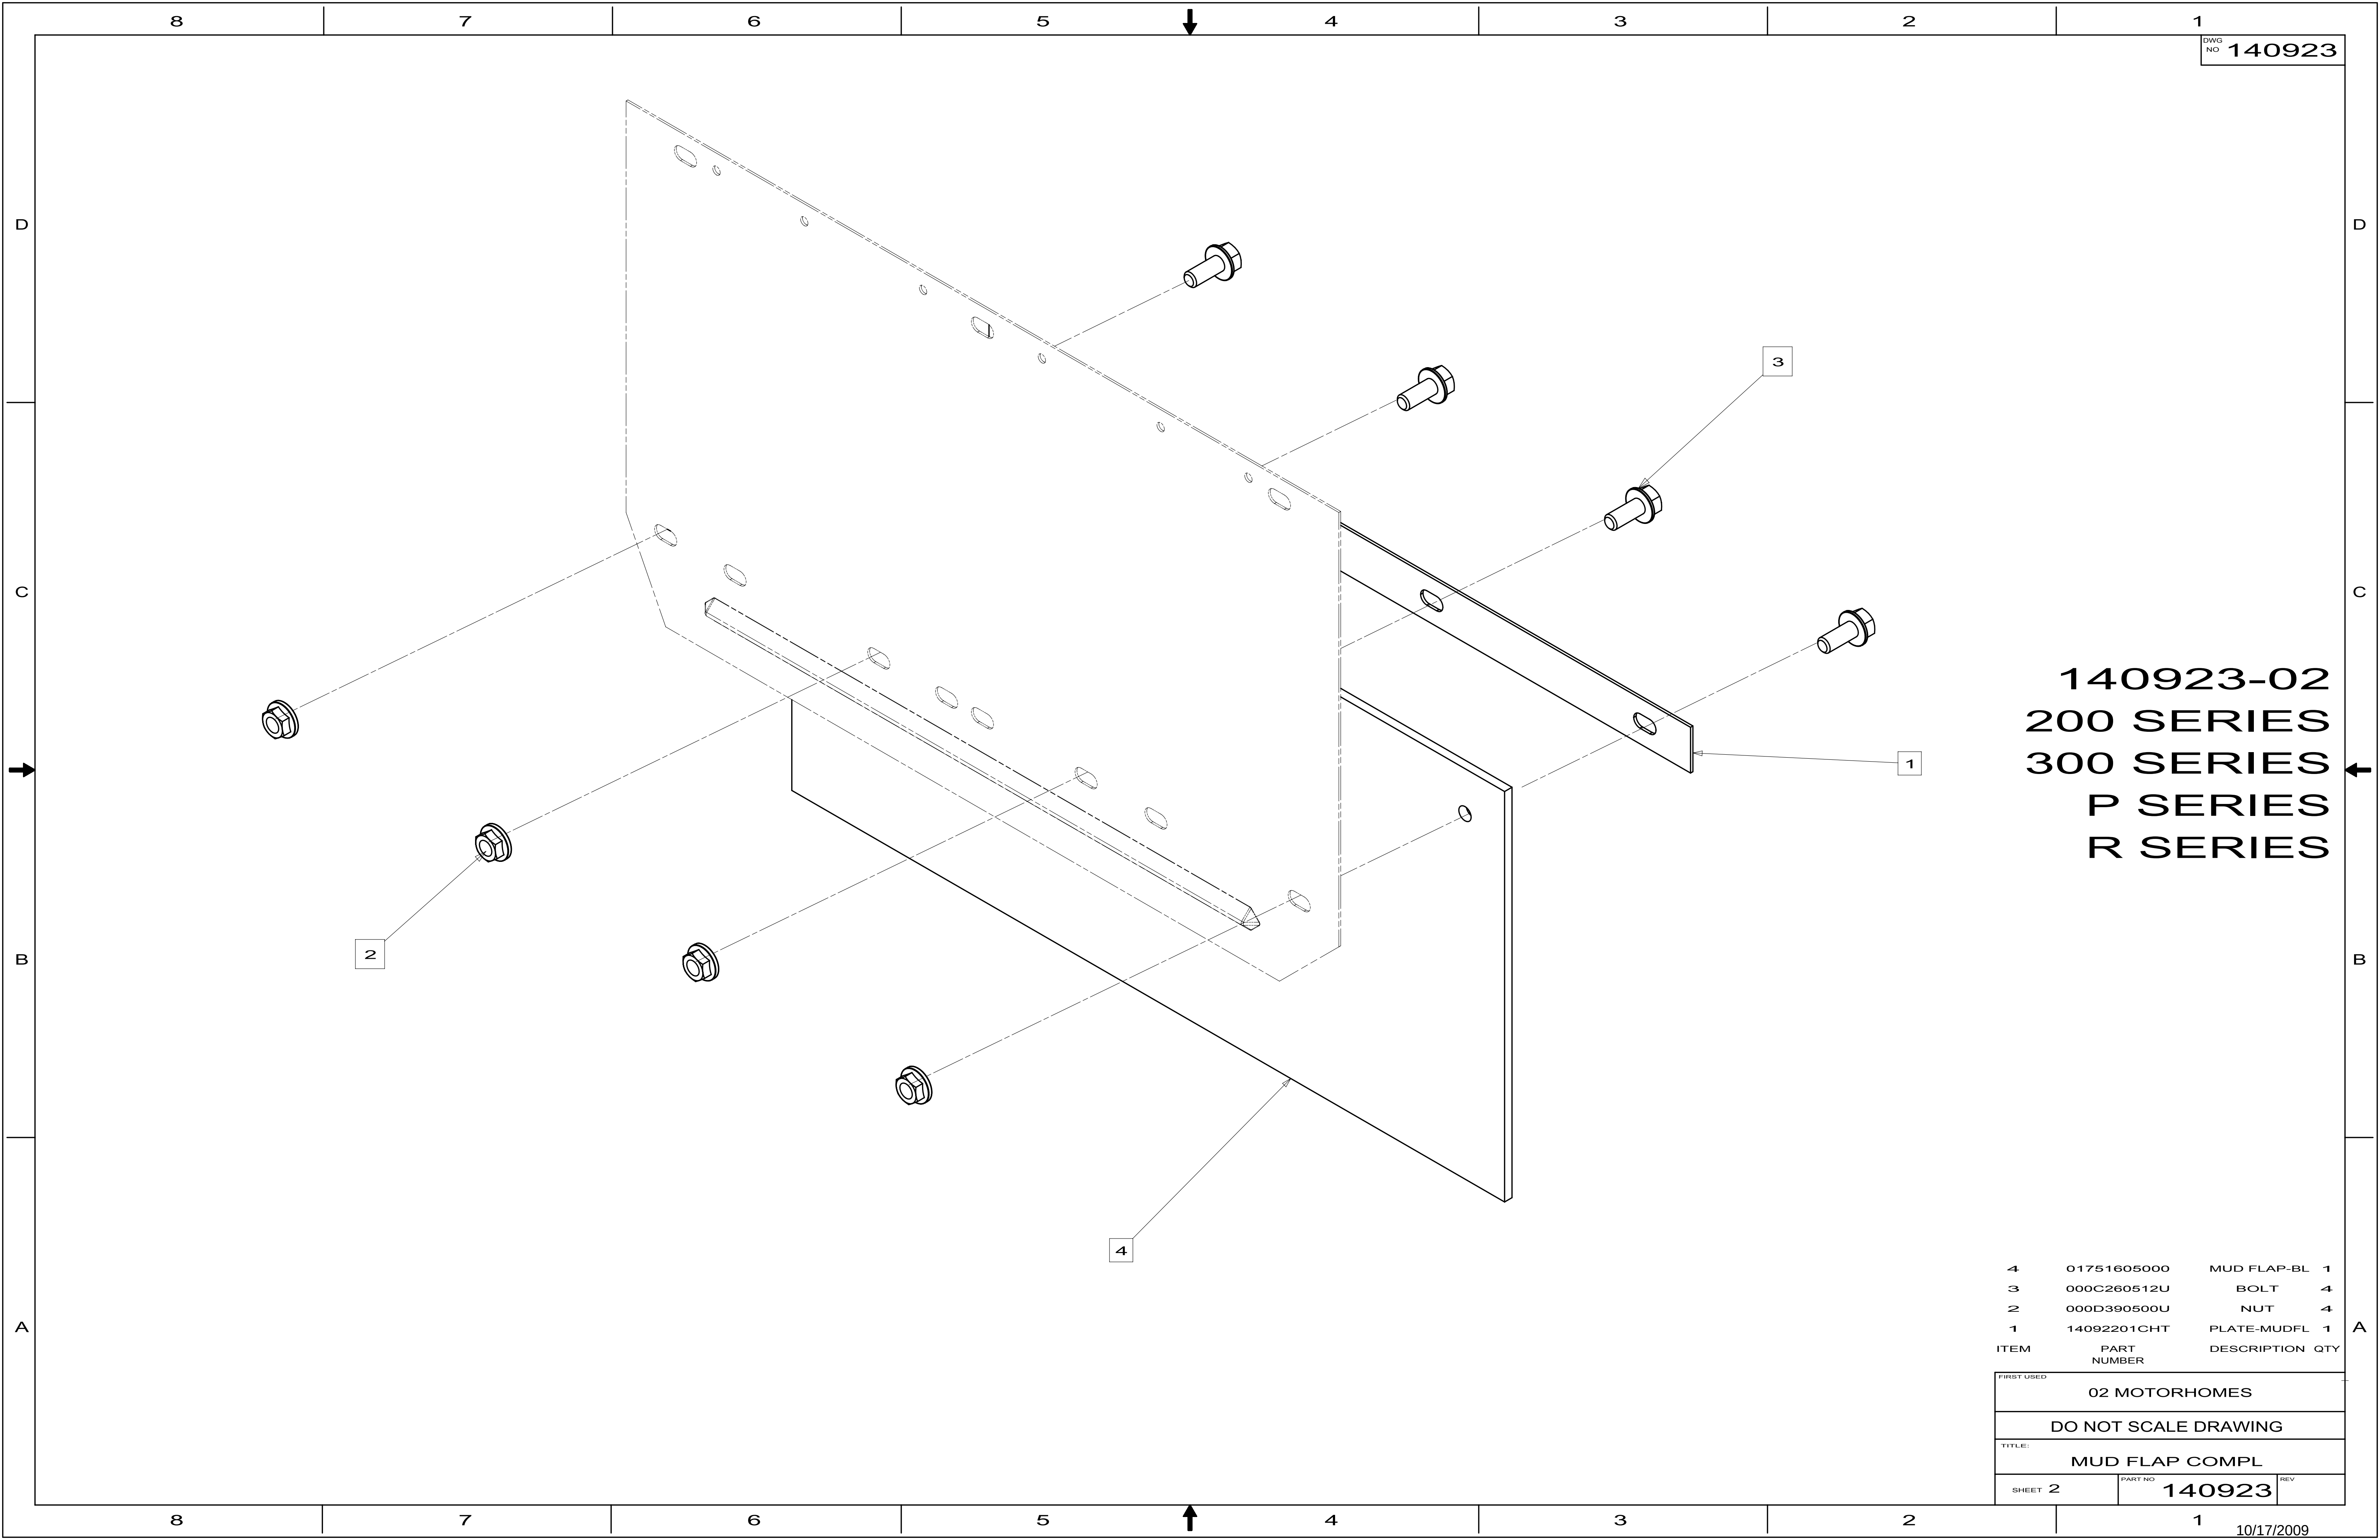


DWG
NO 140923

140923-02
200 SERIES
300 SERIES
P SERIES
R SERIES

4	01751605000	MUD FLAP-BL	1
3	000C260512U	BOLT	4
2	000D390500U	NUT	4
1	14092201CHT	PLATE-MUDFL	1
ITEM	PART NUMBER	DESCRIPTION	QTY

FIRST USED			02 MOTORHOMES
DO NOT SCALE DRAWING			
TITLE:			MUD FLAP COMPL
SHEET 2	PART NO	140923	REV



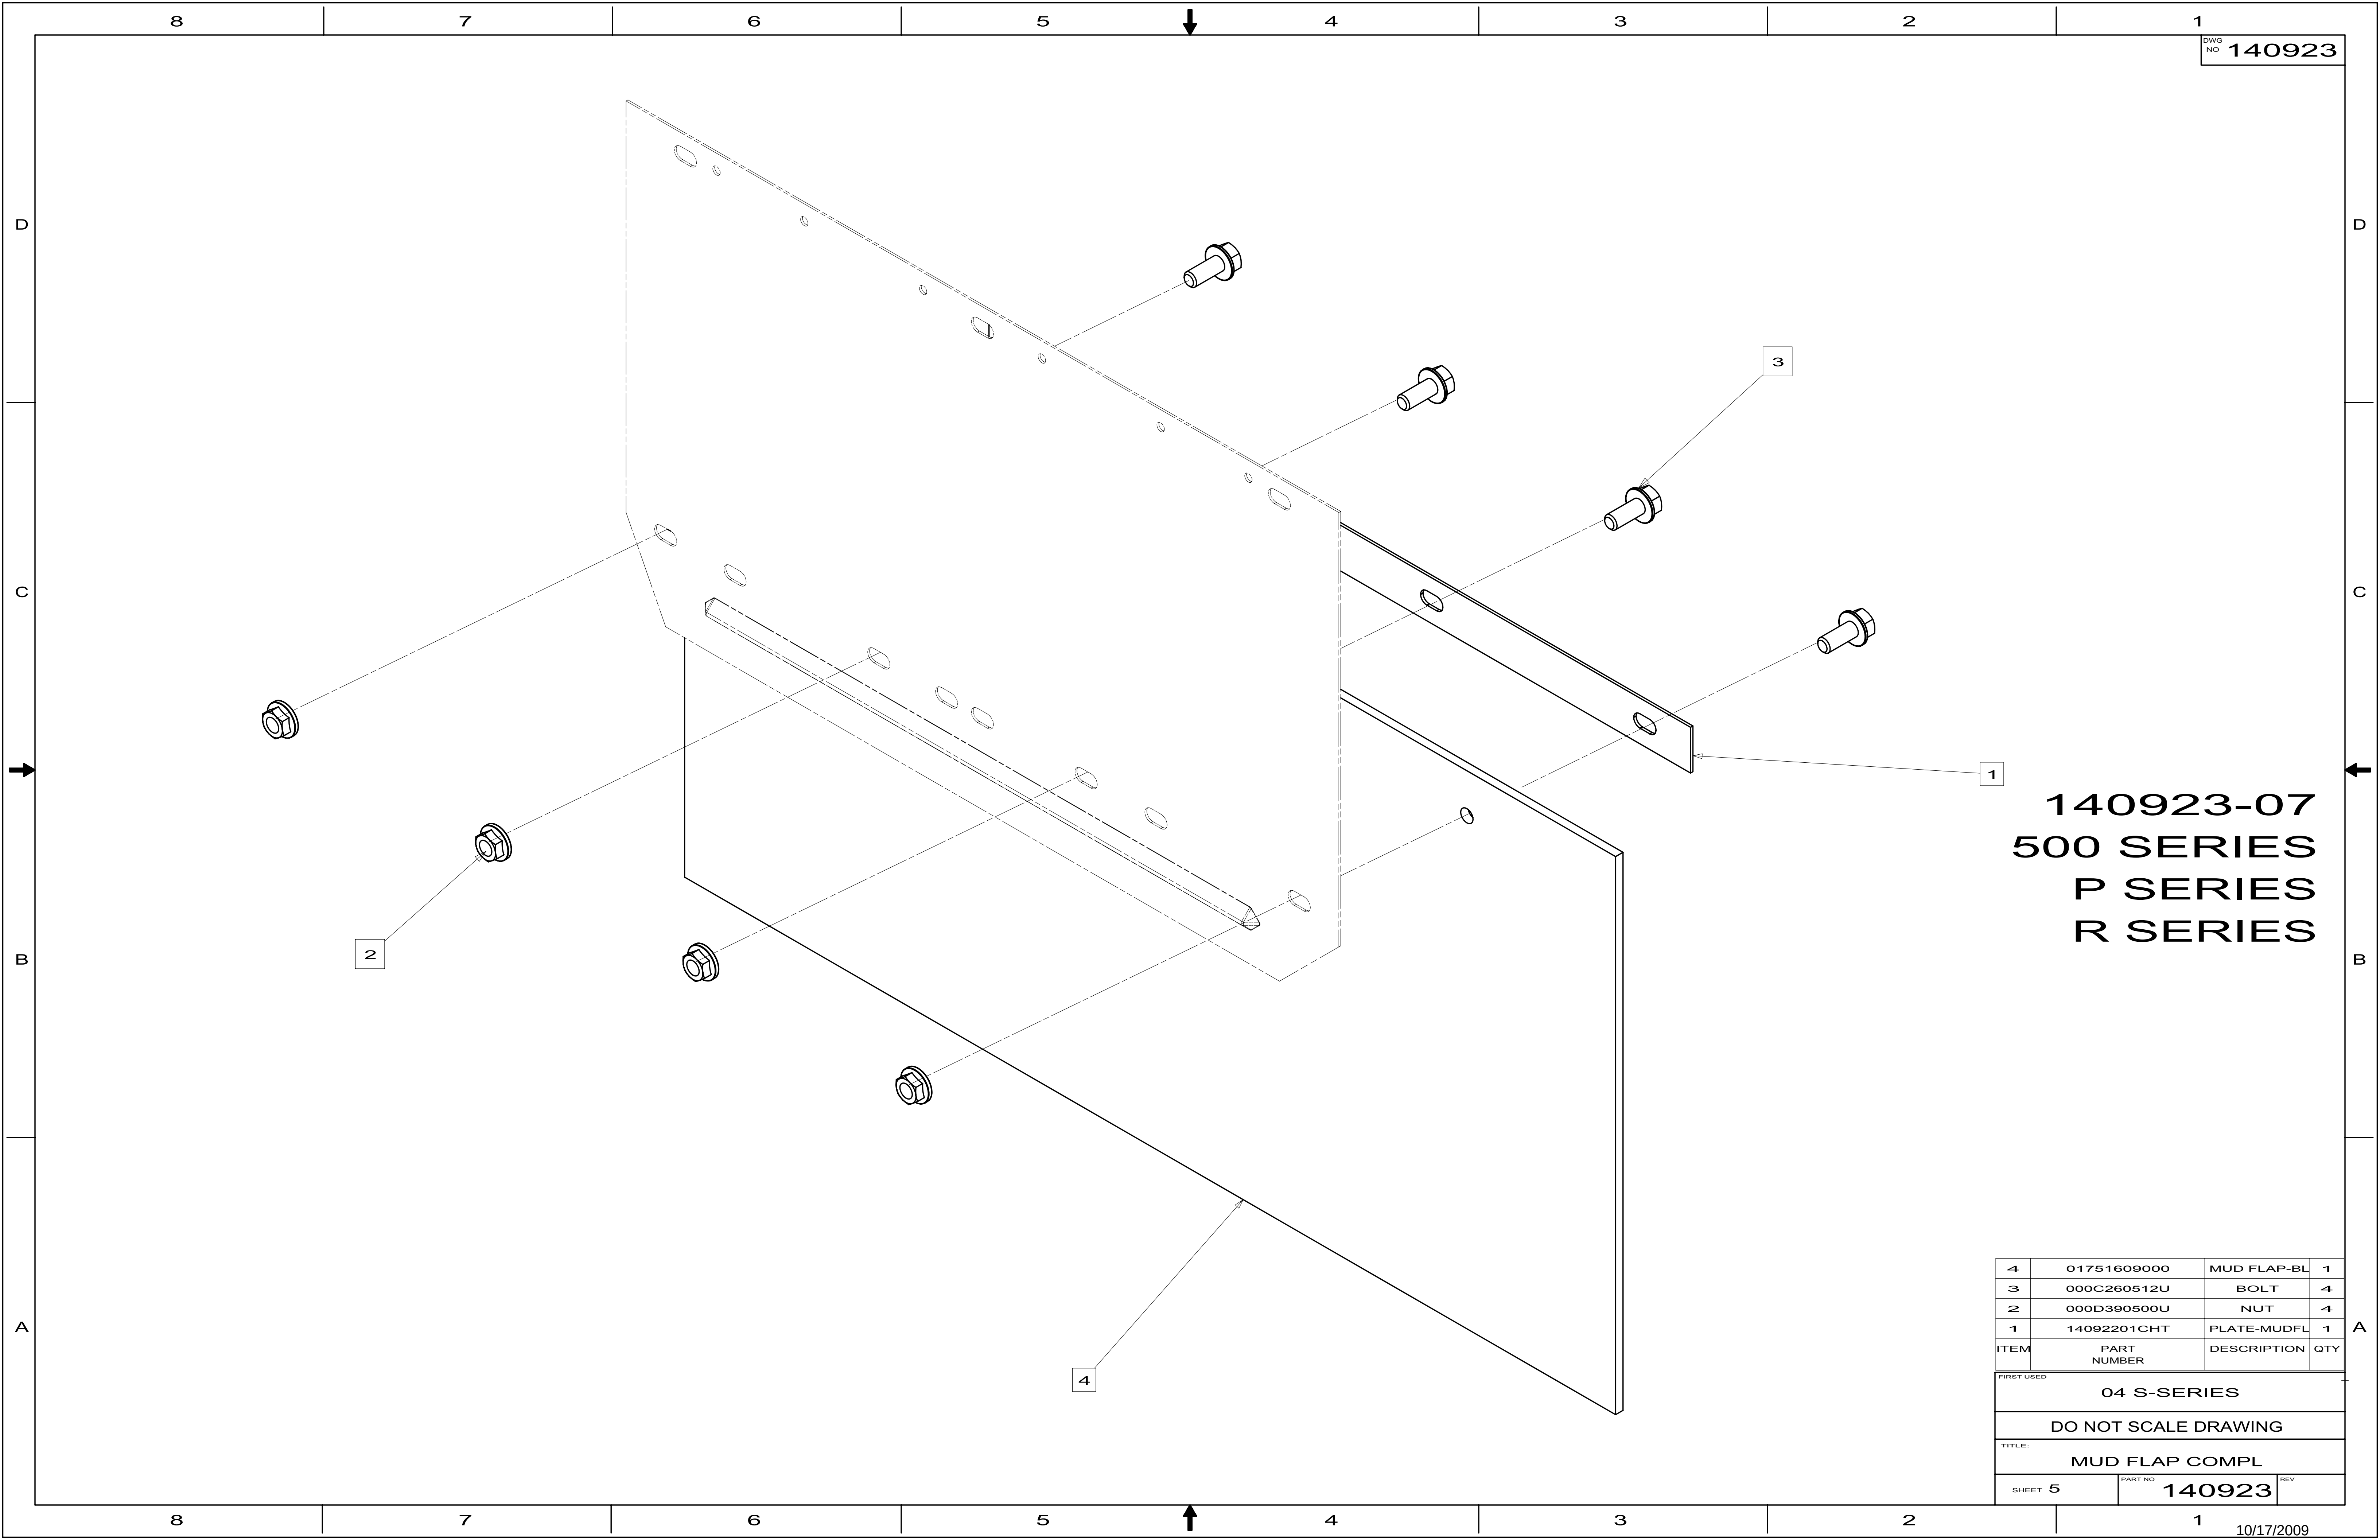


140923-07
500 SERIES
P SERIES
R SERIES

4	01751609000	MUD FLAP-BL	1
3	000C260512U	BOLT	4
2	000D390500U	NUT	4
1	14092201CHT	PLATE-MUDFL	1
ITEM	PART NUMBER	DESCRIPTION	QTY
FIRST USED			
04 S-SERIES			
DO NOT SCALE DRAWING			
TITLE:			
MUD FLAP COMPL			
SHEET 5	PART NO 140923	REV	

KEY	PART NUMBER	U/M	DESCRIPTION	142721-01-02A, 142721-02-02A
				VENDOR NO.
	106015-16-700	EA	GLASS/FLAT-W/HEAT ELEMENT	709450
	106015-18-700	EA	GLASS/CONVEX	709650
	106015-18-701	EA	ACTUATOR - CONVEX GLASS	7475410
	106015-18-702	EA	MOTOR - FLAT GLASS	7471180
	106015-18-703	EA	GLASS/CONVEX-ACT/HOUSING	709651 KIT
	131431-03-700	EA	LIGHT/TURN SIGNAL - AMBER	7475510
	142721-01-700	EA	COVER/CAP - BOTTOM	Q709678
	142721-01-701	EA	CAP - RECTANGULAR (VELVAC)	709557
	142721-01-702	EA	BRACKET/MOUNT - MIRROR	7096800
	142721-01-703	EA	GASKET/MOUNT - MIRROR	7097400
	142721-01-704	EA	SET SCREW - 5/16"-18 X 1.25"	4082140


166256-01-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	106015-16-700	EA GLASS/FLAT-W/HEAT ELEMENT	709450
	106015-18-700	EA GLASS/CONVEX	709650
	106105-18-703	EA GLASS/CONVEX-ACT/HOUSING	709651 KIT
	131431-03-700	EA LIGHT/TURN SIGNAL - AMBER	7475510
	131431-07-700	EA KIT(SCREW CVR BLK)ROUND/OVAL	748344
	131431-08-700	EA CAP/BASE - BLK - 1 PKG OF 2	Q7095150
	166256-01-700	EA MOTOR	747673

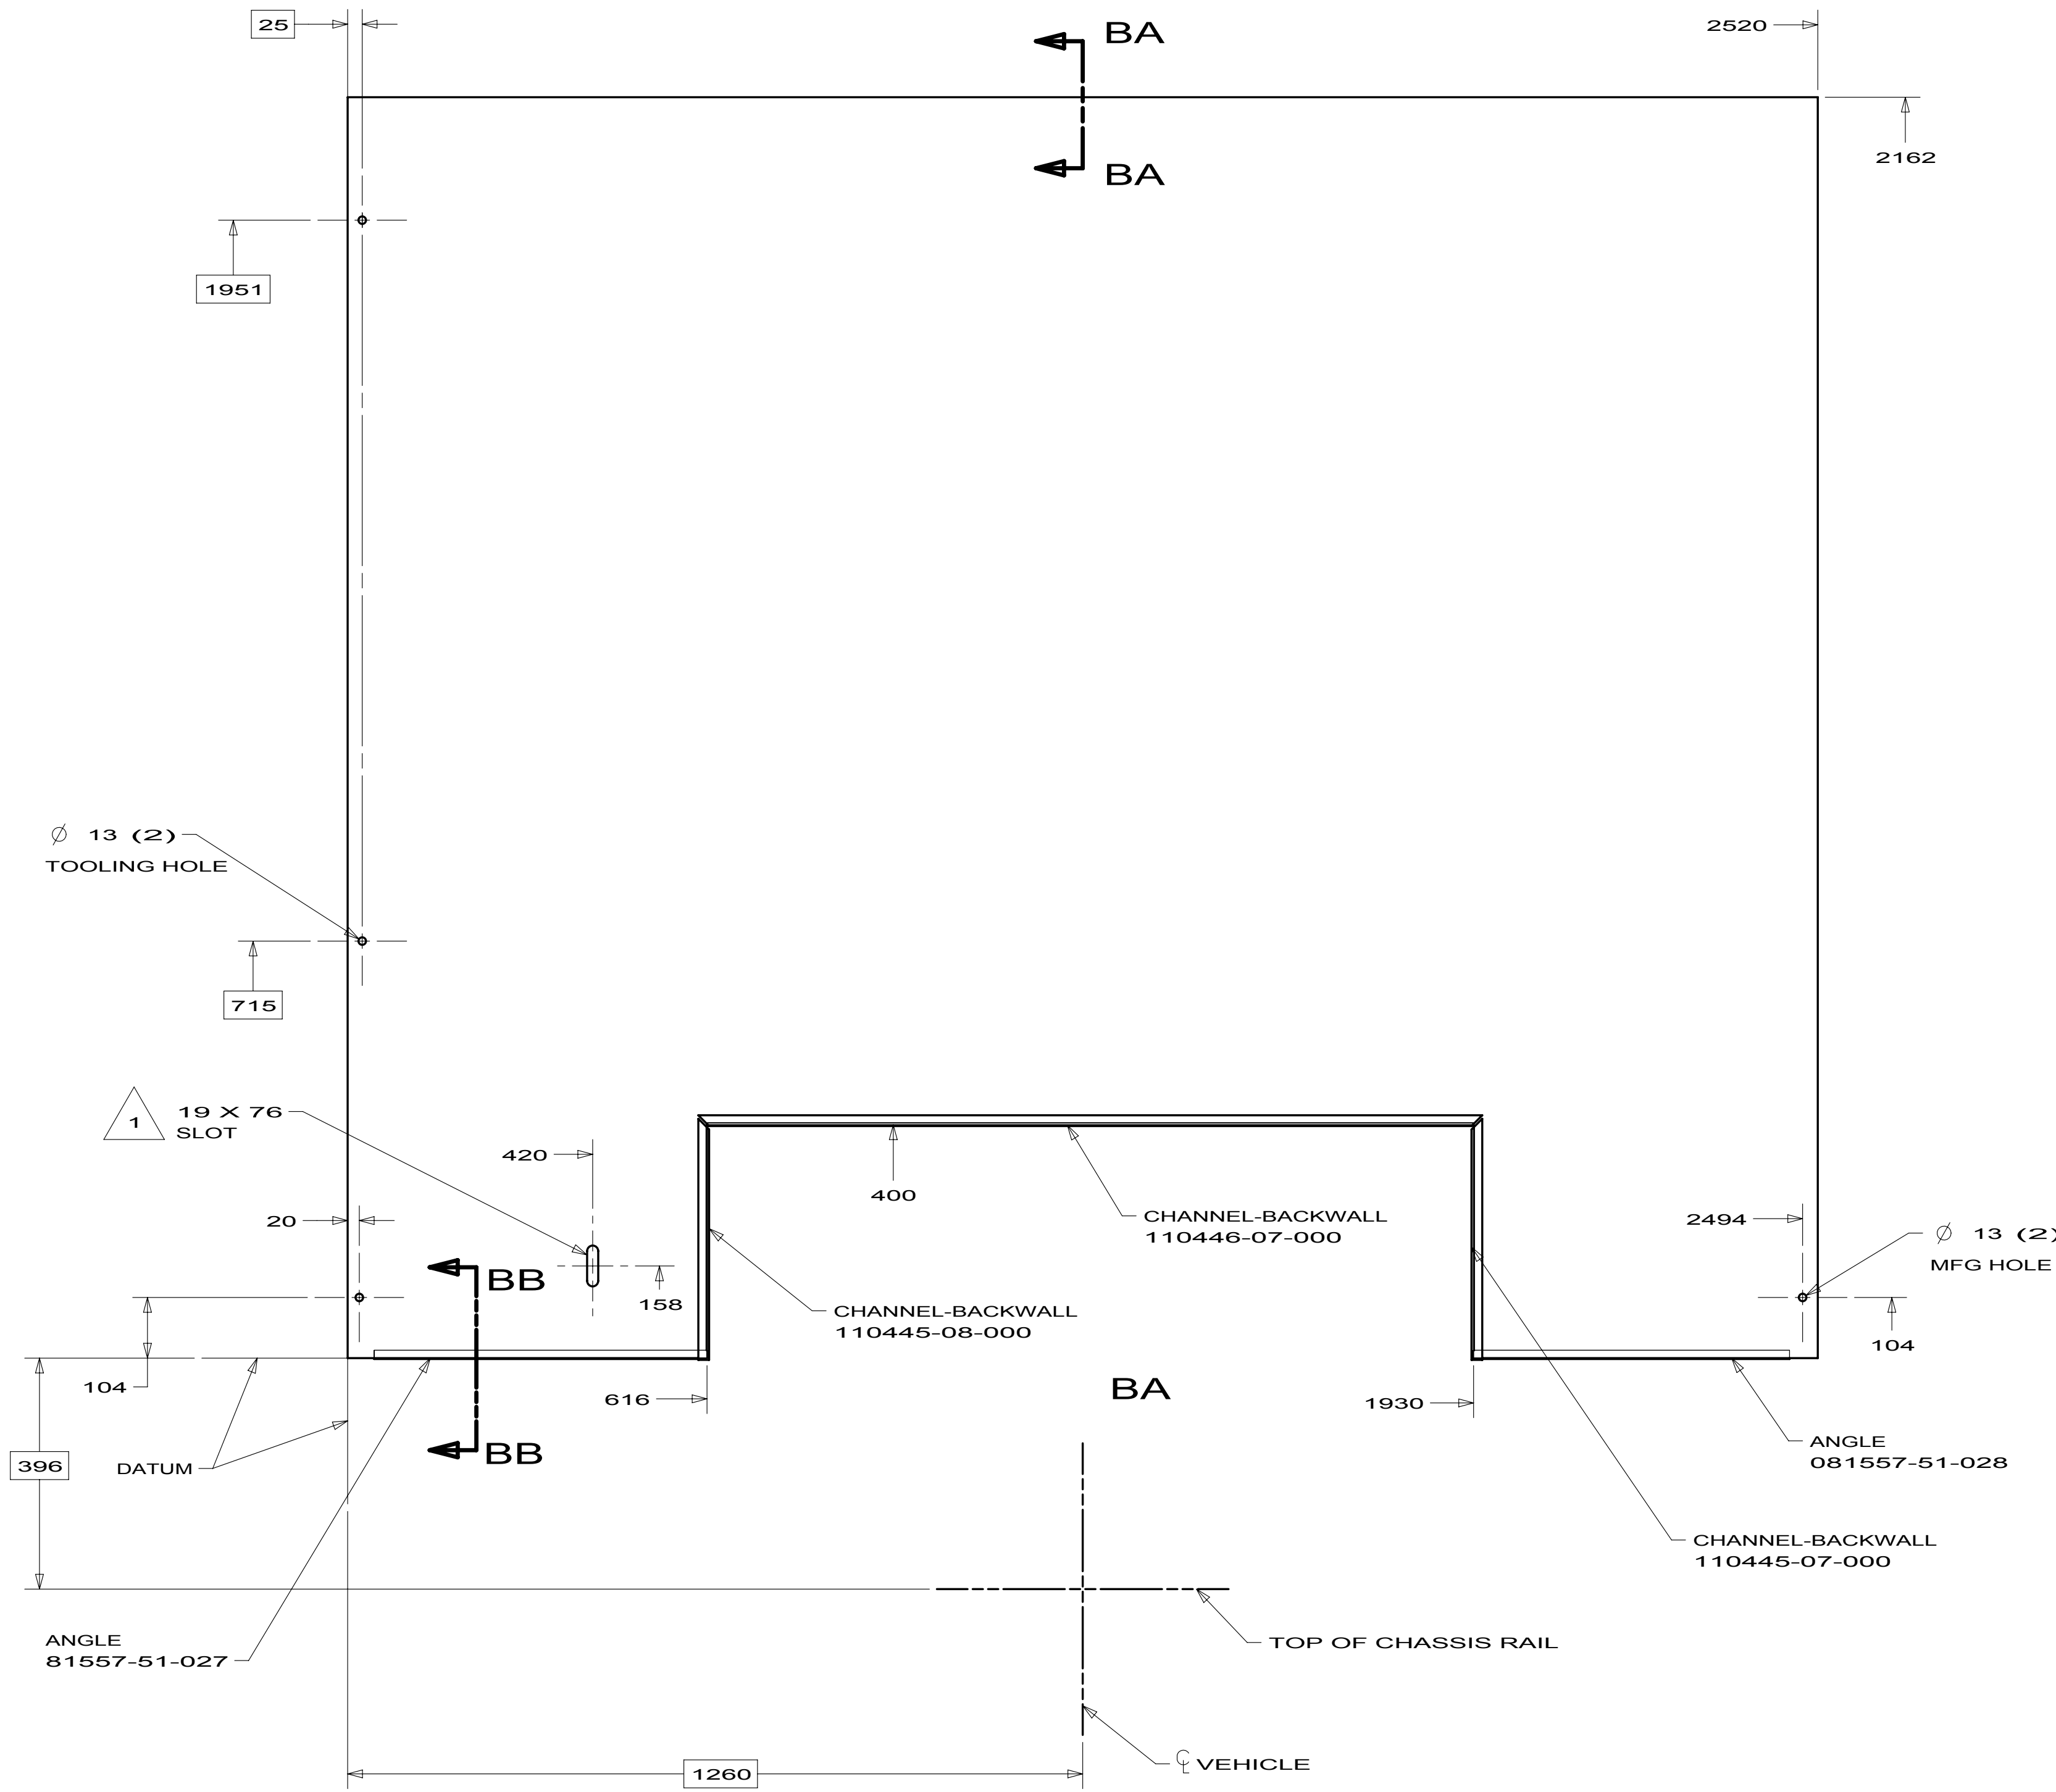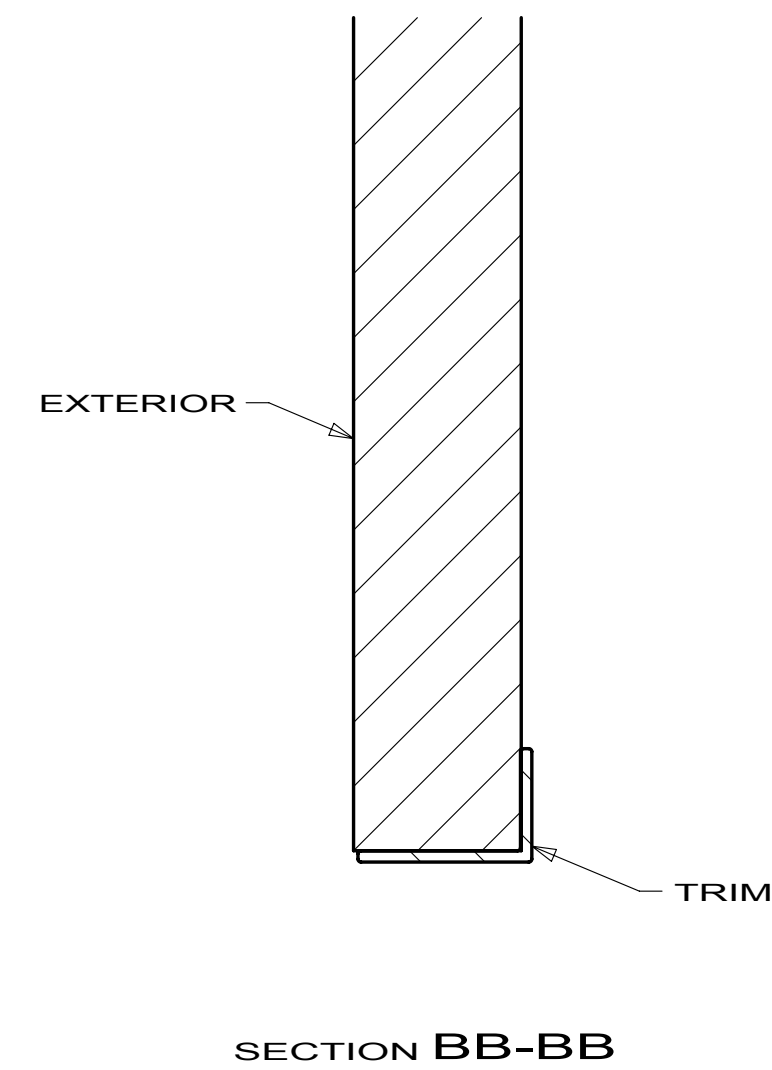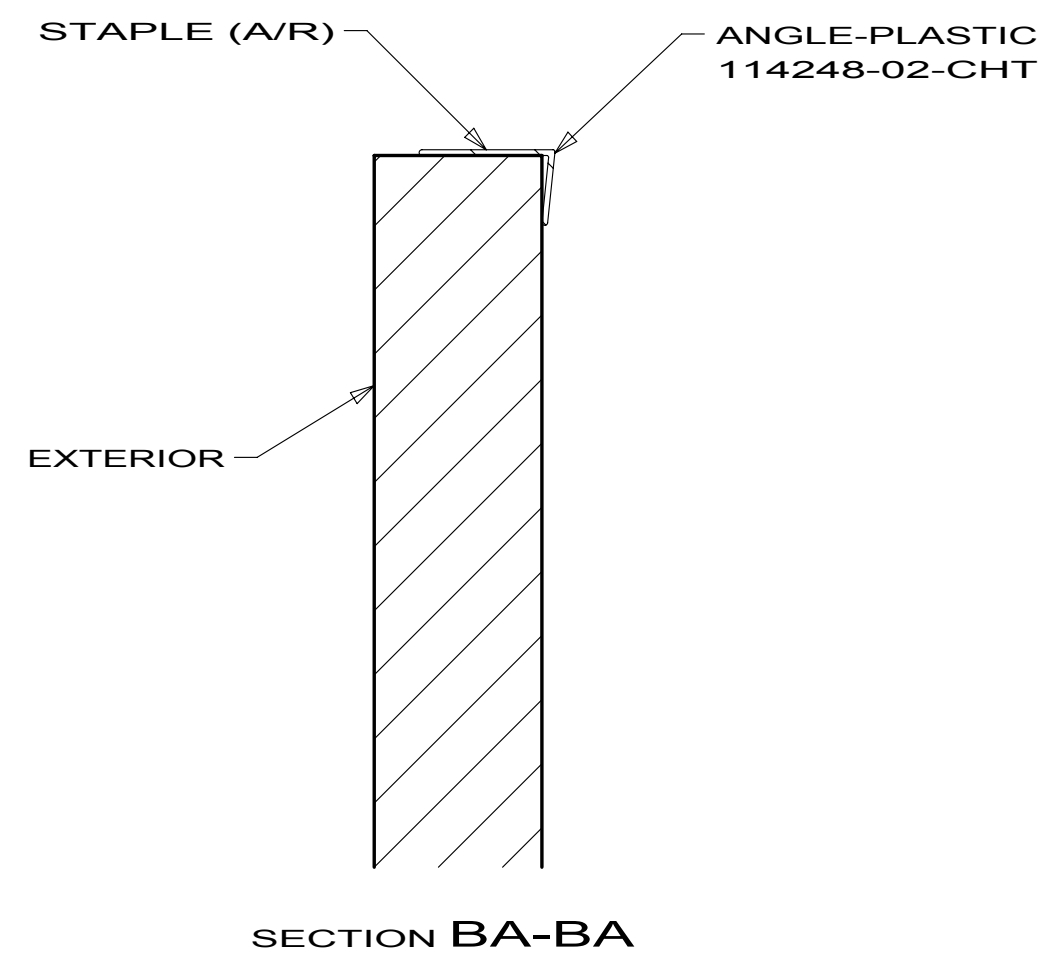

1. THRU EXTERIOR SURFACE AND FOAM.

FIRST USED			10 P40T
DO NOT SCALE DRAWING			
TITLE:			BACKWALL ASM
SHEET 1	PART NO	173198	REV

PANEL ASM-REAR CAP
159018-03-AB0

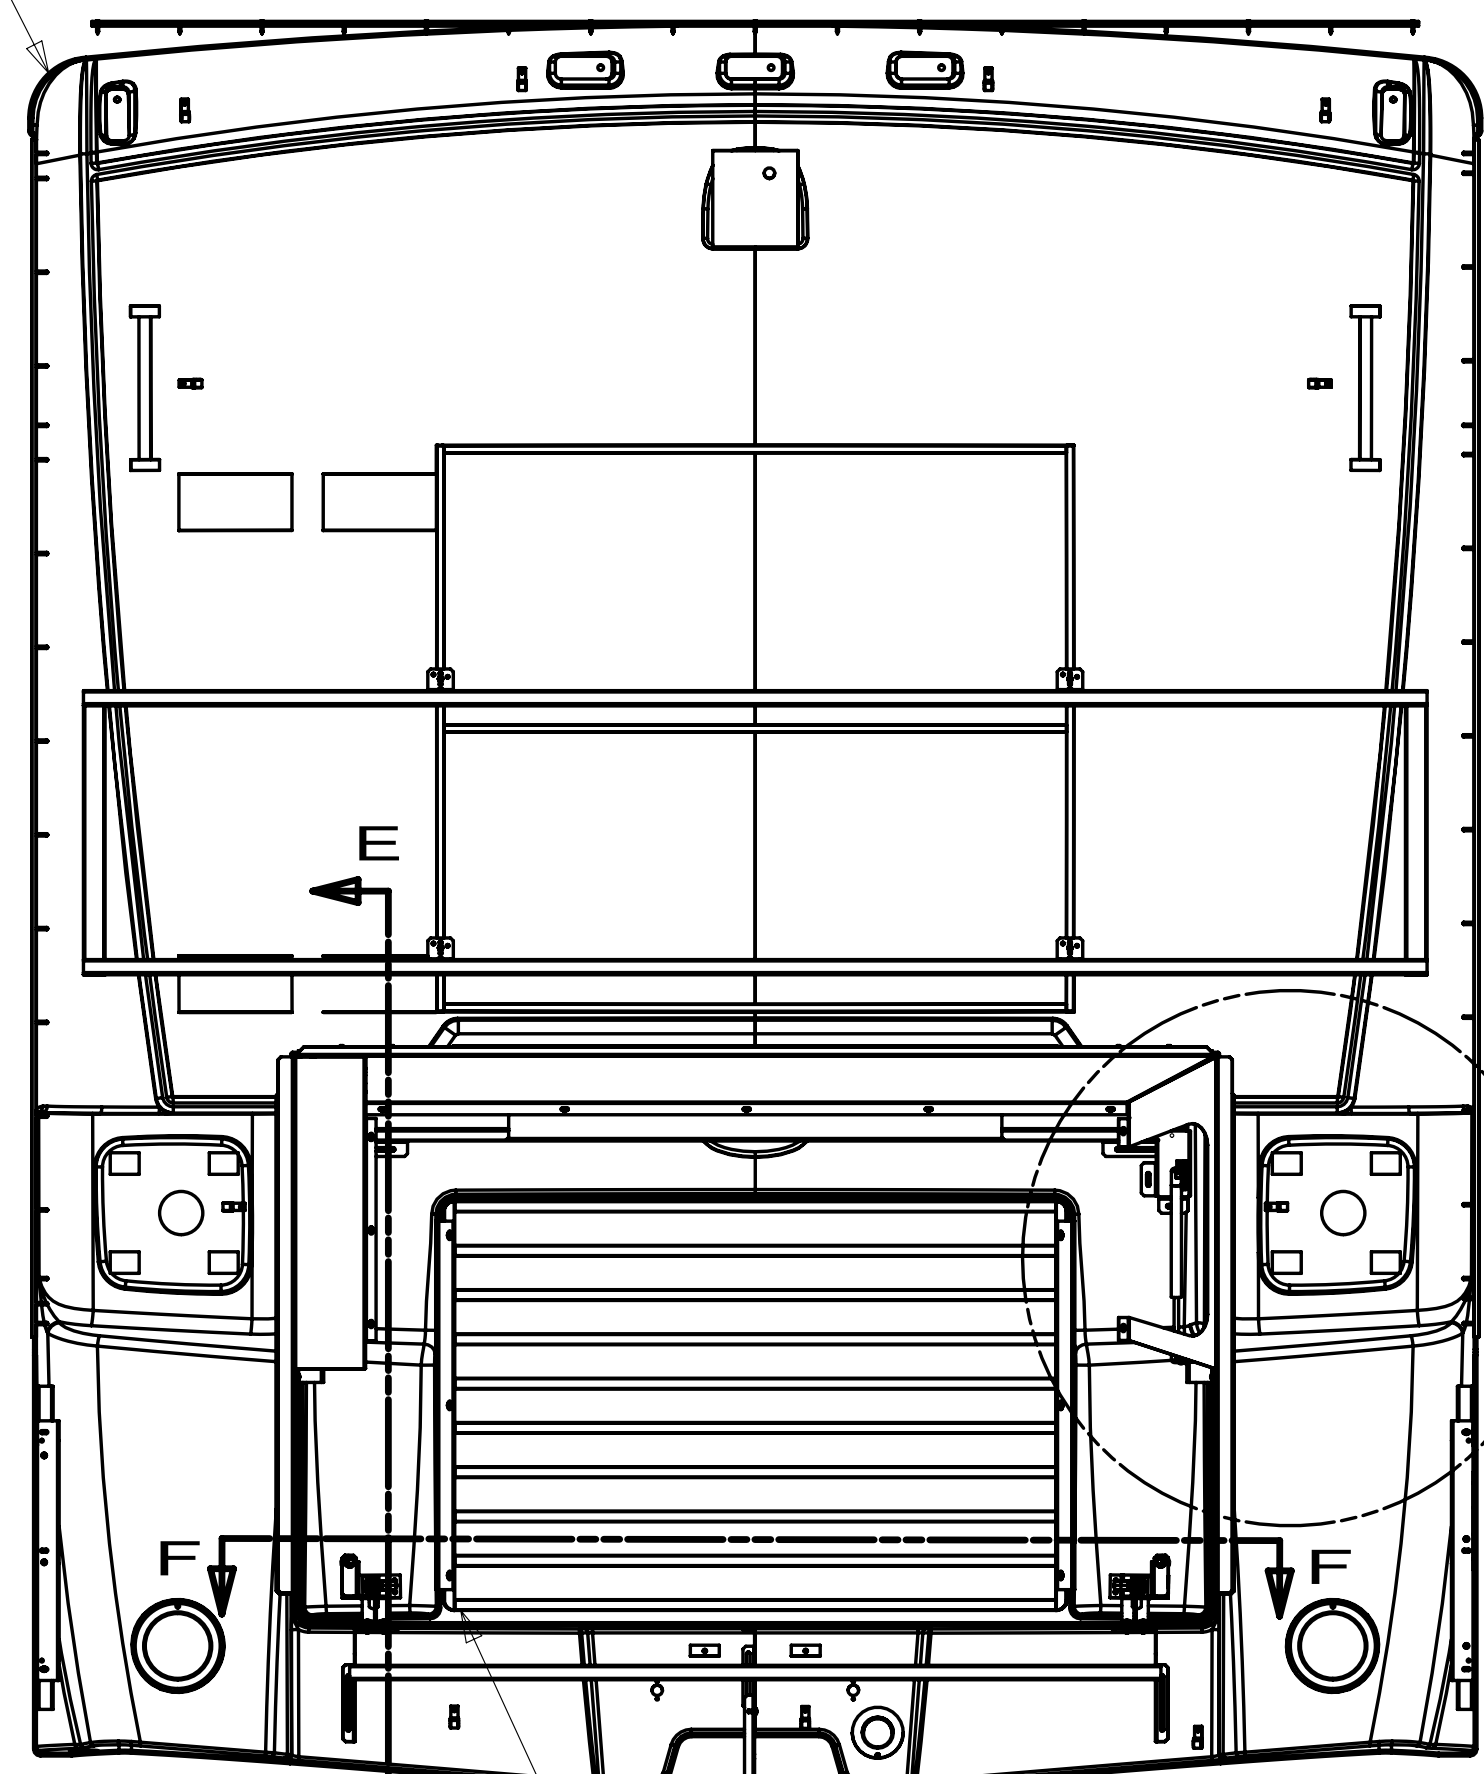

DOOR COMPL-REAR ENGINE
159019-02-WD3

TRIM-REAR,CAP
092041-01-03A
SCREW
000G62-08-16B (15)
MOLDING-TRIM
091985-01-07A
(REF LENGTH 2112)


SCREW
000G62-08-16B (4)

SHIELD-ENGINE,RH,FRTLNR
161660-04-02B
SCREW
000G39-08-08B (6)

SHIELD-ENGINE,CTR,FRTLNR
161660-05-02B
SCREW
000G39-08-08B (15)

DETAIL G

TRIM-REAR,CAP
174826-02-03A
SCREW
000G12-06-12B (26)

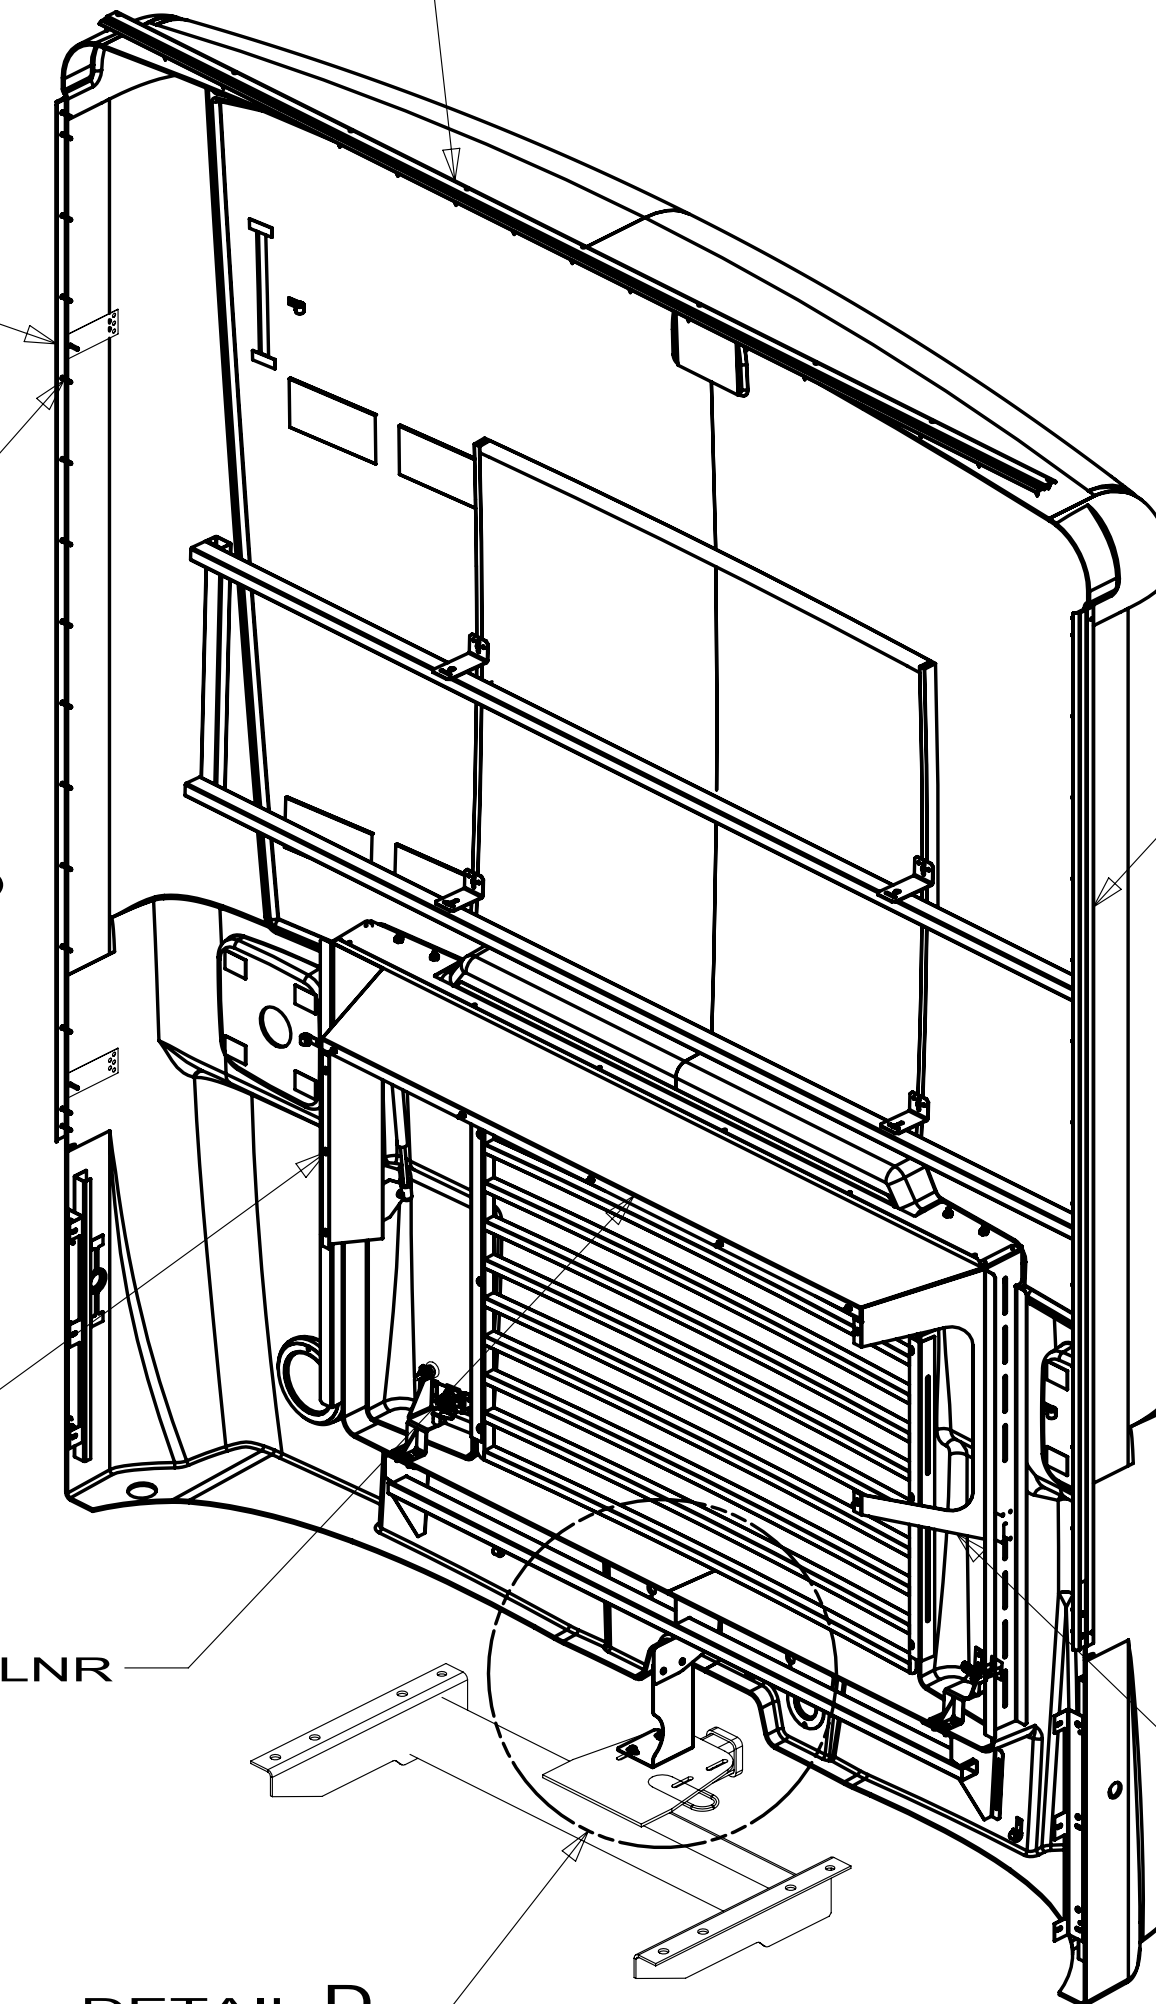

TRIM-REAR,CAP
092041-01-03A
SCREW
000G62-08-16B (15)
MOLDING-TRIM
091985-01-07A
(REF LENGTH 2112)


SHIELD-ENGINE,LH,FRTLNR
161660-06-02B
SCREW
000G39-08-08B (5)

DETAIL D


P40L
P40T

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE:		
REAR CAP INSTL		
SHEET 3	PART NO 162553	REV


P40L
P40T

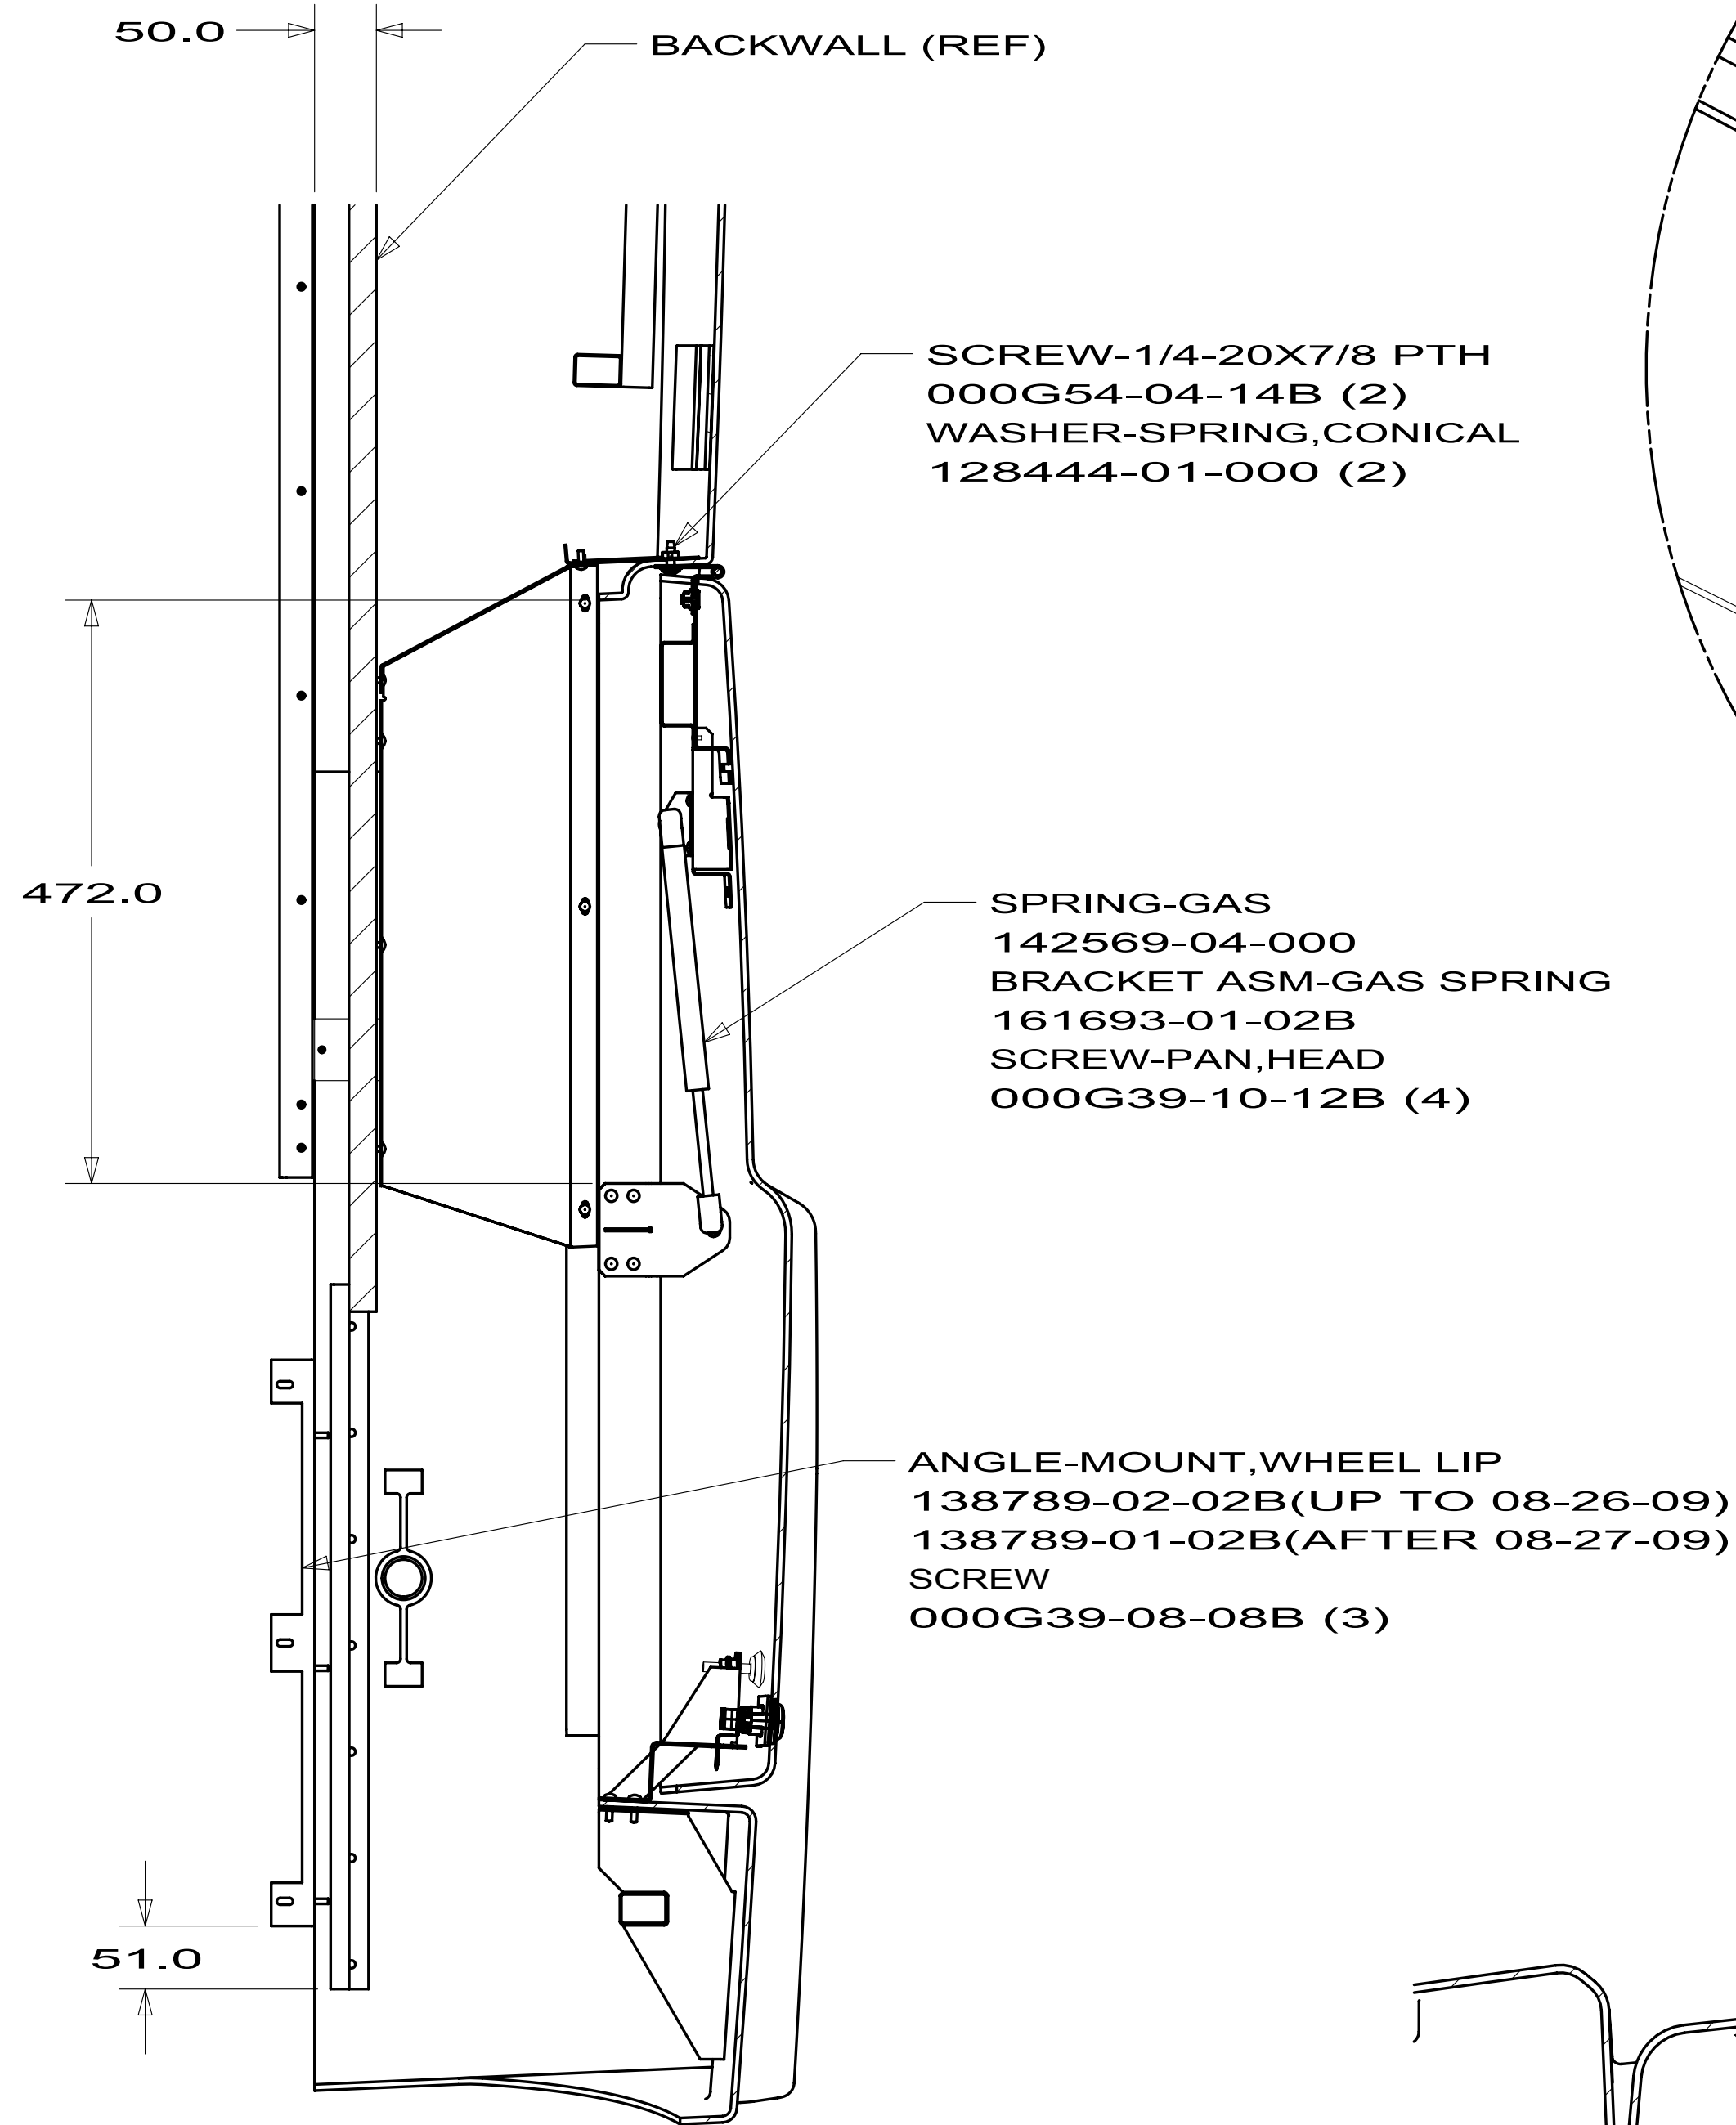


SECTION E-E
(LH OPPOSITE)
(2 PLCS)

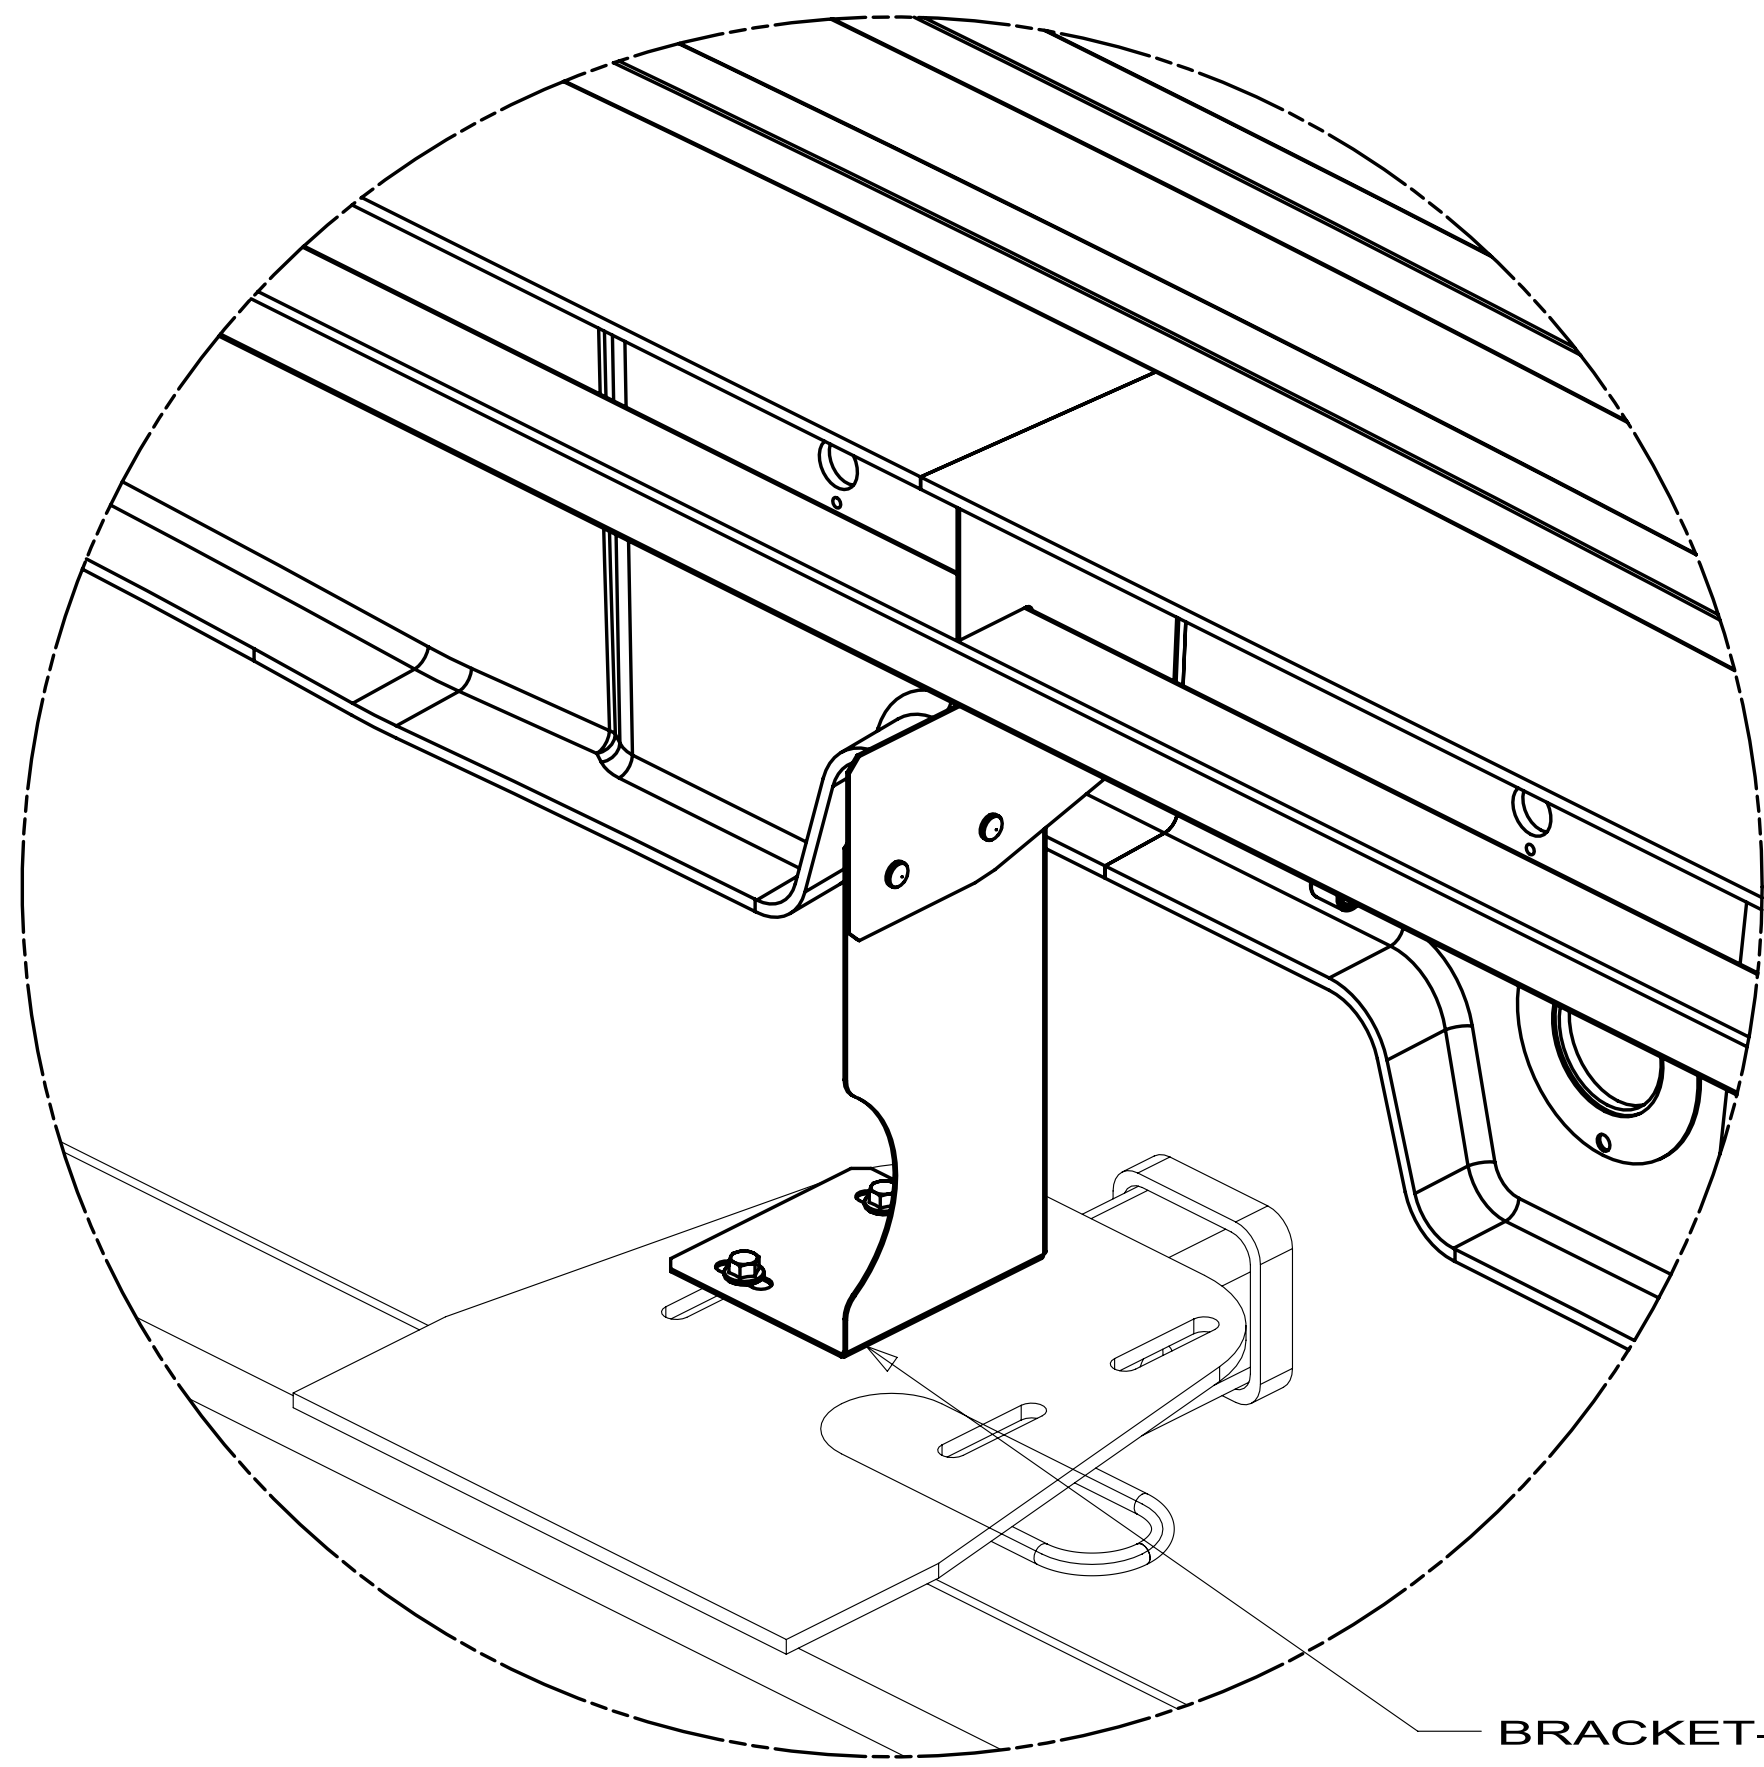

DETAIL D

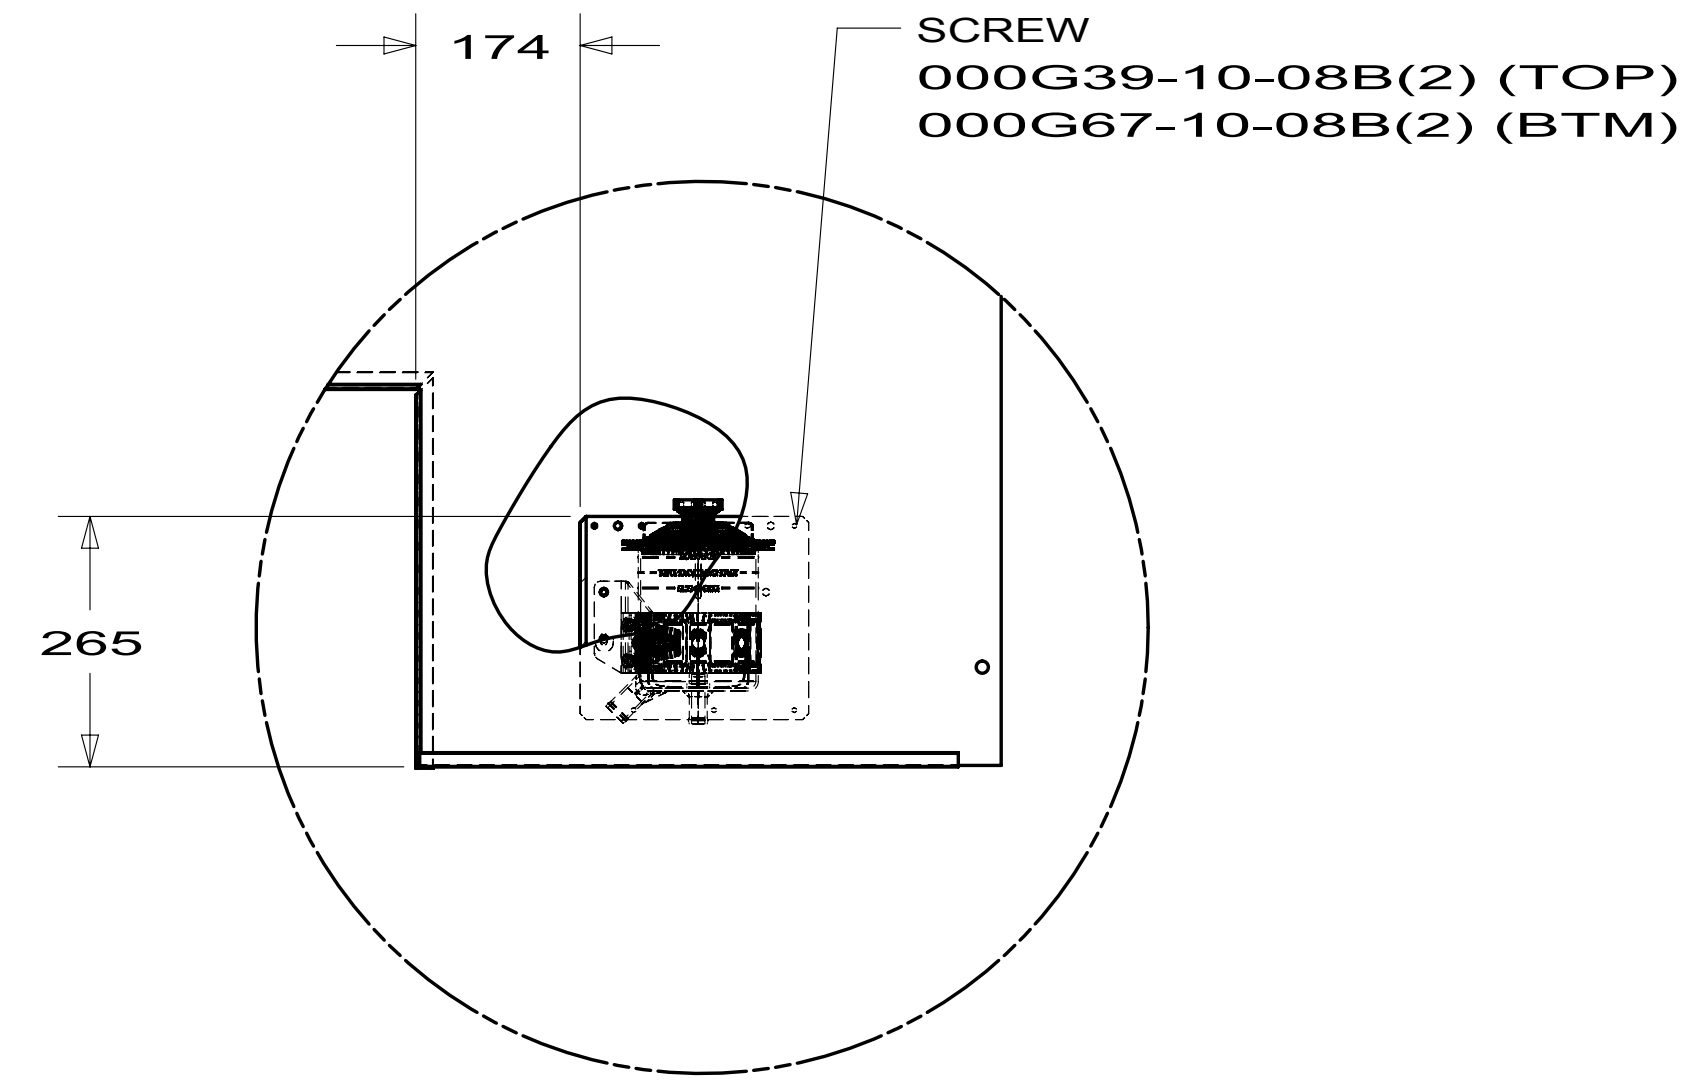

DETAIL G 1

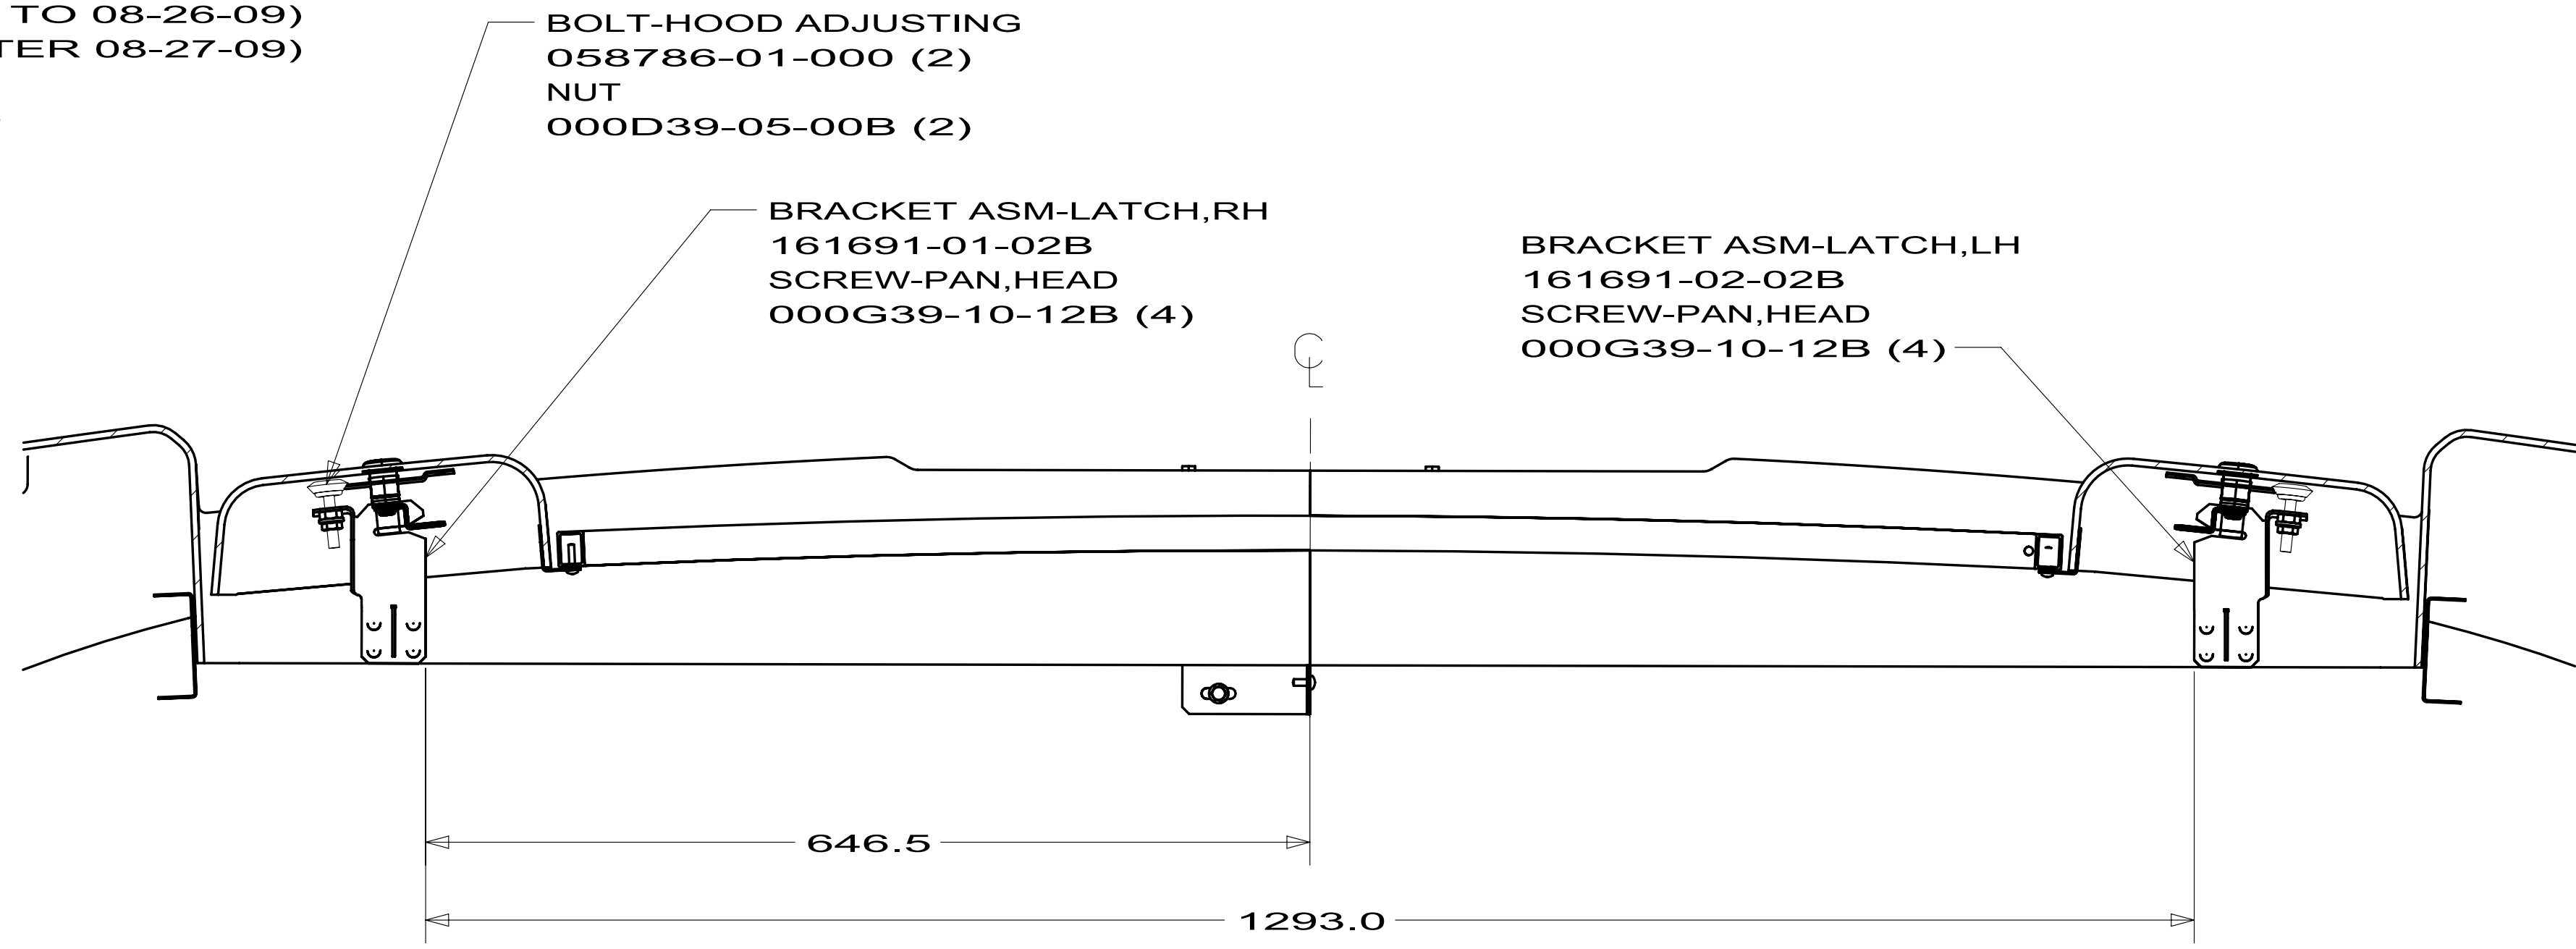


SECTION F-F

1. FASTEN FREIGHTLINER SUPPLIED TRANSMISSION RESERVOIR AND PLATE TO BACKWALL AS SHOWN.

NOTES:

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE:		
REAR CAP INSTL		
SHEET 4	PART NO	REV
	162553	

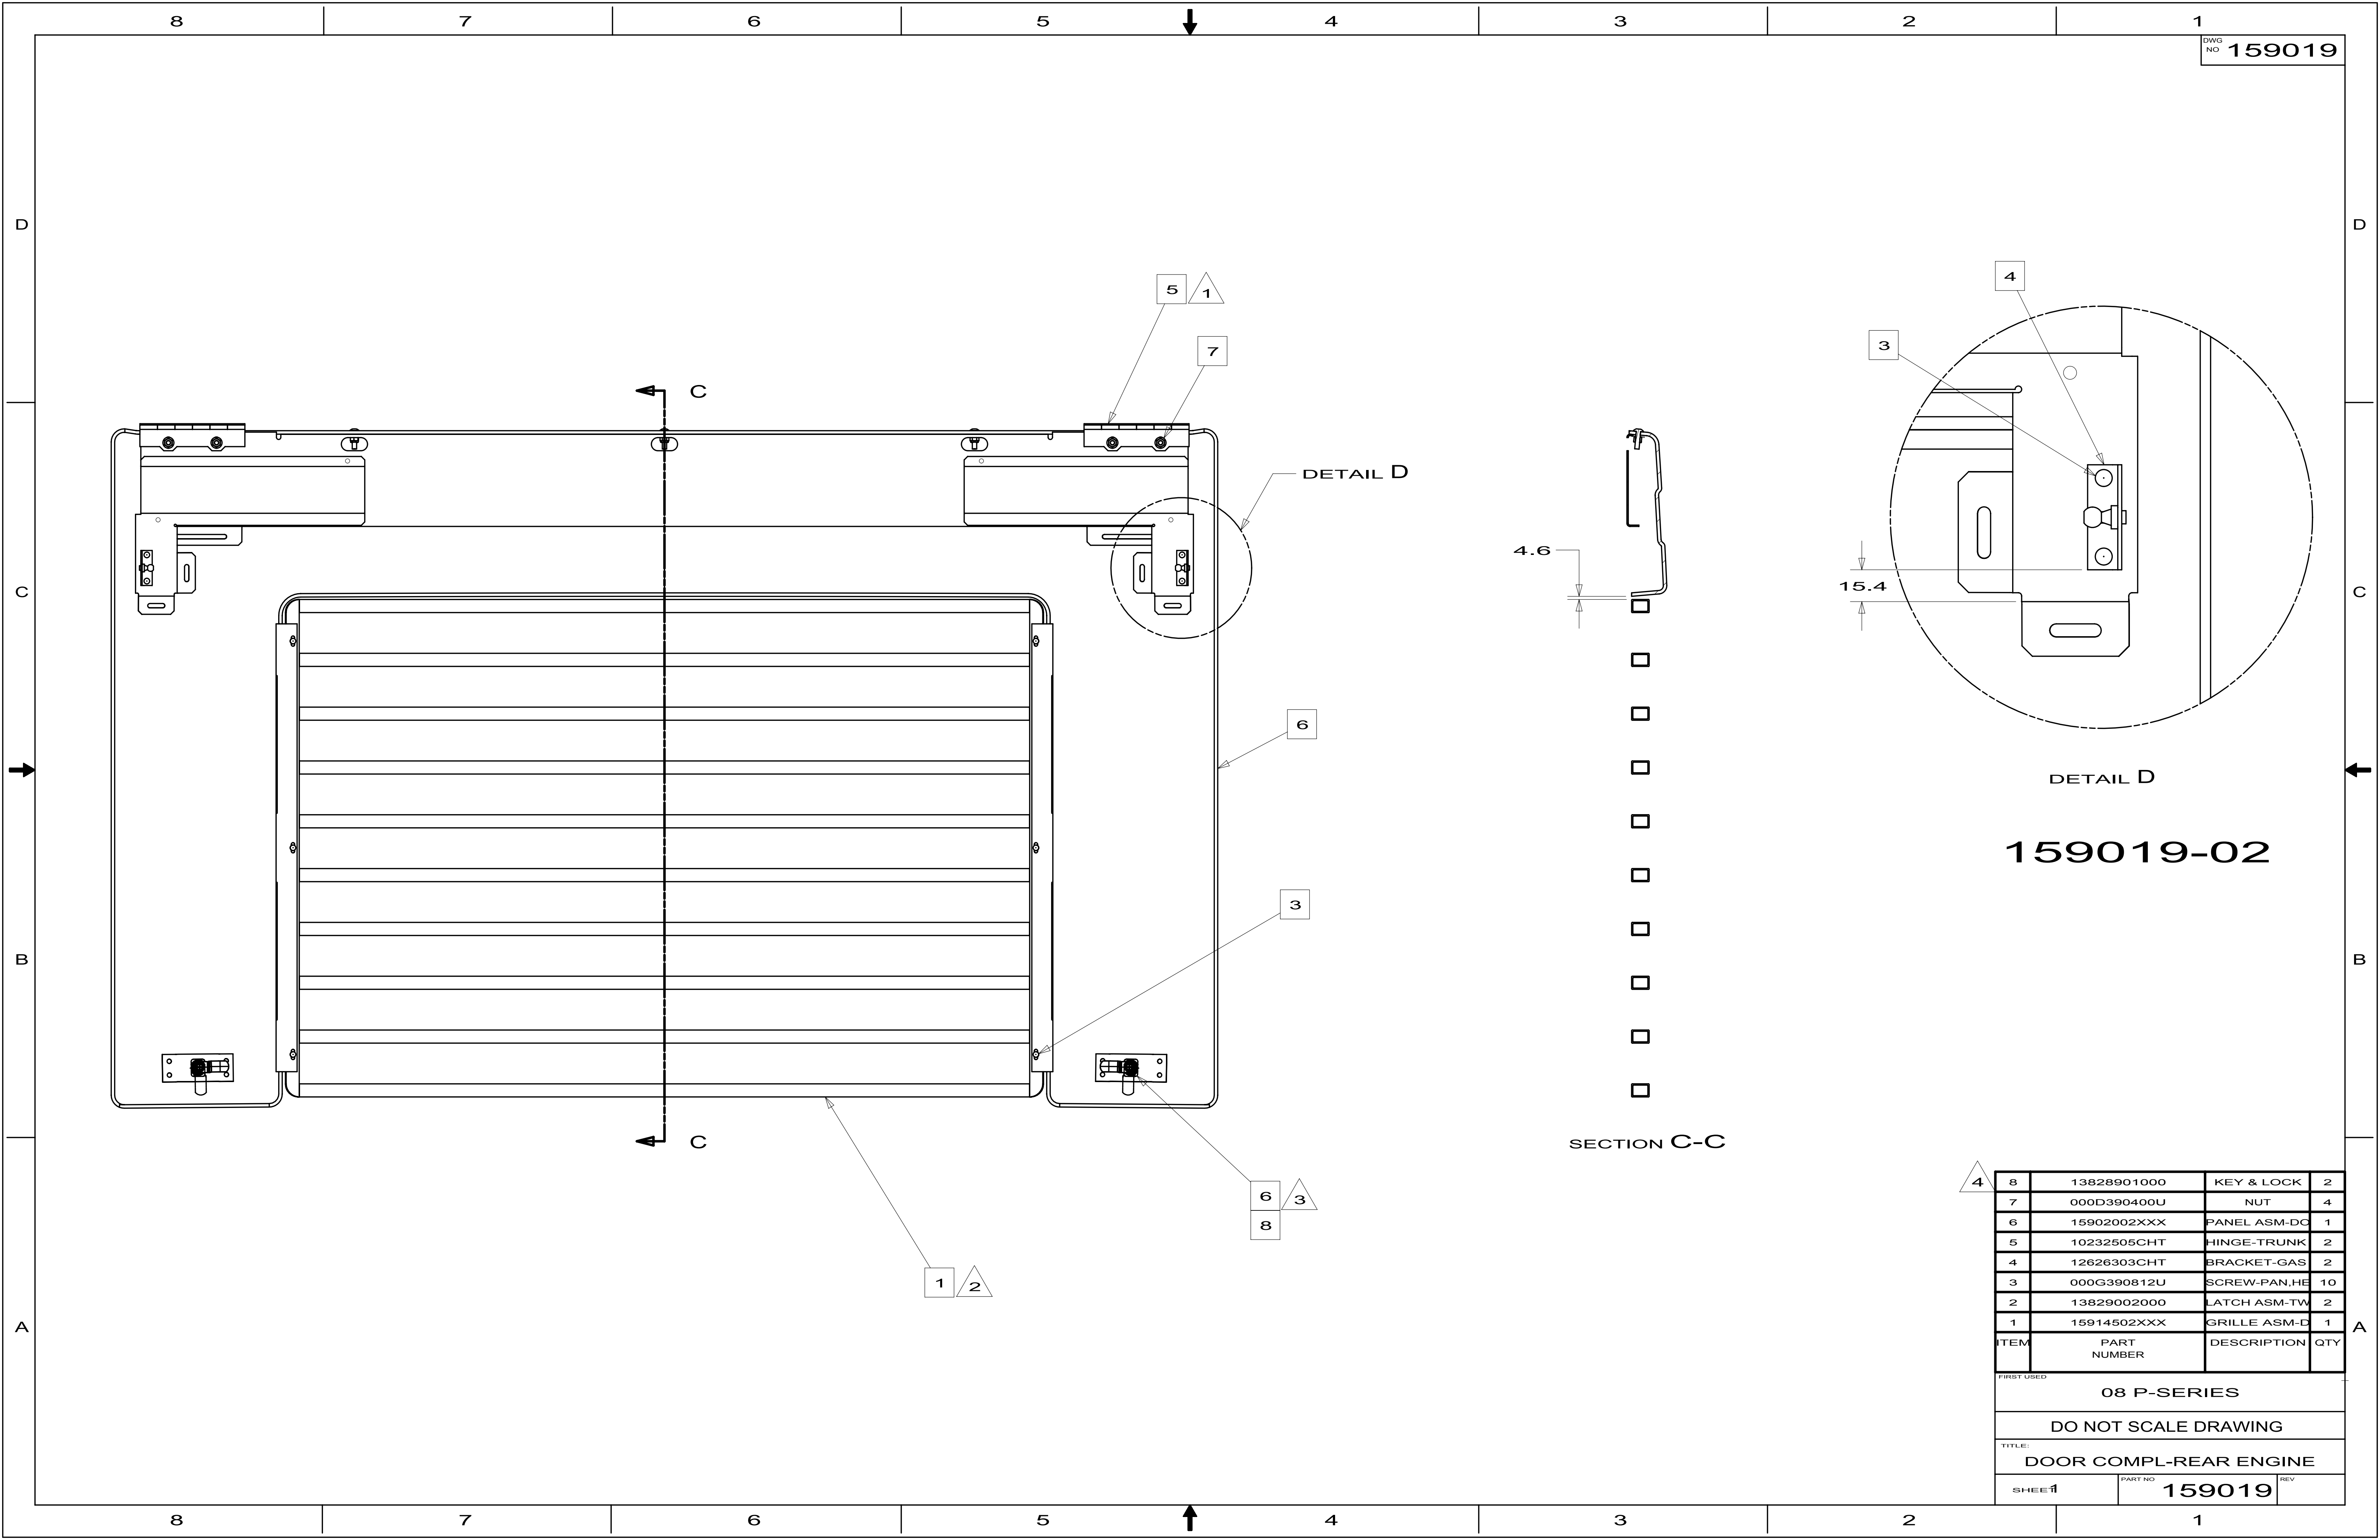


159019-02

8	13828901000	KEY & LOCK	2
7	000D390400U	NUT	4
6	15902002XXX	PANEL ASM-DC	1
5	10232505CHT	HINGE-TRUNK	2
4	12626303CHT	BRACKET-GAS	2
3	000G390812U	SCREW-PAN,HE	10
2	13829002000	LATCH ASM-TW	2
1	15914502XXX	GRILLE ASM-D	1
ITEM	PART NUMBER	DESCRIPTION	QTY

FIRST USED			
08 P-SERIES			
DO NOT SCALE DRAWING			
TITLE: DOOR COMPL-REAR ENGINE			
SHEET 1	PART NO 159019	REV	

8		7		6	5	4	3	2	1
DWG NO	ROOM ASM-SLIDEOUT	SLUG ASM-SLIDEOUT	PANEL ASM-SLIDEOUT,RH	PANEL ASM-SLIDEOUT,LH					
170764-01	170764-11-XXX	170757-11-XXX	162982-43-XXX	162982-44-XXX					
170764-02	170764-12-XXX	170757-12-XXX	162982-52-XXX	162982-53-XXX					

RELEASE		REV	DATE	DWG NO	170764
REV	ZONE	REVISION RECORD		DATE	OFFR-ORIG

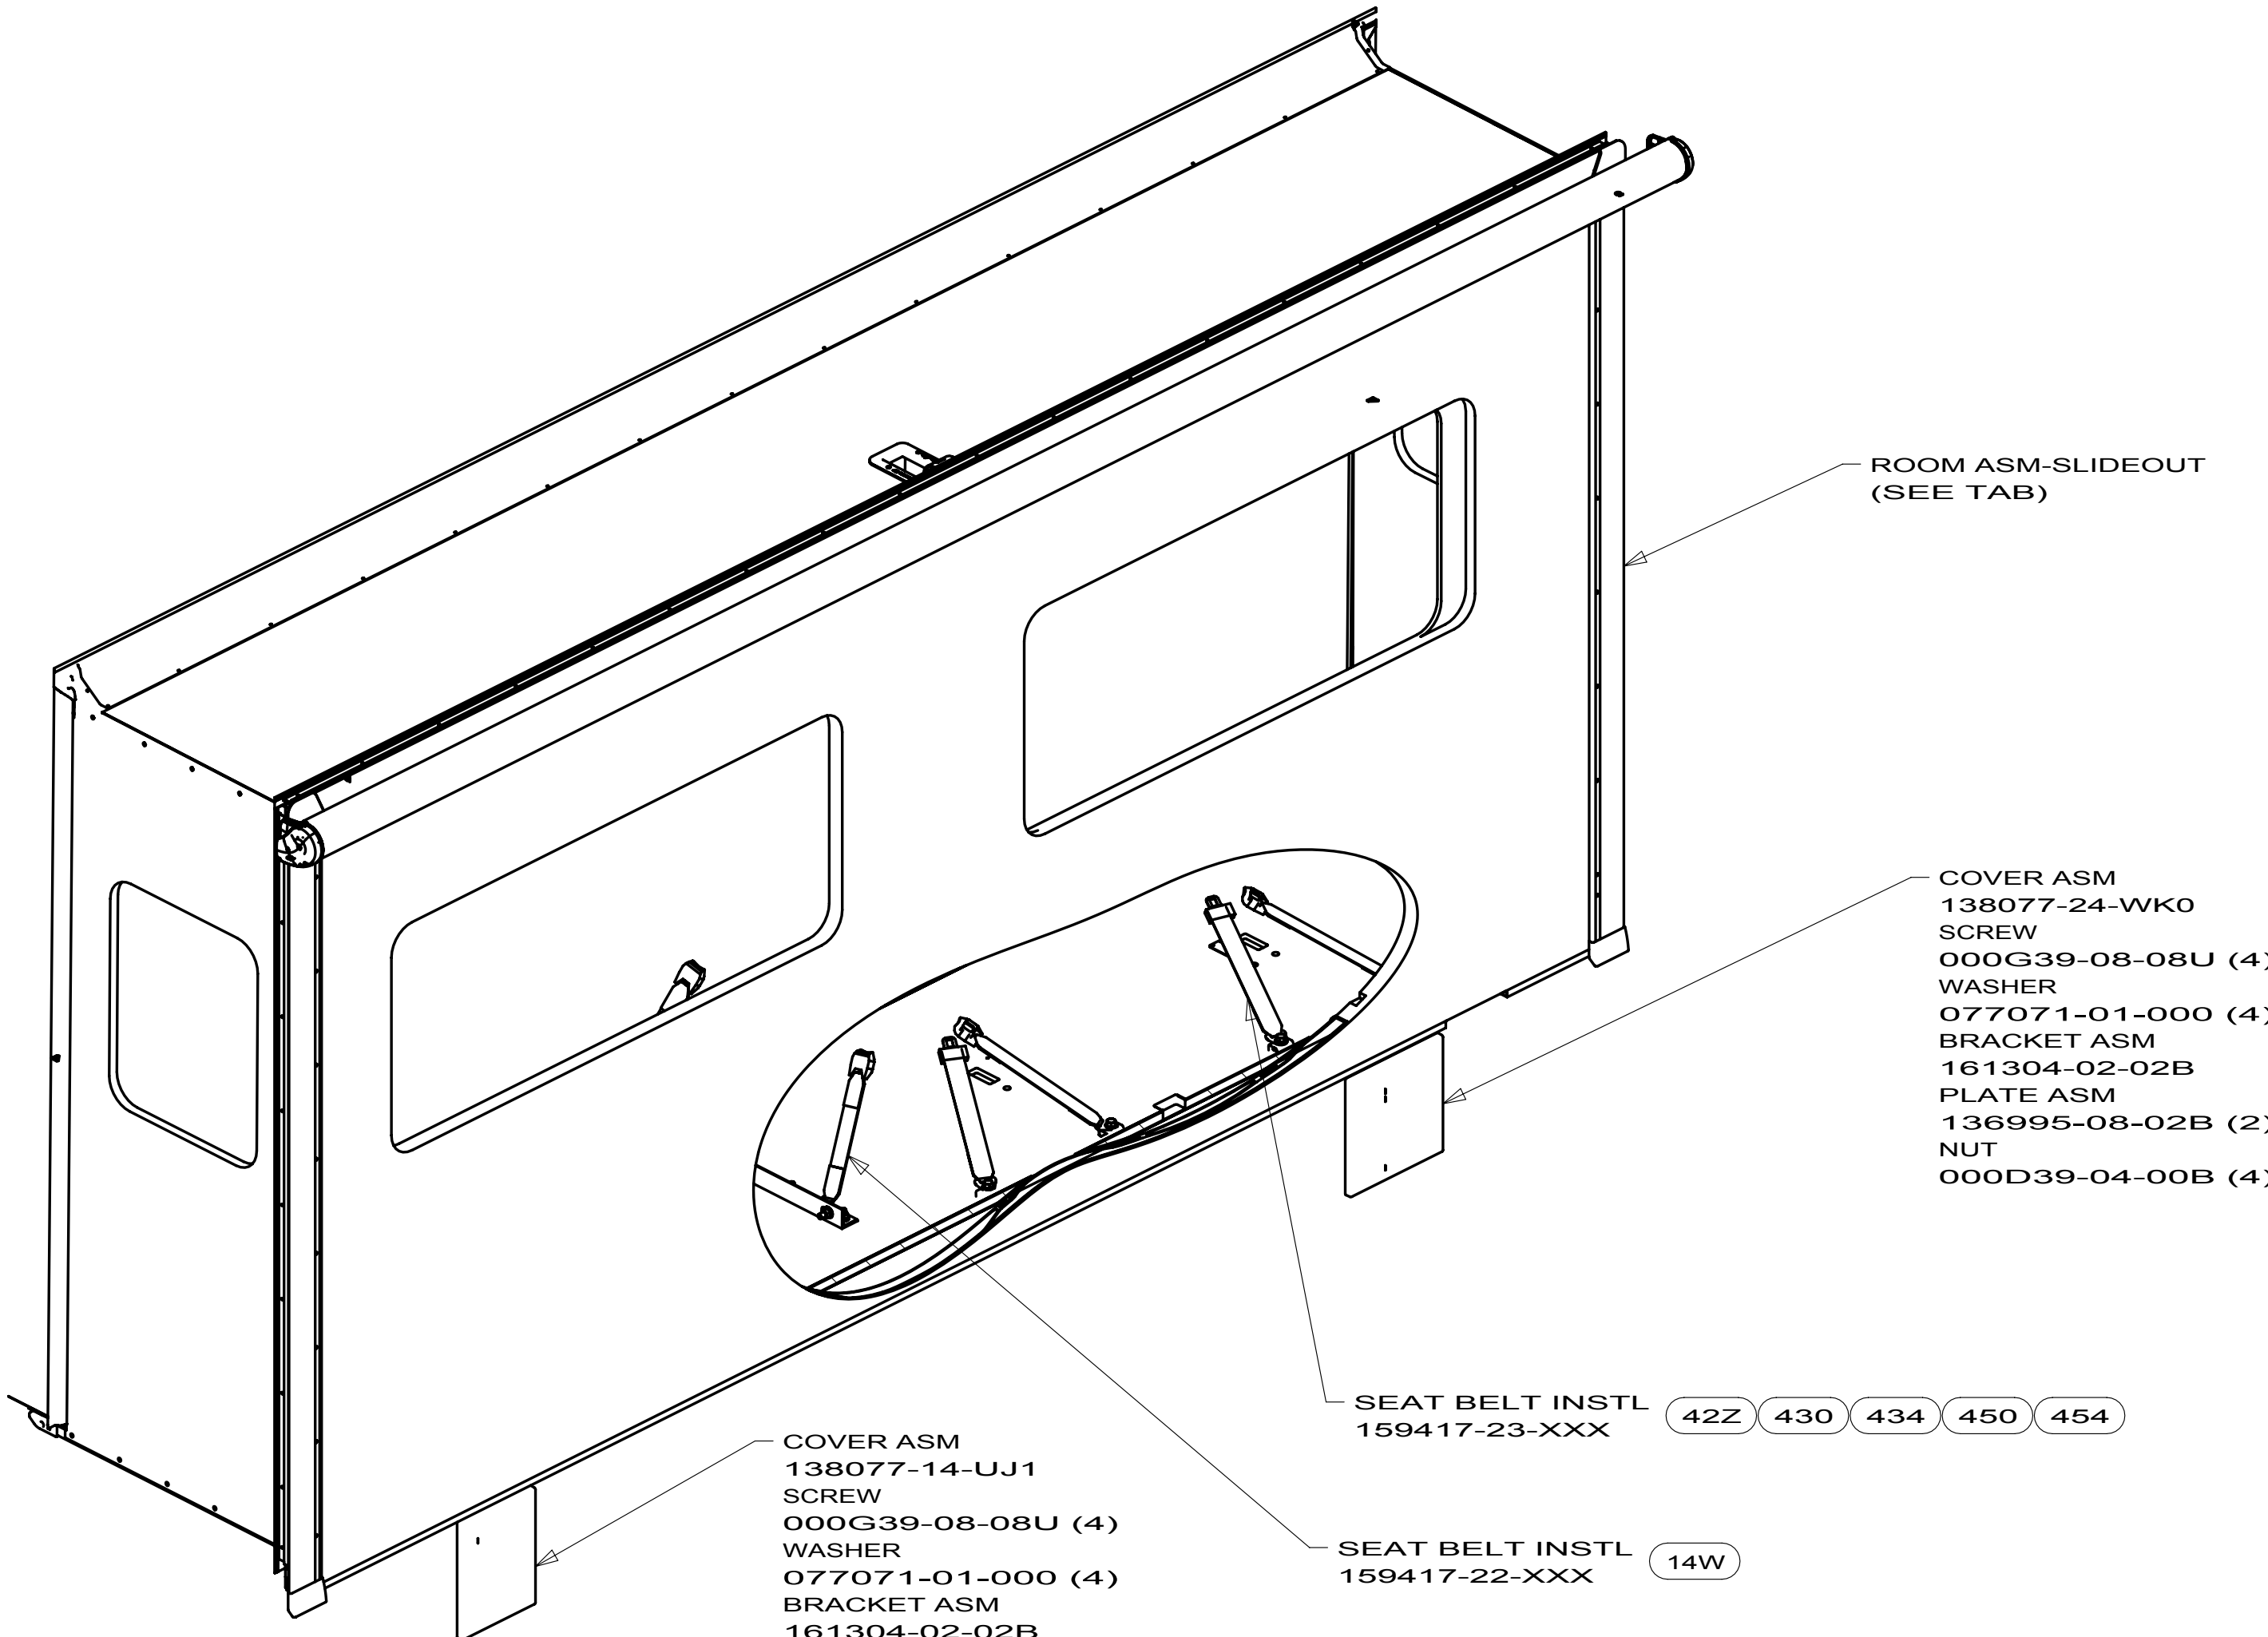

24. PREP SURFACE WITH ISOPROPYL ALCOHOL 900058-01-000.
23. STOP BLOCK TO BE POSITIONED IN HOLES DESIGNATED FOR 30" STROKE LENGTH.
22. SEE ES0080 FOR SLIDEOUT ROOM CONSTRUCTION.
21. MAXIMUM RUNNING AMPS NOT TO EXCEED 20 AMPS WITHOUT SLIDE ROOM COVER AND 25 AMPS WITH COVER AT 65° F.
20. FOR MANUAL RETRACT DISCONNECT 12V WIRING TO THE MOTOR, RELEASE THE MOTOR BRAKE, AND RETRACT USING A 3/4" SOCKET AT THIS LOCATION.
19. TRIM PLASTIC CORNERS SO THAT THEY ARE HIDDEN UNDER CARPET.
18. SCREW BULB SEAL TO BOTTOM OF FLOOR ASM-UPPER THRU REAR LEG OF SEAL.
17. LOCATE FOAM OVER DRAIN HOLES IN EXTRUSION.

14. CLAMP OR WIRE TIE ALL HOSES AT 900mm INTERVALS MAX. & WHERE NECESSARY TO PREVENT HOSES FROM CONTACTING MOVING PARTS OR HEAT PRODUCING ITEMS.
13. ALL HOSES MUST HAVE A 50mm MIN. RADIUS TO AVOID KINKS OR FLOW RESTRICTIONS. COVER ALL HOSES FULL LENGTH BELOW COACH FLOOR WITH CONDUIT 041953-09-000


12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED. (SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	76 (IN-LBS)
5/16 - 18 (.3125)	13 (FT-LBS)
3/8 - 16 (.375)	23 (FT-LBS)
7/16 - 14 (.4375)	37 (FT-LBS)
1/2 - 13 (.500)	57 (FT-LBS)

11. USE POLY-CLEAR 047034-07-000 AND ATTACH IT USING WASHER 044533-01-000 TO PROTECT THE SLIDEOUT FLOOR.
10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST INNER TRIM.
9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.
8. USE SCREW 000G39-08-08S TO HOLD EACH END OF TRIM.
7. SEE SEALANT MANUAL.
6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.
5. LOOSEN JAM NUTS AND ADJUST BOLT TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.
4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED AS REQUIRED FROM THERE.
3. THE RETRACTED LENGTH IS ADJUSTED BY THREADING THE STOP BOLT IN OR OUT UNTIL THE OUTSIDE WALL OF THE ROOM SEALS AGAINST THE SIDEWALL.
2. THE EXTENDED LENGTH IS ADJUSTED BY TURNING THE LOCK NUTS ON THE PISTON RODS IN OR OUT UNTIL THE SLIDEOUT ROOM SEALS AGAINST THE SIDEWALL.
1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:

- 094 WINDOWS - SE-GI
- 14W DINETTE
- 21L DINING TABLE/CHAIRS
- 14E LOUNGE CHAIRS-2 EURO LEATHER
- 42Z LOUNGE SEATING-THEATER STYLE
- 430 RESTEASY SGL FAB LH 60X75
- 434 RESTEASY SGL UL LH 60X75
- 450 RESTEASY DUAL FAB LH 60X75
- 454 RESTEASY DUAL UL LH 60X75

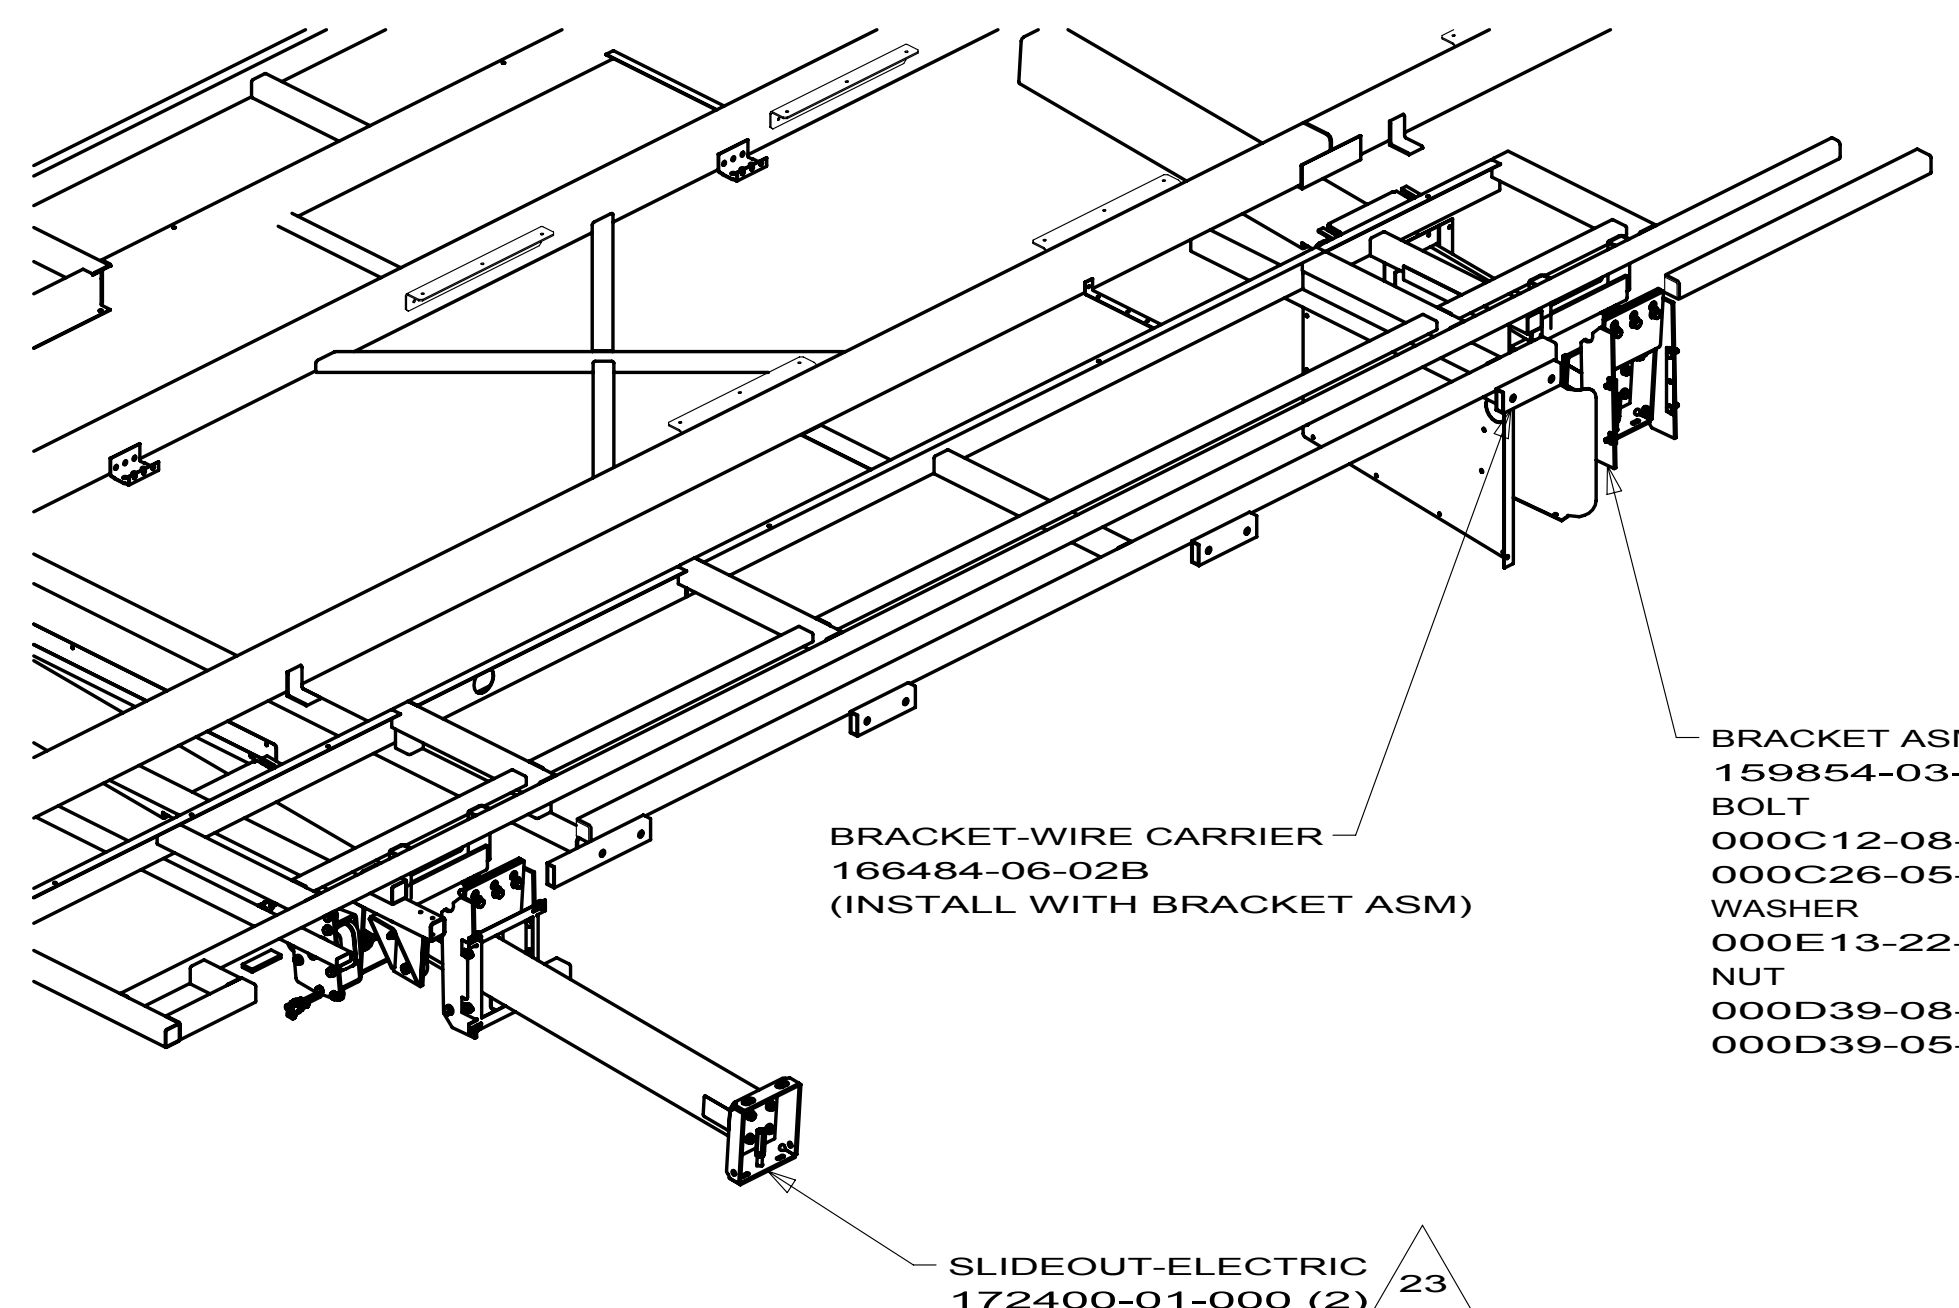

WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DIFFR	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHRR			
P.E.			
M.E.	FIRST USED		
DSNR	10 P40L		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-FRT,LH			
SHEET 1 OF 5	PART NO 170764	REV	

BRACKET ASM-CHAIR,HOLD DOWN
154093-02-01B (2)
SCREW
000G39-08-12U (2)
(SCREW TO
FLOOR ASM-SLIDEOUT)

BRACKET ASM-CHAIR,HOLD DOWN
154093-02-01B (2)
SCREW
000G39-08-12U (4)
(SCREW TO
FLOOR ASM-SLIDEOUT)

TRIM-SEAL
169329-17-02A
SCREW
000G62-08-12B (17)

RETAINER
169330-17-02A

ROOF ASM-SLIDEOUT
172324-01-AB0

LATCH ASM-TRAVEL
153651-04-01A
SCREW
000G39-10-10T (8)

AWNING ASM
166646-38-04A

COVER-TRIM,SLIDEOUT
153115-01-01A
153115-02-01A
SCREW
000G39-10-12U (19)

FILM
093681-39-01A (2)
(1830)

PANEL ASM-SLIDEOUT,LH
(SEE TAB)
SCREW
000G62-08-12B (24)

TRIM-KIT EXTERIOR
169233-13-AA1
SCREW
154938-05-03A (38)
INSERT
105312-01-13A

FOAM PLUG
160563-19-000 (2)










TRIM-FEATURE,LOWER
163021-08-02A
SCREW
154938-02-02A (5)

TRIM-SEAL,INNER
139624-44-02A
SCREW
000G62-08-12B (7)

ROOM ASM-SLIDEOUT
(SEE TAB)

(14E) LOUNGE CHAIRS-2 EURO LEATHER
(21L) DINING TABLE/CHAIRS
(93A) EXTERIOR PAINT-CDI

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 2	PART NO 170764	REV

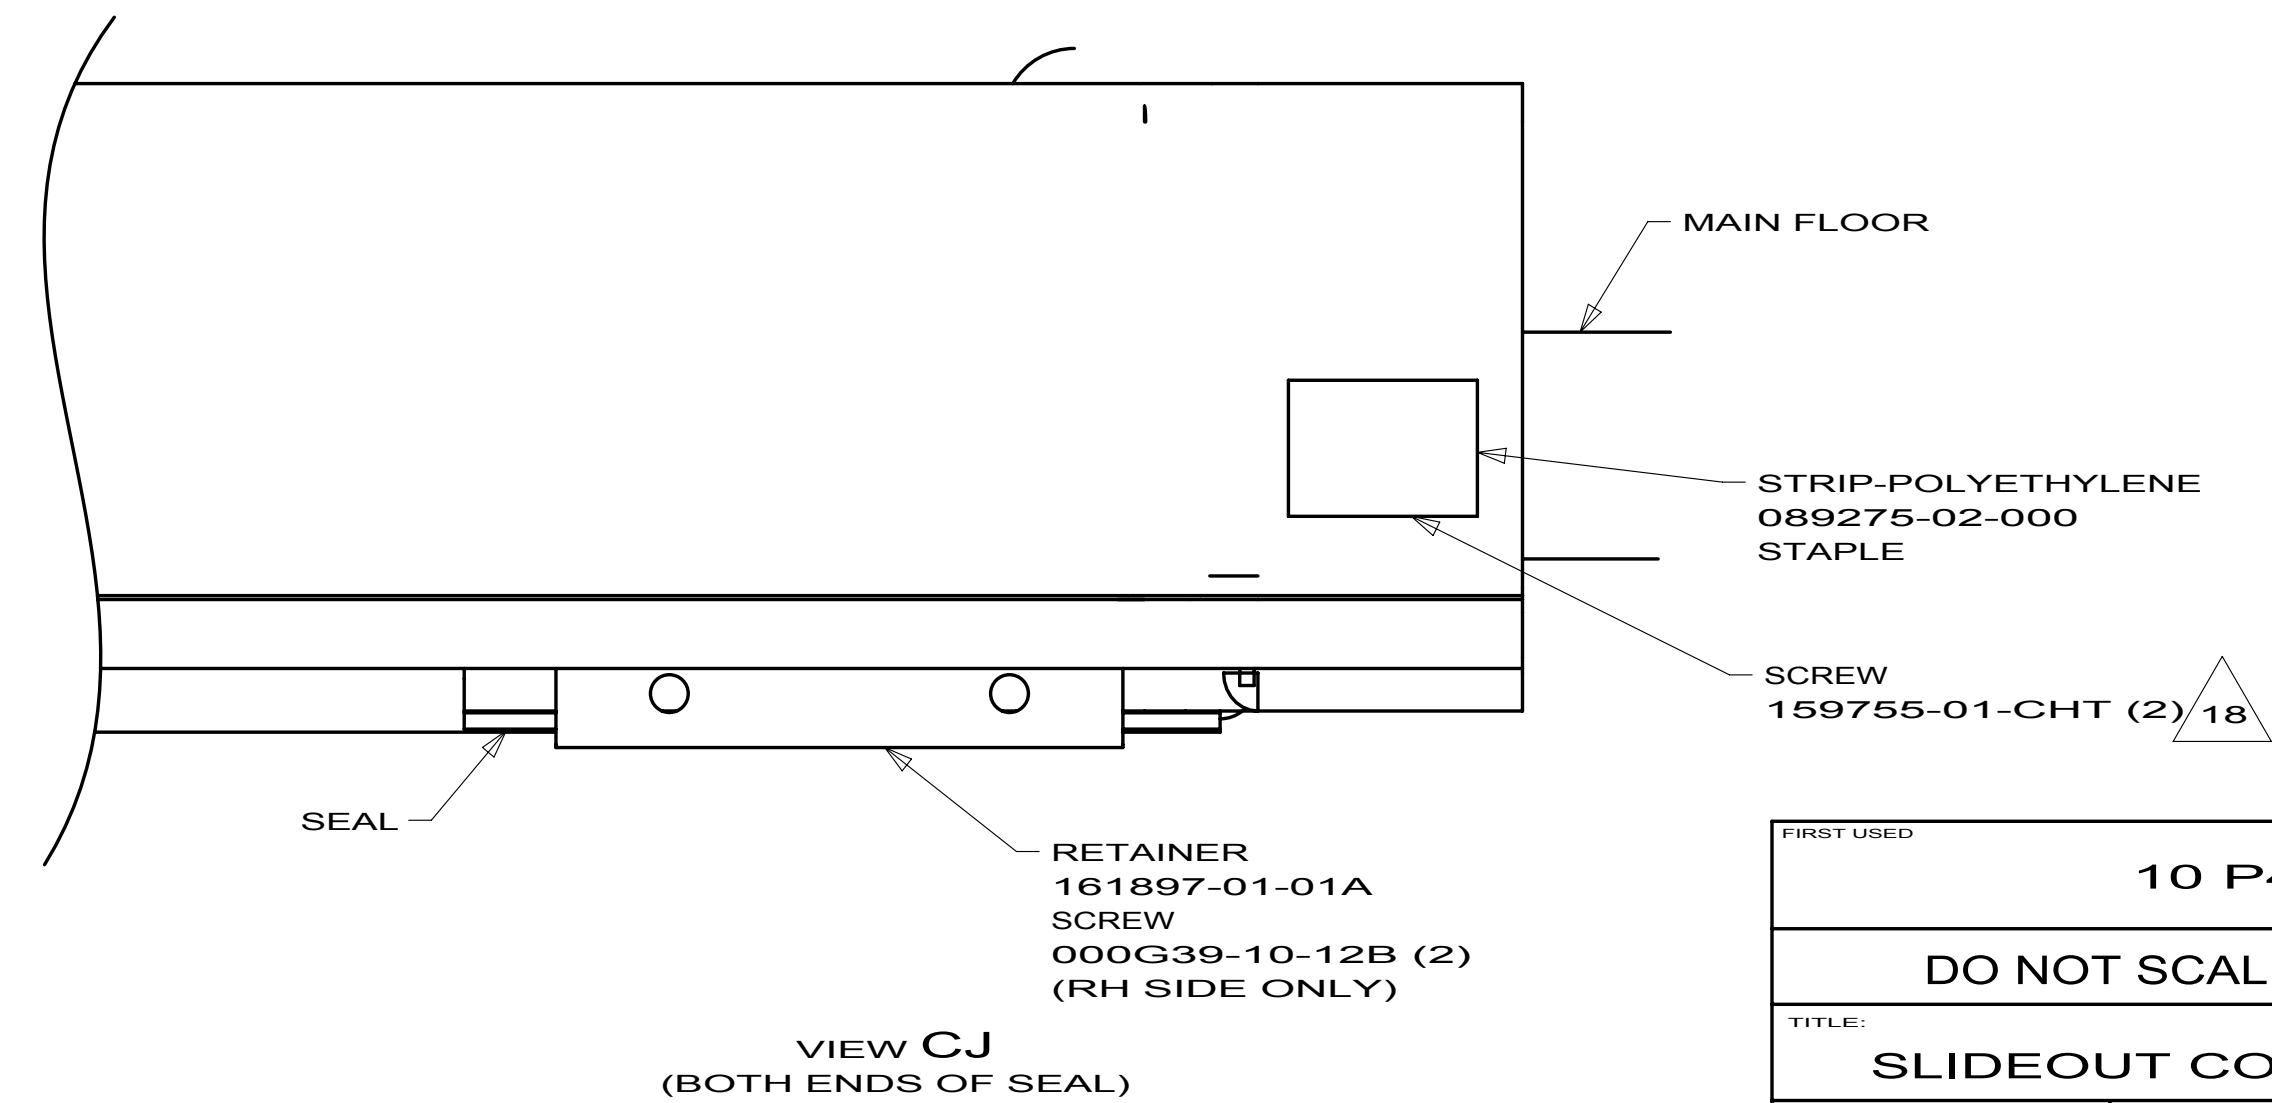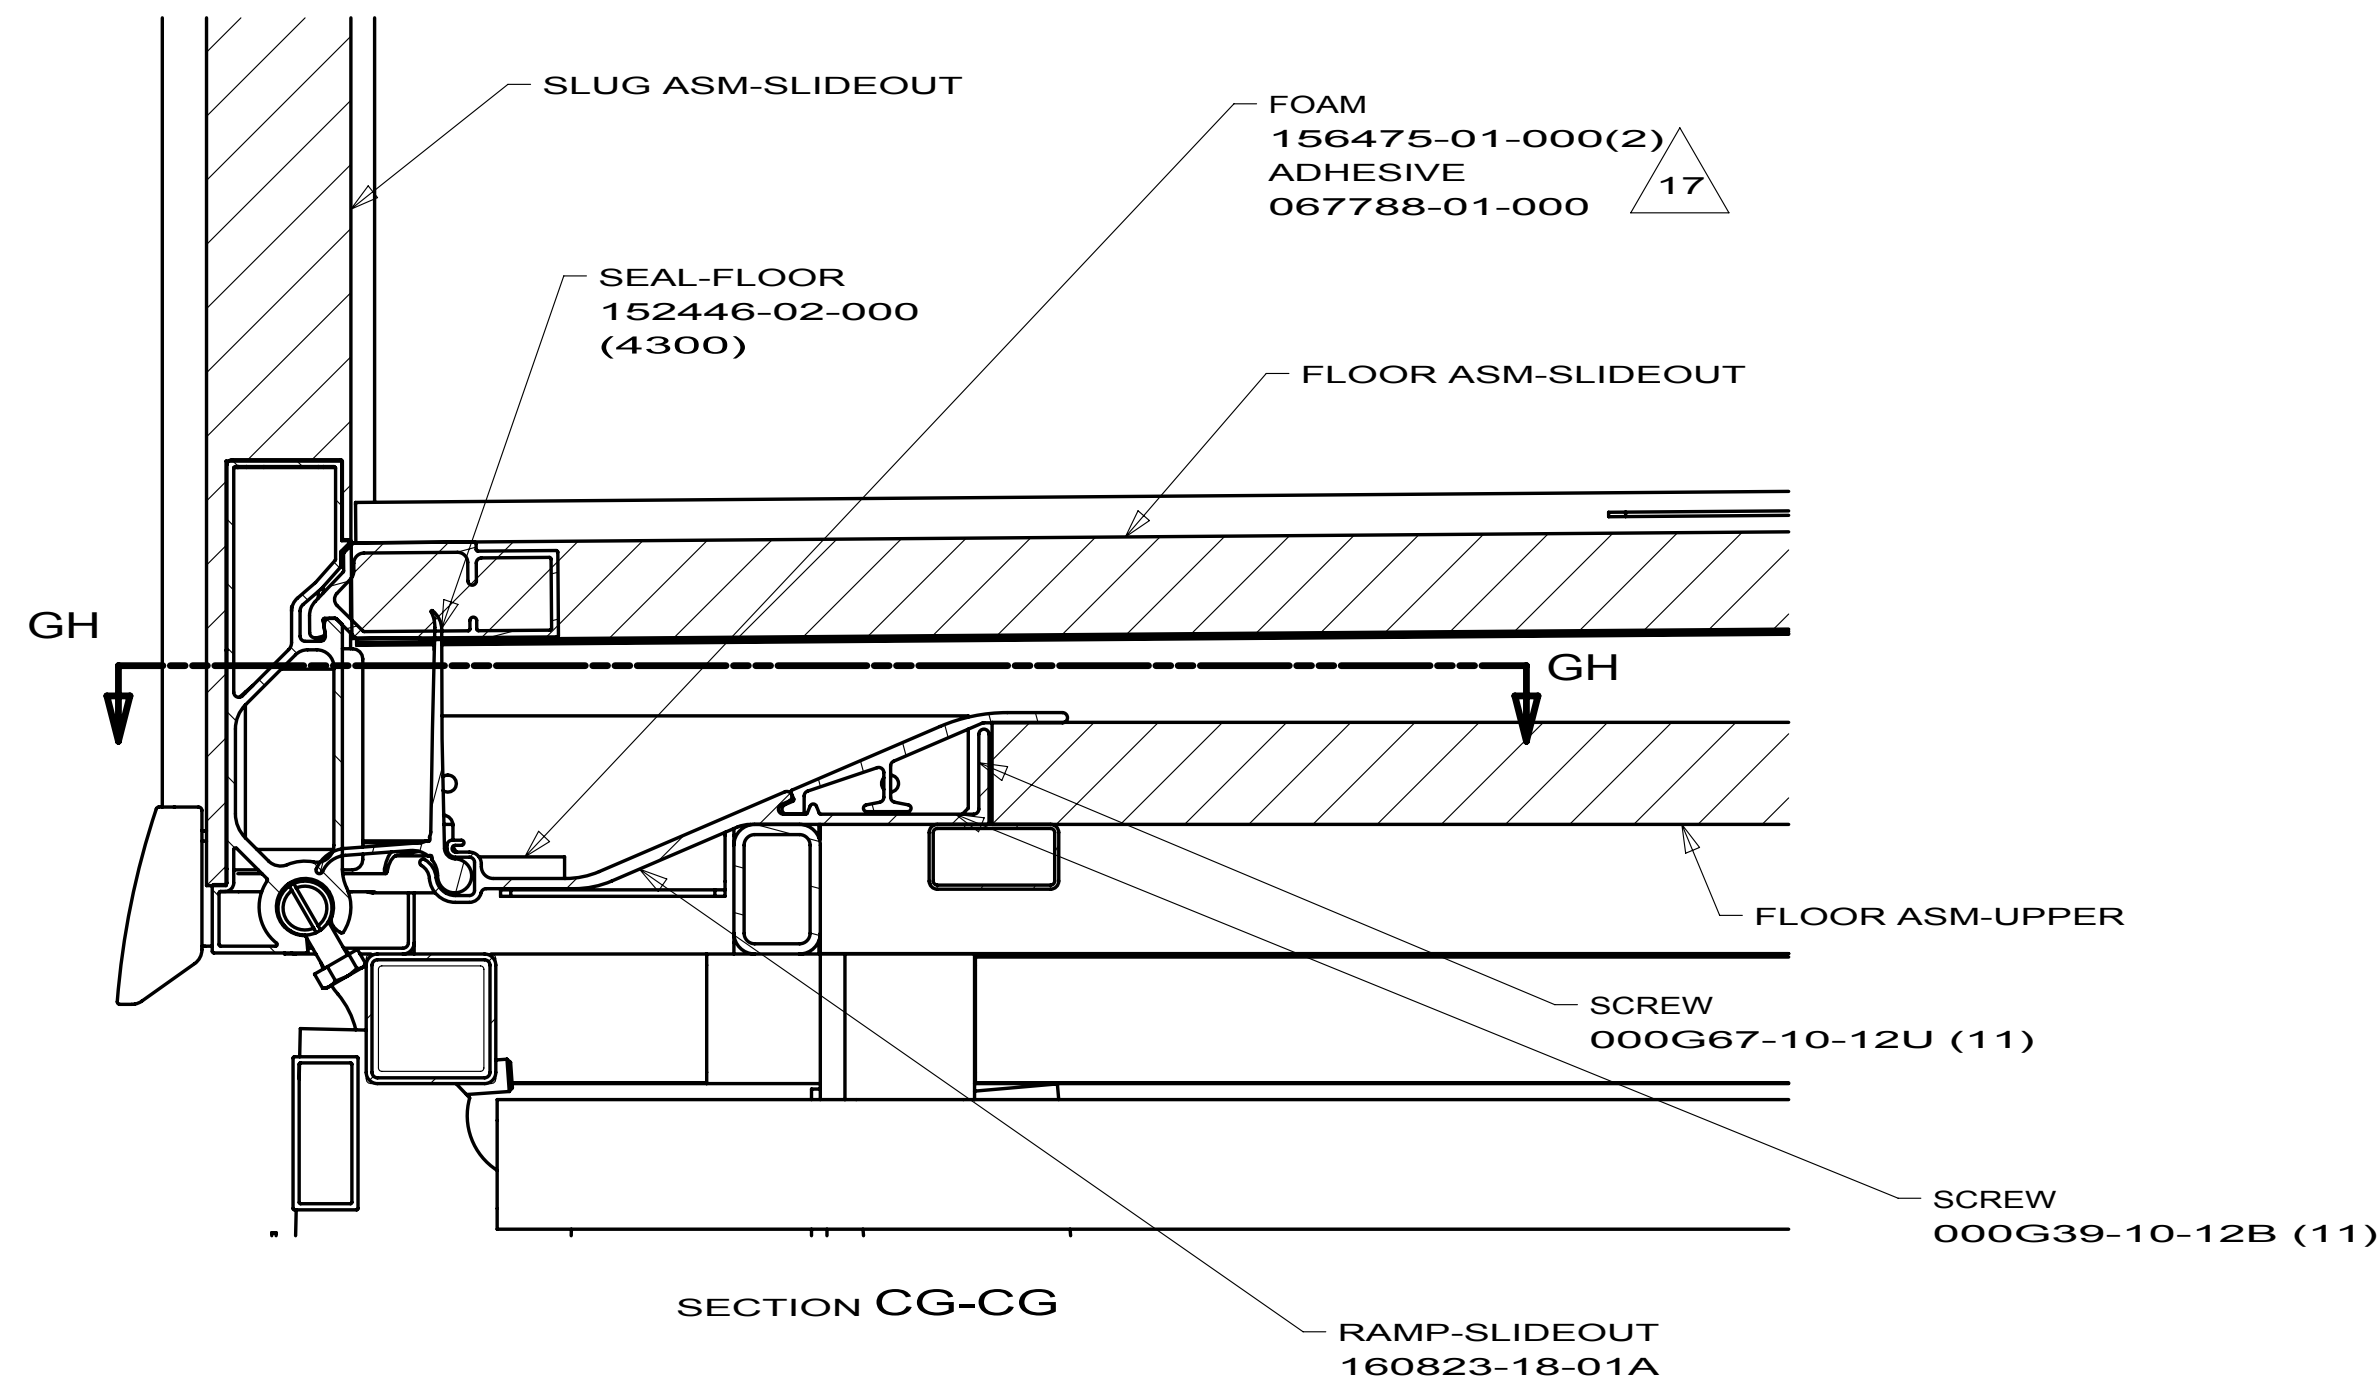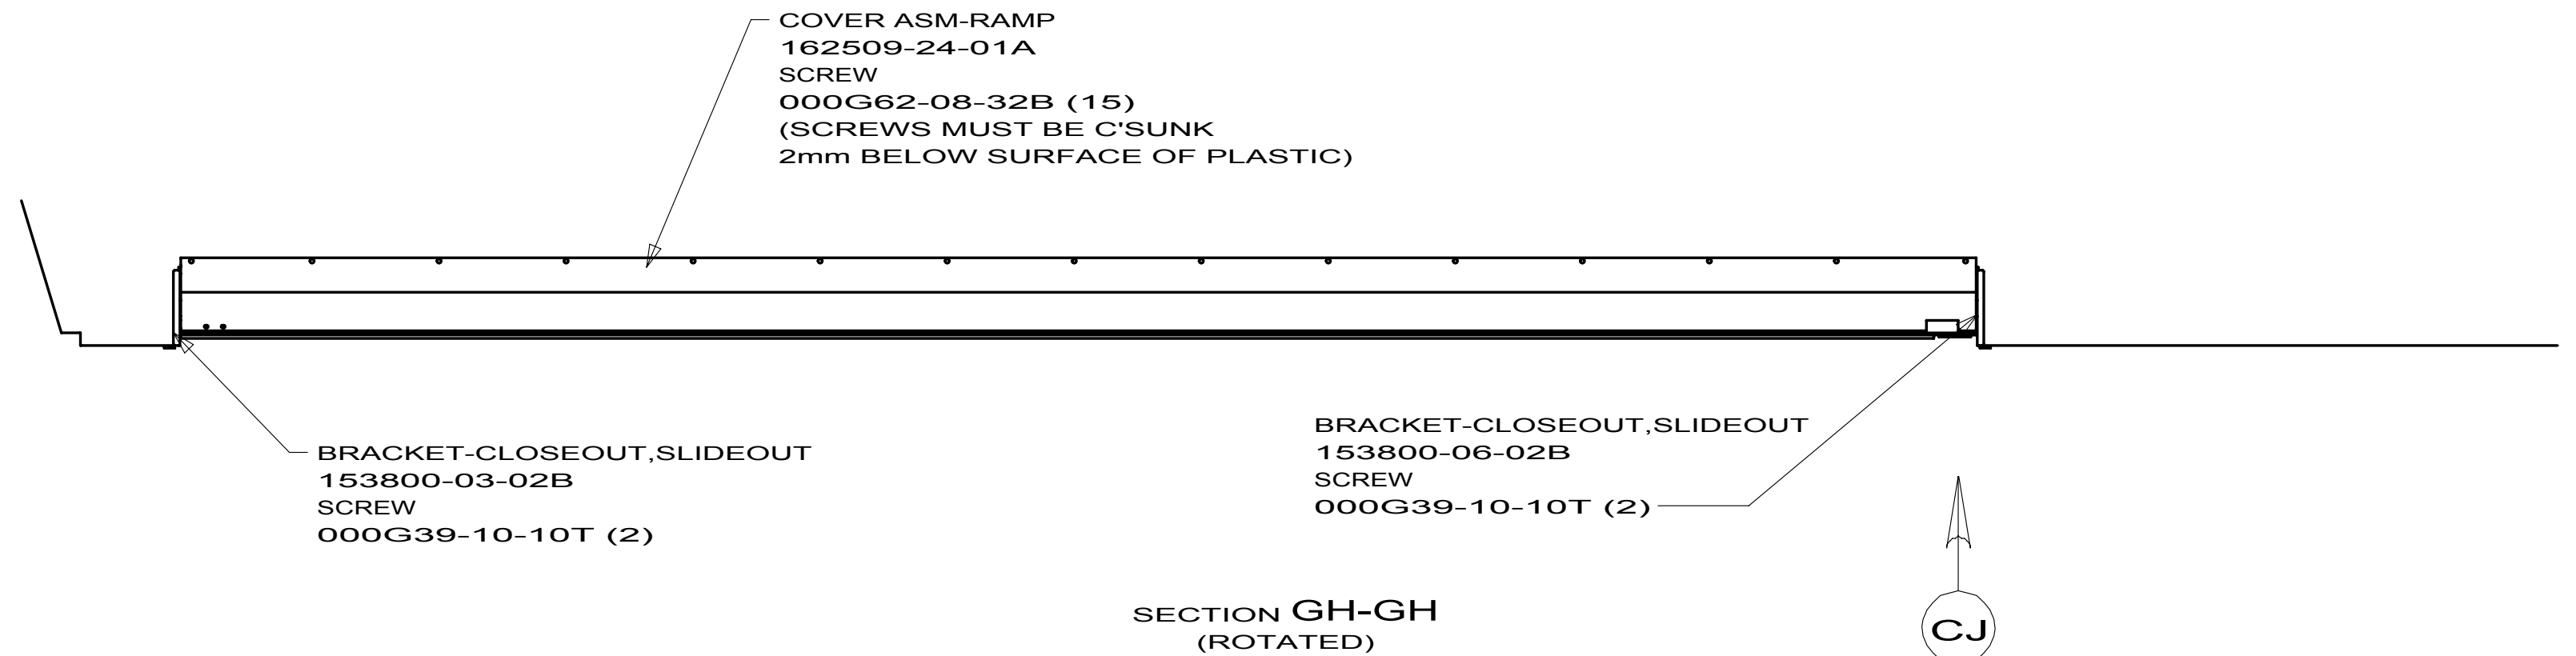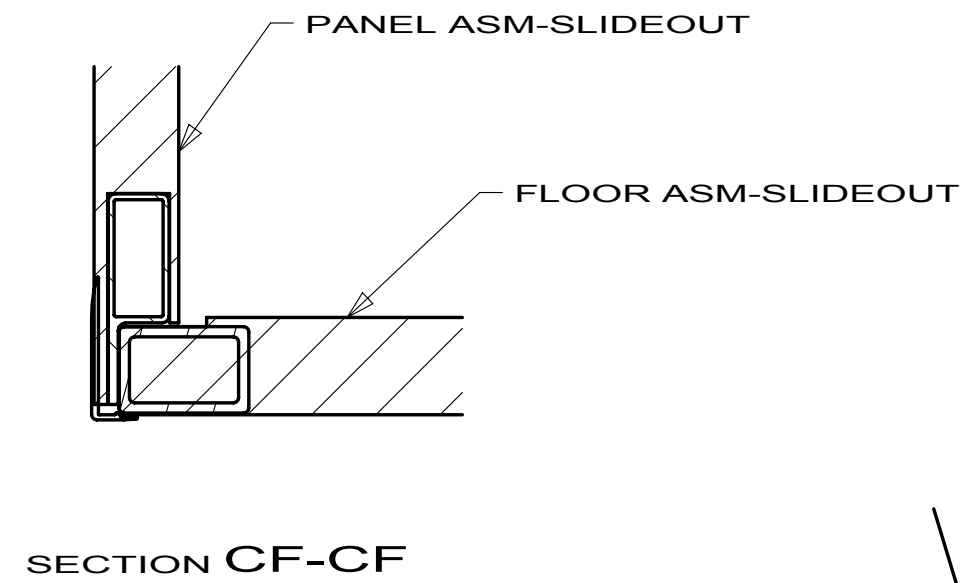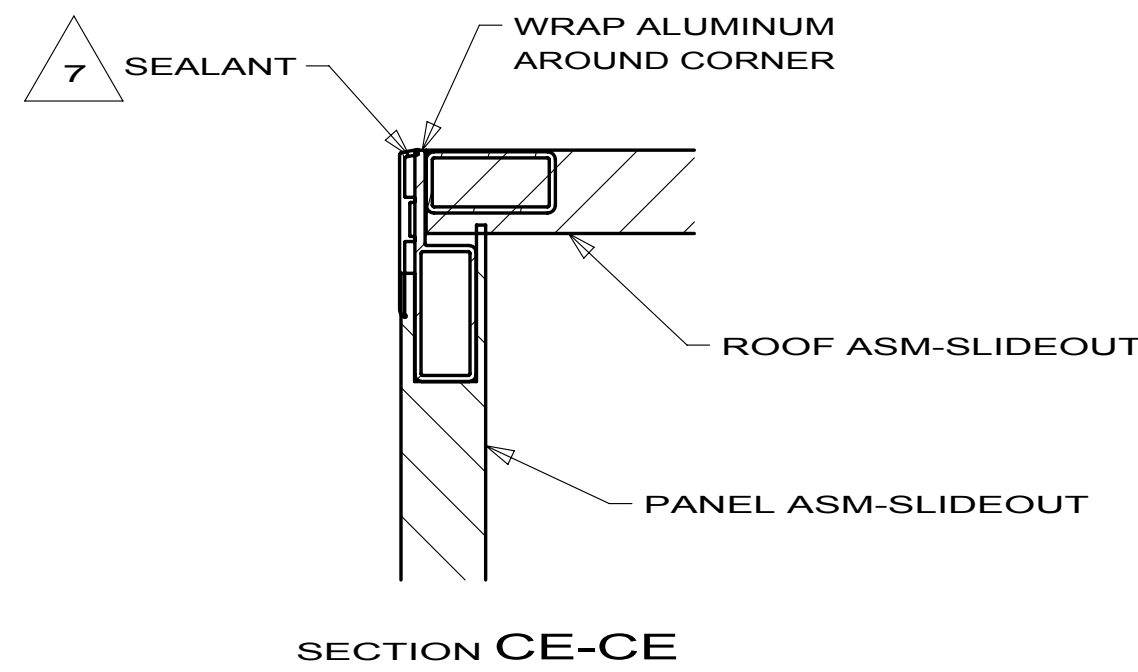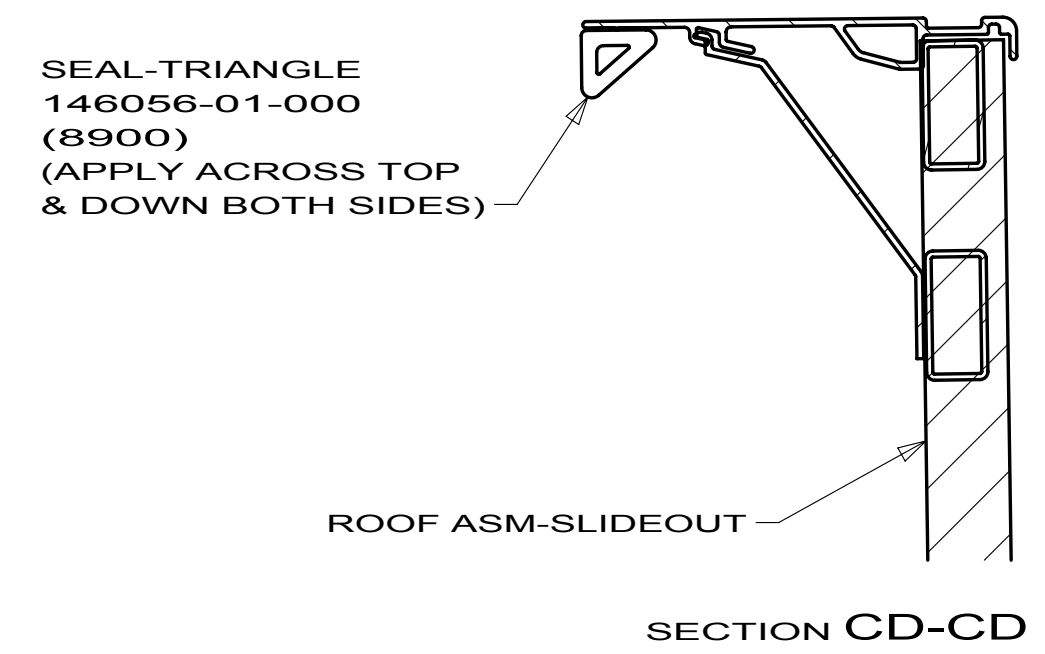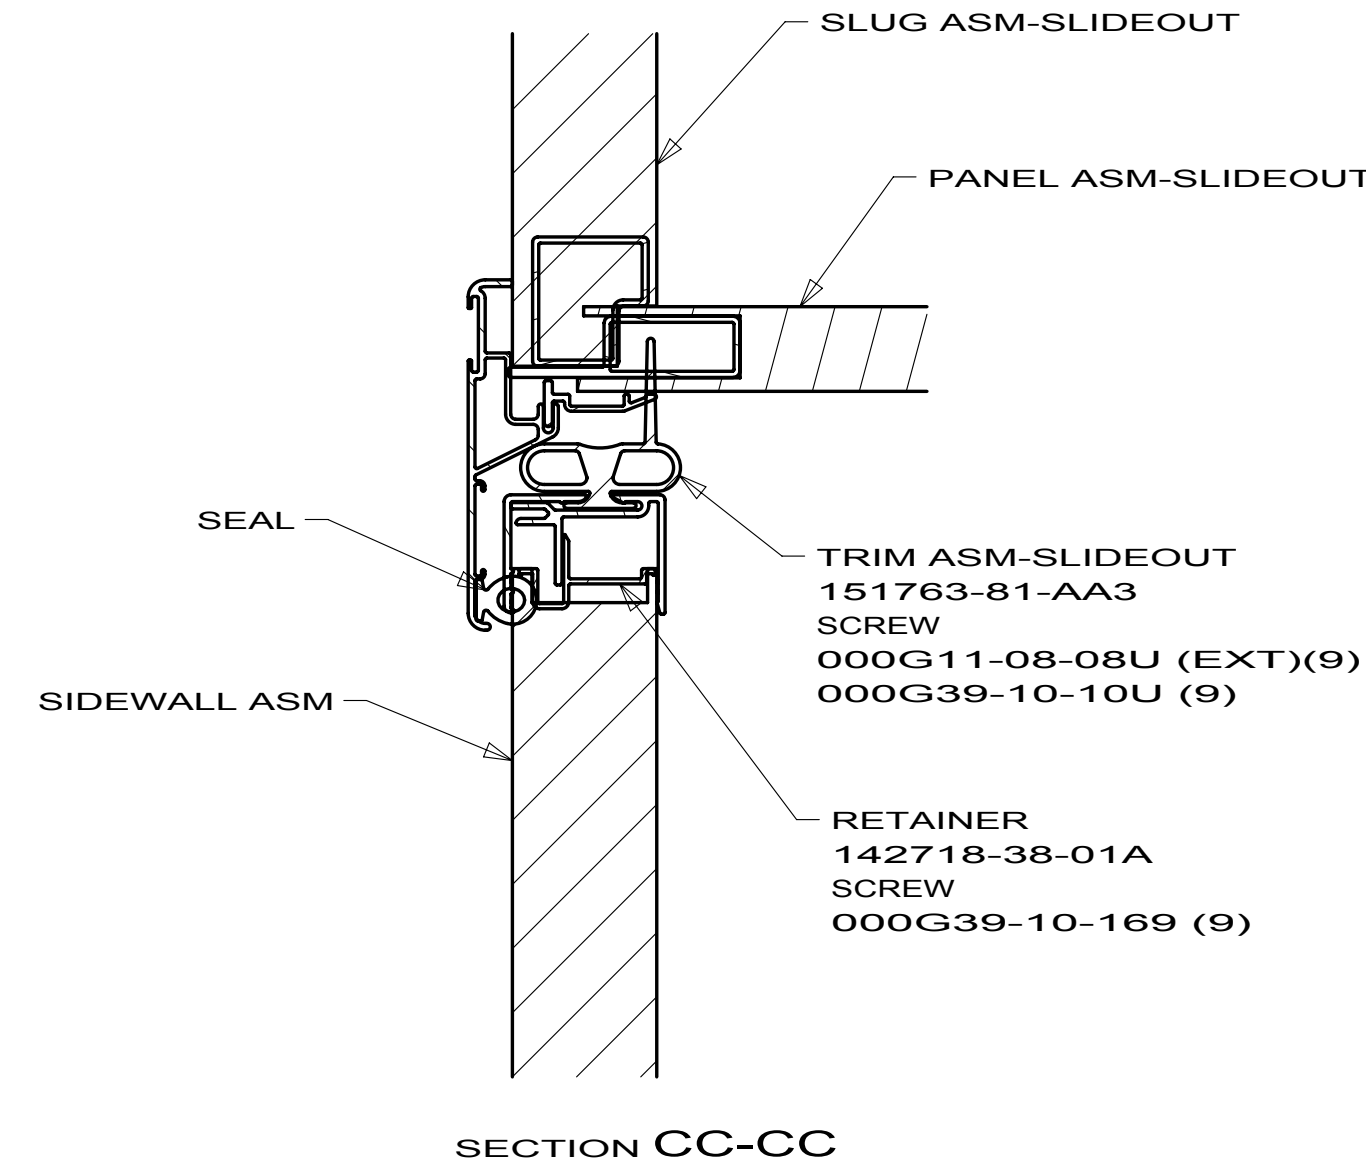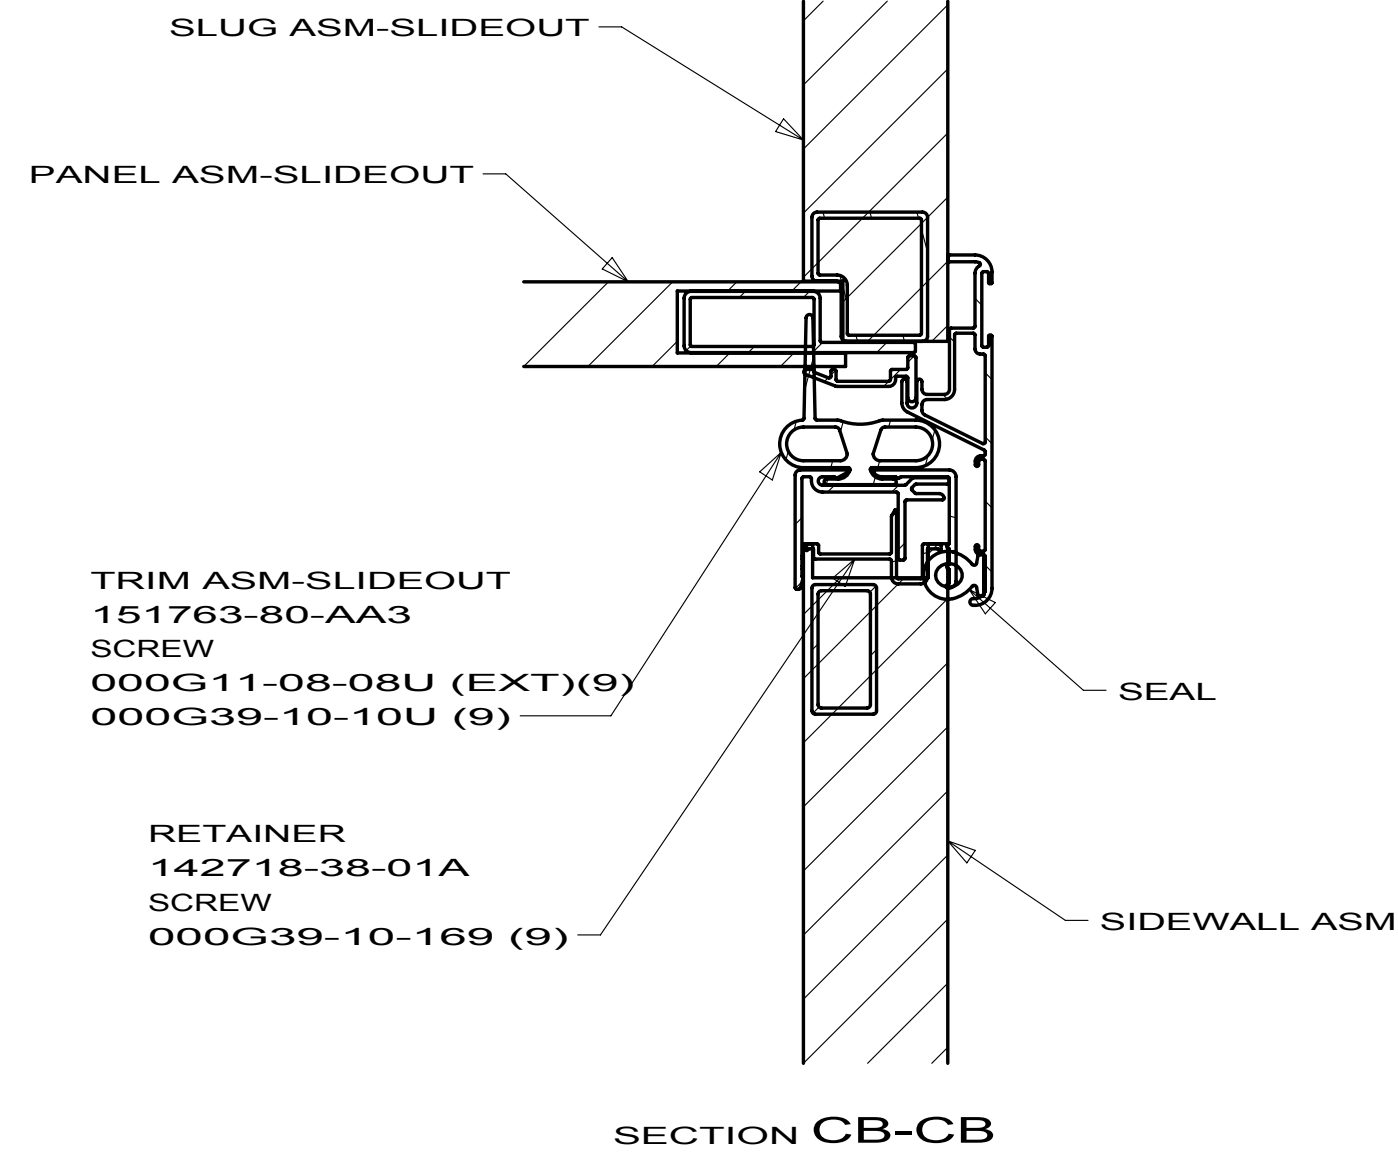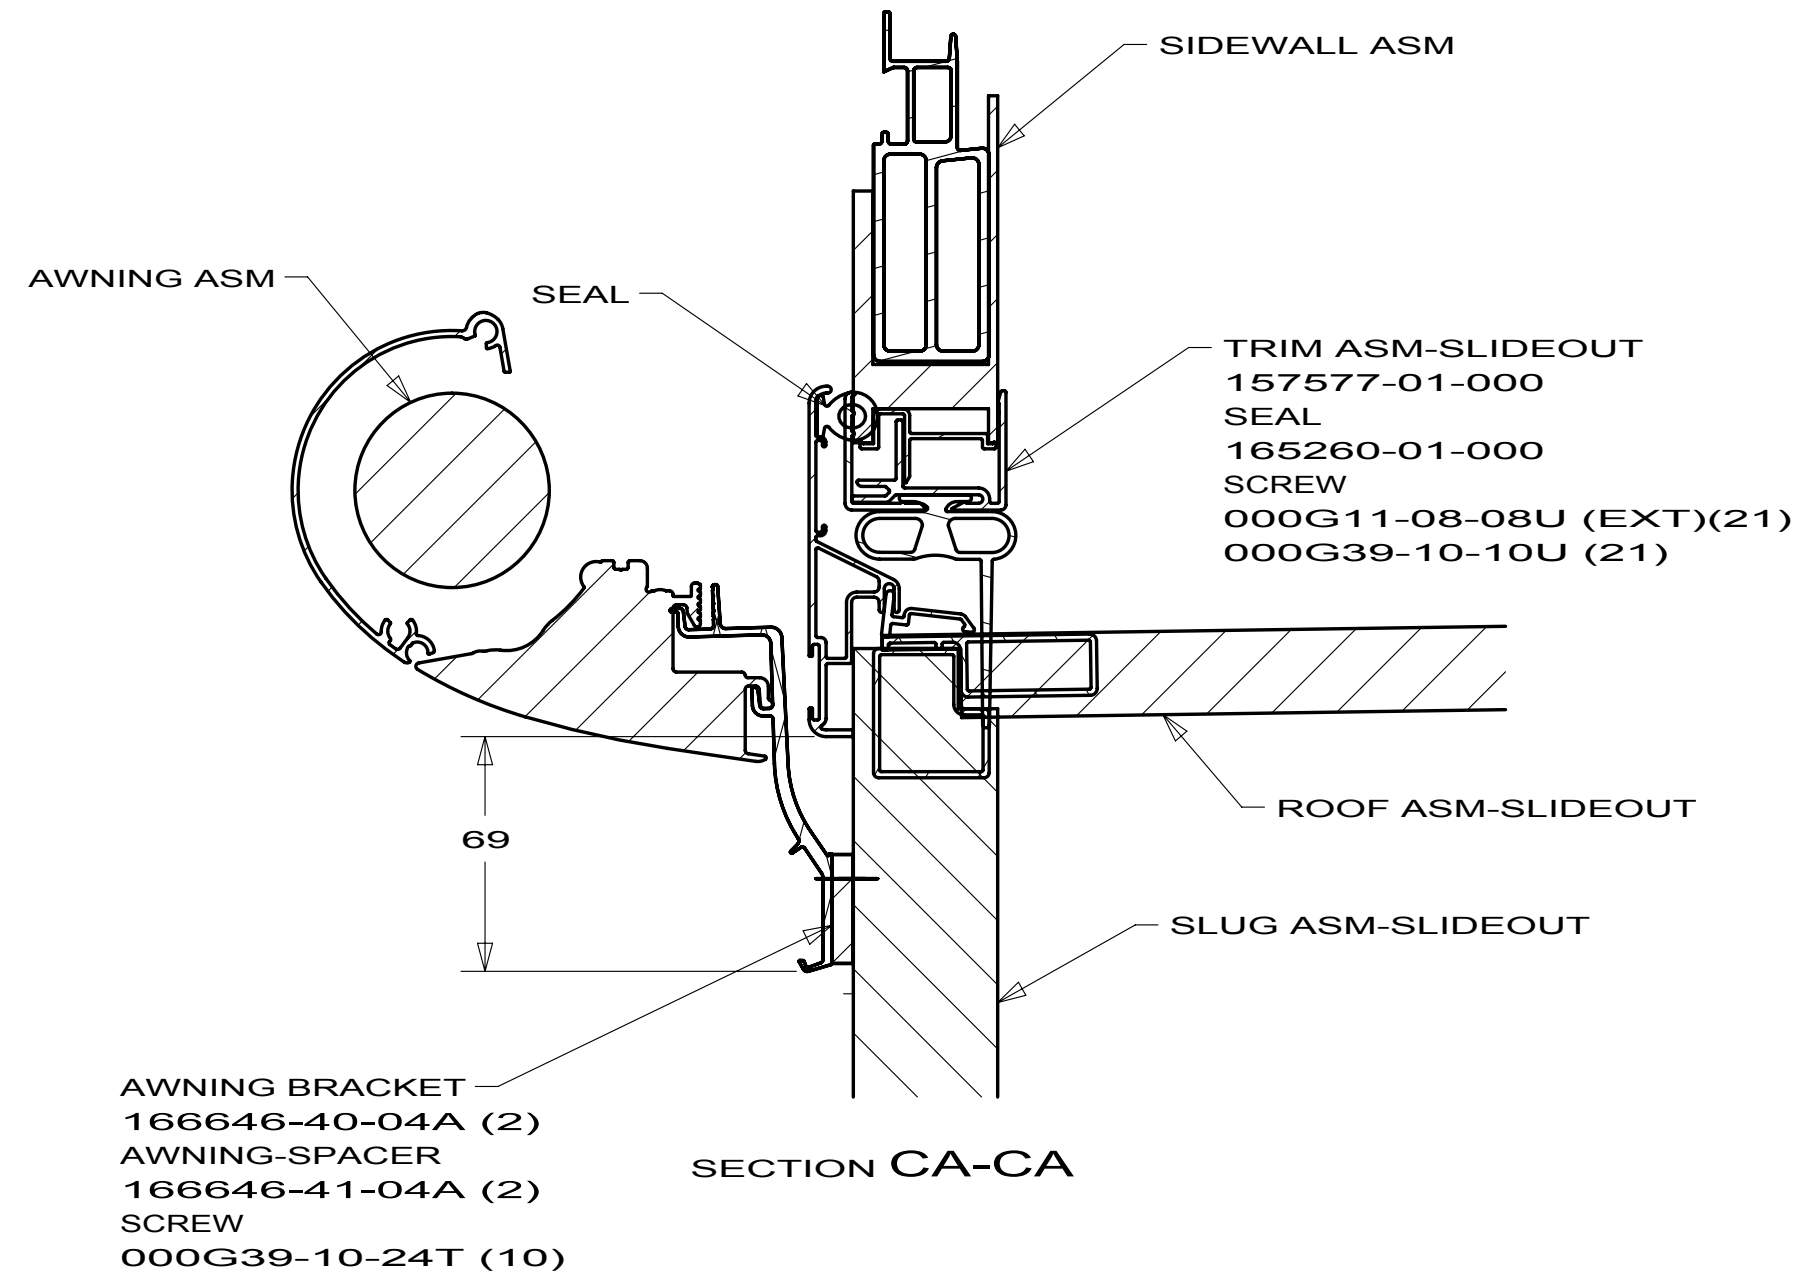

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 3	PART NO 170764	REV

8

7

6

5

4

3

2

1

DWG
NO 170764TAPE-UHMW
156015-01-01A

2153

ROOF ASM-SLIDEOUT

TRIM ASM-SIDEWALL

9BATTO-12-000 (4330MM)
ALIGN WITH TOP OF
TRIM ASM SIDEWALL

TRIM ASM-SLIDEOUT

SECTION DA-DA

ROOF ASM-SLIDEOUT

TAPE-DOUBLE SIDED 1"
123816-01-000(2)
(4185)19 PLASTIC-ABS,COIL
093743-09-04A
(4185)65 ± 3.0
90 ± 3.0CARPET-HEMMED
154772-29-XXX
PAD
075233-06-000
(4185)TAPE-DOUBLE SIDED 2"
123816-07-000
(4185)TUBE-DRAIN
155262-01-01A
WIRE TIE
008543-01-000
NUT SPEED FLAT
044364-02-000
(APPLY SEALANT AROUND
SIDEWALL OPENING
INSTALL TUBE WITH
EXTERIOR HOLE FACING
DOWN.)



SLUG ASM-SLIDEOUT

SECTION DB-DB



SECTION DC-DC

FIRST USED			10 P40L
DO NOT SCALE DRAWING			
TITLE:			SLIDEOUT COMPL-FRT,LH
SHEET 4	PART NO	170764	REV

12/29/2009

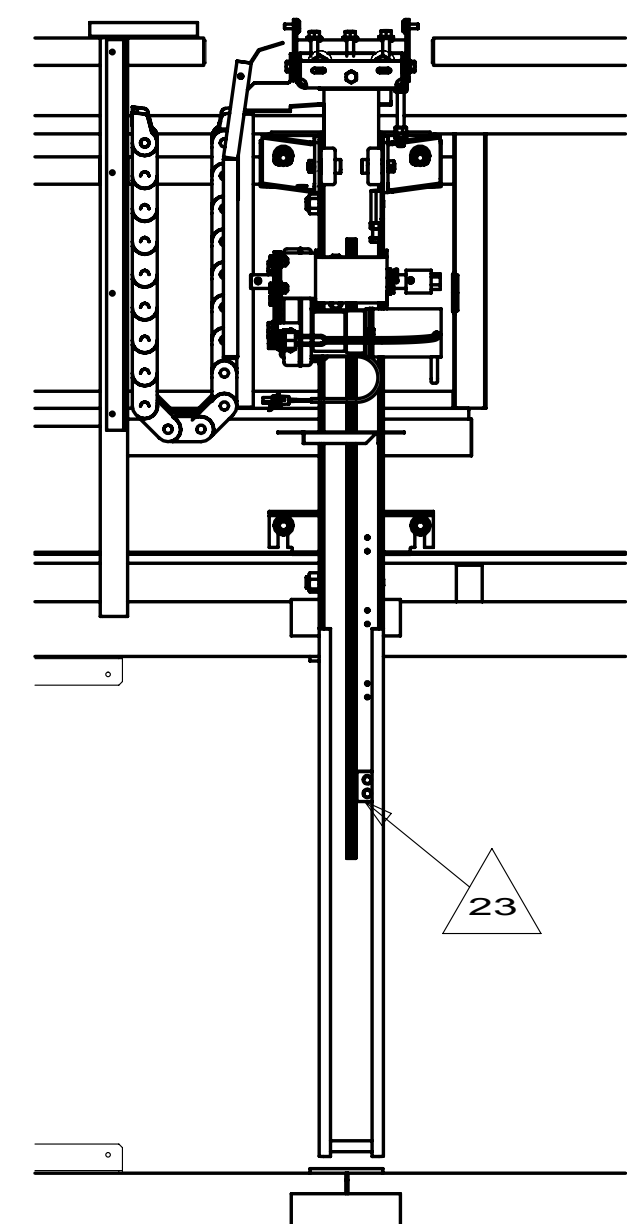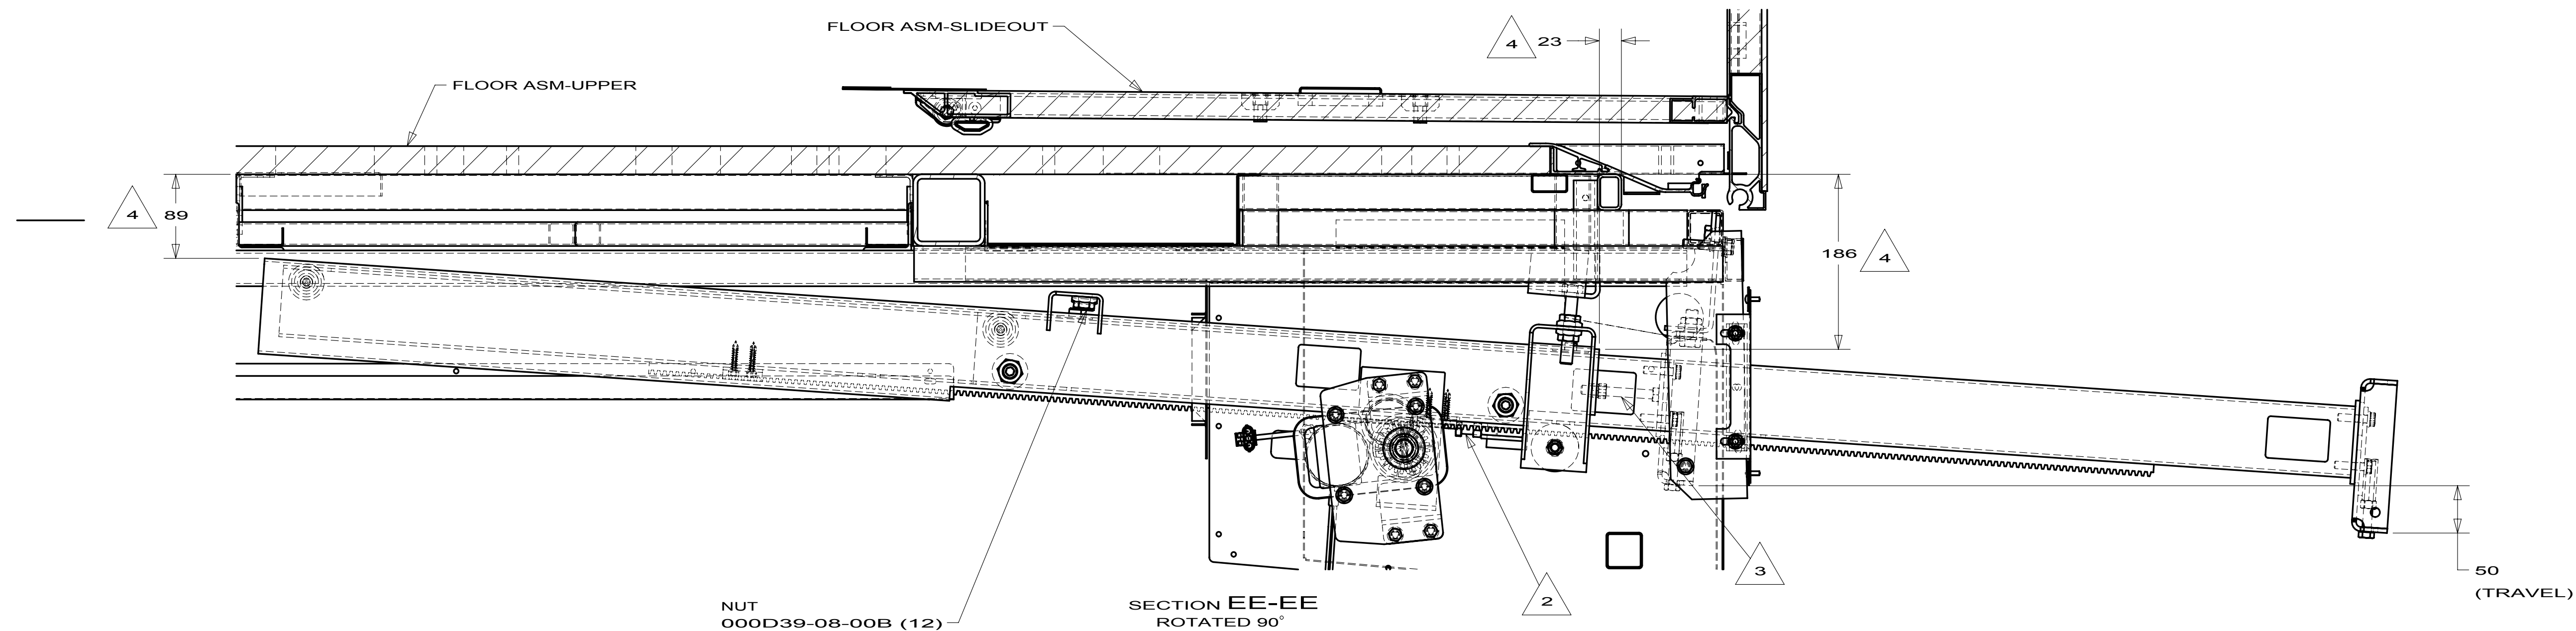


SECTION EF-EF
(TYPICAL BOTH RAMS)

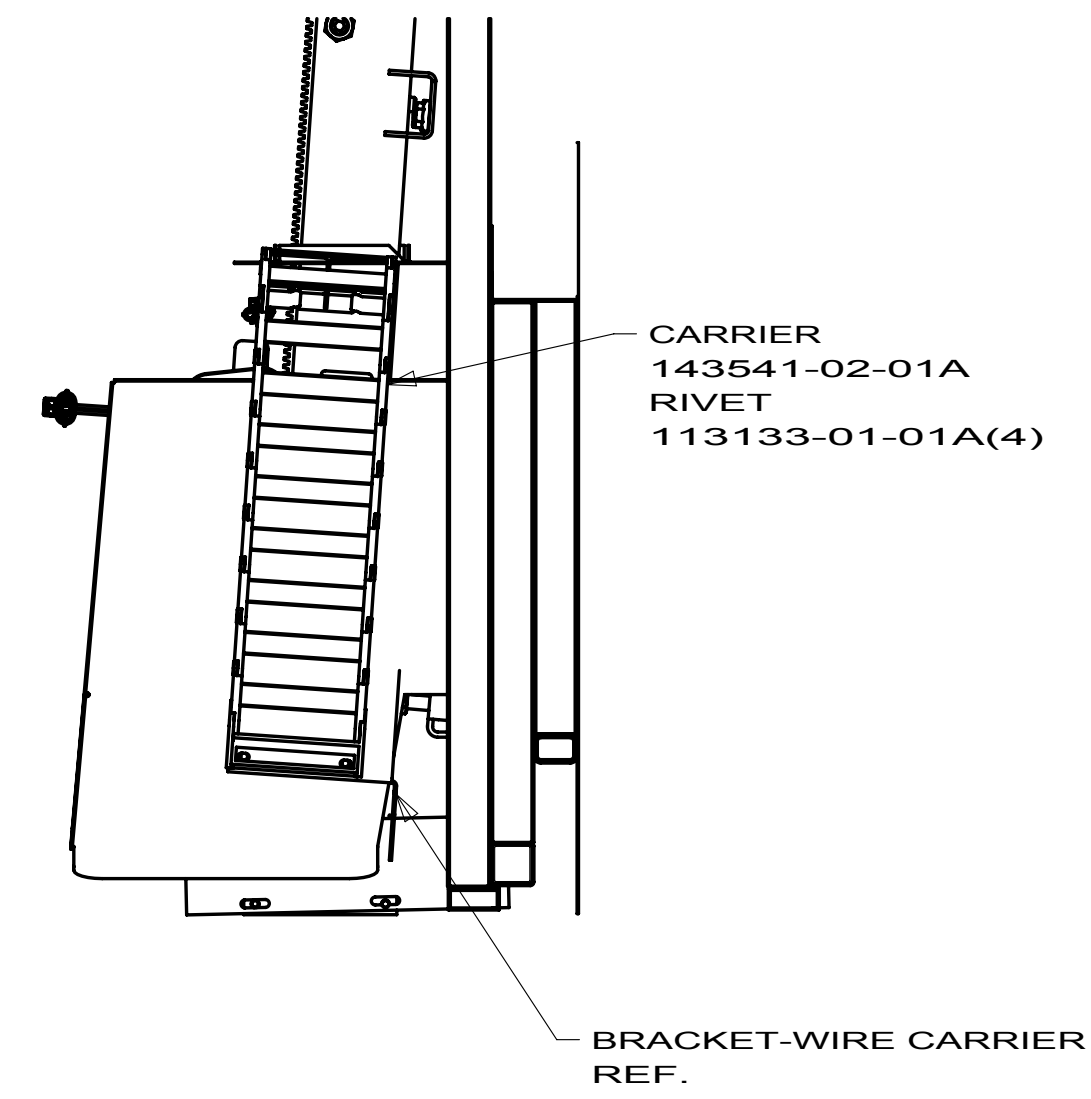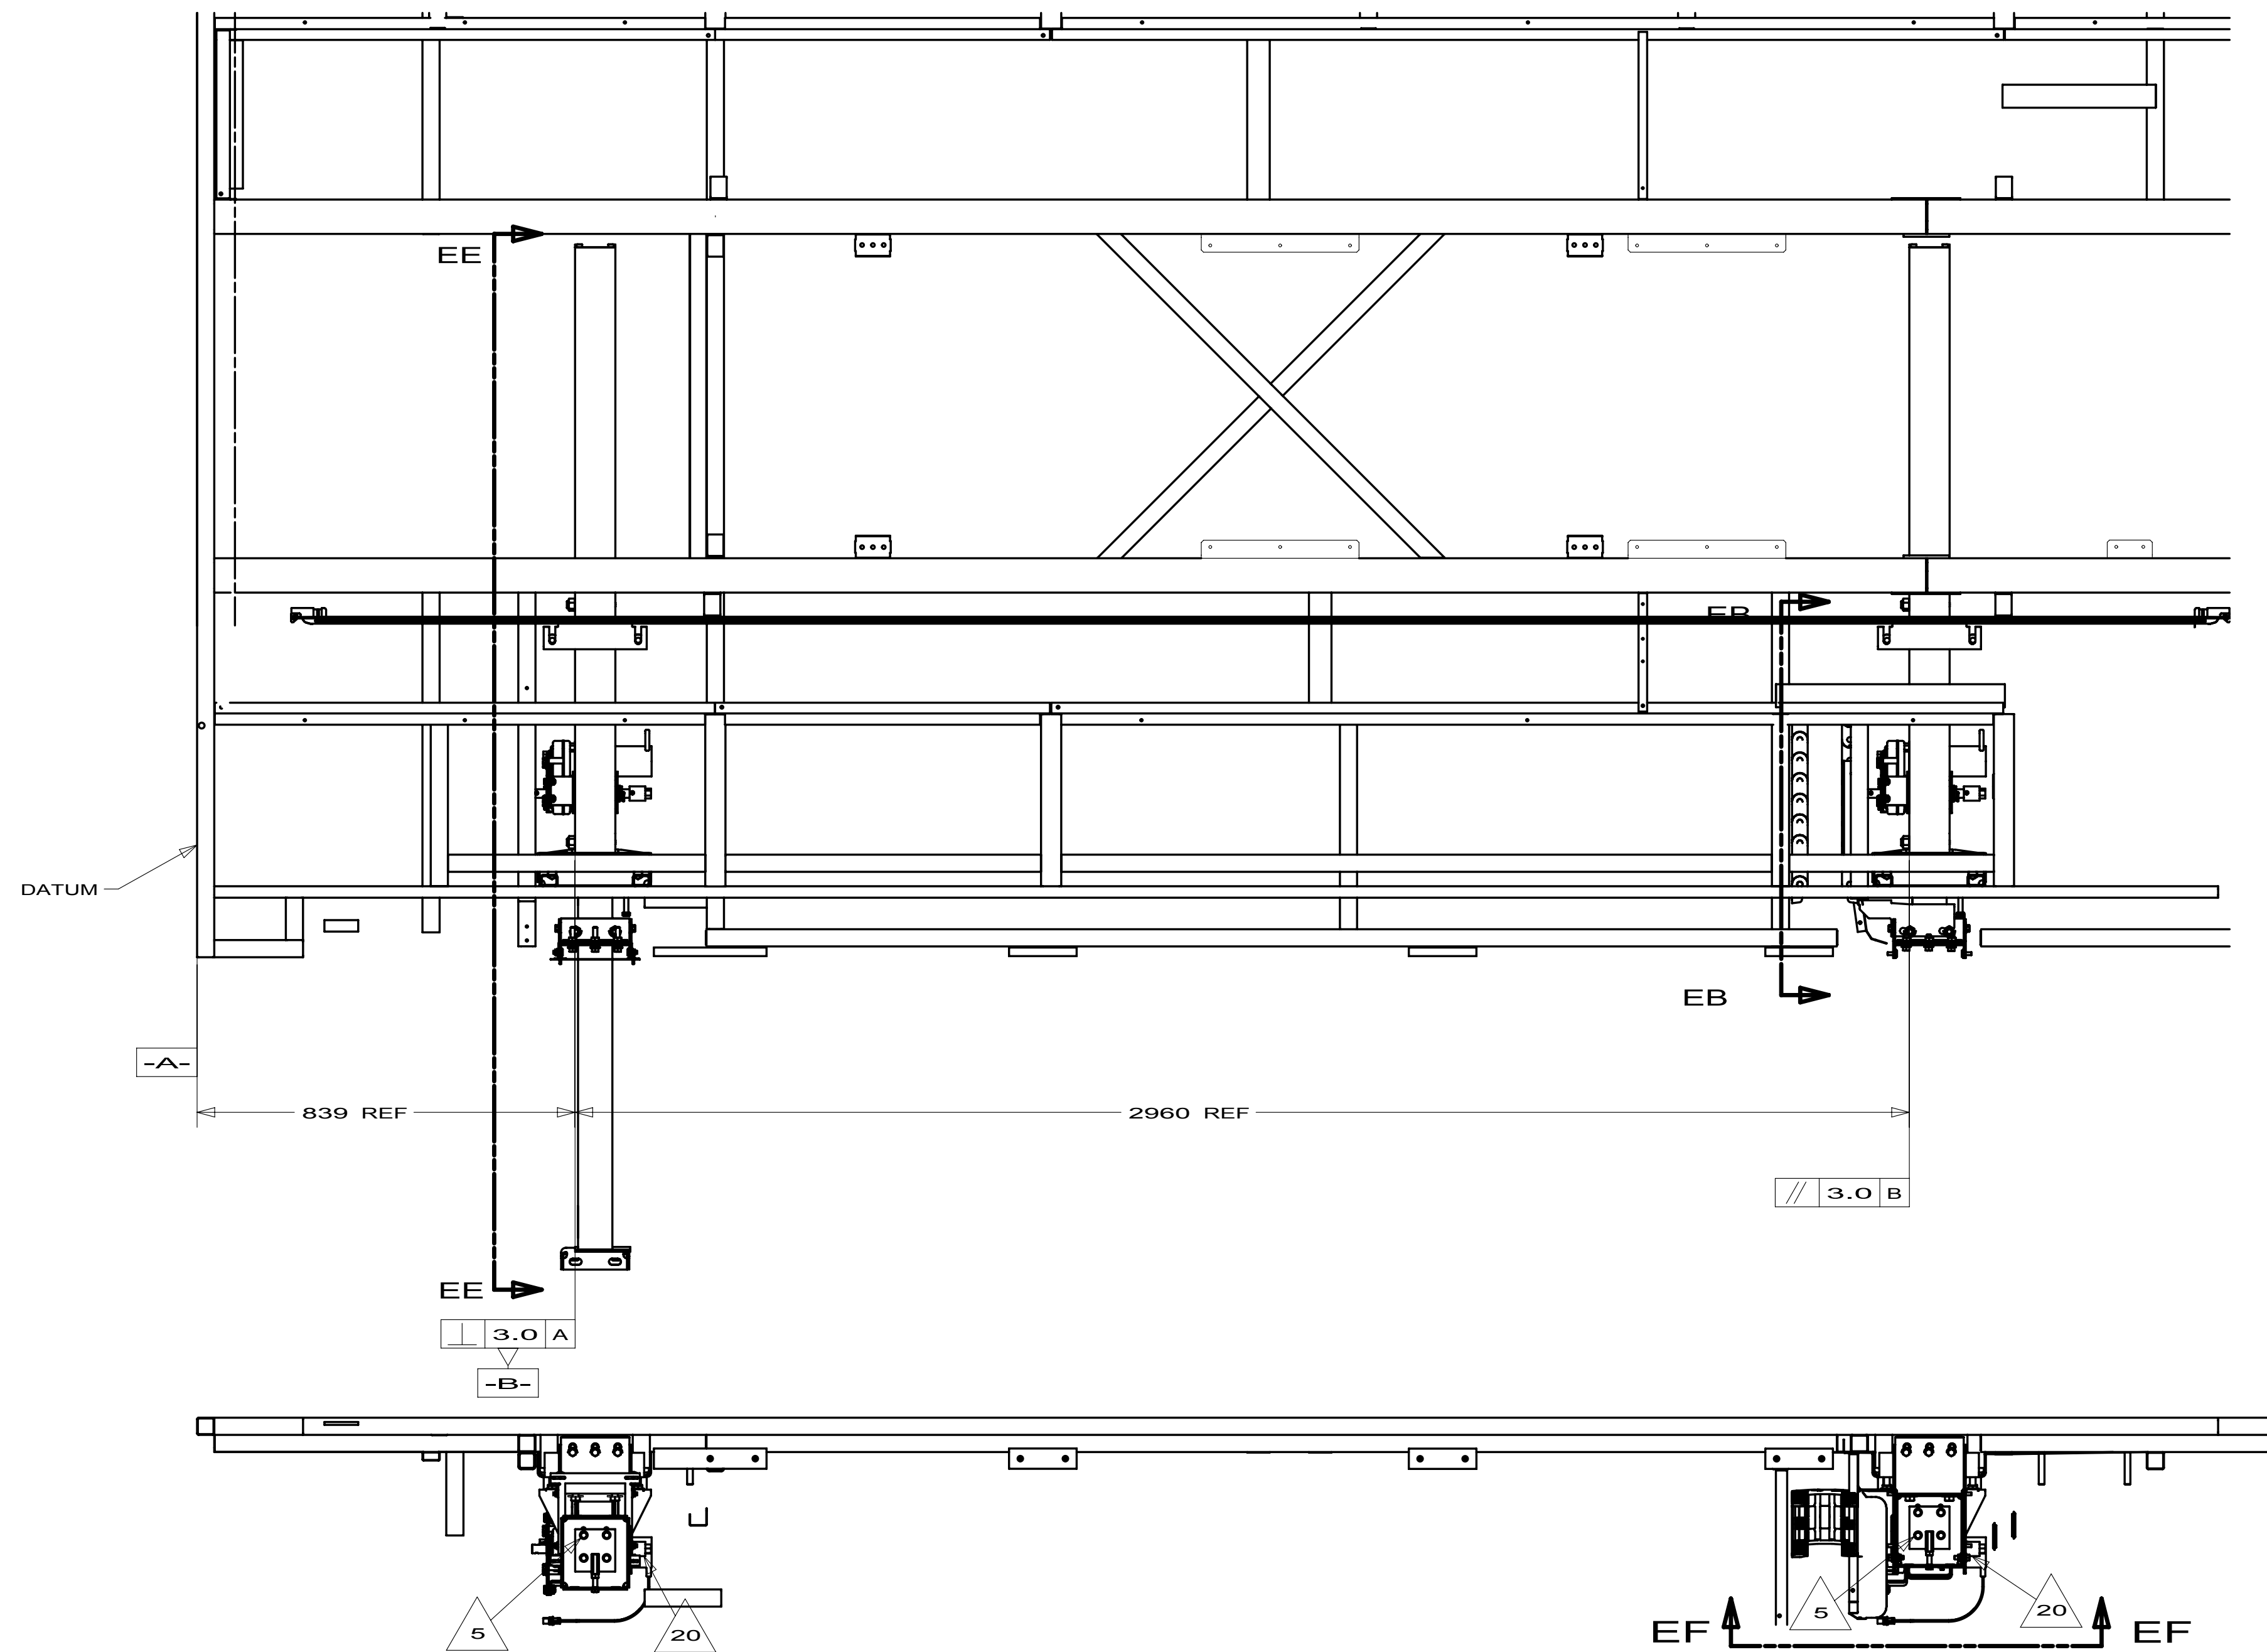

SECTION EB-EB

FIRST USED			10 P40L
DO NOT SCALE DRAWING			
TITLE:			SLIDEOUT COMPL-FRT,LH
SHEET 5	PART NO	170764	REV

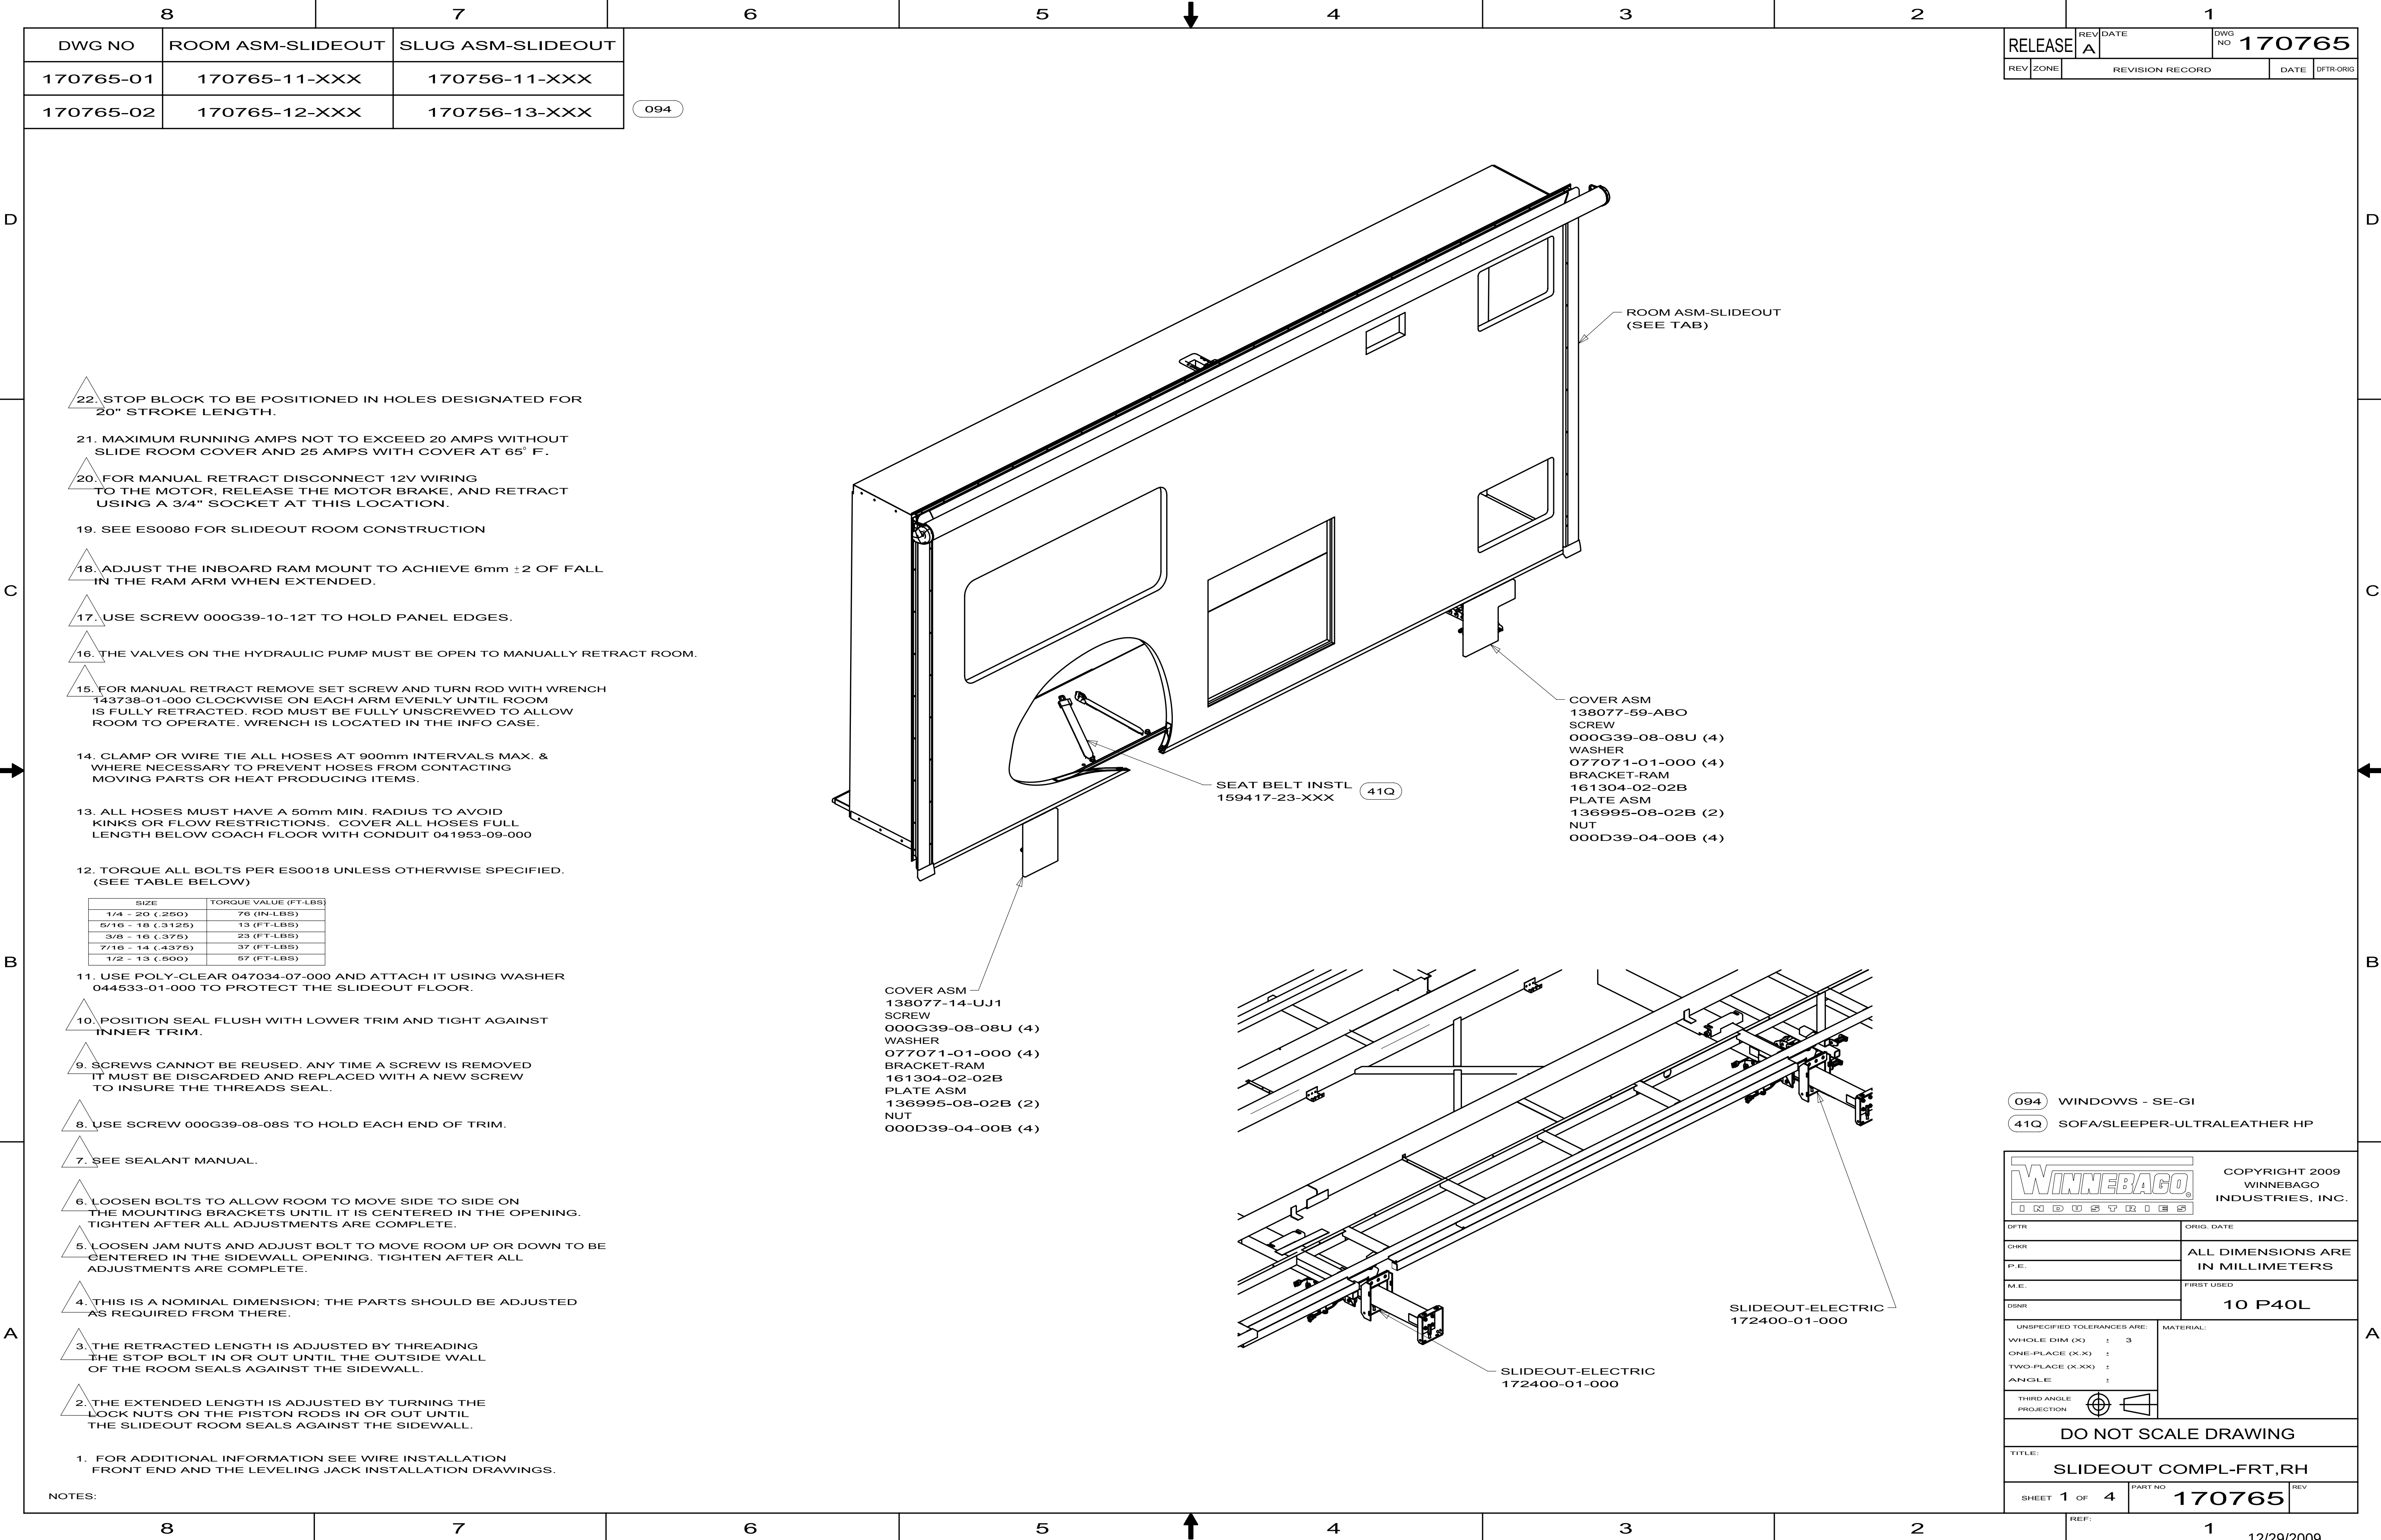






22. STOP BLOCK TO BE POSITIONED IN HOLES DESIGNATED FOR 20" STROKE LENGTH.
21. MAXIMUM RUNNING AMPS NOT TO EXCEED 20 AMPS WITHOUT SLIDE ROOM COVER AND 25 AMPS WITH COVER AT 65° F.
20. FOR MANUAL RETRACT DISCONNECT 12V WIRING TO THE MOTOR, RELEASE THE MOTOR BRAKE, AND RETRACT USING A 3/4" SOCKET AT THIS LOCATION.
19. SEE ES0080 FOR SLIDEOUT ROOM CONSTRUCTION
18. ADJUST THE INBOARD RAM MOUNT TO ACHIEVE 6mm ±2 OF FALL IN THE RAM ARM WHEN EXTENDED.
17. USE SCREW 000G39-10-12T TO HOLD PANEL EDGES.
16. THE VALVES ON THE HYDRAULIC PUMP MUST BE OPEN TO MANUALLY RETRACT ROOM.
15. FOR MANUAL RETRACT REMOVE SET SCREW AND TURN ROD WITH WRENCH 143738-01-000 CLOCKWISE ON EACH ARM EVENLY UNTIL ROOM IS FULLY RETRACTED. ROD MUST BE FULLY UNSCREWED TO ALLOW ROOM TO OPERATE. WRENCH IS LOCATED IN THE INFO CASE.
14. CLAMP OR WIRE TIE ALL HOSES AT 900mm INTERVALS MAX. & WHERE NECESSARY TO PREVENT HOSES FROM CONTACTING MOVING PARTS OR HEAT PRODUCING ITEMS.
13. ALL HOSES MUST HAVE A 50mm MIN. RADIUS TO AVOID KINKS OR FLOW RESTRICTIONS. COVER ALL HOSES FULL LENGTH BELOW COACH FLOOR WITH CONDUIT 041953-09-000
12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED. (SEE TABLE BELOW)
- | SIZE | TORQUE VALUE (FT-LBS) |
|-------------------|-----------------------|
| 1/4 - 20 (.250) | 76 (IN-LBS) |
| 5/16 - 18 (.3125) | 13 (FT-LBS) |
| 3/8 - 16 (.375) | 23 (FT-LBS) |
| 7/16 - 14 (.4375) | 37 (FT-LBS) |
| 1/2 - 13 (.500) | 57 (FT-LBS) |
11. USE POLY-CLEAR 047034-07-000 AND ATTACH IT USING WASHER 044533-01-000 TO PROTECT THE SLIDEOUT FLOOR.
10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST INNER TRIM.
9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.
8. USE SCREW 000G39-08-08S TO HOLD EACH END OF TRIM.
7. SEE SEALANT MANUAL.
6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.
5. LOOSEN JAM NUTS AND ADJUST BOLT TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.
4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED AS REQUIRED FROM THERE.
3. THE RETRACTED LENGTH IS ADJUSTED BY THREADING THE STOP BOLT IN OR OUT UNTIL THE OUTSIDE WALL OF THE ROOM SEALS AGAINST THE SIDEWALL.
2. THE EXTENDED LENGTH IS ADJUSTED BY TURNING THE LOCK NUTS ON THE PISTON RODS IN OR OUT UNTIL THE SLIDEOUT ROOM SEALS AGAINST THE SIDEWALL.
1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:


RELEASE		REV	DATE	DWG NO	170765
REV	ZONE	REVISION RECORD		DATE	DFT-ORIG

- 094 WINDOWS - SE-GI
- 41Q SOFA/SLEEPER-ULTRALEATHER HP





WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT-ORIG		ORIG. DATE	
CHGR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DSNR		10 P40L	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-FRT,RH			
SHEET 1 OF 4		PART NO 170765	
REF:		1	

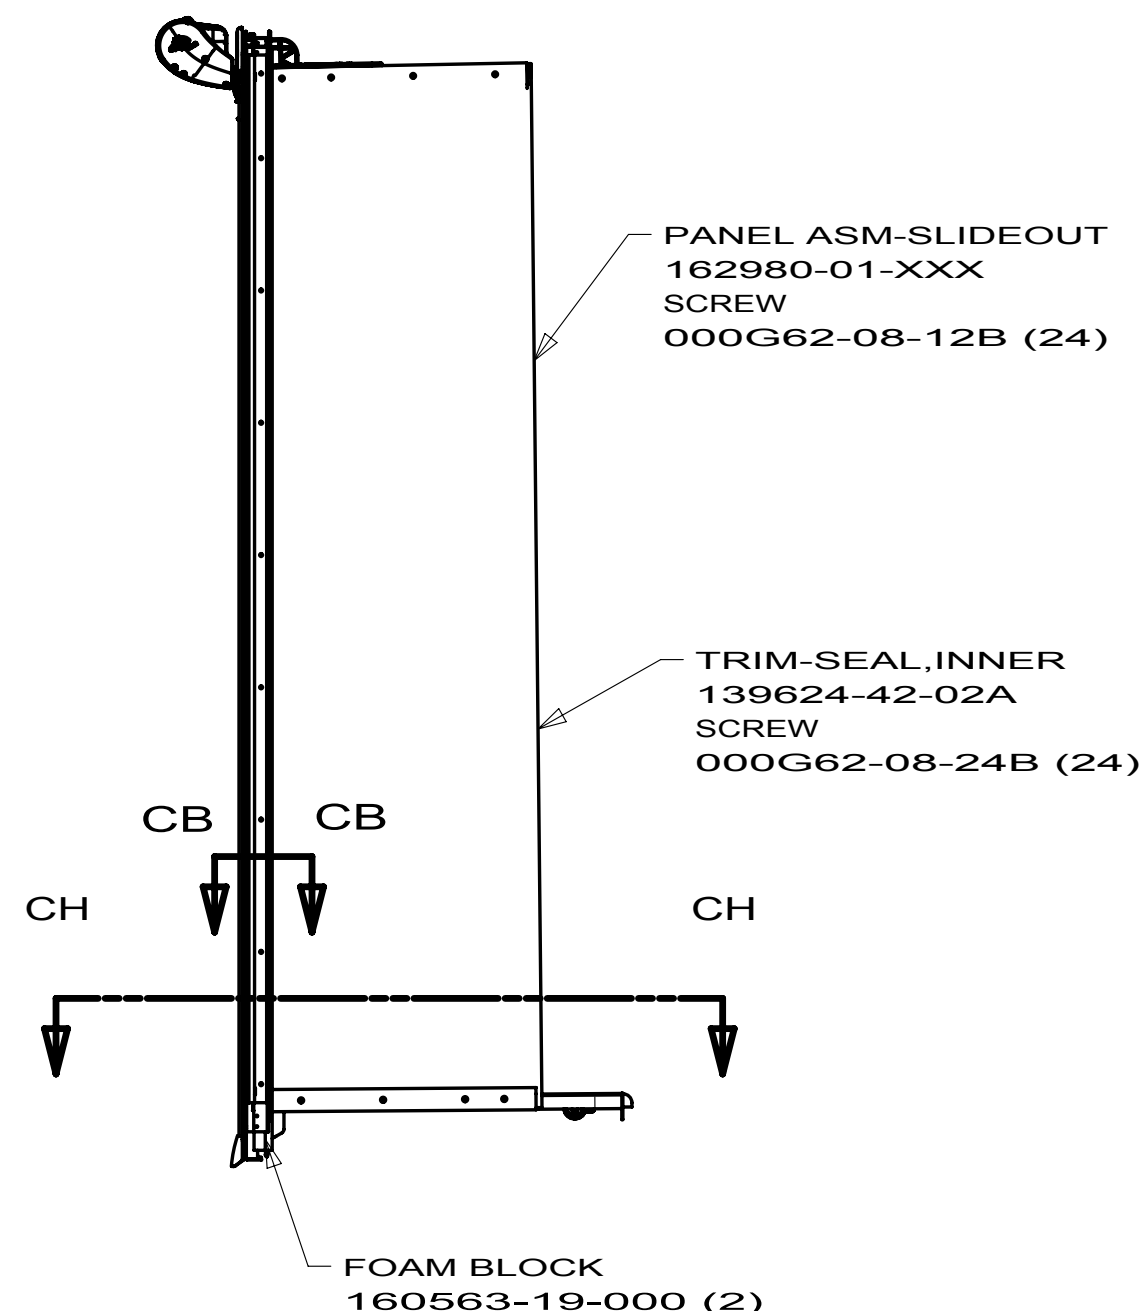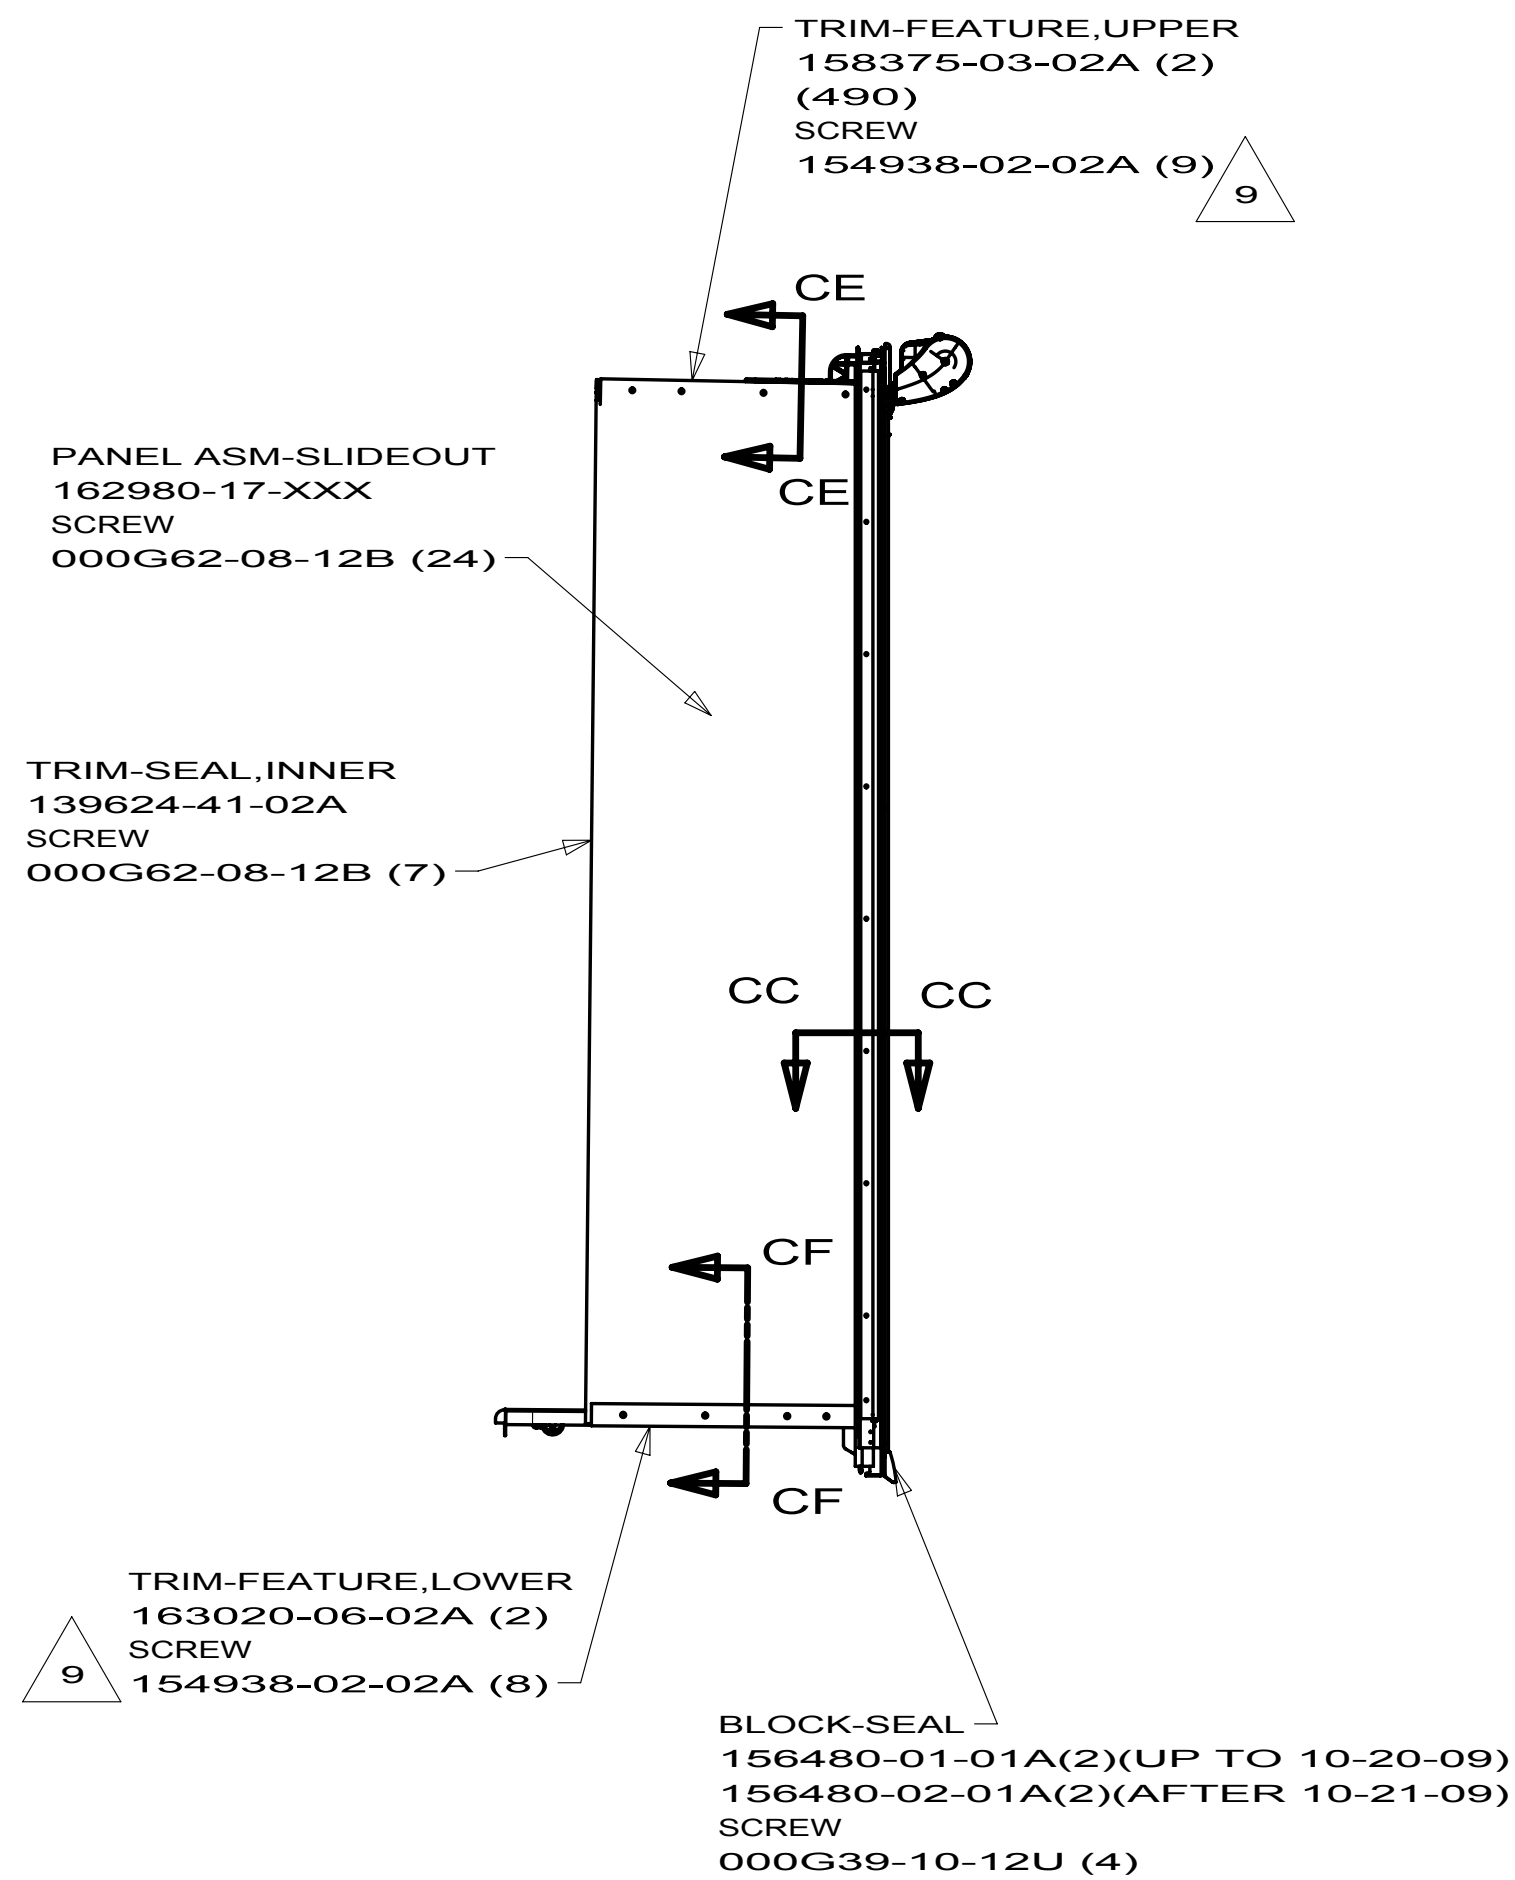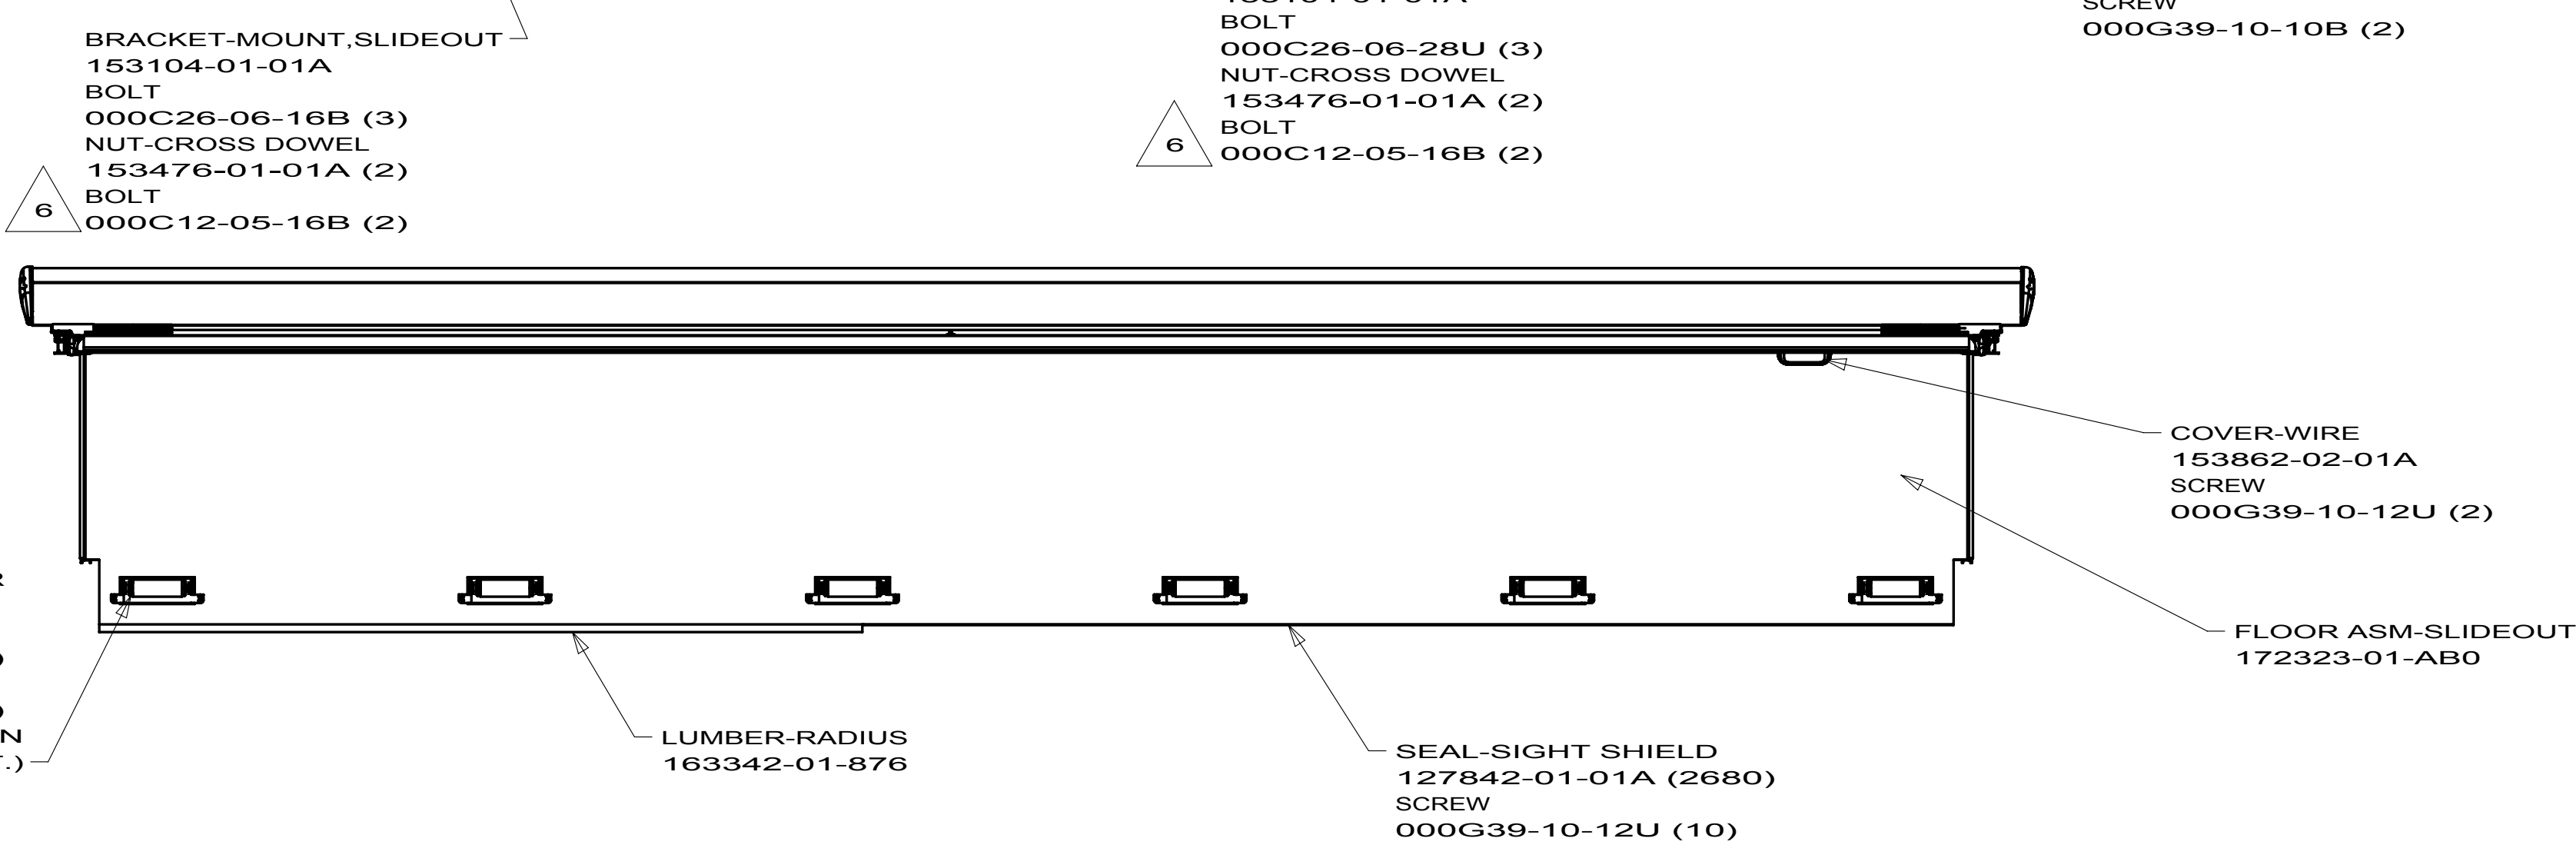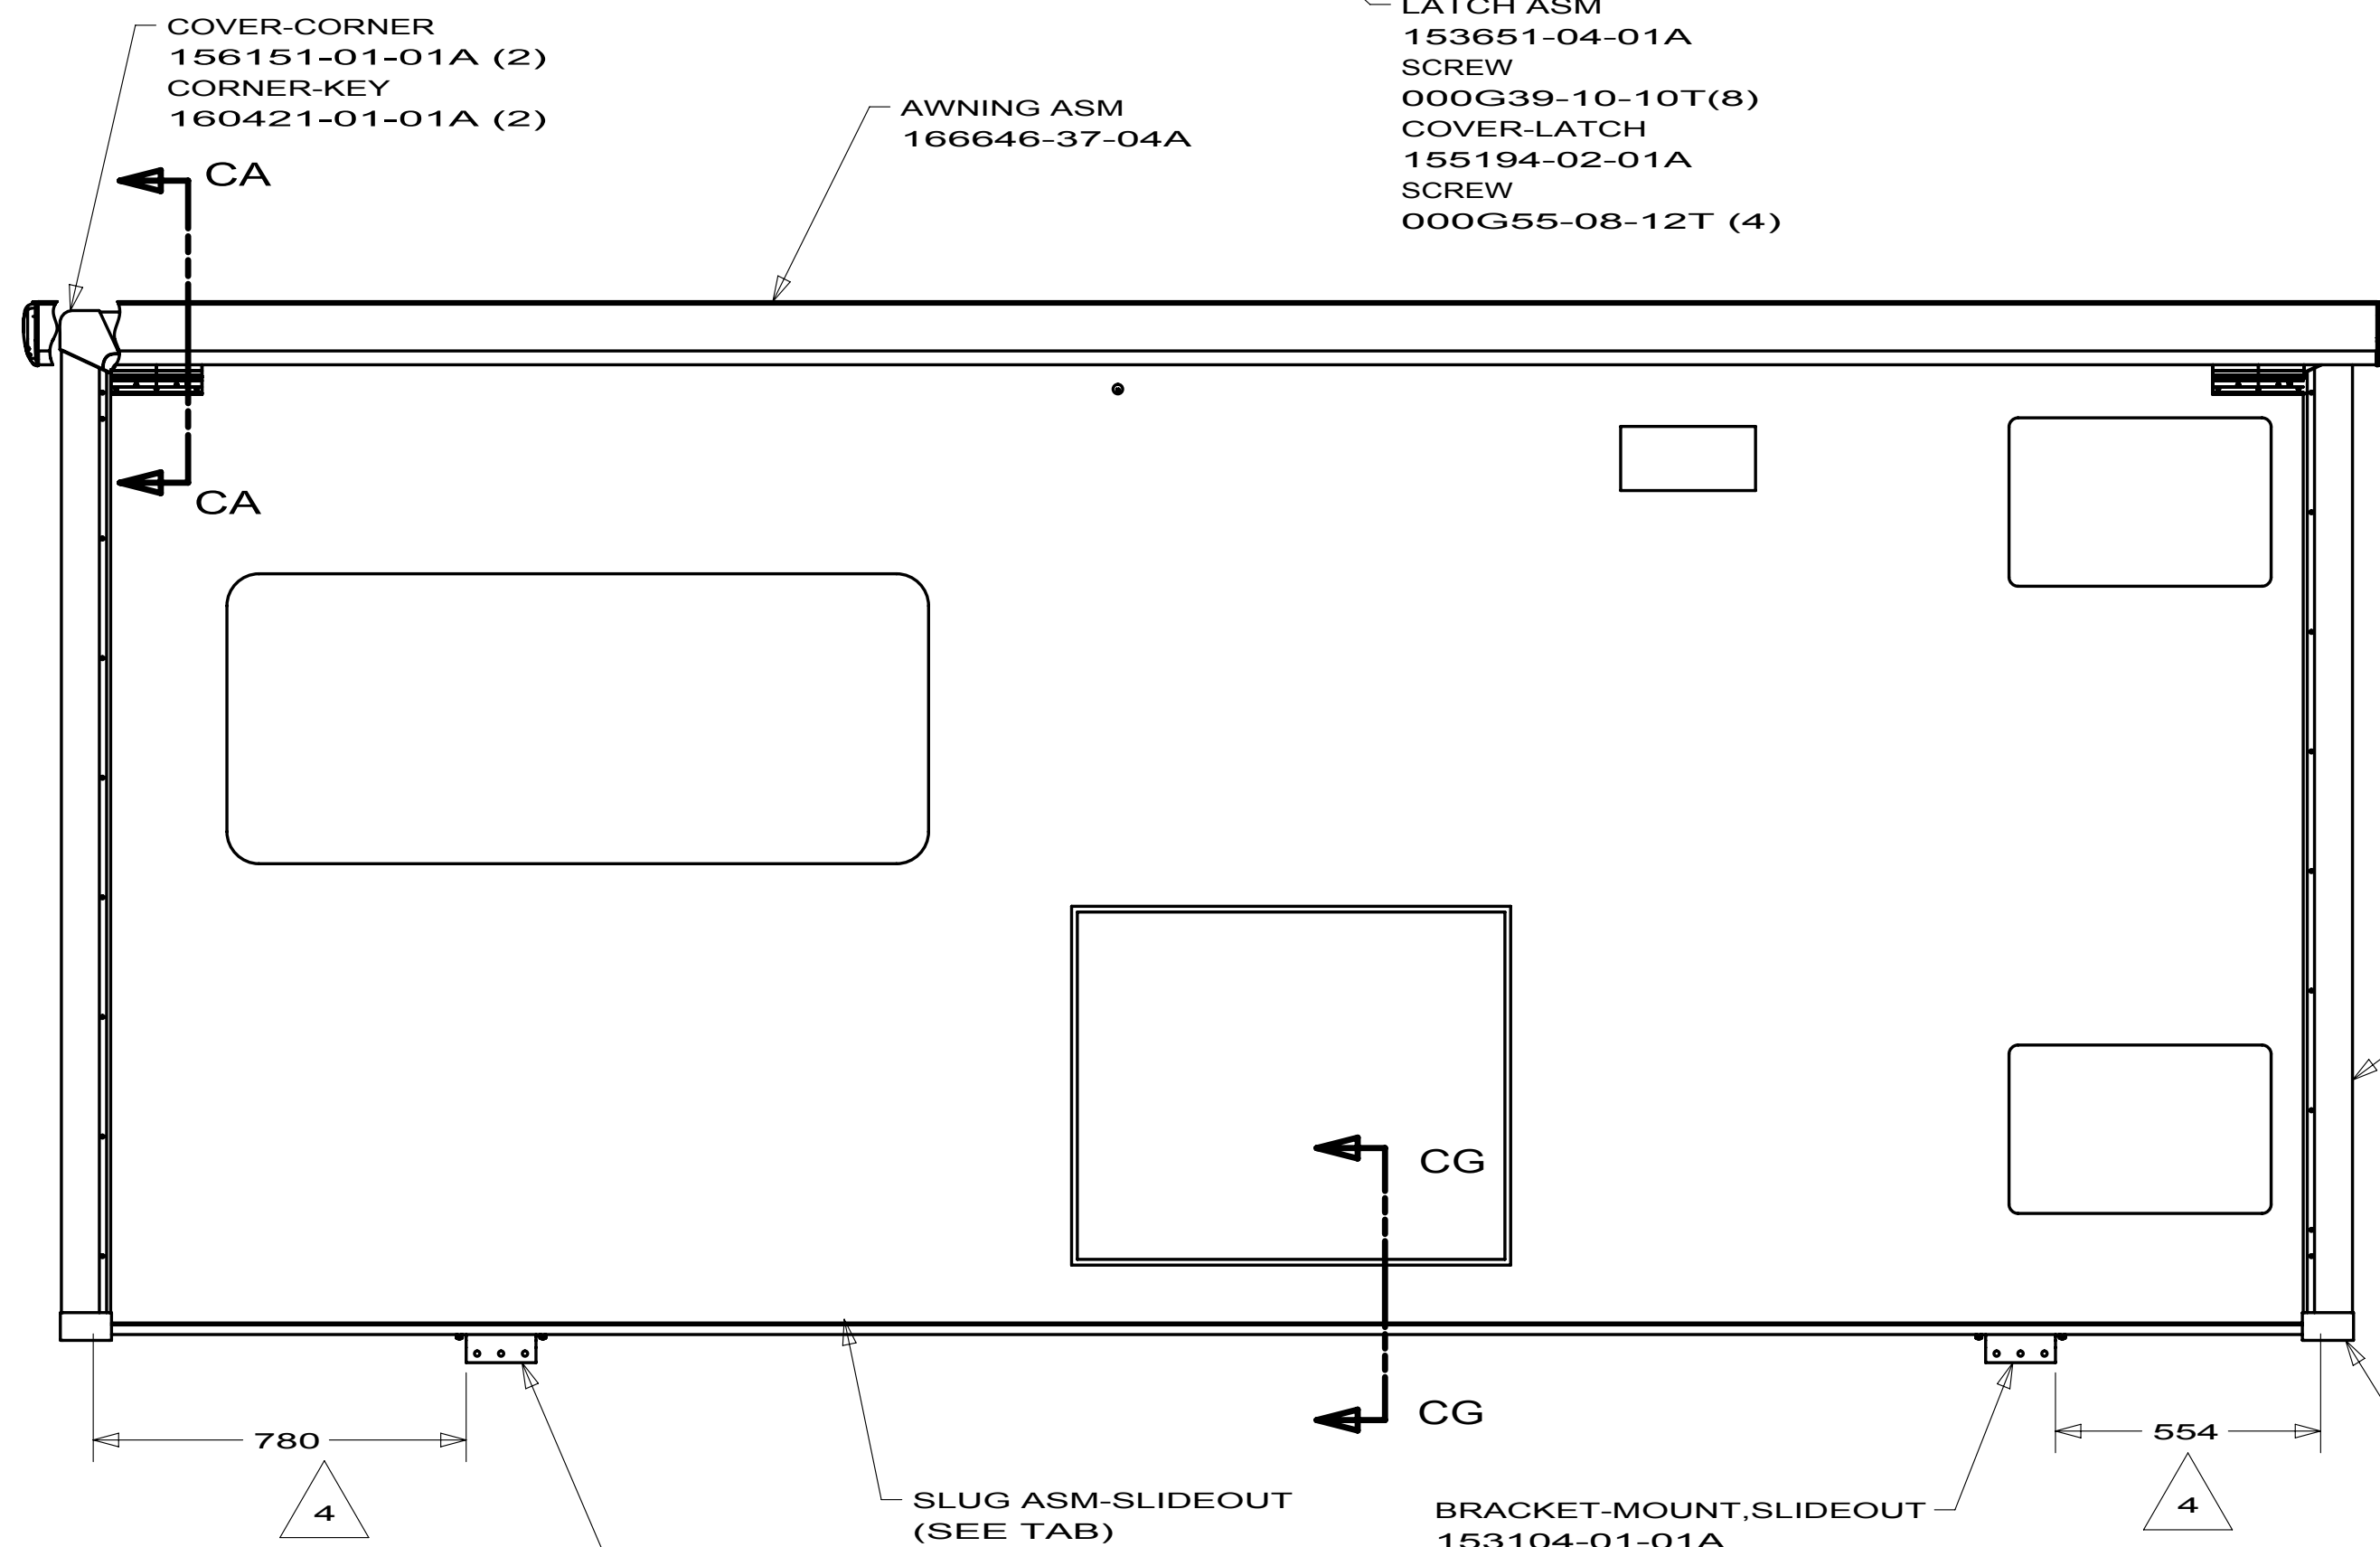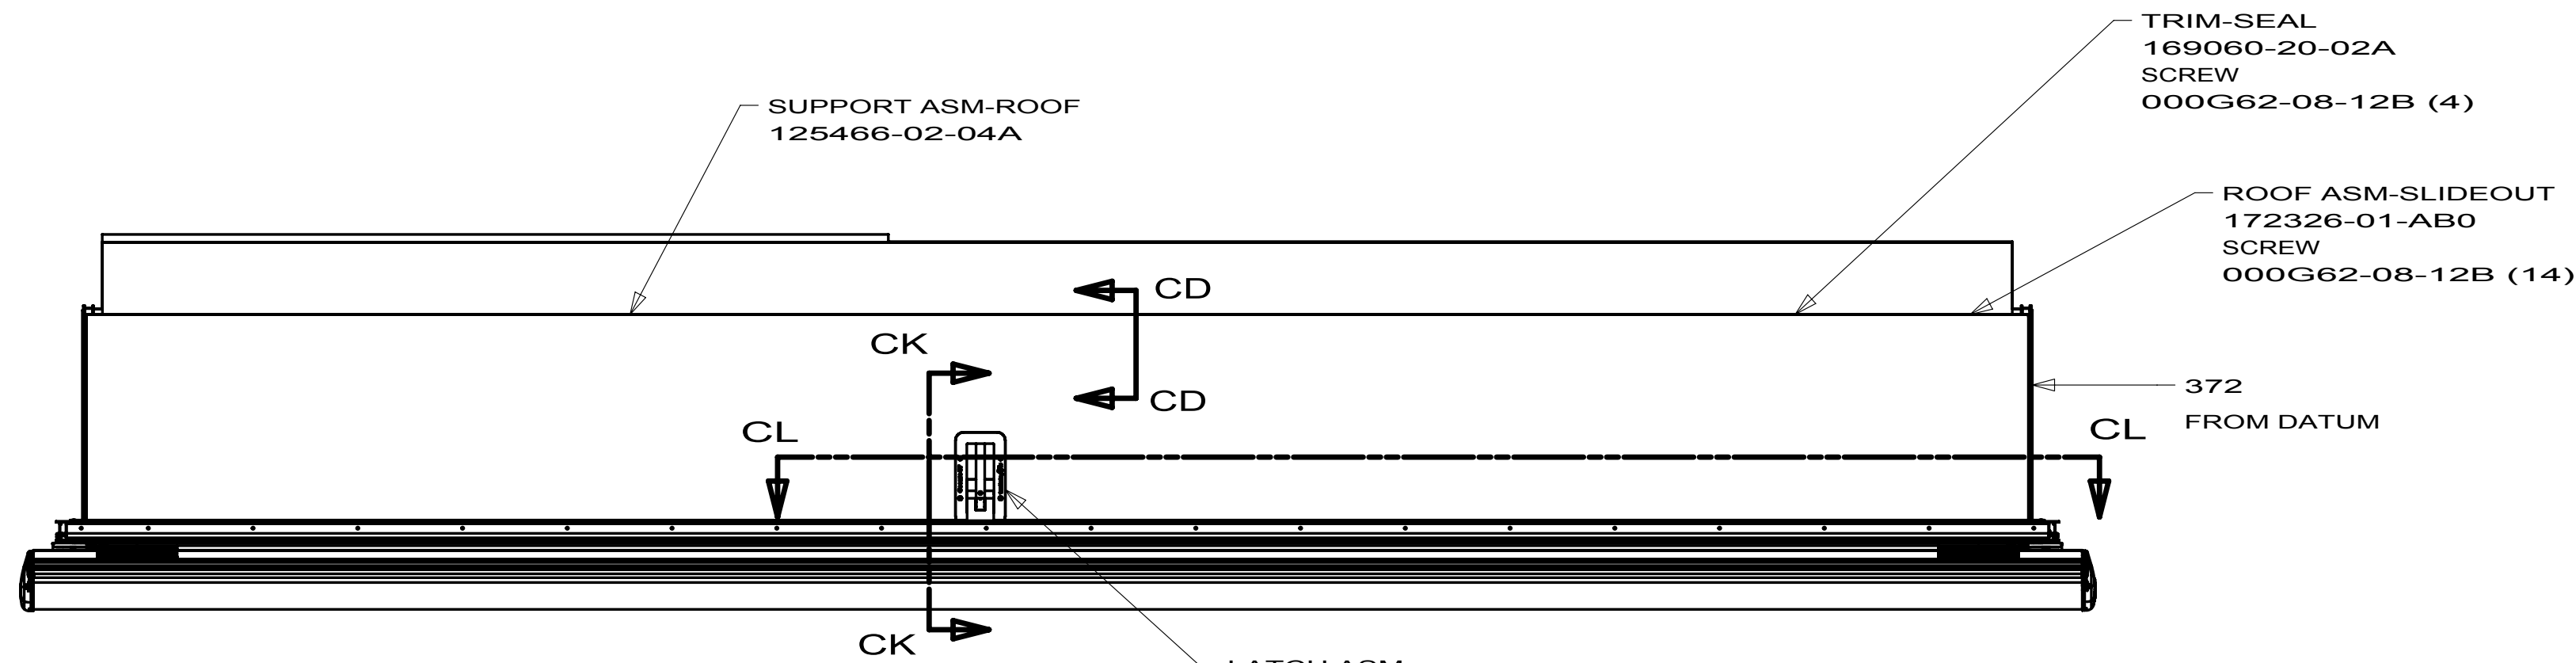

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,RH		
SHEET 2	PART NO 170765	REV

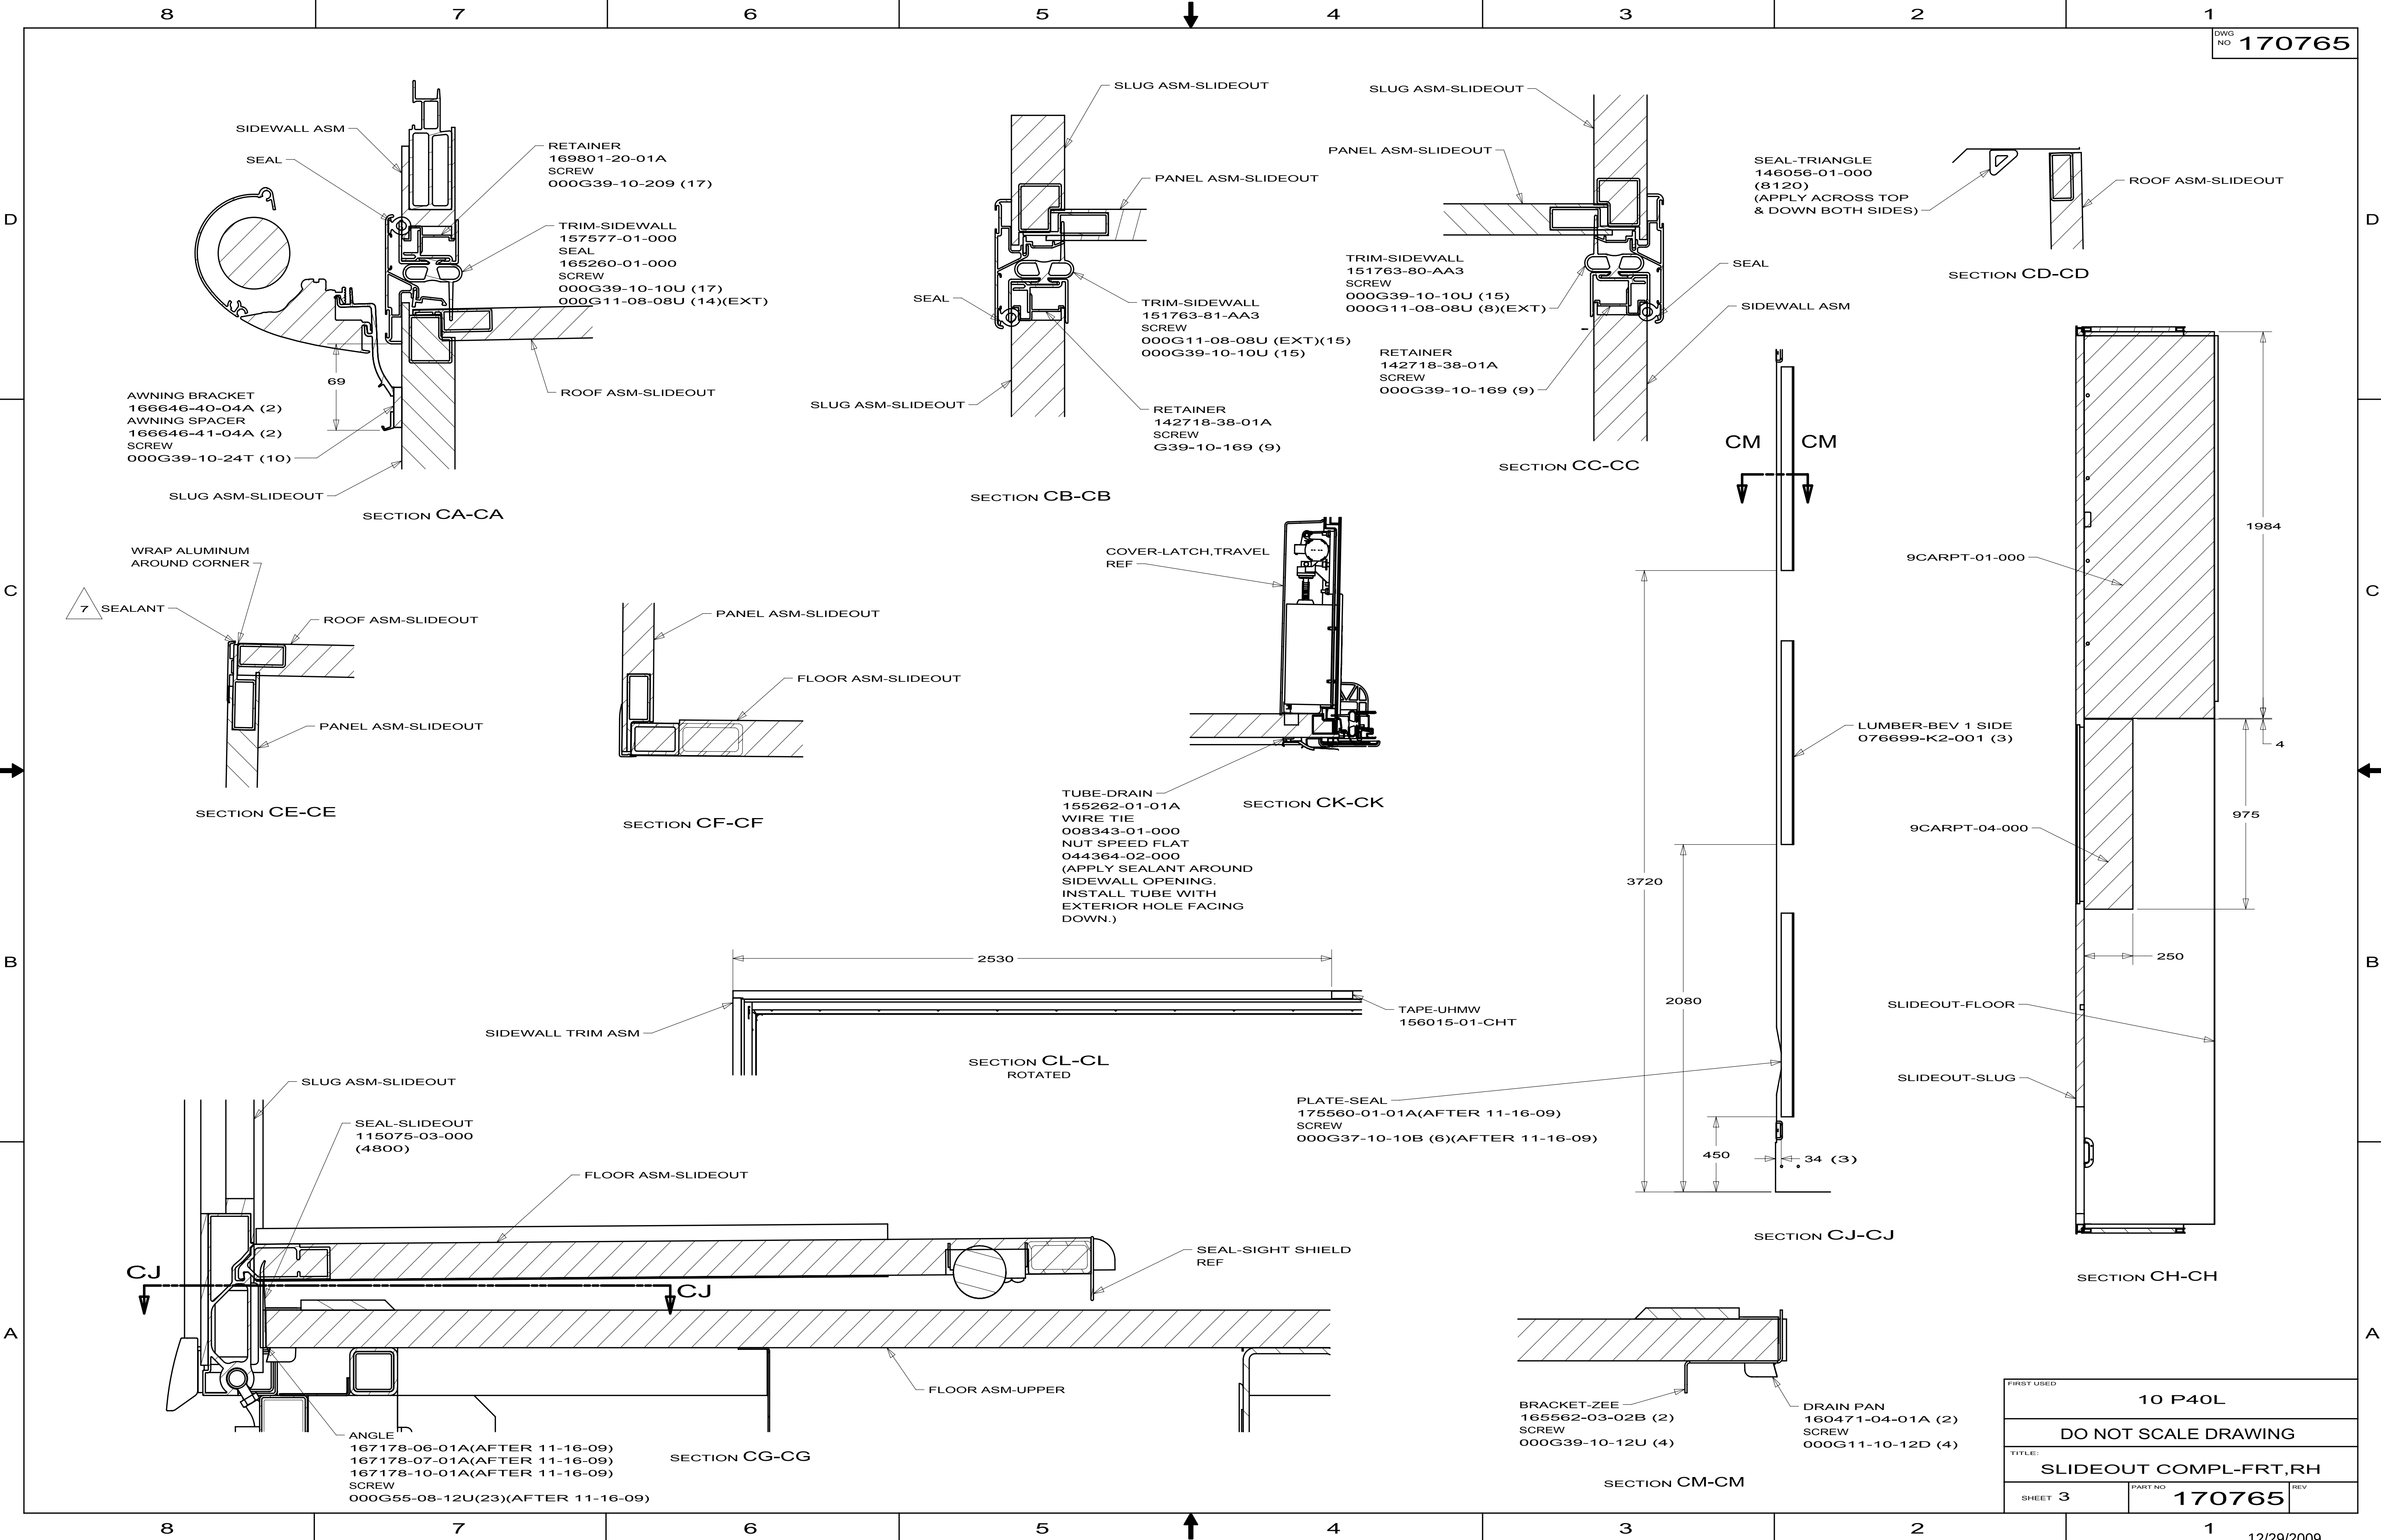

FIRST USED				10 P40L			
DO NOT SCALE DRAWING							
TITLE:							
SLIDEOUT COMPL-FRT,RH							
SHEET 3				PART NO		REV	
				170765			

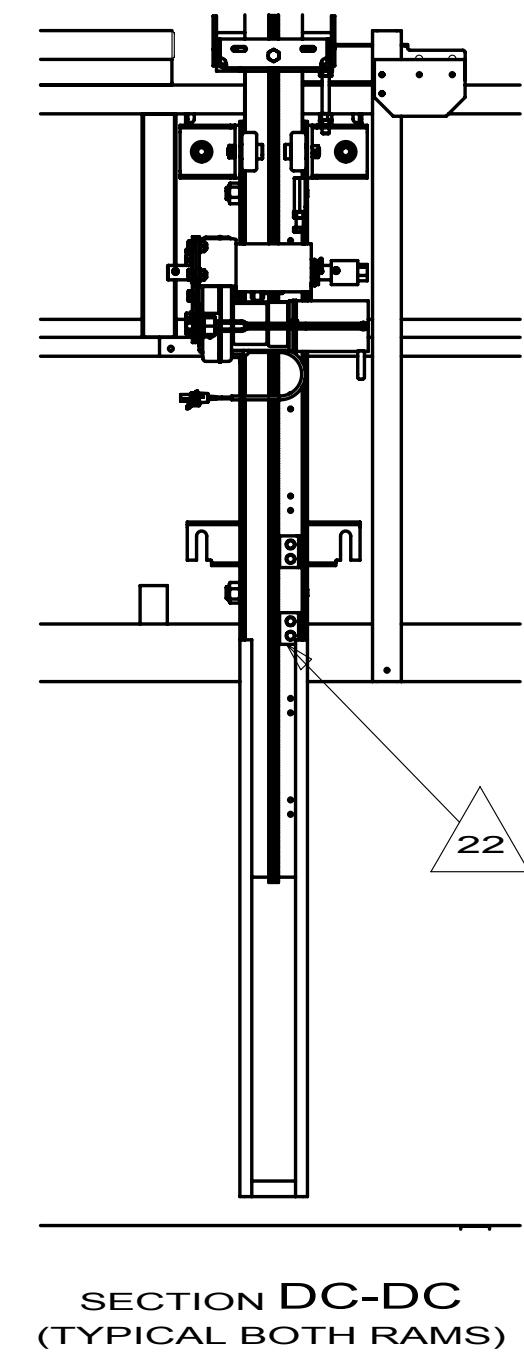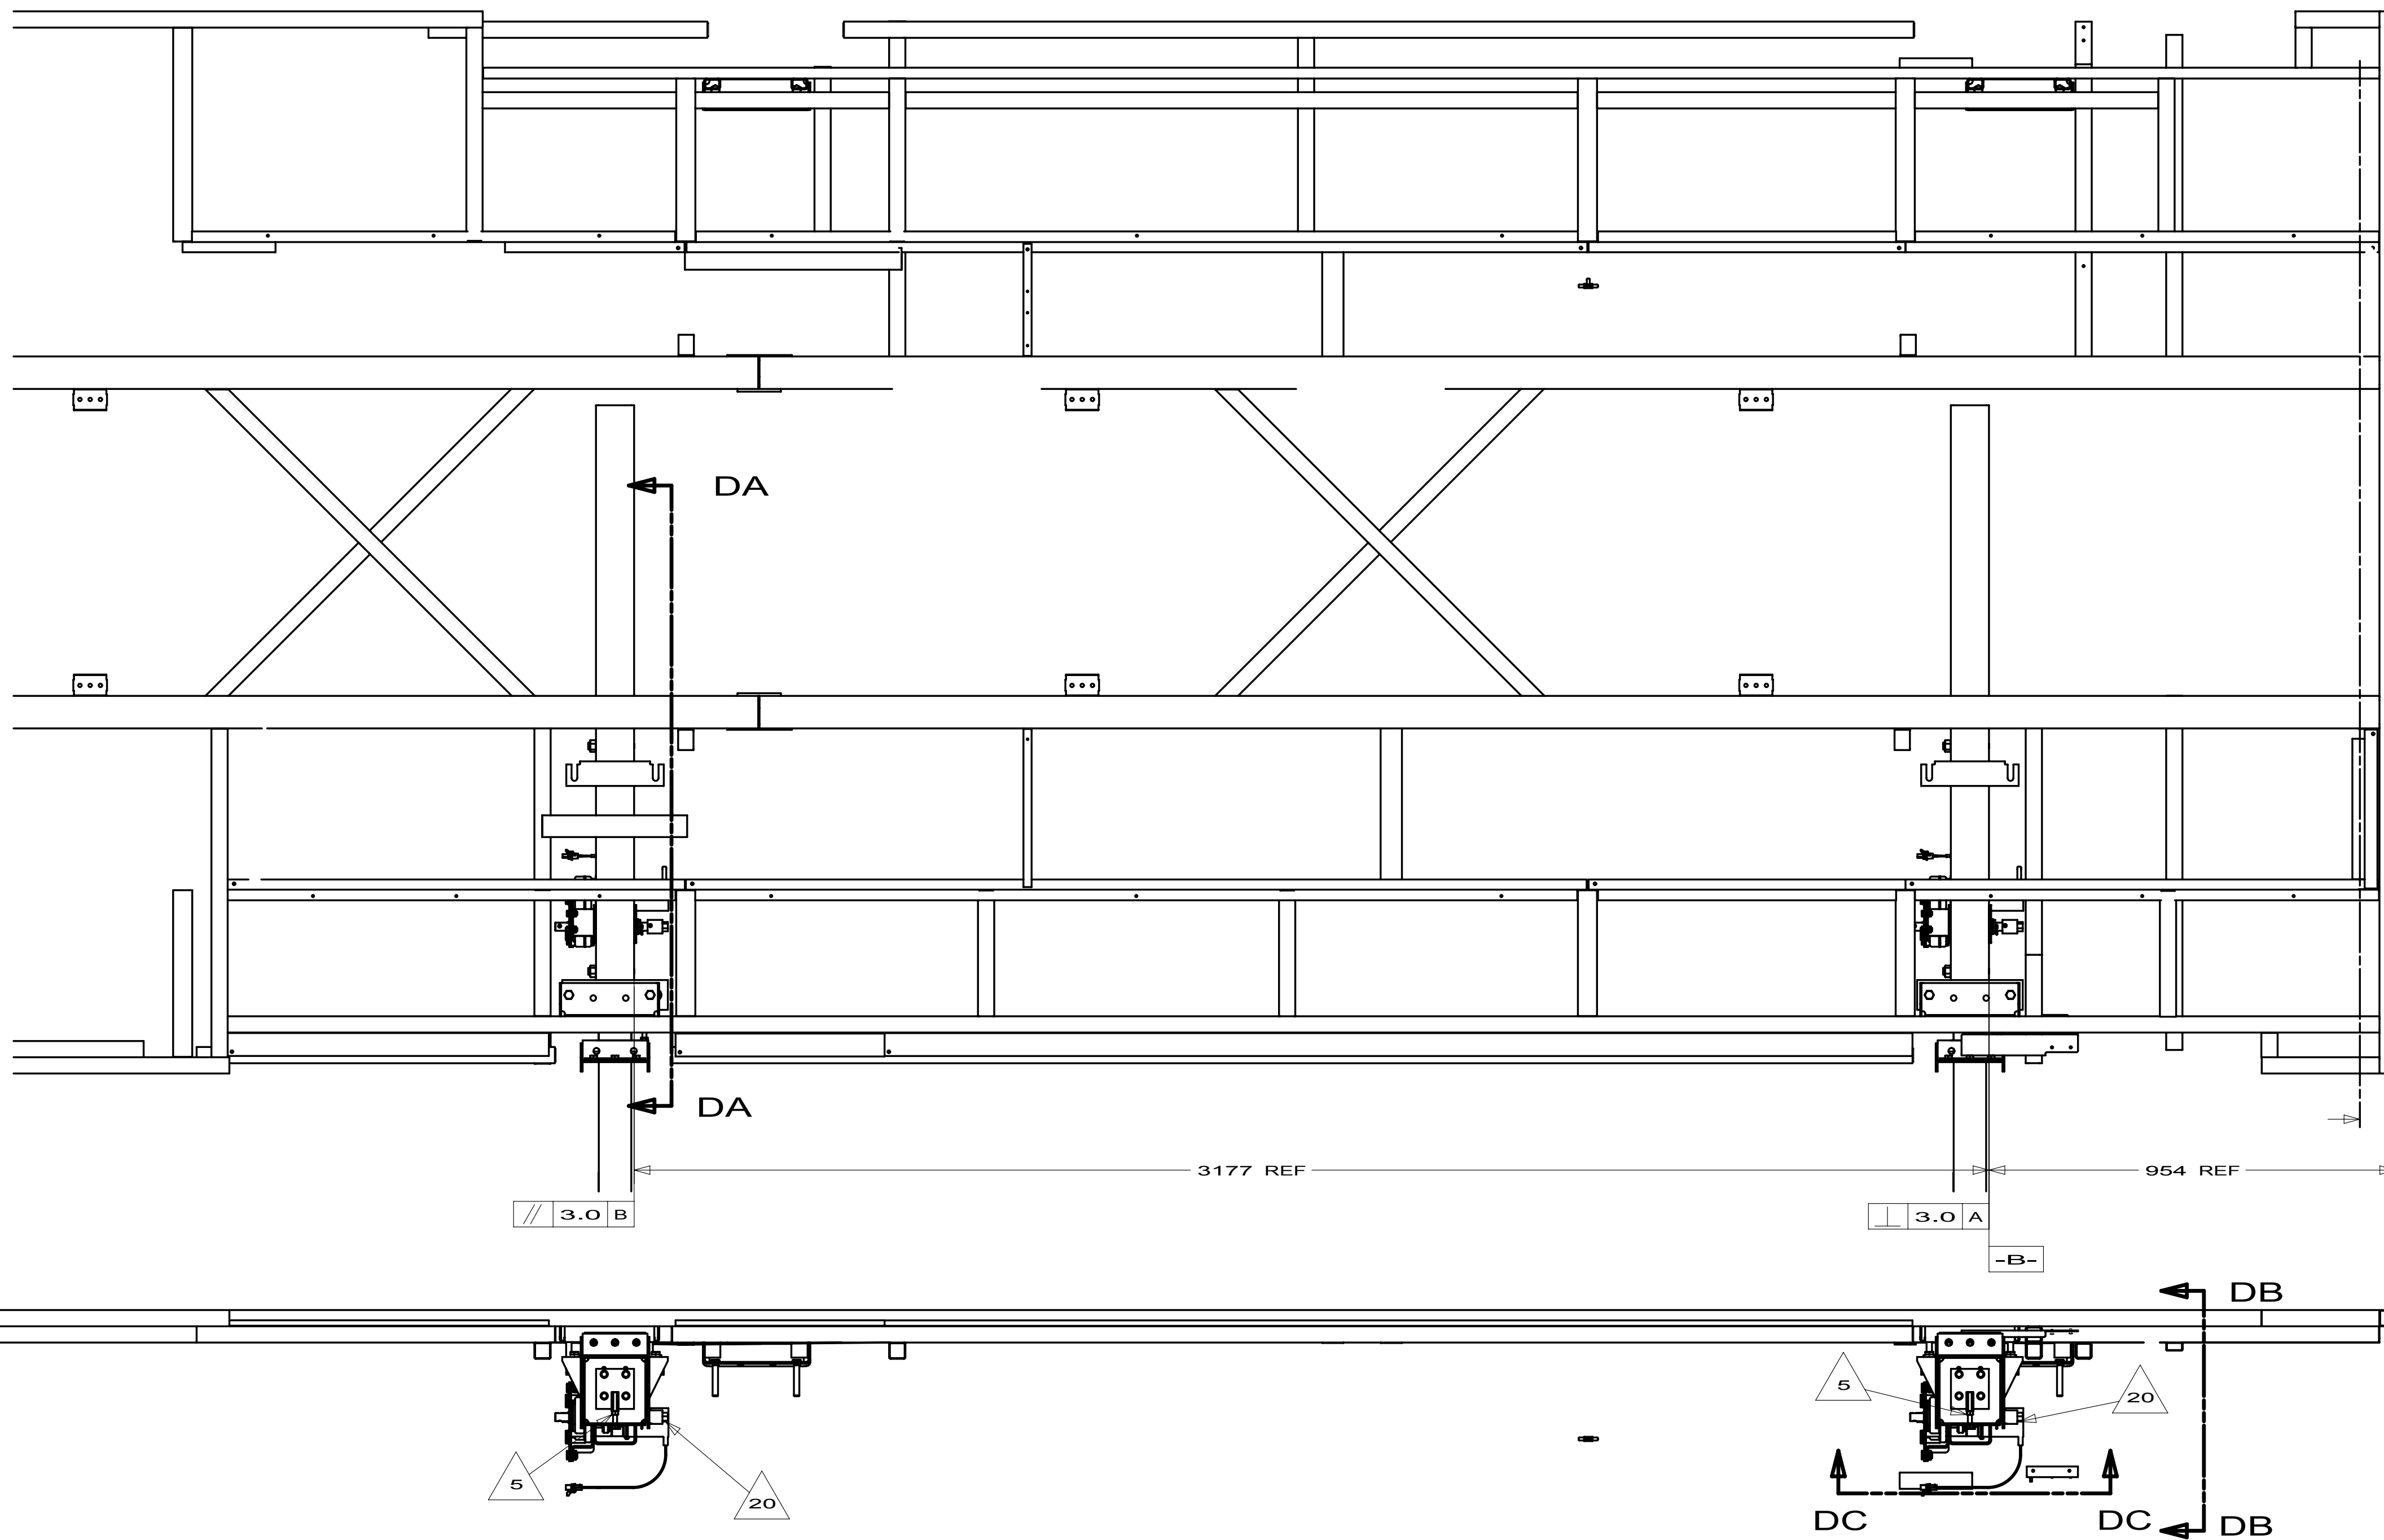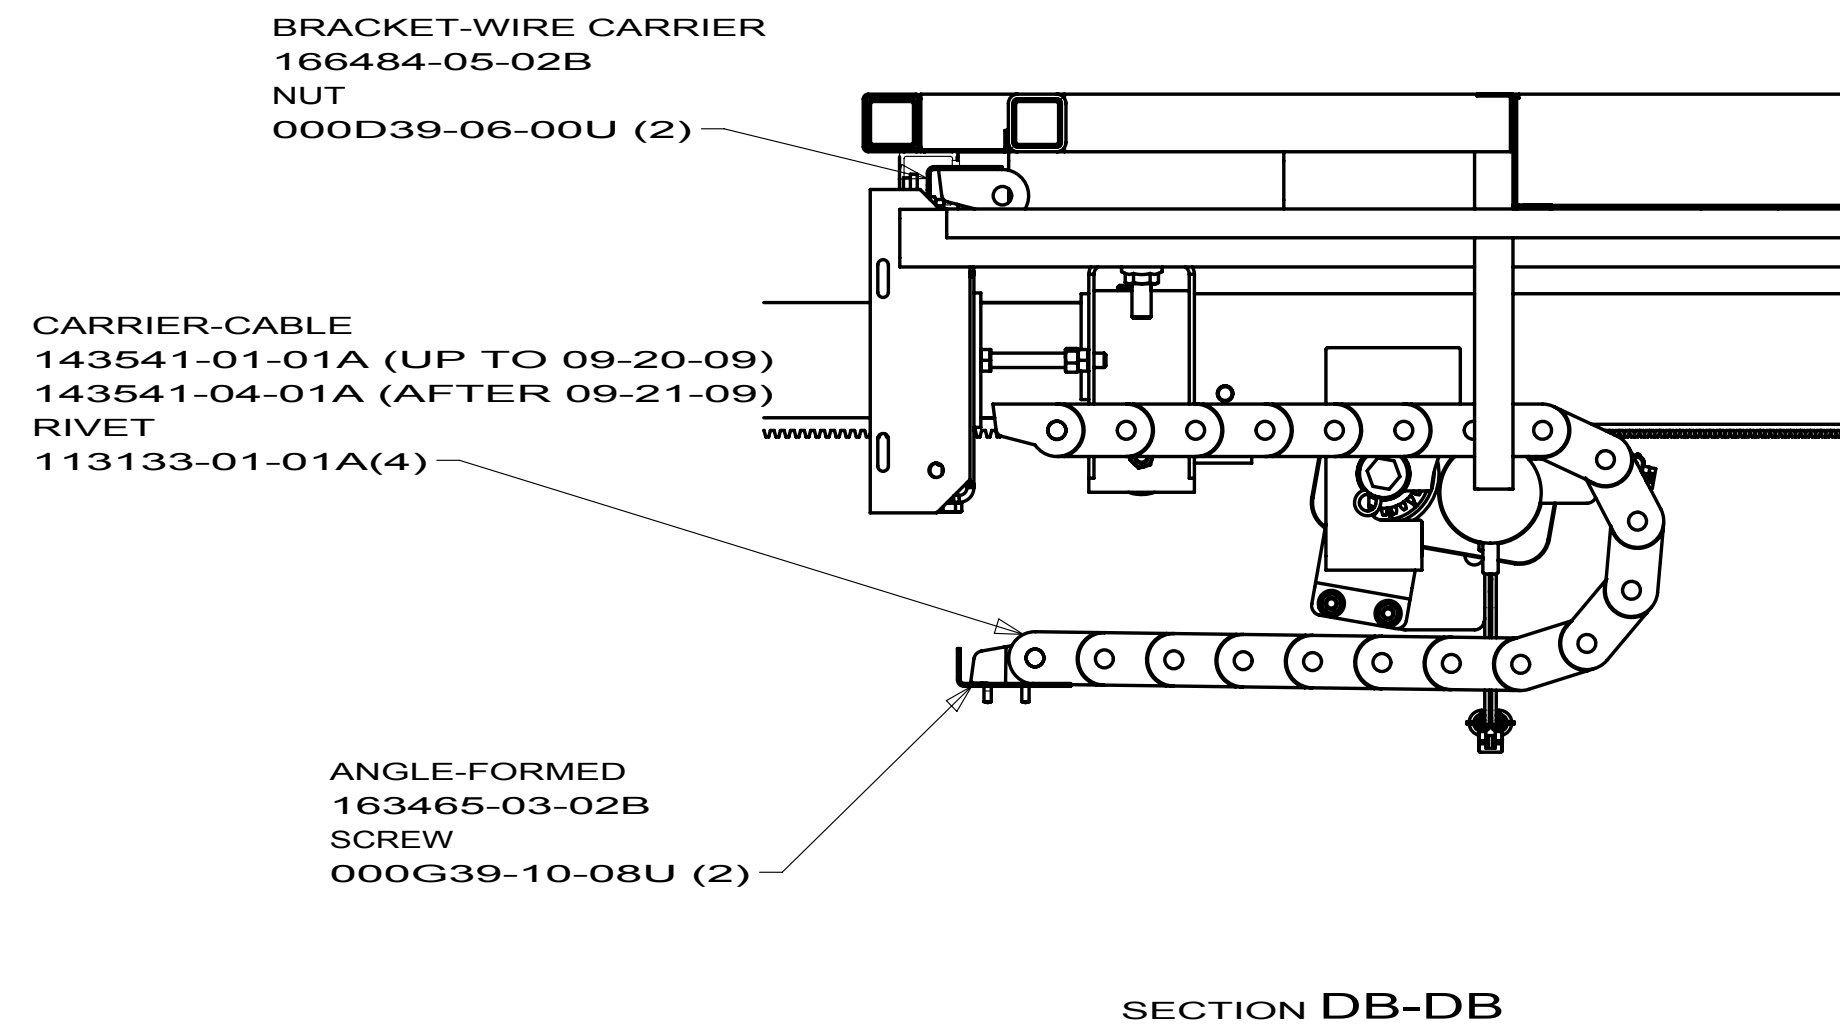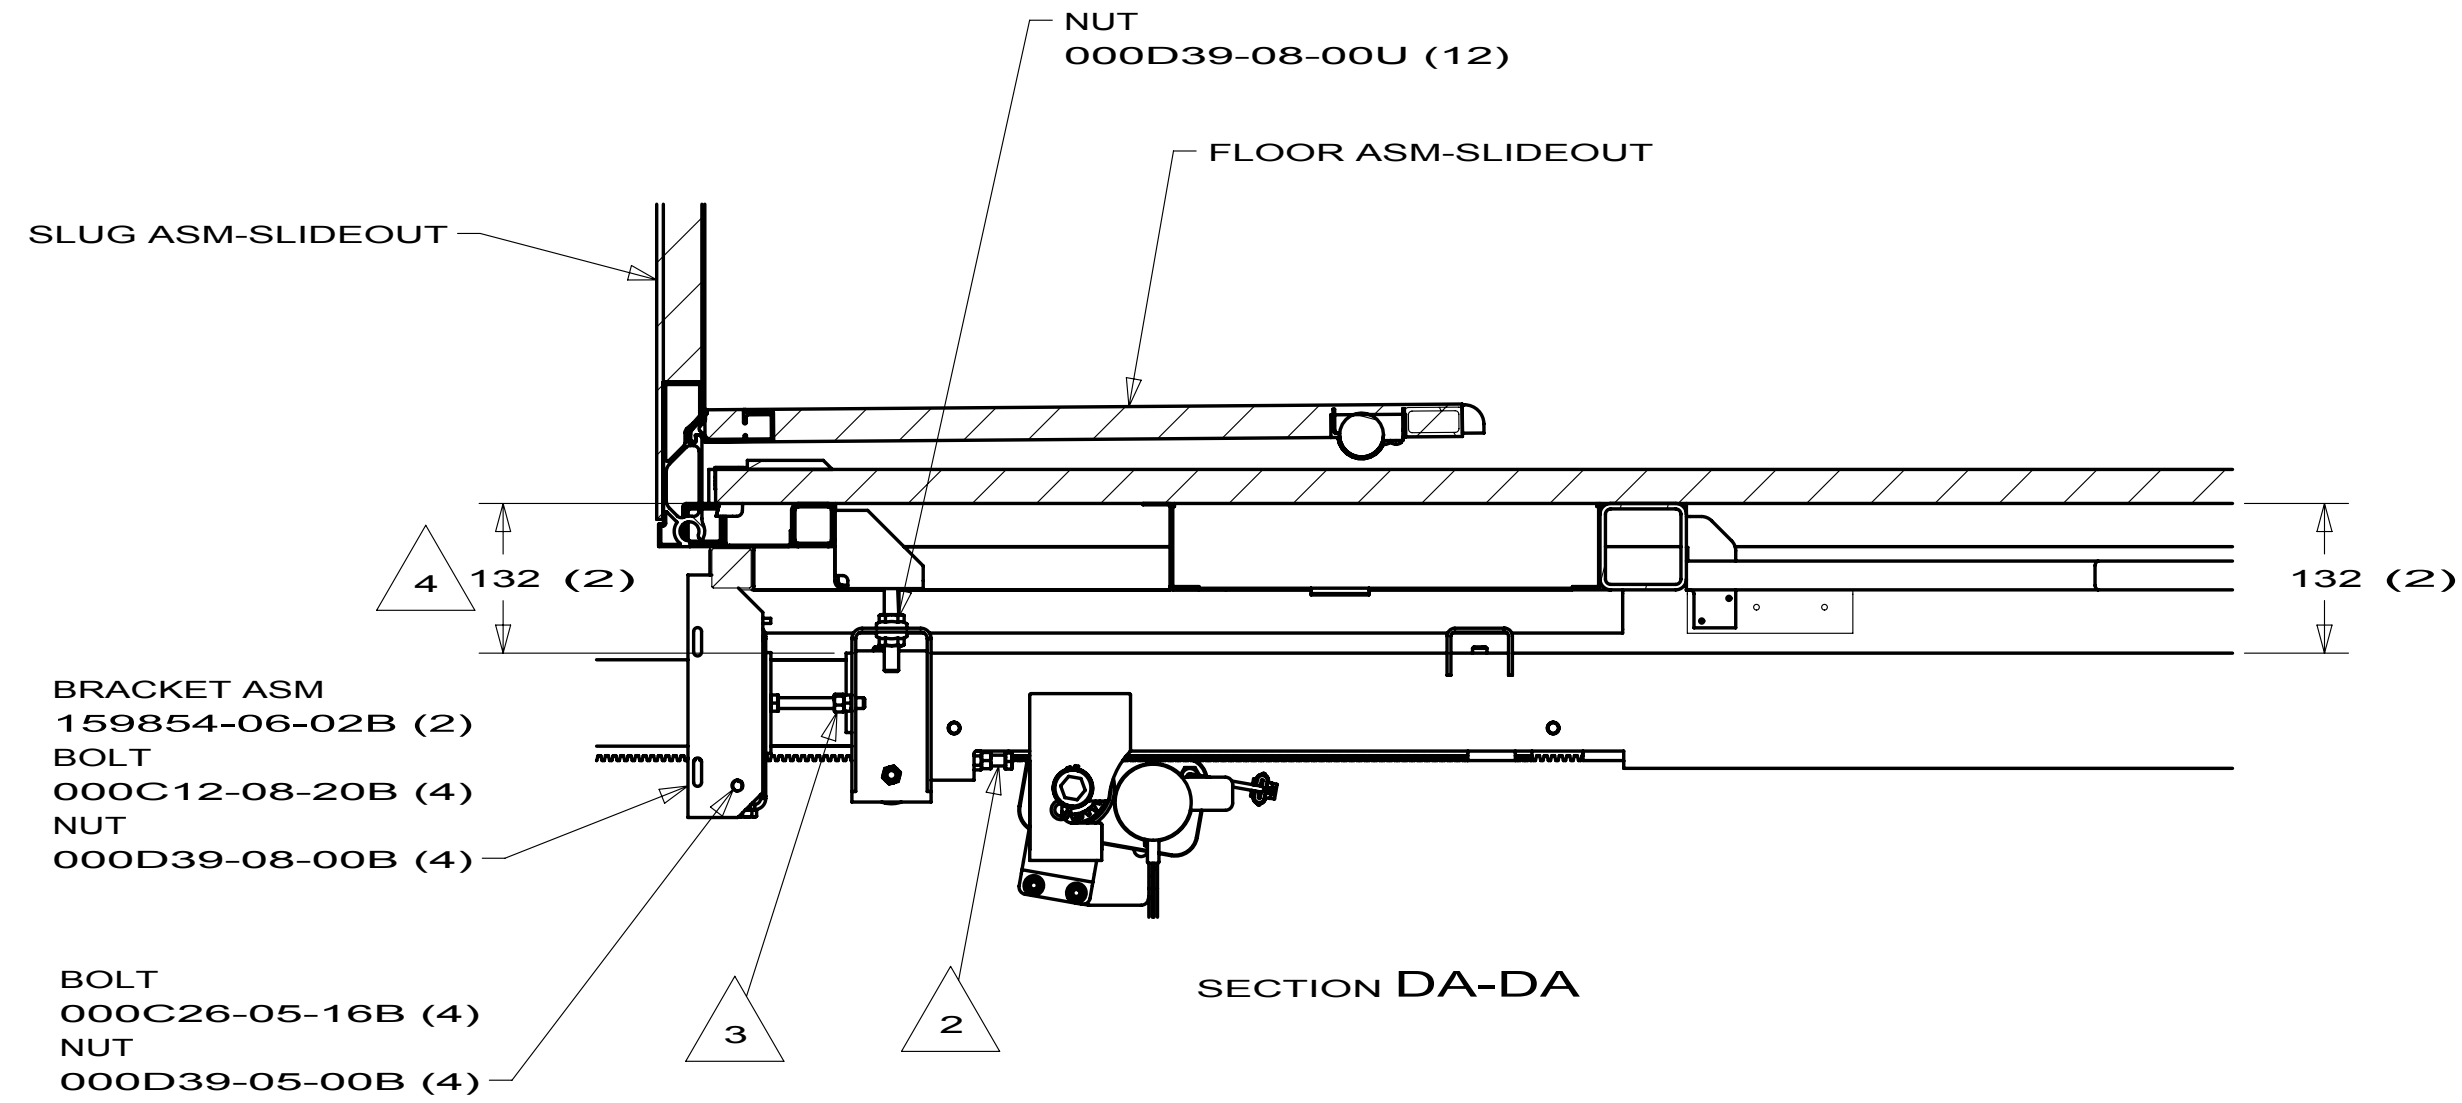


FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,RH		
SHEET 4	PART NO 170765	REV

8		7	
DWG NO	ROOM ASM-SLIDEOUT	SLUG ASM-SLIDEOUT	
170766-01	170766-11-XXX	170756-12-XXX	
170766-02	170766-12-XXX	170756-14-XXX	

094

1	
RELEASE	REV DATE
A	
DWG NO	170766
REV ZONE	REVISION RECORD
DATE	DTFR-ORIG

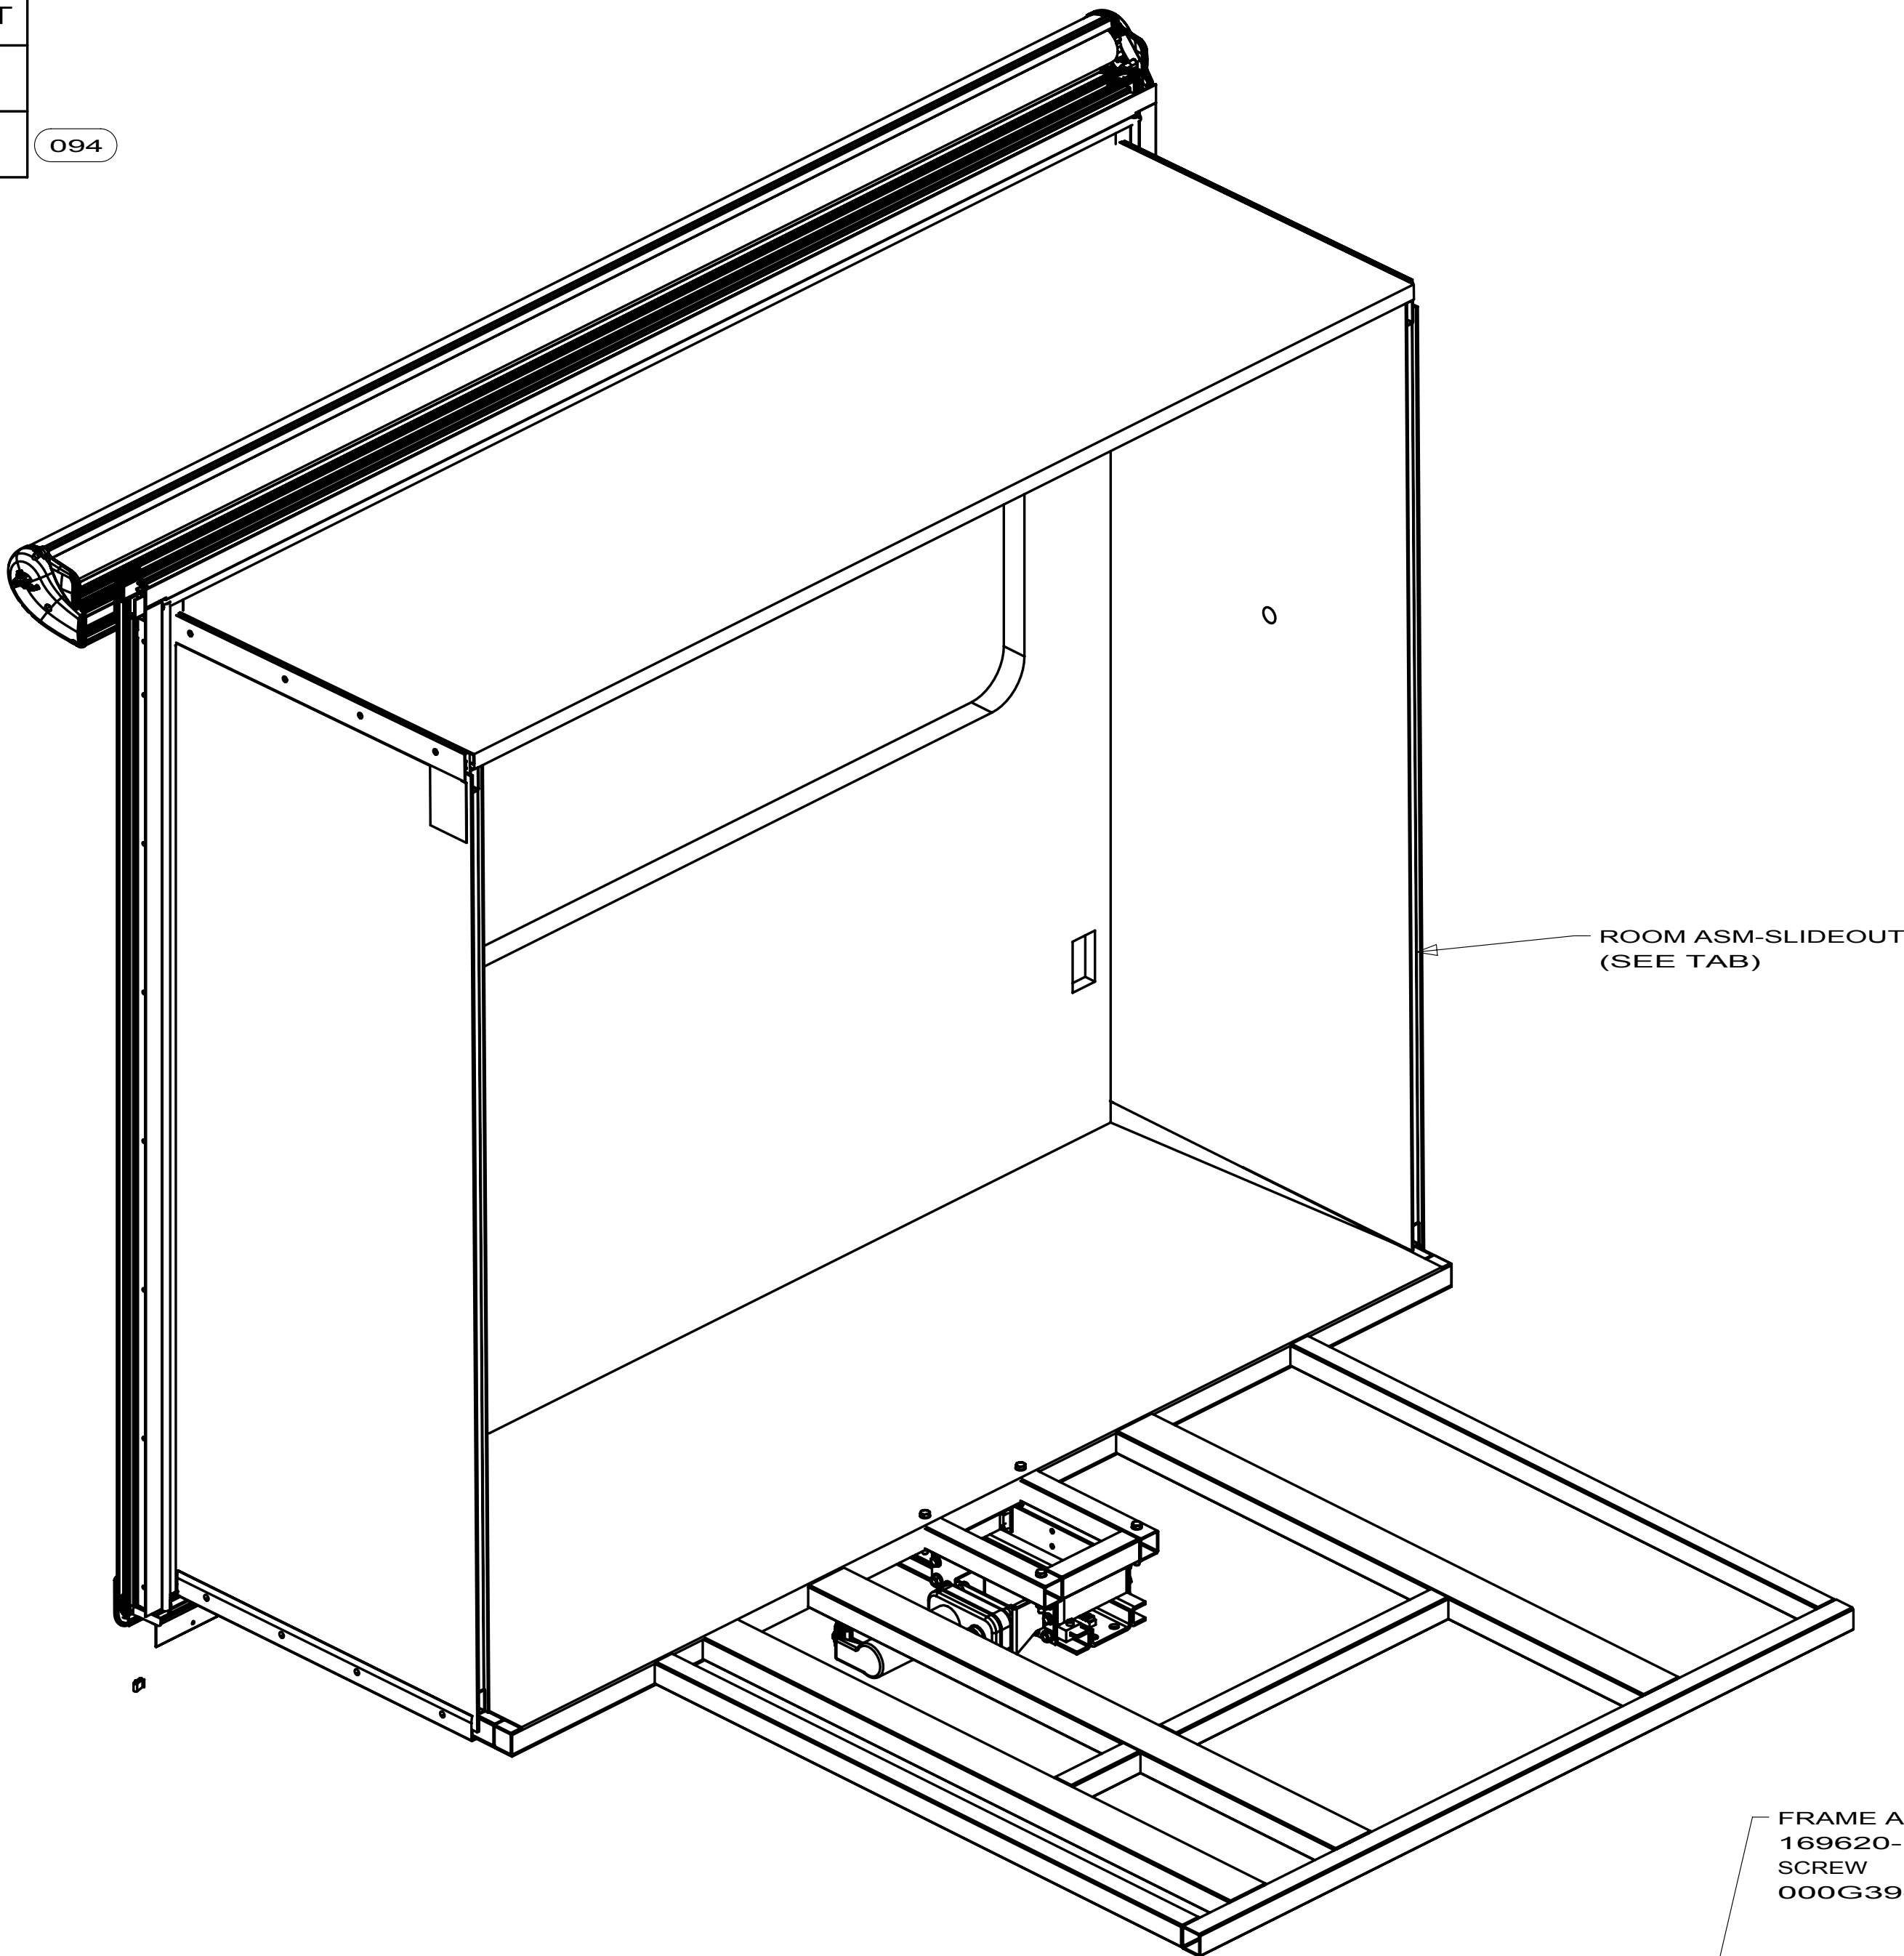

15. TORQUE TO 30 FT-LB.

14. ADJUST BUMPER HEIGHT SO THAT
BED WILL OPERATE SMOOTHLY

13. ADJUST SO THAT BED FRAME IS FLAT.

12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED.
(SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	76 (IN-LBS)
5/16 - 18 (.3125)	13 (FT-LBS)
3/8 - 16 (.375)	23 (FT-LBS)
7/16 - 14 (.4375)	37 (FT-LBS)
1/2 - 13 (.500)	57 (FT-LBS)

11. USE POLY-CLEAR 047034-07-000 AND ATTACH IT USING WASHER
044533-01-000 TO PROTECT THE SLIDEOUT FLOOR.

10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST
INNER TRIM.

9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED
IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW
TO INSURE THE THREADS SEAL.

8. USE SCREW 000G39-08-08S TO HOLD EACH END OF TRIM.

7. SEE SEALANT MANUAL..

6. LOOSEN NUTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON
THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING.
TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

5. ADJUST NUTS TO MOVE ROOM UP OR DOWN TO BE
CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL
ADJUSTMENTS ARE COMPLETE.

4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED
AS REQUIRED FROM THERE.

3. THE RETRACTED LENGTH IS ADJUSTED UNTIL
THE OUTSIDE TRIM OF THE ROOM SEALS AGAINST
THE OUTSIDE OF THE SIDEWALL.

2. THE EXTENDED LENGTH IS ADJUSTED UNTIL
THE INSIDE TRIM OF THE ROOM SEALS AGAINST
THE INSIDE OF THE SIDEWALL.

1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION
FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:


FRAME ASM-SUPPORT, SLIDEOUT
169620-17-02B
SCREW
000G39-10-12U (4)


SLIDEOUT-HYD, PAD
128599-03-000 (4)
SUPPORT ASM-ROLLER
126313-02-02B (4)
BOLT
000C26-06-20B (4)

SLIDEOUT-MECHANISM
170306-01-000


094 WINDOWS - SE-GI

WINNEBAGO INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DTFR	ORIG. DATE		
CHRR	ALL DIMENSIONS ARE IN MILLIMETERS		
P.E.	FIRST USED		
M.E.	10 P40L		
DSNR	MATERIAL:		
UNSPECIFIED TOLERANCES ARE:			
WHOLE DIM (X) : 3			
ONE-PLACE (X.X) :			
TWO-PLACE (X.XX) :			
ANGLE :			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-REAR,RH			
SHEET 1 OF 4	PART NO	170766	REV
REF:		1	

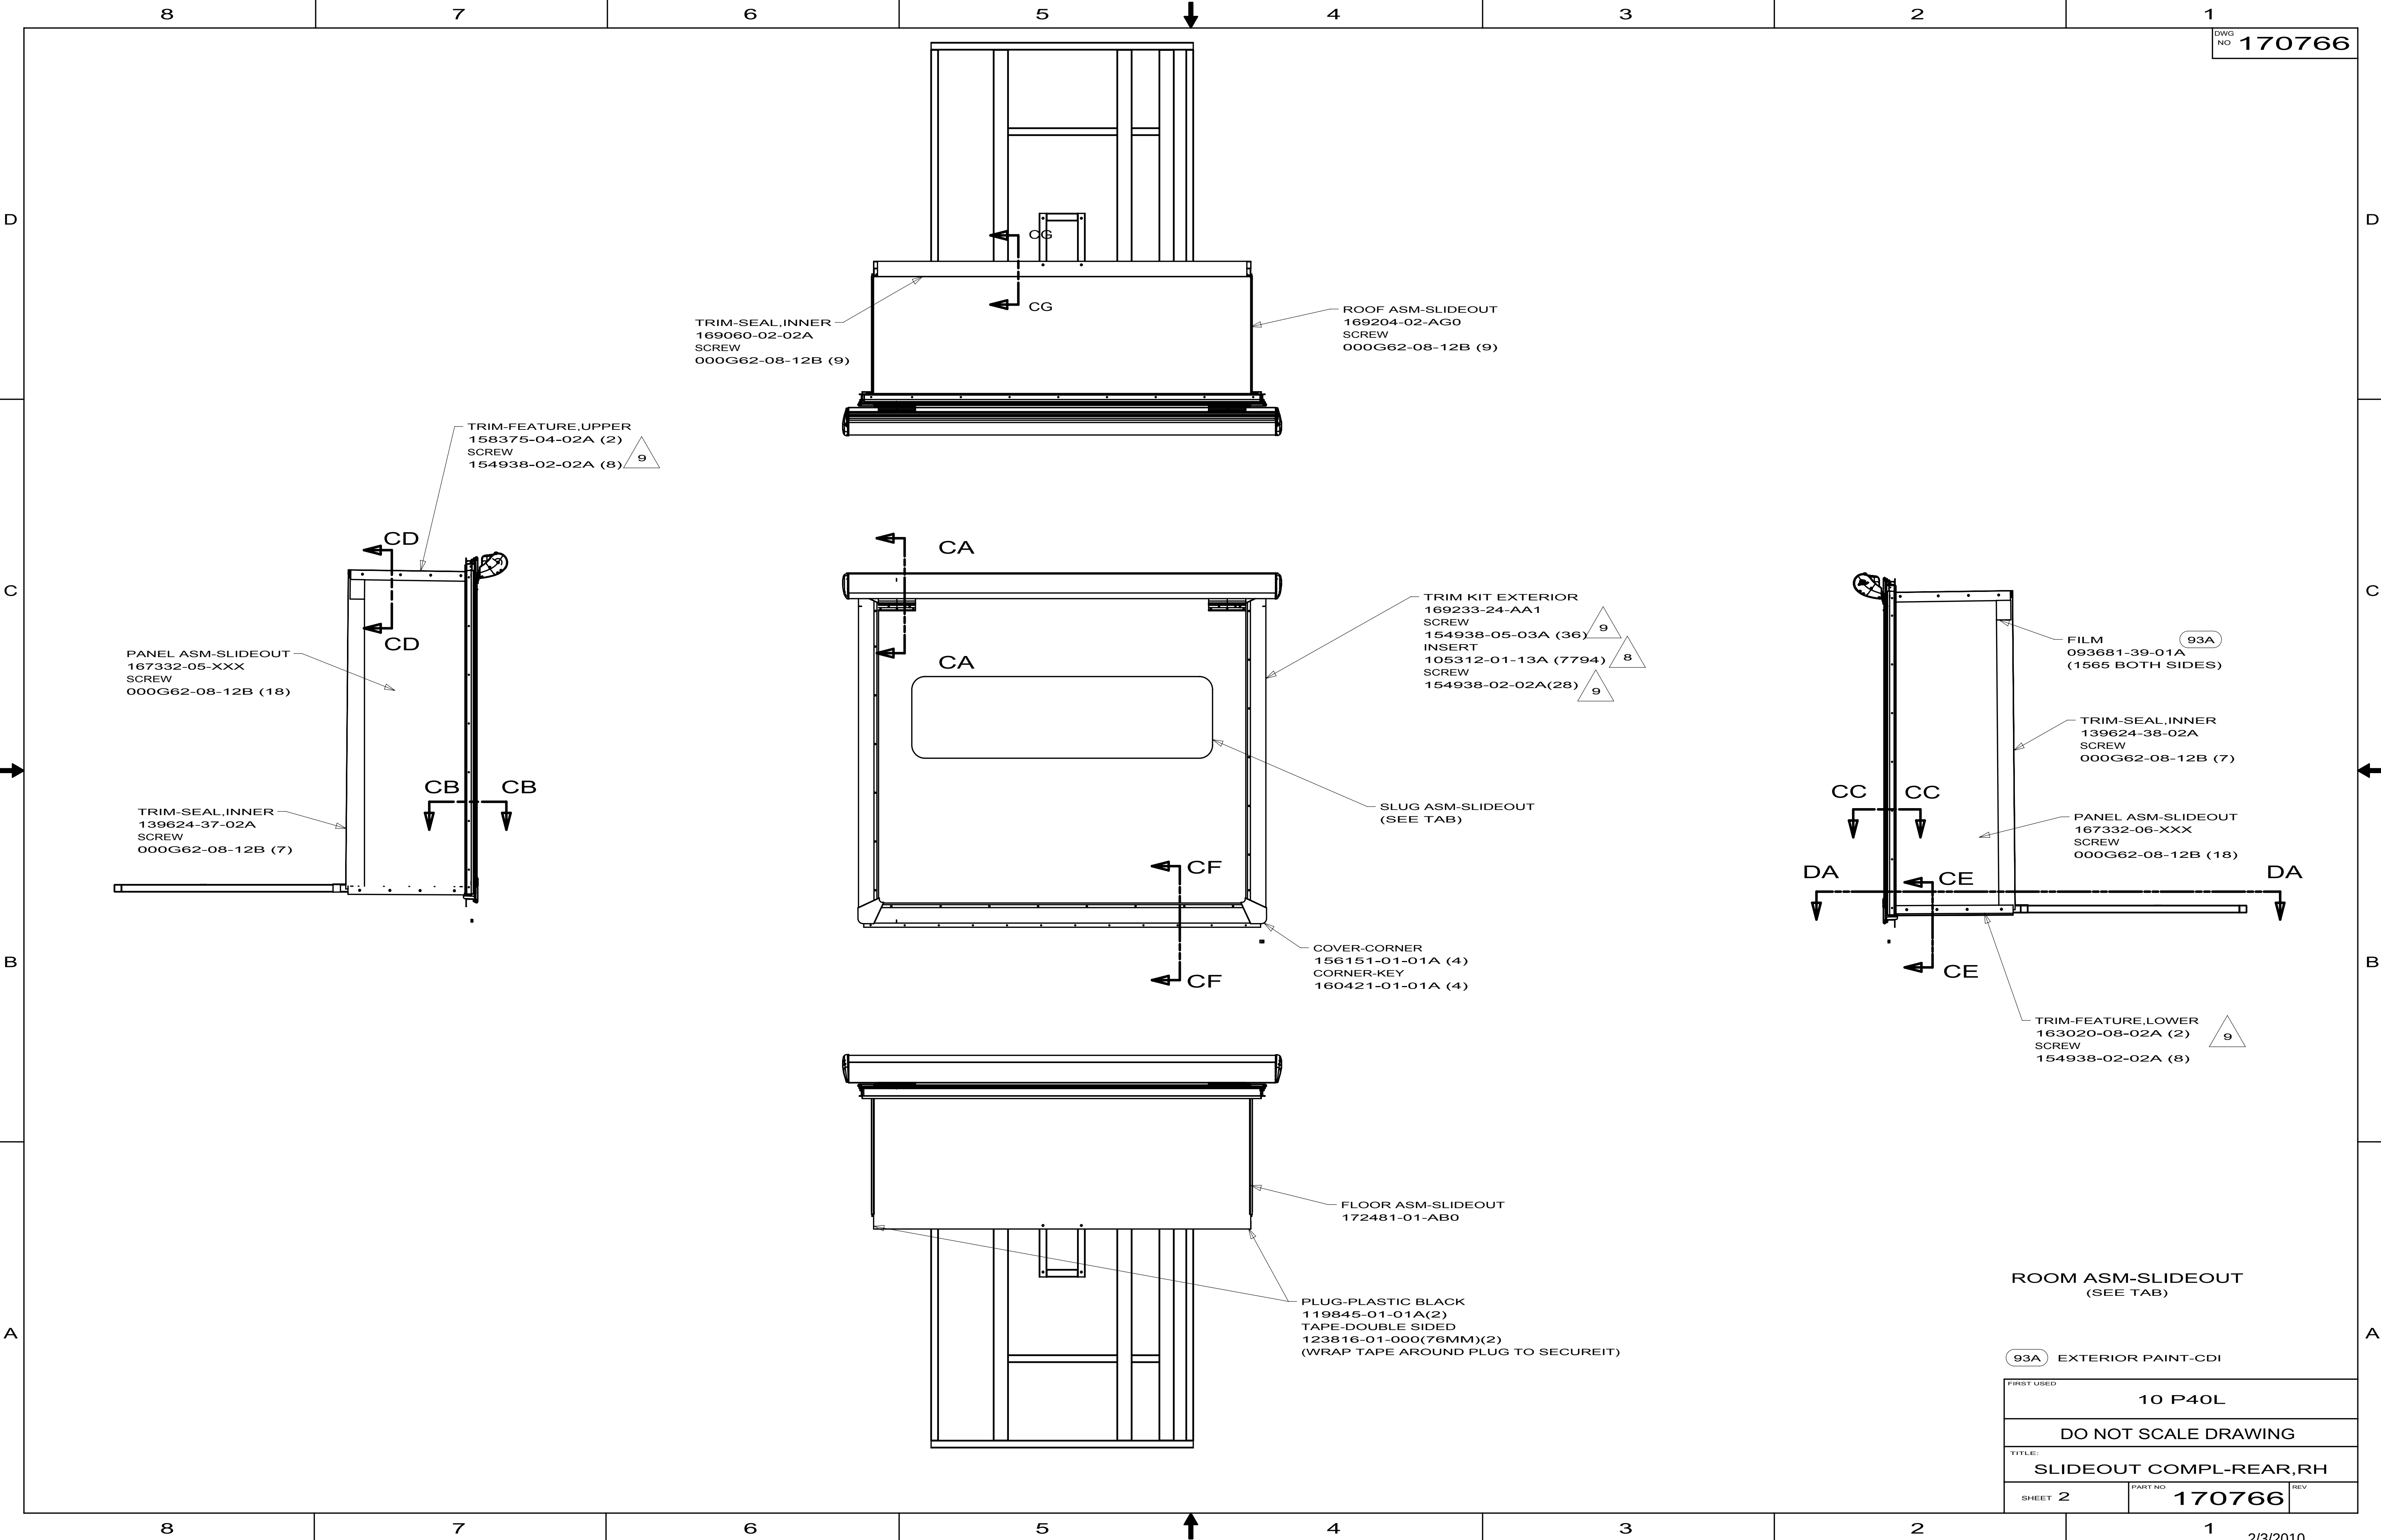


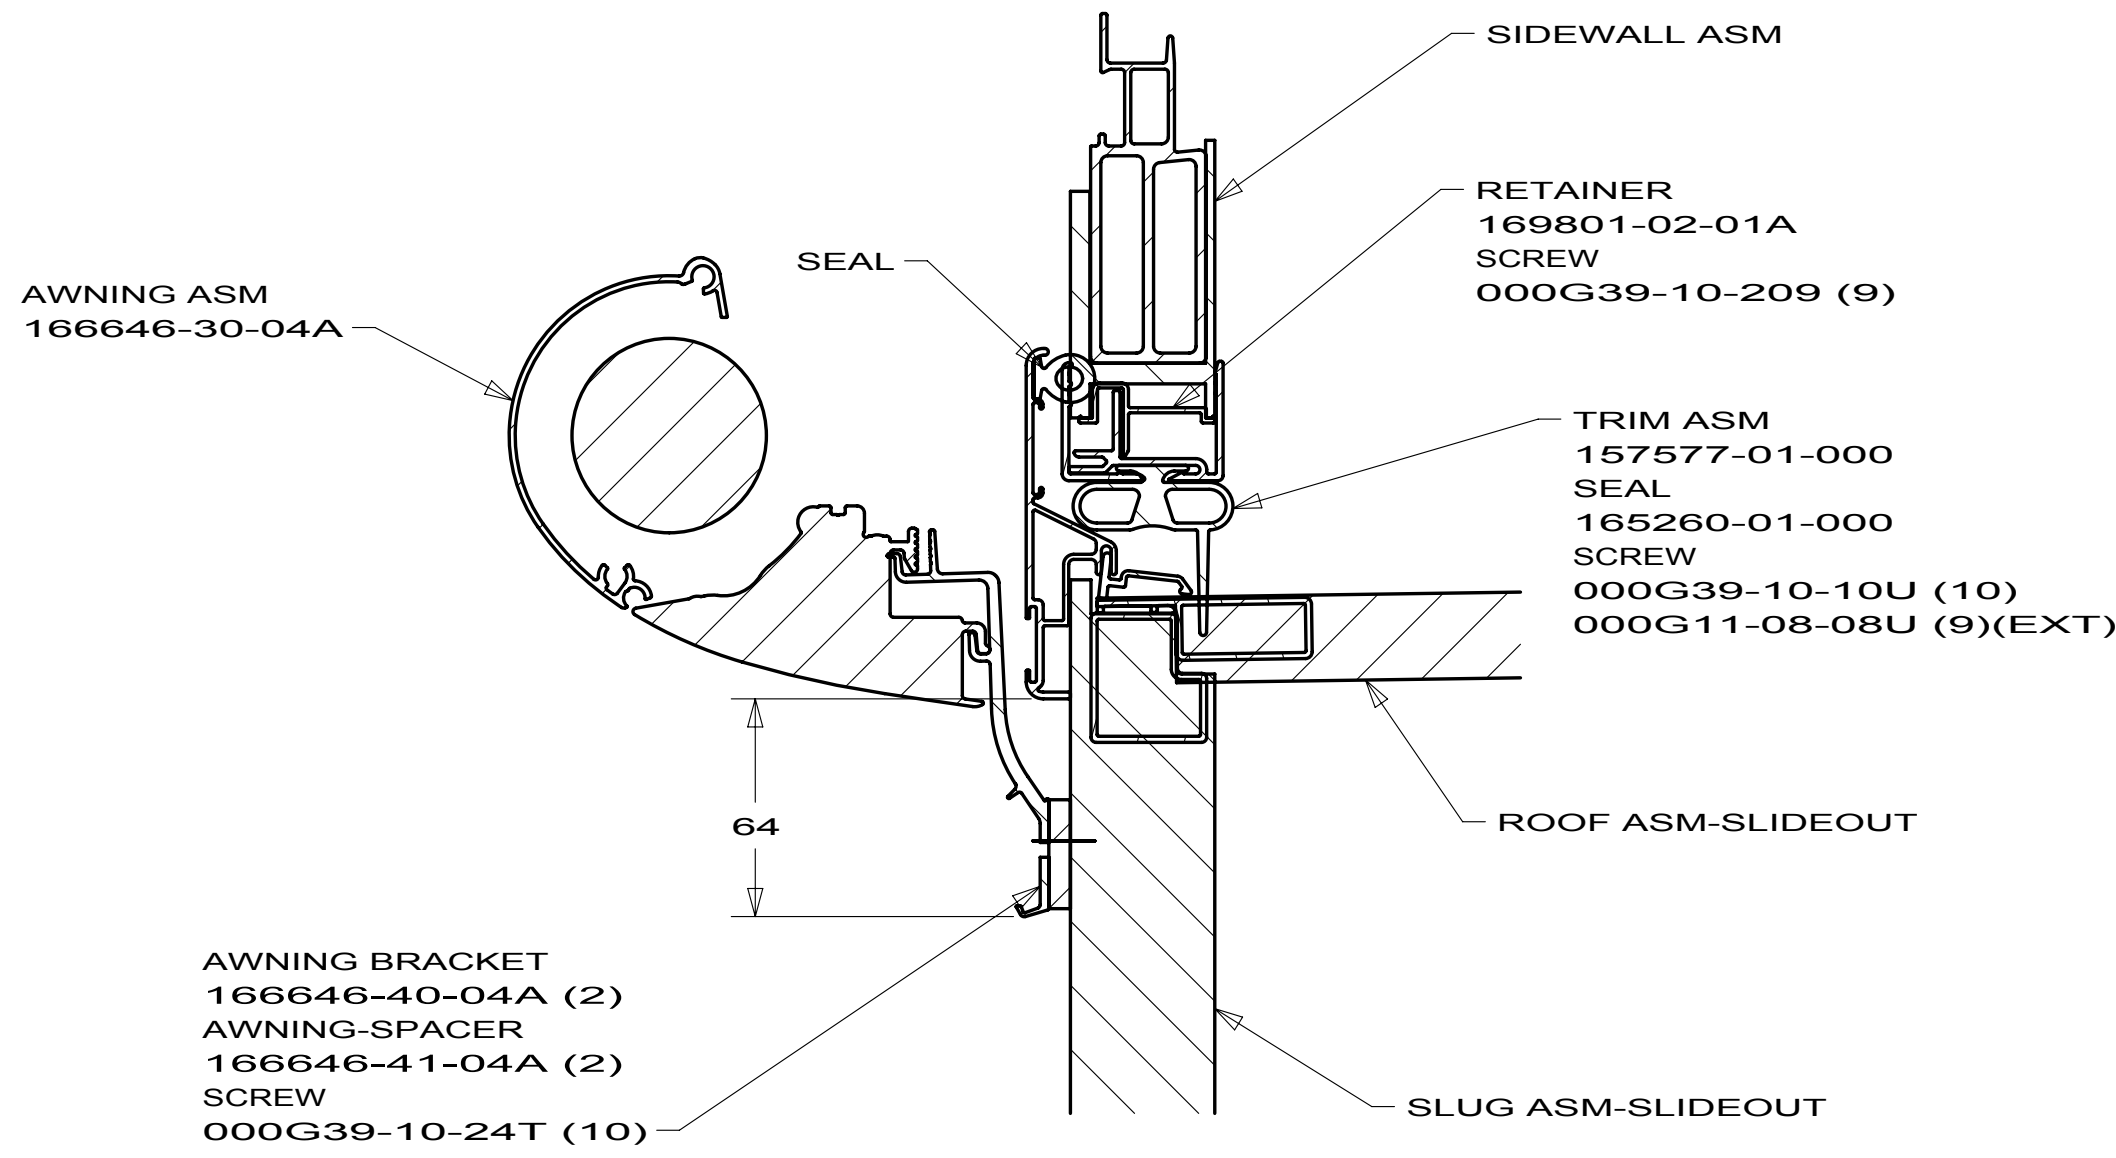


SECTION CA-CA

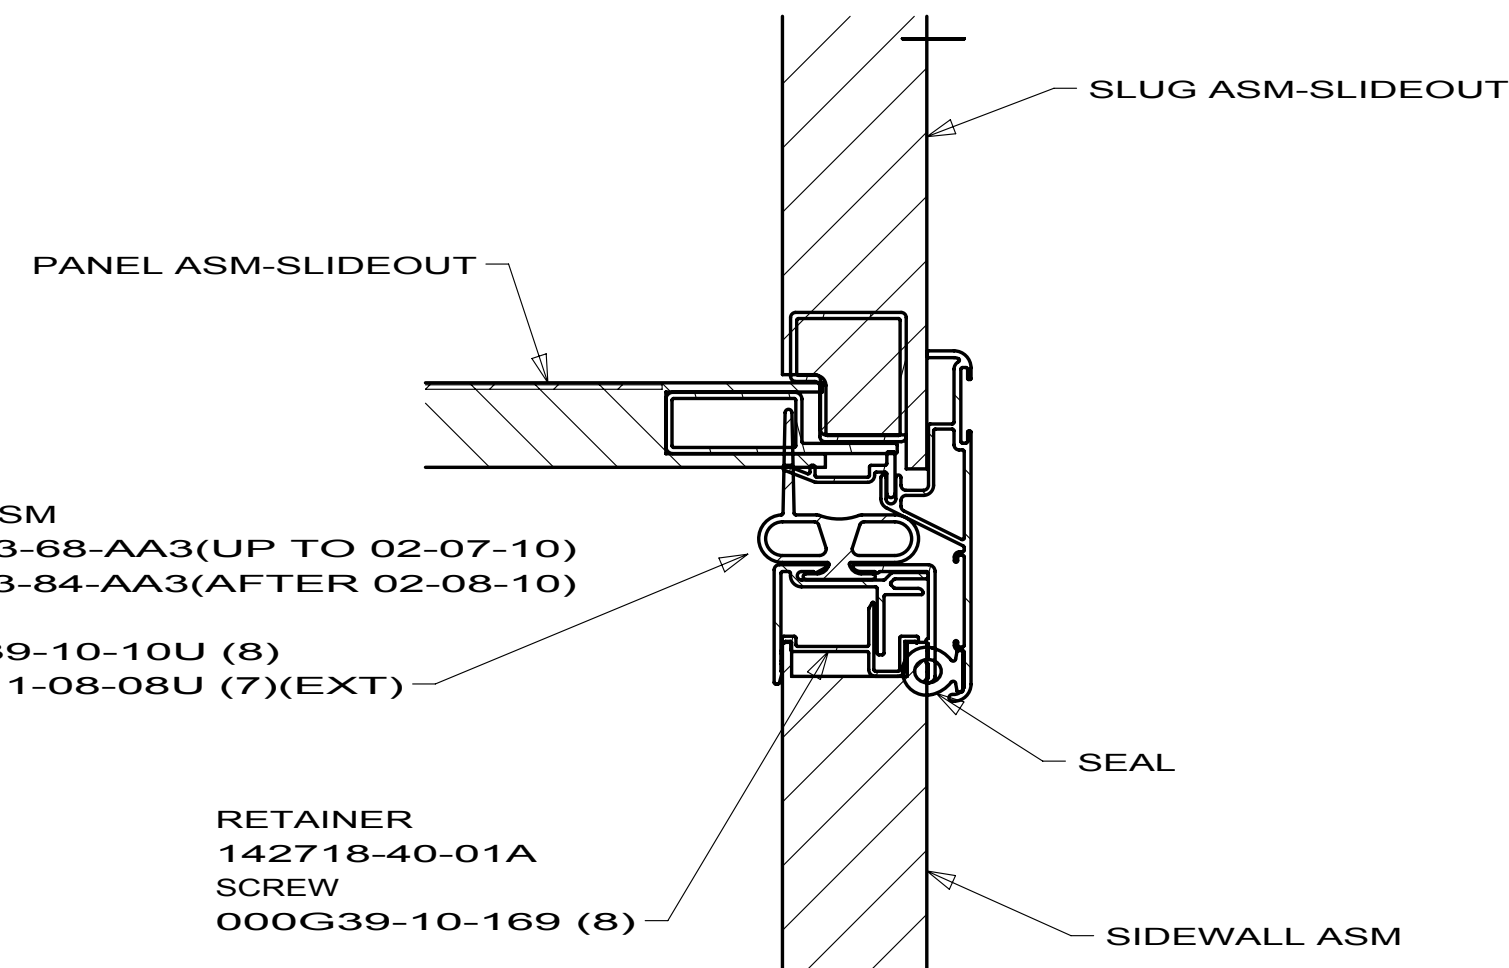


SECTION CB-CB

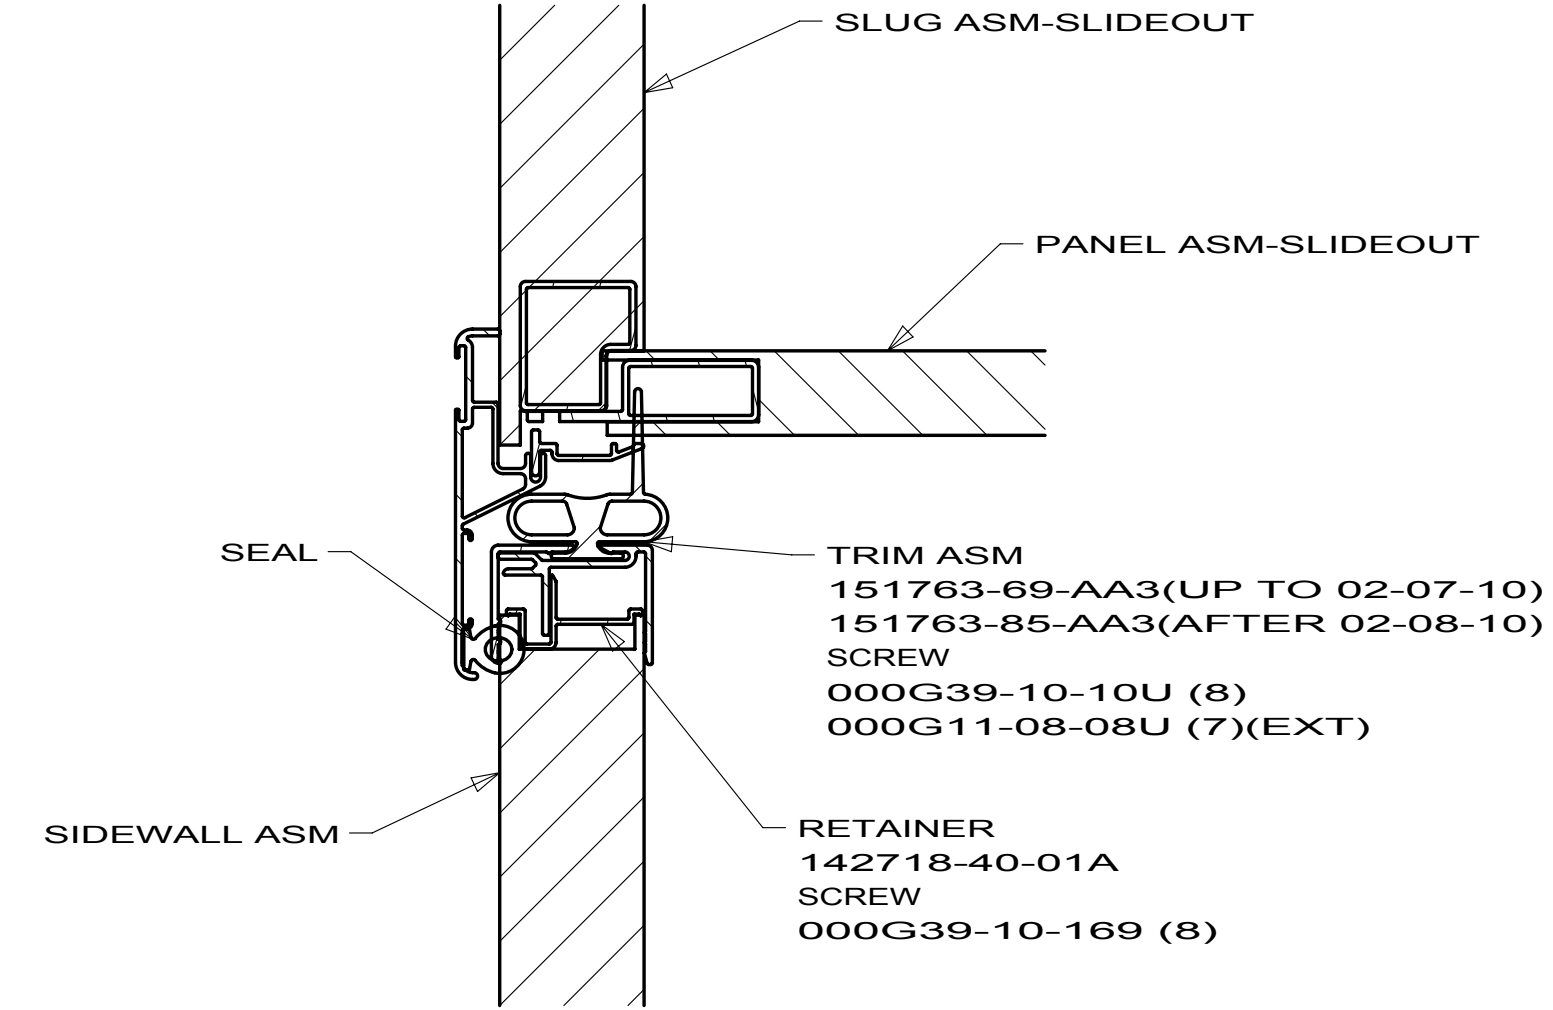


SECTION CC-CC

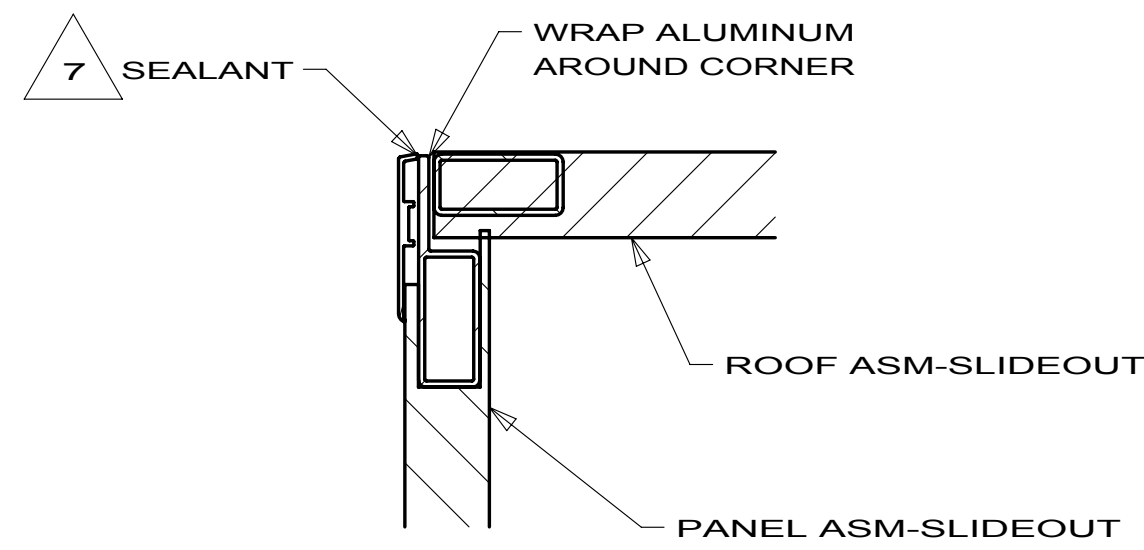


SECTION CD-CD

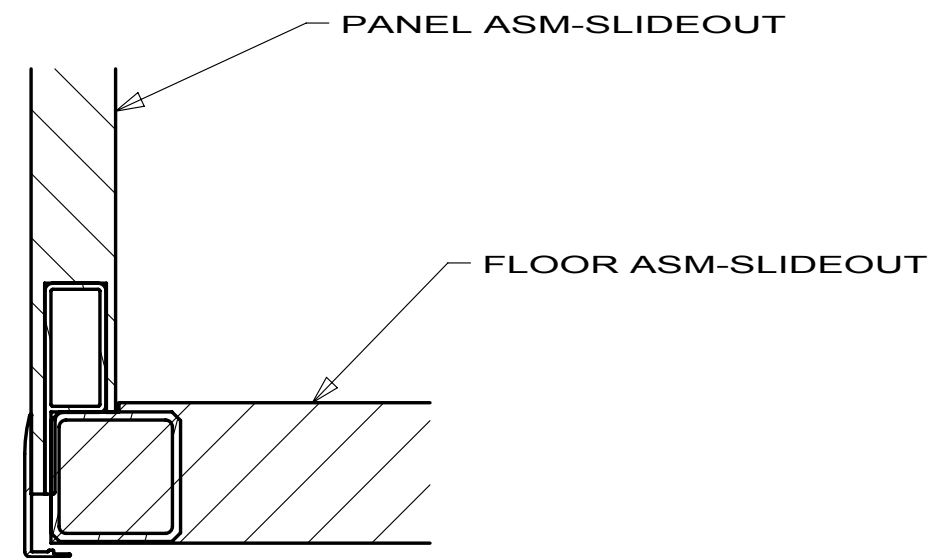

SECTION CE-CE



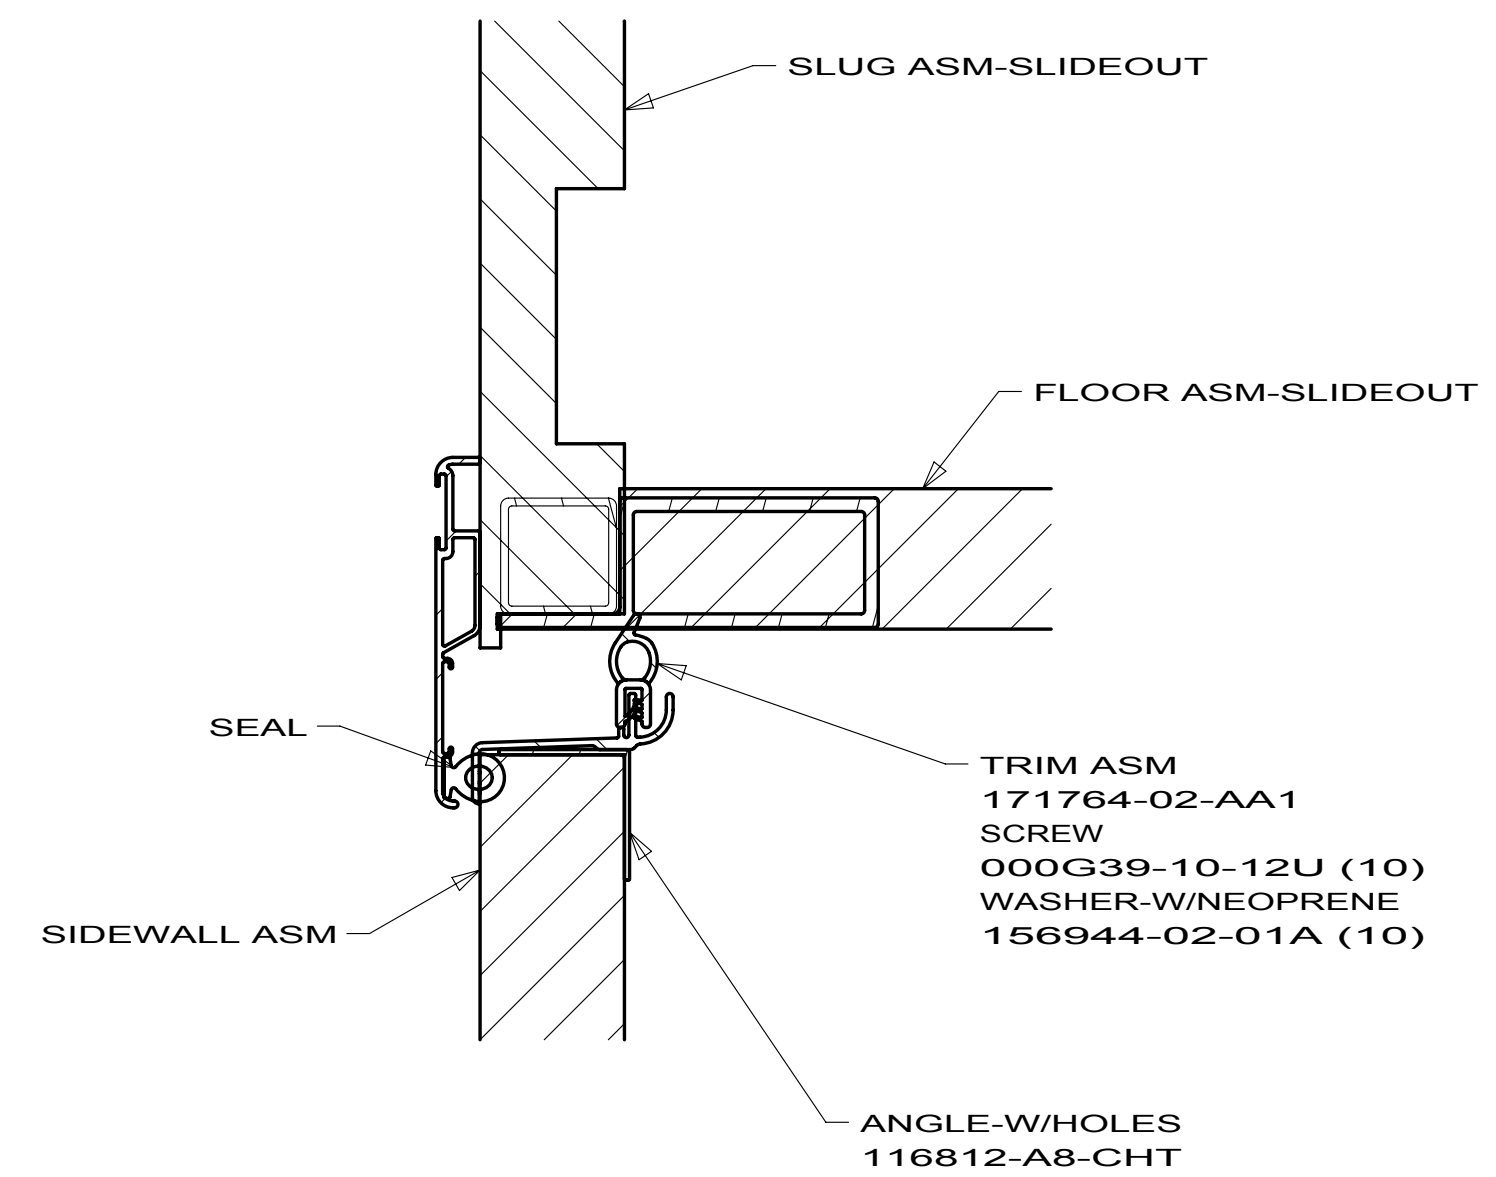


SECTION CF-CF


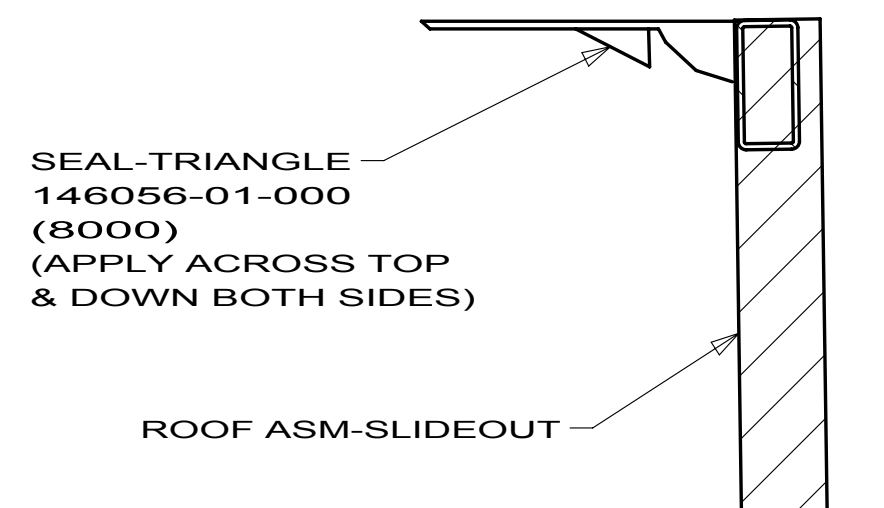


SECTION CG-CG

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-REAR,RH		
SHEET 3	PART NO 170766	REV

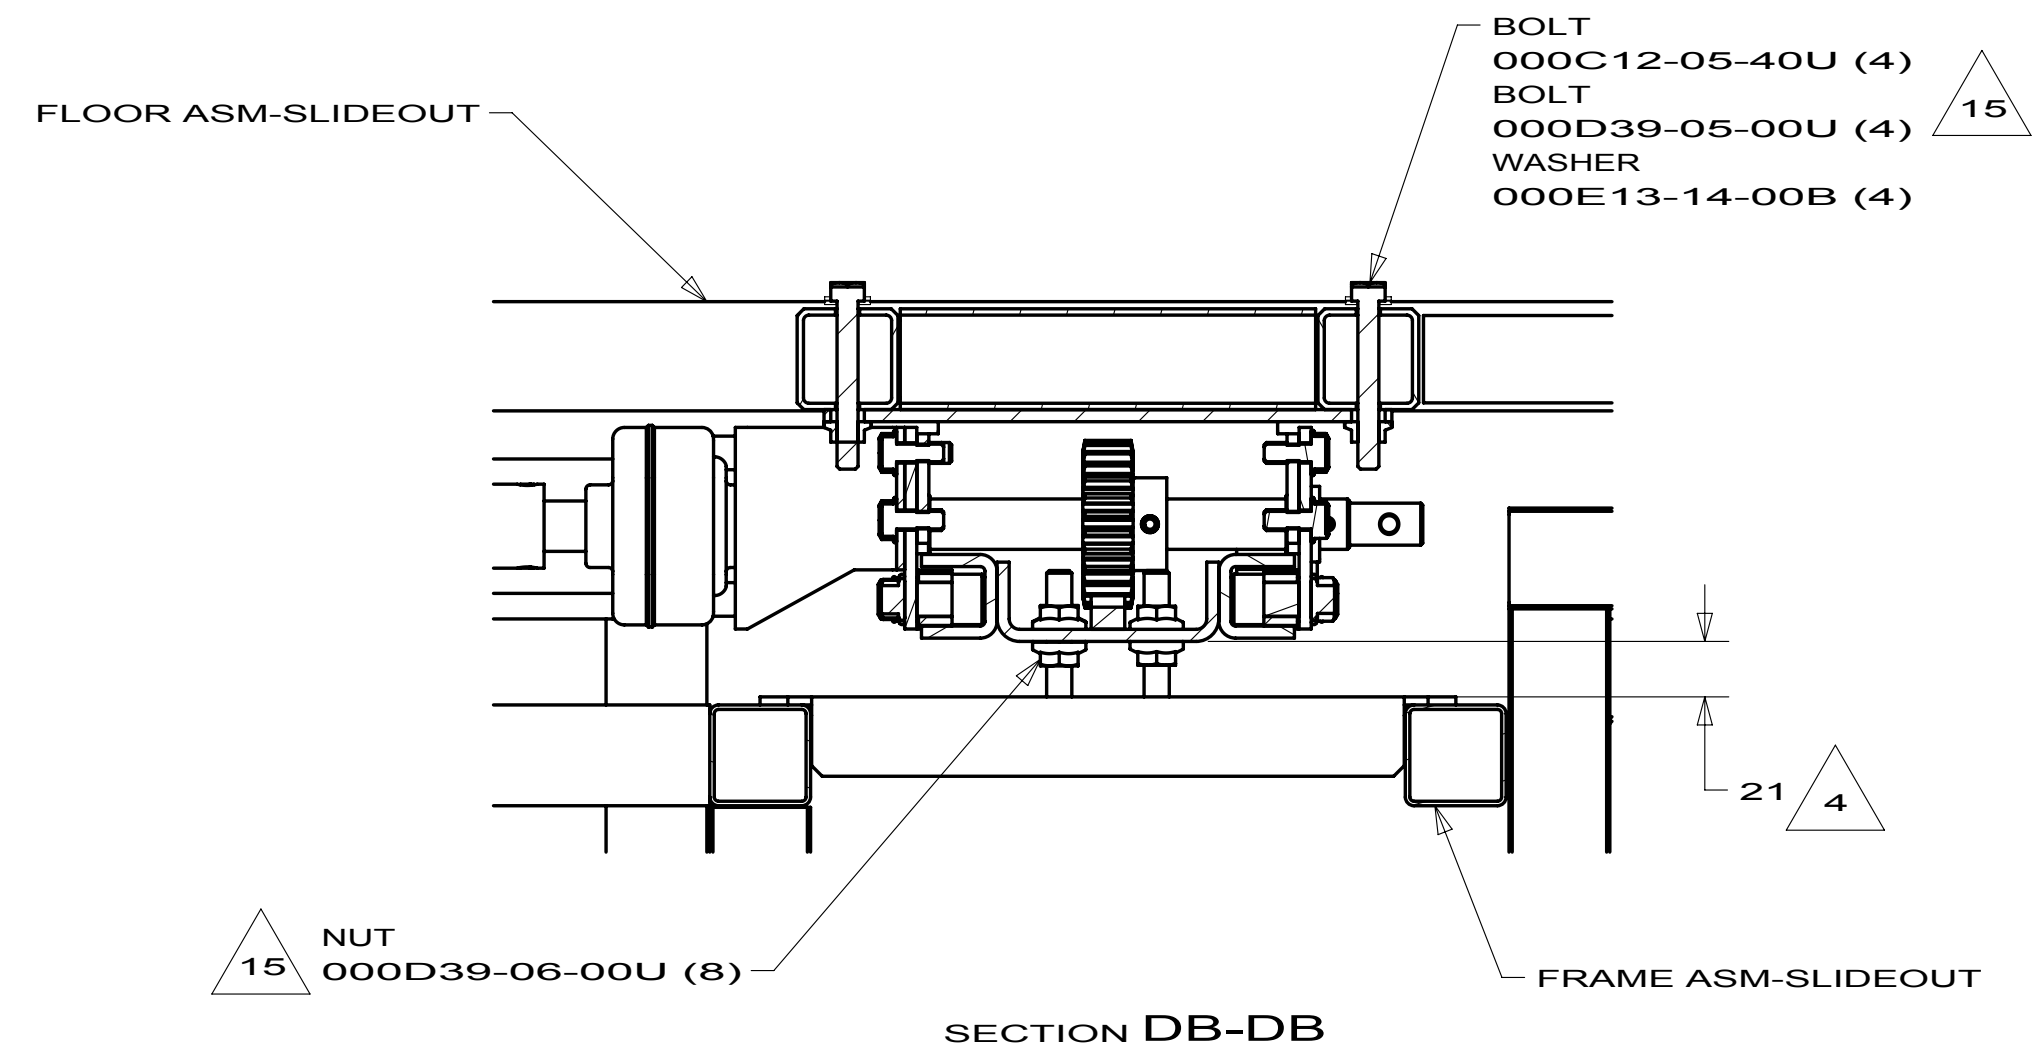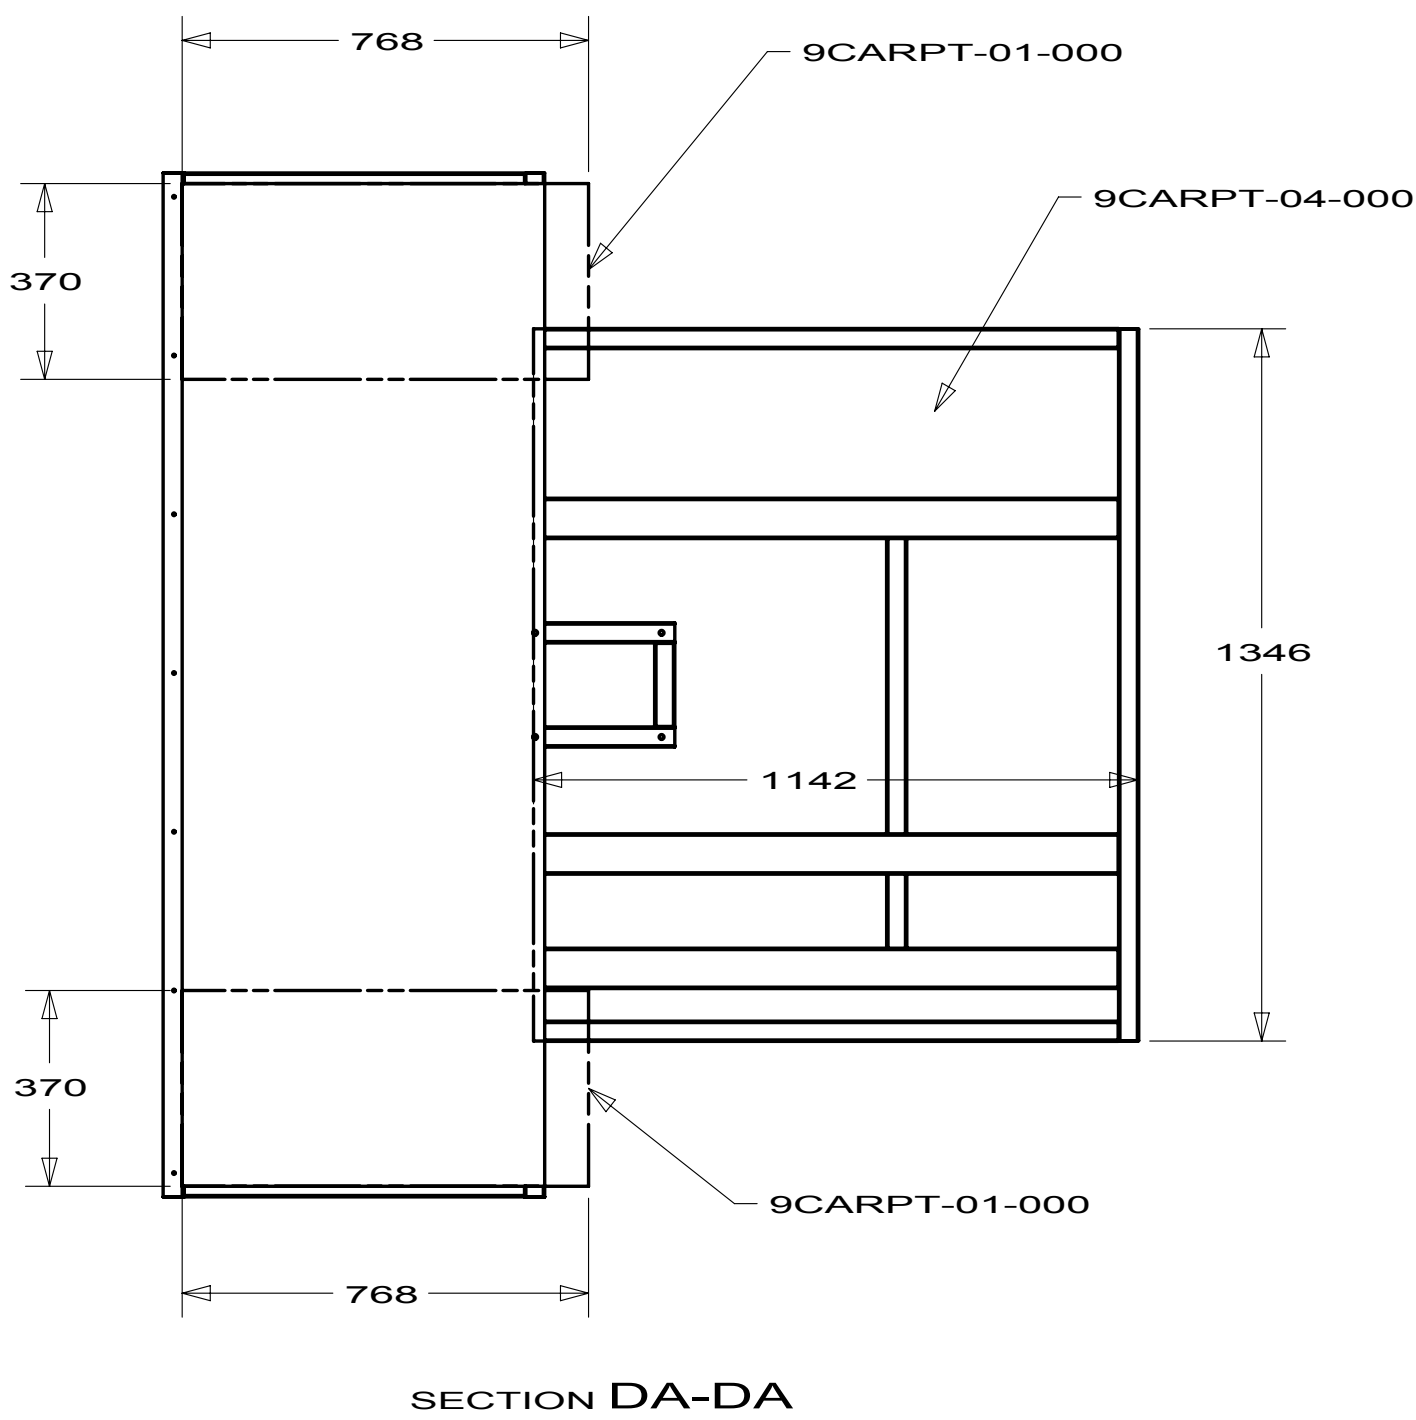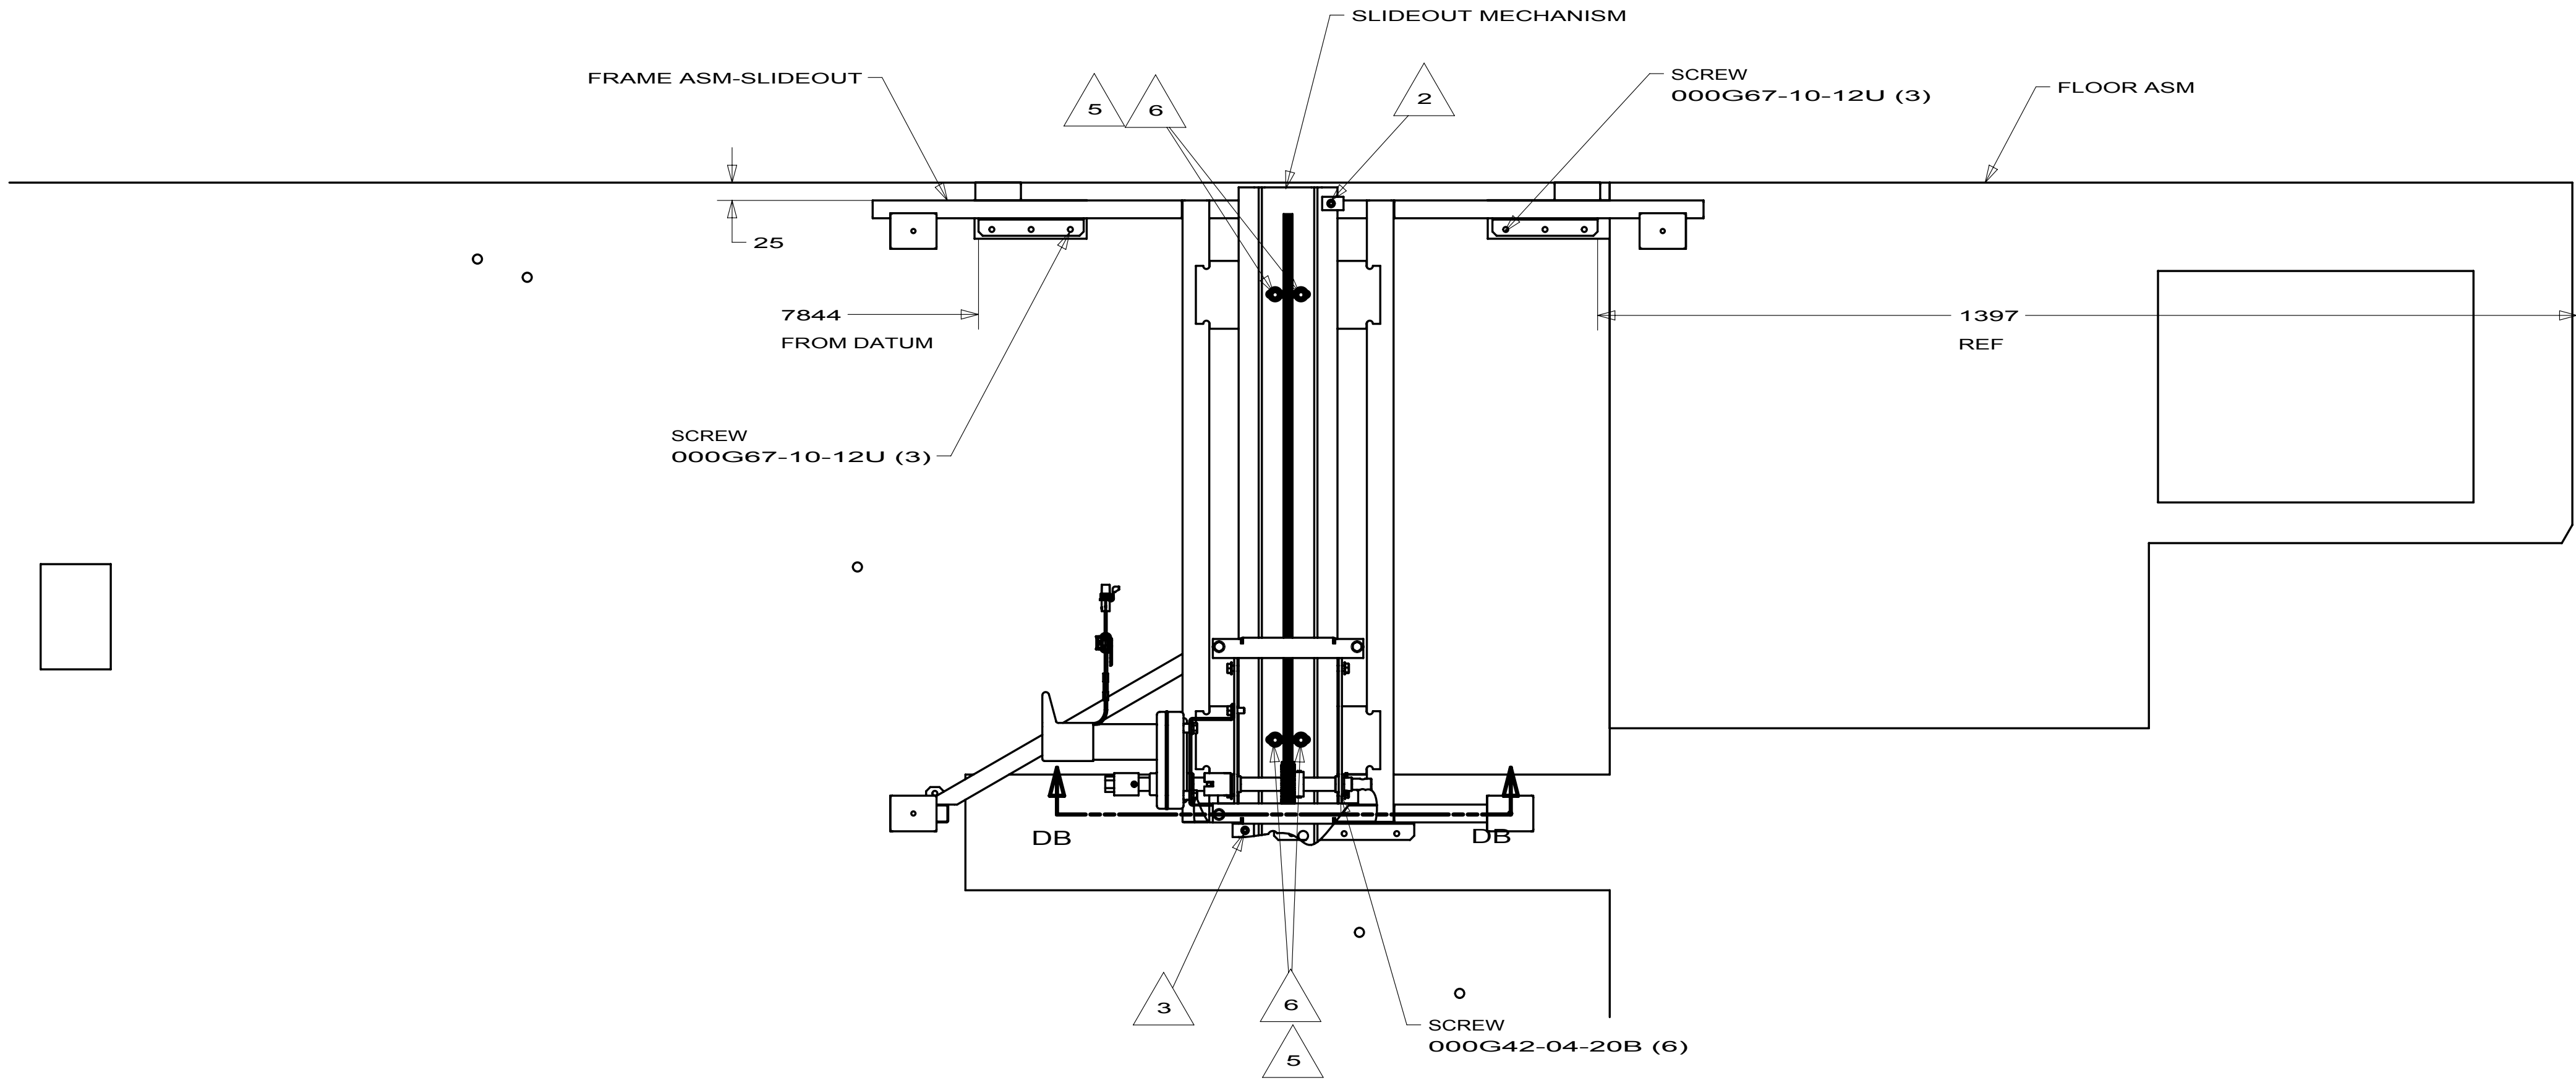

FIRST USED		
10 P40L		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-REAR,RH		
SHEET 4	PART NO 170766	REV

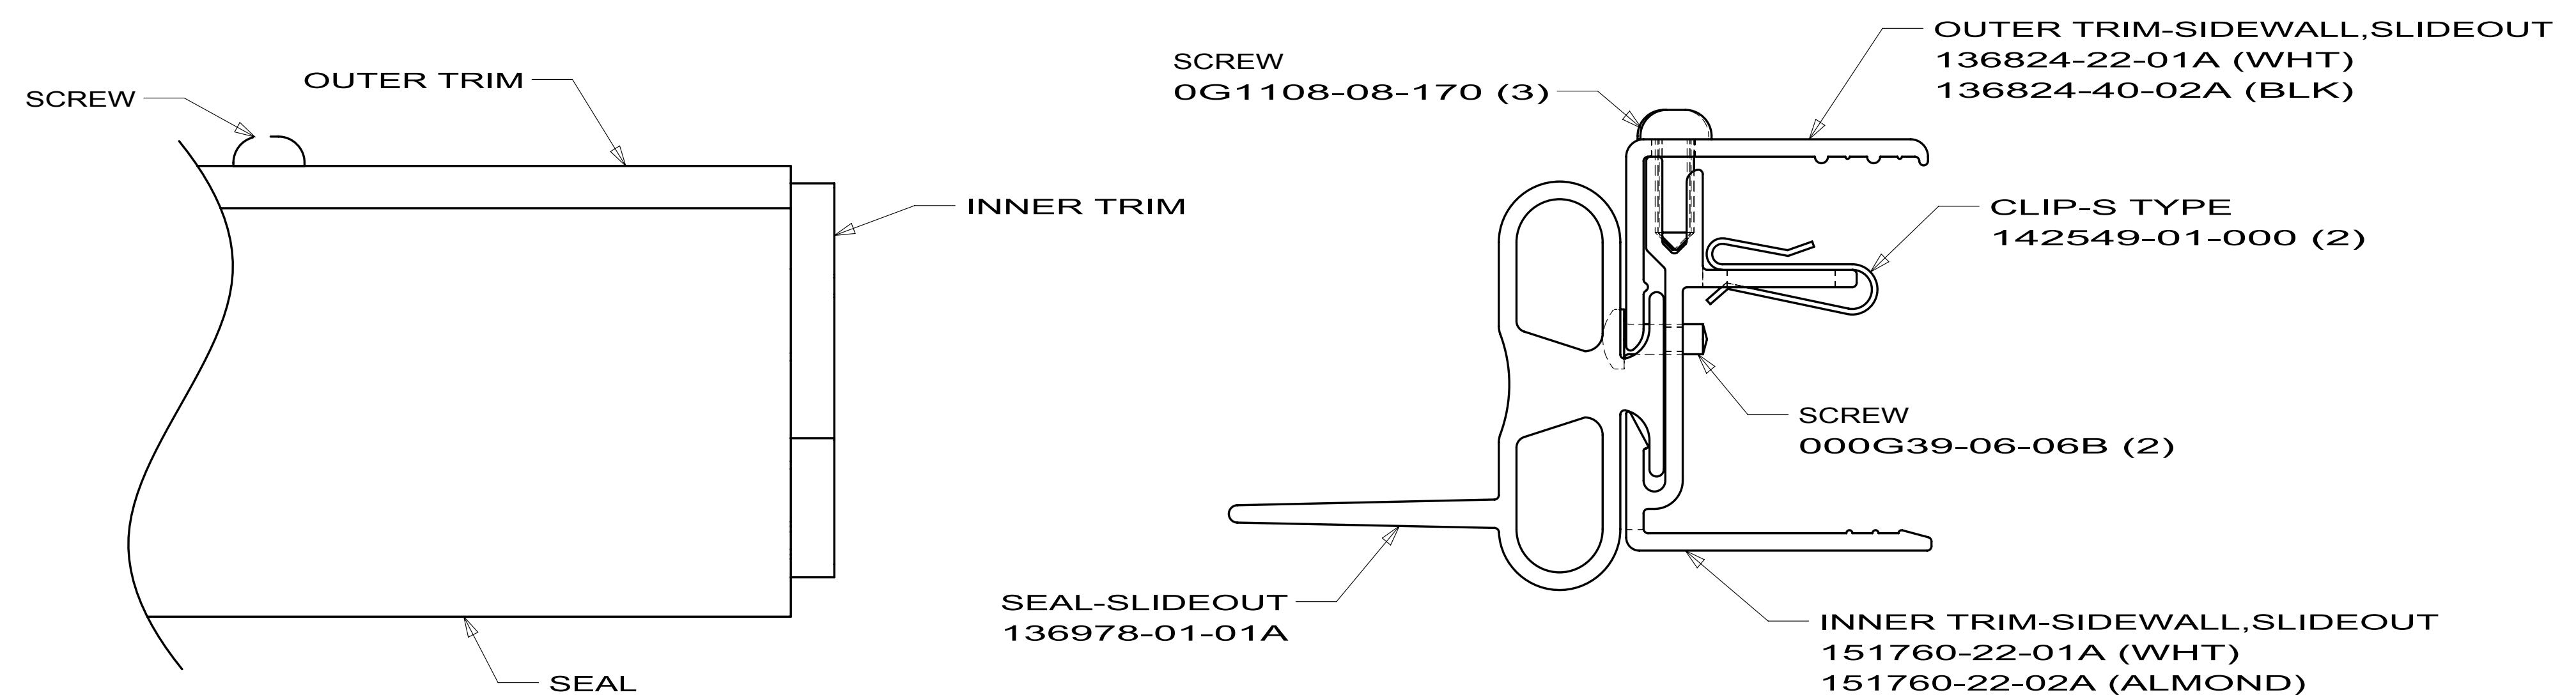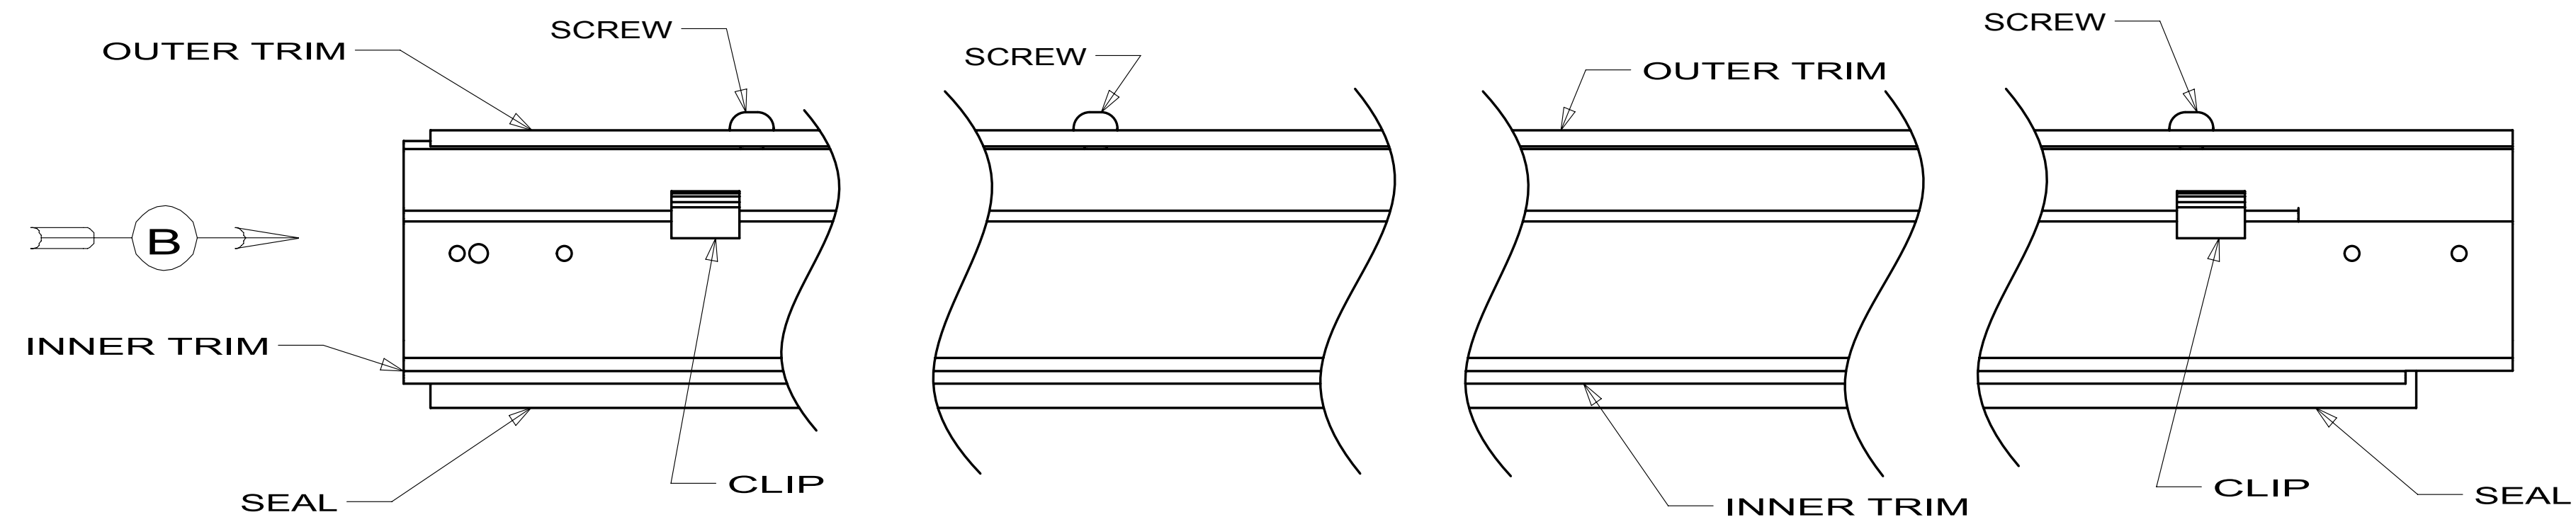




VIEW B

FABWELL SDW

TRIM ASM-SLIDEOUT,SIDE

1 2 151763


4/27/2010

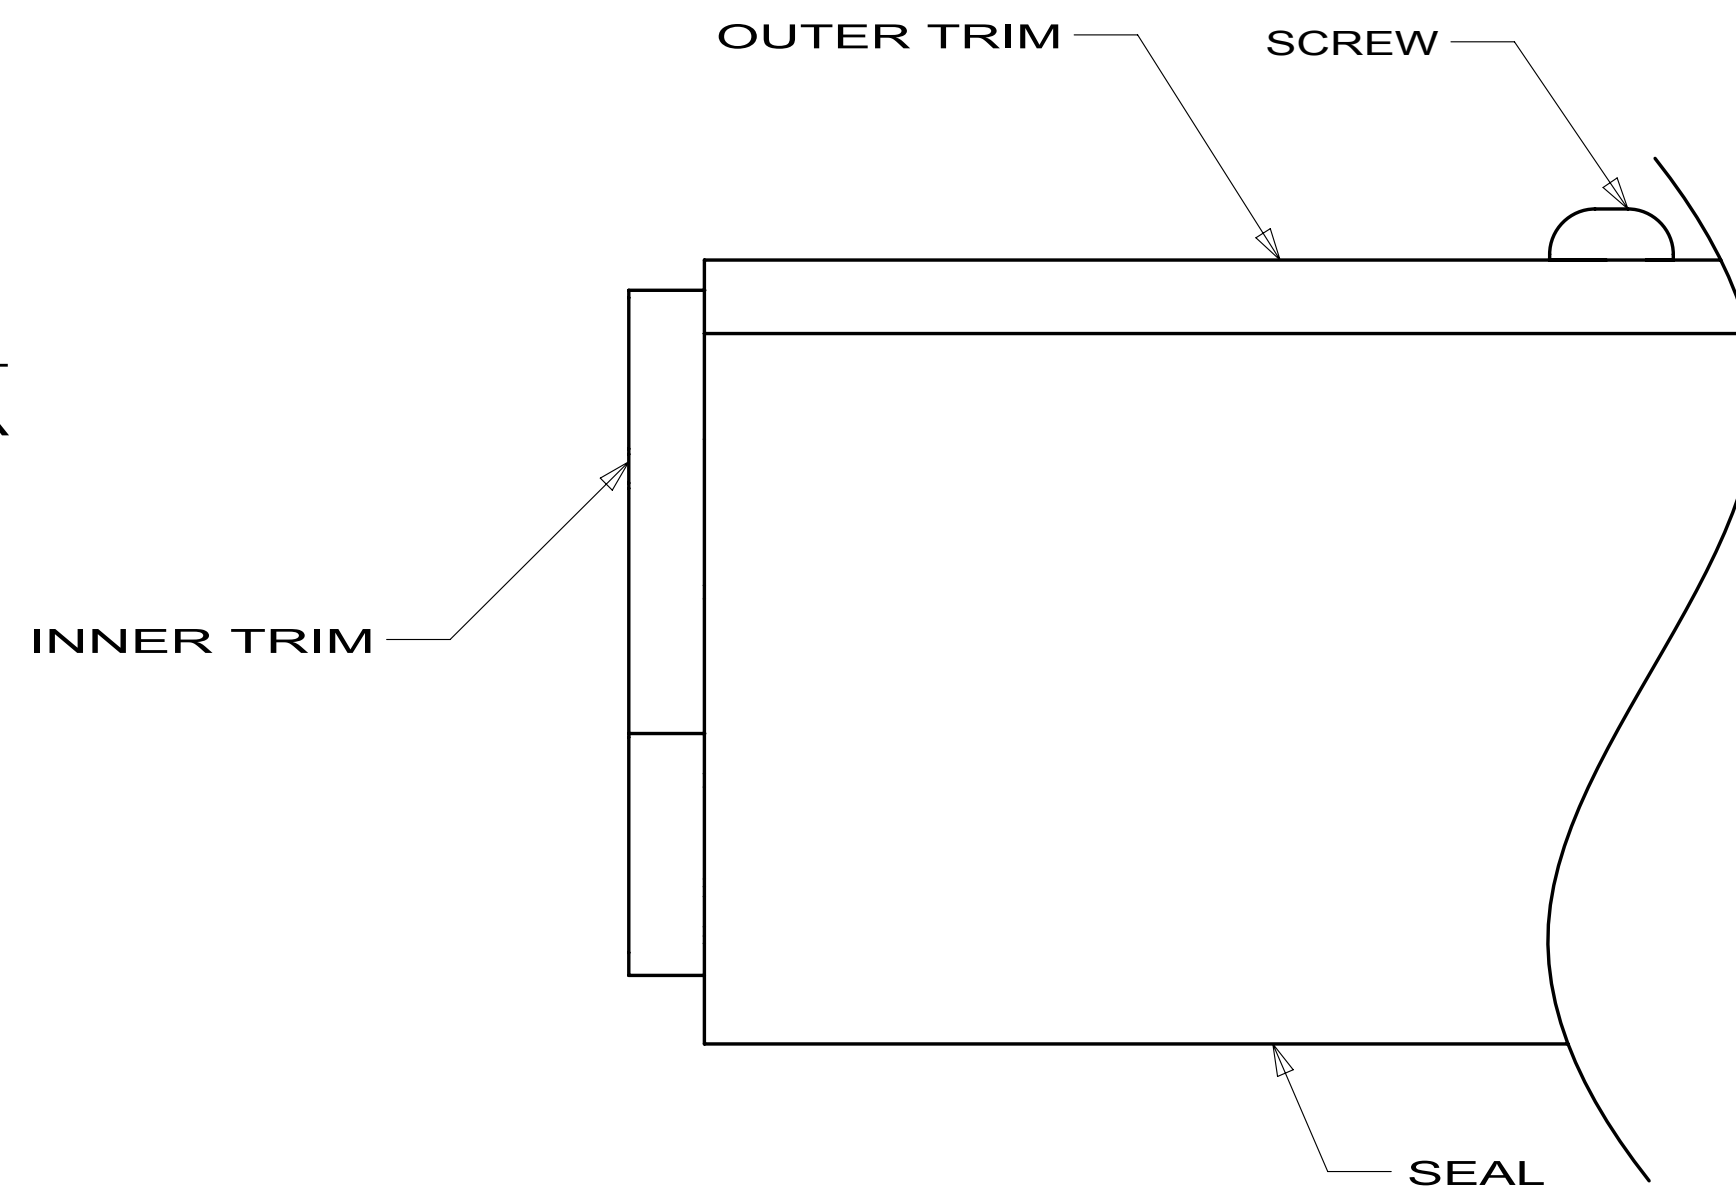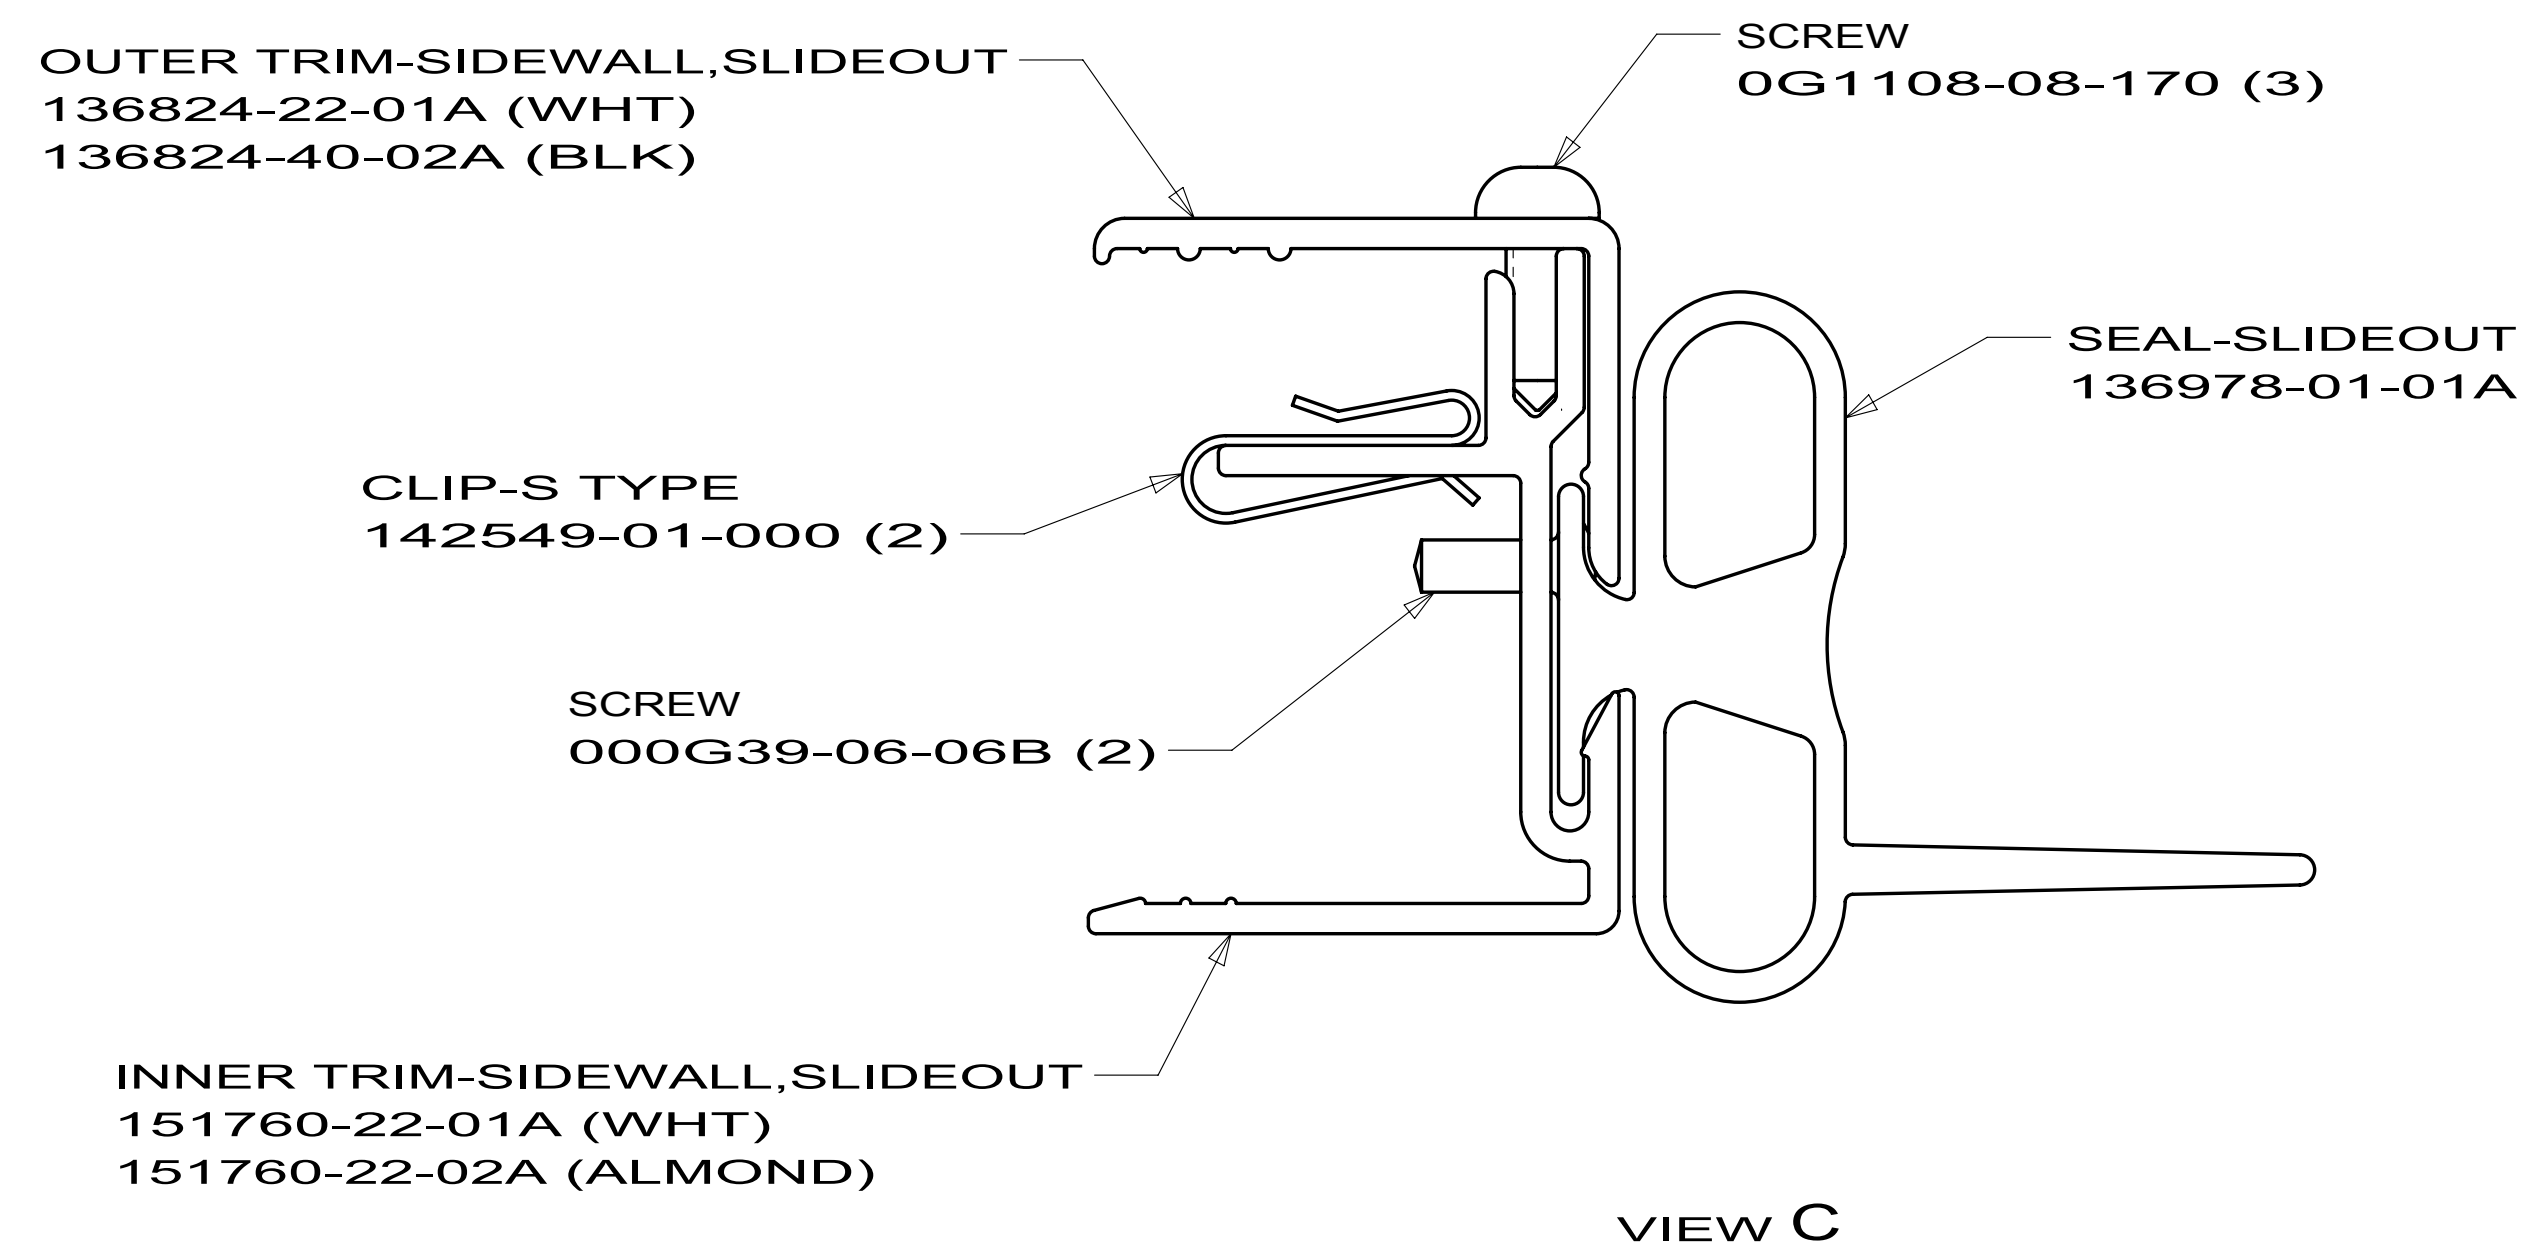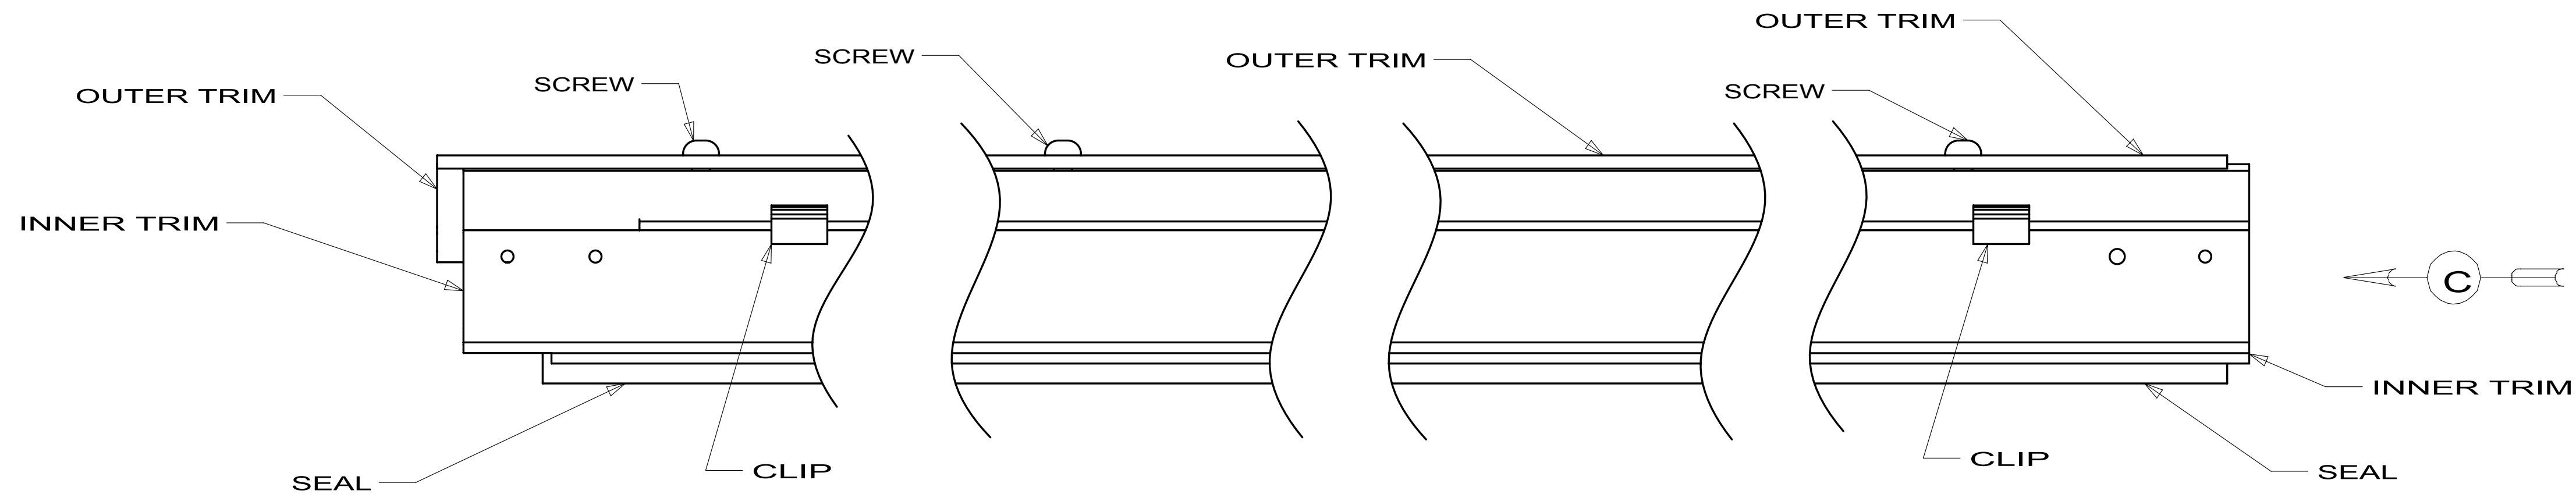

FABWELL SDW



153651-02-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT - SWITCH	1812996
	153651-01-702	EA COVER/BOOT - SEAL	1612011
	153651-02-700	EA MOTOR/LH - F/TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223

153651-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT SWITCH	1812996
	153651-02-700	EA MOTOR "R" - F/LH TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223
	153651-04-700	EA COVER/BOOT - SEAL	1612012
	153651-04-701	EA BEZEL F/MAIN HOUSING	1612567

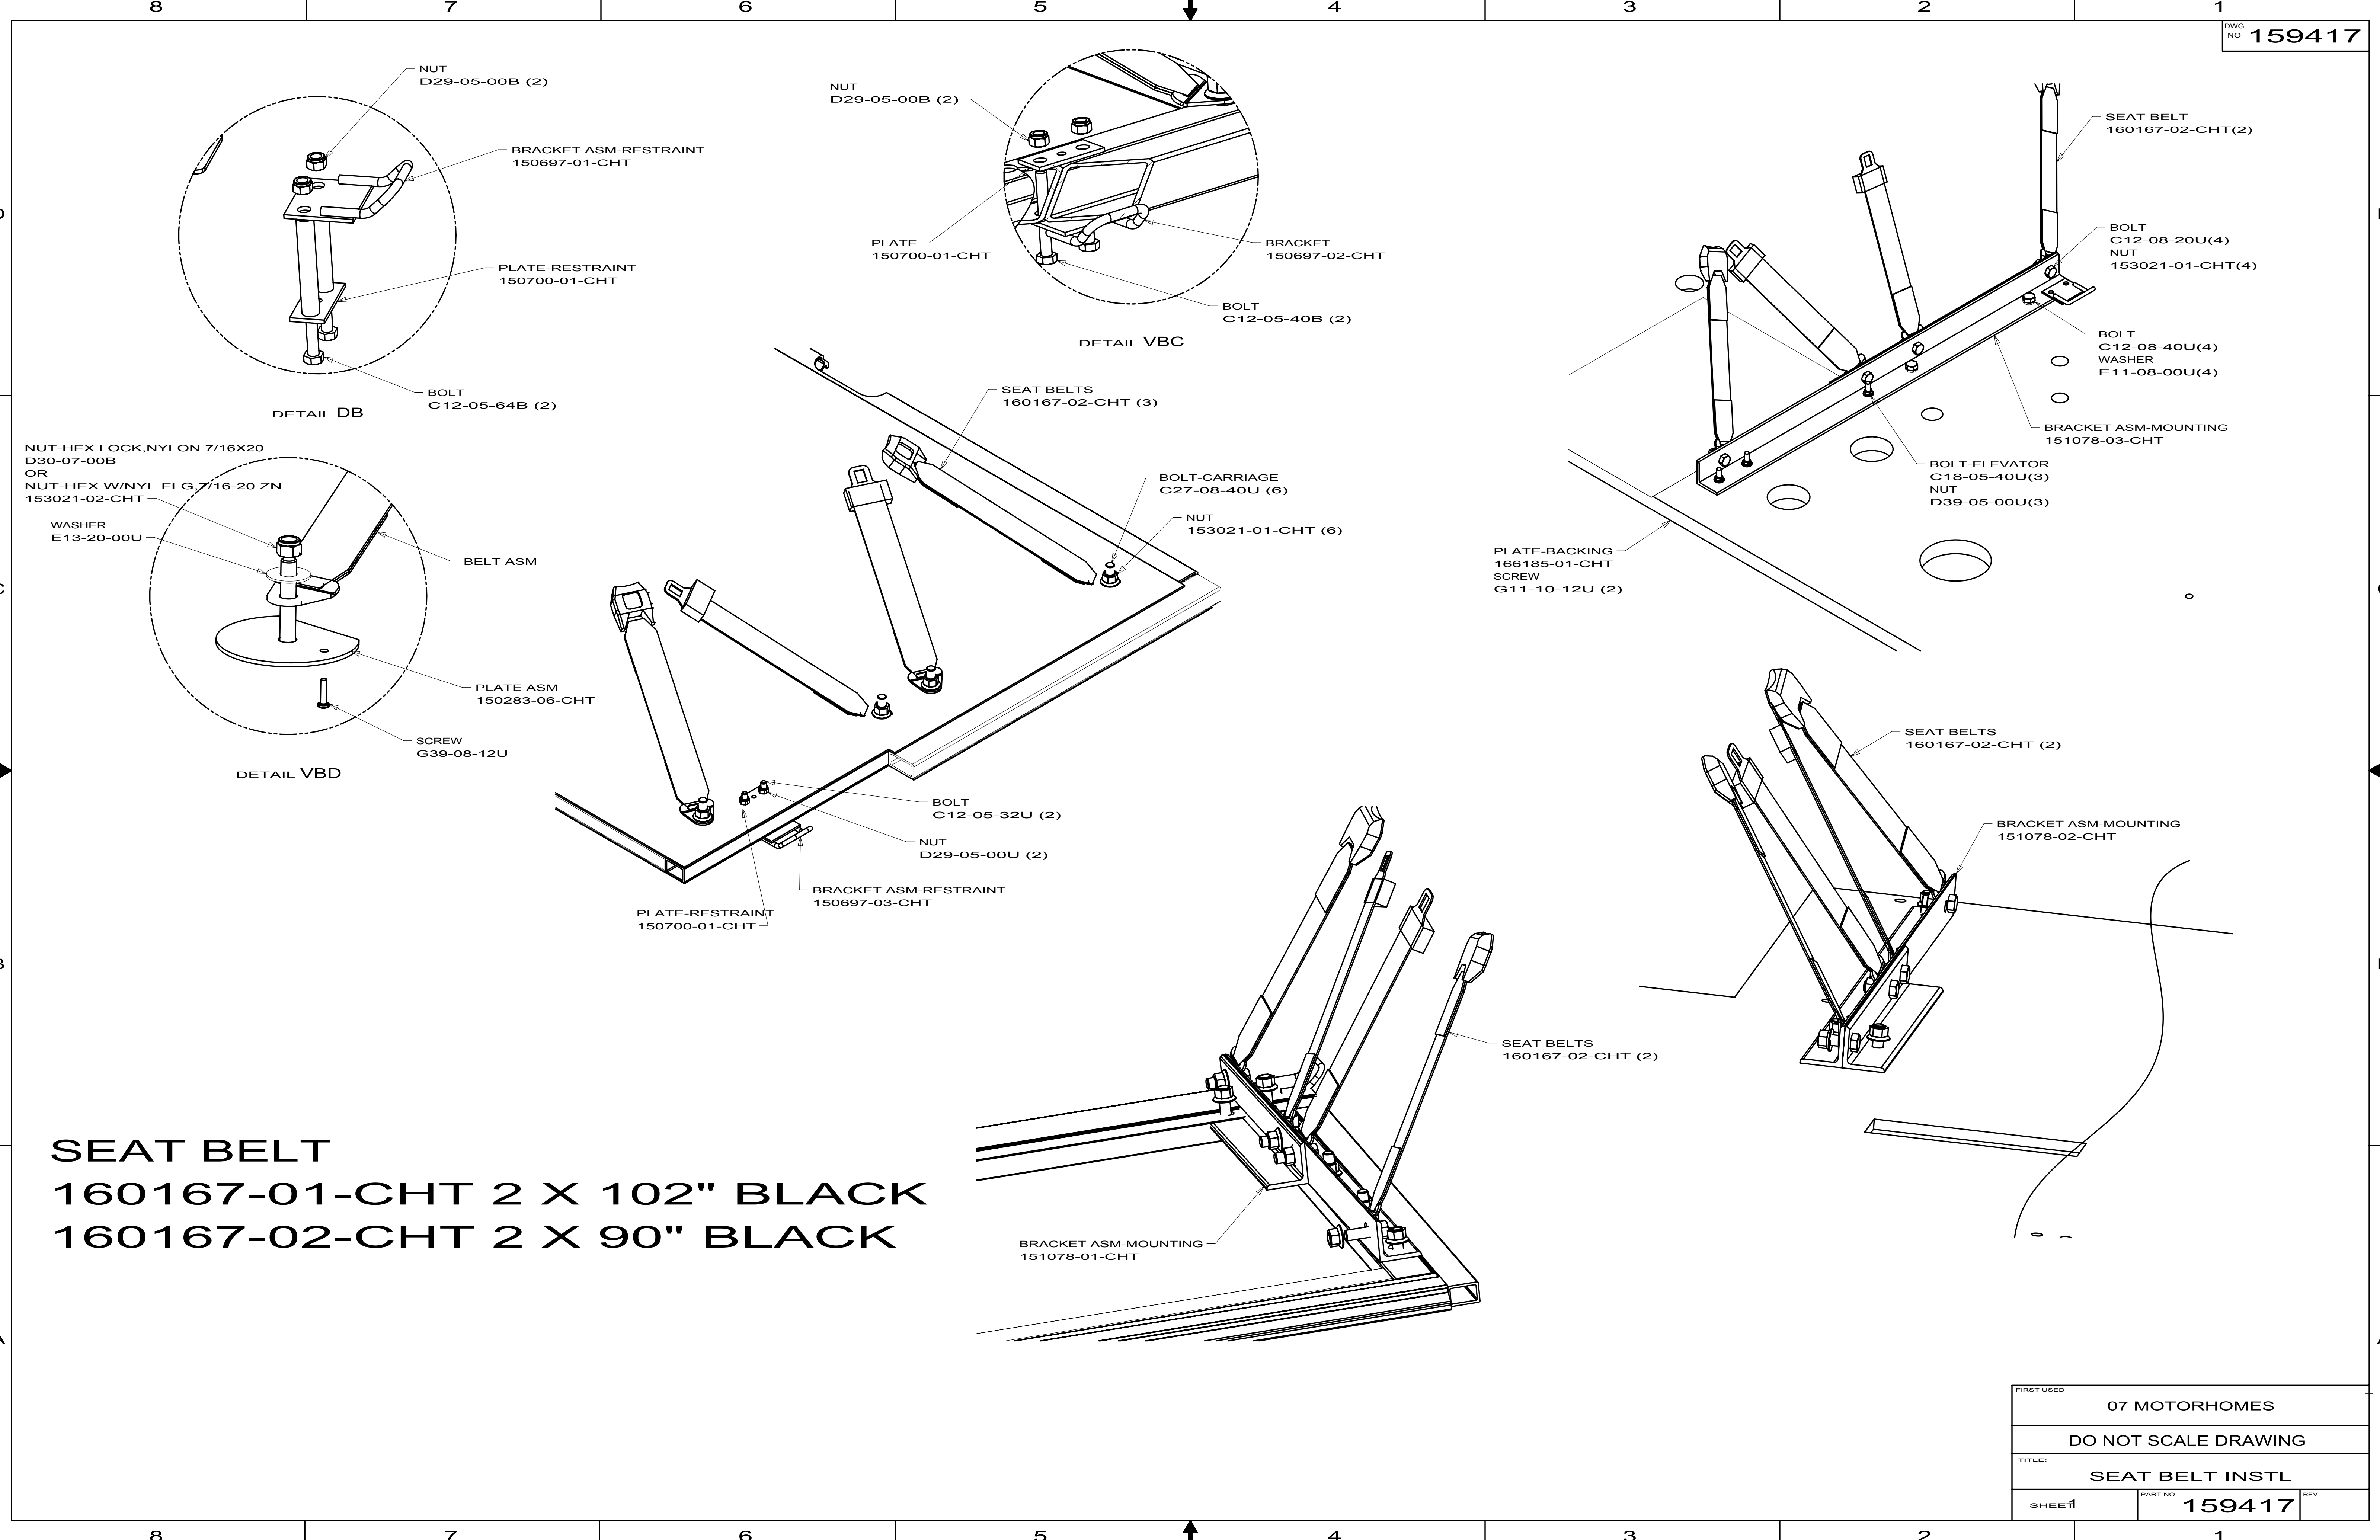


SEAT BELT
160167-01-CHT 2 X 102" BLACK
160167-02-CHT 2 X 90" BLACK

FIRST USED		
07 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
SEAT BELT INSTL		
SHEET 1	PART NO	REV
	159417	

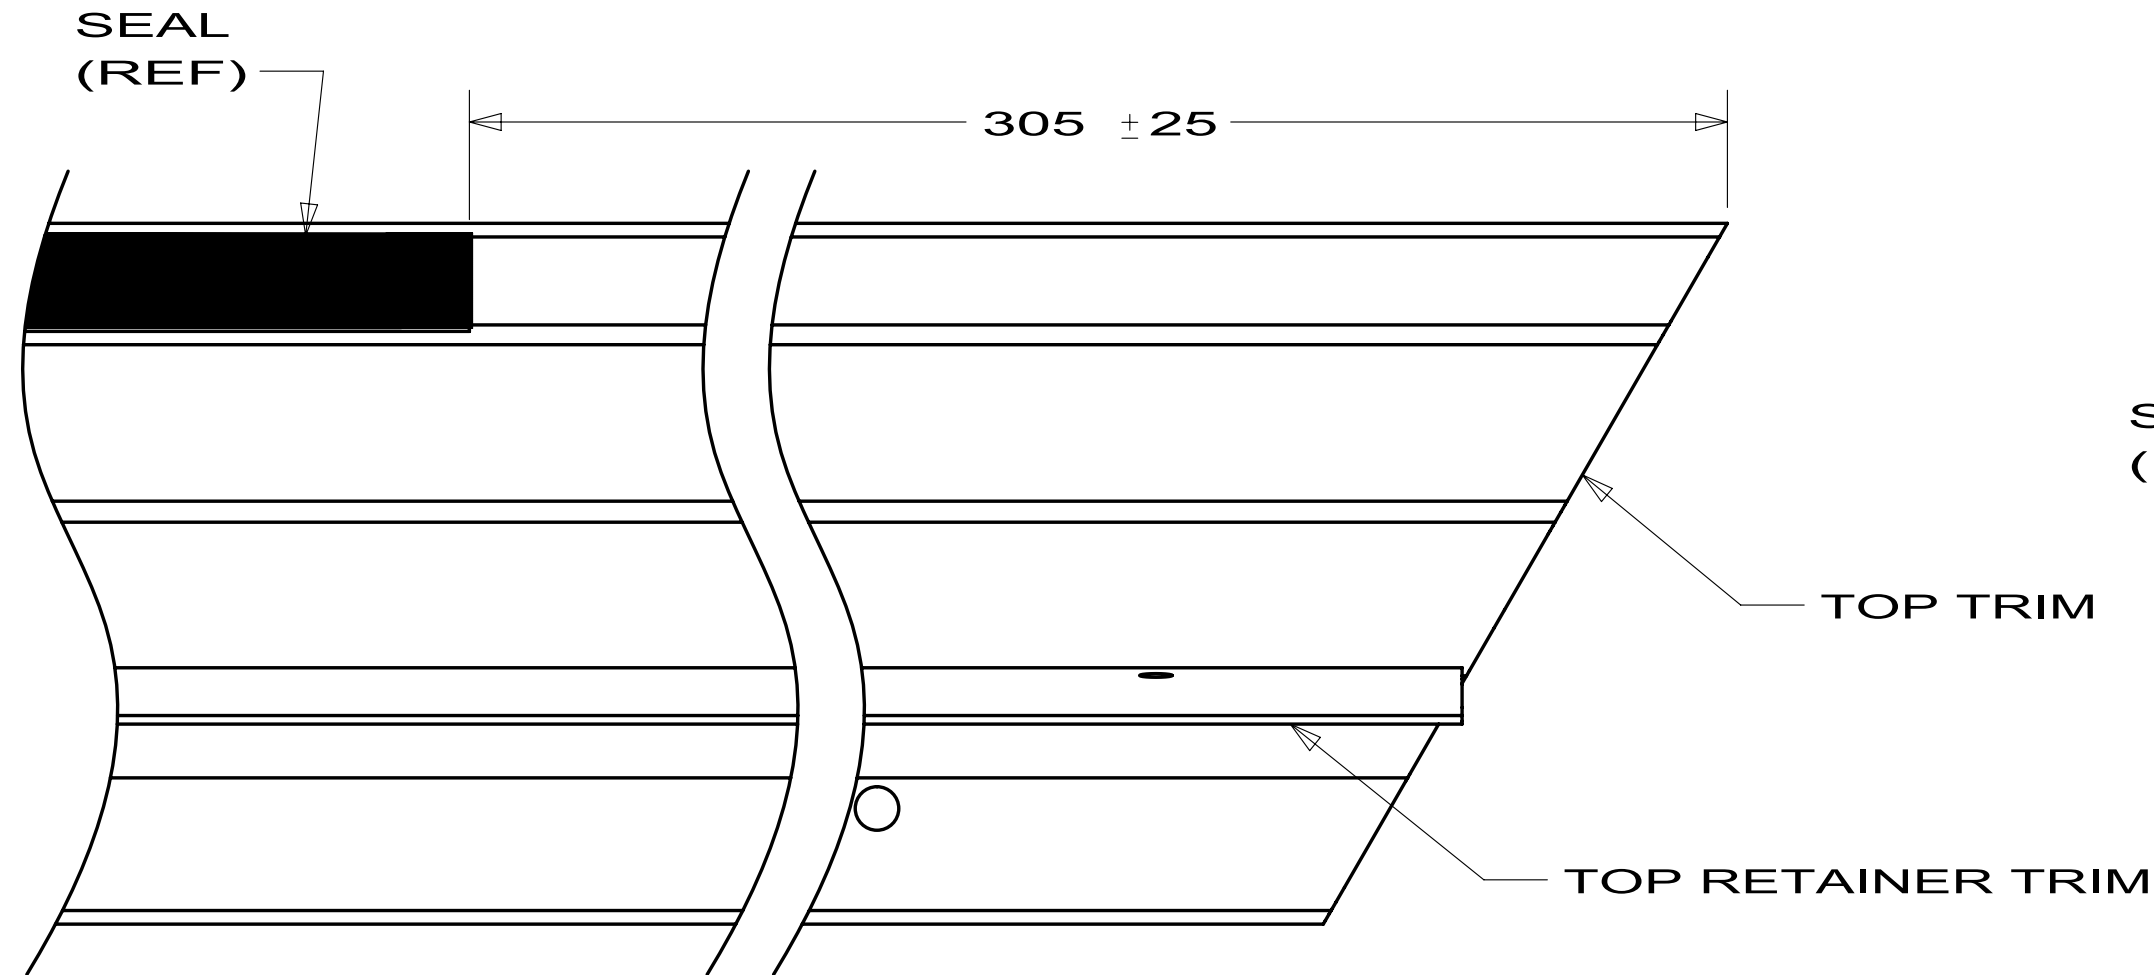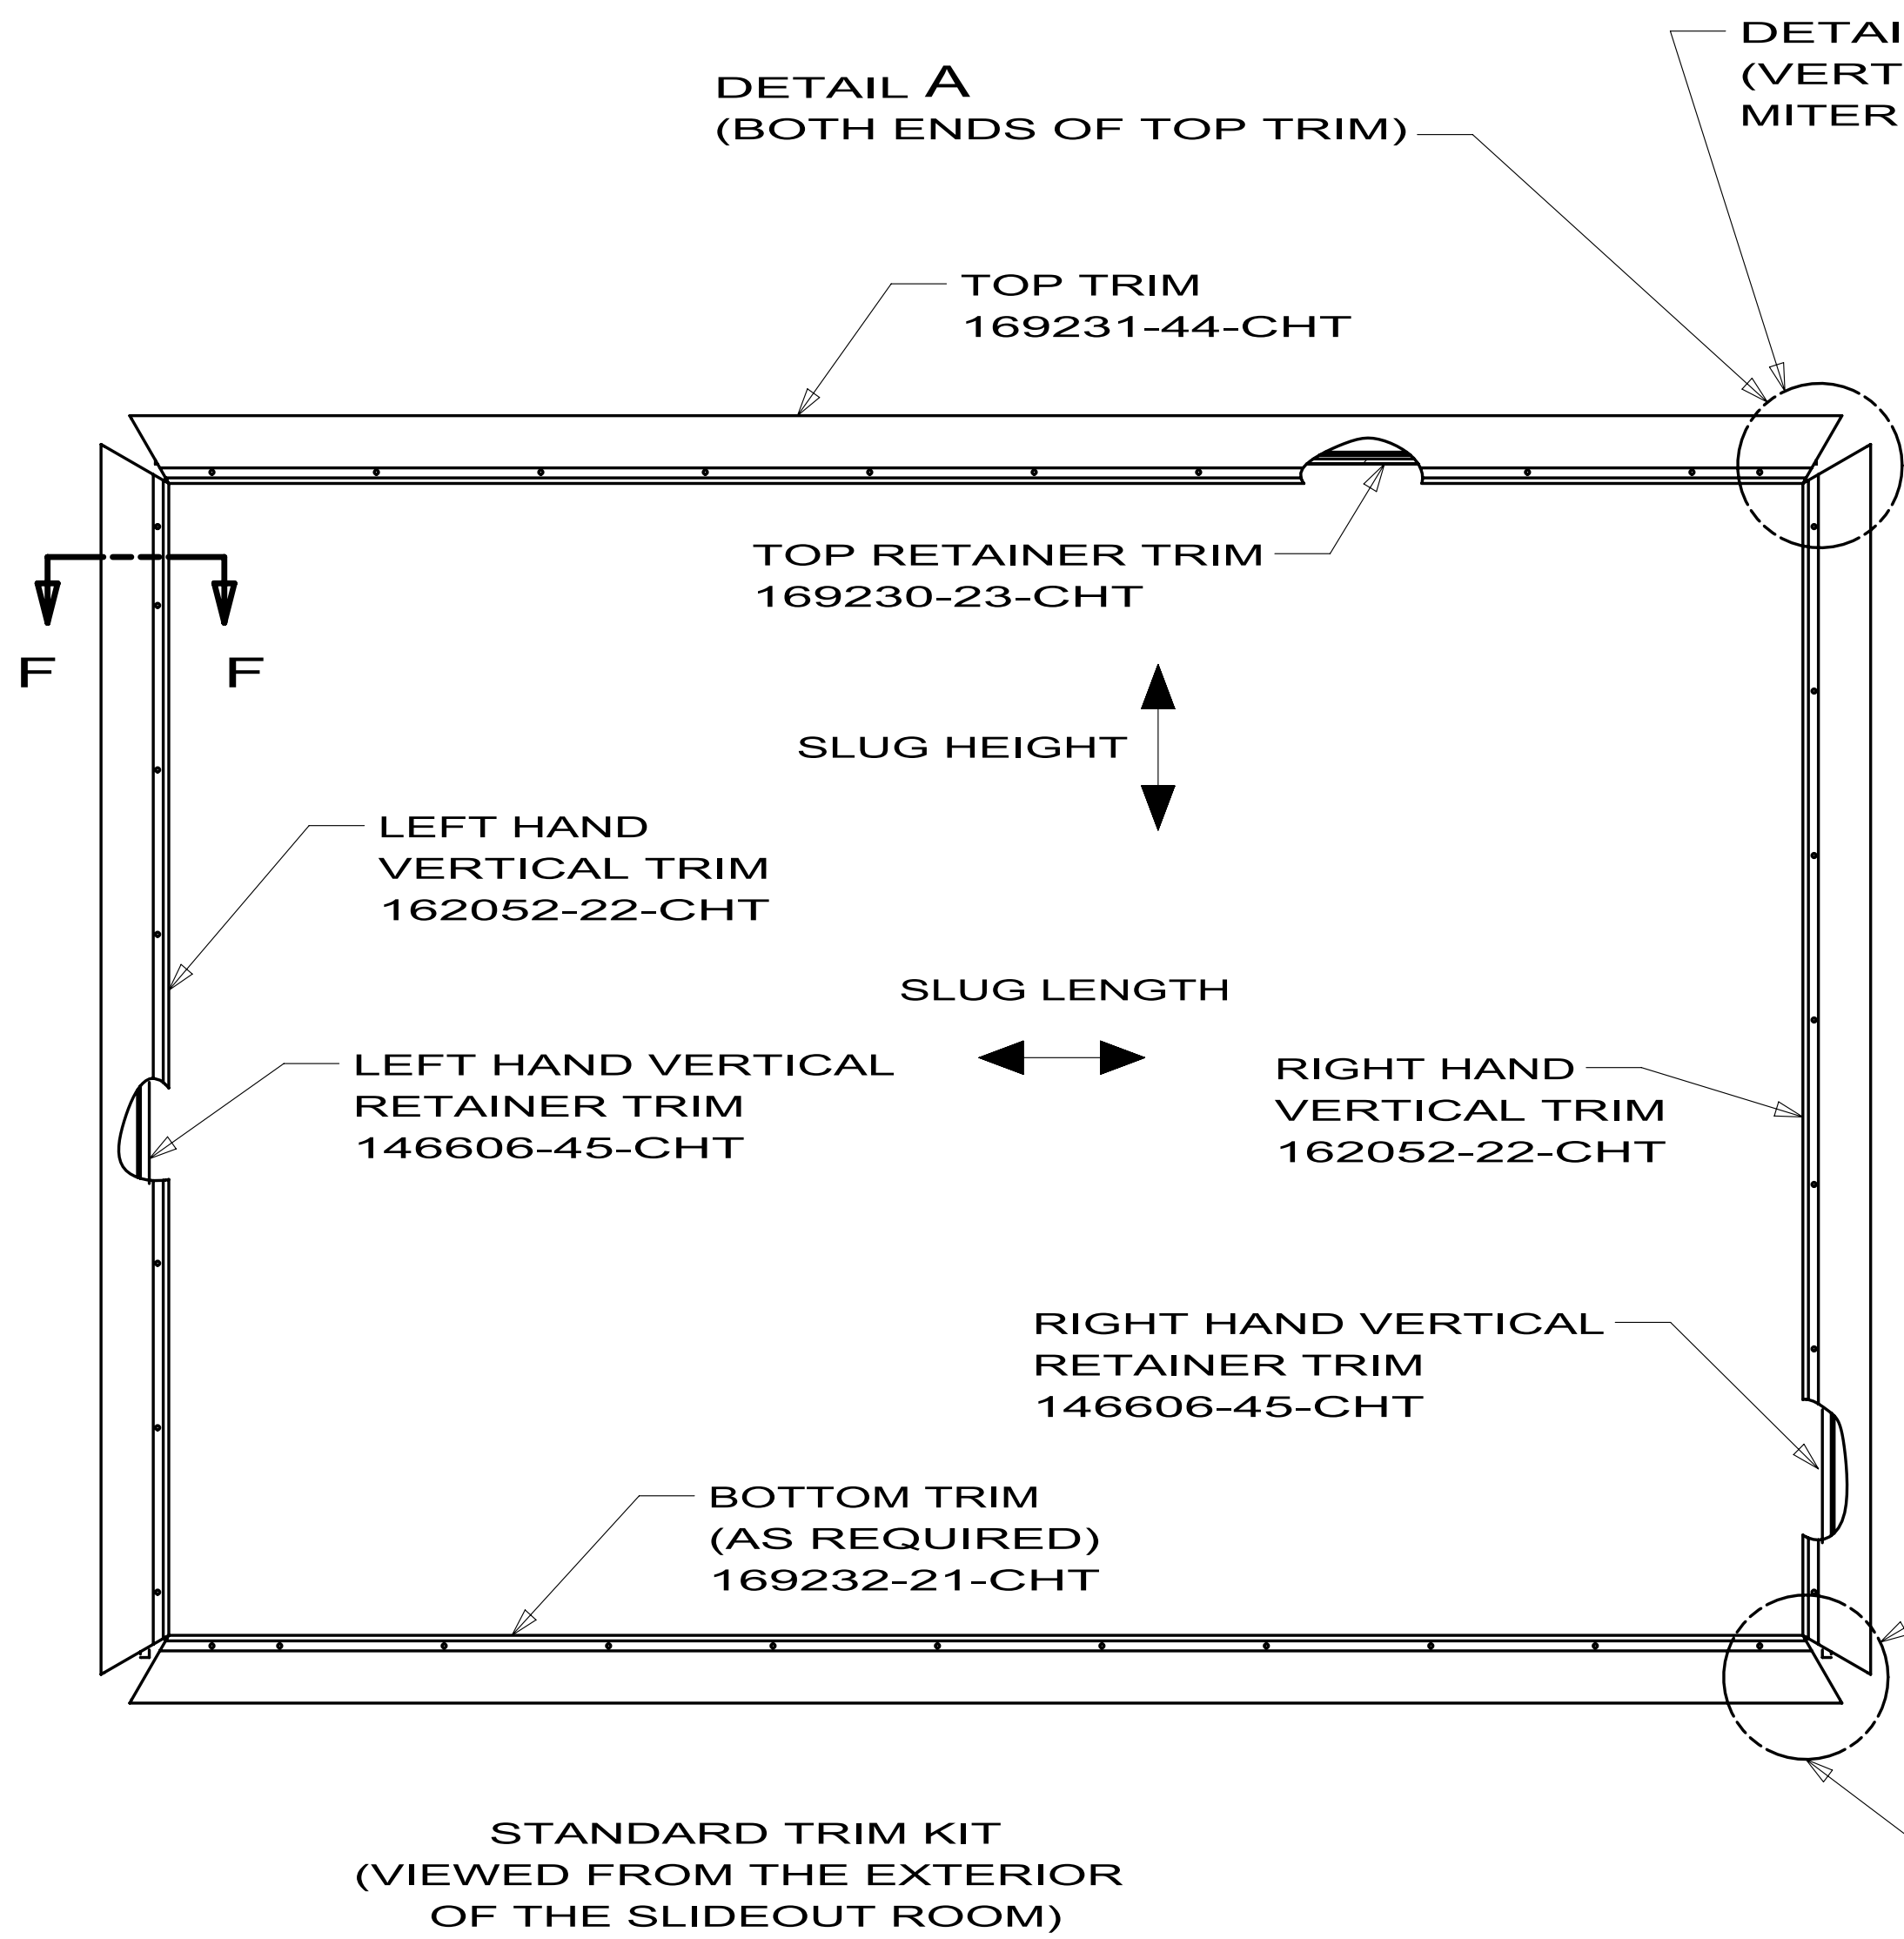

DETAIL A
(TOP TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

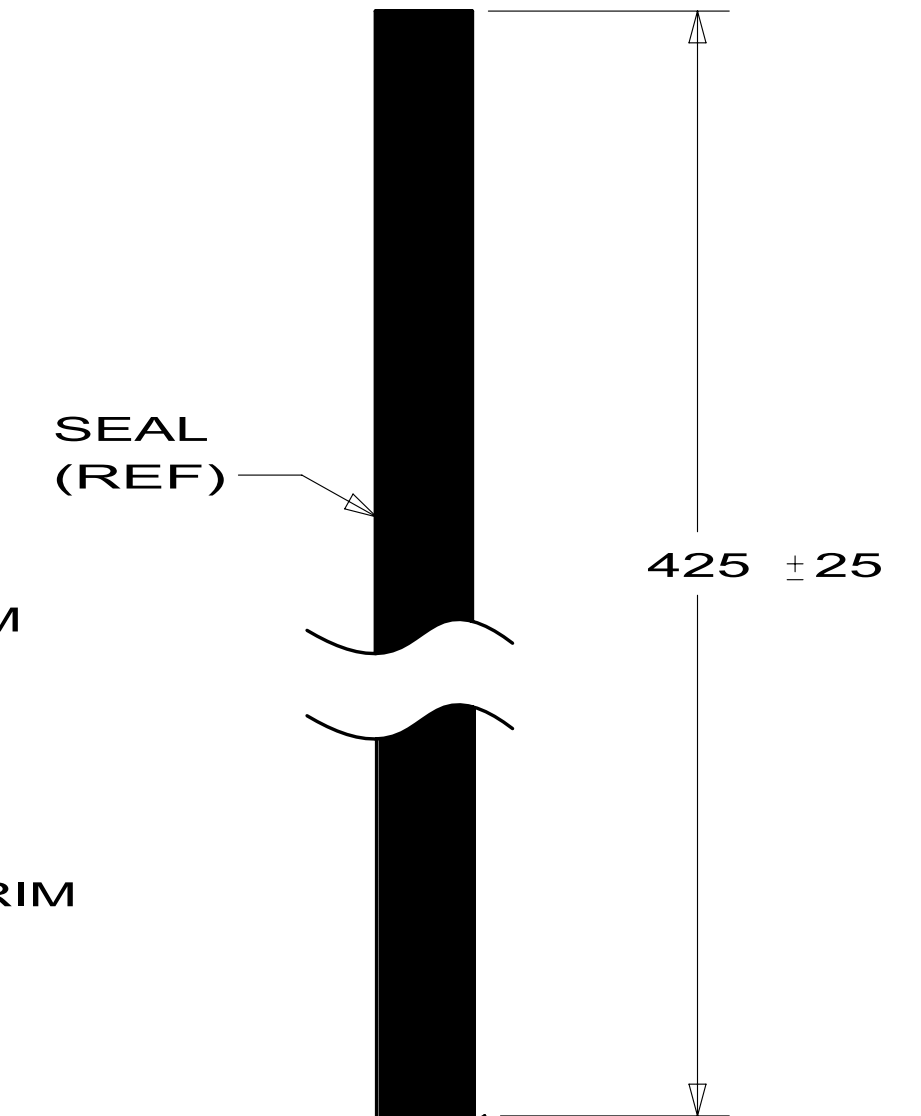

DETAIL B
(ALL MITER CUT VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)


VERTICAL RETAINER TRIM

VERTICAL RETAINER TRIM


VERTICAL TRIM

SEAL
(REF)



DETAIL C
(ALL STRAIGHT CUT VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

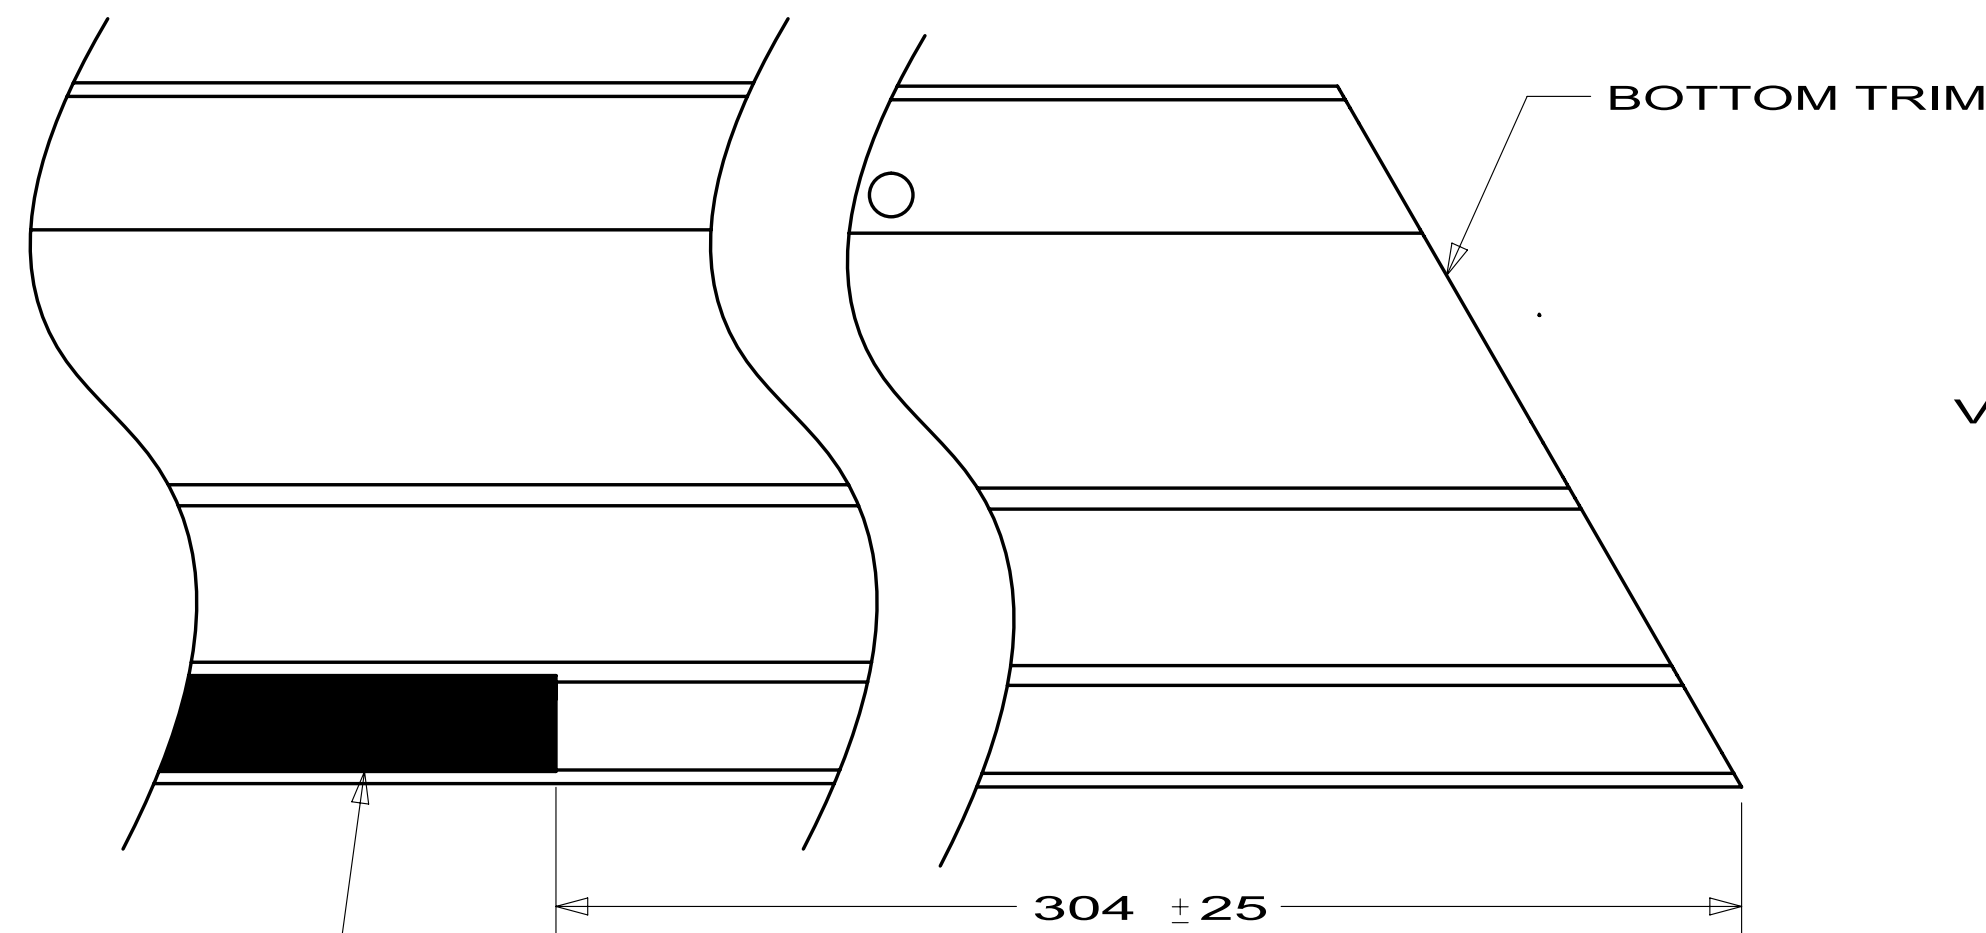



DETAIL D
(BOTTOM TRIM)
VIEWED FROM THE BACKSIDE OF THE TRIM

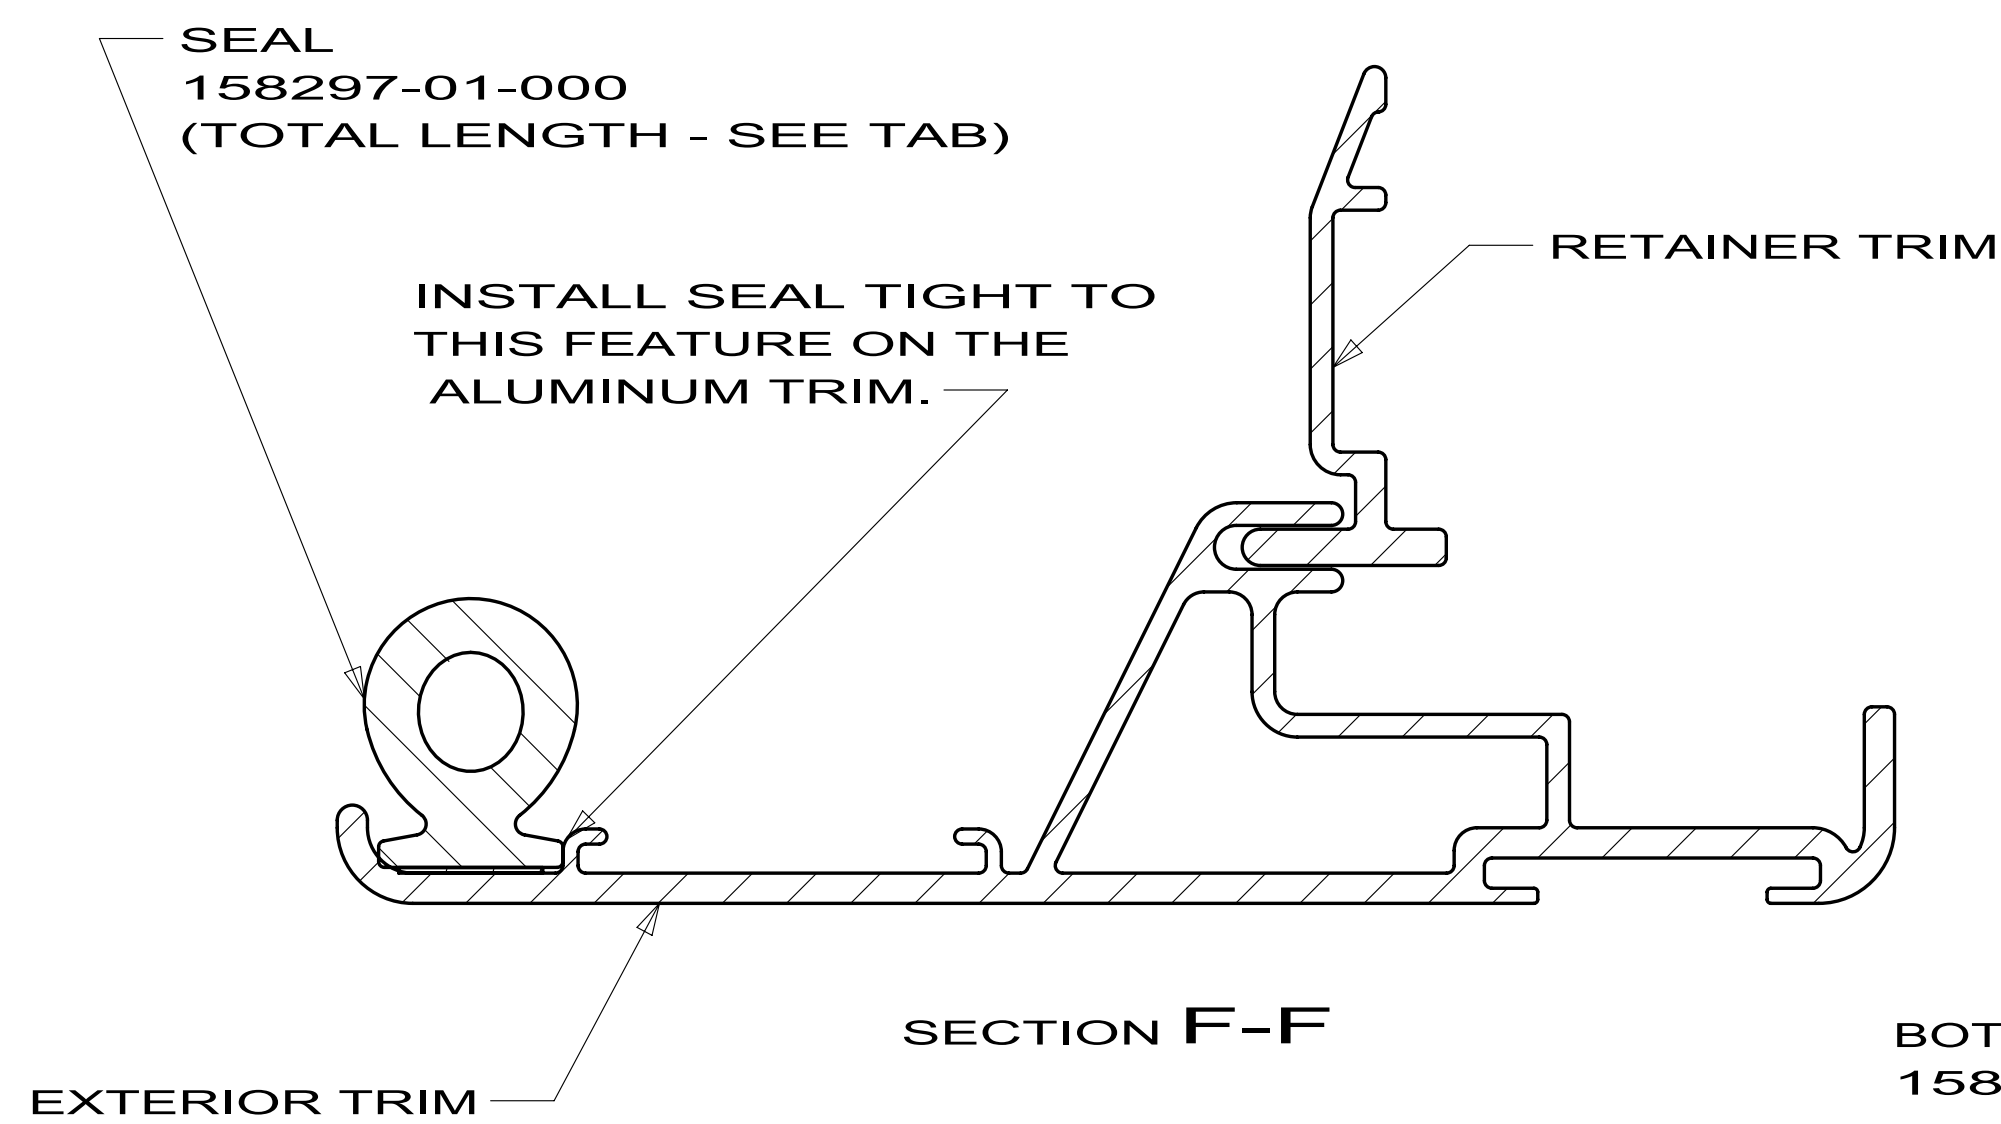

FIRST USED		
2010 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: TRIM KIT-EXTERIOR,SLIDEOUT		
SHEET 1	PART NO 169233	REV


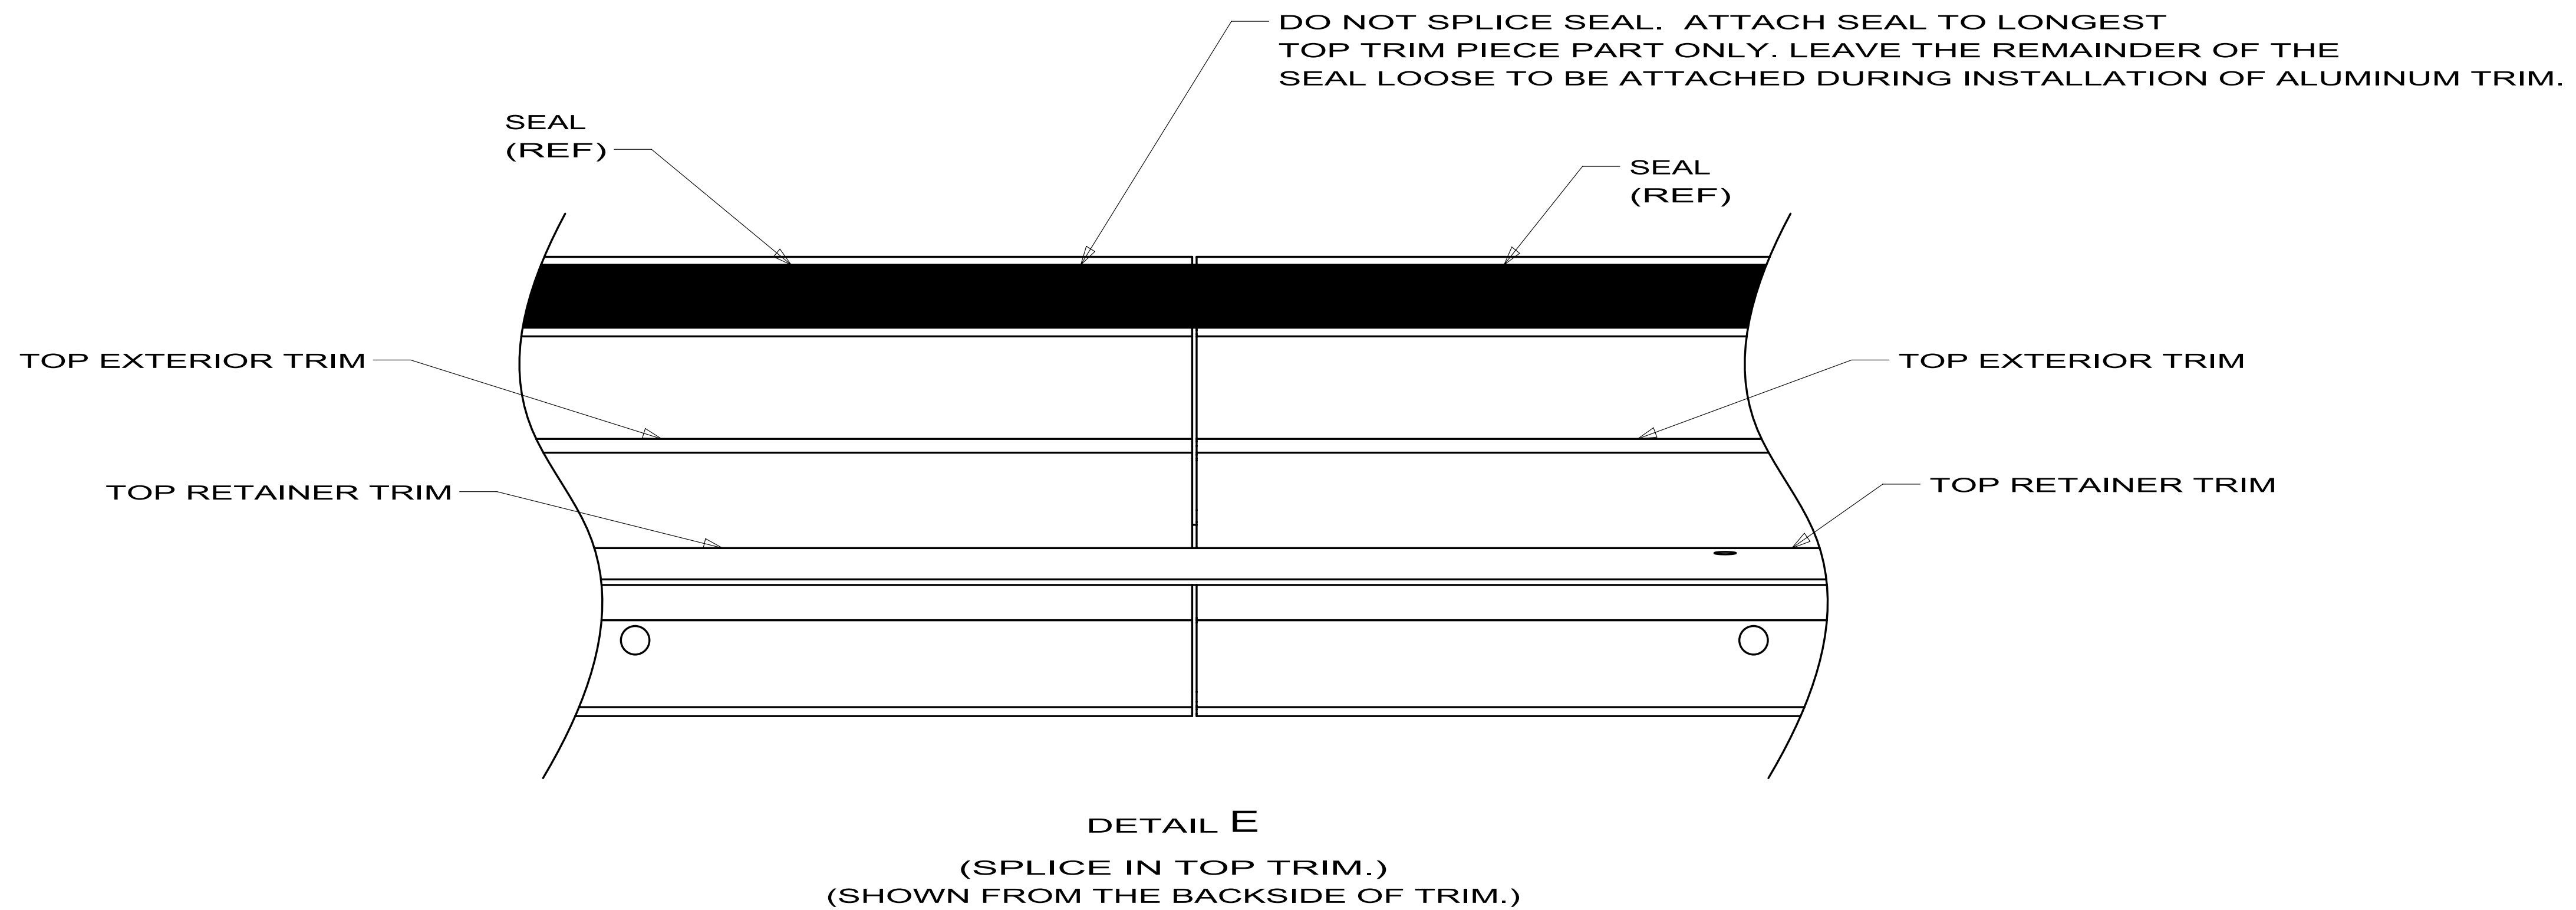
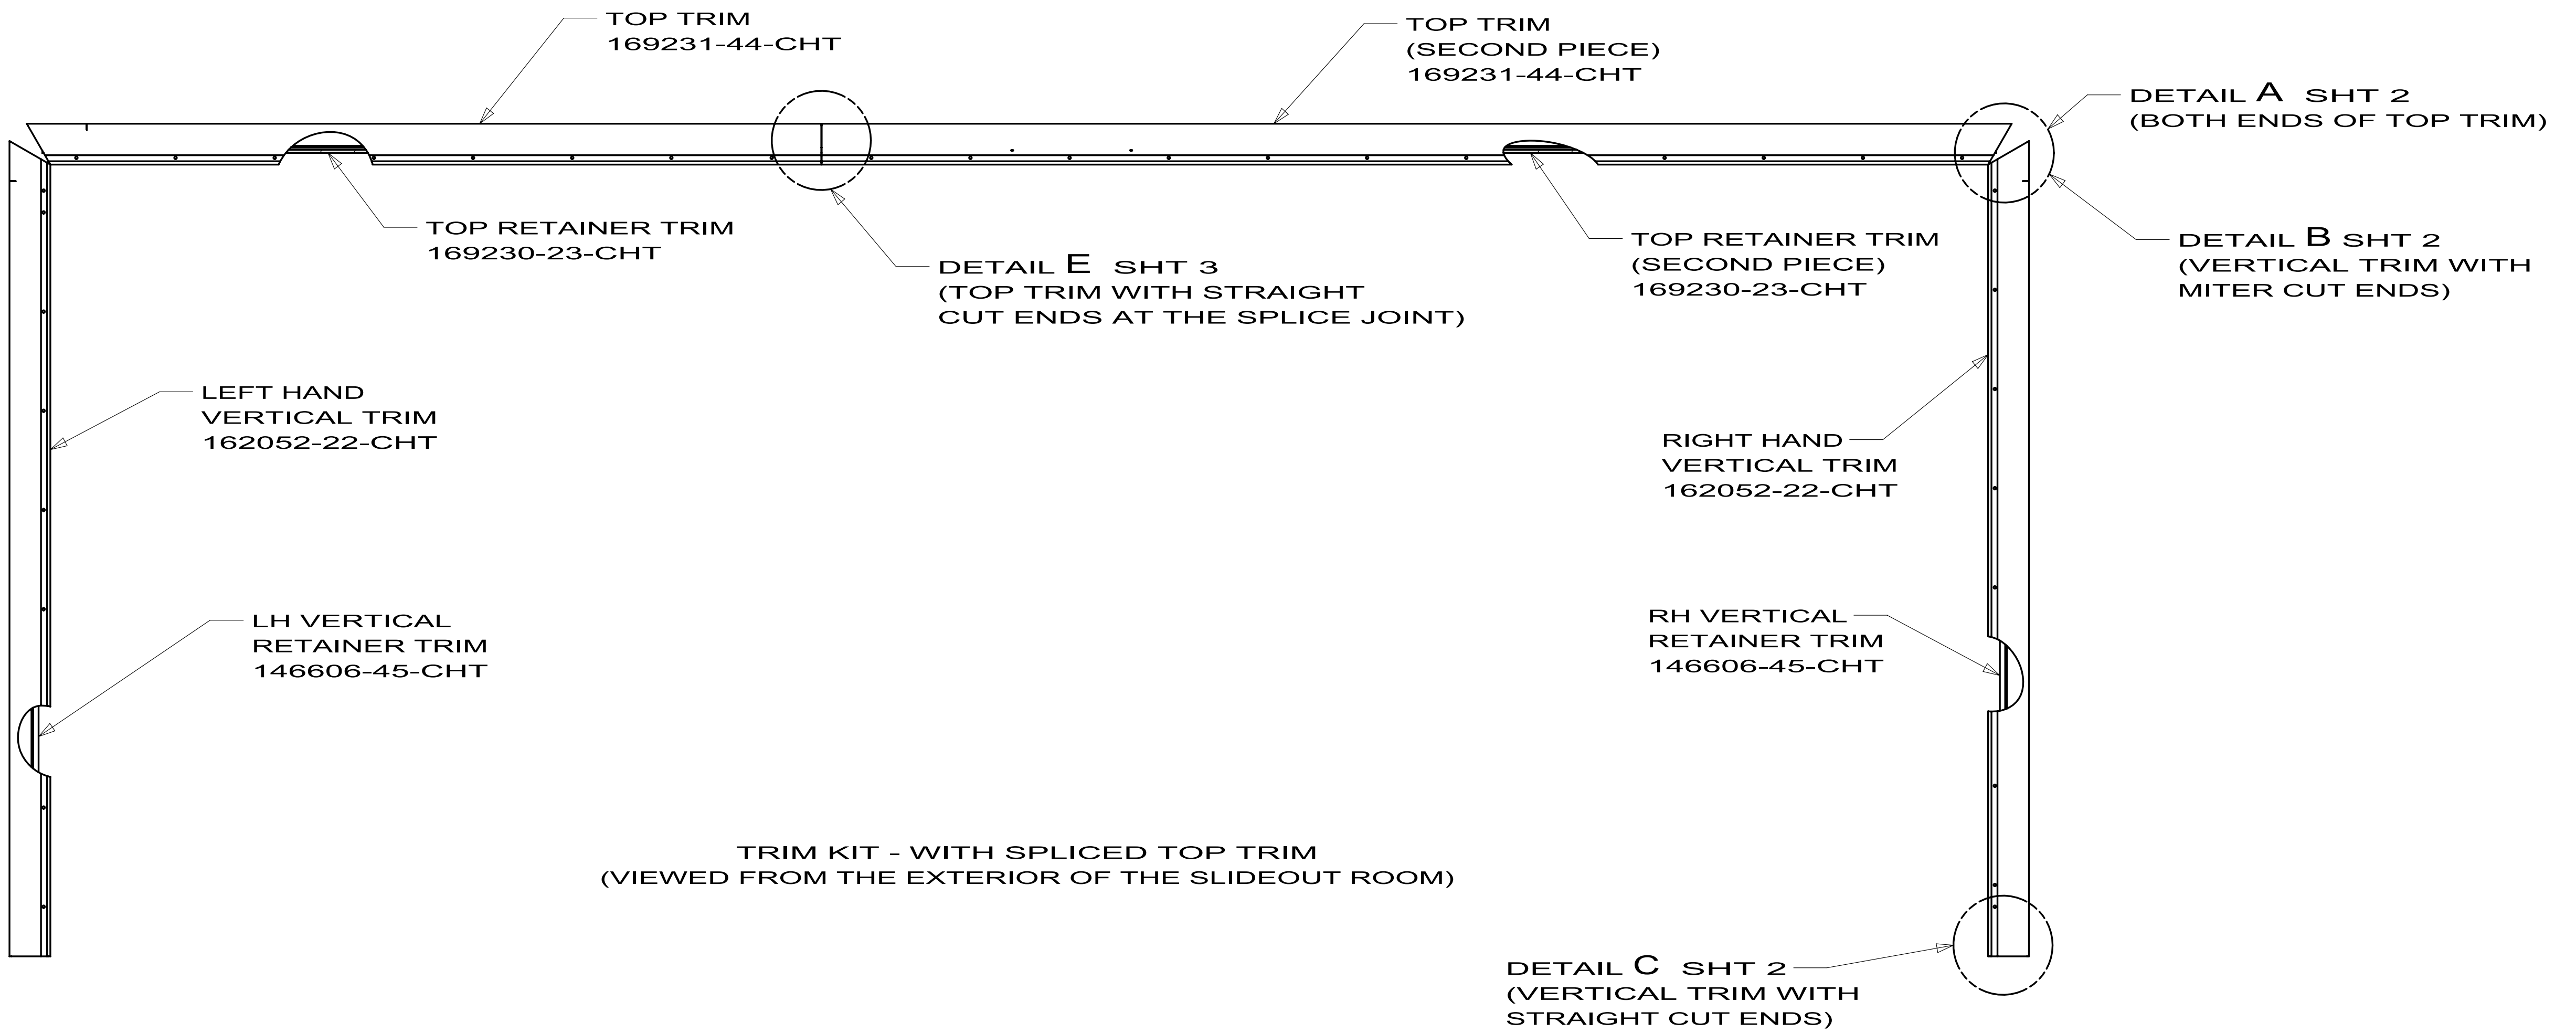


FIRST USED		
2010 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
TRIM KIT-EXTERIOR,SLIDEOUT		
SHEET 4	PART NO 169233	REV

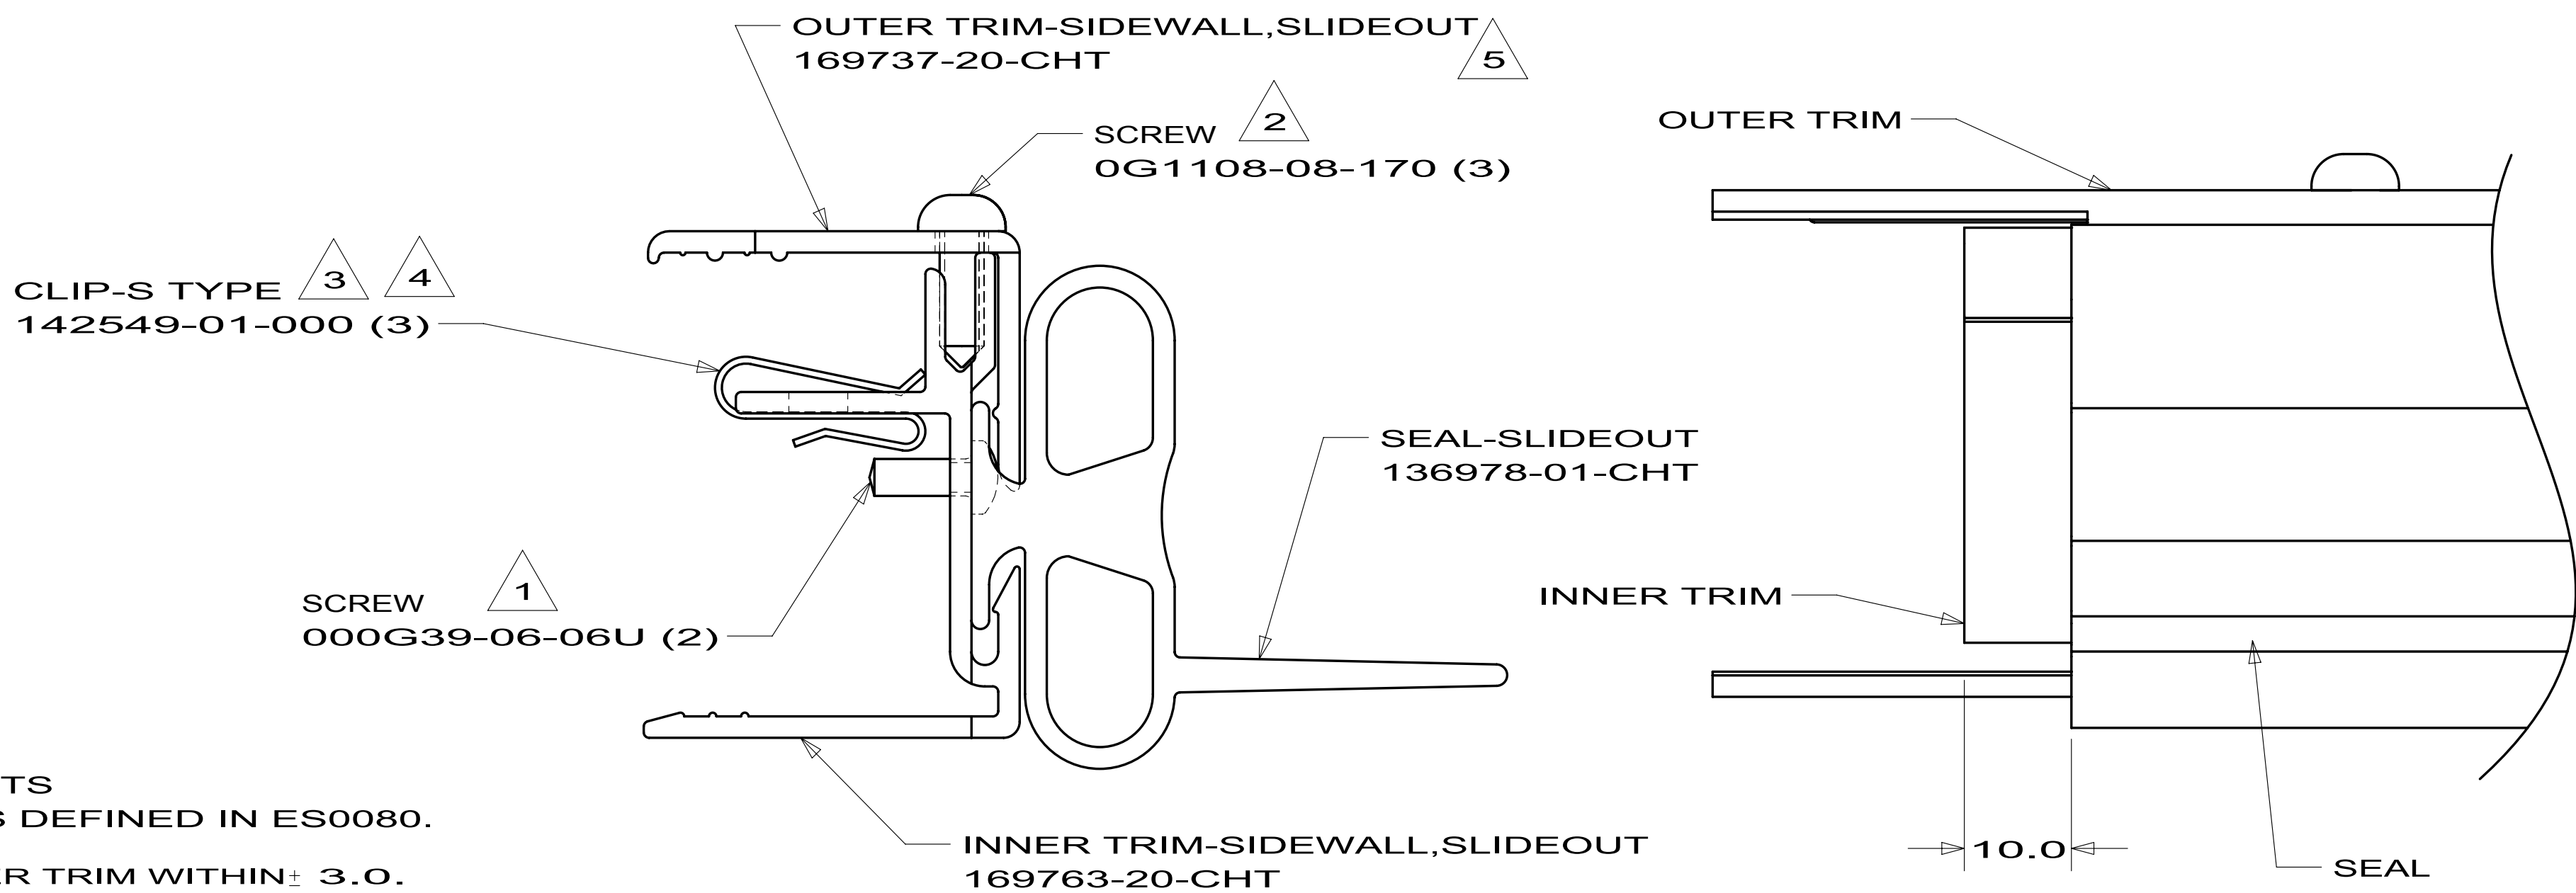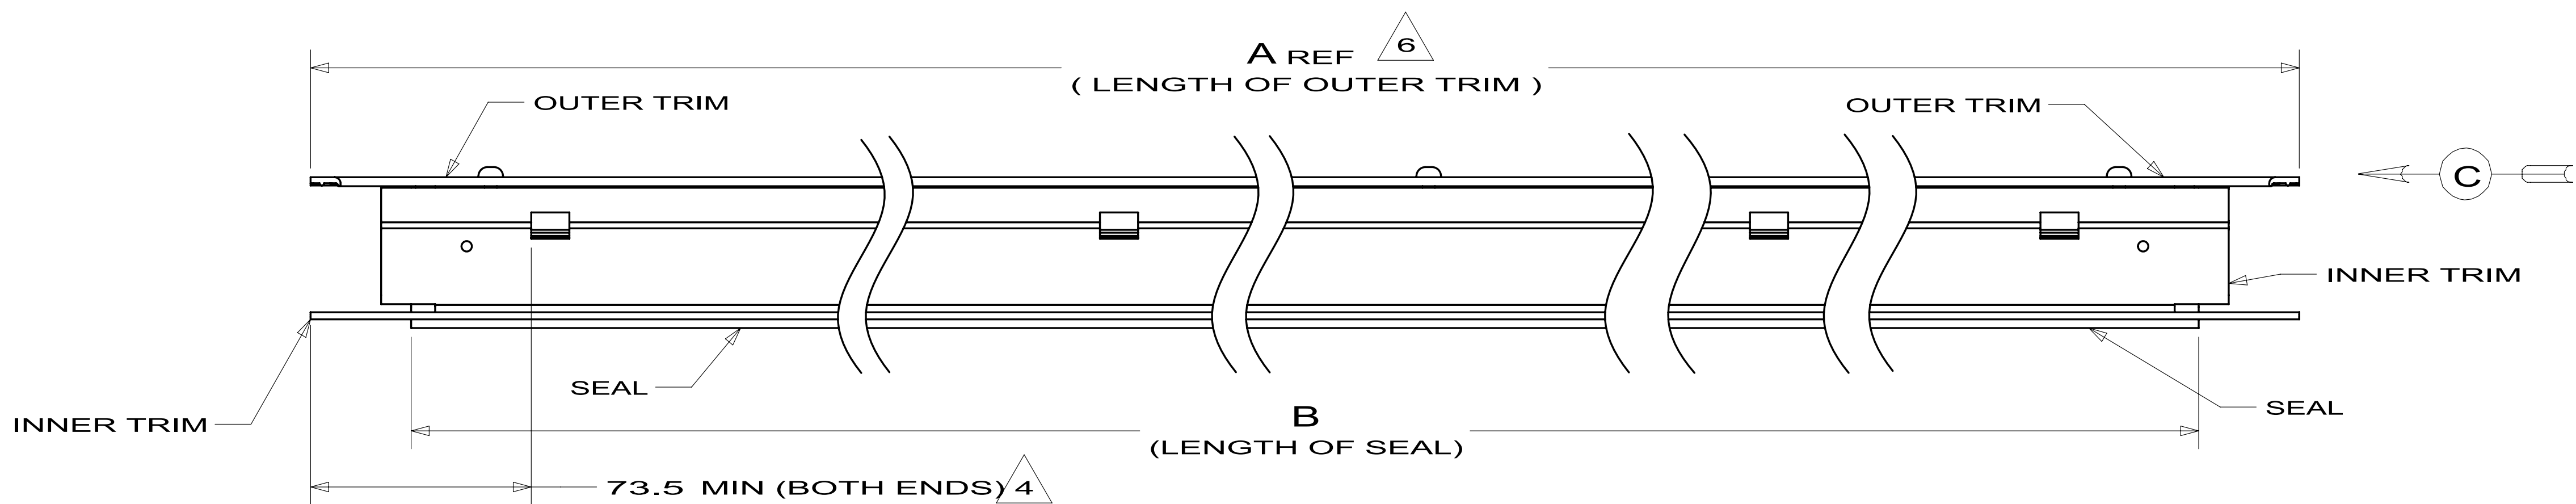

VIEW C

- NOTES:
- 6 LENGTHS SHOULD BE IN 150 mm INCREMENTS PER STANDARD SLIDEOUT ROOM LENGTHS DEFINED IN ES0080.
 - 5 OUTER TRIM MUST BE CENTERED ON THE INNER TRIM WITHIN ± 3.0 .
 - 4 TOLERANCE ON THE CLIP SPACING IS ± 100.0 MM.
 - 3 LOCATE CLIPS AT EACH END AND SPACED EQUALLY ALONG THE INNER TRIM.
 - 2 APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 - 1 APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.

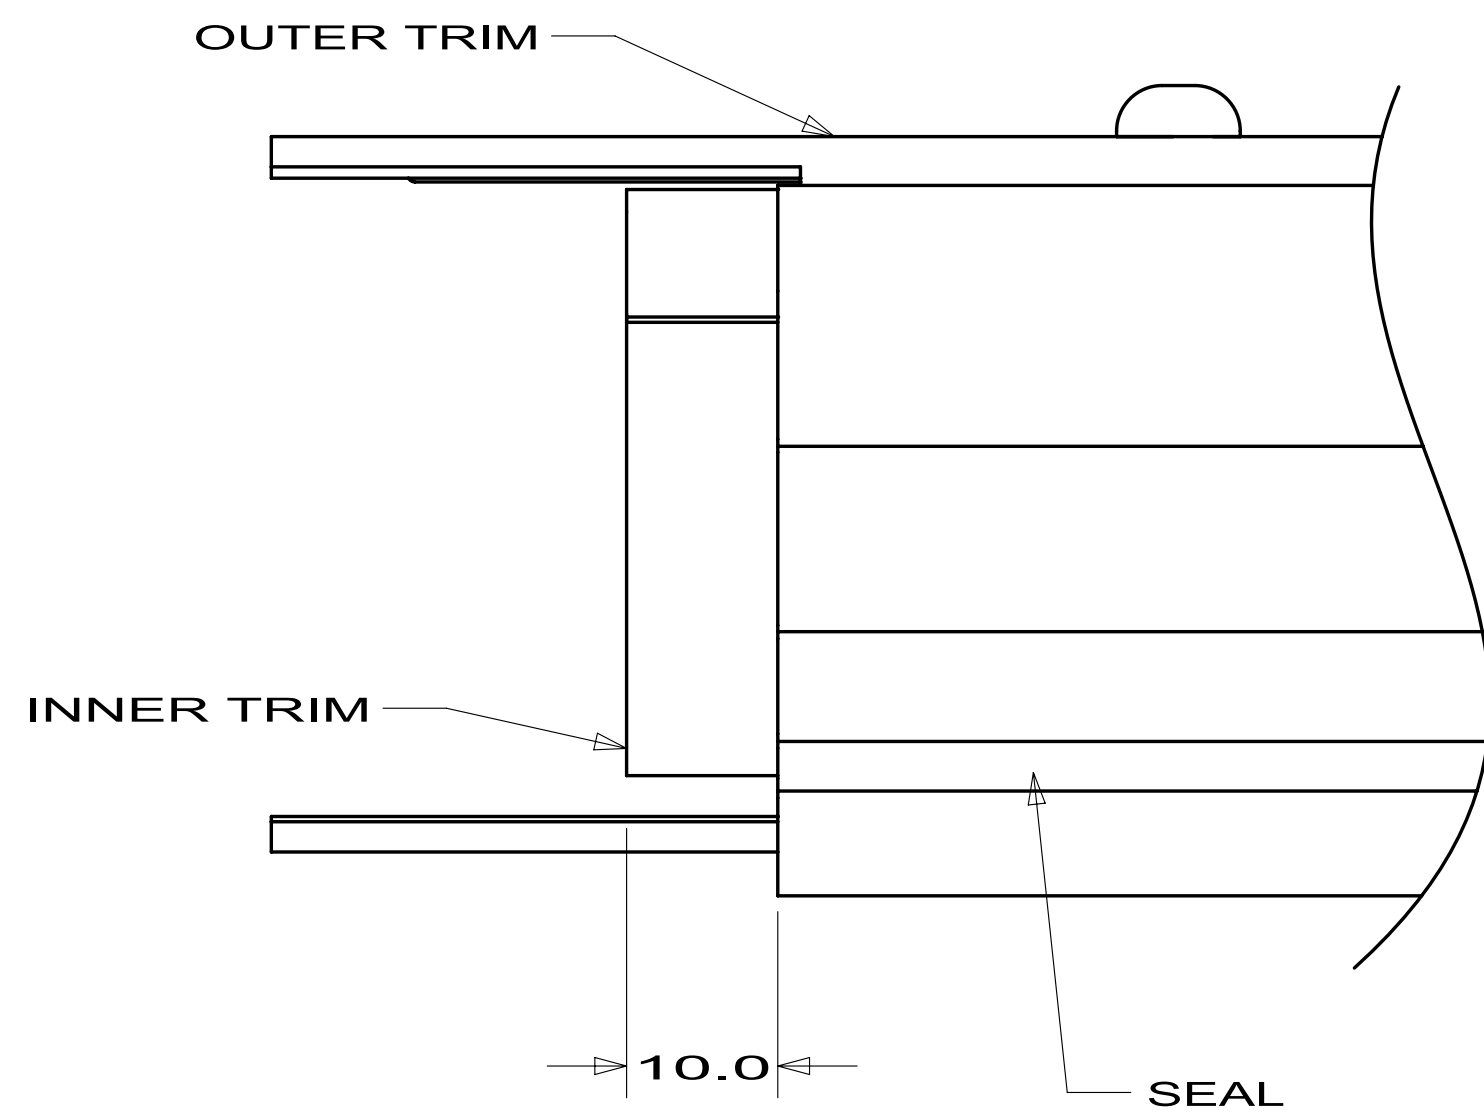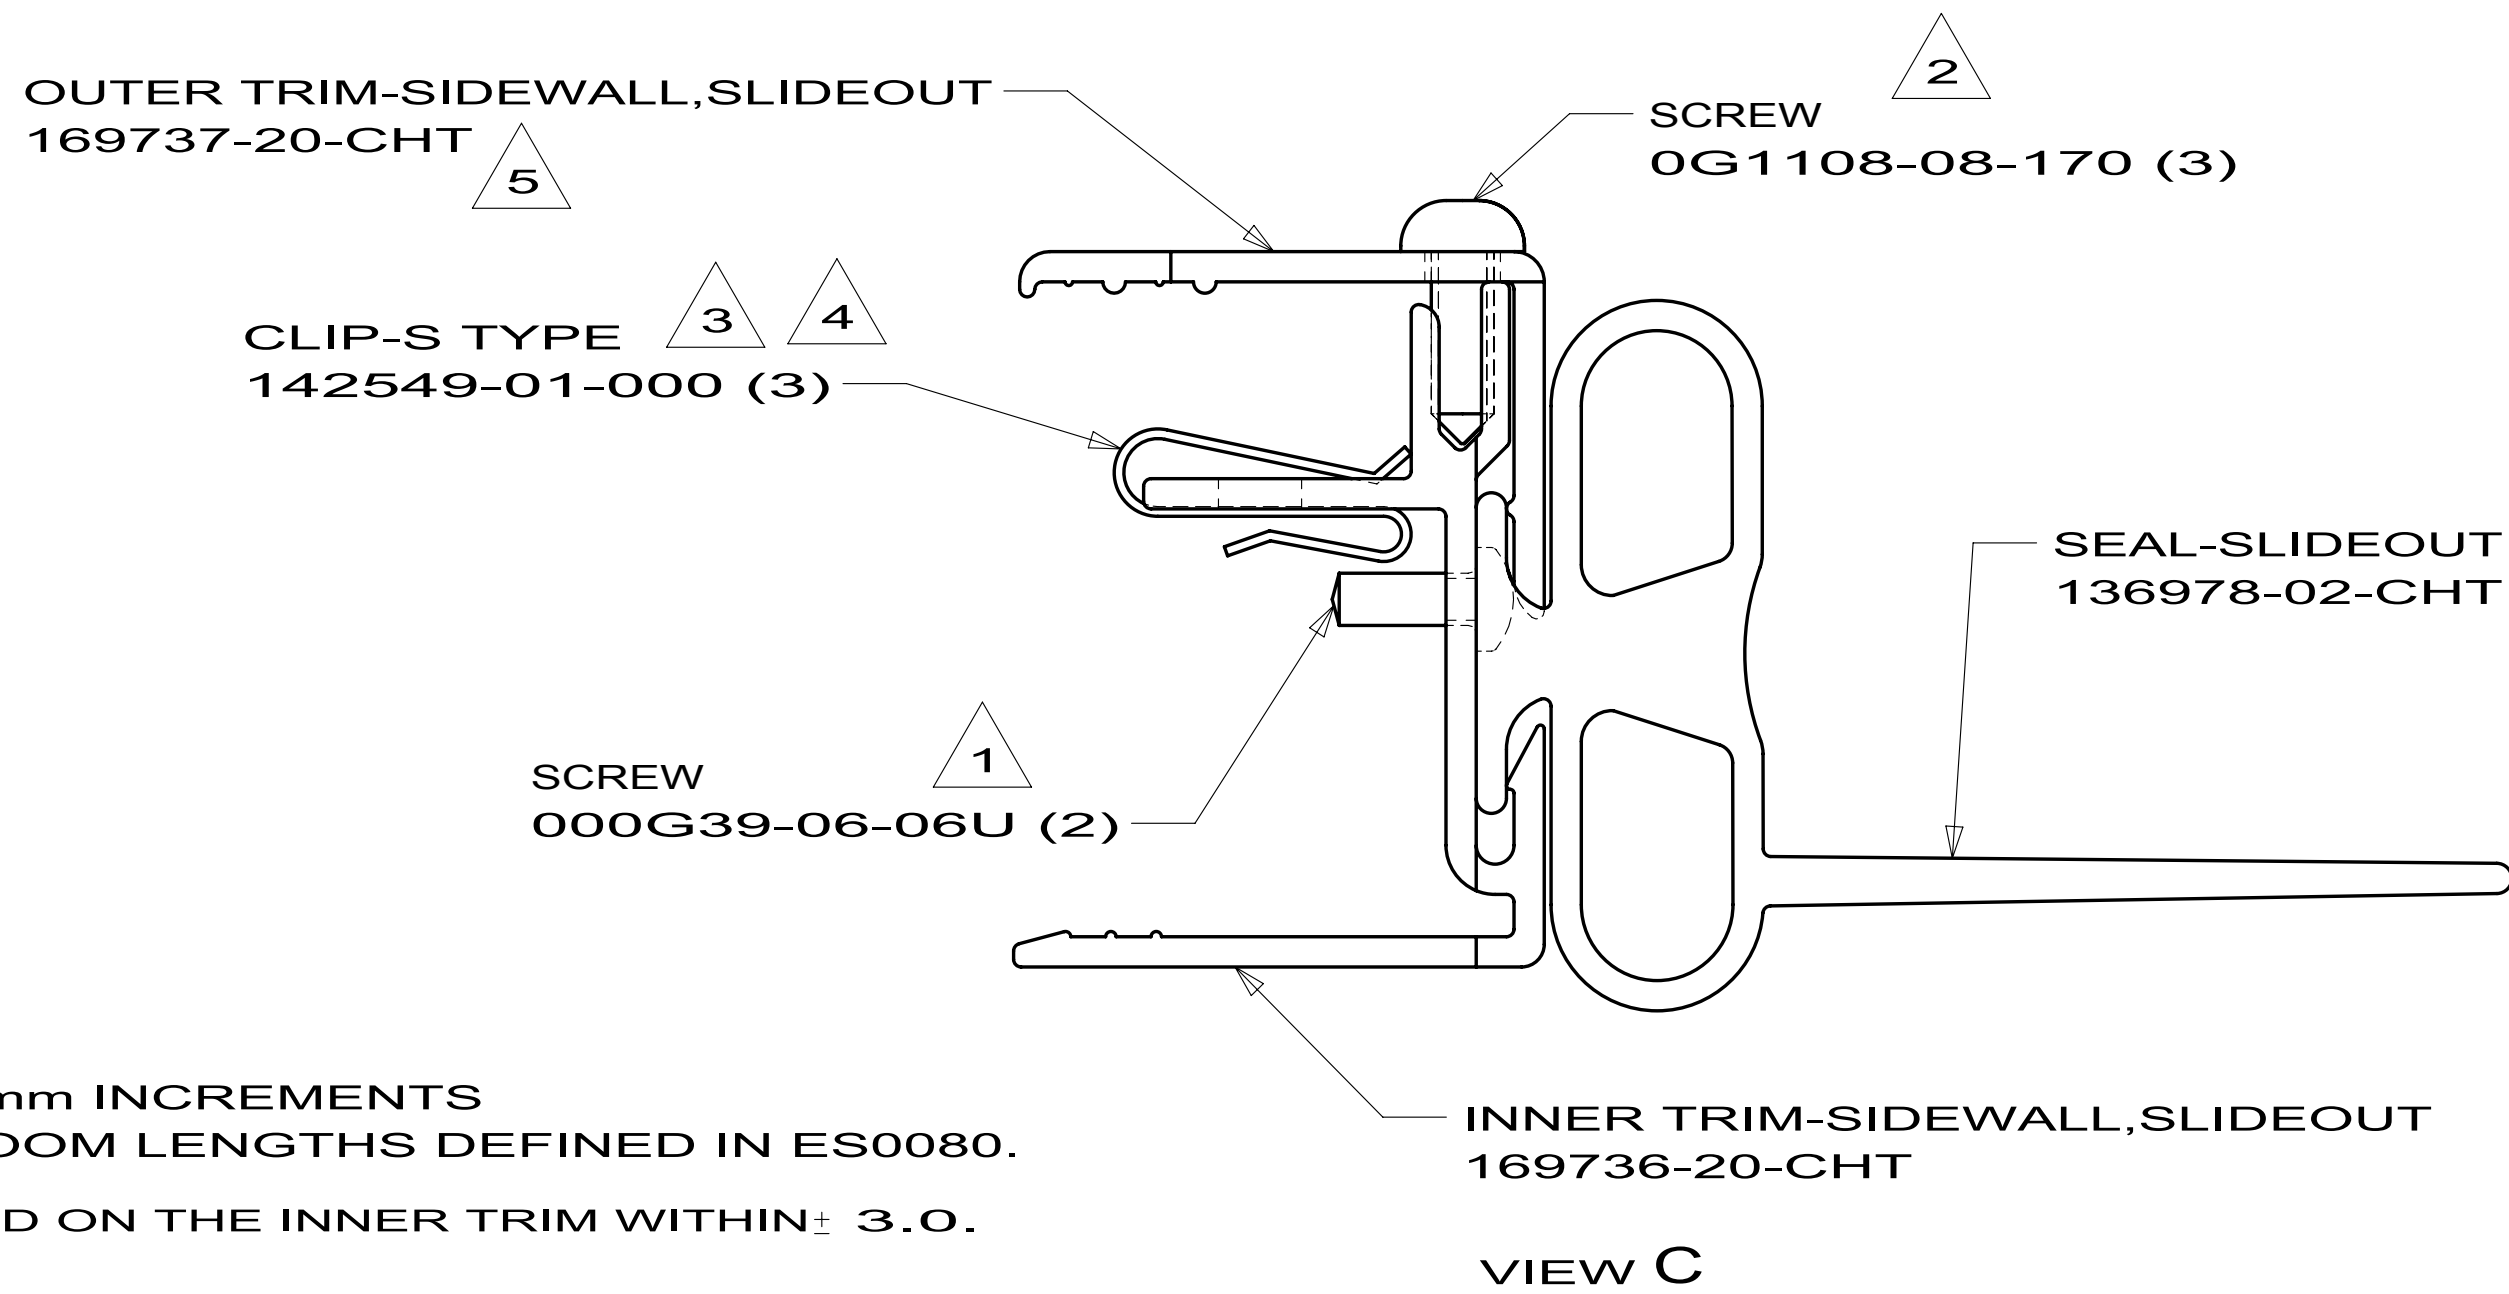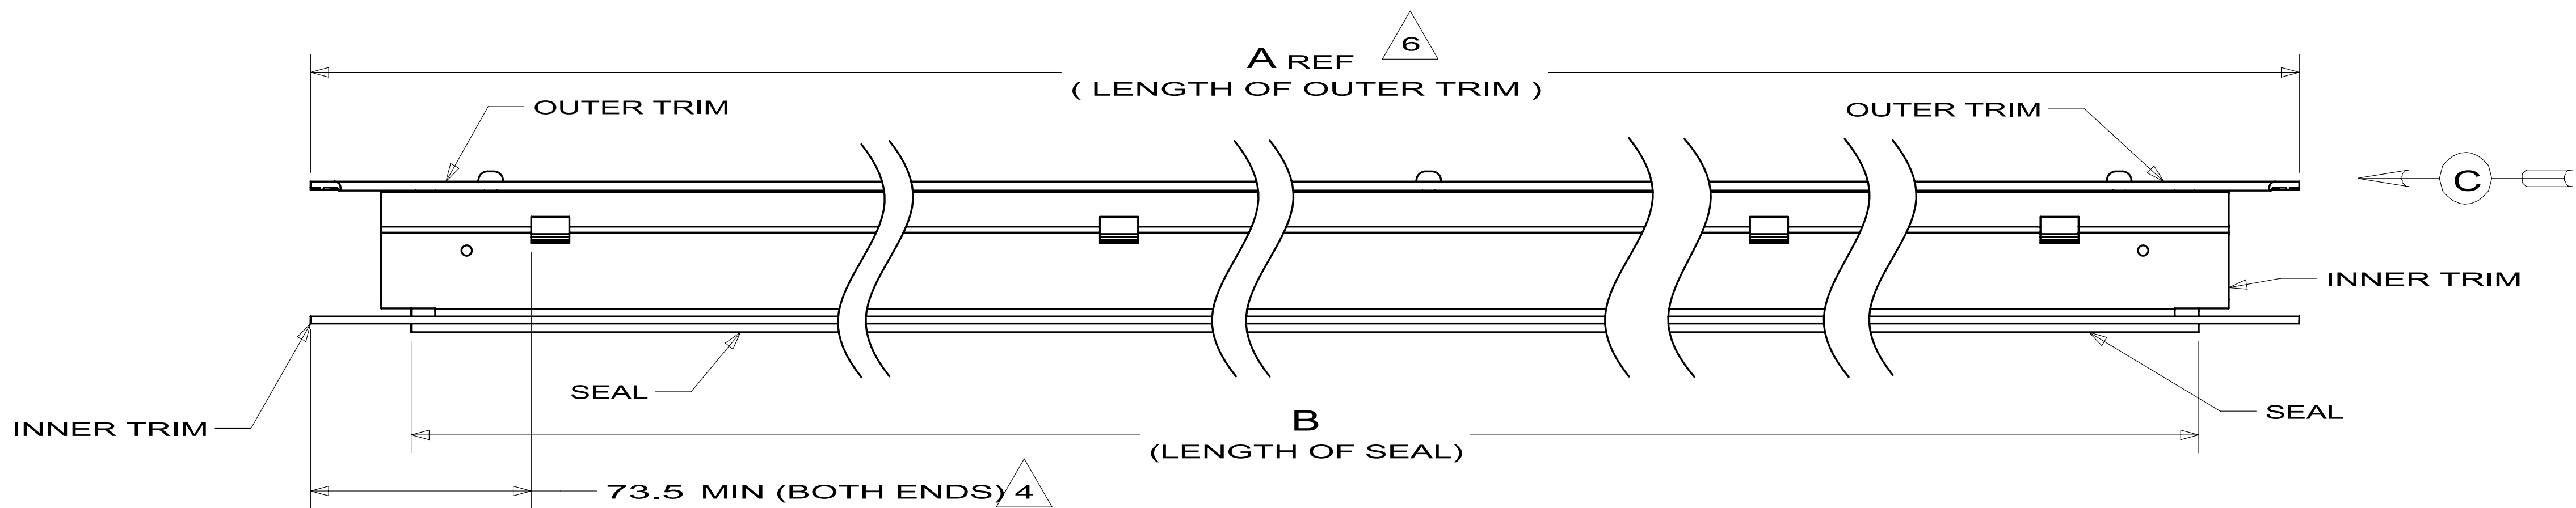

- NOTES:
- 6 LENGTHS SHOULD BE IN 150 mm INCREMENTS PER STANDARD SLIDEOUT ROOM LENGTHS DEFINED IN ES0080.
 - 5 OUTER TRIM MUST BE CENTERED ON THE INNER TRIM WITHIN ± 3.0 .
 - 4 TOLERANCE ON THE CLIP SPACING IS ± 100.0 MM.
 - 3 LOCATE CLIPS AT EACH END AND SPACED EQUALLY ALONG THE INNER TRIM.
 - 2 APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 - 1 APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.