

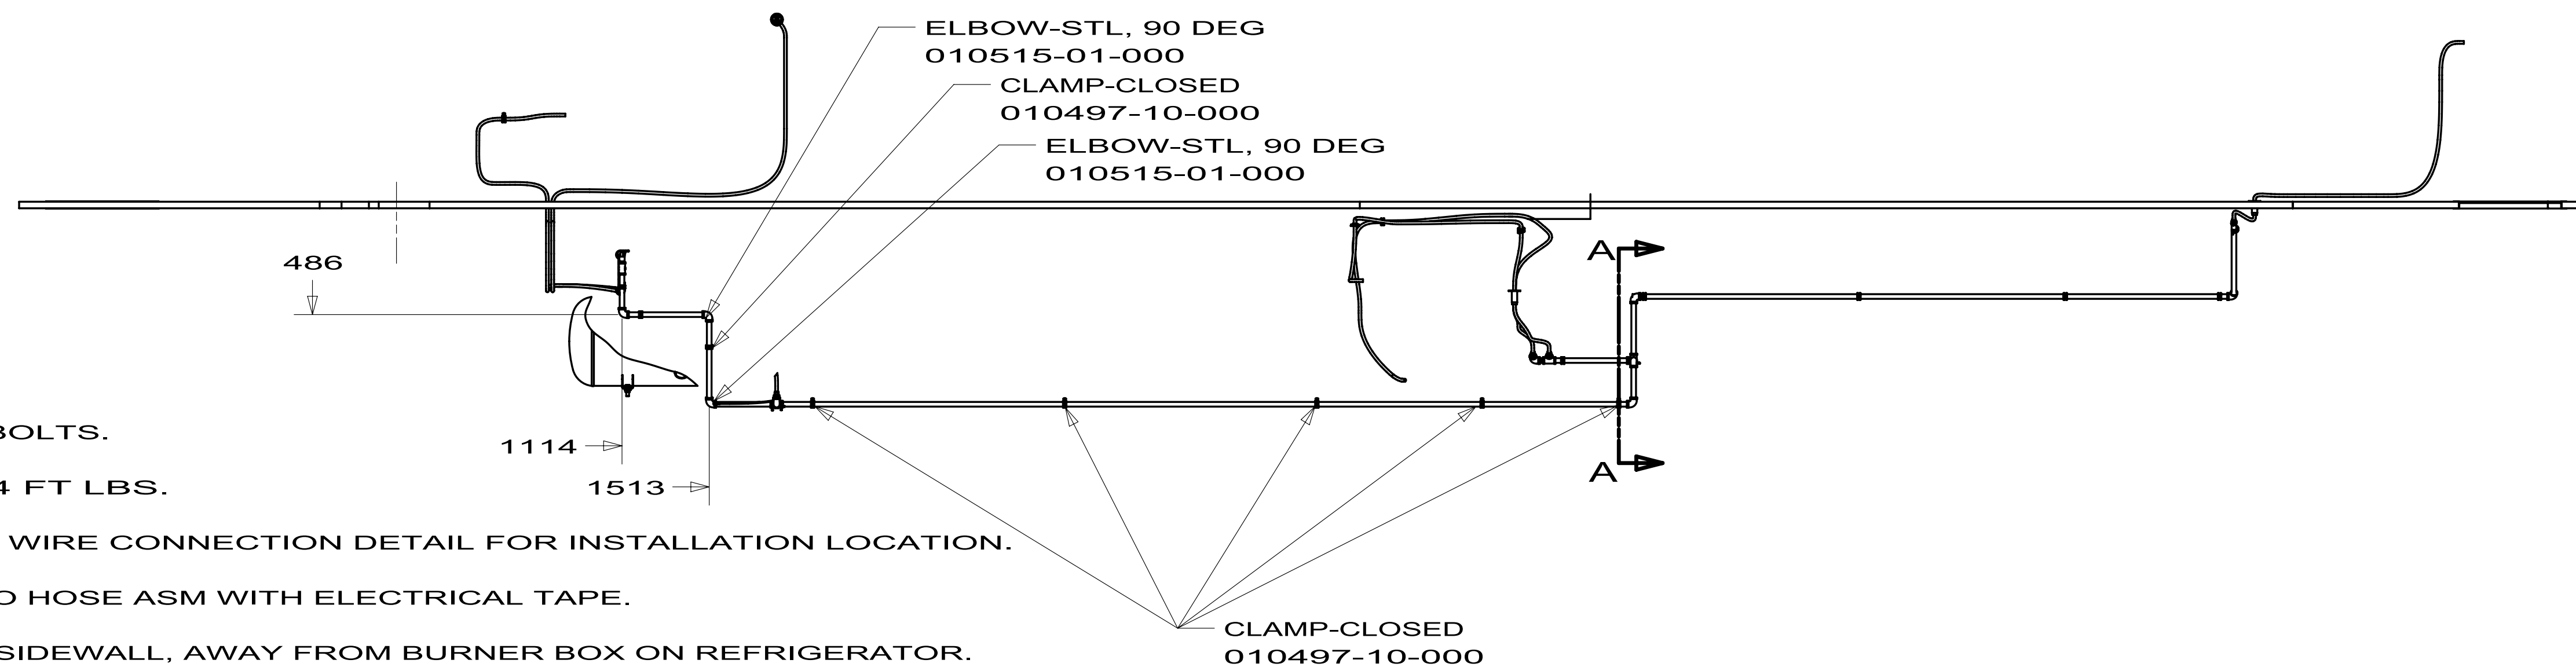



8			7			6			5			4			3			2			1		

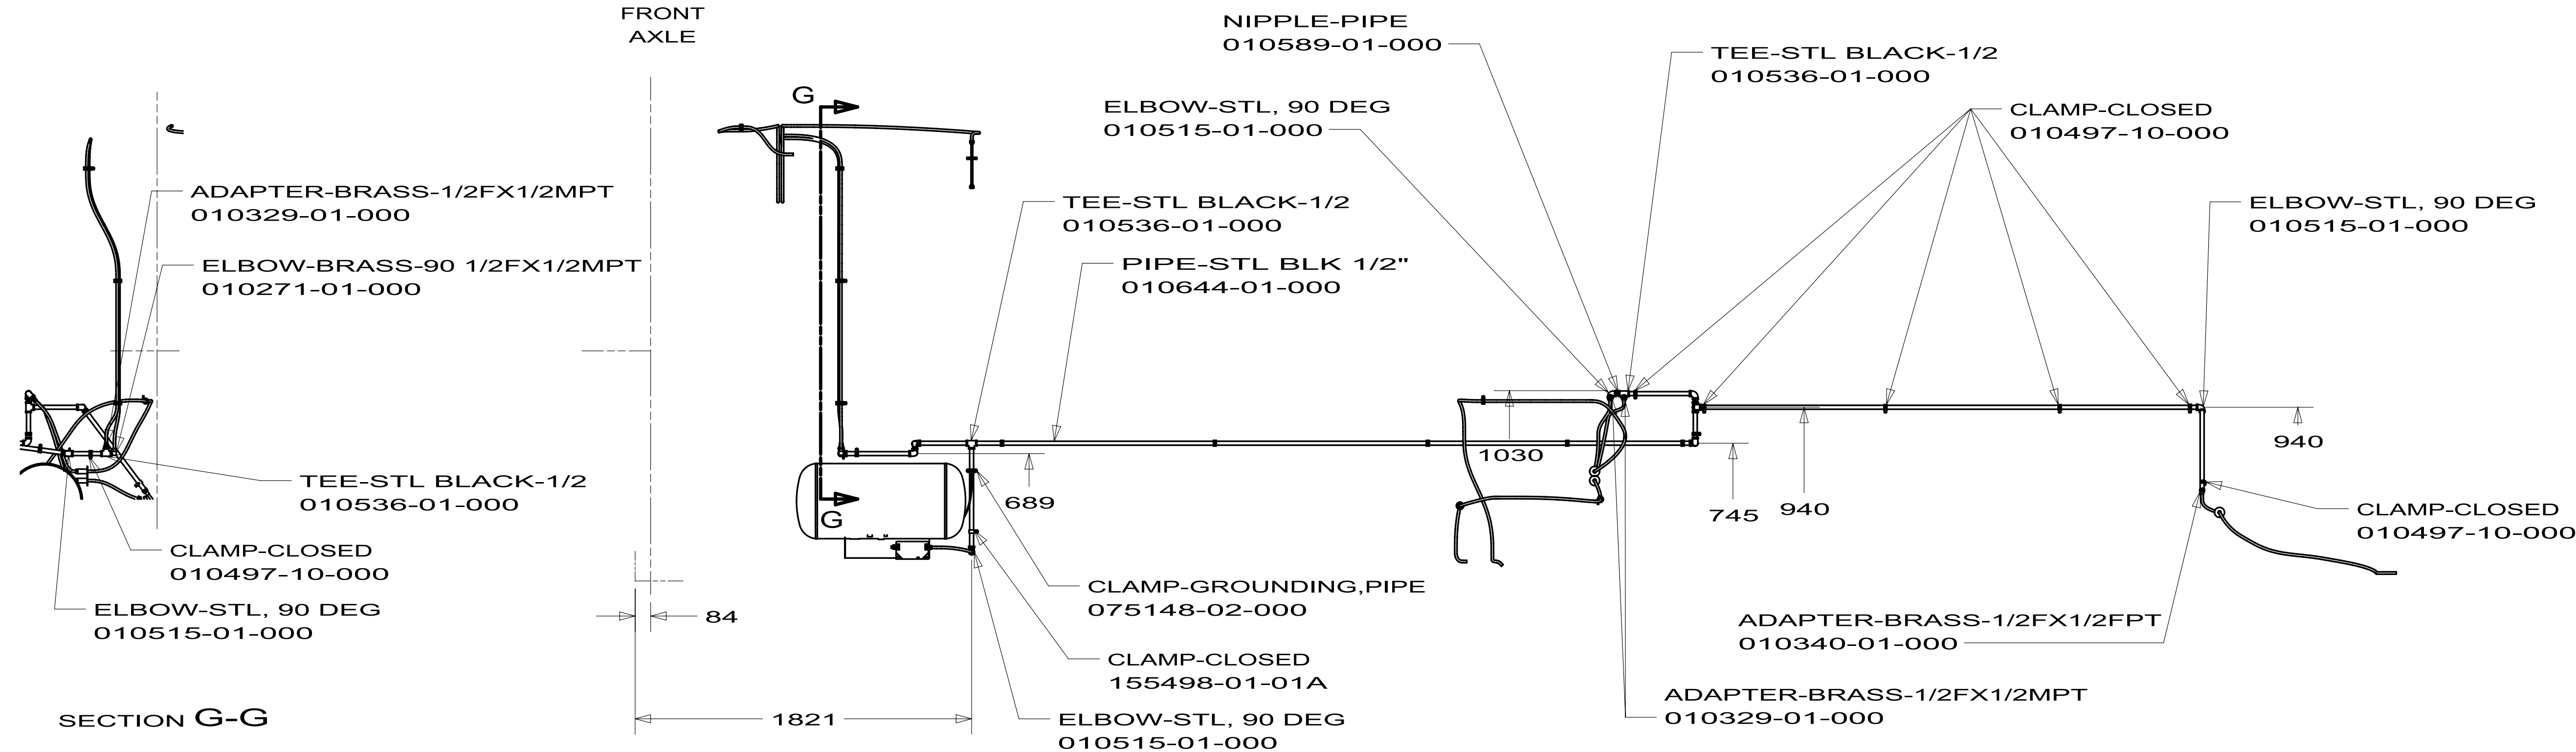

15. USE LOCKITE ON BOLTS.
14. TORQUE TO 100 $\pm$ 4 FT LBS.
13. SEE LP PIPE BOND WIRE CONNECTION DETAIL FOR INSTALLATION LOCATION.
12. SECURE SLEEVE TO HOSE ASM WITH ELECTRICAL TAPE.
11. CLAMP LP LINE TO SIDEWALL, AWAY FROM BURNER BOX ON REFRIGERATOR.
10. TORQUE TO 38 $\pm$ 4 FT LBS.
9. THREAD ALL BLACK PIPE WITH STANDARD NATIONAL PIPE THREAD (NPT) ON BOTH ENDS.
8. GROMMET SUPPLIED WITH WATER HEATER.
7. MINIMUM BEND RADIUS ON COPPER TUBING TO BE 44 FOR 1/2" AND 28 FOR 3/8". HAND BENDS TO BE 76 RADIUS MINIMUM.
6. CUT CONVOLUTED TUBING BEFORE FLARE NUTS ARE ASSEMBLED.
5. GAS PIPING SYSTEM MATERIALS CONFORM WITH NFPA 1192.
4. REGULATOR TO BE POSITIONED WITH VENT POINTING DOWNWARD INSIDE OF 45° .
3. BLACK PIPE AND COPPER TUBING TO BE CLAMPED EVERY 1219 MAX WITH: SCREW 000G67-10-10B (WOOD SUPPORTS), SCREW 000G39-10-12T (METAL SUPPORTS).
2. STEEL PIPE AND FITTINGS TO BE ASSEMBLED WITH SEALANT 084456-01-000.
1. ALL COPPER TUBING BELOW FLOOR IS TO BE ENCASED IN CONDUIT 041953-05-000.


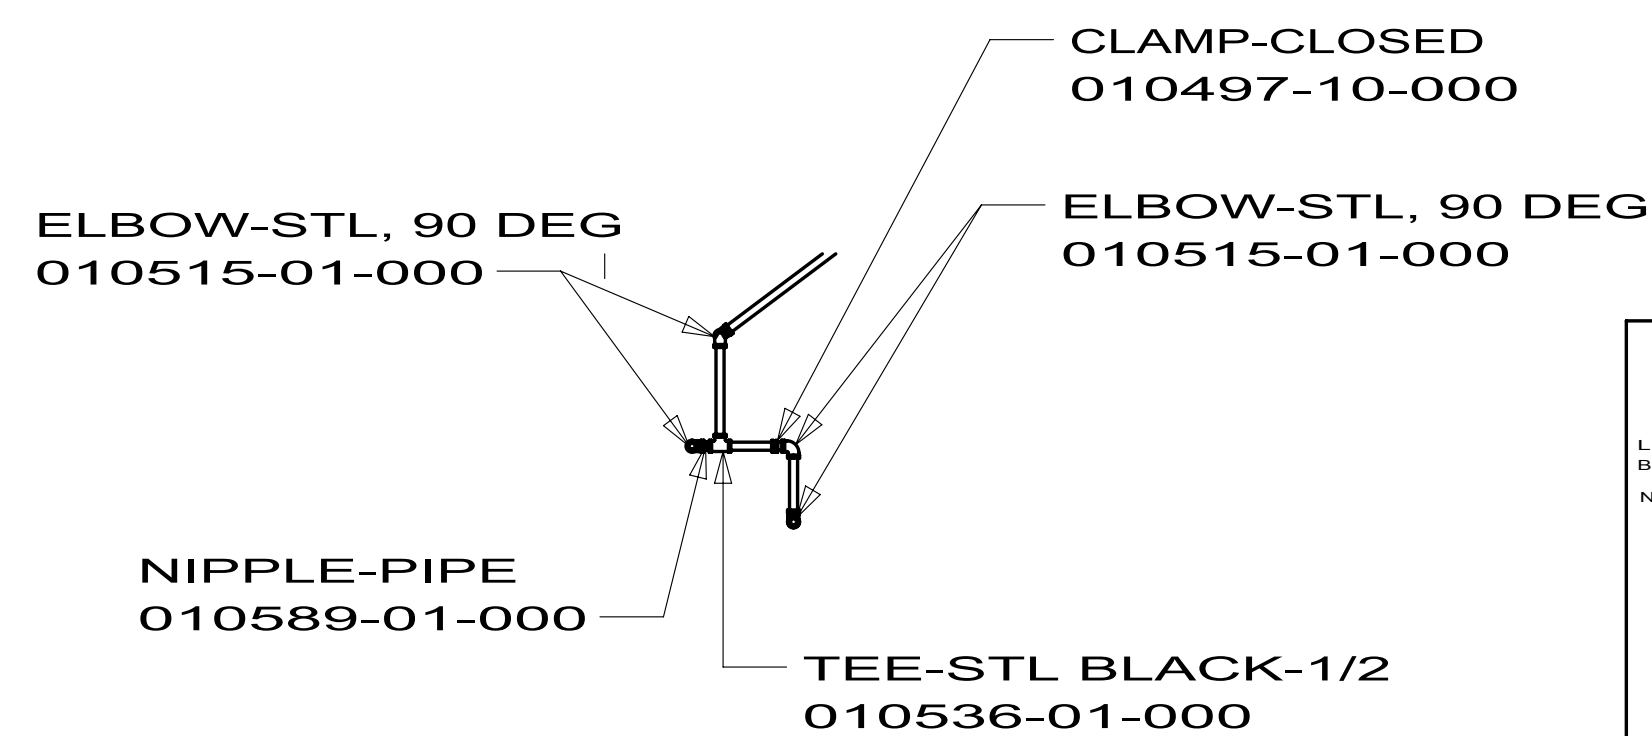



SECTION A-A

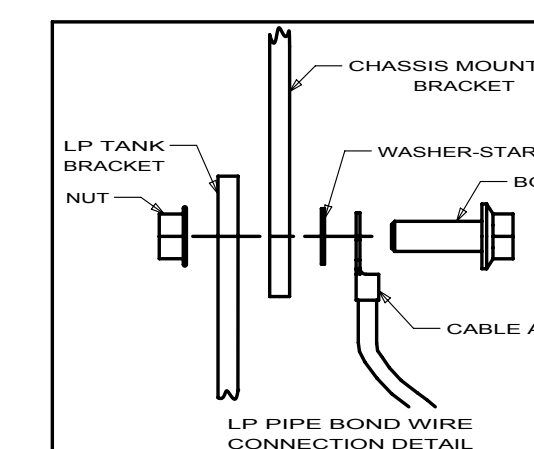


1B1 CODES/STANDARDS USA

265 CODES/STANDARDS-CSA/CMVSS



		COMPANY WINNEBAGO INDUSTRIES, INC.	
DFT# _____ CH# _____ P.E. _____ M.E. _____ DSN# _____		ORIG. DATE _____ ALL DIMENSIONS ARE IN MILLIMETERS 10 P40DL	
UNSPECIFIED TOLERANCES ARE: WHOLE DIM (X) ± 3 ONE-PLACE (X.X) ± 1.5 TWO-PLACE (X.XX) ± 0.50 ANGLE ± 1°		MATERIAL: _____	
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
LP SYSTEM INSTL			
SHEET 1 OF 2		PART NO 170762	
		REV _____	

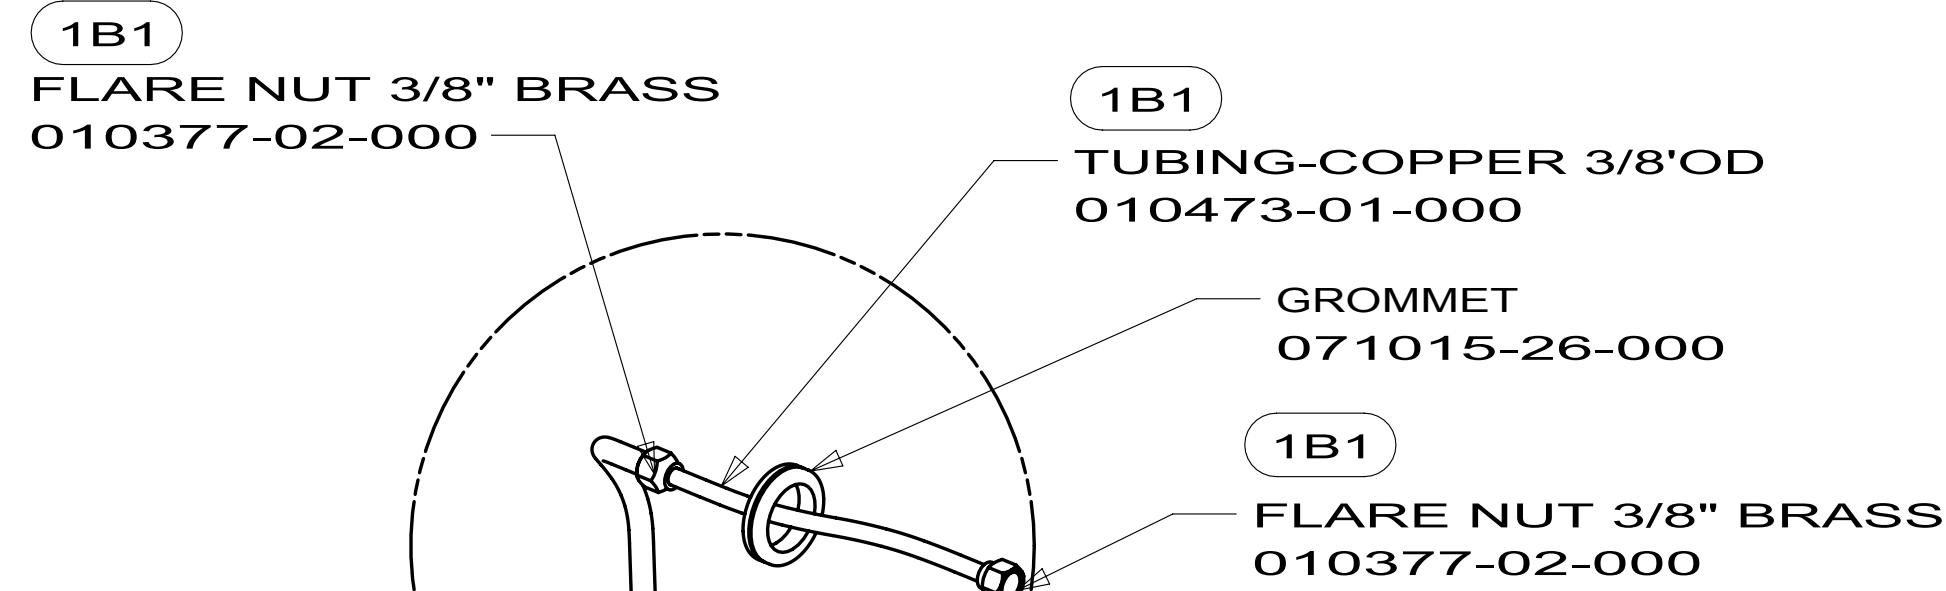

DETAIL D

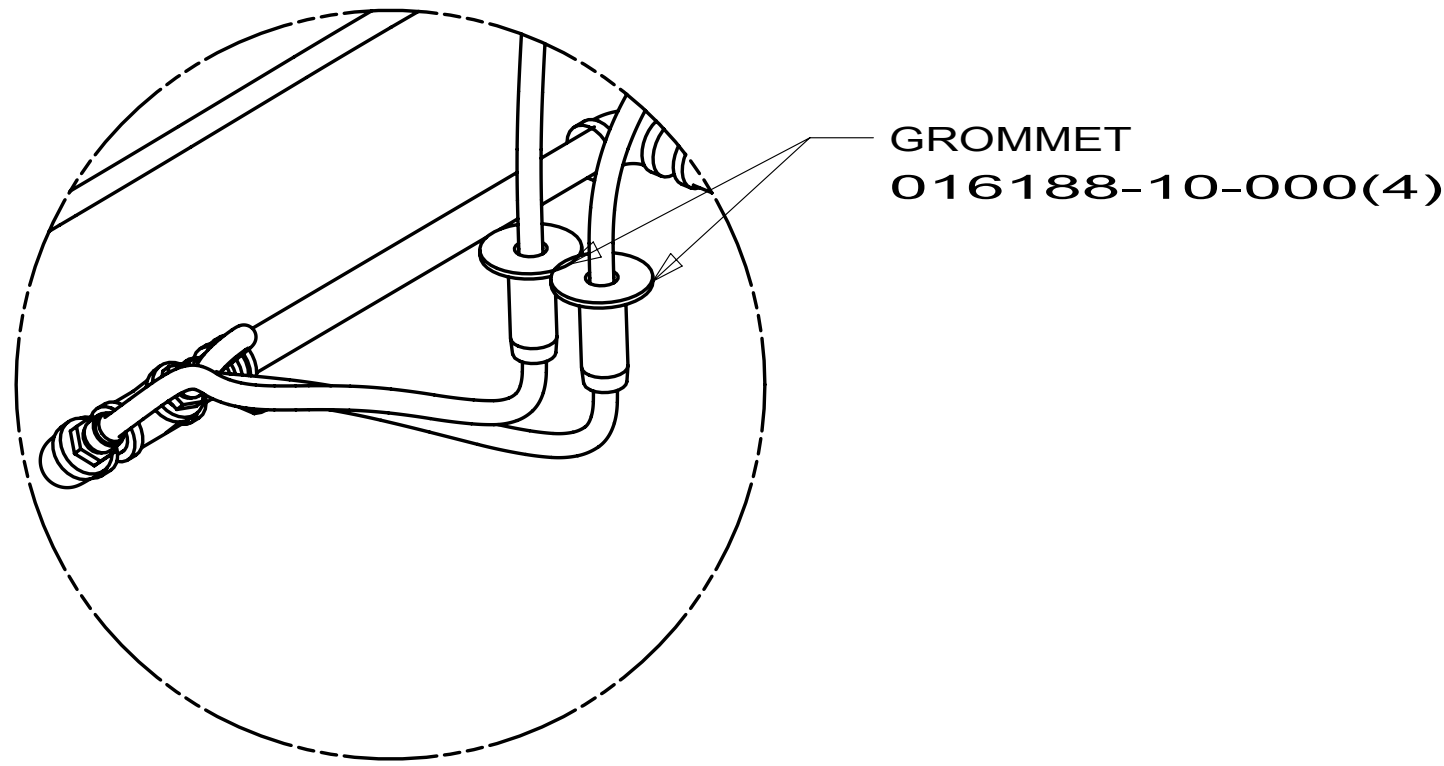


DETAIL F

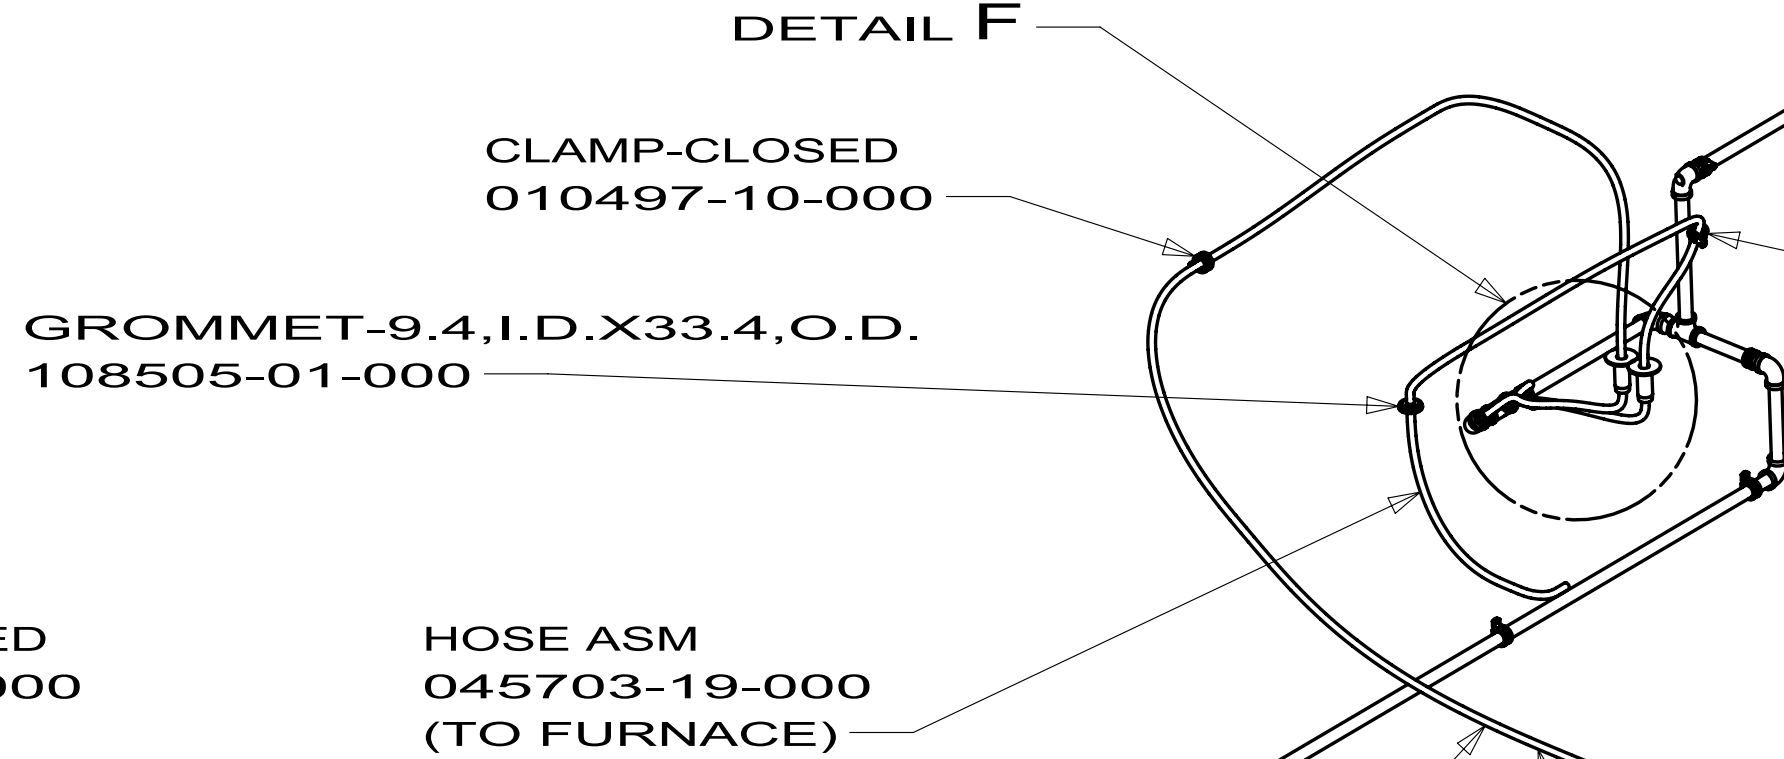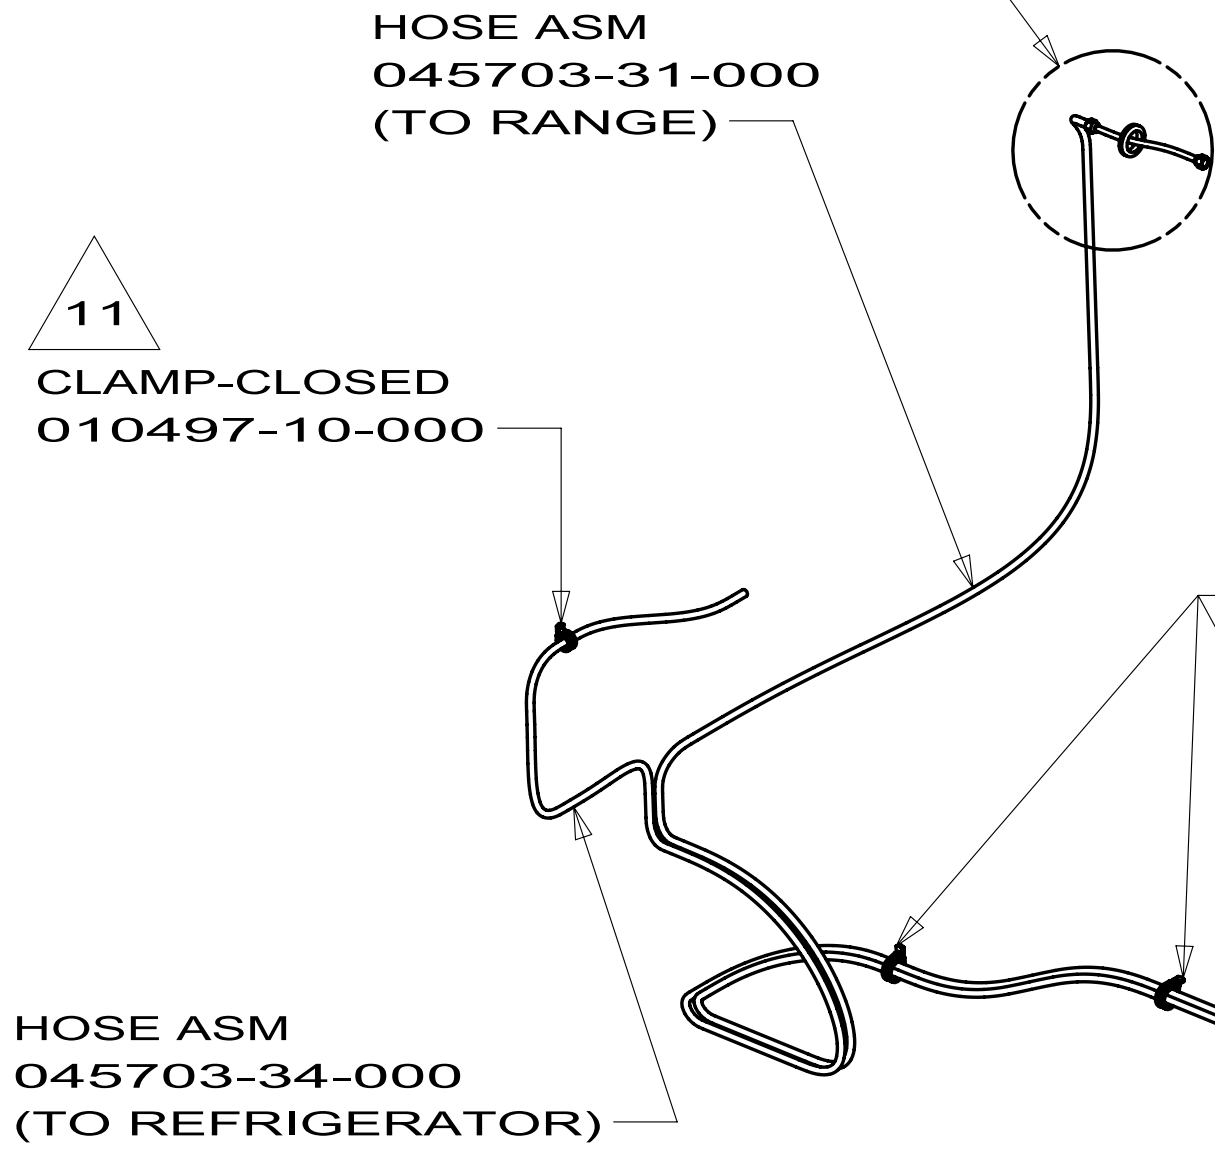

CLAMP-CLOSED
010497-10-000

TANK-LP 130 LB
161212-01-000
BOLT
000C26-08-24U (4)
NUT
000D39-08-00U (4)

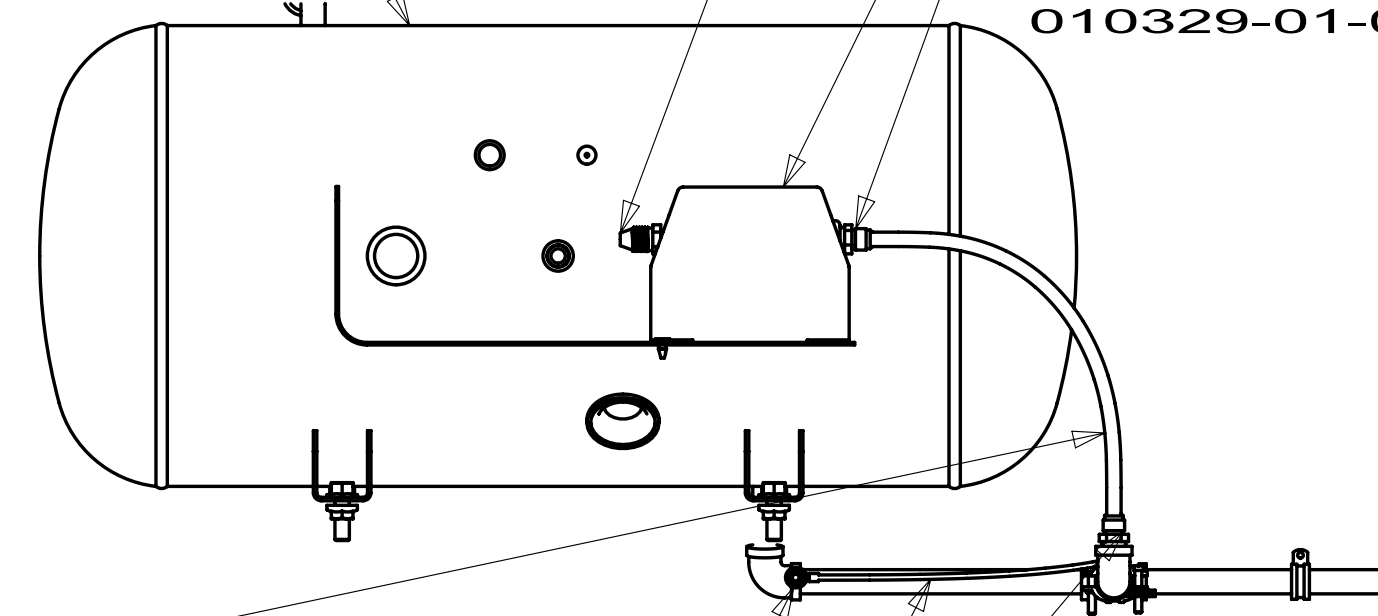

REGULATOR-TWO,STAGE
106150-05-000
DIAL TRANSMITTER
040440-03-000

COMPARTMENT-LP REG HORZ
144485-01-000
(FASTENER PUSH PEGS
PROVIDED W/COVER)

ADAPTER-BRASS-1/2FX1/2MPT
010329-01-000

ADAPTER-BRASS-1/2FX1/2MPT
010329-01-000

CABLE ASM
076603-03-000

13 WASHER-STAR
156569-01-01A
BOLT
000C26-05-12B
NUT
000D39-05-000

HOSE-ASM-LP 3/8" ID X 18" US
1B1 045703-03-000
HOSE-ASM-LP 3/8' ID X 18" CAN
265 045703-12-000

VIEW B

FOR
LP
CALLOUTS
SEE DWG NO
116228-01-000

FIRST USED		10 P40DL	
DO NOT SCALE DRAWING			
TITLE: LP SYSTEM INSTL			
SHEET 2	PART NO	170762	REV

161212-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO
	040421-01-700	EA VALVE-LIQUID LEVEL, 20%	V20058/V21199/G1013
	040421-01-712	EA VALVE-SERV. W/O VAPOR RELIEF	V20373/V21202
	040421-01-714	EA VALVE RELIEF 3/4"W/SPRING 7"	V20479/V21201/LVRF2
	088253-01-702	EA FLOAT/SCREW IN-SNAP ON DIAL	G13063/SG16C0001442
	144116-01-701	EA VALVE/FILL 80 % W/YELLOW CAP	V13414