DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.

CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

Copyright © 2005 Winnebago Industries, Inc.

DRAWING NO.	SHEET	UNIT
156325-01	1,7,8	D
156325-02	2,7,8	F
156325-03	3,8	G
156325-04	4,8	P
156325-05	5,8	R
156325-06	6,8,9	S
156325-07	10,11	E

RELEASE	REV A	DATE	DWG NO 156325
REV	ZONE	REVISION RECORD	DATE	DFTR-ORIG

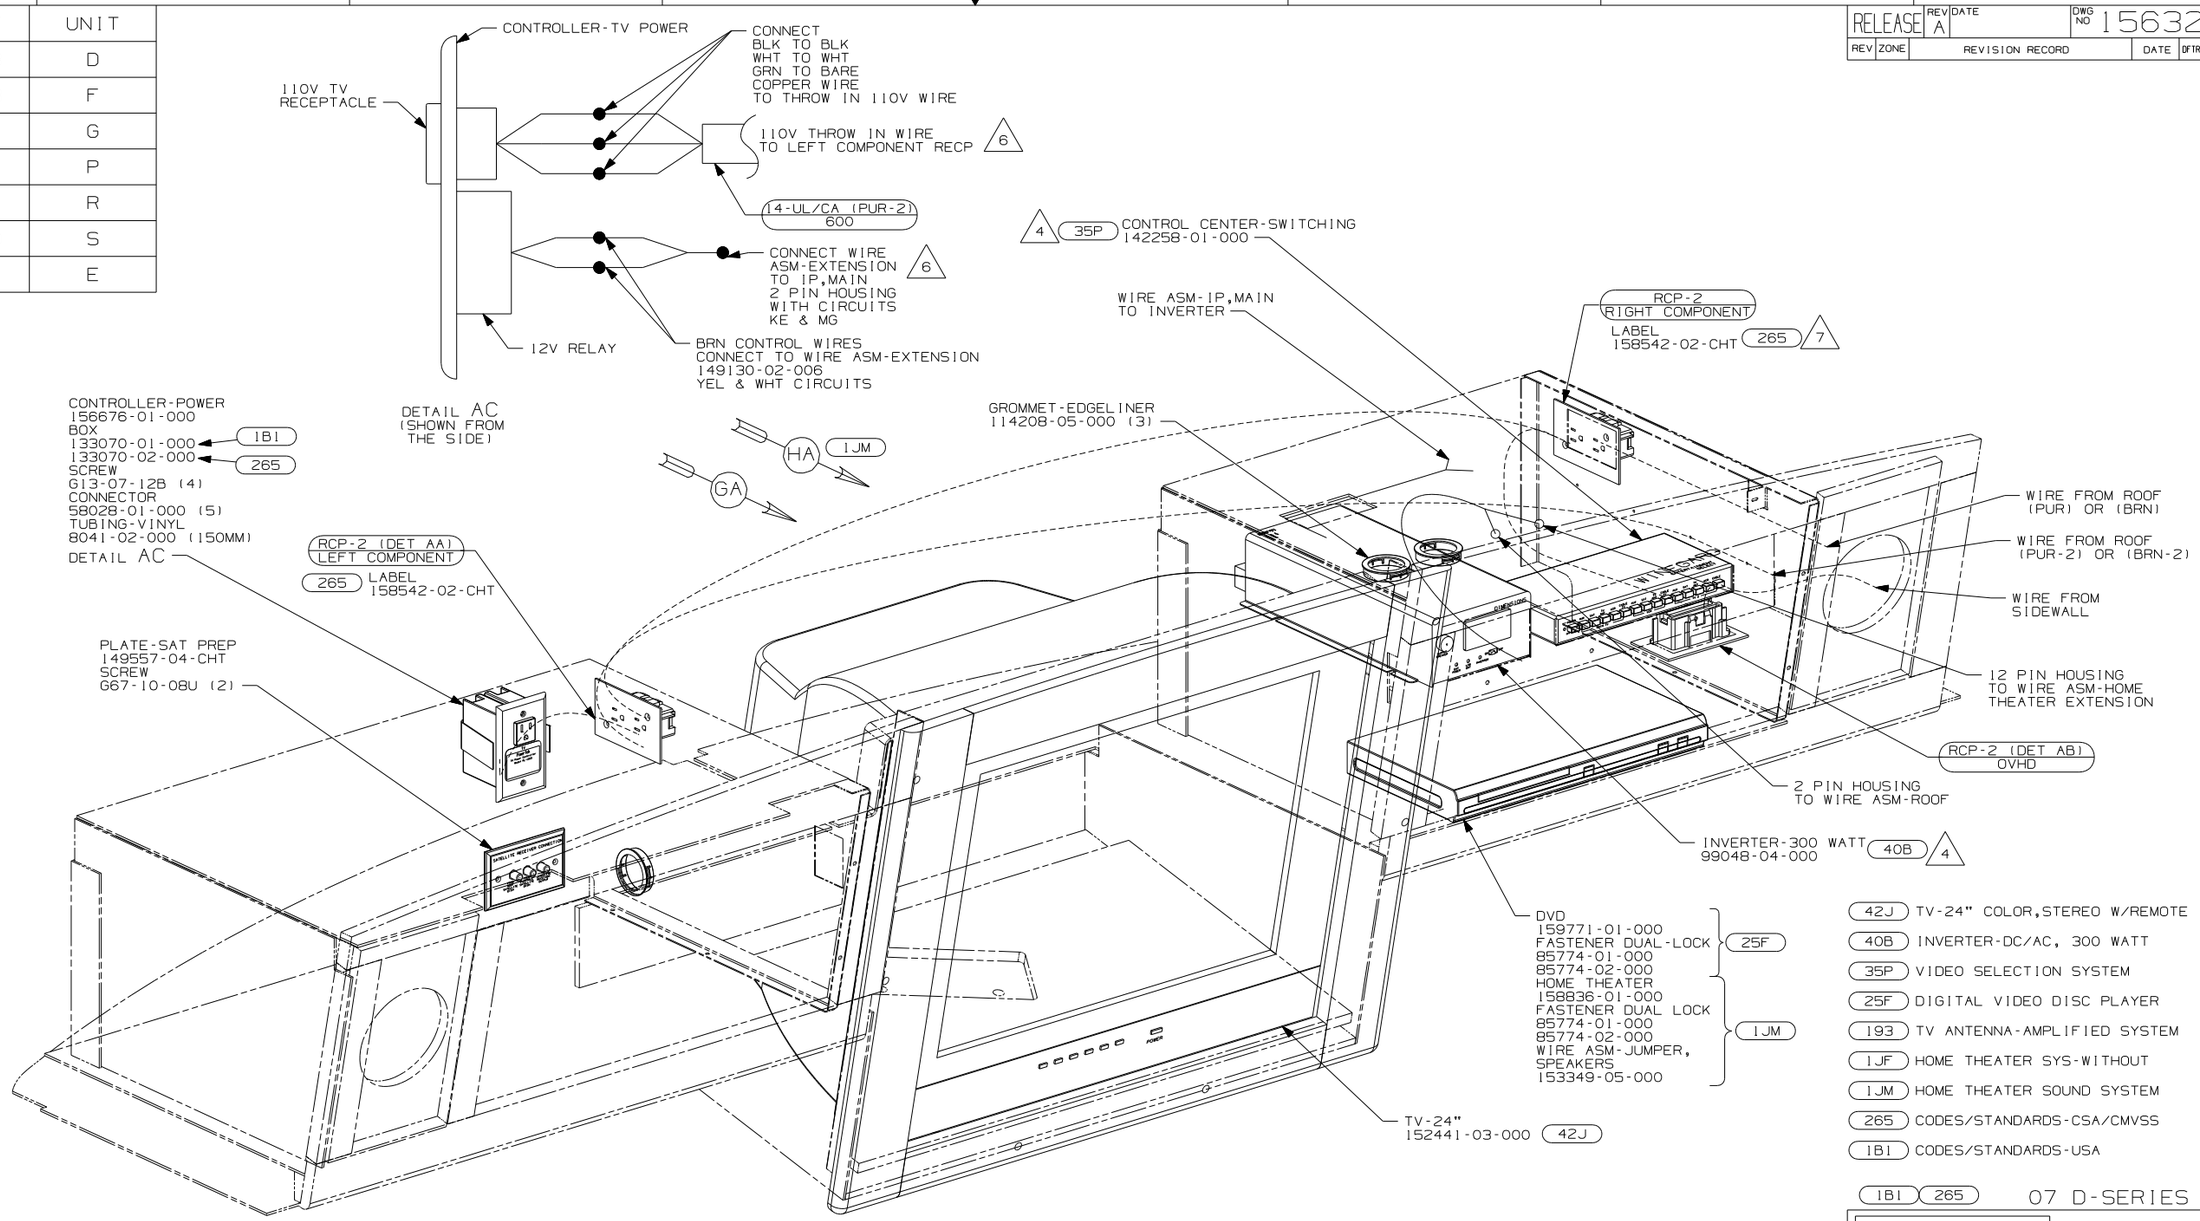

42J TV-24" COLOR,STEREO W/REMOTE
40B INVERTER-DC/AC, 300 WATT
35P VIDEO SELECTION SYSTEM
25F DIGITAL VIDEO DISC PLAYER
193 TV ANTENNA-AMPLIFIED SYSTEM
1JF HOME THEATER SYS-WITHOUT
1JM HOME THEATER SOUND SYSTEM
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS-USA

7 WITH 1JF AND WITHOUT 25G

6 ROUTE 110V AND 12V WIRES IN OPPOSITE ENDS OF ELECTRICAL BOX.

5 CONNECT PURPLE-2/BROWN-2 TO INVERTER WITH FEATURE 40B

4 SLIDE INVERTER AND VIDEO SWITCH INTO RAILS PROVIDED ON SHELF ASM

3. WHERE WIRES PASS THROUGH HOLES IN STEEL AND NOT OTHERWISE PROTECTED, USE GROMMET 92908-02-000.

2. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

1. 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

NOTES:

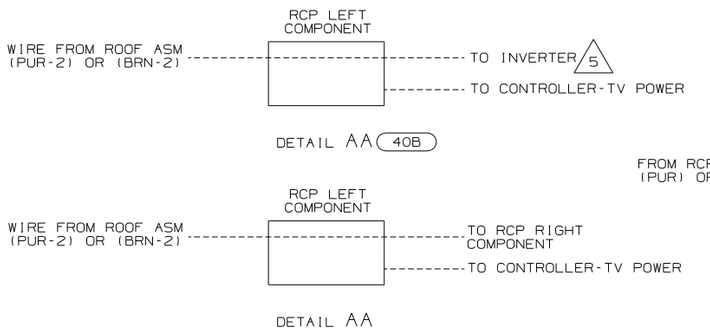

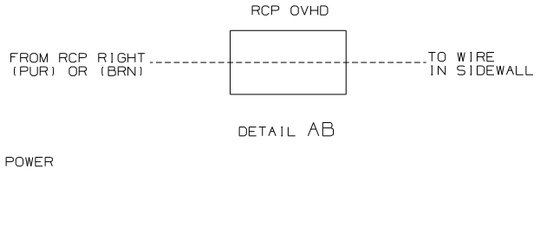

1B1 265 07 D-SERIES

WINNEBAGO

COPYRIGHT 2006
WINNEBAGO
INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED 07 A-BODIES
DSNR	

UNSPECIFIED TOLERANCES ARE:
WHOLE DIM (X) : 3
ONE-PLACE (X.X) : 1.5
TWO-PLACE (X.XX) : 0.50
ANGLE : 1°

MATERIAL:

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-TV/DVD,FRONT

SHEET 1 OF 11 | PART NO 156325 | REV

REF: 1 2/7/2007

DWG NO 156325

RCP BLANK SIDEWALL (PUR-2)

WIRE FROM OVHD RCP (PUR-2) ---------- WIRE FROM SIDEWALL

DETAIL BF

RCP-2 LEFT COMPONENT (PUR-2)

FROM ROOF ASM ---------- TO RCP RIGHT COMPONENT

---------- TO CONTROLLER-TV POWER

DETAIL BG

SPEAKER OUTPUT TO WIRE ASM-IP,MAIN

CONNECT RCA CABLE FROM TV AUDIO OUTPUT HERE

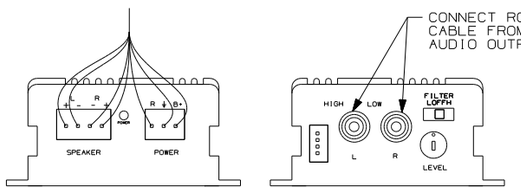

DETAIL BD (1JF)

1JF → RELAY-RADIO/TV 115539-01-000

1JM → WIRE ASM-JUMPER 138005-01-000 CONNECTS TO 15 PIN HOUSING ON IP,MAIN

AMPLIFIER-TV,STEREO 147139-01-000
WIRE ASM-STEREO KIT 147139-02-000
FASTENER-DUAL LOCK 85774-01-000 85774-02-000
DETAIL BD (1JF)

CONTROL CENTER-SWITCHING 142258-01-000 (35P)

SWITCH 89308-01-CHT
PLATE-SWITCH 98351-09-CHT
SCREW G11-06-10J (2)
DETAIL BE (1JF)

1JM HA GA

6 265 LABEL 158542-02-CHT

RCP-2 (PUR-2) RIGHT COMPONENT

RCP-2 DET BG LEFT COMPONENT

265 LABEL 158542-02-CHT

CONTROLLER-POWER 156676-01-000
1B1 → BOX 133070-01-000
265 → SCREW 133070-02-000
G13-07-12B (4)
CONNECTOR 58028-01-000 (3)
TUBING-VINYL 8041-02-000 (150 MM)
DETAIL BB

WIRE FROM SIDEWALL

RCP-B (DET BF) SIDEWALL

PLATE-SAT PREP 149557-04-CHT
SCREW G67-10-08U (2)

DVD PLAYER 159771-01-000
FASTENER DUAL-LOCK 85774-01-000 85774-02-000
HOME THEATER 158836-01-000
FASTENER DUAL LOCK 85774-01-000 85774-02-000
WIRE ASM-JUMPER,SPEAKER 153349-08-000
(25F) (1JM)

RCP-2 (PUR-2) OVHD

SATELLITE SWITCH DETAIL BC (7)

136131-01-120 14-UL (5)
136134-01-120 14-CA (5)

TV-27" COLOR STEREO 146298-02-000 (42N)

GROMMET-EDGE LINER 114208-05-000 (4)

PUR-2 FROM ROOF

FROM WIRE ASM-ROOF

FROM WIRE ASM-IP,MAIN

JA DP

DETAIL BE (1JF)

CABLE ASM-SATELLITE CONTROL FROM ROOF ASM

SWITCH-CONTROL 163598-02-000



SCREW G12-06-12U

DETAIL BC (78K)



3-PIN HOUSING CONNECTS TO WIRE WIRE ASM-ROOF

RJ-11 CONNECTOR IS TO BE INSERTED INTO CONNECTOR ON CONTROL SWITCH

CONTROLLER-TV POWER

110V TV RECEPTACLE

CONNECT BLK TO BLK WHT TO WHT GRN TO BARE COPPER WIRE TO THROW IN 110V WIRE

110V THROW IN WIRE TO LEFT COMPONENT RCP (4)

14-UL/CA (PUR-2) 600

CONNECT WIRE ASM-EXTENSION TO 2 PIN HOUSING ON IP,MAIN WITH CIRCUITS KE & MG (4)

12V RELAY

BRN CONTROL WIRES CONNECT TO WIRE ASM-EXTENSION 149130-02-006 YEL & WHT CIRCUITS

DETAIL BB (SHOWN FROM THE SIDE)

7 SEE ROOF ASM FOR ADDITIONAL INFORMATION.

6 WITH (1JF) AND (25H)

5 FOR USE WITH SHELLS ONLY.

4 ROUTE 110V AND 12V WIRES IN OPPOSITE ENDS OF ELECTRICAL BOX.

3. WHERE WIRES PASS THROUGH HOLES IN STEEL AND NOT OTHERWISE PROTECTED, USE GROMMET 92908-02-000.

2. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

1. 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

NOTES:

(25H) DVD/VCR - WITHOUT
(78K) SATELLITE DISH-AUTOMATIC
(42N) TV(FRONT)-27" COLOR STEREO
(35P) VIDEO SELECTION SYSTEM
(25F) DIGITAL VIDEO DISC PLAYER
(265) CODES/STANDARDS-CSA/CMVSS
(1JF) HOME THEATER SYS-WITHOUT
(1JM) HOME THEATER SOUND SYSTEM
(10A) TV (REAR)-20"COLOR, STEREO
(1B1) CODES/STANDARDS USA

(1B1) (265) 07 F-SERIES

FIRST USED 07 A-BODIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-TV/DVD,FRONT

SHEET 2 | PART NO 156325 | REV

DWG NO 156325

RCP BLANK SIDEWALL (PUR-2)

WIRE FROM OVHD RCP (PUR-2) ---------- WIRE FROM SIDEWALL

DETAIL CA

RCP-2 LEFT COMPONENT (PUR-2)

FROM ROOF ASM ---------- TO RCP RIGHT COMPONENT

---------- TO CONTROLLER-TV POWER

DETAIL CG

4 CONDUCTOR CABLE TO CONTROL BOX



DETAIL CD (48R) △5

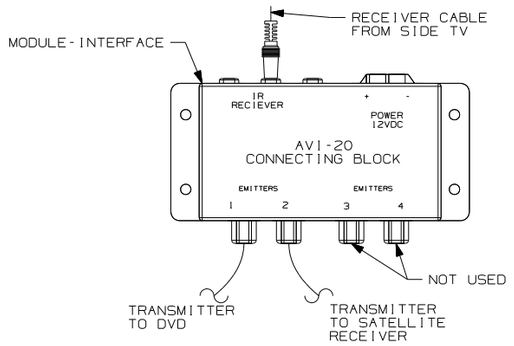

DETAIL CH (42N) & (42E)

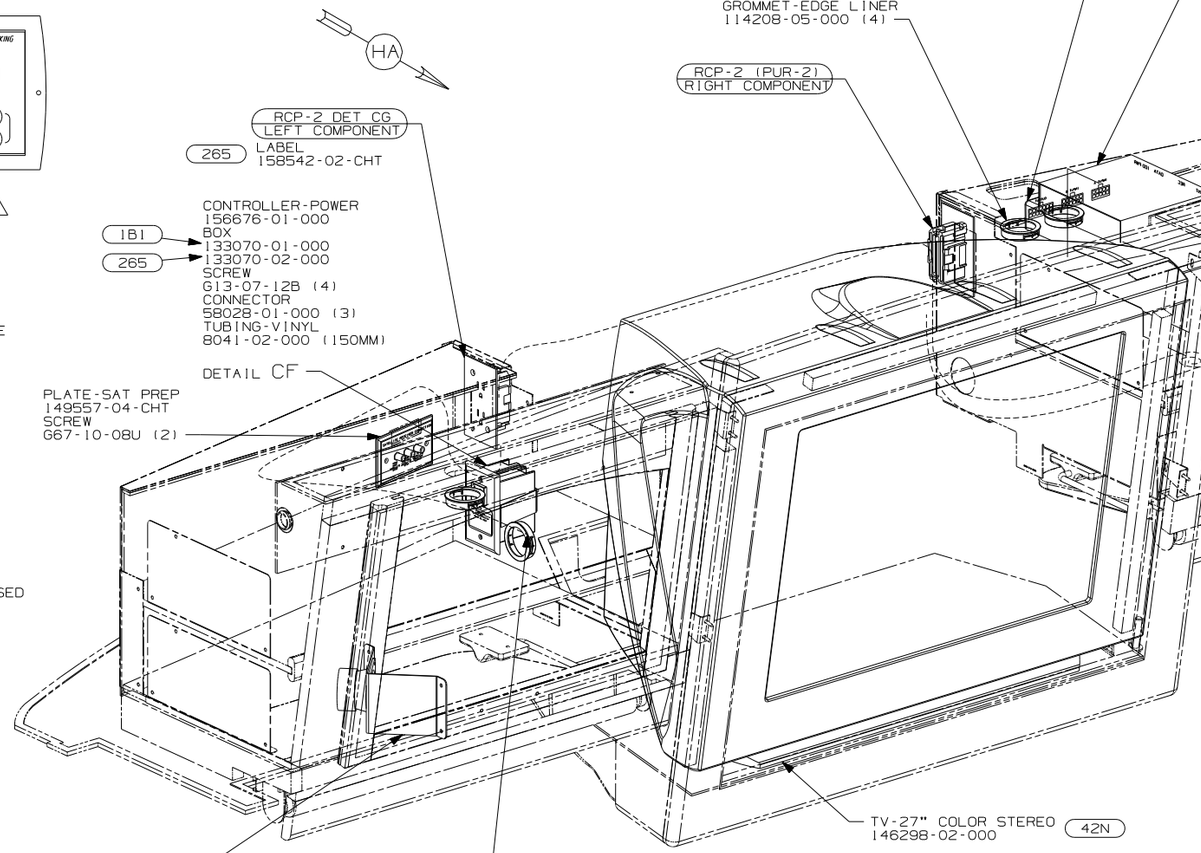

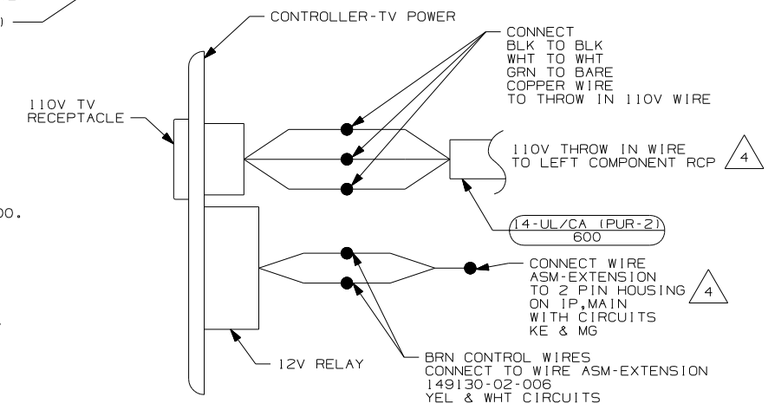

DETAIL CF (SHOWN FROM THE SIDE)

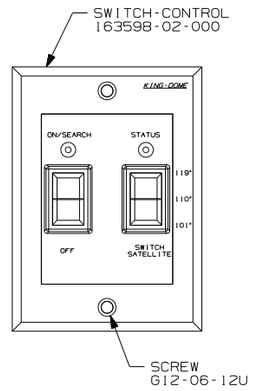

DETAIL CD (78K)

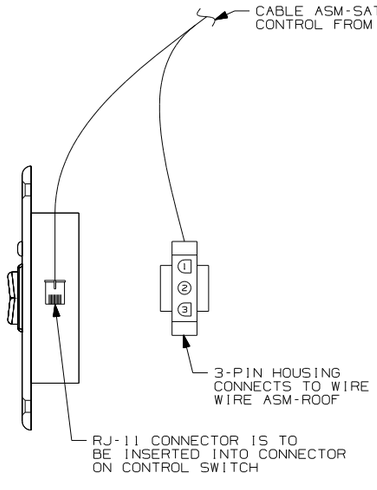

△8 USED ON G37B ONLY WITH (42N) & (42E)

△7 MOUNT SPEAKER & BRACKET TO REMOVABLE SPEAKER COVER ON SIDE OF OVHD CABINET

△6 SEE ROOF ASM FOR ADDITIONAL INFORMATION.

△5 PARTS ARE SUPPLIED WITH SATELLITE KIT 154474-02-000.

△4 ROUTE 110V AND 12V WIRES IN OPPOSITE ENDS OF ELECTRICAL BOX.

3. WHERE WIRES PASS THROUGH HOLES IN STEEL AND NOT OTHERWISE PROTECTED, USE GROMMET 92908-02-000.

2. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

1. 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

NOTES:

(42E) TV-27" COLOR,STEREO W/REMOTE
(78K) SATELLITE DISH-AUTOMATIC
(48R) SAT SYS IN-MOTION W/O RCVR
(42N) TV(FRONT)-27" COLOR STEREO
(35P) VIDEO SELECTION SYSTEM
(1JM) HOME THEATER SOUND SYSTEM
(265) CODES/STANDARDS-CSA/CMVSS
(1B1) CODES/STANDARDS USA

(1B1) (265) 07 G-SERIES

FIRST USED 07 A-BODIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-TV/DVD,FRONT

SHEET 3 | PART NO 156325 | REV

DWG NO 156325

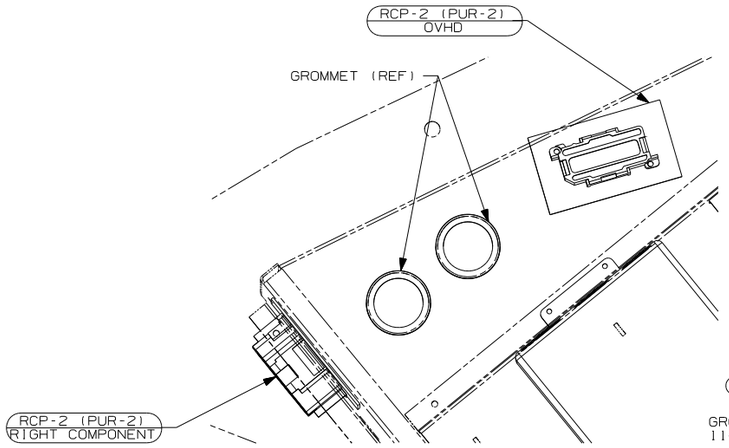

VIEW DA

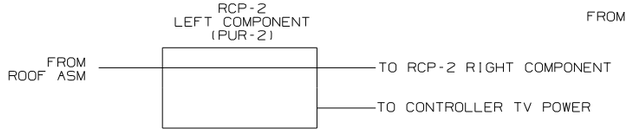

DETAIL DF



DET DD △8



DETAIL DB △7

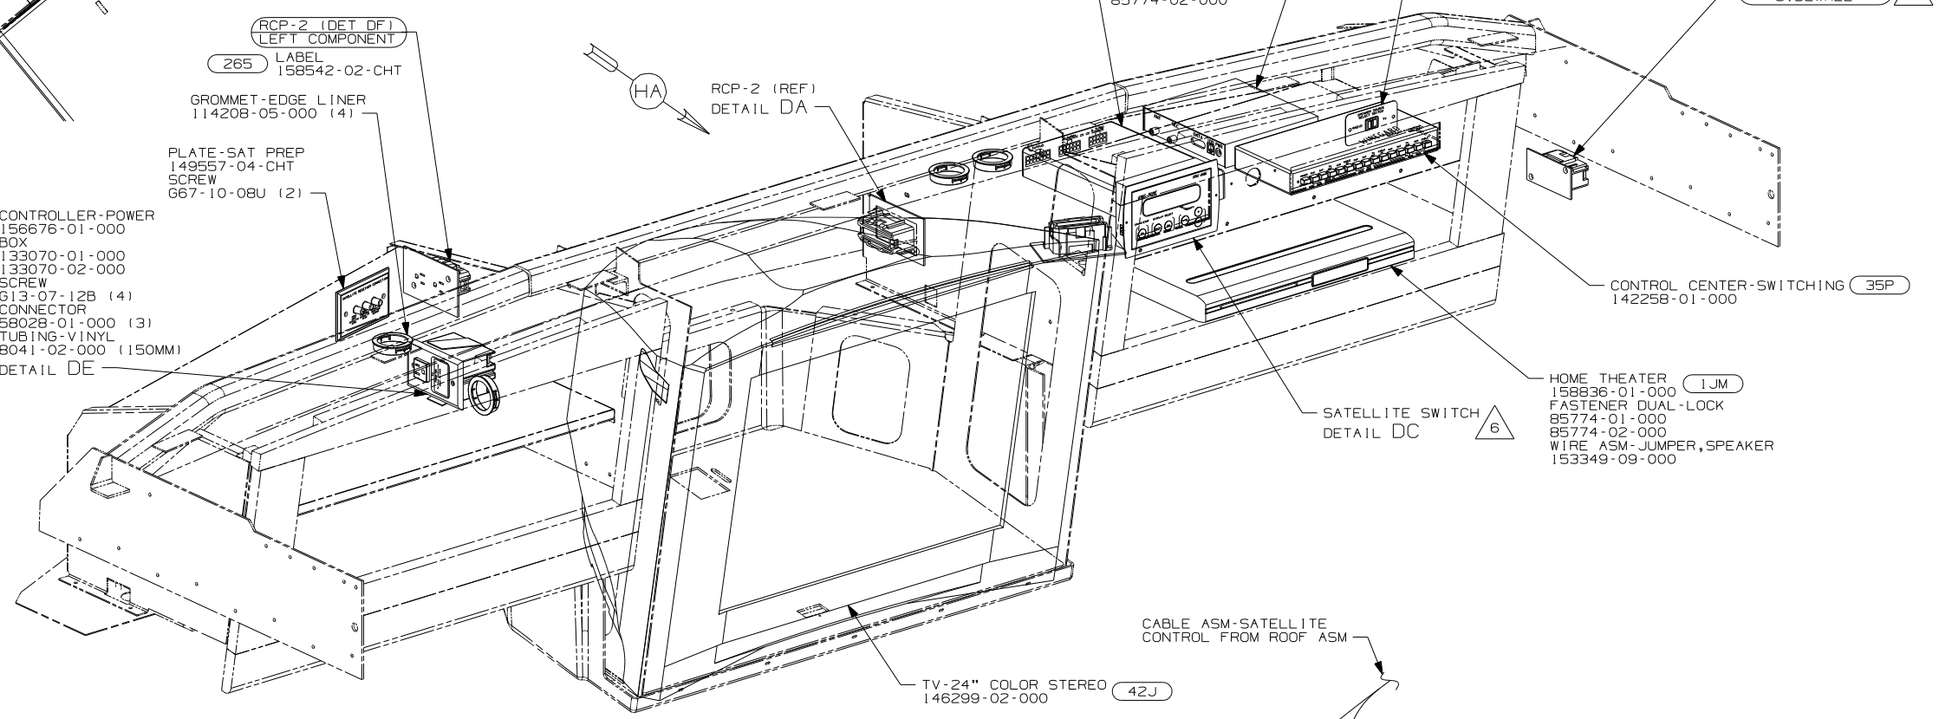



DETAIL DC 48R △5

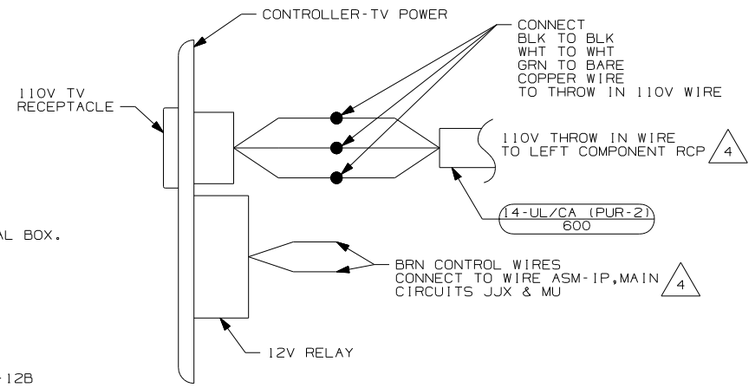

DETAIL DE
(SHOWN FROM
THE SIDE)



DETAIL DC 78K

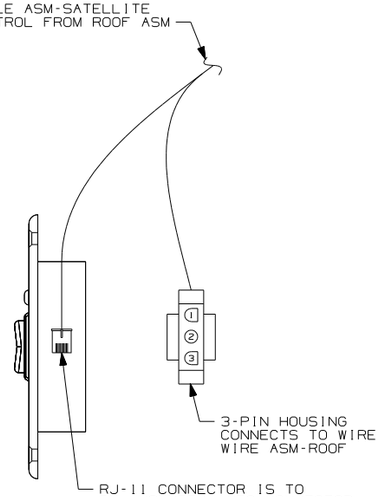

△8 USED ON P39K ONLY.

△7 REMOVE VINYL FROM CUTOUT AT INSTALATION.

△6 SEE ROOF ASM FOR ADDITIONAL INFORMATION.

△5 ROUTE 110V AND 12V WIRES IN OPPOSITE ENDS OF ELECTRICAL BOX.

△4 PARTS ARE SUPPLIED WITH SATELLITE KIT 154474-02-000.

3. WHERE WIRES PASS THROUGH HOLES IN STEEL AND NOT OTHERWISE PROTECTED, USE GROMMET 92908-02-000.

2. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

1. 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

NOTES:

79J INVERTER/CHARGER-1,500 WATT
78K SATELLITE DISH-AUTOMATIC
48R SAT SYS IN-MOTION W/O RCVR
42J TV-24" COLOR,STEREO W/REMOTE
35P VIDEO SELECTION SYSTEM
1JM HOME THEATER SOUND SYSTEM

07 P-SERIES

FIRST USED	07 A-BODIES
	DO NOT SCALE DRAWING
TITLE:	WIRING INSTL-TV/DVD,FRONT
SHEET 4	PART NO 156325 REV

DWG NO 156325

WIRE ASM-ROOF

4 CONDUCTOR CABLE TO CONTROL BOX

DETAIL EA (48R) △5

RCP-2 LEFT COMPONENT (PUR)
FROM ROOF ASM
TO RCP-2 RIGHT COMPONENT
TO CONTROLLER-TV POWER
DETAIL EE

SWITCH-SPEAKER 140062-01-000

SATELLITE SWITCH DETAIL EA △4

(PUR) FROM ROOF

HOME THEATER
158836-01-000
FASTENER DUAL-LOCK
85774-01-000
85774-02-000
WIRE ASM-JUMPER,SPEAKER
153349-09-000
(1JM)

RCP-2 (PUR) RIGHT COMPONENT

HA

GROMMET-EDGE LINER 114208-05-000 (4)

RCP-2 DET EE LEFT COMPONENT

LABEL 158542-02-CHT (265)

PLATE-SAT PREP
149557-04-CHT
SCREW
G67-10-08U (2)

△11 SPEAKER
148026-03-CHT (2)
SCREW
G11-08-08B (8)
BRACKET-MOUNT, SPEAKER
149422-02-CHT (2)
SCREW
G67-08-21U (8)

LAMP-ROPE
146514-03-000
(CUT LENGTH OF 72 INCHES) △7 △9

△8

CONTROL CENTER-SWITCHING
142258-01-000
BRACKET-VIDEO SWITCH
156586-01-CHT
SCREW
G11-08-12U (4)
△10
(35P)

RCP-2 (PUR) OVHD

CONTROL-IN MOTION SATELLITE
FASTENER DUAL-LOCK
85774-01-000
85774-02-000
△5
(48R)

TV-27" COLOR STEREO
146298-02-000 (42N)

SWITCH DETAIL EC

△8

LAMP-ROPE
146514-03-000
(CUT LENGTH OF 72 INCHES) △7 △9

CONTROLLER-POWER
156676-01-000
BOX (1B1)
133070-01-000 (265)
133070-02-000
SCREW
G13-07-12B (4)
CONNECTOR
58028-01-000 (3)
TUBING-VINYL
8041-02-000 (150MM)
DETAIL ED

CONTROLLER-TV POWER

CONNECT
BLK TO BLK
WHT TO WHT
GRN TO BARE
COPPER WIRE
TO THROW IN 110V WIRE

110V TV RECEPTACLE

110V THROW IN WIRE TO LEFT COMPONENT RCP △6

14-UL/CA (PUR) 600

BRN CONTROL WIRES CONNECT TO WIRE ASM-IP,MAIN CIRCUITS JJX & MU △6

12V RELAY

DETAIL ED (SHOWN FROM THE SIDE)

CABLE ASM-SATELLITE CONTROL FROM ROOF ASM

SWITCH-CONTROL 163598-02-000

SCREW G12-06-12U

3-PIN HOUSING CONNECTS TO WIRE WIRE ASM-ROOF

RJ-11 CONNECTOR IS TO BE INSERTED INTO CONNECTOR ON CONTROL SWITCH

DETAIL EA (78K)

JC OR LLA KKP

SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL EC

△11 SPEAKER WIRING FROM WIRE ASM-ROOF

△10 LOCATE BRACKET FLUSH TO THE FRONT OF THE SHELF & 220MM FROM THE LEFT SIDE.

△9 SNAP ROPE LAMP IN CHANNELS ON OVER HEAD CABINETS.

△8 PLACE CONNECTOR HERE TO MAKE CONNECTION TO MATING WIRE ASM.

△7 CUT ROPE LIGHT AT X MARKS ON LIGHT AND INSTALL CONNECTOR 146514-02-000.

△6 ROUTE 110V AND 12V WIRES IN OPPOSITE ENDS OF ELECTRICAL BOX.

△5 PARTS ARE SUPPLIED WITH SATELLITE KIT 154476-02-000.

△4 SEE ROOF ASM FOR ADDITIONAL INFORMATION.

3. WHERE WIRES PASS THROUGH HOLES IN STEEL AND NOT OTHERWISE PROTECTED, USE GROMMET 92908-02-000.

2. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

1. 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

NOTES:

(78K) SATELLITE DISH-AUTOMATIC
(48R) SAT SYS IN-MOTION W/O RCVR
(42N) TV(FRONT)-27" COLOR STEREO
(35P) VIDEO SELECTION SYSTEM
(1JM) HOME THEATER SOUND SYSTEM
(1D5) ENTERTAINMENT CENTR/EXT W/CD
(265) CODES/STANDARDS-CSA/CMVSS
(1B1) CODES/STANDARDS USA

(1B1) (265) 07 R-SERIES

FIRST USED 07 A-BODIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-TV/DVD,FRONT

SHEET 5 | PART NO 156325 | REV

DWG NO 156325

RECEIVER CABLE FROM REAR TV
RECEIVER CABLE FROM ENTERTAINMENT CENTER (1D3)
IR RECEIVER
POWER 12VDC
AVI-20 CONNECTING BLOCK
EMITTERS 1 2 3 4
MODULE-INTERFACE
TRANSMITTER TO DVD/VCR
NOT USED
TRANSMITTER TO RECEIVER
DETAIL FB

RCP-2 LEFT COMPONENT (PUR)
FROM ROOF ASM
TO RCP-2 RIGHT COMPONENT
TO CONTROLLER-TV POWER
DETAIL FE

SWITCH-SPEAKER 140062-01-000
WALLPLATE-ANTENNA CONTROLLER (192)
158270-03-CHT
SCREW G6806-12-170 (4)
DETAIL FF
SATELLITE SWITCH DETAIL FA (4)
WIRE ASM-ROOF
RCP-2 (PUR) RIGHT COMPONENT
(PUR) FROM ROOF

4 CONDUCTOR CABLE TO CONTROL BOX
KING-DOME
TRAC-KING
START/STOP DISPLAY SELECT MODIFY
DETAIL FA (48R) (10)

MODULE-INTERFACE,IR 149750-05-000
FASTENER-DUAL LOCK 85744-01-000 85744-02-000
DETAIL FB
42N 42K HA JA
RCP-2 DET FE LEFT COMPONENT
265 LABEL 158542-02-CHT
GROMMET-EDGE LINER 114208-05-000 (4)

HOME THEATER 160064-01-000
FASTENER DUAL-LOCK 85774-01-000 85774-02-000
WIRE ASM-JUMPER,SPEAKER 153349-04-000
(1JM)

POWER CABLE CONNECTION 13 PIN HOUSING FROM WIRE ASM-ROOF)
DATA CABLE CONNECTION (6 PIN HOUSING FROM WIRE ASM-ANTENNA)
DETAIL FF (REAR VIEW)

PLATE-SAT PREP 149557-04-CHT
SCREW G67-10-08U (2)

(1JM) SPEAKER 148026-03-CHT (2)
SCREW G11-08-08B (8)
BRACKET-MOUNT,SPEAKER 149422-02-CHT (2)
SCREW G67-08-12U (8)

CONTROL CENTER-SWITCHING 142258-01-000
BRACKET-VIDEO SWITCH 156586-01-CHT
SCREW G11-08-12U (4)
(35P) (11)

RCP-2 (PUR) OVHD
CONTROL-IN MOTION SATELLITE (10)
FASTENER DUAL-LOCK 85774-01-000 85774-02-000

TV-32" LCD 160064-02-000 (42K)
TV 27" COLOR STEREO 146298-02-000 (42N)
SWITCH DETAIL FC (8)

LAMP-ROPE 146514-03-000 (7) (9)
(CUT LENGTH OF 72 INCHES) (42N)
(CUT LENGTH OF 90 INCHES) (42K)

LAMP-ROPE 146514-03-000 (7) (9)
(42N) (CUT LENGTH OF 72 INCHES)
(42K) (CUT LENGTH OF 90 INCHES)

SWITCH-ROCKER 135740-01-CHT
SWITCH-BASE 135741-01-CHT
SWITCH-BEZEL 135742-01-CHT
SCREW G11-08-08U (2)
(JC OR LLA) KKP
DETAIL FC

CONTROLLER-POWER 156676-01-000
BOX 133070-01-000 133070-02-000
SCREW G13-07-12B (4)
CONNECTOR 58028-01-000 (3)
TUBING-VINYL 8041-02-000 (150MM)
(1B1) (265)
DETAIL FD

TRANSMITTER 149750-03-000 (2)

CABLE ASM-SATELLITE CONTROL FROM ROOF ASM
SWITCH-CONTROL 163598-02-000
KING-DOME
ON/SEARCH STATUS
OFF SWITCH SATELLITE
3-PIN HOUSING CONNECTS TO WIRE WIRE ASM-ROOF
SCREW G12-06-12U
RJ-11 CONNECTOR IS TO BE INSERTED INTO CONNECTOR ON CONTROL SWITCH
DETAIL FA (78K)

110V TV RECEPTACLE
CONNECT BLK TO BLK WHT TO WHT GRN TO BARE COPPER WIRE TO THROW IN 110V WIRE
110V THROW IN WIRE TO LEFT COMPONENT RCP (12)
14-UL/CA (PUR) 600
CONTROLLER-TV POWER
BRN CONTROL WIRES CONNECT TO WIRE ASM-IP,MAIN CIRCUITS JJX & MU (12)
12V RELAY
DETAIL FD (SHOWN FROM THE SIDE)

(192) TV ANTENNA-AMPLIFIED SYS PWR
(78K) SATELLITE DISH-AUTOMATIC
(48R) SAT SYS IN-MOTION W/O RCVR
(42N) TV(FRONT)-27" COLOR STEREO
(35P) VIDEO SELECTION SYSTEM
(1D5) ENTERTAINMENT CENTR/EXT W/CD
(1D3) ENTERTAIN CENTR/EXT TV-DVD
(1JM) HOME THEATER SOUND SYSTEM
(42K) TV-32" COLOR,STEREO W/REMOTE
(265) CODES/STANDARDS-CSA/CMVSS
(1B1) CODES/STANDARDS USA

(1B1) (265) 07 S-SERIES
FIRST USED 07 A-BODIES
DO NOT SCALE DRAWING
TITLE: WIRING INSTL-TV/DVD,FRONT
SHEET 6 PART NO 156325 REV

NOTES:

1. 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
2. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.
3. WHERE WIRES PASS THROUGH HOLES IN STEEL AND NOT OTHERWISE PROTECTED, USE GROMMET 92908-02-000.

(4) SEE ROOF ASM FOR ADDITIONAL INFORMATION.

(5) POSITION TRANSMITTER ON THE FRONT LEFT SIDE OF THE DVD/VCR USING TIE-MOUNT 155366-01-000 AND TIE-WIRE 8343-01-000 45MM UP FROM THE BOTTOM TO LINE UP WITH THE RECEIVER EYE.

(6) POSITION TRANSMITTER IN THE MIDDLE OF THE TOP SHELF,TOWARD OUTER EDGE OF SHELF.

(7) CUT ROPE LIGHT AT X MARKS ON LIGHT AND INSTALL CONNECTOR 146514-02-000.

(8) PLACE CONNECTOR HERE TO MAKE CONNECTION TO MATING WIRE ASM.

(9) SNAP ROPE LAMP IN CHANNELS ON OVER HEAD CABINETS.

(10) PARTS ARE SUPPLIED WITH SATELLITE KIT 154476-02-000.

(11) LOCATE BRACKET FLUSH TO THE FRONT OF THE SHELF & 220MM FROM THE LEFT SIDE.

(12) ROUTE 110V AND 12V WIRES IN OPPOSITE ENDS OF ELECTRICAL BOX.

DWG NO 156325

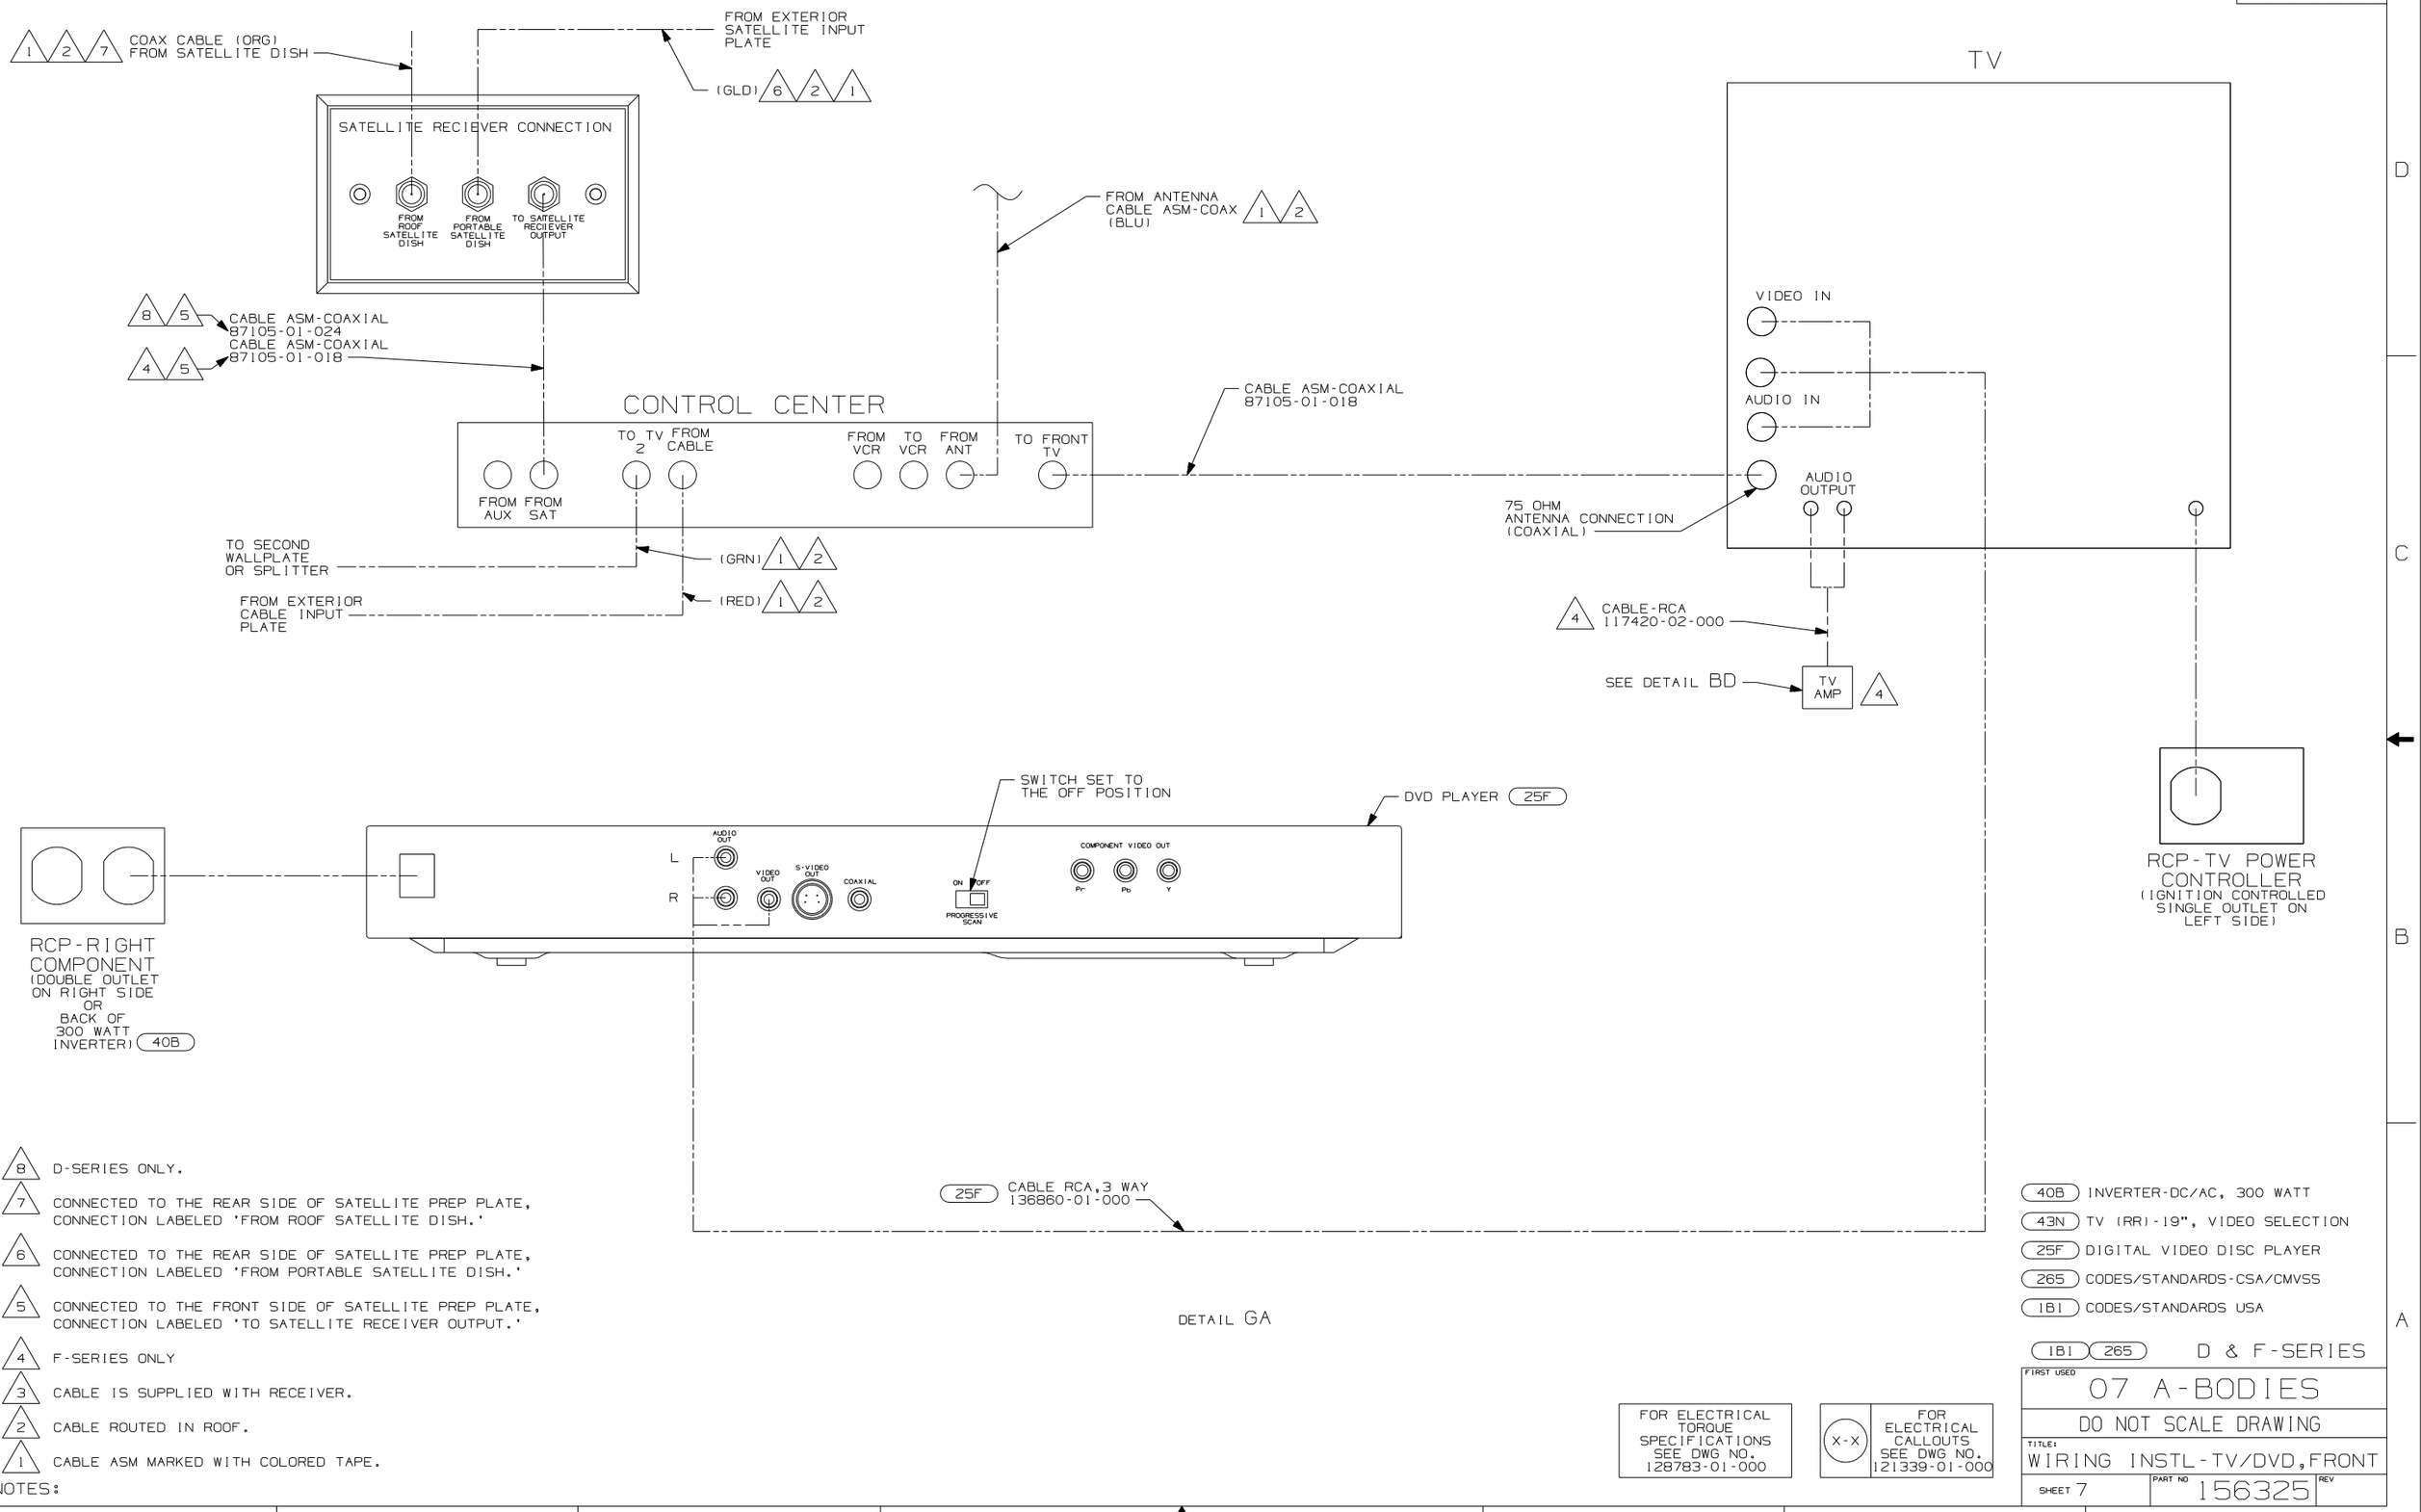

DETAIL GA

8 D-SERIES ONLY.

7 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM ROOF SATELLITE DISH.'

6 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM PORTABLE SATELLITE DISH.'

5 CONNECTED TO THE FRONT SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'

4 F-SERIES ONLY

3 CABLE IS SUPPLIED WITH RECEIVER.

2 CABLE ROUTED IN ROOF.

1 CABLE ASM MARKED WITH COLORED TAPE.

NOTES:

40B INVERTER-DC/AC, 300 WATT

43N TV (RR)-19", VIDEO SELECTION

25F DIGITAL VIDEO DISC PLAYER

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1B1 265 D & F-SERIES

FIRST USED 07 A-BODIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-TV/DVD,FRONT

SHEET 7 PART NO 156325 REV

DWG NO 156325

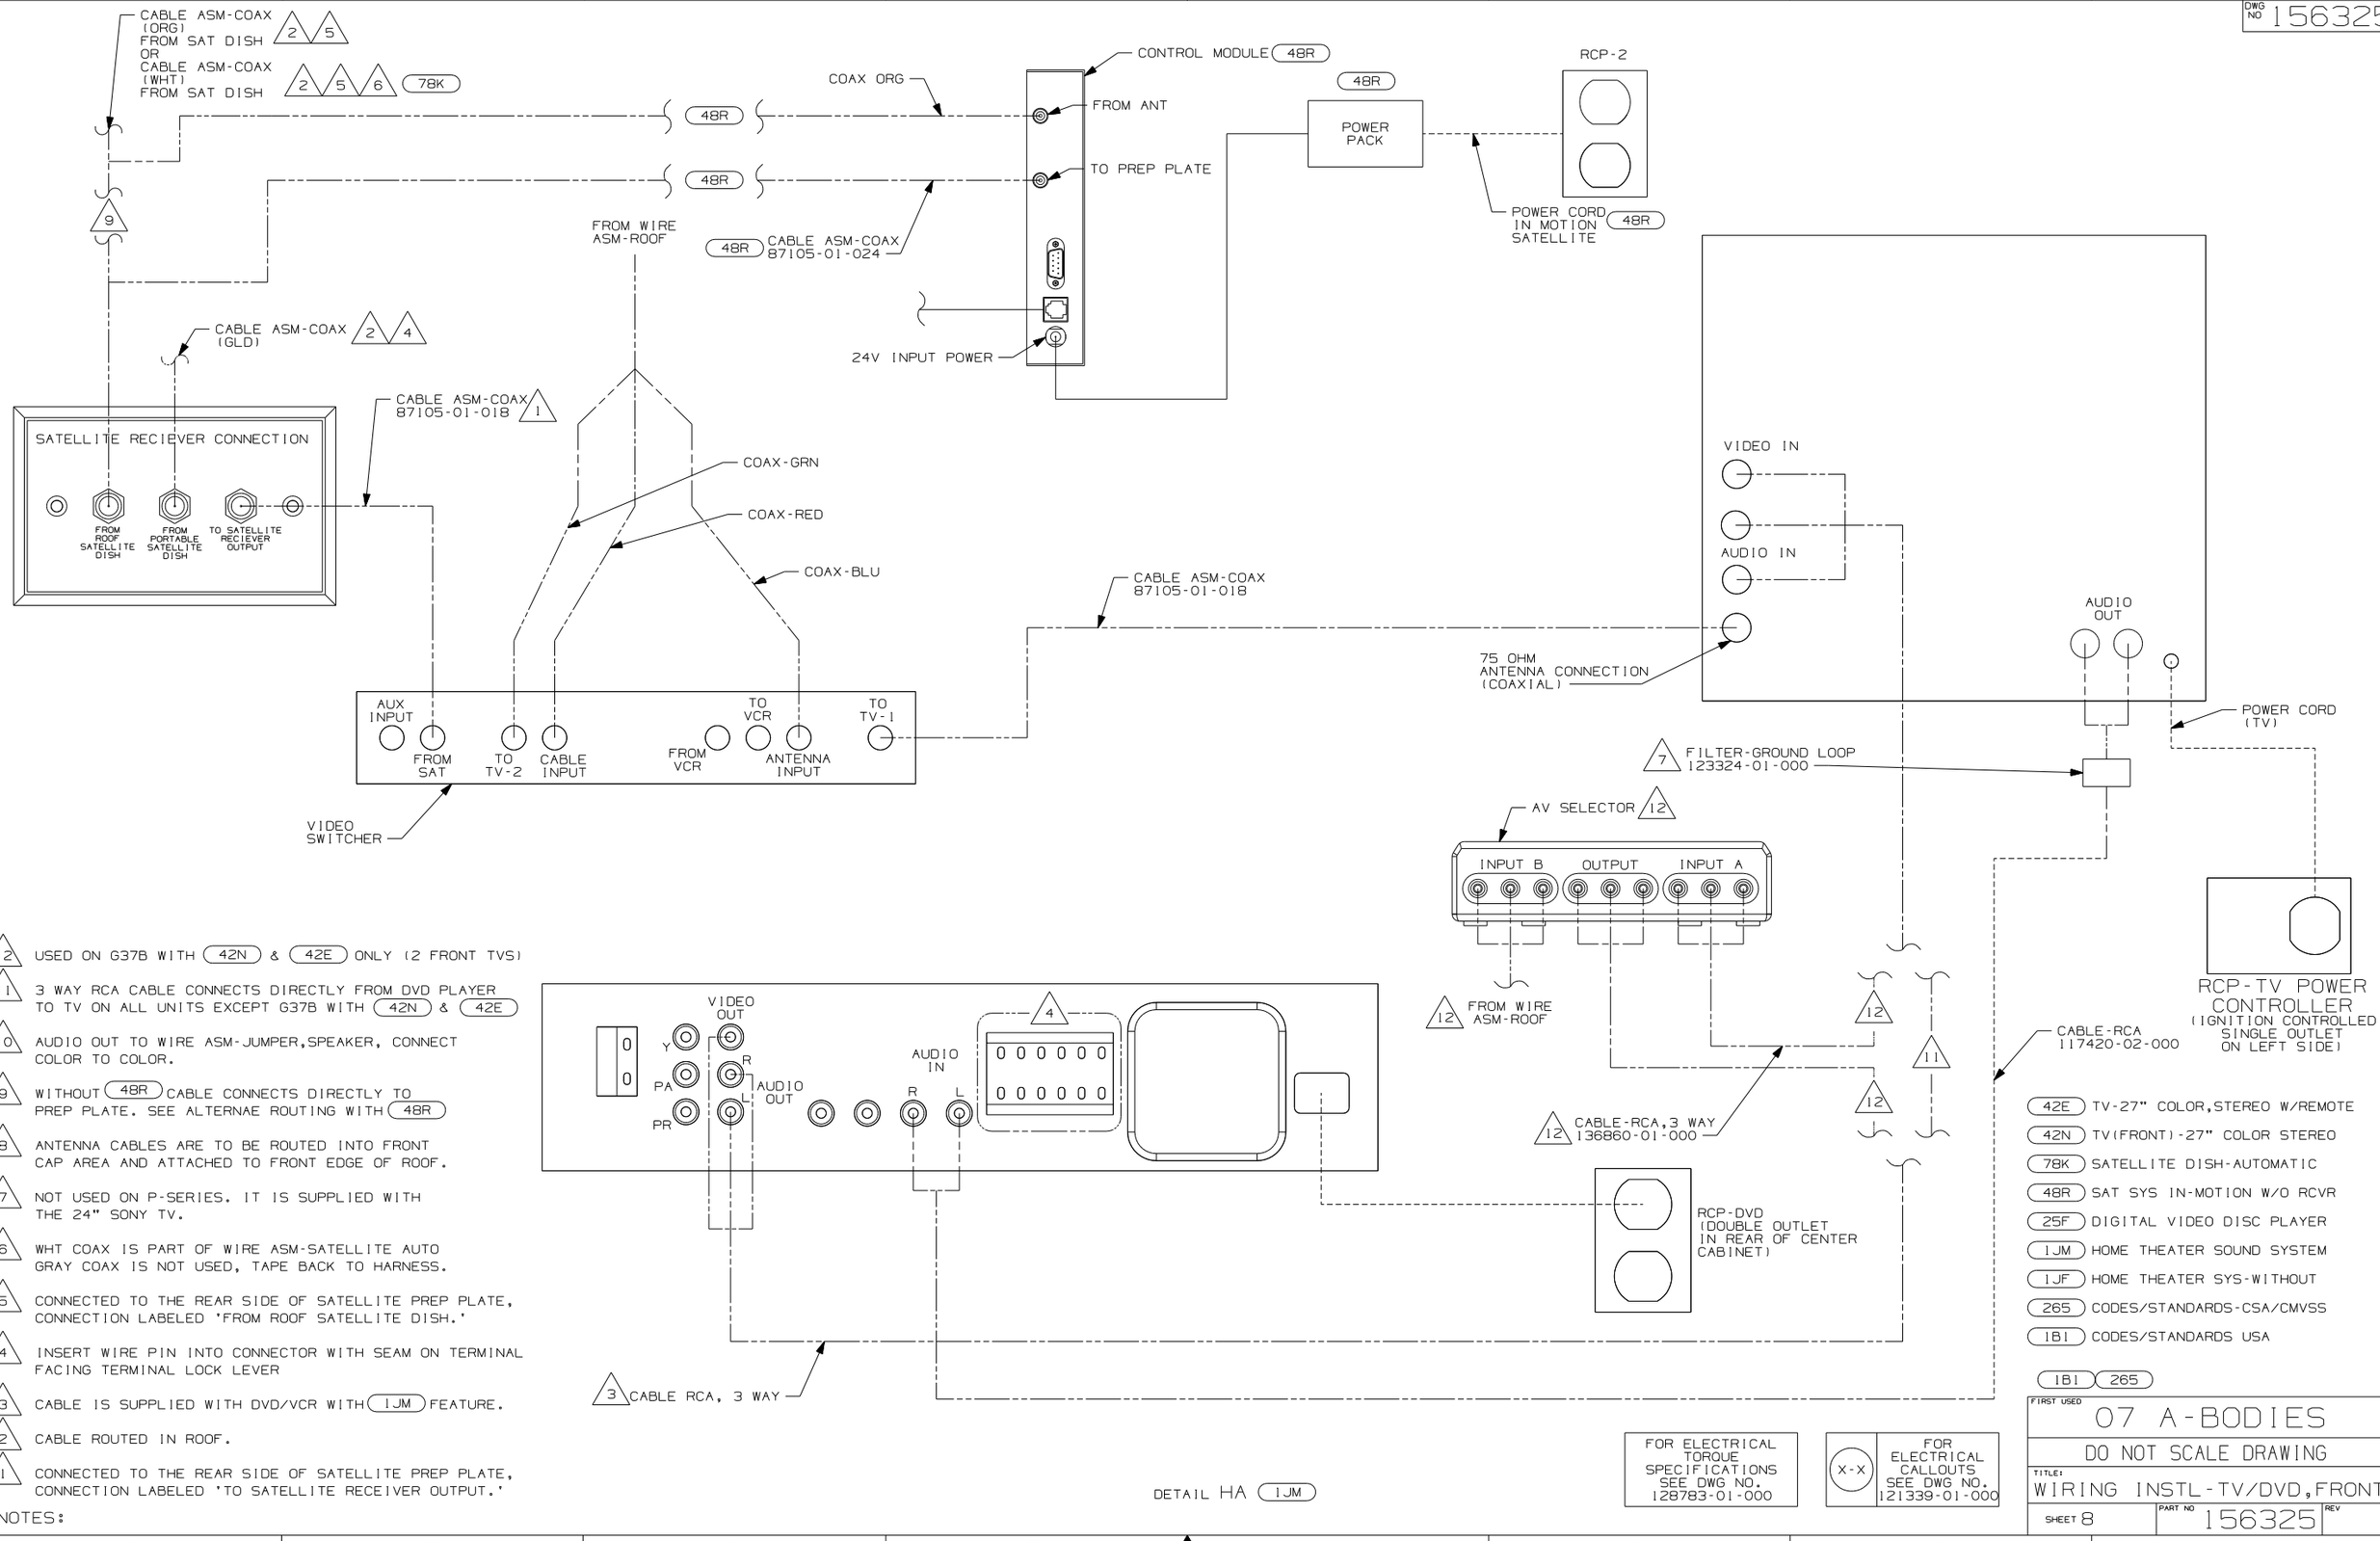

12 USED ON G37B WITH 42N & 42E ONLY (2 FRONT TVS)

11 3 WAY RCA CABLE CONNECTS DIRECTLY FROM DVD PLAYER TO TV ON ALL UNITS EXCEPT G37B WITH 42N & 42E

10 AUDIO OUT TO WIRE ASM-JUMPER,SPEAKER, CONNECT COLOR TO COLOR.

9 WITHOUT 48R CABLE CONNECTS DIRECTLY TO PREP PLATE. SEE ALTERNAE ROUTING WITH 48R

8 ANTENNA CABLES ARE TO BE ROUTED INTO FRONT CAP AREA AND ATTACHED TO FRONT EDGE OF ROOF.

7 NOT USED ON P-SERIES. IT IS SUPPLIED WITH THE 24" SONY TV.

6 WHT COAX IS PART OF WIRE ASM-SATELLITE AUTO GRAY COAX IS NOT USED, TAPE BACK TO HARNESS.

5 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM ROOF SATELLITE DISH.'

4 INSERT WIRE PIN INTO CONNECTOR WITH SEAM ON TERMINAL FACING TERMINAL LOCK LEVER

3 CABLE IS SUPPLIED WITH DVD/VCR WITH 1JM FEATURE.

2 CABLE ROUTED IN ROOF.

1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'

NOTES:

DETAIL HA 1JM

42E TV-27" COLOR,STEREO W/REMOTE
42N TV(FRONT)-27" COLOR STEREO
78K SATELLITE DISH-AUTOMATIC
48R SAT SYS IN-MOTION W/O RCVR
25F DIGITAL VIDEO DISC PLAYER
1JM HOME THEATER SOUND SYSTEM
1JF HOME THEATER SYS-WITHOUT
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED 07 A-BODIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-TV/DVD,FRONT

SHEET 8 PART NO 156325 REV

DWG NO 156325

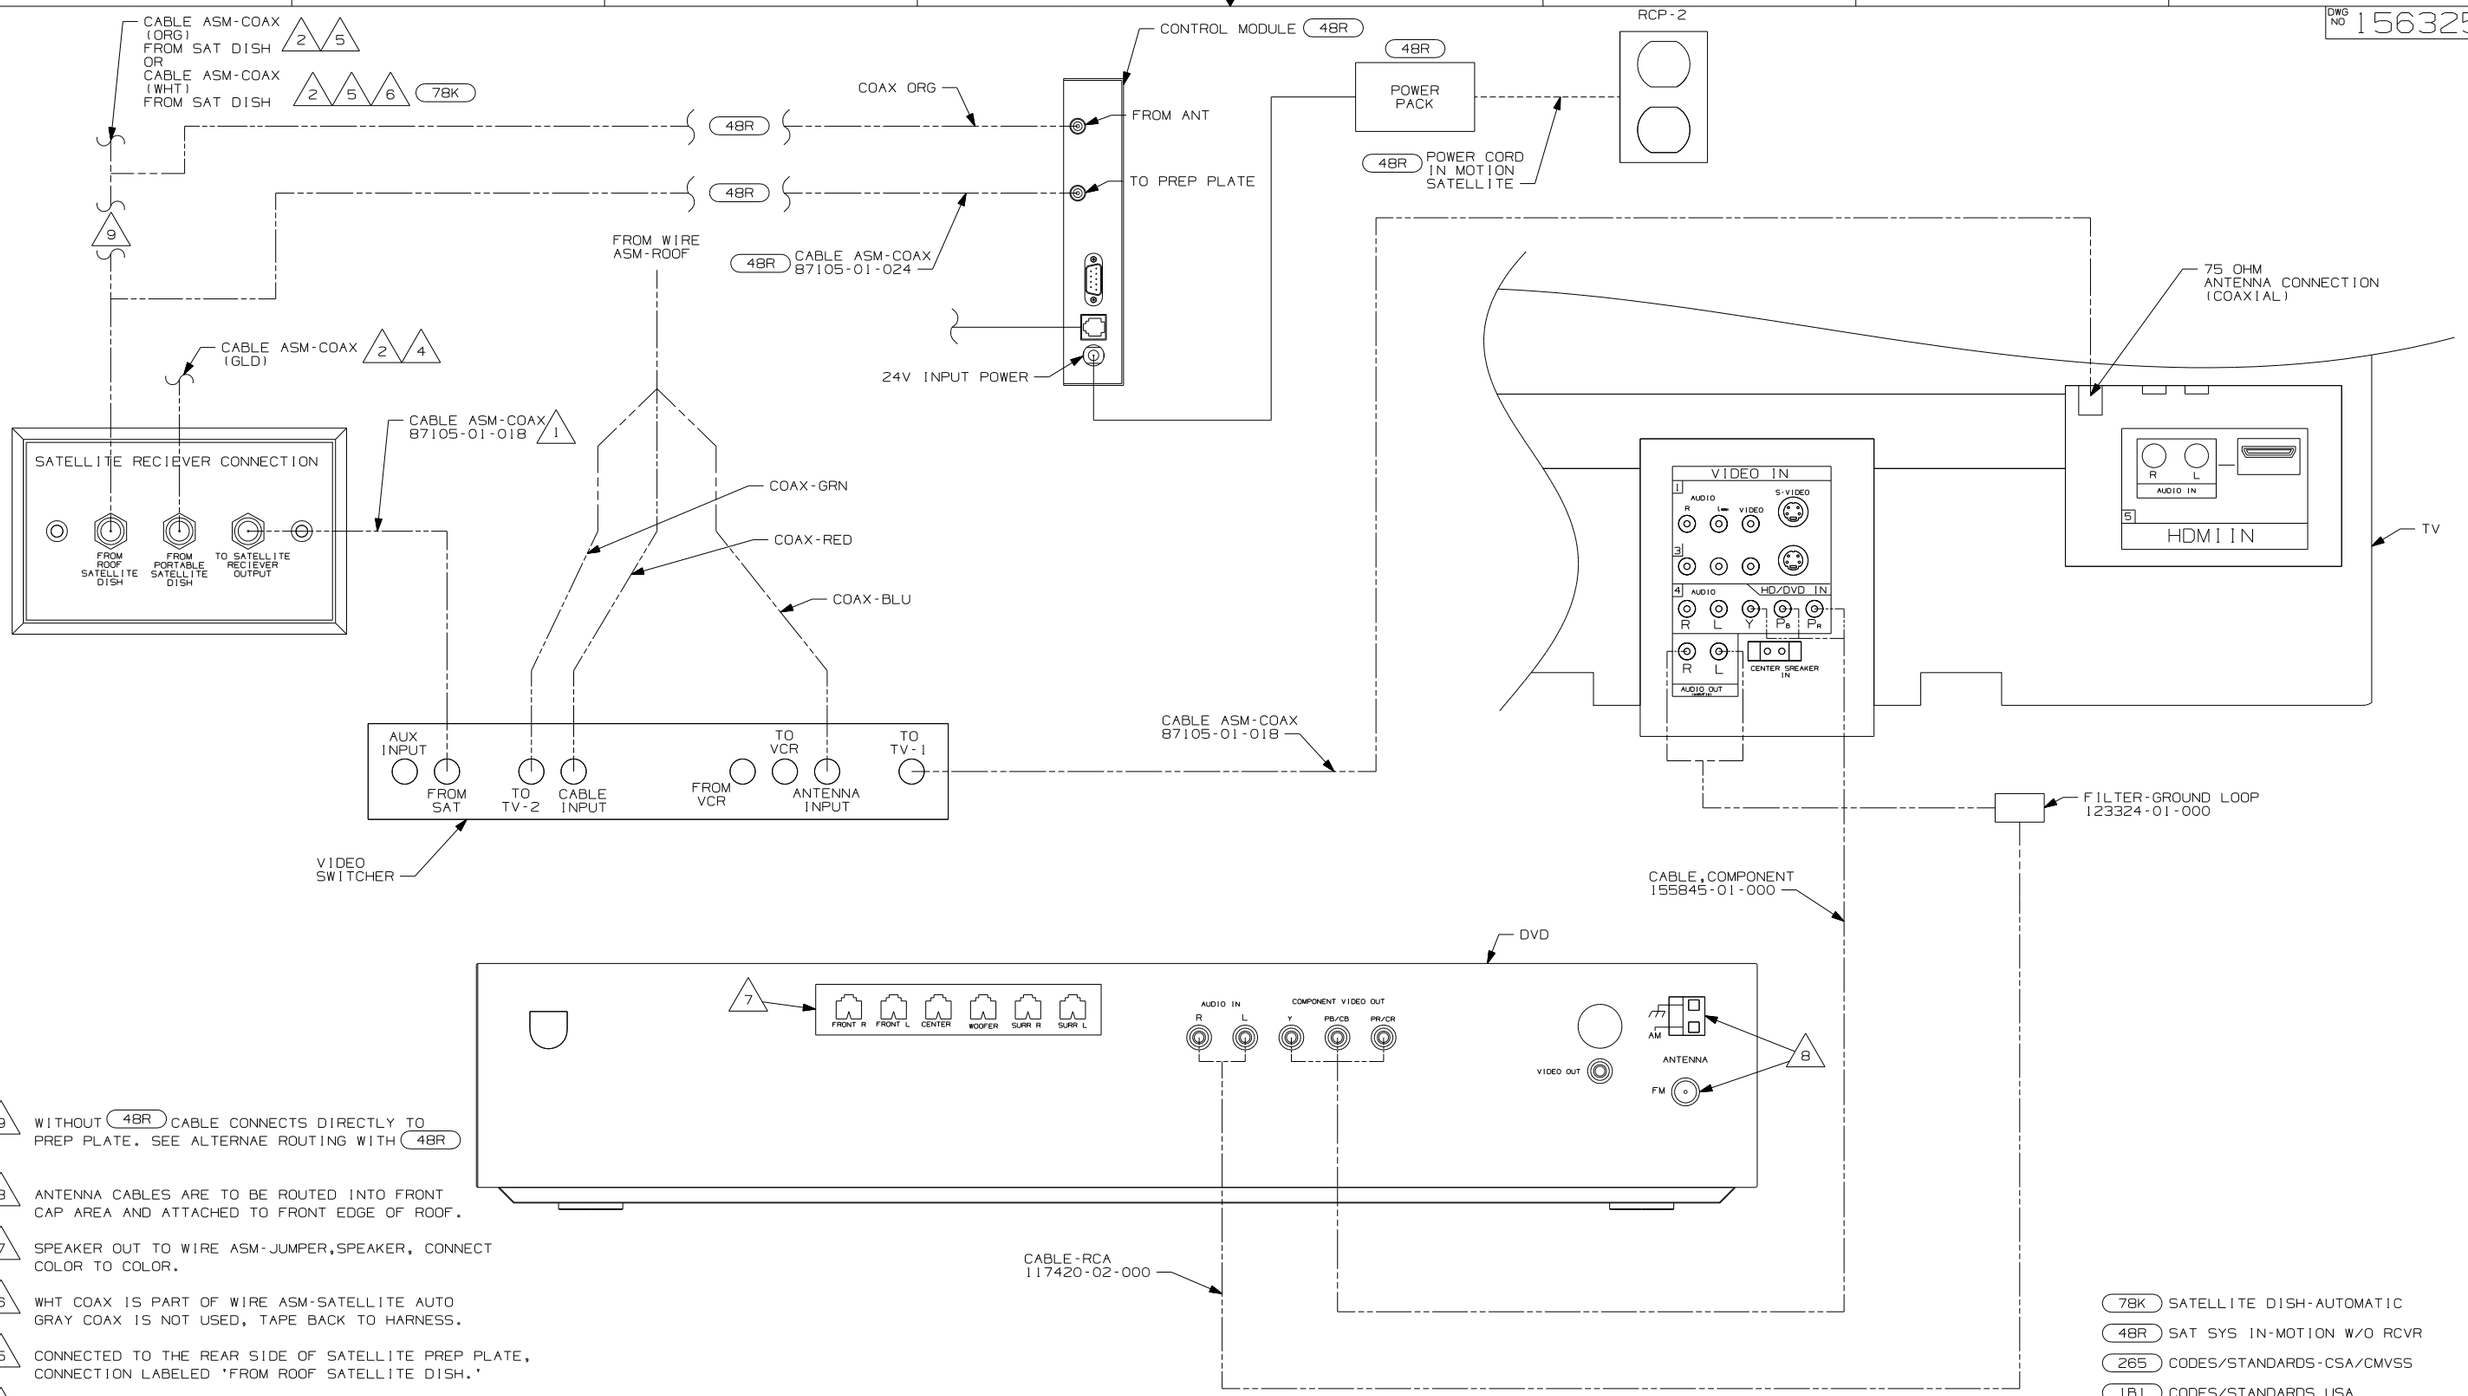

9 WITHOUT 48R CABLE CONNECTS DIRECTLY TO PREP PLATE. SEE ALTERNAE ROUTING WITH 48R

8 ANTENNA CABLES ARE TO BE ROUTED INTO FRONT CAP AREA AND ATTACHED TO FRONT EDGE OF ROOF.

7 SPEAKER OUT TO WIRE ASM-JUMPER,SPEAKER, CONNECT COLOR TO COLOR.

6 WHT COAX IS PART OF WIRE ASM-SATELLITE AUTO GRAY COAX IS NOT USED, TAPE BACK TO HARNESS.

5 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM ROOF SATELLITE DISH.'

4 INSERT WIRE PIN INTO CONNECTOR WITH SEAM ON TERMINAL FACING TERMINAL LOCK LEVER

3 CABLE IS SUPPLIED WITH DVD/VCR.

2 CABLE ROUTED IN ROOF.

1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'

NOTES:

78K SATELLITE DISH-AUTOMATIC
48R SAT SYS IN-MOTION W/O RCVR
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

DETAIL JA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FIRST USED	07 A-BODIES
	DO NOT SCALE DRAWING
TITLE:	WIRING INSTL-TV/DVD,FRONT
SHEET 9	PART NO 156325 REV

DWG NO 156325

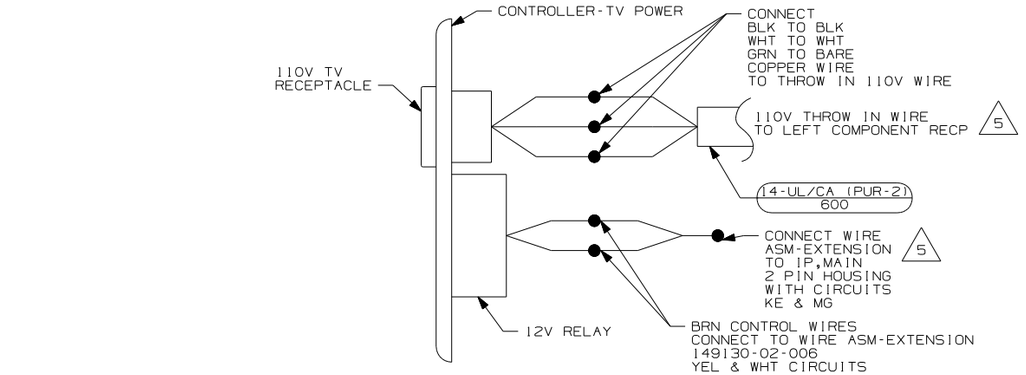

DETAIL AC
(SHOWN FROM
THE SIDE)

CONTROLLER-POWER
156676-01-000
BOX
133070-01-000 (1B1)
133070-02-000 (265)
SCREW
G13-07-12B (4)
CONNECTOR
58028-01-000 (5)
TUBING-VINYL
8041-02-000 (150MM)
DETAIL AC

KA

RCP-2 (DET AA)
LEFT COMPONENT
(265) LABEL
158542-02-CHT

PLATE-SAT PREP
149557-04-CHT
SCREW
G67-10-08U (2)

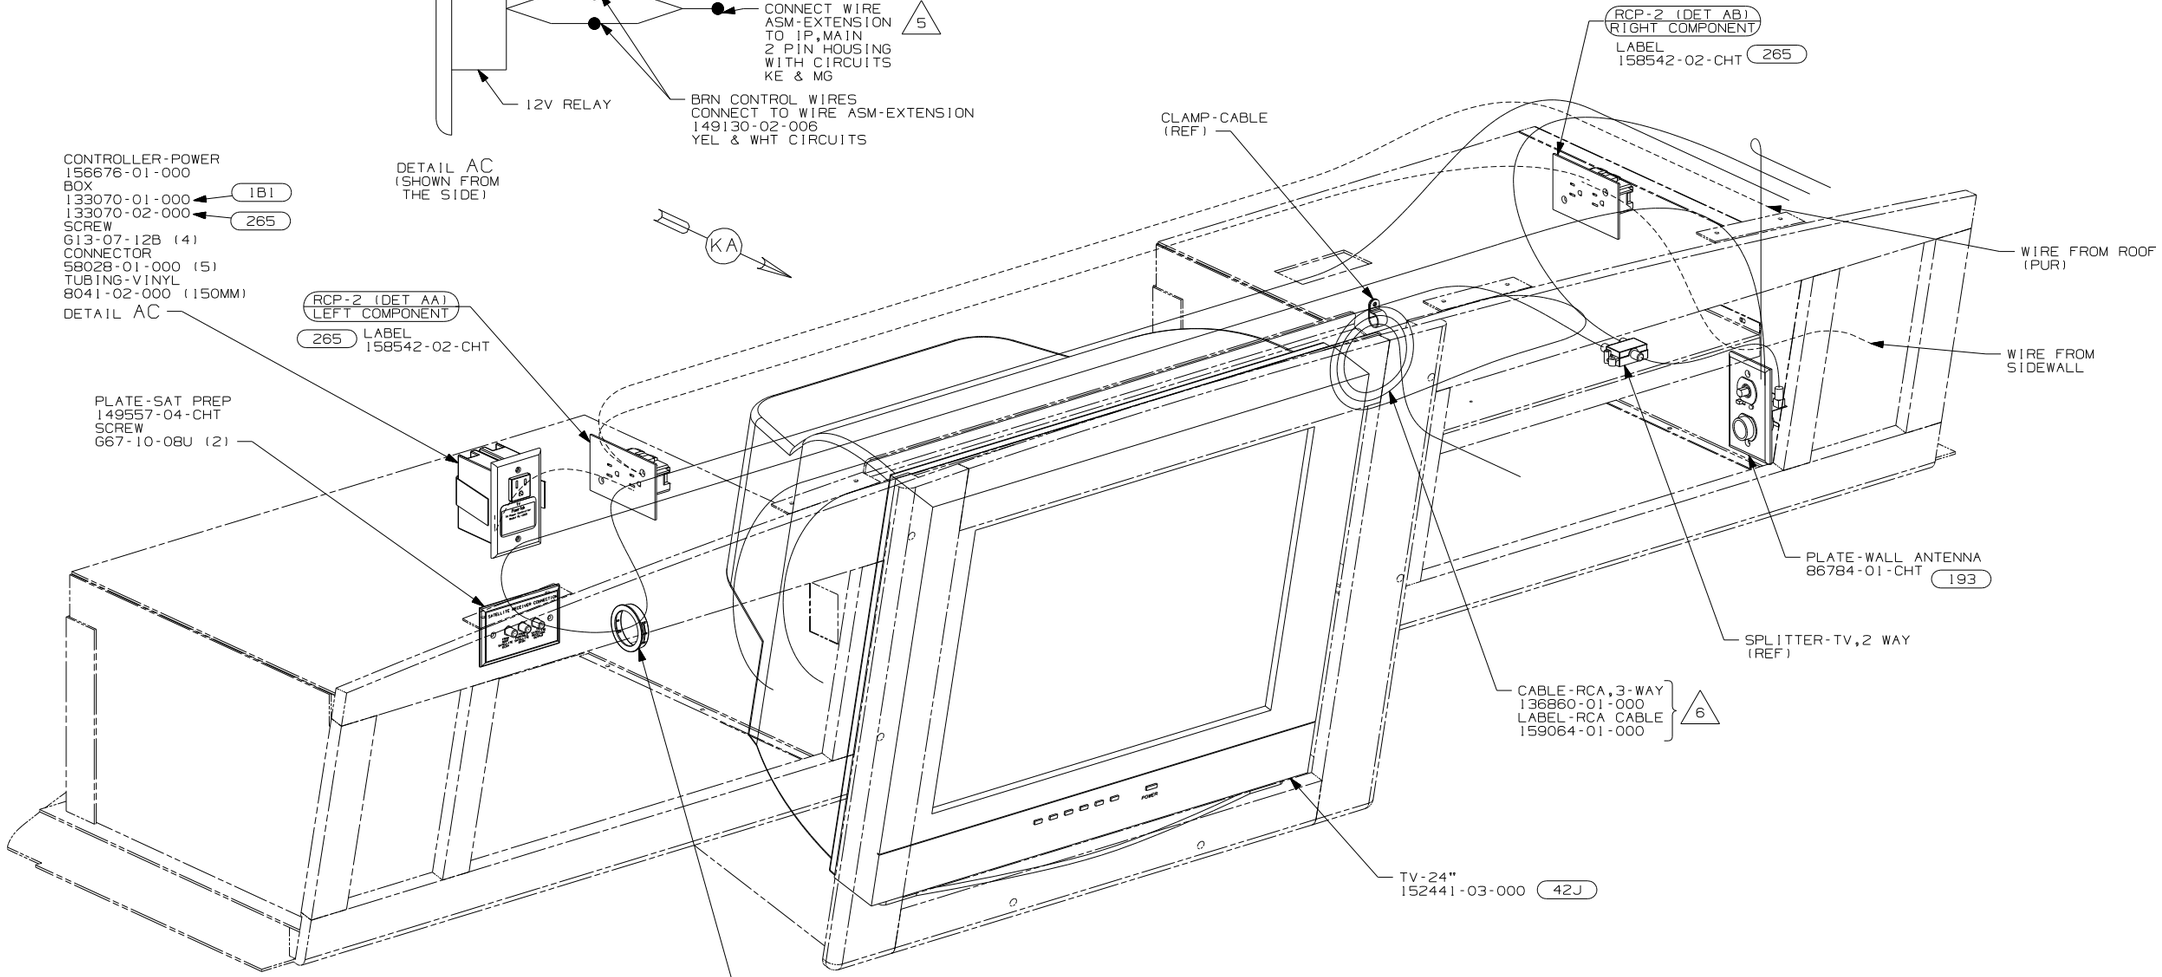

6 CONNECT RCA CABLE TO A/V1 ON BEDROOM TV AND INSTALL LABEL ON END OF RCA CABLE. ROUTE CABLE TO SHELF BELOW TV AND COIL FOR USE.

5 ROUTE 110V AND 12V WIRES IN OPPOSITE ENDS OF ELECTRICAL BOX.

4 SLIDE INVERTER AND VIDEO SWITCH INTO RAILS PROVIDED ON SHELF ASM.

3. WHERE WIRES PASS THROUGH HOLES IN STEEL AND NOT OTHERWISE PROTECTED, USE GROMMET 92908-02-000.

2. ALL WIRES TO BE SECURED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600MM. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

1. 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

NOTES:



DETAIL AA (40B)



DETAIL AB

(42J) TV-24" COLOR,STEREO W/REMOTE
(193) TV ANTENNA-AMPLIFIED SYSTEM
(265) CODES/STANDARDS-CSA/CMVSS
(1B1) CODES/STANDARDS-USA

(1B1) (265) 07 E-SERIES

FIRST USED
07 A-BODIES

DO NOT SCALE DRAWING

TITLE:
WIRING INSTL-TV/DVD,FRONT

SHEET 10 | PART NO 156325 | REV

DWG NO 156325

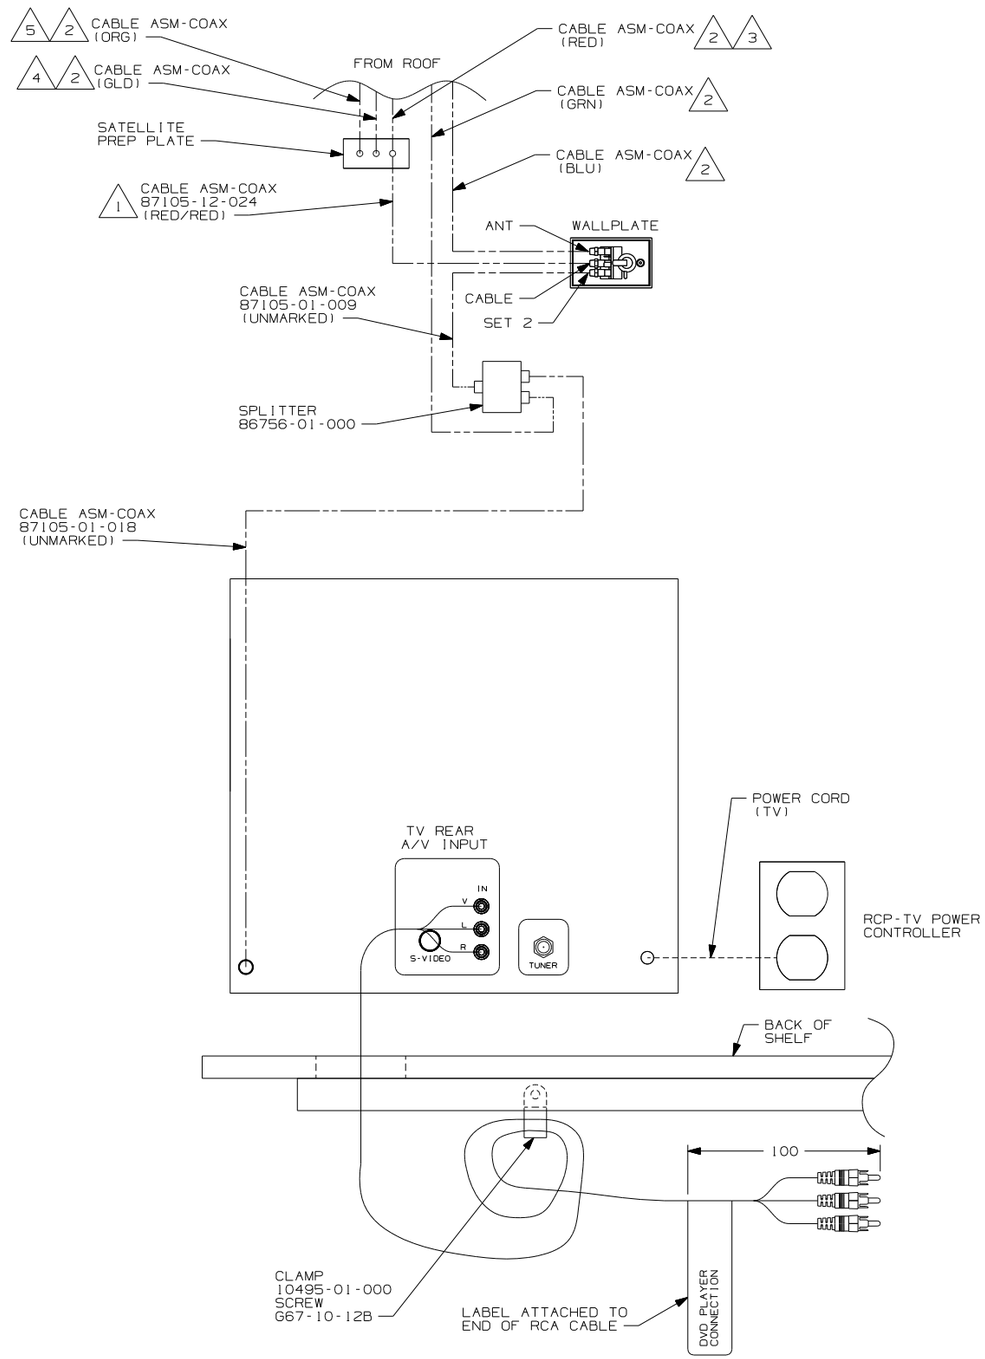

DETAIL KA

5 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM ROOF SATELLITE DISH.'

4 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM PORTABLE SATELLITE DISH.'

3 CONNECTED TO THE FRONT SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'

2 CABLE ROUTED IN ROOF.

1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265 E-SERIES

FIRST USED 07 A-BODIES

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-TV/DVD,FRONT

SHEET 11 PART NO 156325 REV