


TV-24", INSIGNIA  
 000278243 / 355042-01-000  
 BRACKET ASM-AV MTG  
 000254170 / 349803-01-CHT  
 SPEAKER-SOUNDBAR,NO SUB  
 000221107 / 342430-01-000  
 CABLE-OPTICAL AUDIO  
 187116-01-000  
 SCREW  
 (SUPPLIED W/ SOUND BAR)  
 NUT  
 000D24-10-00U (4)  
 SCREW  
 0MG02U-06-010 (4)  
 SPACER-NYLON  
 086285-01-000 (4)  
 CONVOLUTE  
 041953-01-000  
 (1200 MM)  
 DETAIL BA

07B WIRE ASM-SWITCH,RUNNING BOARD  
 000210536 / 339934-01-000

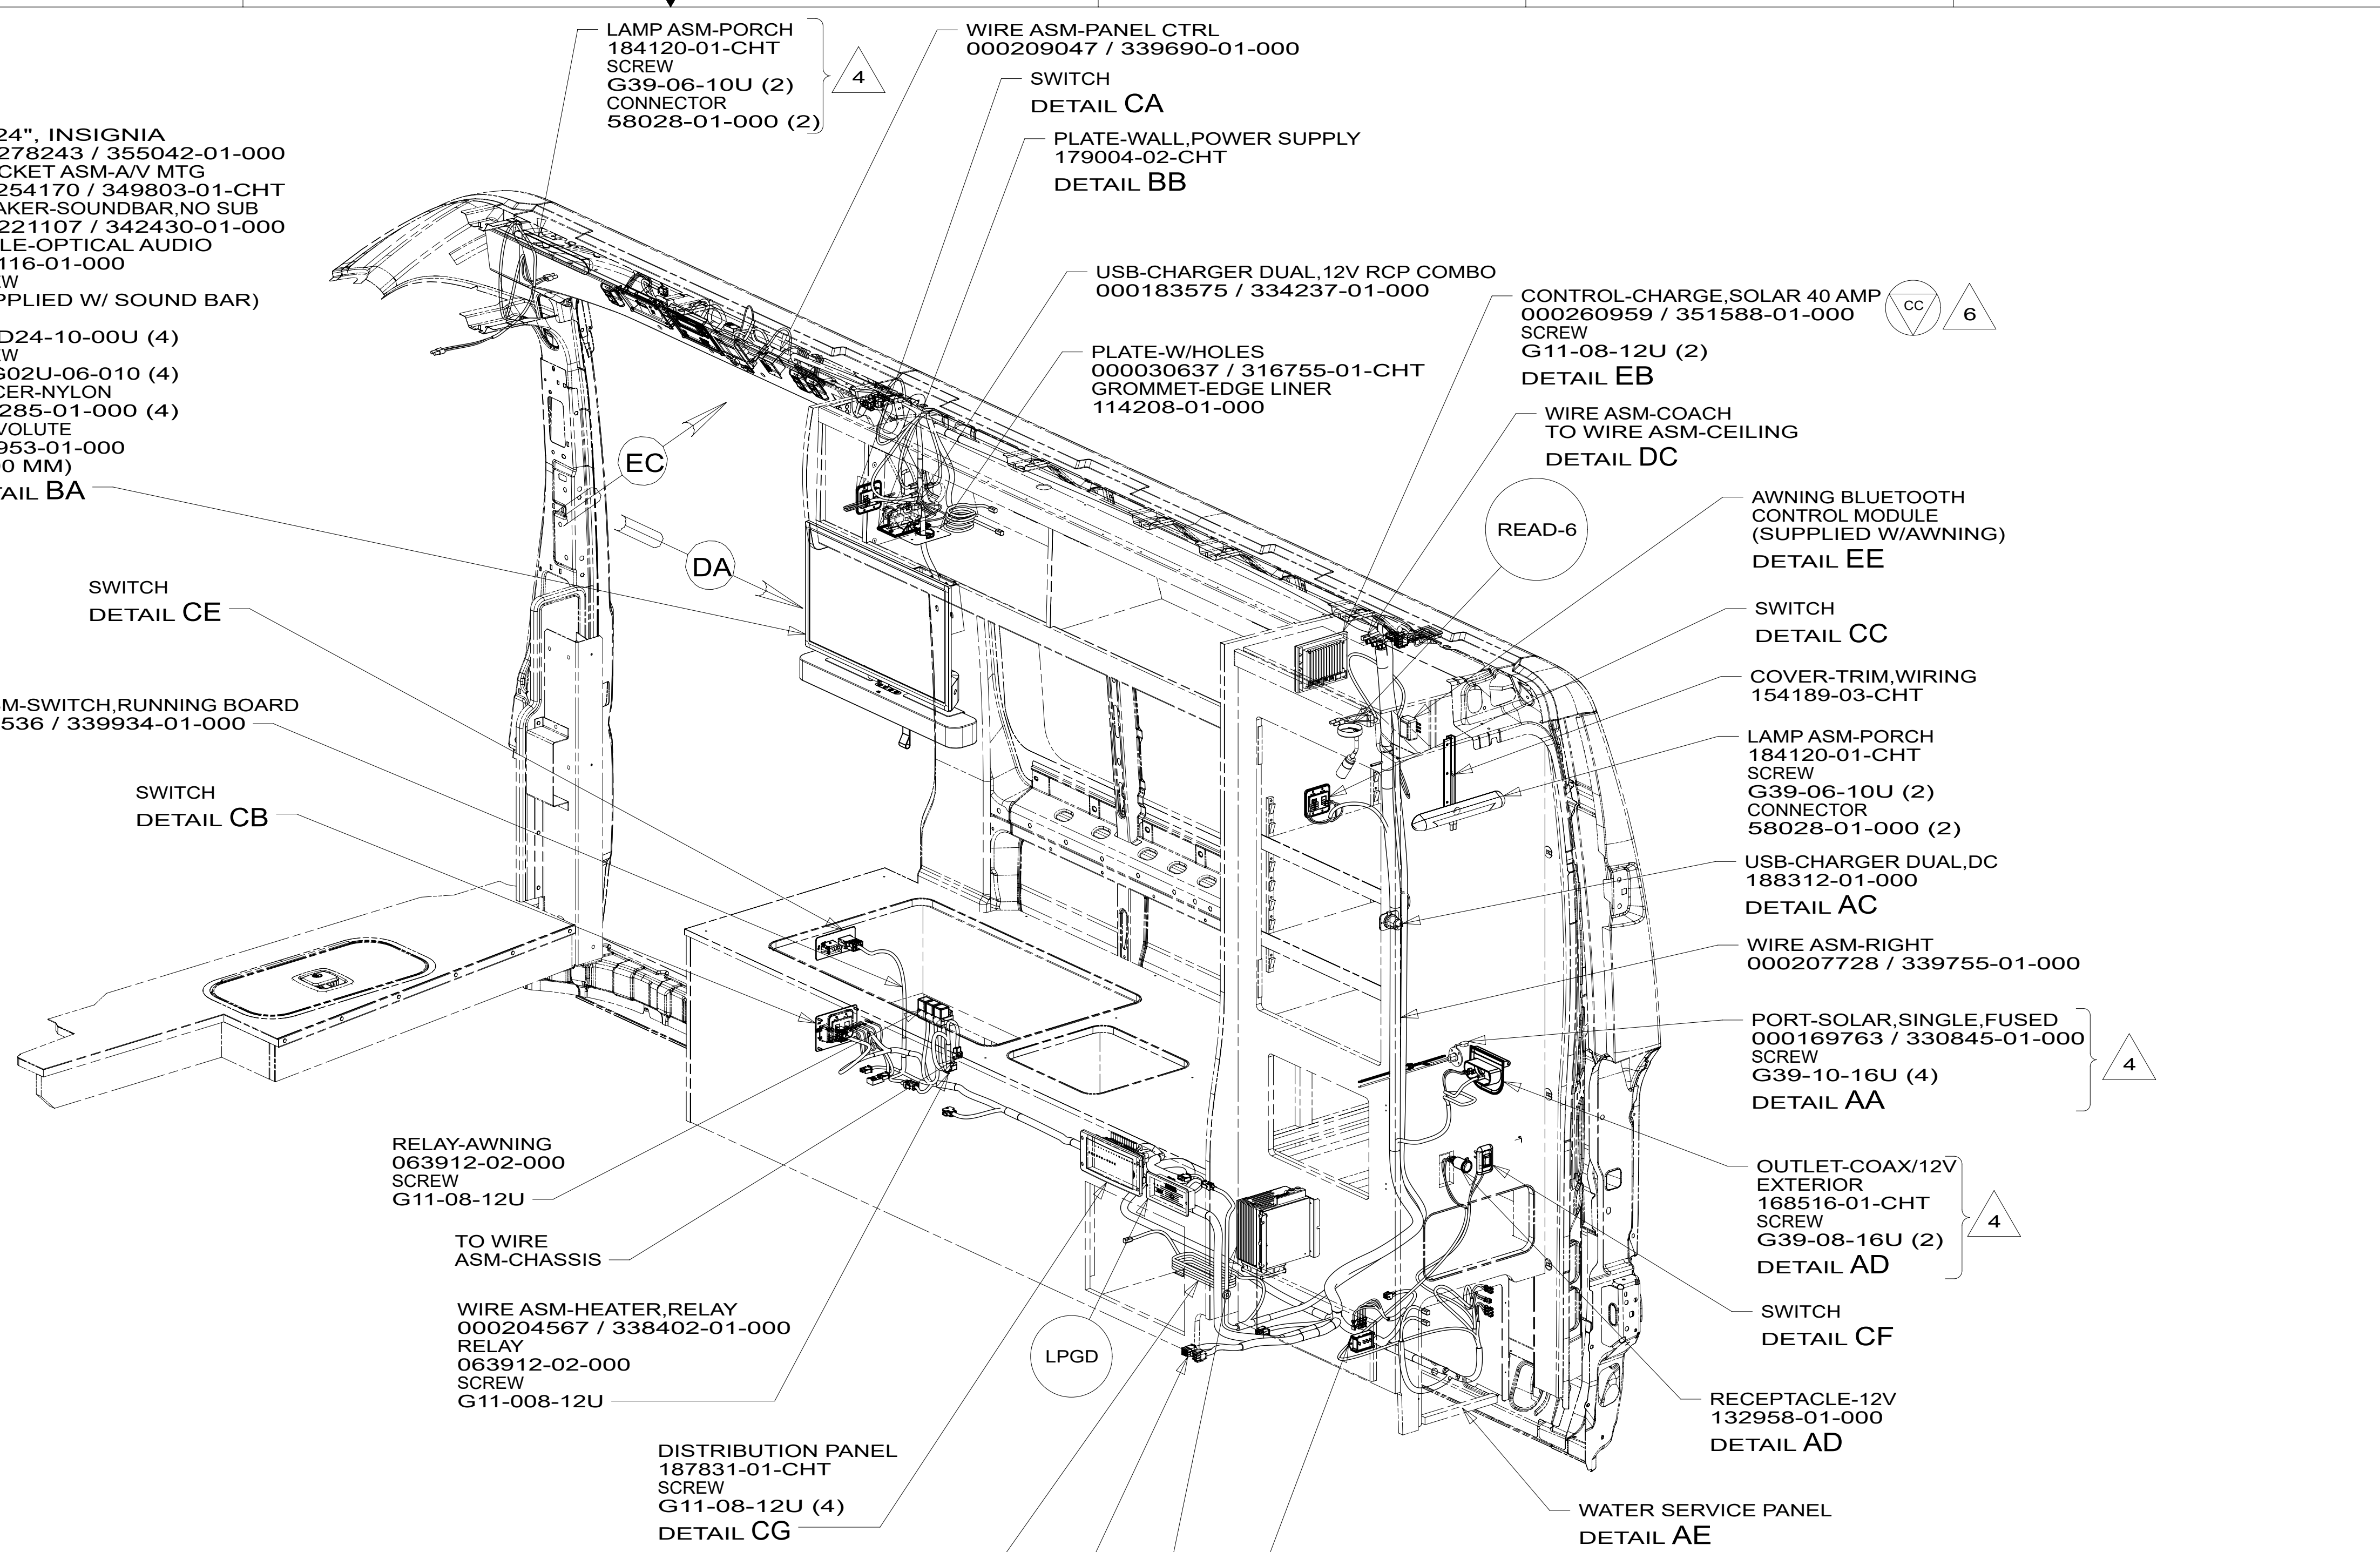

- 6 SEE COMPONENT DRAWING FOR TORQUE SPECIFICATIONS.
- 5 SEE WIRE ASM-SOLAR SYSTEM AND WIRE INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 MOUNT ON EXTERIOR SURFACE OF VAN SIDEWALL.
- 3 COVER ALL WIRES AND CABLES WITH CONVOLUTED TUBING. SECURE TO TV BRACKET SO THAT WIRES AND CABLES DO NOT BECOME PINCHED.

2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- 07B RUNNING BOARDS - ALUMINUM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


**WINNEBAGO**  
 COPYRIGHT 2024 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:	MATERIAL:	
UNSPECIFIED TOLERANCES:		
WHOLE DIM (X)	: 3	
ONE-PLACE (X.X)	: 1.5	
TWO-PLACE (X.XX)	: 0.50	
ANGLE	: 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		21 259K
<b>DESCRIPTION:</b>		
<b>WIRING INSTL-BODY,12V</b>		
SHEET:	ITEM/PART NO:	REV:
1 OF 5	000207694 / 34131701000	

INDICATES A CRITICAL CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
INDICATES A SIGNIFICANT CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.
INDICATES A KEY CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X  
 FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

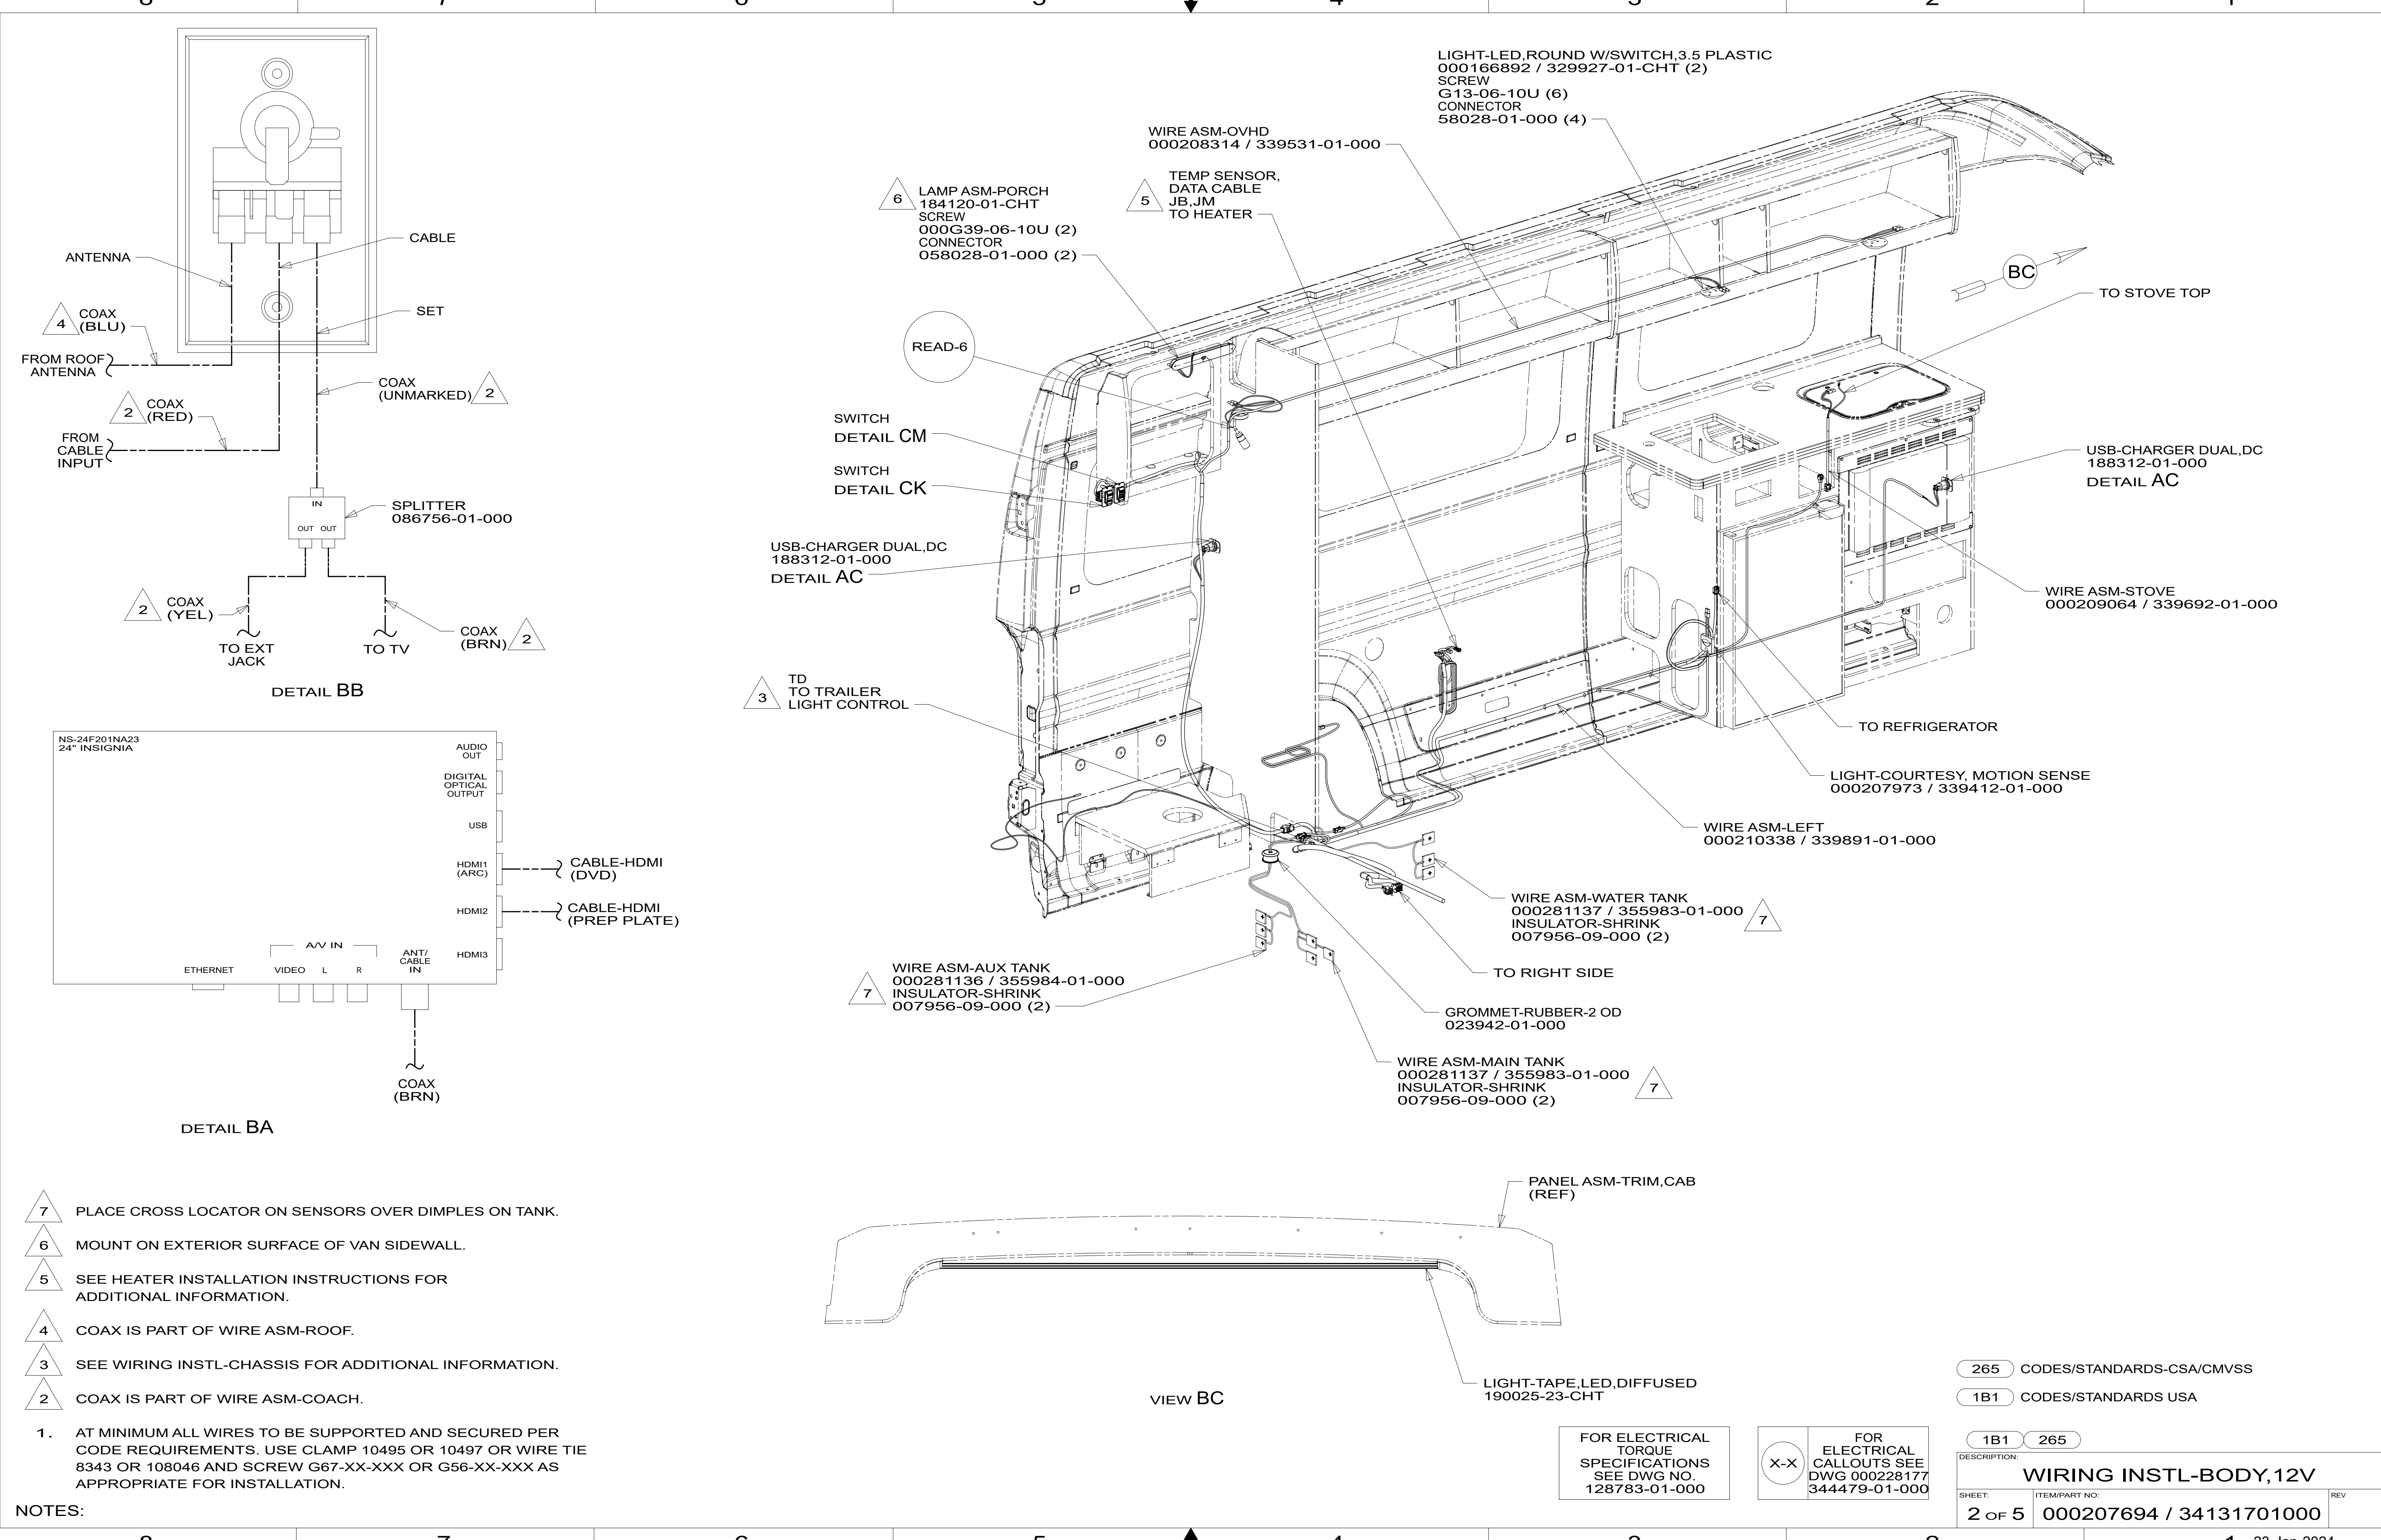

- 7 PLACE CROSS LOCATOR ON SENSORS OVER DIMPLES ON TANK.
- 6 MOUNT ON EXTERIOR SURFACE OF VAN SIDEWALL.
- 5 SEE HEATER INSTALLATION INSTRUCTIONS FOR ADDITIONAL INFORMATION.
- 4 COAX IS PART OF WIRE ASM-ROOF.
- 3 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 2 COAX IS PART OF WIRE ASM-COACH.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000


265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
<b>WIRING INSTL-BODY, 12V</b>			
SHEET:	ITEM/PART NO.:	REV	
2 OF 5	000207694 / 34131701000		

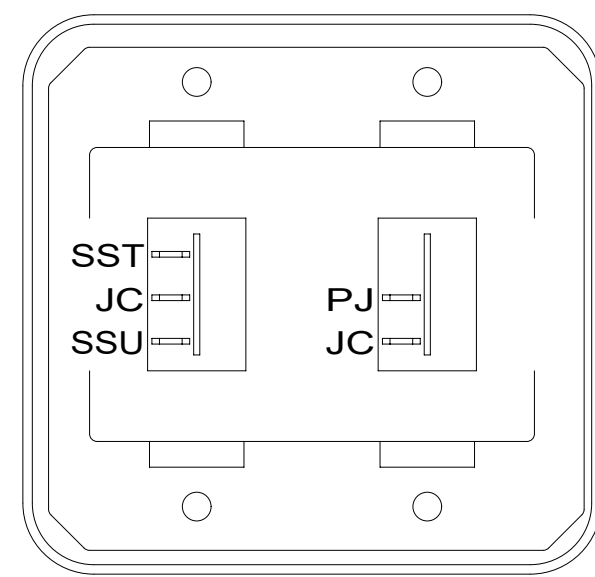

SWITCH-ROCKER  
135740-01-CHT  
135740-02-CHT  
SWITCH-BASE  
135741-02-CHT  
SWITCH-BEZEL  
135742-02-CHT  
SCREW  
G11-08-08U (4)

DETAIL CA

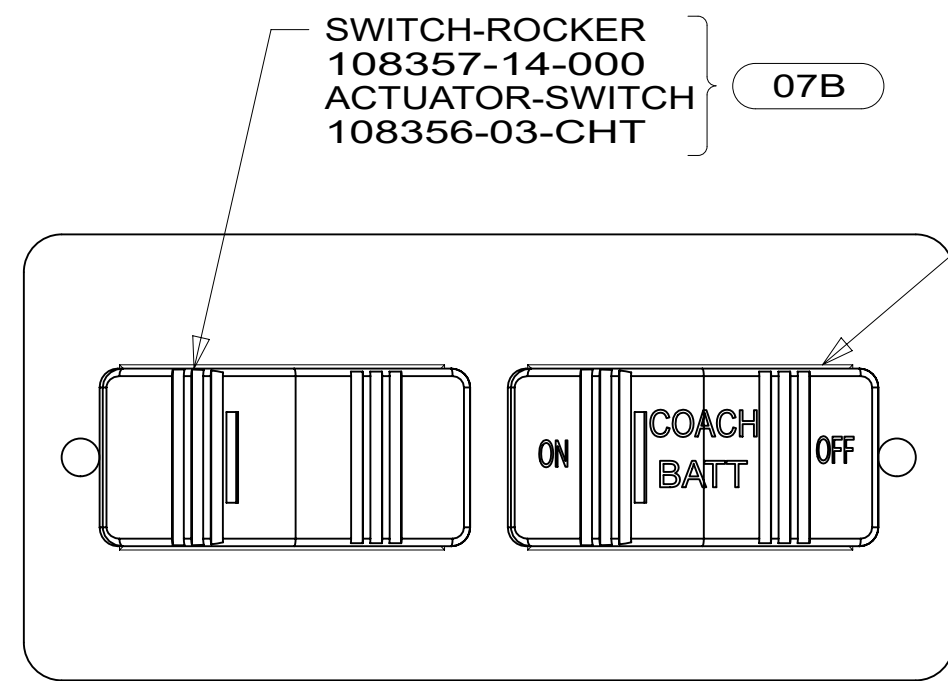


SWITCH-ROCKER  
108357-14-000  
ACTUATOR-SWITCH  
108356-03-CHT

SWITCH-ROCKER  
108357-18-000  
ACTUATOR-SWITCH  
108356-19-CHT  
WIRE ASM-THERM  
186796-01-000


PLATE-SWITCH  
164352-06-CHT  
SCREW  
G11-06-10U (2)

DETAIL CE

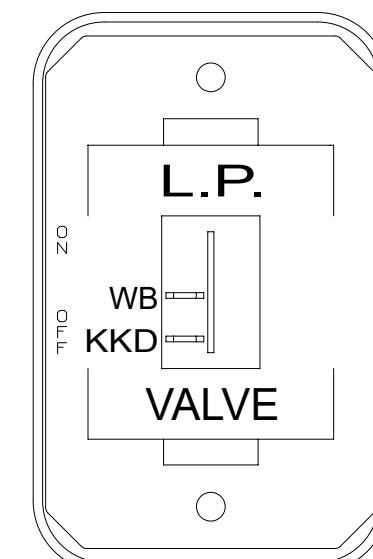


SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-59-CHT  
SCREW  
G11-08-08U (2)

DETAIL CH

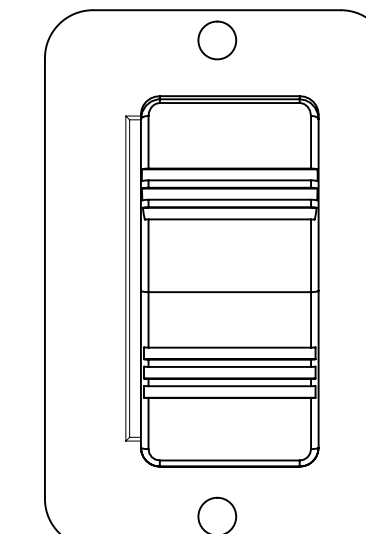

SWITCH-ROCKER  
108357-01-000  
ACTUATOR-SWITCH  
108356-01-CHT  
PLATE-SWITCH  
144363-02-CHT  
SCREW  
G11-06-10U (4)

DETAIL CK

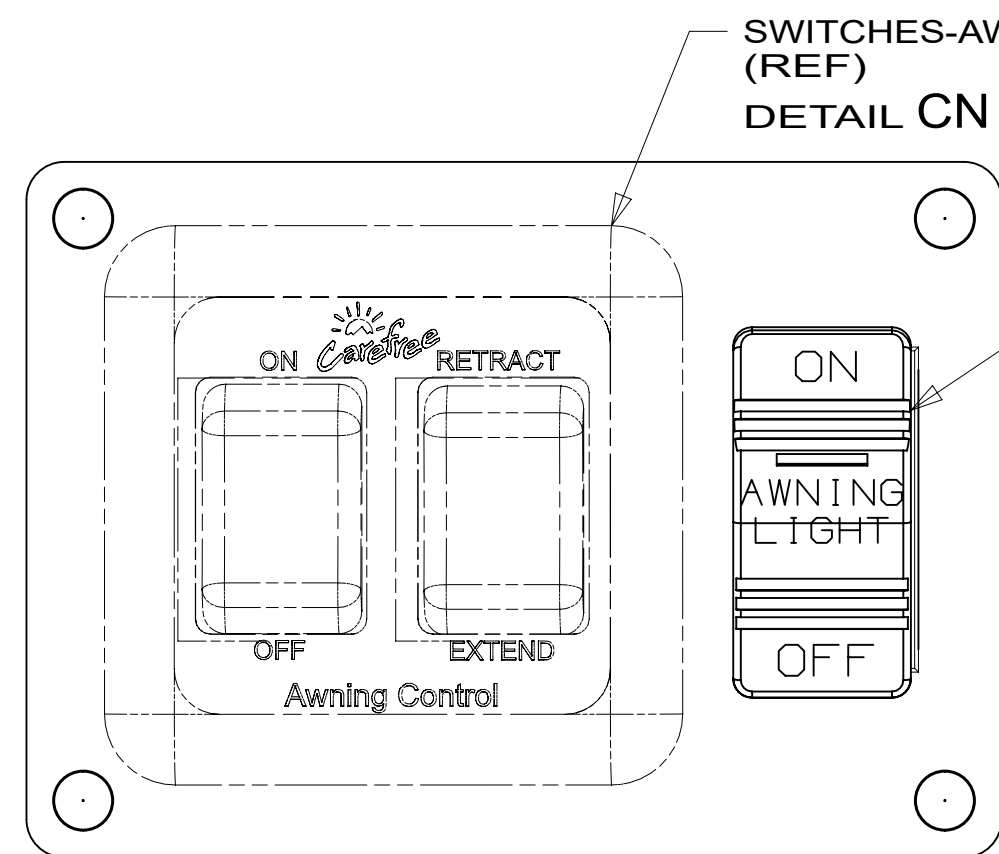


SWITCHES-AWNING  
(REF)  
DETAIL CN

SWITCH-ROCKER  
108357-14-000  
ACTUATOR-SWITCH  
108356-28-CHT


PLATE-SWITCH  
000269615 / 353478-01-CHT  
SCREW  
G11-06-10U (4)

DETAIL CB

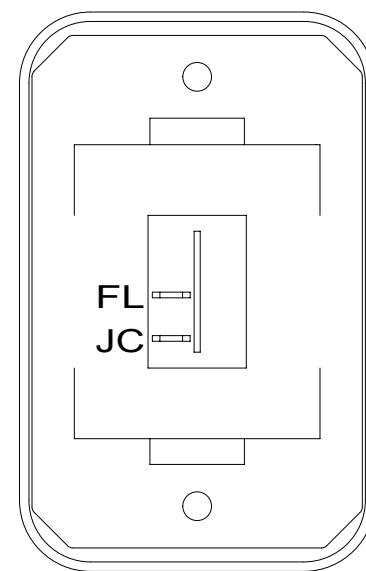


SWITCH-ROCKER  
135740-01-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

DETAIL CF

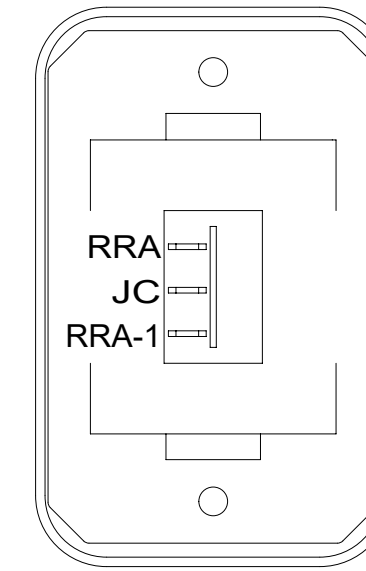


SWITCH-ROCKER  
135740-04-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)  
WIRE ASM-RESISTOR  
140195-01-000

DETAIL CJ

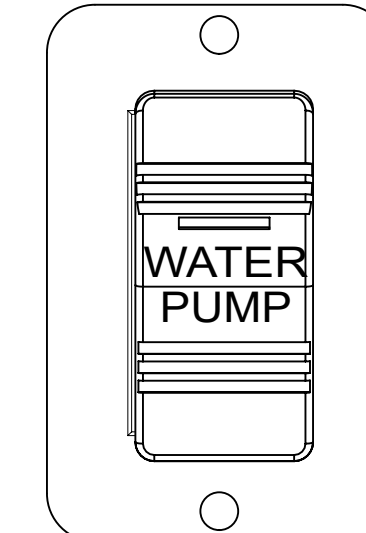


SWITCH-ROCKER  
108357-21-000  
ACTUATOR-SWITCH  
108356-23-CHT  
PLATE-SWITCH  
144363-02-CHT  
SCREW  
G11-06-10U (2)

DETAIL CM

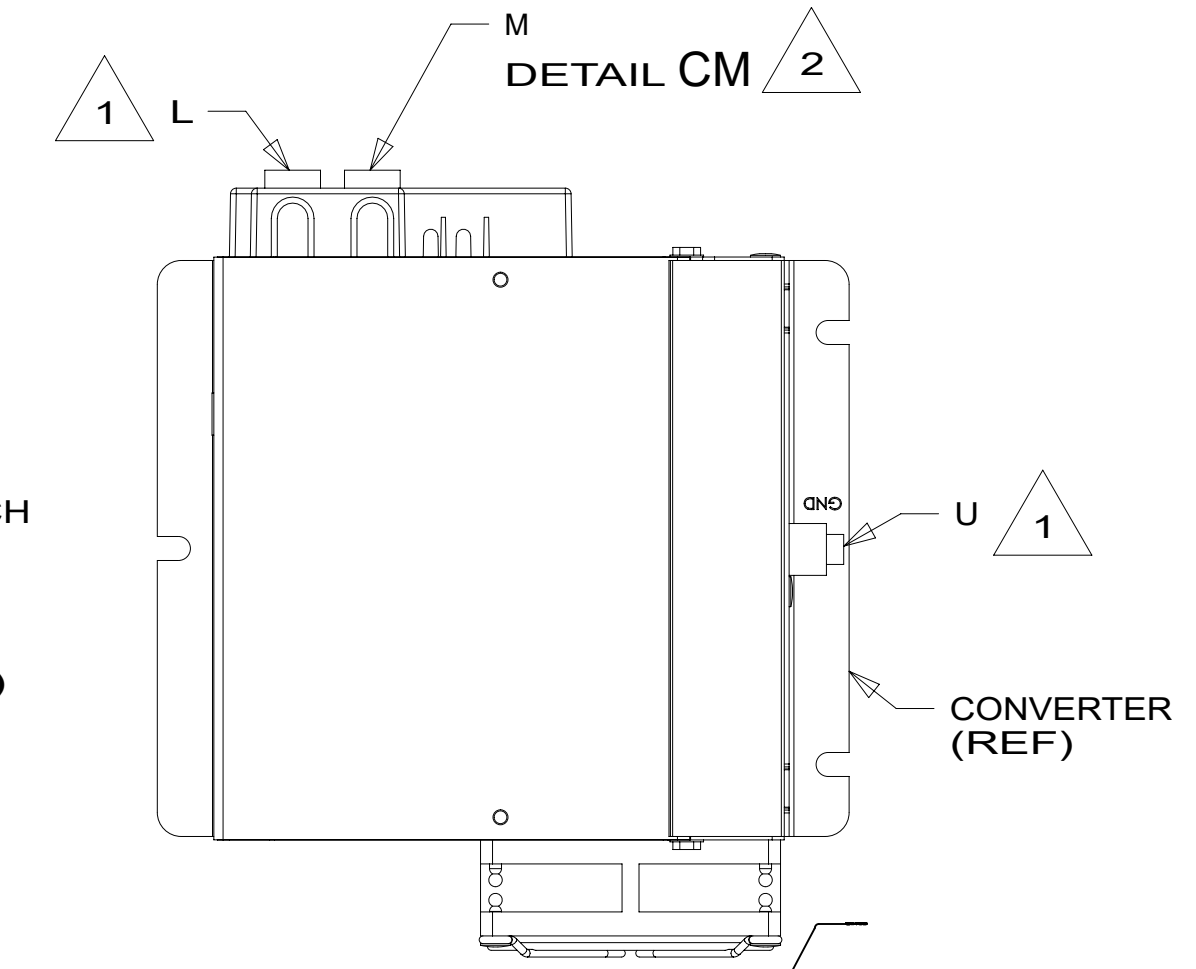


DETAIL CL

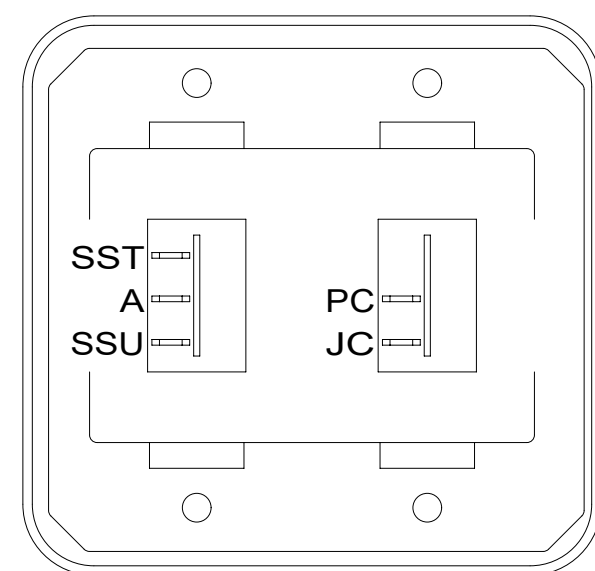

SWITCH-ROCKER  
135740-01-CHT  
135740-02-CHT  
SWITCH-BASE  
135741-02-CHT  
SWITCH-BEZEL  
135742-02-CHT  
SCREW  
G11-08-08U (4)

DETAIL CC

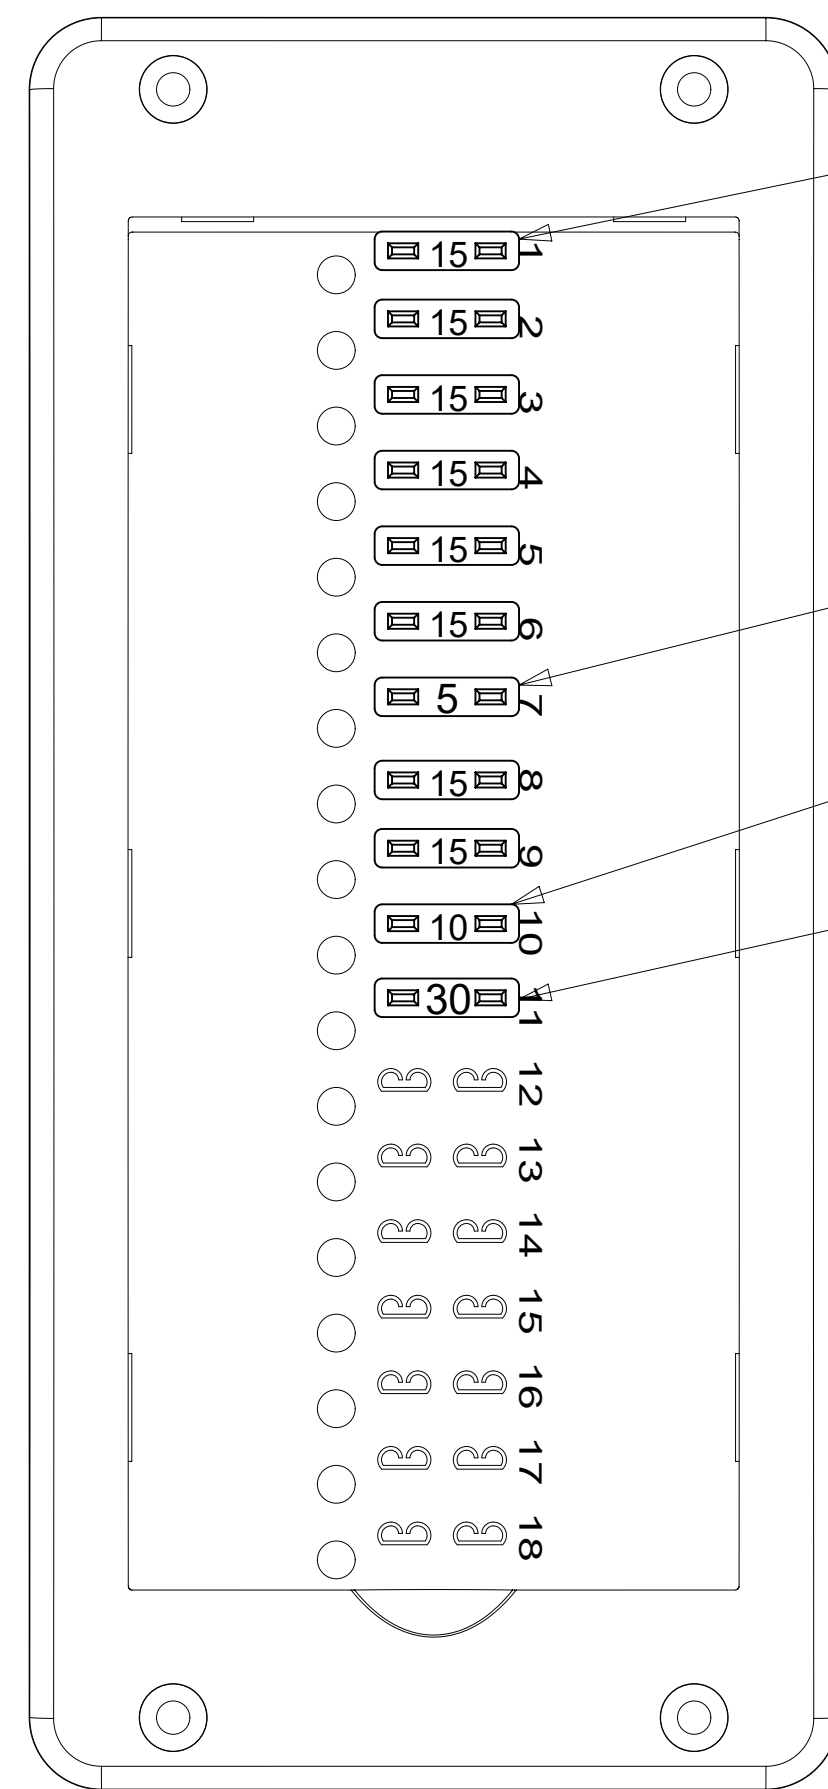


FUSE-15 AMP  
062901-05-000 (8)

FUSE-5 AMP  
062901-02-000

FUSE-10 AMP  
062901-04-000

FUSE-30 AMP  
062901-08-000

DETAIL CG  
(COVER REMOVED)

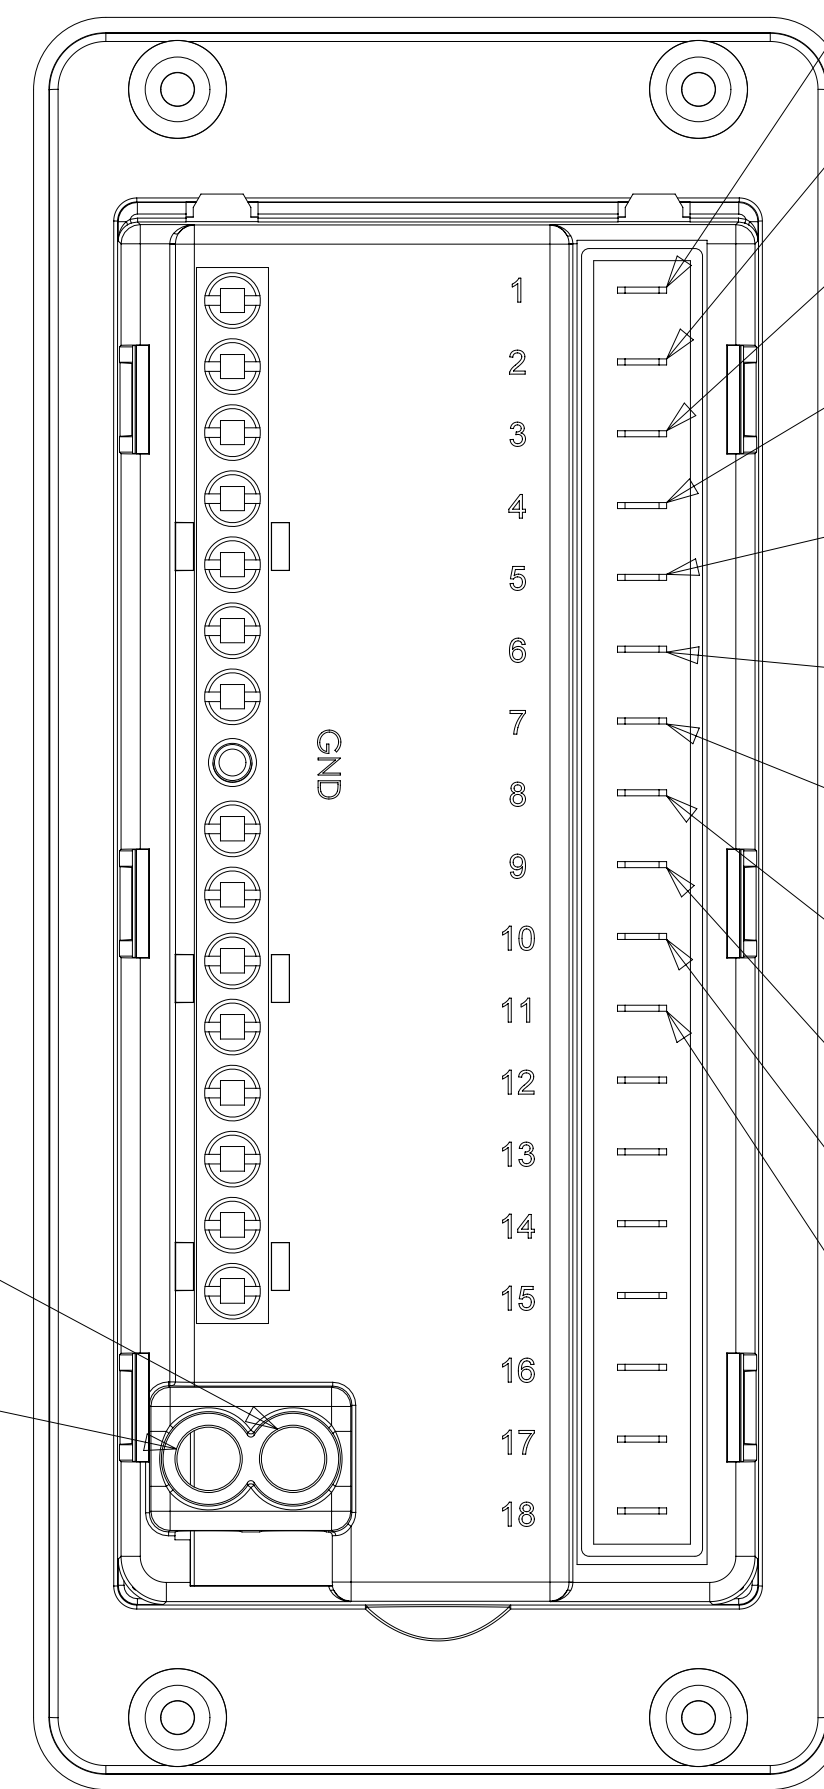

JC  
14 Y  
(LIGHTS)

JD  
14 Y  
(12V RCP)

JE  
14 Y  
(USB CHARGER)

JF  
14 Y  
(MONITOR PANEL)

JG  
14 Y  
(VENT)

NM  
12 Y  
(AWNING)

WB  
16 Y  
(LP DETECTOR)


JA  
12 Y  
(WATER PUMP)

ET  
10 Y  
(REFRIG)

JB  
10 Y  
(HEATER)


FFZ  
10 Y  
(TANK HTR)

DETAIL CG  
(BACK SIDE)

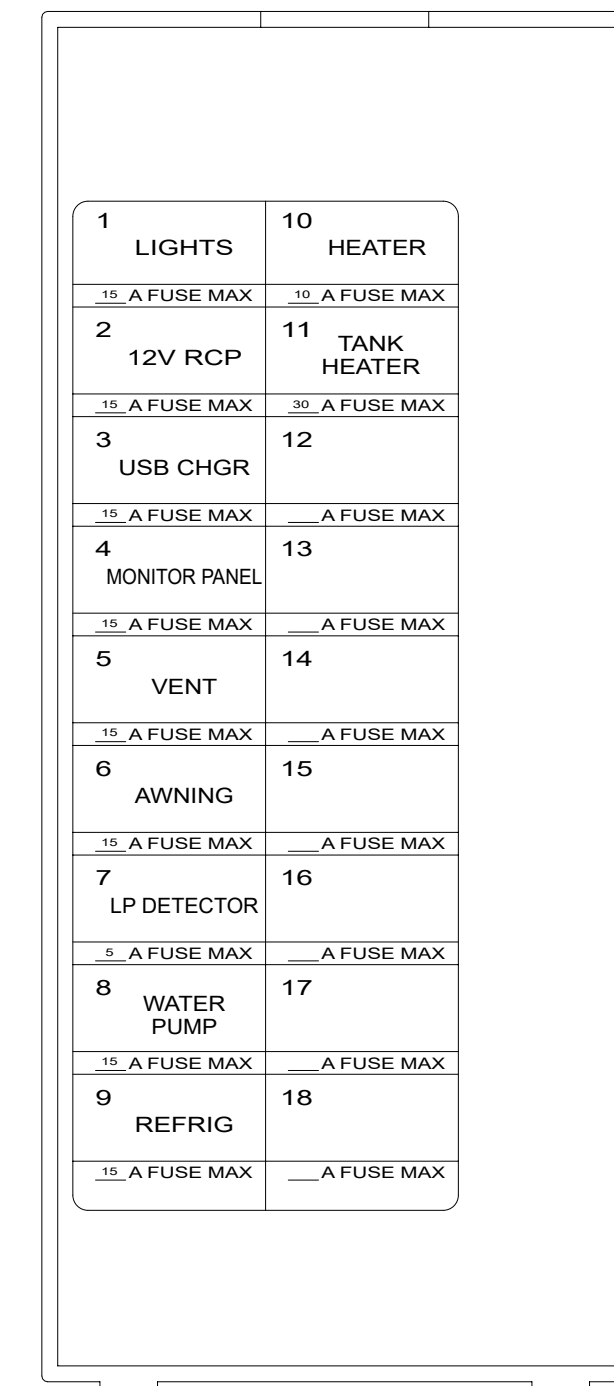

1	LIGHTS	10	HEATER
2	12V RCP	11	TANK HEATER
3	USB CHGR	12	
4	MONITOR PANEL	13	
5	VENT	14	
6	AWNING	15	
7	LP DETECTOR	16	
8	WATER PUMP	17	
9	REFRIG	18	


DETAIL CG  
(BACK SIDE  
OF COVER)

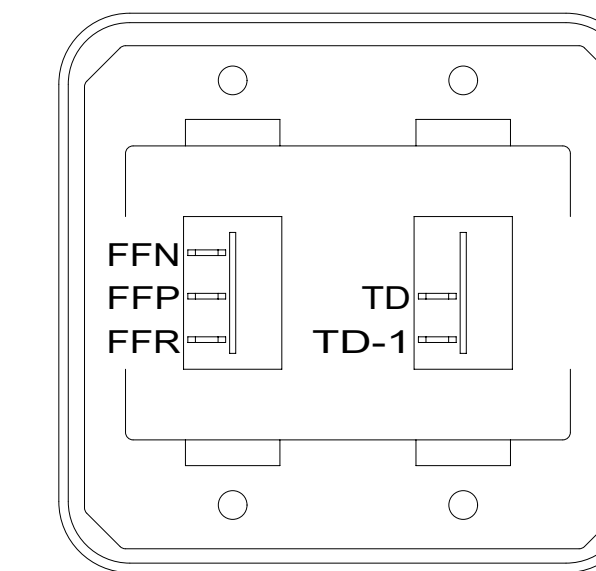

DETAIL CN

HOLDING TANK HEATER  
TURN OFF When Not In Use  
SEE OPERATORS MANUAL

LABEL-SWITCH  
134563-01-CHT

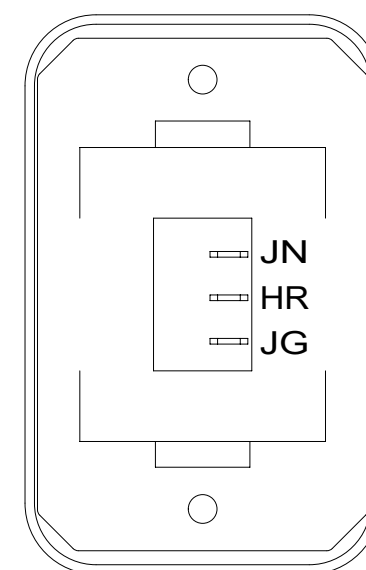

SWITCH-BLANK  
138253-01-CHT  
SWITCH-ROCKER  
135740-06-CHT  
SWITCH-BASE  
135741-01-CHT  
SWITCH-BEZEL  
135742-01-CHT  
SCREW  
G11-08-08U (2)

DETAIL CD

1JD DRAINAGE SYSTEM-HEATED-W/O

07B RUNNING BOARDS - ALUMINUM

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

2 CIRCUIT FROM WIRE ASM-COACH.  
1 CIRCUIT FROM WIRE ASM-CHASSIS.

NOTES:

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR  
ELECTRICAL  
CALLOUTS SEE  
DWG 000228177  
344479-01-000

1B1 265

DESCRIPTION:  
**WIRING INSTL-BODY, 12V**

SHEET: 3 OF 5 ITEM/PART NO: 000207694 / 34131701000 REV

1 23-Jan-2024



- PANEL-SOLAR 48 WATT, ATP 000282882 / 356486-01-000
- BOLT 000C12-04-08U (8)
- LOCK WASHER 000E11-04-00U (8)
- NUT-T 000224221 / 343407-01-CHT (8)
- BRACKET-MOUNTING,SOLAR PANEL,ROOF RACK 000031343 / 316954-01-CHT (4)
- BOLT 000C27-05-16U (4)
- WASHER 058716-07-000 (4)
- NUT 000D39-05-00U (4)
- BRACKET 000223989 / 343383-01-CHT (4)
- SCREW 000G39-10-10U (12)

WIRE ASM-ROOF  
000210400 / 339909-01-000  
DETAIL DC

TO AWNING  
DETAIL ED

GROMMET  
114208-04-000

PORT-SOLAR, DOUBLE, ATP  
000282789 / 356474-01-000  
SPACER 000041695 / 319875-01-CHT (2)

SCREW G39-10-16U (4)

GROMMET-RUBBER-2 OD 023942-01-000

DETAIL DD

TO REAR PORCH LIGHT

CLAMP 10495-02-000 (4)

ANTENNA-TV, OMNIDIRECTIONAL  
000171487 / 331386-01-CHT

SCREW G39-10-16U (4)

BRACKET-MTG,ANTENNA  
000200070 / 336887-01-CHT

SCREW G39-10-12U (6)

GROMMET-EDGE LINER 114208-04-000 (2)

TO BATH VENT

LIGHT-SHOWER/REFRESH BEZEL  
000239986 / 346294-01-CHT

CONNECTOR 000156211 / 346654-01-000 (2)

CABLE-EXTENSION, SOLAR, 24IN  
000282879 / 356483-01-000

PANEL-SOLAR 190 WATT, ATP  
000282881 / 356485-01-000
- BOLT 000C12-04-08U (8)
- LOCK WASHER 000E11-04-00U (8)
- NUT-T 000224221 / 343407-01-CHT (8)
- BRACKET-MOUNTING,SOLAR PANEL, ROOF RACK 000031343 / 316954-01-CHT (4)
- BOLT 000C27-05-16U (4)
- WASHER 058716-07-000 (4)
- NUT 000D39-05-00U (4)
- BRACKET-MOUNT,SOLAR PANEL 000200492 / 337038-01-CHT (4)
- SCREW 000G39-10-10U (12)

LIGHT-LED,ROUND 3.5 PLASTIC  
000166893 / 329928-01-CHT (4)

SCREW G13-06-10U (12)

CONNECTOR 58028-01-000 (8)

CABLE- EXTENSION SOLAR,10 FOOT  
000282849 / 356473-01-000

TO A/C CONTROL BOX

TO GALLEY VENT

DETAIL EA

TO SERVICE LIGHT

WIRE ASM-CEILING  
000210933 / 340033-01-000


TO EXTERIOR LAMP

CONNECT VENDOR BLACK WIRE TO WINNEBAGO GREEN WIRE.

WIRE ASM-ROOF

CONNECT VENDOR RED WIRE TO WINNEBAGO BLACK WIRE THAT HAS RED TAPE

DETAIL DD

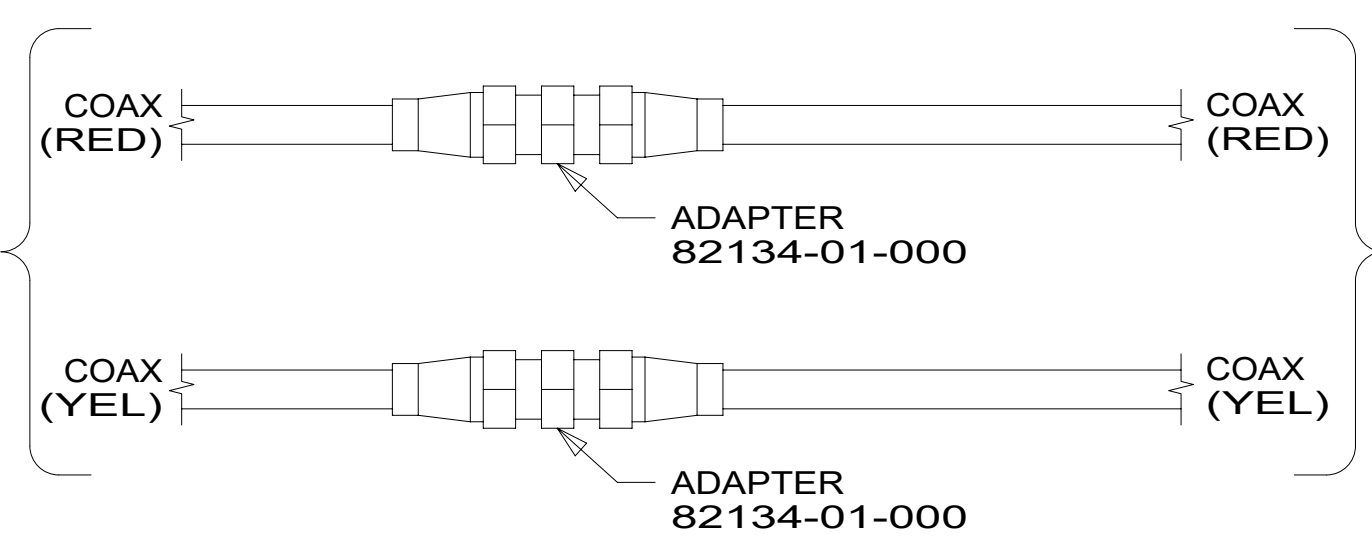

DETAIL DC


BRACKET-TV SWING MOUNT  
179241-02-CHT  
PAD-FELT 3/8  
023320-01-000 (3)  
(ADHERE TO RUBBER BUMPERS ON BRACKET)

NUT-SERT 39715-01-000 (4)


BOLT C26-04-12U (4)

WASHER 000E13-04-00U (6)

SEAL-FOAM TAPE 154585-07-CHT (370 MM)

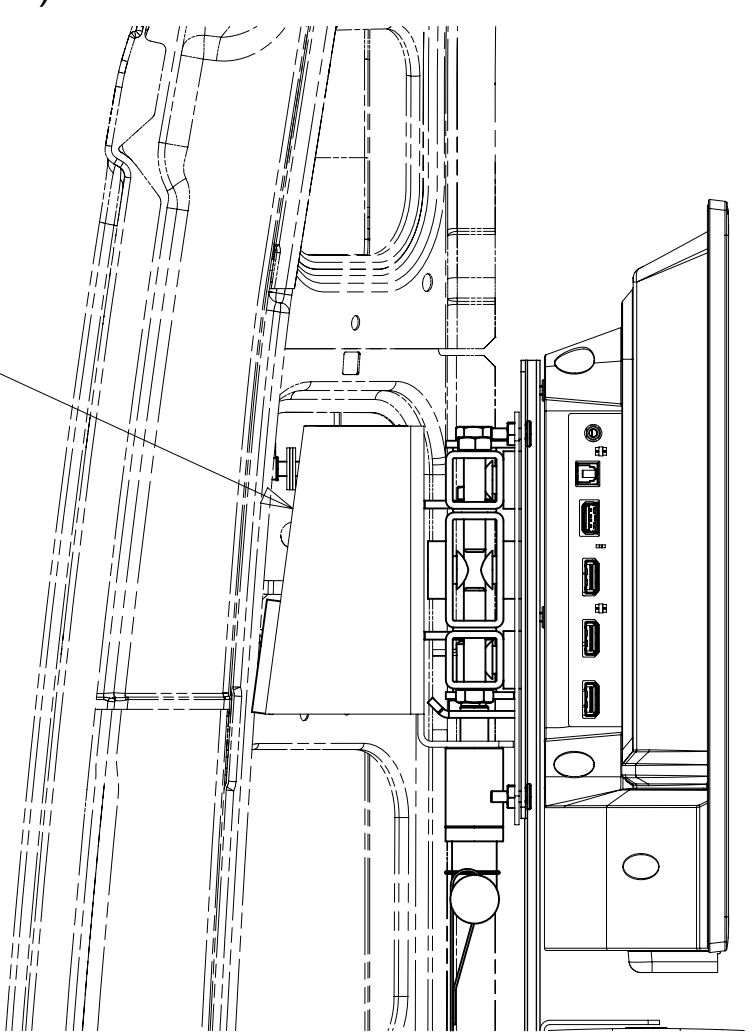

VIEW DA

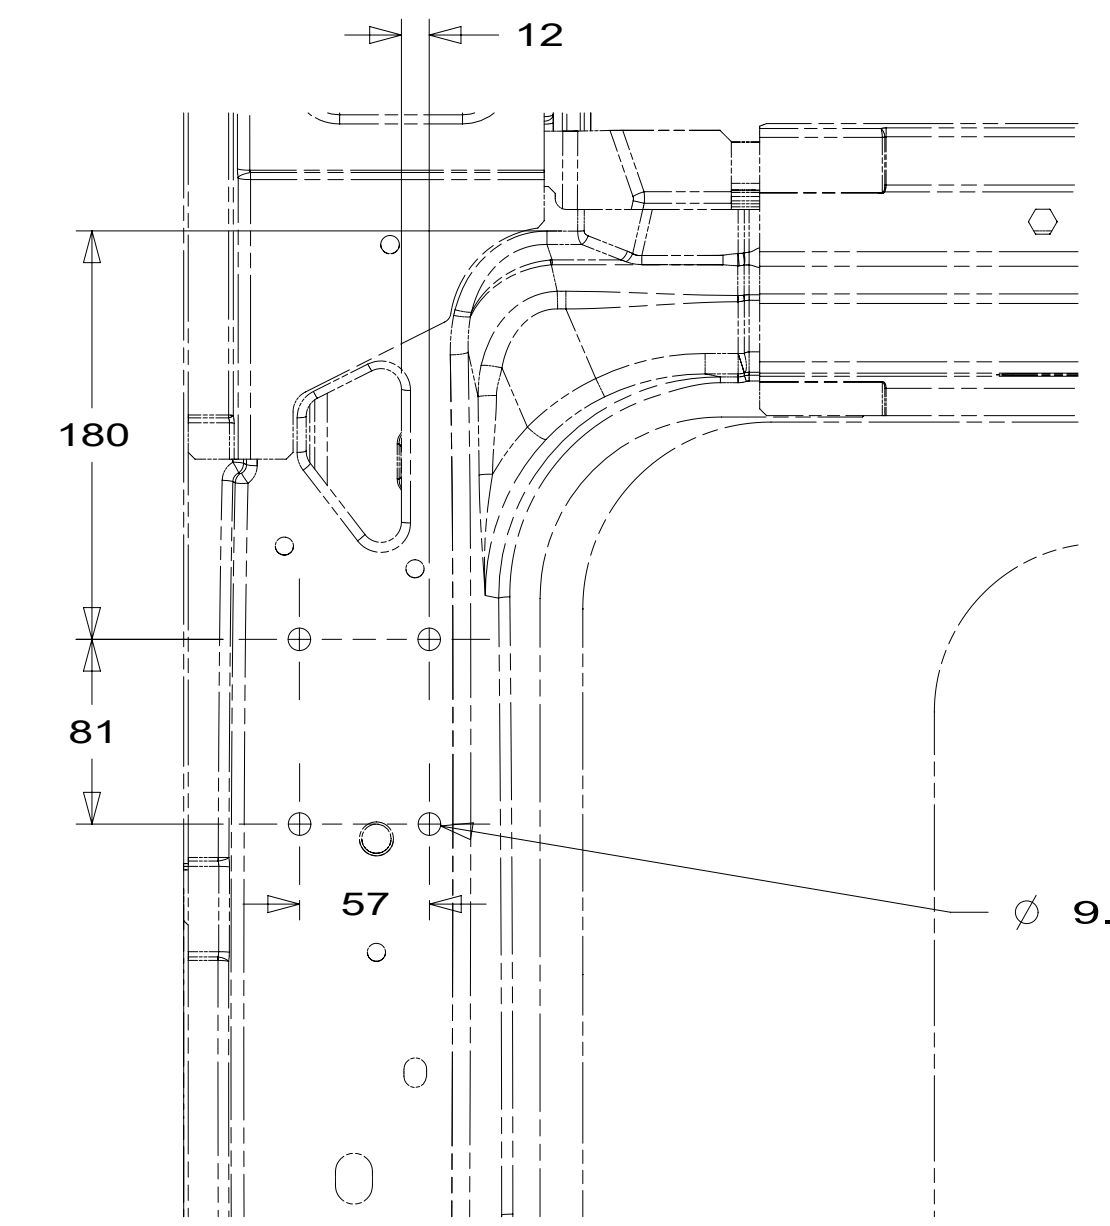

VIEW DB

- 5 ATTACH CLAMPS WHEN MOUNTING A/C PANEL. SEE A/C SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 4 LOCATE HOLES TO MATCH PANEL-REAR,RH.
- 3 MOUNTED ON INTERIOR SURFACE OF ROOF.
- 2 MOUNTED ON EXTERIOR SURFACE OF ROOF.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


- 35W LUGGAGE RACK - WITHOUT
- 35B LUGGAGE RACK
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

DESCRIPTION:	1B1 265	
<b>WIRING INSTL-BODY,12V</b>		
SHEET:	ITEM/PART NO.:	REV:
4 OF 5	000207694 / 34131701000	




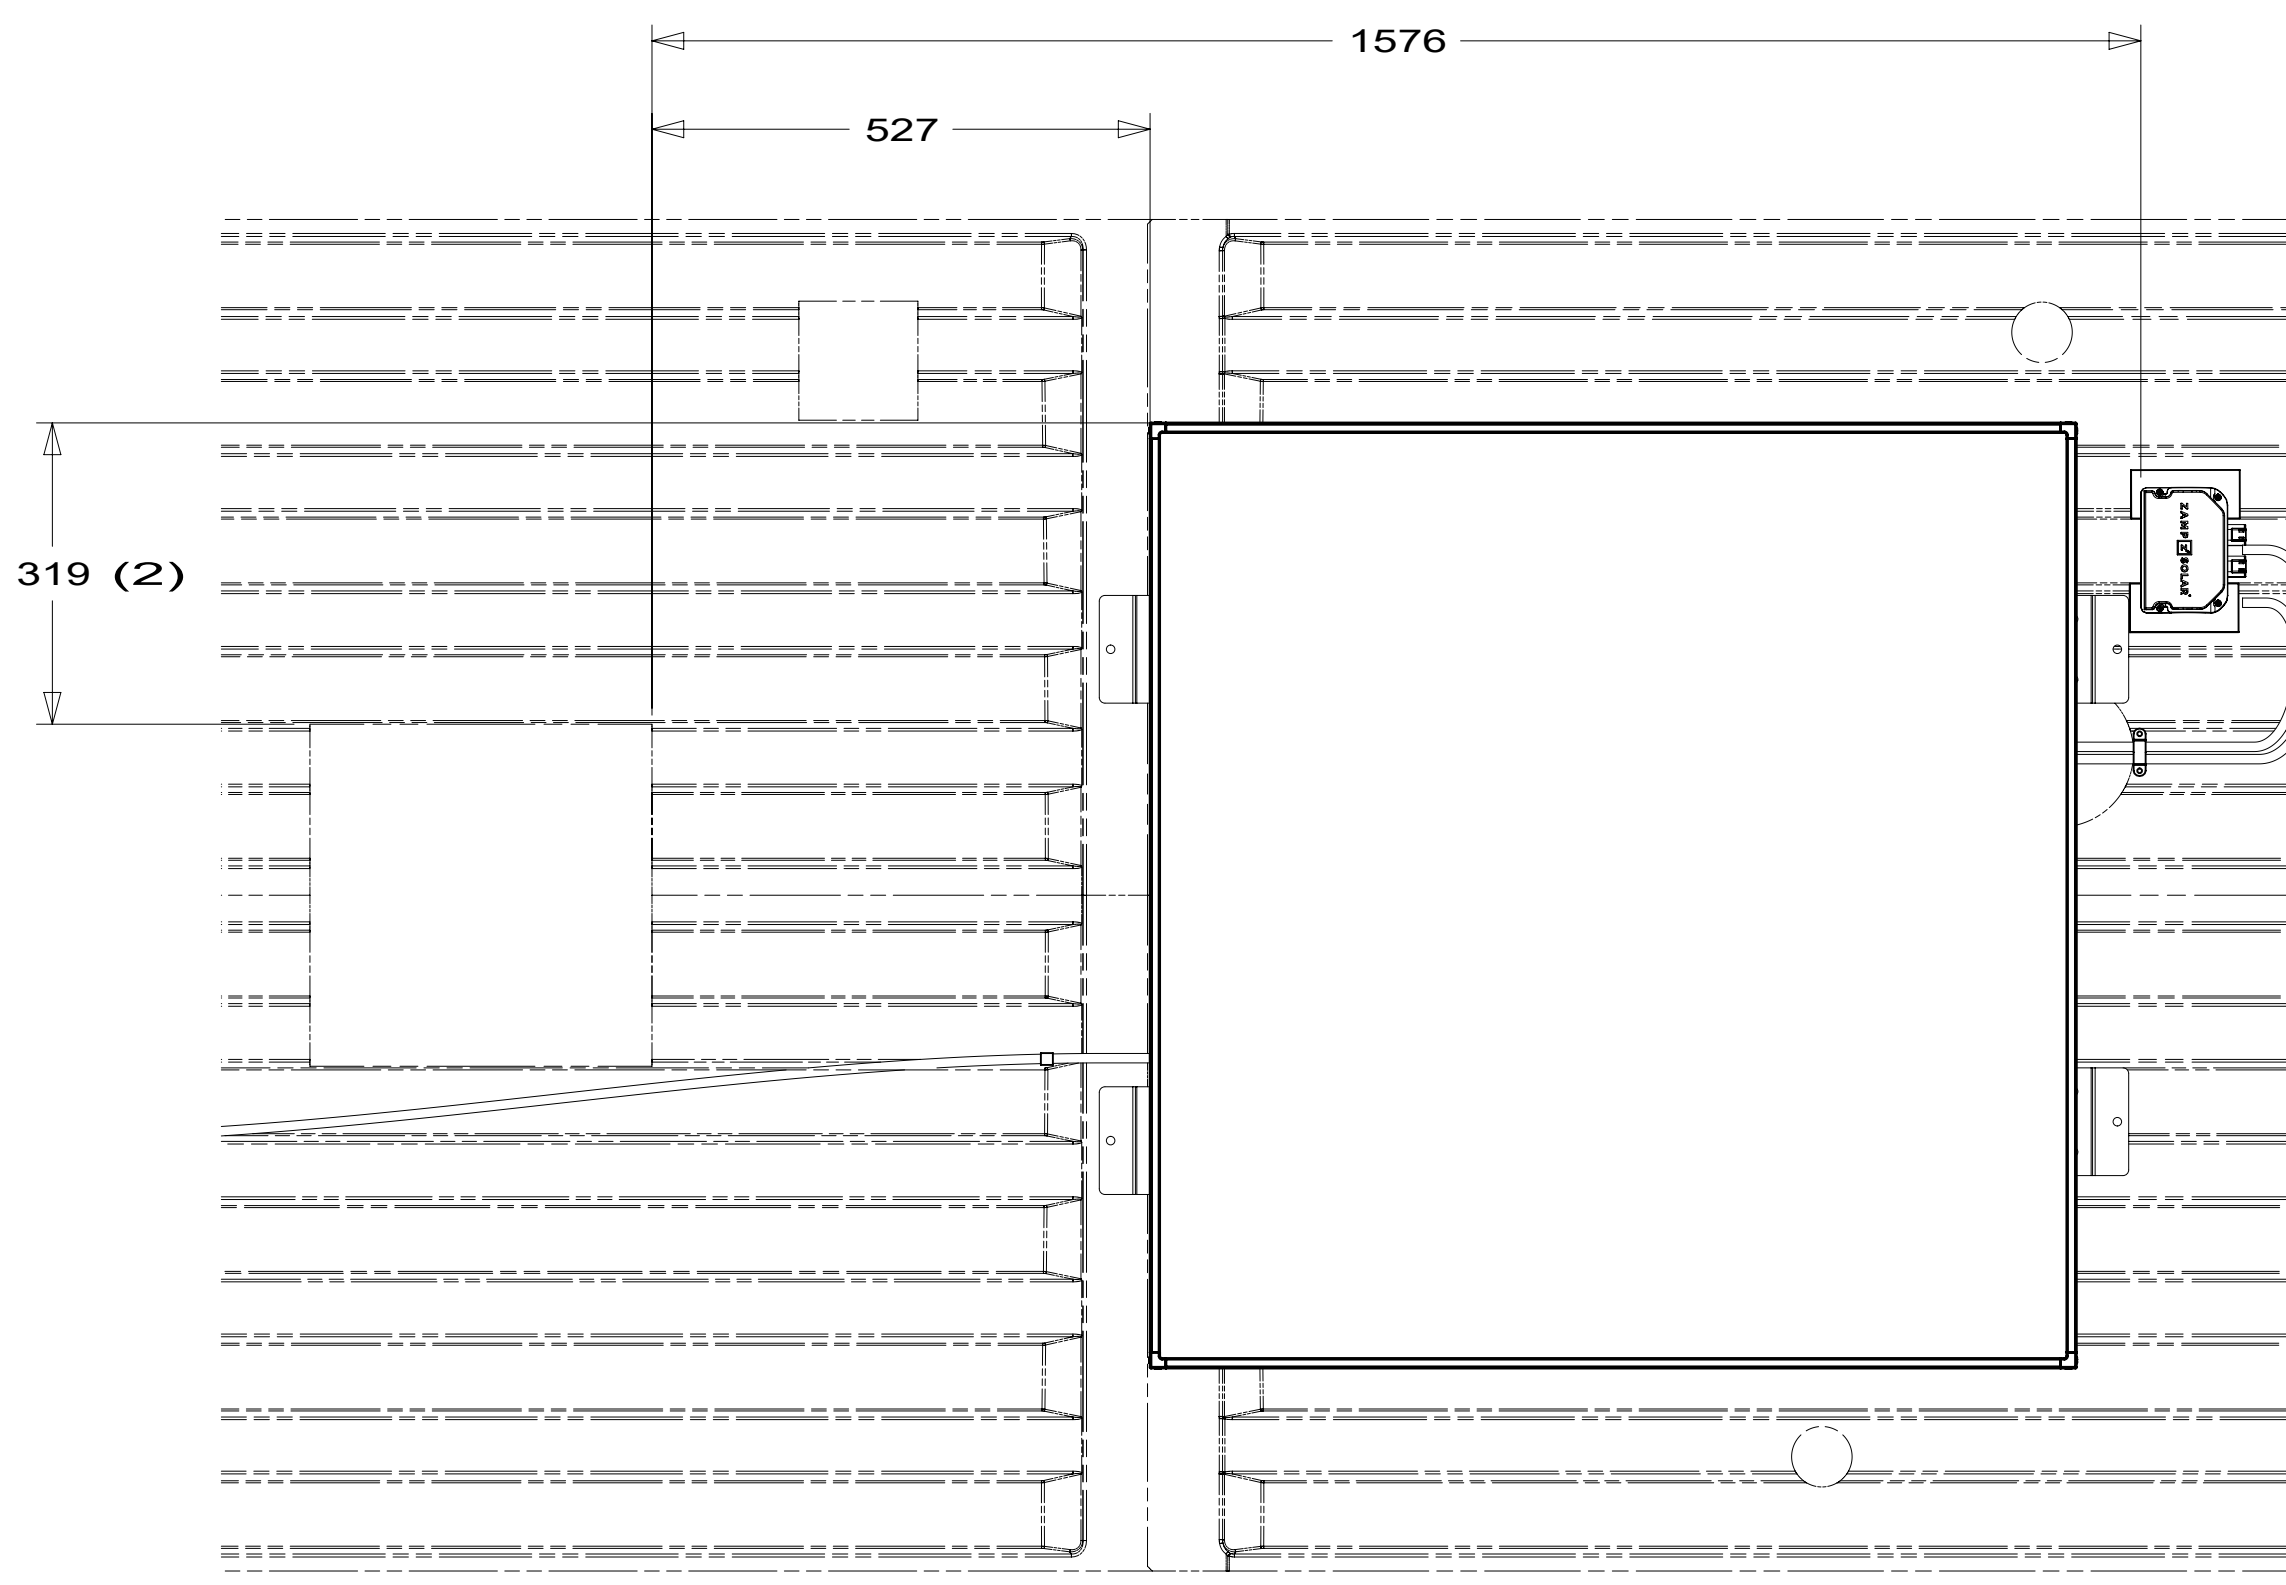


DETAIL EA

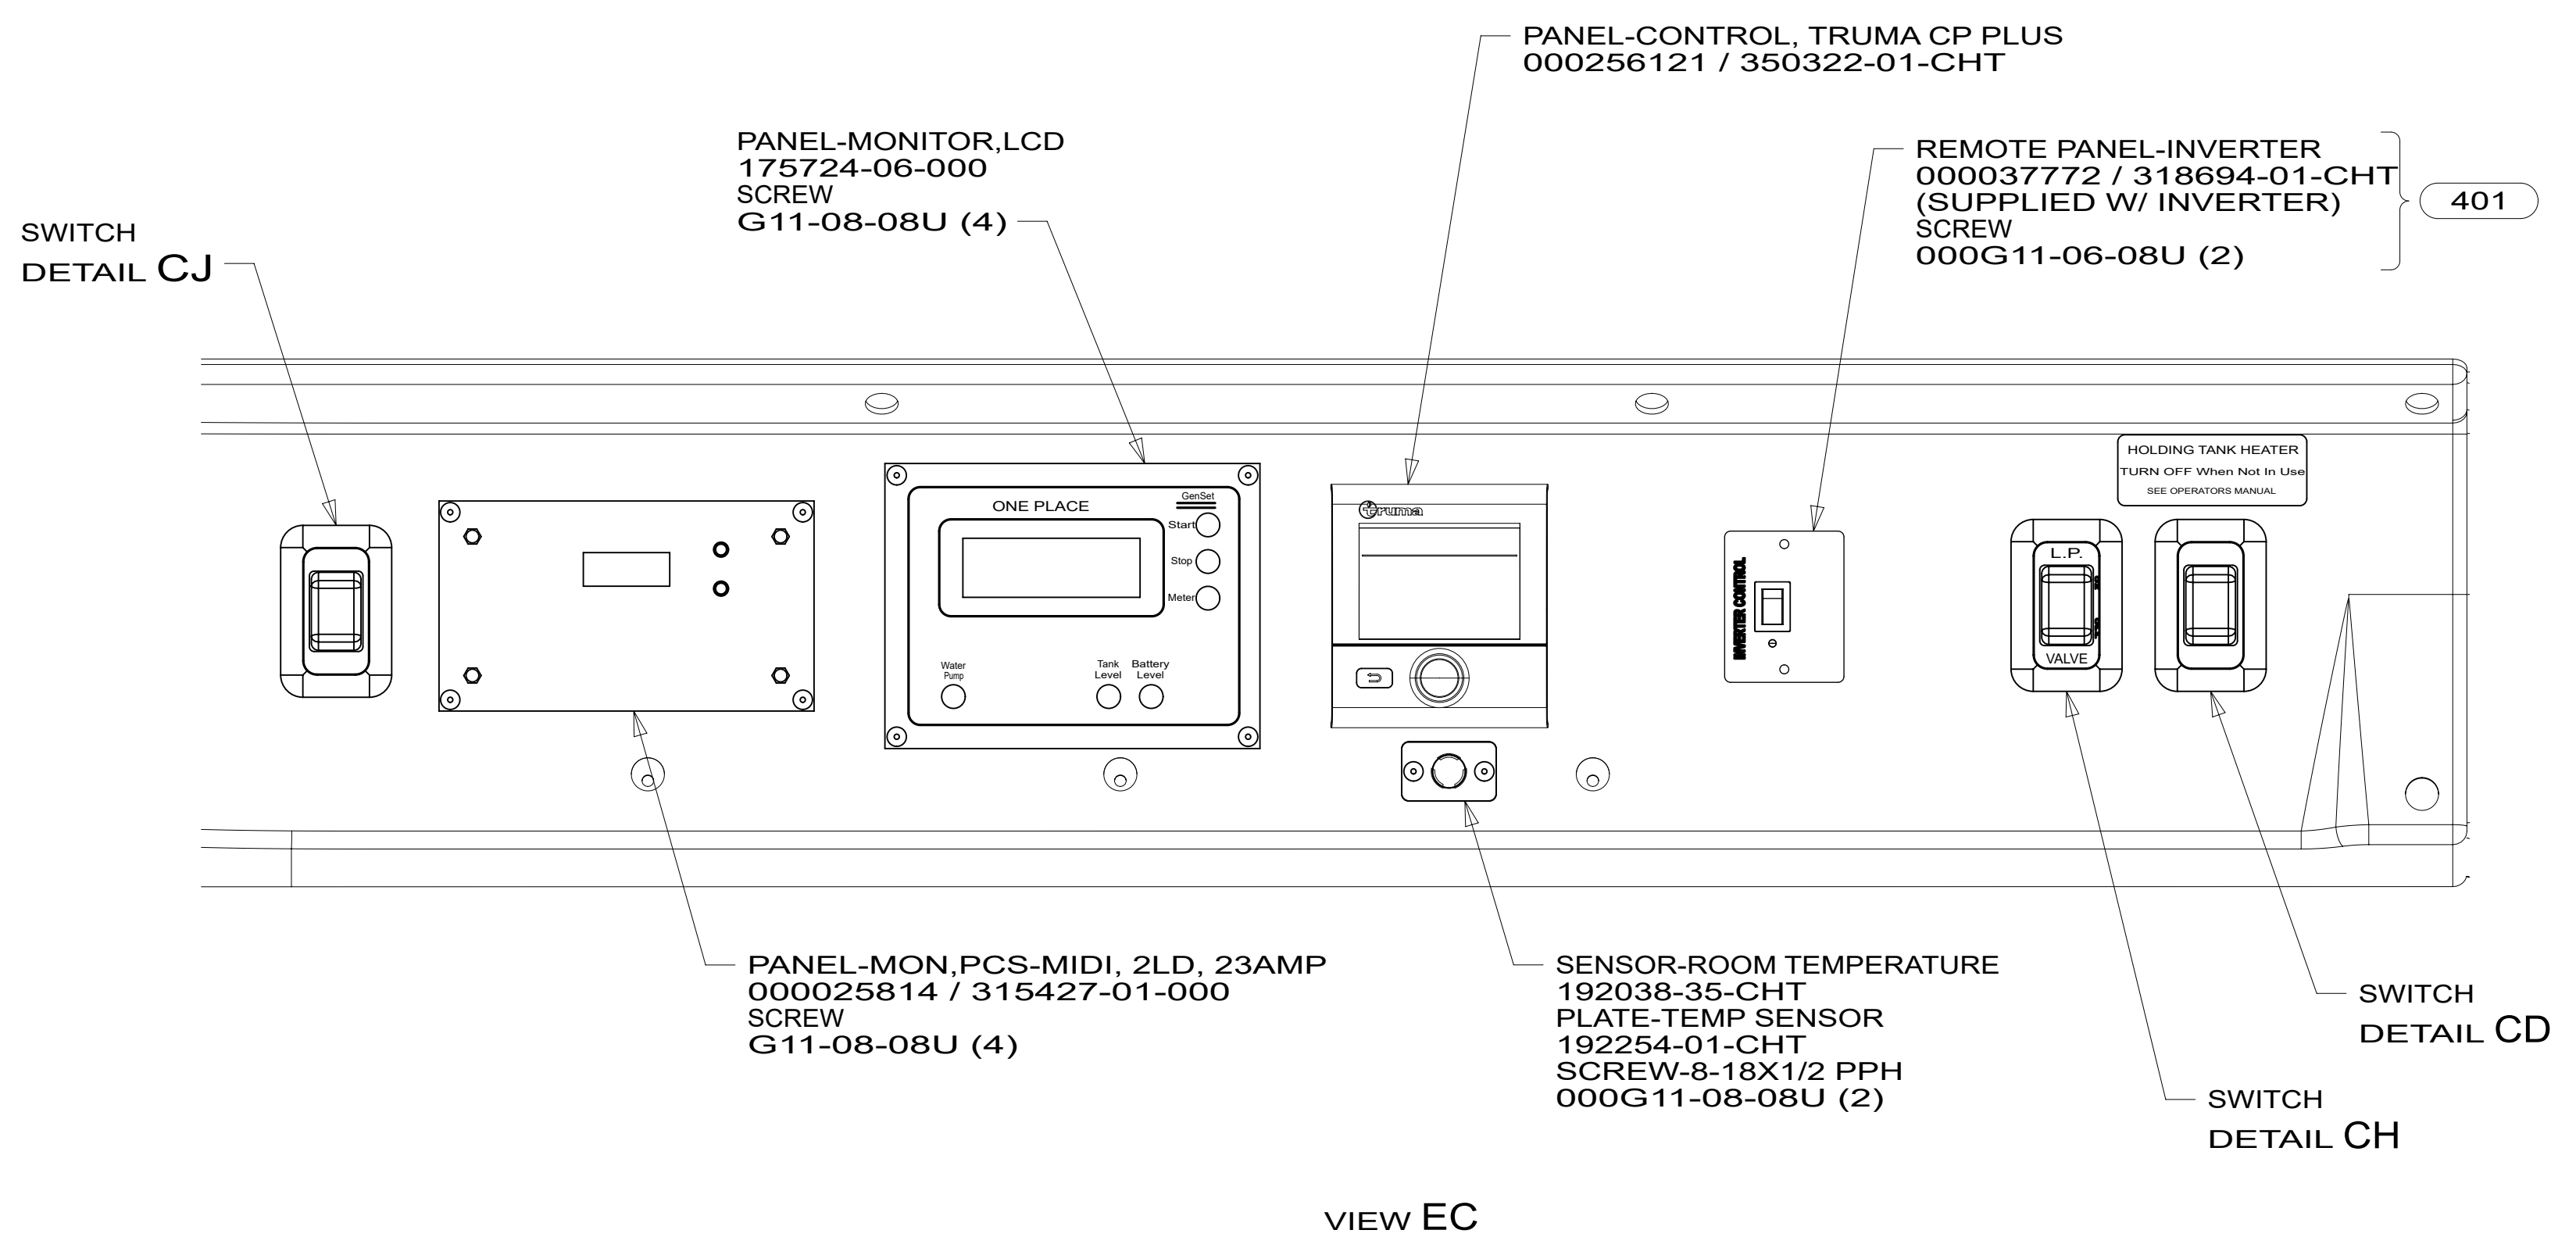


VIEW EC

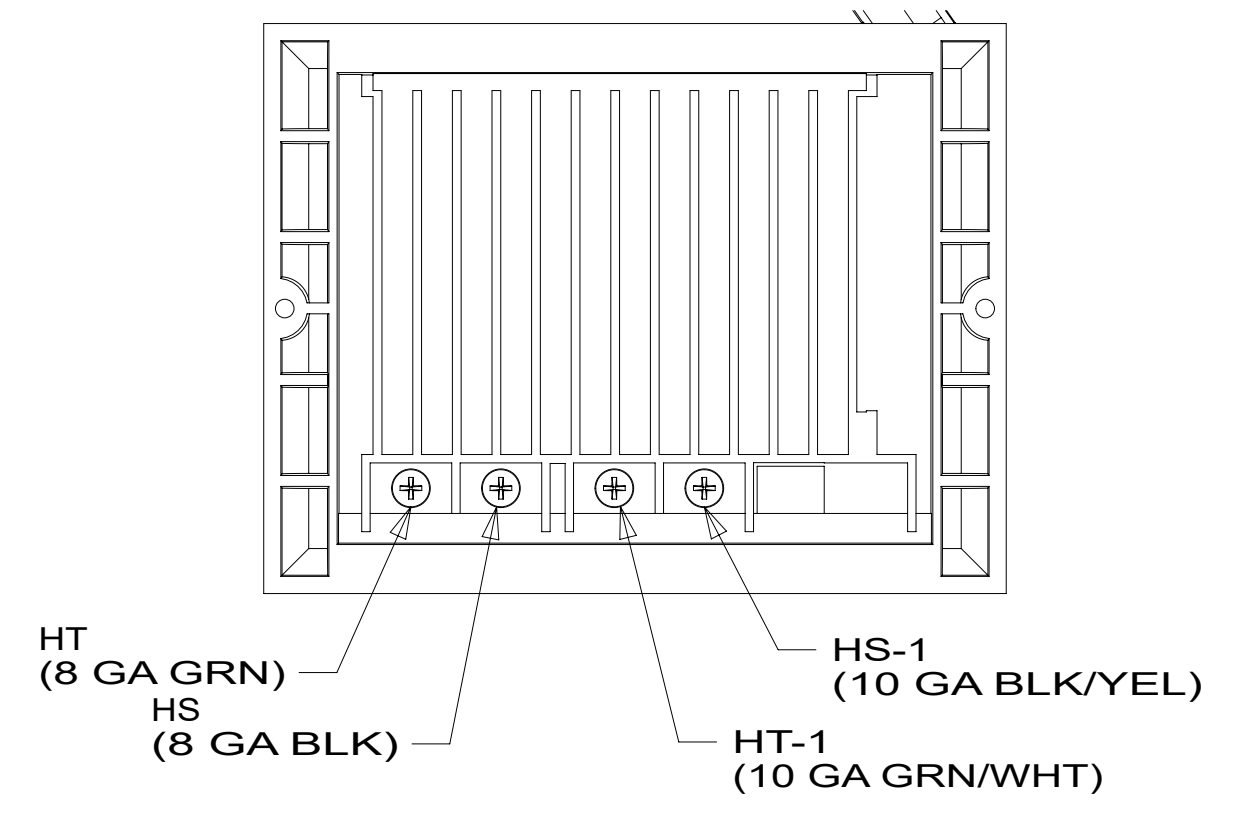

DETAIL EB 2

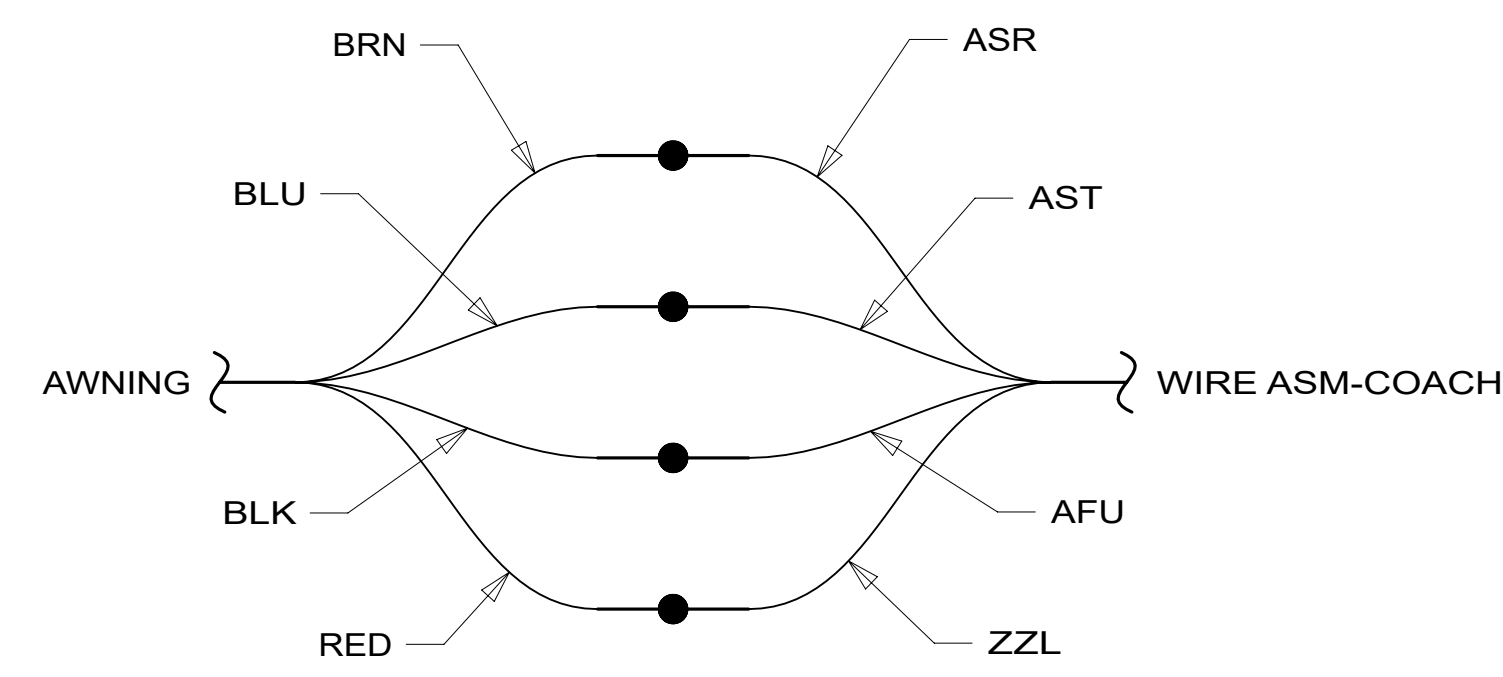

DETAIL ED

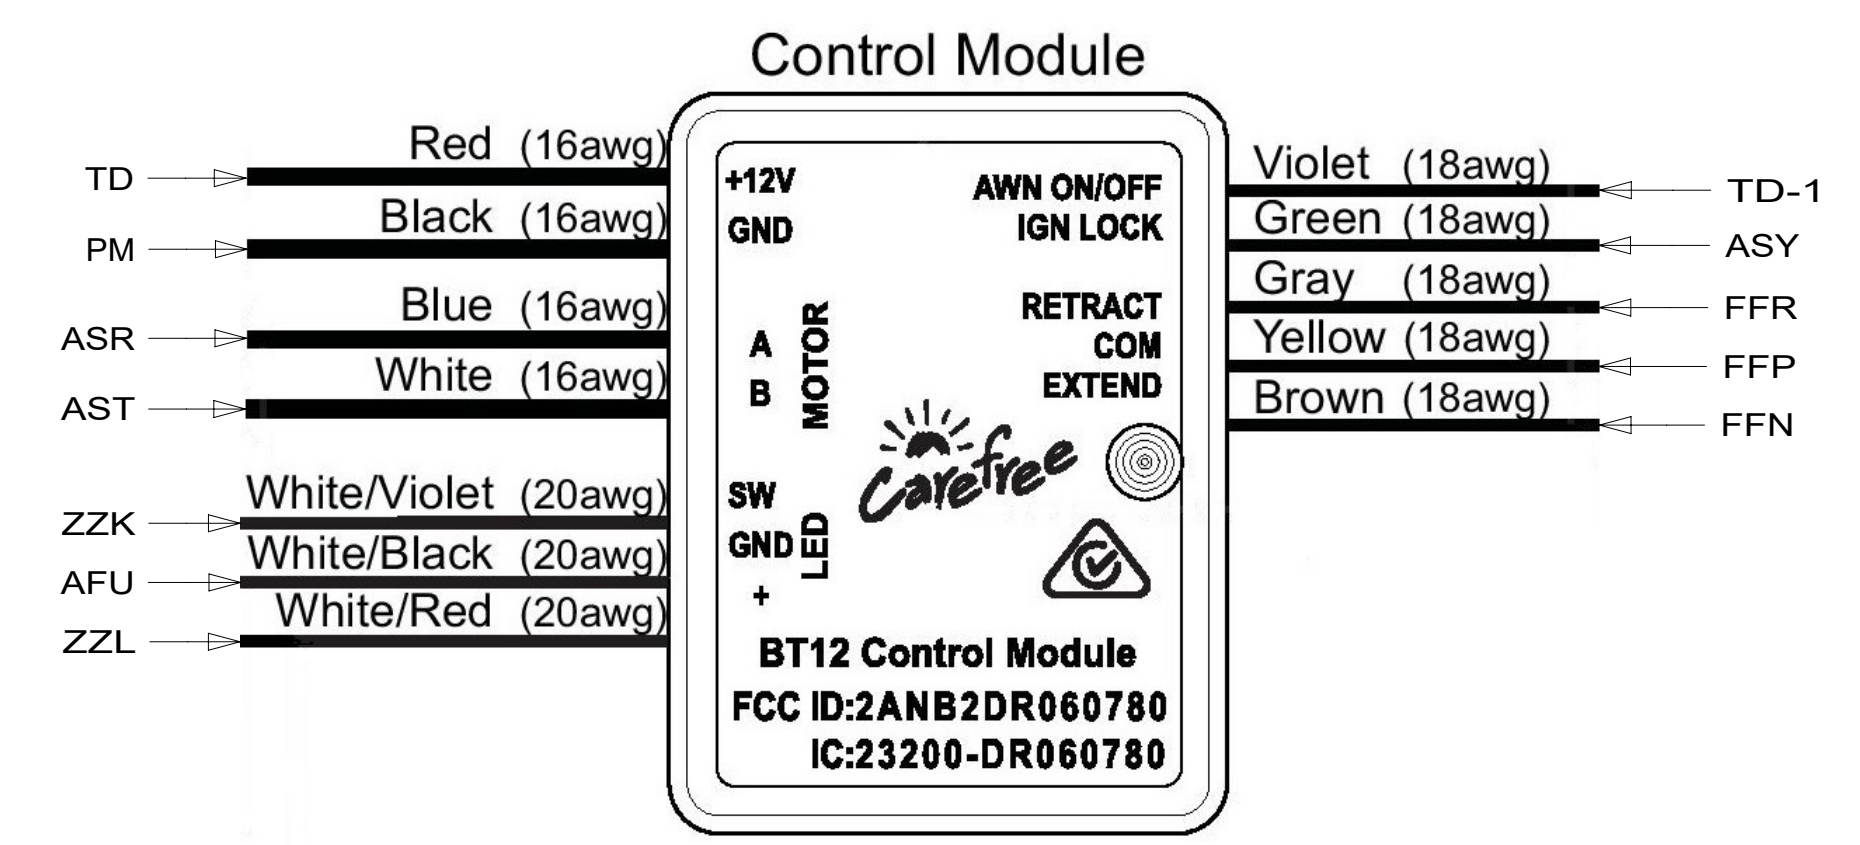

DETAIL EE

2 SEE WIRE ASM-SOLAR SYSTEM AND WIRE INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- 401 INVERTER-DC/AC, 1000 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

DESCRIPTION:		1B1 265	
<b>WIRING INSTL-BODY,12V</b>			
SHEET:	ITEM/PART NO.:	REV	
5 OF 5	000207694 / 34131701000		