



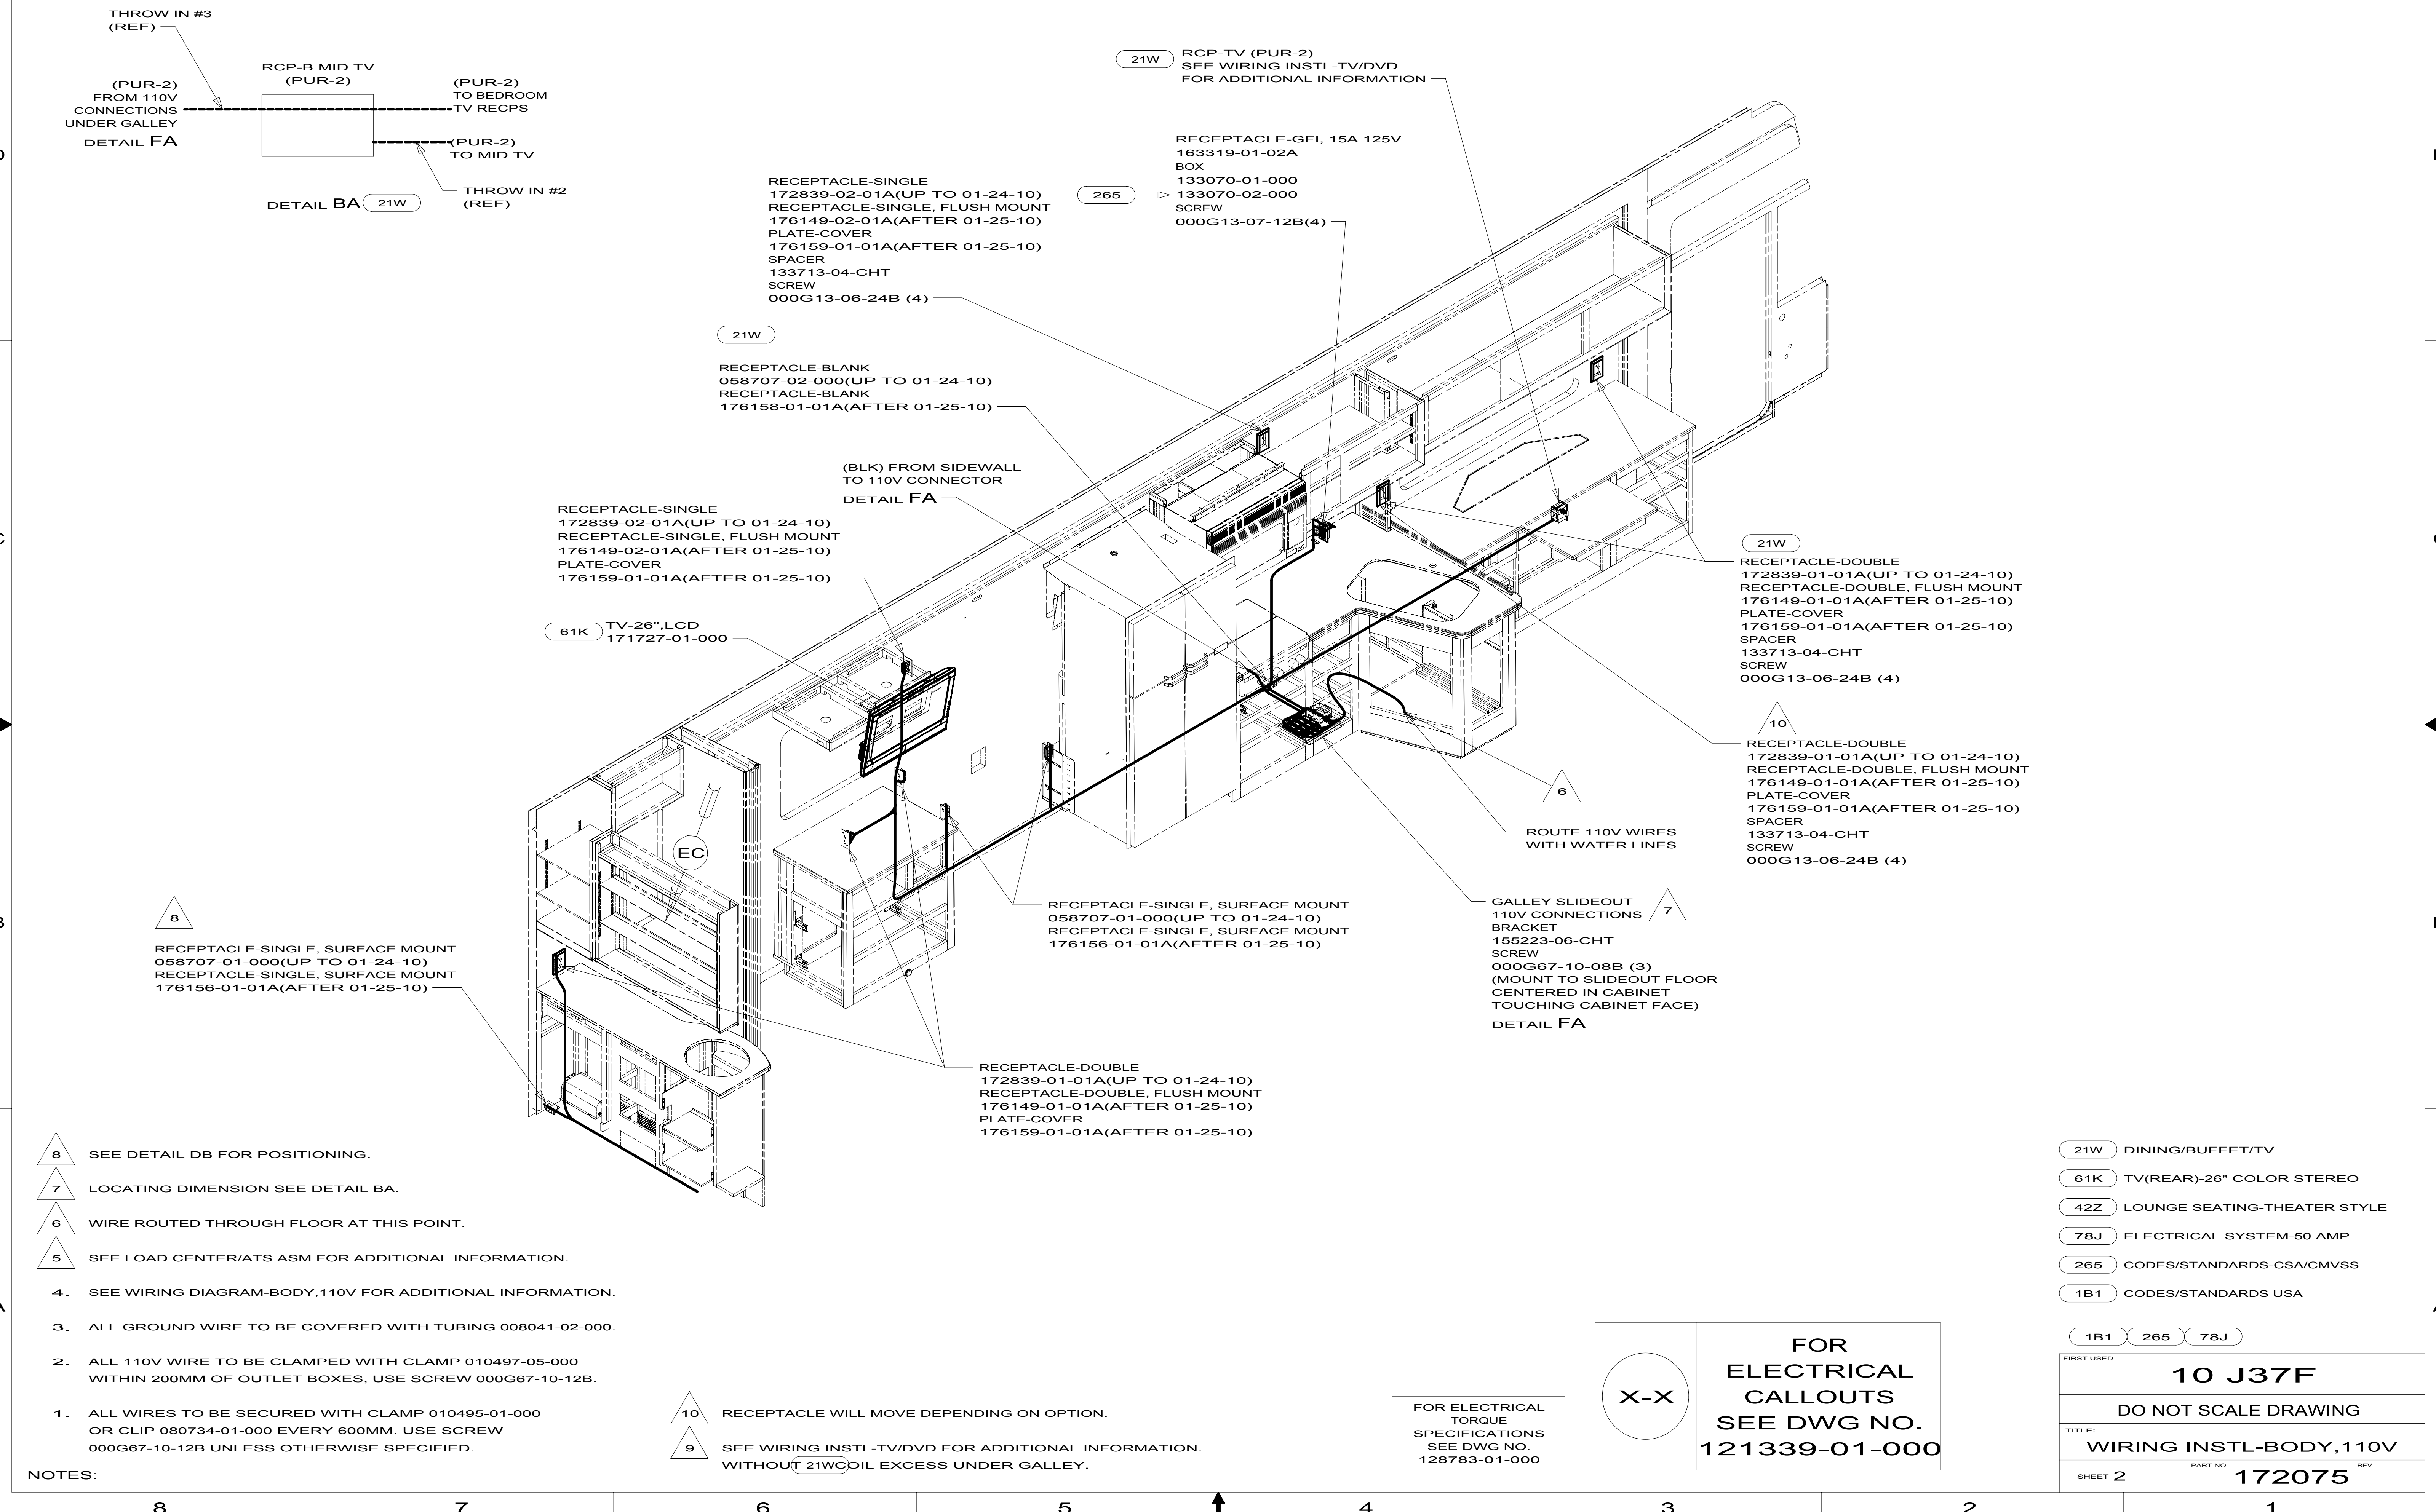

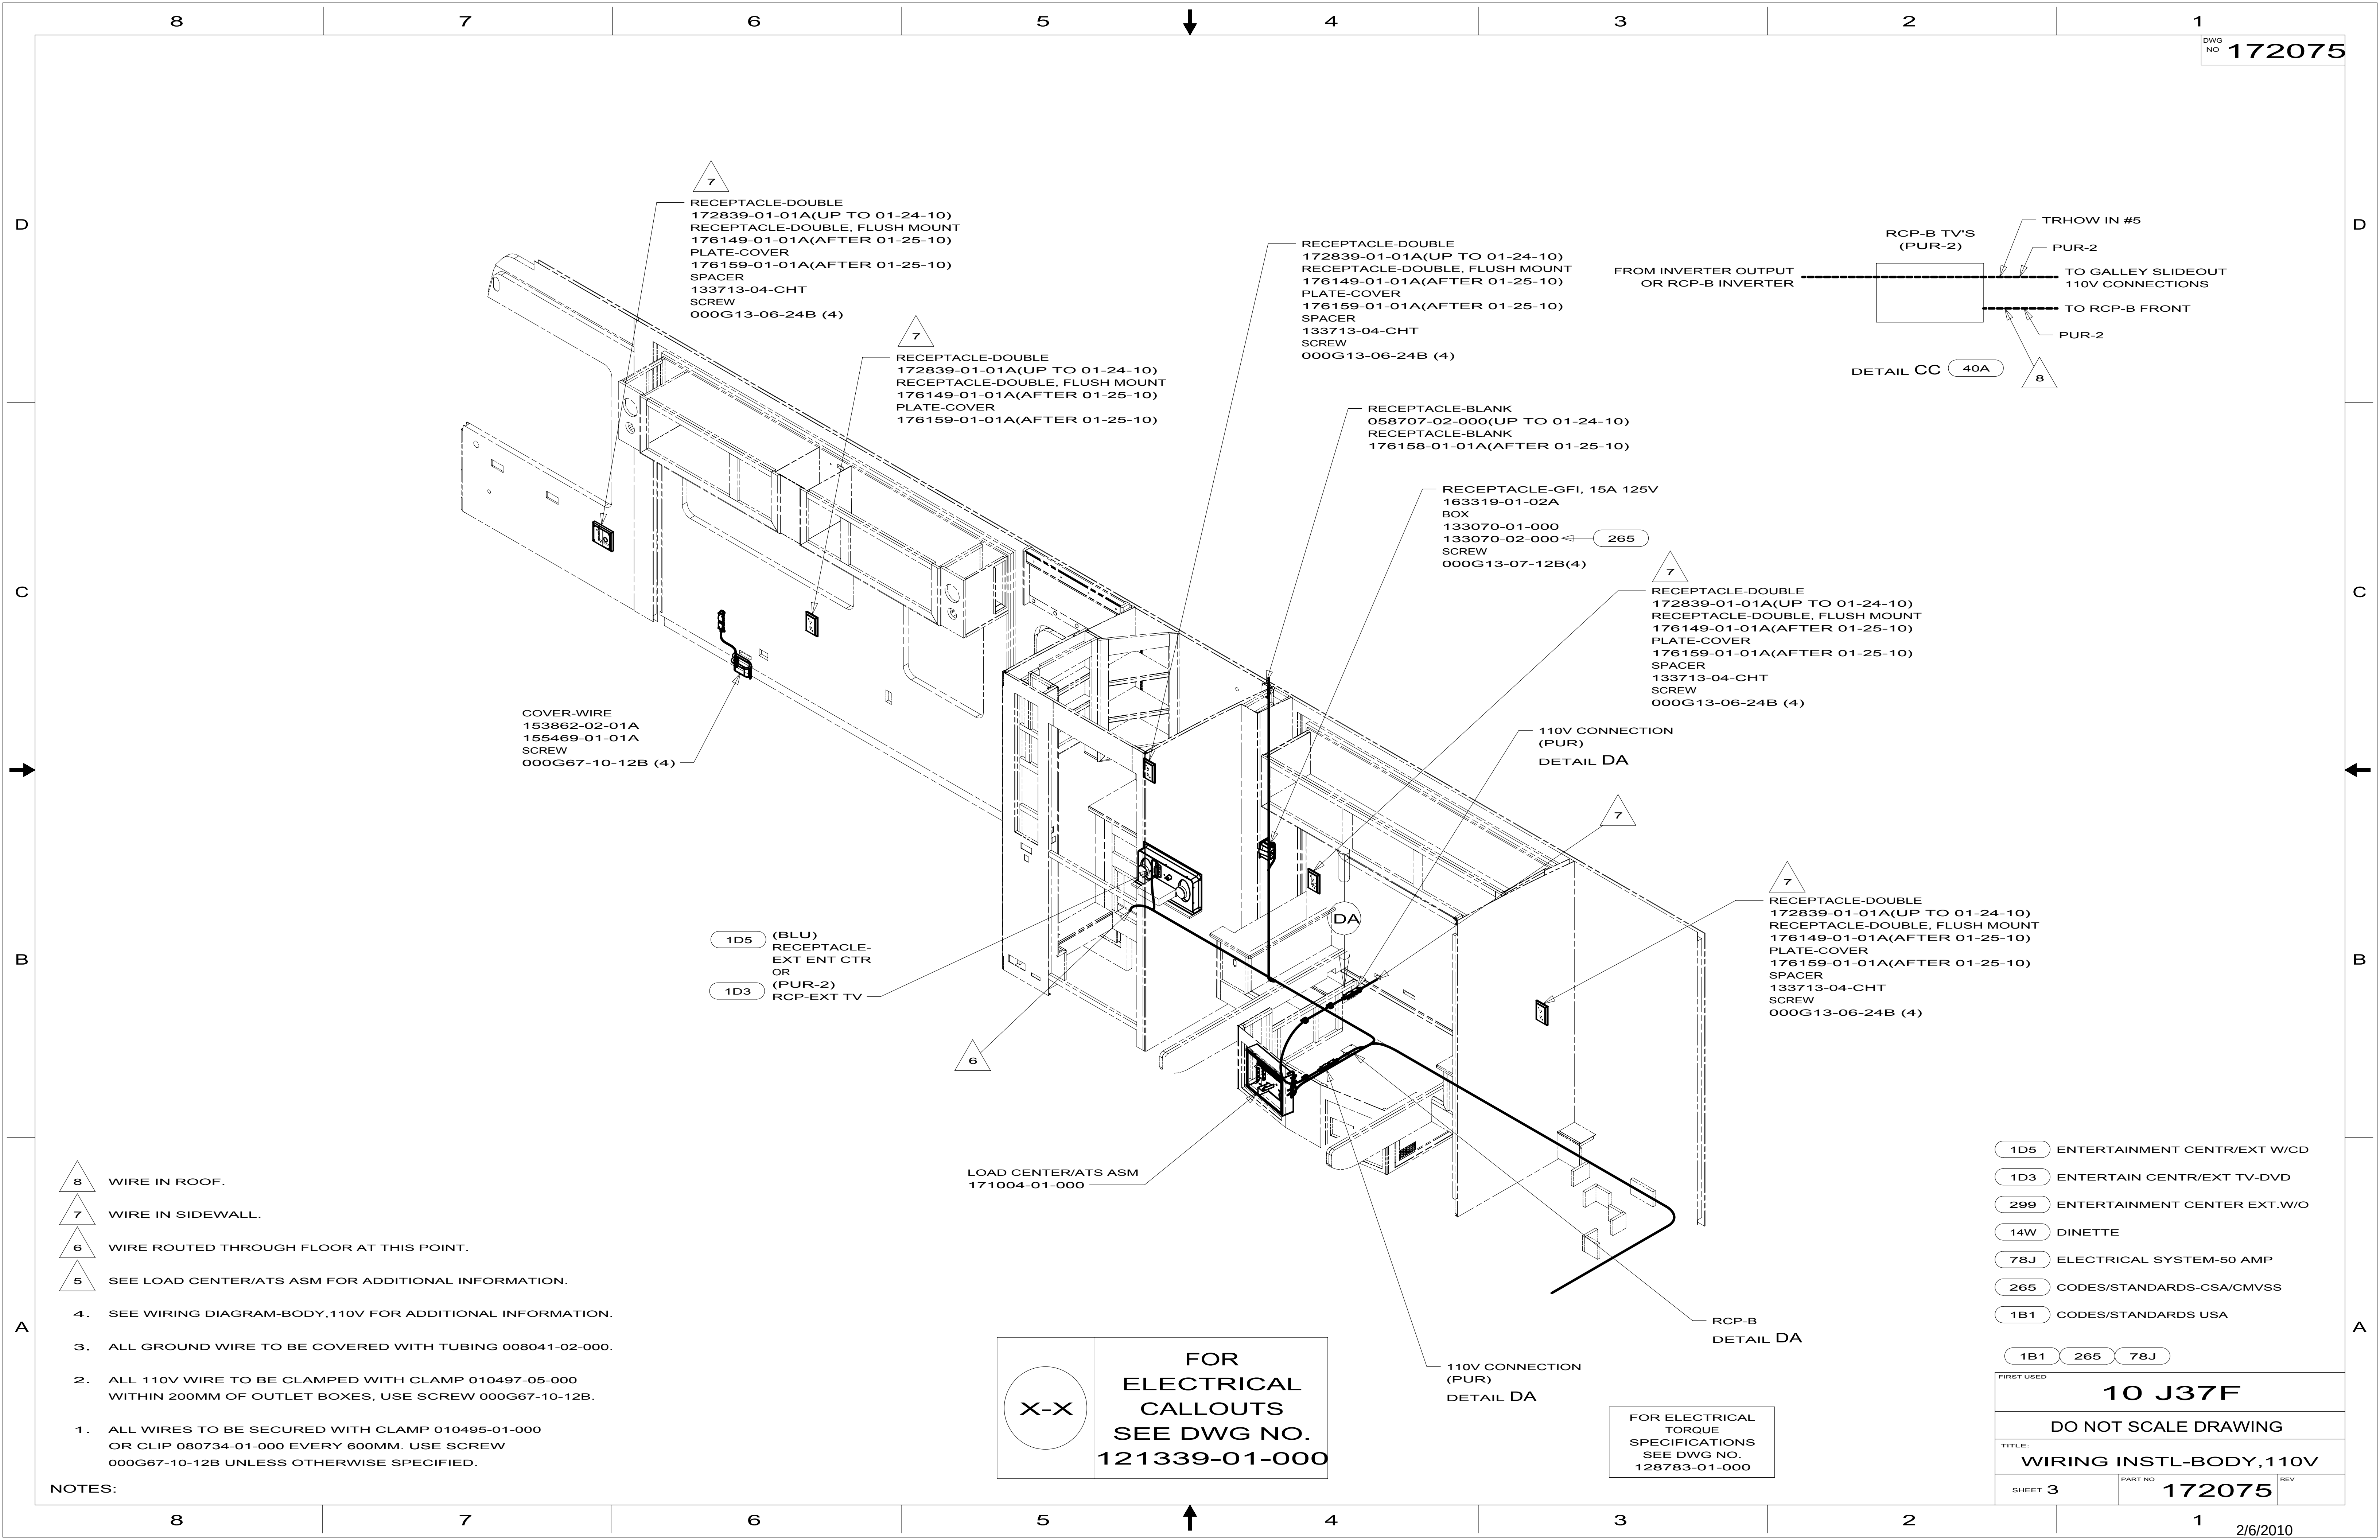

NOTES:

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

1D5

ENTERTAINMENT CENTRE/EXT W/CD

1D3

ENTERTAIN CENTR/EXT TV-DVD

299

ENTERTAINMENT CENTER EXT.W/O

14W

DINETTE

78J

ELECTRICAL SYSTEM-50 AMP

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

78J

FIRST USED

10 J37F

DO NOT SCALE DRAWING

TITLE:

WIRING INSTL-BODY, 110V

SHEET 3

PART NO 172075

REV

USE CONNECTOR-WIRE,NM
144283-02-000
TO CONNECT TO
WIRE FROM SIDEWALL

RECEPTACLE-BLANK
058707-02-000(UP TO 01-24-10)
RECEPTACLE-BLANK
176158-01-01A(AFTER 01-25-10)

CLAMP
010495-01-000 (4)
SCREW
000G67-10-12B (4)


SCREW
000G39-06-24B (8)

CLAMP
010497-03-000 (3)
SCREW
000G39-06-12B (3)


4 REAR SLIDEOUT WIRE #6

3

DETAIL DA

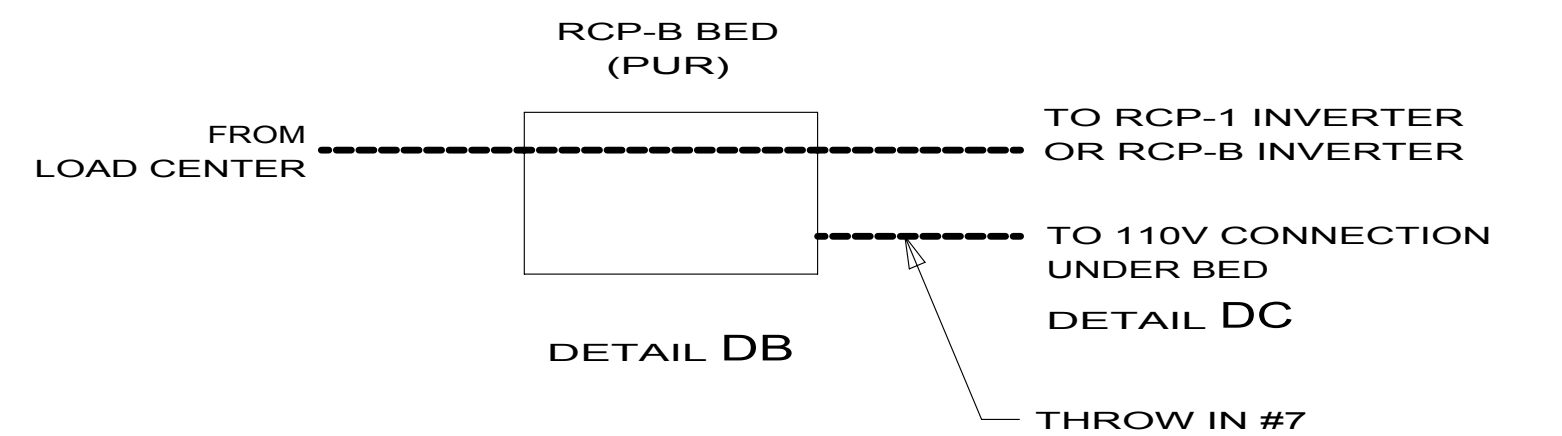

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

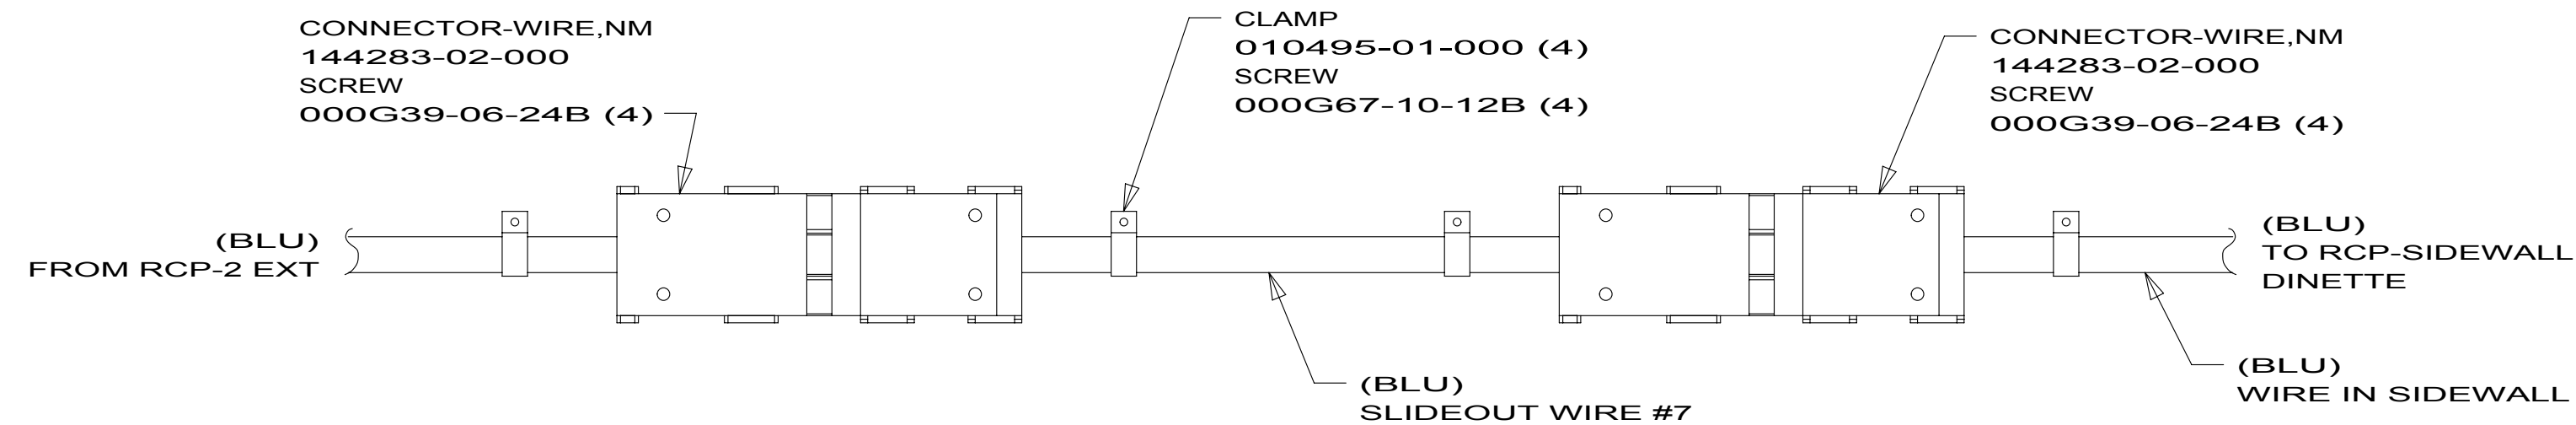

DETAIL DC


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 4	PART NO 172075	REV


- 4 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 3 MAKE LOOP AS SMALL AS POSSIBLE WHEN SLIDEOUT IS COMPLETELY RETRACTED.
2. RUN 12V WIRE ALONG WITH REAR SLIDEOUT WIRE.
1. WIRE MUST BE ROUTED THROUGH CLAMPS AS SHOWN.

NOTES:

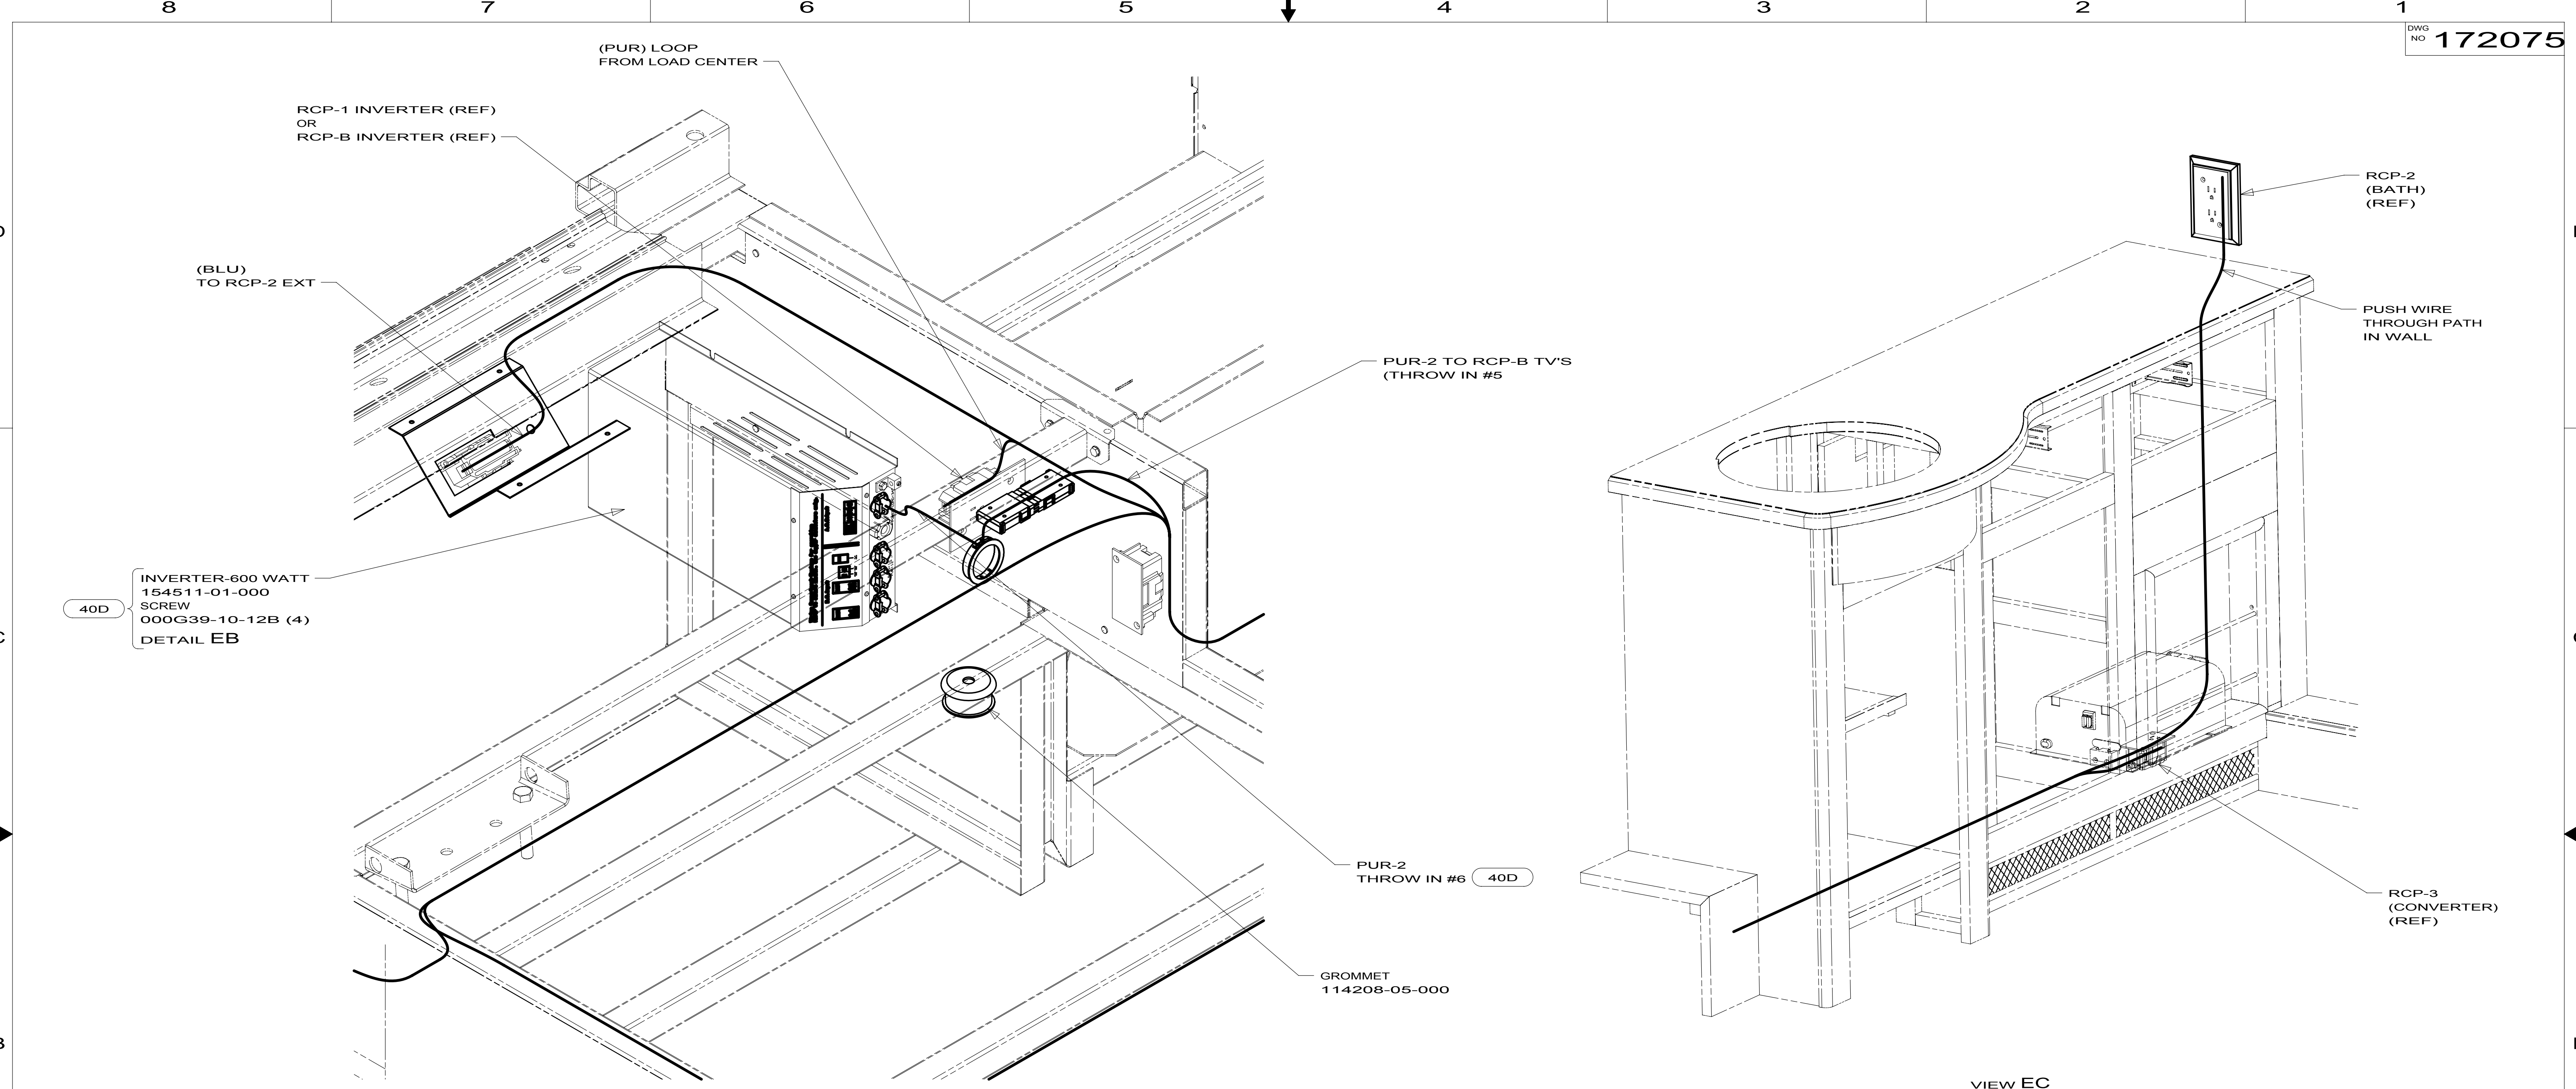

VIEW EA

VIEW EC

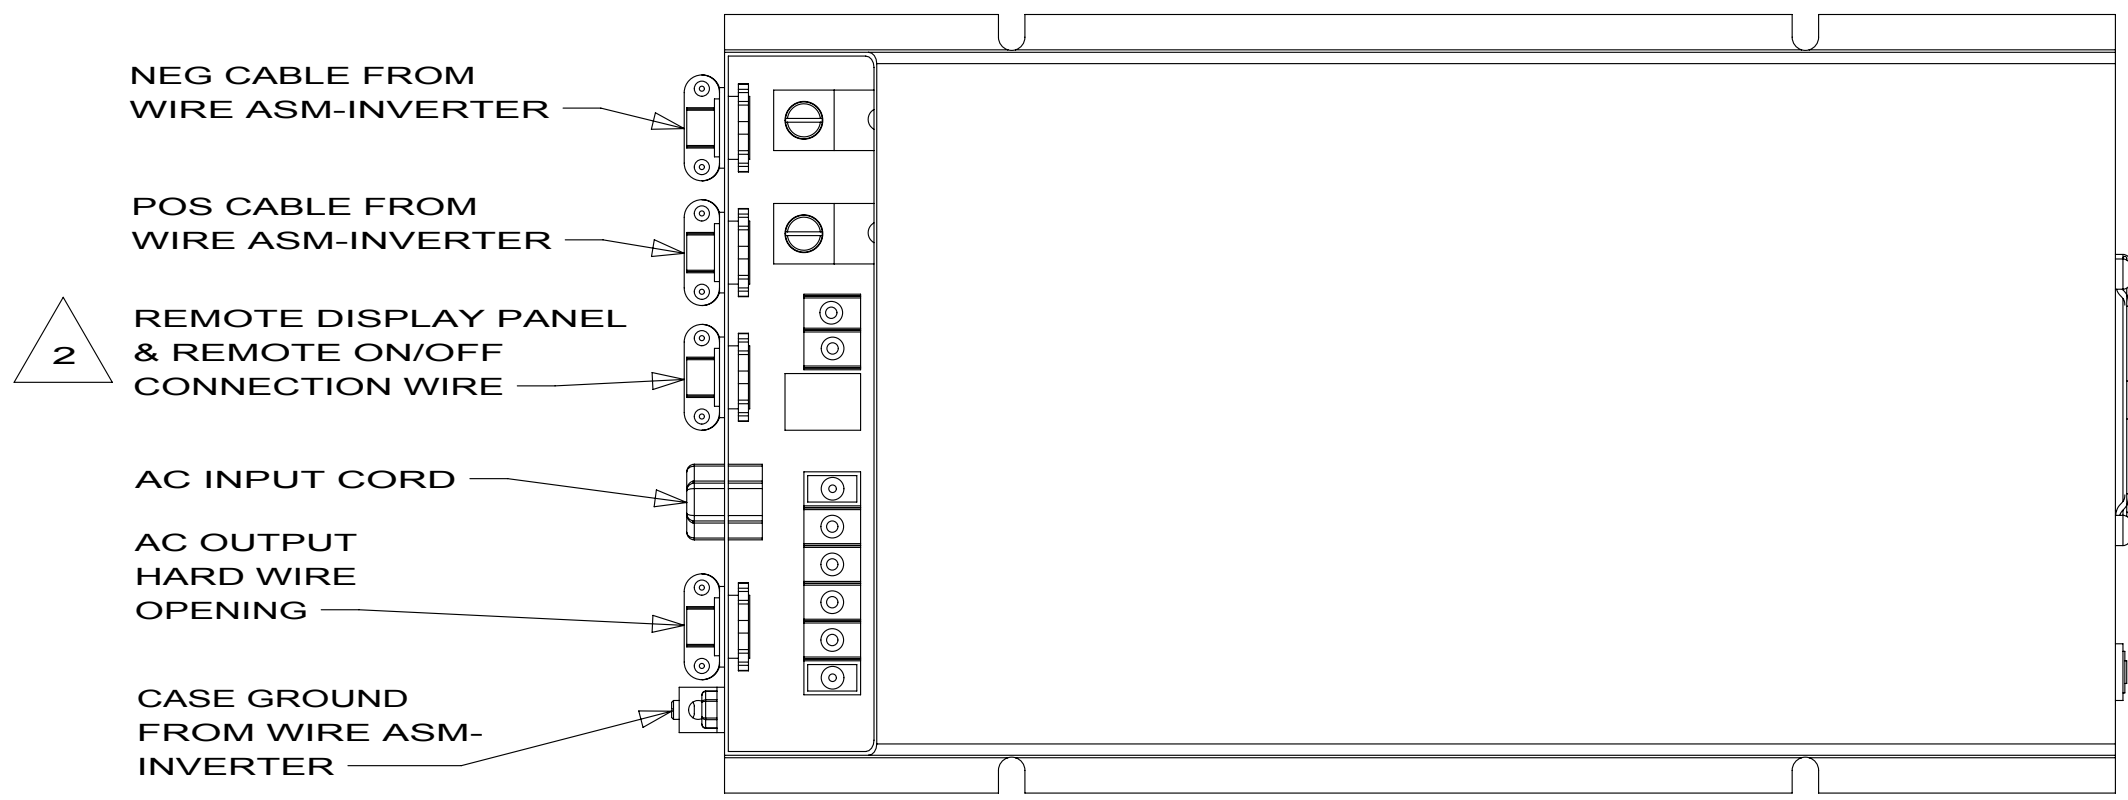

DETAIL EB


- NOTES:
- 2 WB FROM WIRE ASM-COACH TO PUR WIRE FROM INVERTER.
 - 1 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 40D INVERTER-DC/AC, 600 WATT
- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY, 110V		
SHEET 5	PART NO 172075	REV

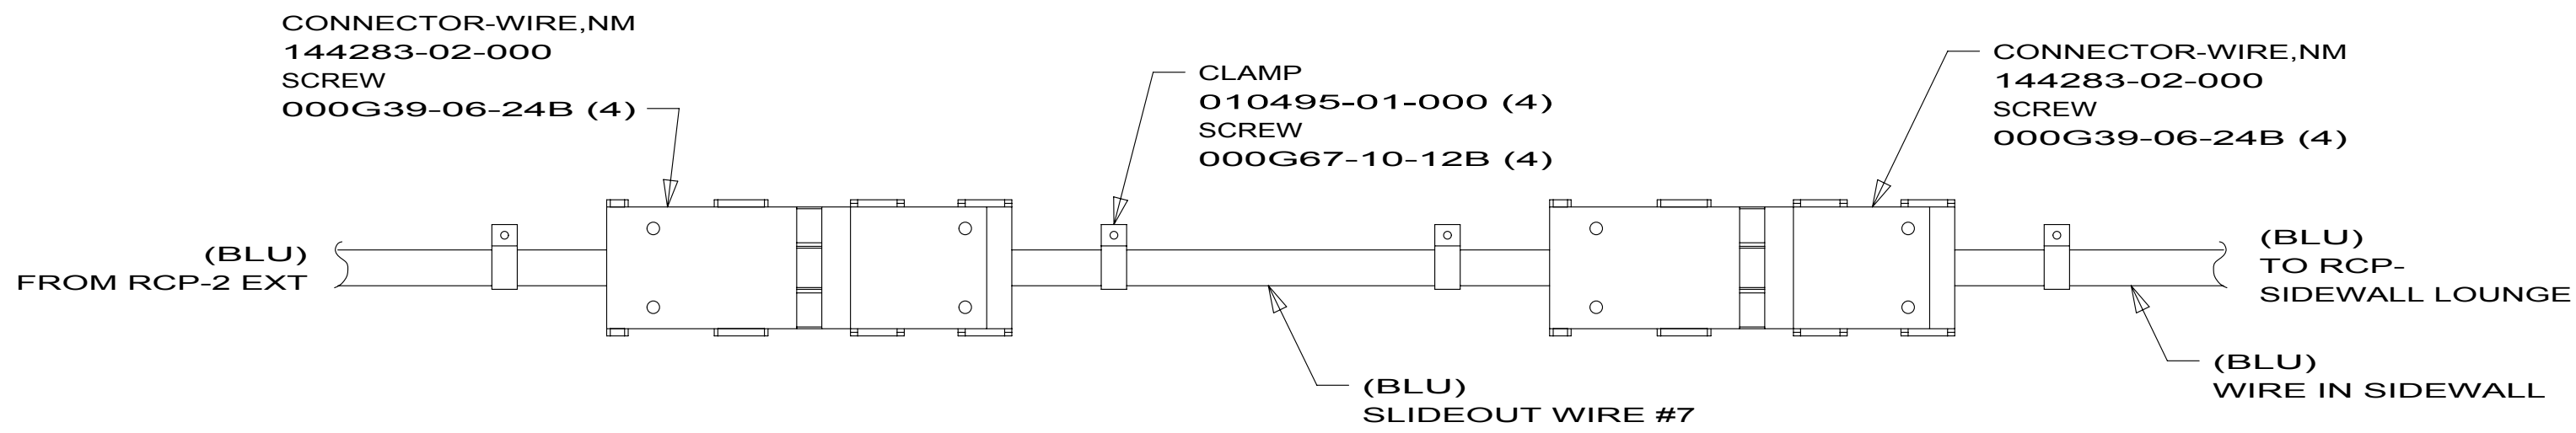

DETAIL FB

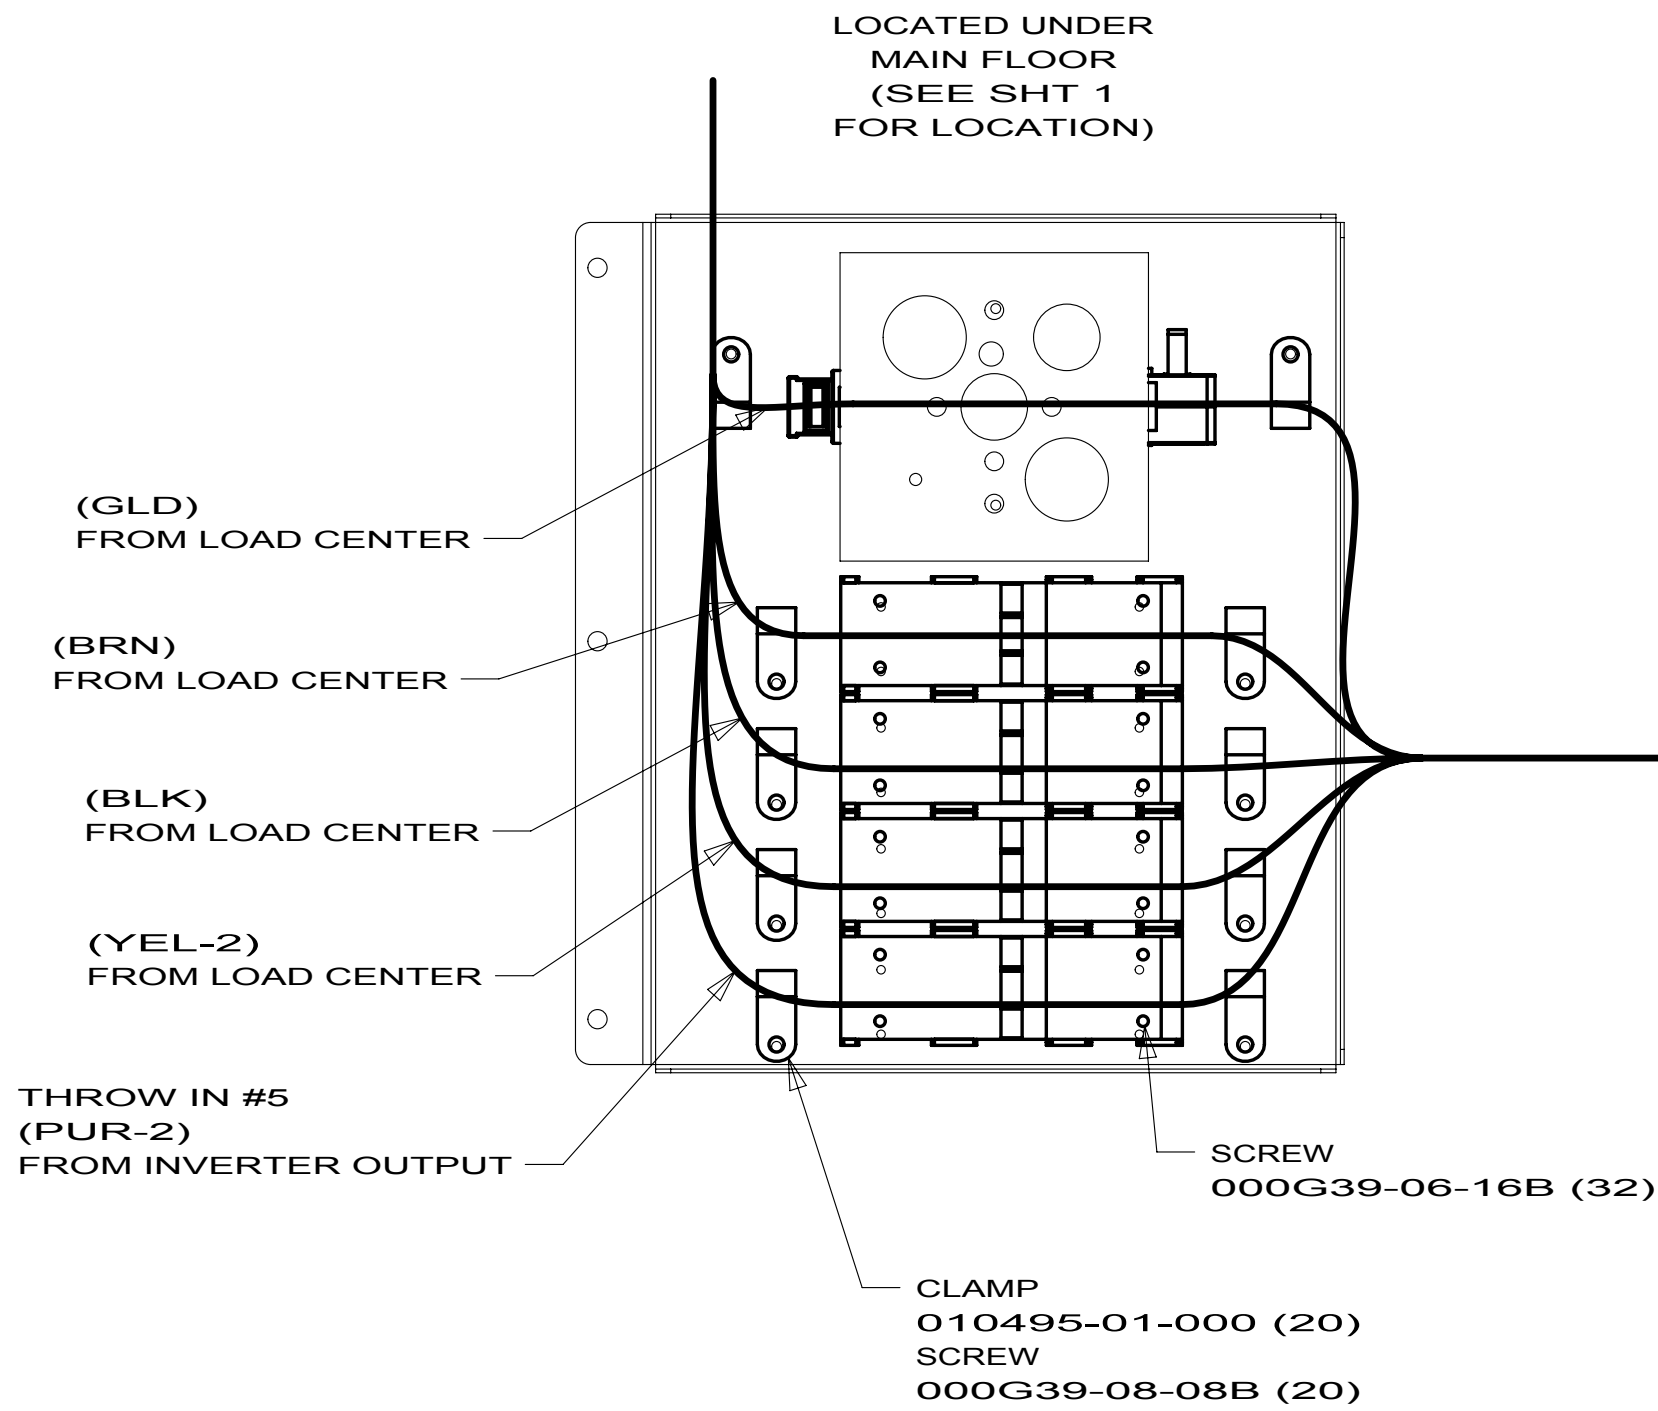

DETAIL FA

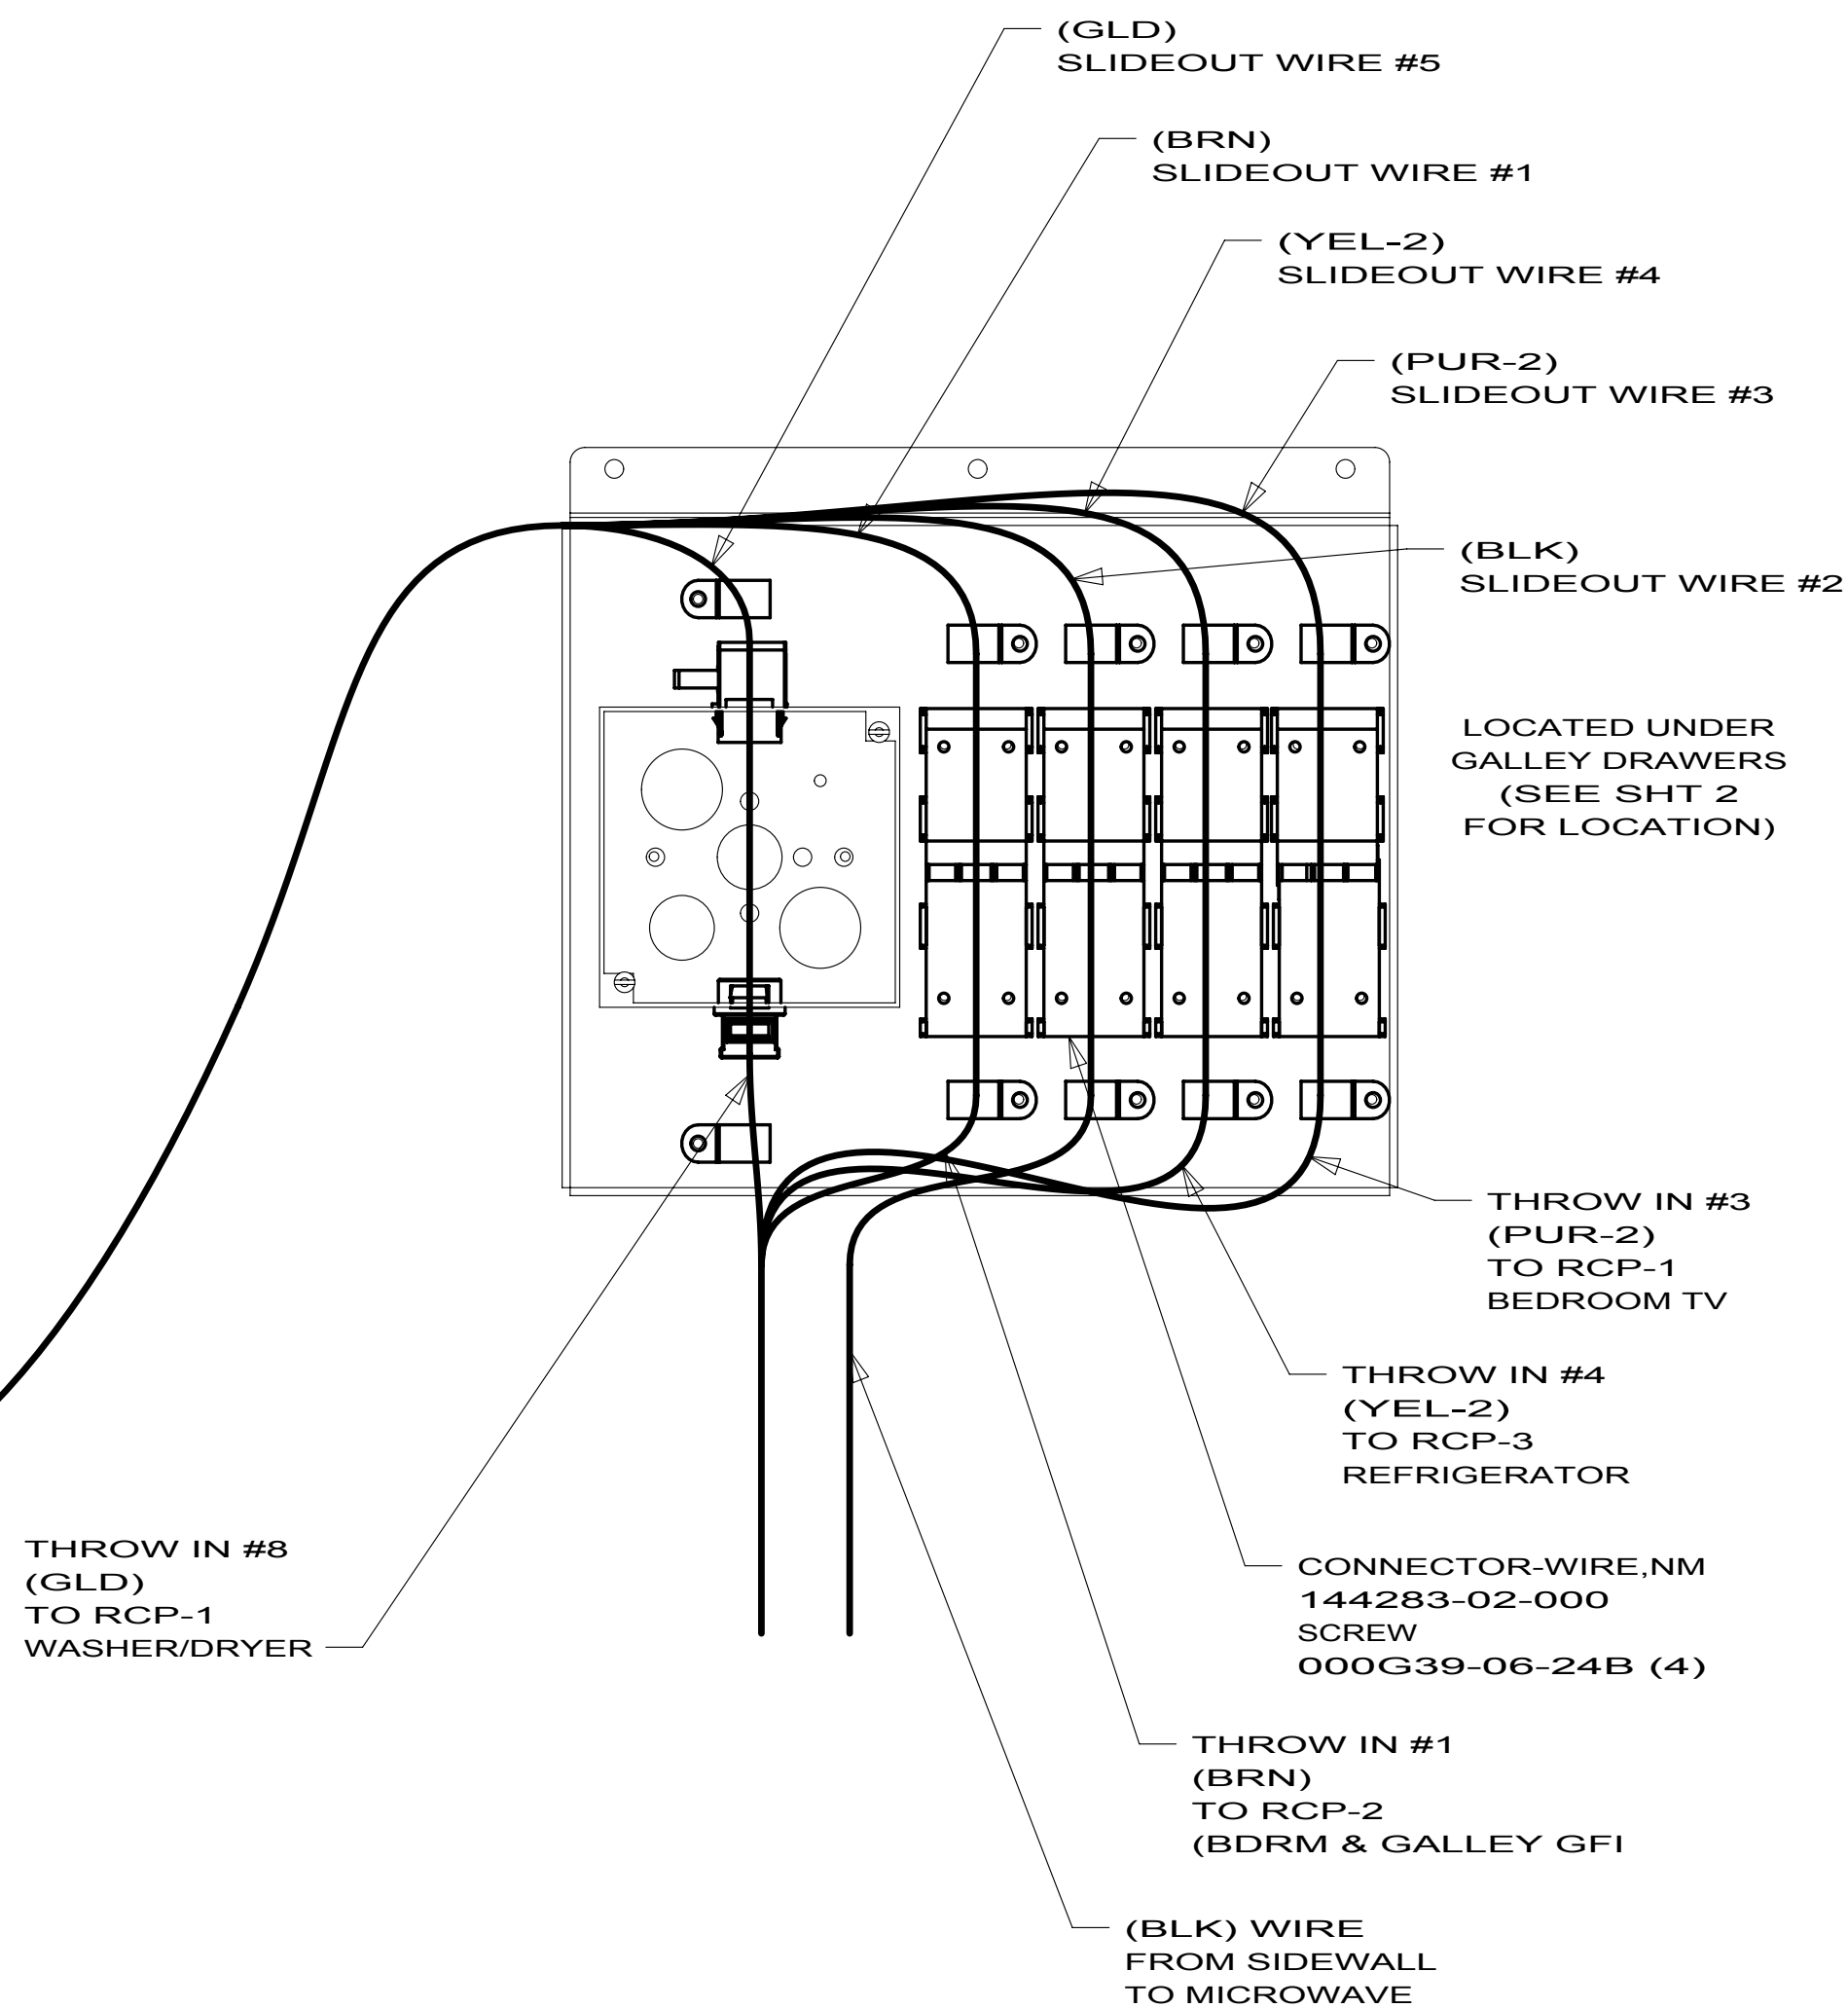

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 78J

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,110V		
SHEET 6	PART NO 172075	REV

8				7				6				5		↓		4				3		2		1																																																																															
		J32H		J37F				J35Z				J38N		J35P																																																																																									
BLK	14-UL	136131-06-040	1	136131-06-085	1	136131-06-030	136131-06-075	1	136131-06-040	1																																																																																													
	14-CA	136134-06-040	1	136134-06-085	1	136134-06-030	136134-06-075	1	136134-06-040	1																																																																																													
BLU	14-UL	136131-02-105		136131-02-270	1	136131-02-075	136131-02-165		136131-02-135	1																																																																																													
	14-CA	136134-02-105		136134-02-250	1	136134-02-075	136134-02-165		136134-02-135	1																																																																																													
BRN	14-UL	136131-03-040	1	136131-03-085	1	136131-03-120	136131-03-015		136131-03-040	1																																																																																													
	14-CA	136134-03-040	1	136134-03-085	1	136134-03-120	136134-03-015		136134-03-040	1																																																																																													
GLD	12-UL	N/A		136135-10-085		N/A	136135-10-065		136135-10-046		21M	54E																																																																																											
	12-CA	N/A		136136-10-085		N/A	136136-10-065		136136-10-046		21M	54E																																																																																											
GRN	12-UL	136135-08-090		136135-08-065		136135-08-110	136135-08-095		136135-08-095		78J																																																																																												
	12-CA	136136-08-090		136136-08-065		136136-08-110	136136-08-095		136136-08-095		78J																																																																																												
	12-UL	136135-08-070		136135-08-048		136135-08-093	136135-08-060		136135-08-075		12D																																																																																												
	12-CA	136136-08-070		136136-08-048		136136-08-093	136136-08-060		136136-08-075		12D																																																																																												
GRN 2	12-UL	136135-14-054		136135-14-080		136135-14-054	136135-14-054		136135-14-054		12D																																																																																												
	12-CA	136136-14-054		136136-14-080		136136-14-054	136136-14-054		136136-14-054		12D																																																																																												
PUR	14-UL	136131-04-090	1	136131-04-065	1	136131-04-140	136131-04-160	1	136131-04-090	1																																																																																													
	14-CA	136134-04-090	1	136134-04-065	1	136134-04-140	136134-04-160	1	136134-04-090	1																																																																																													
RED	12-UL	136135-07-090		136135-07-065		136135-07-110	136135-07-095		136135-07-095																																																																																														
	12-CA	136136-07-090		136136-07-065		136136-07-110	136136-07-095		136136-07-095																																																																																														
WHT	12-UL	136135-09-025		136135-09-051		136135-09-075	136135-09-040		136135-09-025		1B2																																																																																												
	12-CA	136136-09-025		136136-09-051		136136-09-075	136136-09-040		136136-09-025		1B2																																																																																												
YEL	14-UL	136131-05-020		136131-05-065		136131-05-030	136131-05-052		136131-05-020																																																																																														
	14-CA	136134-05-020		136134-05-065		136134-05-030	136134-05-052		136134-05-020																																																																																														
YEL 2	14-UL	136131-13-040	1	136131-13-085	1	136131-13-041	136131-13-055		136131-13-040	1																																																																																													
	14-CA	136134-13-040	1	136134-13-085	1	136134-13-041	136134-13-055		136134-13-040	1																																																																																													
GRY	14-UL	N/A		N/A		N/A	136131-15-075	1	-----		14C																																																																																												
	14-CA	N/A		N/A		N/A	136134-15-075	1	-----		14C																																																																																												
MAIN	10-UL	136137-01-070		136137-01-048		136137-01-093	136137-01-060		136137-01-075		12D																																																																																												
	10-CA	136138-01-070		136138-01-048		136138-01-093	136138-01-060		136138-01-075		12D																																																																																												
	6-3 UL	136139-01-070		136139-01-048		136139-01-093	136139-01-060		136139-01-075		78J																																																																																												
	6-3 CA	136140-01-070		136140-01-048		136140-01-093	136140-01-060		136140-01-075		78J																																																																																												
MAIN GROUND		N/A	2	N/A	2	136145-01-030	136145-01-045		-----																																																																																														
ATS GROUND		136145-01-020		136145-01-020		136145-01-067	136145-01-061		136145-01-020																																																																																														
CONDUIT ASM-CENTRAL A/C		151704-01-015		151704-01-015		151704-01-015	151704-01-015		151704-01-015																																																																																														
NOTES:														FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000										FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000										DO NOT SCALE DRAWING										TITLE: LOAD CENTER/ATS ASM										SHEET 1 OF 5										PART NO. 171004										REV										REF: 1										10/15/2009									

8

7

6

5

4

3

2

1

THROW IN WIRE #1

THROW IN WIRE #2

THROW IN WIRE #3

THROW IN WIRE #4

THROW IN WIRE #5

THROW IN WIRE #6

THROW IN WIRE #7

THROW IN WIRE #8

THROW IN FRONT TV

SLIDEOUT WIRE #1

SLIDEOUT WIRE #2

SLIDEOUT WIRE #3

SLIDEOUT WIRE #4

SLIDEOUT WIRE #5

SLIDEOUT WIRE #6

SLIDEOUT WIRE #7

171004

TRANSFORMER (REF)

DETAIL BA
(LOAD CENTER SHOWN FROM THE BACK SIDE)

21W DINING,BUFFET,TV

78J ELECTRICAL SYSTEM-50 AMP

49N SLEEP NUMBER BED-KING SIZE

49M SLEEP NUMBER BED-QUEEN SIZE

45X BED - BUNKS

40D INVERTER-DC/AC,600 WATT

12D ELECTRICAL SYSTEM 30 AMP

14C FIREPLACE-ELECTRIC

10X SOFA (BEDROOM)

10G SOFA (BEDROOM) ULTRALEATHER

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

10 J-SERIES

DO NOT SCALE DRAWING


LOAD CENTER/ATS ASM

171004

10/15/2009

- 7 SEE DETAIL EG.
- 6 SEE DETAIL EF.
- 5 SEE DETAIL EE.
- 4 SEE DETAIL ED.
- 3 SEE DETAIL EC.
- 2 SEE DETAIL EB.
- 1 SEE DETAIL EA.

NOTES:

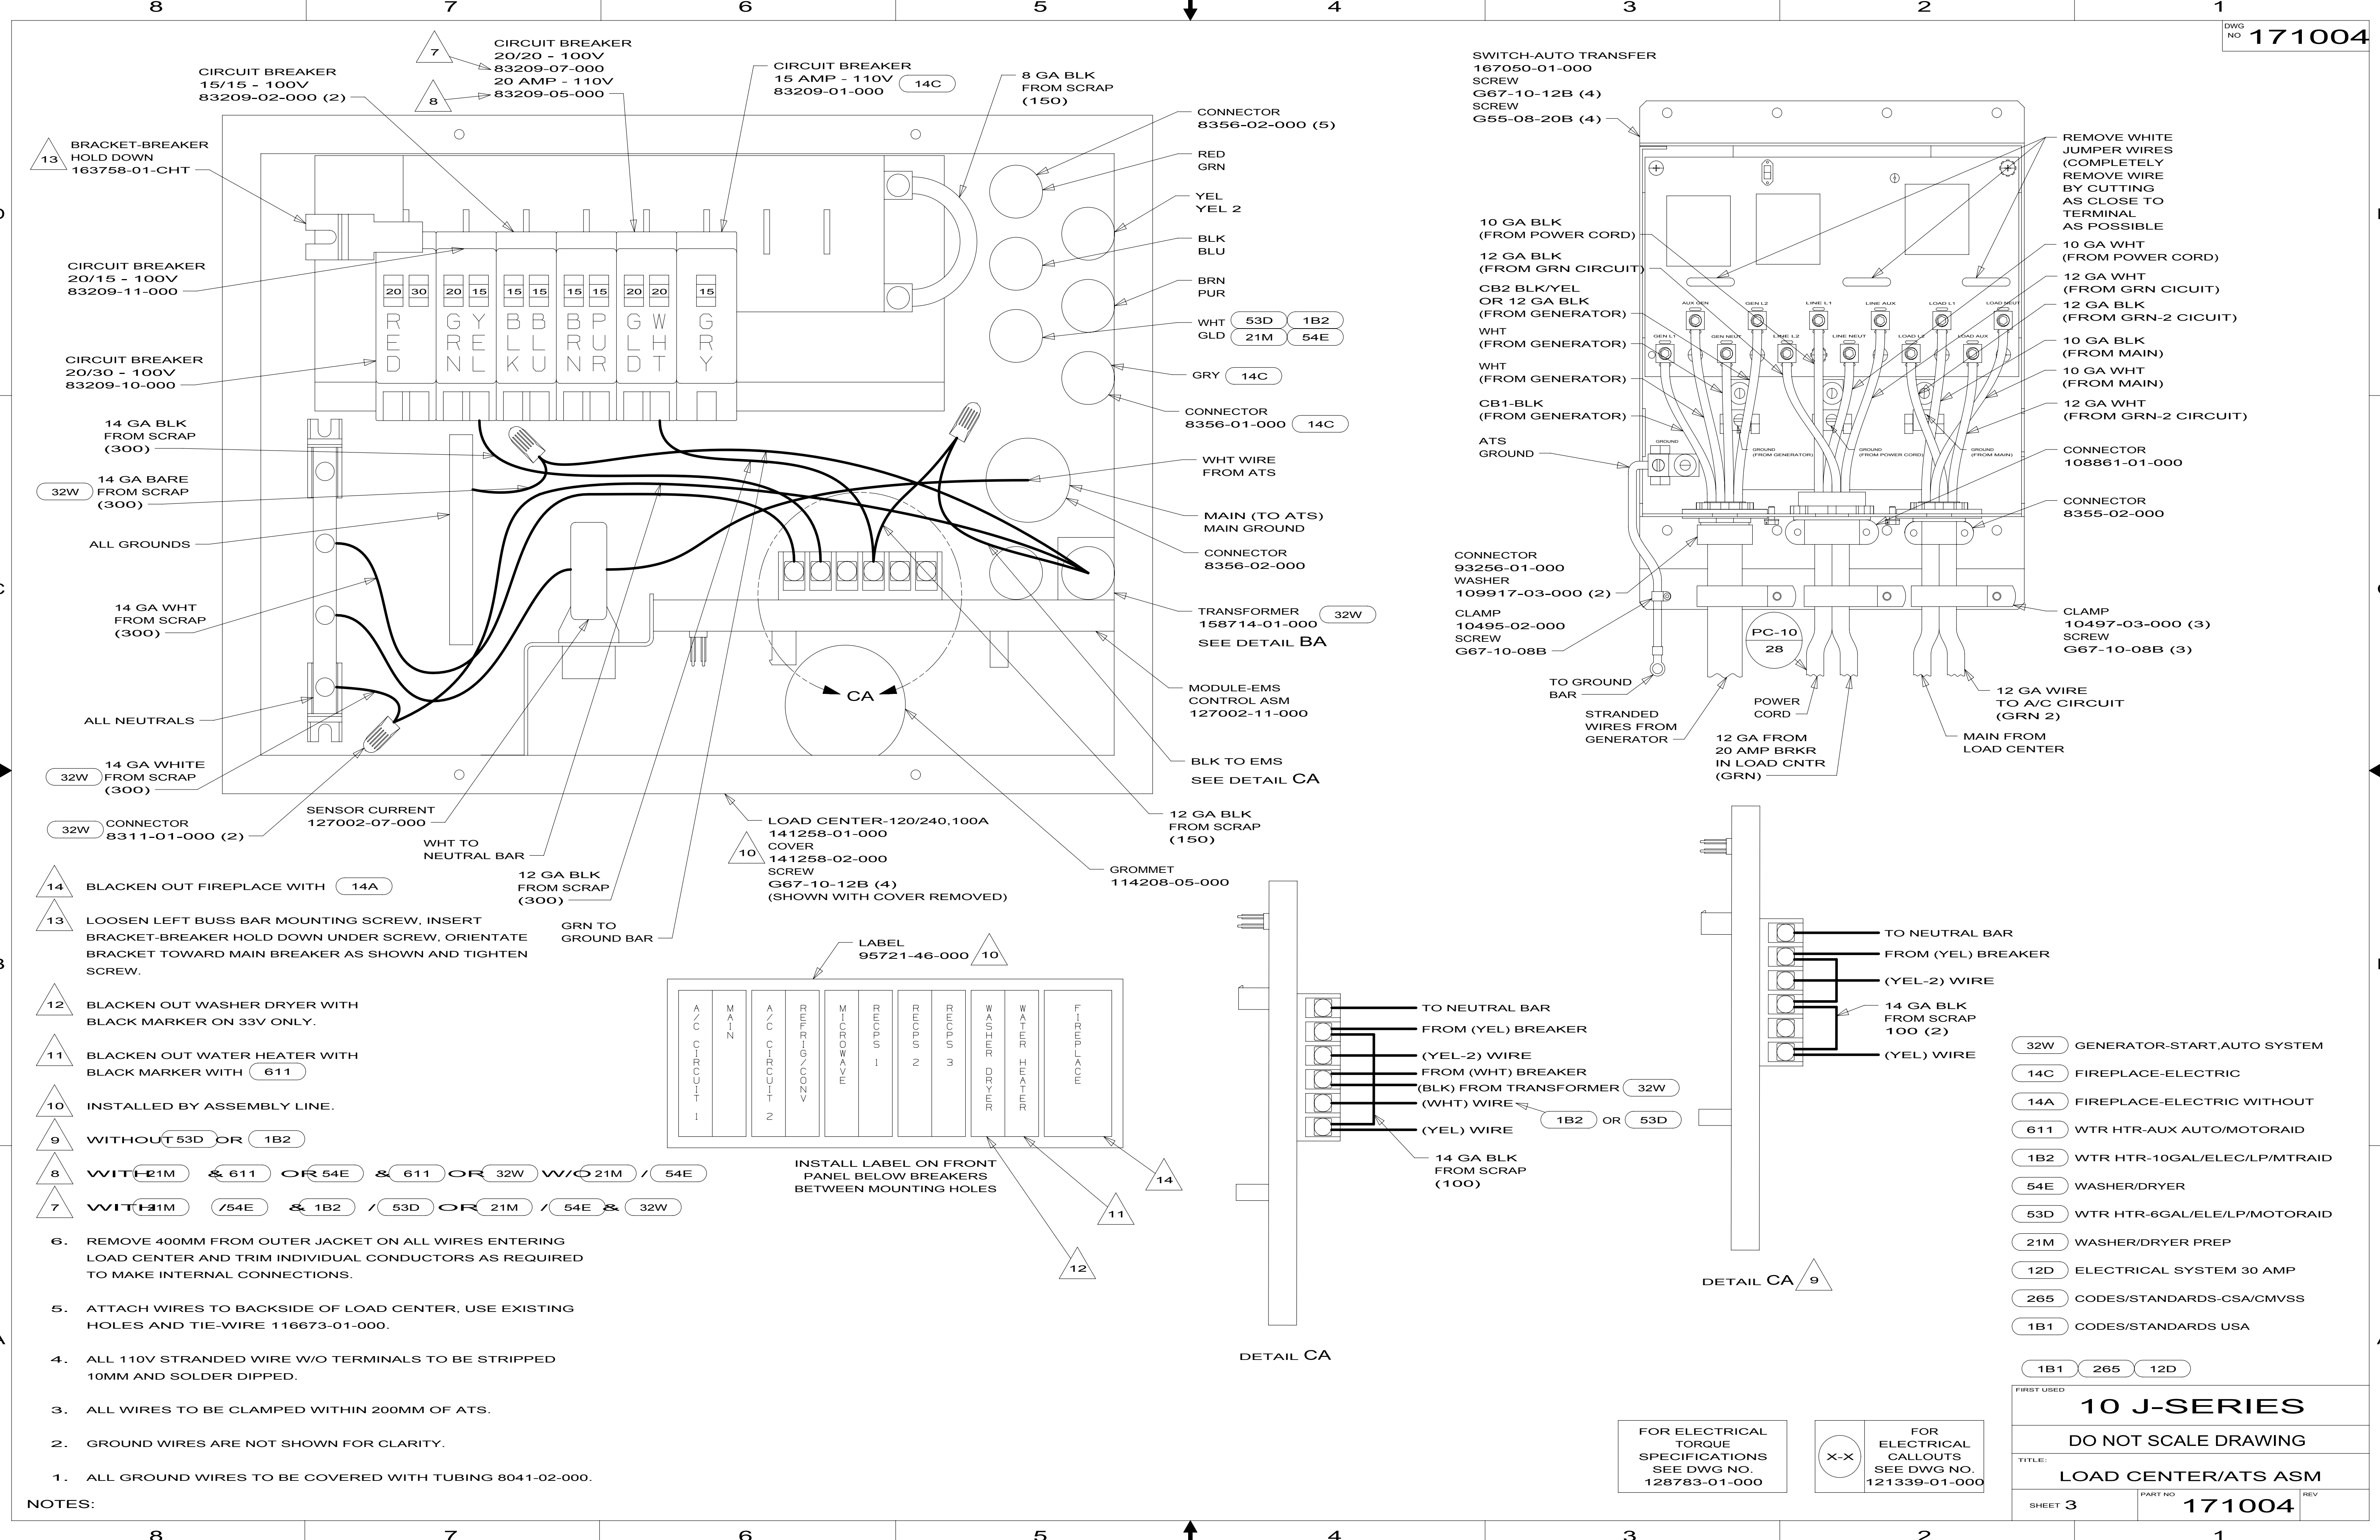

D

D

C

C

B

B

A

A

- NOTES:
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 2. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
 3. ALL WIRES TO BE CLAMPED WITHIN 200MM OF ATS.
 4. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
 5. ATTACH WIRES TO BACKSIDE OF LOAD CENTER, USE EXISTING HOLES AND TIE-WIRE 116673-01-000.
 6. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS.

- 32W GENERATOR-START,AUTO SYSTEM
- 14C FIREPLACE-ELECTRIC
- 14A FIREPLACE-ELECTRIC WITHOUT
- 611 WTR HTR-AUX AUTO/MOTORAID
- 1B2 WTR HTR-10GAL/ELEC/LP/MTRAIID
- 54E WASHER/DRYER
- 53D WTR HTR-6GAL/ELE/LP/MOTORAID
- 21M WASHER/DRYER PREP
- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



FIRST USED

10 J-SERIES

DO NOT SCALE DRAWING

TITLE: **LOAD CENTER/ATS ASM**

SHEET **3** PART NO **171004** REV

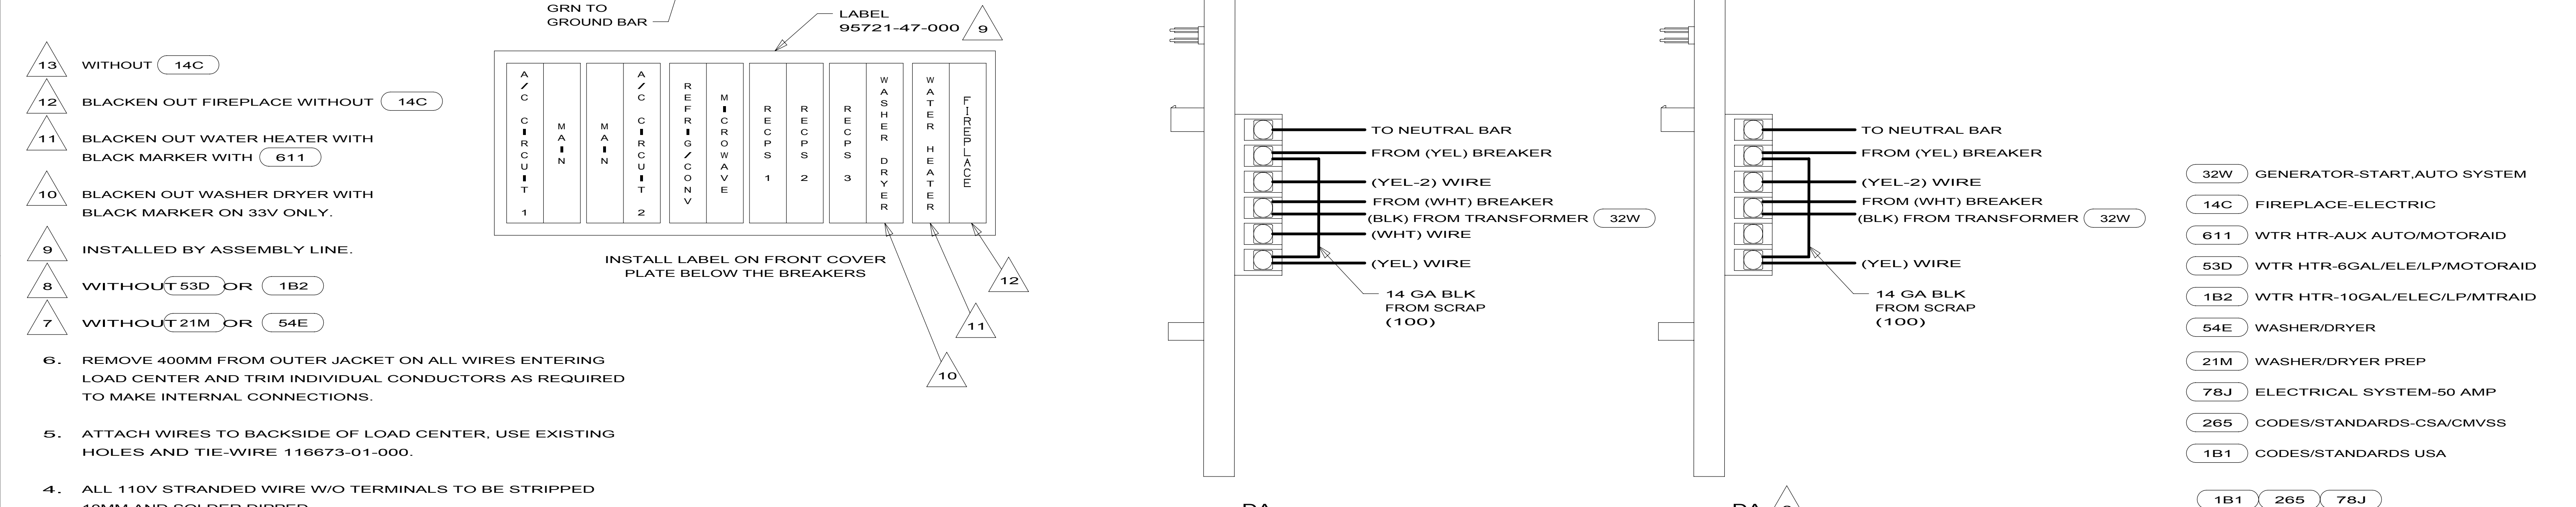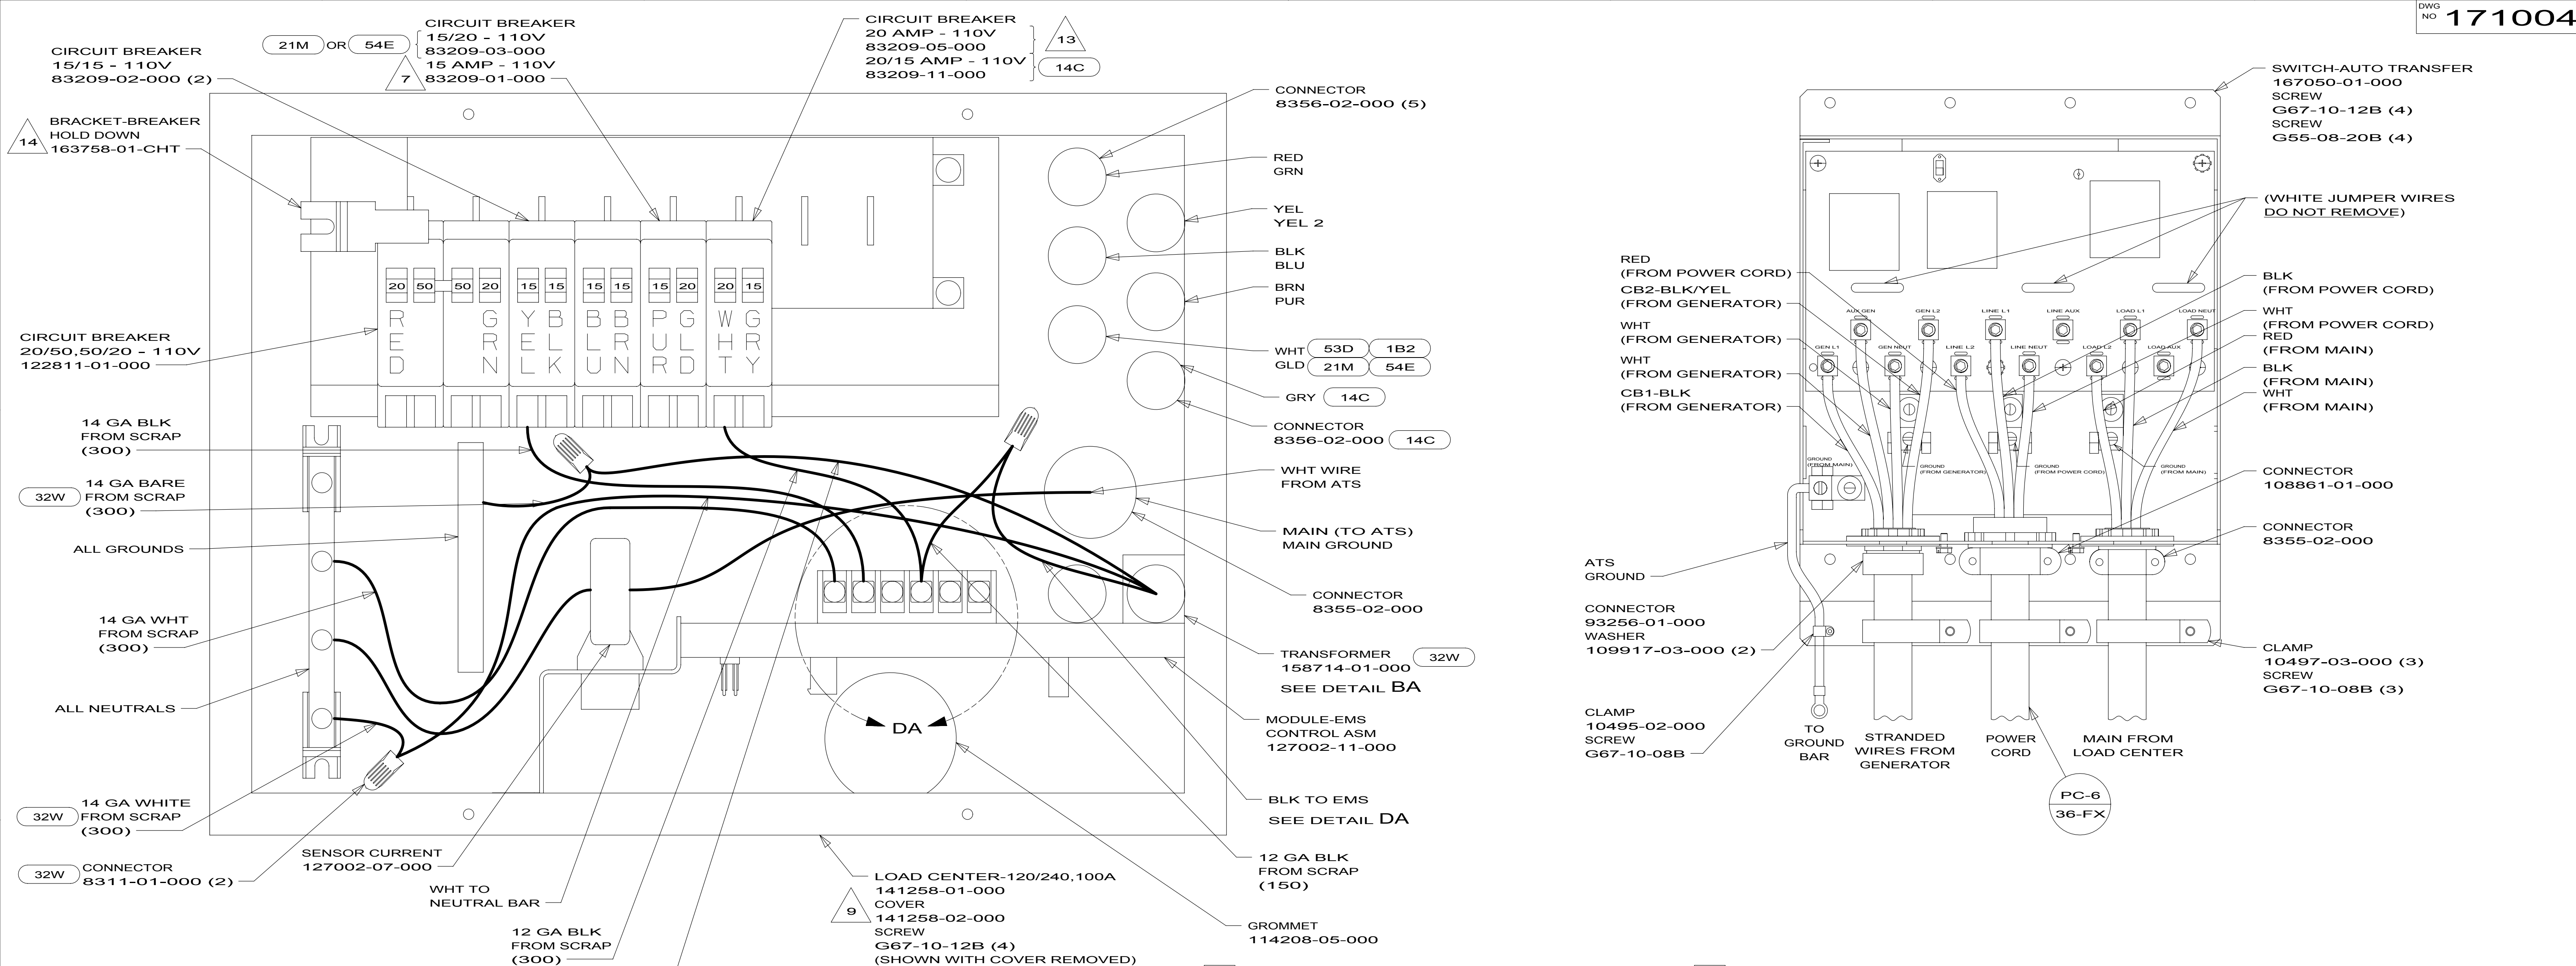

NOTES:

1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
2. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
3. ALL WIRES TO BE CLAMPED WITHIN 200MM OF ATS.
4. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
5. ATTACH WIRES TO BACKSIDE OF LOAD CENTER, USE EXISTING HOLES AND TIE-WIRE 116673-01-000.
6. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS.

COMPONENTS:

- 13 WITHOUT 14C
- 12 BLACKEN OUT FIREPLACE WITHOUT 14C
- 11 BLACKEN OUT WATER HEATER WITH BLACK MARKER WITH 611
- 10 BLACKEN OUT WASHER DRYER WITH BLACK MARKER ON 33V ONLY.
- 9 INSTALLED BY ASSEMBLY LINE.
- 8 WITHOUT 53D OR 1B2
- 7 WITHOUT 21M OR 54E

WIRING LABELS:

A / C	C I R C U I T	1	A / C	C I R C U I T	2	R E F R I G / C O N V	M I C R O W A V E	R E C P S 1	R E C P S 2	R E C P S 3	W A S H E R D R Y E R	W A T E R H E A T E R	L I N D U L K O M
-------	---------------	---	-------	---------------	---	-----------------------	-------------------	-------------	-------------	-------------	-----------------------	-----------------------	-------------------

INSTALL LABEL ON FRONT COVER PLATE BELOW THE BREAKERS

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


10 J-SERIES

DO NOT SCALE DRAWING


TITLE: LOAD CENTER/ATS ASM

SHEET 4 **171004** **REV**

10/15/2009

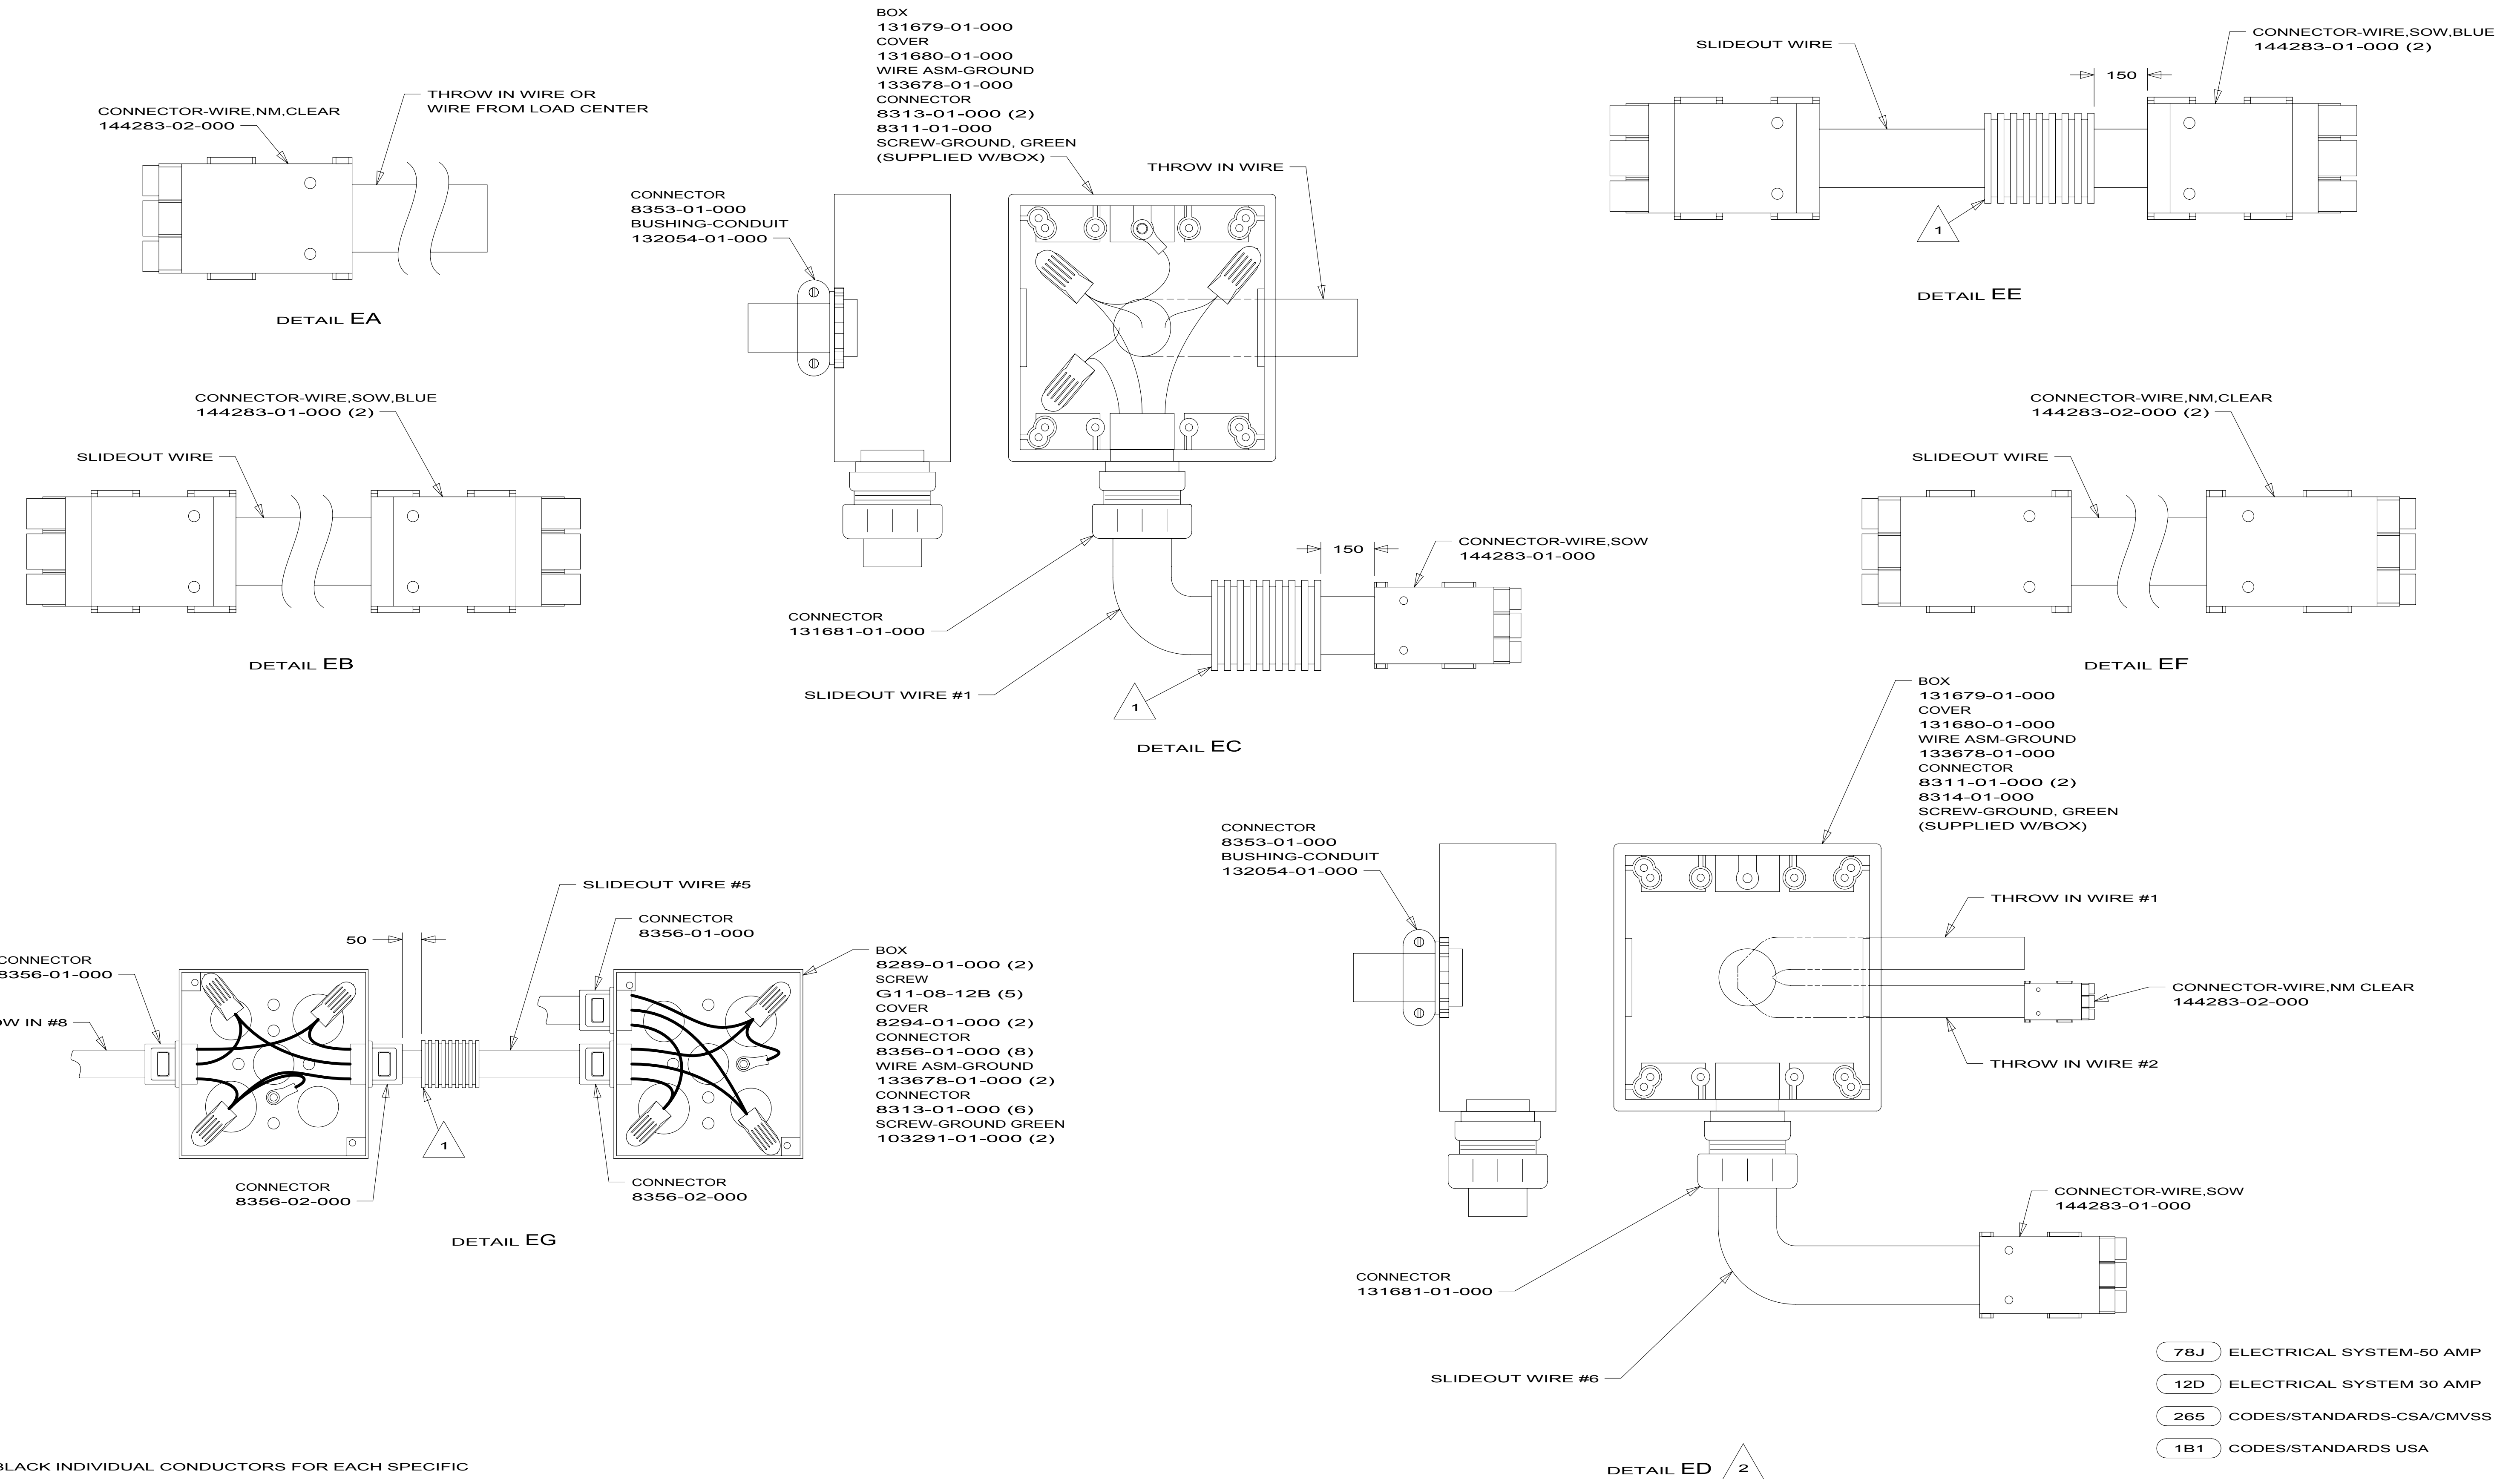

NOTES:

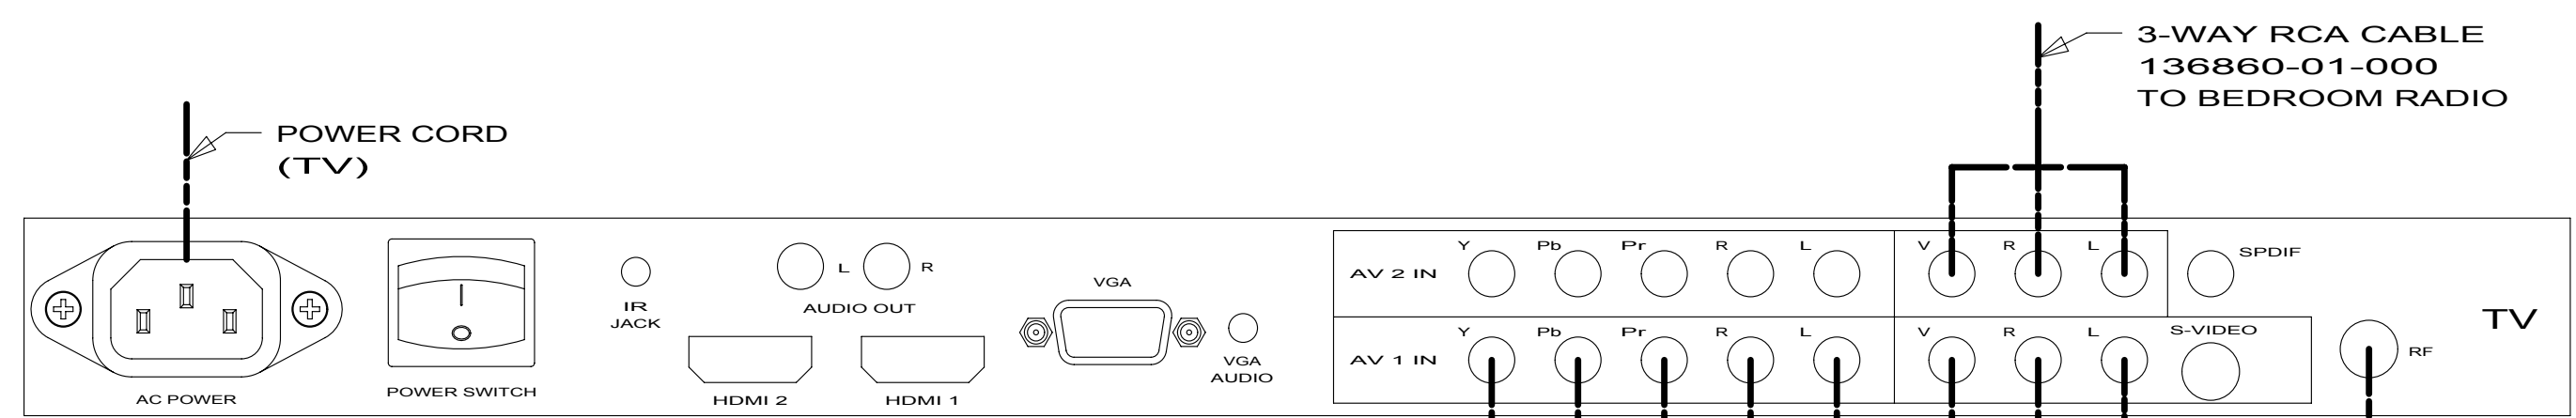


CABLE-RCA,Y
136454-01-000 (2)

DETAIL BA 61K


CABLE-COMPONENT/
COMPOSITE
168245-03-000

LABEL-CABLE
159064-02-01A

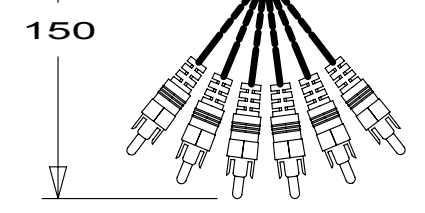

COIL CABLE IN
SATELLITE PREP
AREA

PLATE-WALL
149557-08-02A
SCREW
000G12-06-08B (2)

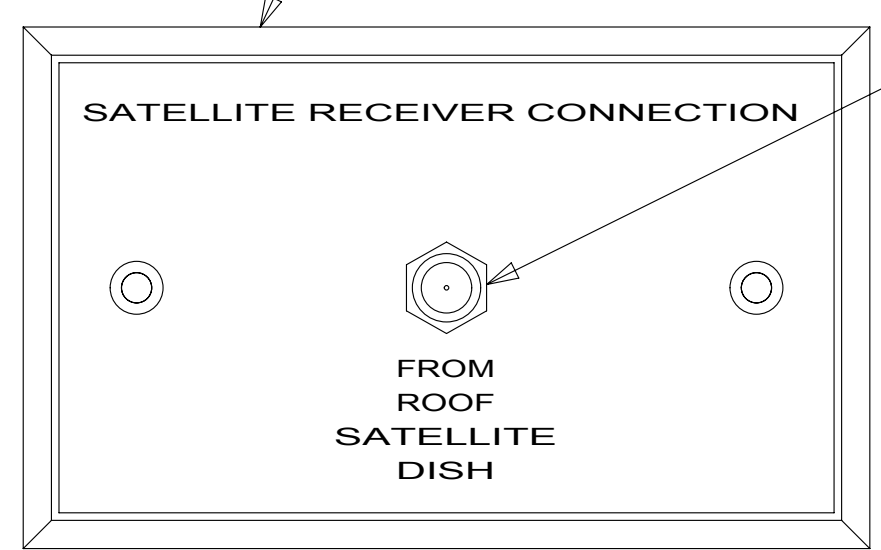

COAX-ORG/ORG
(FROM WIRE ASM-ROOF) 9

LIGHT-HALOGEN,ROUND
165170-01-01A (2)

LIGHT-WARDROBE W/SWITCH
087694-01-000(2)

LIGHT-MAKE UP,3 BULB CURVED
138116-02-02A

WIRE ASM-TOILET
172776-01-000

6-WAY,
3-WAY RCA &
COAX TO TV
DETAIL BA

SLIDEOUT LOCK
DETAIL DH

LIGHT-HALOGEN,ROUND
165170-01-01A

SWITCH
DETAIL EY

SWITCH
DETAIL ET

SLIDEOUT LOCK
DETAIL DJ

21W WIRE ASM-OVHD
172488-01-000

21W LIGHT-HALOGEN,ROUND
165170-01-01A (3)

2 PIN HOUSING
FROM WIRE ASM-SIDEWALL

WIRE ASM-EXTENSION
133572-01-015 14W

SWITCH
DETAIL EV 21W

14W
LAMP
093575-54-01A
SCREW
000G11-06-105 (2)
CONNECTOR
058028-01-000 (2)

2-PIN HOUSING
TO TV POWER
CONTROL 21W

WIRE ASM COACH TO TV
SEE WIRING INSTL-TV
FOR ADDITIONAL INFORMATION
COIL WIRES UNDER GALLEY 14

SPEAKER
124884-01-000
GRILL
151844-01-01A
SCREW
076790-01-000 (4)

WIRE ASM-COACH
ROUTED WITH WATER LINES
& 110V WIRING 11

COAX CONNECTIONS
DETAIL DL

MISC HOUSINGS
TO SIDEWALL
FROM WIRE ASM-COACH

MM,MS
TO SIDEMARKER LAMP

ET,EU
TO REFRIGERATOR

WIRE ASM-SLIDEOUT
172439-01-000

SWITCH
DETAIL EC

RADIO-WALL MT,
DVD/CD/W ALARM
169536-01-01A
SCREW
076790-03-000 (4)
FILTER-VIDEO NOISE
165161-01-000

25D 13

COAX TO SATELLITE
PREP PLATE & TV
DETAIL BB

COIL 6-WAY
RCA HERE

SWITCH
DETAIL EX

SWITCH
DETAIL EW

SWITCH
DETAIL ES

TOILET-SWITCH
170062-02-01A

CONVERTER
DETAIL DC

- 14 WITHOUT 21W .
- 13 CONNECTS INLINE OF THE YELLOW VIDEO CABLE. WRAP BOTH ENDS OF FILTER CONNECTIONS WITH TAPE 008363-01-000 TO SECURE FILTER.
- 12 PLACE CONNECTOR HERE TO MAKE CONNECTION TO WIRE ASM. USE CONNECTOR 058028-01-000 (2).
- 11 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
- 10 CONNECTS TO FRONT OF SATELLITE PREP PLATE.
- 9 CONNECTS TO REAR OF SATELLITE PREP PLATE.
- 8 INSTALL GASKET ON BACKSIDE OF ONE PLACE AFTER INSTALLATION OF THERMOSTAT, MAKING SURE THAT THE GASKET COVERS AND SEALS THE HOLE THAT THE WIRES PASS THROUGH.
- 7 ADD CONDUIT 041953-07 TO COVER EXPOSED WIRES.
- 6 MOUNT DEVICE AS CLOSE TO WIRE DROP FROM CABINET AS POSSIBLE.
- 5 WIRE IN ROOF.
- 4 WIRE IN SIDEWALL.
- 3 WIRE PASSES THROUGH FLOOR AT THIS POINT.
2. SEE WIRING DIAGRAM-BODY,12V FOR ADDITIONAL INFORMATION.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 010495-01-000 OR WIRE TIE 008343-02-000 EVERY 600MM UNLESS OTHERWISE SPECIFIED.


NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 21W DINING/BUFFET/37" TV
- 14W DINETTE
- 25D STEREO SYSTEM/W/CD/DVD REAR
- 61K TV(REAR)-26" COLOR STEREO
- 40D INVERTER-DC/AC,600 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-BODY,12V		
SHEET 2	PART NO	REV
	172074	

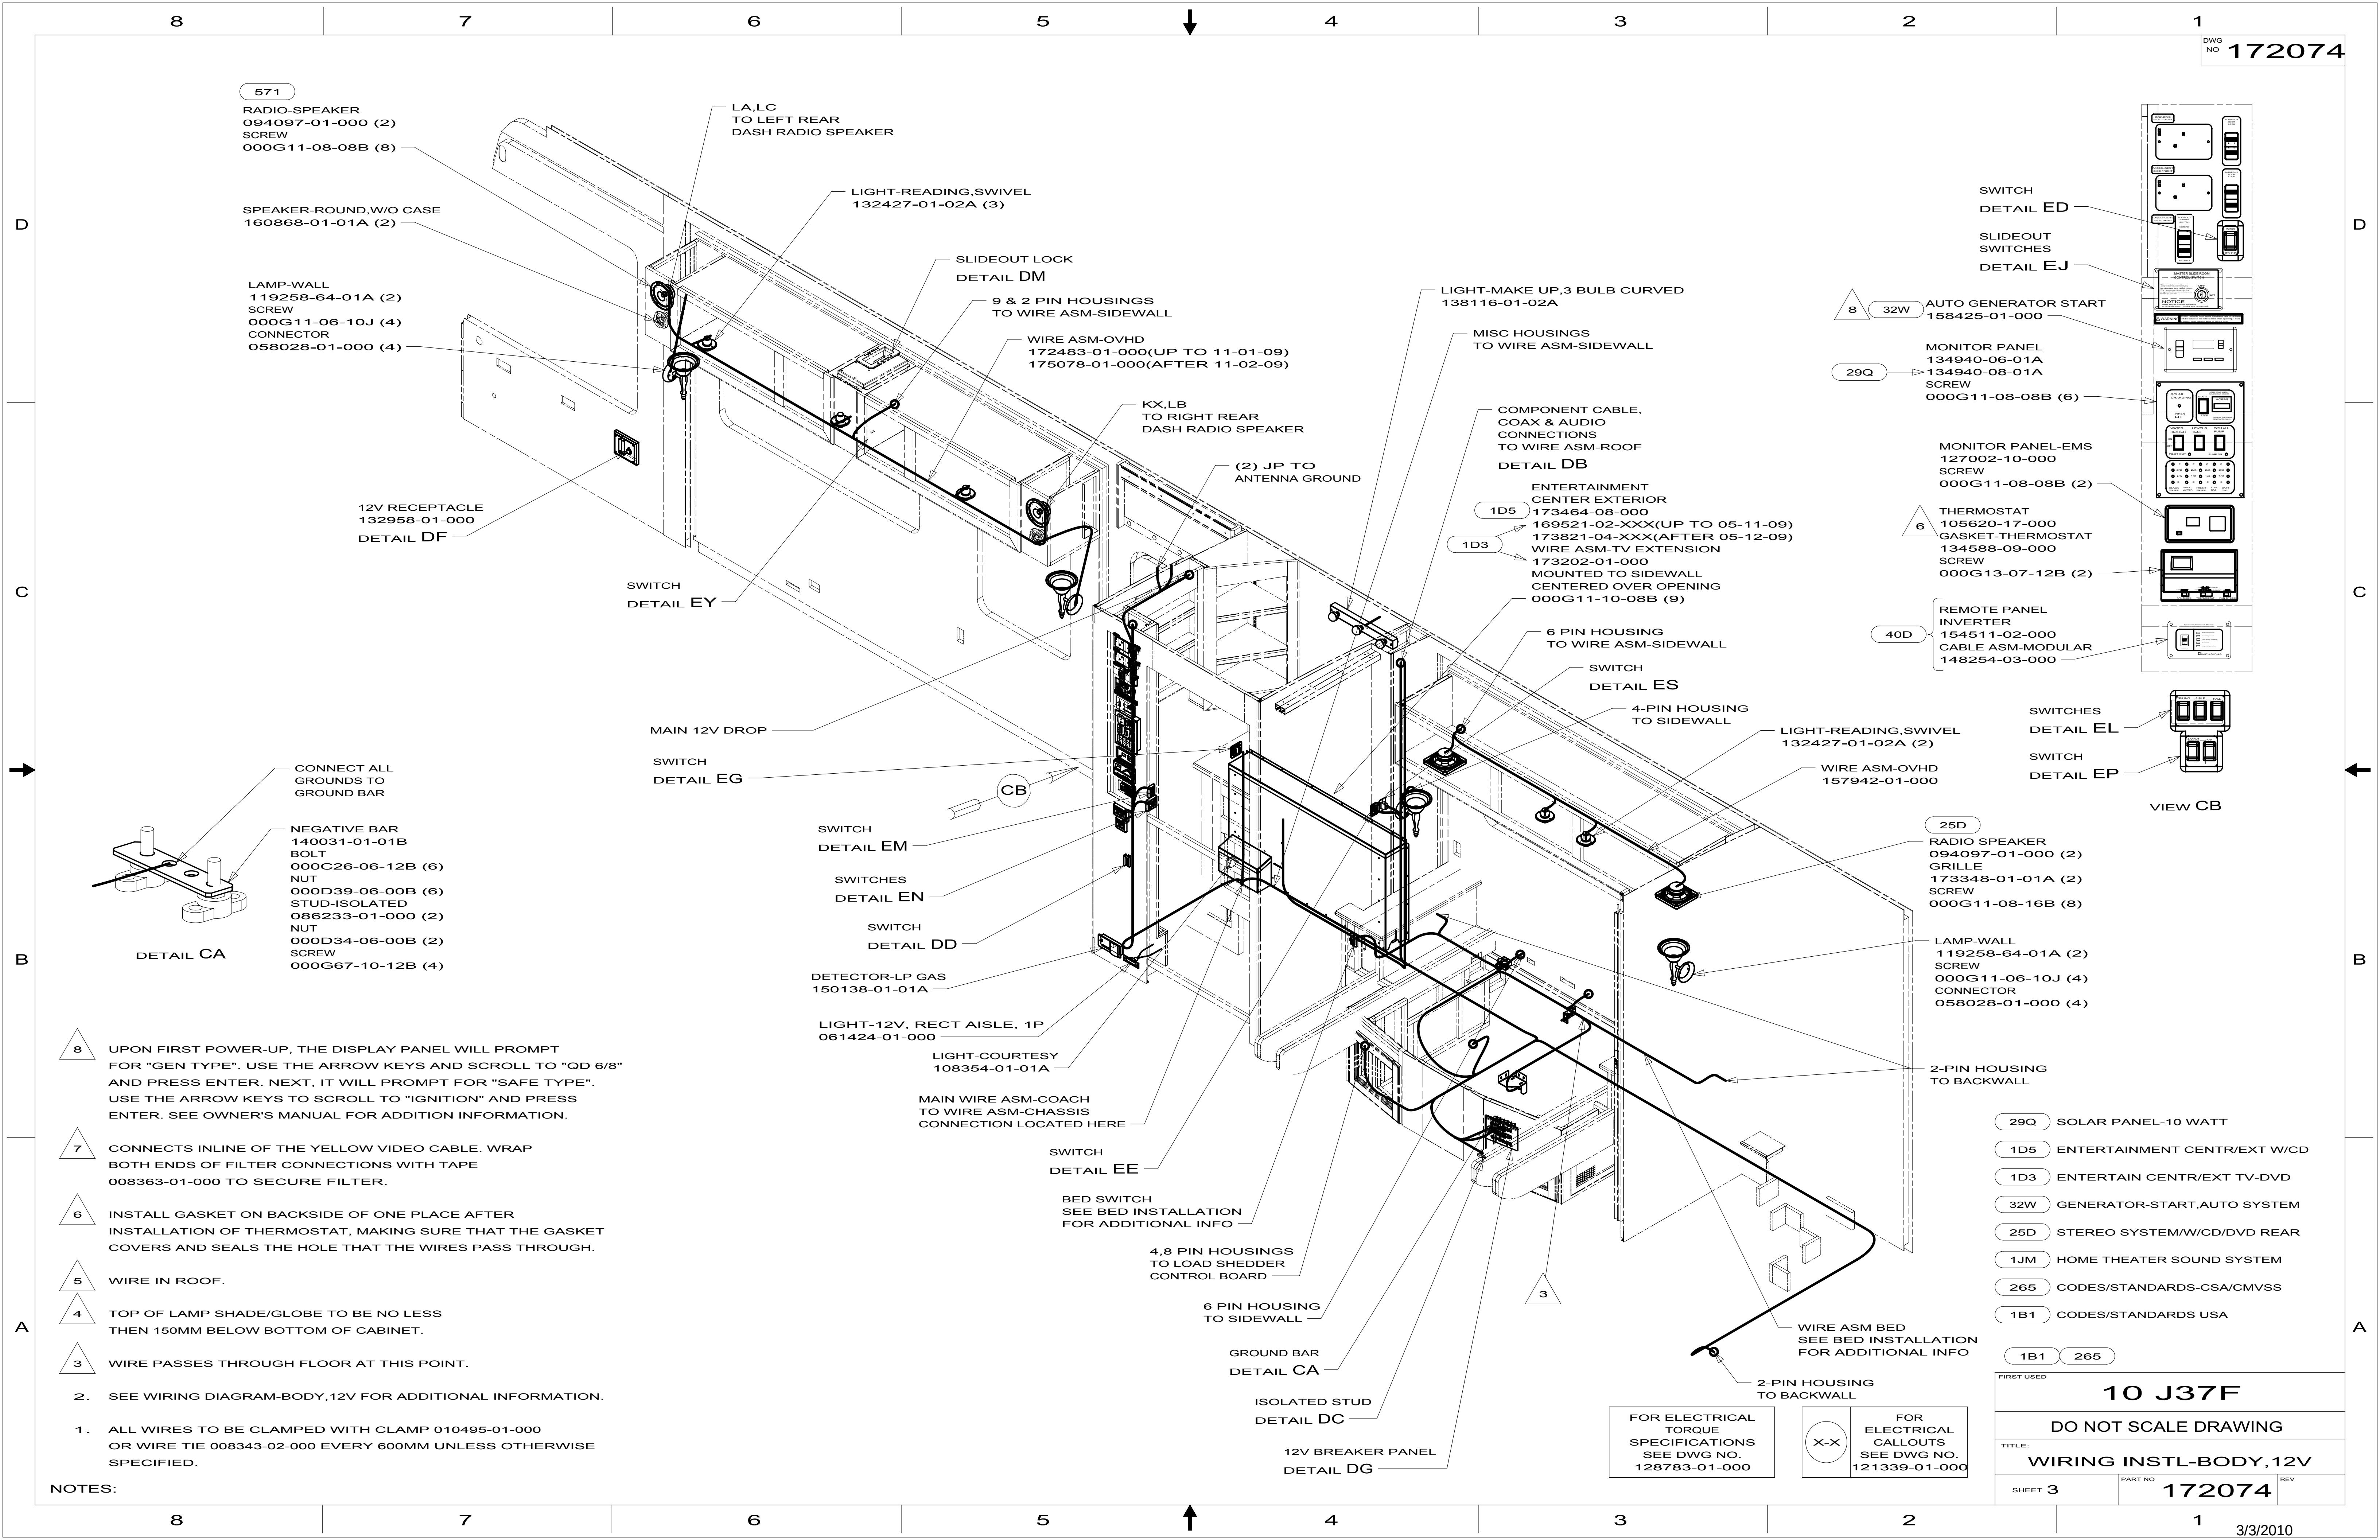

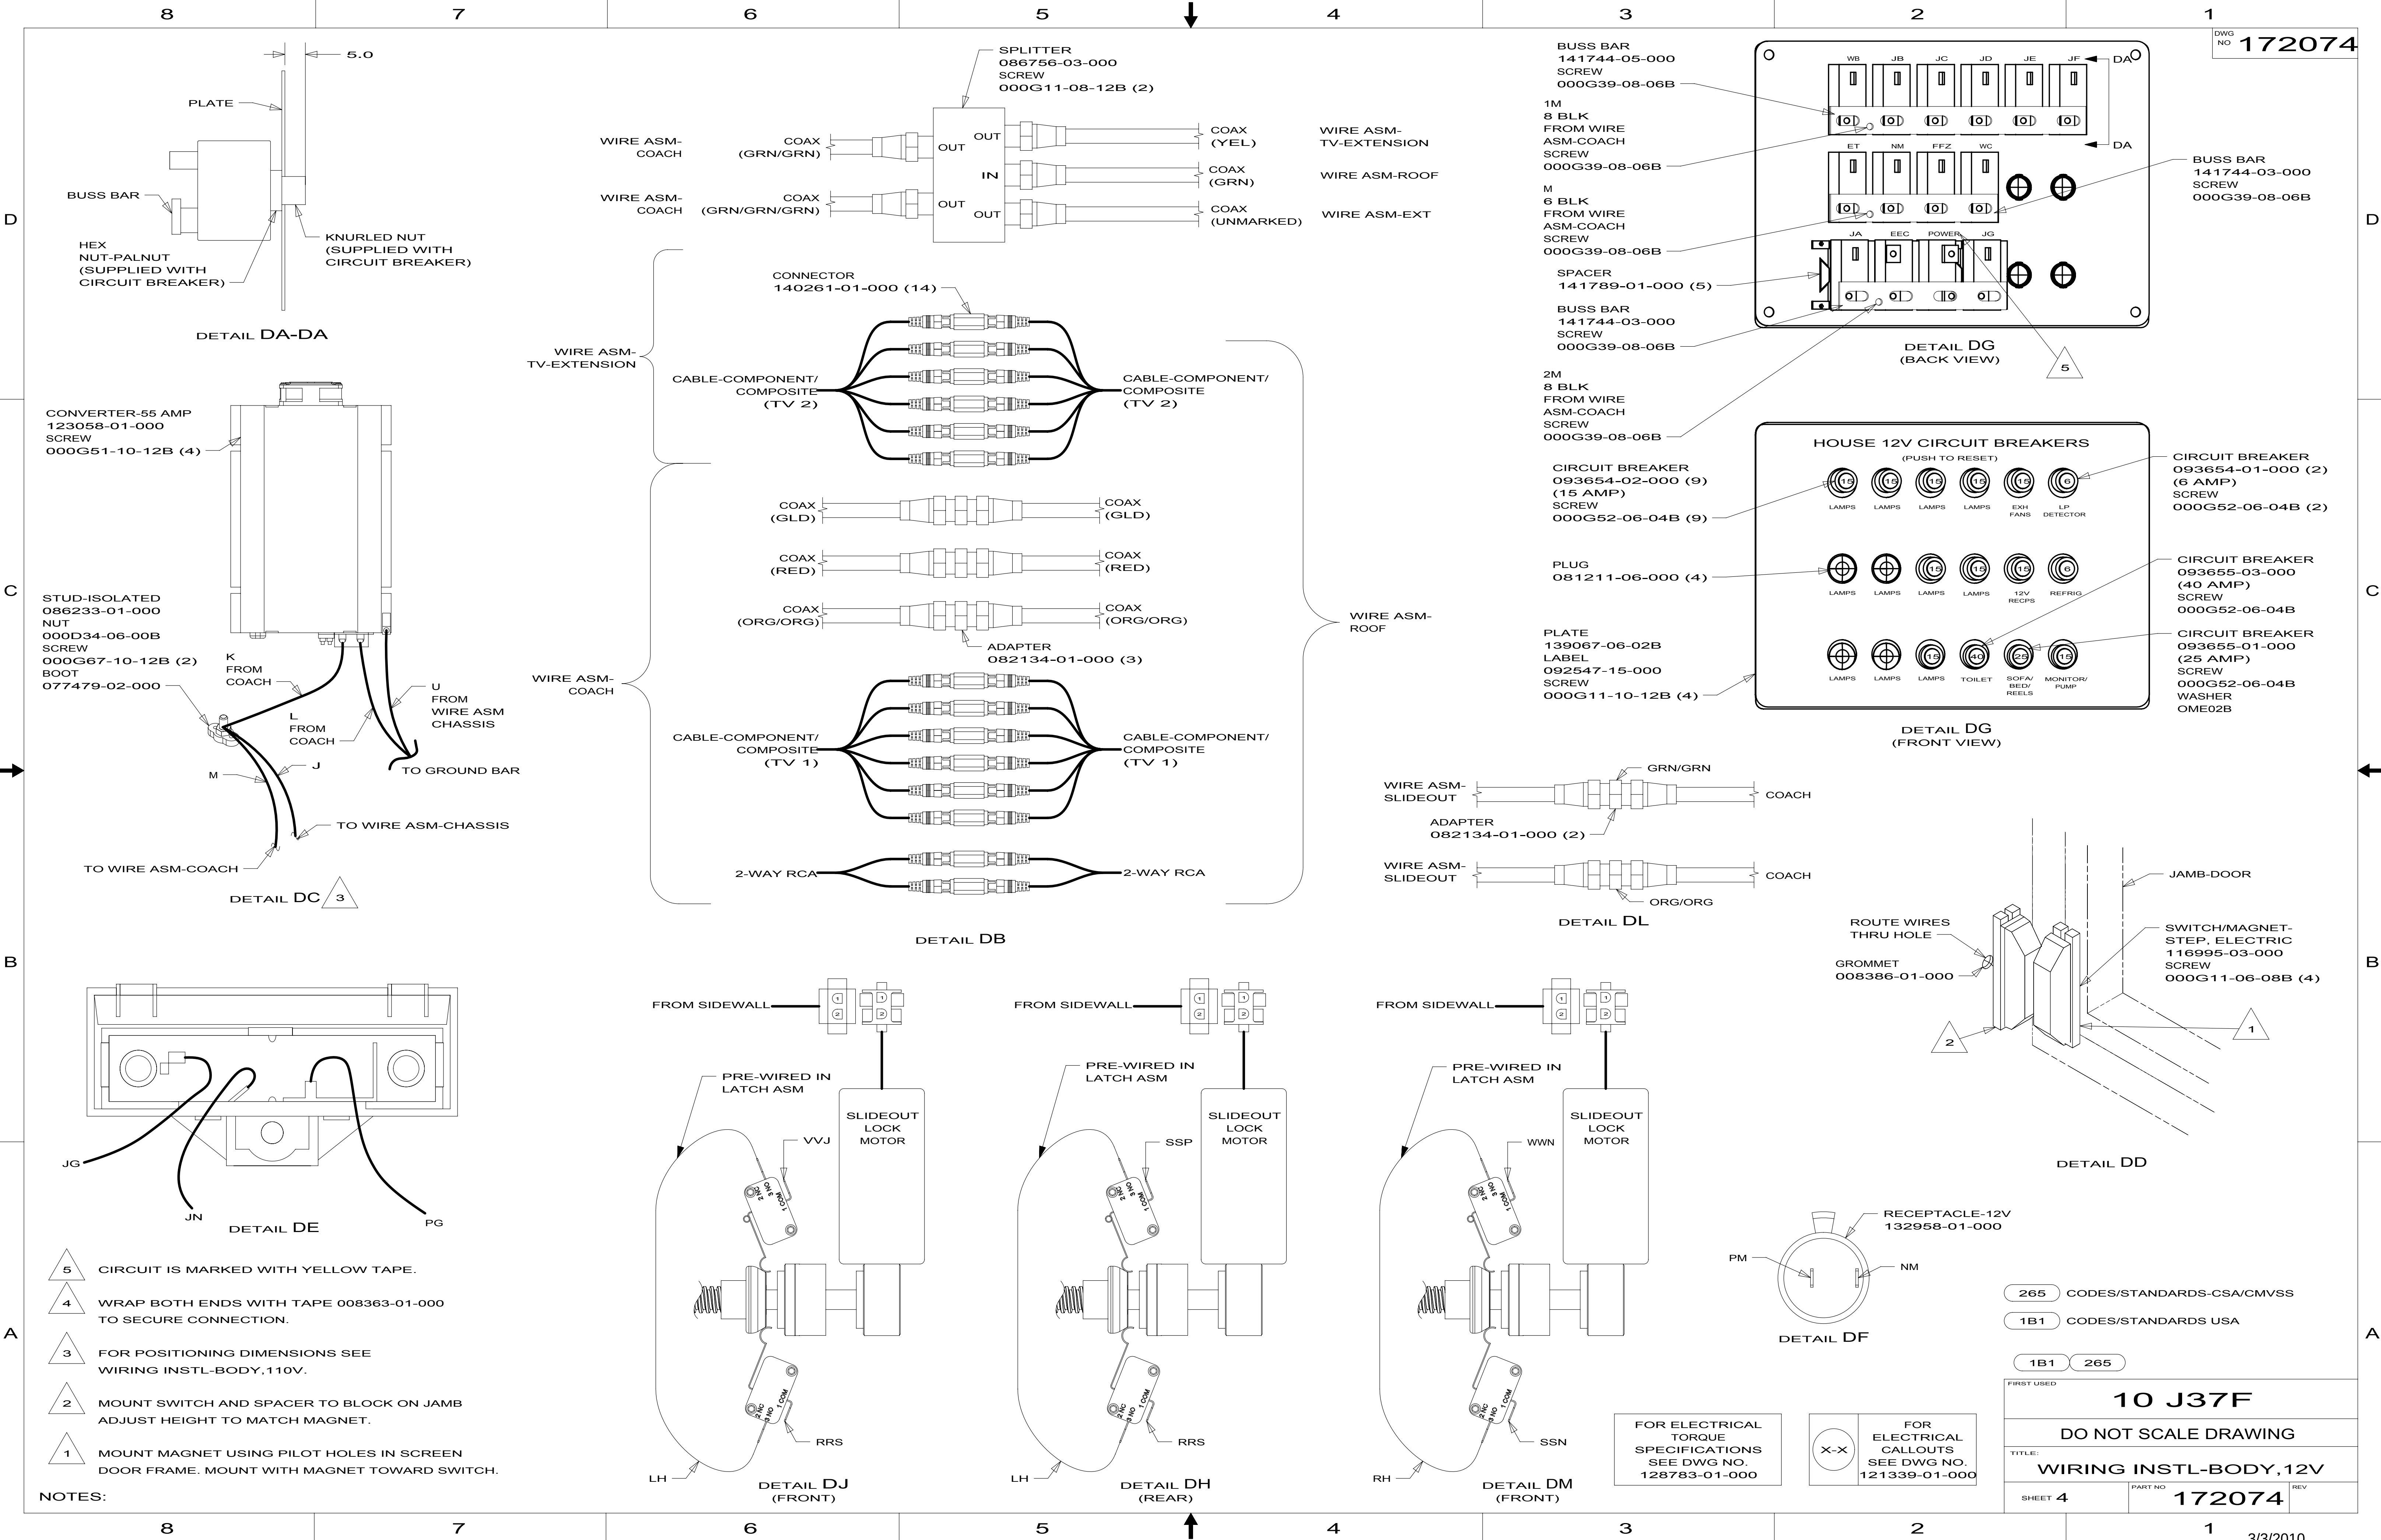

52N
2
SWITCH-AWNING
108357-07-000
ACTUATOR
108356-12-01A
FFR,FFP,FFN
SWITCH-BLANK
096241-03-000

SWITCH-AUTO LEVEL
108357-18-000
ACTUATOR-SWITCH
108356-15-01A
CIRCUITS SSD,SSE,
SSC,SSE,SSF

SWITCH-COMPT LIGHTS
108357-01-000
ACTUATOR-SWITCH
108356-14-01A
CIRCUITS WC,WA

PLATE-SWITCH
158431-03-04B
SCREW
000G11-06-10B (6)

SWITCH-STEP
108357-19-000
CIRCUITS ER,ES

SWITCH-COACH BATT
108357-17-000
ACTUATOR-SWITCH
108356-19-01A
CIRCUITS KF,LG,
LJ,LJ,LH,KF,KF,LK

SWITCH-CHASSIS BATT
108357-17-000
ACTUATOR-SWITCH
108356-20-01A
CIRCUITS UUC,TTY,UUB,
UUB,TTZ,UUC,UUC,UUA


VIEW EA 3

SWITCH-PUMP
108357-15-000
ACTUATOR
108356-03-01A
JY,AG,JA,AF,JS

SWITCH-SERVICE LAMP
108357-01-000
ACTUATOR
108356-01-01A
WC,WA

SWITCH-AUTO LEVEL
108357-18-000
ACTUATOR-SWITCH
108356-03-01A
SSD,SSE,SSC,SSF,SSE
SWITCH-BLANK
96241-03-000

DETAIL EB 3

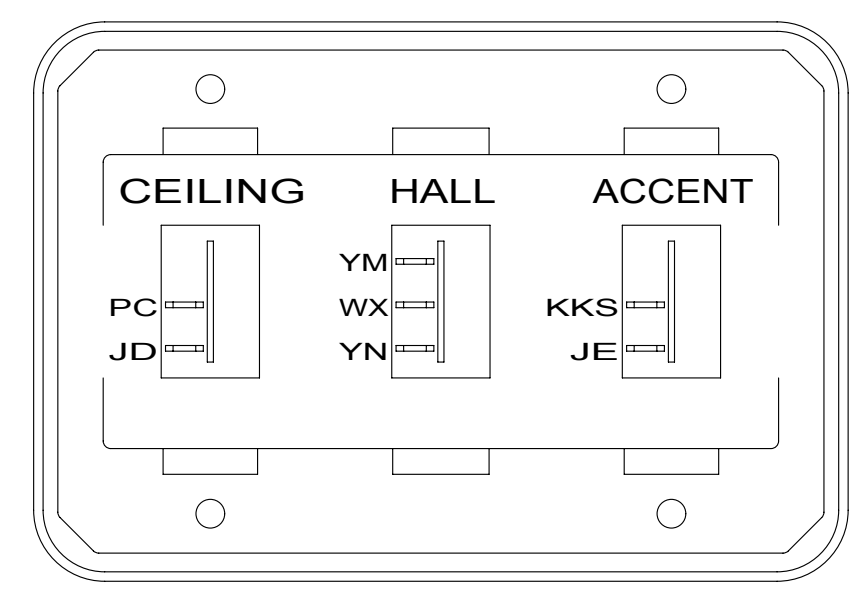

DETAIL EC

SWITCH-ROCKER
135740-01-01A (2)
135740-02-01A
SWITCH-BASE
135741-03-01A
SWITCH-BEZEL
135742-57-02A
SCREW
000G11-08-08B (4)


4 WITHOUT 1B2 OR 53D

3 FOR SWITCH ORIENTATION SEE DETAIL EK.


2 WITHOUT 52N

1. SWITCHES ARE TO BE INSTALLED AS SHOWN ON THIS DRAWING.


NOTES:

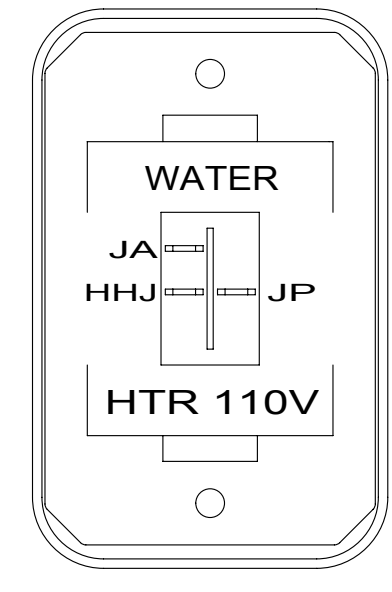


DETAIL ED

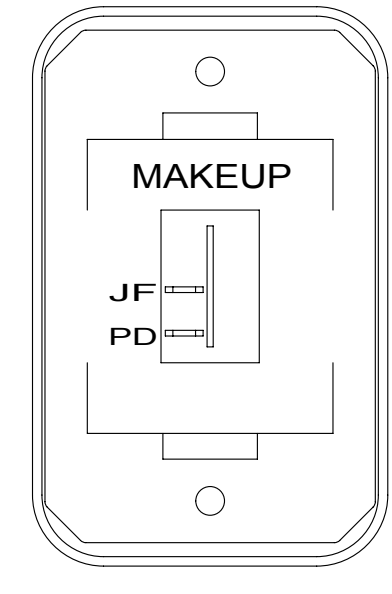


DETAIL EE

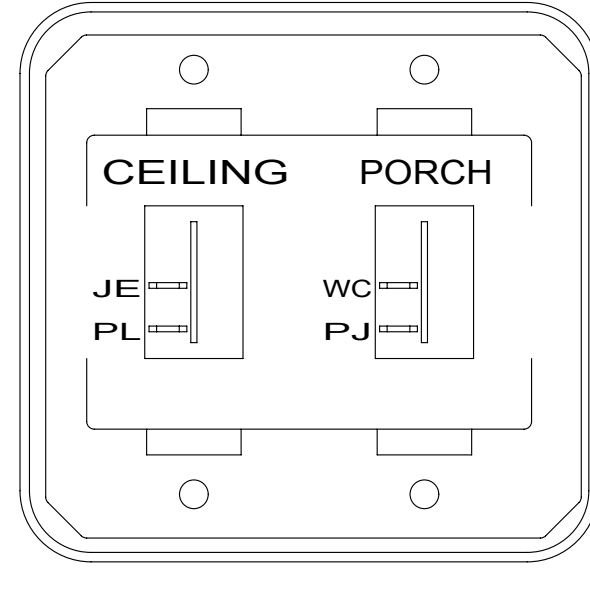


DETAIL EG

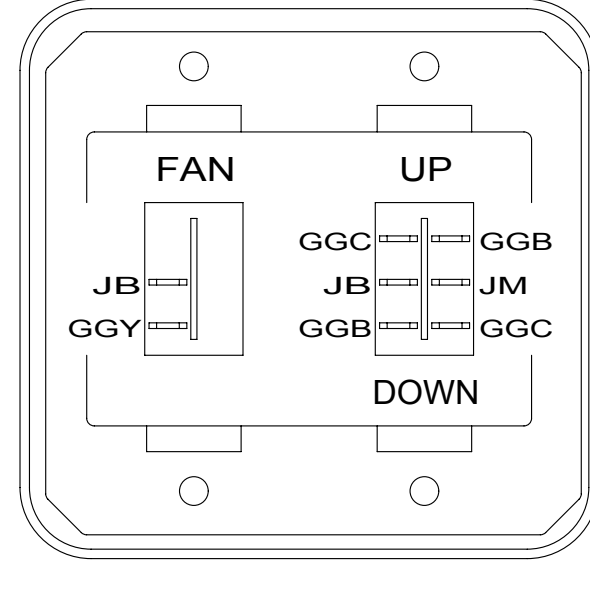

DETAIL EW

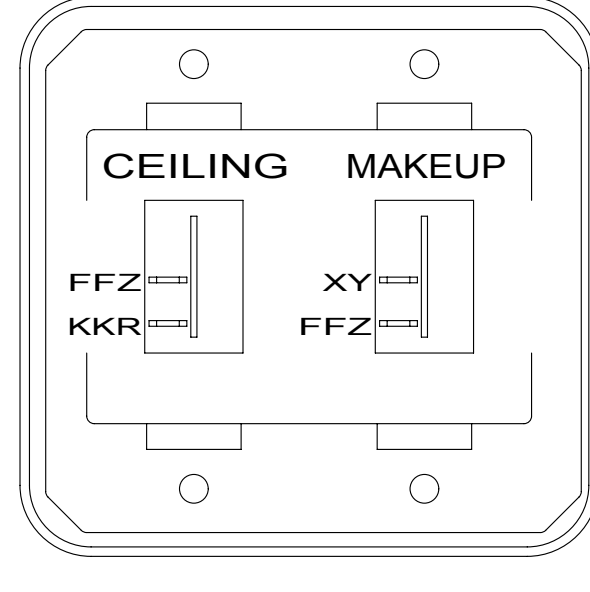

DETAIL EX

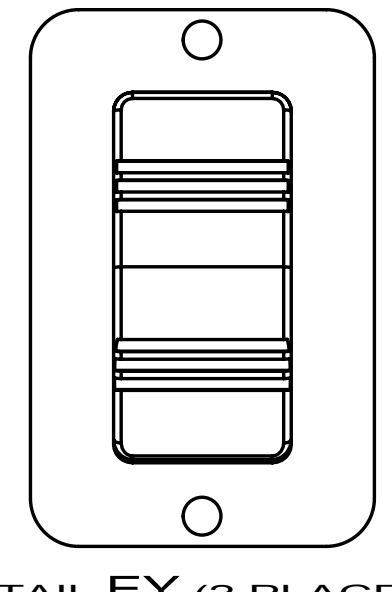

DETAIL EY (2 PLACES)

SWITCH-ROCKER
135740-06-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-35-02A
SCREW
000G11-08-08B (2)


SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-08-02A
SCREW
000G11-08-08B (2)

SWITCH-ROCKER
135740-01-01A (2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-19-02A
SCREW
000G11-08-08B (4)


SWITCH-ROCKER
135740-01-01A
135740-03-01A
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-17-02A
SCREW
000G11-08-08B (4)

SWITCH-ROCKER
135740-01-01A (2)
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-14-02A
SCREW
000G11-08-08B (4)


SWITCH-TV-LIFT
108357-16-000(UP TO 12-29-09)
108357-07-000(AFTER 12-30-09)
ACTUATOR
108356-01-01A(UP TO 12-29-09)
108356-26-000(AFTER 12-30-09)
PLATE
098351-07-03A
SCREW
000G11-06-10B (2)

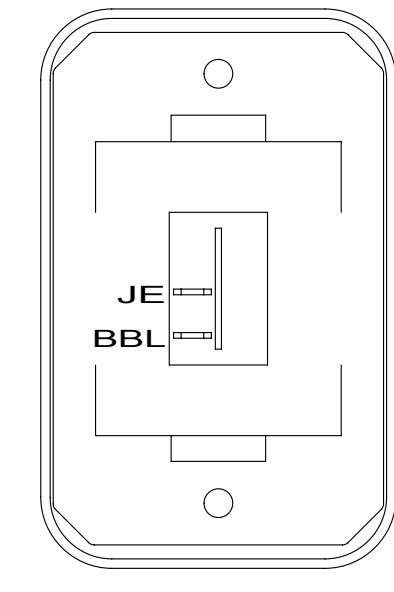


DETAIL ET

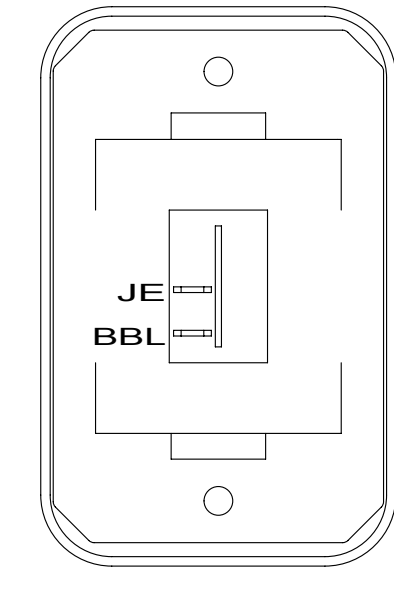


DETAIL EV 21W

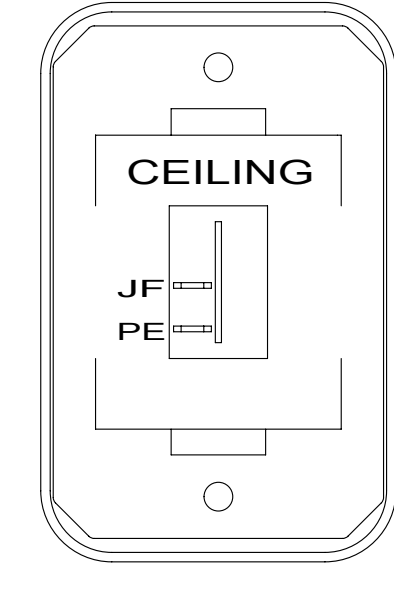


DETAIL EM

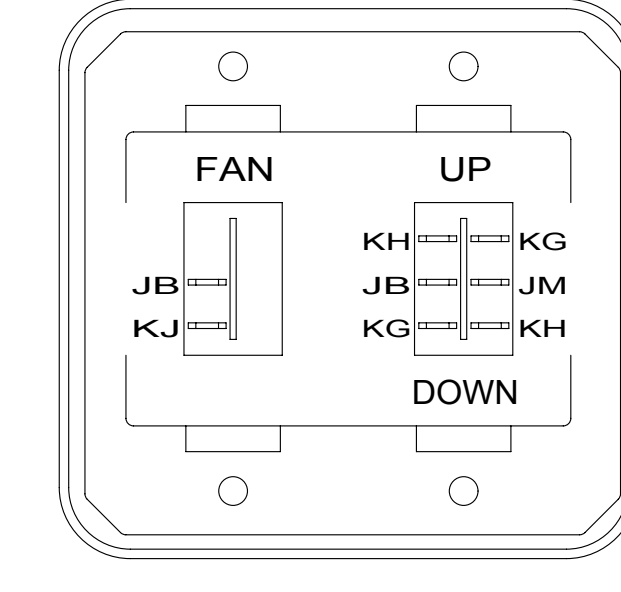

DETAIL EN

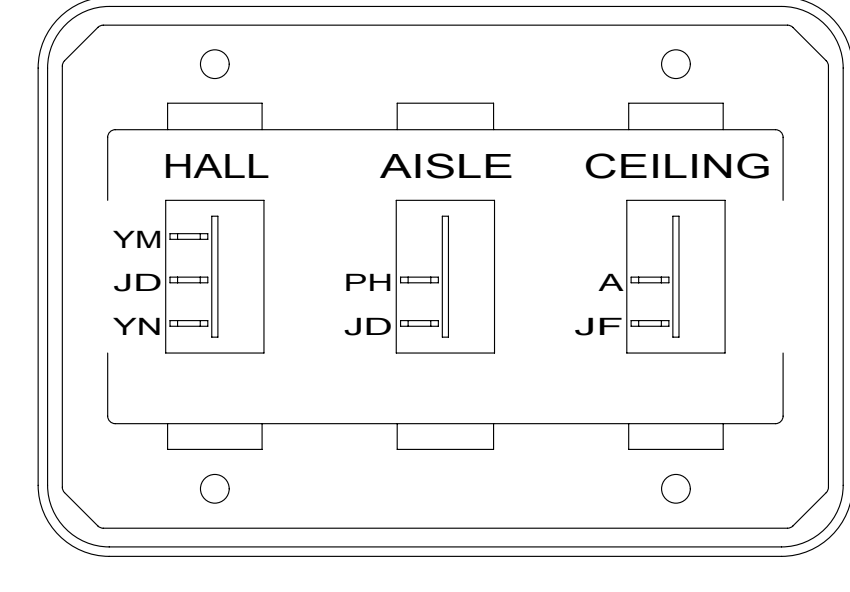

DETAIL EL

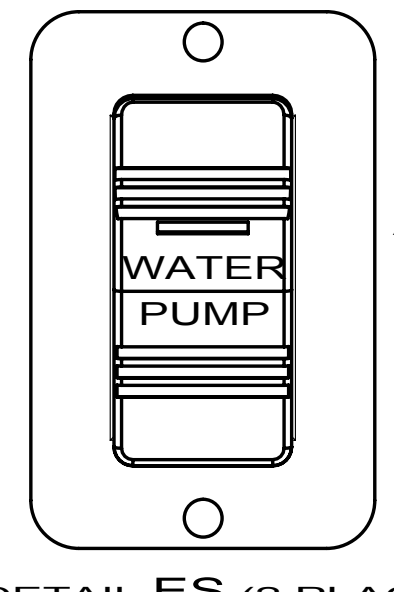

DETAIL ES (2 PLACES)

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-01-01A
SCREW
000G11-08-08B (2)

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-07-02A
SCREW
000G11-08-08B (2)

SWITCH-ROCKER
135740-01-01A
135740-03-01A
SWITCH-BASE
135741-02-01A
SWITCH-BEZEL
135742-17-02A
SCREW
000G11-08-08B (4)

SWITCH-ROCKER
135740-01-01A (2)
135740-02-01A
SWITCH-BASE
135741-03-01A
SWITCH-BEZEL
135742-25-02A
SCREW
000G11-08-08B (4)

SWITCH-PUMP
108357-15-000
ACTUATOR
108356-23-01A
PLATE
098351-07-03A
SCREW
000G11-06-10B (2)

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

LABEL-SLIDEOUT,DRIVERS,FRT
163992-01-01A

CONNECT TO 12-PIN
HOUSING WITH CIRCUITS
SSP,GGE,GGF,GGD,
DR,DV,VVP,VVN.

LABEL-SLIDEOUT,DRIVER,REAR
163992-04-01A

CONNECT TO 12-PIN
HOUSING WITH CIRCUITS
WWN,NNP,NNR,NNP,
HHE,HFF,WWR,WWP

SLIDEOUT-ELEC,FRONT
171341-01-000 (2)
SCREW
076790-05-000 (4)

LABEL-SLIDEOUT,PASS,REAR
163992-03-01A





PLATE-SWITCH
144363-09-02B
SWITCH
108357-07-000
ACTUATOR
108356-01-01A
NUT
000D65-08-00B (2)
LABEL
116220-01-000
(CIRCUITS MMA,PPW,MMC)

PLATE-KEY,SLIDE ROOM
163987-01-02B
SCREW
076790-05-000 (4)

LABEL-SLIDEROOM CONTROL,MAN
163988-02-01A


SWITCH-KEY,SPST-ILLINOIS LCK
163097-01-000
(CONNECTS TO CIRCUITS DY & DDJ)

LABEL-WARNING,SLIDEOUT
116549-01-000

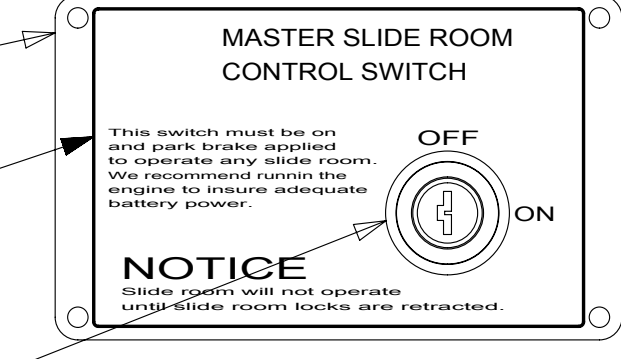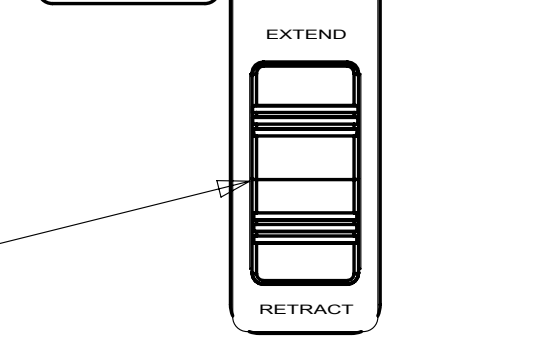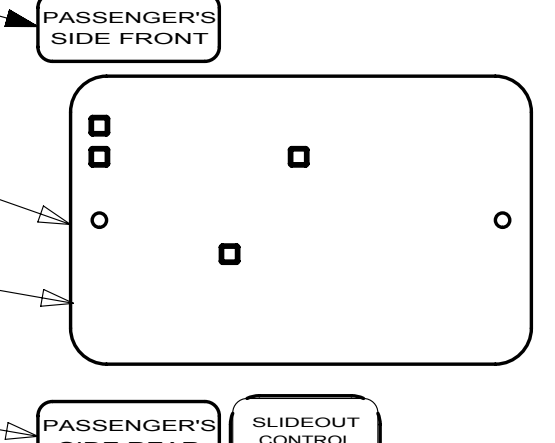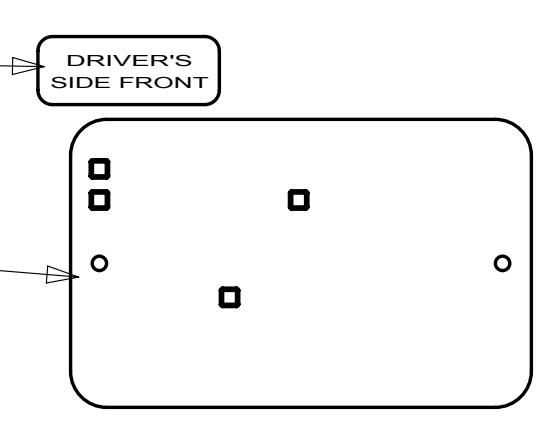


CRUSH HAZARD. Keep people and objects clear of the inside and the outside of the slideout room when operating. Failure to comply could result in death or serious injury.

DETAIL EJ

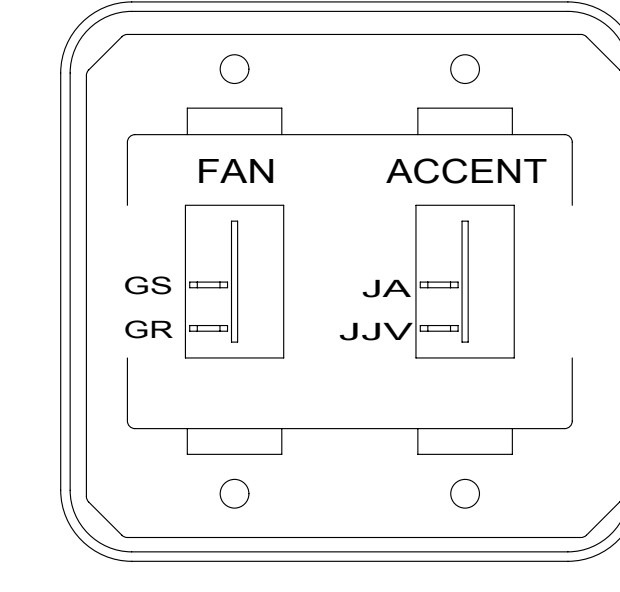

DETAIL EP 41M

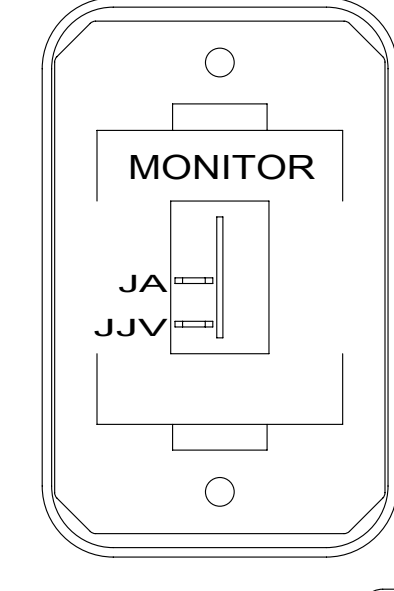

DETAIL EP 311

SWITCH-ROCKER
135740-01-01A
SWITCH-BASE
135741-01-01A
SWITCH-BEZEL
135742-30-02A
SCREW
000G11-08-08B (2)

21W DINING/BUFFET/37" TV

41M VENT-POWER VENTILATOR

311 VENT-NON-POWERED


52N AWNING - PATIO, ELECTRIC

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 5	PART NO 172074	REV

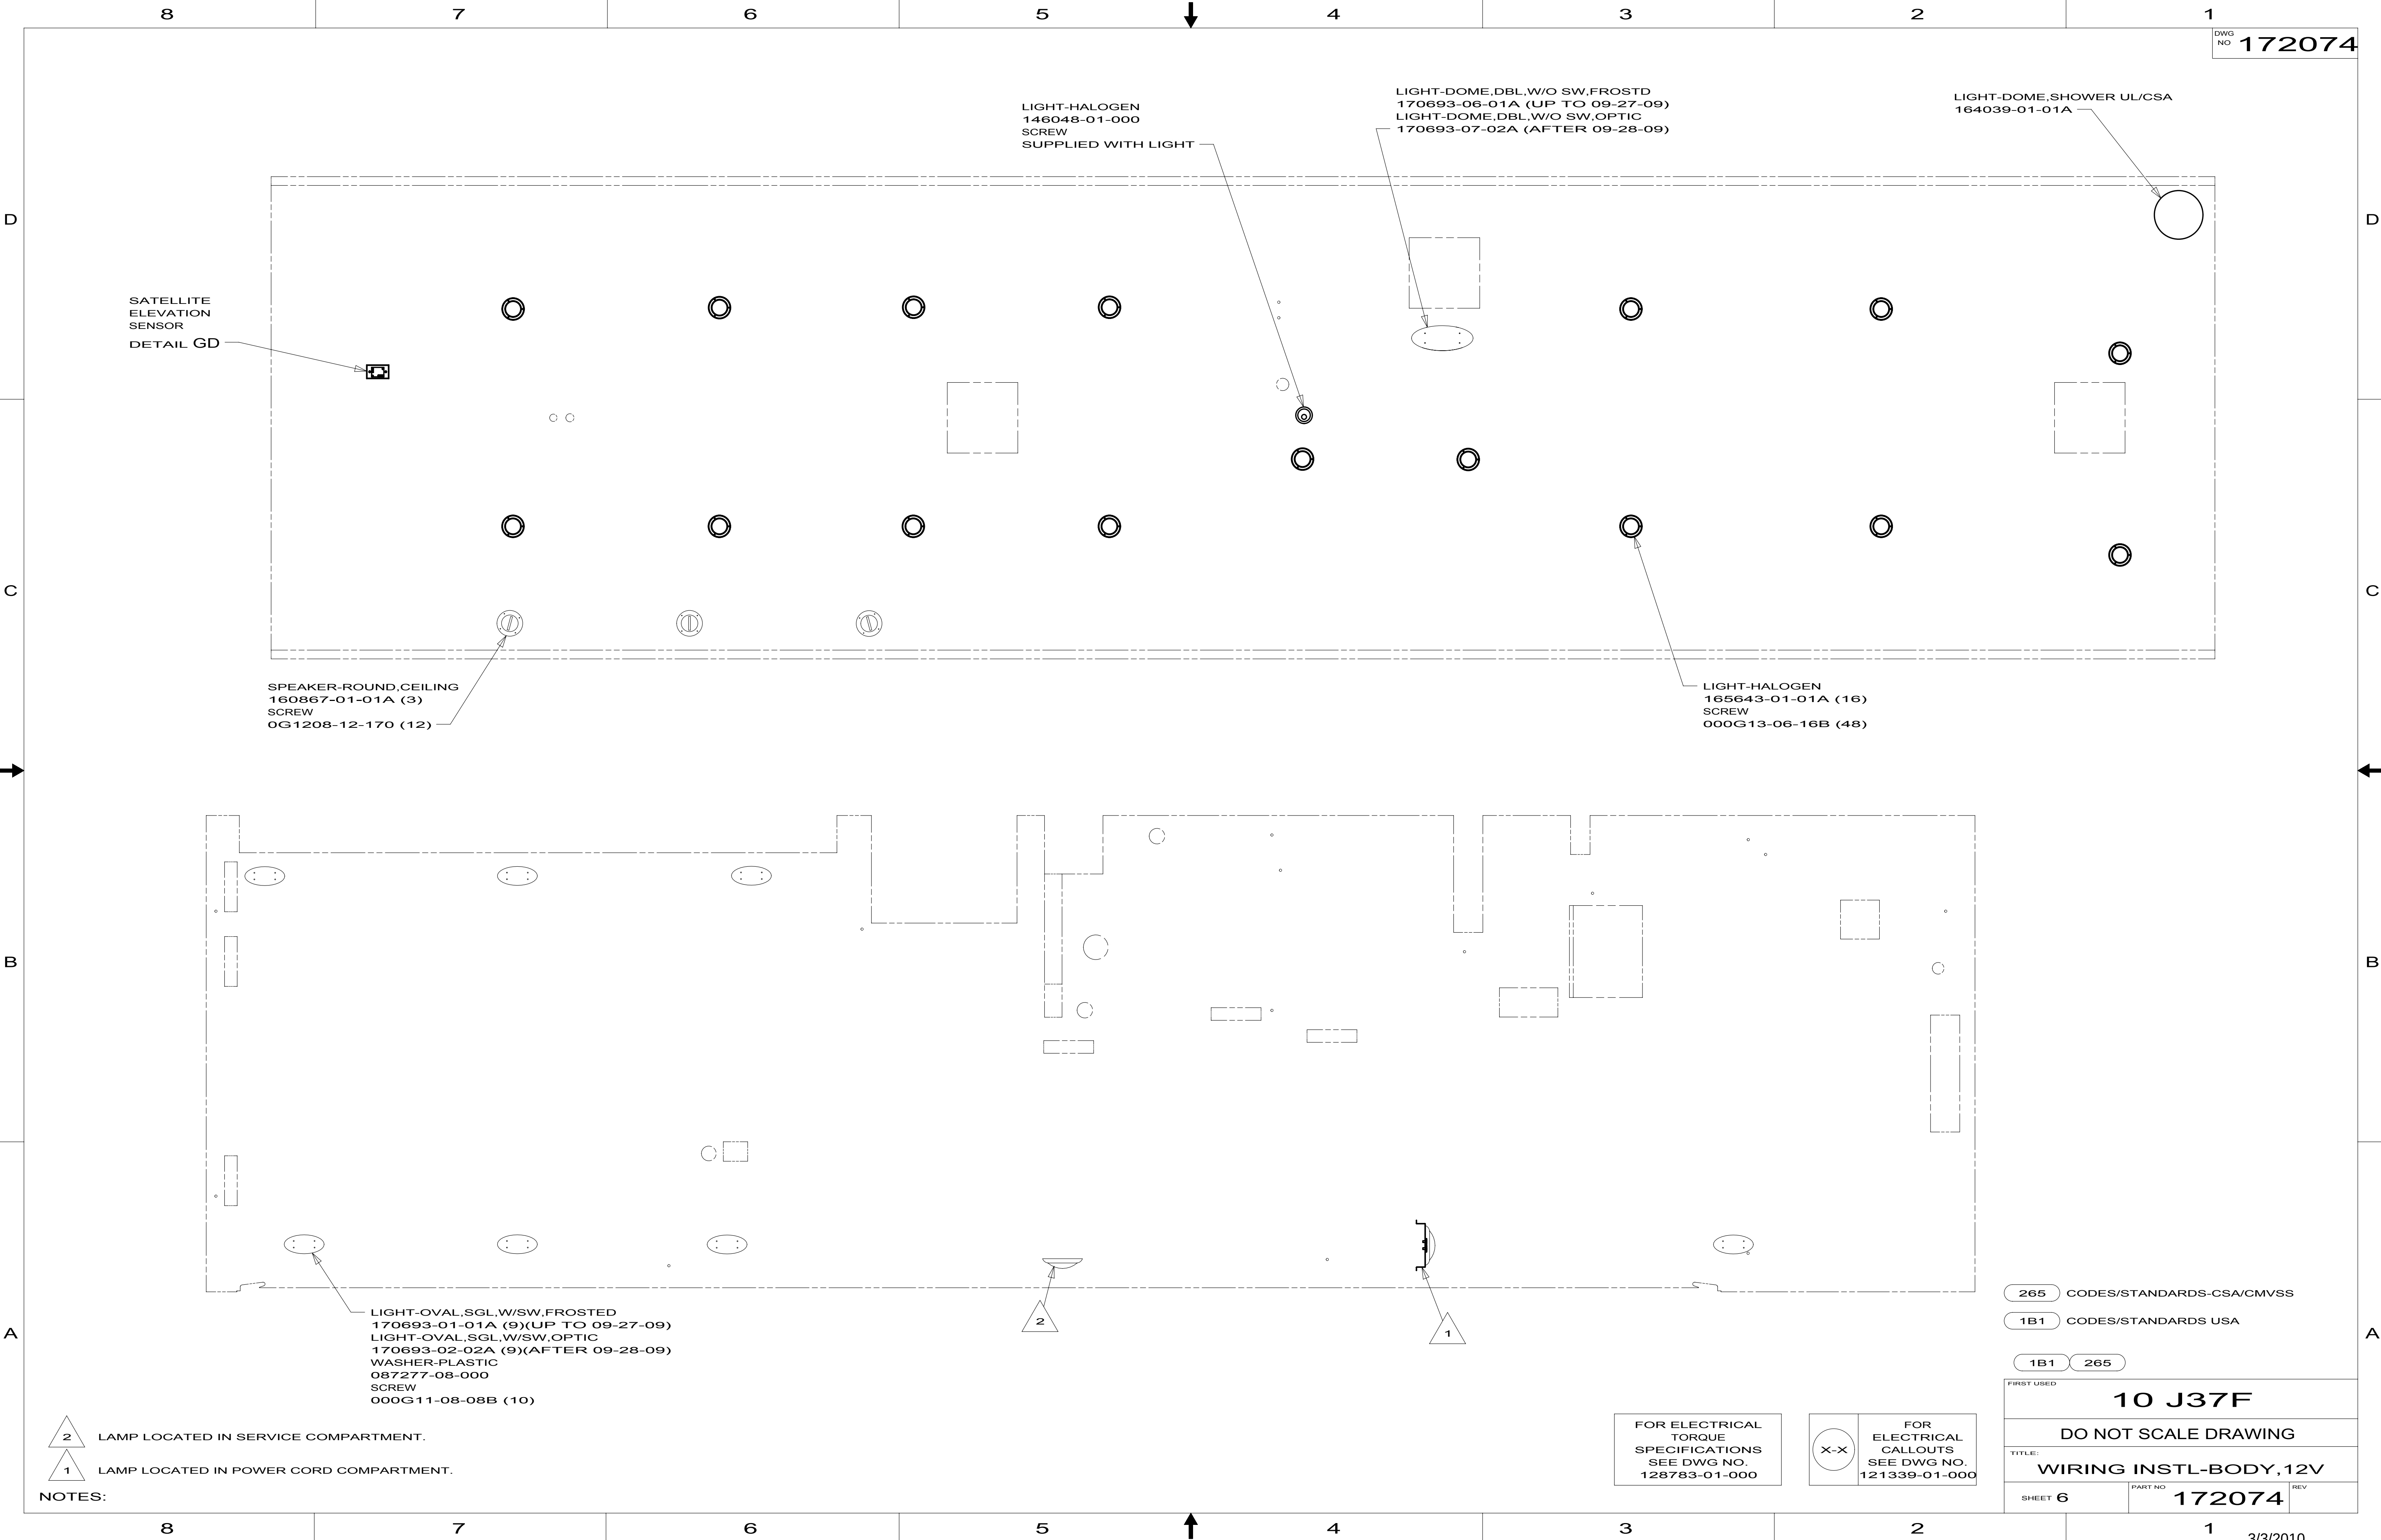

SATELLITE
ELEVATION
SENSOR
DETAIL GD

LIGHT-HALOGEN
146048-01-000
SCREW
SUPPLIED WITH LIGHT

LIGHT-DOME,DBL,W/O SW,FROSTD
170693-06-01A (UP TO 09-27-09)
LIGHT-DOME,DBL,W/O SW,OPTIC
170693-07-02A (AFTER 09-28-09)

LIGHT-DOME,SHOWER UL/CSA
164039-01-01A

SPEAKER-ROUND,CEILING
160867-01-01A (3)
SCREW
0G1208-12-170 (12)

LIGHT-HALOGEN
165643-01-01A (16)
SCREW
000G13-06-16B (48)

LIGHT-OVAL,SGL,W/SW,FROSTED
170693-01-01A (9)(UP TO 09-27-09)
LIGHT-OVAL,SGL,W/SW,OPTIC
170693-02-02A (9)(AFTER 09-28-09)
WASHER-PLASTIC
087277-08-000
SCREW
000G11-08-08B (10)

2 LAMP LOCATED IN SERVICE COMPARTMENT.
1 LAMP LOCATED IN POWER CORD COMPARTMENT.


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000



FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-BODY,12V		
SHEET 6	PART NO 172074	REV

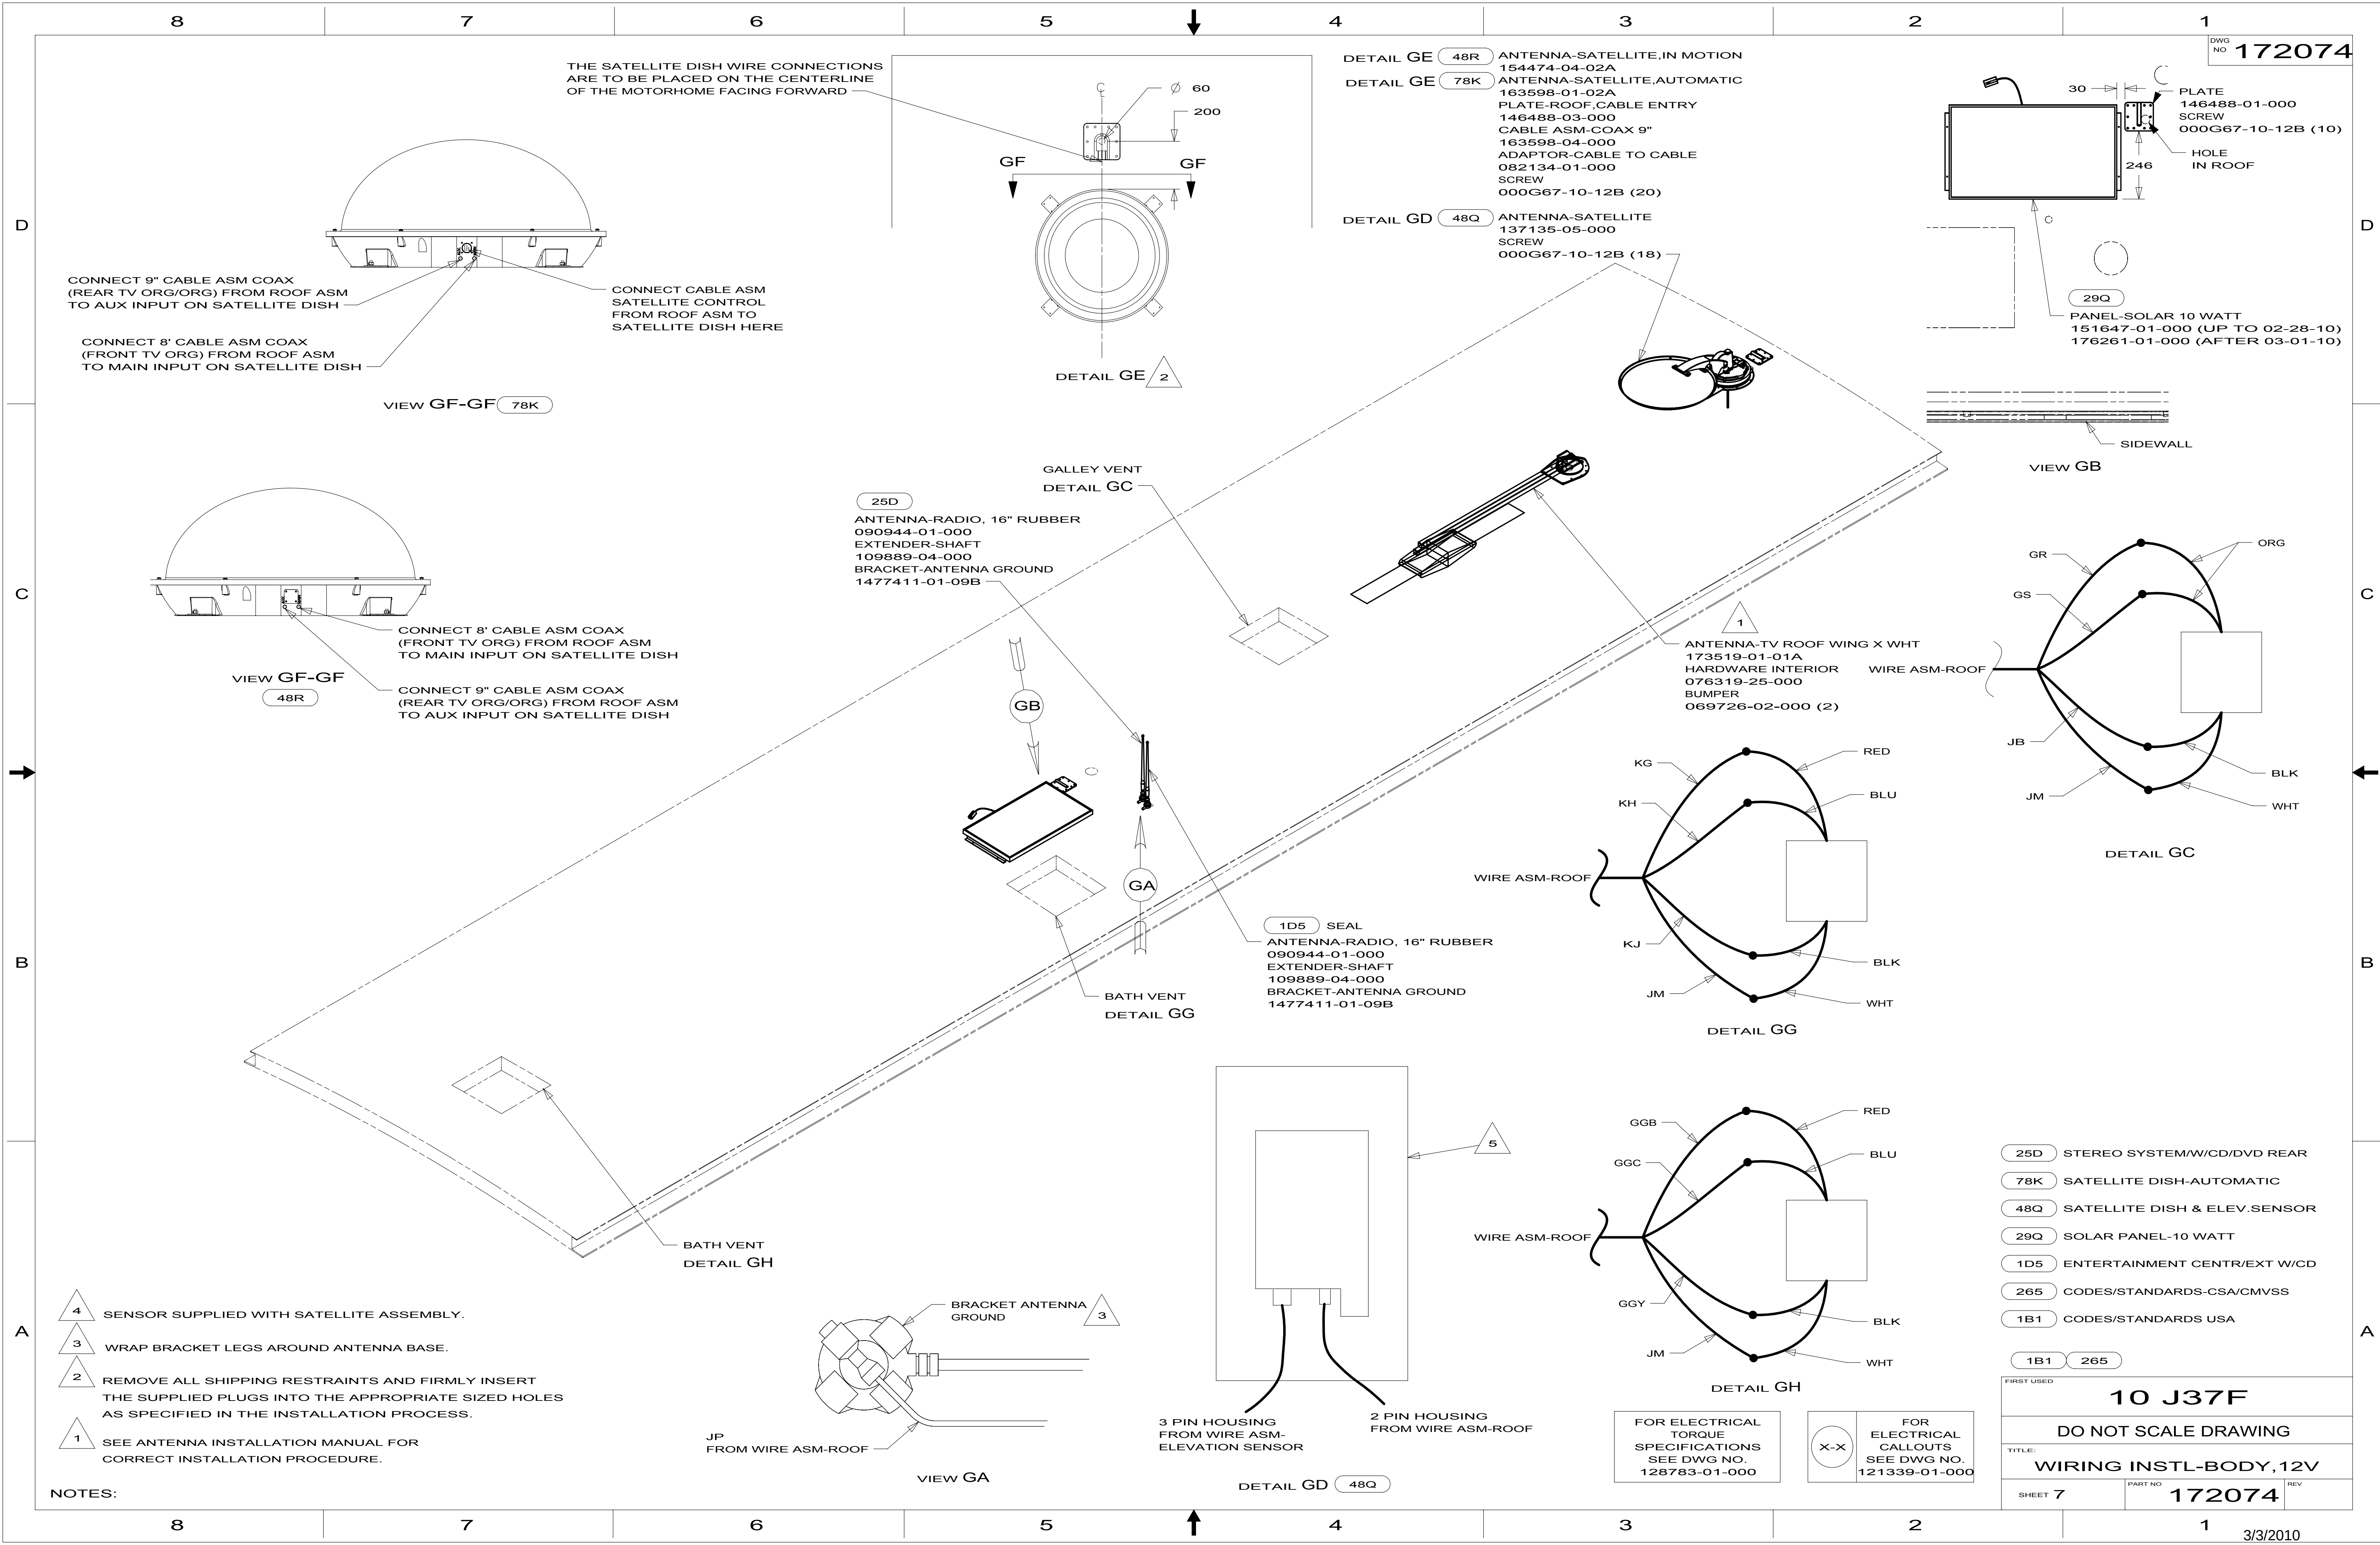

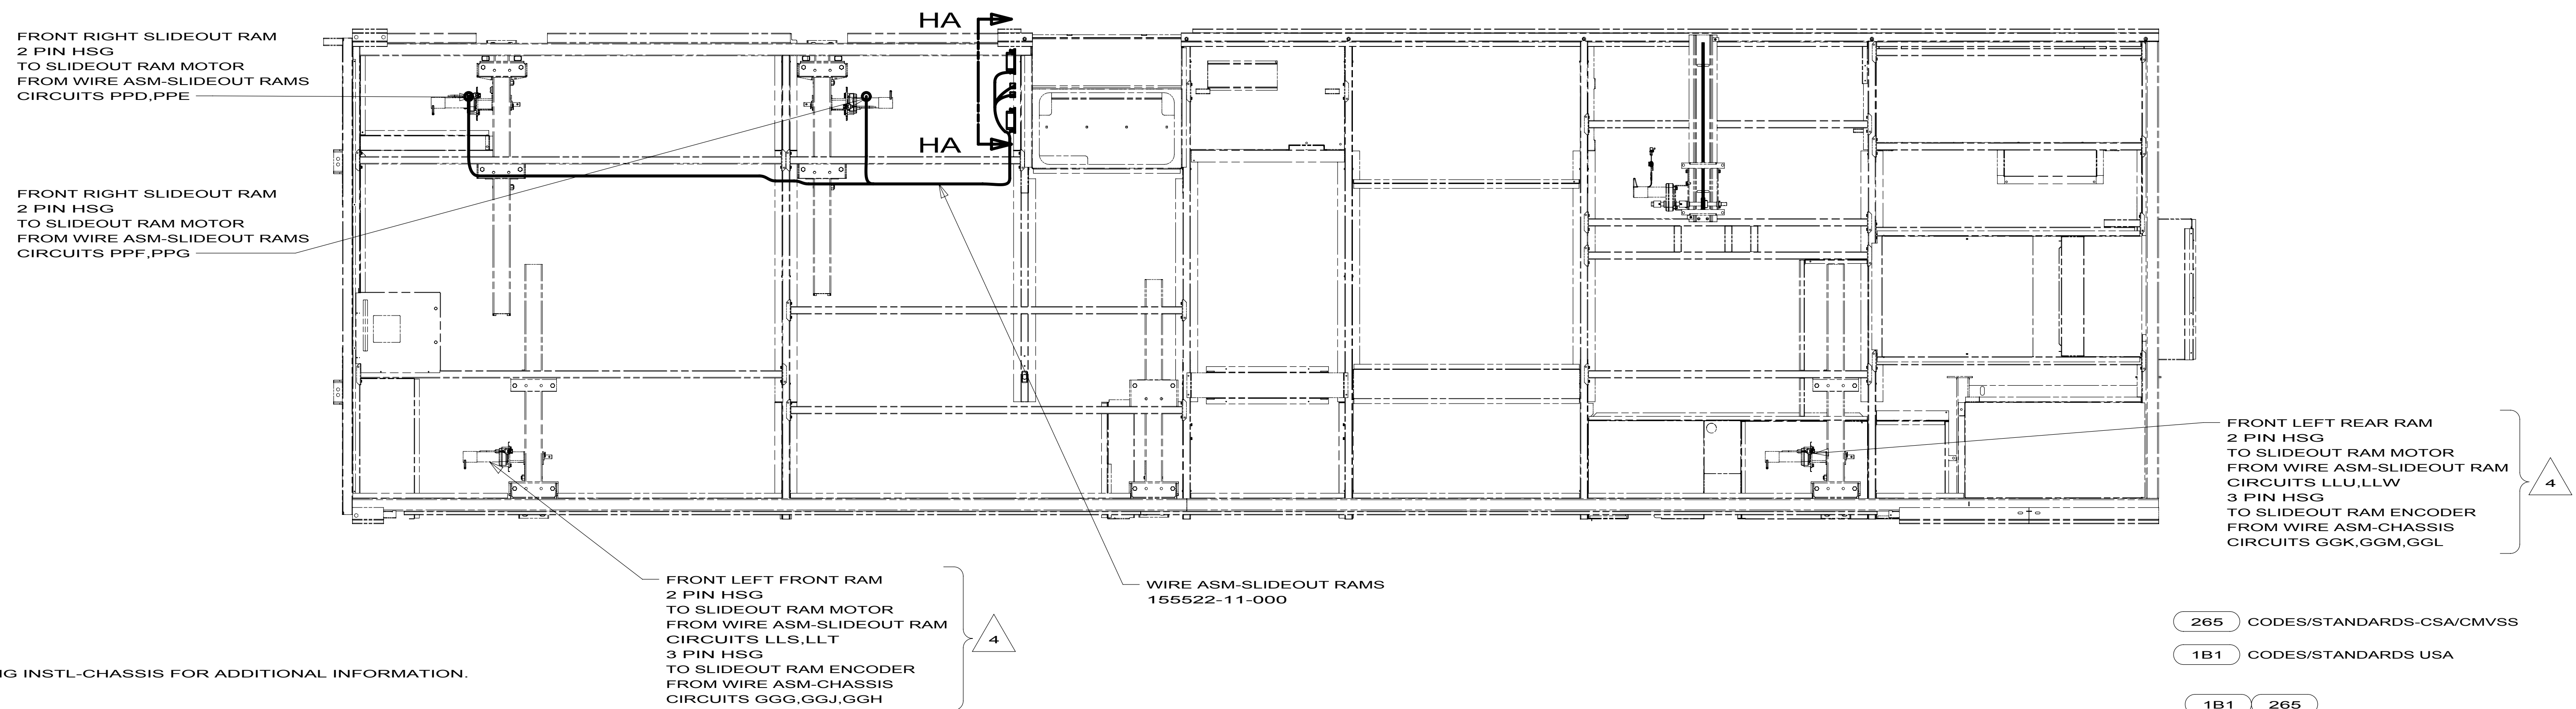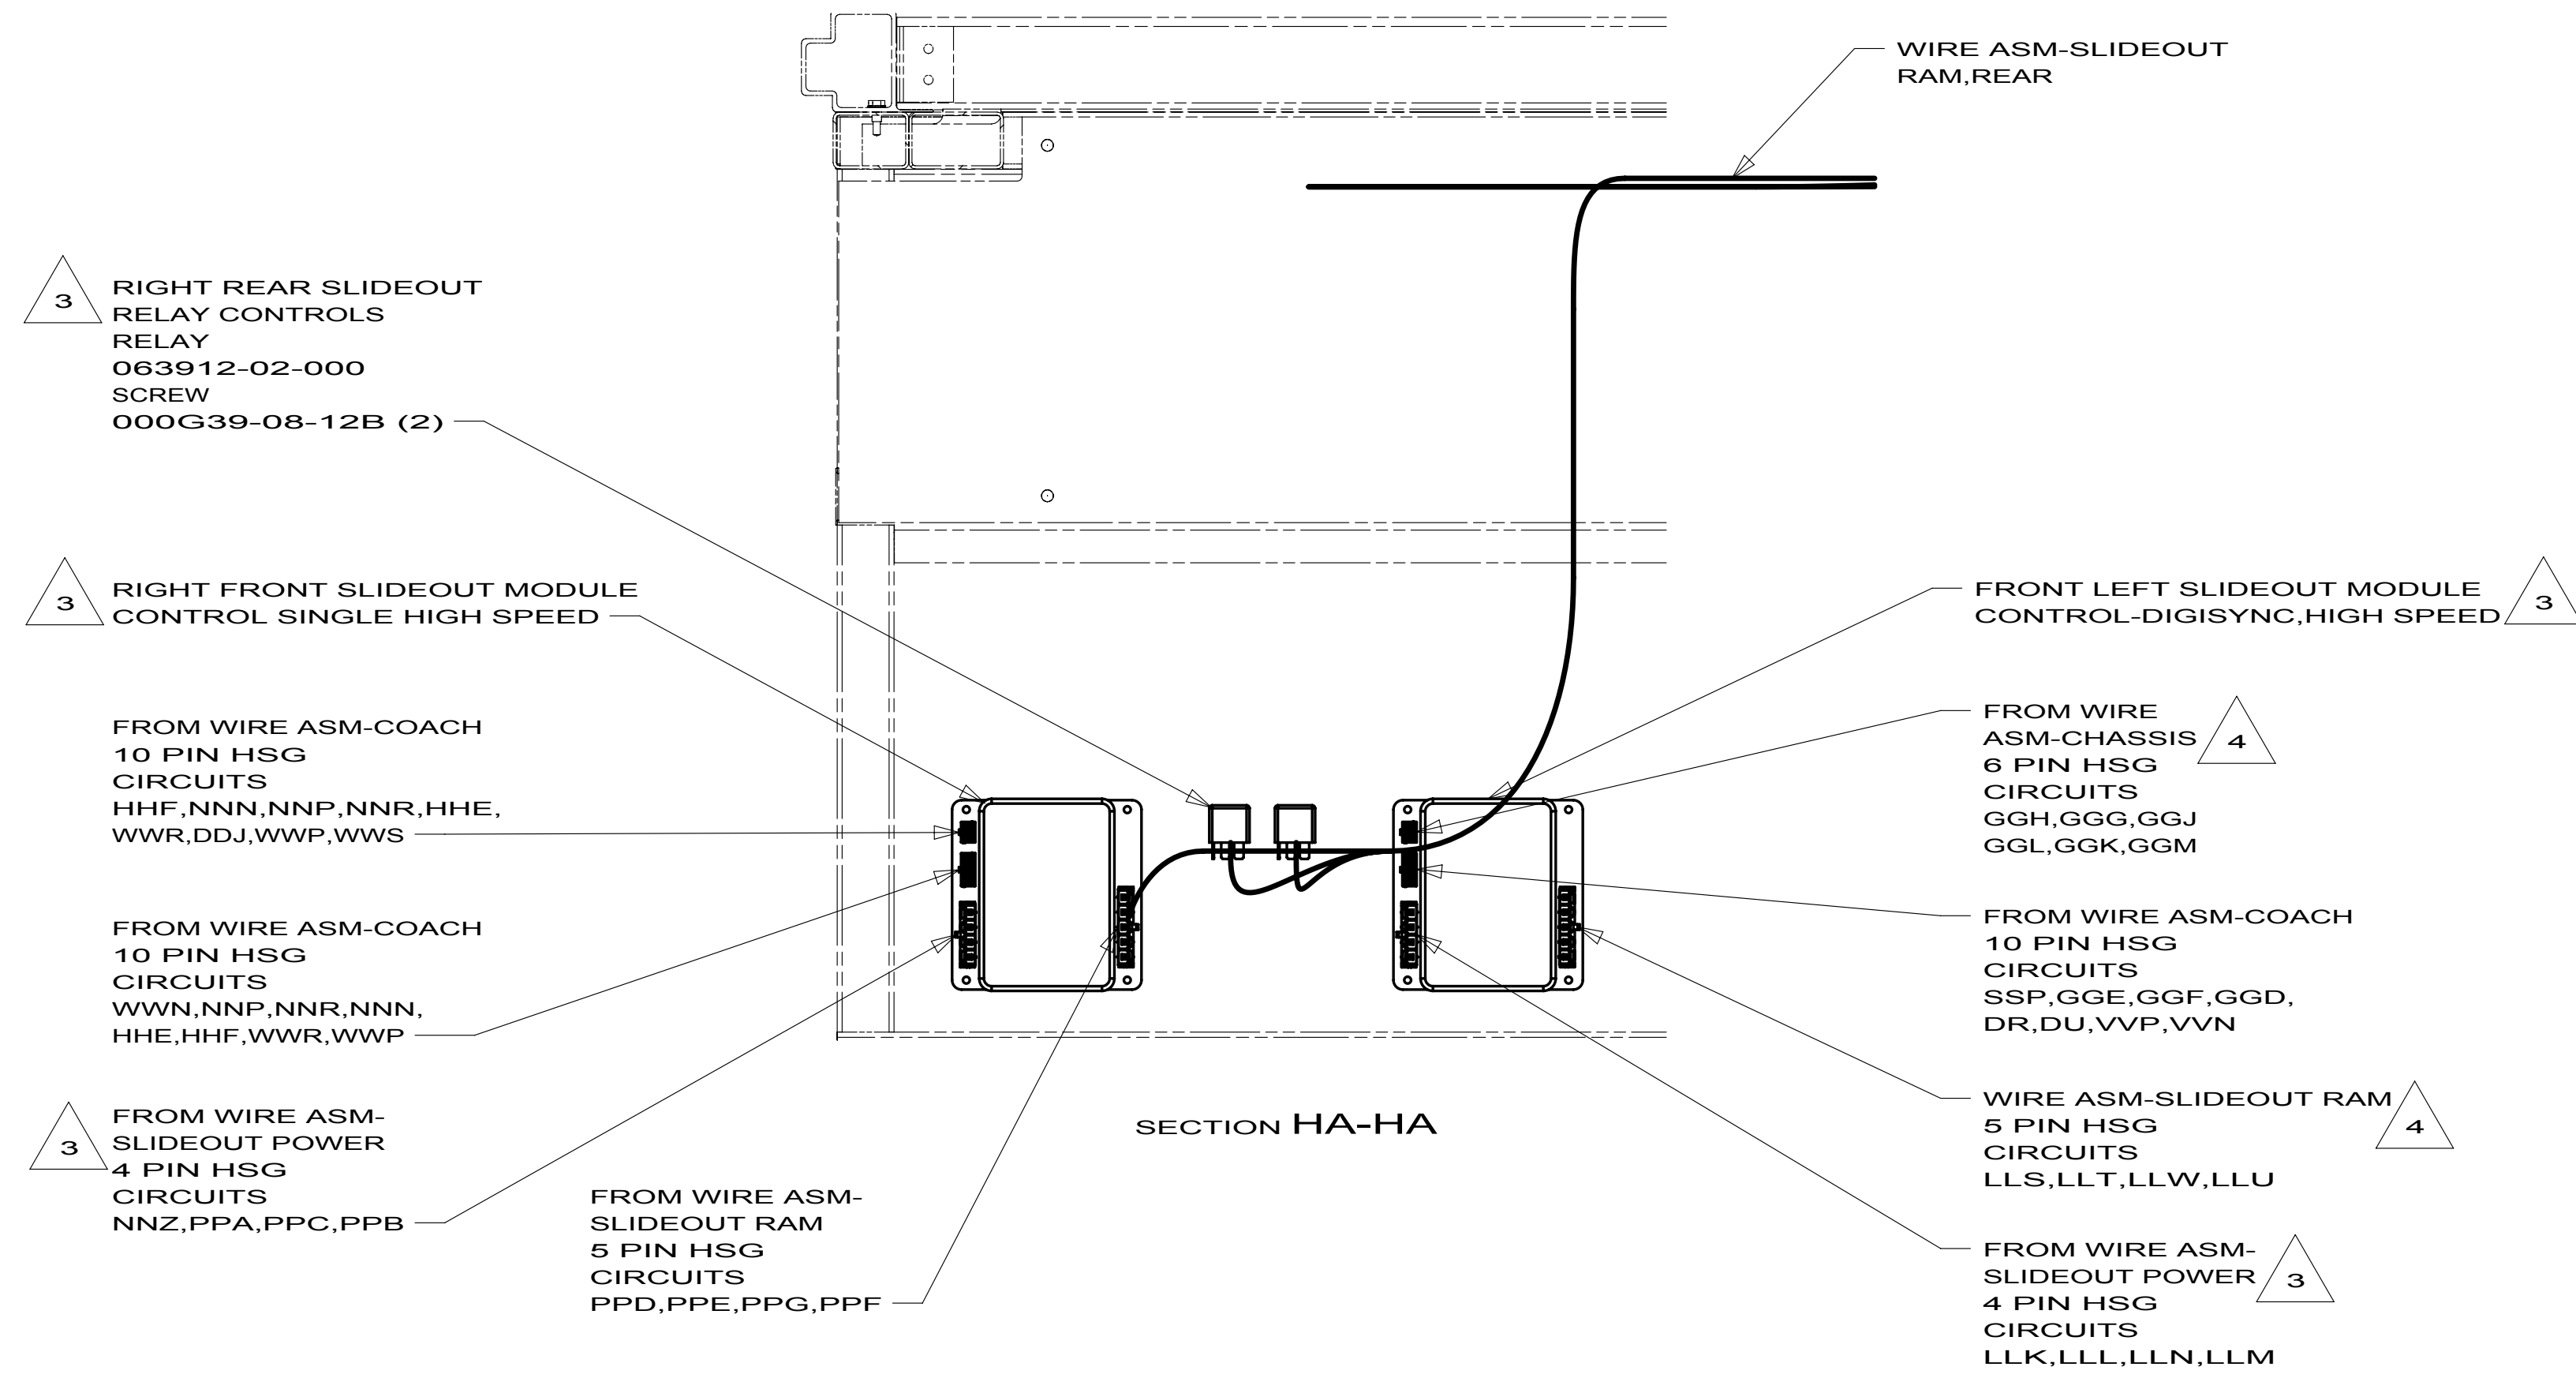


2. SEE WIRING DIAGRAM-BODY,12V FOR ADDITIONAL INFORMATION.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 010495-01-000 OR WIRE TIE 008343-02-000 EVERY 600MM, UNLESS OTHERWISE SPECIFIED.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA
1B1 265

FIRST USED			10 J37F		
DO NOT SCALE DRAWING					
TITLE: WIRING INSTL-BODY,12V					
SHEET 8		PART NO		172074	
				REV	

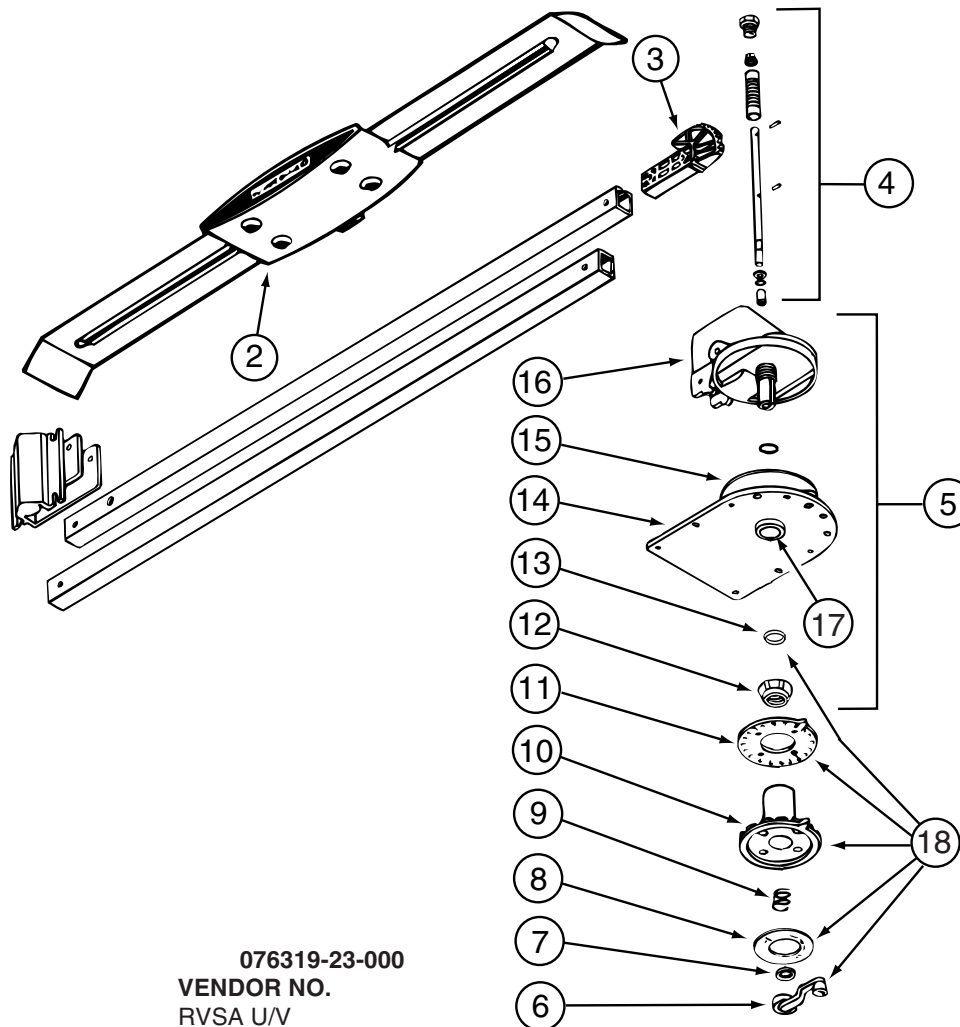


KEY PART NUMBER

2	076319-01-700	EA	HEAD-ANTENNA, AMPLIFIED
3	076319-01-701	EA	GEAR-ELEVATING, PLASTIC
4	076319-01-702	EA	SHAFT ASM-ELEVATING
5	076319-01-711	EA	BASE & LIFT ASM
7	076319-01-705	EA	GROMMET-NYLON, 7/8"ID
8	076319-01-708	EA	DECAL-CRANK
9	076319-01-707	EA	SPRING-HANDLE
11	076319-01-712	EA	PLATE - CEILING
12	076319-01-715	EA	NUT (GEAR HOUSING)
14	076319-01-713	EA	PLATE-BASE, STEEL
15	076319-01-703	EA	BEARING-NYLON, 5"OD
16	076319-01-714	EA	HOUSING, ROTATING GEAR
17	076319-01-704	EA	BEARING-NYLON, 1.25"OD
18	076319-01-709	EA	HANDLE-HEAD DIRECTIONAL
	076319-01-716	EA	TUBING, ELEVATING

076319-23-000
VENDOR NO.

RVSA U/V
2200046
RP-4000
2762802
3200658
5413002
2160822
3200608
2200047
3100523
3200656
2200049
3200657
200644
RP-2900

CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)

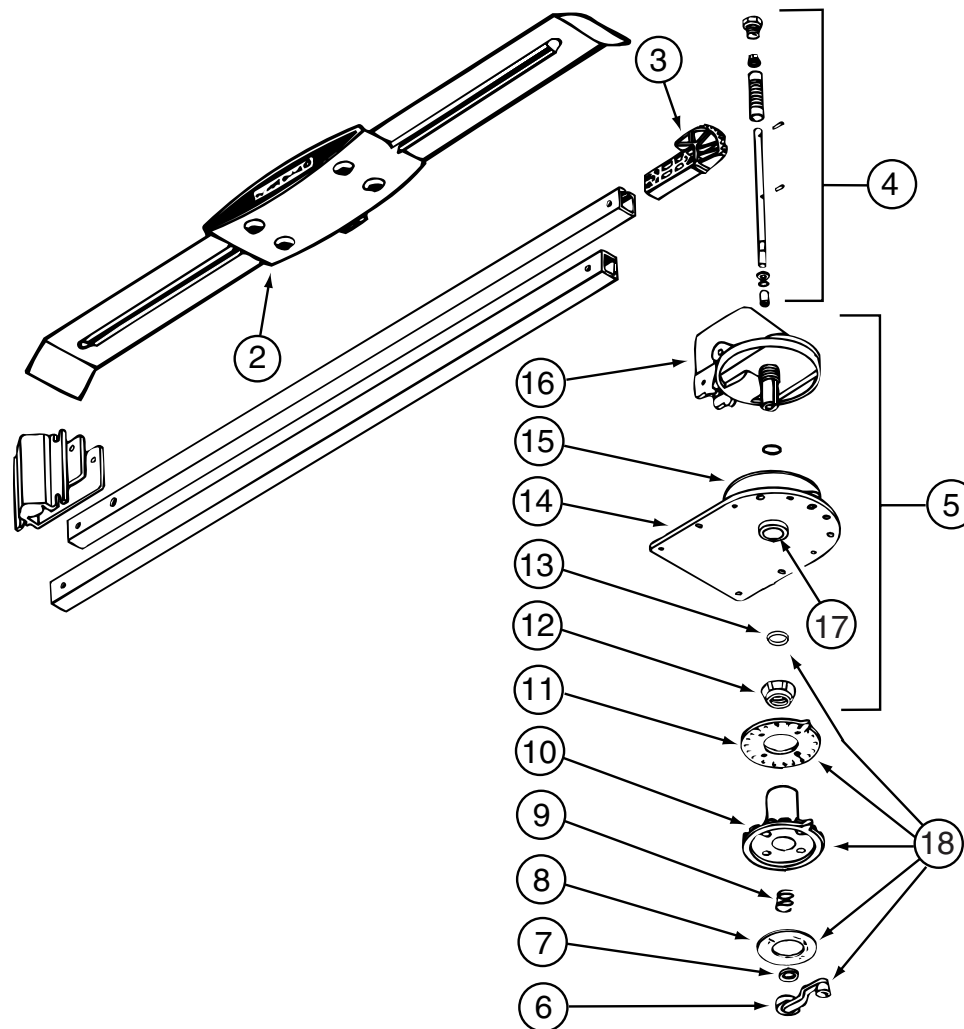


076319-25-000

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
6	076319-01-706	EA	CRANK-W/SET SCREW UNIV/BEIGE	2750897
6	120233-01-710	EA	HANDLE-CRANK W/SCREW - WHITE	RP-6795
8	076319-01-708	EA	DECAL-CRANK	5413002
10	076319-25-700	EA	DIRECTIONAL HANDLE(WHITE)	3200612
11	076319-25-701	EA	PLATE - CEILING(WHITE)	3200609
13	120233-01-709	EA	WASHER-NYLON	RP-2658
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

KEY	PART NUMBER	U/M	DESCRIPTION
	087694-01-700	EA	BULB

087694-01-000
VENDOR NO.
GE561

KEY	PART NUMBER	U/M	DESCRIPTION	108354-01-01A	VENDOR NO.
	108354-01-700	EA	BULB-COURTESY LIGHT		395-B

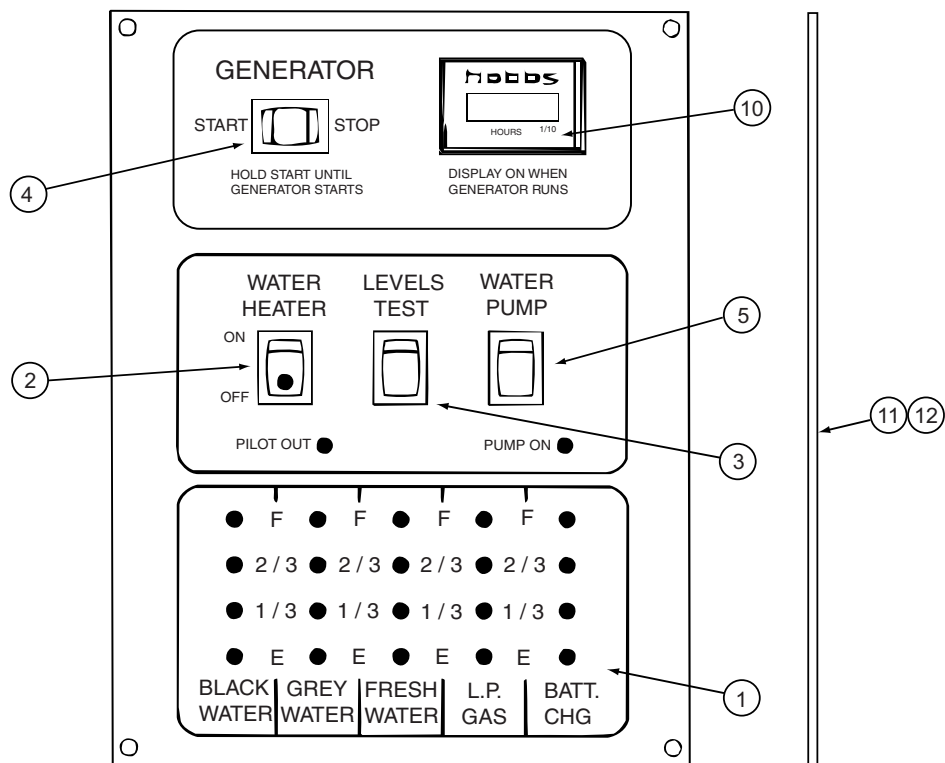


134940-06-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-07-01A

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-01-702	EA	CHASSIS - SILKSCREENED	CC0558-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-703	EA	SWITCH - ON/ON	L0115-00
5	134940-02-700	EA	SWITCH - DUMMY	L0118
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

134940-08-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-04-700	EA	CHASSIS - SILKSCREENED	CE0136-00
2	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
3	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
4	096983-01-702	EA	SWITCH - MOM/OFF/MOM/3 TERM	L0112-00
5	096983-01-703	EA	SWITCH - ON/ON	L0115-00
10	100258-10-701	EA	GAUGE-HR METER ONLY (LCD)	L0775-00
11	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
12	134940-04-701	EA	BOARD - PC - SOLAR LIGHT	L5121-01
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

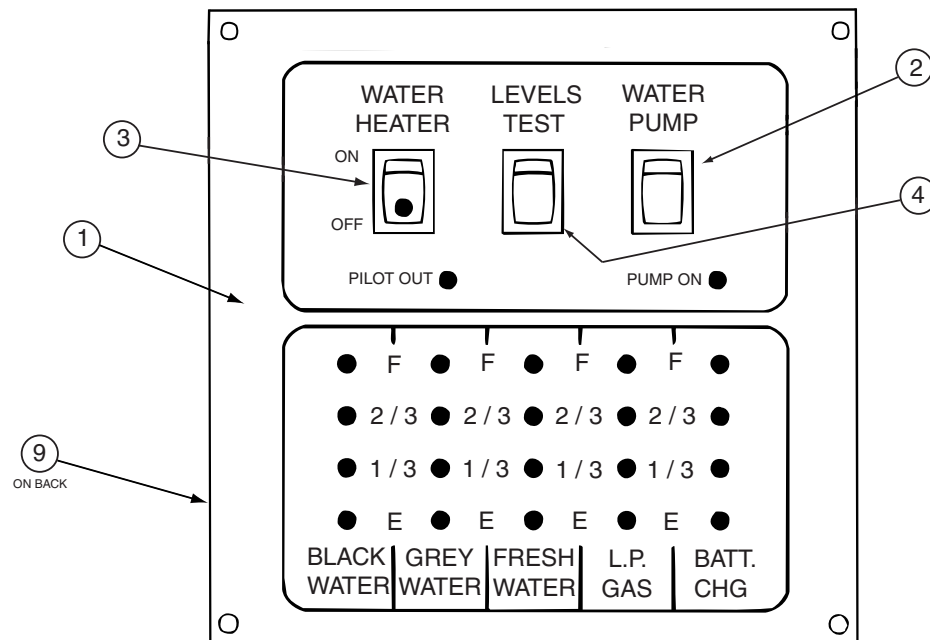

134940-10-01A				
KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
1	134940-10-700	EA	SILKSCREENED CHASSIS	CE0129-00
2	096983-01-703	EA	SWITCH - ON/ON	L0115-00
3	134940-01-701	EA	SWITCH-SPST/ON-OFF/BLK W/LGT	L0109
4	096983-01-701	EA	SWITCH - SPST/MOM 2 TERMINAL	L0111-00
9	134940-06-700	EA	PC BOARD - SENSOR SYSTEM/RED	L5131-02
CONTACT WINNEBAGO PART SALES FOR UNLISTED COMPONENT(S)				

137135-05-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	120233-01-714	EA CLIP-E	5160818
	120233-01-737	EA PLATE/INT-W/DIRECTIONAL HDLE	RK-CEIL
	120233-01-738	EA HDW PKG-HANDLE/SPRING/WASHER	RK-HAND
	120233-04-703	EA KIT-DIRECTIONAL HDL UPGRADE	RP-RM46
	137135-01-703	EA KIT ELEV-SHAFT/PLUG/SPRING	RP-4400
	137135-01-704	EA PIN - 1/4" X 3.25"	2160813
	137135-01-708	EA TURRET	3100728
	137135-01-710	EA PLATE - ROTATE LIMIT	3720052
	137135-01-712	EA BEARING - OUTER	2590347
	137135-01-713	EA TURRET BASE	3100730
	137135-01-714	EA GEAR - ELEVATING SHAFT	2200465
	137135-01-715	EA BEARING - INNER	2590348
	137135-01-717	EA BOLT - FLAT HEAD	2160362
	137135-01-719	EA BRACKET - PIVOT	2744945
	137135-01-722	EA CLAMP	2590343

KEY	PART NUMBER	U/M DESCRIPTION	146048-01-01A VENDOR NO.
	123775-01-700	EA BULB - 10 WATT - HALOGEN	71-JC10

154474-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1

154474-04-02A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	154474-04-702	EA DOME ONLY-REPLACEMENT-BLACK	1850-B-LP-FS
	154474-04-703	EA BOARD RF ASSEMBLY N/C	100087
	154474-04-705	EA CABLE OUT DUAL TOP PCBA N/C	20034-1
	154474-04-706	EA LNB DUAL EAGLE ASPEN N/C	1863-1


KEY	PART NUMBER	U/M	DESCRIPTION	163097-01-000	VENDOR NO.
	163097-01-700	EA	KEY - #2382 (ILLINOIS LOCK)		2382
	163097-01-701	EA	KEY - #2341 (MILLER DIAL)		PART SALES

163598-01-01A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1863-1
			1990-RF-LP KIT
			438

163598-01-02A			
KEY	PART NUMBER	U/M	DESCRIPTION
	154474-04-702	EA	DOME ONLY-REPLACEMENT-BLACK
	154474-04-706	EA	LNB DUAL EAGLE ASPEN N/C
	163598-01-700	EA	BOARD CIRCUIT N/C
	163598-01-701	EA	STUFFED PCB,CWIM DVB N/C
VENDOR NO.			
			1850-B-LP-FS
			1863-1
			1990-RF-LP KIT
			438

KEY	PART NUMBER	U/M	DESCRIPTION
	165170-01-700	EA	LENS

165170-01-01A
VENDOR NO.
81230-LENS

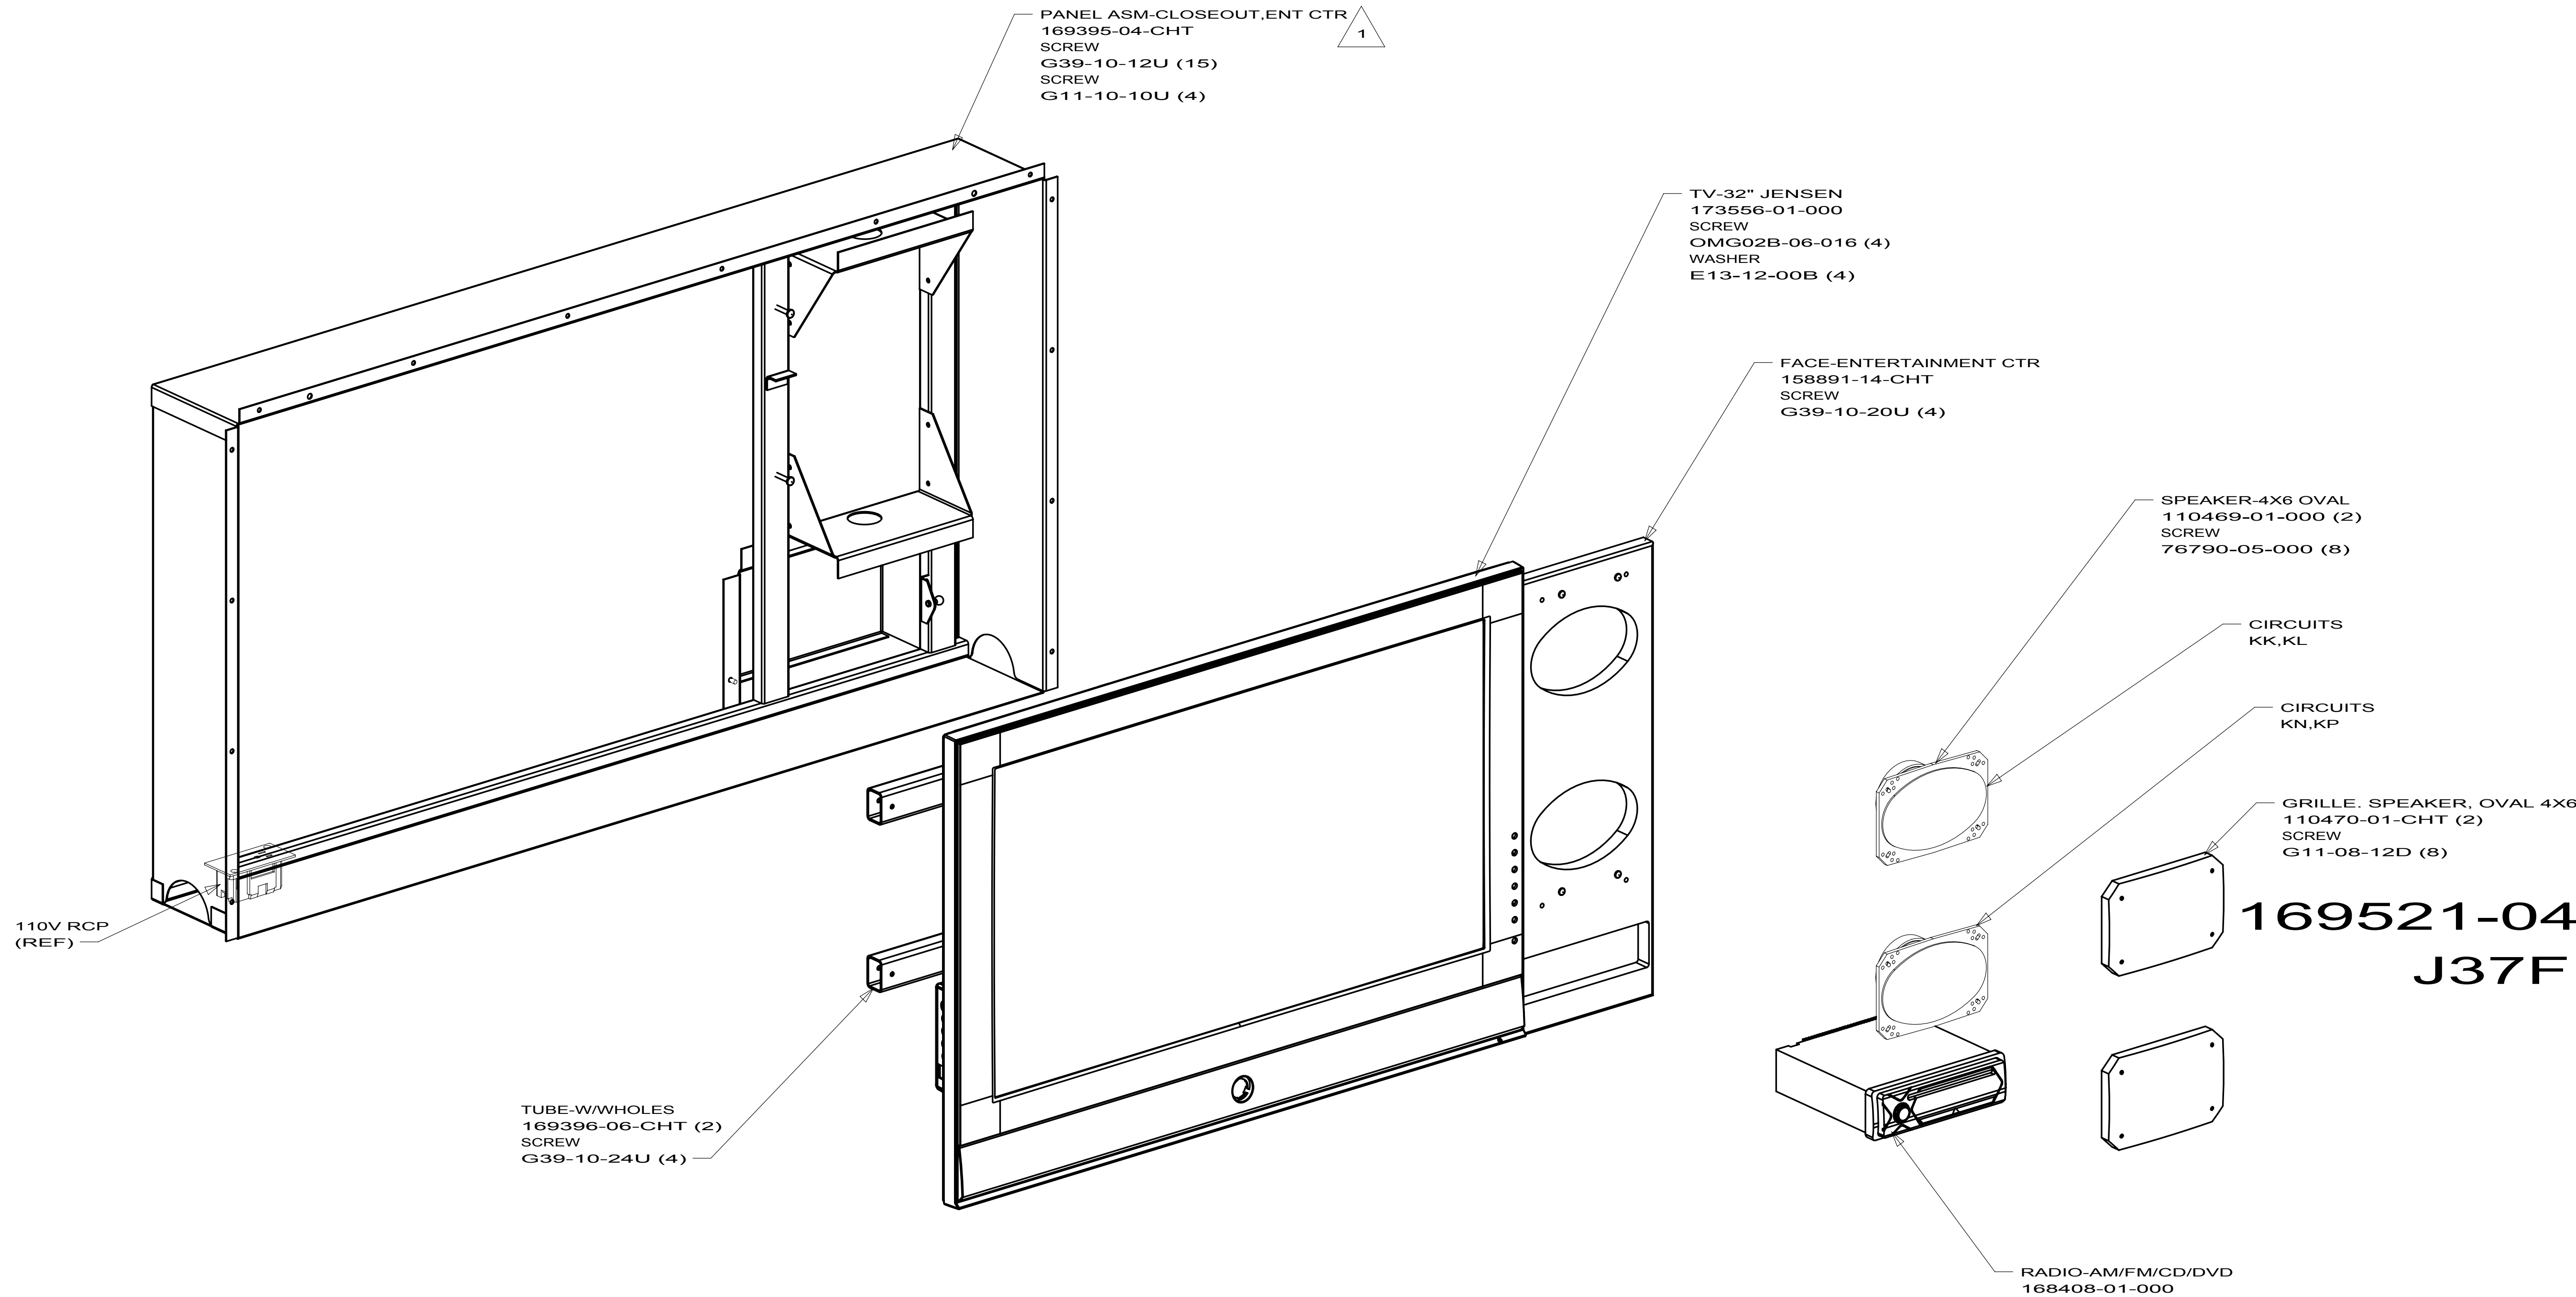

169521-04-XXX
J37F


(UP TO 05-11-09) OPTION 1D3

NOTES:
1 INSTALL ON LINE IF IN SIDEWALL, INSTALL IN 803 IF IN SLIDEOUT.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X
FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: ENTERTAINMENT CTR COMPL-TV		
SHEET 5	PART NO 169521	REV

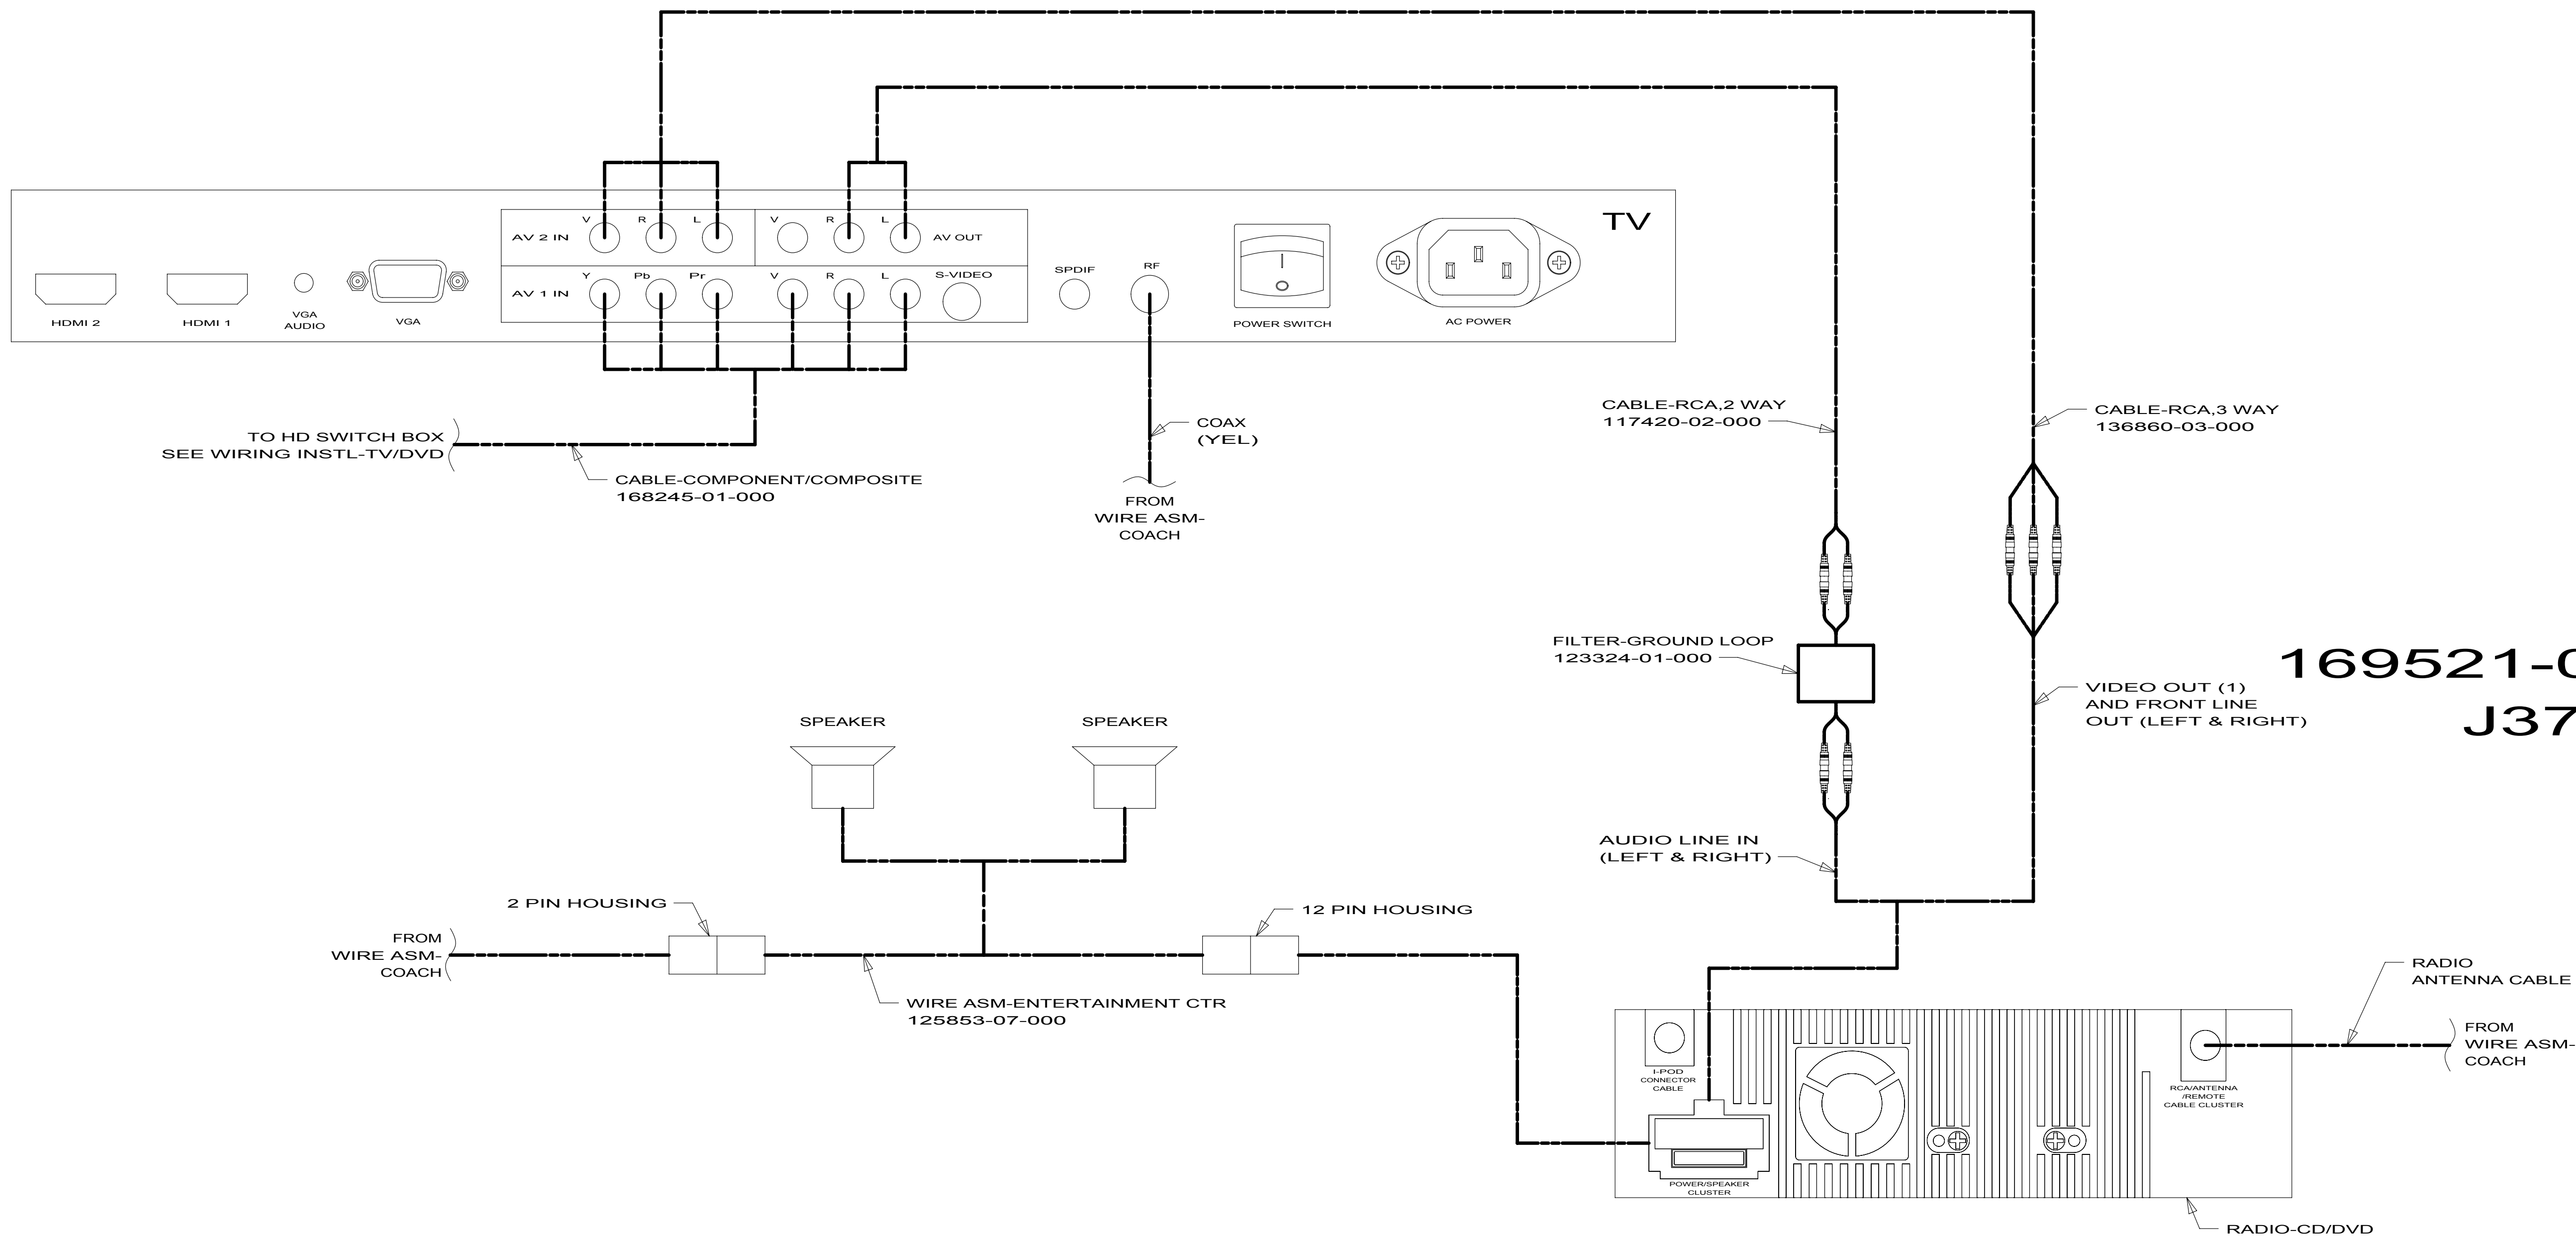


169521-04-XXX
J37F

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE:		
ENTERTAINMENT CTR COMPL-TV		
SHEET 6	PART NO	REV
	169521	

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	169536-01-700	EA	REMOTE - SERVICE PACK	PSVCAWM970

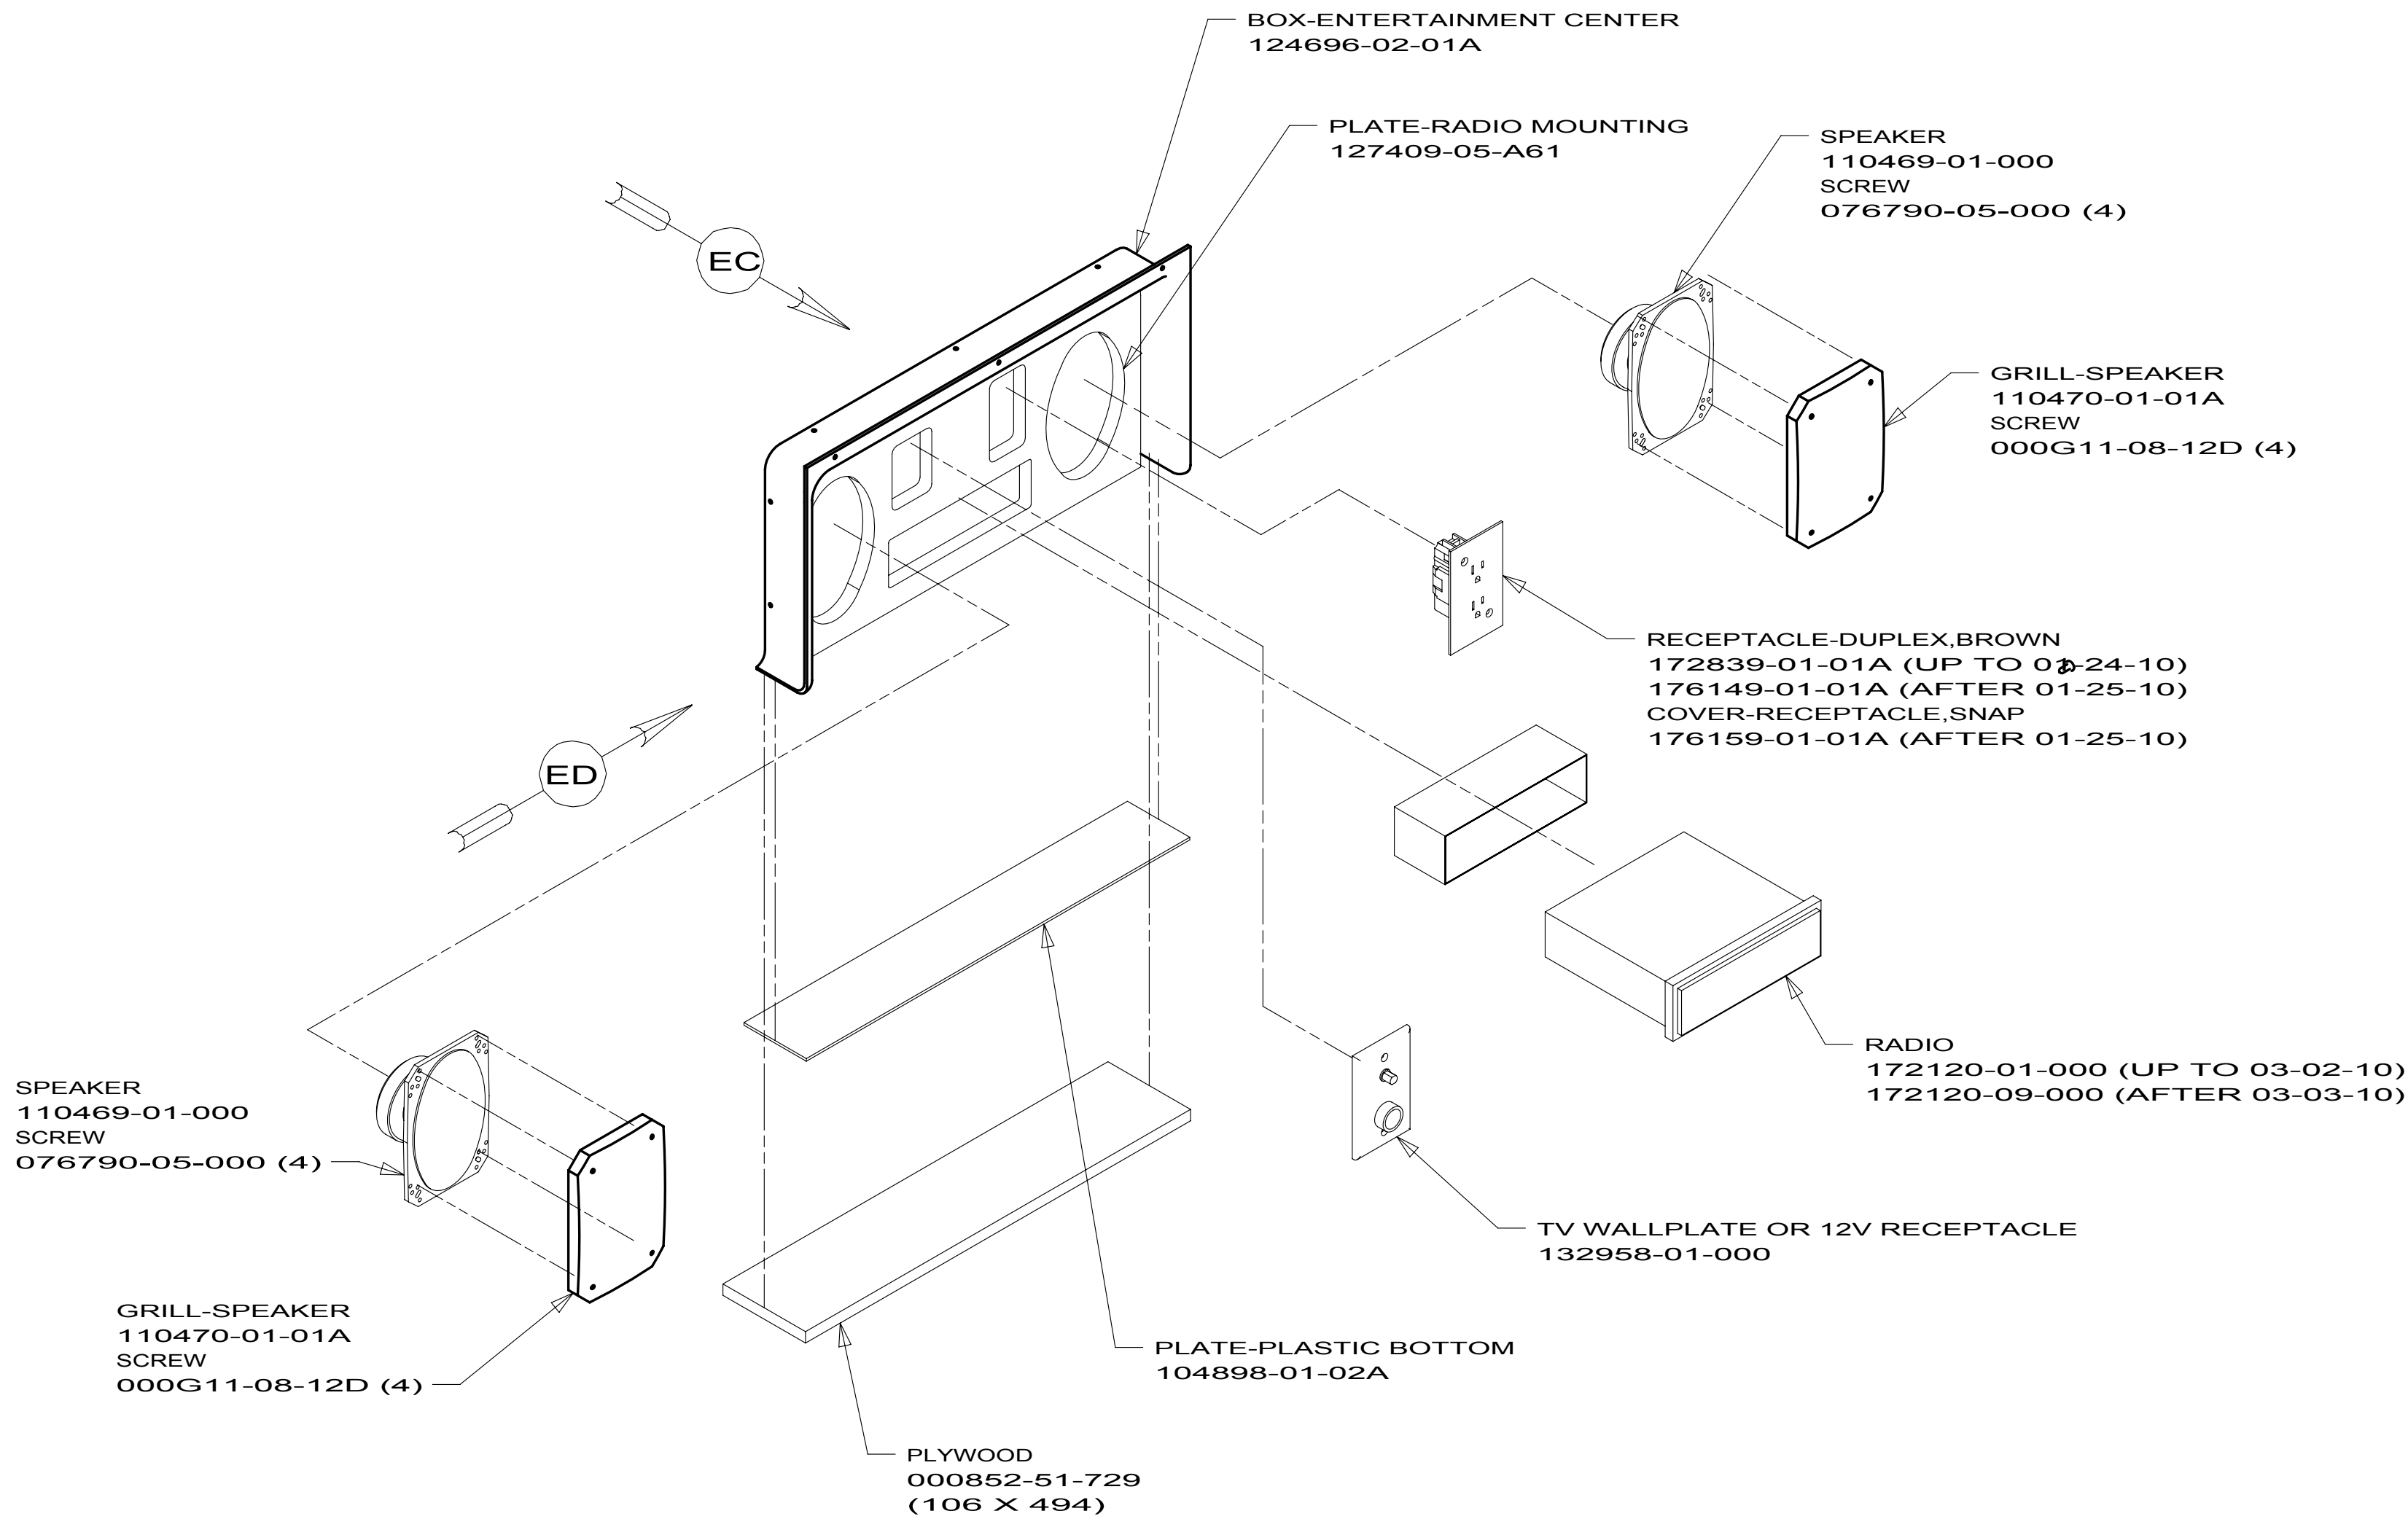

173464-08
J32H
J35P
J37F

1. SEE WIRING INSTL-BODY FOR ADDITIONAL INFORMATION.

NOTES:


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


1D5 ENTERTAINMENT CENTER/EXT W/CD

10 MOTORHOMES

ENTERTAINMENT CENTER COMPL

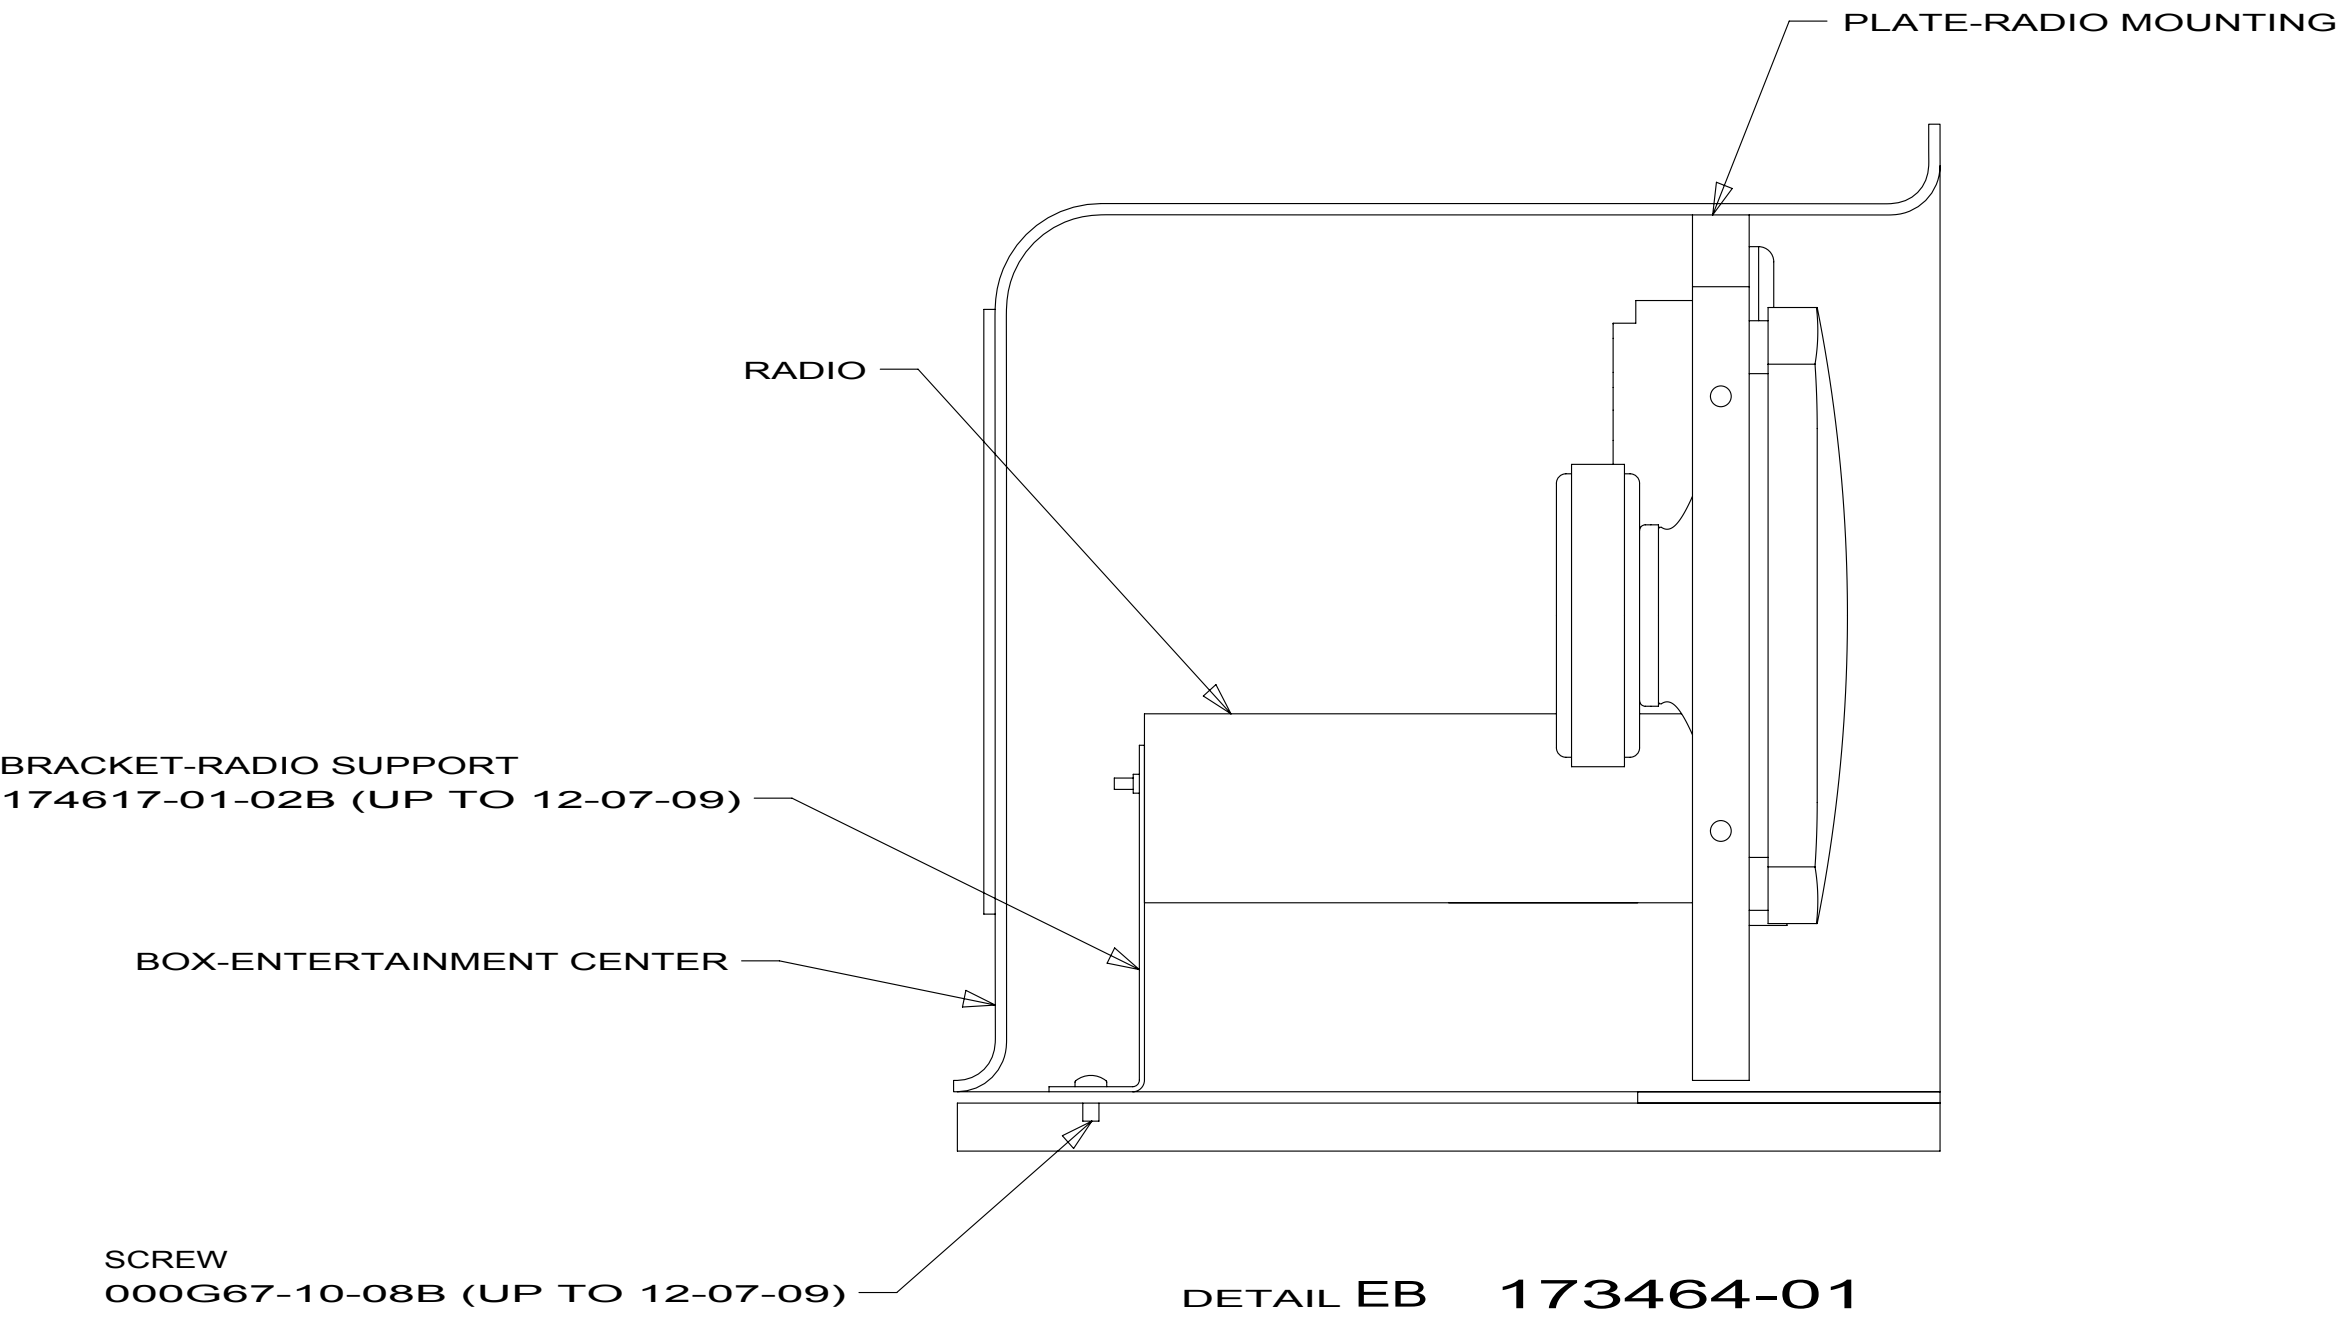


DETAIL EB 173464-01

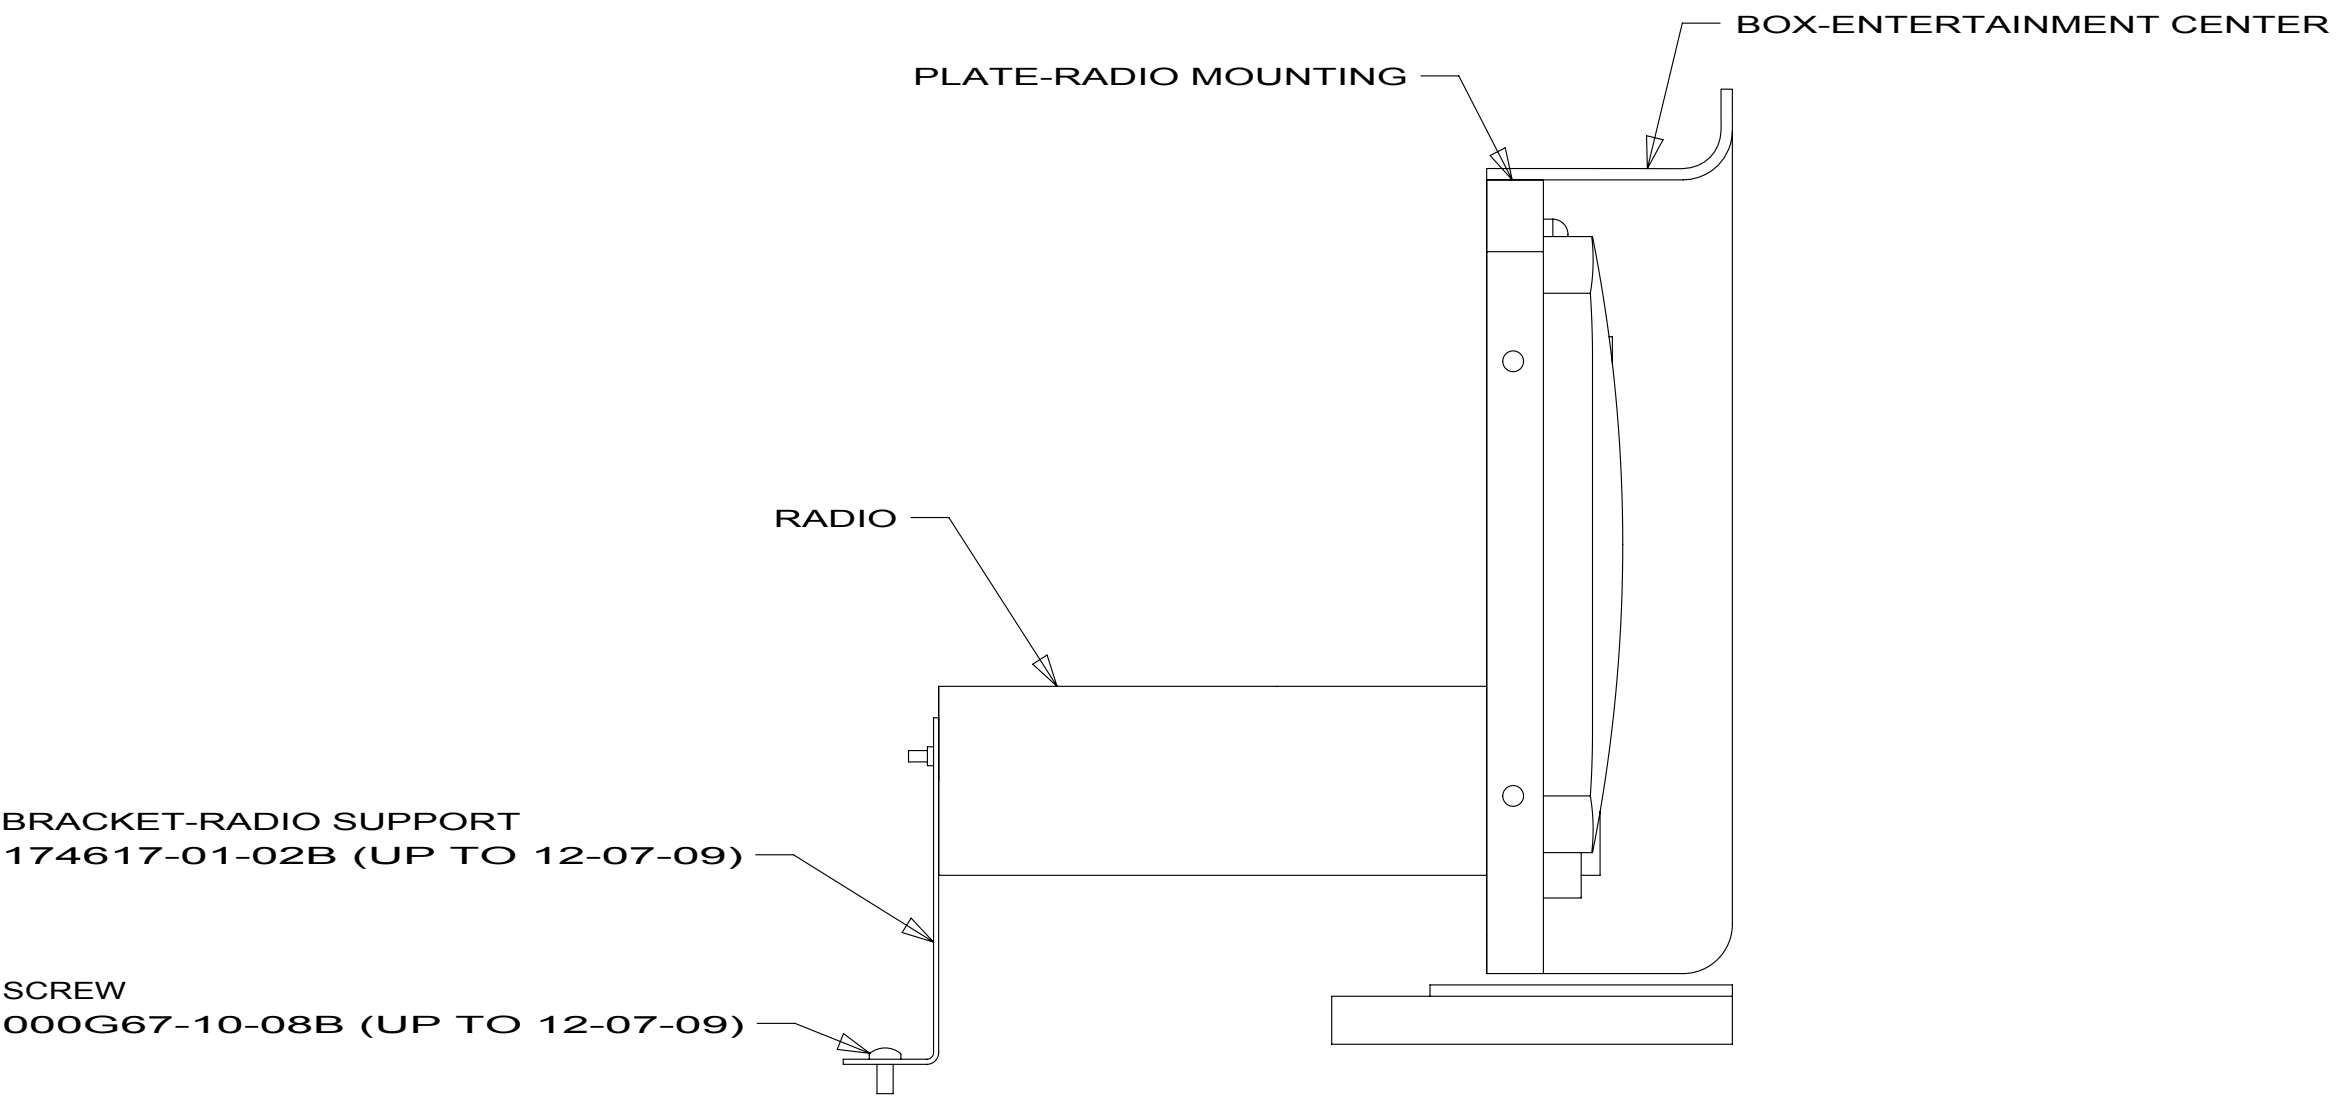


DETAIL ED 173464-03
173464-07
173464-08

173464-01
173464-03
173464-07
173464-08

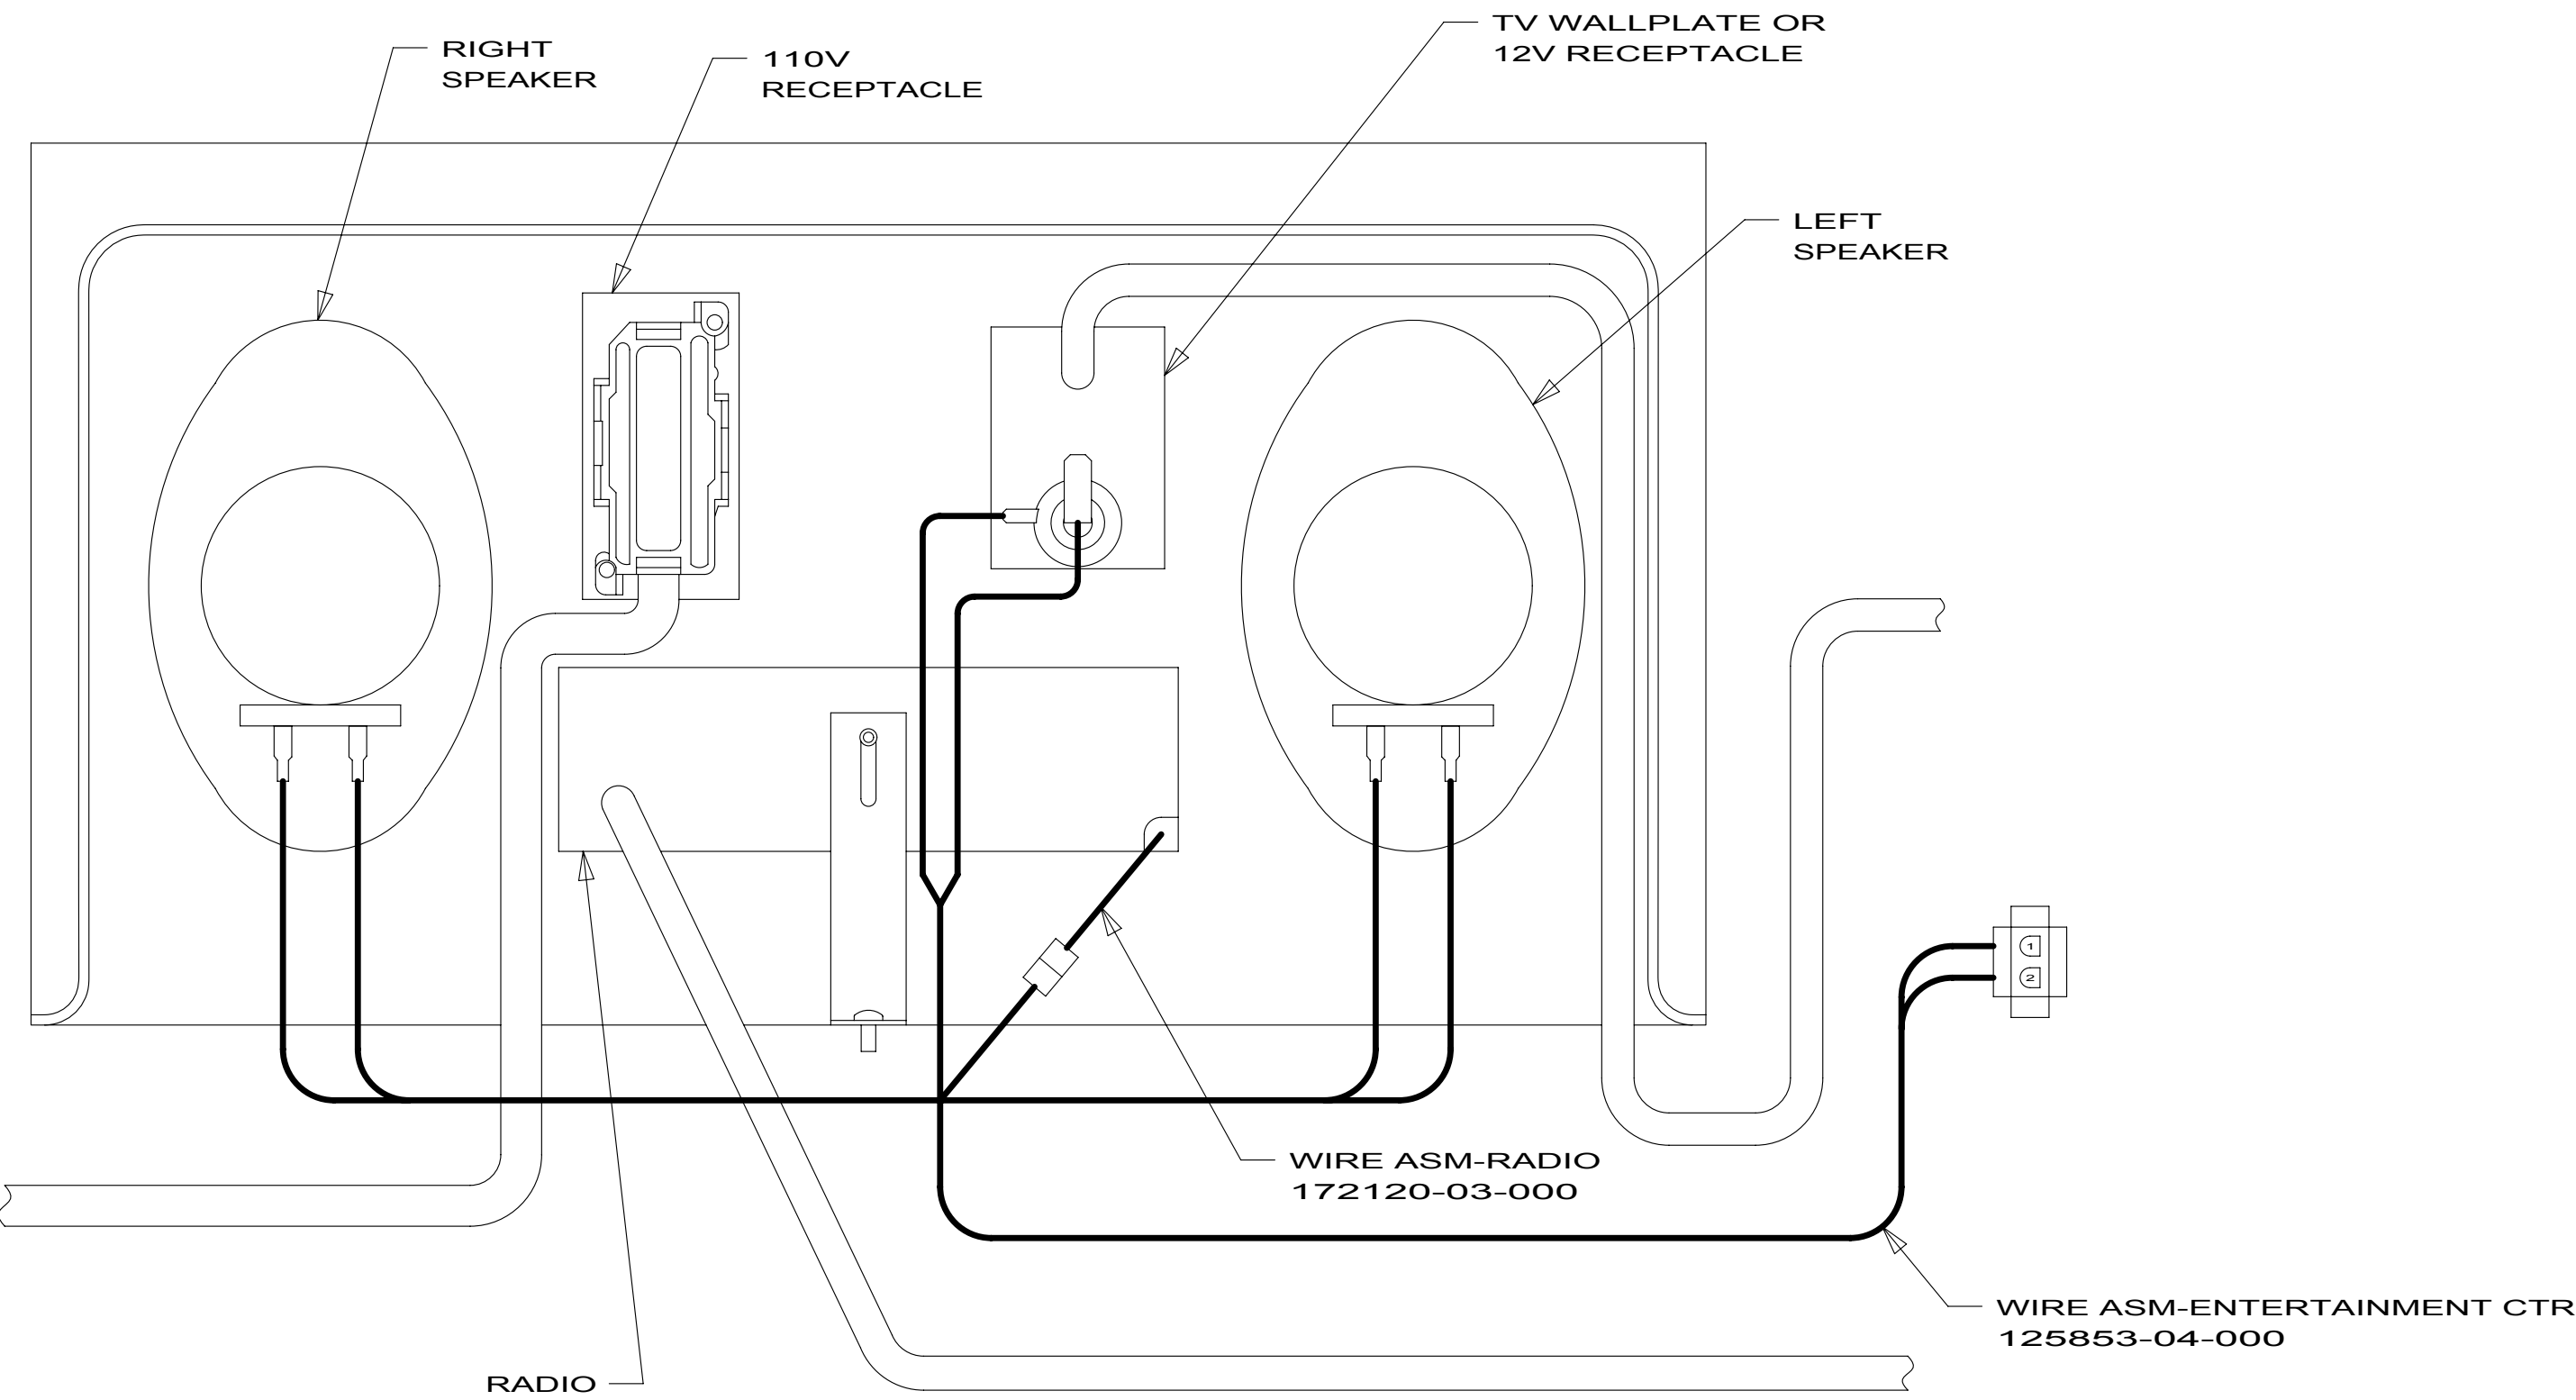

DETAIL EA 173464-01

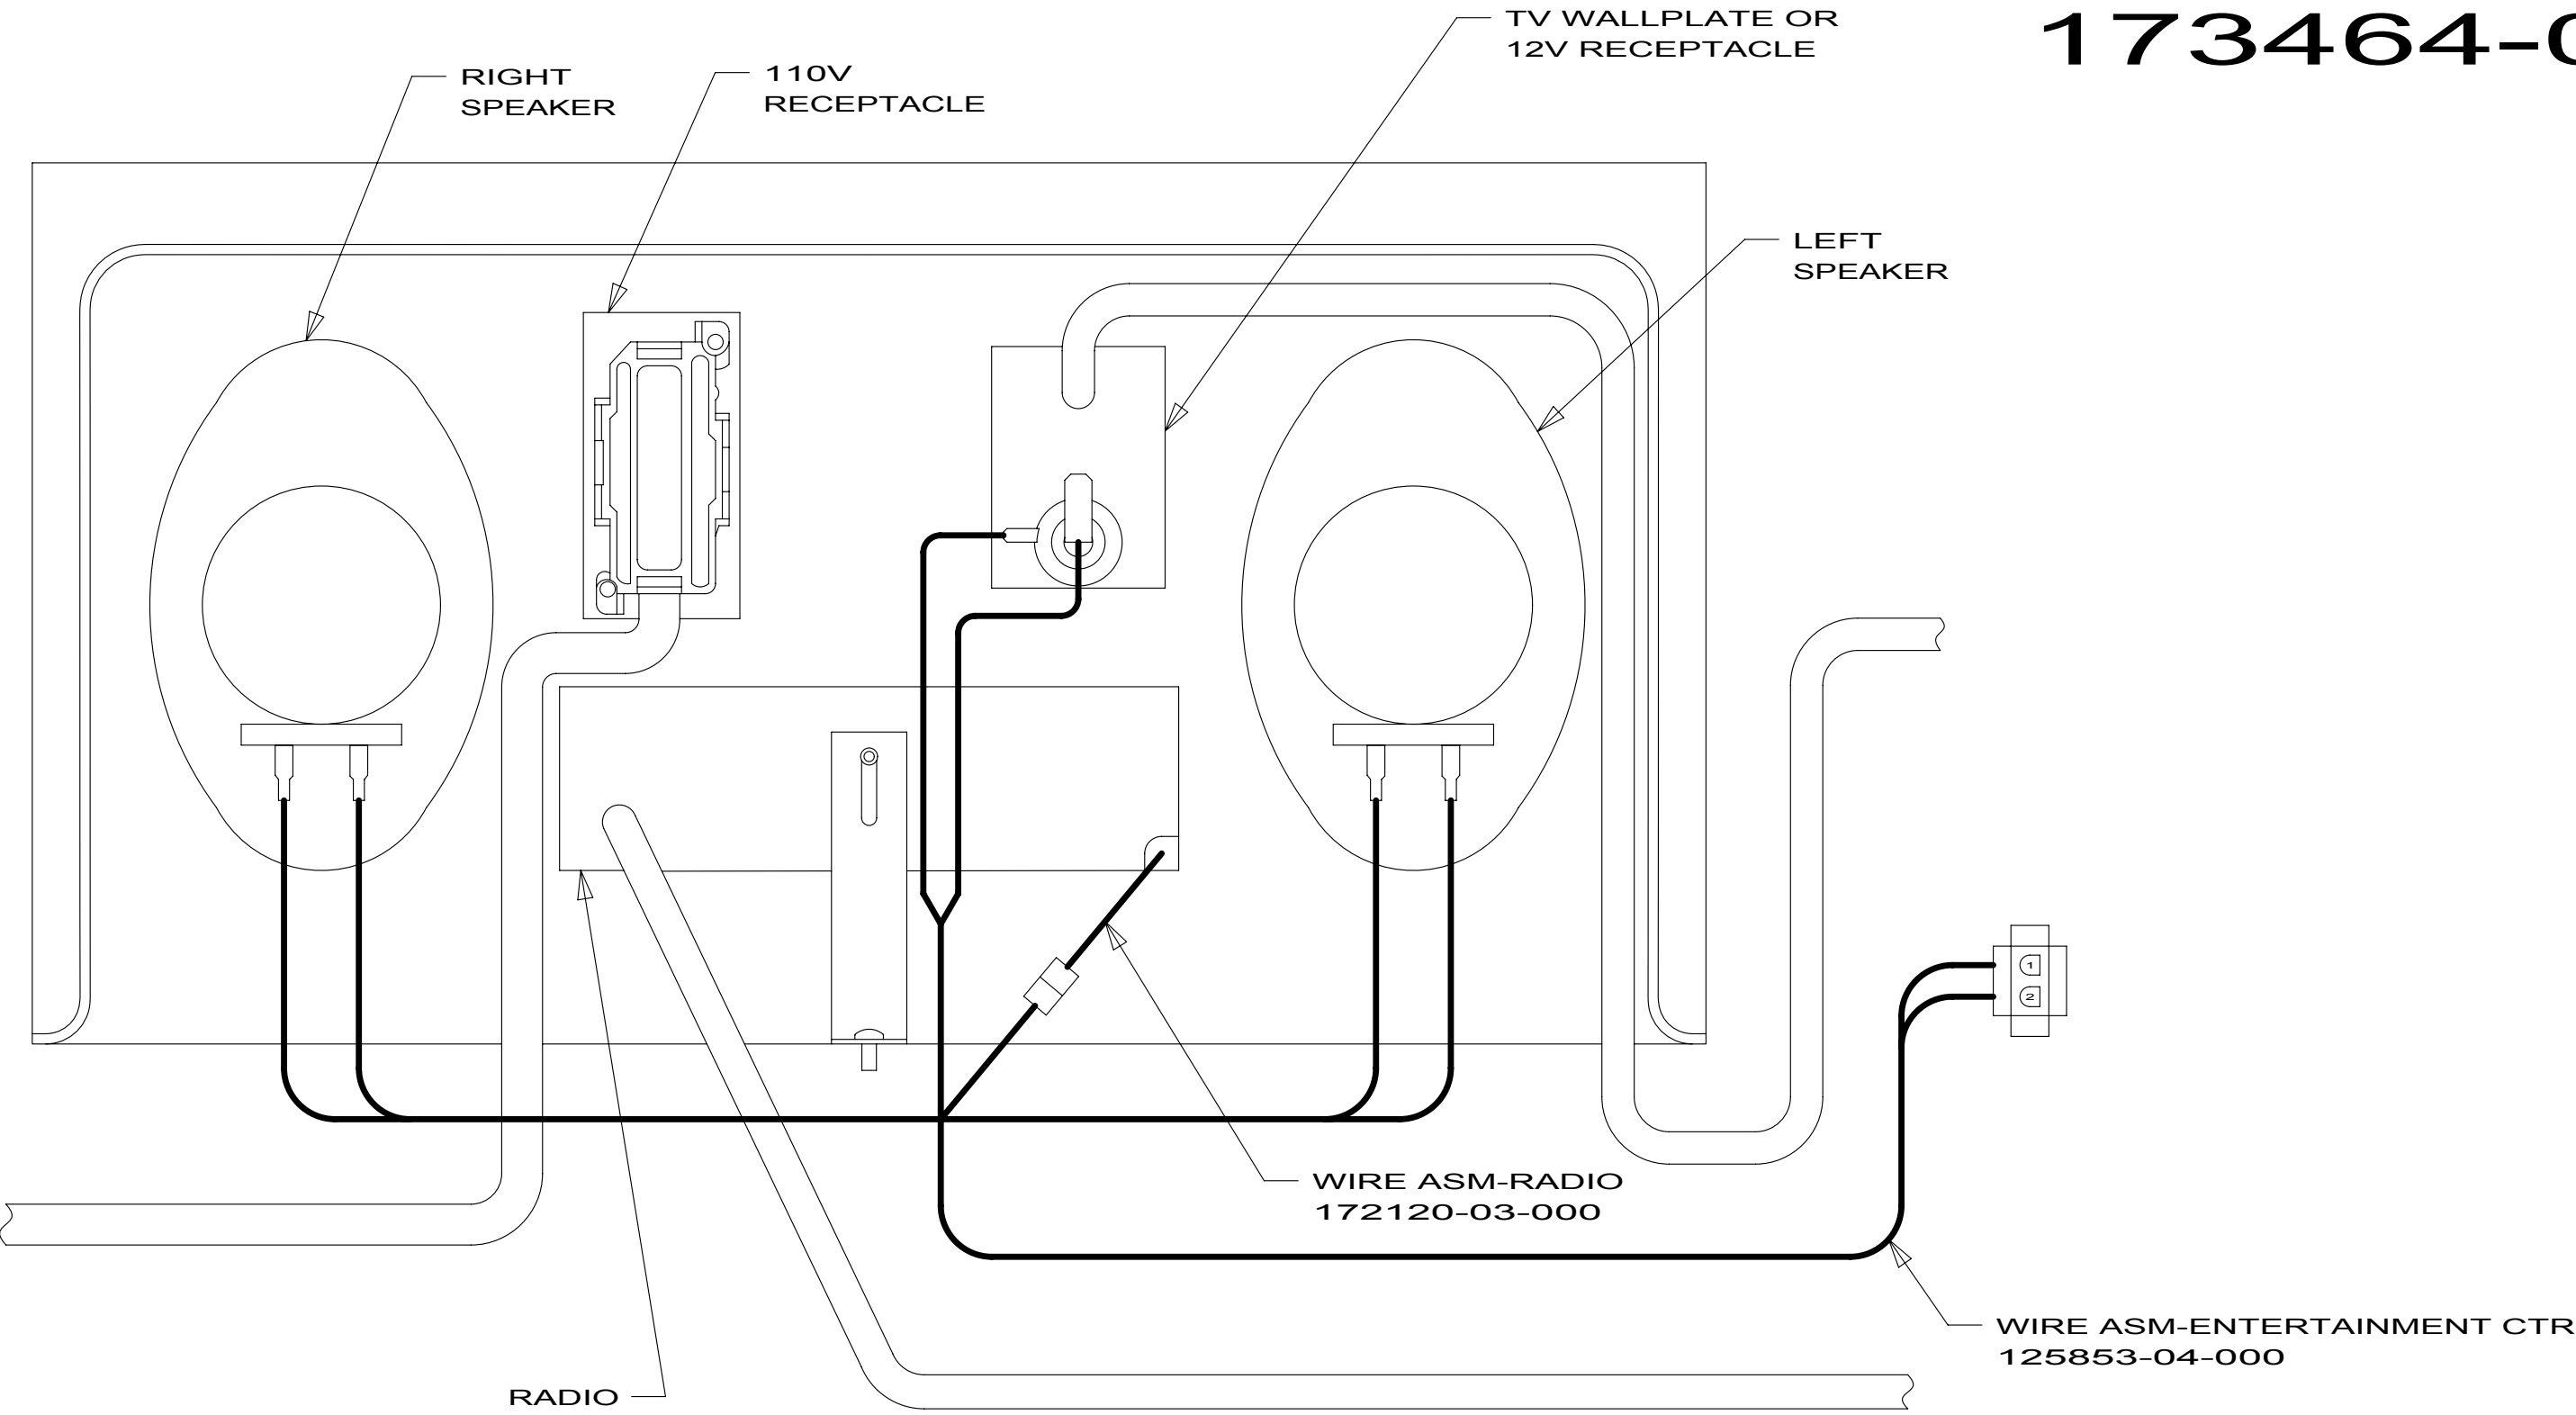

DETAIL EC 173464-03
173464-07
173464-08

1D5 ENTERTAINMENT CENTER/EXT W/CD


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

10 MOTORHOMES

ENTERTAINMENT CENTER COMPL

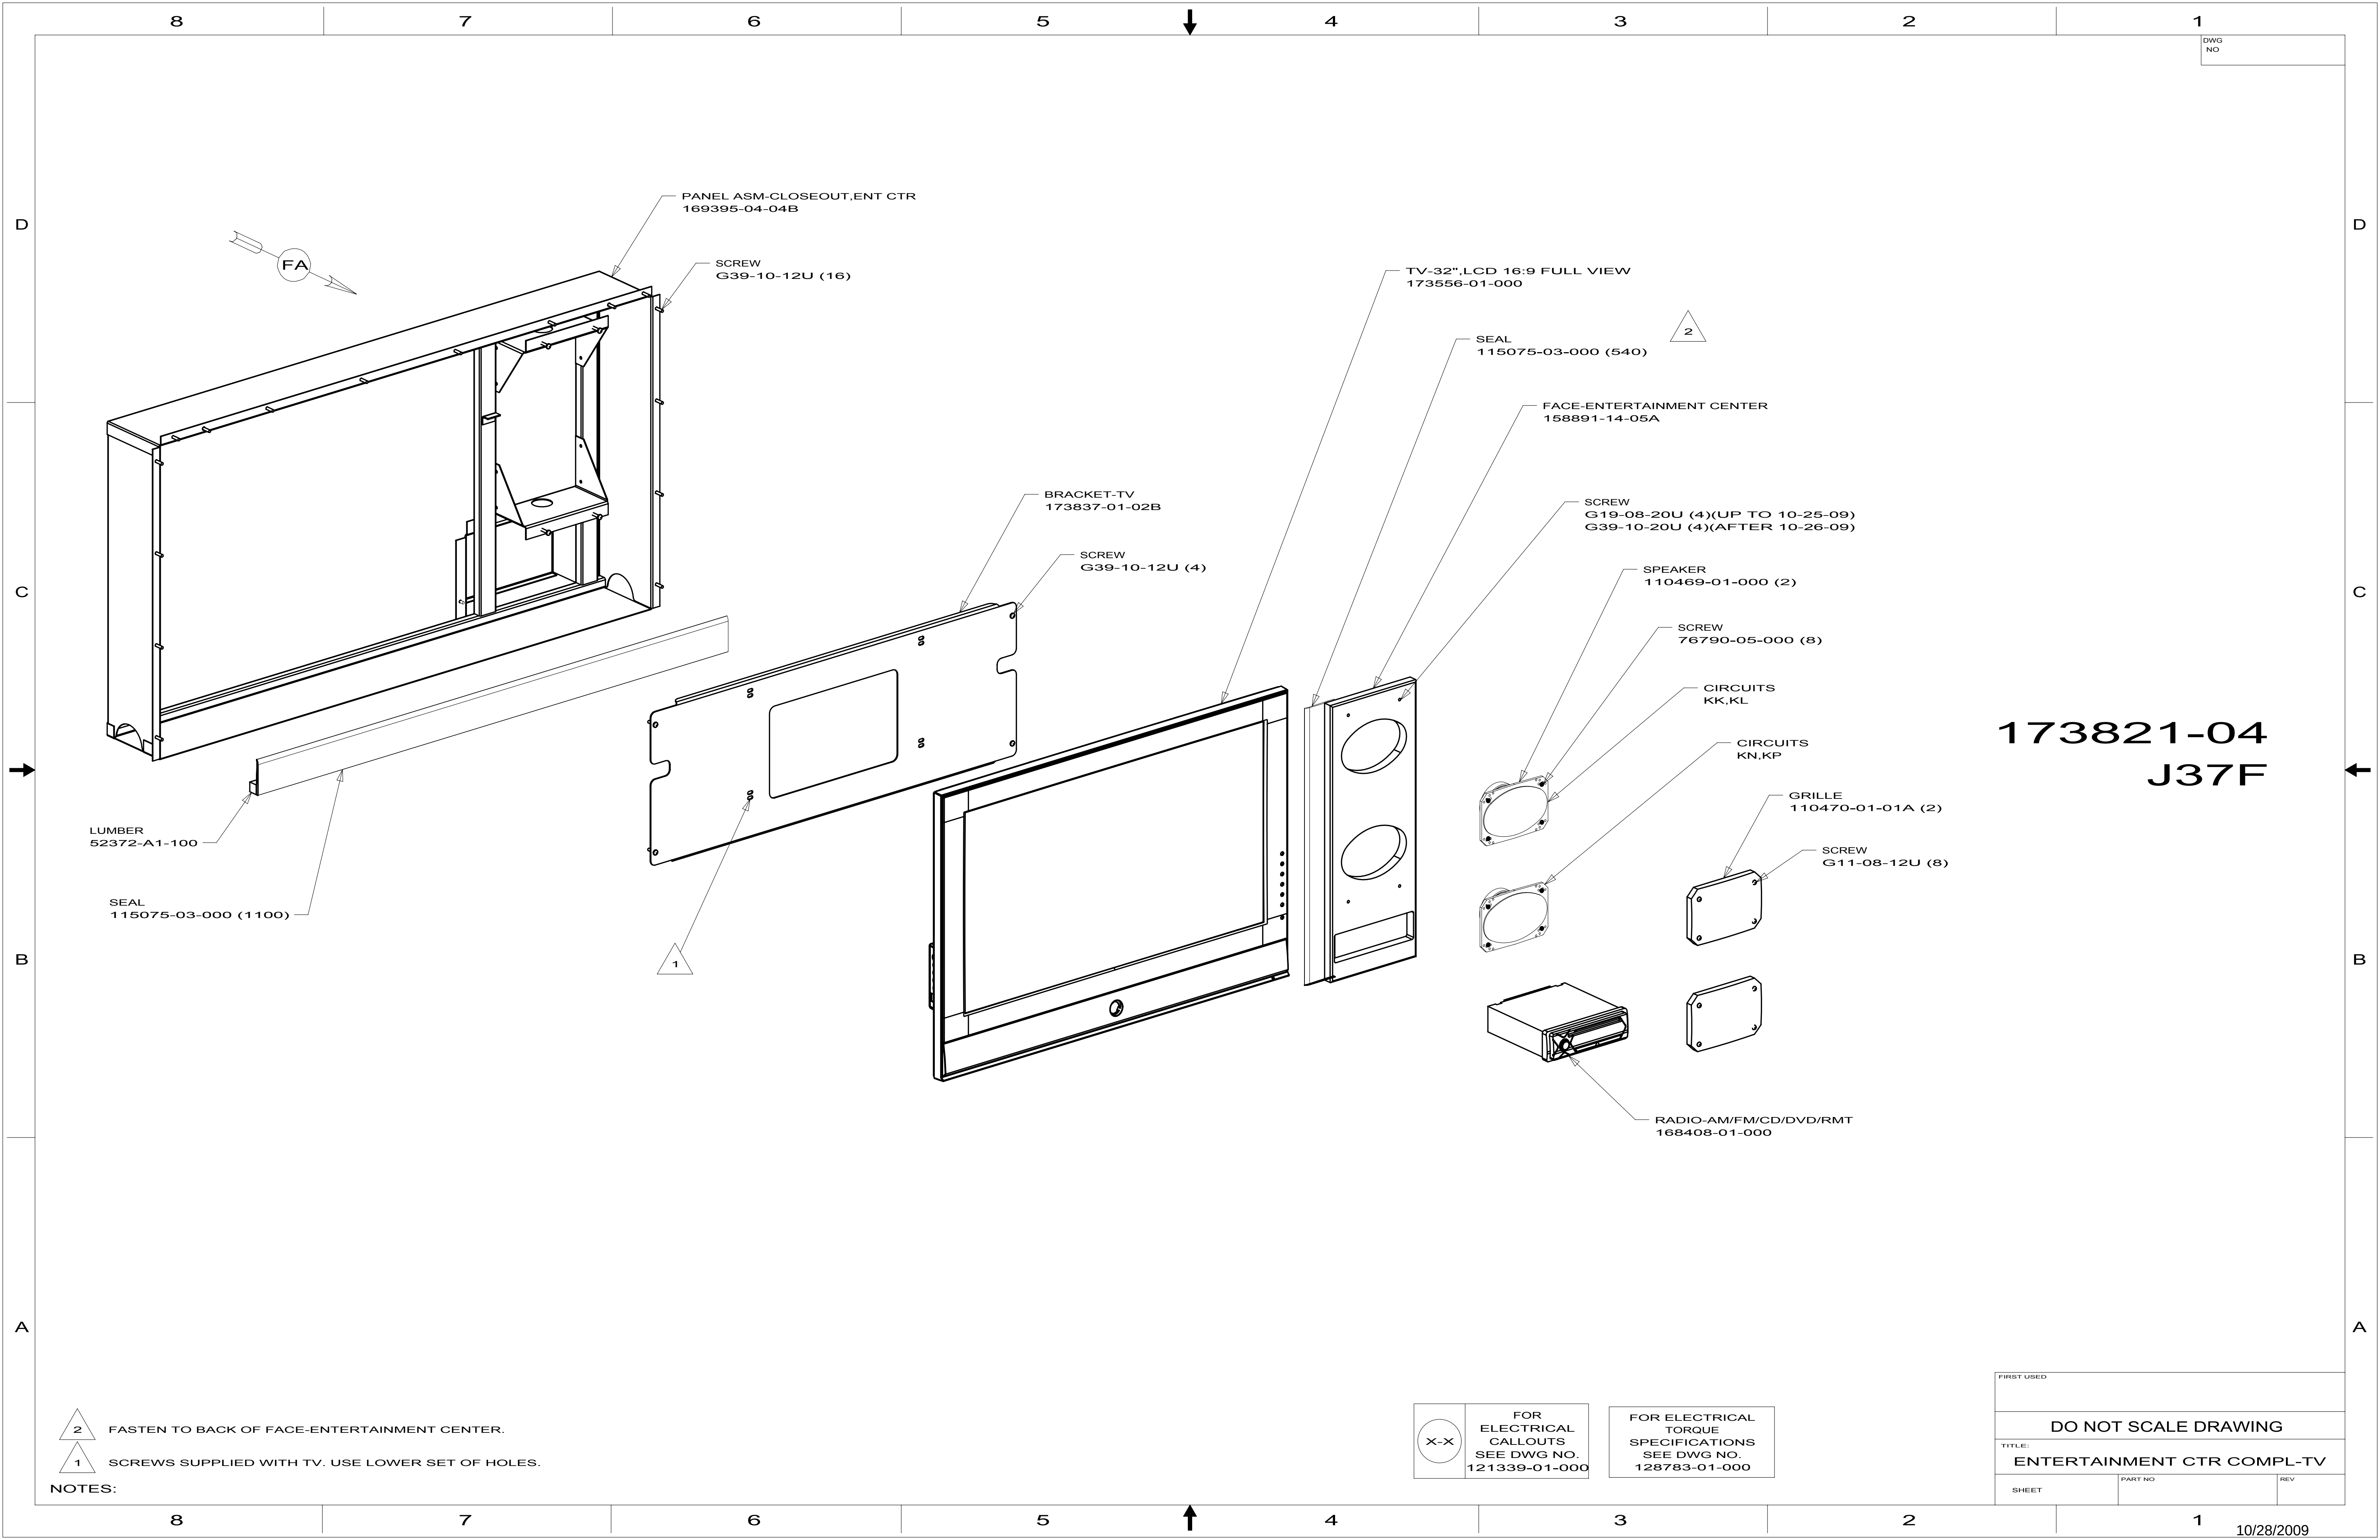

DWG
NO

173821-04
J37F


- 2 FASTEN TO BACK OF FACE-ENTERTAINMENT CENTER.
- 1 SCREWS SUPPLIED WITH TV. USE LOWER SET OF HOLES.

NOTES:


FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FIRST USED		
DO NOT SCALE DRAWING		
TITLE: ENTERTAINMENT CTR COMPL-TV		
SHEET	PART NO	REV

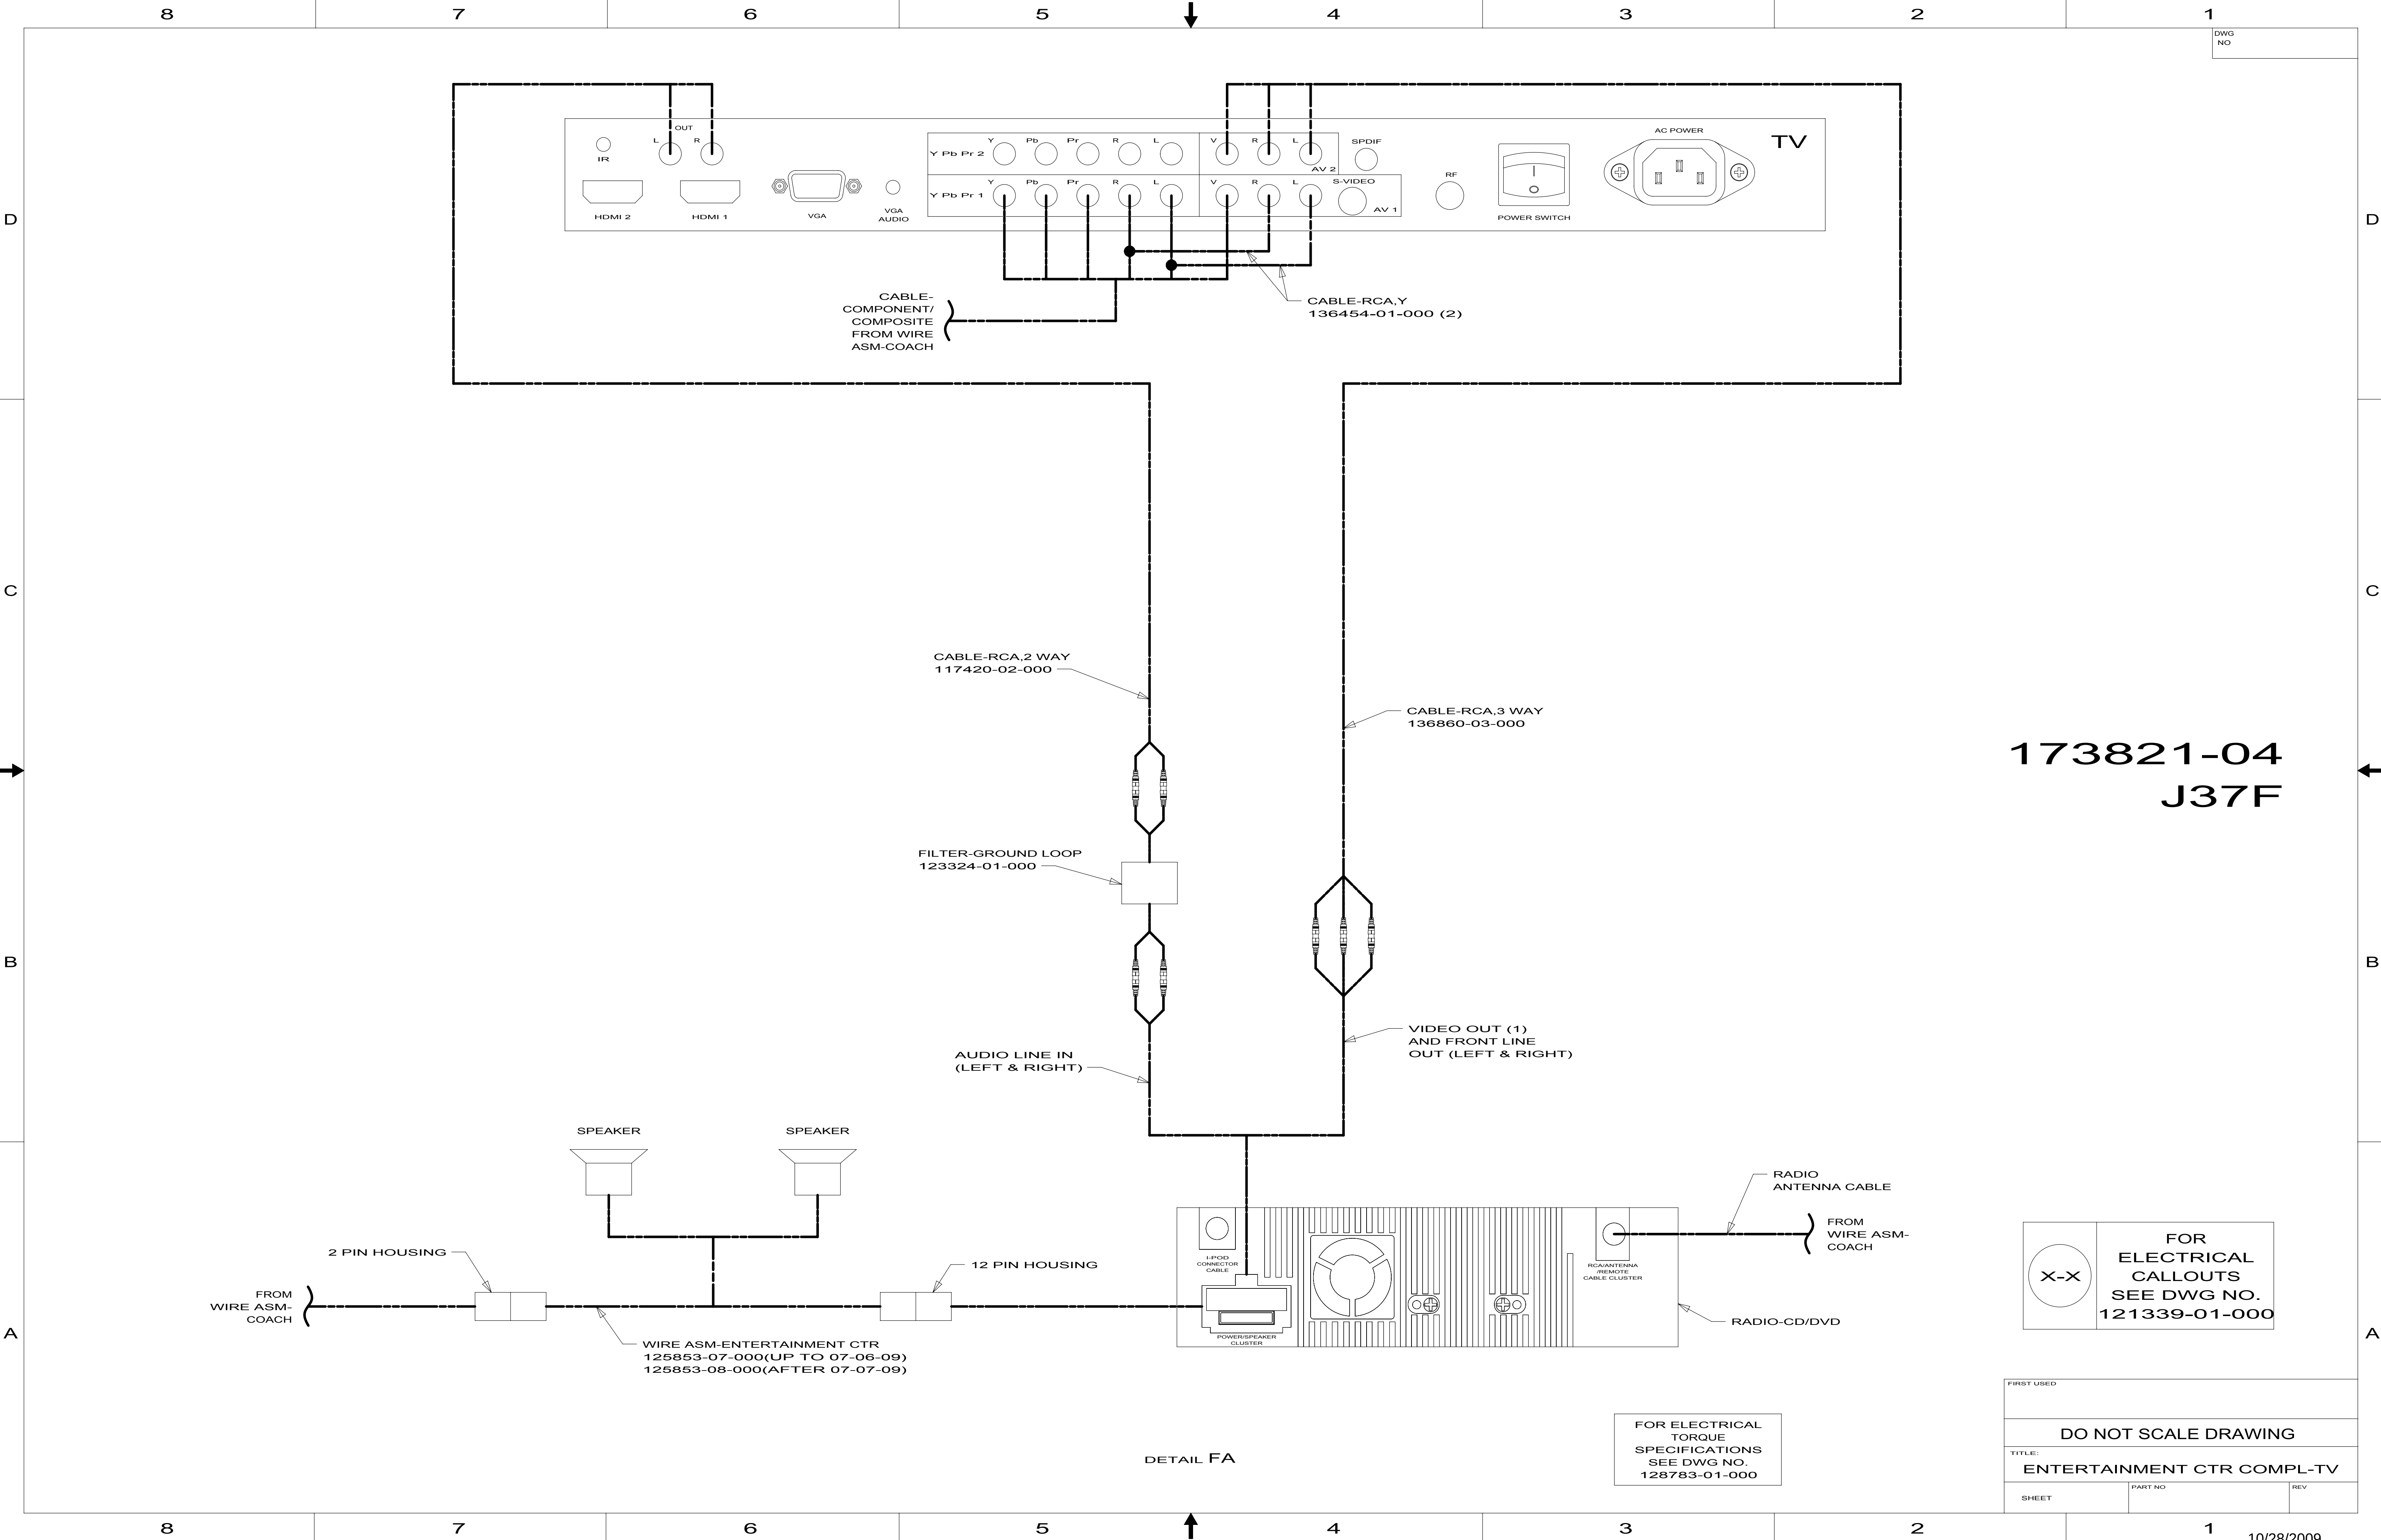

D-Series
E-Series
J-Series
169848-05

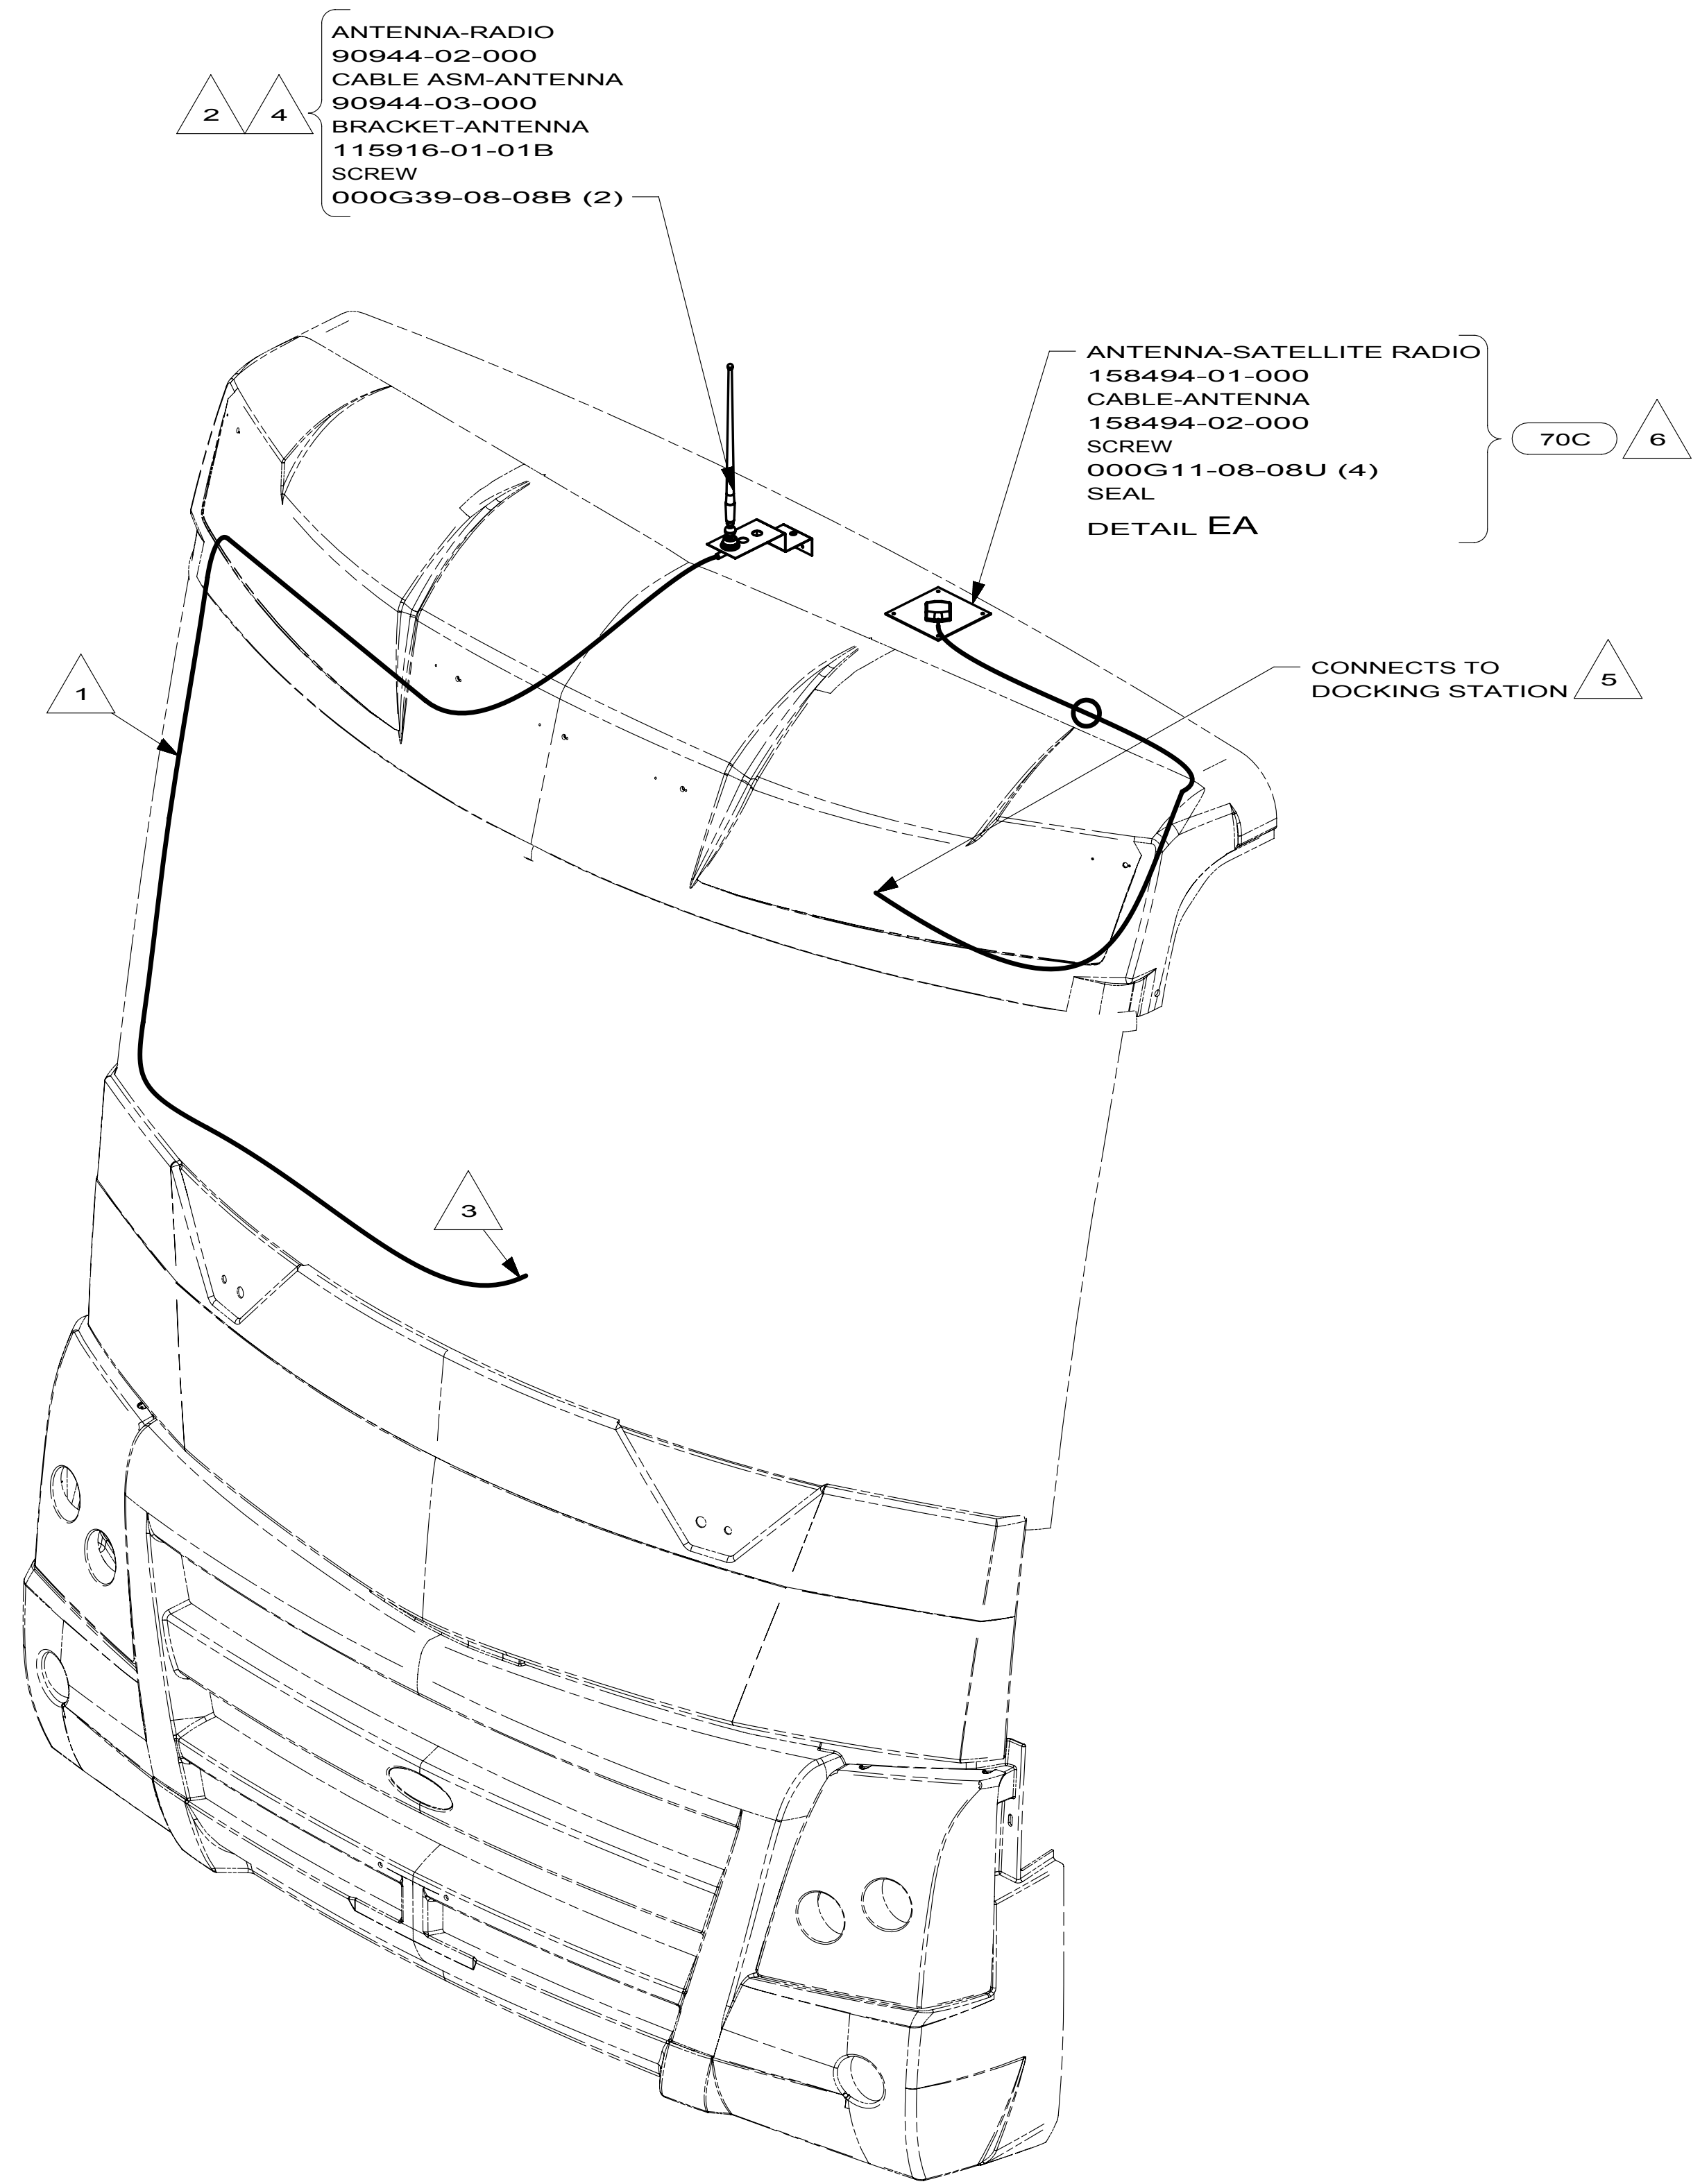

- 6 MOUNT ANTENNA SUCH THAT BASE IS SQUARE W/REAR OF ROOF CAP & HOLE IS DIRECTLY OVER HOLE IN FIBERGLASS. SEAL HOLE IN ROOF CAP, BASE AT SCREWS.
- 5 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 4 USE HOLE IN BRACKET AS GUIDE TO DRILL 13 DIAMETER HOLE IN FIBERGLASS.
- 3 TO RADIO.
- 2 SEAL AROUND ANTENNA BASE.
- 1 ROUTE CABLE ALONG A-POST, UNDER TRIM COVER.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 70C RADIO - SATELLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE: ANTENNA INSTL-RADIO AND CB		
SHEET 5	PART NO 169848	REV


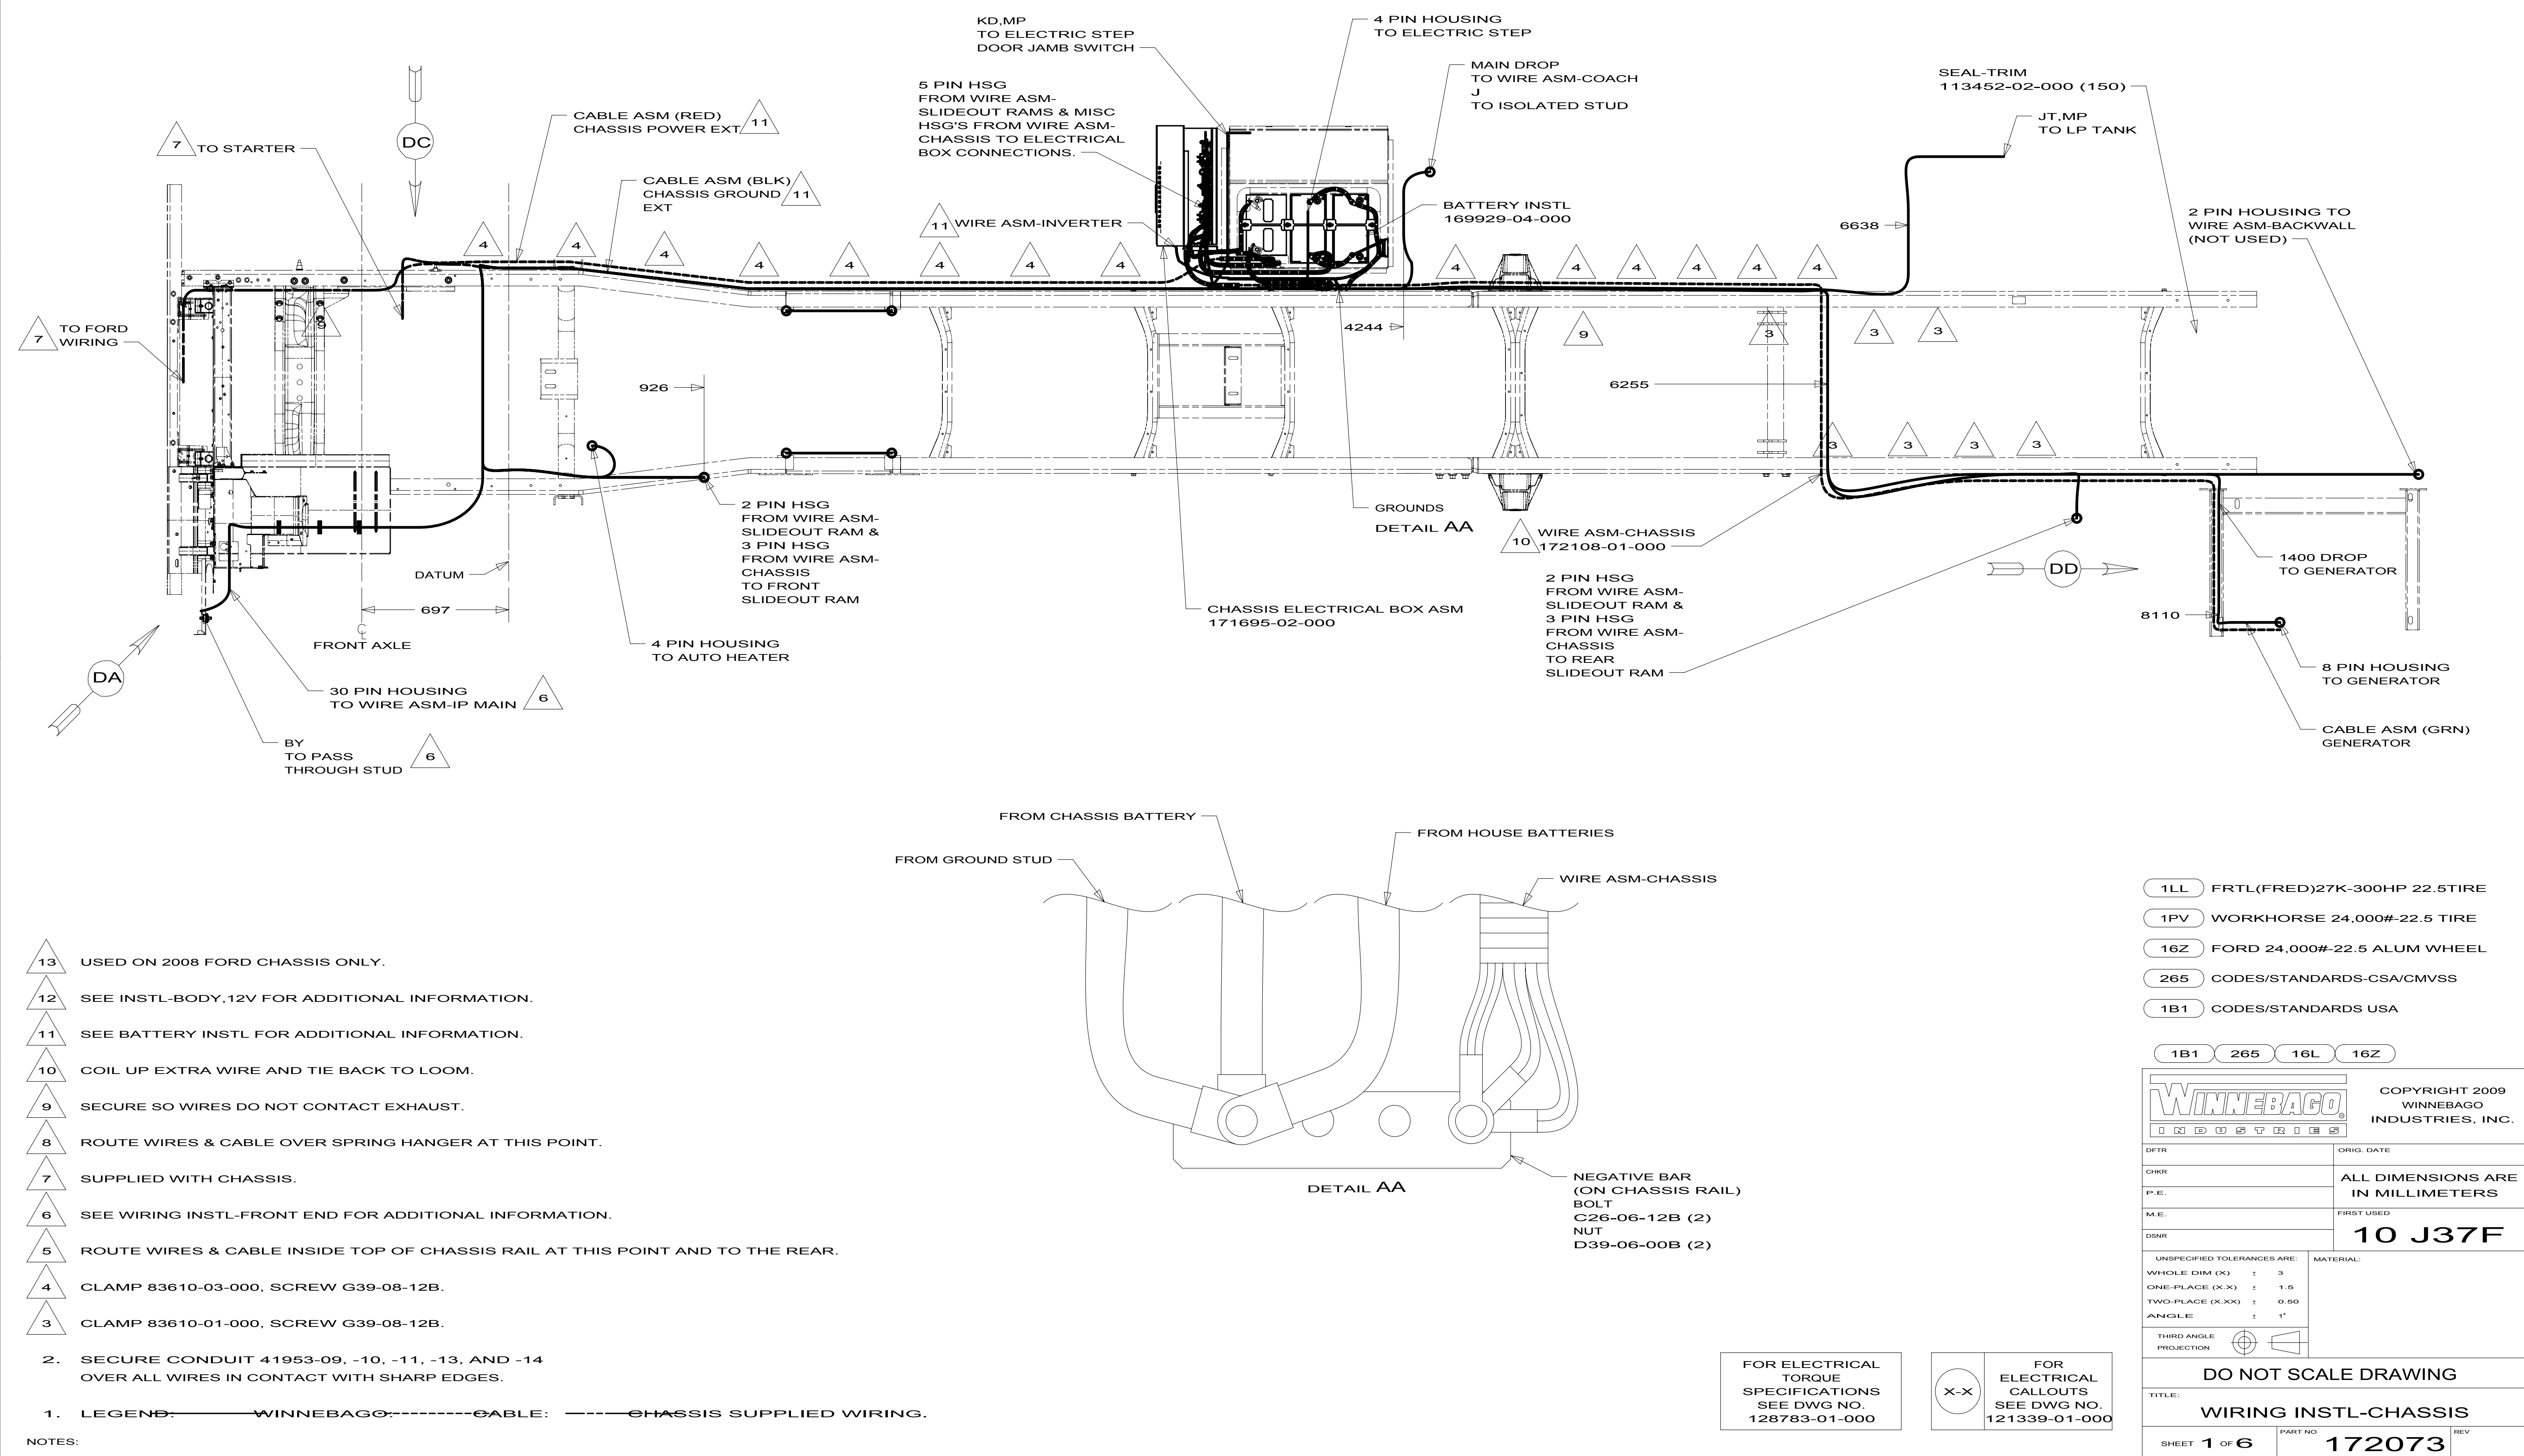


- 1LL FRTL(FRED)27K-300HP 22.5TIRE
- 1PV WORKHORSE 24,000#-22.5 TIRE
- 16Z FORD 24,000#-22.5 ALUM WHEEL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO INDUSTRIES

COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHKR	
P.E.	ALL DIMENSIONS ARE IN MILLIMETERS
M.E.	FIRST USED
DSNR	10 J37F
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	

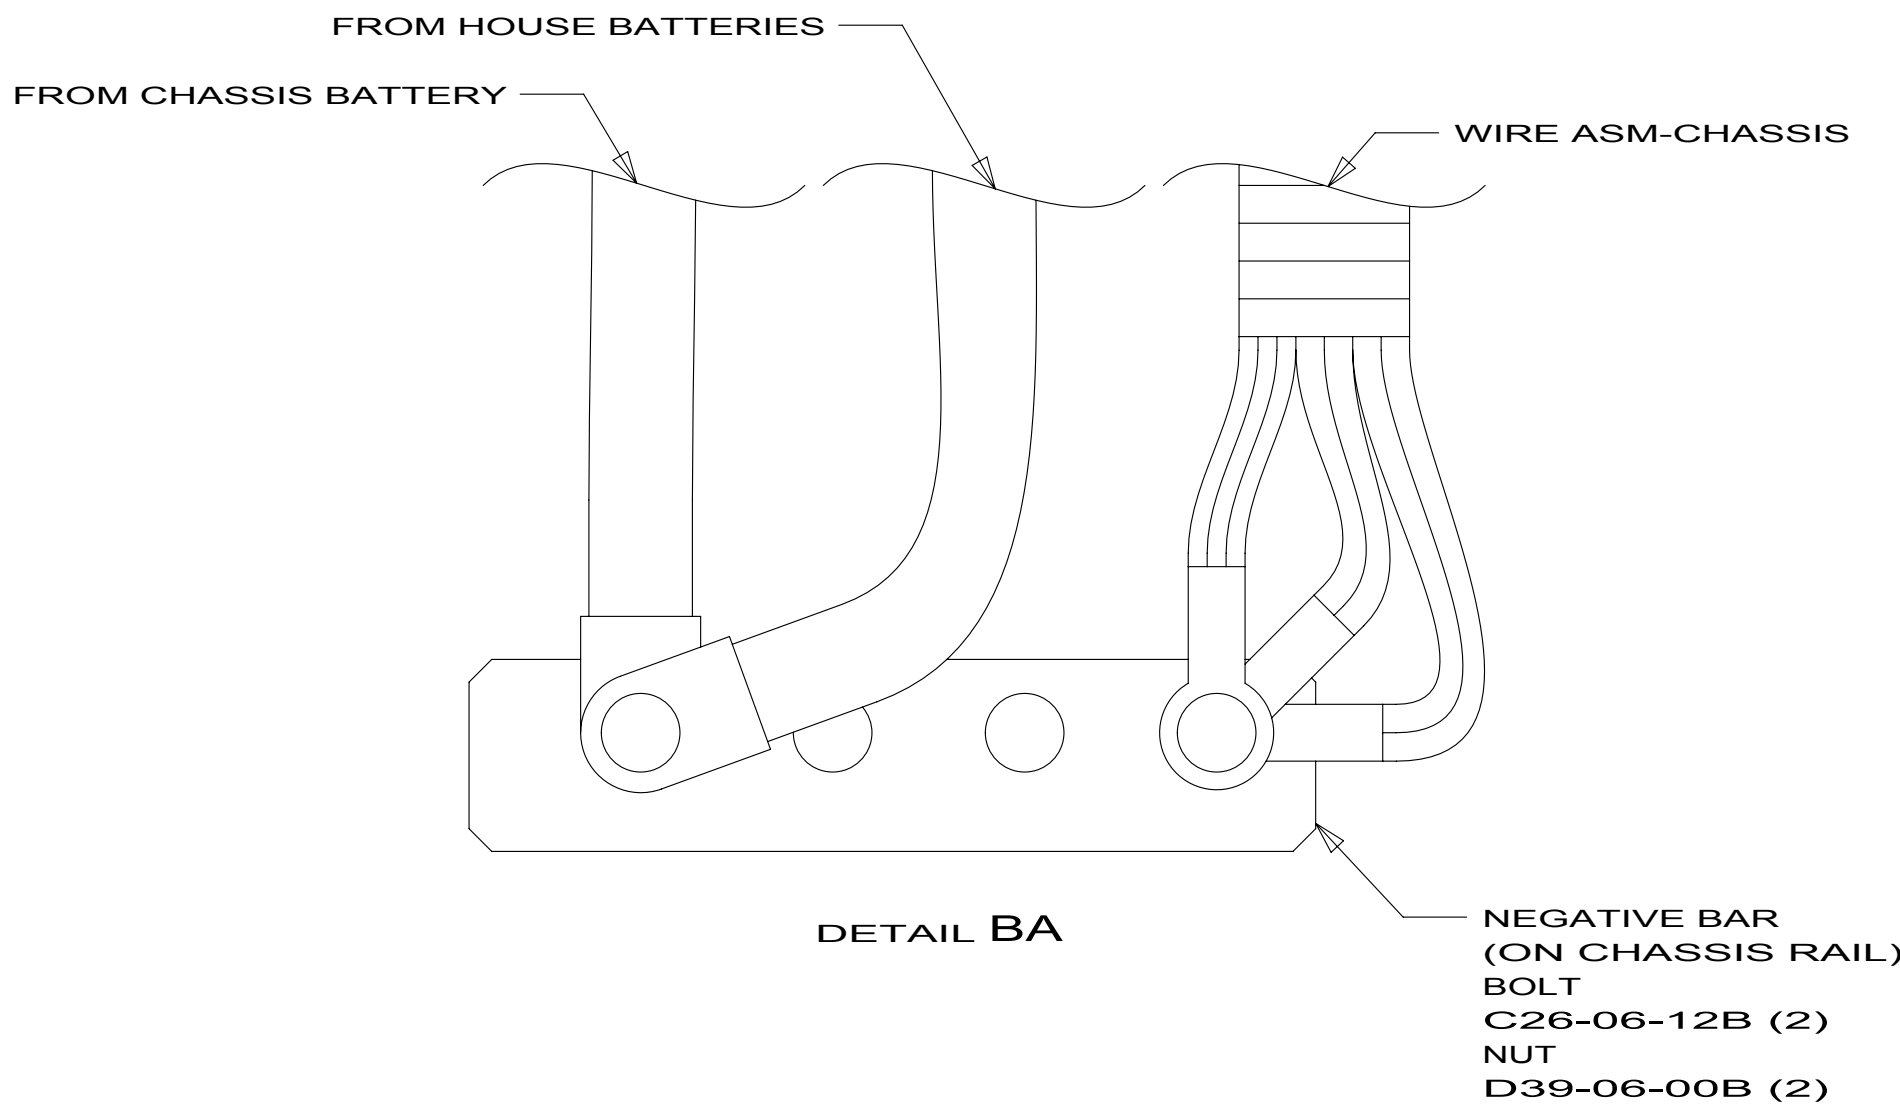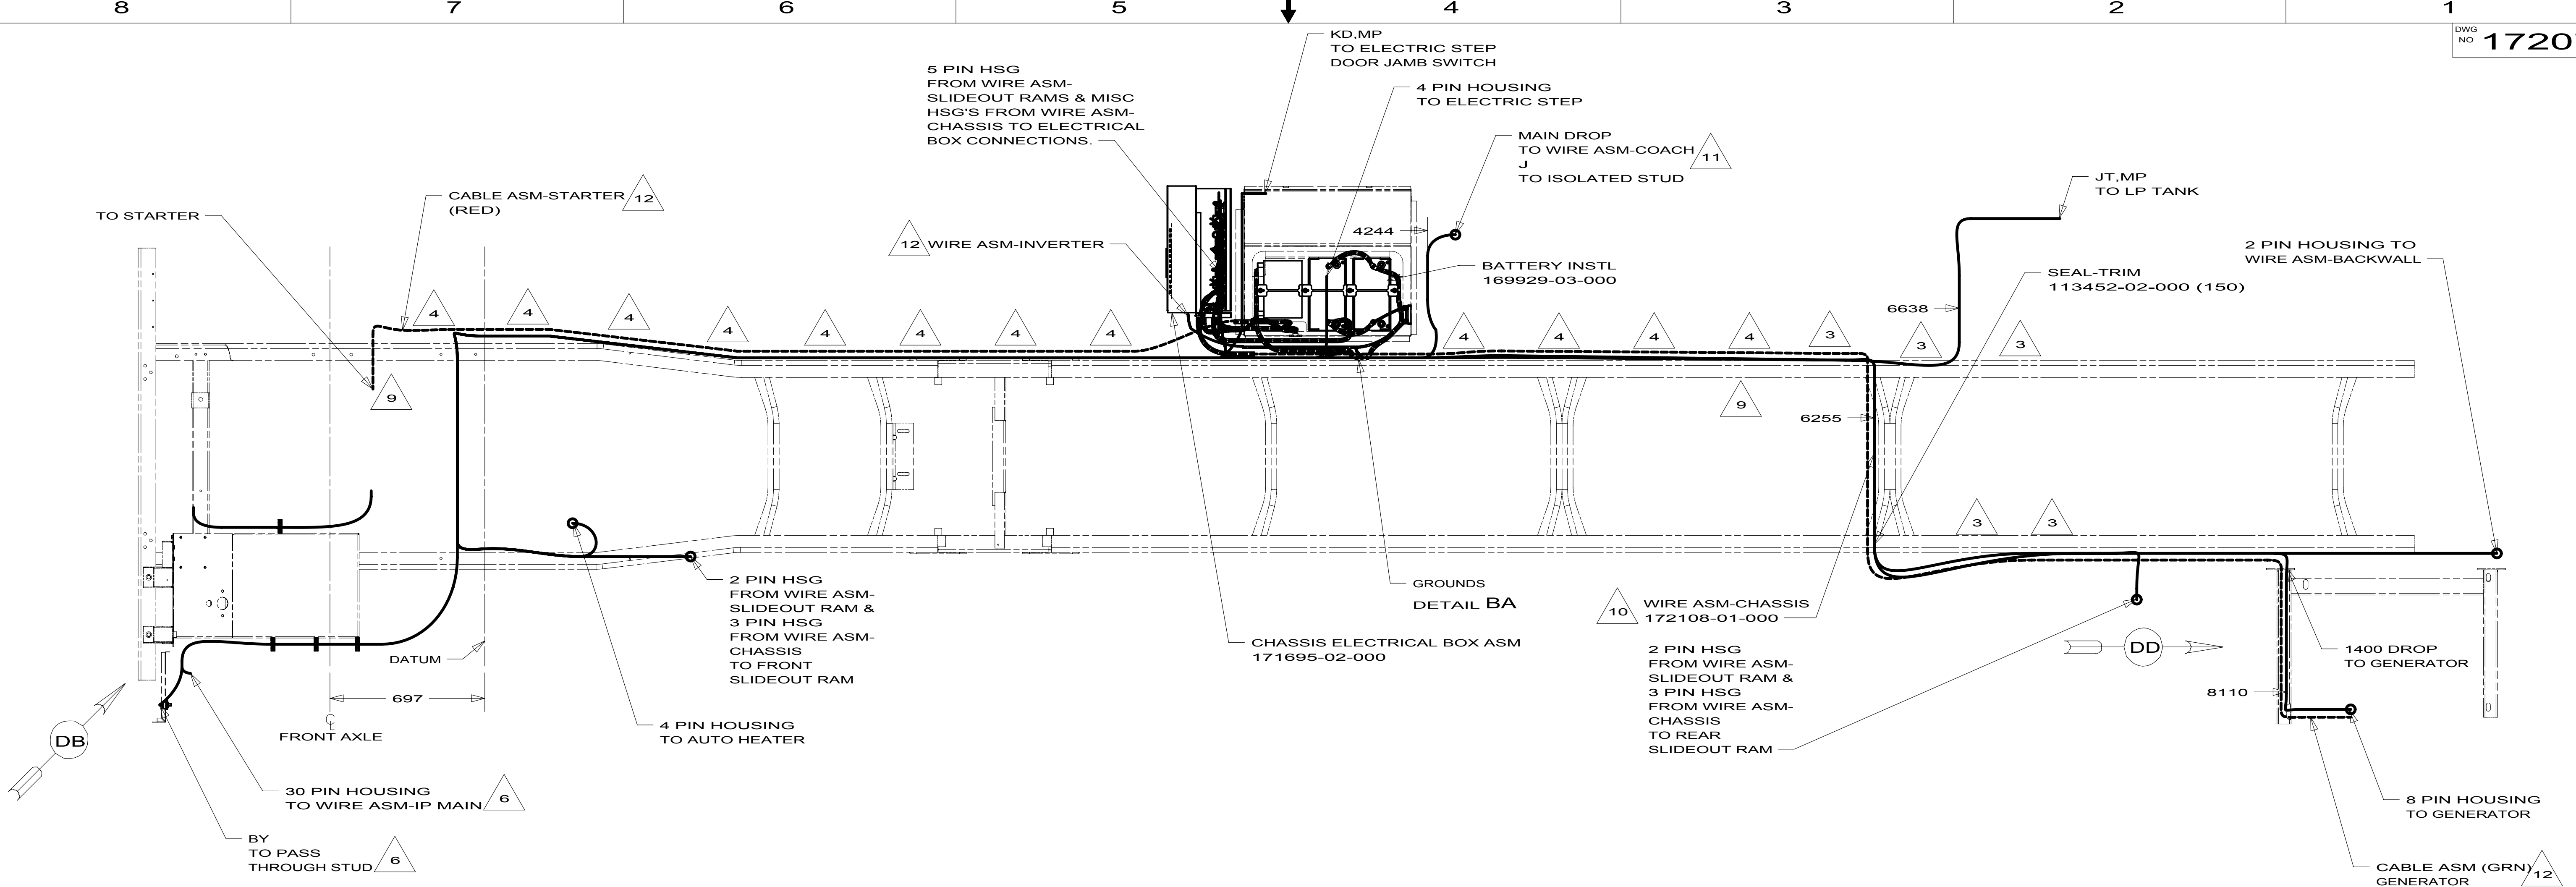

- 12 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 11 SEE INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
- 10 COIL UP EXTRA WIRE AND TIE BACK TO LOOM.
- 9 SECURE SO WIRES DO NOT CONTACT EXHAUST.
- 8 ROUTE WIRES & CABLE OVER SPRING HANGER AT THIS POINT.
- 7 SUPPLIED WITH CHASSIS.
- 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5 ROUTE WIRES & CABLE INSIDE CHASSIS RAIL AT THIS POINT AND TO THE REAR.
- 4 CLAMP 83610-03-000, SCREW G39-08-12B.
- 3 CLAMP 83610-01-000, SCREW G39-08-12B.

2. SECURE CONDUIT 41953-09, -10, -11, -13, AND -14 OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. LEGEND: — WINNEBAGO; - - - - - CABLE; - - - - - CHASSIS SUPPLIED WIRING.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALL-OUTS SEE DWG NO. 121339-01-000

- 1PV WORKHORSE 24,000#-22.5 TIRE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

- 1B1 265 1PV 1PS

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 2	PART NO 172073	REV

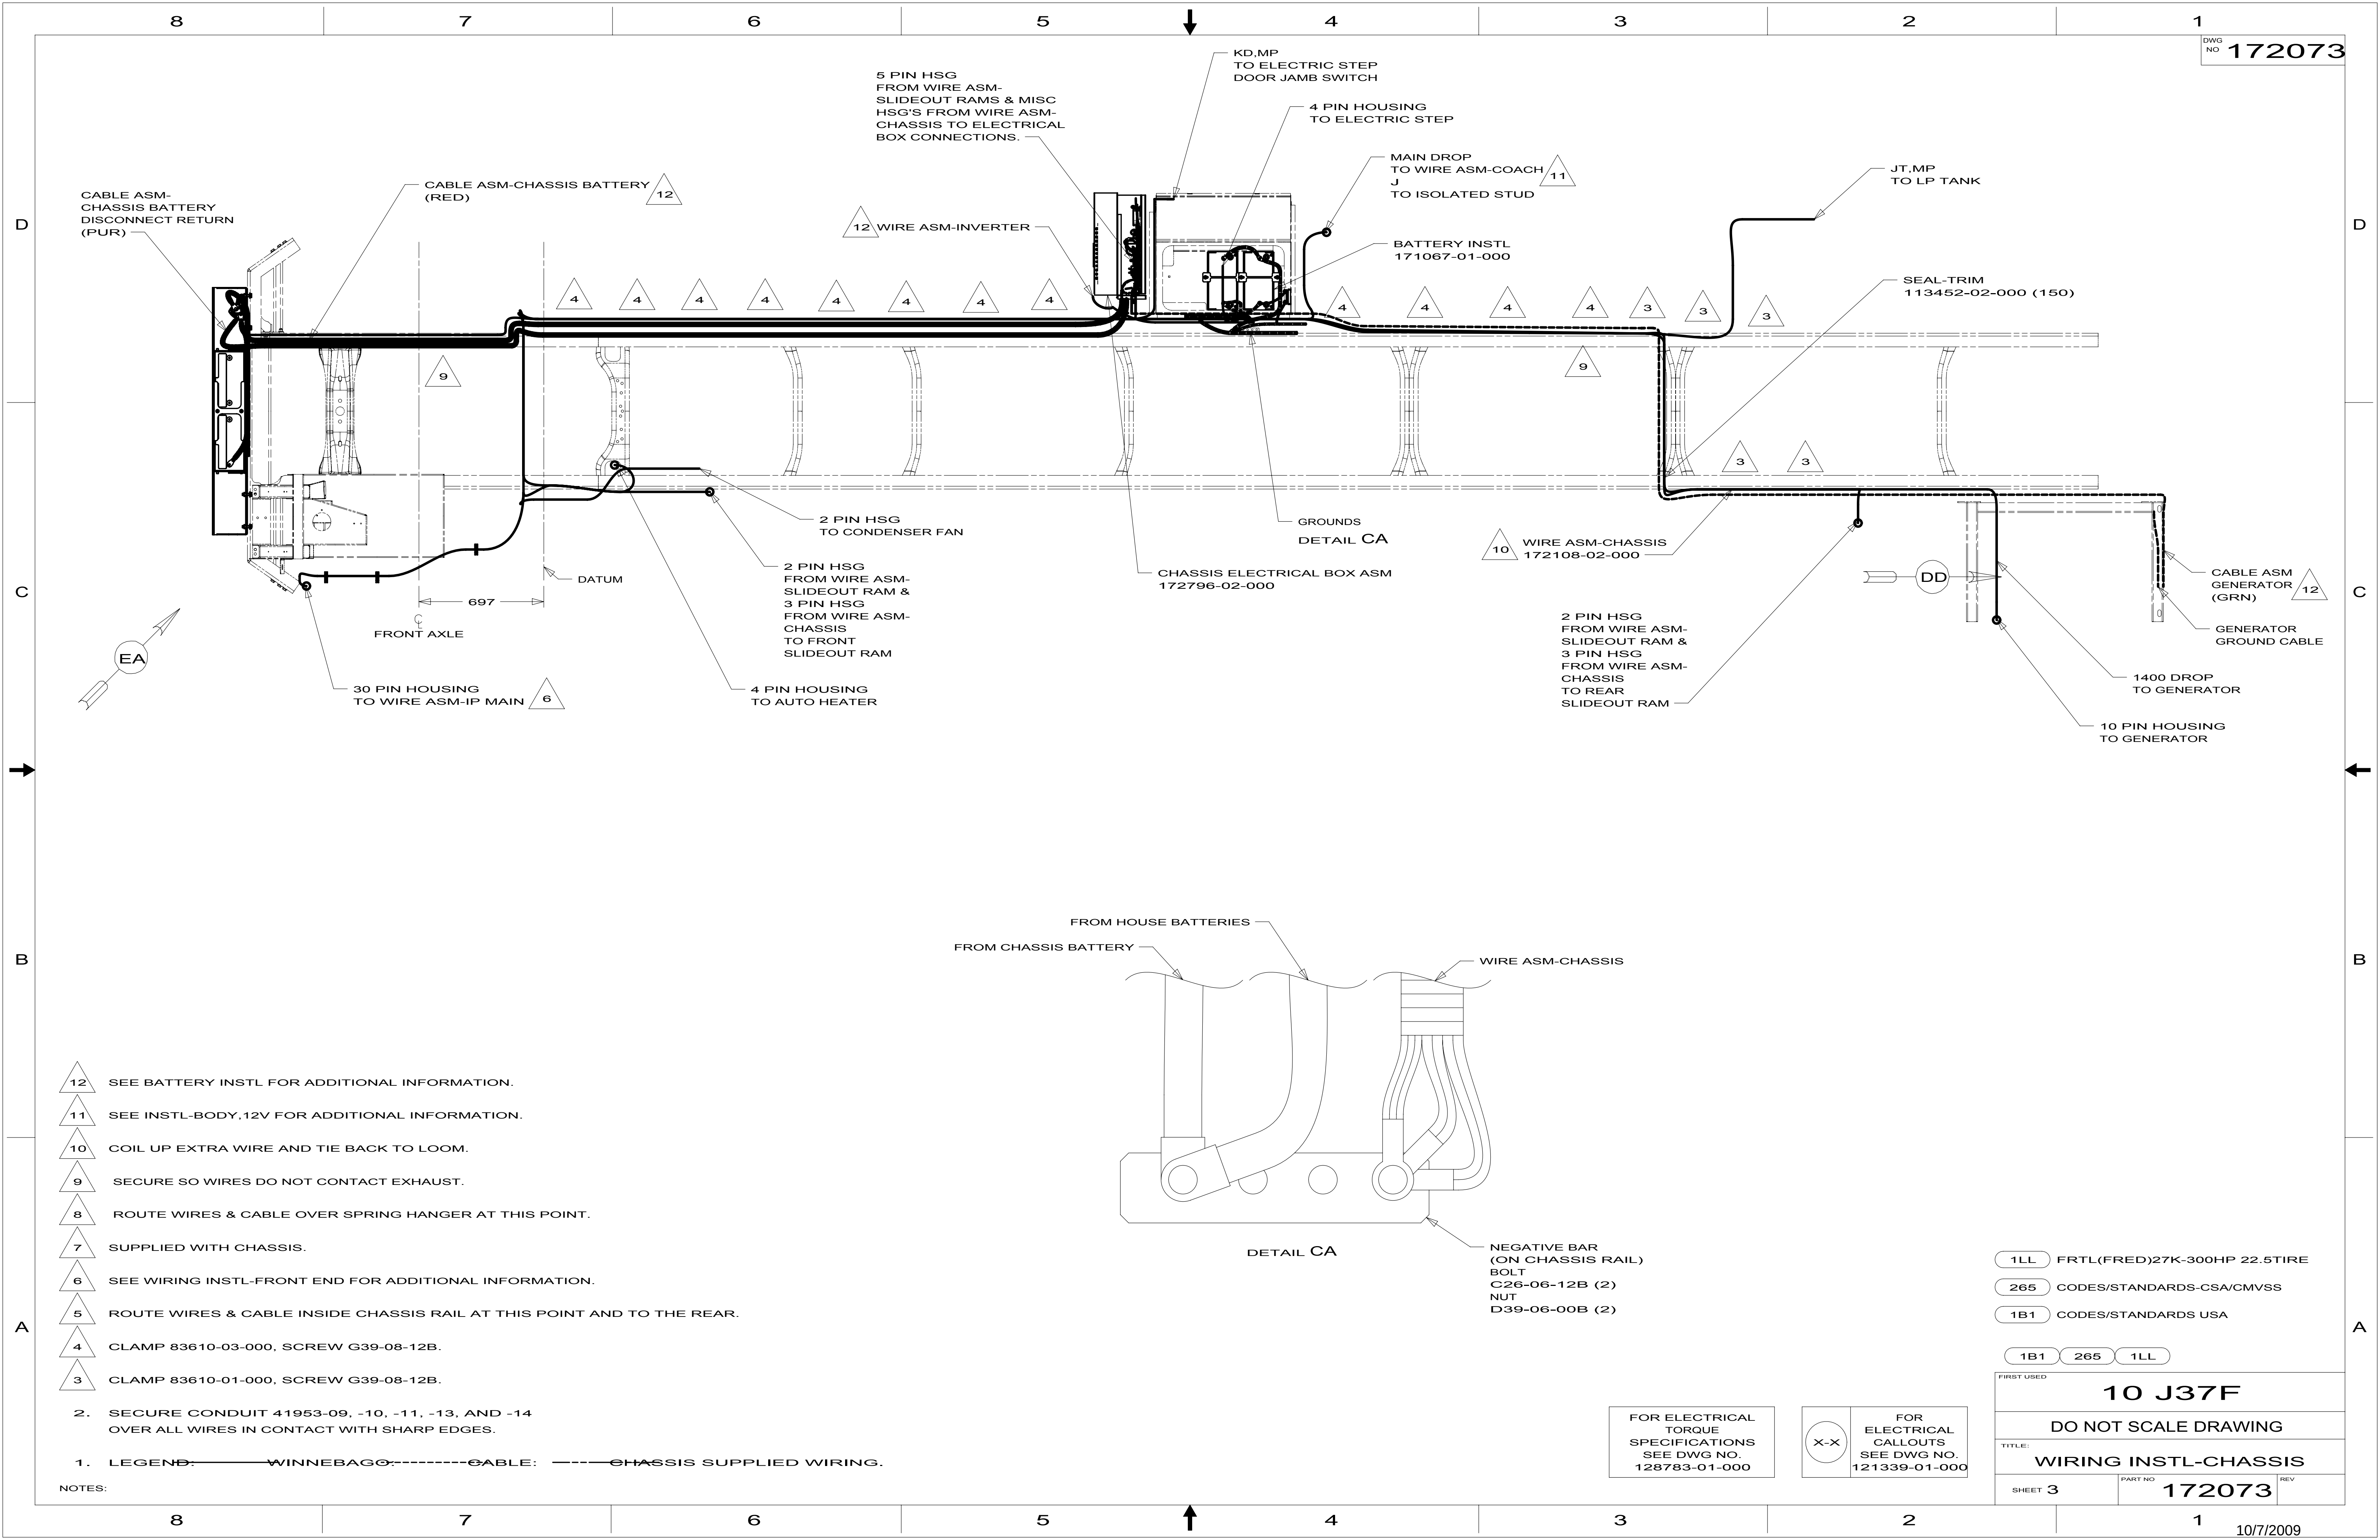

- 12 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 11 SEE INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
- 10 COIL UP EXTRA WIRE AND TIE BACK TO LOOM.
- 9 SECURE SO WIRES DO NOT CONTACT EXHAUST.
- 8 ROUTE WIRES & CABLE OVER SPRING HANGER AT THIS POINT.
- 7 SUPPLIED WITH CHASSIS.
- 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5 ROUTE WIRES & CABLE INSIDE CHASSIS RAIL AT THIS POINT AND TO THE REAR.
- 4 CLAMP 83610-03-000. SCREW G39-08-12B.
- 3 CLAMP 83610-01-000. SCREW G39-08-12B.

2. SECURE CONDUIT 41953-09, -10, -11, -13, AND -14
OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: ~~WINNEBAGO~~ CABLE: ~~CHASSIS~~ SUPPLIED WIRING.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--

1LL	FRTL(FRED)27K-300HP 22.5TIRE
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

1B1 265 1LL

10 J37F

DO NOT SCALE DRAWING





TITLE: **WIRING INSTL-CHASSIS**

SHEET 3

PART NO
172073

EV

10/7/2009

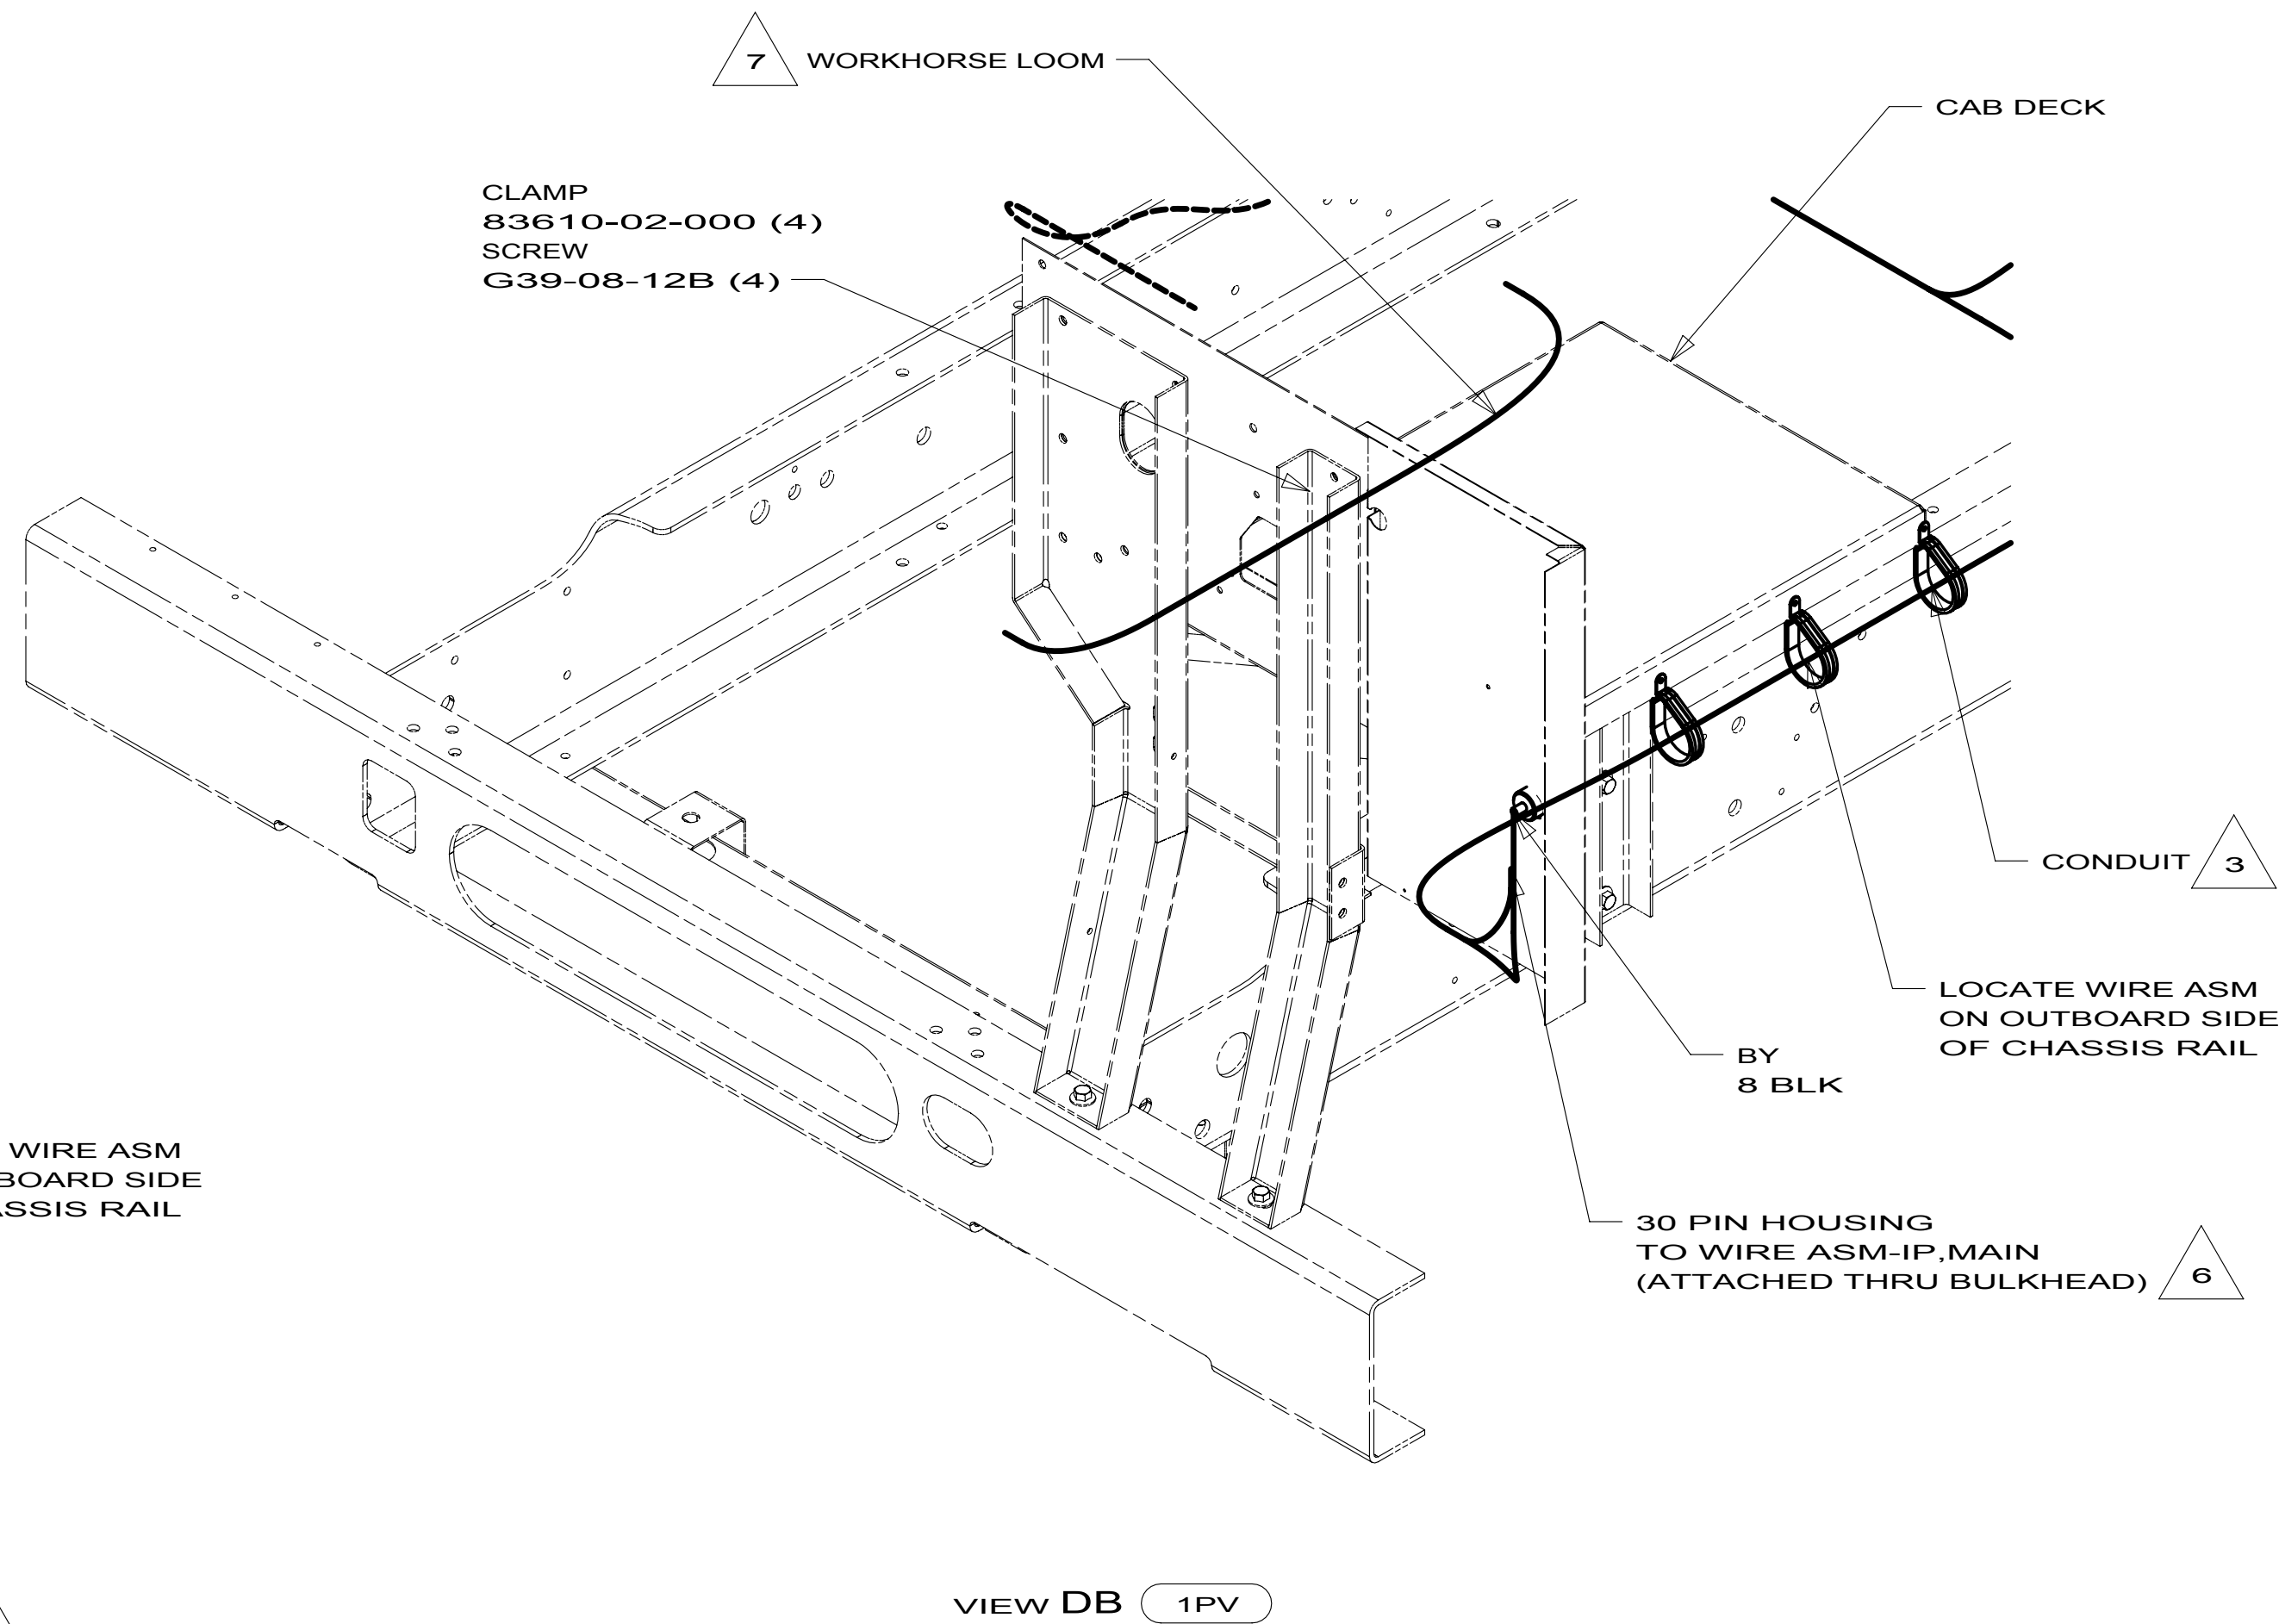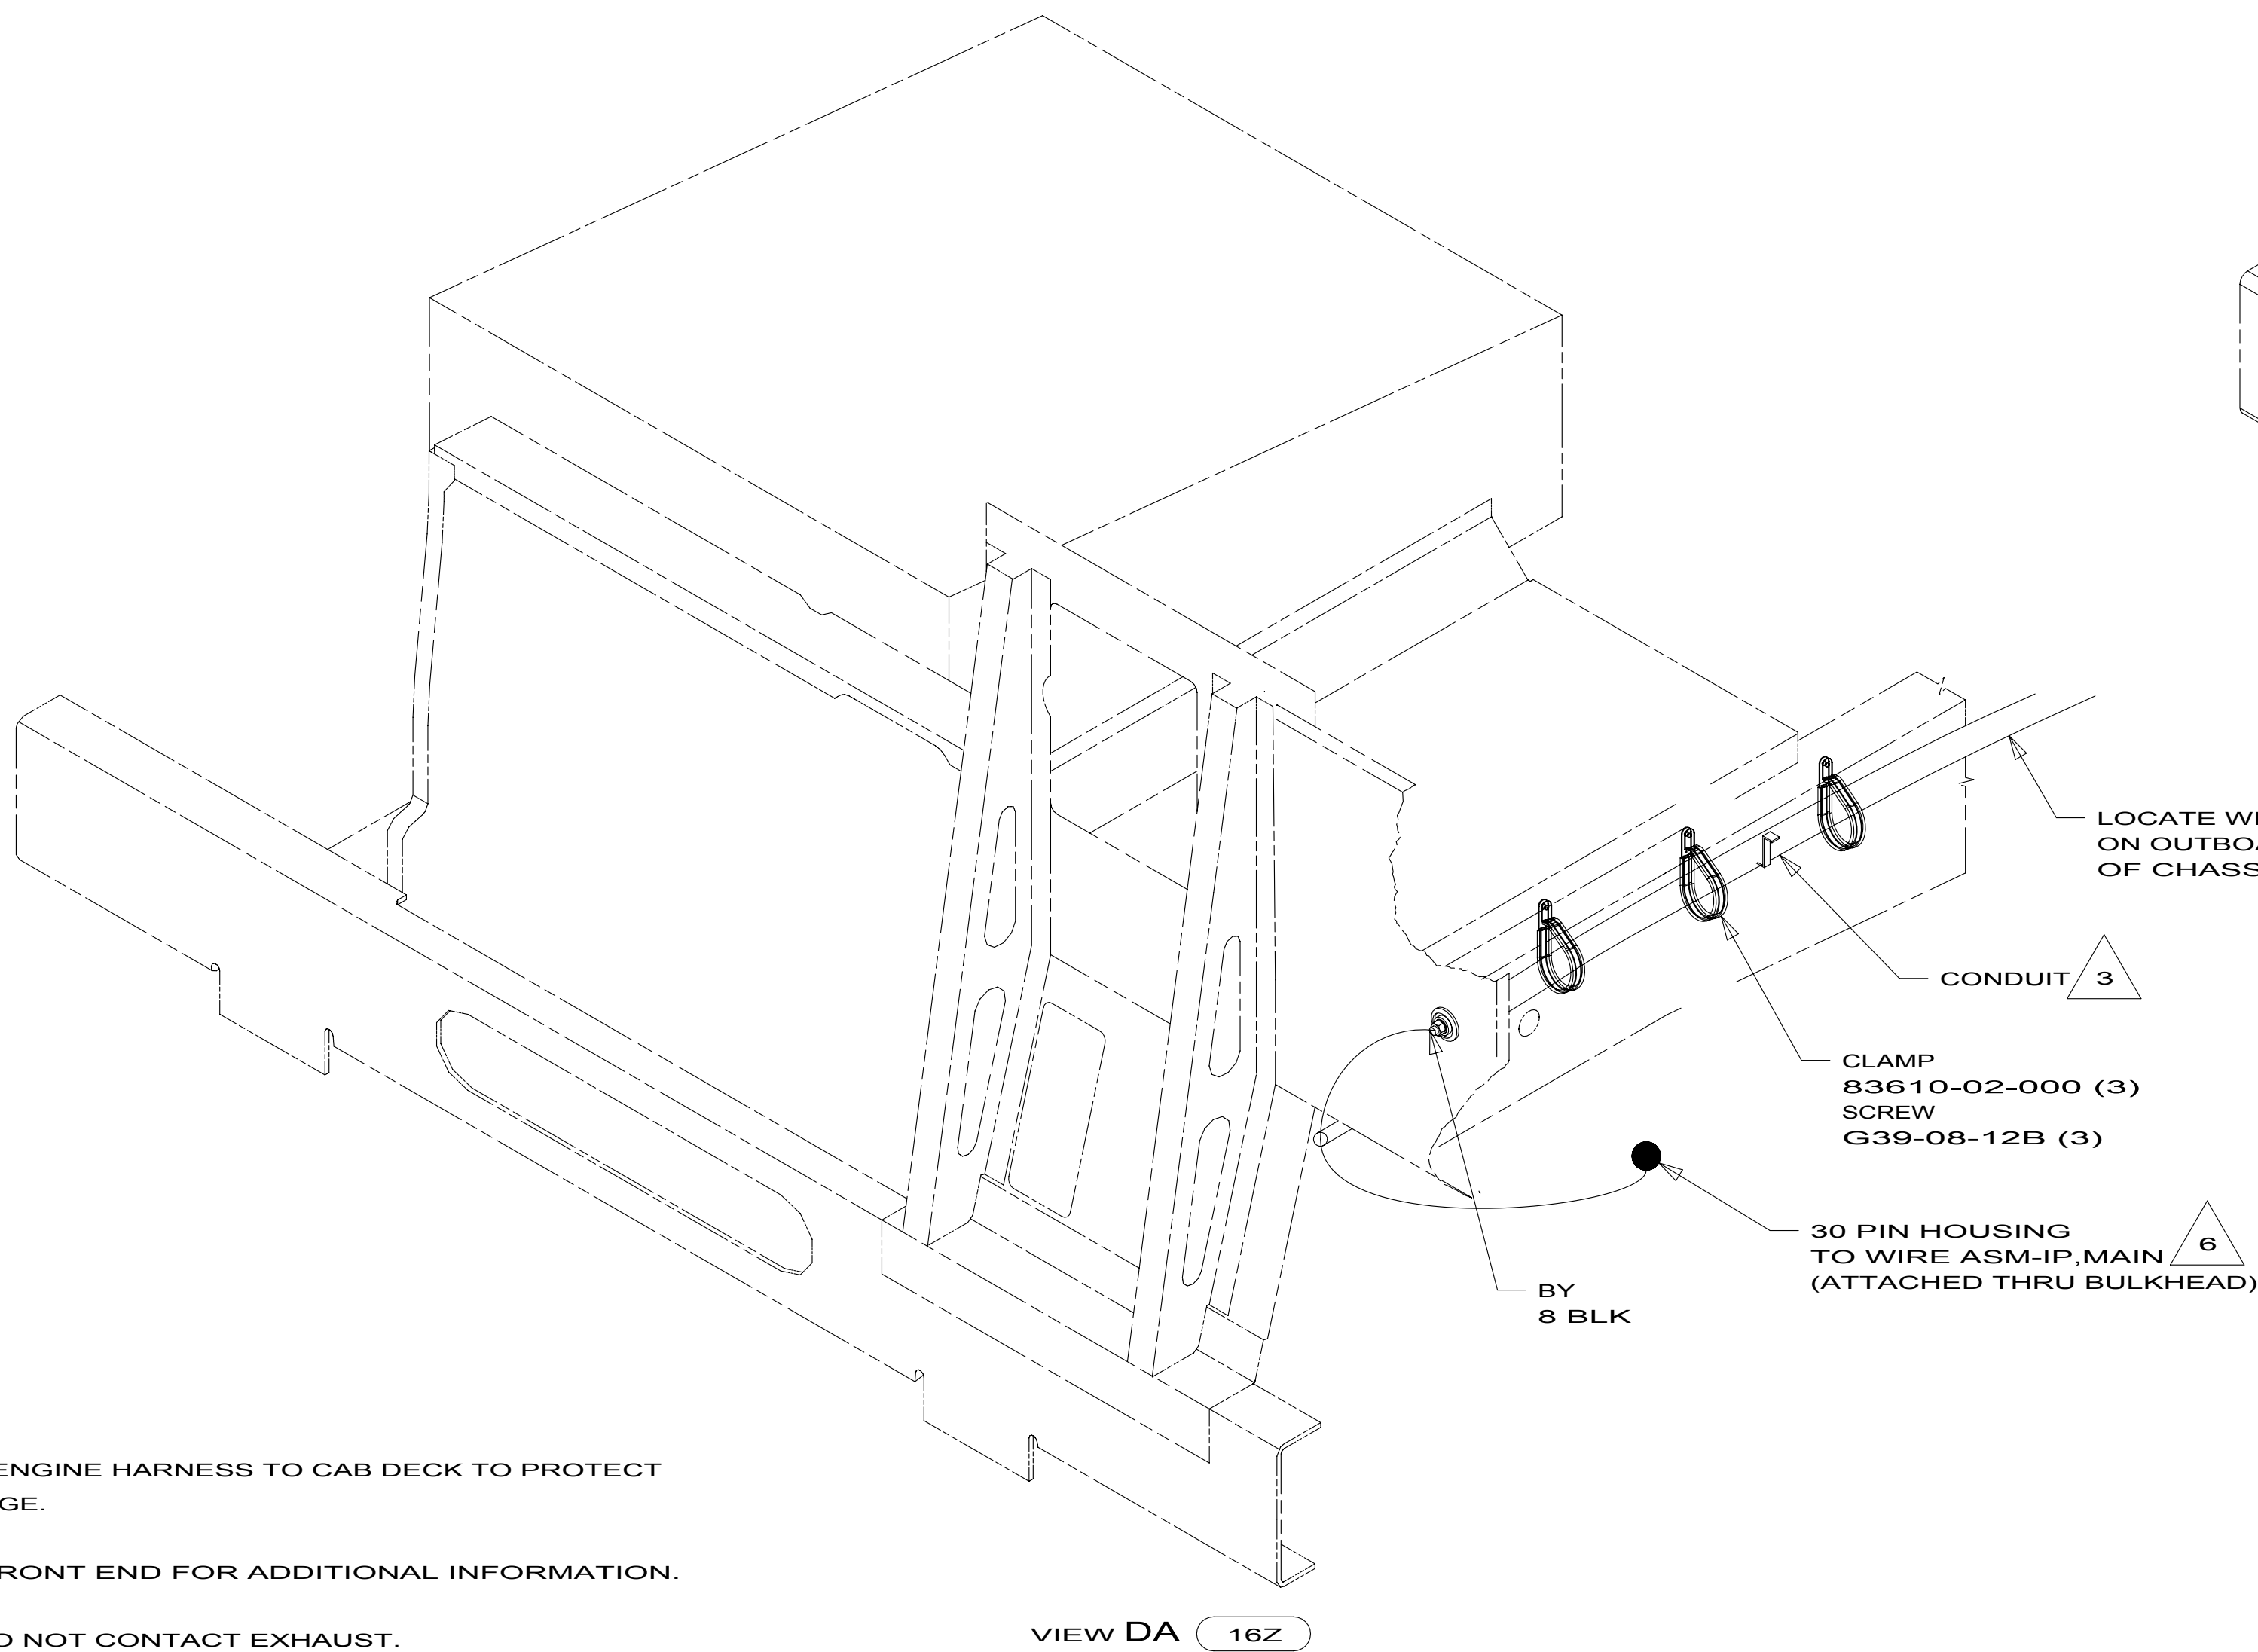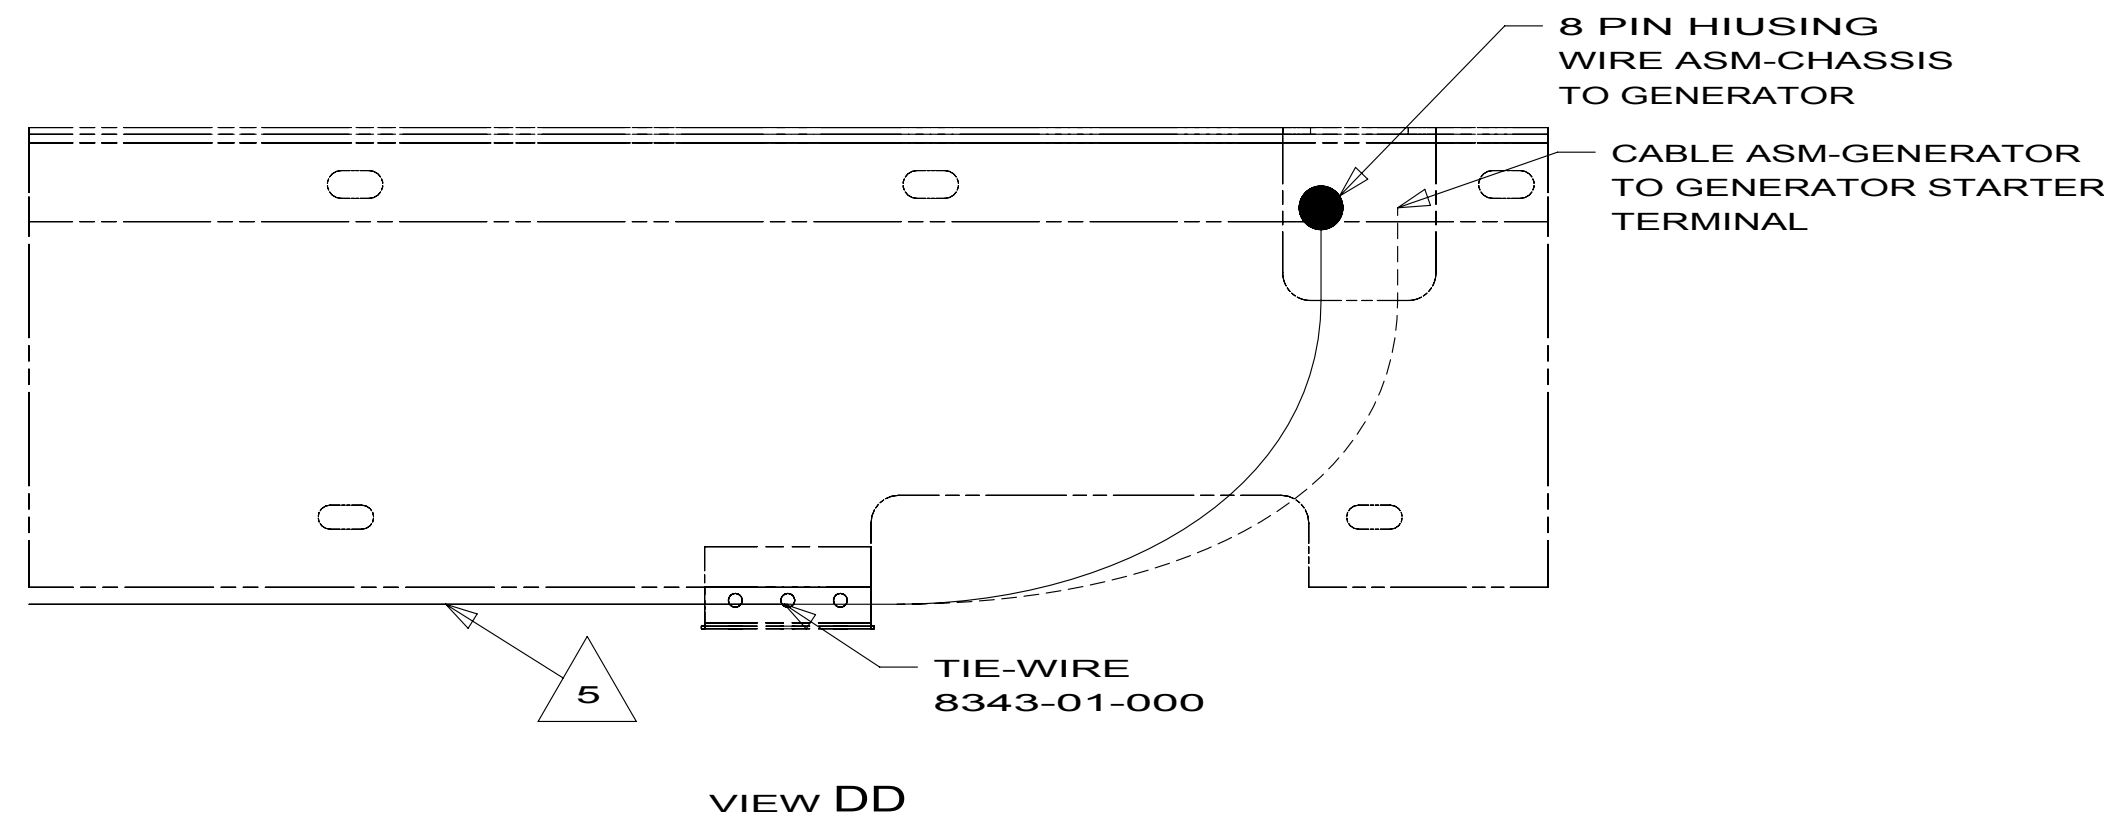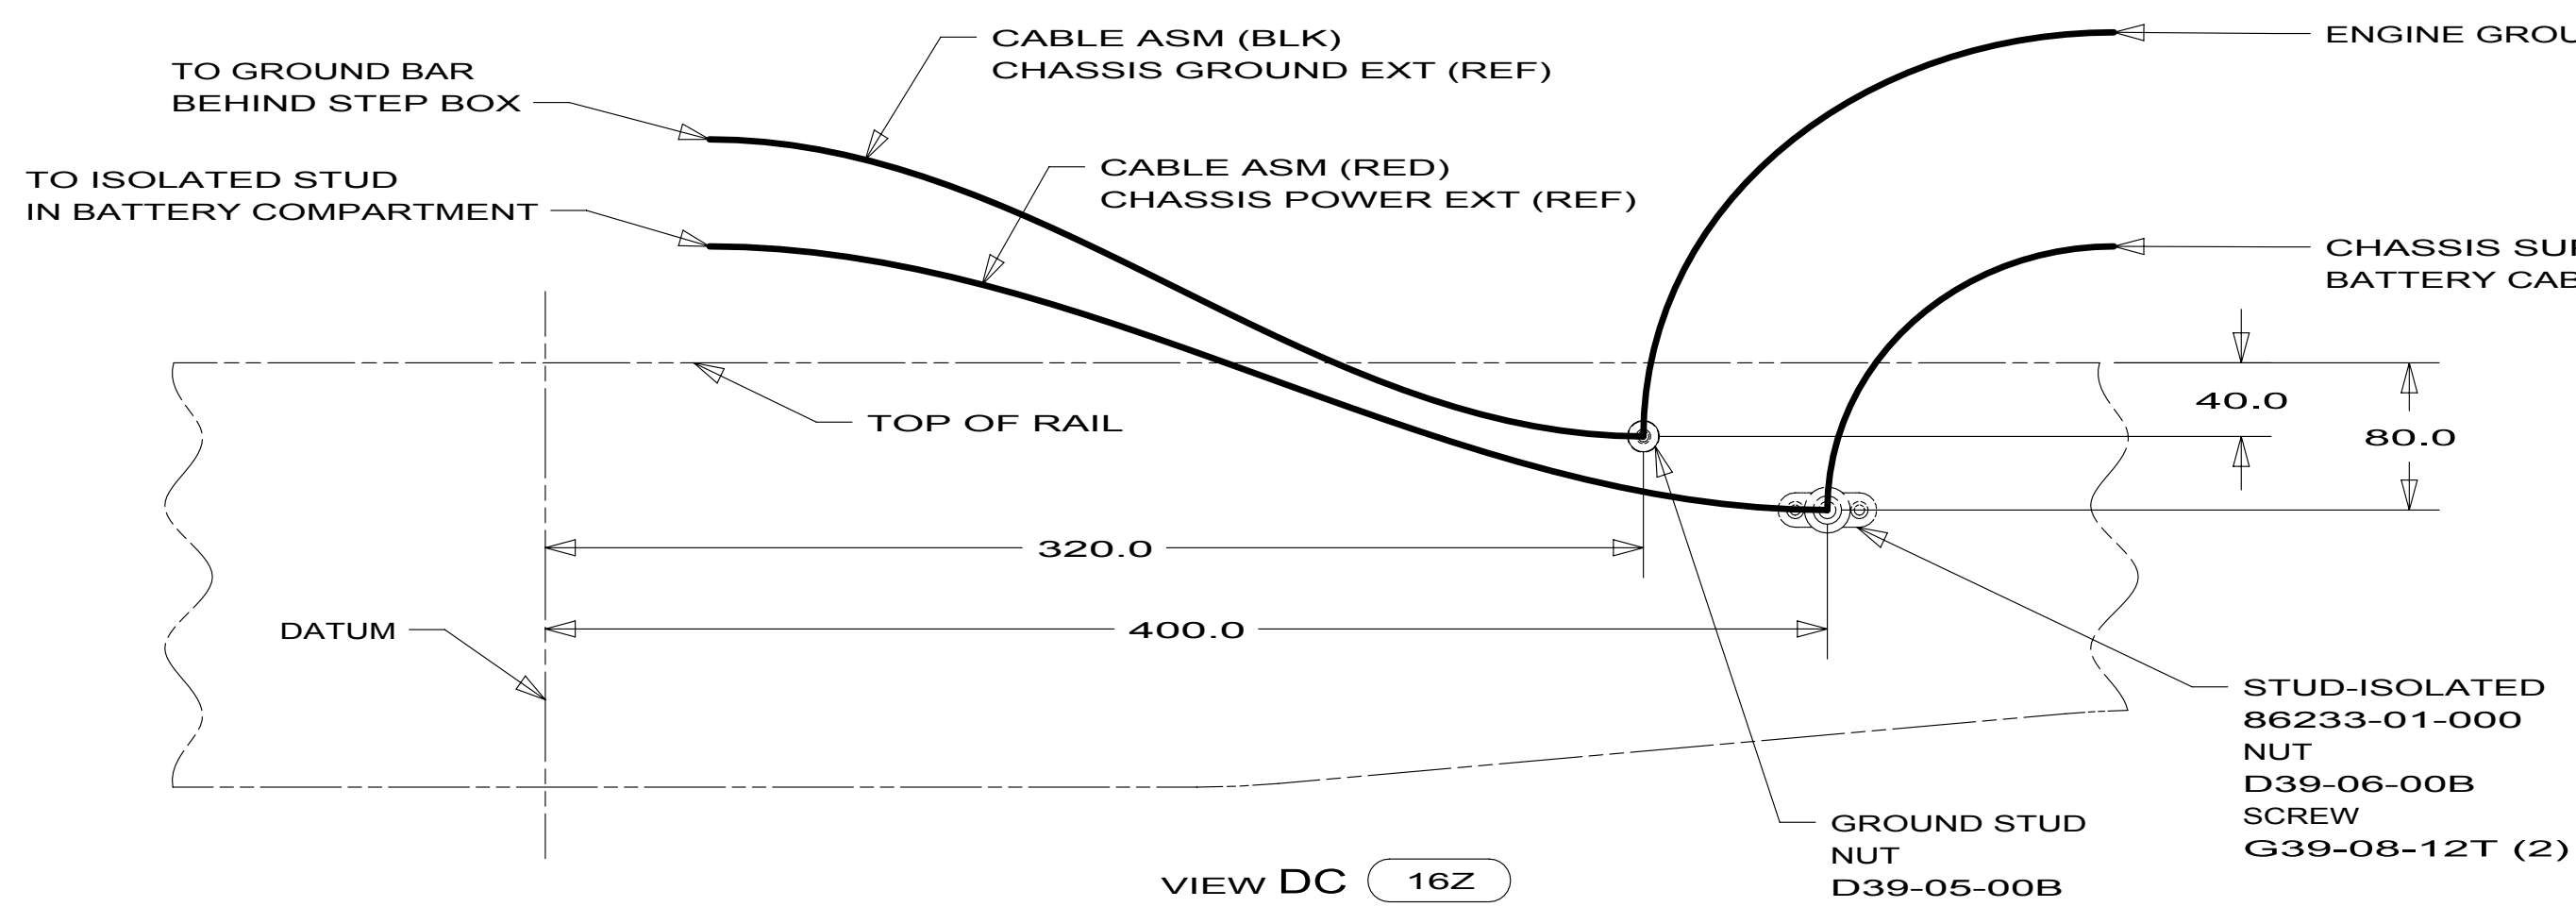

- 7 CLAMP WORKHORSE ENGINE HARNESS TO CAB DECK TO PROTECT HARNESS FROM DAMAGE.
- 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5 SECURE SO WIRES DO NOT CONTACT EXHAUST.
- 4 SUPPLIED WITH CHASSIS.
- 3 COVER WITH CONDUIT 41953-10-000 AND 41953-11-000 AS REQUIRED.

2. SECURE CONDUIT 41953-09, -10, -11, -13, AND -14 OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: — WINNEBAGO — CABLE: — CHASSIS SUPPLIED WIRING.


- 9 CUT CHASSIS SUPPLIED BATTERY CABLE 700MM FROM BATTERY TERMINAL AND ADD TERMINAL 8348-01-000 TO CUT END
- 8 CUT CHASSIS SUPPLIED POSITIVE BATTERY CABLE 150MM FROM BATTERY TERMINAL END, DISCARD TERMINAL END AND ADD TERMINAL 113738-01-000 TO CUT END. COIL EXCESS ALONG FRAME RAIL JUST BEHIND THE RADIATOR AND TIE UP WITH WIRE-TIE 8343-04-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 16Z FORD 24,000#-22.5 ALUM WHEEL
- 1PV WORKHORSE 24,000#-22.5 TIRE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 4	PART NO 172073	REV

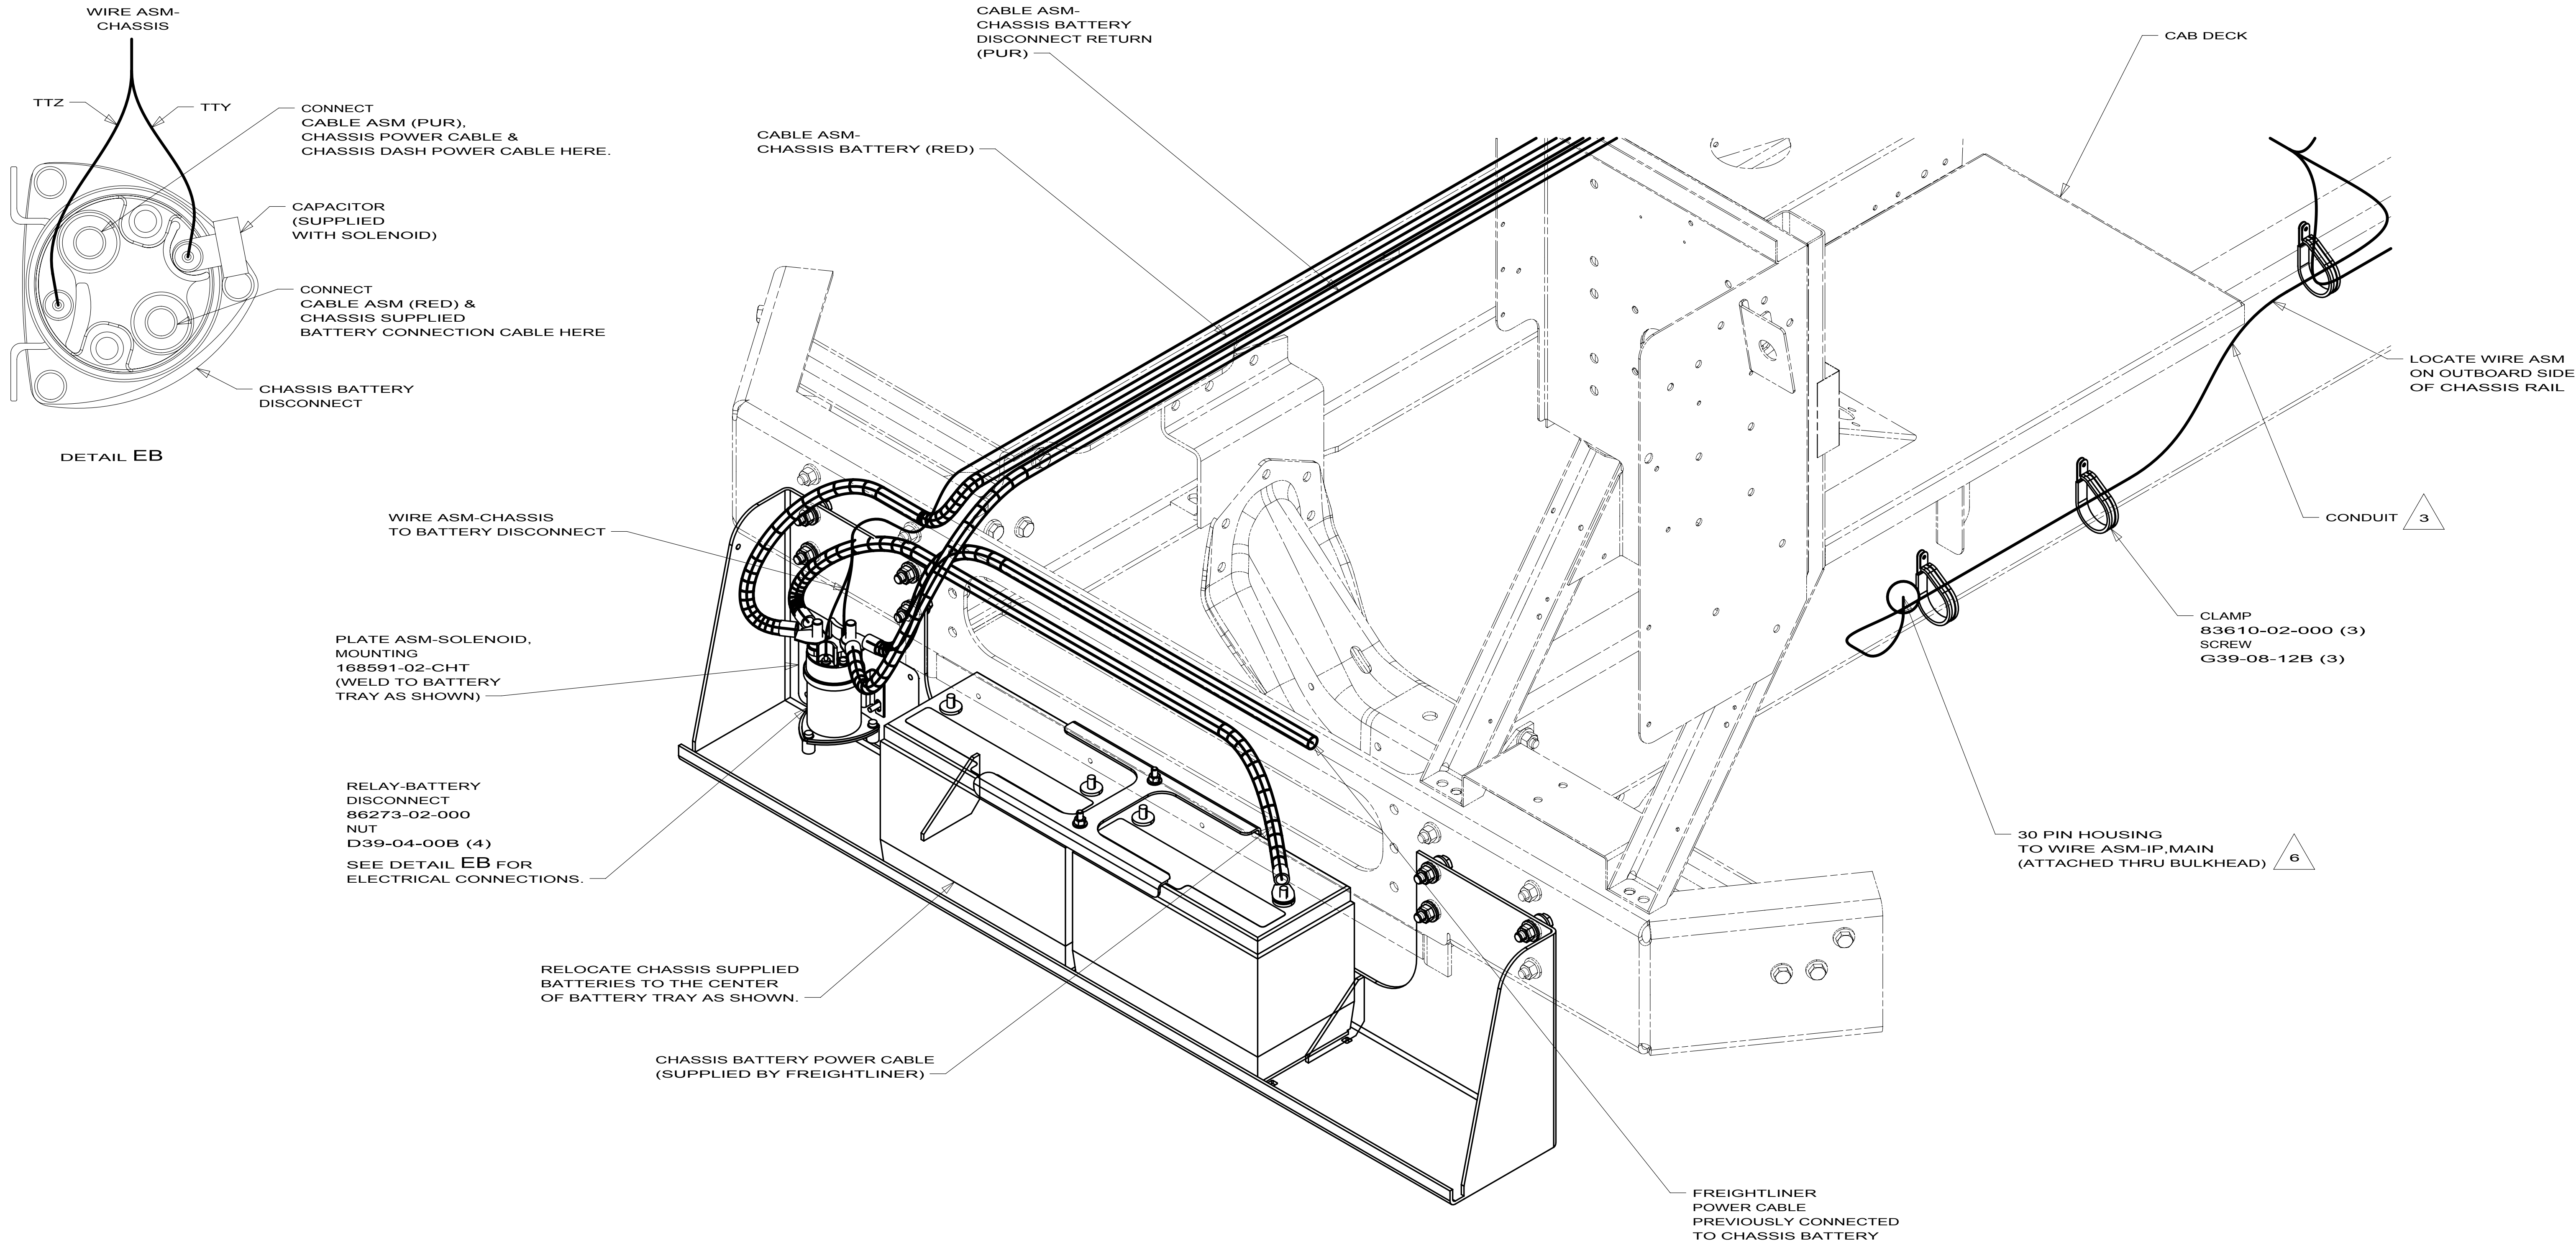

VIEW EA

- 7 CLAMP WORKHORSE ENGINE HARNESS TO CAB DECK TO PROTECT HARNESS FROM DAMAGE.
- 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 5 SECURE SO WIRES DO NOT CONTACT EXHAUST.
- 4 SUPPLIED WITH CHASSIS.
- 3 COVER WITH CONDUIT 41953-10-000 AND 41953-11-000 AS REQUIRED.

2. SECURE CONDUIT 41953-09, -10, -11, -13, AND -14 OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: — WINNEBAGO; - - - - - CABLE; - - - - - CHASSIS SUPPLIED WIRING.

- 9 CUT CHASSIS SUPPLIED BATTERY GROUND CABLE 700MM FROM BATTERY TERMINAL AND ADD TERMINAL 8343-01-000 TO CUT END.
- 8 CUT CHASSIS SUPPLIED POSITIVE BATTERY 150MM FROM BATTERY TERMINAL END, DISCARD TERMINAL END AND ADD TERMINAL 113738-01-000 TO CUT END. COIL EXCESS CABLE ALONG FRAME RAIL JUST BEHIND THE RADIATOR AND TIE UP WITH WIRE-TIE 8343-04-000.


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 1LL FRTL(FRED) 27,000#-22.5 TIRE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

- 1B1 265 1LL

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 5	PART NO 172073	REV

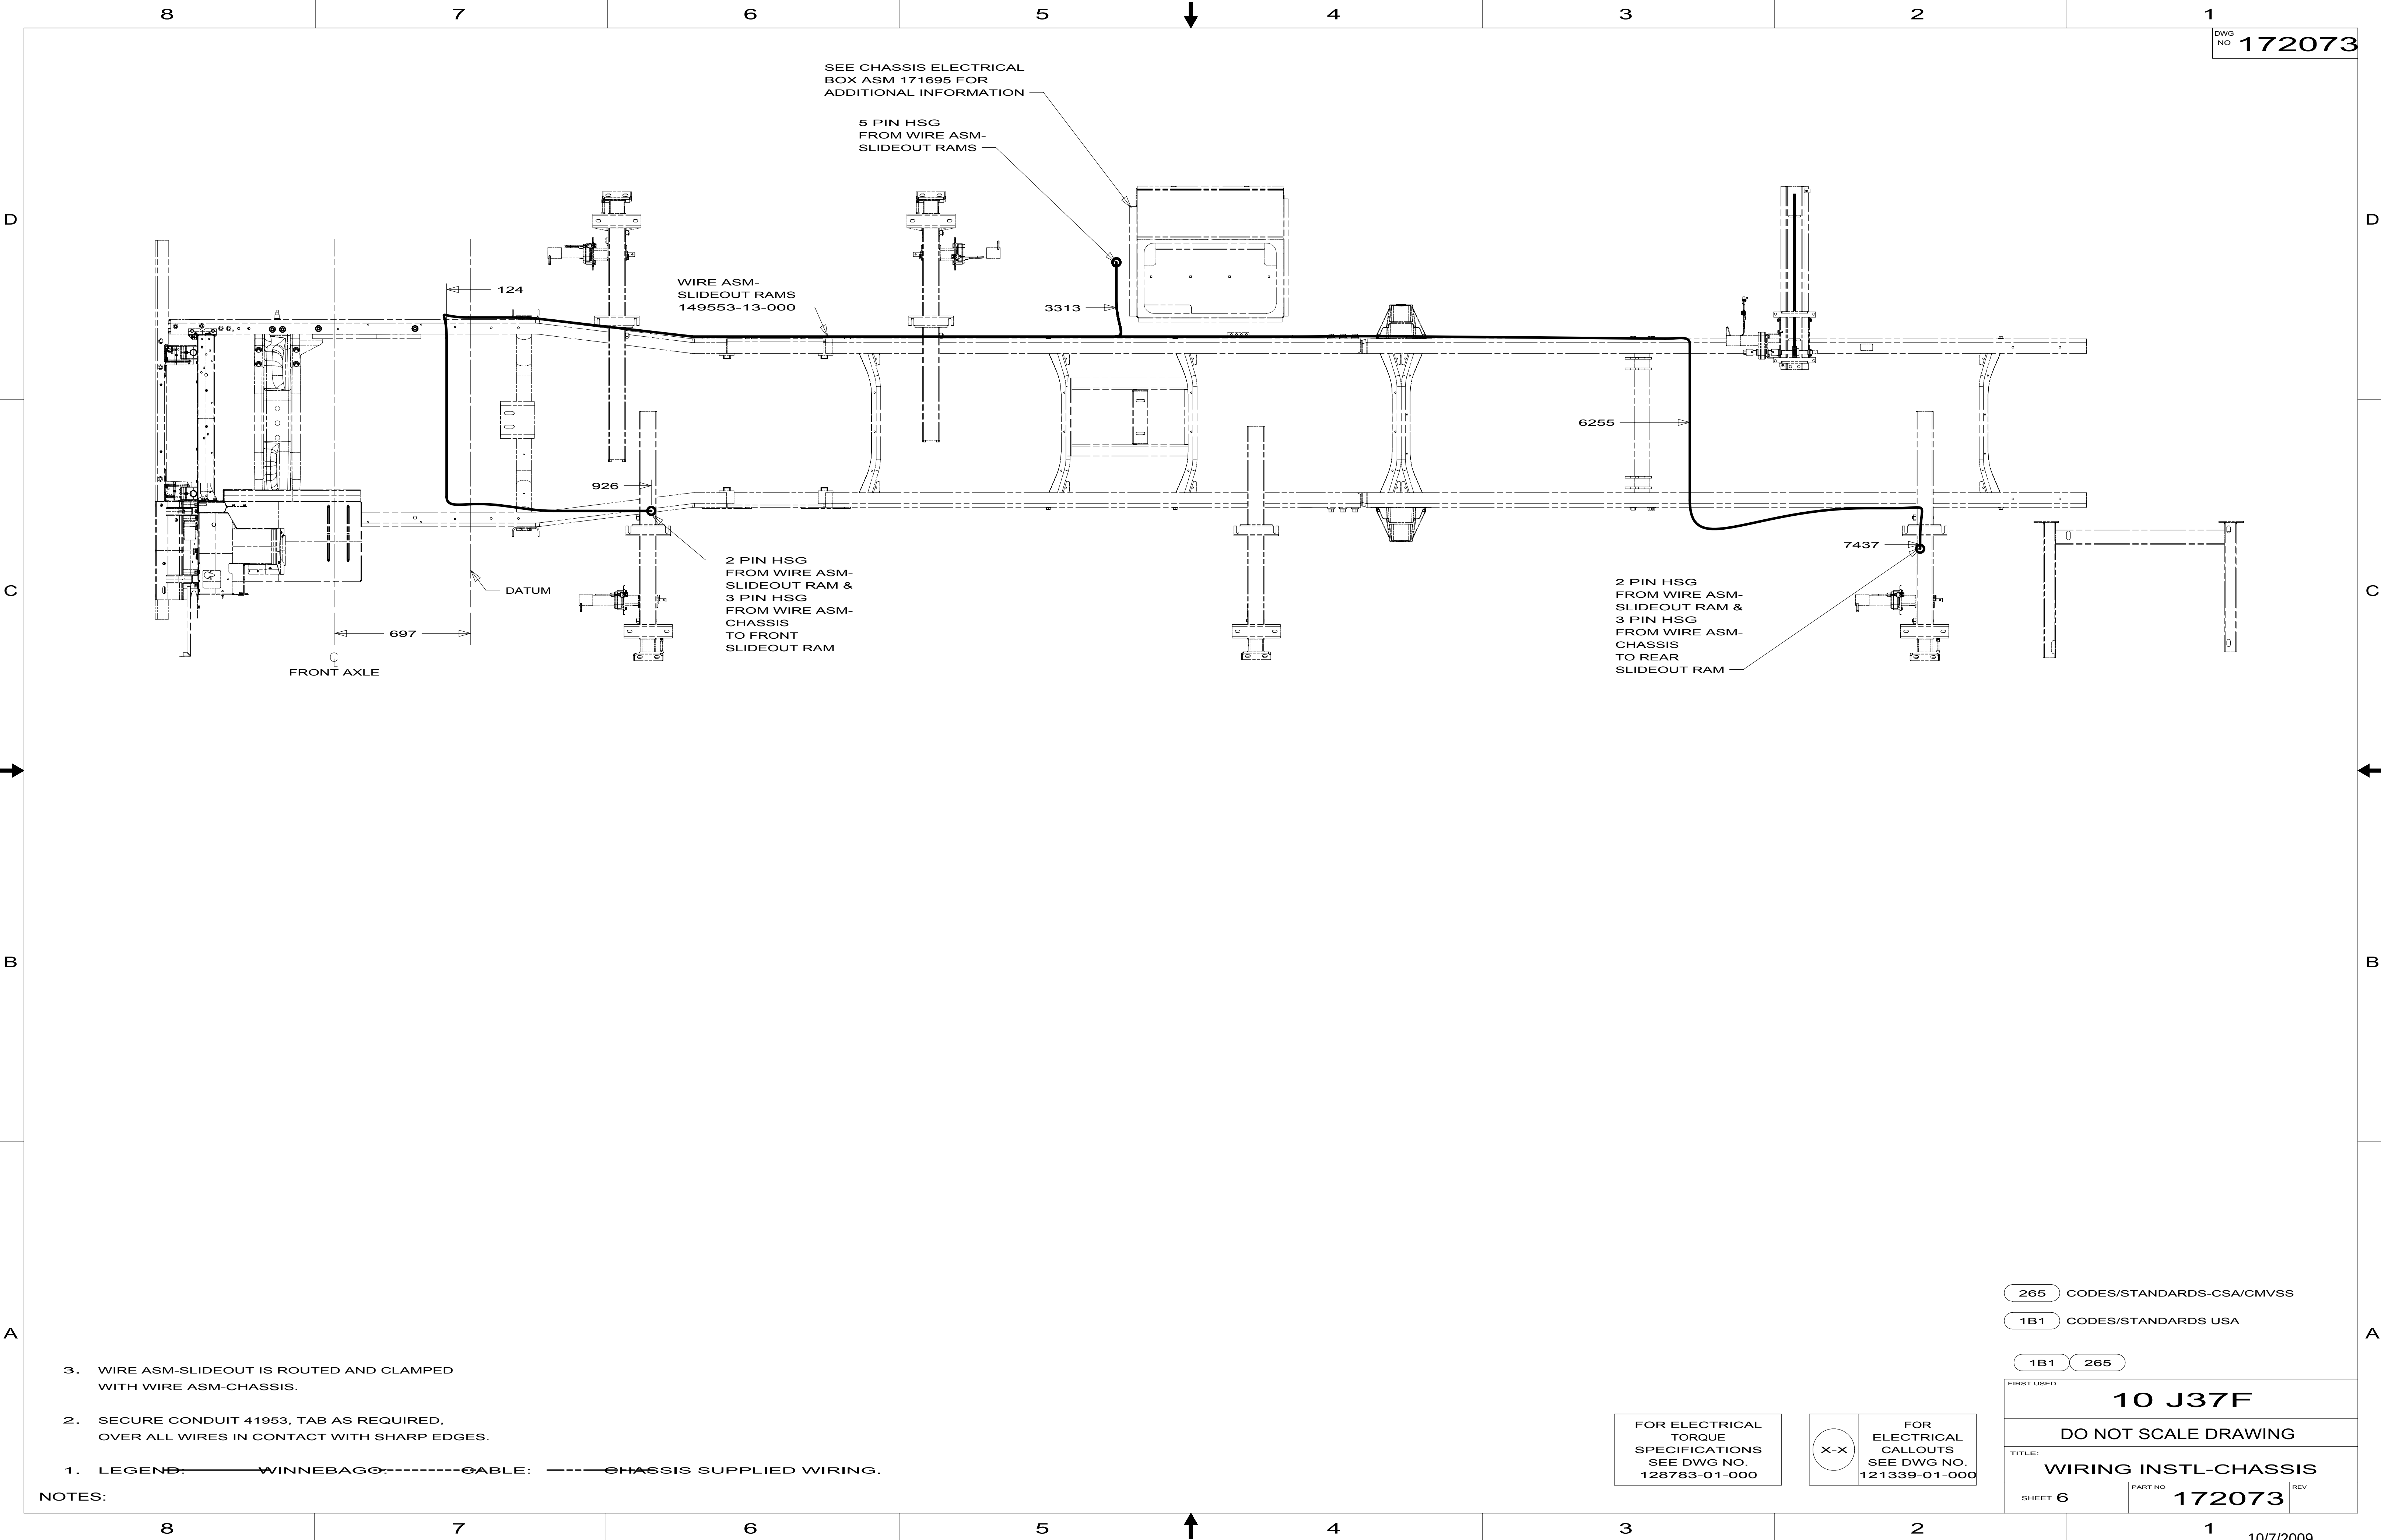

DWG NO 172073

SEE CHASSIS ELECTRICAL BOX ASM 171695 FOR ADDITIONAL INFORMATION

5 PIN HSG FROM WIRE ASM-SLIDEOUT RAMS

WIRE ASM-SLIDEOUT RAMS 149553-13-000

2 PIN HSG FROM WIRE ASM-SLIDEOUT RAM & 3 PIN HSG FROM WIRE ASM-CHASSIS TO FRONT SLIDEOUT RAM

2 PIN HSG FROM WIRE ASM-SLIDEOUT RAM & 3 PIN HSG FROM WIRE ASM-CHASSIS TO REAR SLIDEOUT RAM

FRONT AXLE

DATUM

- NOTES:
- 3. WIRE ASM-SLIDEOUT IS ROUTED AND CLAMPED WITH WIRE ASM-CHASSIS.
 - 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
 - 1. LEGEND: — WINNEBAGO; - - - - - CABLE; - - - - - CHASSIS SUPPLIED WIRING.


265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 J37F		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-CHASSIS		
SHEET 6	PART NO 172073	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

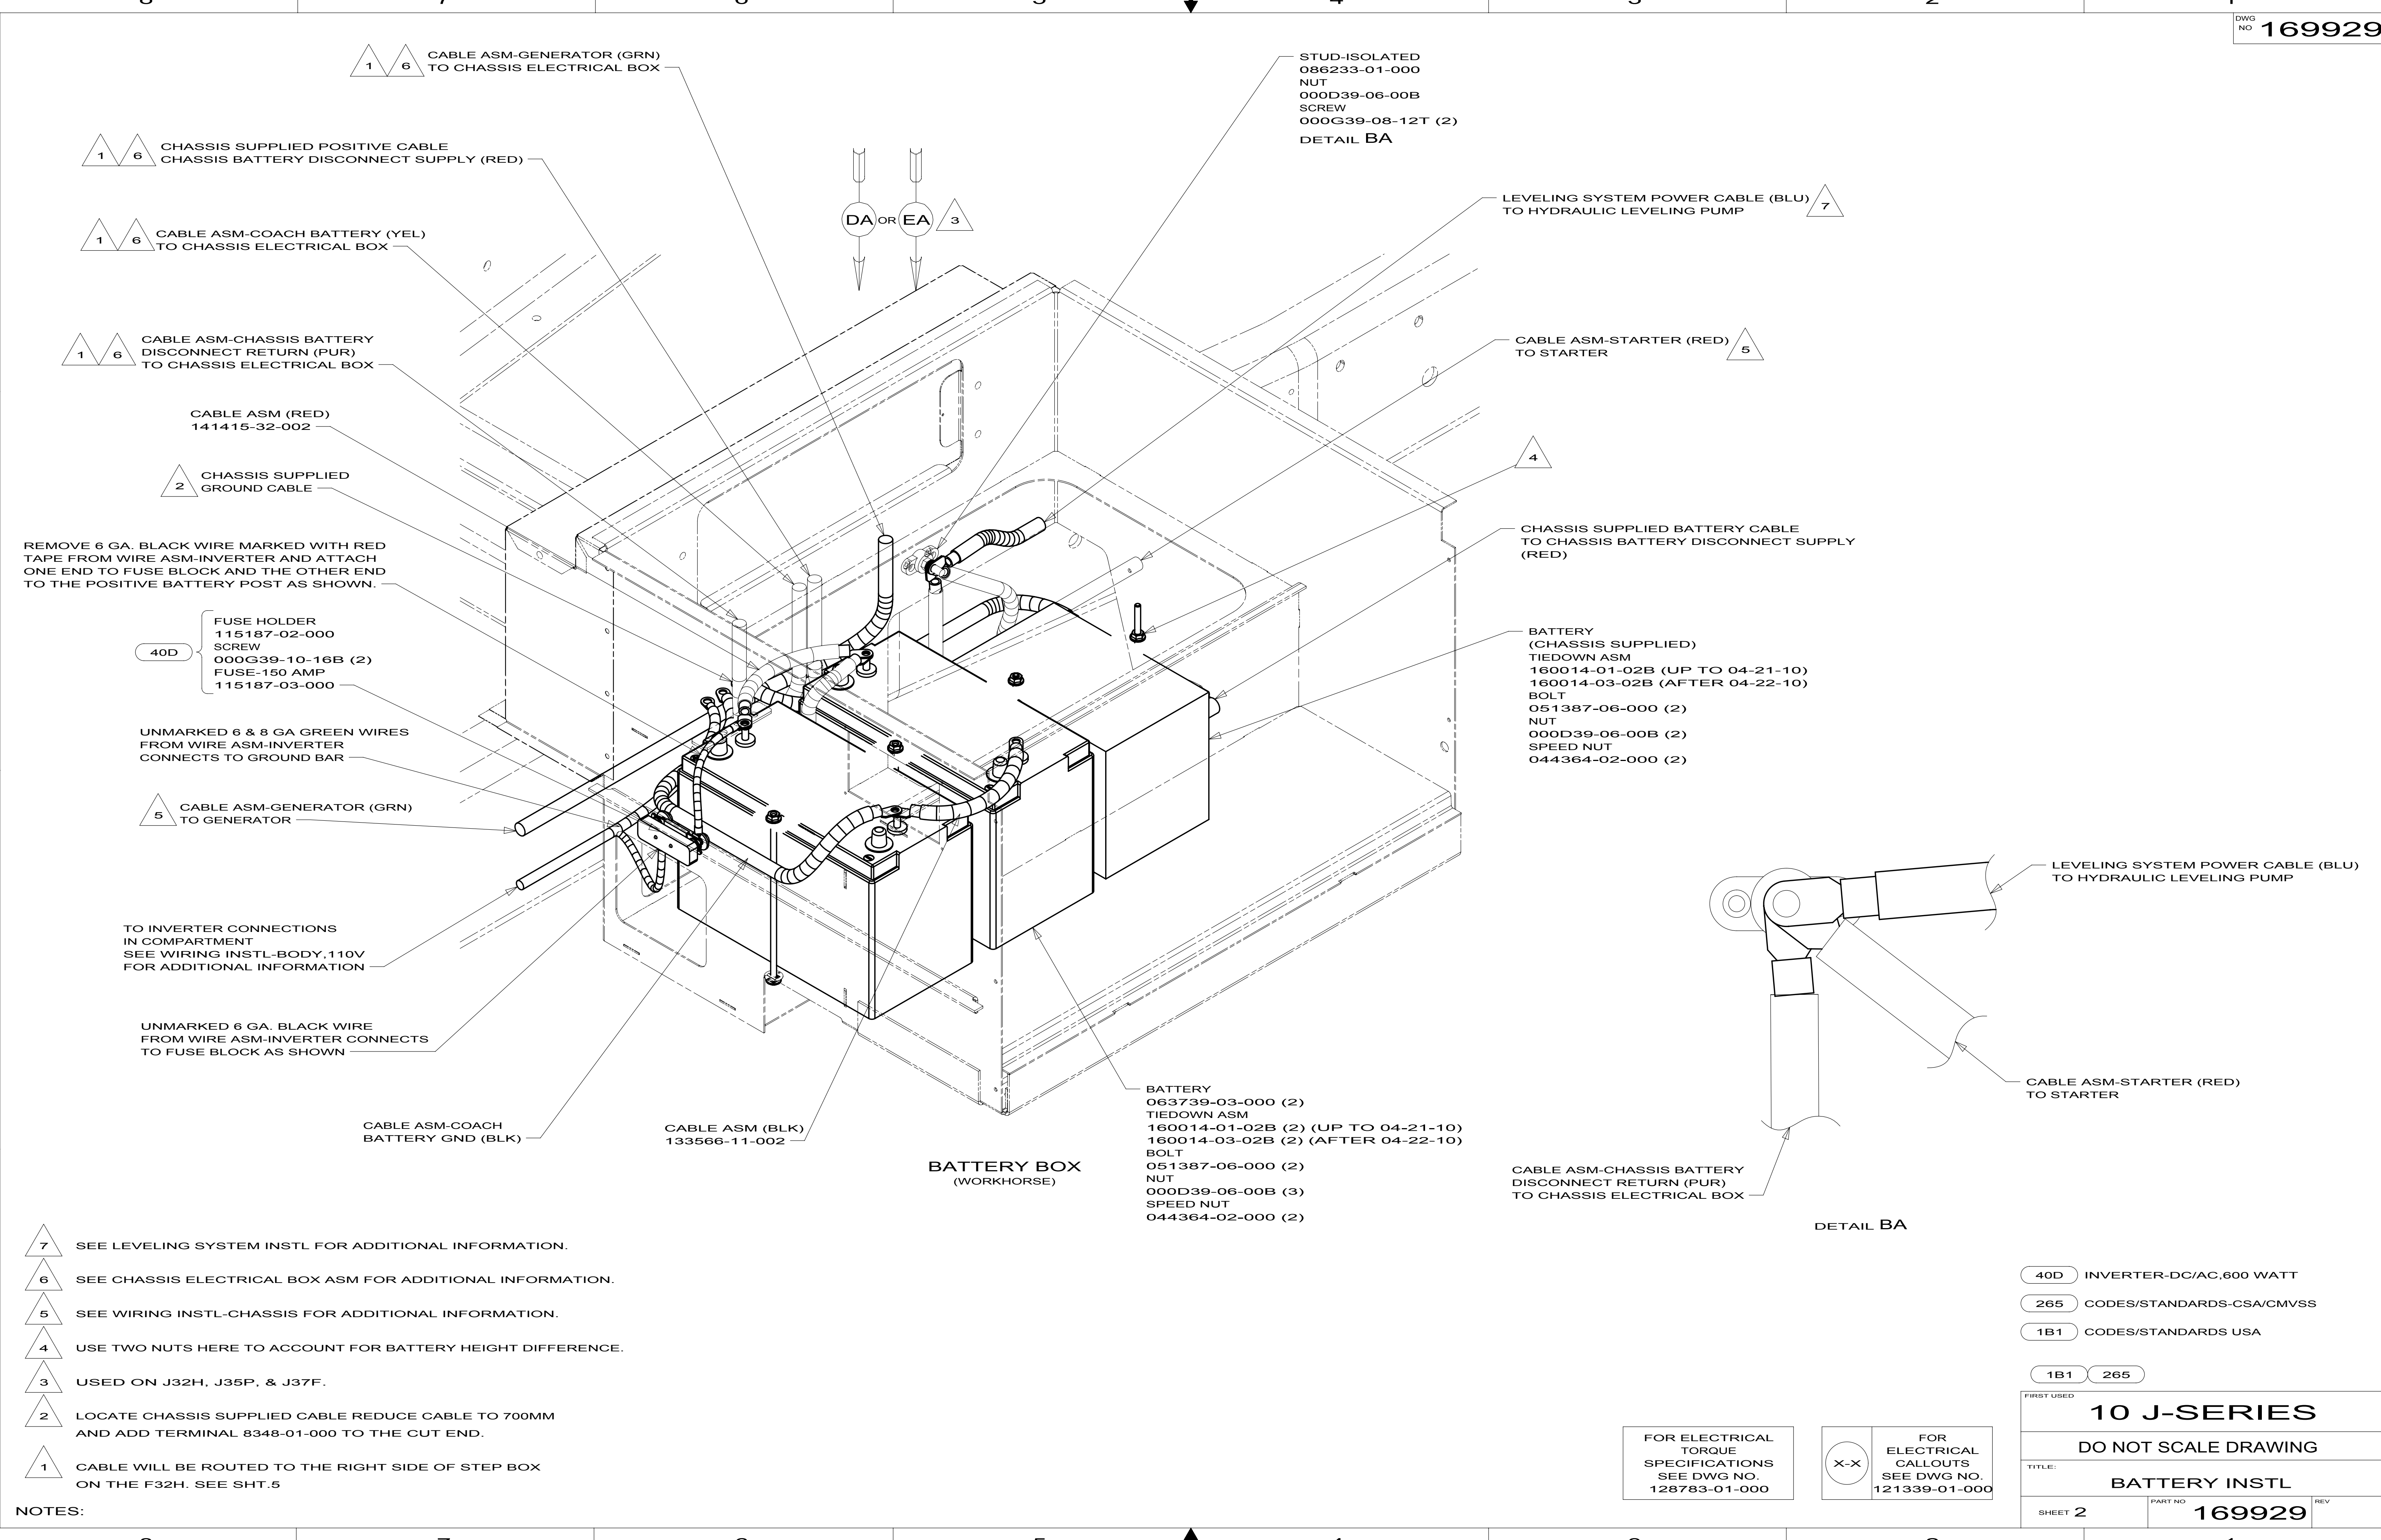

- 7 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 USE TWO NUTS HERE TO ACCOUNT FOR BATTERY HEIGHT DIFFERENCE.
- 3 USED ON J32H, J35P, & J37F.
- 2 LOCATE CHASSIS SUPPLIED CABLE REDUCE CABLE TO 700MM AND ADD TERMINAL 8348-01-000 TO THE CUT END.
- 1 CABLE WILL BE ROUTED TO THE RIGHT SIDE OF STEP BOX ON THE F32H. SEE SHT.5



NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 40D INVERTER-DC/AC,600 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 2	PART NO 169929	REV

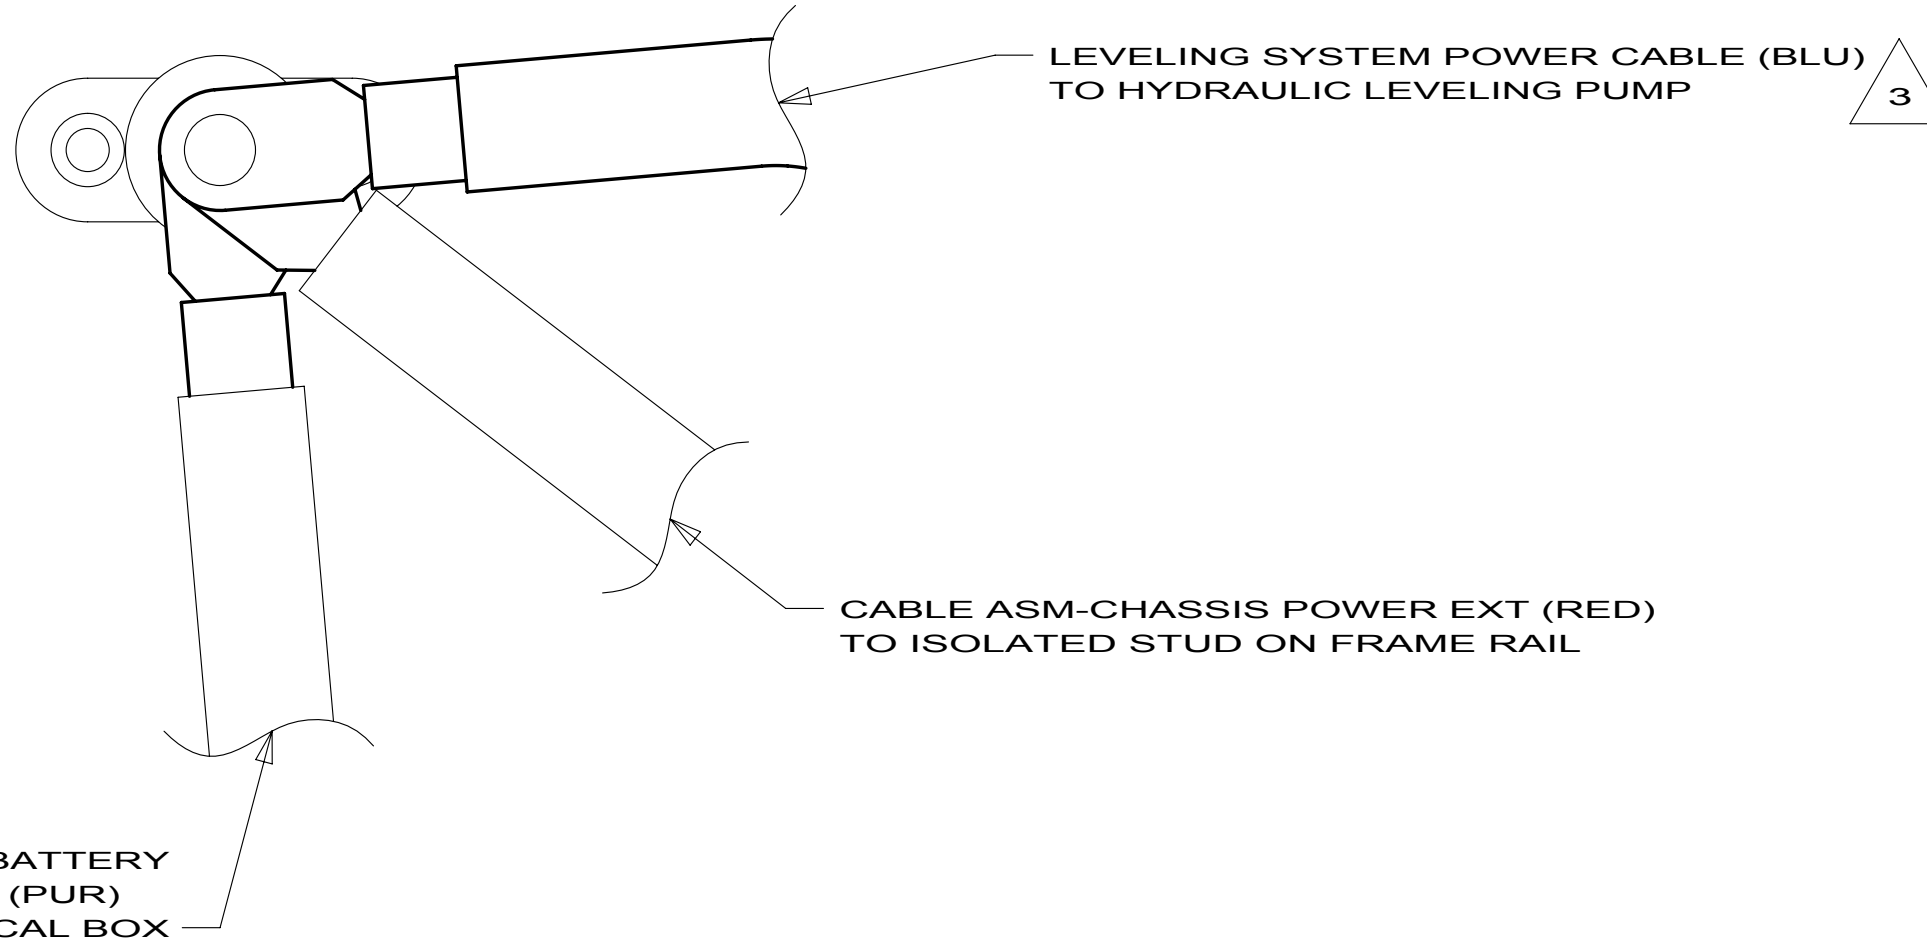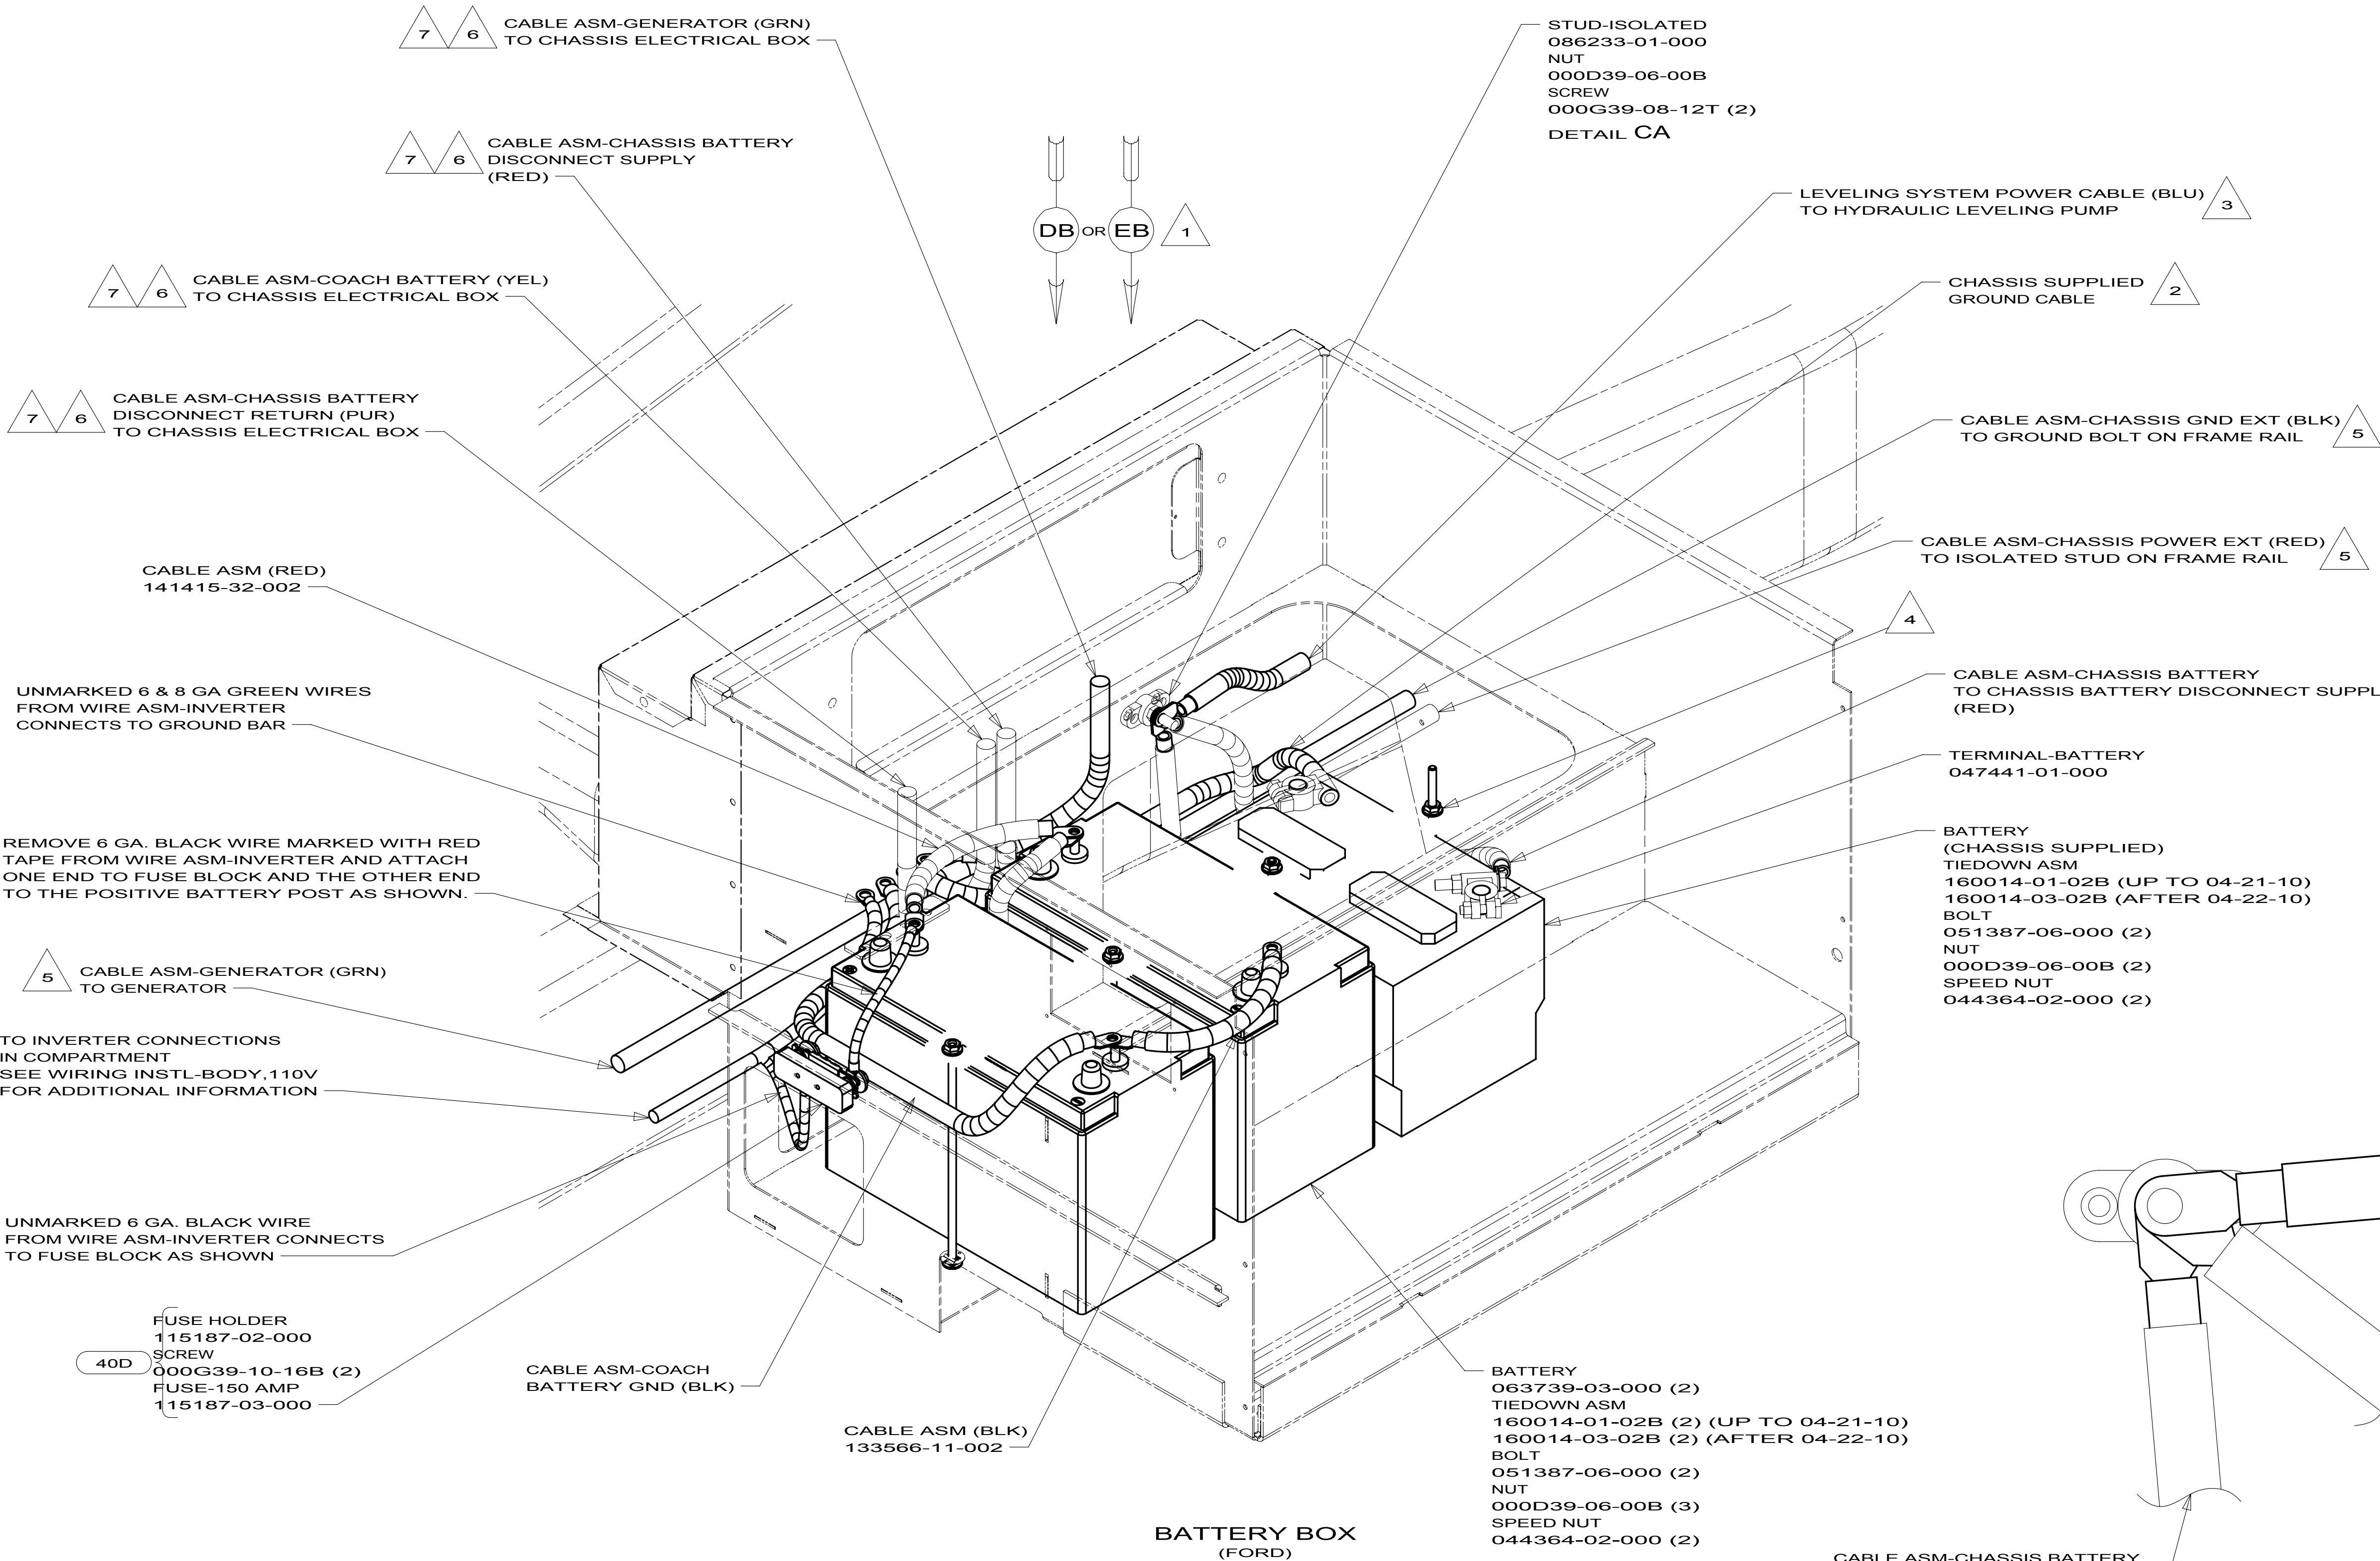

- NOTES:
- 7 CABLE WILL BE ROUTED TO THE RIGHT SIDE OF STEP BOX ON THE F32H. SEE SHT.5
 - 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
 - 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 4 USE TWO NUTS HERE TO ACCOUNT FOR BATTERY HEIGHT DIFFERENCE.
 - 3 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
 - 2 LOCATE CHASSIS SUPPLIED GROUND WIRES TO CABLE, AND REDUCE LENGTH TO 700MM AND ADD TERMINAL 8348-01-000 TO THE CUT END.
 - 1 USED ON J32H, J35P, & J37F.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

40D INVERTER-DC/AC,600 WATT

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL		
SHEET 3	PART NO 169929	REV

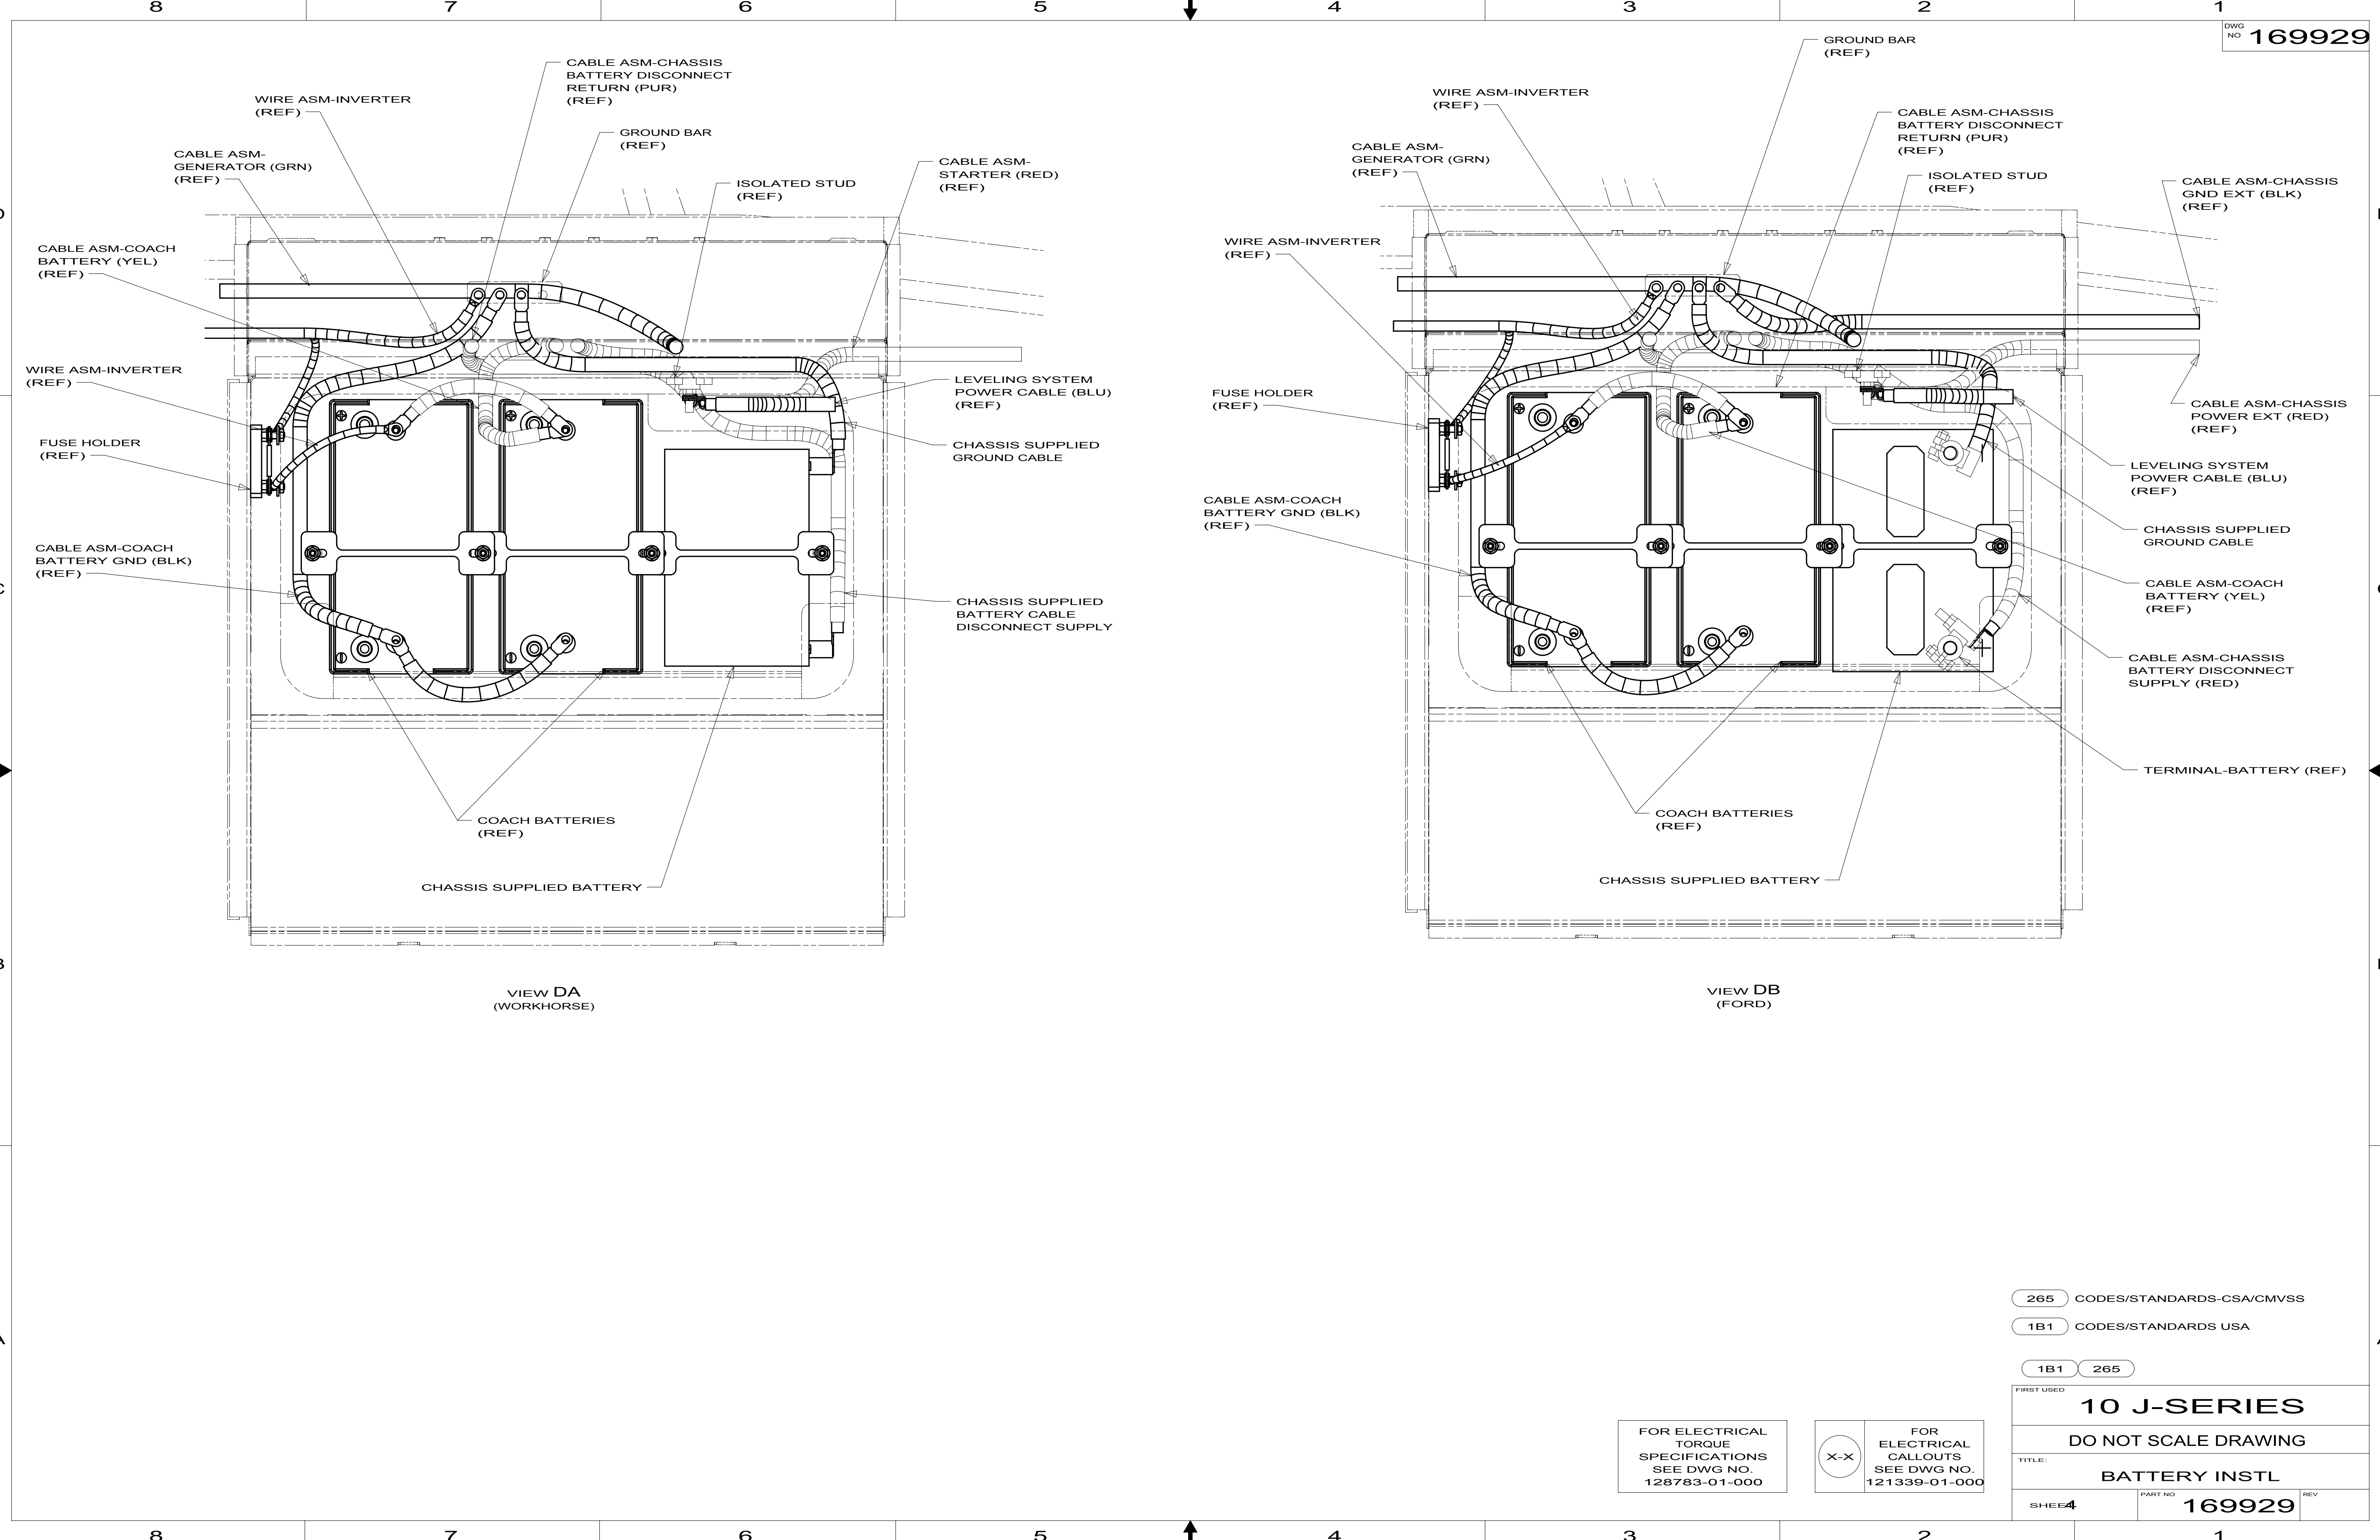

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265

FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
BATTERY INSTL		
SHEET4	PART NO	REV
	169929	

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

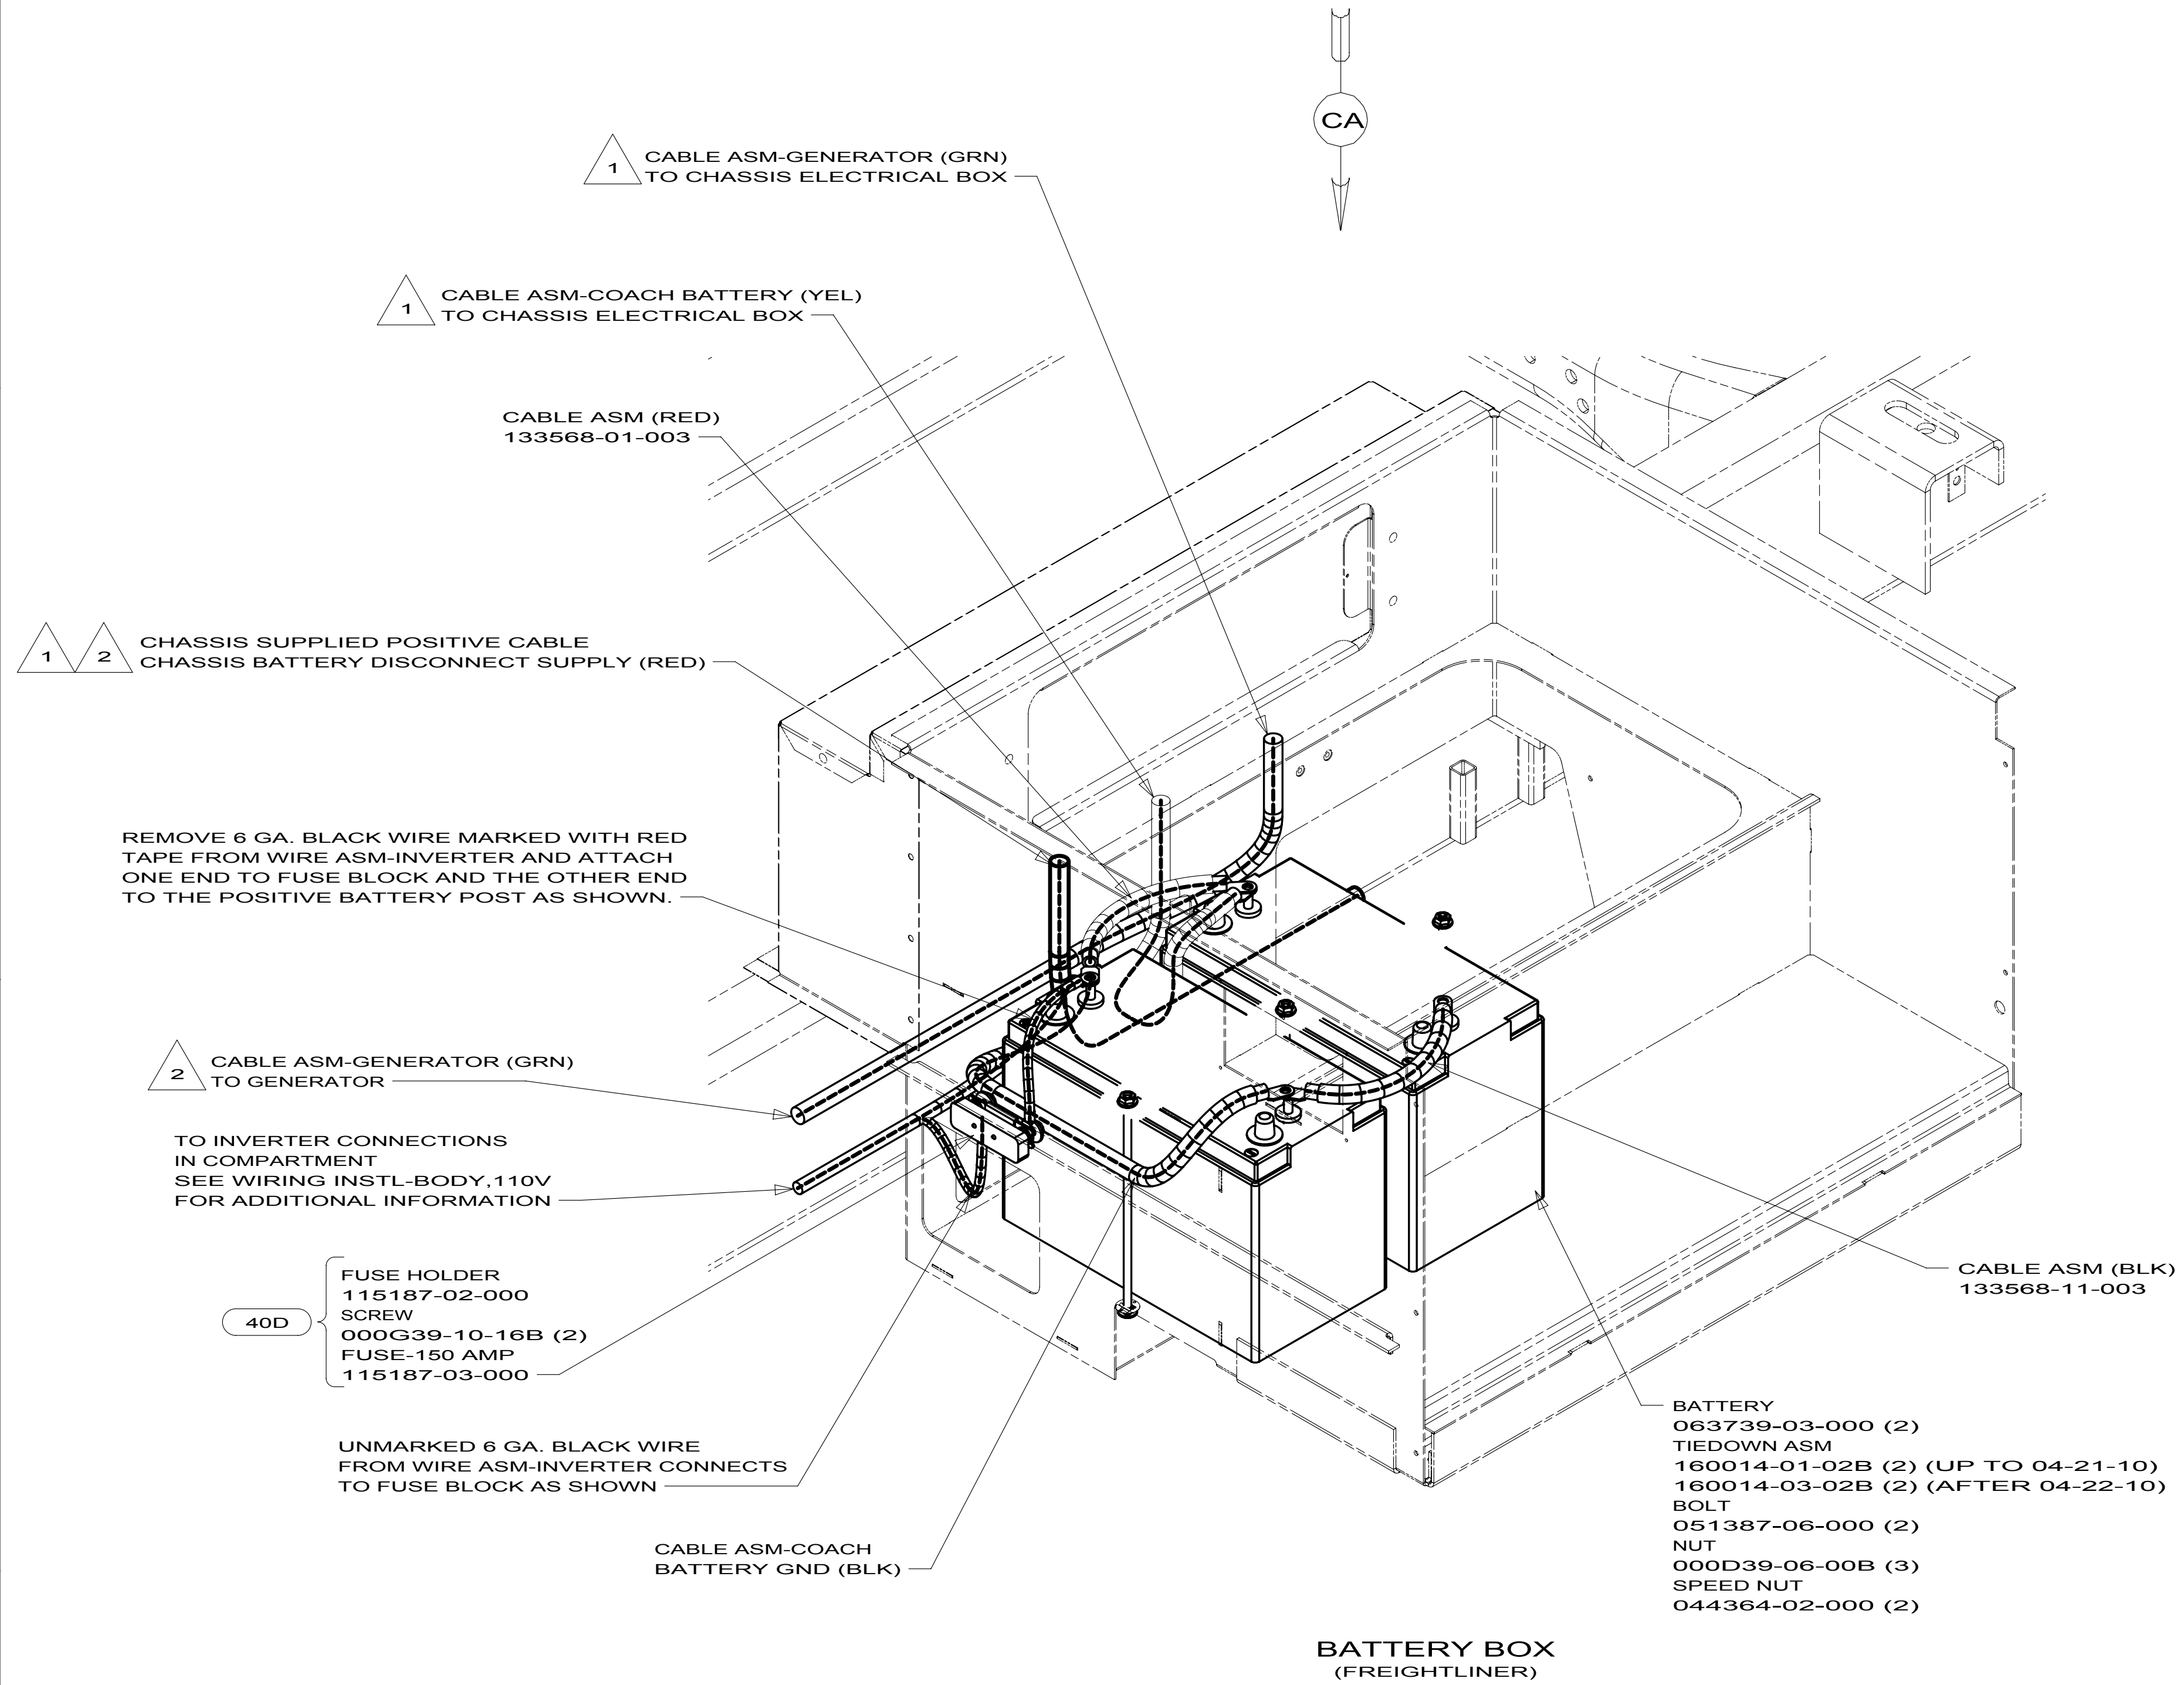

2 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

1 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.

NOTES:


- 40D** INVERTER-DC/AC,600 WATT
- 265** CODES/STANDARDS-CSA/CMVSS
- 1B1** CODES/STANDARDS USA

1B1 **265**

FIRST USED		
10 J-FREIGHTLINER		
DO NOT SCALE DRAWING		
TITLE: BATTERY INSTL,FL		
SHEET 2	PART NO 171067	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

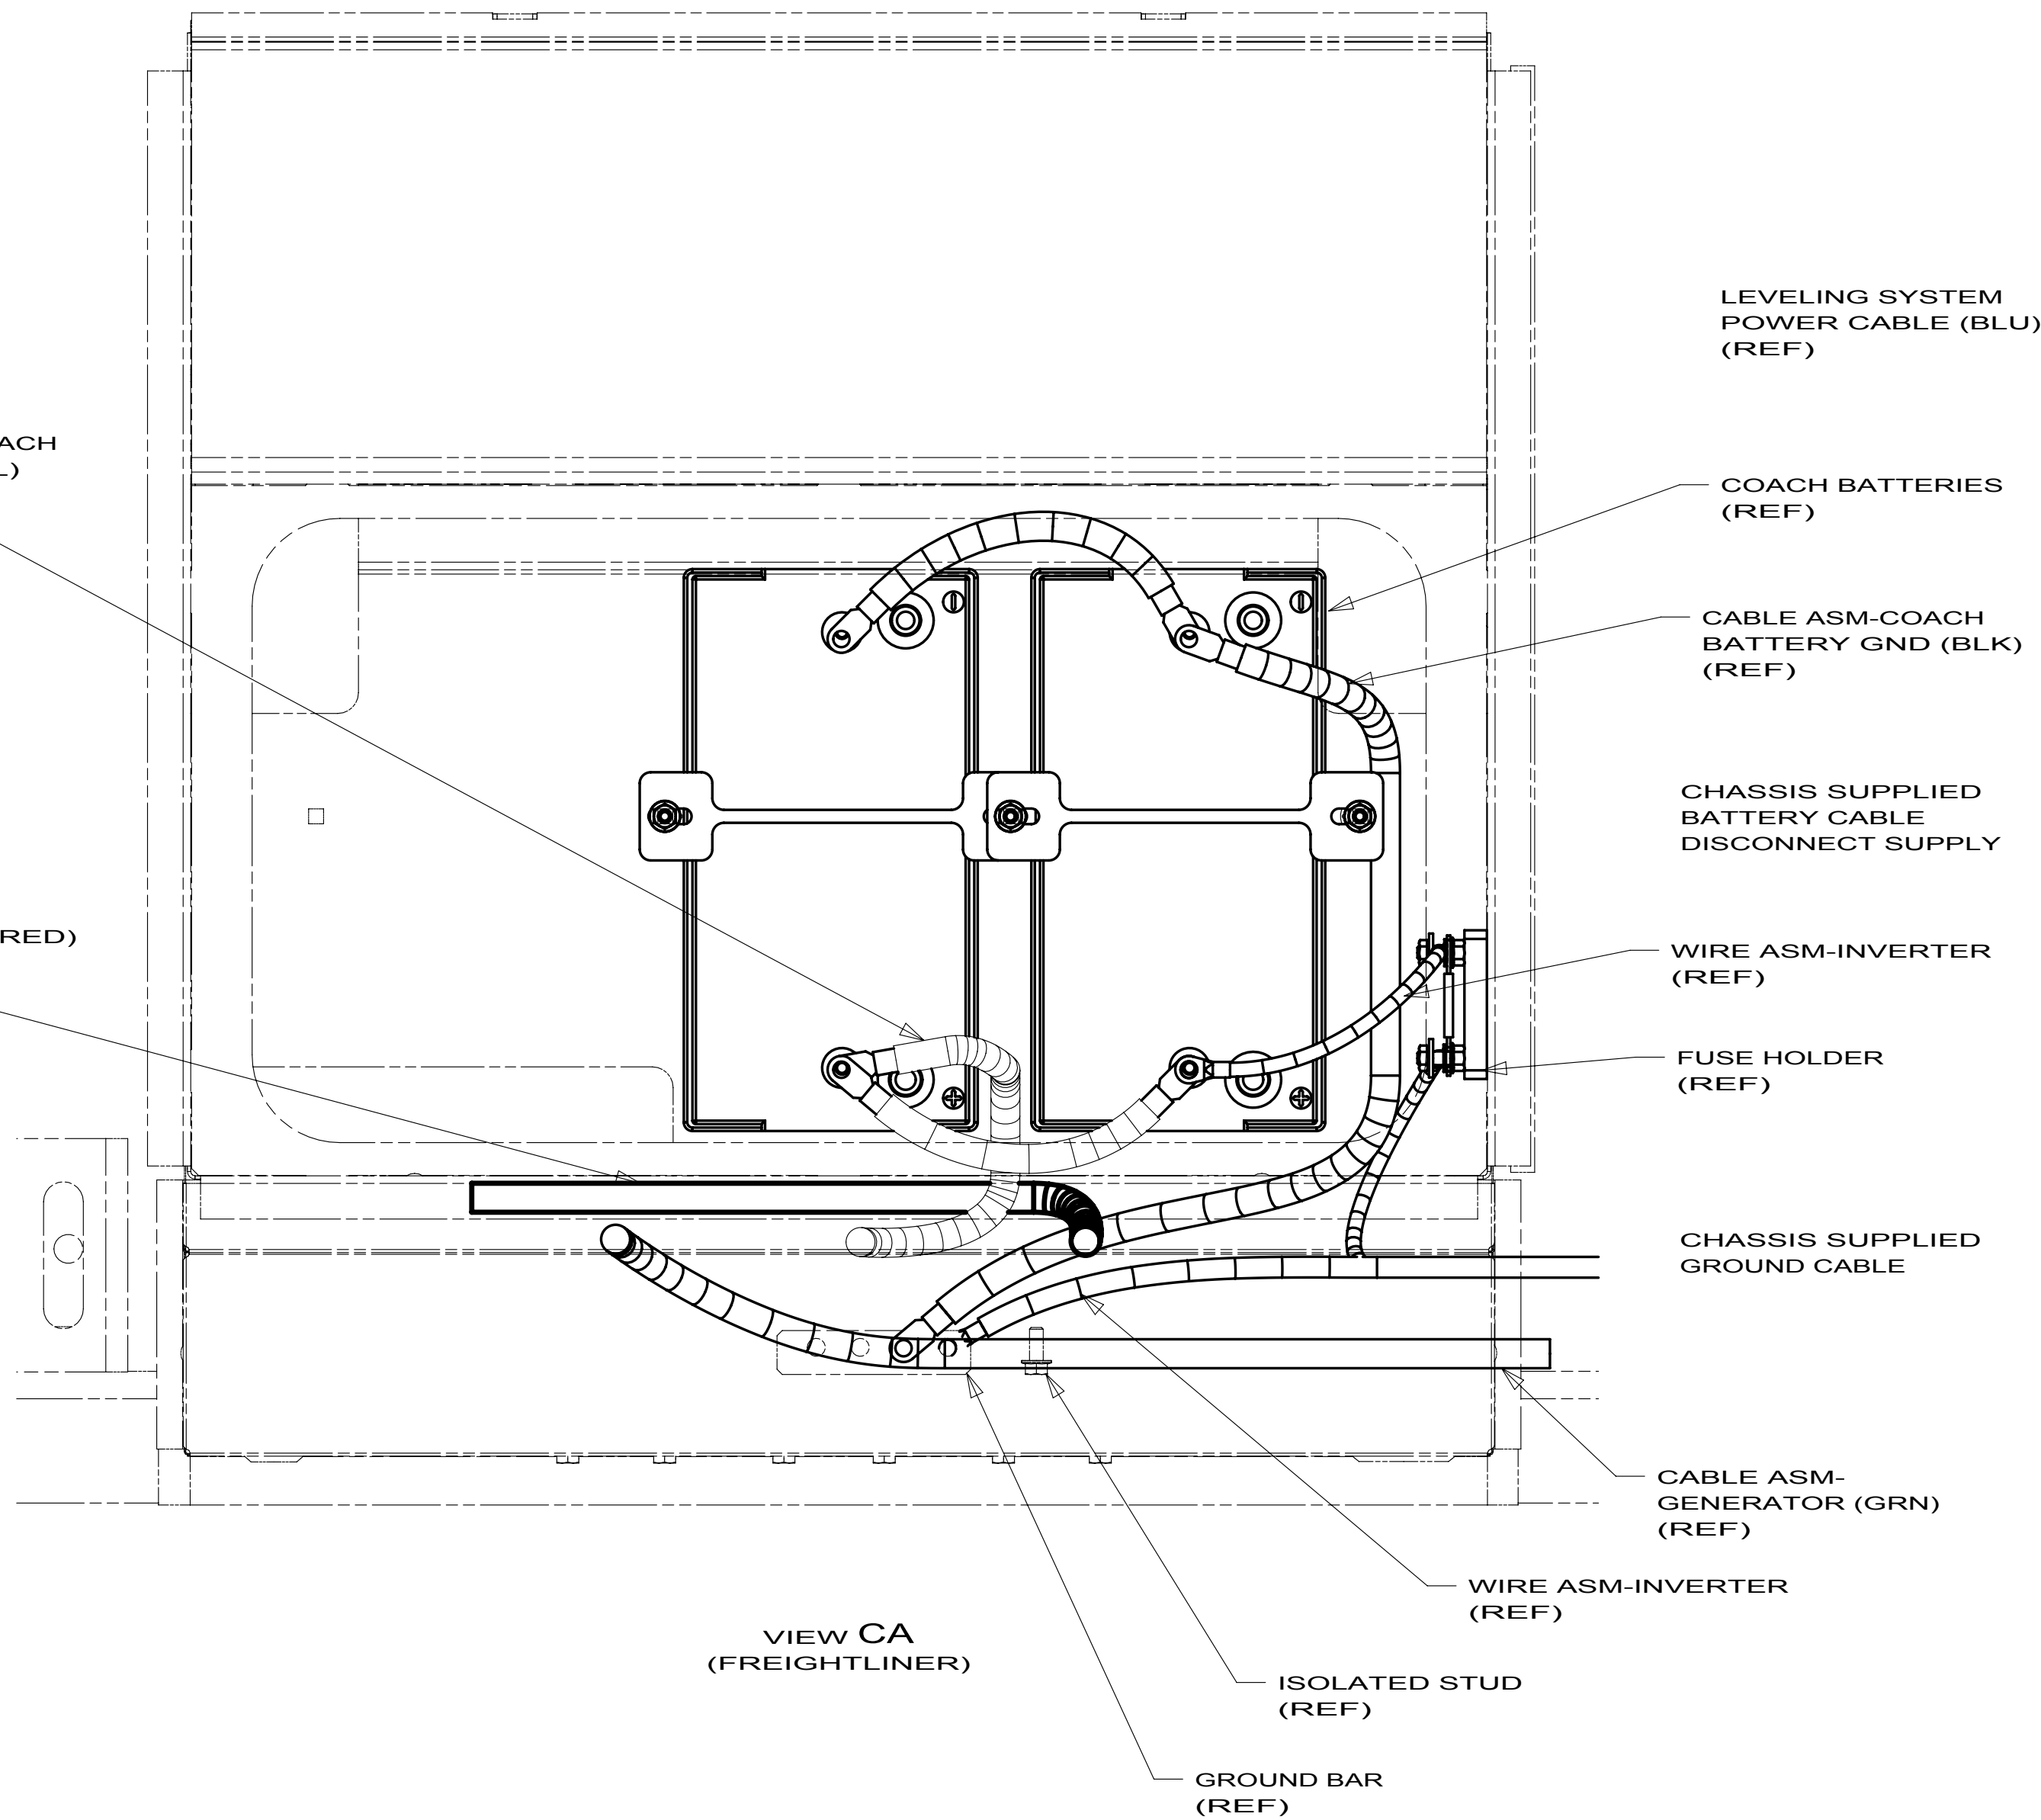

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED
10 J-FREIGHTLINER


DO NOT SCALE DRAWING

TITLE:
BATTERY INSTL,FL

SHEET 3 PART NO 171067 REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

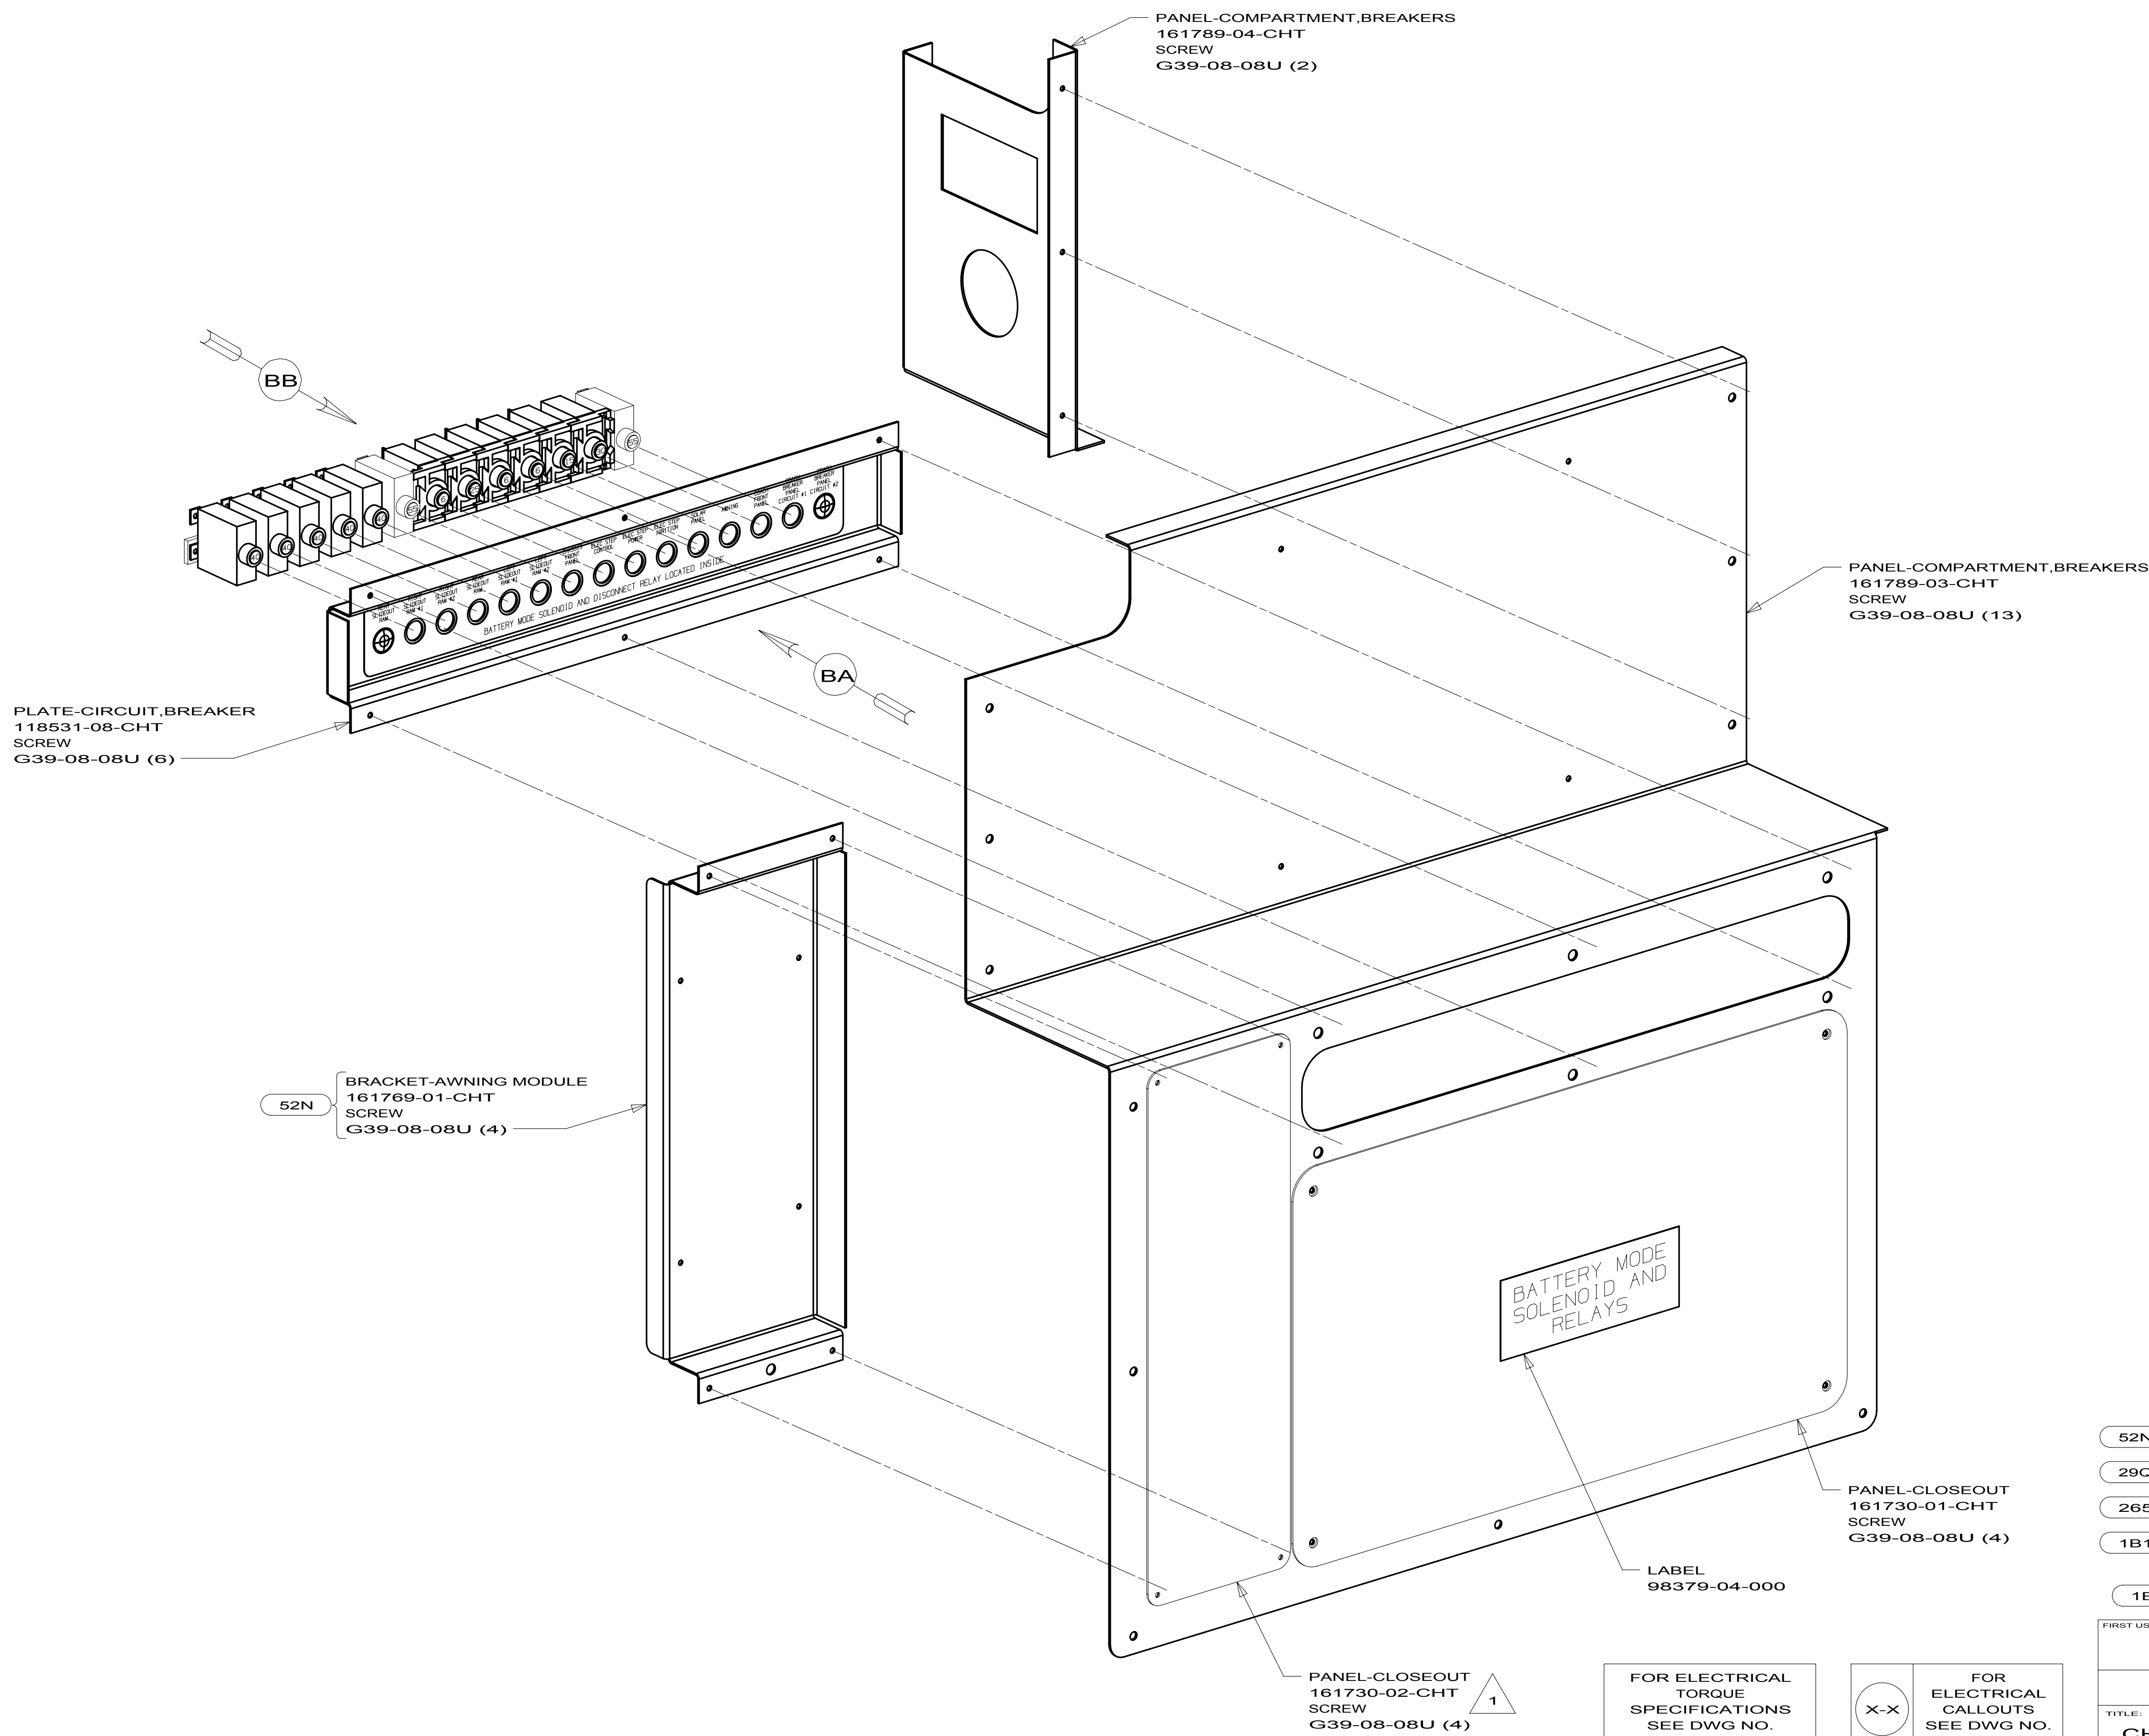


NOTES:
1 NOT USED WITH 52N


52N	AWNING - PATIO, ELECTRIC
29Q	SOLAR PANEL-10 WATT
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265

FIRST USED		
10 J&K-SERIES		
DO NOT SCALE DRAWING		
TITLE: CHASSIS ELECTRICAL BOX ASM		
SHEET 4	PART NO 171695	REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
--	---

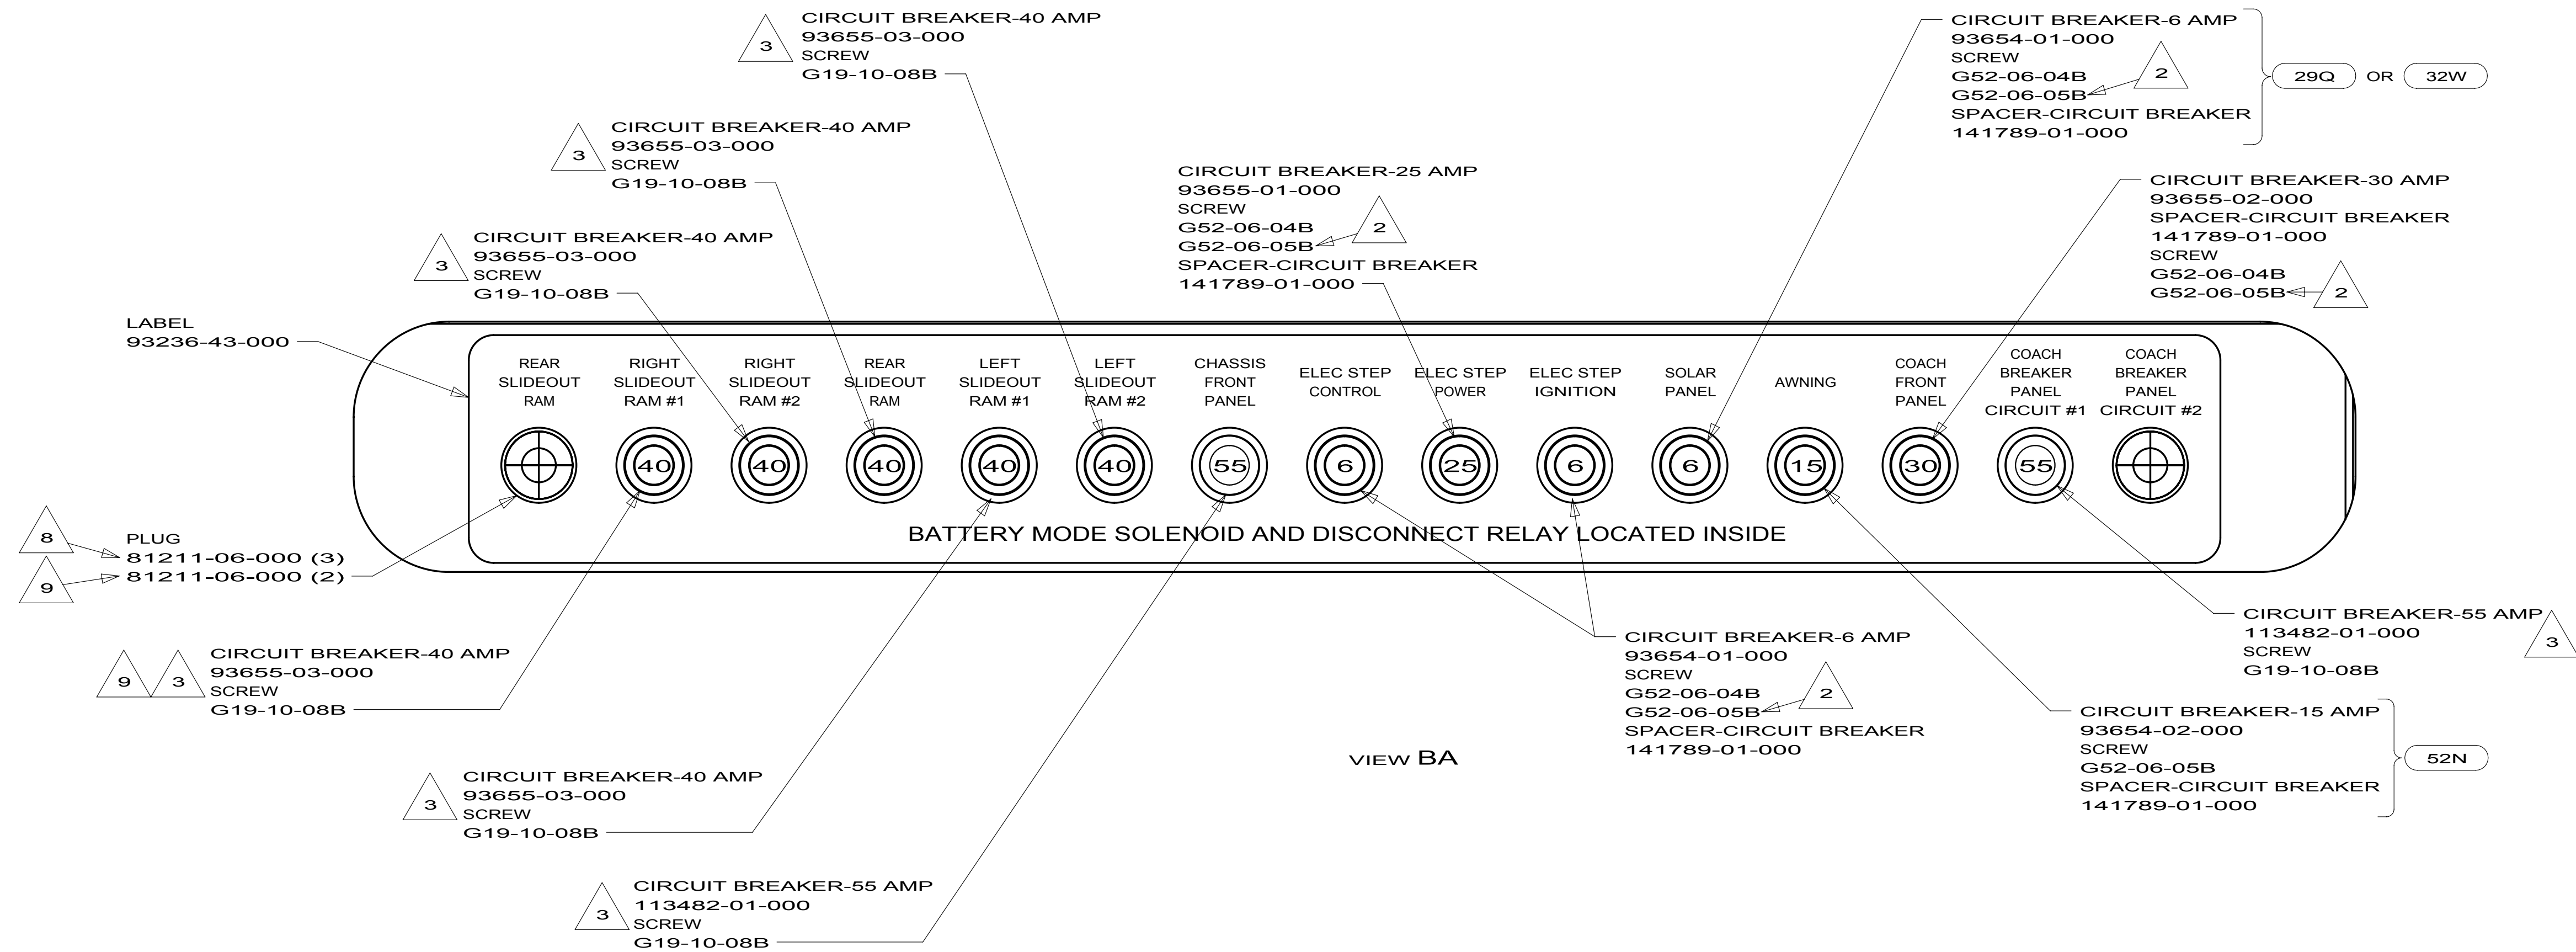

VIEW BA

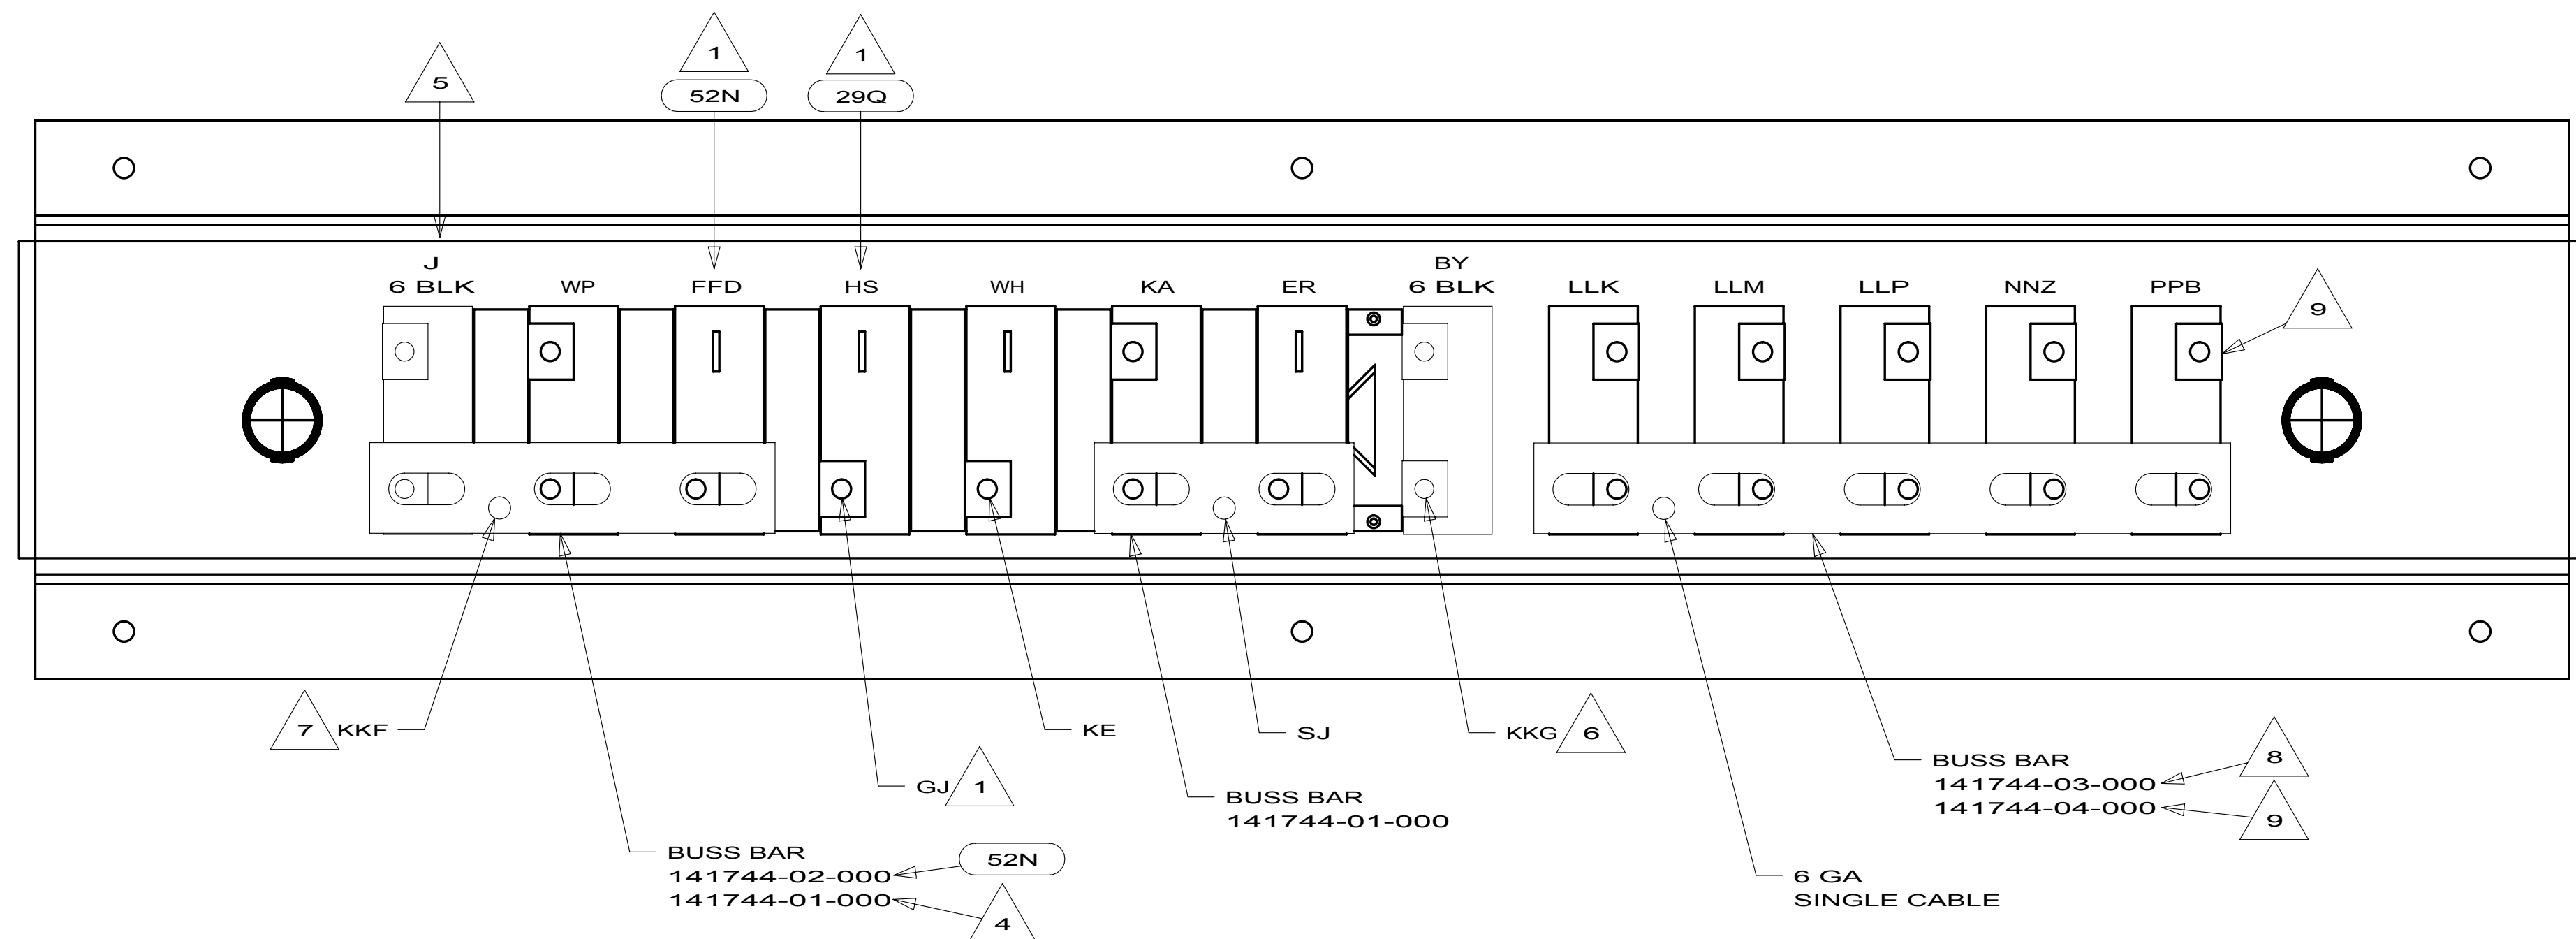

VIEW BB

- 9 USED ON J37F ONLY.
- 8 USED ON K35P ONLY.
- 7 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.
- 6 WIRE MARKED WITH PURPLE TAPE.
- 5 WIRE MARKED WITH YELLOW TAPE.
- 4 WITHOUT 52N
- 3 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 2 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 1 IF CIRCUIT NOT USED, TAPE BACK TO HARNESS.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 32W GENERATOR-START, AUTO SYSTEM
- 52N AWNING - PATIO, ELECTRIC
- 29Q SOLAR PANEL-10 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 J&K-SERIES		
DO NOT SCALE DRAWING		
TITLE: CHASSIS ELECTRICAL BOX ASM		
SHEET 5	PART NO 171695	REV

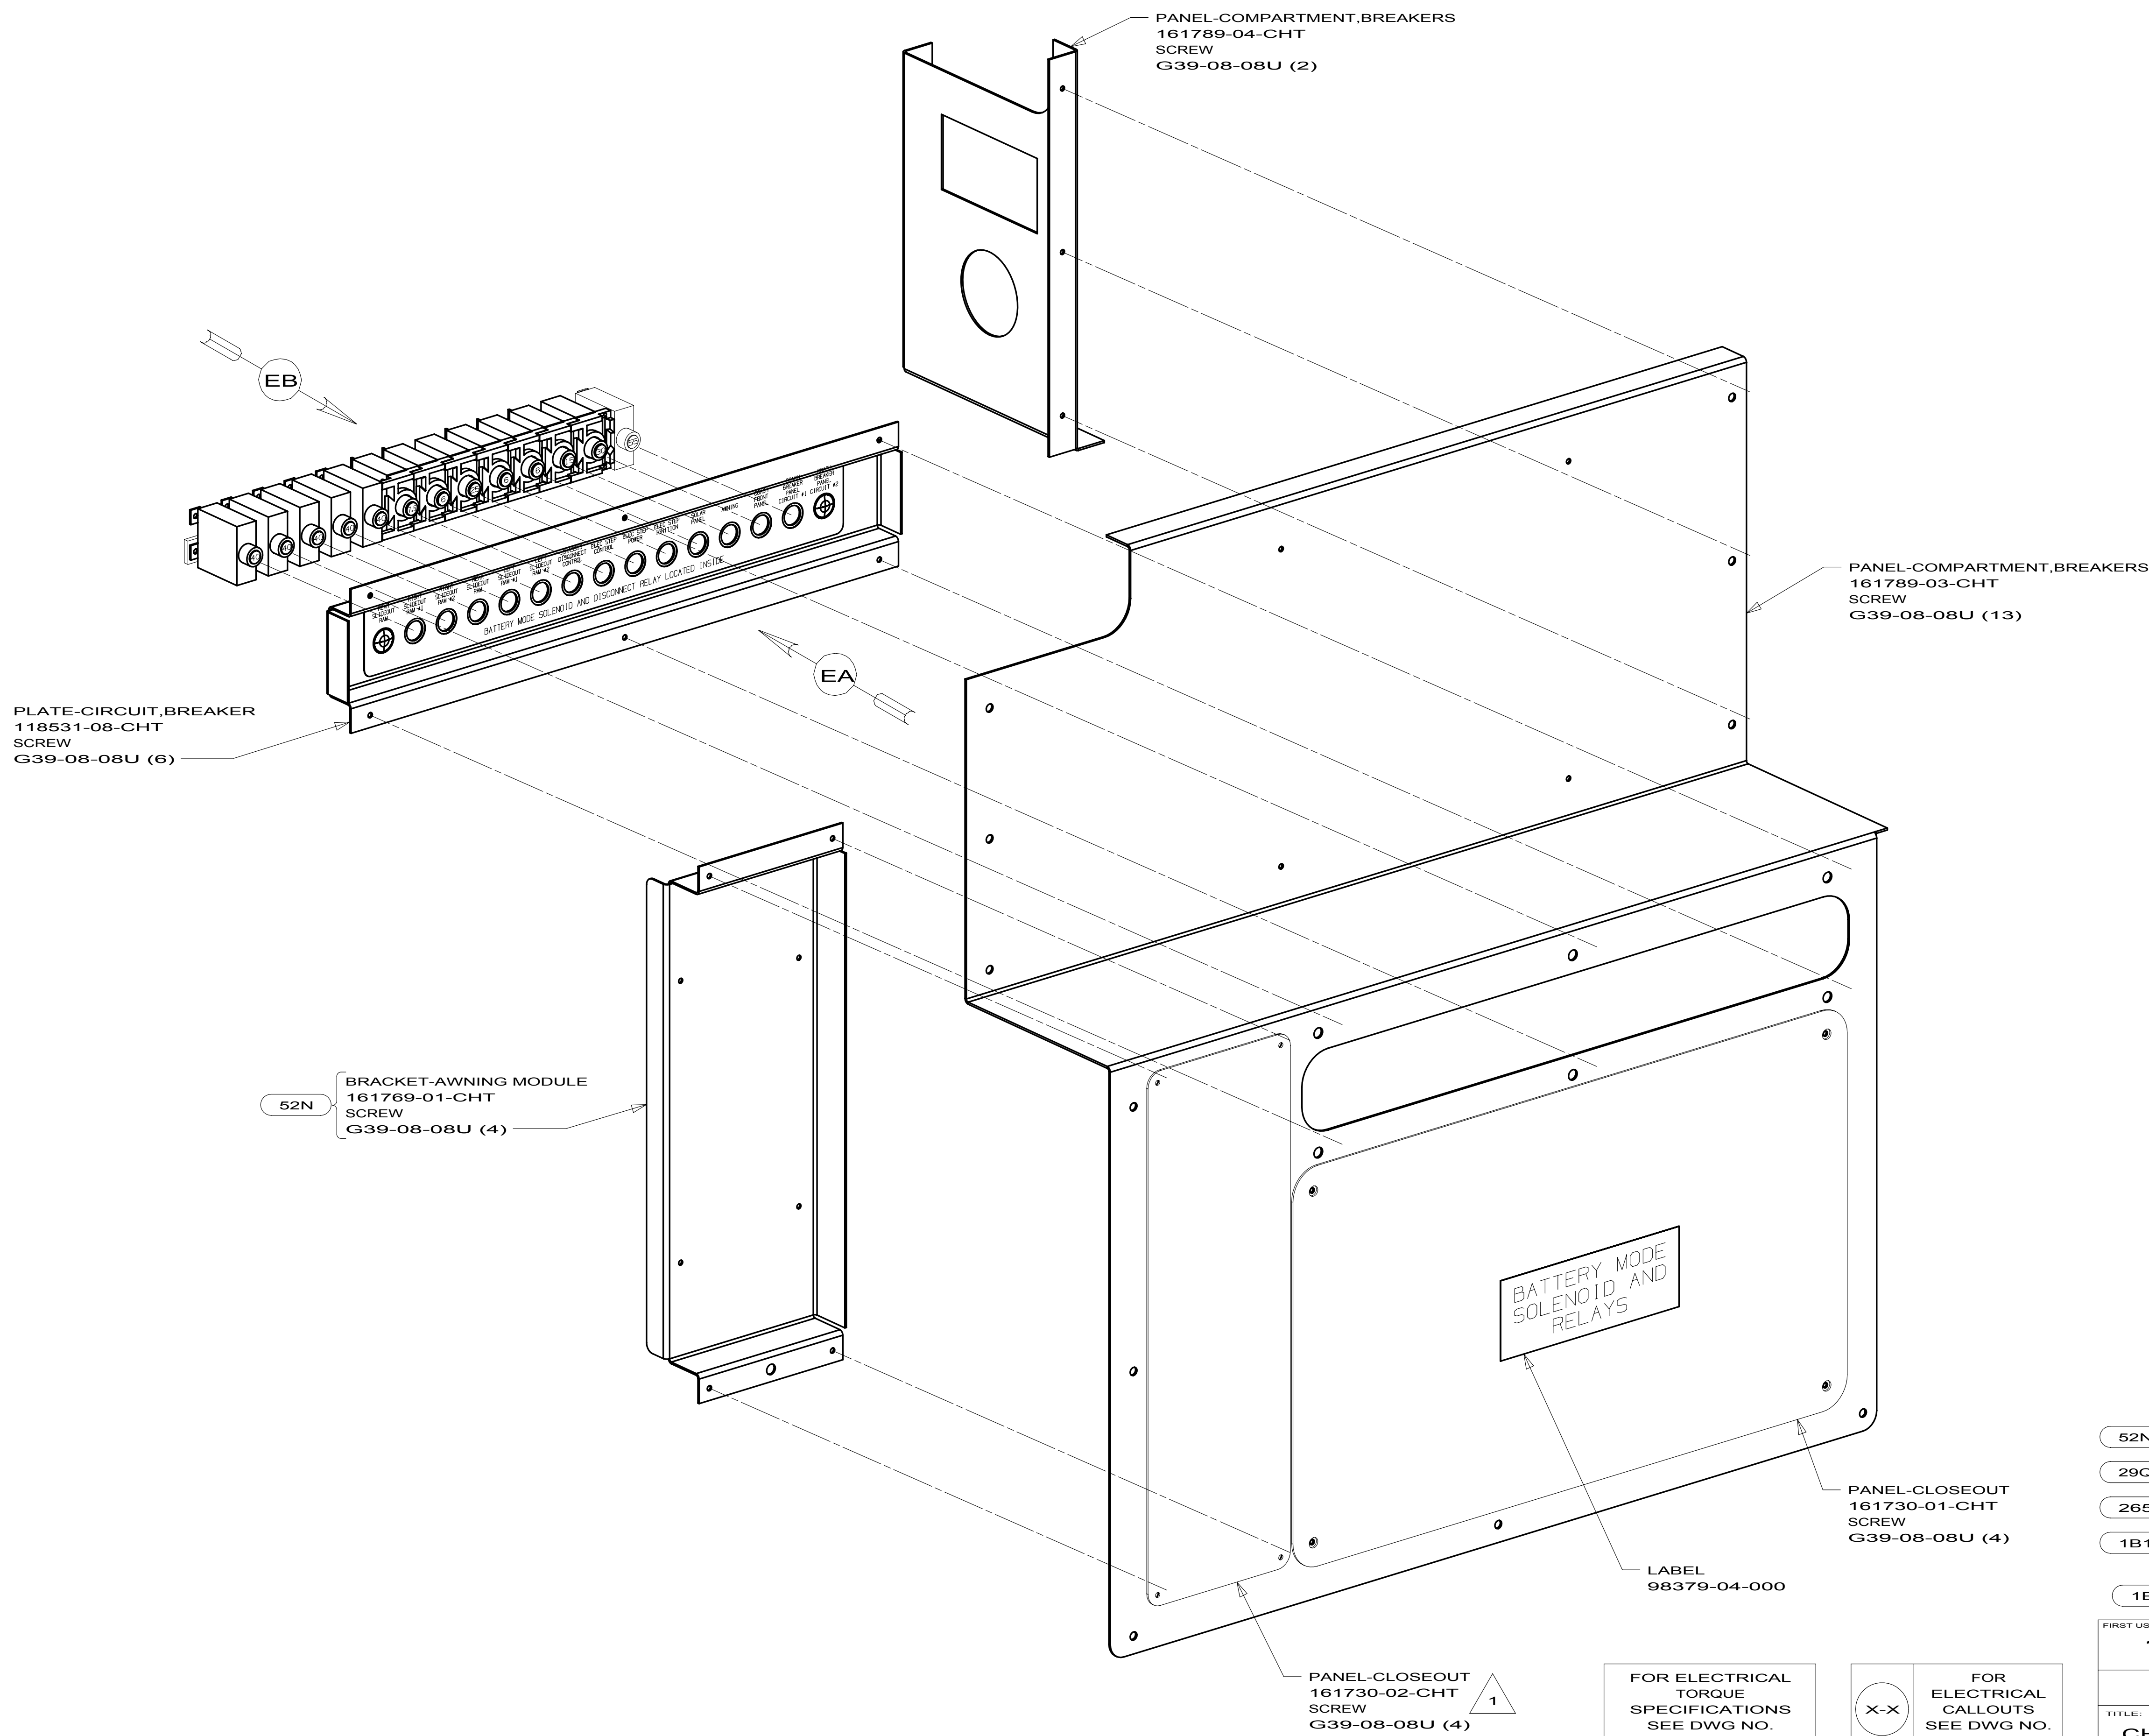

- 52N AWNING - PATIO, ELECTRIC
 - 29Q SOLAR PANEL-10 WATT
 - 265 CODES/STANDARDS-CSA/CMVSS
 - 1B1 CODES/STANDARDS USA
- 1B1 265



FIRST USED		
10 J-SERIES,FL		
DO NOT SCALE DRAWING		
TITLE: CHASSIS ELECTRICAL BOX ASM		
SHEET 4	PART NO 172796	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

NOT USED WITH 52N

NOTES:

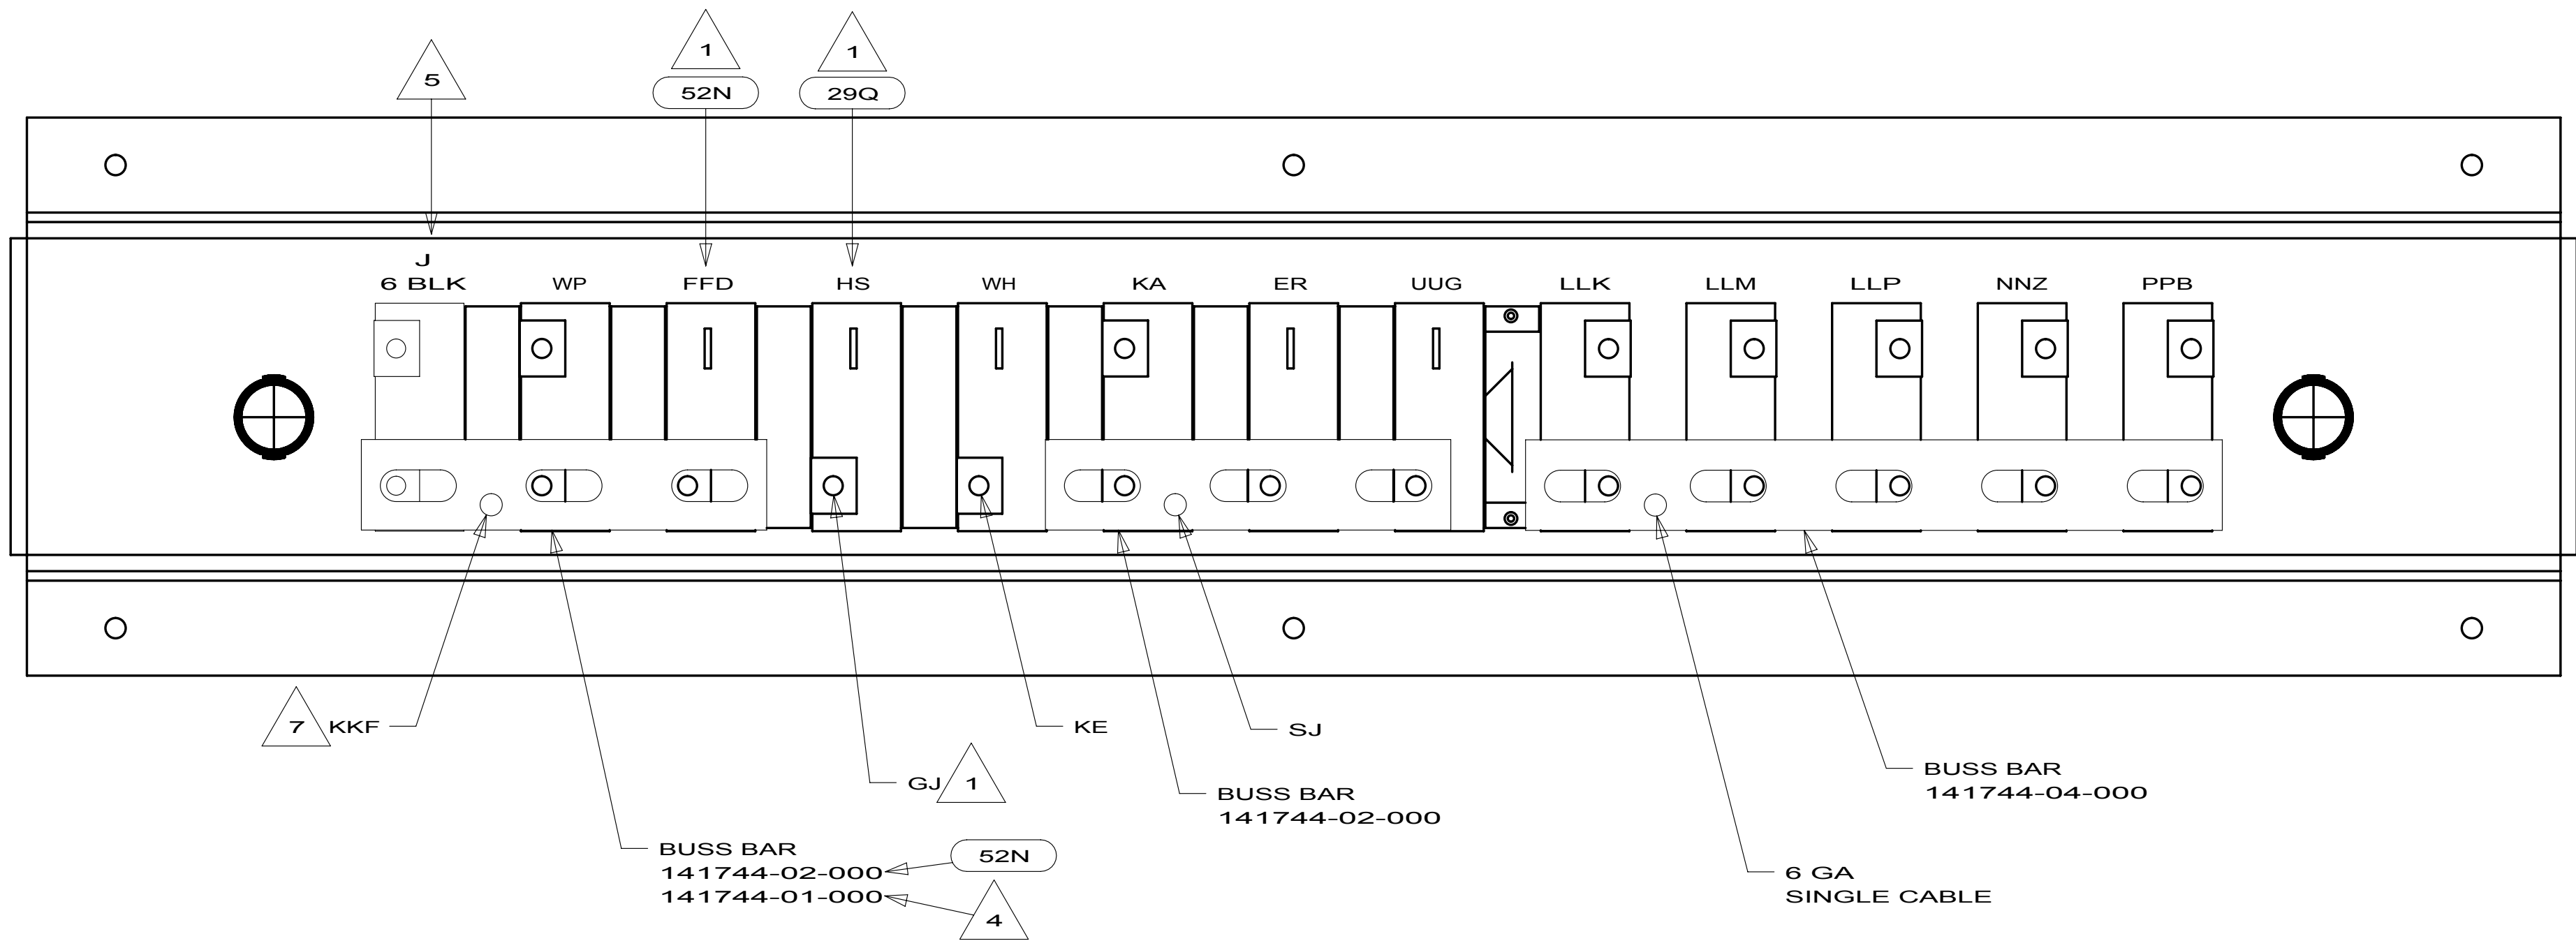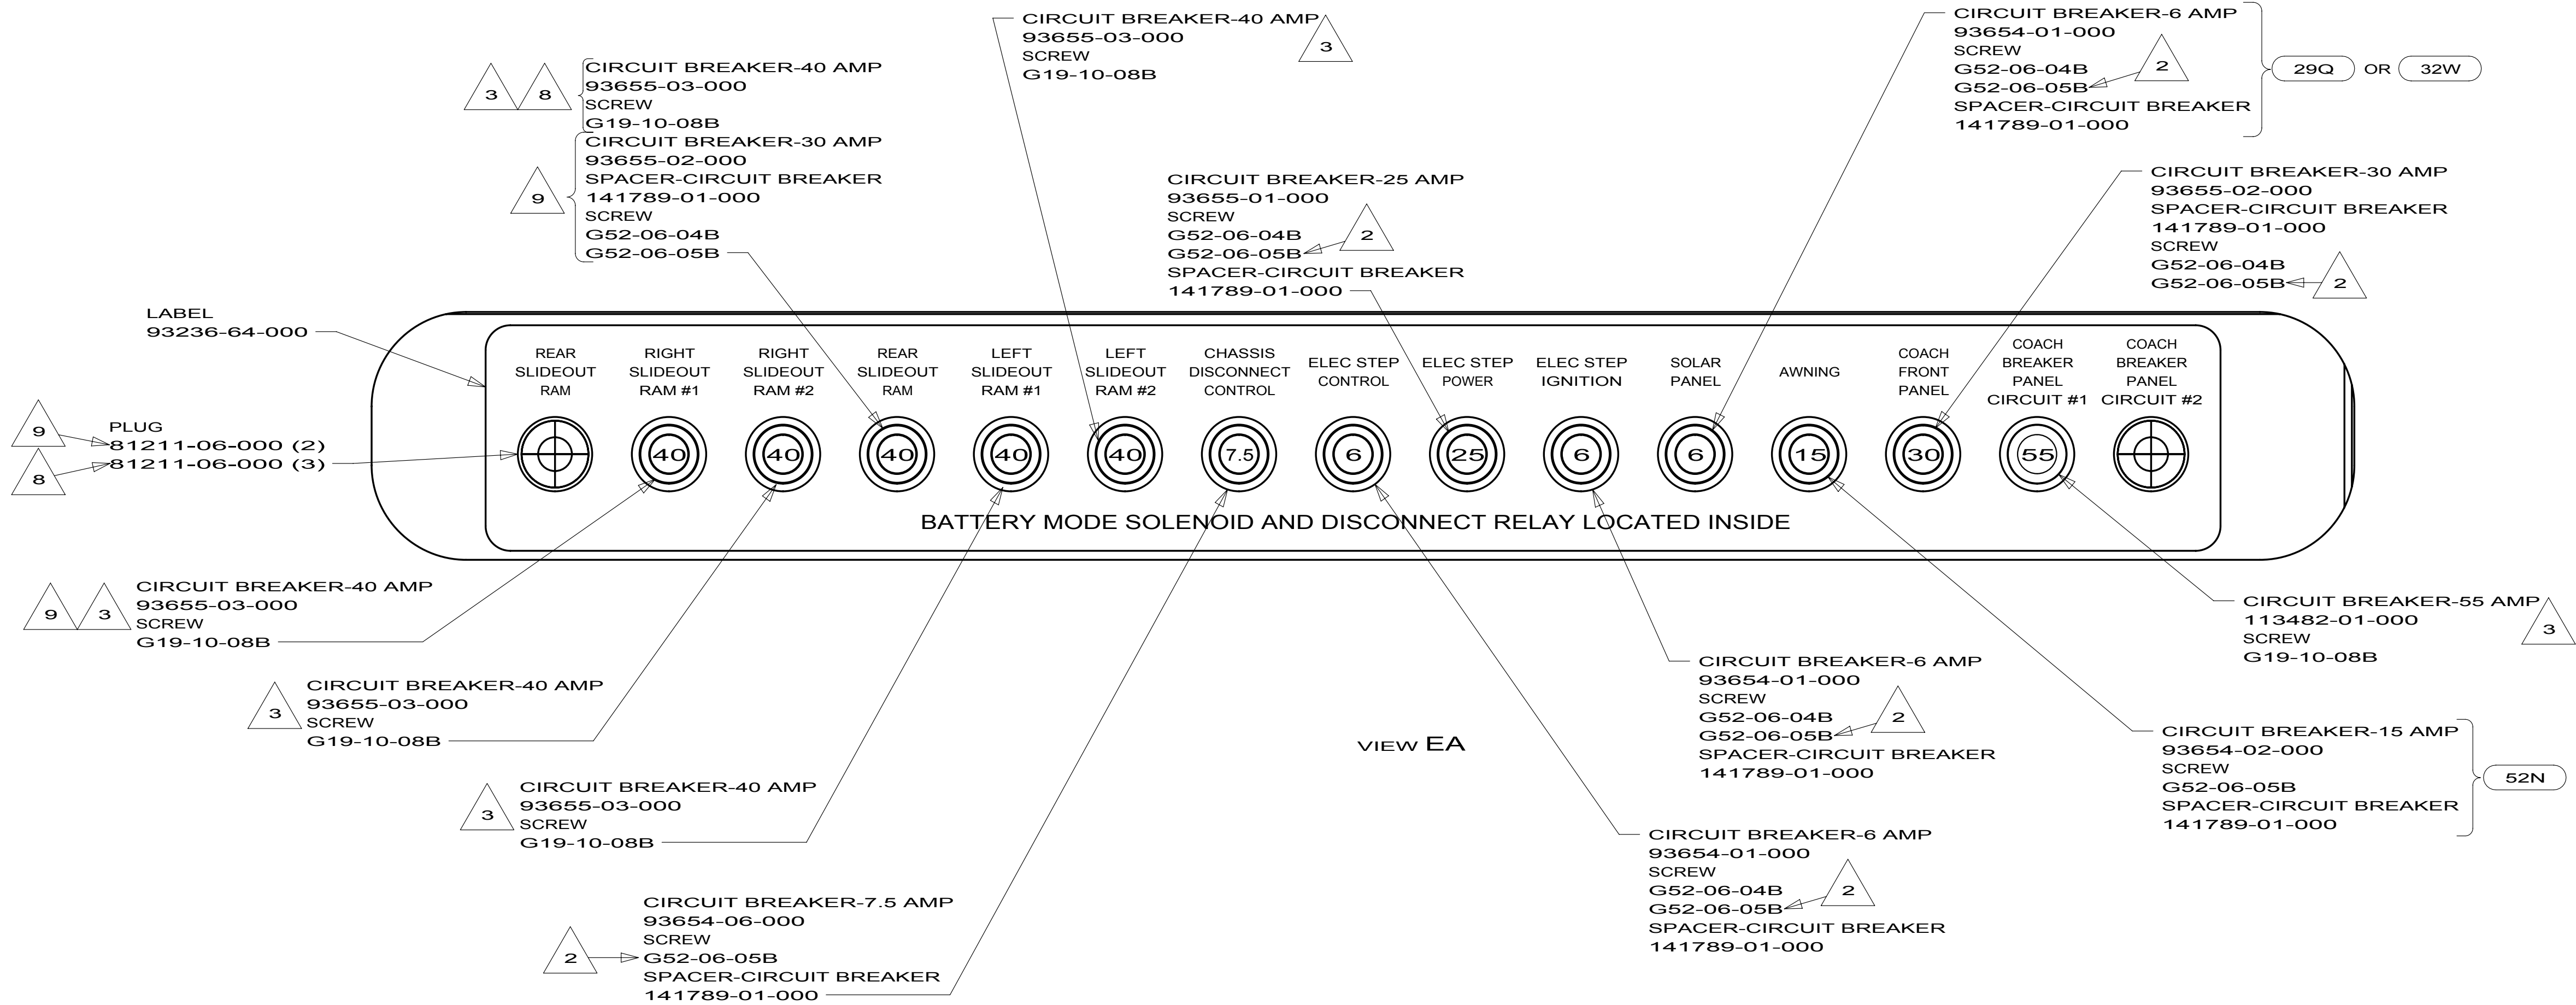

- 9 USED ON J37F ONLY.
- 8 USED ON J35P ONLY.
- 7 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.
- 6 WIRE MARKED WITH PURPLE TAPE.
- 5 WIRE MARKED WITH YELLOW TAPE.
- 4 WITHOUT 52N
- 3 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 2 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 1 IF CIRCUIT NOT USED, TAPE BACK TO HARNESS.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 32W GENERATOR-START,AUTO SYSTEM
- 52N AWNING - PATIO, ELECTRIC
- 29Q SOLAR PANEL-10 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 J-SERIES,FL		
DO NOT SCALE DRAWING		
TITLE:		
CHASSIS ELECTRICAL BOX ASM		
SHEET 5	PART NO 172796	REV

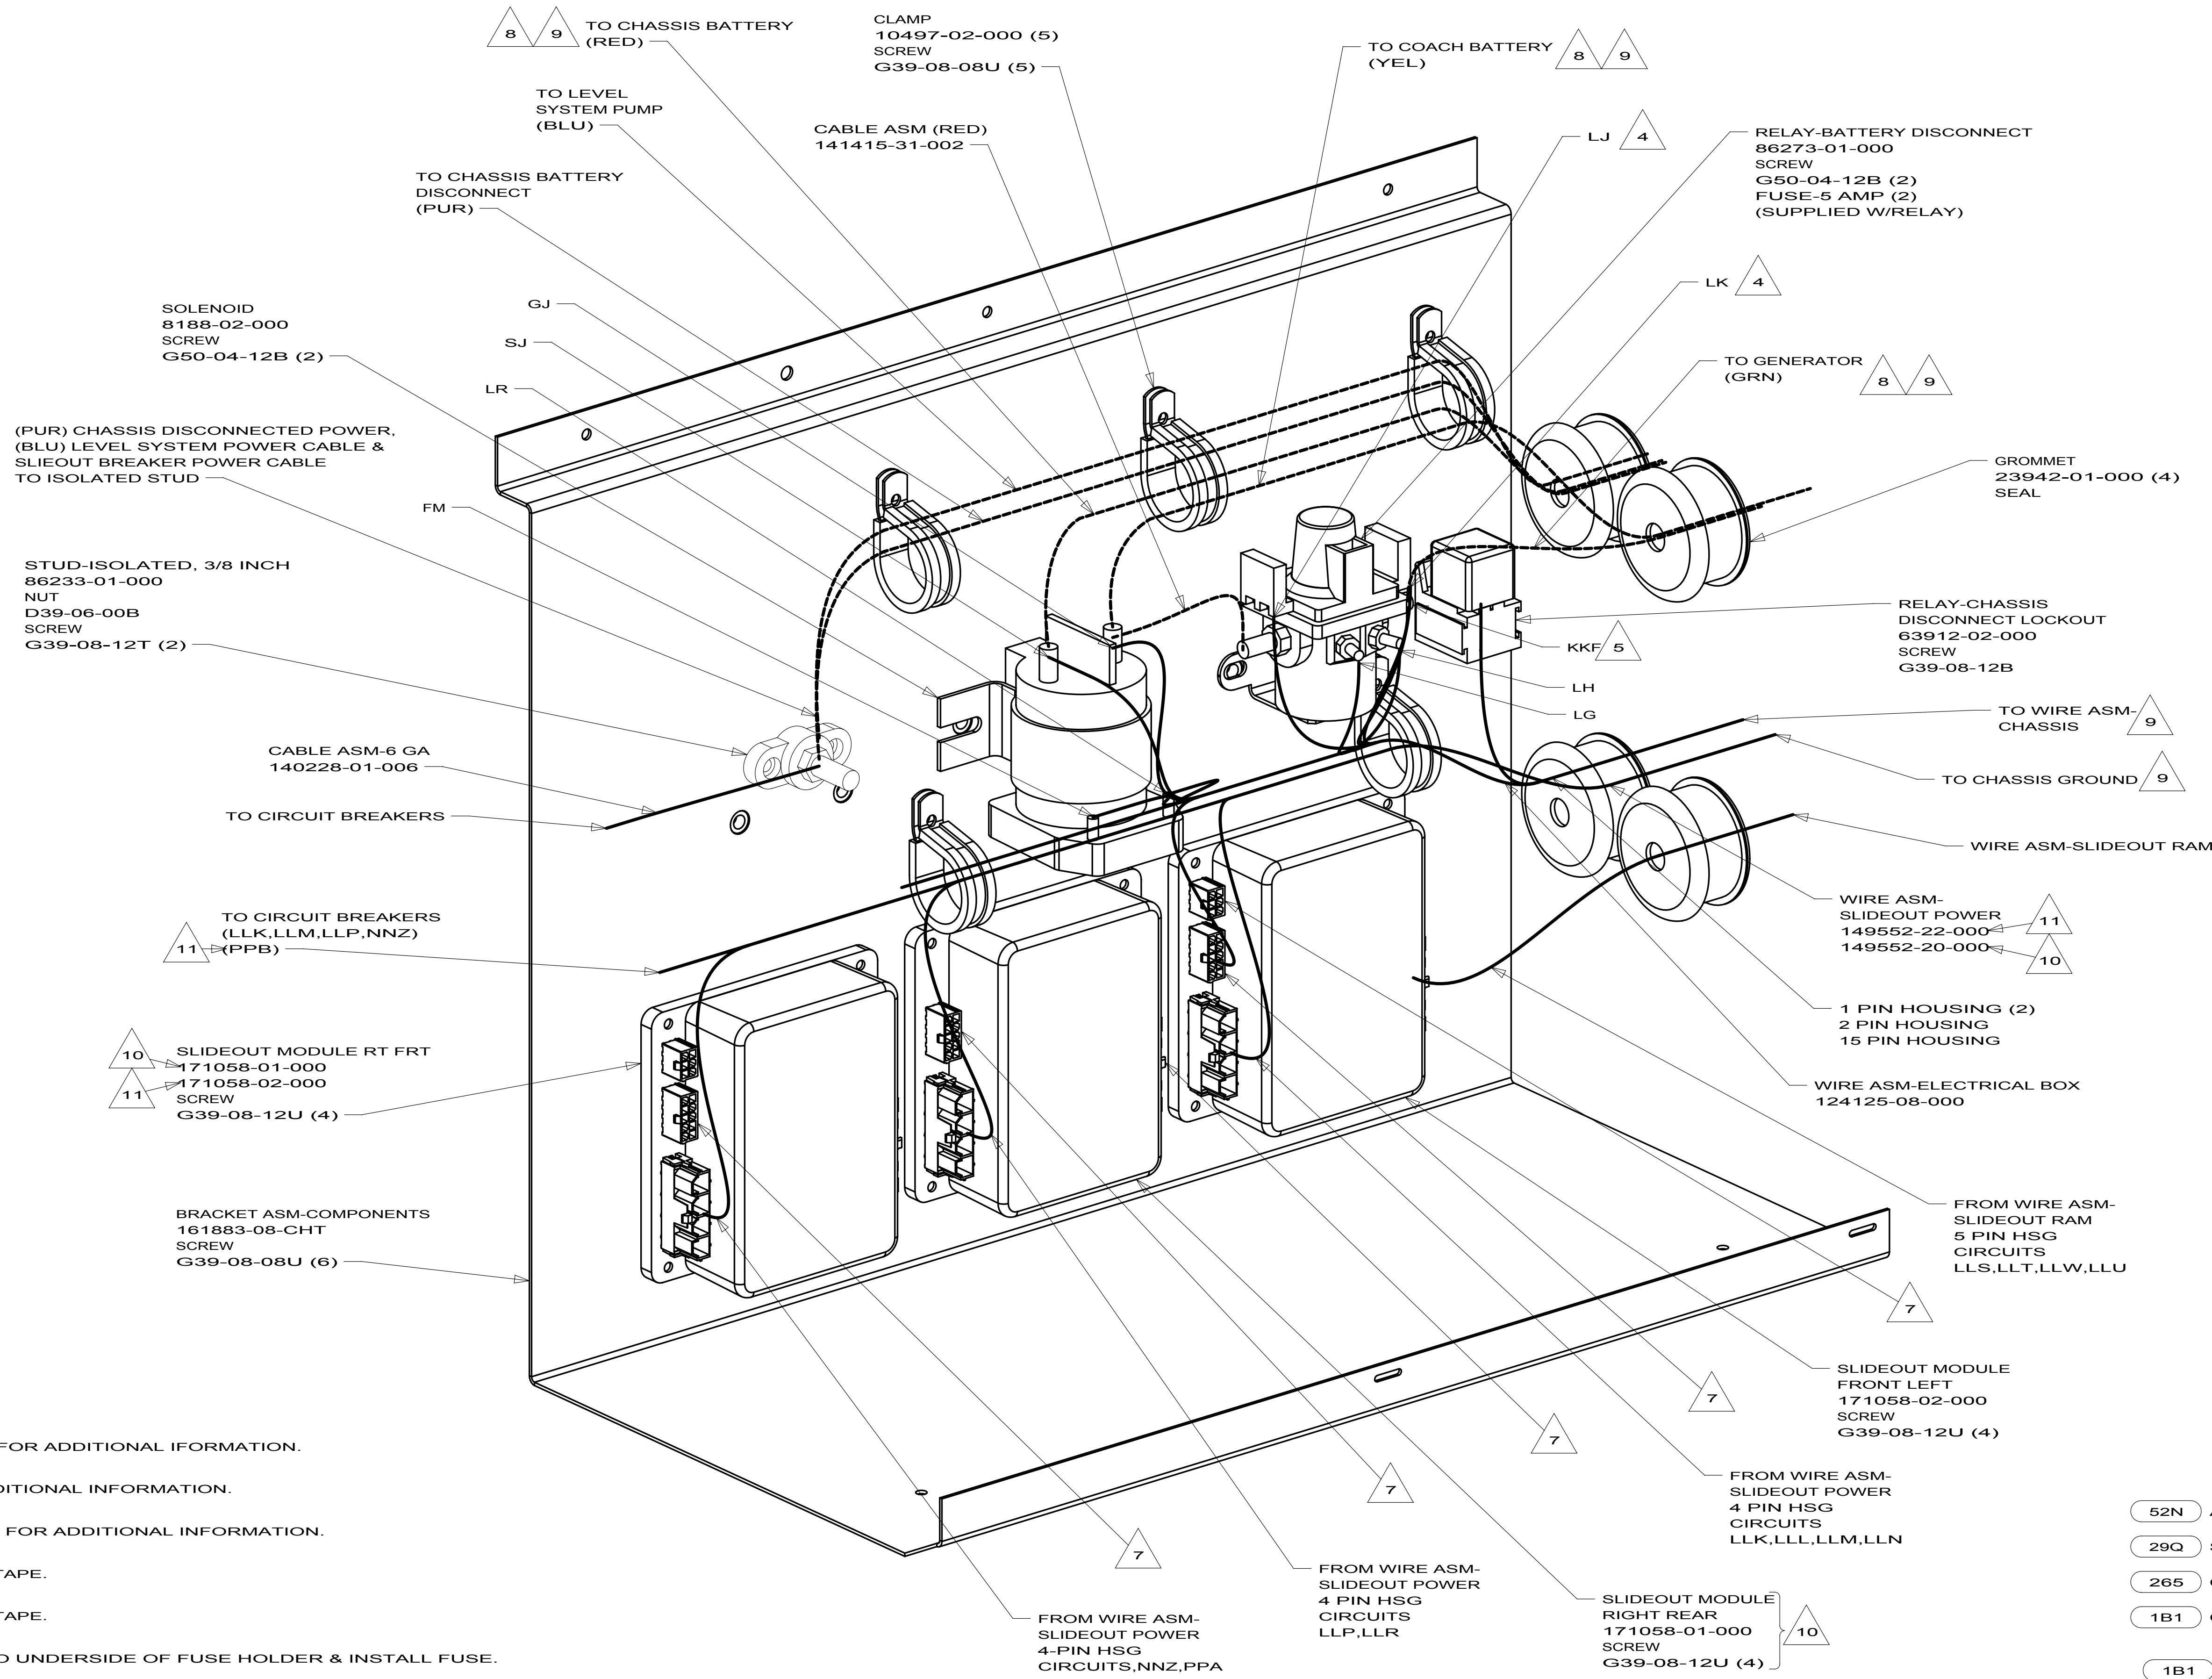

- 11 USED ON J37F ONLY.
- 10 USED ON J35P ONLY.
- 9 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL IFORMATION.
- 8 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 7 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
- 6 WIRE MARKED WITH PURPLE TAPE.
- 5 WIRE MARKED WITH YELLOW TAPE.
- 4 INSERT CIRCUIT LJ & LK INTO UNDERSIDE OF FUSE HOLDER & INSTALL FUSE.
- 3 SECURE WITH SOLENOID MOUNTING SCREW.

2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. LEGEND: — WINNEBAGO — CABLE: — CHASSIS SUPPLIED WIRING.

- 52N AWNING - PATIO, ELECTRIC
- 29Q SOLAR PANEL-10 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED

10 J-SERIES,FL

DO NOT SCALE DRAWING

TITLE: CHASSIS ELECTRICAL BOX ASM

SHEET 6 PART NO 172796 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

8

7

6

5

4

3

2

1

TERMINALS

NO.	PART NUMBER	DESCRIPTION
B-1 B-2 B-11 B-12	50003-01 50004-01 50003-02 50004-02	TERMINAL-PIN, 16-14 GA,.156 DIA TERMINAL-RECP, 16-14 GA,.156 DIA TERMINAL-PIN, 16-14 GA,.180 DIA TERMINAL-RECP, 16-14 GA,.180 DIA
WP-1 WP-2 WP-3	106950-01 106950-02 106950-03	TERMINAL-PIN, 16-14 GA TERMINAL-PIN, 10-12 GA TERMINAL-PIN, 8 GA
R-1 R-2 R-3 R-4 R-5 R-6 R-7 R-8 R-9	35416-01 35416-02 35416-03 35416-04 37018-01 102777-01 102777-02 102777-03 33787-01	TERMINAL-RING, #10 STD, 8 GA TERMINAL-RING, #10 STD, 6 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, 5/16 STD, 12-10 GA TERMINAL-RING, #6 STD, 14-16 GA TERMINAL-RING, #6 STD, 10-12 GA TERMINAL-RING, #6 STD, 8 GA TERMINAL-RING, #10 STD, 14 GA
R-60 R-61 R-62 R-63 R-64 R-65 R-66 R-67 R-68 R-69 R-70 R-71	8325-01 8326-01 8327-01 8328-01 8328-02 8329-01 8331-01 8332-01 8332-02 8350-01 99275-02 101397-01	TERMINAL-RING, 1/4 STD, 14-16 GA TERMINAL-RING, 3/8 STD, 14-16 GA TERMINAL-RING, #10 STD, 14-16 GA TERMINAL-RING, #10 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 10-12 GA TERMINAL-RING, 3/8 STD, 8 GA TERMINAL-RING, 3/8 STD, 4 GA TERMINAL-RING, 1/4 STD, 6 GA TERMINAL-RING, 1/4 STD, 10 GA TERMINAL-RING, 3/8 STD, 6 GA TERMINAL-RING, 7/16 STD, 8 GA TERMINAL-RING, #10 STD, 14-16 GA
R-91 R-92 R-93 R-94	88791-01 88791-02 8348-01 99275-01	TERMINAL-RING, 3/8, 90° , 1/0 GA TERMINAL-RING, 3/8, 90° , 2 GA TERMINAL-RING, 3/8 STD, 2 GA TERMINAL-RING, 7/16 STD, 1/0 GA
RF-51 RF-52	7944-01 7945-01	TERMINAL-SPADE, 12-10 GA, #8 STUD TERMINAL-SPADE, 18-14 GA, #8 STUD
TR-1 TR-2 TR-3 TR-11 TR-12	47443-01 47443-02 47443-05 47443-03 47443-04	TERMINAL-RECP, 16-14 GA,.25, INS TERMINAL-RECP, 12-10 GA,.25, INS TERMINAL-RECP, 22-18 GA,.25, INS TERMINAL-RECP, 16-14 GA,.19, INS TERMINAL-RECP, 16-14 GA,.11, INS
TR-21	80015-01	TERMINAL-RECP, 22-18 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-22	80015-02	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-23	80015-03	TERMINAL-RECP, 16-14 GA,.250, 90 DEG FOR USE WITH TAB THICKNESS .032
TR-24	80015-04	TERMINAL-RECP, 16-14 GA,.187, 90 DEG FOR USE WITH TAB THICKNESS .020
TR-51 TR-52 TR-53 TR-54 TR-55	7940-01 23809-01 23809-02 49270-01 7940-02	TERMINAL-RECP, 16-12 GA,.25, UNINS TERMINAL-RECP, 16-14 GA,.19, UNINS TERMINAL-RECP, 18-20 GA,.25, UNINS TERMINAL-RECP, 18-20 GA,.19, UNINS TERMINAL-RECP, 10 GA, .25, UNINS
TT-1 TT-2 TT-11	85745-02 85745-03 85745-04	TERMINAL-TAB, 16-14 GA,.25, INS TERMINAL-TAB, 10-12 GA,.25, INS TERMINAL-TAB, 18-22 GA,.19, INS
TT-51 TT-52	7942-01 7943-01	TERMINAL-TAB, 16-14 GA,.25, UNINS TERMINAL-TAB, 14-10 GA,.25, UNINS
MF6-1	129236-01	TERMINAL-FEM, M/P, 630, 10-12
MF6-2	129236-02	TERMINAL-FEM, M/P, 630, 14-16

1

2

FOR RECP-BLANK, DET-X DENOTES DETAIL VIEW.

CONTACT WIRE PREP PRIOR TO USING FOR TOOLING PURPOSES.

NOTES:

SPLICES

NO.	PART NUMBER	DESCRIPTION
BS-1 BS-2 BS-3 BS-SB	31876-01 31876-02 31876-03 100070-01	SPLICE-BUTT, 16-14 GA, BLUE SPLICE-BUTT, 12-10 GA, YELLOW SPLICE-BUTT, 22-18 GA, RED SPLICE-BUTT, 14-16 GA, SHRINK,BLUE
BS-RB	112823-01	SPLICE-BUTT, 14-22 GA, REDUCER
BS-RS	173854-01	SPLICE-BUTT, 14-22 GA, REDUCER, SHRINK
S-1 S-2	7946-01 23808-01	SPLICE, 1-6 MM² SPLICE, 6-9 MM²
I-2 I-5	7956-02 7956-05	SHRINK WRAP .375 DIA SHRINK WRAP .25 DIA
SH-1	58028-01	SPLICE-HAT
S-10	101173-01	SPLICE-BARREL, 26300 CMA

NO.	PART NUMBER	DESCRIPTION
SP-1	90986-02	PLUG ASM-ELECTRIC STEP
SP-2	142524-01-000 098261-01-000 098262-07-000 098261-02-000 (3) 098262-01-000 (3)	HOUSING-4 PIN SOCKET-CONNECTOR SEAL-CONNECTOR SOCKET-CONNECTOR SEAL-CONNECTOR
HR-1	63910-01	HOUSING-RELAY
MP-8 MP-10 MPP CAV-1 CON-3	125323-02 125323-01 125324-01 125325-01 98262-03	HOUSING-PIN, 8 CAVITY HOUSING-PIN, 10 CAVITY TERMINAL-MALE, M/P, 150 SEAL-CAVITY, 150-SERIES M/P SEAL-CONNECTOR
LS-8 LS-10	125323-03 125323-04	LOCK-SECONDARY 8 POSITION LOCK-SECONDARY 10 POSITION
H-8 H-12	108355-01 108355-02	HOUSING-SWITCH, 8 POSITION HOUSING-SWITCH, 12 POSITION

NO.	PART NUMBER	DESCRIPTION
GEN-1	125323-02-000 125324-01-000 (4) 098262-03-000 (4) 125325-01-000 (4) 125323-03-000	HOUSING-8 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 8 POSITION
GEN-2	125323-01-000 125324-01-000 (5) 098262-03-000 (5) 125325-01-000 (5) 125323-04-000	HOUSING-10 POSN, MALE ,150 SERIES TERMINAL-MALE, M/P, 150 SEAL-CONNECTOR SEAL-CAVITY, 150 SERIES M/P LOCK-SECONDARY 10 POSITION

HOUSINGS AND TERMINALS

NO.	PART NUMBER	DESCRIPTION
HS-2 HS-3 HS-4 HS-5 HS-6 HS-7 HS-9 HS-12 HS-15 HS-2-R	88474-10 88474-09 88474-08 88474-07 88474-06 88474-05 88474-03 88474-01 88474-02	HOUSING-SOCKET, 2 CAVITY HOUSING-SOCKET, 3 CAVITY HOUSING-SOCKET, 4 CAVITY HOUSING-SOCKET, 5 CAVITY HOUSING-SOCKET, 6 CAVITY HOUSING-SOCKET, 6 CAVITY-IN LINE HOUSING-SOCKET, 9 CAVITY HOUSING-SOCKET, 12 CAVITY HOUSING-SOCKET, 15 CAVITY HOUSING-SOCKET, 2 CAVITY-RED
HP-2 HP-3 HP-4 HP-5 HP-6 HP-7 HP-8 HP-9 HP-12 HP-15 HP-2-R HP-3-B HP-3-G HP-3-R	88473-10 88473-09 88473-08 88473-07 88473-06 88473-05 88473-04 88473-03 88473-01 88473-02 88473-15 88473-12 88473-13 88473-14	HOUSING-PIN, 2 CAVITY HOUSING-PIN, 3 CAVITY HOUSING-PIN, 4 CAVITY HOUSING-PIN, 5 CAVITY HOUSING-PIN, 6 CAVITY HOUSING-PIN, 6 CAVITY-IN LINE HOUSING-PIN, 8 CAVITY-IN LINE HOUSING-PIN, 9 CAVITY HOUSING-PIN, 12 CAVITY HOUSING-PIN, 15 CAVITY HOUSING-PIN, 2 CAVITY-RED HOUSING-PIN, 3 CAVITY-BLUE HOUSING-PIN, 3 CAVITY-GREEN HOUSING-PIN, 3 CAVITY-RED
TS-1 TS-2	88476-01 88476-02	SOCKET-CONNECTOR, 20-14 GA SOCKET-CONNECTOR, 12-10 GA
TP-1 TP-2	88475-01 88475-02	PIN-CONNECTOR, 20-14 GA PIN-CONNECTOR, 12-10 GA
HS2HA HP2HA	137208-01 137207-01	HOUSING-SOCKET, 2 CAVITY-HIGH AMP HOUSING-PIN, 2 CAVITY-HIGH AMP
TS-HA TP-HA	137210-01 137209-01	SOCKET-CONNECTOR, 10AWG HIGH AMP PIN-CONNECTOR, 10AWG HIGH AMP
H-HA	104100-01	HOUSING, 1 CAVITY 75 AMP
T-HA	104100-03	TERMINAL 10 AWG - 6 AWG 75 AMP

BALLOON CALLOUT LEGEND

110 V WIRE	TERMINALS/SPLICES	RECEPTACLES
PART NUMBER COLOR LENGTH	PART NUMBER QUANTITY	PART NUMBER CIRCUIT COLOR LOCATION
POWER CORD	CONDUIT	12 V WIRE
WIRE GAUGE LENGTH IN FEET APPROVAL/ LISTING	TYPE DIA IN 1/16" INCREMENTS LENGTH (mm)	CIRCUIT COLOR & WIRE GAUGE HOUSING POSITION/ TERMINATION

1

2

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL


SHEET 1 OF 7

PART NO 121339

REV

REF: 1

2/17/2010

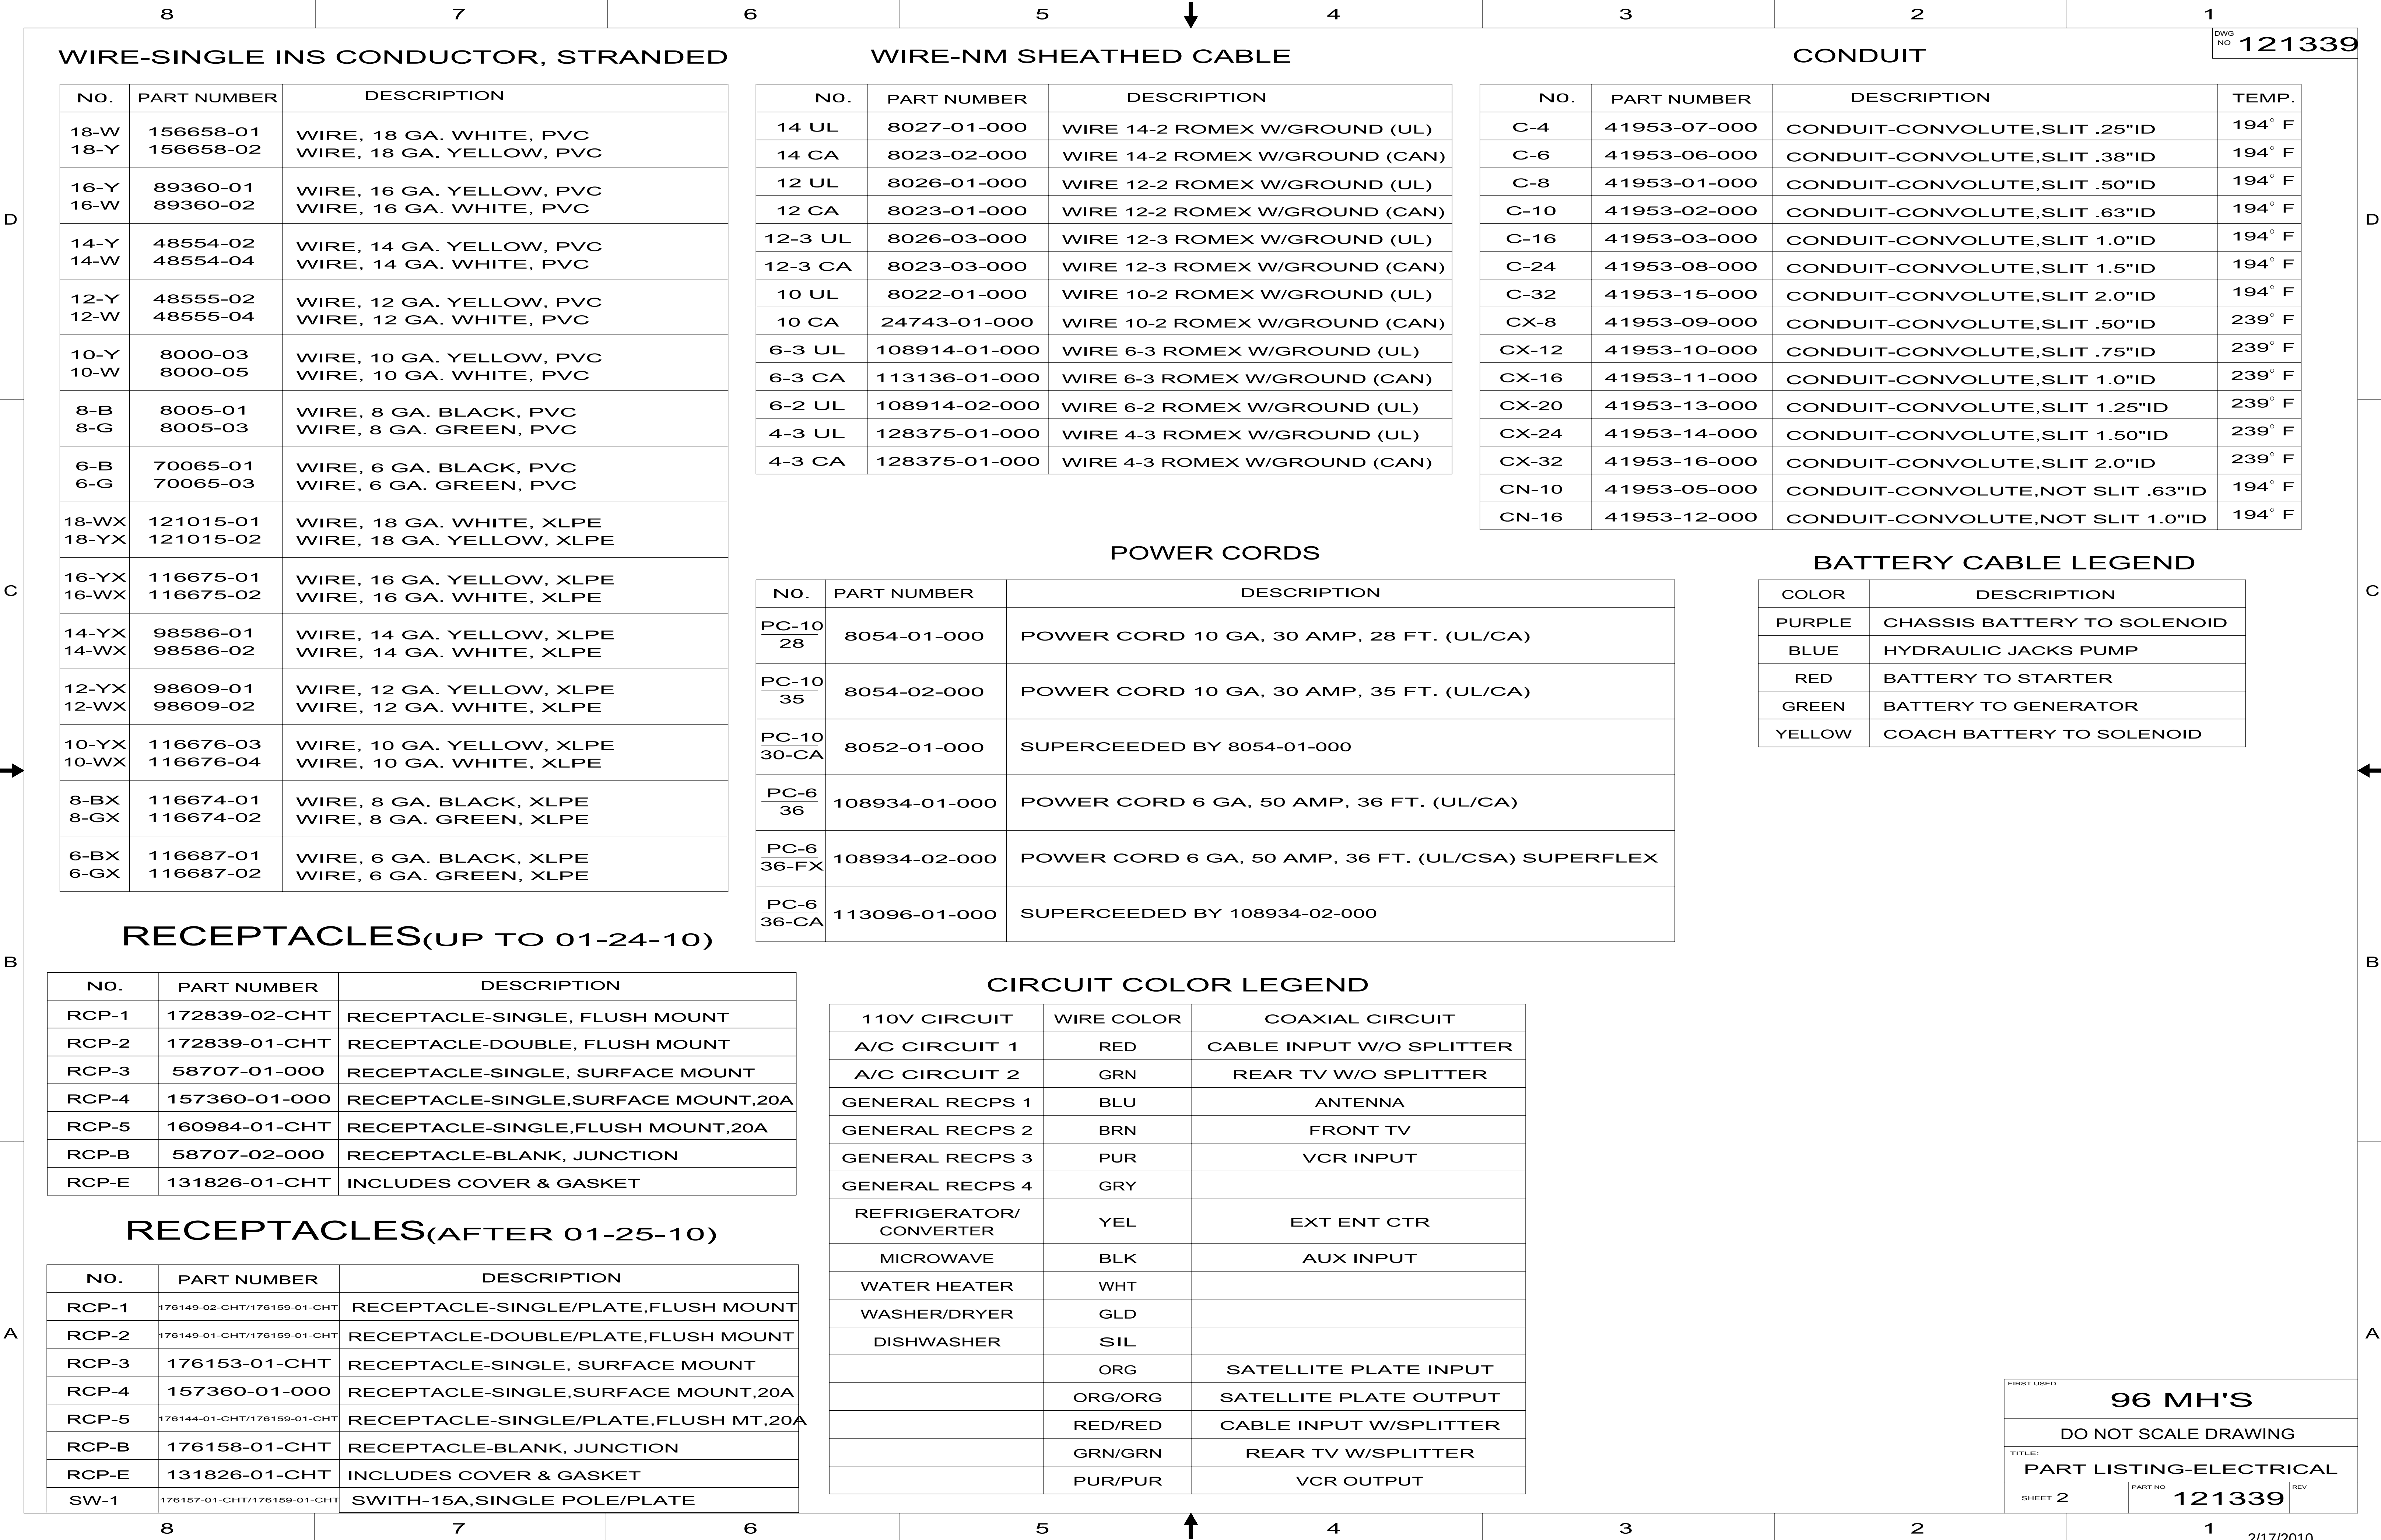

POWER CORDS

BATTERY CABLE LEGEND

NO.

PART NUMBER

DESCRIPTION

PC-10

28

PC-10

35

PC-10

30-CA

PC-6

36

PC-6

36-FX

PC-6

36-CA

8054-01-000

8054-02-000

8052-01-000

108934-01-000

108934-02-000

113096-01-000

POWER CORD 10 GA, 30 AMP, 28 FT. (UL/CA)

POWER CORD 10 GA, 30 AMP, 35 FT. (UL/CA)

SUPERCEEDED BY 8054-01-000

POWER CORD 6 GA, 50 AMP, 36 FT. (UL/CA)

POWER CORD 6 GA, 50 AMP, 36 FT. (UL/CSA) SUPERFLEX

SUPERCEEDED BY 108934-02-000

COLOR

DESCRIPTION

PURPLE

BLUE

RED

GREEN

YELLOW

CHASSIS BATTERY TO SOLENOID

HYDRAULIC JACKS PUMP

BATTERY TO STARTER

BATTERY TO GENERATOR

COACH BATTERY TO SOLENOID

RECEPTACLES(UP TO 01-24-10)

RECEPTACLES(AFTER 01-25-10)

NO.

PART NUMBER

DESCRIPTION

RCP-1

RCP-2

RCP-3

RCP-4

RCP-5

RCP-B

RCP-E

172839-02-CHT

172839-01-CHT

58707-01-000

157360-01-000

160984-01-CHT

58707-02-000

131826-01-CHT

RECEPTACLE-SINGLE, FLUSH MOUNT

RECEPTACLE-DOUBLE, FLUSH MOUNT

RECEPTACLE-SINGLE, SURFACE MOUNT

RECEPTACLE-SINGLE,SURFACE MOUNT,20A

RECEPTACLE-SINGLE,FLUSH MOUNT,20A

RECEPTACLE-BLANK, JUNCTION

INCLUDES COVER & GASKET

NO.

PART NUMBER

DESCRIPTION

RCP-1

RCP-2

RCP-3

RCP-4

RCP-5

RCP-B

RCP-E

SW-1

176149-02-CHT/176159-01-CHT

176149-01-CHT/176159-01-CHT

176153-01-CHT

157360-01-000

176144-01-CHT/176159-01-CHT

176158-01-CHT

131826-01-CHT

176157-01-CHT/176159-01-CHT

RECEPTACLE-SINGLE/PLATE,FLUSH MOUNT

RECEPTACLE-DOUBLE/PLATE,FLUSH MOUNT

RECEPTACLE-SINGLE, SURFACE MOUNT

RECEPTACLE-SINGLE,SURFACE MOUNT,20A

RECEPTACLE-SINGLE/PLATE,FLUSH MT,20A

RECEPTACLE-BLANK, JUNCTION

INCLUDES COVER & GASKET

SWITH-15A,SINGLE POLE/PLATE

CIRCUIT COLOR LEGEND

110V CIRCUIT

WIRE COLOR

COAXIAL CIRCUIT

A/C CIRCUIT 1

A/C CIRCUIT 2

GENERAL RECPS 1

GENERAL RECPS 2

GENERAL RECPS 3

GENERAL RECPS 4

REFRIGERATOR/
CONVERTER

MICROWAVE

WATER HEATER

WASHER/DRYER

DISHWASHER

RED

GRN

BLU

BRN

PUR

GRY

YEL

BLK

WHT

GLD

SIL

ORG

ORG/ORG

RED/RED

GRN/GRN

PUR/PUR

CABLE INPUT W/O SPLITTER

REAR TV W/O SPLITTER

ANTENNA

FRONT TV

VCR INPUT

EXT ENT CTR

AUX INPUT

SATELLITE PLATE INPUT

SATELLITE PLATE OUTPUT

CABLE INPUT W/SPLITTER

REAR TV W/SPLITTER

VCR OUTPUT

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:
PART LISTING-ELECTRICAL

SHEET 2

PART NO
121339

REV

8

7

6

5

4

3

2

1

121339

2/17/2010

8

7

6

5








4

3


2

1

LAMP ASM-PACKAGE,PANCAKE

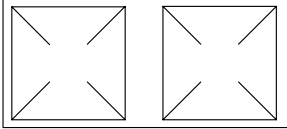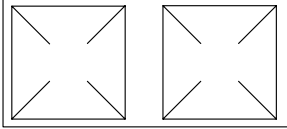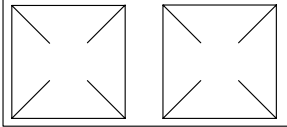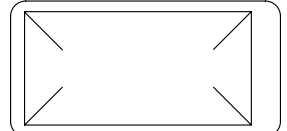NO	PART NUMBER	DESCRIPTION
LF1-1	LAMP 98024-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-1	LAMP 98024-03-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-1	LAMP 98024-05-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-1	LAMP 98024-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N1	LAMP 98024-07-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LF2N1	LAMP 98024-08-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN1	LAMP 98024-09-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,PORCH

NO	PART NUMBER	DESCRIPTION
LEXT-1	LAMP 97917-01-CHT SCREW G67-10-129 (4) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, SURFACE MOUNT BARGMAN 
LEXT-2UL	LAMP 8089-01-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED UL LIST JRV PROD 
LEXT-2CA	LAMP 8089-02-000 SCREW G68-06-10E (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH, RECESSED CAN LIST JRV PROD 
LEXT-3	LAMP 171513-01-CHT SCREW G67-10-129 (2) CONNECTOR 58028-01-000 (2)	LAMP ASM-PORCH SURFACE MOUNT OPTRONICS

87.0

22.2 R

96

CUT OUT IN PANEL

HALOGEN LAMP

LINE SPRING CLIPS UP WITH RELIEF IN CUT OUT

DETAIL CA

LEGEND

PART NUMBER

QUANTITY

XXXX

XX

PART NUMBER

QUANTITY

XXXXXX

XX

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 3





PART NO121339

REV





DWG NO121339


























2/17/2010

LAMP ASM-PACKAGE,PANCAKE

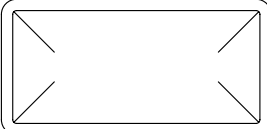NO	PART NUMBER	DESCRIPTION
LF1-2	LAMP 137417-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF2-2	LAMP 137417-04-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO1-2	LAMP 137417-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LO2-2	LAMP 137417-05-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH PROGRESSIVE DYNAMICS INC. 
LF1N2	LAMP 137417-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)	LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 
LFSN2	LAMP 137417-06-CHT SCREW G11-08-16U (6) CONNECTOR 58028-01-000 (2)	LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH PROGRESSIVE DYNAMICS INC. 

LAMP ASM-PACKAGE,HALOGEN

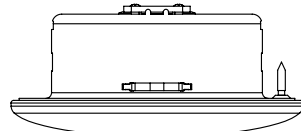NO	PART NUMBER	DESCRIPTION
HAL	LAMP 123775-01-CHT SCREW (SUPPLIED) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING 1 BULB 
HAL-S	LAMP 123775-01-CHT SPACER 123775-02-CHT SCREW G13-06-16U (3) CONNECTOR 58028-01-000 (2)	LAMP ASM-HALOGEN, READING WITH 3/4" SPACER 1 BULB 
HAL-2	LIGHT-HAL,ROUND 165170-01-CHT SCREW G13-06-12B (2) CONNECTOR 58028-01-000 (2)	LIGHT-HALOGEN, ROUND 3" 
HAL-4	LIGHT-HAL,ROUND 165643-01-CHT SCREW G13-05-16B (3) CONNECTOR 58028-01-000 (2) (SEE DETAIL CA)	LIGHT-HALOGEN, ROUND 4.5" 

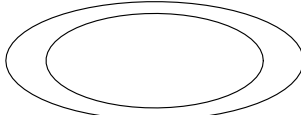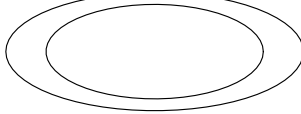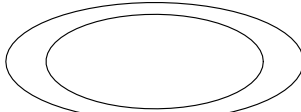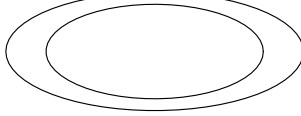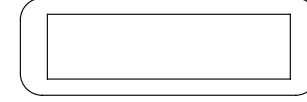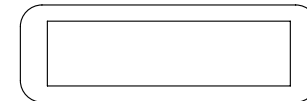8			7			6			5			4			3			2			1																																																																	
LAMP ASM-PACKAGE,FLUORESCENT												LAMP ASM-PACKAGE,MAKEUP LAMP												LAMP ASM-PACKAGE,OTHER												LAMP ASM-PACKAGE,PANCAKE												DWG NO 121339																																						
NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION						NO		PART NUMBER				DESCRIPTION																																																								
FLU-1		LAMP 91936-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH THIN-LITE 						LMU3-1		LAMP 110235-01-CHT SCREW W/SPACER (SUPPLIED) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB (SUPPLIED) PROGRESSIVE DYNAMICS 						LSH-1		LAMP 121935-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-SHOWER PROGRESSIVE DYNAMICS INC. 						LF1-3		LAMP 170693-01-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/SWITCH GUSTAFSON 																																												
FLU-2		LAMP 91936-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/SWITCH THIN-LITE 						LMM3-2		LAMP 123774-03-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 3 BULB GUSTOFSON 						LSH-2		LAMP 164039-01-CHT SCREW G11-08-16U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER 						LF2-3		LAMP 170693-04-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 2 BULB W/SWITCH GUSTAFSON 																																												
FLU-3		LAMP 127327-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 1-12" BULB W/SWITCH THIN-LITE 						LMU3-2		LAMP 138116-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LSH-3		LAMP 164040-01-CHT SCREW G13-07-12U (3) CONNECTOR 58028-01-000 (2)				LIGHT-DOME,SHOWER GLASS 						LO1-3		LAMP 170693-02-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 1 BULB W/SWITCH GUSTAFSON 																																												
FLU-4		LAMP 130338-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT W/SWITCH THIN-LITE 						LMU3-3		LAMP 162446-01-CHT SCREW (SUPPLIED) BULB 123918-01-000 (3) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 3 BULB GUSTOFSON 						LCR-1		LAMP 61424-01-000 SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE RAMCO (RECTANGULAR) 						L02-3		LAMP 170693-05-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTI CLEAR LENS, 2 BULB W/SWITCH GUSTAFSON 																																												
FLU-5		LAMP 153464-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-1		LAMP 110235-02-CHT SCREW G11-08-16U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB PROGRESSIVE DYNAMICS 						LCS-1		LAMP 108354-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-COURTESY,AISLE ITC MARINE (SQUARE) 						LF1N3		LAMP 170693-03-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, FROSTED LENS, 1 BULB W/O SWITCH GUSTAFSON 																																												
FLU-6		LAMP 130338-02-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB SURFACE MOUNT WARM WHITE BULB W/SWITCH THIN-LITE 						LMU4-2		LAMP 138116-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-1		LIGHT-READING 132427-01-CHT SCREW SUPPLIED W/ LIGHT CLIP-U 141395-02-CHT (2) CONNECTOR 58028-01-000 (2)				LIGHT-READING,SWIVEL,ROUND 1 BULB 						LFSN3		LAMP 170693-06-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, SINGLE FROSTED LENS, 2 BULB W/O SWITCH GUSTAFSON 																																												
FLU-7		LAMP 153464-05-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336						LMU4-3		LAMP 162446-02-CHT SCREW (SUPPLIED) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/O MIRROR) 4 BULB GUSTOFSON 						READ-2		LIGHT-READING 128786-02-CHT SCREW G11-08-16J (2) BULB 123917-01-000 CONNECTOR 58028-01-000 (2)				LIGHT,READING,SWIVEL 						LOS3		LAMP 170693-07-CHT SCREW G11-08-24U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 2 BULB W/O SWITCH GUSTAFSON 																																												
FLU-8		LAMP 173072-01-CHT SCREW G11-08-12U (2) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" ONE 8 WATT BULB W/SWITCH OPTRONICS 						LMM4-2		LAMP 123774-01-CHT SCREW G11-08-16U (2) BULB 123918-01-000 (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-MAKEUP (W/MIRROR) 4 BULB GUSTOFSON 						READ-3		LIGHT-READING 170833-01-CHT SCREW SUPPLIED W/LIGHT CONNECTOR 58028-01-000 (2)				LIGHT,READING,HAL 						LO1N3		LAMP 170693-08-CHT SCREW G11-08-16U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM, OPTICLEAR LENS, 1 BULB W/O SWITCH GUSTAFSON 																																												
FLUN1		LAMP 91936-04-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH THIN-LITE 																																																																																
FLUN2		LAMP 91936-03-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH THIN-LITE 																																																																																
FLUN3		LAMP 153464-01-CHT SCREW G11-08-12U (4) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																																
FLUN4		LAMP 153464-03-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH COOL WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																																
FLUN5		LAMP 153464-06-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 18" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 480																																																																																
FLUN6		LAMP 153464-04-CHT SCREW G11-08-12U (6) CONNECTOR 58028-01-000 (2)				LAMP ASM-FLUORESCENT 12" 2 BULB W/O SWITCH WARM WHITE BULB THIN-LITE  CUTOUT-122 X 336																																																																																

87654321

DWG NO121339

ANTENNA ASM-PACKAGE

NO	PART NUMBER	DESCRIPTION
ANT-1	ANTENNA 76319-24-000 HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) CLIP 80734-02-000	ROOF MOUNT TV ANTENNA ASM 25.5" MAST 600 MAX COAX LENGTH
ANT-2	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA	ROOF MOUNT TV ANTENNA ASM 44.5" MAST 600 MAX COAX LENGTH
ANT-2W	ANTENNA 076319-23-000(UP TO 05-31-09) 173519-01-CHT(AFTER 06-01-09) HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA WEDGE 76319-26-000	ROOF MOUNT TV ANTENNA ASM 44.5" MAST 600 MAX COAX LENGTH
ANTA-1	ANTENNA 158270-01-CHT BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-WINGMAN, ACCESSORY 173519-03-CHT	ROOF MOUNT TV ANTENNA ASM AUTOMATIC 600 MAX COAX LENGTH
ANT-3	ANTENNA-TV ROOF MNT.ROUND 167632-01-CHT PLATE-ROOF, CABLE ENTRY 146488-01-000 SCREW G67-10-129 (10) CABLE ASM-COAX 87105-01-006 ADAPTER 82134-01-000	ROOF MOUNT OMNI- DIRECTIONAL ANTENNA MOUNTING SCREWS SUPPLIED WITH ANTENNA 600 MAX COAX LENGTH
ANT-4	ANTENNA 173519-01-CHT HARDWARE-INTERIOR 76319-25-000 BUMPER 69726-02-000 (2) ADAPTER SUPPLIED W/ANTENNA ANTENNA-HANDLE EXTENSION 173519-02-CHT	ROOF MOUNT TV ANTENNA ASM 44.5" MAST 600 MAX COAX LENGTH

ANTENNA ASM-PACKAGE

ANTEXT-1	CABLE ASM-EXTENS 77069-02-000	RADIO ANTENNA CABLE EXTENSION 2400MM USABLE LENGTH
ANTKIT-1	ADAPTER-PLATE 76319-06-000 SCREW G11-08-08T (6) CLIP-WIRE 80734-02-000 SCREW G11-08-08T	PLATE ASM-ADAPTERS CABLE ROOF MOUNTING PLATE W/ CABLE-CABLE ADAPTER, FITTINGS, AND CABLE RETAINING CLIP
ANT-R	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT ANTENNA 109889-04-000 BRACKET-ANTENNA GROUND 147741-01-CHT	ROOF MOUNT RADIO ANTENNA
ANTEXT-2	CABLE ASM-EXTENS 77069-03-000	RADIO ANTENNA CABLE EXTENSION 6600 MM USABLE LENGTH
ANT-A	ANTENNA-RADIO 90944-01-000 EXTENDER-SHAFT 76 MM 171825-01-000 (2) BRACKET-GROUND 147741-01-CHT NUT OMD01K-06-000 (2)	ROOF MOUNT RADIO ANTENNA THICK ROOF

SATELLITE DISH INSTL

DA-2	SATELLITE DISH 163598-01-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP
DI-2	SATELLITE DISH 154474-04-CHT PLATE-ROOF,CABLE ENTRY QUAD 146488-03-000 CABLE ASM-COAX 9" 163598-04-000 ADAPTOR-CABLE TO CABLE 82134-01-000 SCREW G67-10-12U (8) (FOR PLATE) SCREW G39-10-12U (12) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM AUTOMATIC SETUP
DM-2	SATELLITE DISH 137135-05-000 PLATE-ROOF,ENTRY (SUPPLIED WITH SATELLITE DISH) SCREW G67-10-12U (8) (FOR ROOF PLATE) SCREW G67-10-12U (10) (FOR SATELLITE DISH)	SATELLITE DISH ANTENNA ASM MANUAL SETUP

SENSORS

NO	PART NUMBER	DESCRIPTION
LPGD	LP GAS DETECTOR 150138-03-CHT SCREW G68-06-10U (2)	DETECTOR-LP GAS

PANELS

NO	PART NUMBER	DESCRIPTION
SOLAR	PANEL-SOLAR 10 WATT 151647-01-000 (UP TO 03-14-10) 176161-01-000 (AFTER 03-15-10) SCREW G11-08-12U (4)	SOLAR PANEL

LEGEND

PART NUMBER

QUANTITY

PART NUMBER

QUANTITY

1

ADD BUMPER TO BOTTOM SIDE OF ANTENNA WINGS TO PREVENT DAMAGE TO ROOF.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 5

PART NO121339

REV

2/17/2010

8

7

6

5

4

3

2

1

D

C

B

A

1

2

3

4

5

6



7

8



DWG NO

121339






RECEPTACLE PACKAGE-GFI

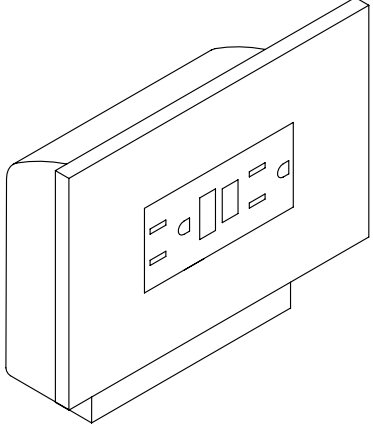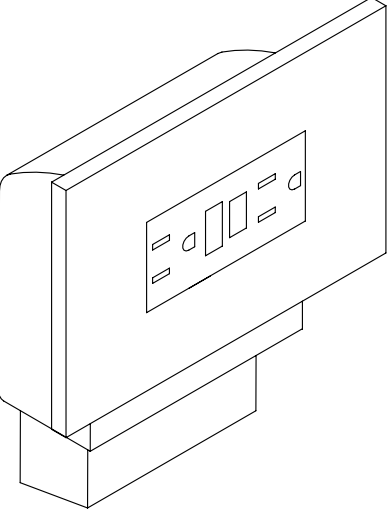
NO	PART NUMBER	DESCRIPTION
<u>GFI</u> US	RECEPTACLE 163319-01-CHT BOX 91910-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI</u> CAN	RECEPTACLE 163319-01-CHT BOX 91910-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

RECEPTACLE PACKAGE-GFI

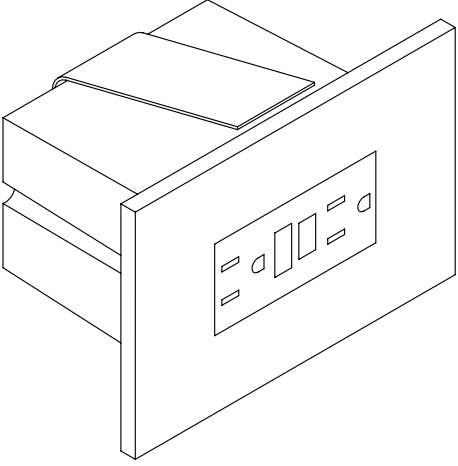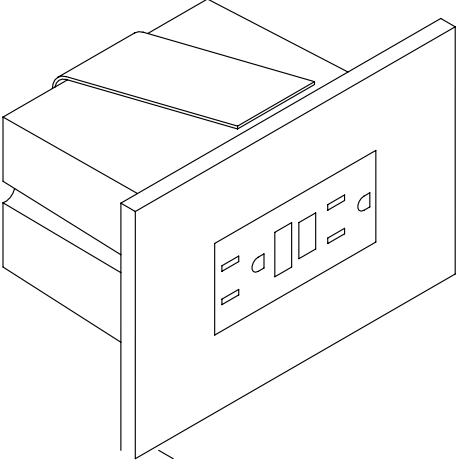NO	PART NUMBER	DESCRIPTION
<u>GFI-1</u> US	RECEPTACLE 163319-01-CHT BOX 133070-01-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR US APPLICATION 
<u>GFI-1</u> CAN	RECEPTACLE 163319-01-CHT BOX 133070-02-000 WIRE-BONDING 133678-03-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 TUBING-VINYL 8041-02-000 (300MM) ¹	GFI RECEPTACLE WITH COVER AND BOX FOR CANADA APPLICATION 

SPACERS

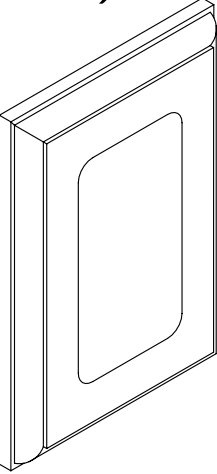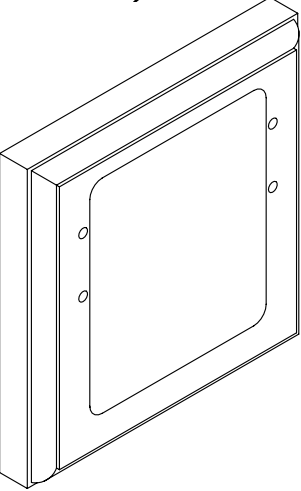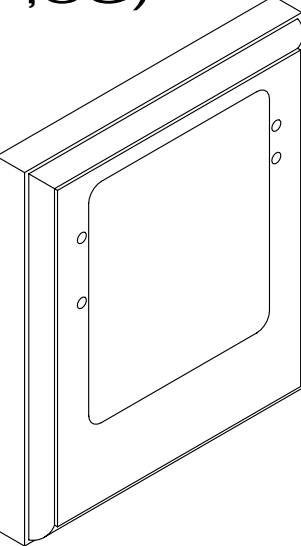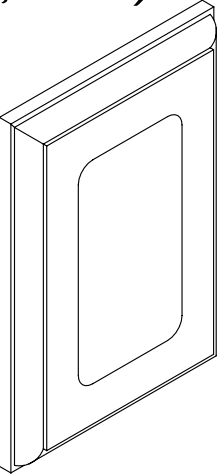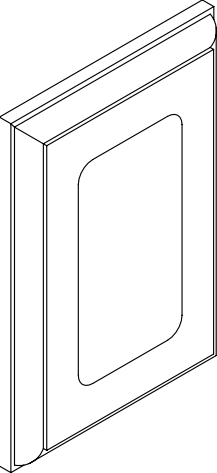NO	PART NUMBER	DESCRIPTION
SP-01	SPACER 102568-01-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,OG) 
SP-02	SPACER 102568-02-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (US) (WOOD,VYL RAP,OG) 
SP-03	SPACER 102568-03-XXX	WOOD SPACER FOR CEILING MOUNTED A/C PREP BOX (CANADA) (WOOD,VYL RAP,OG) 
SP-04	SPACER 133713-01-CHT	STANDARD 110V RECEPTACLE SPACER (WOOD,VYL RAP,BEV) 
SP-05	SPACER 133713-20-XXX	STANDARD 110V RECEPTACLE SPACER (WOOD,BEV) 

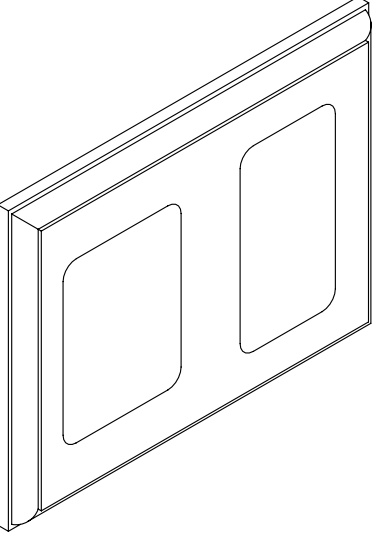SP-21	SPACER 126052-01-XXX	WOOD SPACER FOR 1 - 110V RECEPTACLE AND 1 - REAR TV (12V) JACK (WOOD,BEV) 
-------	-------------------------	---

LEGEND

MISC.	SPACER
PART NUMBER LISTING XXXX XXX	XXXX PART NUMBER

1 APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE:

PART LISTING-ELECTRICAL

SHEET 6

PART NO 121339

REV

2/17/2010

87654321

D

C



B

A


1

DWG NO121339


PREP-A/C, RECESSED (W/OUT FACTORY A/C)

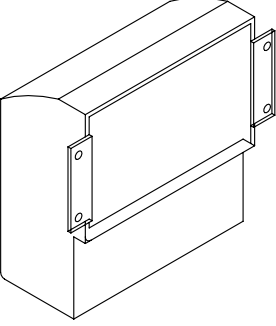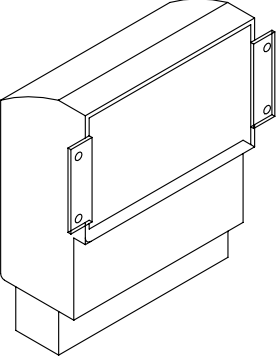NO	PART NUMBER	DESCRIPTION
PREP A/C-US	BOX 91910-02-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). US APPLICATION (RECESSED IN ROOF) 
PREP A/C-CAN	BOX 91910-01-000 COVER 84099-02-CHT LABEL 91243-01-000 SCREW G13-07-12B (4) CONNECTOR 8313-01-000 (3)	BOX AND EQUIPMENT USED FOR A/C PREP (W/OUT FACTORY A/C). CANADA APPLICATION (RECESSED IN ROOF) 


CONNECTION BOX-POWER CORD

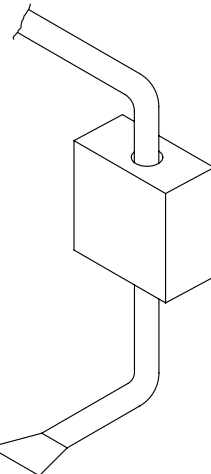NO	PART NUMBER	DESCRIPTION
J-PC 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 CONNECTOR 8314-01-000 (3) CONNECTOR 8356-02-000 CONNECTOR (PC) 8355-01-000	CONNECTION BOX IN POWER CORD COMPT FOR POWER CORD (US & CA APPLICATION) 
J-PC 30-US		
J-PC 30-CA		


CONNECTION BOX-GENERATOR RECEPTACLE

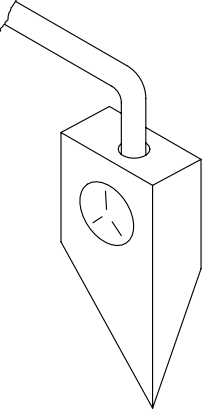NO	PART NUMBER	DESCRIPTION
J-RCP 30	BOX 8289-01-000 RECEPTACLE 24924-02-000 COVER 69238-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 133678-04-000 CONNECTOR 8314-01-000 TUBING-VINYL 8041-02-000 (150MM)	CONNECTION BOX IN POWER CORD COMPT FOR THE GENERATOR RECEPTACLE (US & CA APPLICATION) 
J-RCP 30-US		
J-RCP 30-CA		

CONNECTION BOX, GENERATOR SERVICE FEED

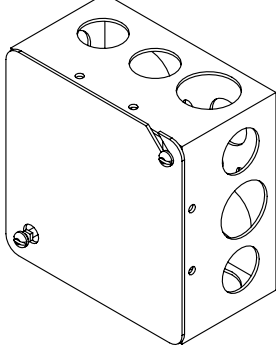NO	PART NUMBER	DESCRIPTION
J-GEN 30	BOX 8289-01-000 COVER 8294-01-000 SCREW G67-10-10B (2) WIRE ASM-GROUND 133678-02-000 WIRE NUT-GREY 8314-01-000 (3) CONNECTOR-WIRE 8356-01-000	BOX AND EQUIPMENT USED FOR CONNECTING THE GENERATOR LEADS TO THE SERVICE ENTRANCE WIRES (US & CA APPLICATION) 
J-GEN 30-US		
J-GEN 30-CA		

PREP-A/C, SURFACE (W/OUT FACTORY A/C)

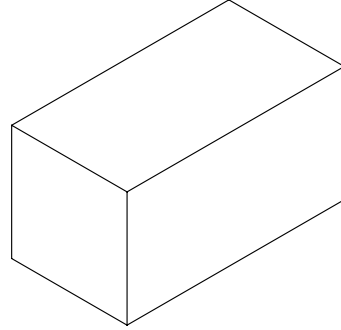NO	PART NUMBER	DESCRIPTION
PREP SURF	BOX 93603-01-000 COVER 53337-01-000 LABEL 91243-01-000 WIRE-BONDING 8019-01-000 SCREW G11-08-12B (2) TERMINAL 8328-01-000 CONNECTOR 8313-01-000 (2) CONNECTOR 8311-01-000	SURFACE MOUNT, US AND CANADA, BOX AND EQUIPMENT FOR A/C PREP (W/OUT FACTORY A/C). TYPICALLY LOCATED ON OVERHEAD CABINET INNER WALL OR ON CEILING. 

LEGEND

PART NUMBER

LISTING

XXXX

XX

NOTES:

1 APPLY TUBING TO BARE GROUND WIRES.

FIRST USED

96 MH'S

DO NOT SCALE DRAWING

TITLE: PART LISTING-ELECTRICAL

SHEET 7



PART NO 121339

REV

87654321

1

2/17/2010

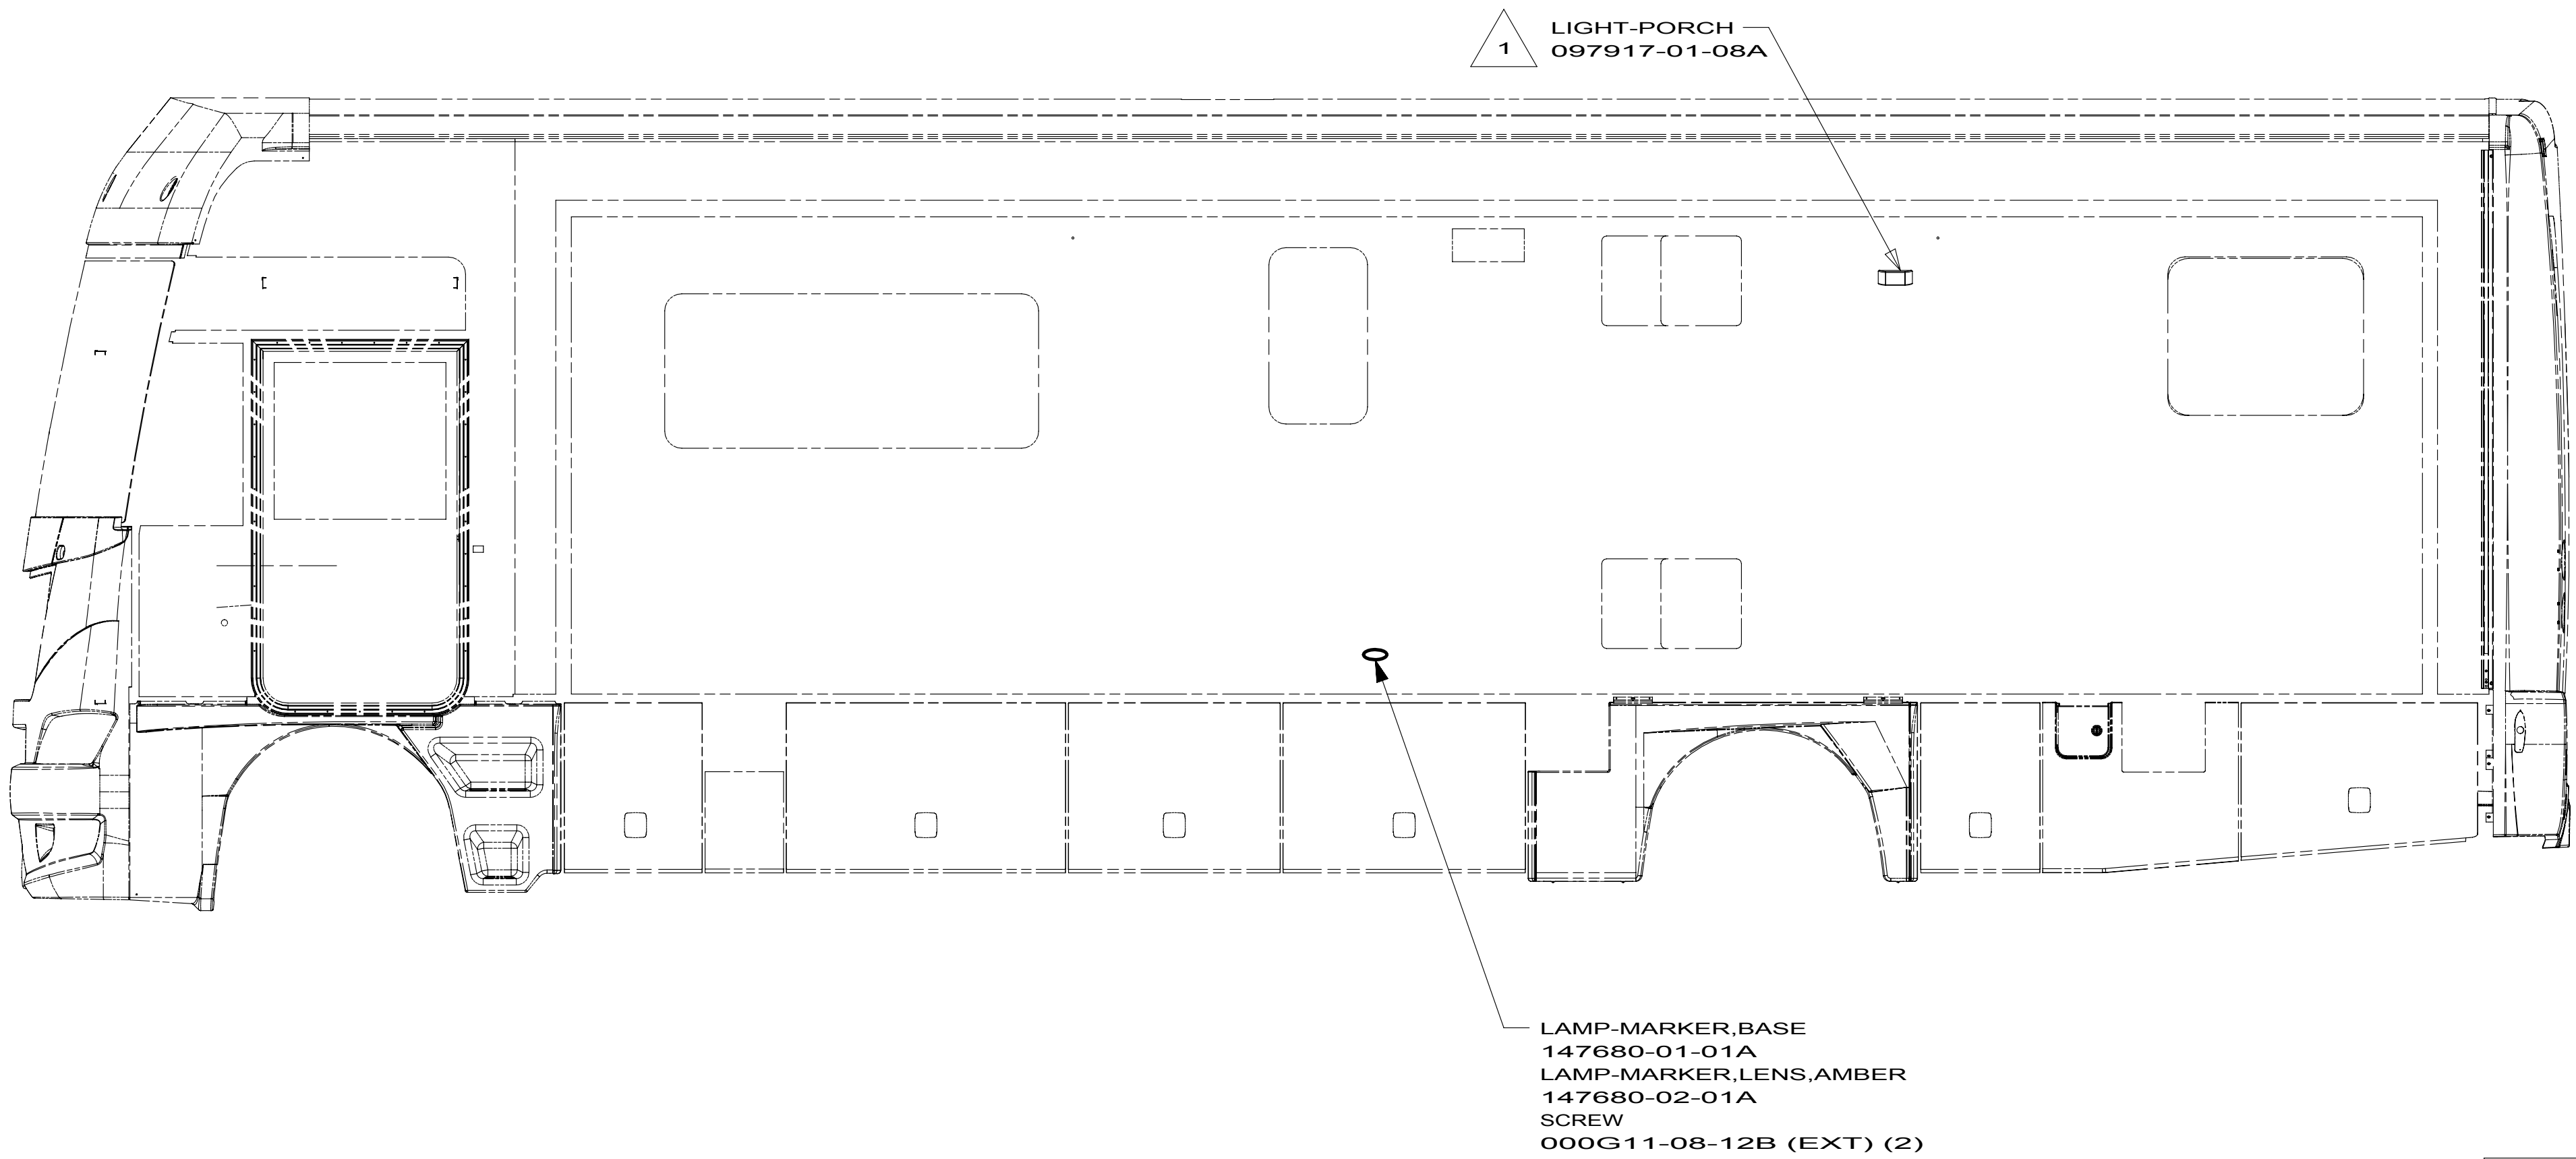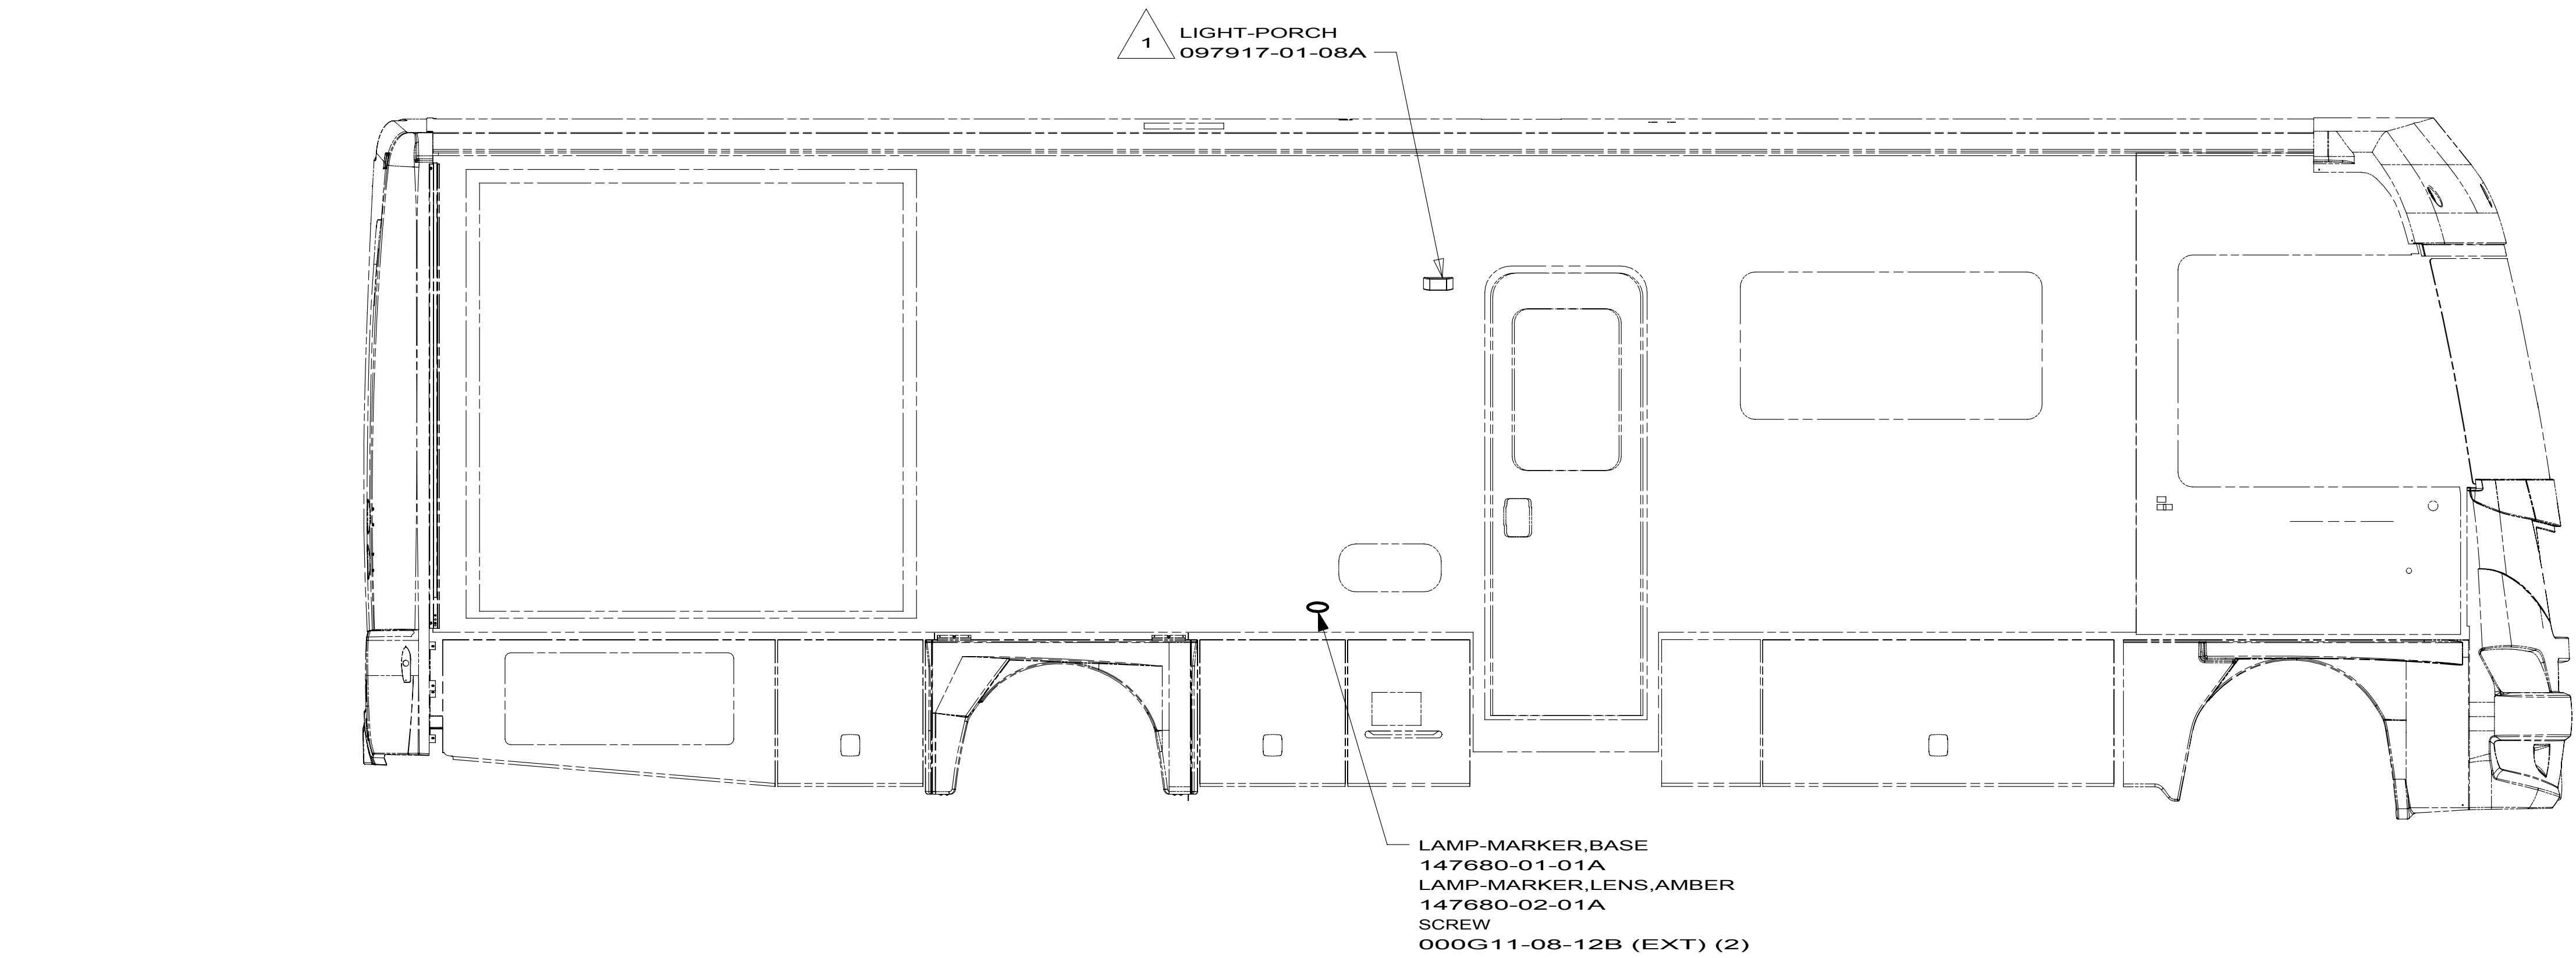

1 NOT USED ON SHELLS.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

WINNEBAGO INDUSTRIES

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHKD	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	
DSNR	
FIRST USED	
10 J-SERIES	
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-EXTERIOR LAMPS	
SHEET 1 OF 3	PART NO 171037 REV
REF:	1 3/18/2010

LAMP ASM-MARKER,BASE
147680-01-01A (5)
LAMP ASM-MARKER,LENS,AMBER
147680-02-01A (5)
SCREW
000G39-08-08T (EXT)(10)

WIRE ASM-CLEARANCE LAMPS
129943-01-000

2 PIN HOUSING TO
WIRE ASM-IP,MAIN

16L 16Z
WIRE ASM-HEADLAMP,FD
141678-11-000
1PS 1PV
WIRE ASM-HEADLAMP,WH
141678-13-000
1LL
WIRE ASM-HEADLAMP,
FRED LEFT
141678-15-000 (UP TO 01-12-10)
141678-17-000 (AFTER 01-13-10)
WIRE ASM-HEADLAMP,
FRED RIGHT
141678-16-000 (UP TO 01-12-10)
141678-18-000 (AFTER 01-13-10)

LAMP-CLEARANCE,RED
102520-02-000 (5)
SCREW
000G39-08-16T (10)
GASKET
102541-01-000 (5)
BULB
036196-01-000 (5)

WIRE ASM-
TAILLAMPS
149622-07-000(UP TO 11-01-09)
149622-10-000(AFTER 11-02-09)
149622-08-000(UP TO 11-01-09)
149622-11-000(AFTER 11-02-09)
149622-09-000(UP TO 11-01-09)
149622-12-000(AFTER 11-02-09)

LIGHT-THIRD BRAKE,LED
151076-01-000 (2)
SCREW
000G39-06-16T (4)

LAMP ASM-STOP/TURN/TAIL
146205-02-000(2)(UP TO 11-01-09)
174698-01-000(2)(AFTER 11-02-09)
BULB
112708-01-000(2)(UP TO 11-01-09)
SCREW
000G39-08-16T(4)

LAMP ASM-STOP/TURN/TAIL
146205-01-000(2)(UP TO 11-01-09)
174698-01-000(2)(AFTER 11-02-09)
BULB
112708-01-000(2)(UP TO 11-01-09)
SCREW
000G39-08-20T(4)

LAMP-MARKER,RED
117826-01-000 (2)
GASKET-MARKER LIGHT
117826-03-000 (2)
BULB
036196-01-000 (2)
SCREW
000G11-08-12B (EXT) (4)

REFLECTOR
106646-02-000 (2)
(ADHESIVE BACKING)

LAMP ASM-BACKUP,CLEAR
152352-01-000 (2)
BULB
037934-01-000 (2)
SCREW
000G11-06-24B (8)

LAMP-LICENSE PLATE
087201-01-000
SCREW
000G11-06-12B (EXT)(2)

CONNECTOR-TRAILER
157593-01-000
SCREW
101618-01-000 (4)

TO GROUND STUD
TP,RRJ
(LOCATED ON BACKSIDE
OF GENERATOR OUTRIGGER)
NUT-GROUND
000D39-05-00B


2 PIN HOUSING
TO WIRE ASM-CHASSIS

- 6 LAMP WILL ONLY BE USED AS A TAILLAMP.
- 5 MOUNT LAMP ASM SO THAT THE LABEL TOP IS IN THE UP POSITION.
- 4 CLEAN PAINT OFF METAL (BOLT) BEFORE CONNECTING
GROUND TO INSURE CONTACT.
- 3 CONNECTOR-PLUG,TRAILER 146246-01-000 TO
BE SUPPLIED LOOSE IN COACH WITH 240
- 2 SECURE WIRE ASM APPROX. EVERY 450 TO BACKWALL BRACKETS.
USE TIE-WIRE 008343-01-000 OR 093147-01-000 AS APPROPRIATE.
- 1 GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS AND BUNDLE
AND SECURE WITH TIE-WIRE 008343-01-000 OR 093147-01-000.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-EXTERIOR LAMPS		
SHEET 2	PART NO 171037	REV

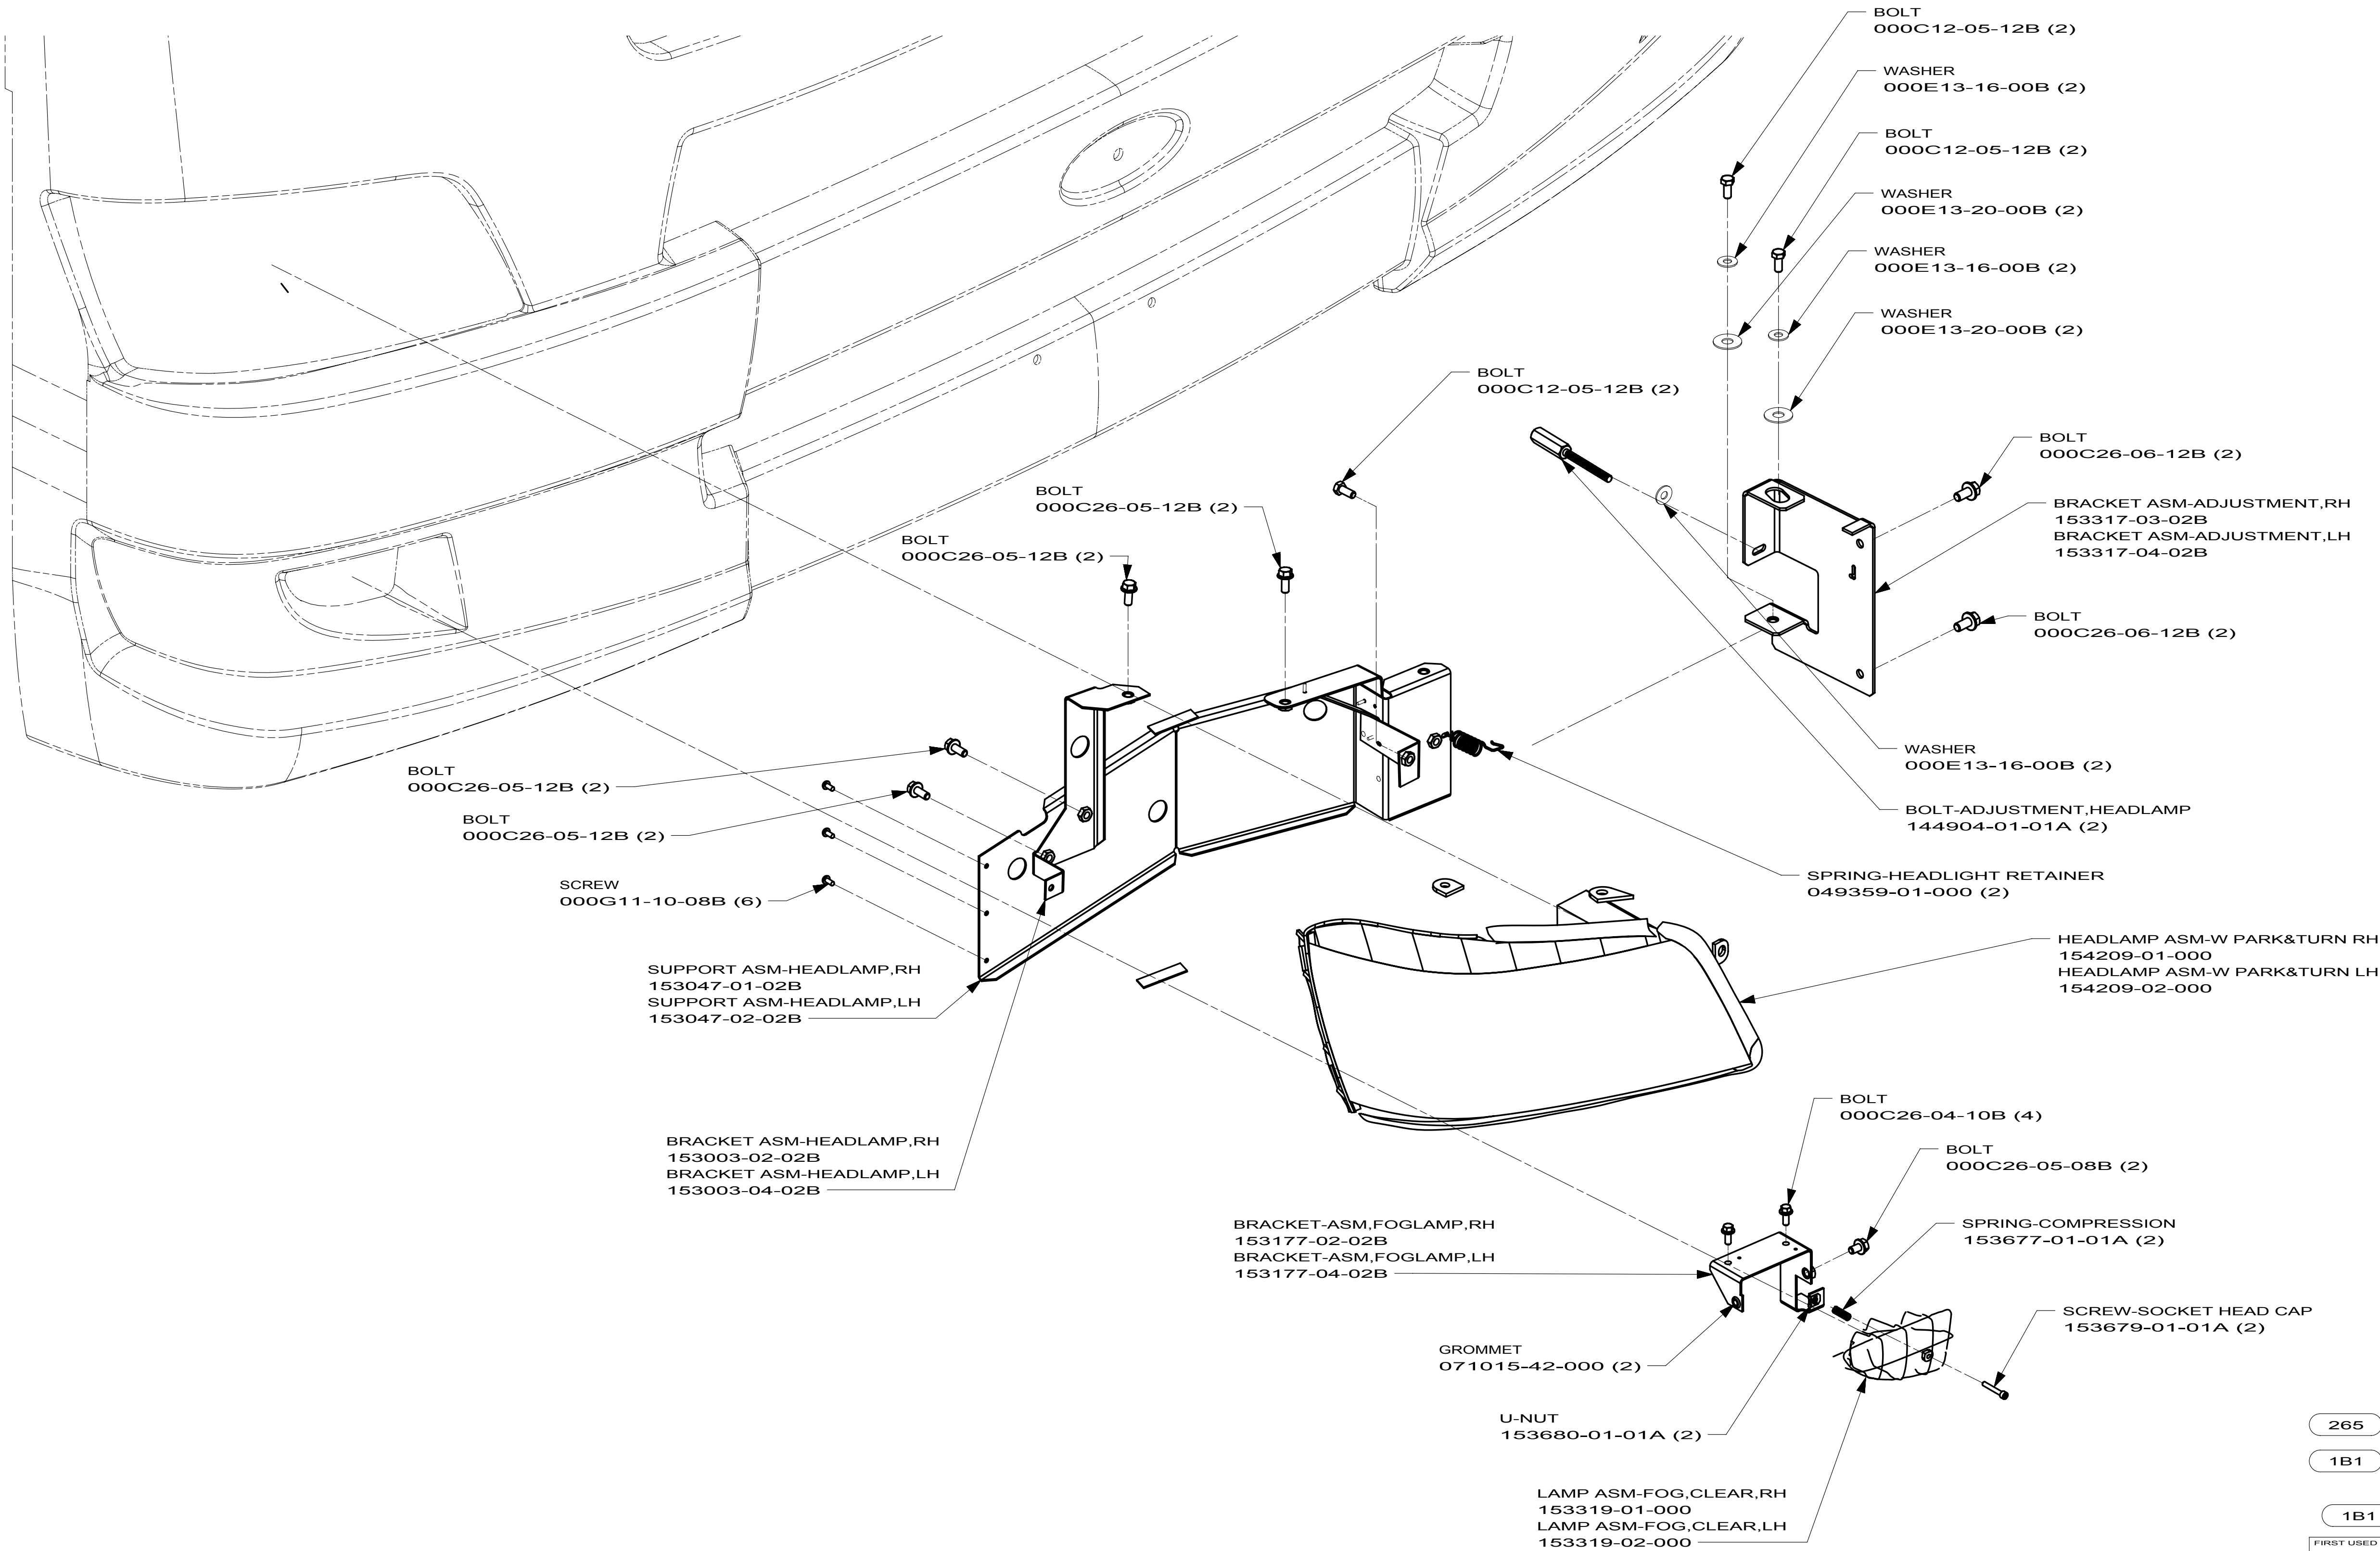

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265



FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
WIRING INSTL-EXTERIOR LAMPS		
SHEET 3	PART NO 171037	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

KEY	PART NUMBER	U/M	DESCRIPTION
	097917-01-700	EA	LENS-LIGHT, CLEAR

097917-01-08A/09A
VENDOR NO.
30-78-021

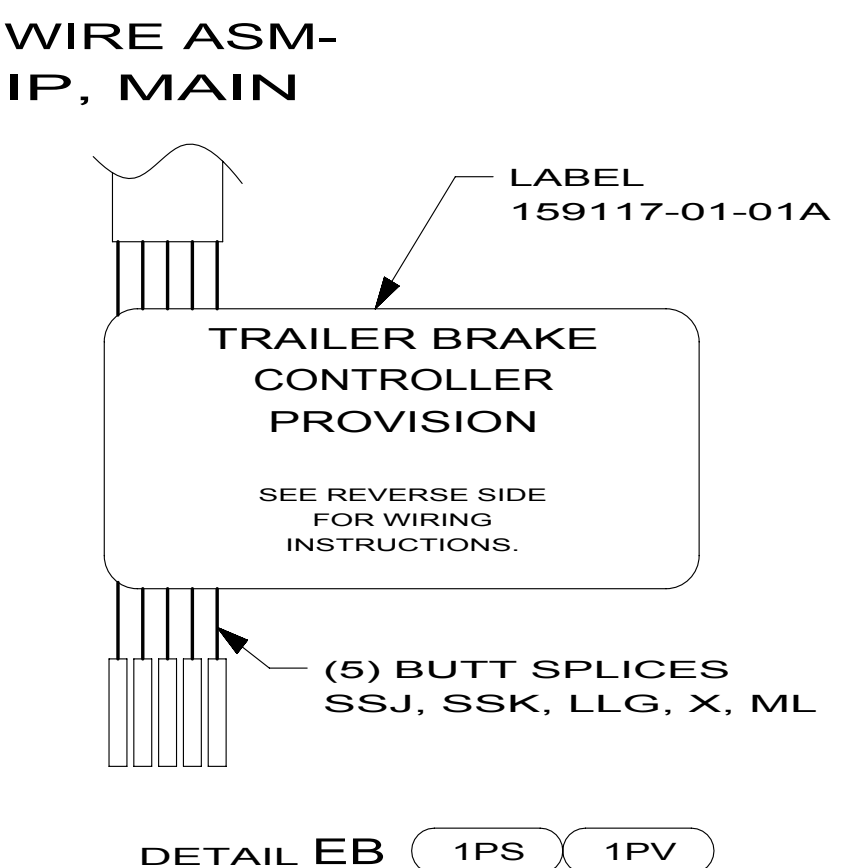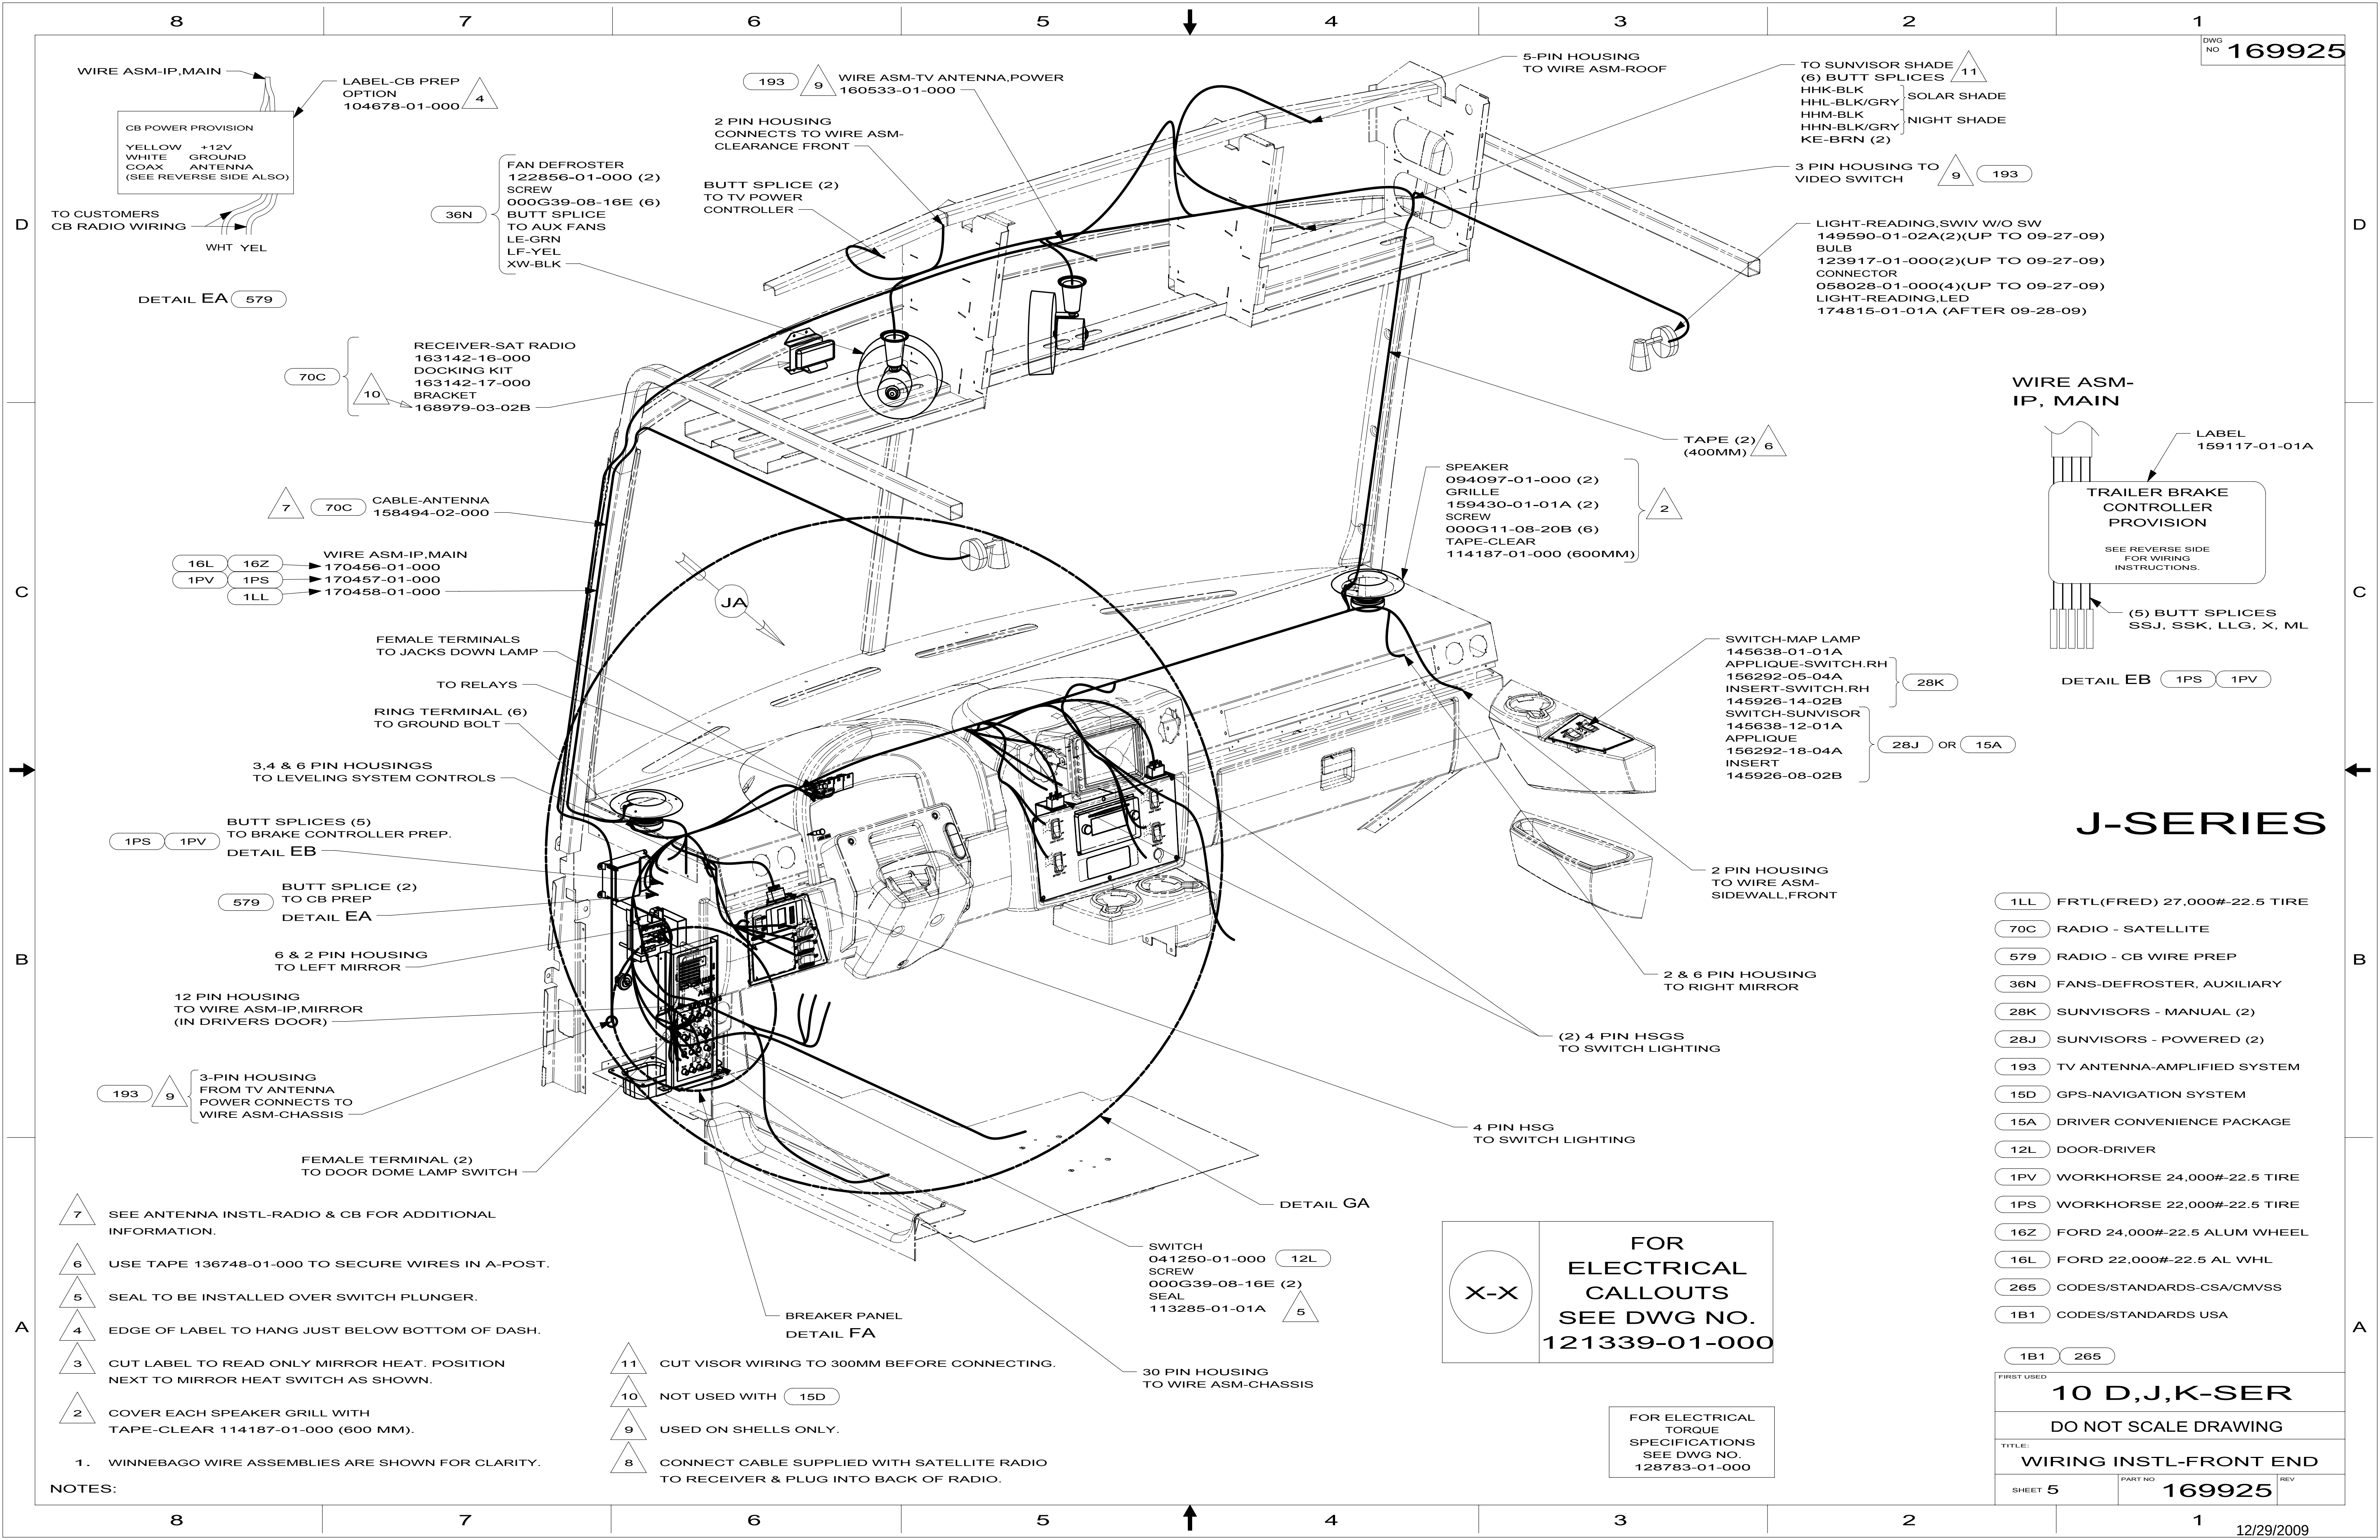

J-SERIES

- 1LL FRTL(FRED) 27,000#-22.5 TIRE
- 70C RADIO - SATELLITE
- 579 RADIO - CB WIRE PREP
- 36N FANS-DEFROSTER, AUXILIARY
- 28K SUNVISORS - MANUAL (2)
- 28J SUNVISORS - POWERED (2)
- 193 TV ANTENNA-AMPLIFIED SYSTEM
- 15D GPS-NAVIGATION SYSTEM
- 15A DRIVER CONVENIENCE PACKAGE
- 12L DOOR-DRIVER
- 1PV WORKHORSE 24,000#-22.5 TIRE
- 1PS WORKHORSE 22,000#-22.5 TIRE
- 16Z FORD 24,000#-22.5 ALUM WHEEL
- 16L FORD 22,000#-22.5 AL WHL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D,J,K-SER		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 5	PART NO. 169925	REV

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000







FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

- 7 SEE ANTENNA INSTL-RADIO & CB FOR ADDITIONAL INFORMATION.
- 6 USE TAPE 136748-01-000 TO SECURE WIRES IN A-POST.
- 5 SEAL TO BE INSTALLED OVER SWITCH PLUNGER.
- 4 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.
- 3 CUT LABEL TO READ ONLY MIRROR HEAT. POSITION NEXT TO MIRROR HEAT SWITCH AS SHOWN.
- 2 COVER EACH SPEAKER GRILL WITH TAPE-CLEAR 114187-01-000 (600 MM).

1. WINNEBAGO WIRE ASSEMBLIES ARE SHOWN FOR CLARITY.

NOTES:

- 11 CUT VISOR WIRING TO 300MM BEFORE CONNECTING.
- 10 NOT USED WITH 15D
- 9 USED ON SHELLS ONLY.
- 8 CONNECT CABLE SUPPLIED WITH SATELLITE RADIO TO RECEIVER & PLUG INTO BACK OF RADIO.

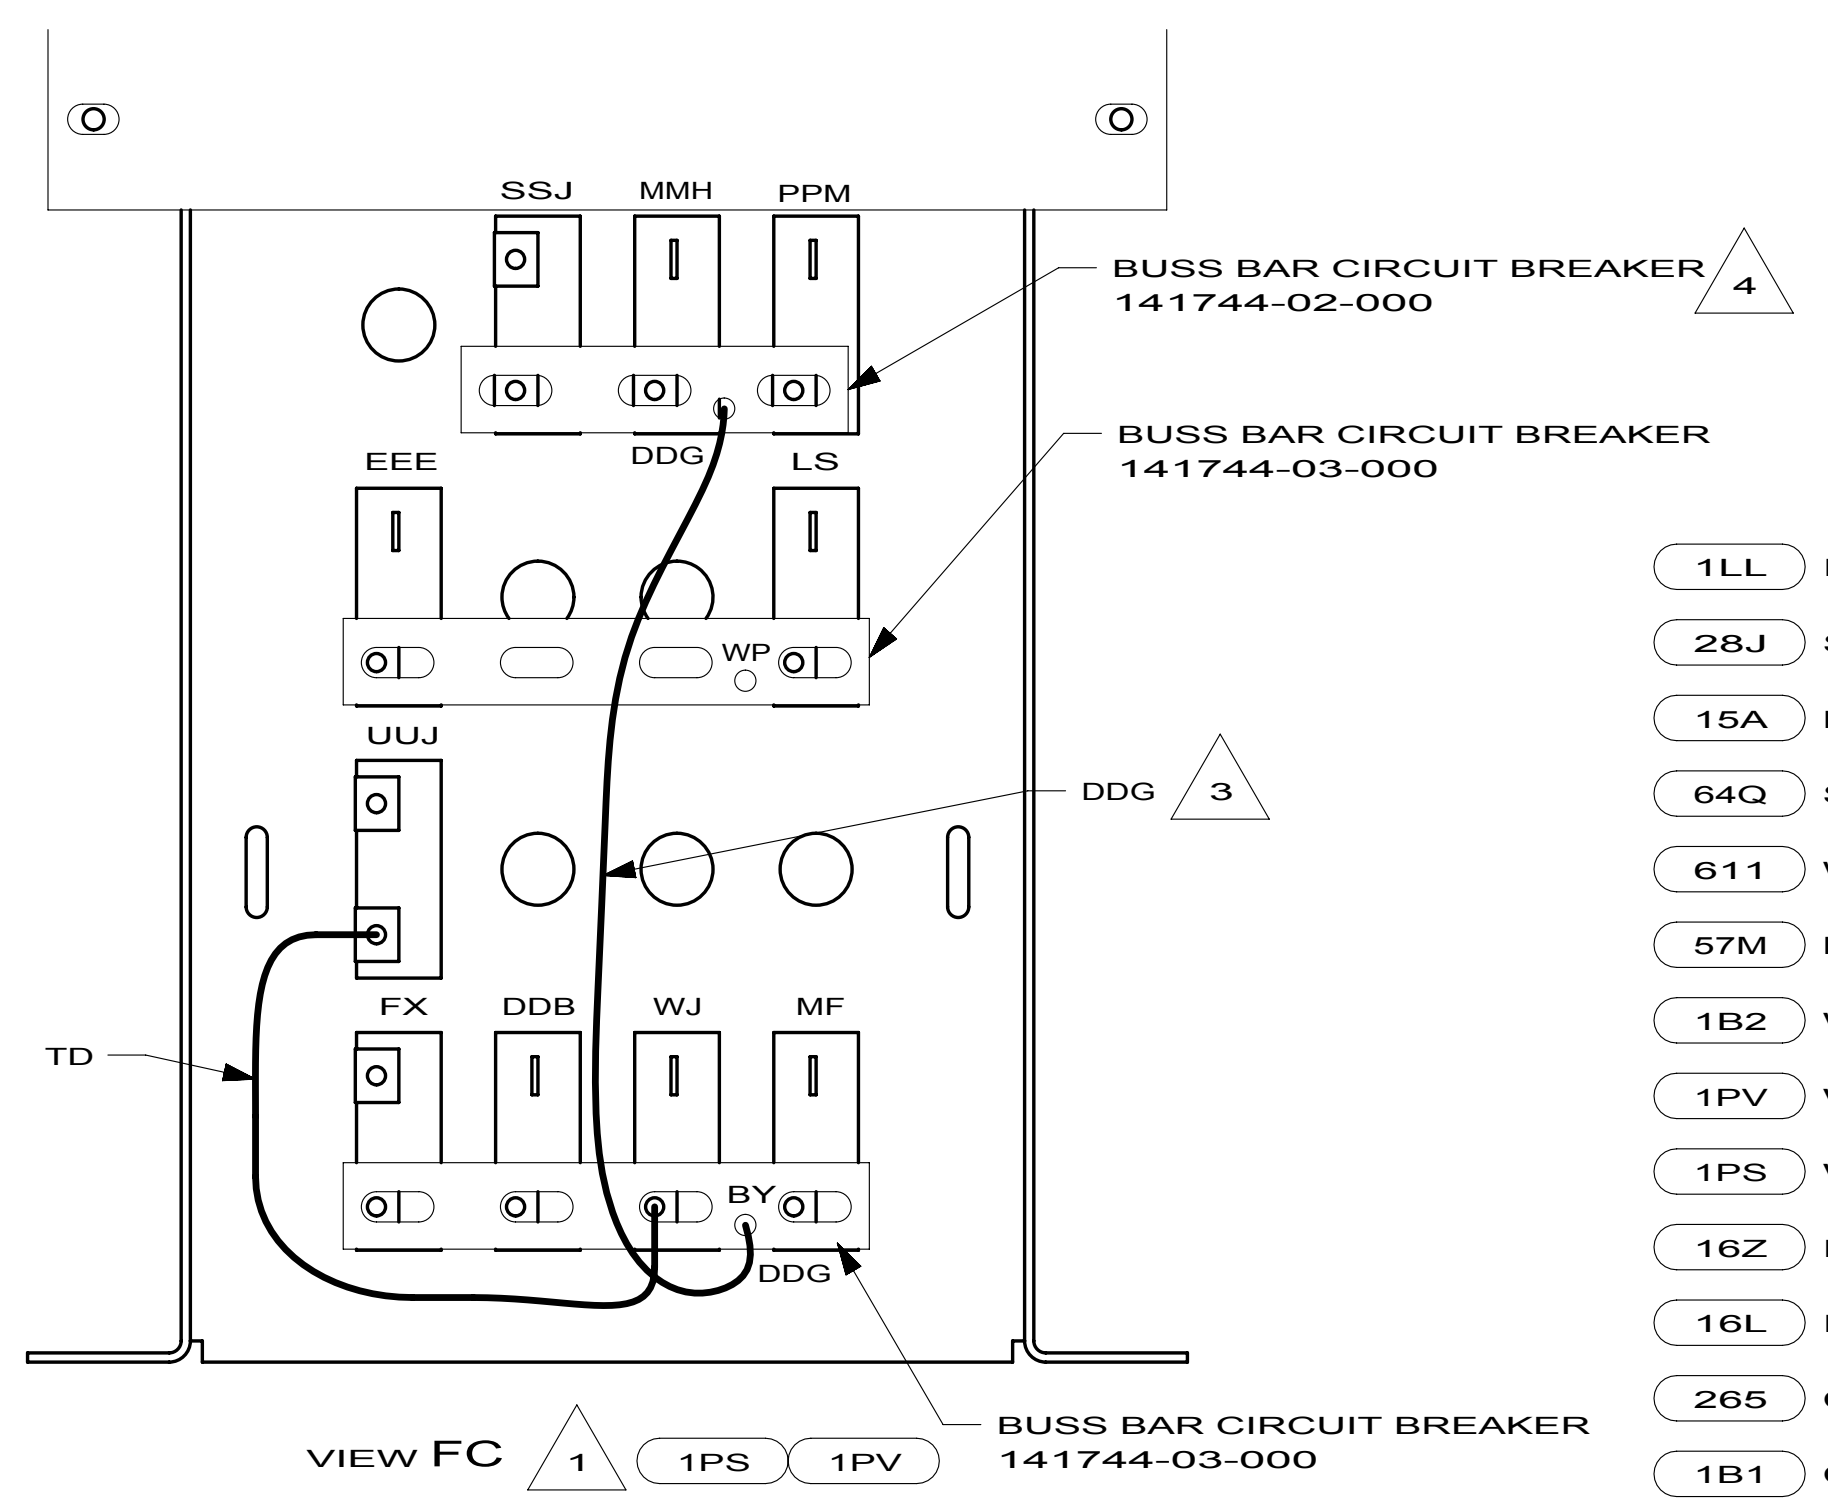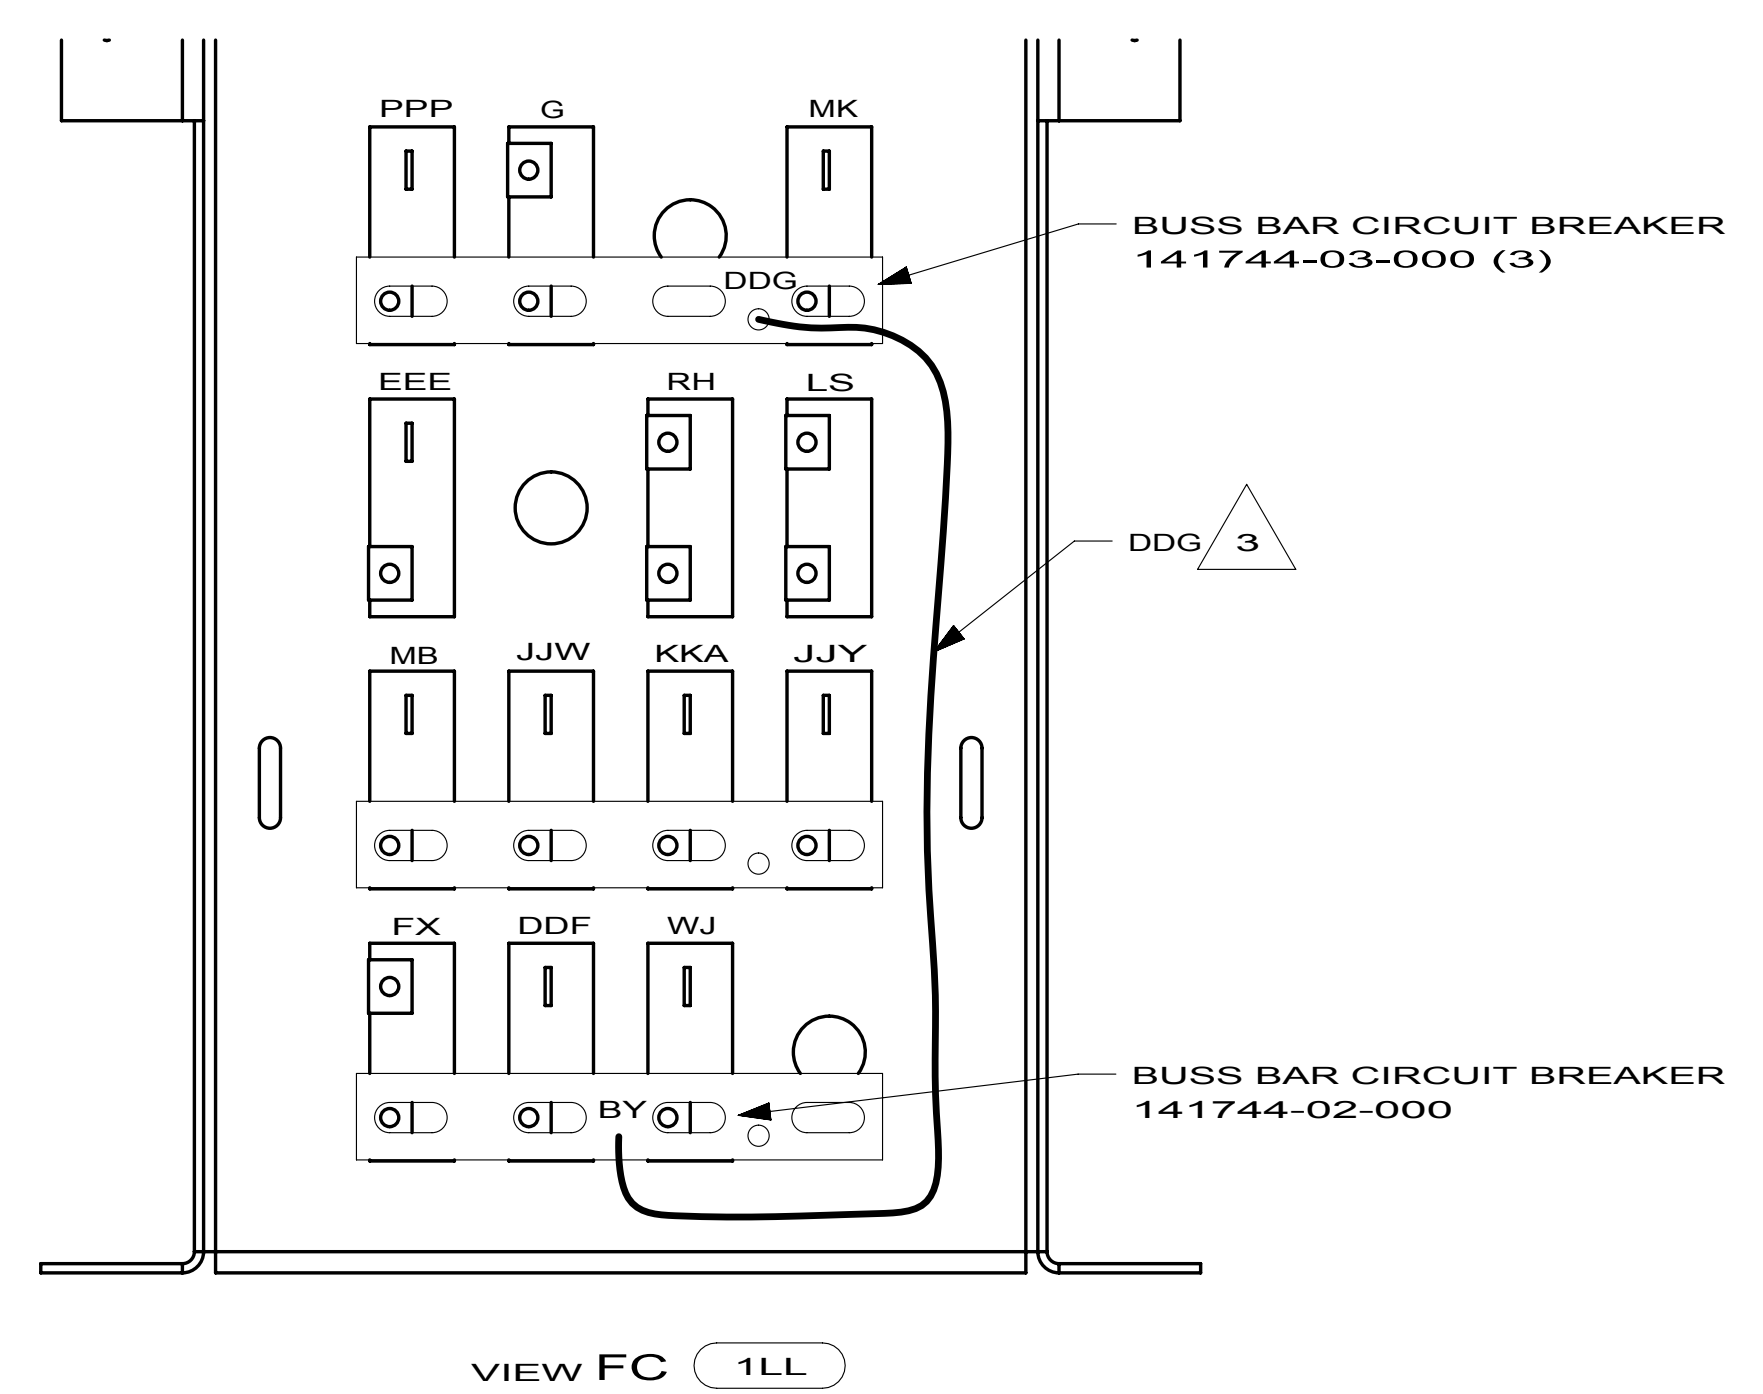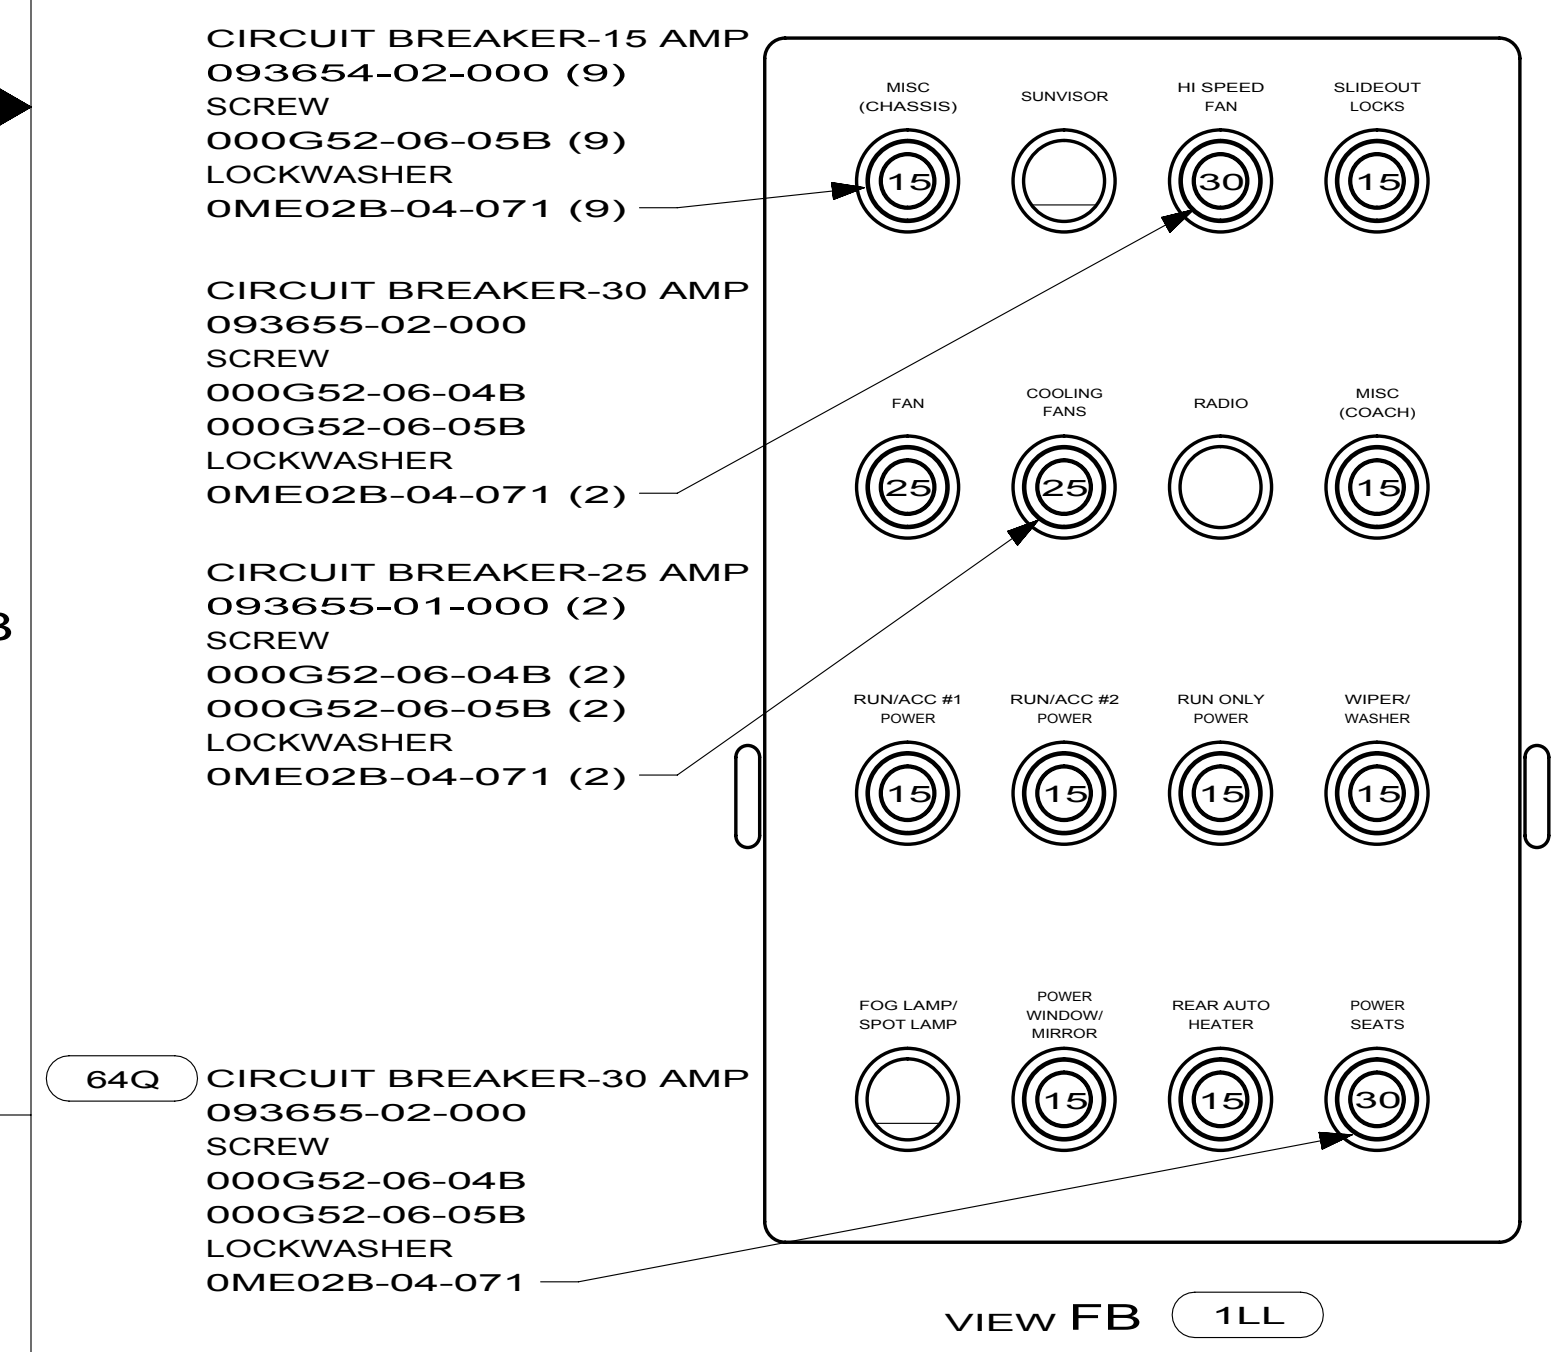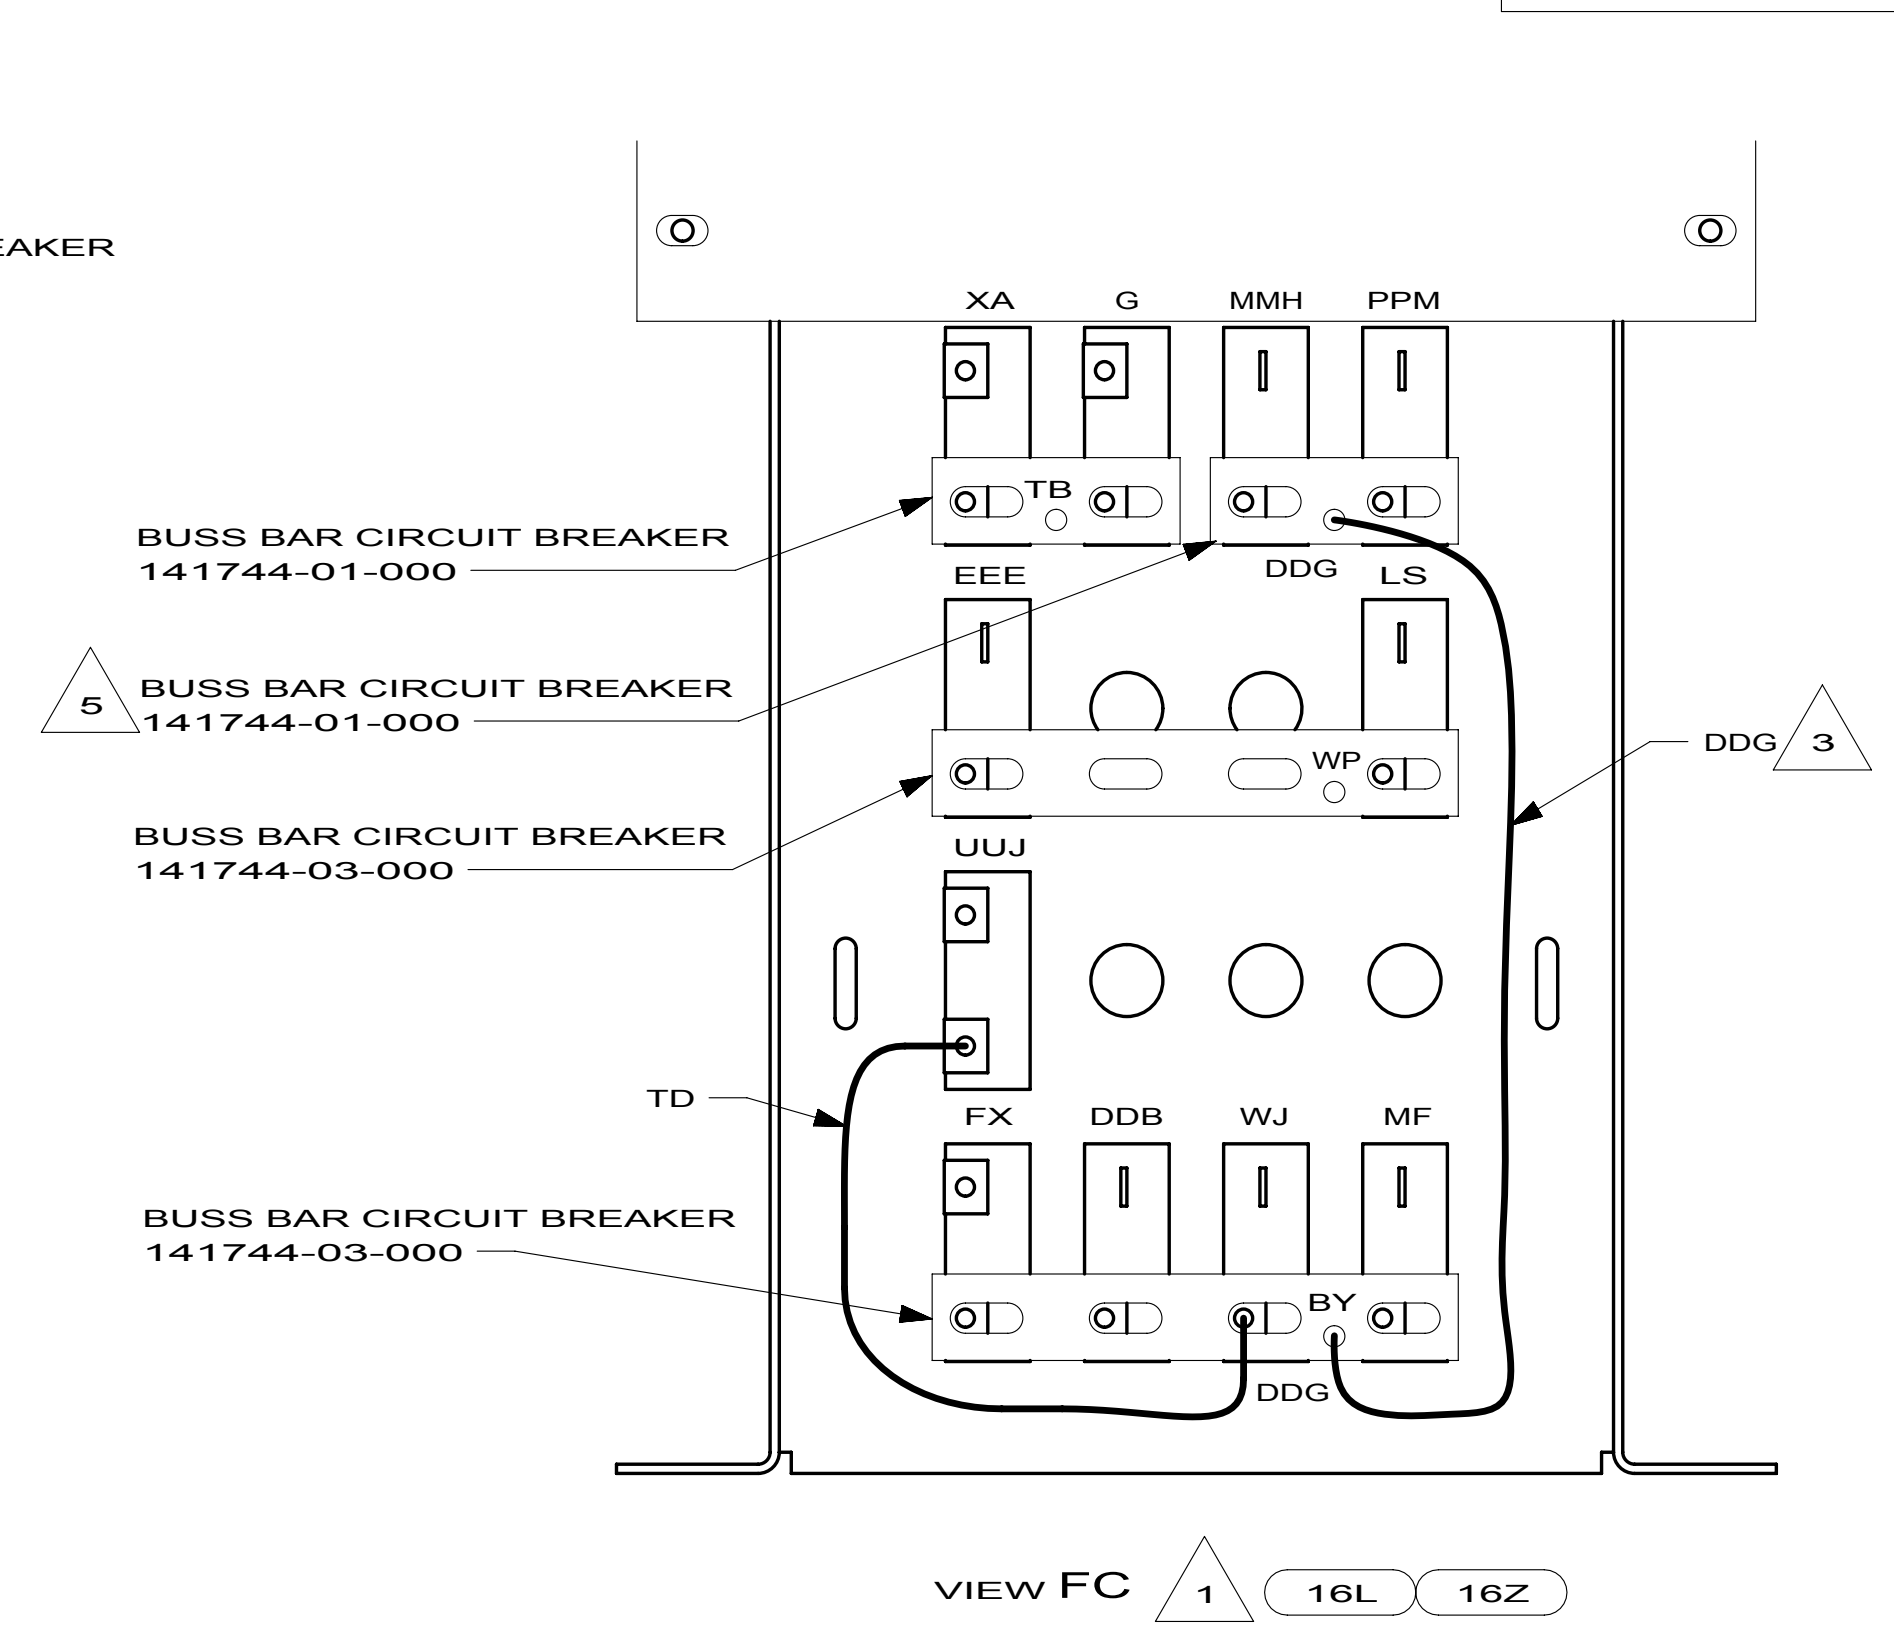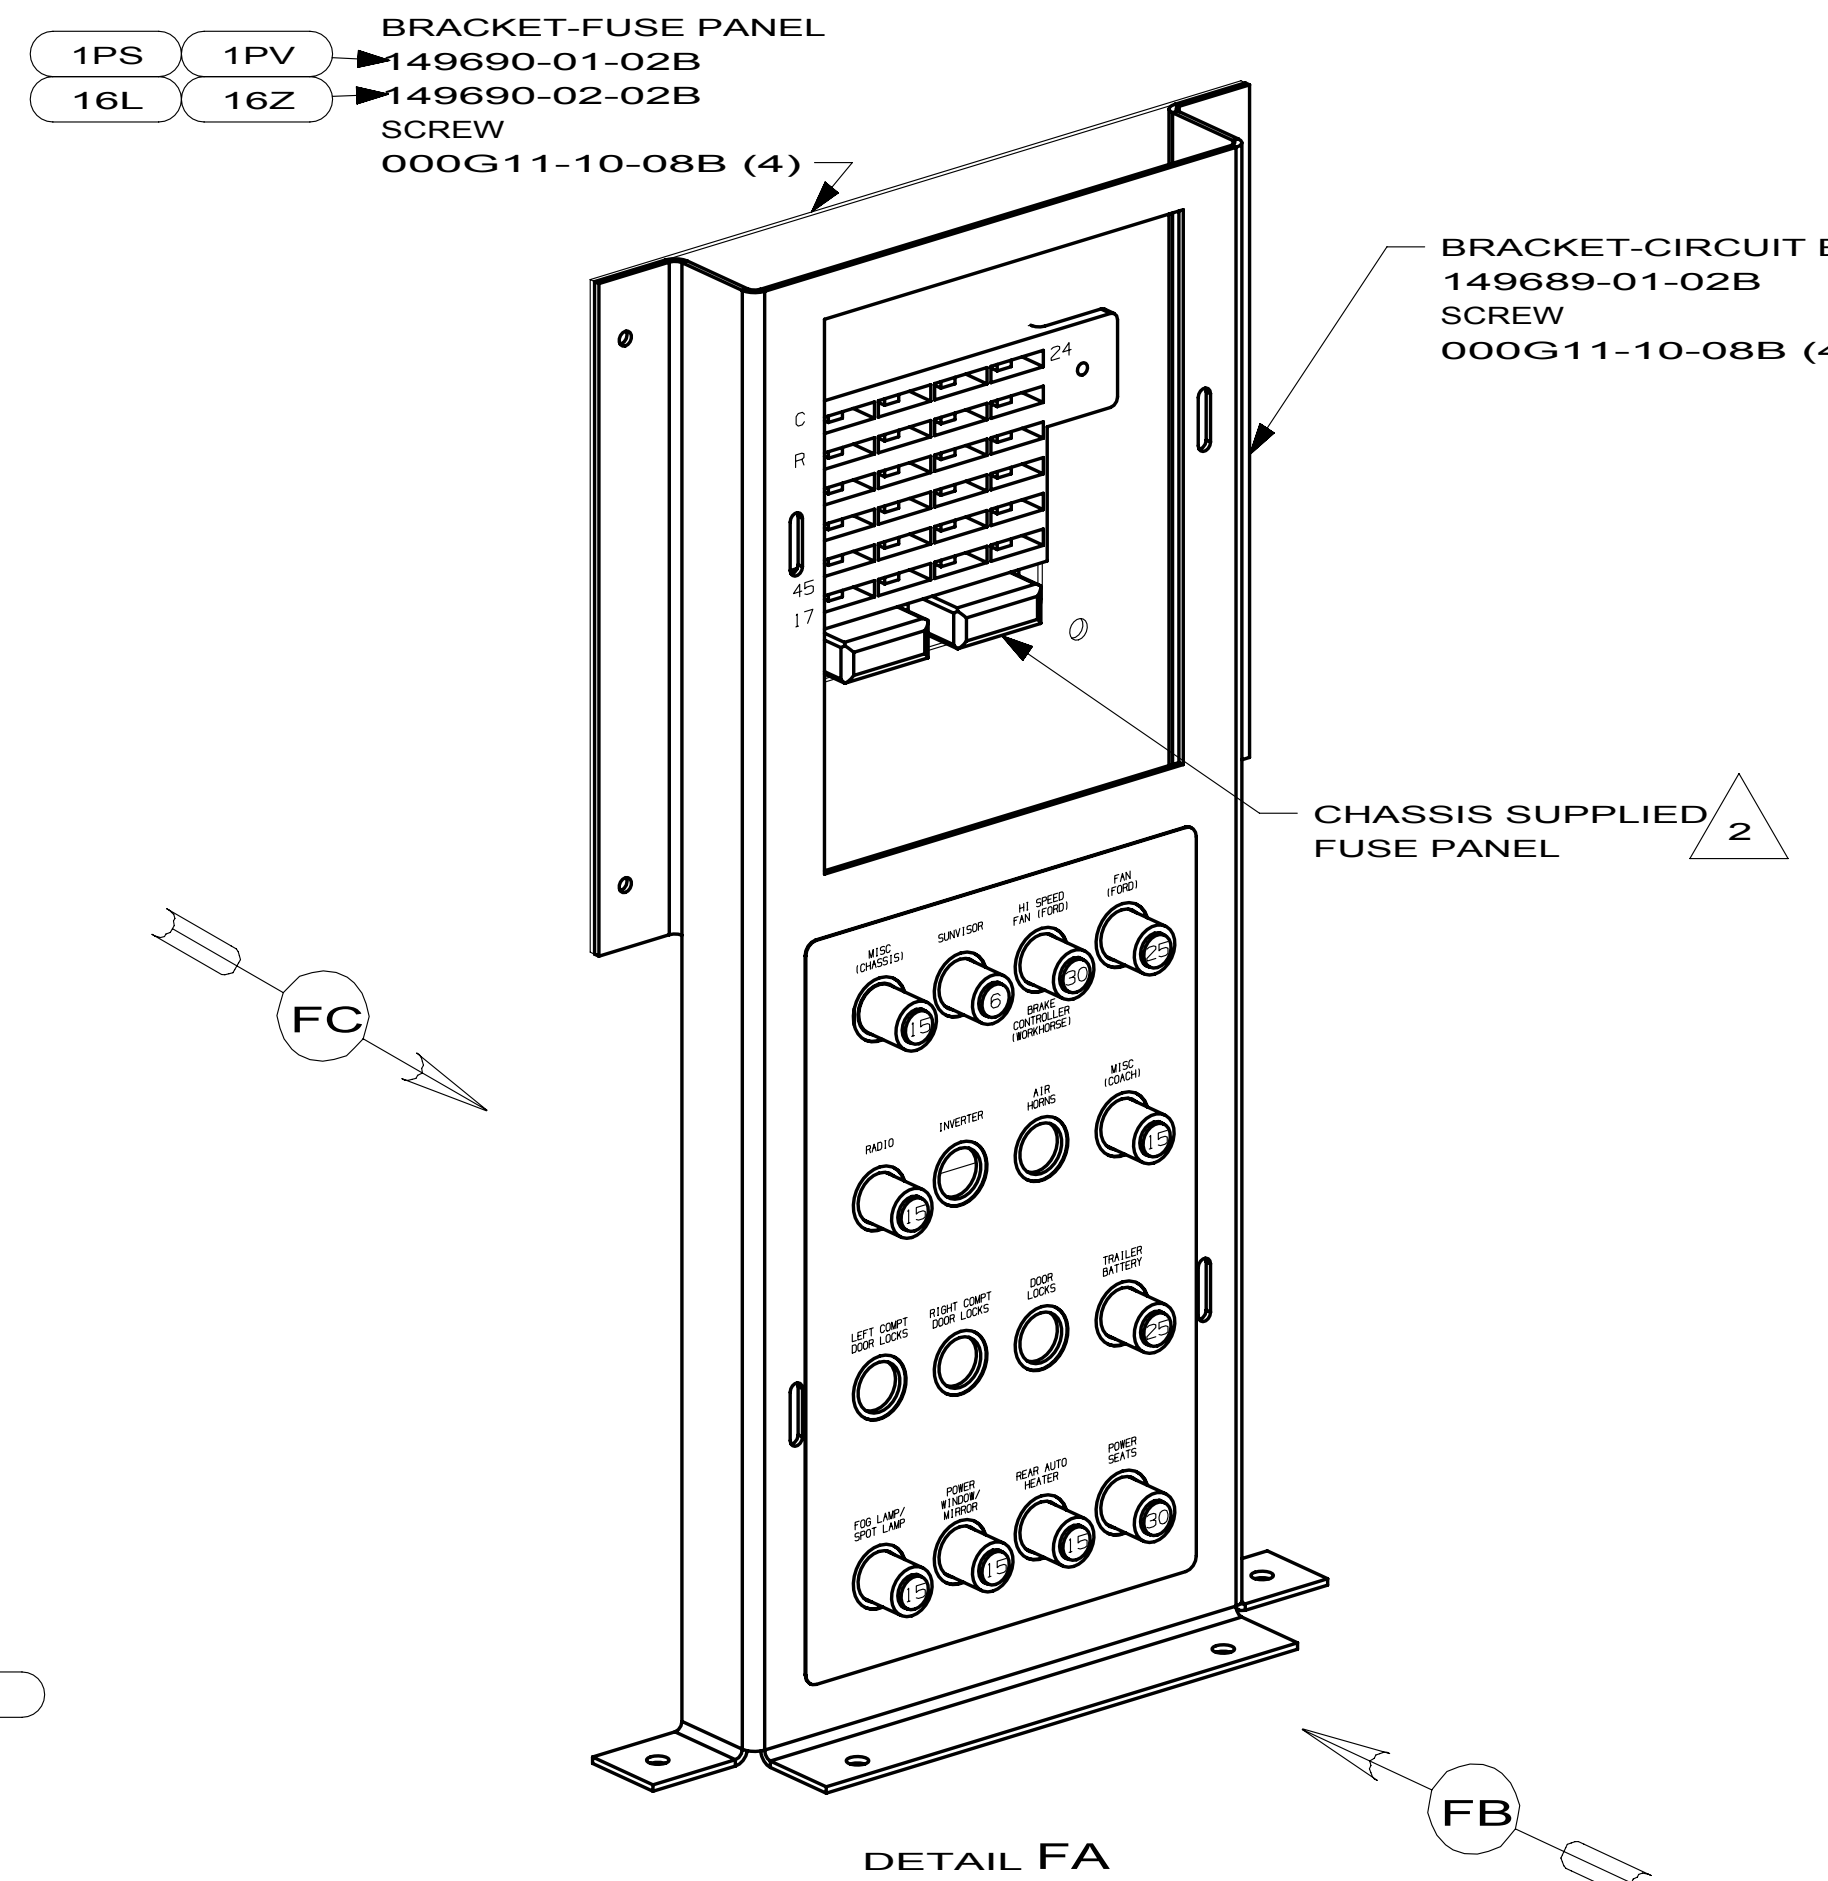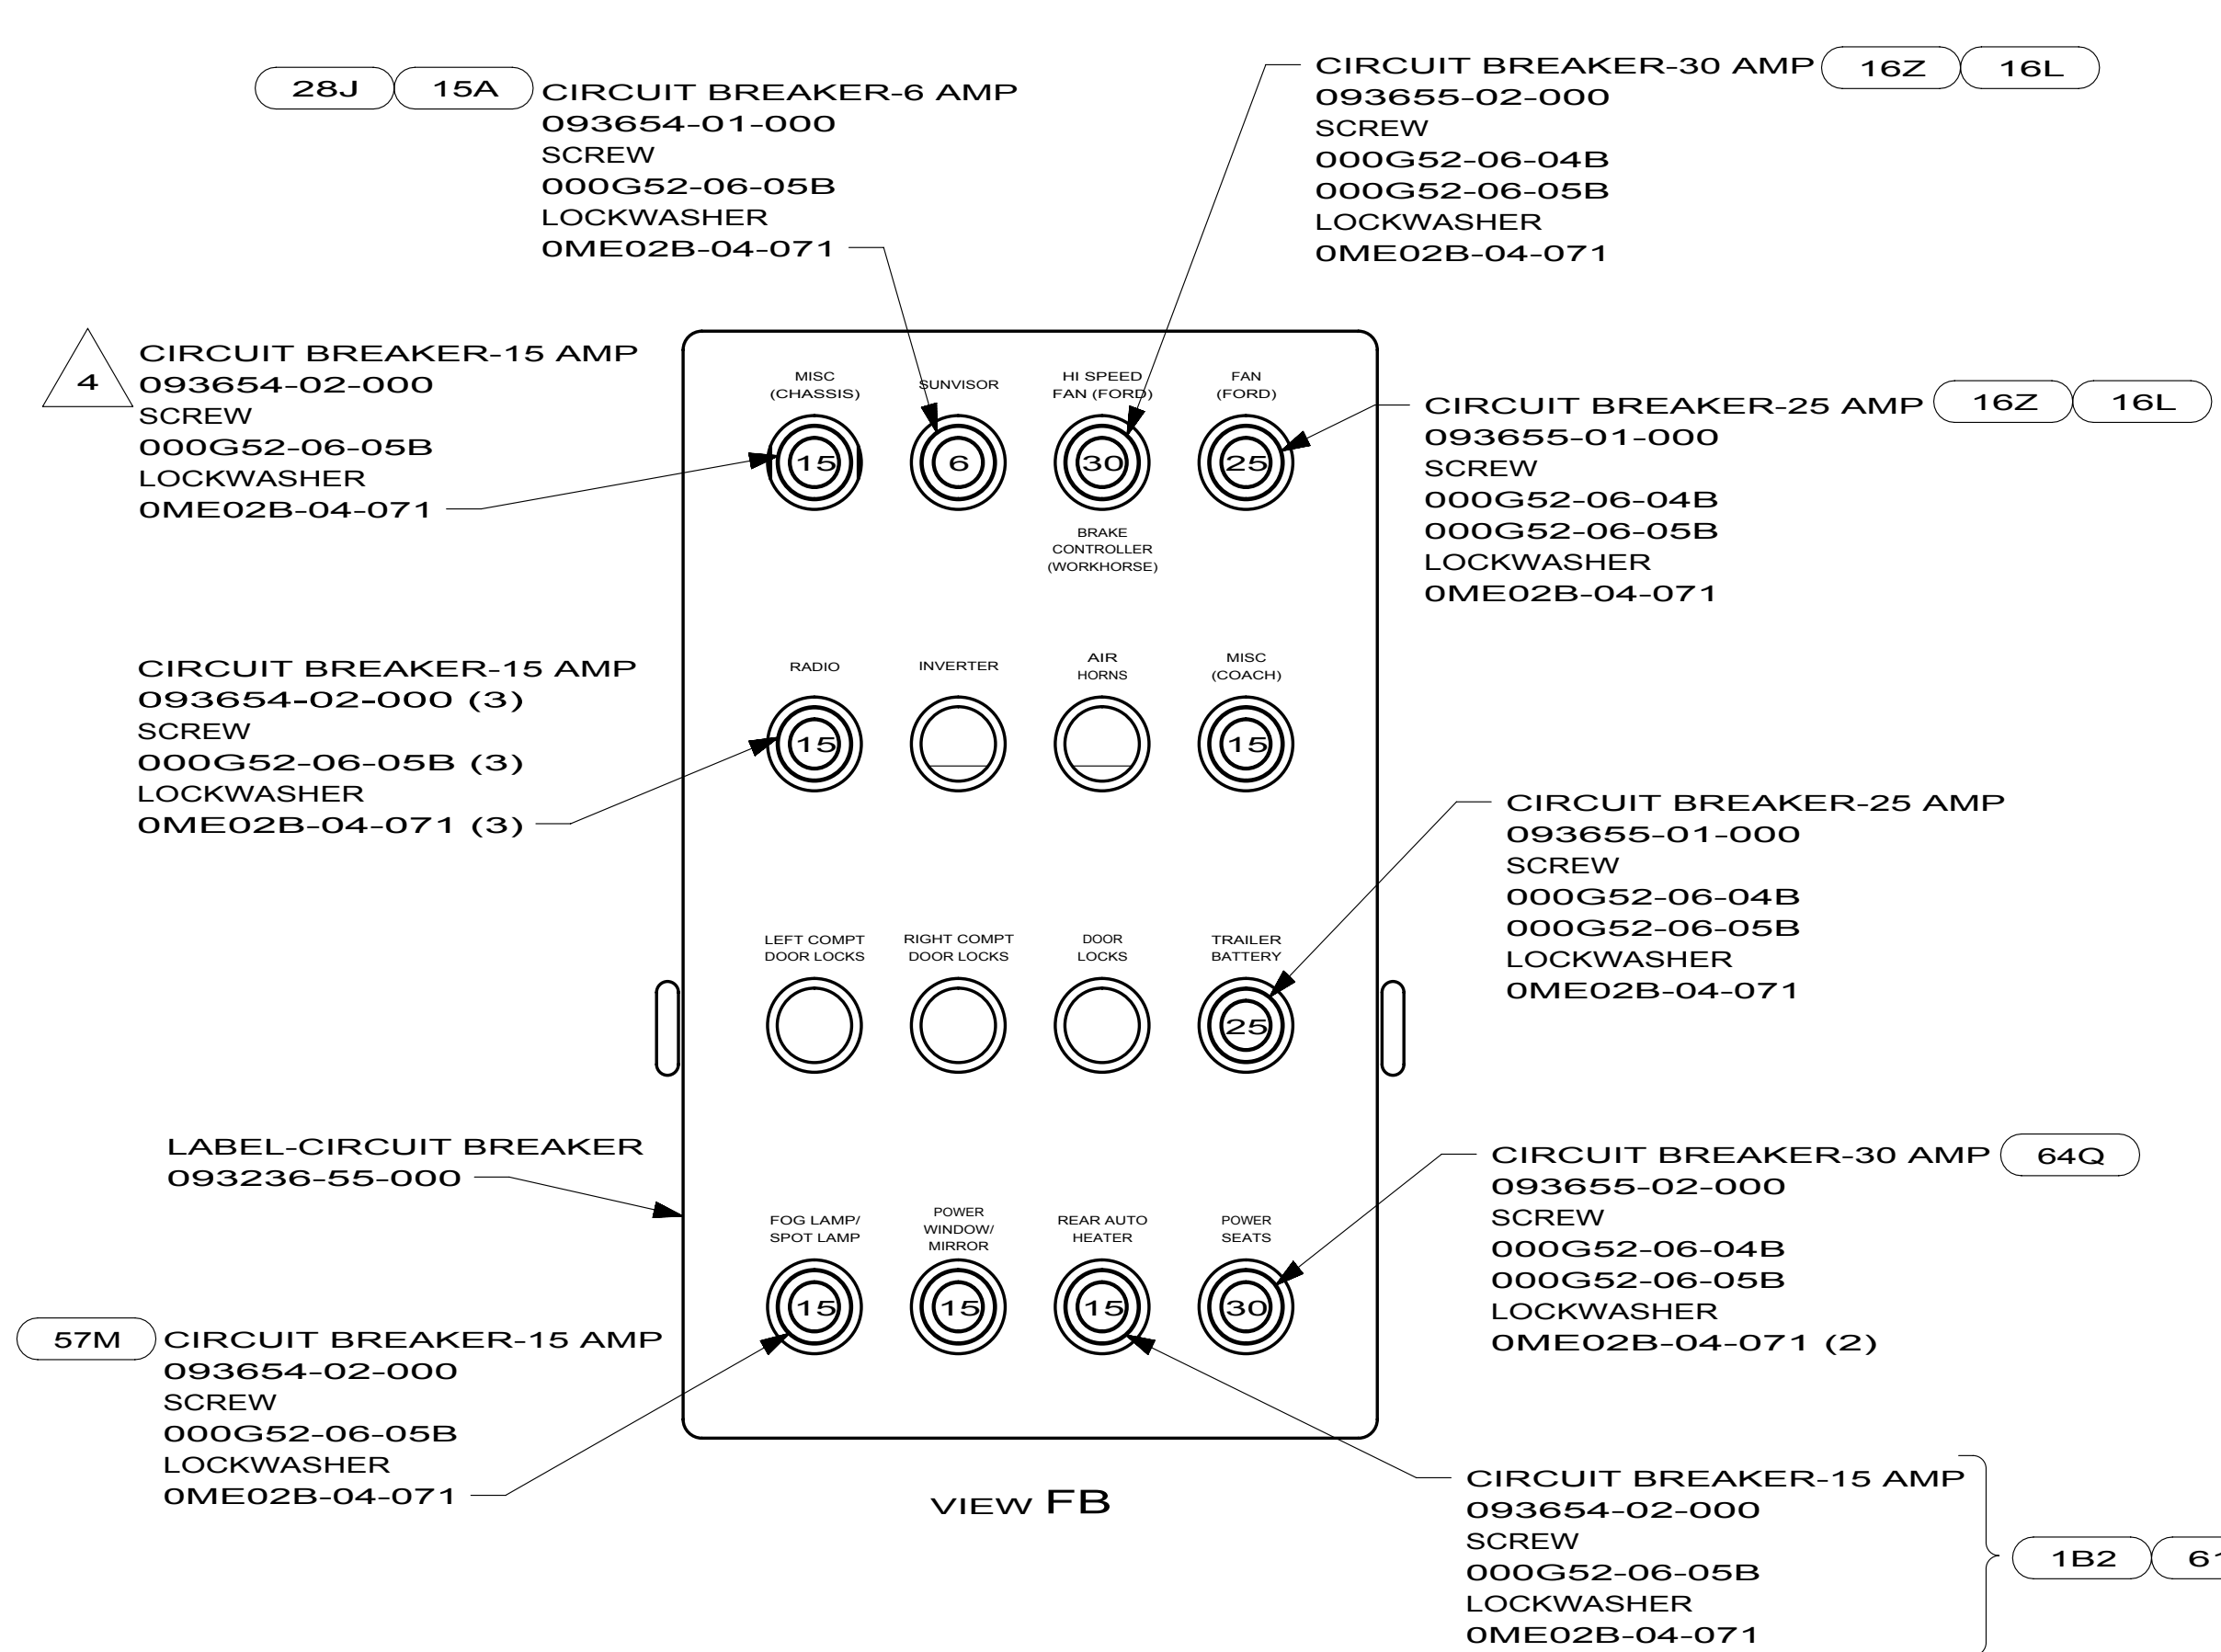


- | | |
|-----|------------------------------|
| 1LL | FRTL(FRED) 27,000#-22.5 TIRE |
| 28J | SUNVISORS - POWERED (2) |
| 15A | DRIVER CONVENIENCE PACKAGE |
| 64Q | SEAT PED-6-WAY POWER DRIVER |
| 611 | WTR HTR-AUX AUTO/MOTORAID |
| 57M | LAMPS-FOG |
| 1B2 | WTR HTR-10GAL/ELEC/LP/MTRAID |
| 1PV | WORKHORSE 24,000#-22.5 TIRE |
| 1PS | WORKHORSE 22,000#-22.5 TIRE |
| 16Z | FORD 24,000#-22.5 ALUM WHEEL |
| 16L | FORD 22,000#-22.5 AL WHL |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

- 5 32H, 38N, 38T WITH 15A OR 28J
- 4 32H, 35P, 38N, 38T ONLY
- 3 CONNECT DDG TO HOLE IN BUSS BAR OR TO BOTTOM LUG OF 30 AMP BREAKER.
- 2 WORKHORSE PANEL SHOWN.
- 1 ALL CIRCUITS ARE IN WIRE ASM-IP,MAIN.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

	FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000
---	--


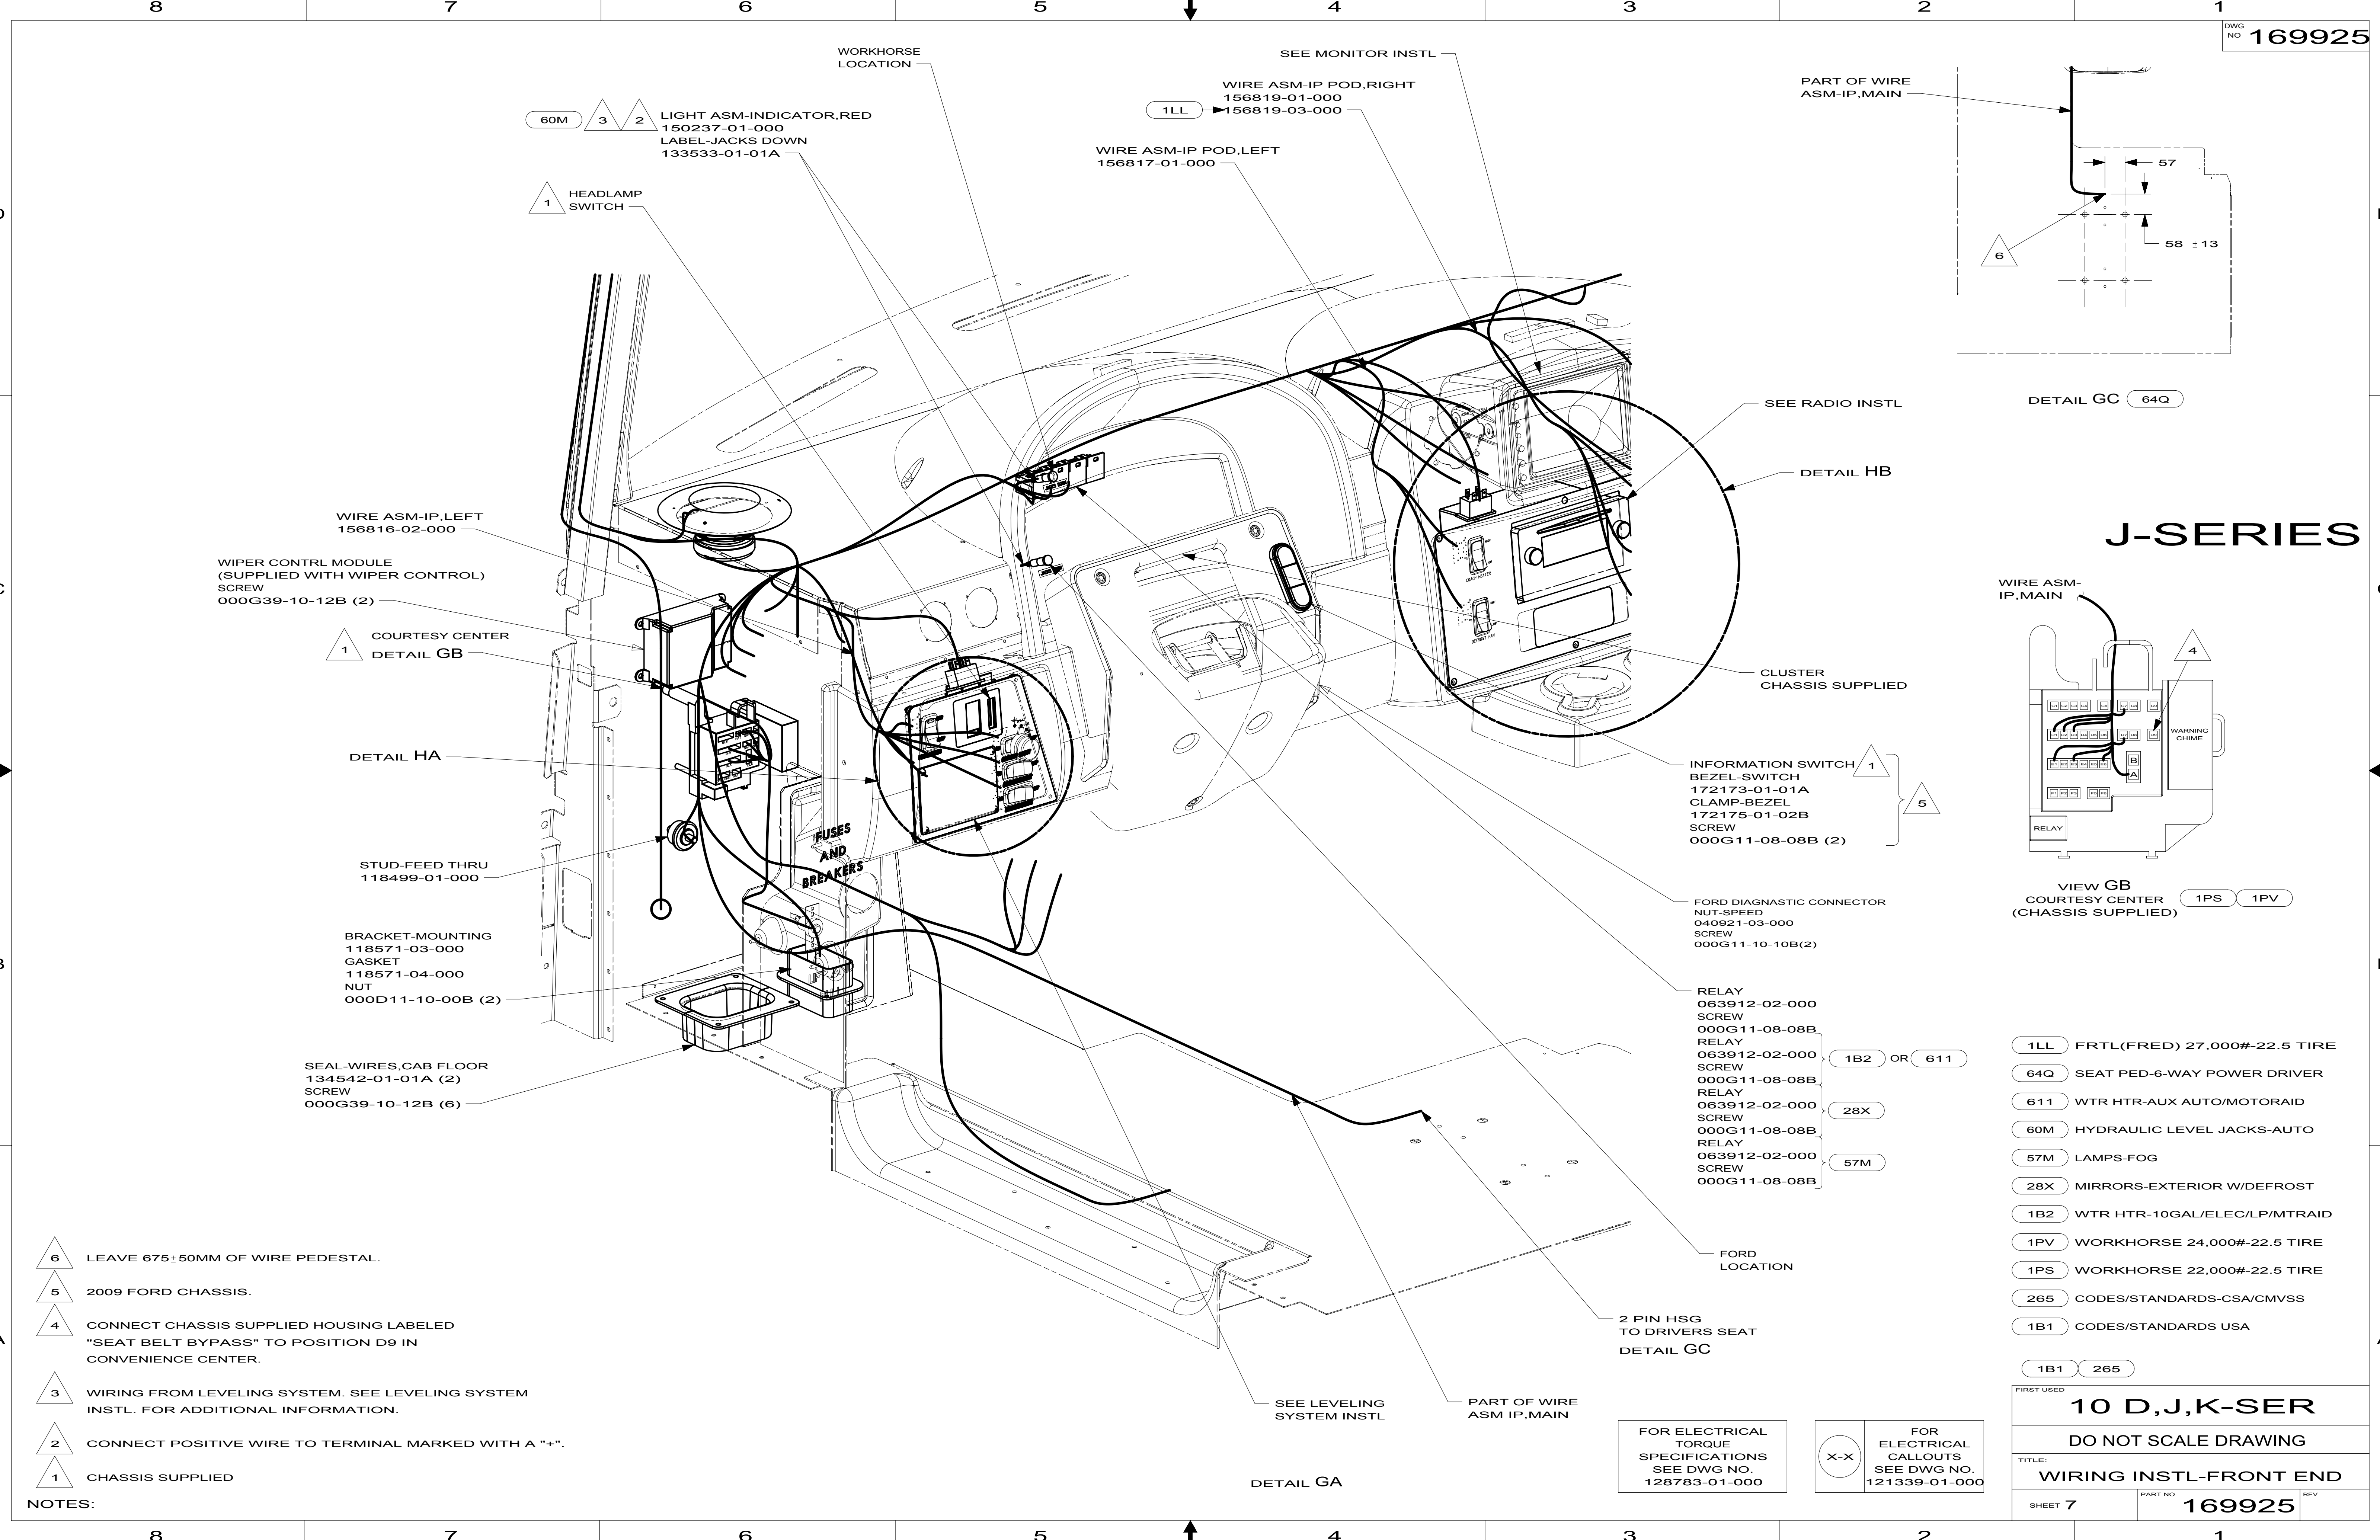


- NOTES:
- 6 LEAVE 675±50MM OF WIRE PEDESTAL.
 - 5 2009 FORD CHASSIS.
 - 4 CONNECT CHASSIS SUPPLIED HOUSING LABELED "SEAT BELT BYPASS" TO POSITION D9 IN CONVENIENCE CENTER.
 - 3 WIRING FROM LEVELING SYSTEM. SEE LEVELING SYSTEM INSTL. FOR ADDITIONAL INFORMATION.
 - 2 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH A "+".
 - 1 CHASSIS SUPPLIED

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

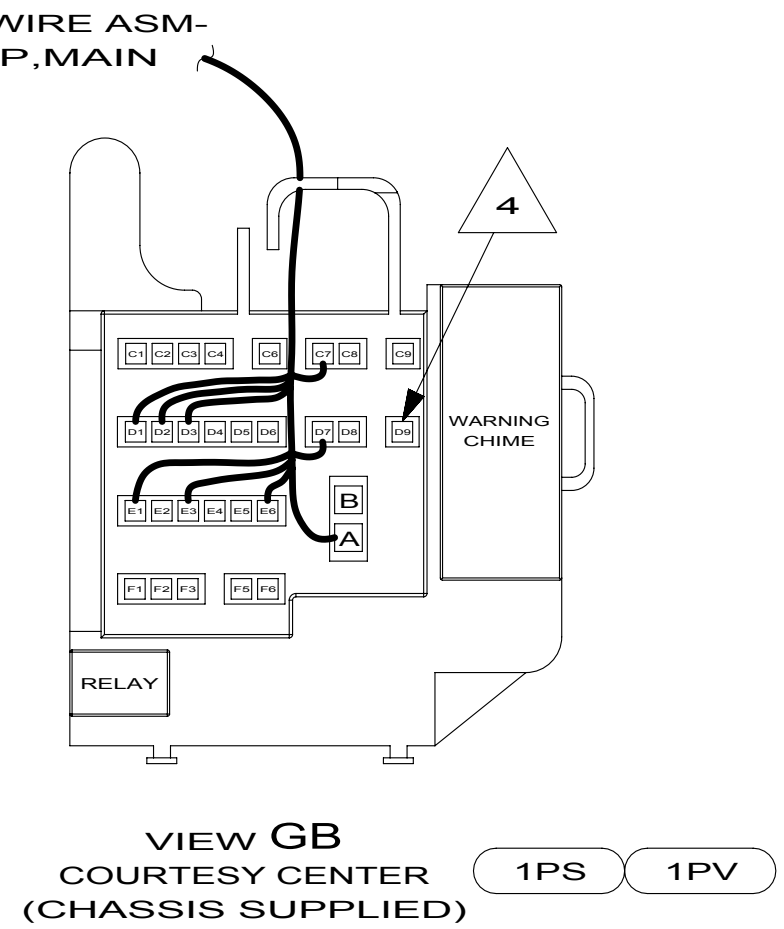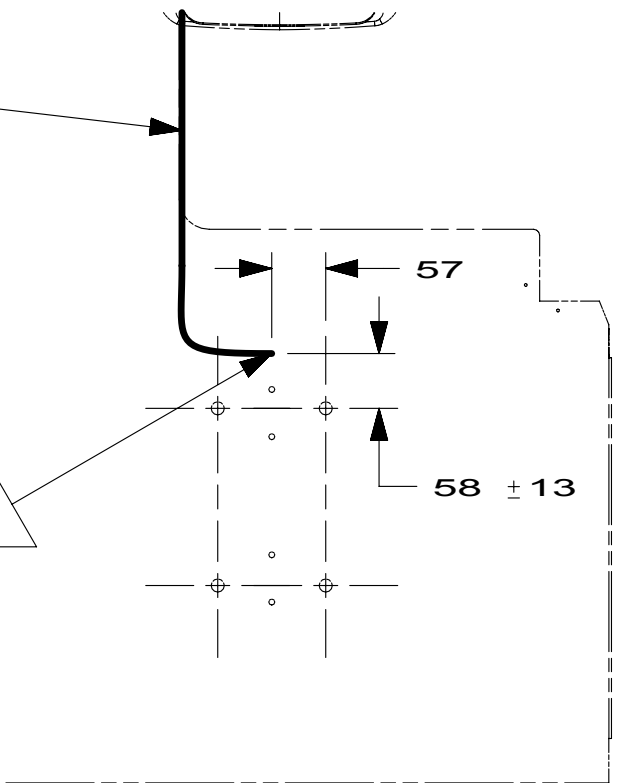


- 1LL FRTL(FRED) 27,000#-22.5 TIRE
- 64Q SEAT PED-6-WAY POWER DRIVER
- 611 WTR HTR-AUX AUTO/MOTORAID
- 60M HYDRAULIC LEVEL JACKS-AUTO
- 57M LAMPS-FOG
- 28X MIRRORS-EXTERIOR W/DEFROST
- 1B2 WTR HTR-10GAL/ELEC/LP/MTRAID
- 1PV WORKHORSE 24,000#-22.5 TIRE
- 1PS WORKHORSE 22,000#-22.5 TIRE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D,J,K-SER		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 7	PART NO 169925	REV

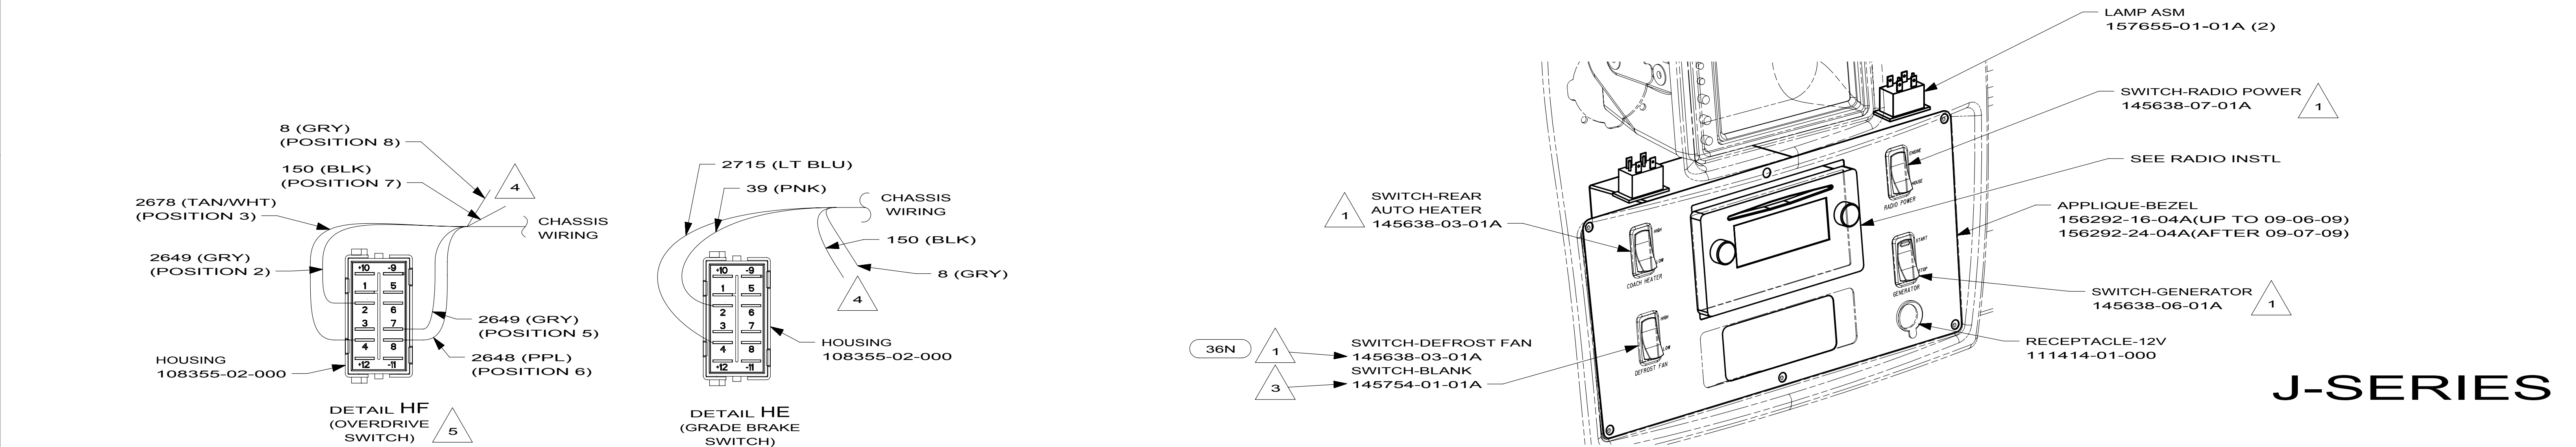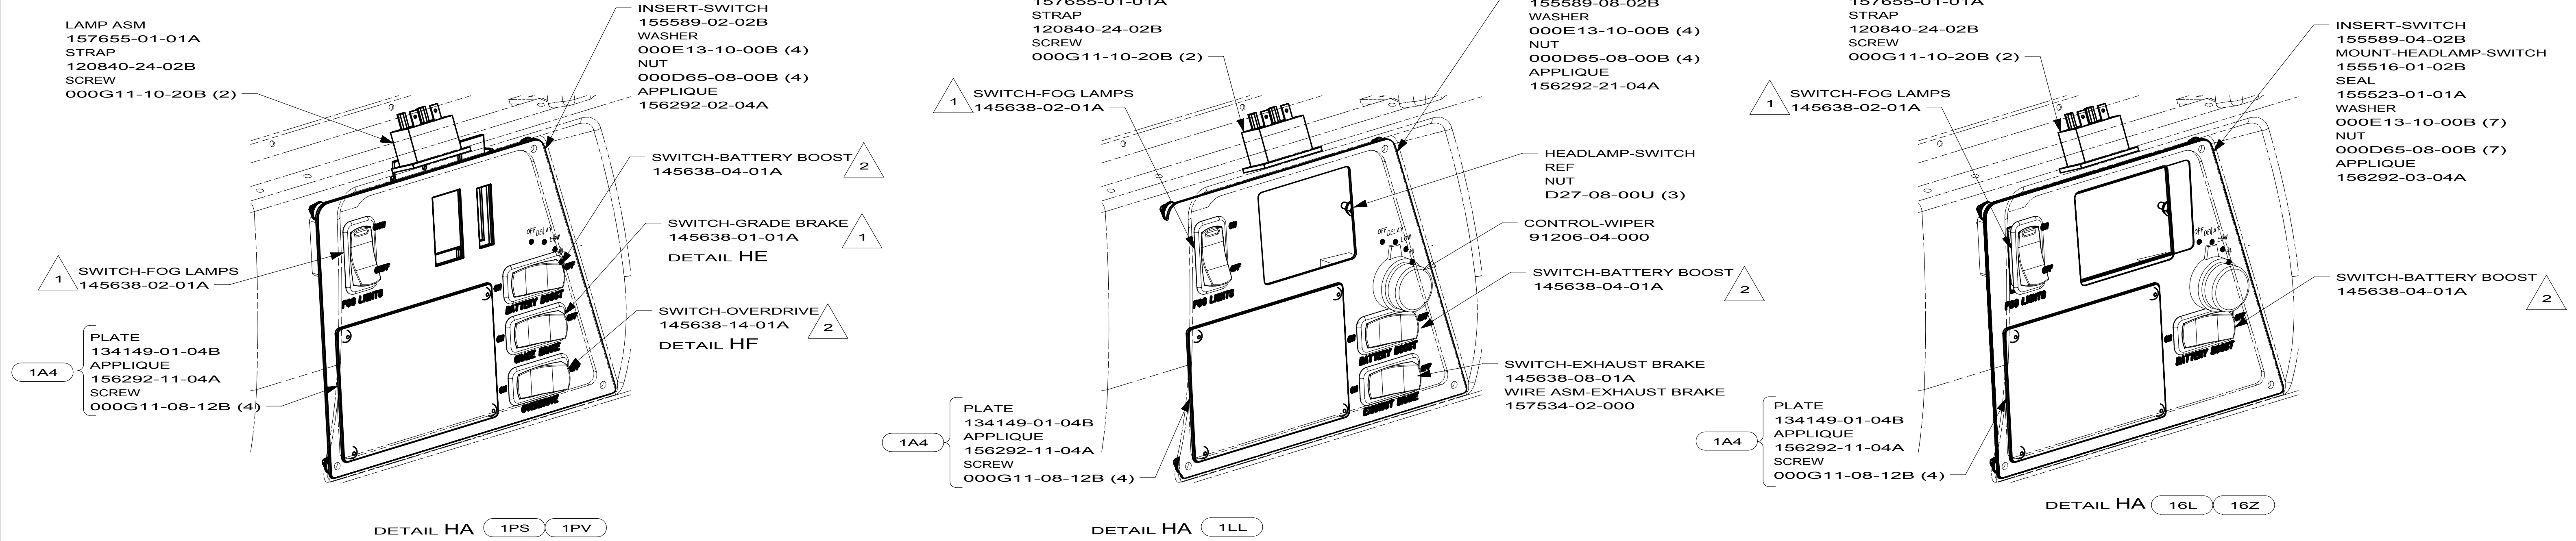

J-SERIES

- NOTES:
- 7 WITH SWITCH INSTALLED THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
 - 6 DETAIL IS LOOKING AT SWITCH FROM THE BACK SIDE OF SWITCH AS ITS INSTALLED.
 - 5 POSITIONS NOTED IN PARENTHESIS ARE LOCATIONS IN WORKHORSE SUPPLIED HOUSING.
 - 4 REMOVE TERMINALS & TAPE BACK TO LOOM.
 - 3 WITHOUT 36N
 - 2 SEE DETAIL HC FOR ORIENTATION.
 - 1 SEE DETAIL HD FOR ORIENTATION.


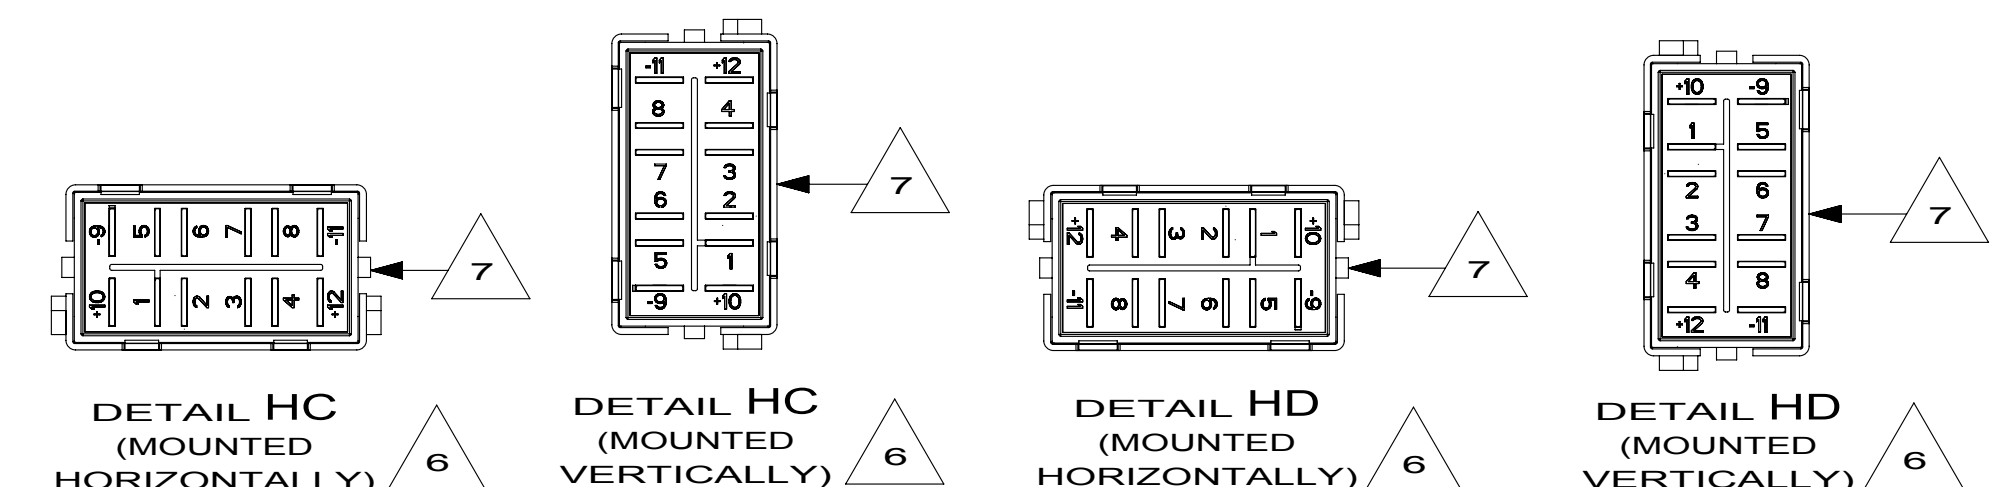


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1LL FRTL(FRED) 27,000#-22.5 TIRE
- 36N FANS-DEFROSTER, AUXILIARY
- 1A4 LEVELING JACK WITHOUT
- 1PV WORKHORSE 24,000#-22.5 TIRE
- 1PS WORKHORSE 22,000#-22.5 TIRE
- 16Z FORD 24,000#-22.5 ALUM WHEEL
- 16L FORD 22,000#-22.5 AL WHL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 D,J,K-SER		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-FRONT END		
SHEET 8	PART NO 169925	REV

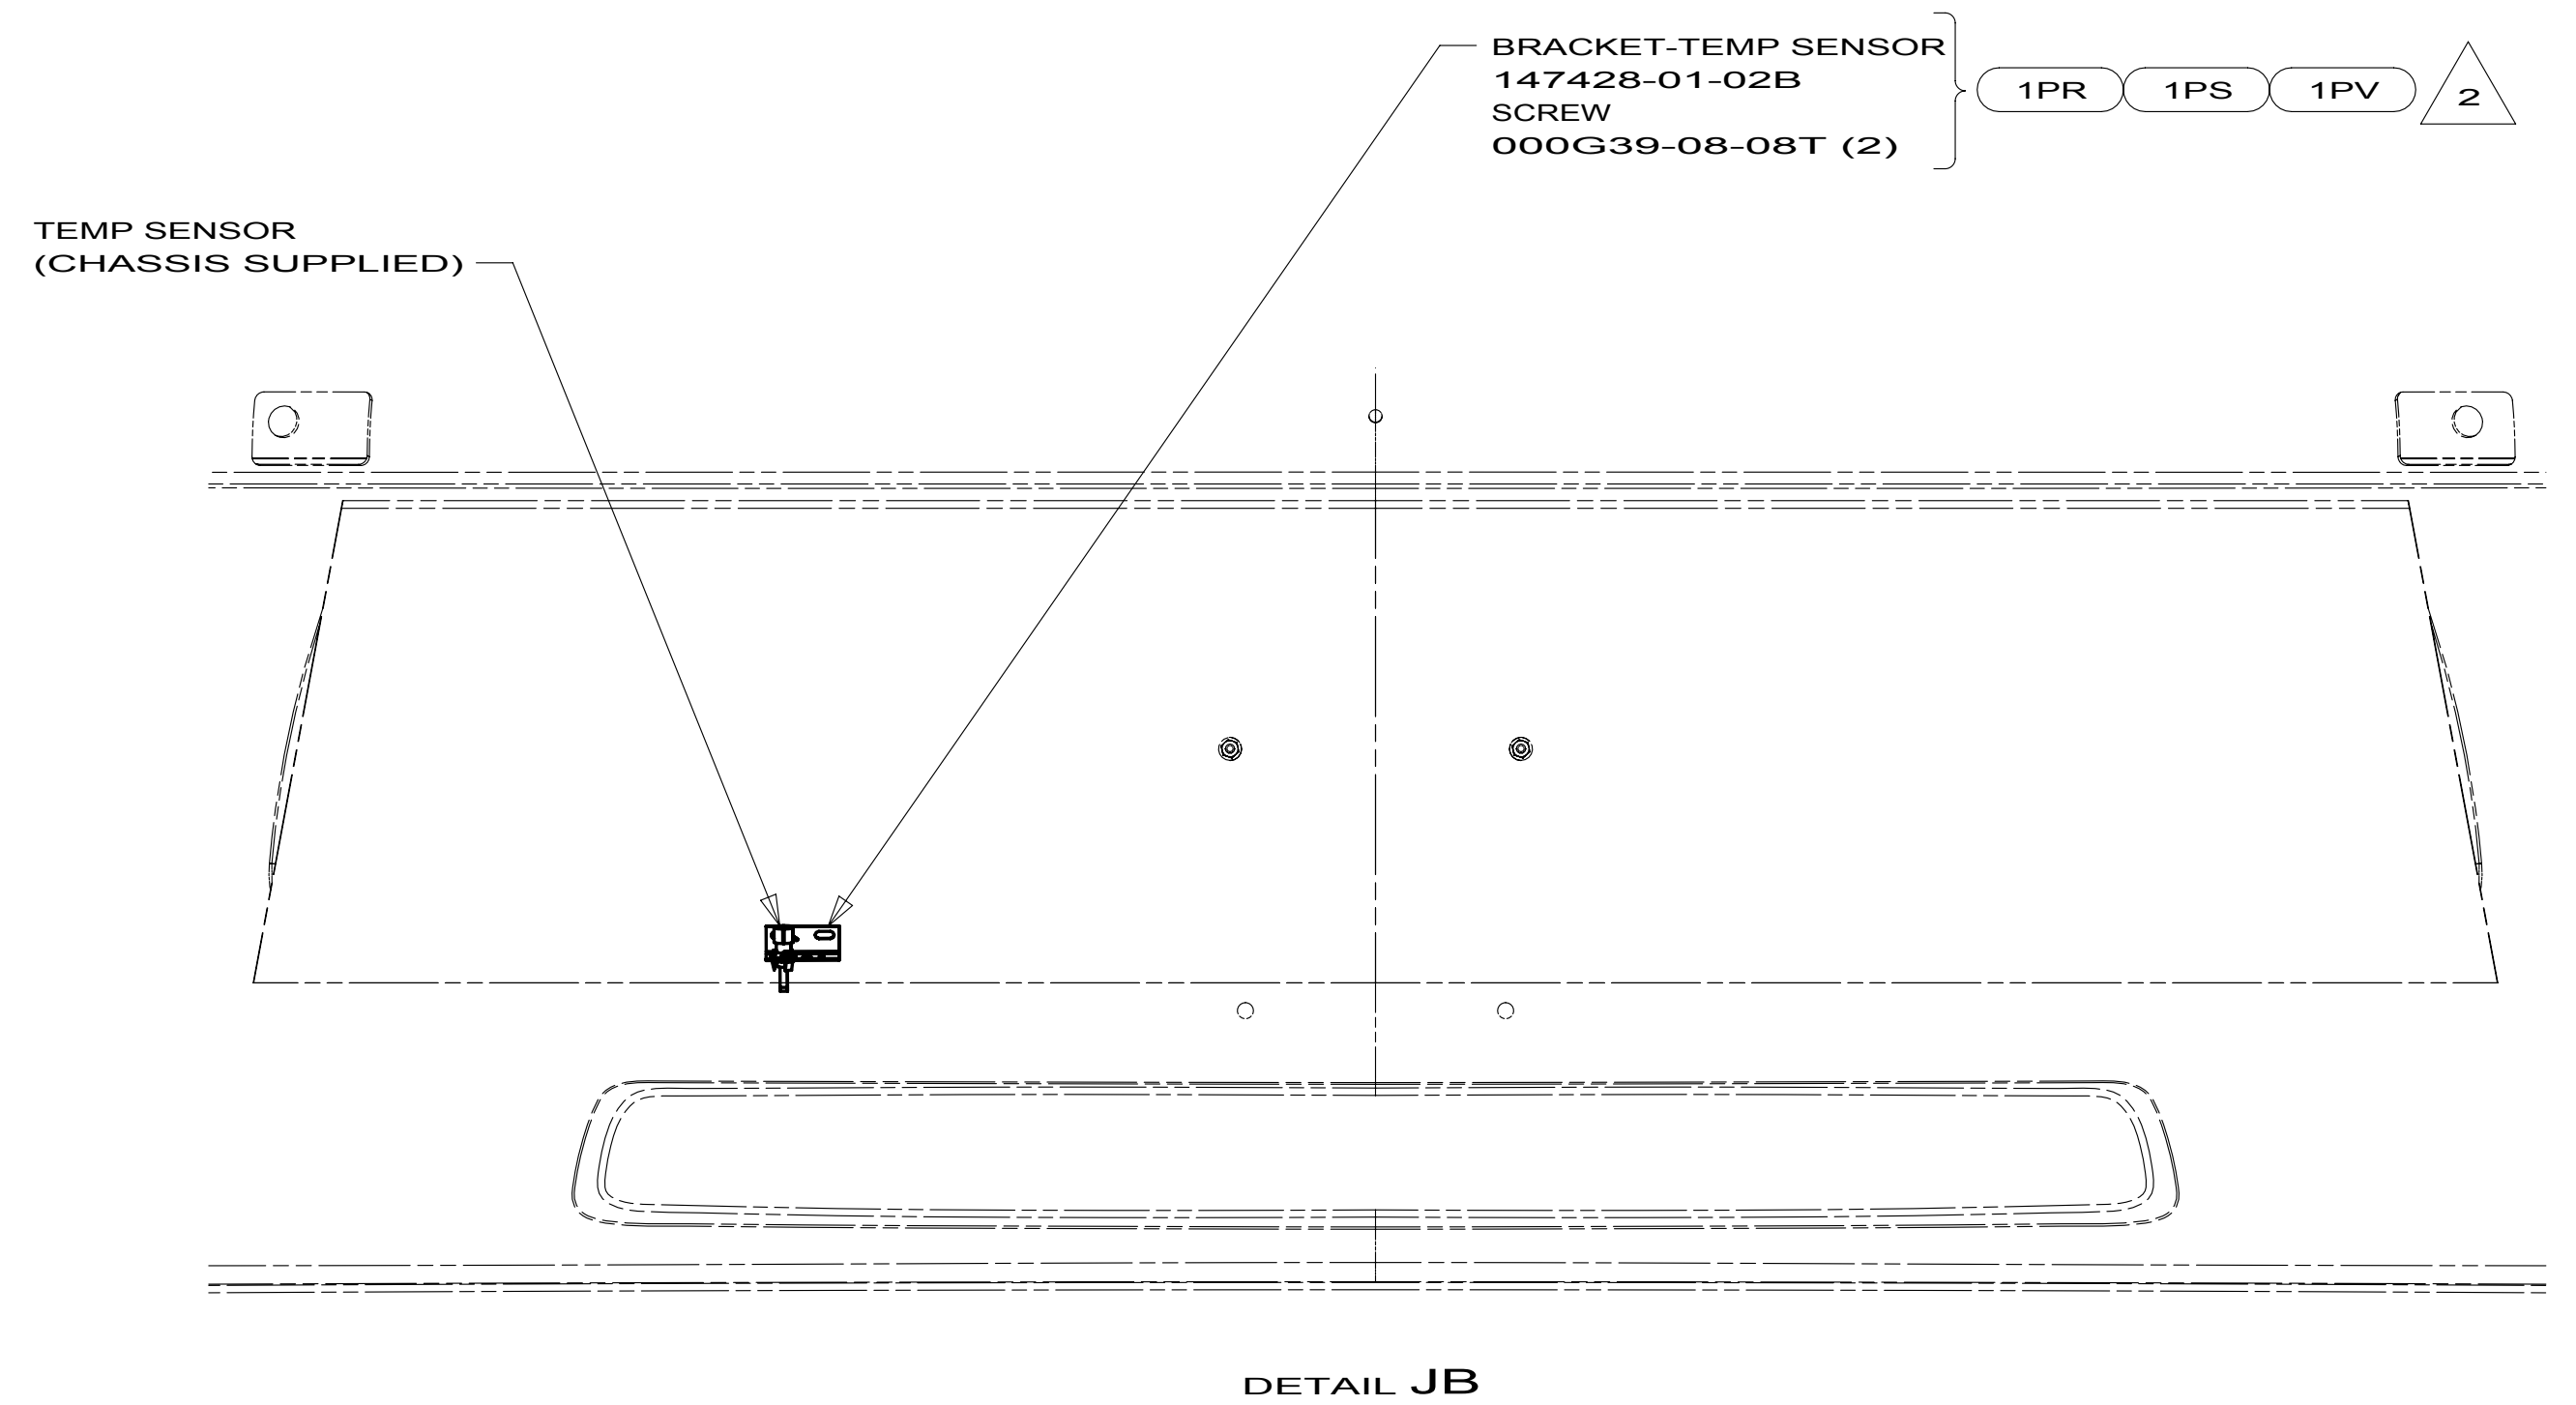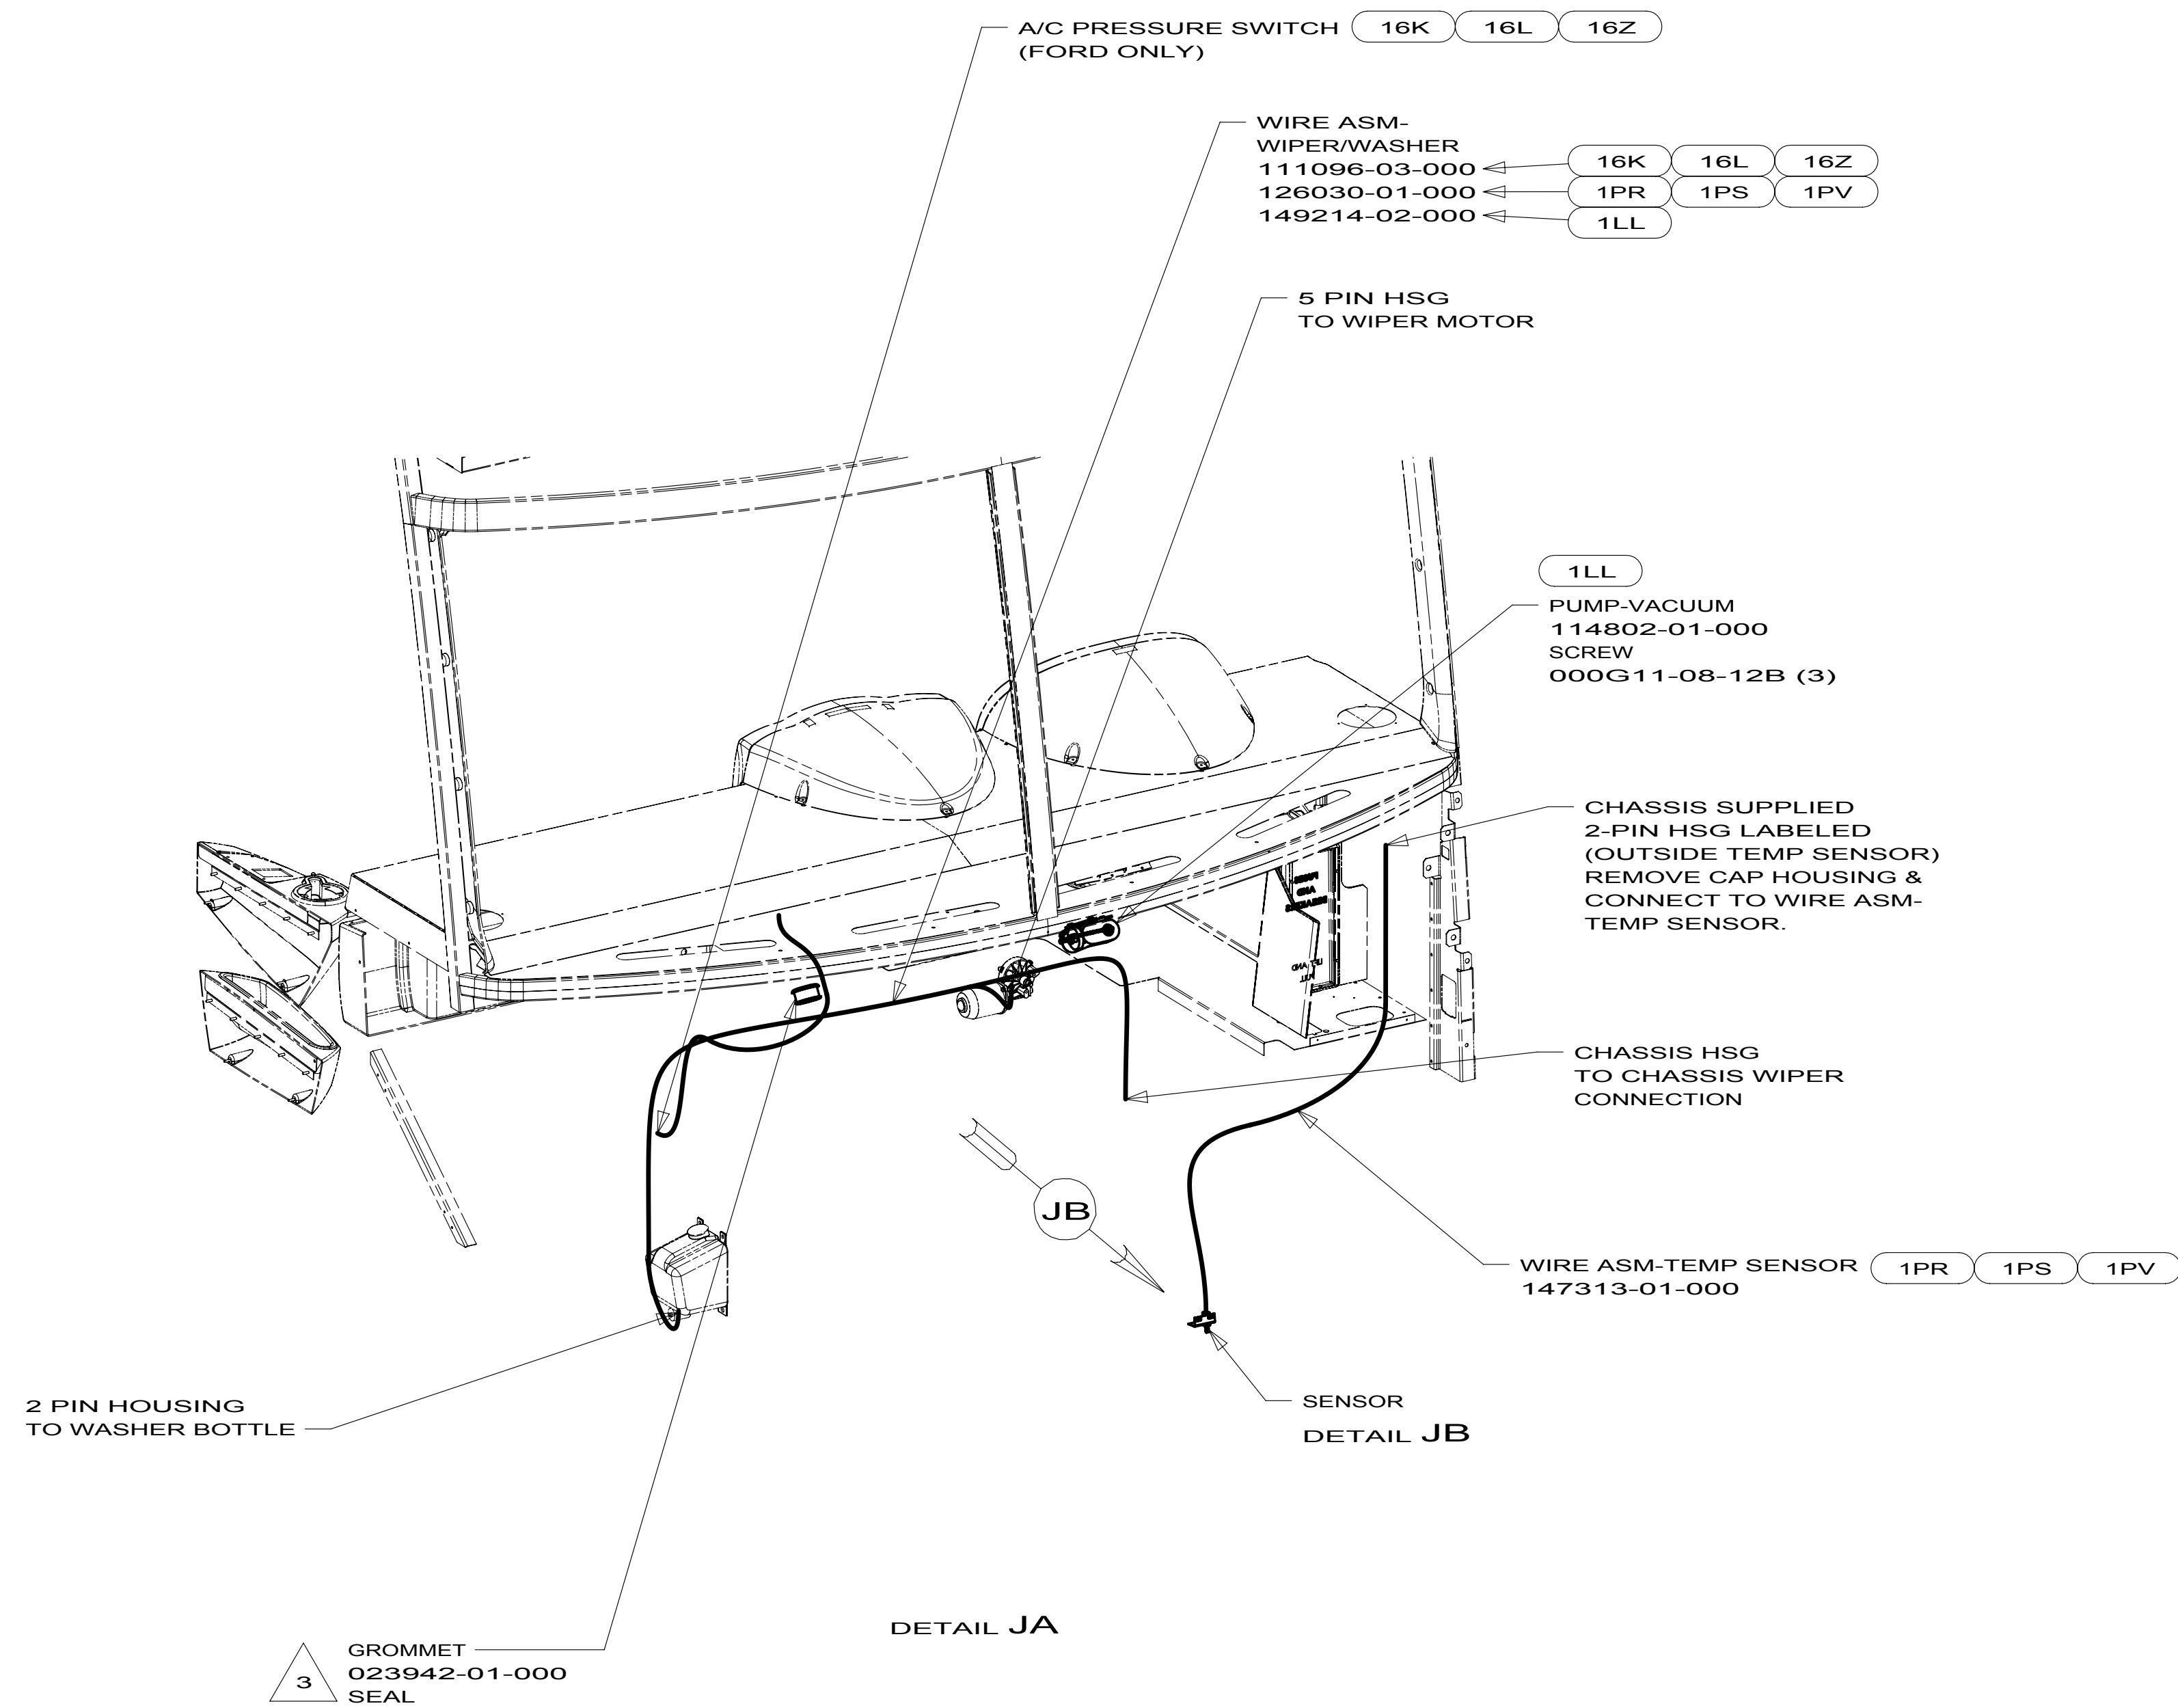

D,J-SERIES

- | | |
|-----|------------------------------|
| 1PV | WORKHORSE 24,000#-22.5 TIRE |
| 1PS | WORKHORSE 22,000#-22.5 TIRE |
| 1PR | WORKHORSE 22,000#-19.5 TIRE |
| 1LL | FRTL(FRED) 27,000#-22.5 TIRE |
| 16Z | FORD 24,000#-22.5 ALUM WHEEL |
| 16L | FORD 22,000#-22.5 AL WHL |
| 16K | FORD CHASSIS 22,000 |
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |

- 1B1 265

10 D,J,K-SER

DO NOT SCALE DRAWING

TITLE: WIRING INSTL-FRONT END

SHEET 9	PART NO 169925	REV
---------	--------------------------	-----

2/29/2009

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

1. GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS. BUNDLE AND SECURE WITH WIRE TIE 008343-01-000 OR 093147-01-000.

NOTES:

091206-04-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	091206-02-700	EA KNOB-INNER	66C-00019
	091206-02-701	EA KNOB-OUTER	66C-00020
	091206-04-700	EA SWITCH ASSEM. ONLY	250-6623
	102362-03-700	EA MODULE-WIPER CONT., DYNAMIC	66D-00093

J-SERIES
P-SERIES
R-SERIES
169847-04

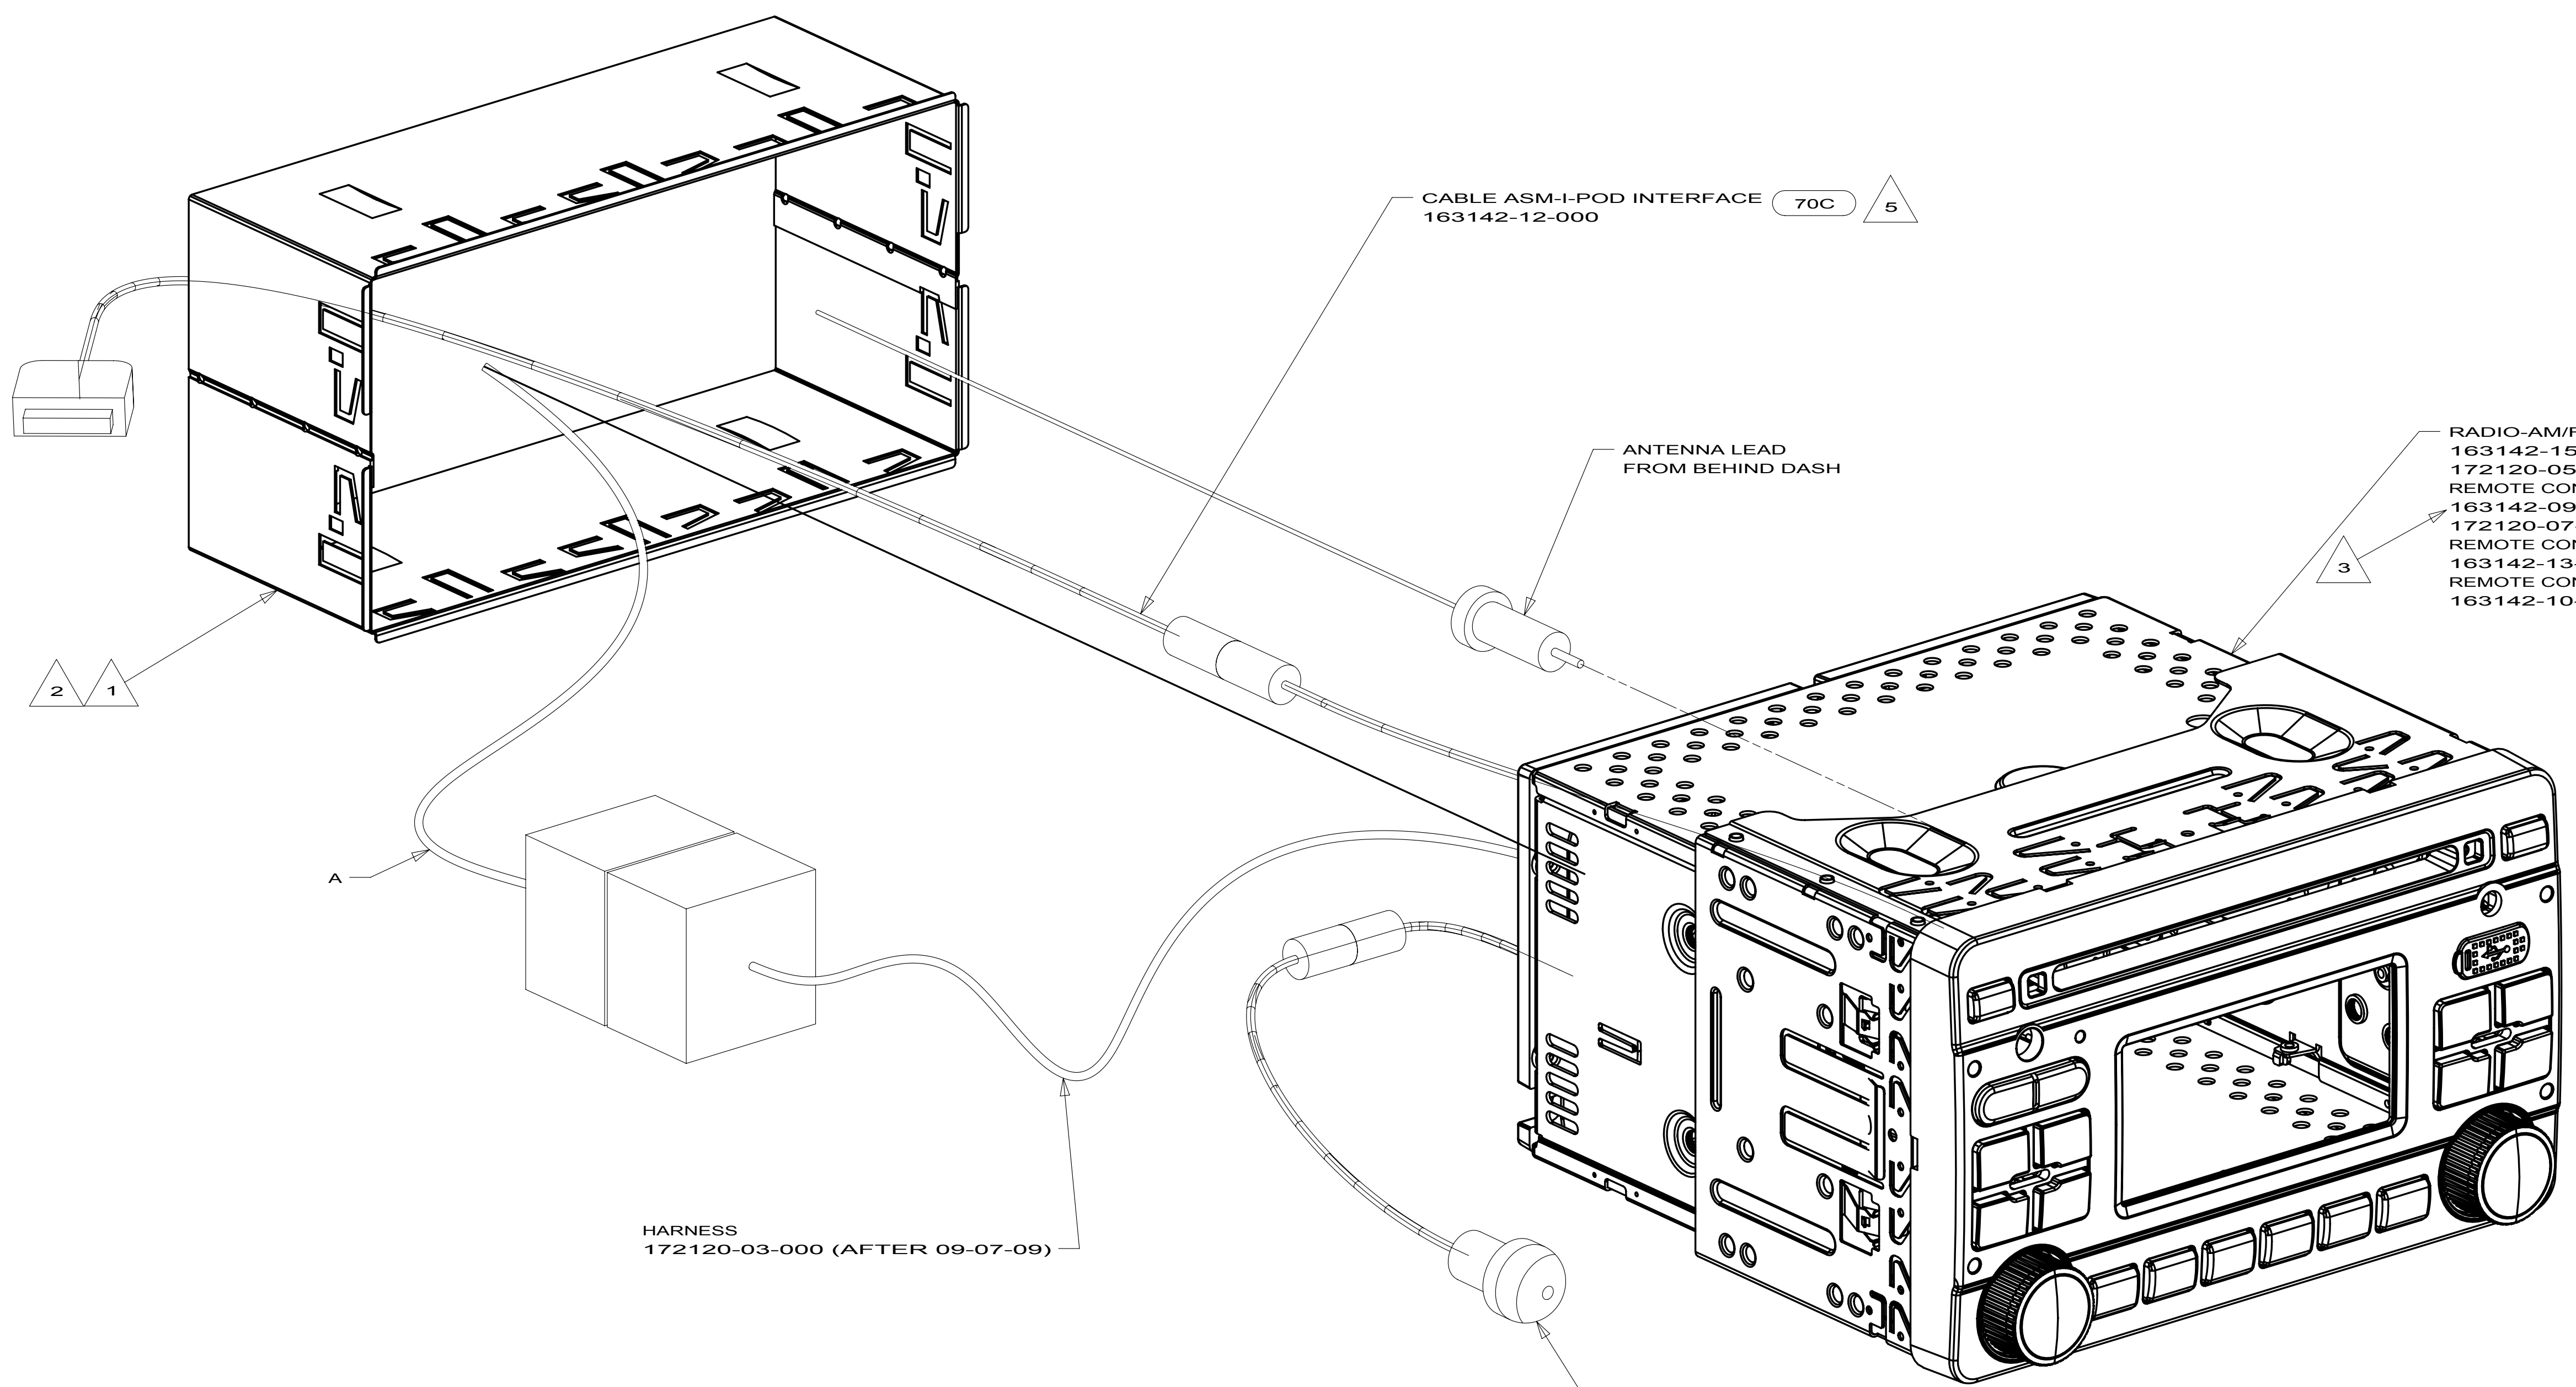

- 7 FORD CHASSIS.
- 6 WORKHORSE AND FREIGHTLINER CHASSIS.
- 5 PLUG I-POD CABLE INTO LEAD ON BACK OF RADIO MARKED 'I-POD'. ROUTE CABLE UP LEFT A-PILLAR AND INTO OVERHEAD CABINET ABOVE DRIVER. LEAVE 600 MM OF CABLE IN OVERHEAD TIED UP WITH WIRE TIE 8343-01-000.
- 4 INSTALL PER DRAWING 170205.
- 3 TO BE SUPPLIED LOOSE IN WINNEBAGO OWNERS CASE.
- 2 BEND TABS ON ALL 4 SIDES TO SECURE MOUNTING BRACKET TO DASH OPENING.
- 1 SUPPLIED WITH RADIO.

NOTES:




- 70C RADIO - SATELLITE
- 19V RADIO-AM/FM STEREO CD PLAYER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 19V


FIRST USED		
10 J,P,R-SERIES		
DO NOT SCALE DRAWING		
TITLE: RADIO INSTL		
SHEET 4	PART NO 169847	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

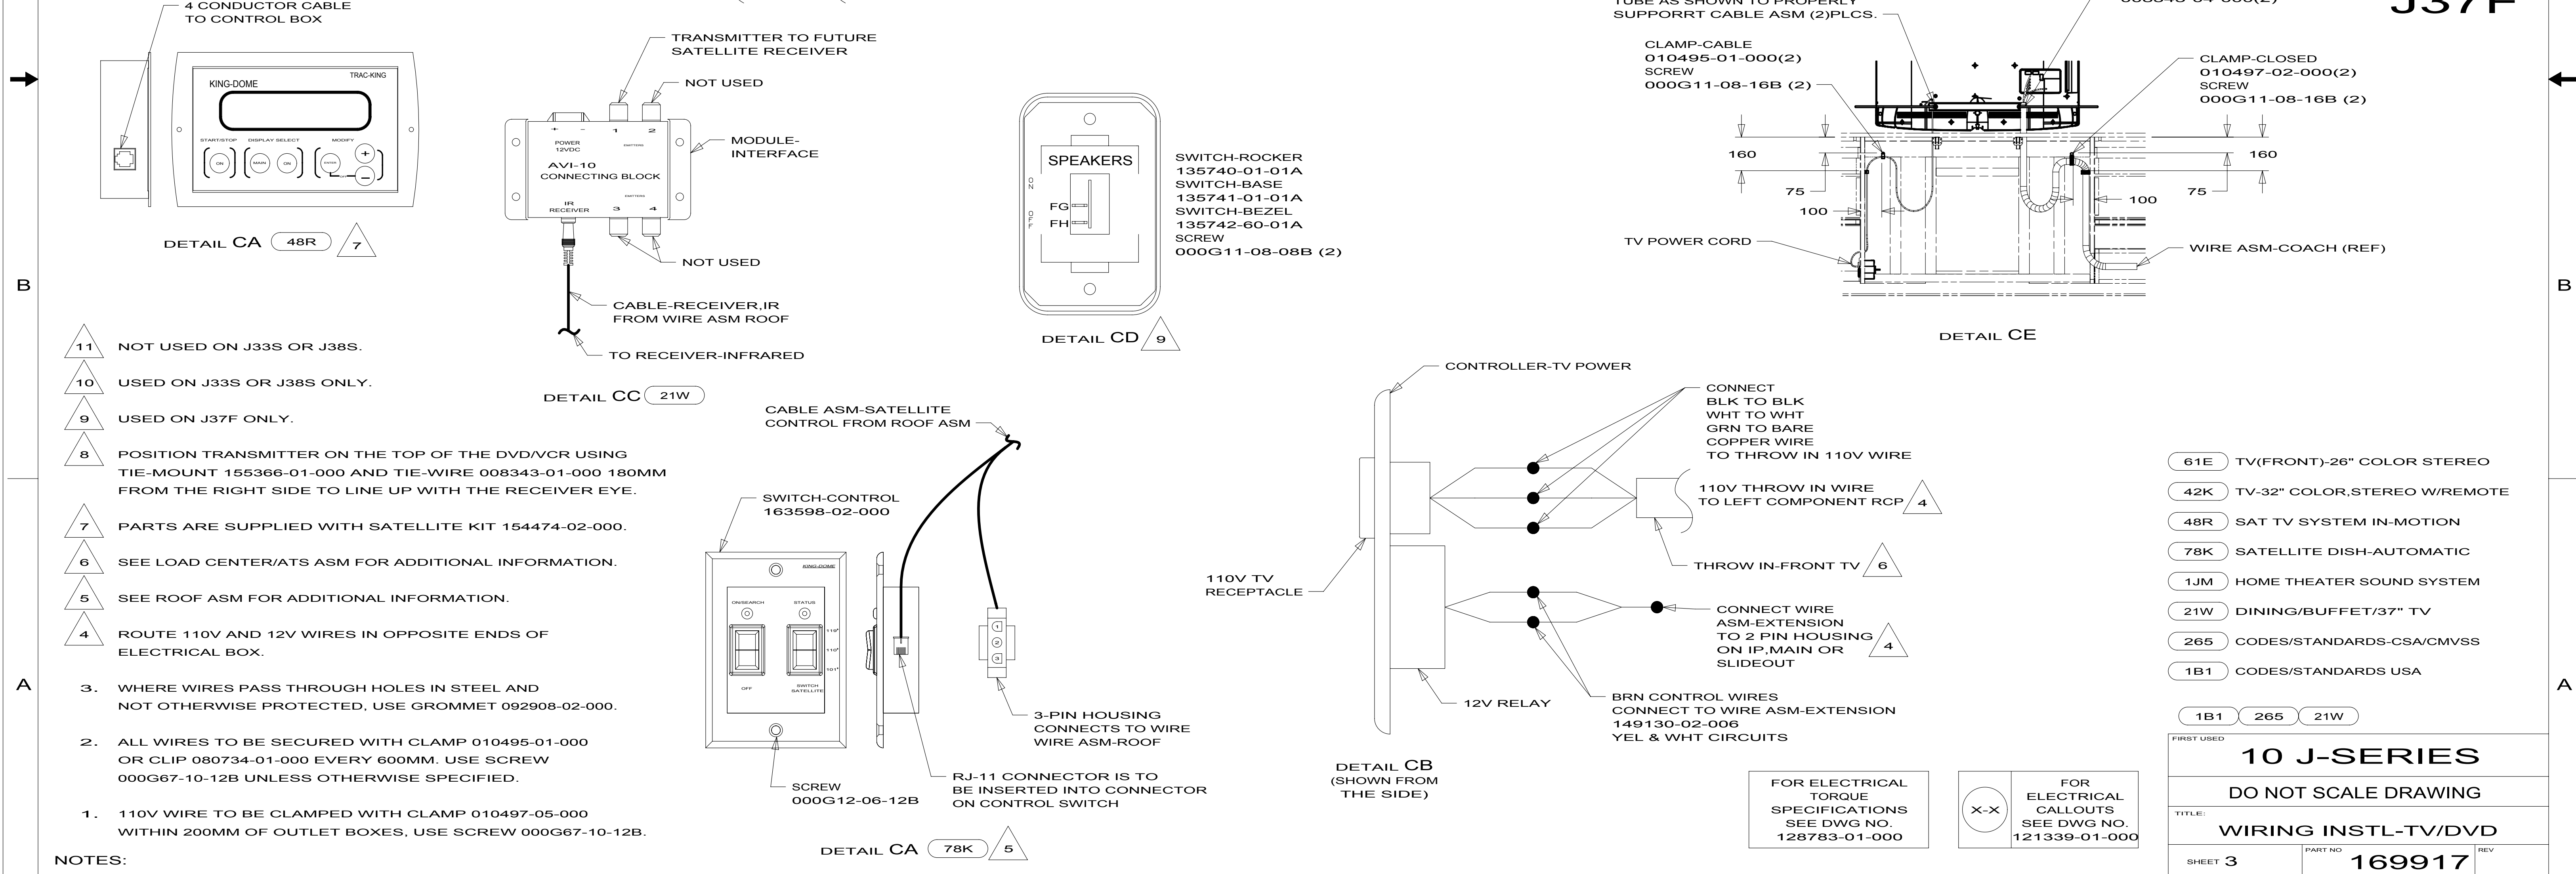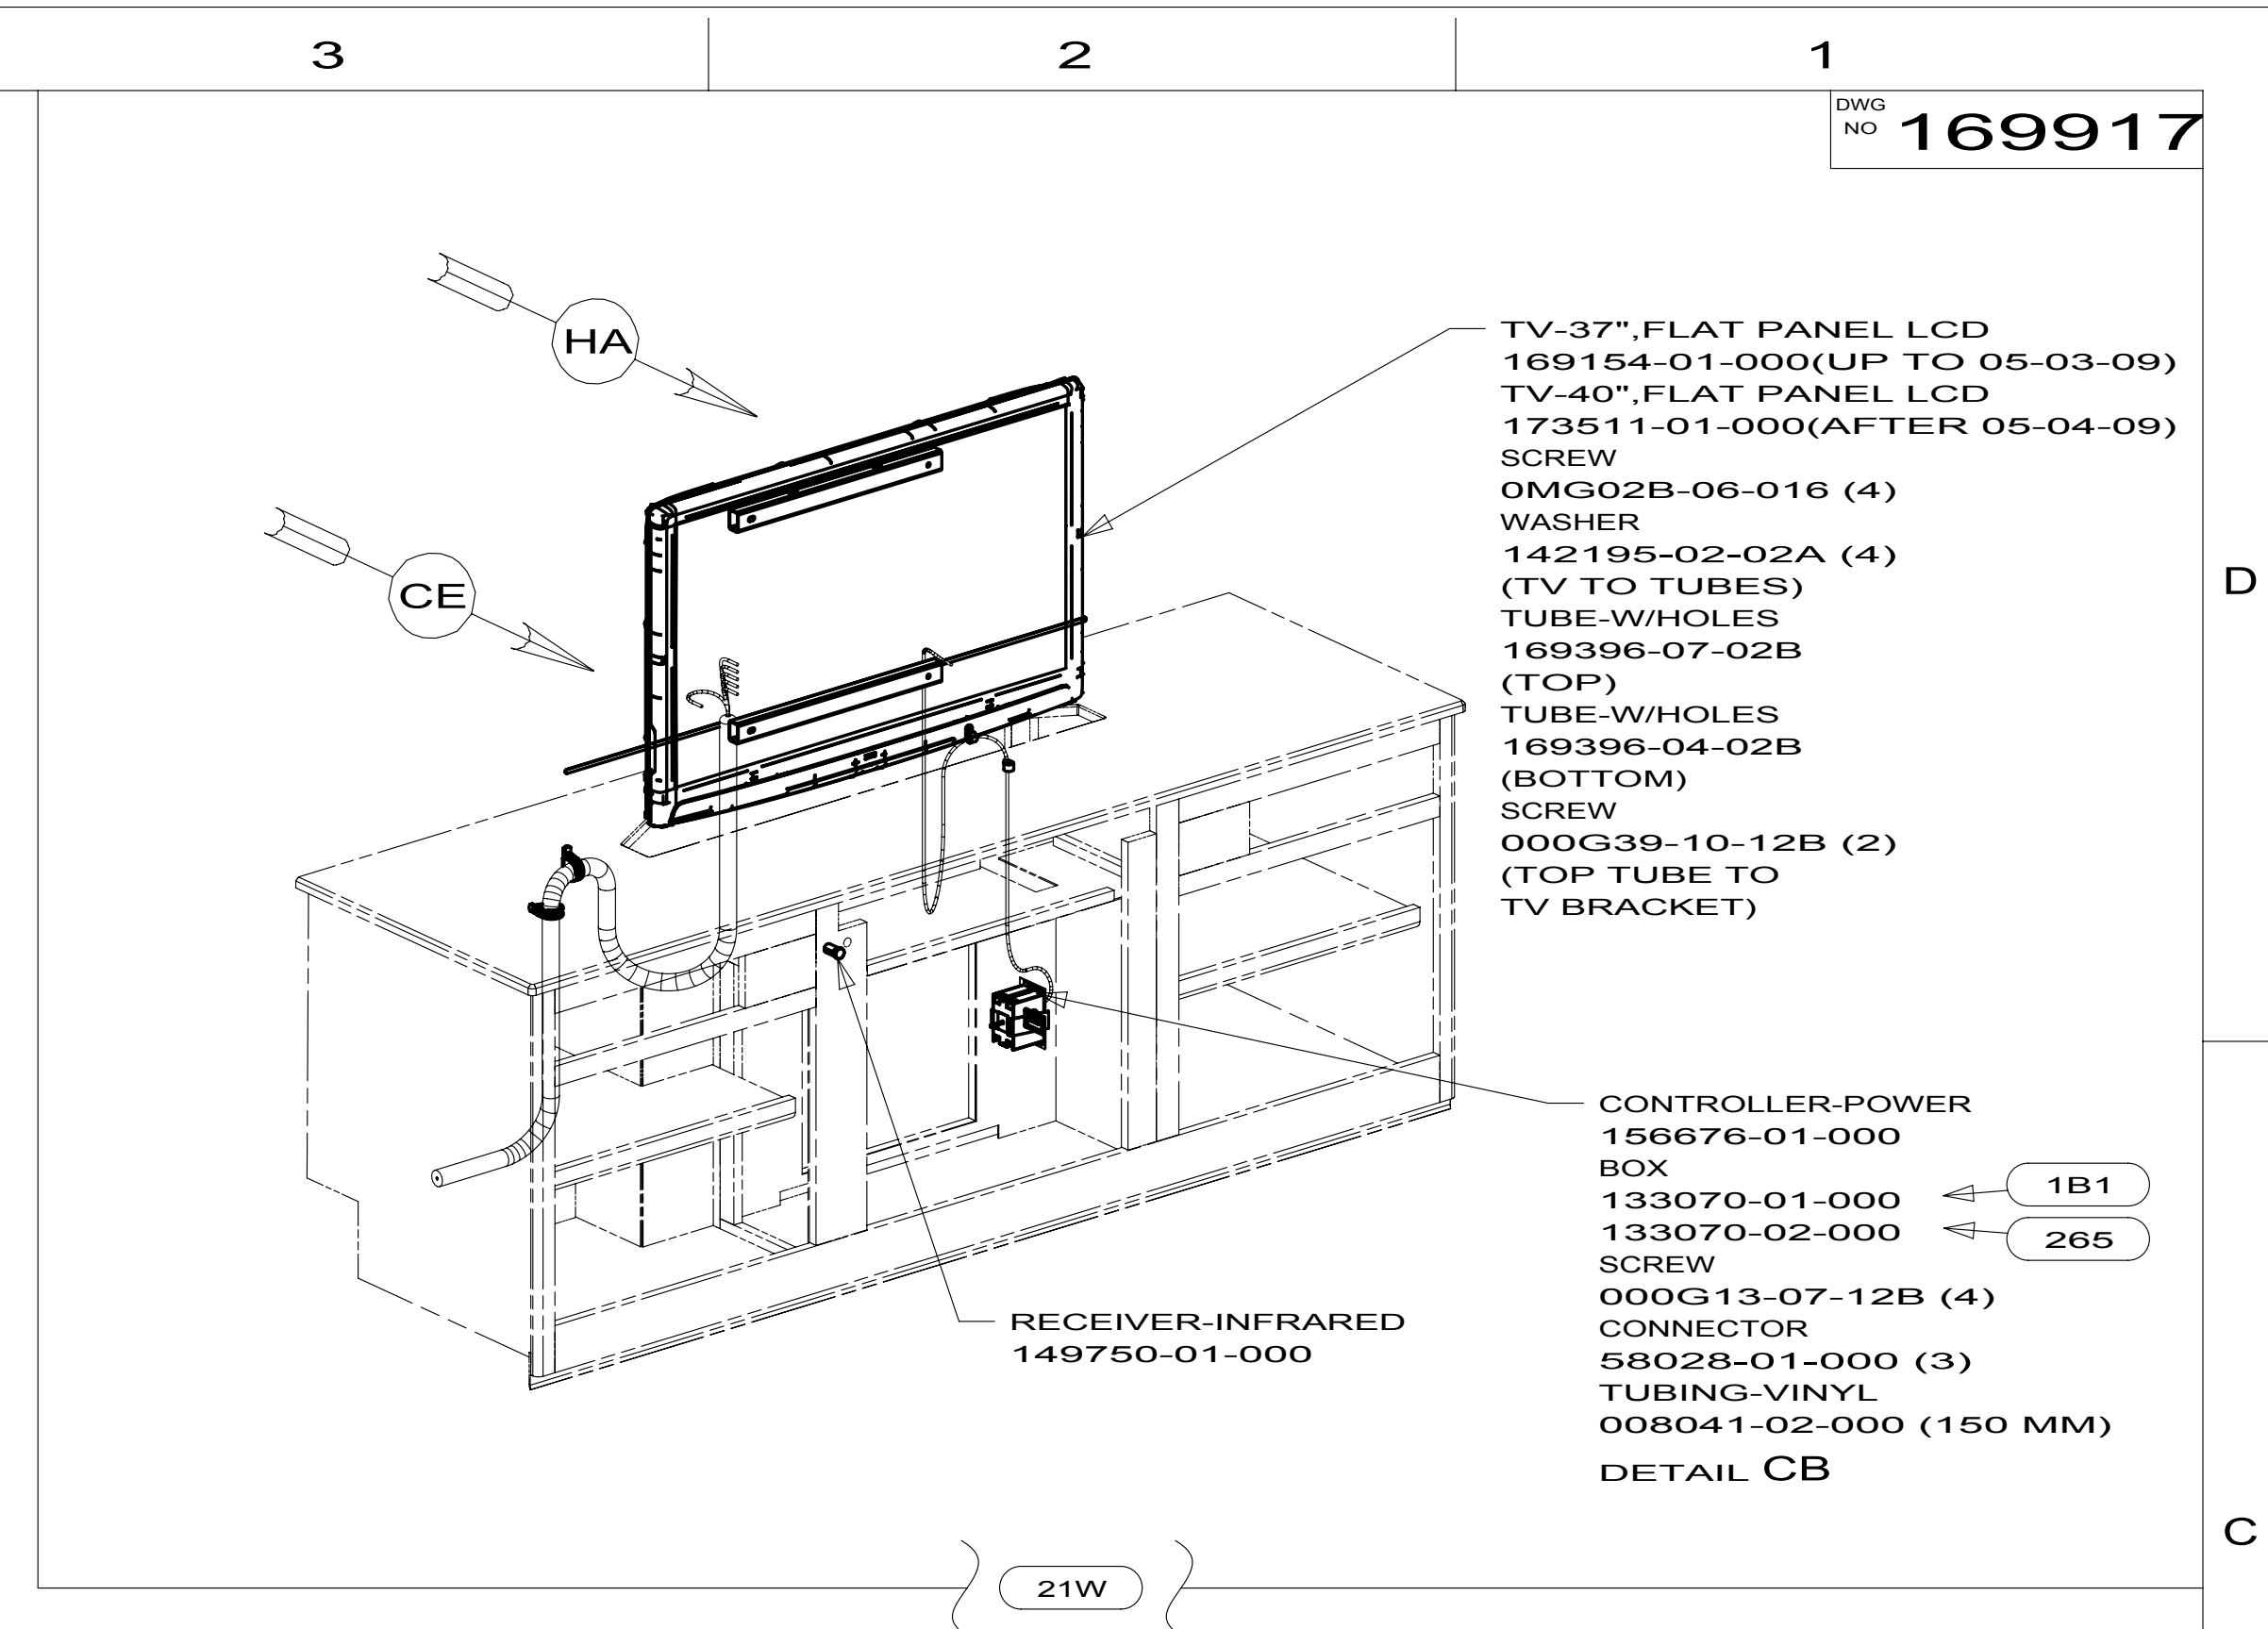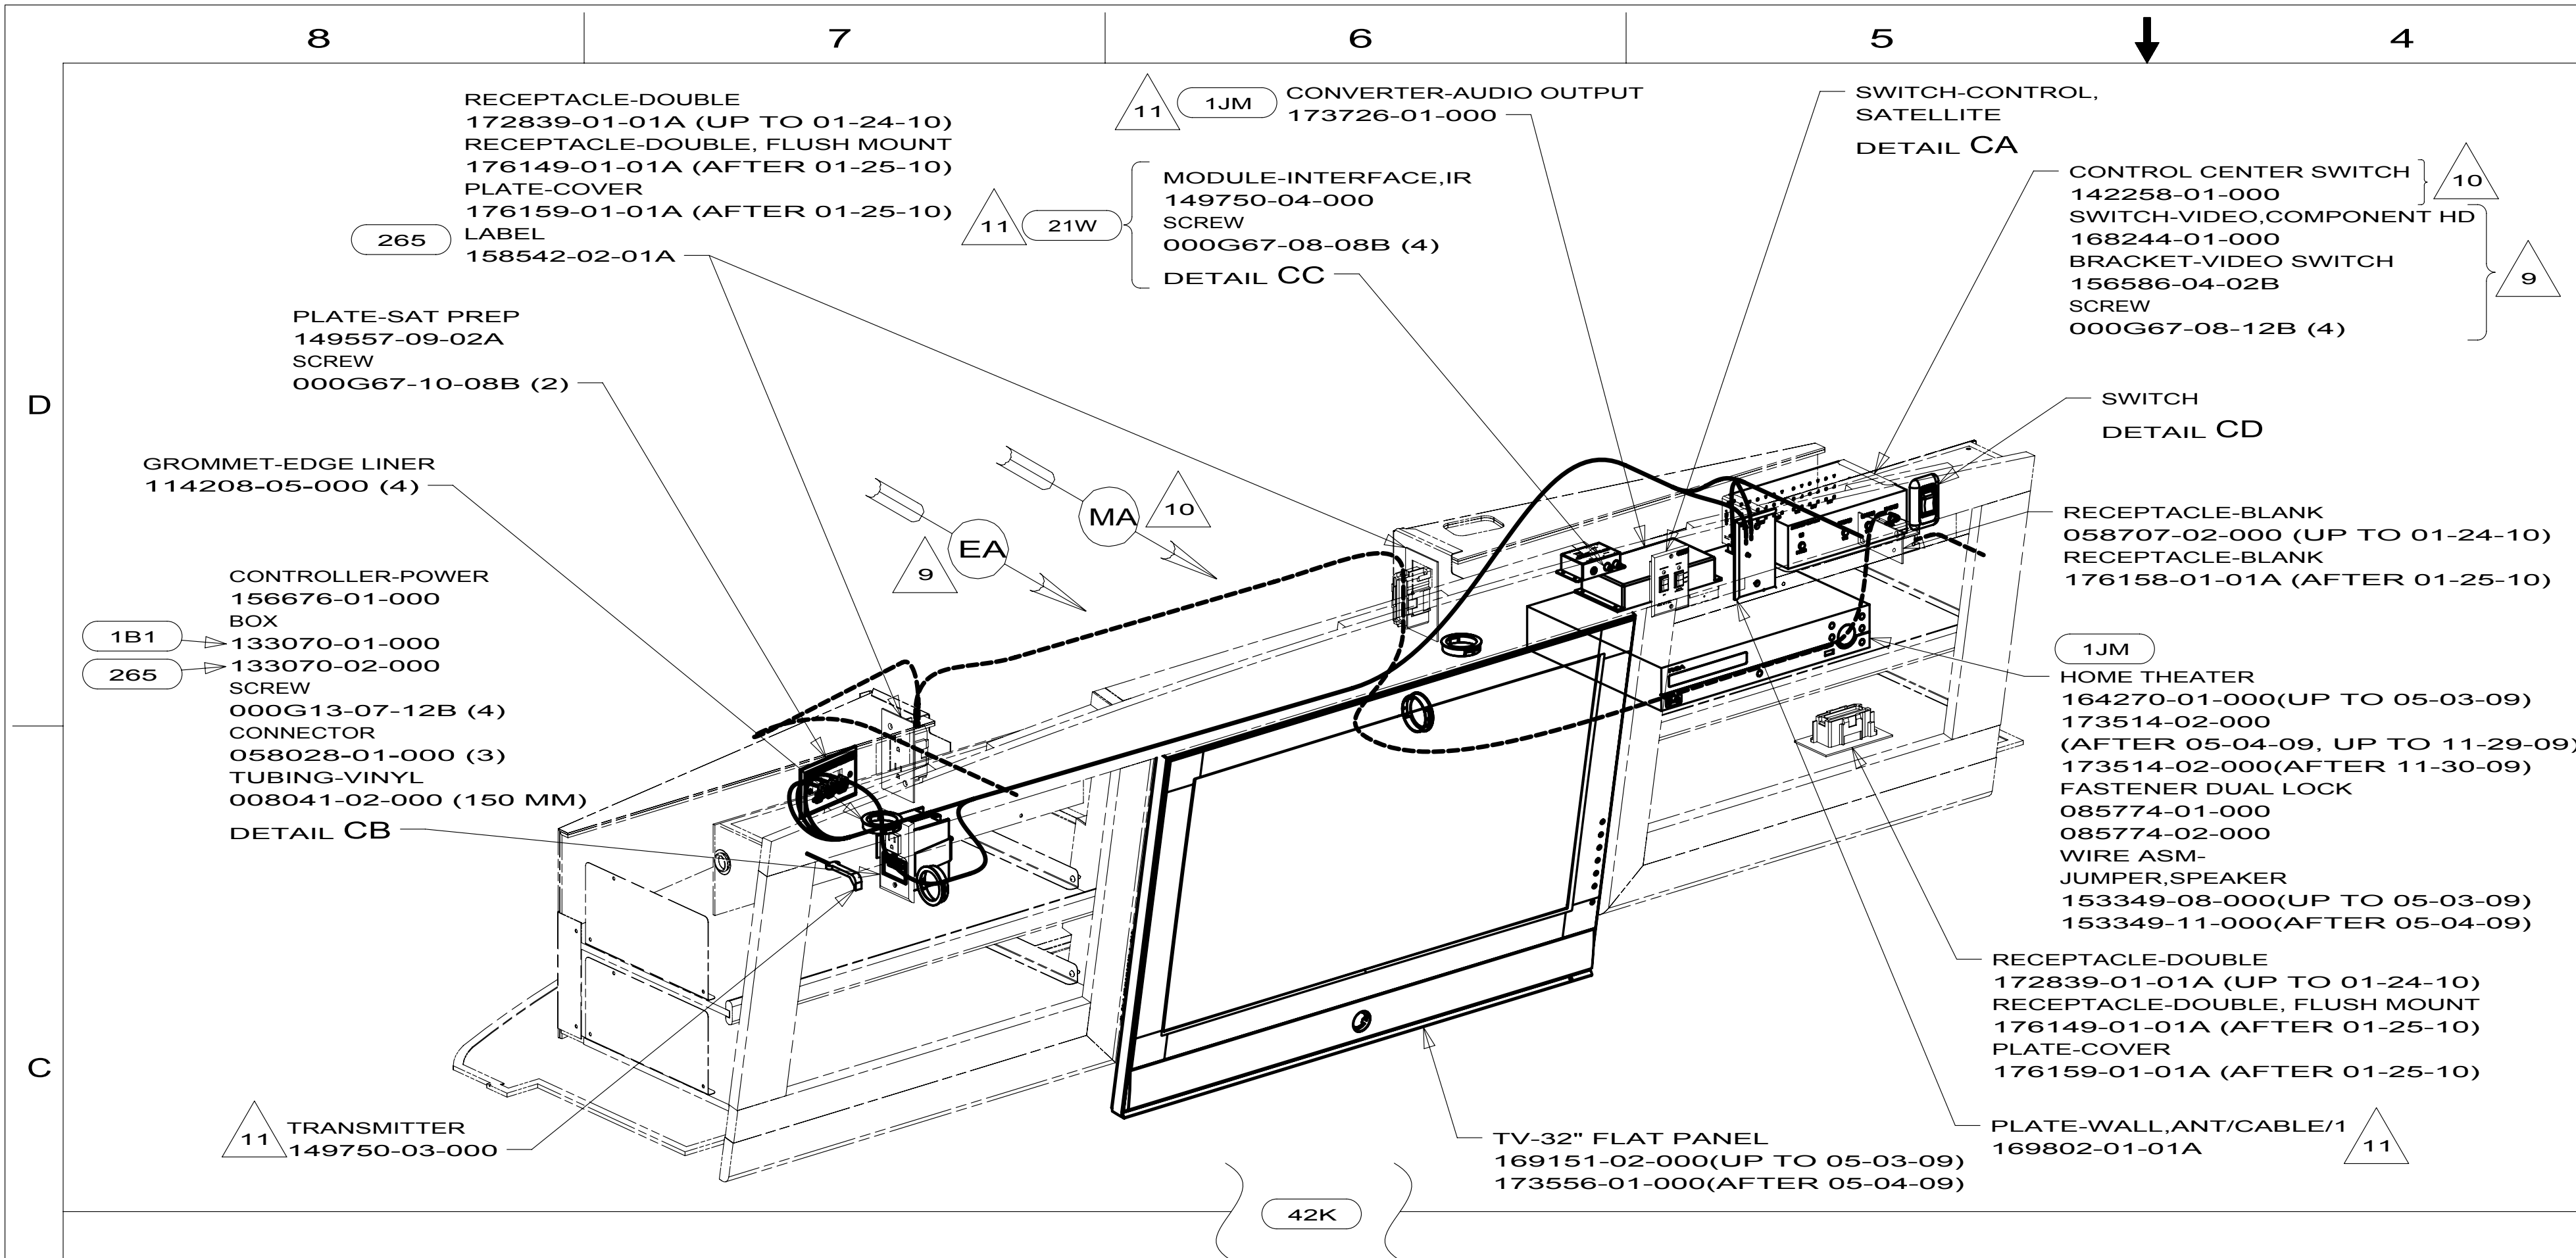

42K J37F
(UP TO 05-03-09)

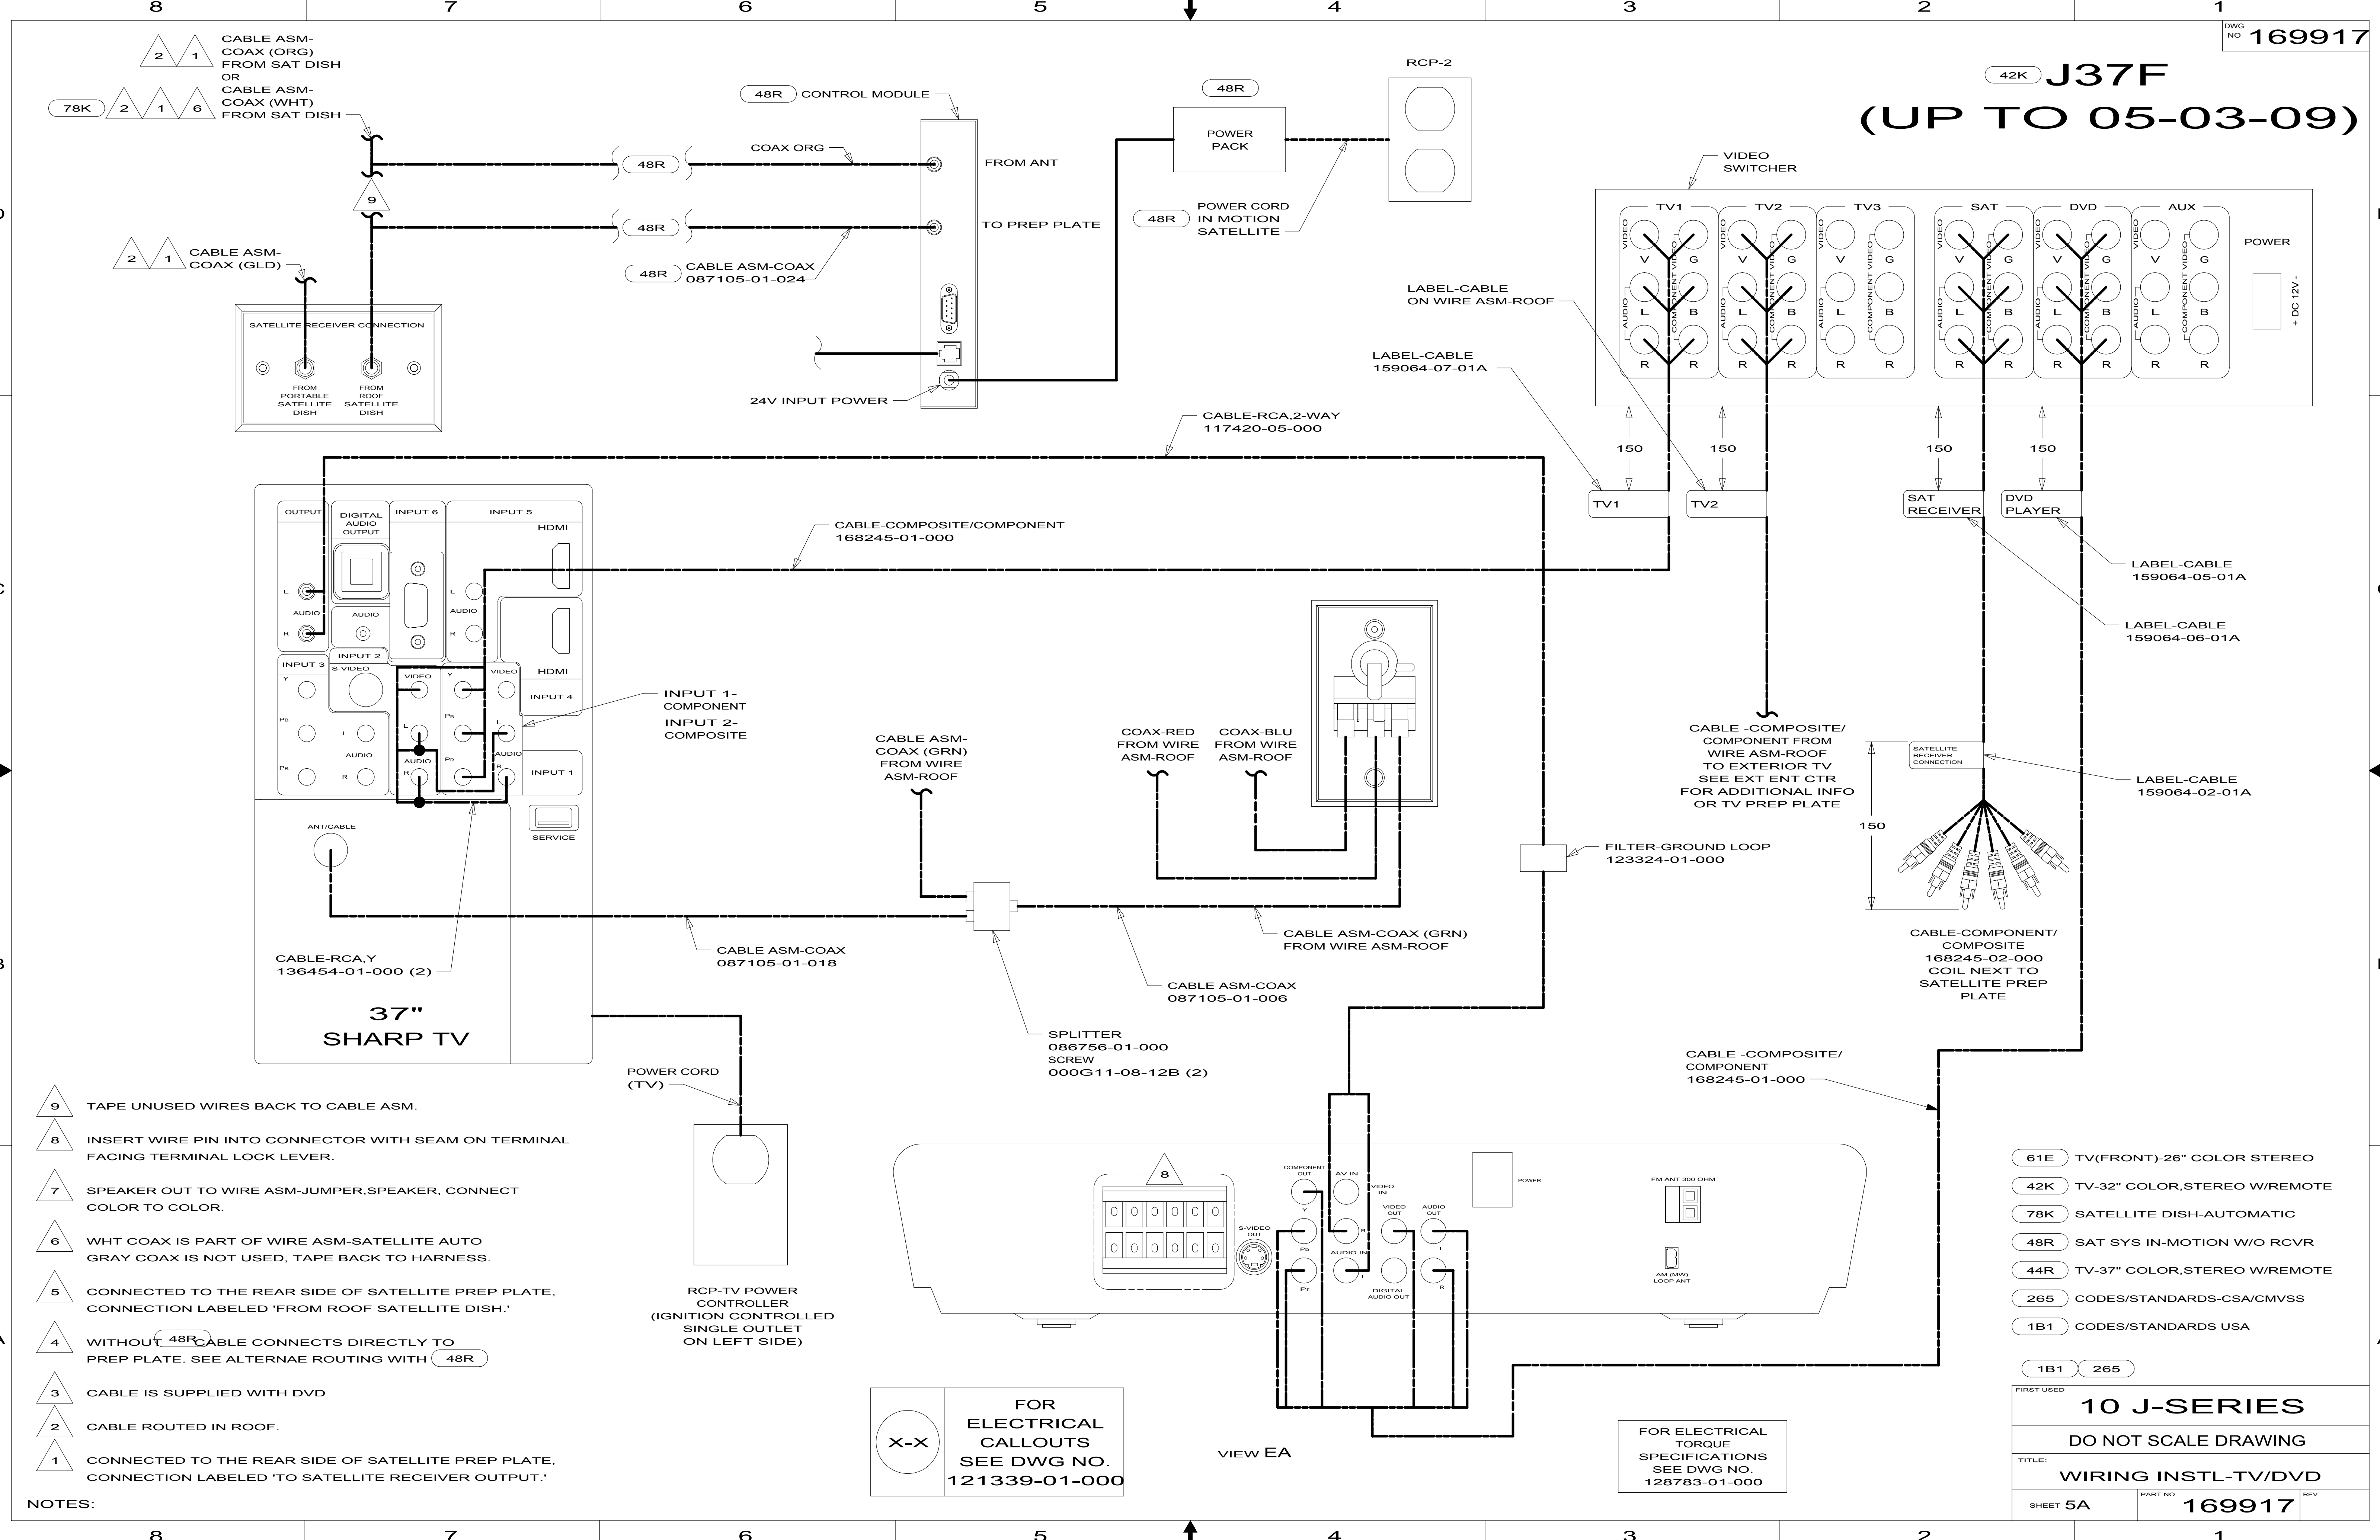

- 9 TAPE UNUSED WIRES BACK TO CABLE ASM.
- 8 INSERT WIRE PIN INTO CONNECTOR WITH SEAM ON TERMINAL FACING TERMINAL LOCK LEVER.
- 7 SPEAKER OUT TO WIRE ASM-JUMPER,SPEAKER, CONNECT COLOR TO COLOR.
- 6 WHT COAX IS PART OF WIRE ASM-SATELLITE AUTO GRAY COAX IS NOT USED, TAPE BACK TO HARNESS.
- 5 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM ROOF SATELLITE DISH.'
- 4 WITHOUT 48R CABLE CONNECTS DIRECTLY TO PREP PLATE. SEE ALTERNAE ROUTING WITH 48R
- 3 CABLE IS SUPPLIED WITH DVD
- 2 CABLE ROUTED IN ROOF.
- 1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'


NOTES:

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

- 61E TV(FRONT)-26" COLOR STEREO
- 42K TV-32" COLOR,STEREO W/REMOTE
- 78K SATELLITE DISH-AUTOMATIC
- 48R SAT SYS IN-MOTION W/O RCVR
- 44R TV-37" COLOR,STEREO W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 5A	PART NO 169917	REV

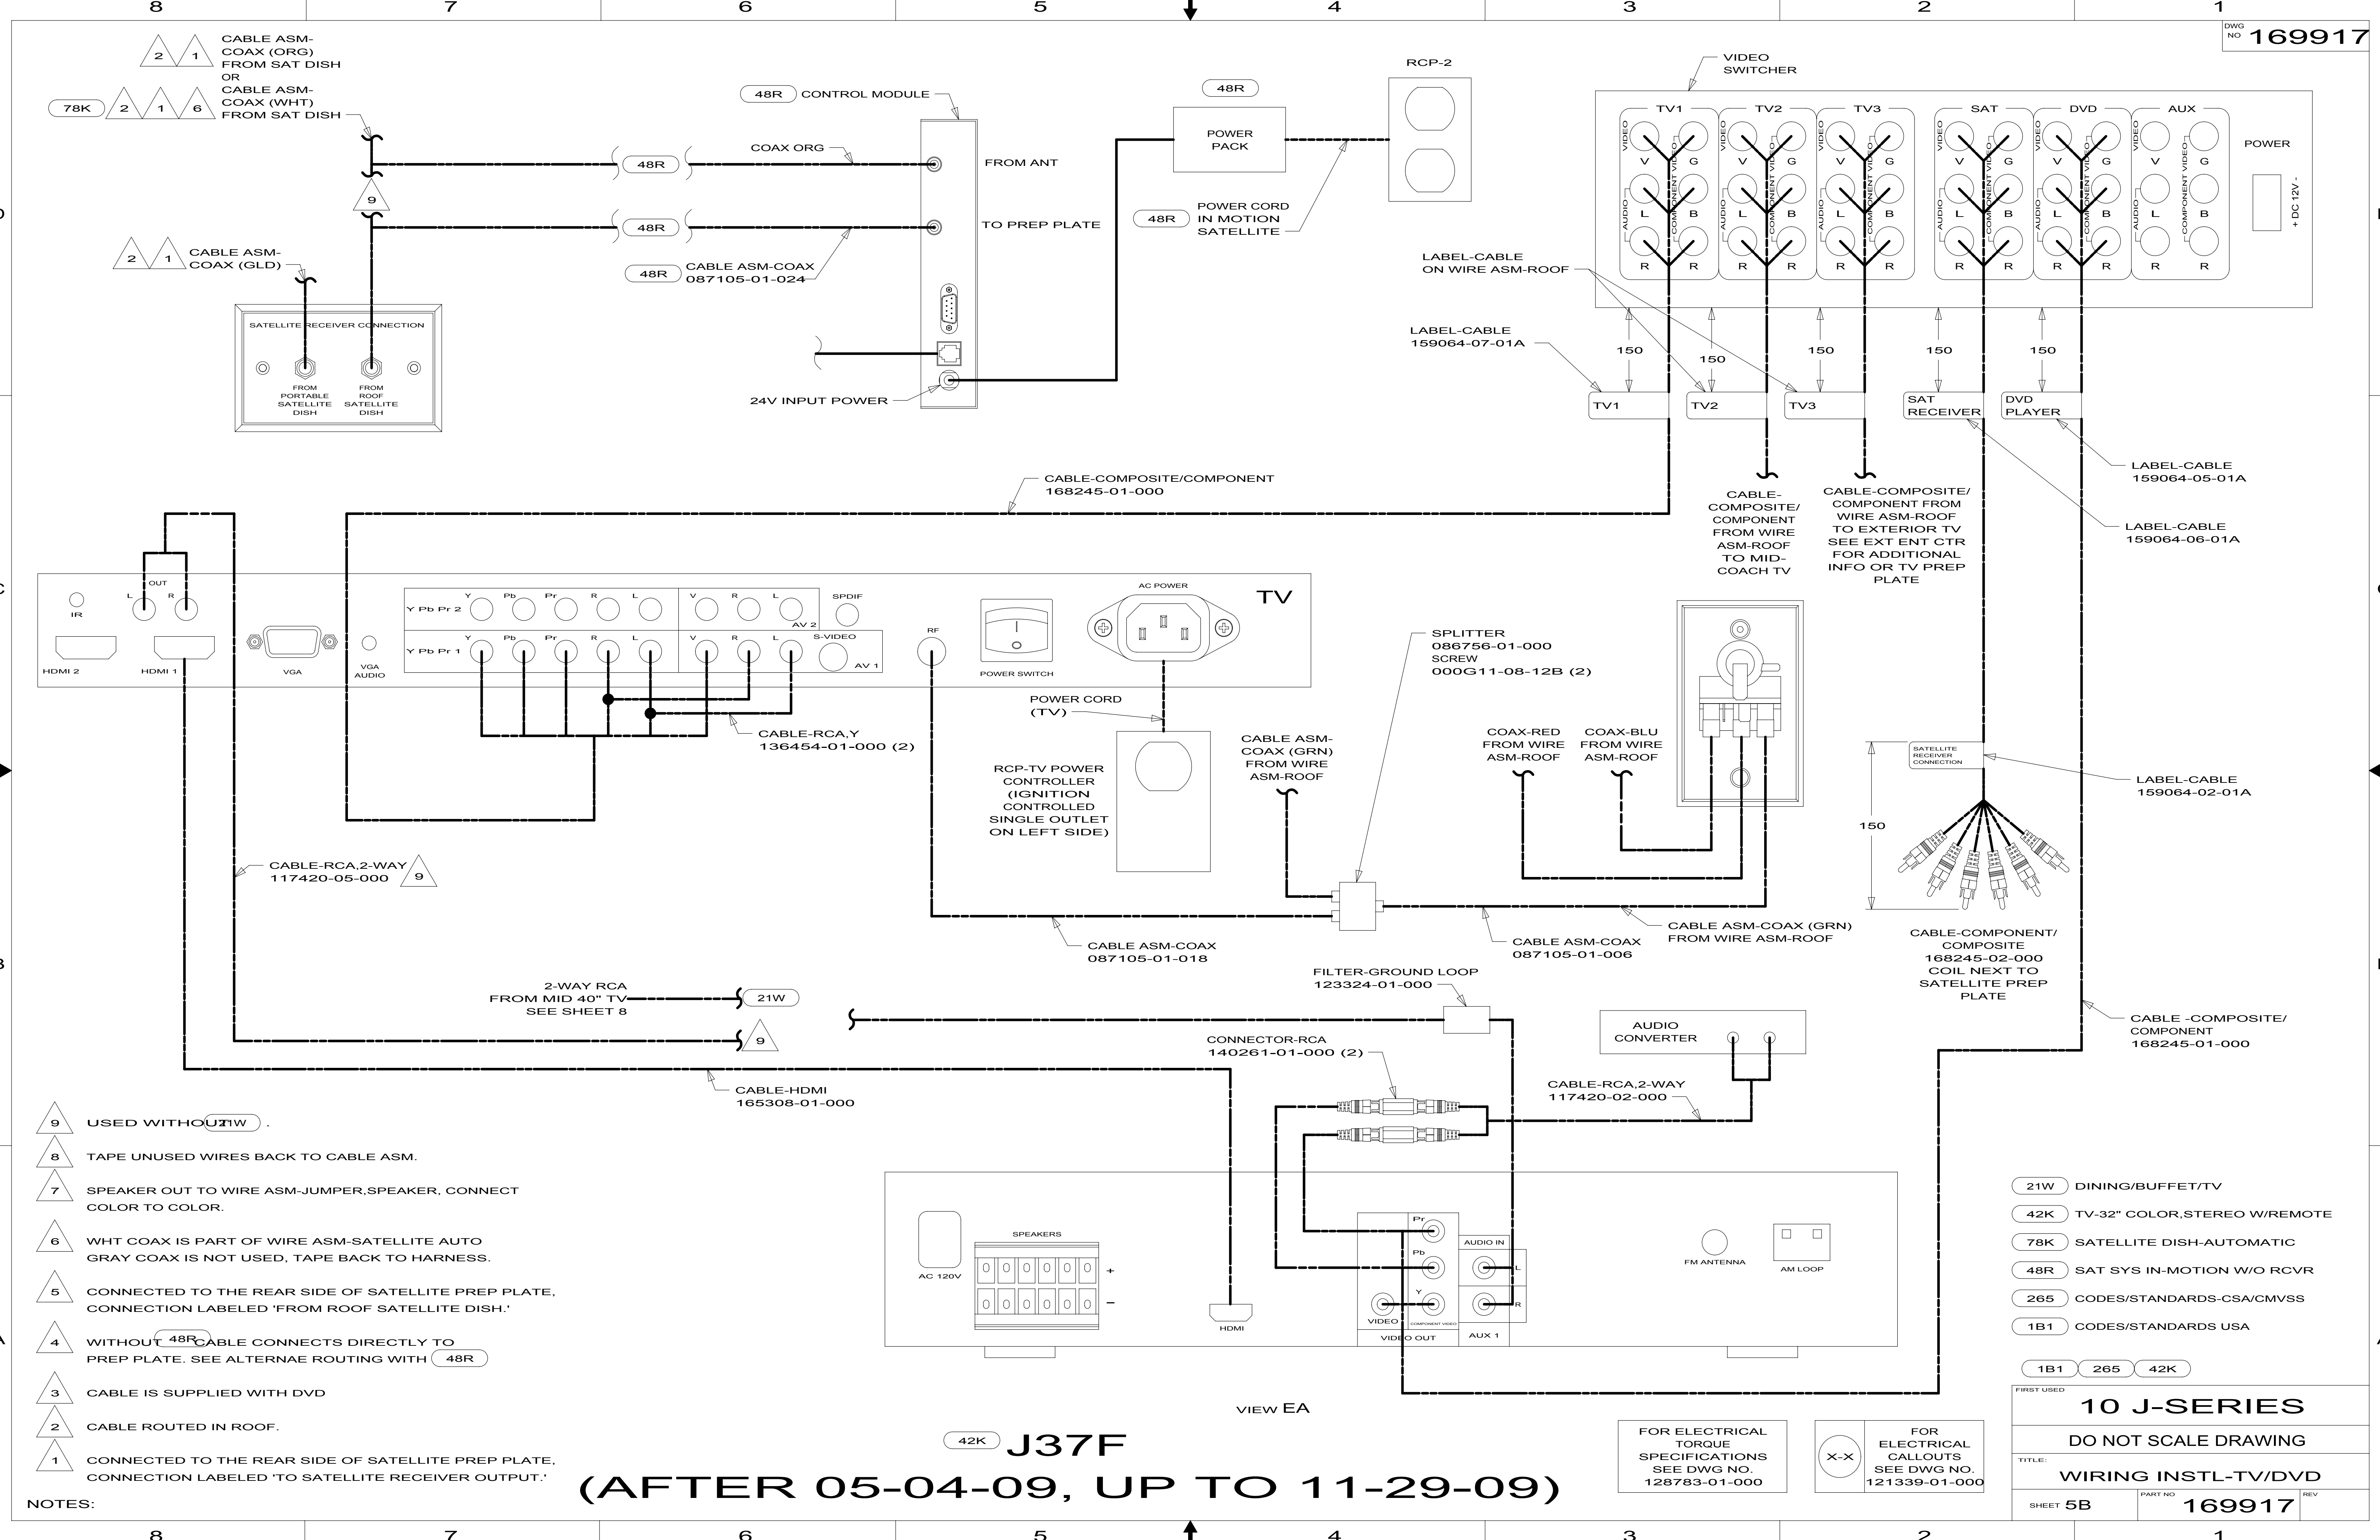

D

D

C

C

B

B

A

A

- NOTES:
- 9 USED WITHOUT 21W .
 - 8 TAPE UNUSED WIRES BACK TO CABLE ASM.
 - 7 SPEAKER OUT TO WIRE ASM-JUMPER,SPEAKER, CONNECT COLOR TO COLOR.
 - 6 WHT COAX IS PART OF WIRE ASM-SATELLITE AUTO GRAY COAX IS NOT USED, TAPE BACK TO HARNESS.
 - 5 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'FROM ROOF SATELLITE DISH.'
 - 4 WITHOUT 48R CABLE CONNECTS DIRECTLY TO PREP PLATE. SEE ALTERNAE ROUTING WITH 48R
 - 3 CABLE IS SUPPLIED WITH DVD
 - 2 CABLE ROUTED IN ROOF.
 - 1 CONNECTED TO THE REAR SIDE OF SATELLITE PREP PLATE, CONNECTION LABELED 'TO SATELLITE RECEIVER OUTPUT.'

- 21W DINING/BUFFET/TV
- 42K TV-32" COLOR,STEREO W/REMOTE
- 78K SATELLITE DISH-AUTOMATIC
- 48R SAT SYS IN-MOTION W/O RCVR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED

10 J-SERIES

DO NOT SCALE DRAWING

TITLE: **WIRING INSTL-TV/DVD**

SHEET 5B PART NO **169917** REV


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


X-X


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

42K J37F (AFTER 05-04-09, UP TO 11-29-09)

VIEW EA

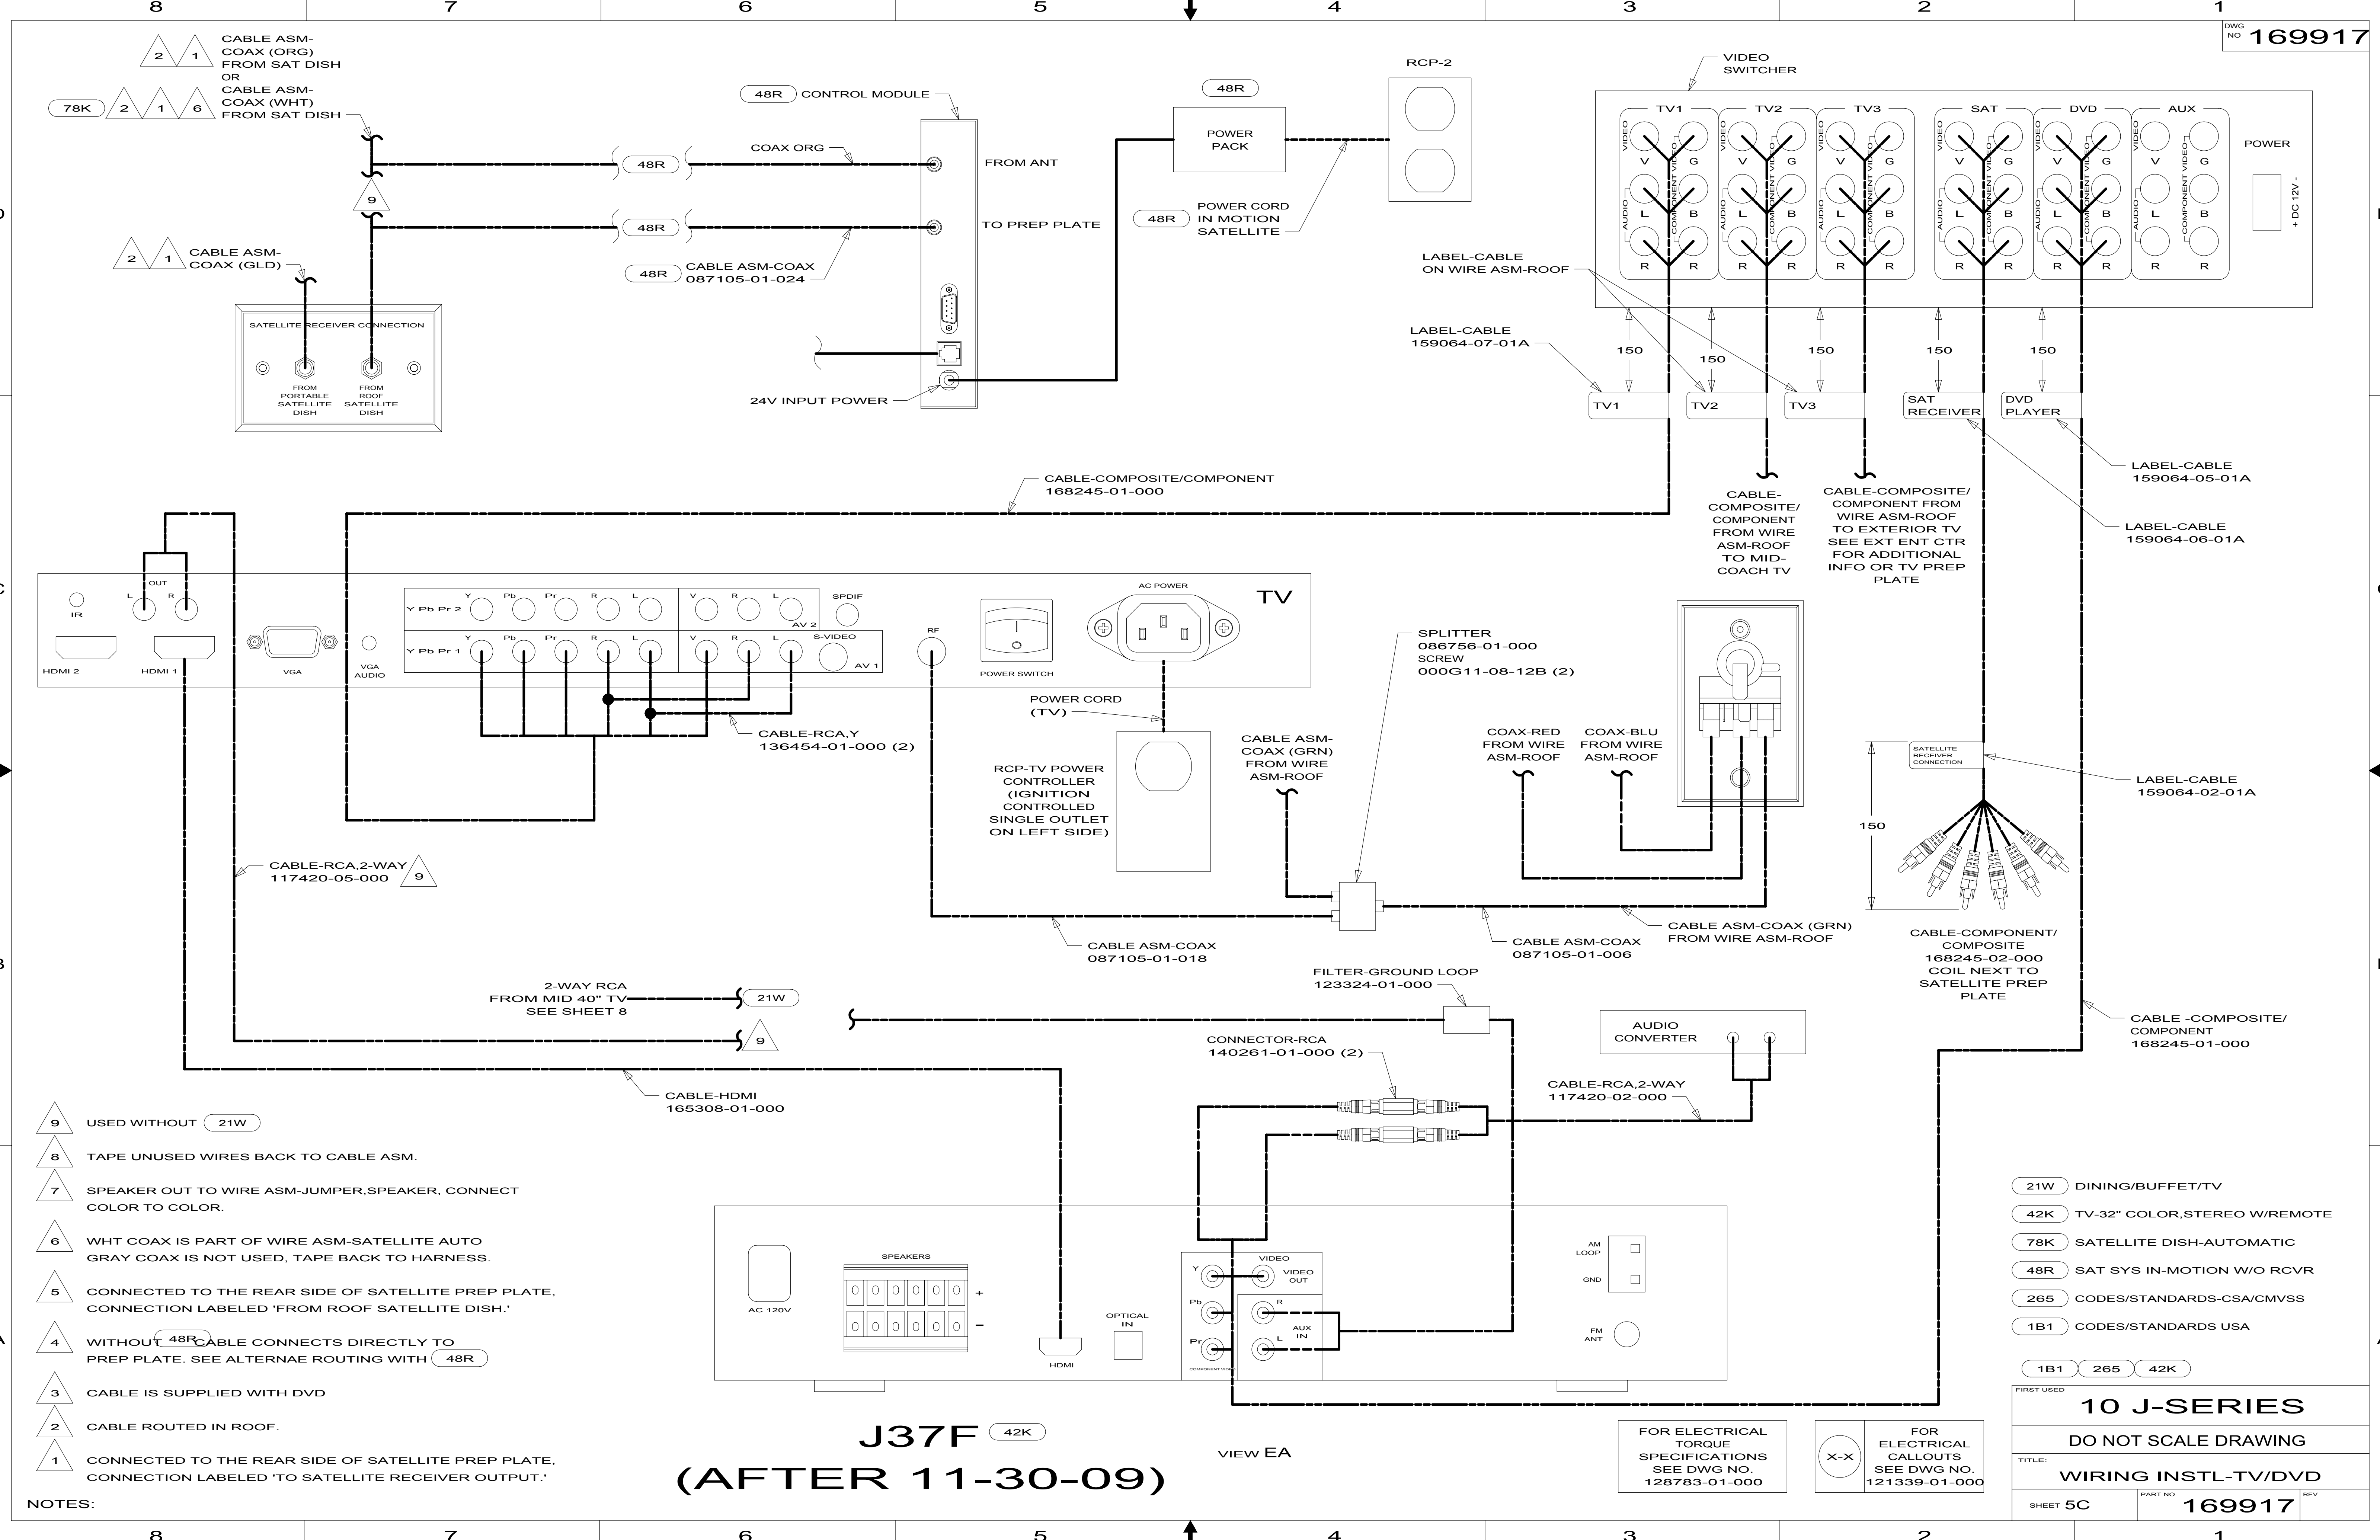

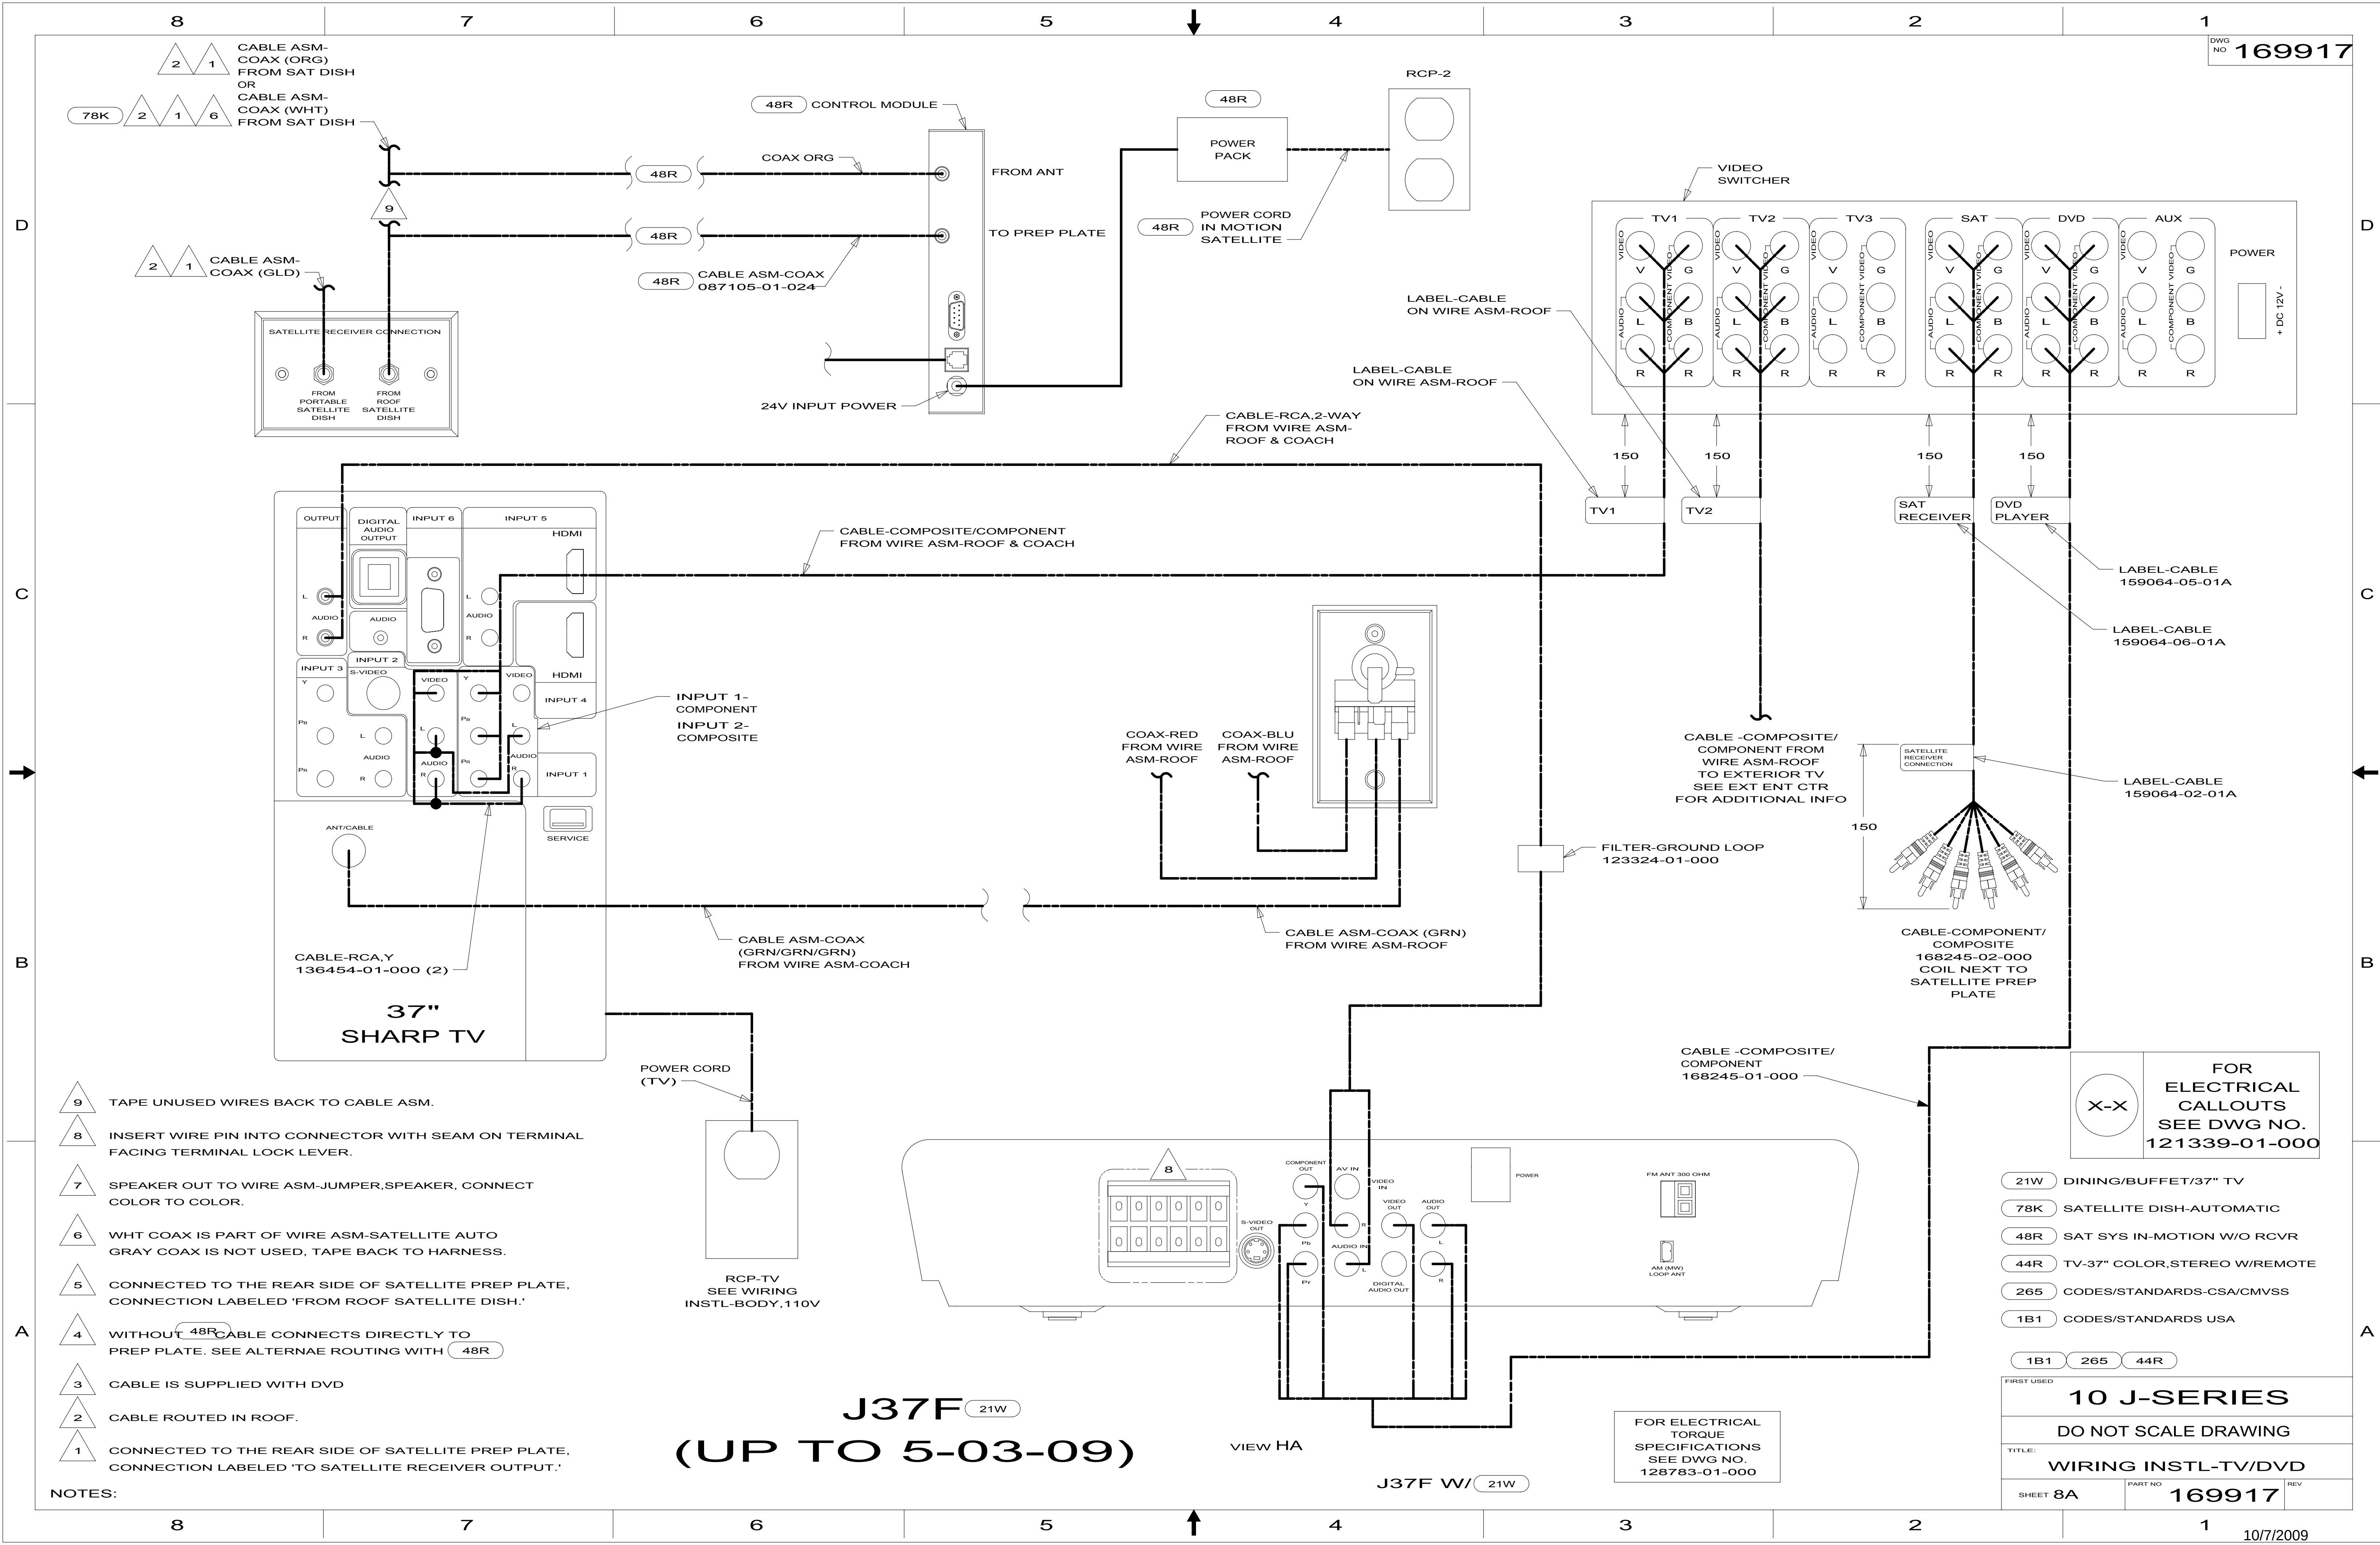

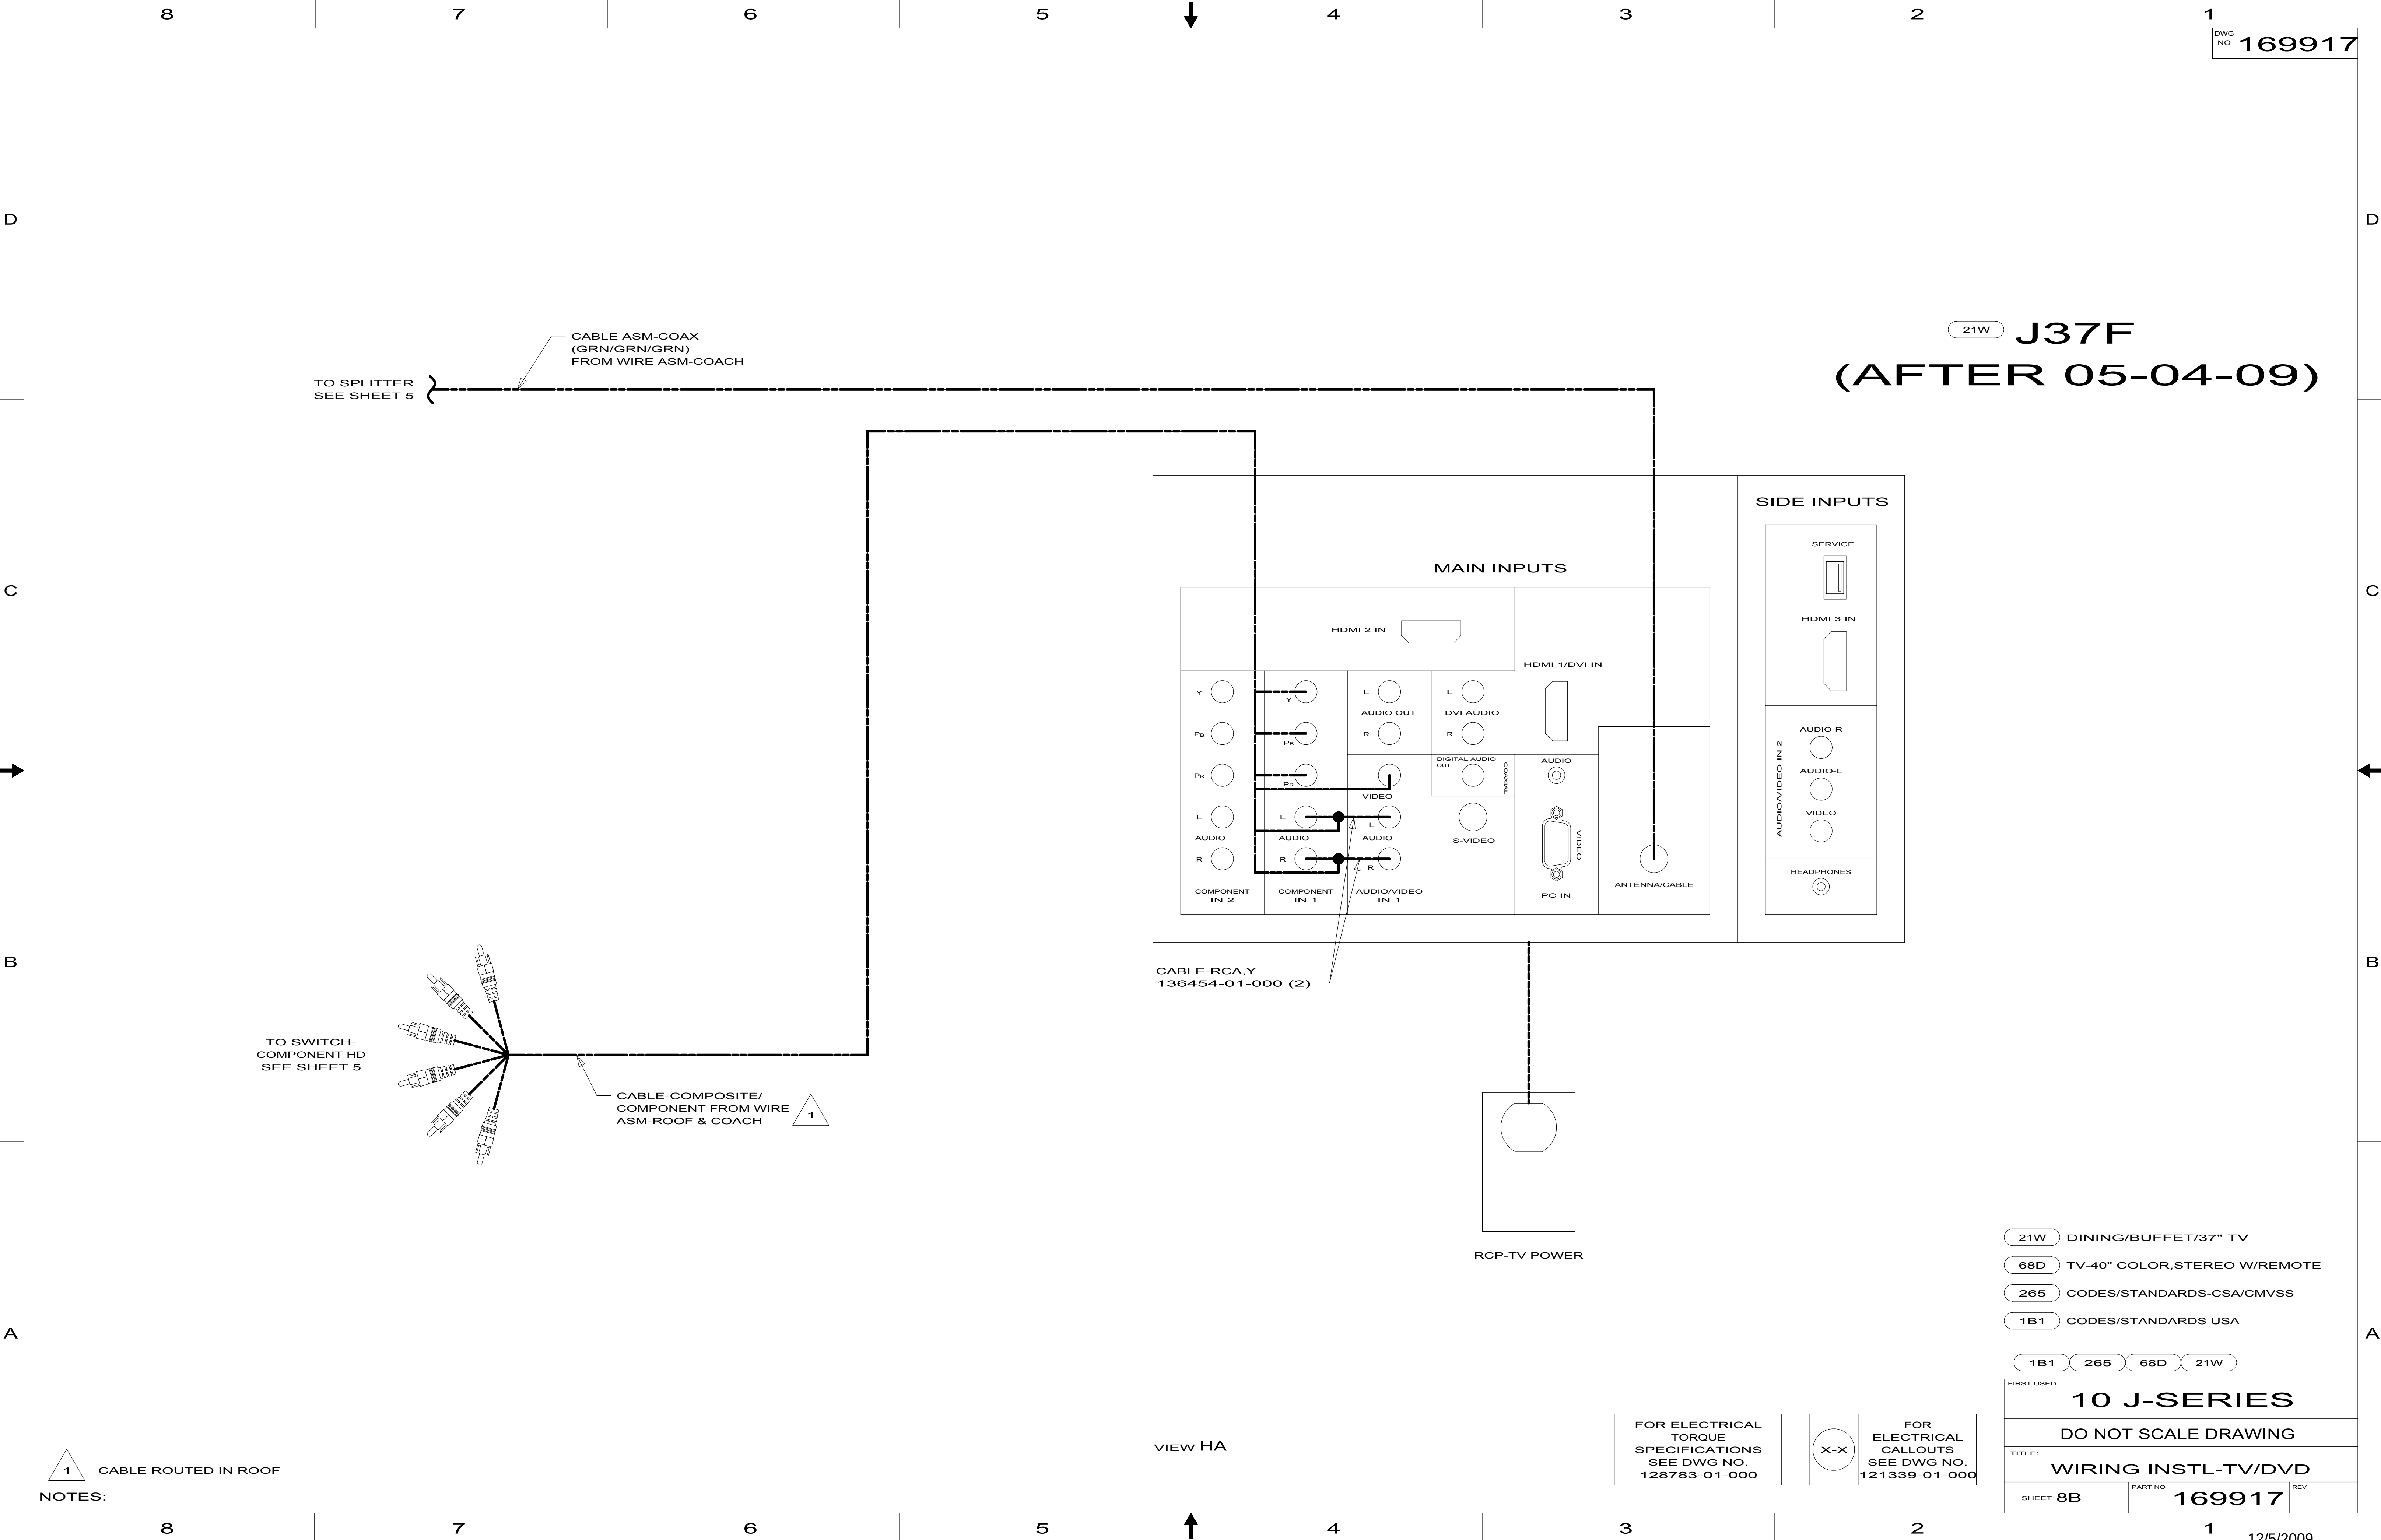

21W J37F
(AFTER 05-04-09)

CABLE-RCA,Y
136454-01-000 (2)

RCP-TV POWER

- 21W DINING/BUFFET/37" TV
- 68D TV-40" COLOR,STEREO W/REMOTE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 68D 21W

FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: WIRING INSTL-TV/DVD		
SHEET 8B	PART NO 169917	REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

1 CABLE ROUTED IN ROOF

VIEW HA

KEY	PART NUMBER	U/M	DESCRIPTION
	164270-01-700	EA	REMOTE

164270-01-000
VENDOR NO.
STS2891REM

KEY	PART NUMBER	U/M	DESCRIPTION
1	168408-01-700	EA	REMOTE

168408-01-000
VENDOR NO.
PSVCDV2007 SVC PK

KEY	PART NUMBER	U/M	DESCRIPTION
	169154-01-700	EA	REMOTE - TV

169151-01-000, 169151-02-000
VENDOR NO.
RRMCGA667WJSA

KEY	PART NUMBER	U/M	DESCRIPTION
	169154-01-700	EA	REMOTE - TV

169154-01-000
VENDOR NO.
RRMCGA667WJSA

KEY	PART NUMBER	U/M	DESCRIPTION	VENDOR NO.
	171727-01-700	EA	REMOTE	PR7ATSC