



8 7 6 5 4 3 2 1

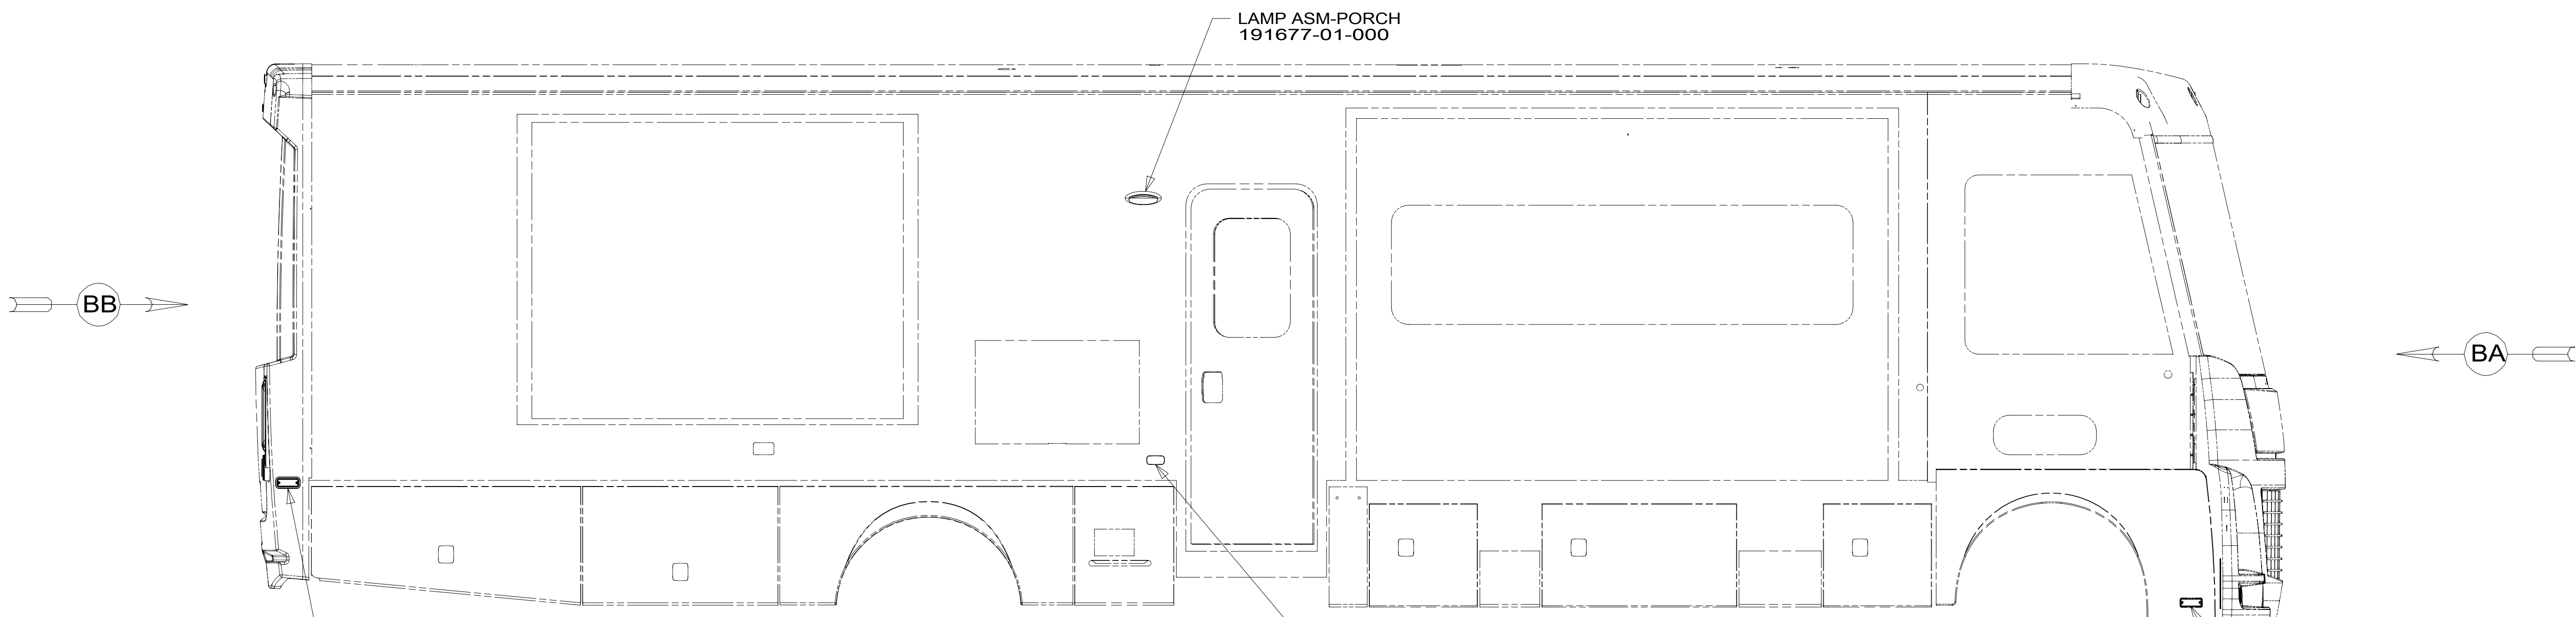

BB

BA

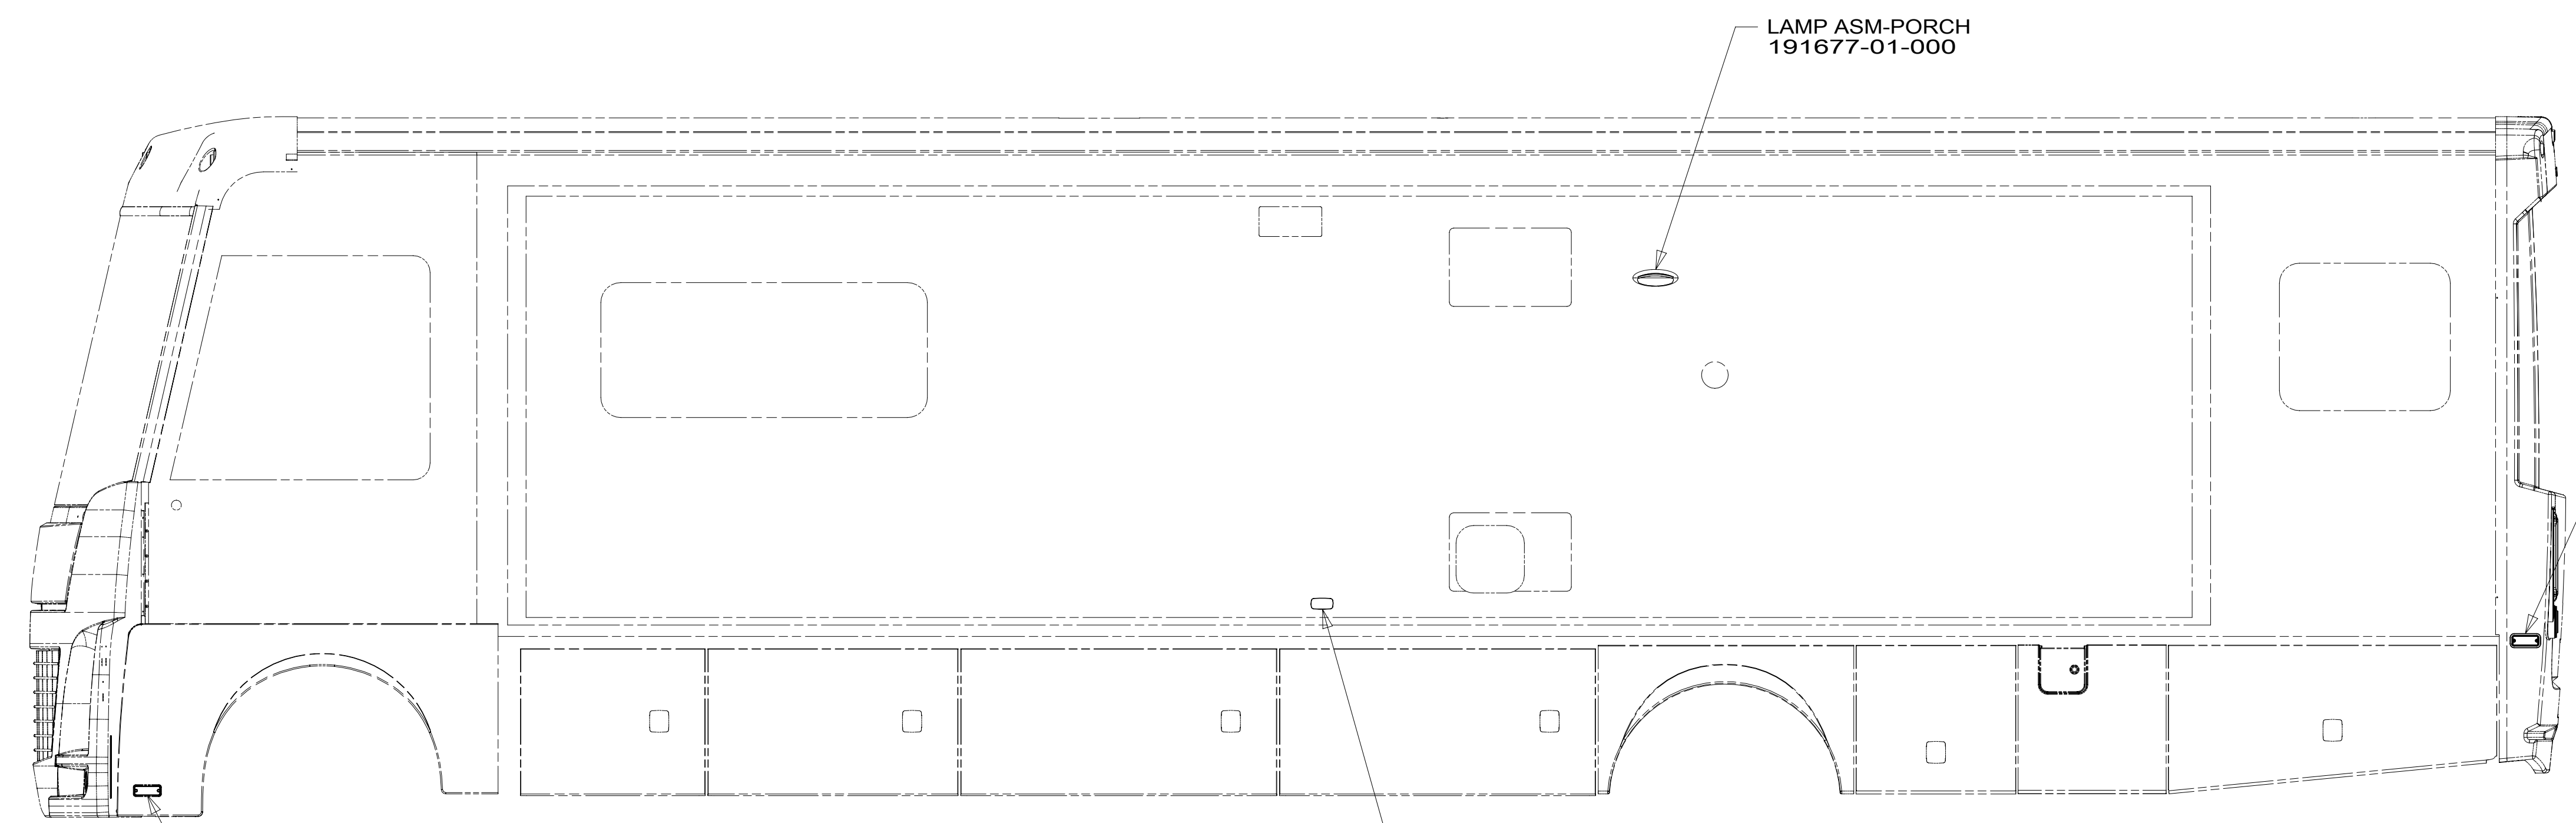

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			16 J-SER

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:
WIRING INSTL-EXTERIOR LAMPS

SHEET: 1 OF 2 ITEM/PART NO.: 000210209 / 30161901000 REF: 1

8 7 6 5 4 3 2 1

D

C

B

A

LAMP ASM-CLEARANCE,AMBER
187283-01-000 (5)
BASE-CLEARANCE LAMP
187283-03-000 (5)
SCREW
G39-08-16U (10)
TRIM-RING,CHROME
187283-04-000 (5)
SCREW
G68-06-12U (10)

WIRE ASM-CLEARANCE LAMPS
126486-04-000

2 PIN HOUSING TO
WIRE ASM-IP,MAIN

CIRCUITS SP,AR
TO STRIP LED LIGHT

HEADLAMP ASM-LOW
146527-01-000 (2)
RIVET
113133-02-CHT (8)

HEADLAMP ASM-HIGH
146527-02-000 (2)
RIVET
113133-02-CHT (8)

LAMP ASM-PARK/TURN
146560-01-000 (2)
BULB
112708-02-000 (2)
NUT
139130-01-CHT (6)

LAMP ASM-FOG
138910-01-000 (2)
BOLT
C26-06-12U (12)
NUT
D39-04-00U (12)
BRACKET-FOG LIGHT
191106-01-000 (2)

TO RIGHT SIDE
MARKER LAMP

1 LIGHT-TAPE, LED
192971-09-CHT

WIRE ASM-HEADLAMP
191560-01-000

CHASSIS HOUSING
TO CHASSIS HEADLAMP
CONNECTOR

CIRCUITS SP,AR
TO STRIP LED LIGHT

6 PIN HOUSING
TO WIRE ASM-CHASSIS

LIGHT-TAPE, LED
192971-09-CHT 1

TO LEFT SIDE
MARKER LAMP

2 PIN HOUSING
TO HORN

RING TERMINAL
TO GROUND BOLT 2

VIEW BA

LAMP ASM-CLEARANCE,RED
187283-02-000 (5)
BASE-CLEARANCE LAMP
187283-03-000 (5)
SCREW
G39-08-16U (10)

WIRE ASM-TAILAMP
191563-01-000

LIGHT-THIRD BRAKE,LED
192871-01-CHT
BEZEL
192846-01-CHT
SCREW
G39-10-12U (2)

3

4 POD-TAILLIGHT,LH
189318-02-CHT
SEAL-TRIM,EDGE
115870-01-000
(1350 MM)

TO LEFT SIDE
MARKER LAMP

TO GROUND STUD
TP,RRJ
(LOCATED ON
BACKSIDE OF
GENERATOR
OUTRIGGER)
NUT-GROUND
D39-05-00B

2 PIN HOUSING
TO WIRE ASM-CHASSIS

VIEW BB

4 POD-TAILLIGHT,RH
189318-01-CHT
SEAL-TRIM,EDGE
115870-01-000
(1350 MM)

LAMP ASM-STOP/TURN/TAIL
191553-01-000 (2)
BEZEL
191553-02-000 (2)
SCREW
G39-08-32U (4)

LAMP ASM-BACKUP
184674-01-000 (2)
BEZEL-LAMP
184674-02-000 (2)
SCREW
G39-08-32U (6)

TO RIGHT SIDE
MARKER LAMP

CONNECTOR-TRAILER
157593-01-000
SCREW
101618-01-000 (4)

LAMP-LICENSE PLATE
87201-01-000
SCREW
G11-06-12U (2)

VIEW BB

- 4 INSTALL SEAL AROUND ENTIRE PERIMETER OF POD. PLACE SEAM AT BOTTOM OF POD.
- 3 SECURE WIRE ASM APPROX. EVERY 450 MM TO BACKWALL BRACKETS. USE TIE-WIRE 8343-01-000 OR 93147-01-000 AS APPROPRIATE.
- 2 CLEAN PAINT OFF METAL (BOLT) BEFORE CONNECTING GROUND TO INSURE CONTACT.
- 1 MOUNT TO FIBERGLASS AFTER PAINT AND CLEAR COAT. CLEAN SURFACE WITH ISOPROPYL ALCOHOL. REMOVE SMALL AREA OF TAPE LINER ON TOP AND BOTTOM OF THE BACK SIDE OF LIGHT STRIP. APPLY PRIMER 176823-01-000 TO ENDS OF LIGHT STRIP, LET DRY AND THEN APPLY ADHESIVE 176824-01-000 IN THE SAME AREA. REMOVE REMAINING TAPE LINER AND APPLY TO PAINTED FIBERGLASS SURFACE. DO NOT APPLY PRIMER OR ADHESIVE DIRECTLY ON PAINTED FIBERGLASS SURFACE.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION:	1B1 265	
WIRING INSTL-EXTERIOR LAMPS		
SHEET:	ITEM/PART NO:	REV
2 OF 2	000210209 / 30161901000	