

8			7			6			5			4			3			2			1		


CLAMP-CLOSED
010497-10-000

CLAMP-CLOSED
010497-10-000

FOR
LP
CALLOUTS
SEE DWG NO
116228-01-000

(265) CODES/STANDARDS-CSA/CMVSS
(1B1) CODES/STANDARDS USA
(1KM) DODGE-11,030# DIESEL,COWL


WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE		
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS		
P.E.	FIRST USED		
M.E.	10 H25T		
DSNR	MATERIAL:		
UNSPECIFIED TOLERANCES ARE:			
WHOLE DIM (X) : 3			
ONE-PLACE (X.X) : 1.5			
TWO-PLACE (X.XX) : 0.50			
ANGLE : 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: LP SYSTEM INSTL			
SHEET 1 OF 4	PART NO	169768	REV
REF: 1			

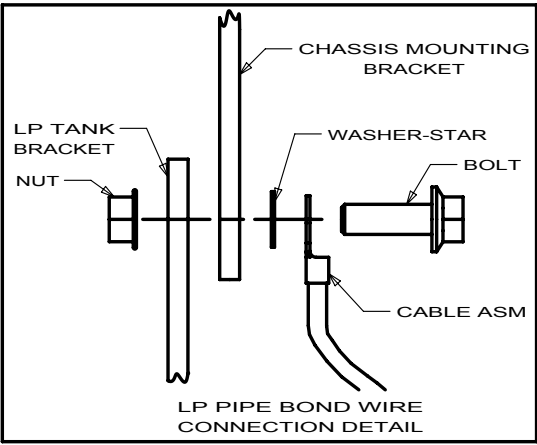


6. CUT CONVOLUTED TUBING BEFORE FLARE NUTS ARE ASSEMBLED.
5. GAS PIPING SYSTEM MATERIALS CONFORM WITH NFPA 1192.
4. REGULATOR TO BE POSITIONED WITH BENT POINTING DOWNWARD INSIDE OF 45° .
3. BLACK PIPE AND COPPER TUBING TO BE CLAMPED EVERY 1219 MAX WITH: SCREW G67-10-10B (WOOD SUPPORTS), SCREW G39-10-12T (METAL SUPPORTS).
2. STEEL PIPE AND FITTINGS TO BE ASSEMBLED WITH SEALANT 84456-01-000.
1. ALL COPPER TUBING BELOW FLOOR IS TO BE ENCASED IN CONDUIT 41953-05-000.

12. COMPONENT IS MOUNTED TO HOLDING TANK CRADLE.
11. CLAMP LP LINE TO SIDEWALL, AWAY FROM BURNER BOX ON REFRIGERATOR.
10. TORQUE TO 38± FT LBS.
9. THREAD ALL BLACK PIPE WITH STANDARD NATIONAL PIPE THREAD (NPT) ON BOTH ENDS.
8. GROMMET SUPPLIED WITH WATER HEATER.
7. MINIMUM BEND RADIUS ON COPPER TUBING TO BE 44 FOR 1/2" AND 28 FOR 3/8". HAND BENDS TO BE 76 RADIUS MINIMUM.

NOTES:

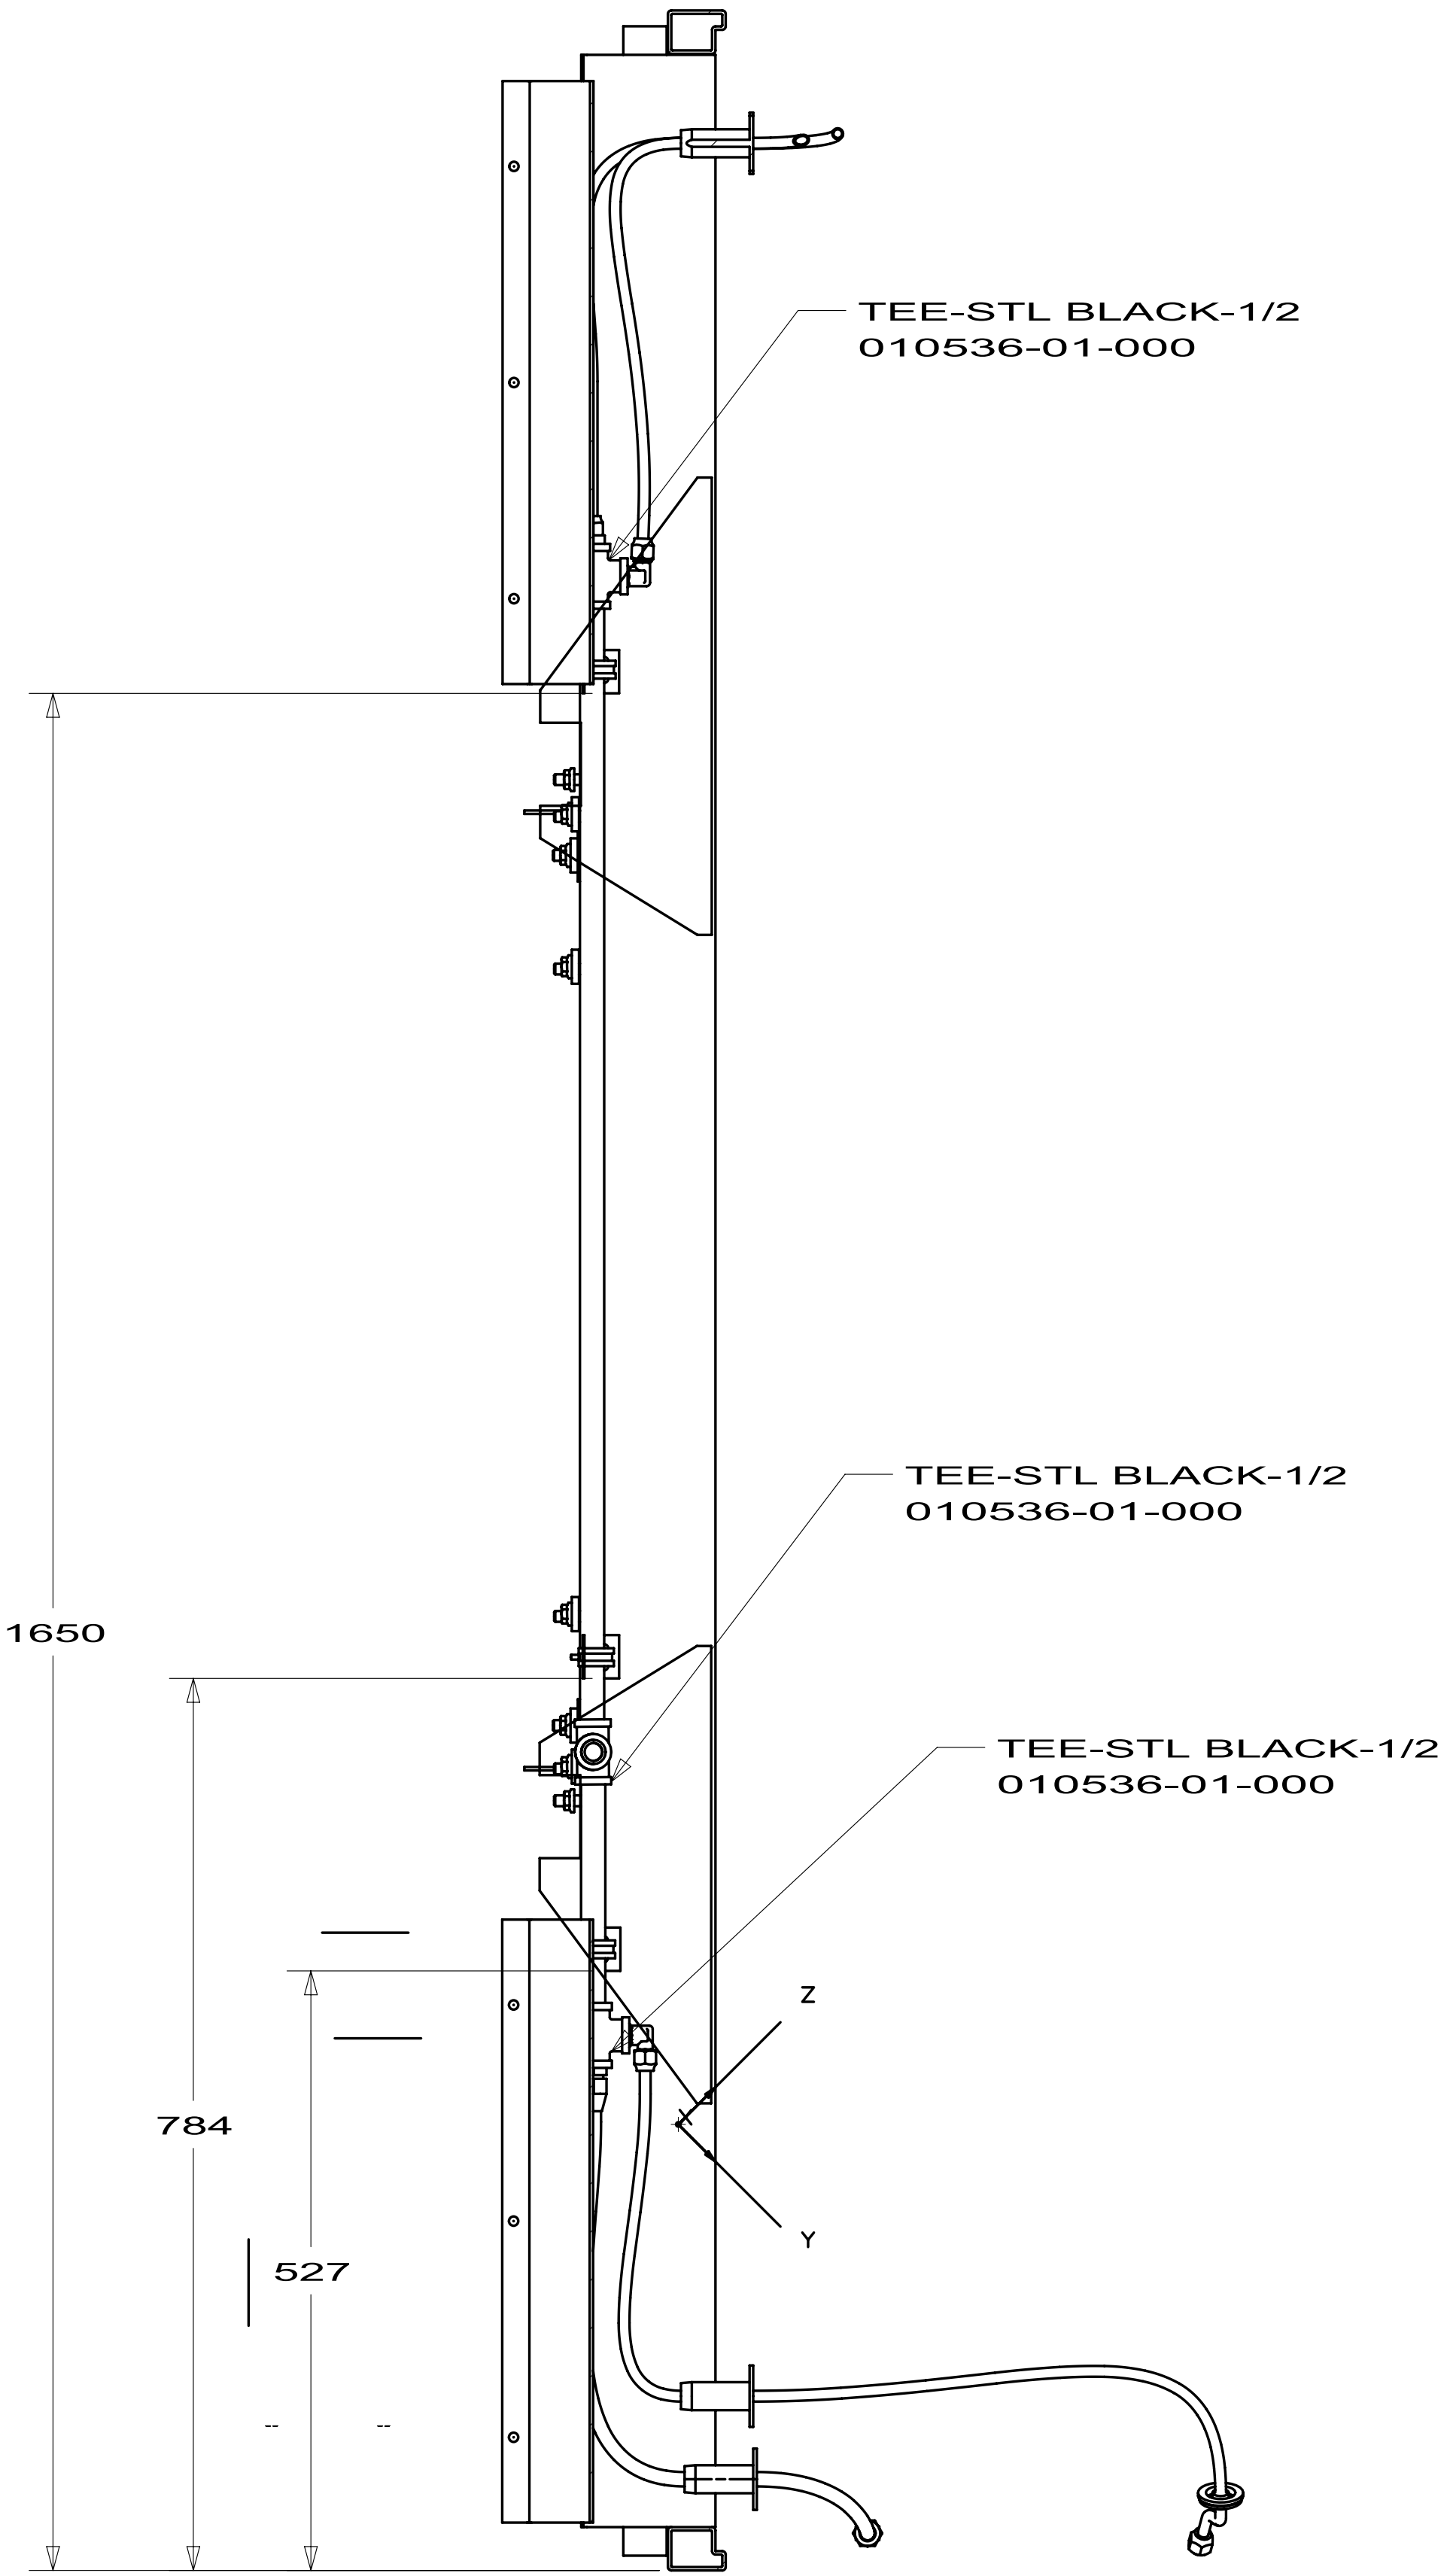


SECTION BB-BB

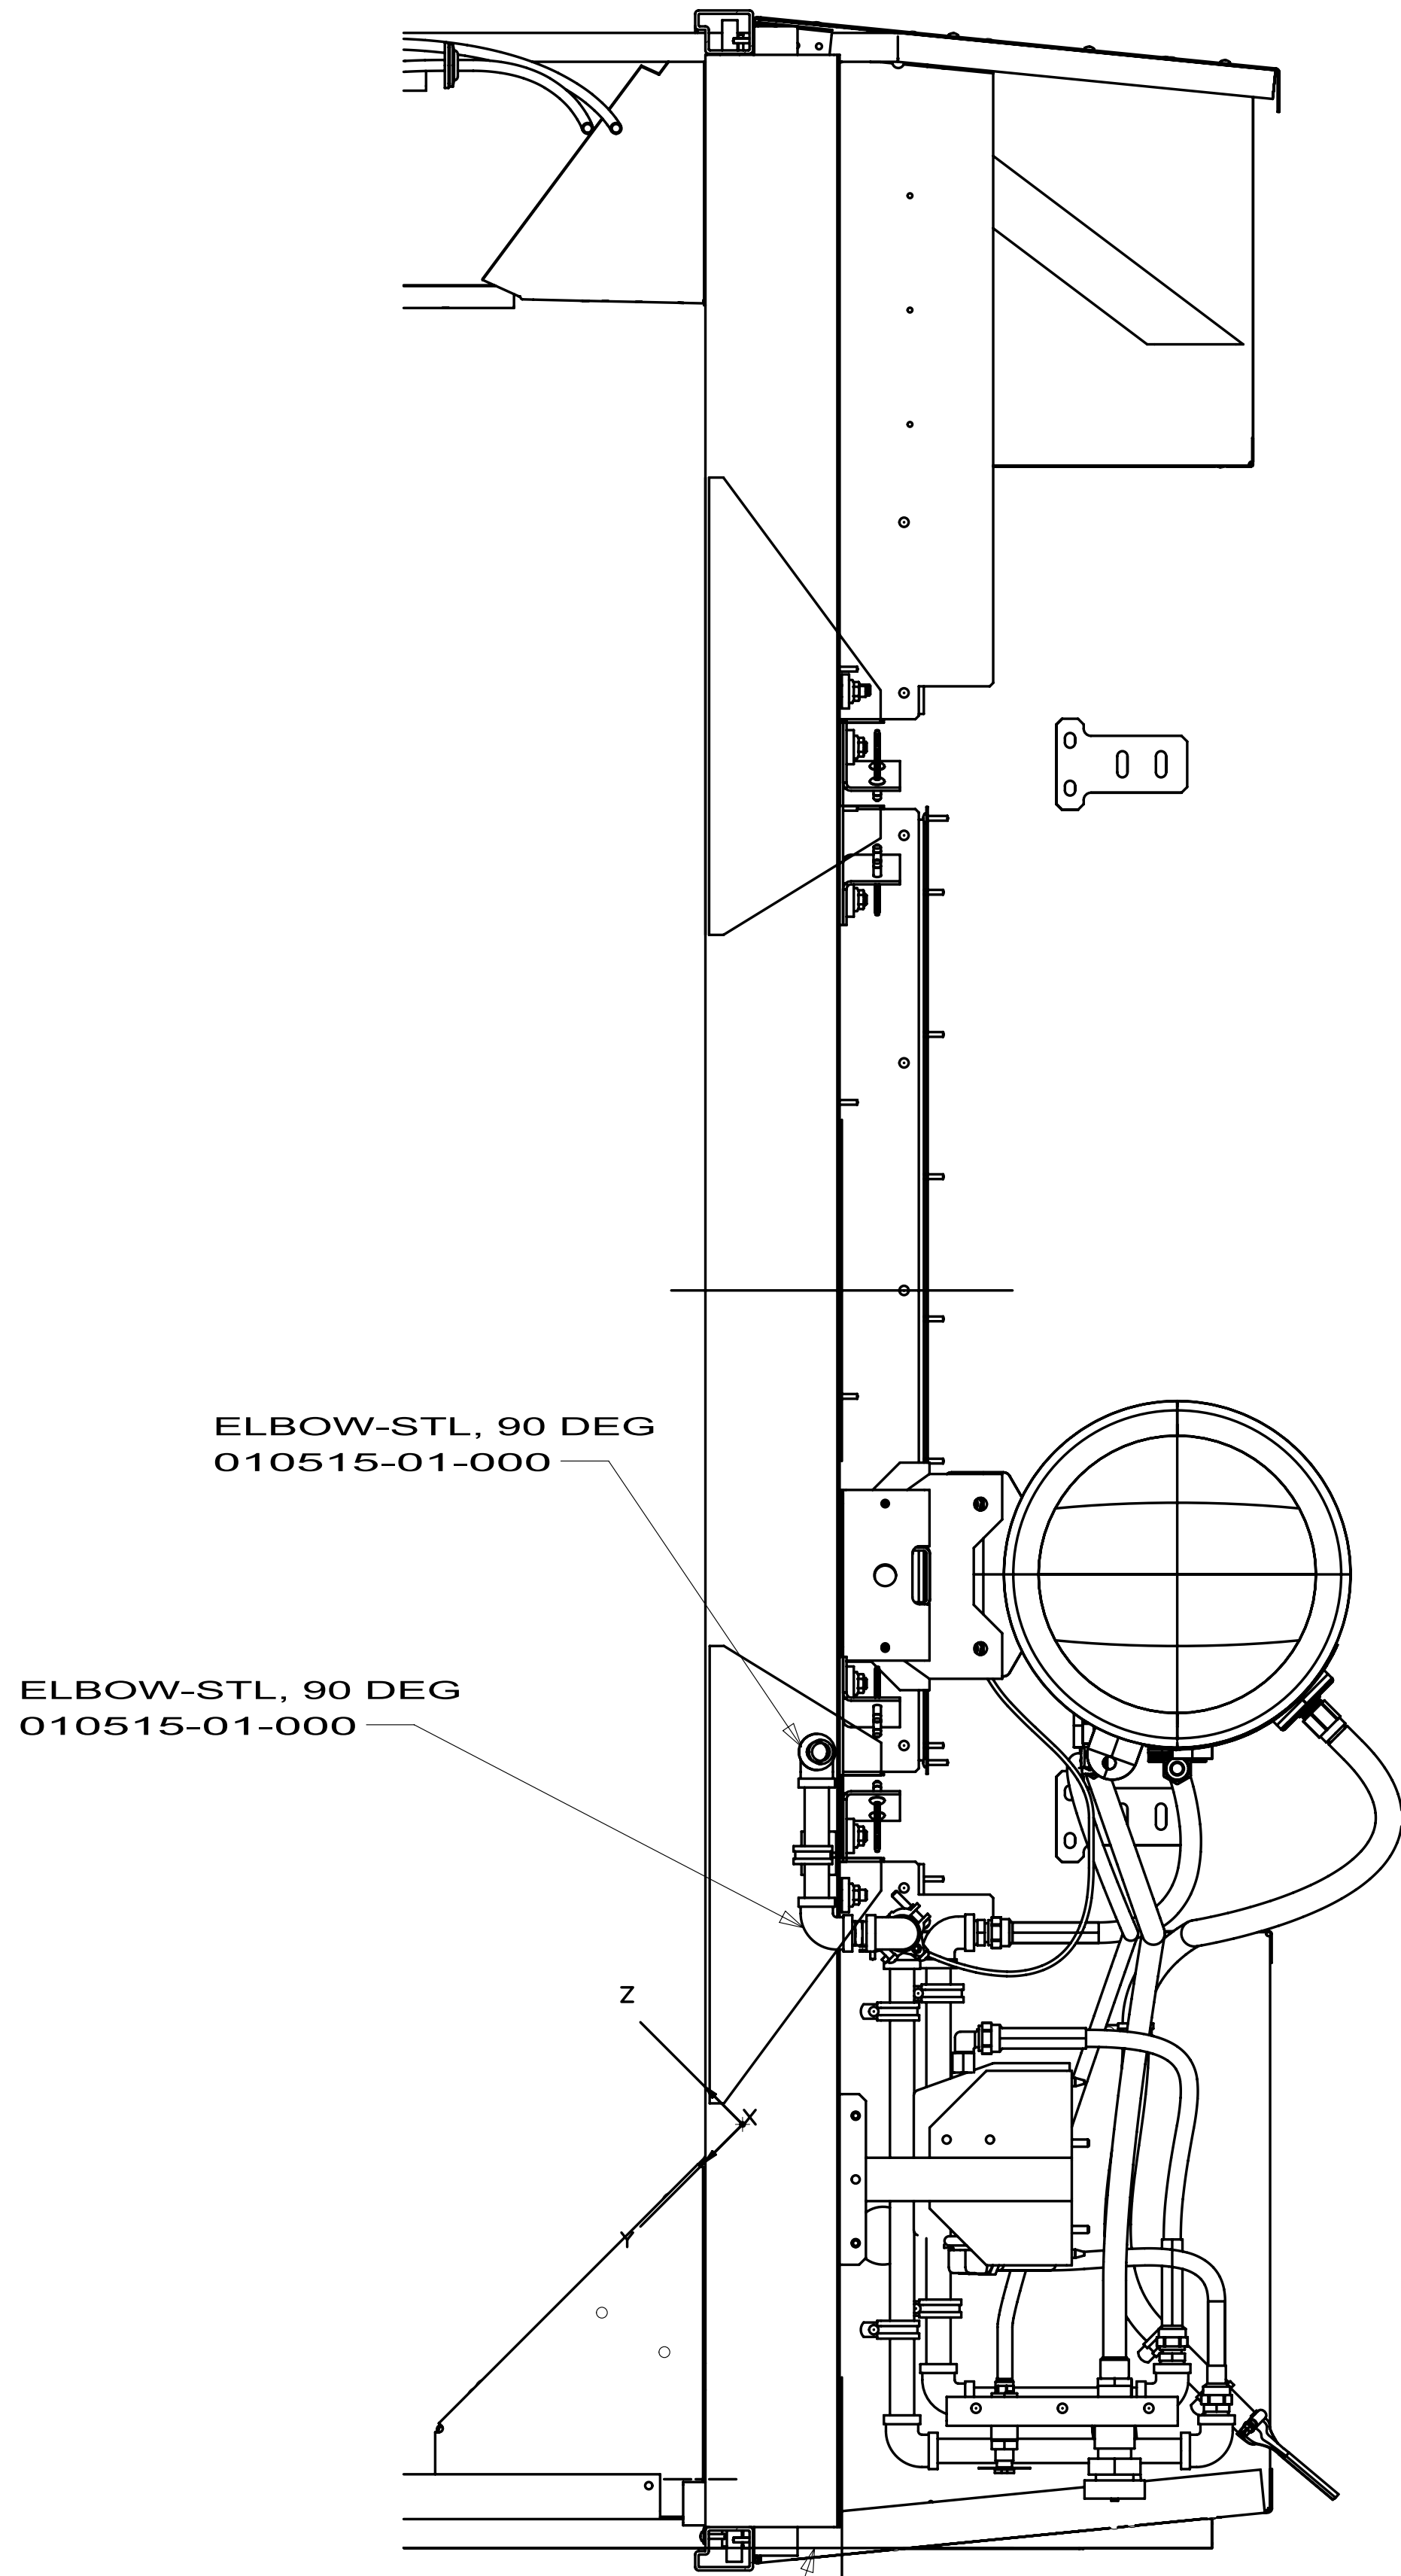


SECTION BA-BA

FIRST USED			10 H25T
DO NOT SCALE DRAWING			
TITLE: LP SYSTEM INSTL			
SHEET 2	PART NO	169768	REV

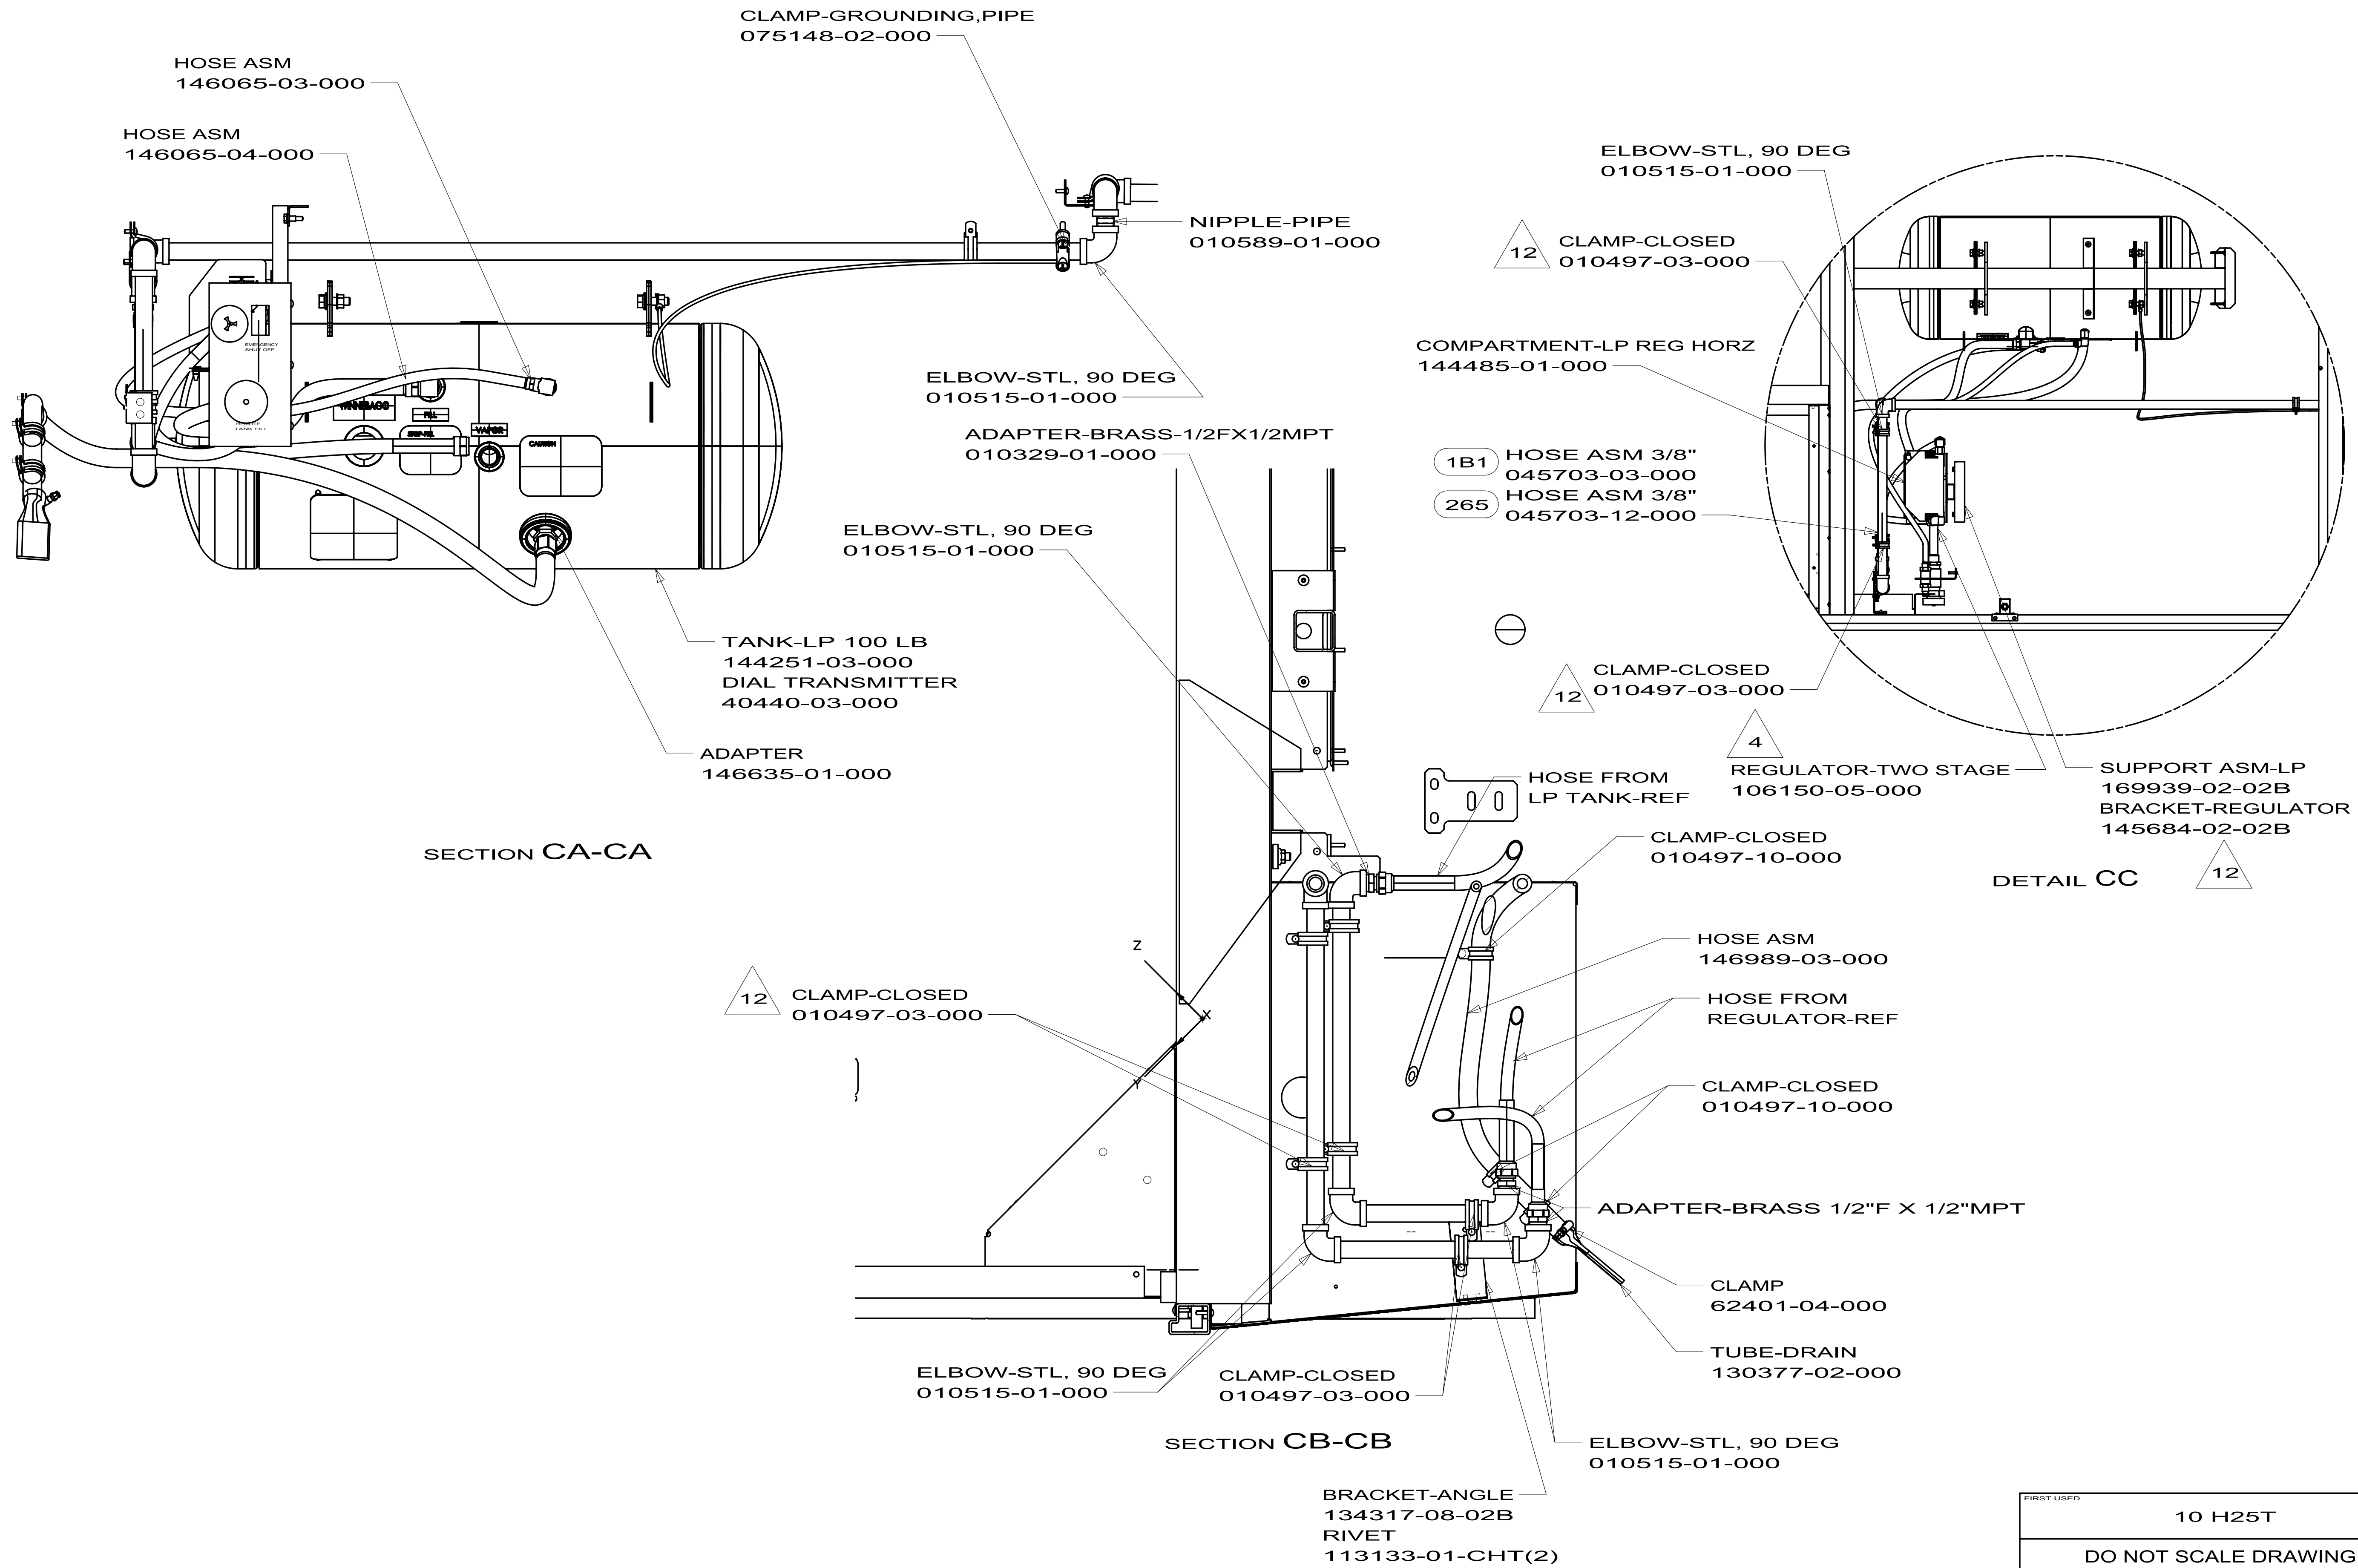

FIRST USED		10 H25T	
DO NOT SCALE DRAWING			
TITLE:			
LP SYSTEM INSTL			
SHEET 3	PART NO	169768	REV

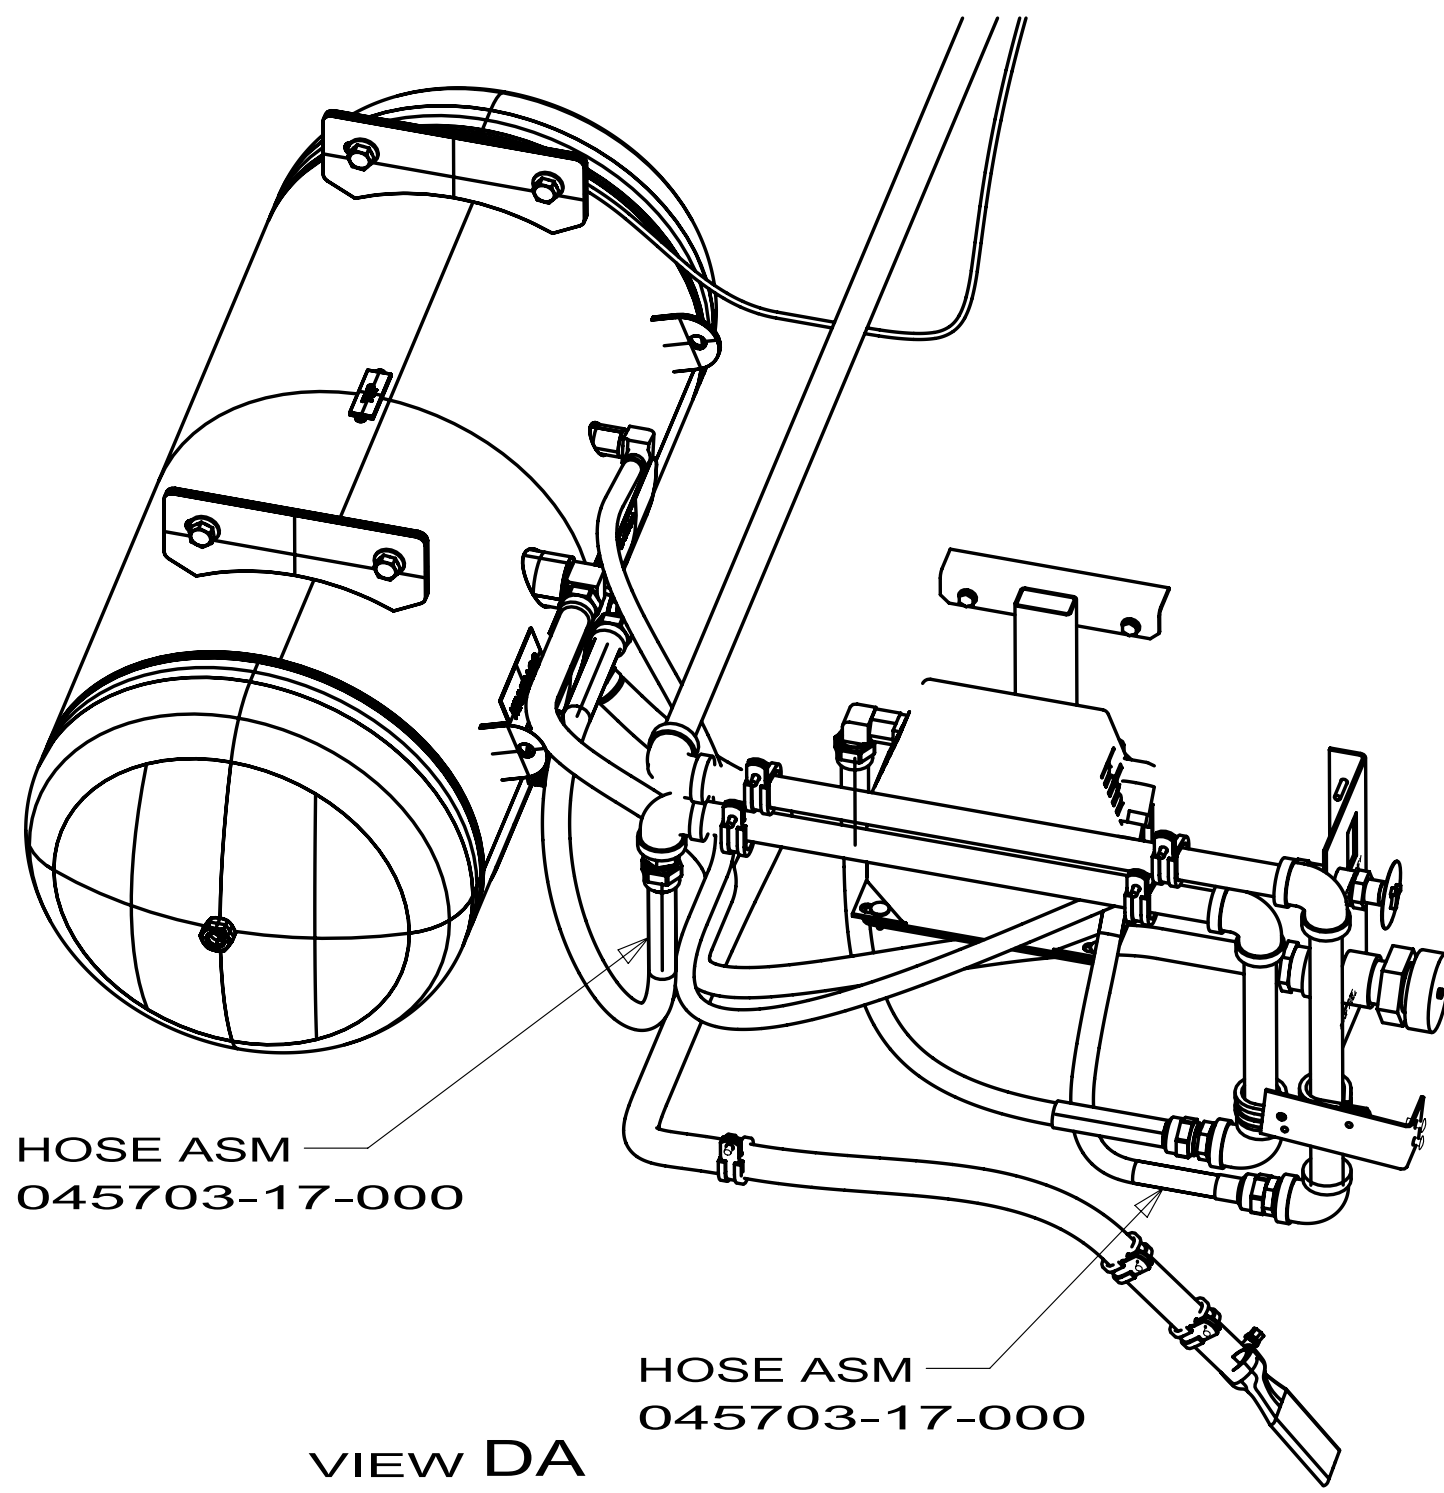

FLARE NUT 3/8" BRASS
010377-02-000


STOVE

GROMMET-9.4,I.D.X33.4,O.D.
108505-01-000

FLARE NUT 3/8" BRASS
010377-02-000

REFRIGERATOR

ELBOW-BRASS-90
166513-02-000

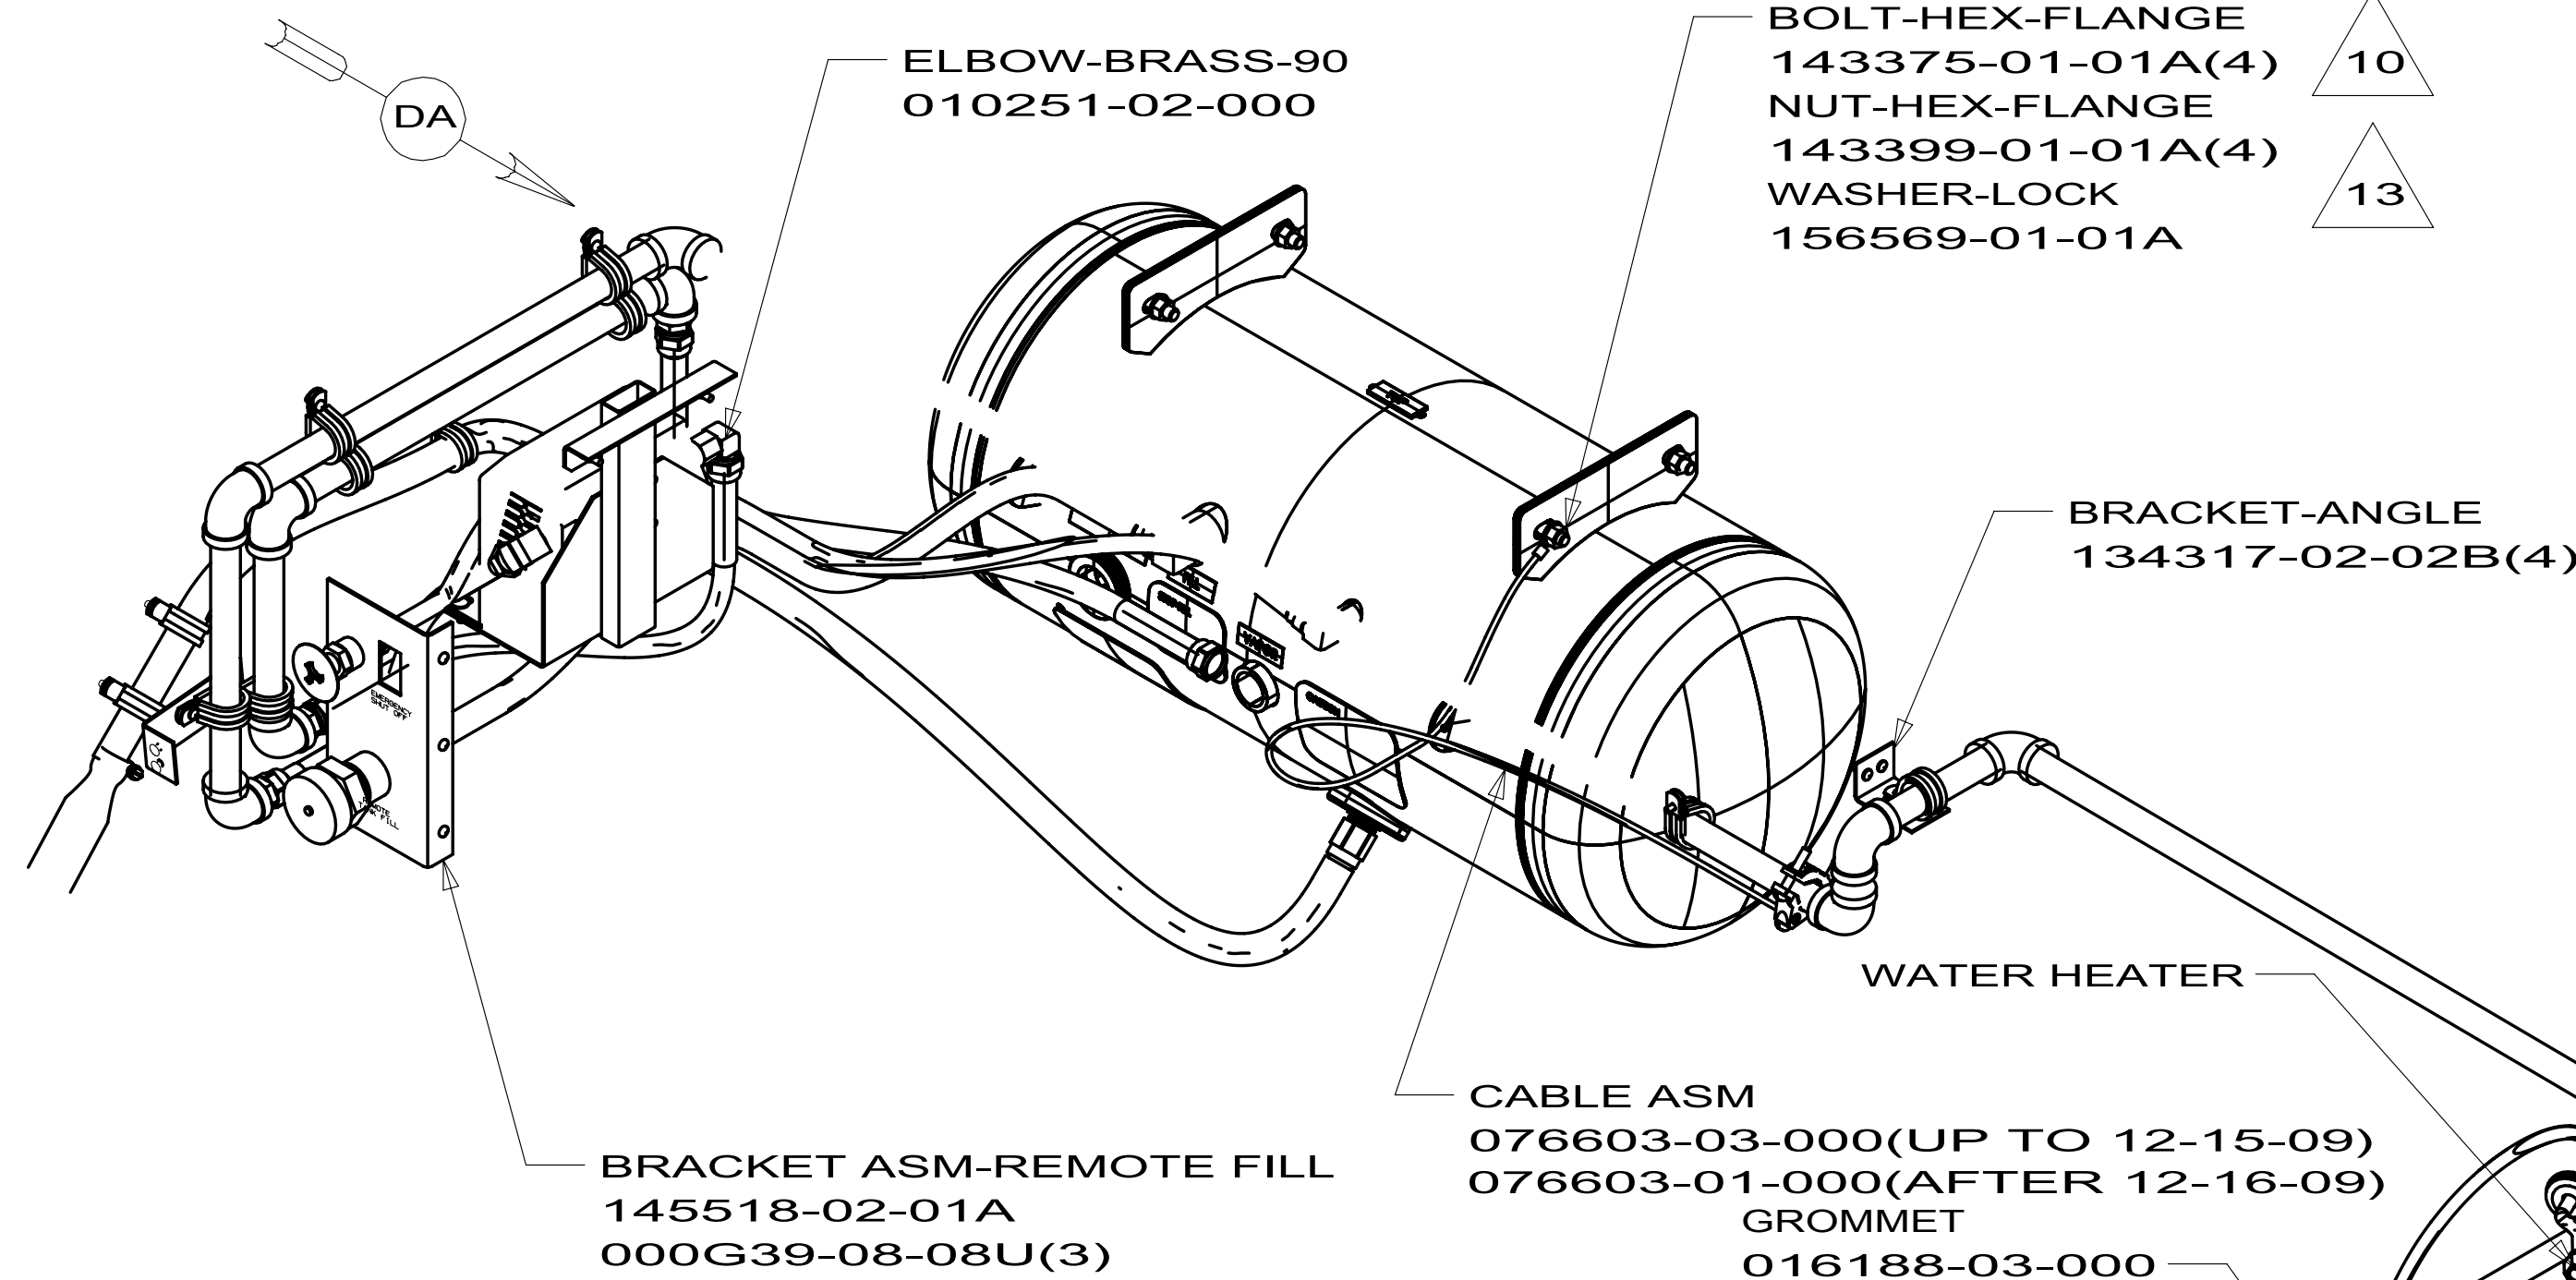

FLARE NUT 3/8" BRASS
010377-02-000

ELBOW-BRASS-90 3/8FX1/2MPT
010252-01-000

GROMMET-9.4,I.D.X33.4,O.D.
108505-01-000

FLARE NUT 3/8" BRASS
010377-02-000

GROMMET
016188-03-000

PANEL-ROCKGUARD, LP
151724-06-02B
SCREW
000G3908-08-08U(6)

FLARE NUT 3/8" BRASS
010377-02-000

ADAPTOR-BRASS
010323-01-000

GROMMET
016188-04-000

FURNACE

NUT-BRASS
010380-02-000

ADAPTOR-FLARE,W/ CONE GASKET
010326-01-000

FLARE NUT 3/8" BRASS
010377-02-000

ADAPTER-BRASS-1/2FX1/2MPT
010329-01-000

NUT-BRASS
010380-02-000

ROCK GUARD
151724-06-02B
SCREW
000G39-08-08U(6)

FIRST USED		10 H25T	
DO NOT SCALE DRAWING			
TITLE: LP SYSTEM INSTL			
SHEET 4	PART NO	169768	REV

144251-03-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	040421-01-714	EA VALVE RELIEF 3/4"W/SPRING 7"	V20479/V21201/LVRF2
	144251-01-700	EA VALVE - OUTAGE	V13399
	144251-01-701	EA VALVE/FILL	V13415
	144251-01-702	EA SOLENOID VALVE/SERVICE/VAPOR	V20533.1
	144251-01-703	EA SENDING UNIT F/SNAP ON GAUGE	G13060