


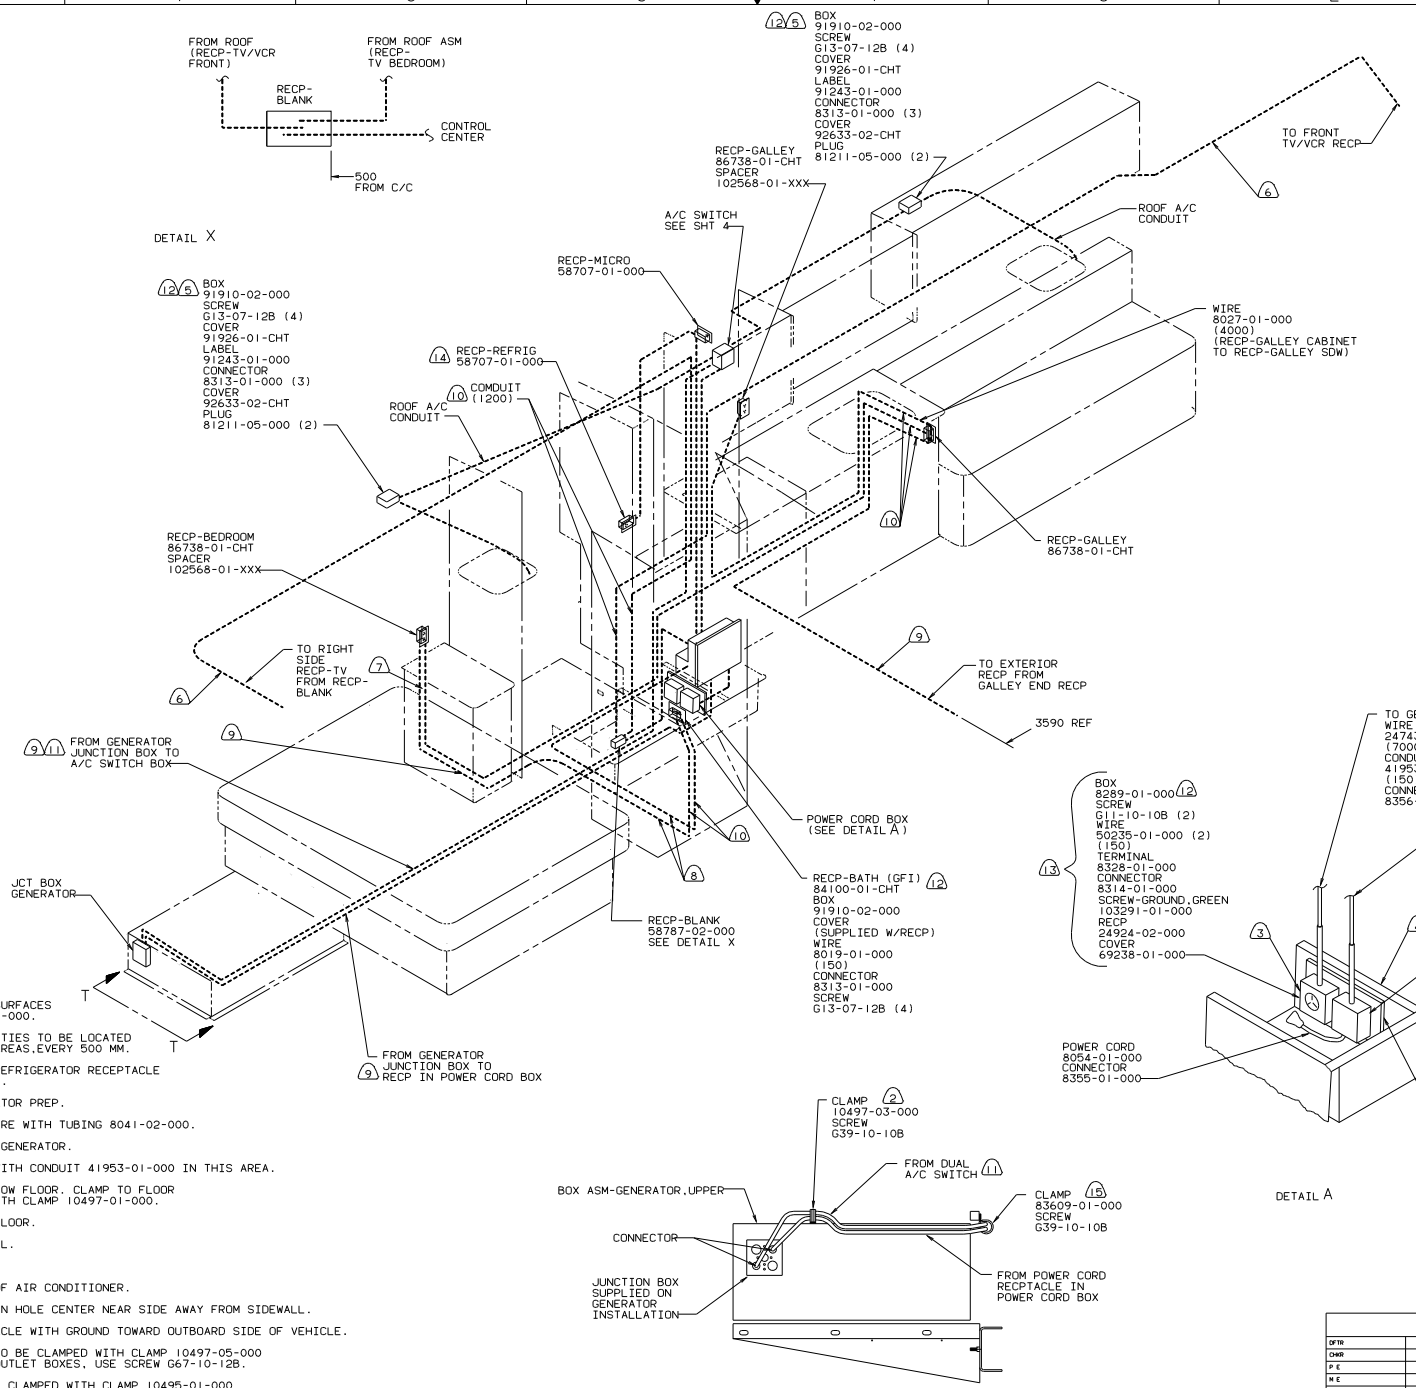


16. PAINT EXPOSED SURFACES BLACK 106112-01-000.
15. CLAMPS OR WIRE TIES TO BE LOCATED ABOVE STORAGE AREAS, EVERY 500 MM.
14. LOCATE TOP OF REFRIGERATOR RECEPTACLE 300 ABOVE SHELF.
13. USE WITH GENERATOR PREP.
12. COVER GROUND WIRE WITH TUBING 8041-02-000.
11. USE WITH 6.5KW GENERATOR.
10. PROTECT WIRES WITH CONDUIT 41953-01-000 IN THIS AREA.
9. WIRE ROUTED BELOW FLOOR. CLAMP TO FLOOR AS NECESSARY WITH CLAMP 10497-01-000.
8. ROUTE WIRE IN FLOOR.
7. WIRE IN SIDEWALL.
6. WIRE IN ROOF.
5. USE WITHOUT ROOF AIR CONDITIONER.
4. ADD 13 DIA DRAIN HOLE CENTER NEAR SIDE AWAY FROM SIDEWALL.
3. INSTALL RECEPTACLE WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW 667-10-12B.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 700. USE SCREW 667-10-12B UNLESS OTHERWISE SPECIFIED.

110V LEFT SIDE (US)

WINNAGO 92 W/1CG34RA

QTY	DESCRIPTION	UNSPECIFIED TOLERANCES ARE:	MATERIAL
1	WIRE 10-18		
1	ONE-PLATE 10-18		
1	WIRE 10-18		
1	WIRE 10-18		
1	WIRE 10-18		

LAUNCH DATE: 10/1/96
 SCALE: NONE
 30 NET SCALE DRAWING
 ALL DIMENSIONS ARE IN MILLIMETERS
 SHEET 1 OF 12
 105196

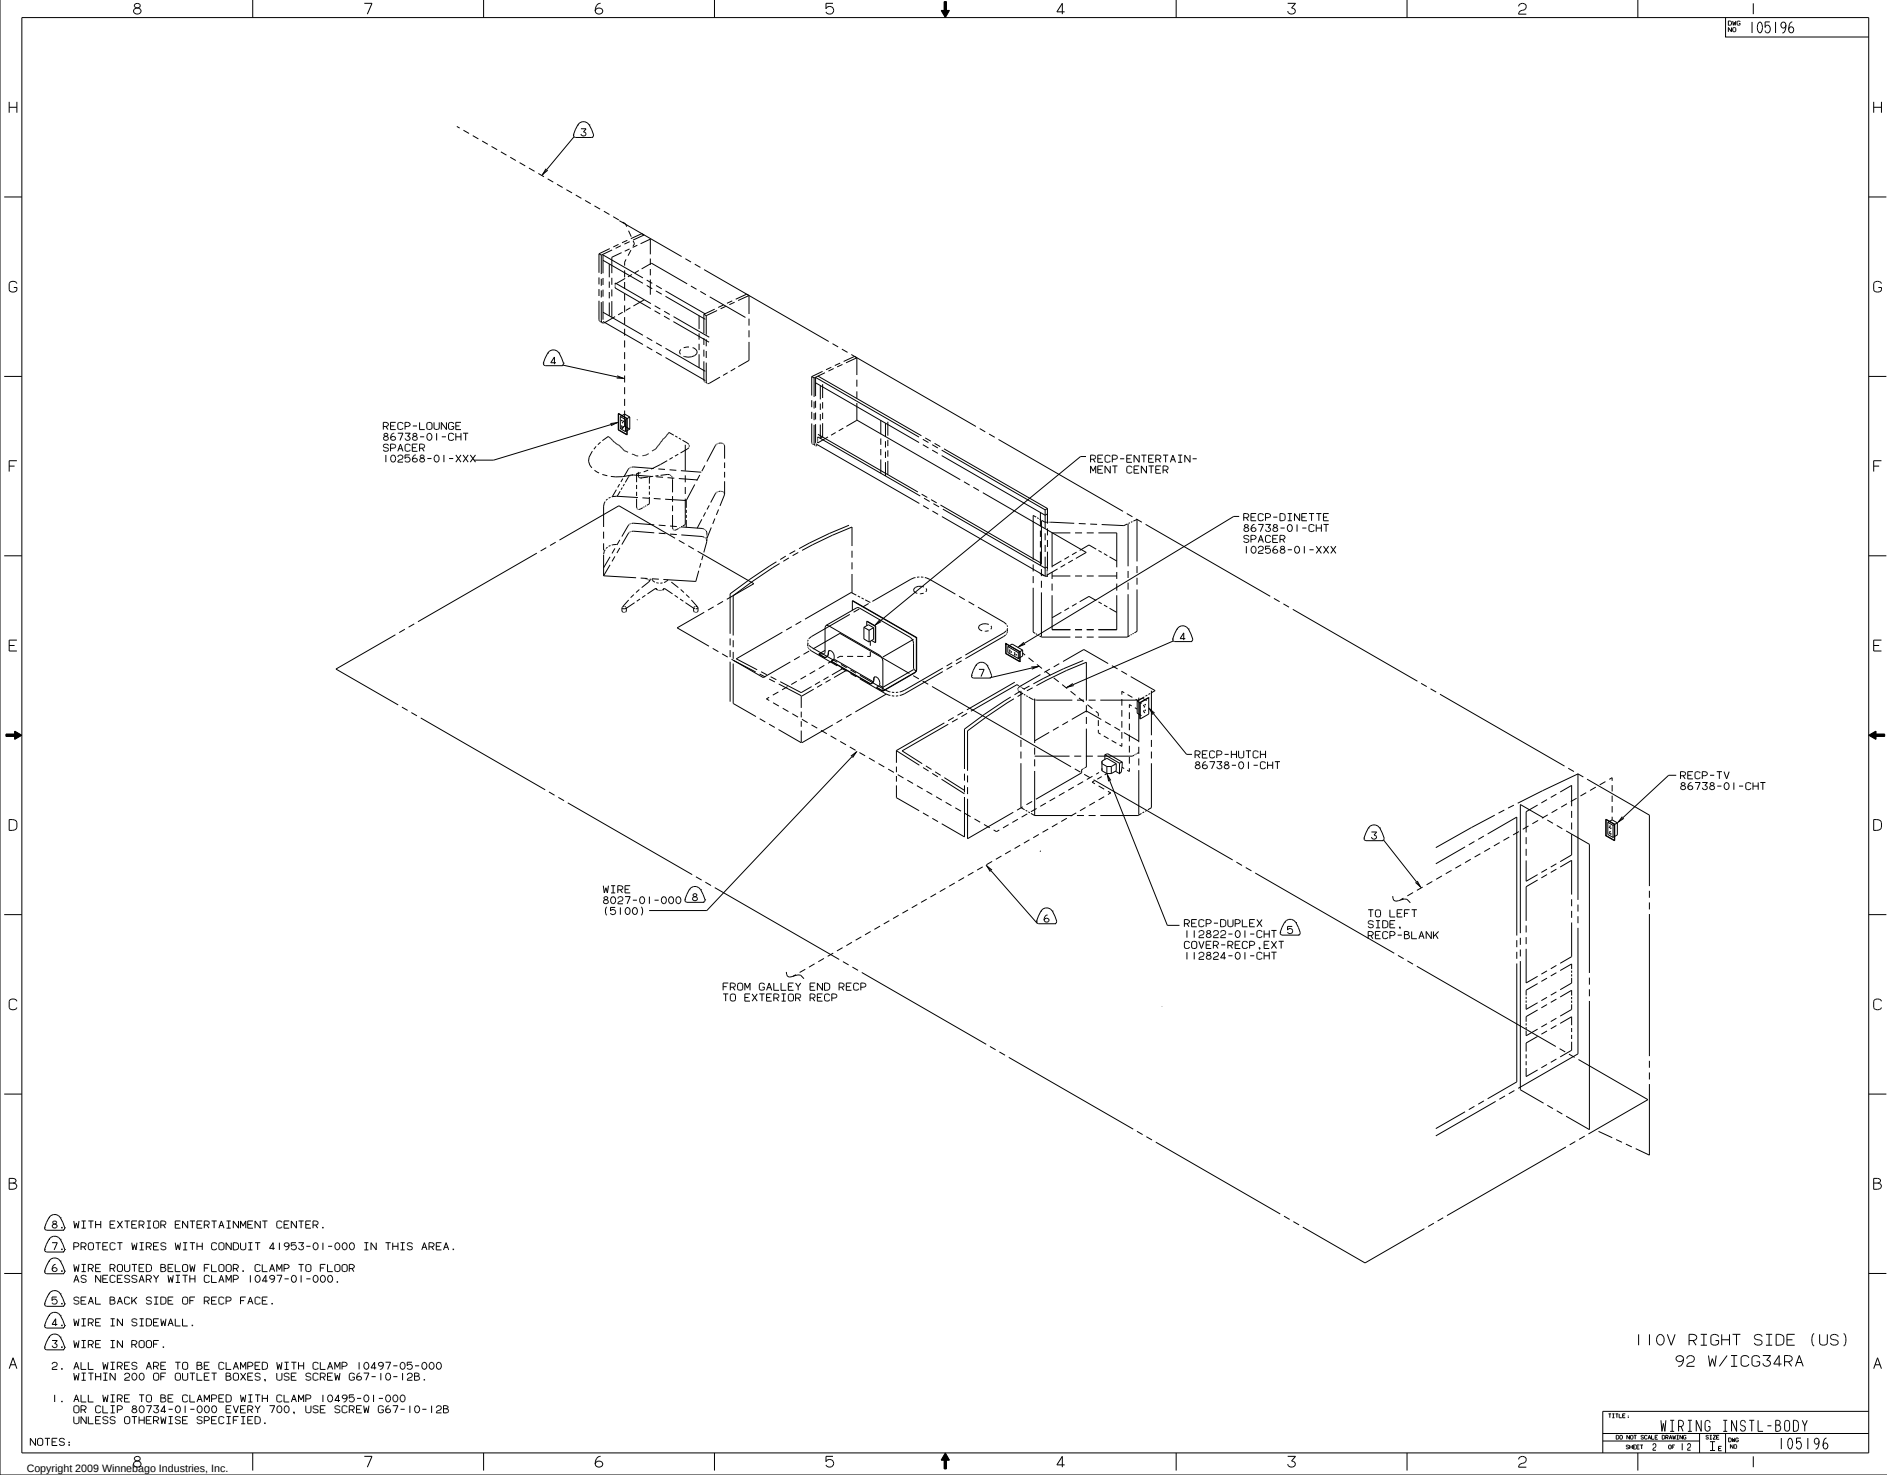

REC-P-LOUNGE
86738-01-CHT
SPACER
102568-01-XXX

REC-P-ENTERTAIN-
MENT CENTER

REC-P-DINETTE
86738-01-CHT
SPACER
102568-01-XXX

REC-P-HUTCH
86738-01-CHT

REC-P-TV
86738-01-CHT

WIRE
8027-01-000 (8)
(5100)

FROM GALLEY END RECP
TO EXTERIOR RECP

REC-P-DUPLEX
112822-01-CHT
COVER-REC-EXT
112824-01-CHT


TO LEFT
SIDE
REC-BLANK


- 8 WITH EXTERIOR ENTERTAINMENT CENTER.
7 PROTECT WIRES WITH CONDUIT 41953-01-000 IN THIS AREA.
6 WIRE ROUTED BELOW FLOOR. CLAMP TO FLOOR AS NECESSARY WITH CLAMP 10497-01-000.
5 SEAL BACK SIDE OF RECP FACE.
4 WIRE IN SIDEWALL.
3 WIRE IN ROOF.
2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 700. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

110V RIGHT SIDE (US)
92 W/ICG34RA

TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	ING	NO
SHEET 2 OF 12	1E		105196

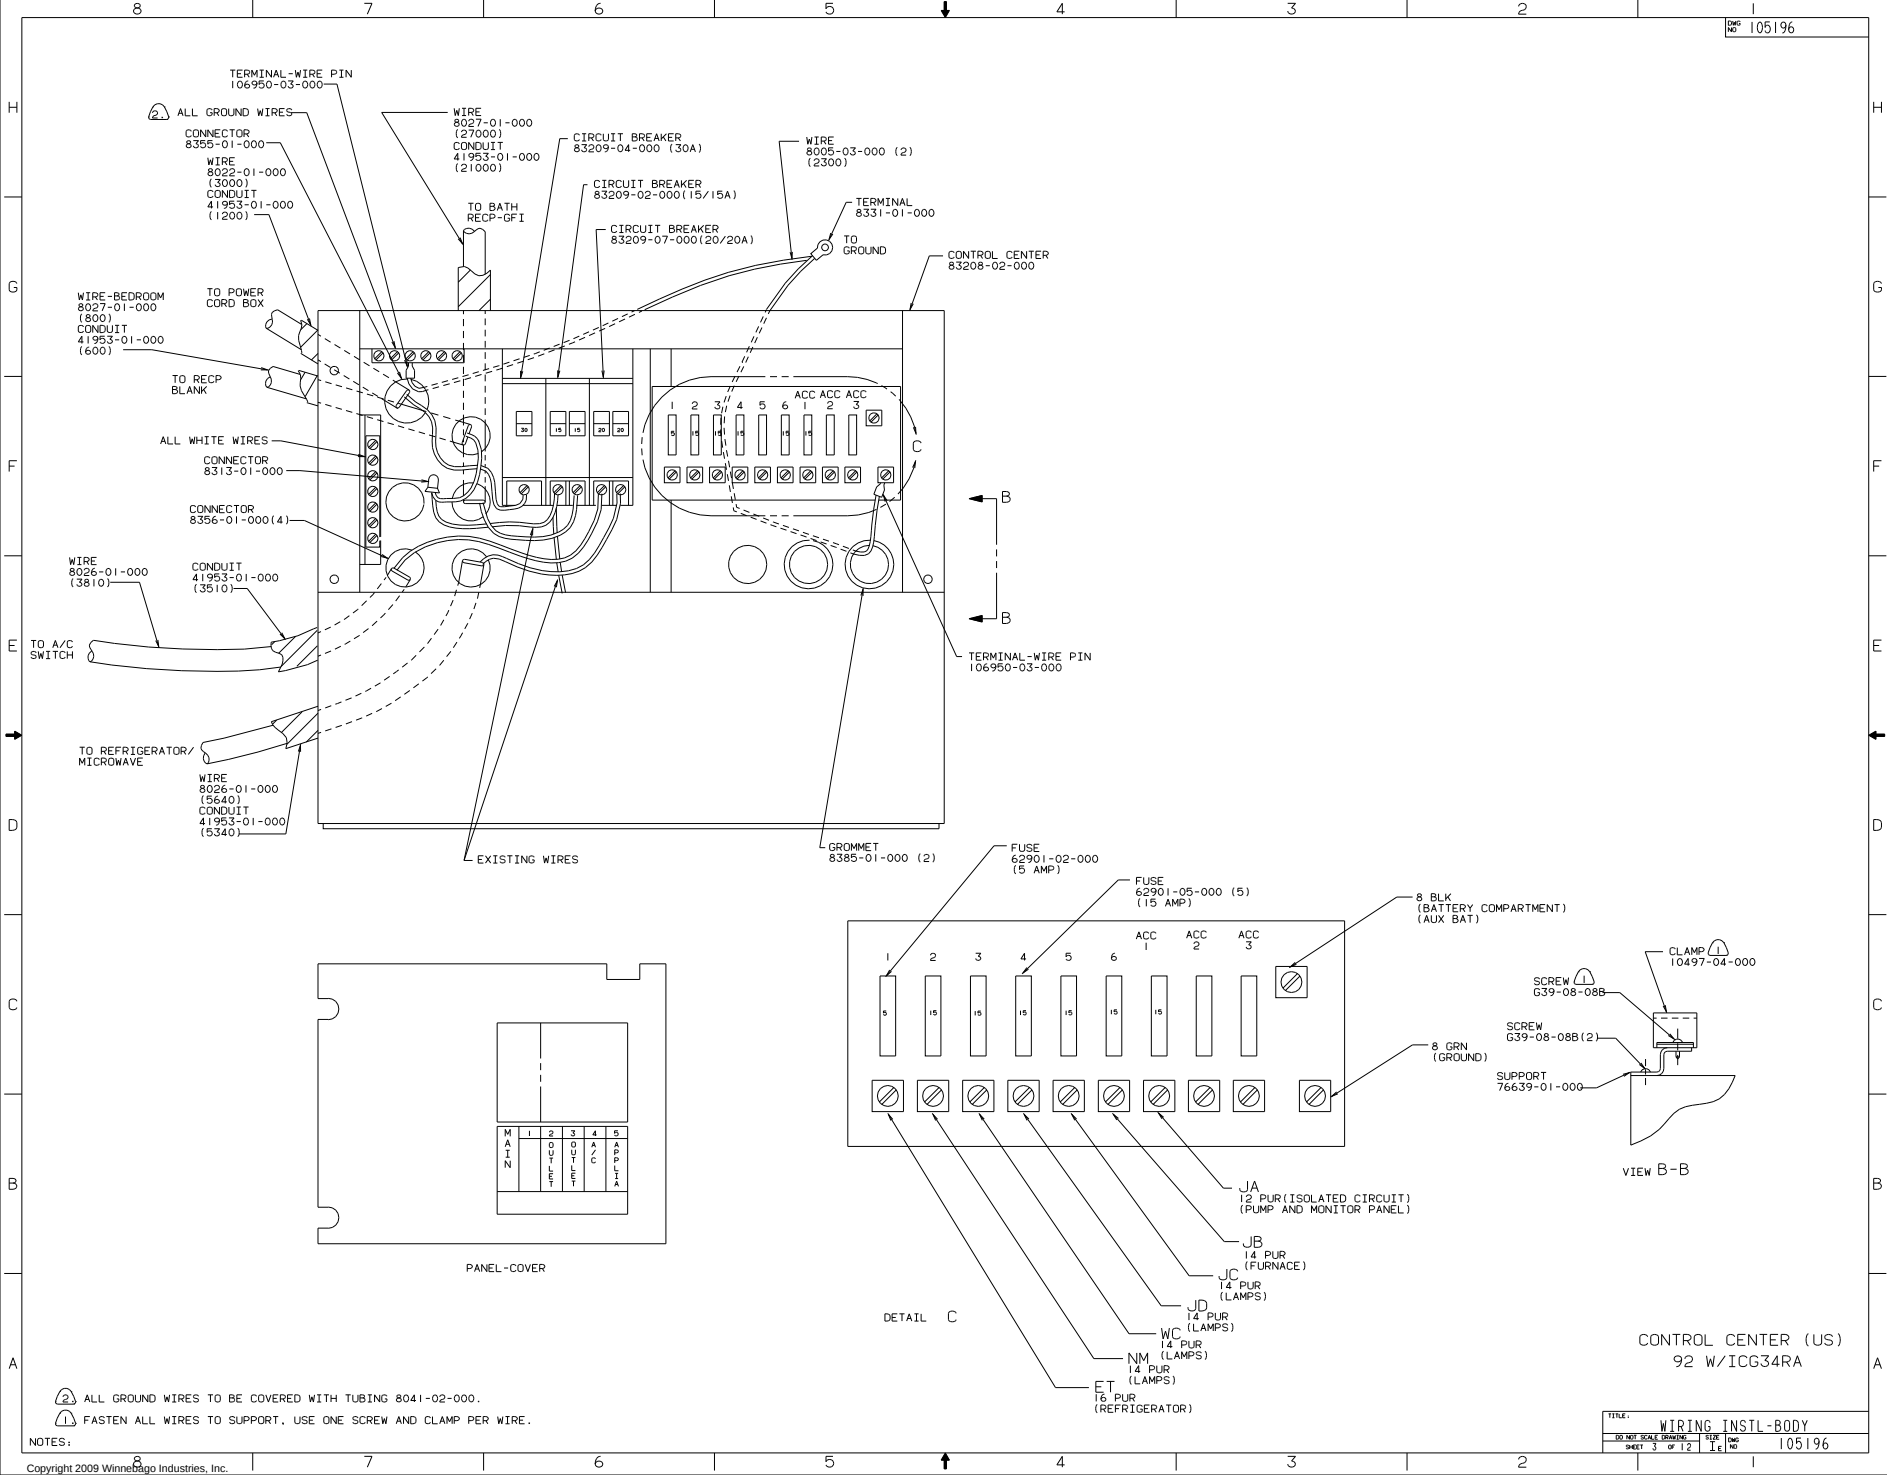

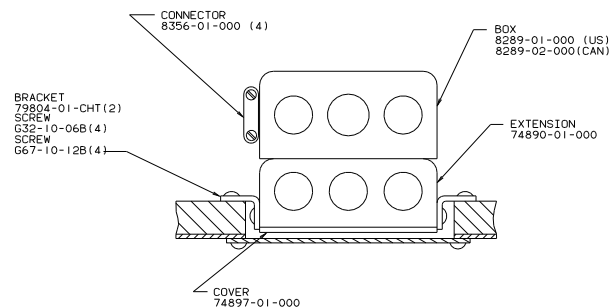

AIR CONDITIONER SELECTOR SWITCH


FRONT **REAR**

SWITCH MUST BE IN FRONT POSITION TO RUN BOTH AIR CONDITIONERS

COVER-A/C SWITCH
88238-01-000 (3)
88238-02-000
SCREW
G11-08-12D(4)——

DUAL AIR SWITCH
110V (US/CAN)
92 W/ICG34RA

- (5) USE WITH ROOF AIR CONDITIONER.
- (4) USE WITHOUT ROOF AIR CONDITIONER.
- (3) USE WITH 6500 WATT GENERATOR OR LARGER.
2. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
- (1) FASTEN SWITCH TO COVER 74897-01-000 BEFORE FASTENING COVER TO BOX.

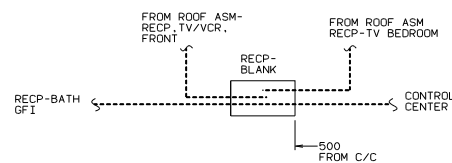

DETAIL V

- BOX 91910-01-000
SCREW G11-06-10J (4)
COVER 91926-01-CHT
LABEL 91243-01-000
CONNECTOR 8313-01-000 (3)
PLUG 81211-02-000 (2)
COVER 92633-02-CHT

- RECP-MICRO 58707-01-000
RECP-REFRIG 58707-01-000
CONDUIT (1200)

- RECP-BEDROOM 86738-01-CHT
SPACER 102568-01-XXX

- WIRE 8023-02-000 (7800)
(RECEP-BEDROOM TO RECP GALLEY CABINET)

- FROM GENERATOR JUNCTION BOX TO A/C SWITCH BOX

- JCT BOX GENERATOR

- FROM GENERATOR JUNCTION BOX TO RECP IN POWER CORD BOX

- RECP-GALLEY 86738-01-CHT
SPACER 102568-01-XXX

- A/C SWITCH (SEE SHT 4)

- BOX 91910-01-000
SCREW G11-06-10J (4)
COVER 91926-01-CHT
LABEL 91243-01-000
CONNECTOR 8313-01-000 (3)
PLUG 81211-02-000 (2)
COVER 92633-02-CHT

- CONTROL CENTER (SEE SHT 7)

- TO EXTERIOR RECP RIGHT SIDE FROM RECP GALLEY

- BOX 91910-01-000
SCREW G11-06-10J (4)
RECP-BATH (GFI) 84100-01-CHT
EXTENSION 97734-01-CHT
SCREWS (SUPPLIED W/EXT)
COVER (SUPPLIED W/RECP)
WIRE 8019-01-000 (150)
TERMINAL 8328-01-000
CONNECTOR 8313-01-000
SCREW-GROUND (SUPPLIED W/BOX)

- POWER CORD BOX (SEE DETAIL D)

- BOX 8289-02-000
SCREW G11-10-10B (2)
WIRE 50235-01-000 (2)
TERMINAL 8328-01-000
CONNECTOR 8314-01-000
SCREW-GROUND, GREEN 103291-01-000
RECP 24924-02-000
COVER 69238-01-000

- TO GENERATOR WIRE 24743-01-000 (7000)
CONDUIT 41953-01-000 (150)
CONNECTOR 8356-01-000

- TO CONTROL CENTER CONDUIT 41953-01-000 (150)

- BOX 8289-02-000
COVER 8294-02-000
SCREW G11-10-10B (2)
WIRE 50235-01-000 (150)
TERMINAL 8328-01-000
CONNECTOR 8314-01-000
SCREW-GROUND, GREEN 103291-01-000
CONNECTOR 8356-01-000

- PLYWOOD 852-01-082
SCREW G11-10-10B (4)

DETAIL D


- 14 LOCATE TOP OF REFRIGERATOR RECEPTACLE 300 ABOVE SHELF.
13 USE WITH GENERATOR PREP.
12 COVER GROUND WIRE WITH TUBING 8041-02-000.
11 USE WITH 6.5KW GENERATOR, OR LARGER.
10 PROTECT WIRES WITH CONDUIT 41953-01-000 IN THIS AREA.
9 WIRE ROUTED BELOW FLOOR. CLAMP TO FLOOR AS NECESSARY WITH CLAMP 10497-01-000.
8 ROUTE WIRE IN FLOOR.
7 WIRE IN SIDEWALL.
6 WIRE IN ROOF.
5 USE WITHOUT ROOF AIR CONDITIONER.
4 ADD 13 DIA DRAIN HOLE CENTER NEAR SIDE AWAY FROM SIDEWALL.
3 INSTALL RECEPTACLE WITH GROUND TOWARD OUTBOARD SIDE OF VEHICLE.




2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW 667-10-12B.
1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 700. USE SCREW 667-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

TITLE: WIRING INSTL-BODY			
30 NET SCALE DRAWING	16	16	16
SHEET 5 OF 12	16	16	16

105196

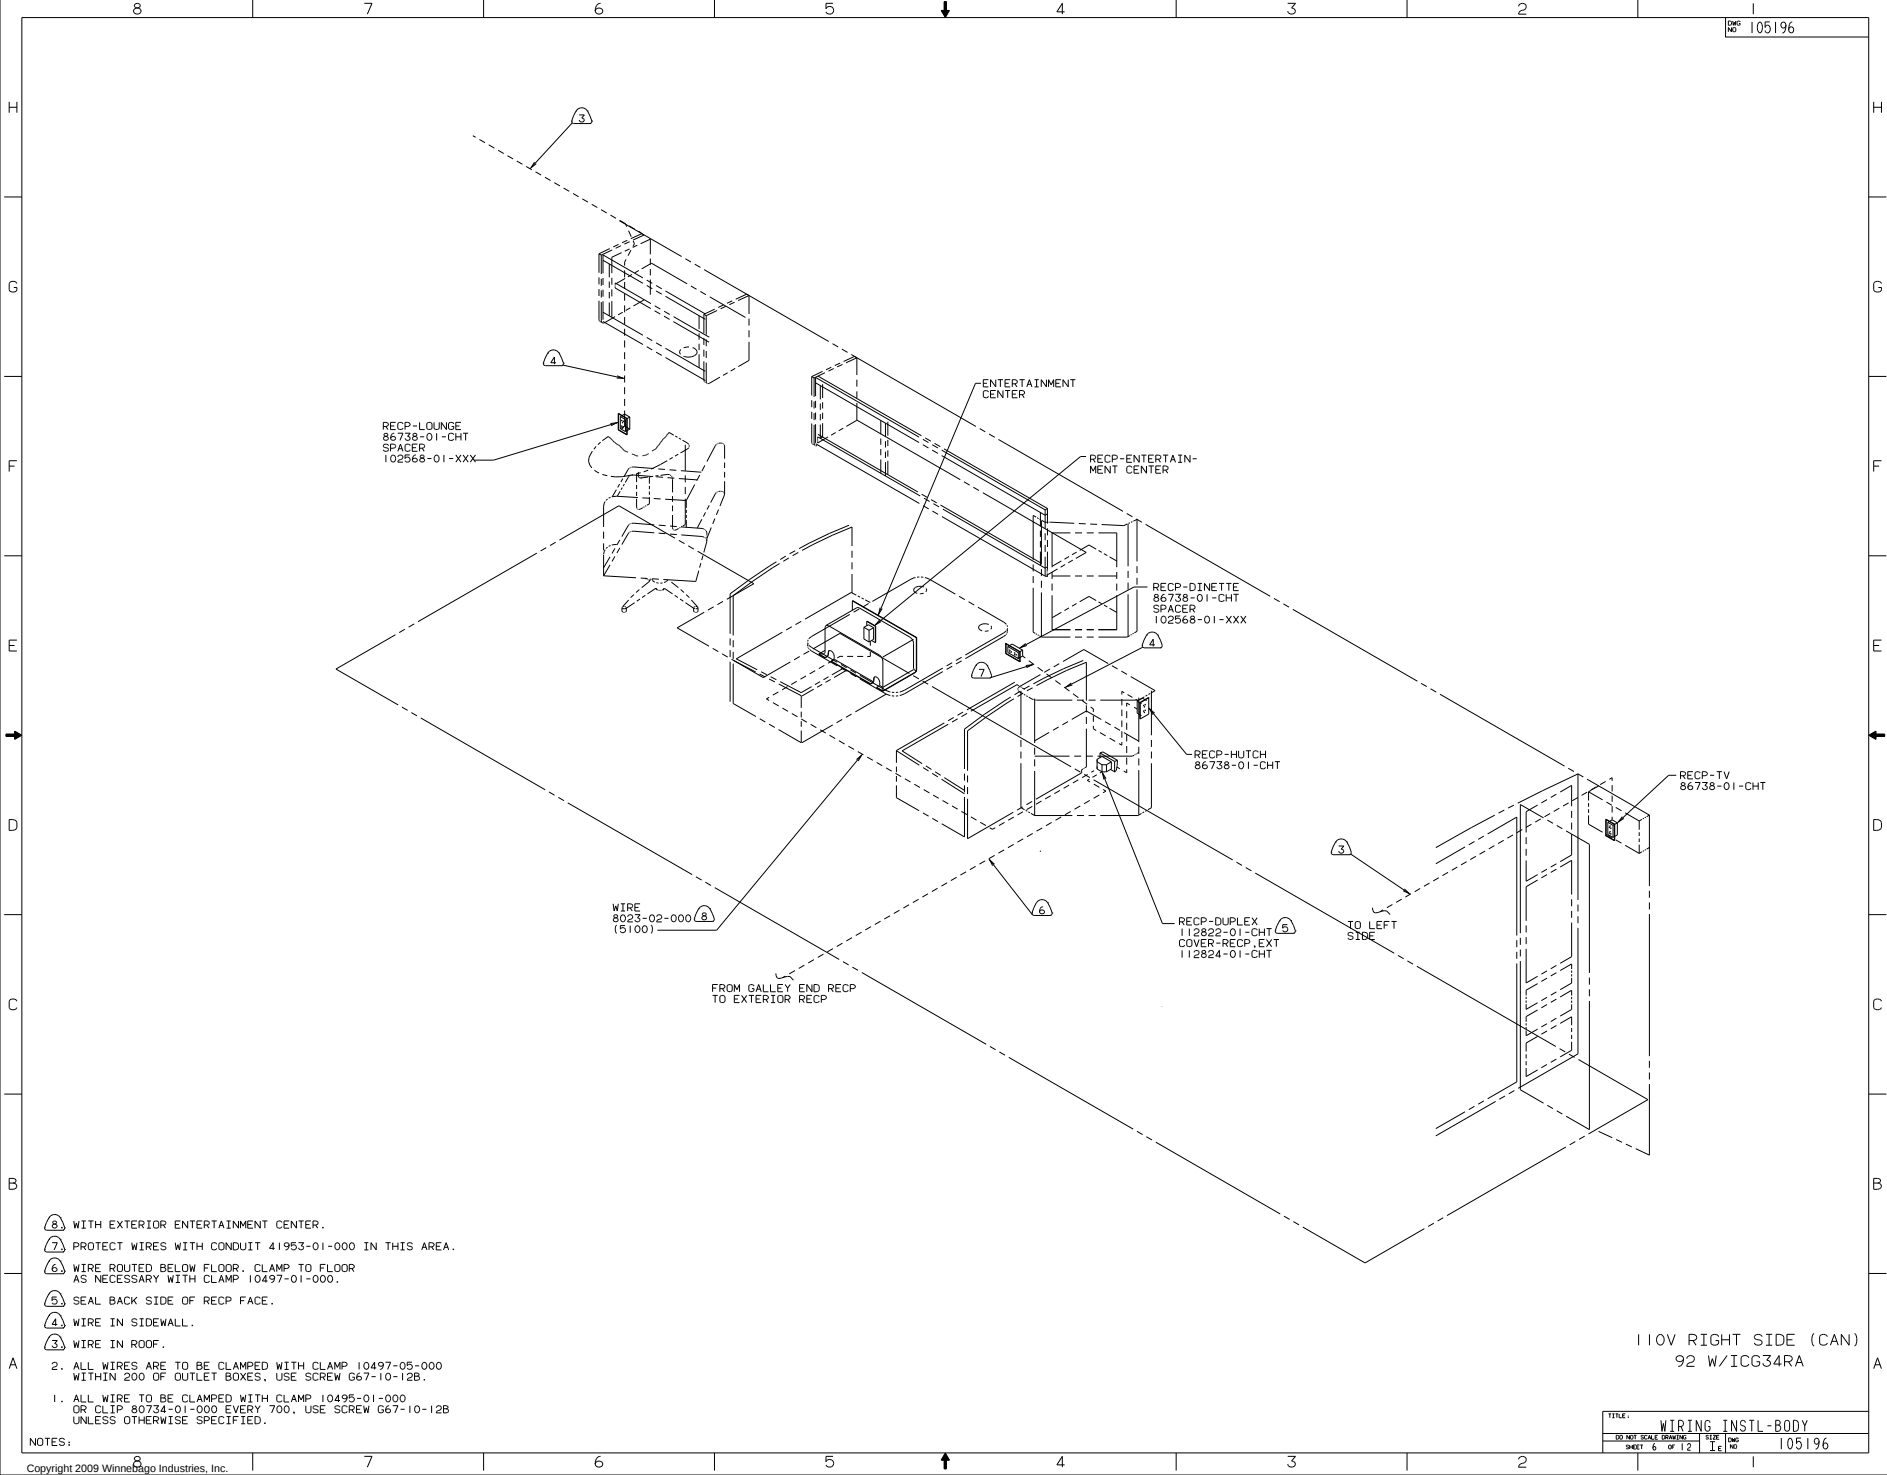

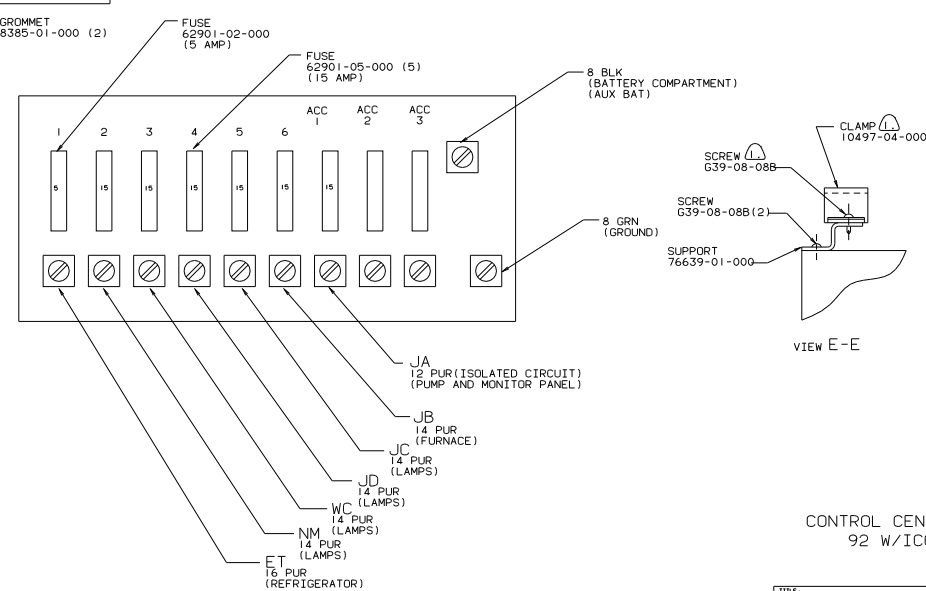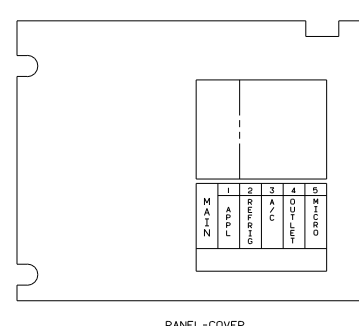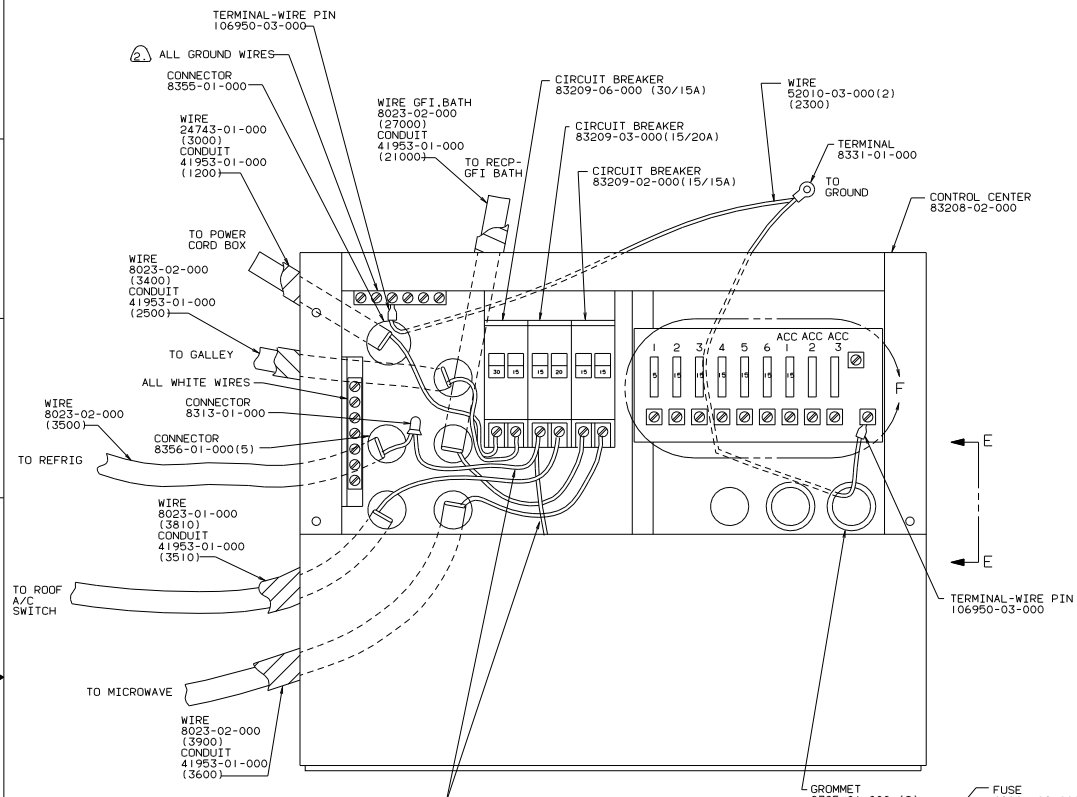


CONTROL CENTER (CAN)
92 W/ICG34RA

NOTES:

- ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
- FASTEN ALL WIRES TO SUPPORT, USE ONE SCREW AND CLAMP PER WIRE.




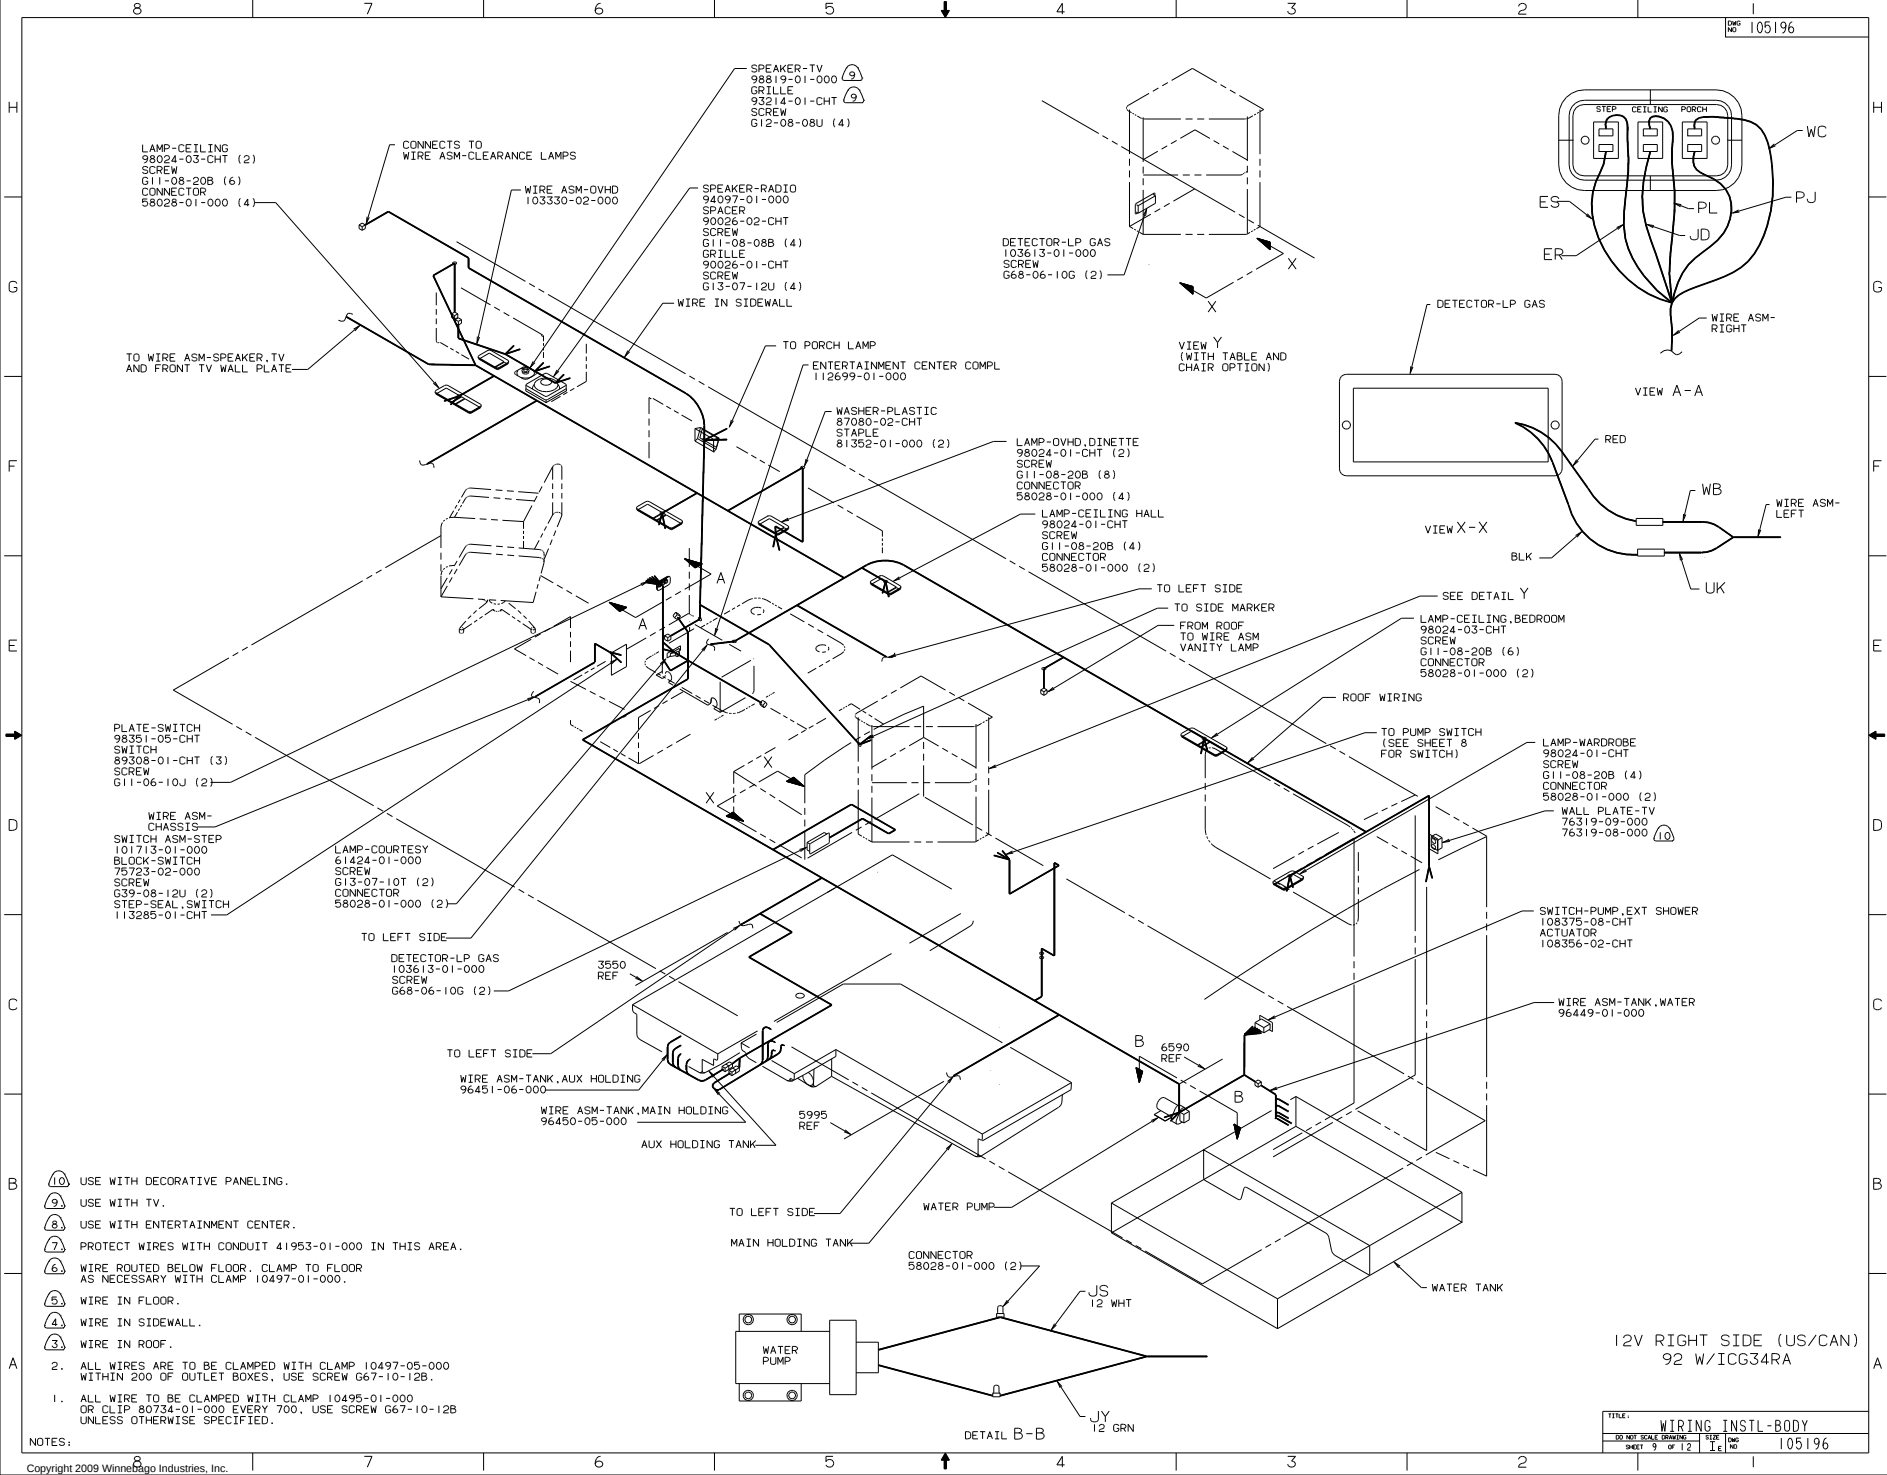

- 10 USE WITH DECORATIVE PANELING.
 9 USE WITH TV.
 8 USE WITH ENTERTAINMENT CENTER.
 7 PROTECT WIRES WITH CONDUIT 41953-01-000 IN THIS AREA.
 6 WIRE ROUTED BELOW FLOOR. CLAMP TO FLOOR AS NECESSARY WITH CLAMP 10497-01-000.
 5 WIRE IN FLOOR.
 4 WIRE IN SIDEWALL.
 3 WIRE IN ROOF.
 2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
 1. ALL WIRE TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 700. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

12V RIGHT SIDE (US/CAN)
92 W/ICG34RA

TITLE: WIRING INSTL-BODY			
DO NOT SCALE DRAWING	FILE	DATE	105196
SHEET 9 OF 12	1E		

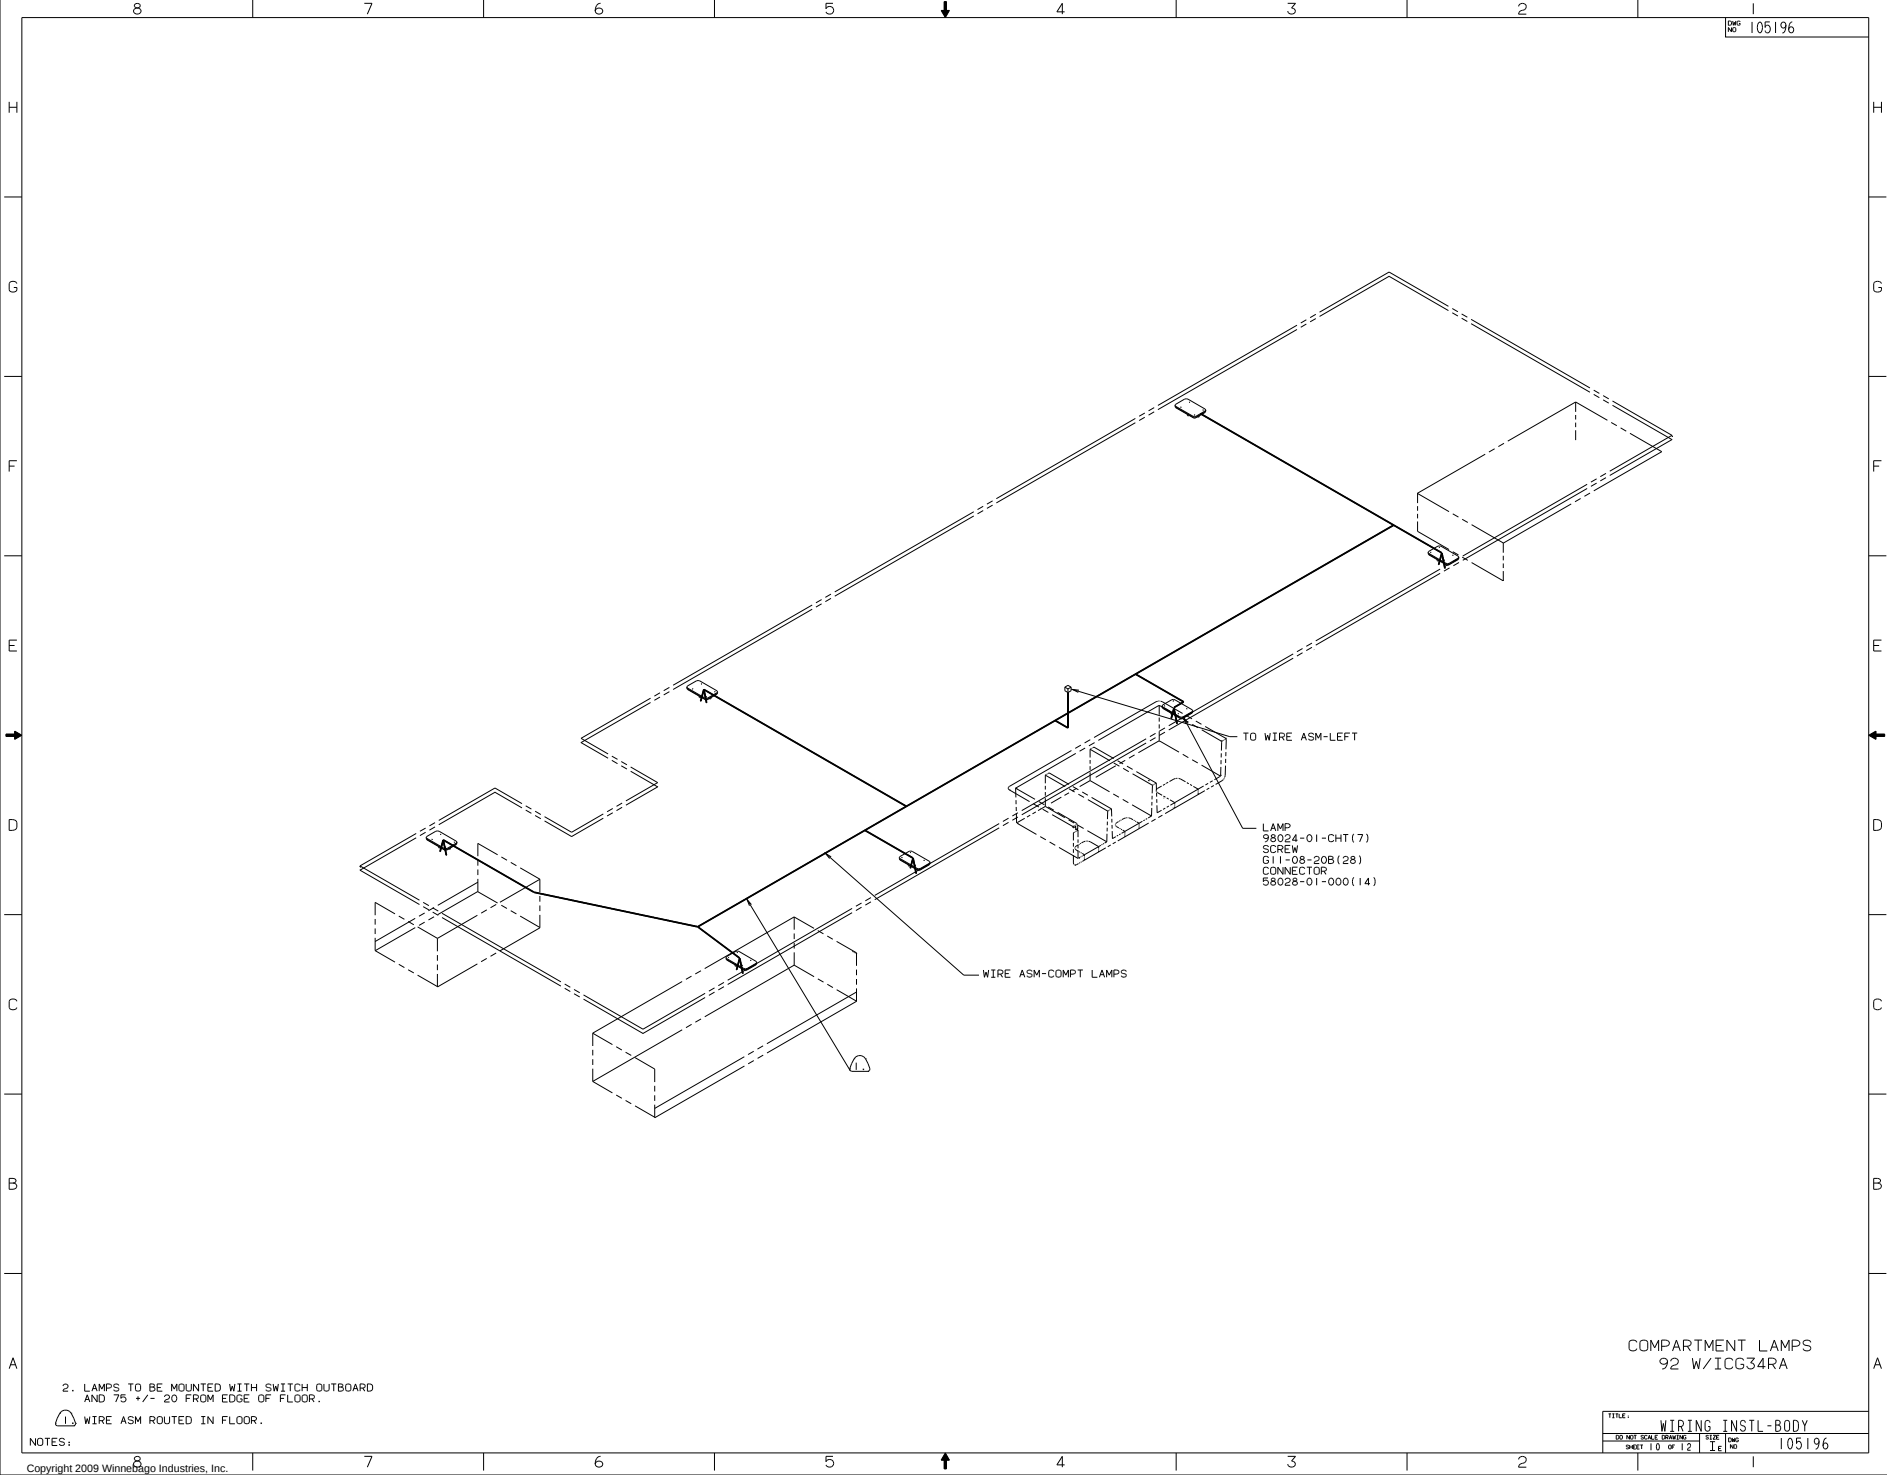


2. LAMPS TO BE MOUNTED WITH SWITCH OUTBOARD
AND 75 +/- 20 FROM EDGE OF FLOOR.


⚠ WIRE ASM ROUTED IN FLOOR.

NOTES:

COMPARTMENT LAMPS
92 W/ICG34RA

TITLE: WIRING INSTL-BODY		ENG NO	105196
DO NOT SCALE DRAWING	SHEET	10	12

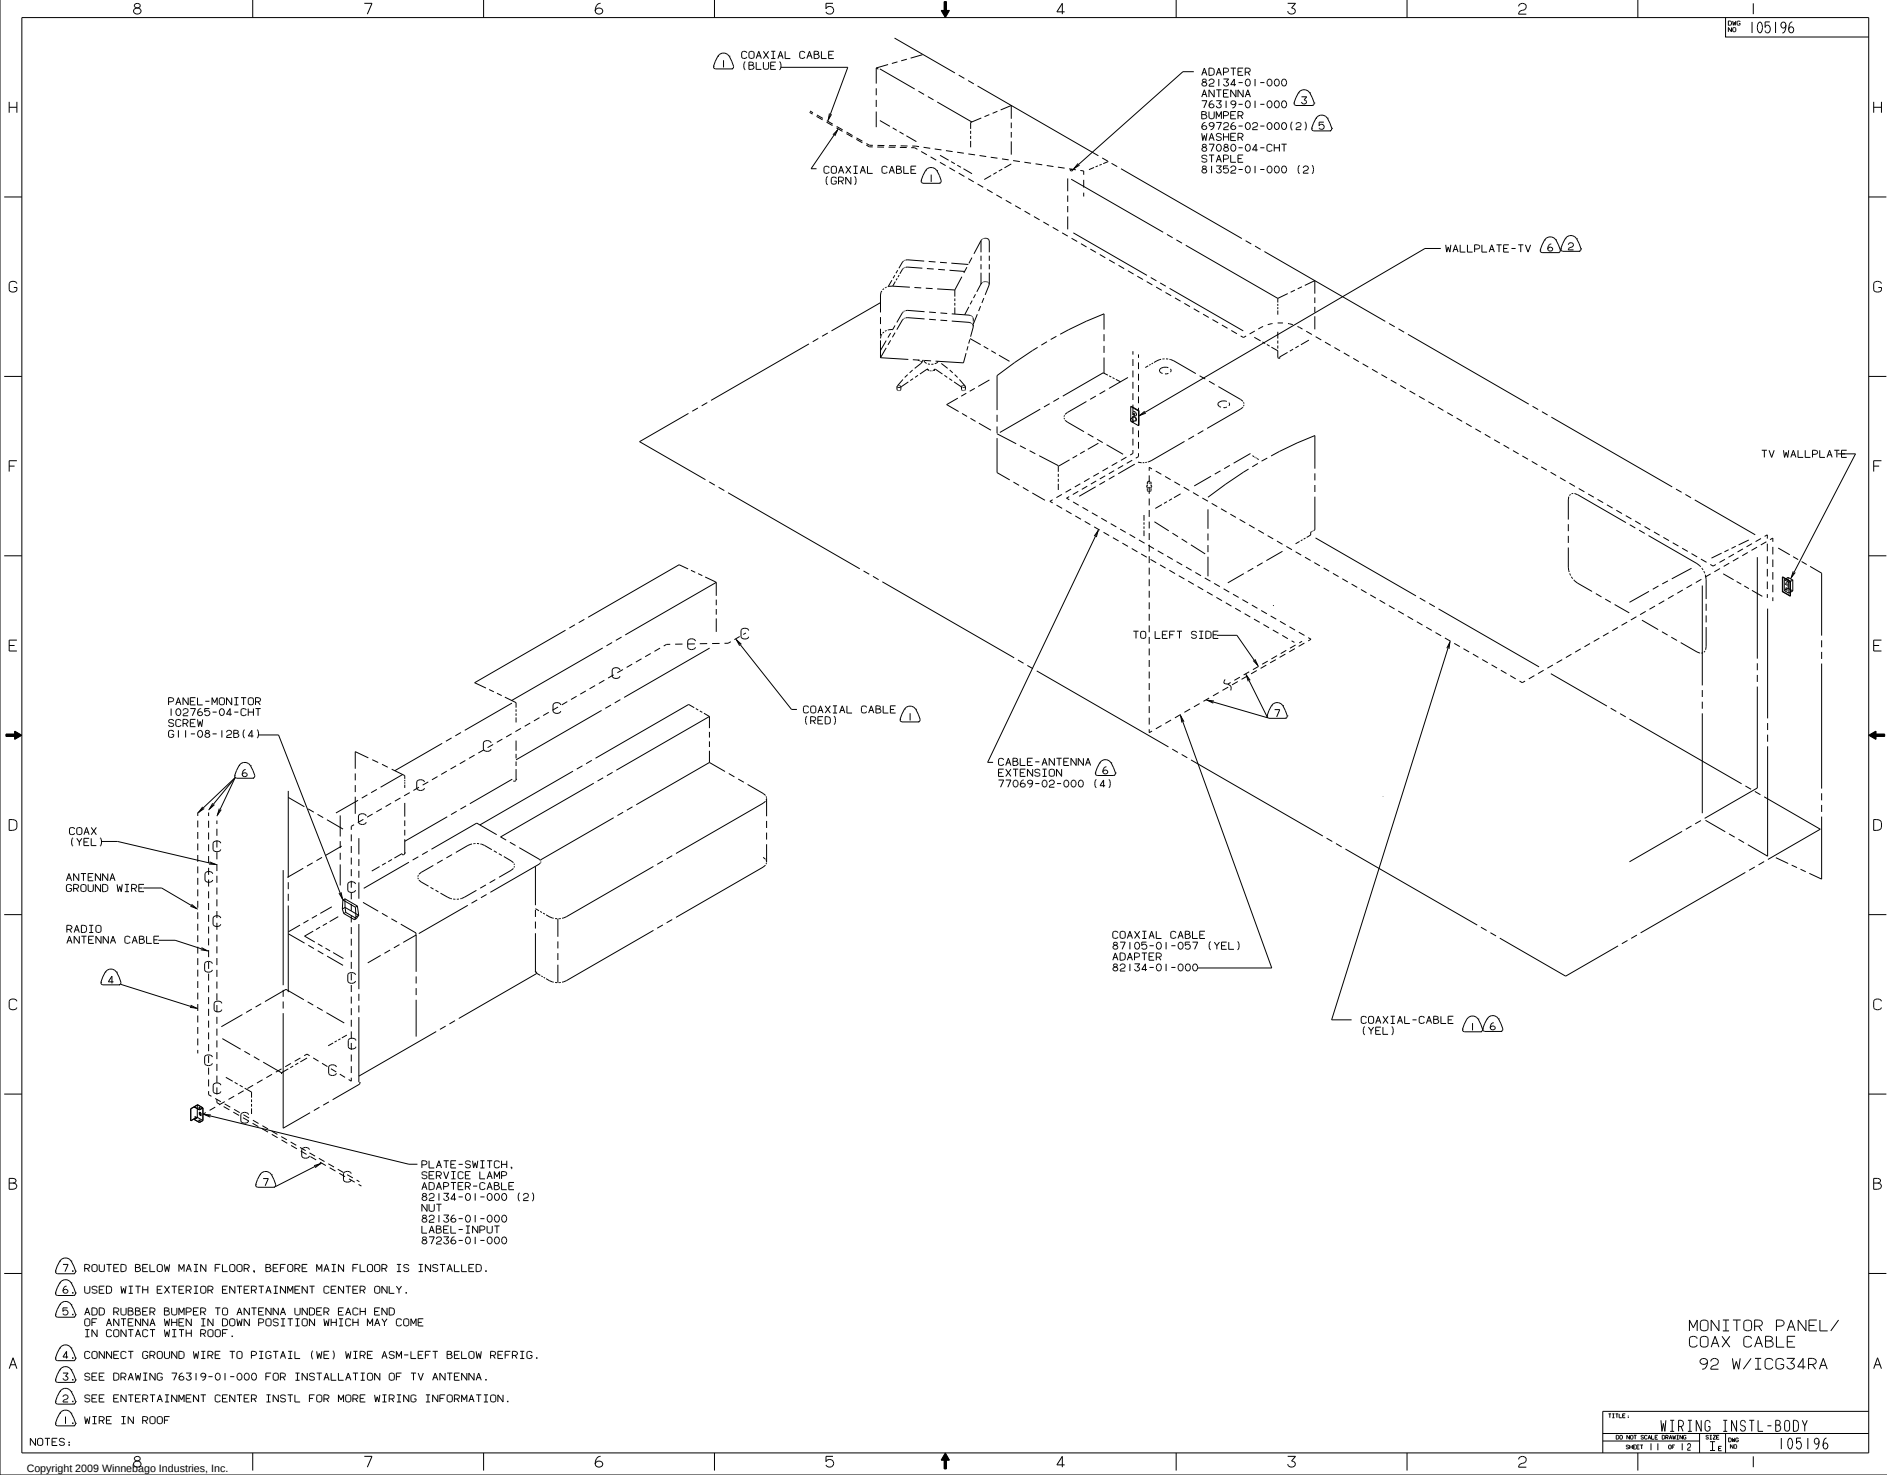

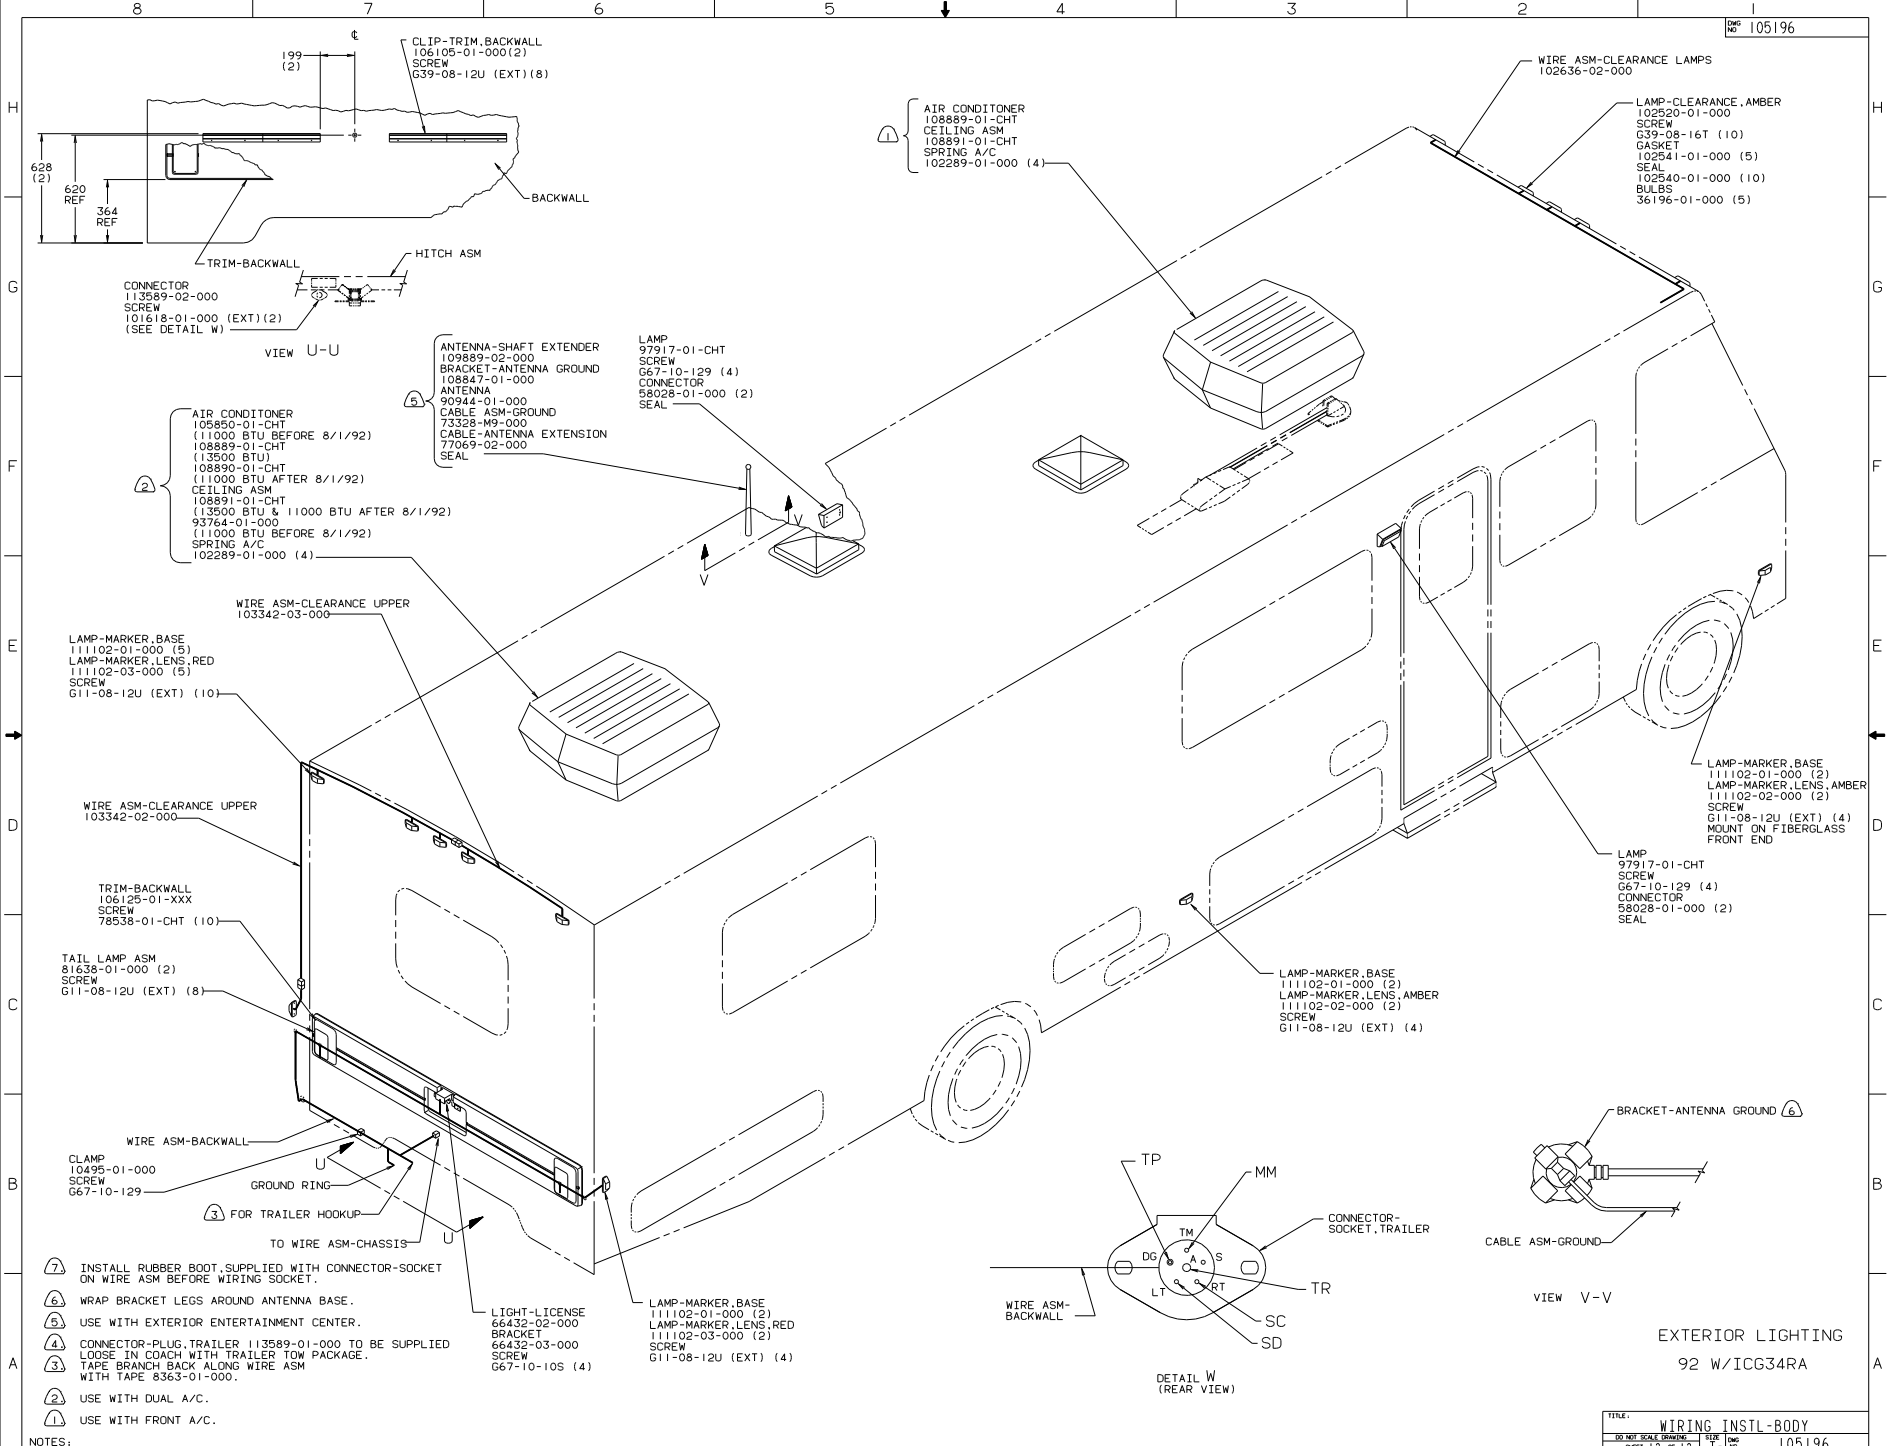

NOTES:

- ⑦ INSTALL RUBBER BOOT, SUPPLIED WITH CONNECTOR-SOCKET ON WIRE ASM BEFORE WIRING SOCKET.
- ⑥ WRAP BRACKET LEGS AROUND ANTENNA BASE.
- ⑤ USE WITH EXTERIOR ENTERTAINMENT CENTER.
- ④ CONNECTOR-PLUG, TRAILER 113589-01-000 TO BE SUPPLIED LOOSE IN COACH WITH TRAILER TOW PACKAGE. TAPE BRANCH BACK ALONG WIRE ASM WITH TAPE 8365-01-000.
- ③ USE WITH DUAL A/C.
- ② USE WITH FRONT A/C.
- ① USE WITH FRONT A/C.

EXTERIOR LIGHTING
92 W/ICG34RA

TITLE: WIRING INSTL-BODY			
30 NET SCALE DRAWING	FILE	105196	
SHEET 12 OF 12	12		