



DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.




CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

DRAWING NO	FEATURE
176314-01	-----
176314-12	1B1 78J
176314-16	265 78J

RELEASE	REV DATE	DWG NO	176314
REV ZONE	REVISION RECORD	DATE	DFTR-ORIG

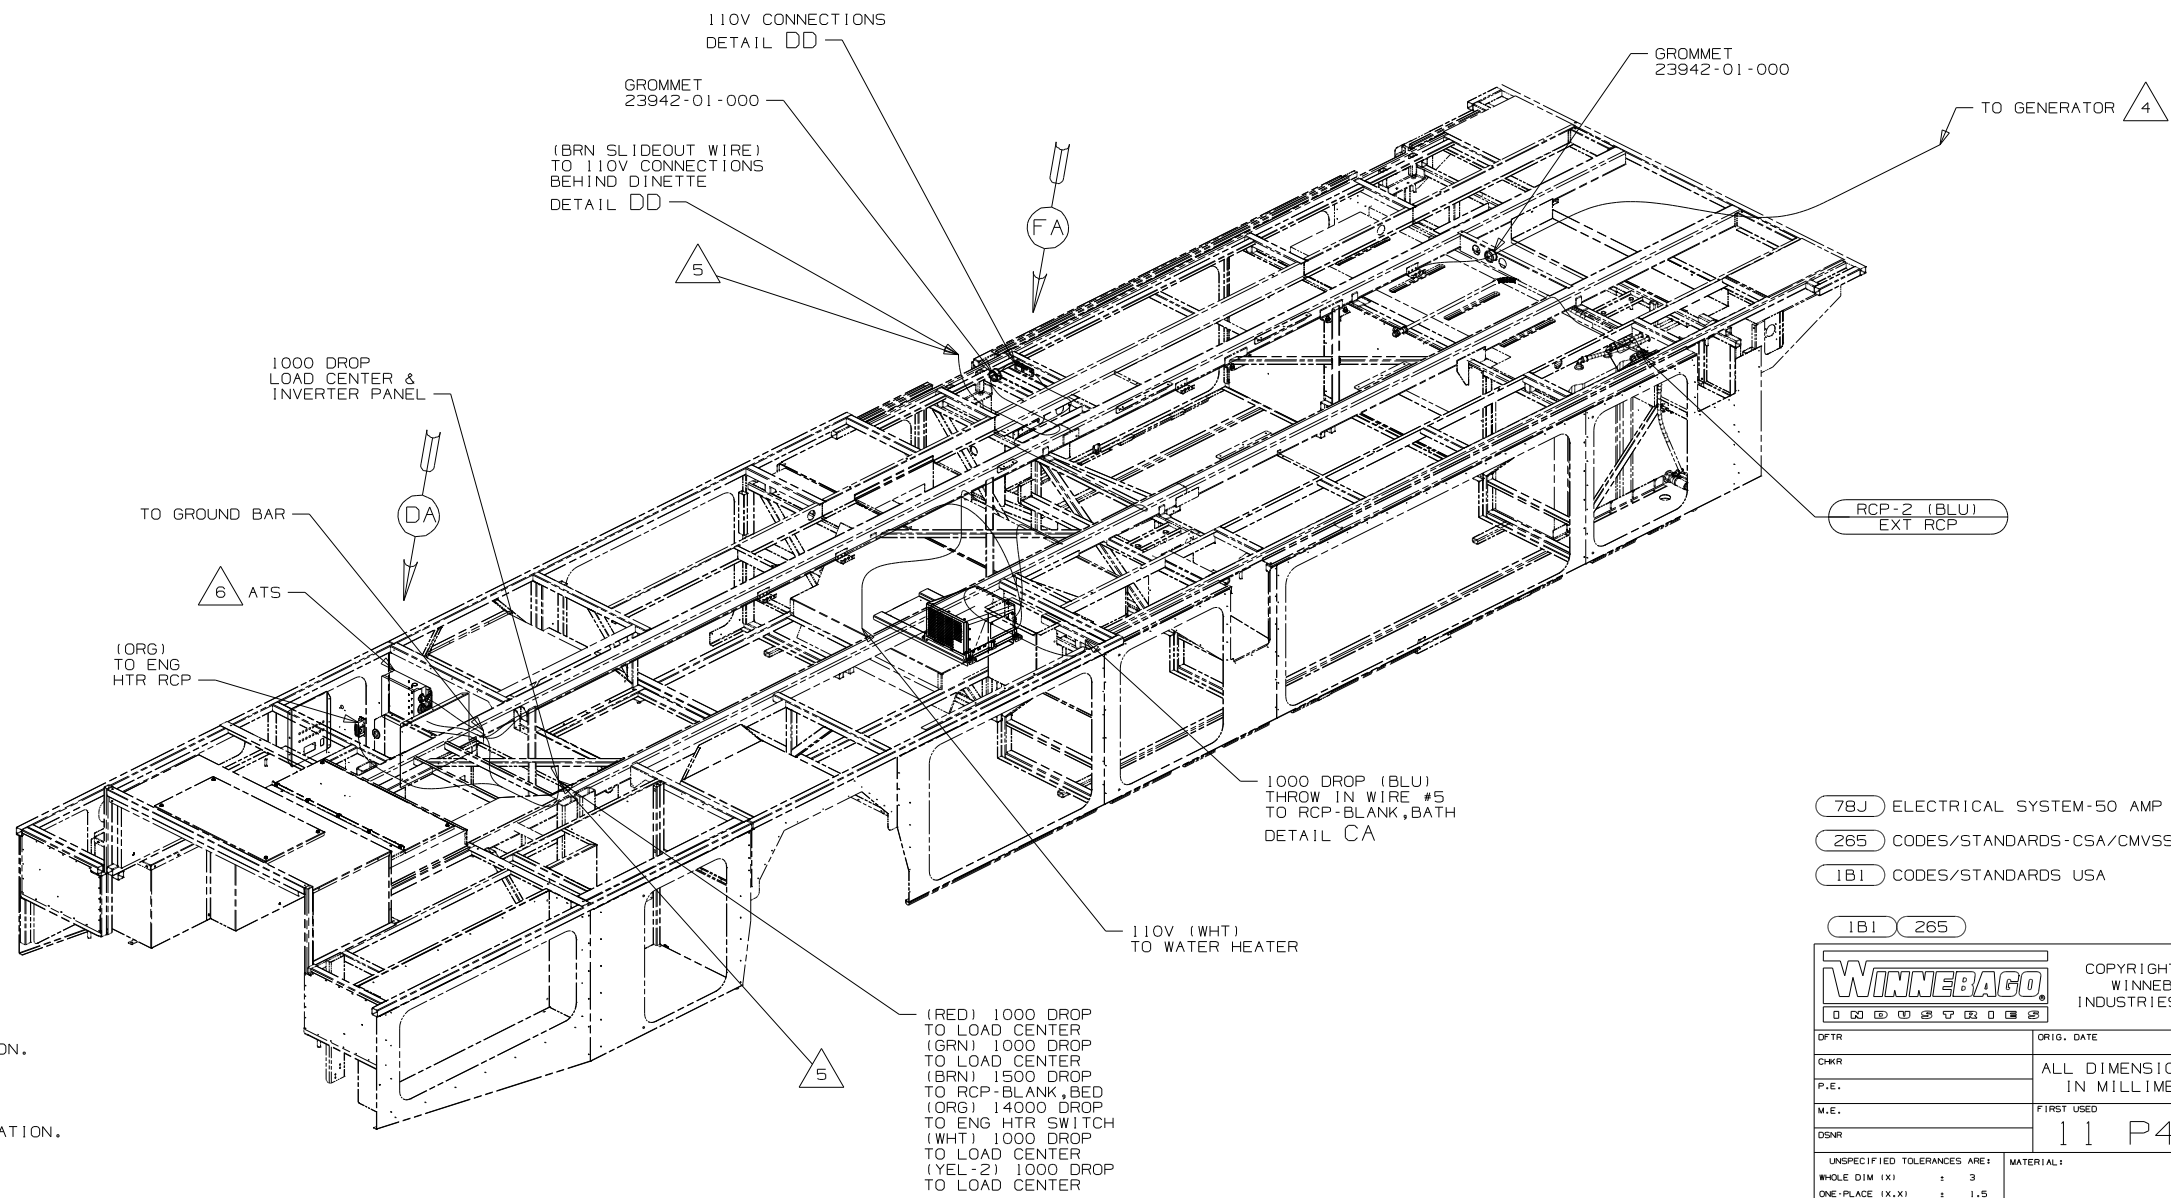

- 6 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 5 TO ABOVE FLOOR.
- 4 SEE GENERATOR INSTALLATION FOR ADDITIONAL INFORMATION.

3. WIRES THAT REST ON WIRE TRAYS ARE TO BE TIED DOWN WITH WIRE TIE 8343-04-000.
2. CLAMP TO FLOOR SUPPORT TUBES AS NECESSARY WITH CLAMP 10497-01-000.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:



- 78J ELECTRICAL SYSTEM-50 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	11 P40L
UNSPECIFIED TOLERANCES ARE:	MATERIAL:
WHOLE DIM (X)	3
ONE-PLACE (X,X)	1.5
TWO-PLACE (X,XX)	0.50
ANGLE	1°
THIRD ANGLE PROJECTION	


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 110V	
SHEET 1 of 6	PART NO 176314 REV
REF:	1 12/3/2010

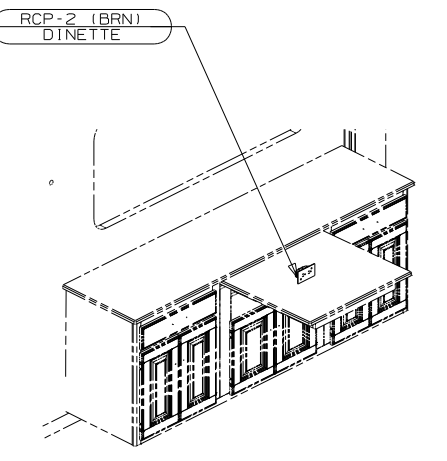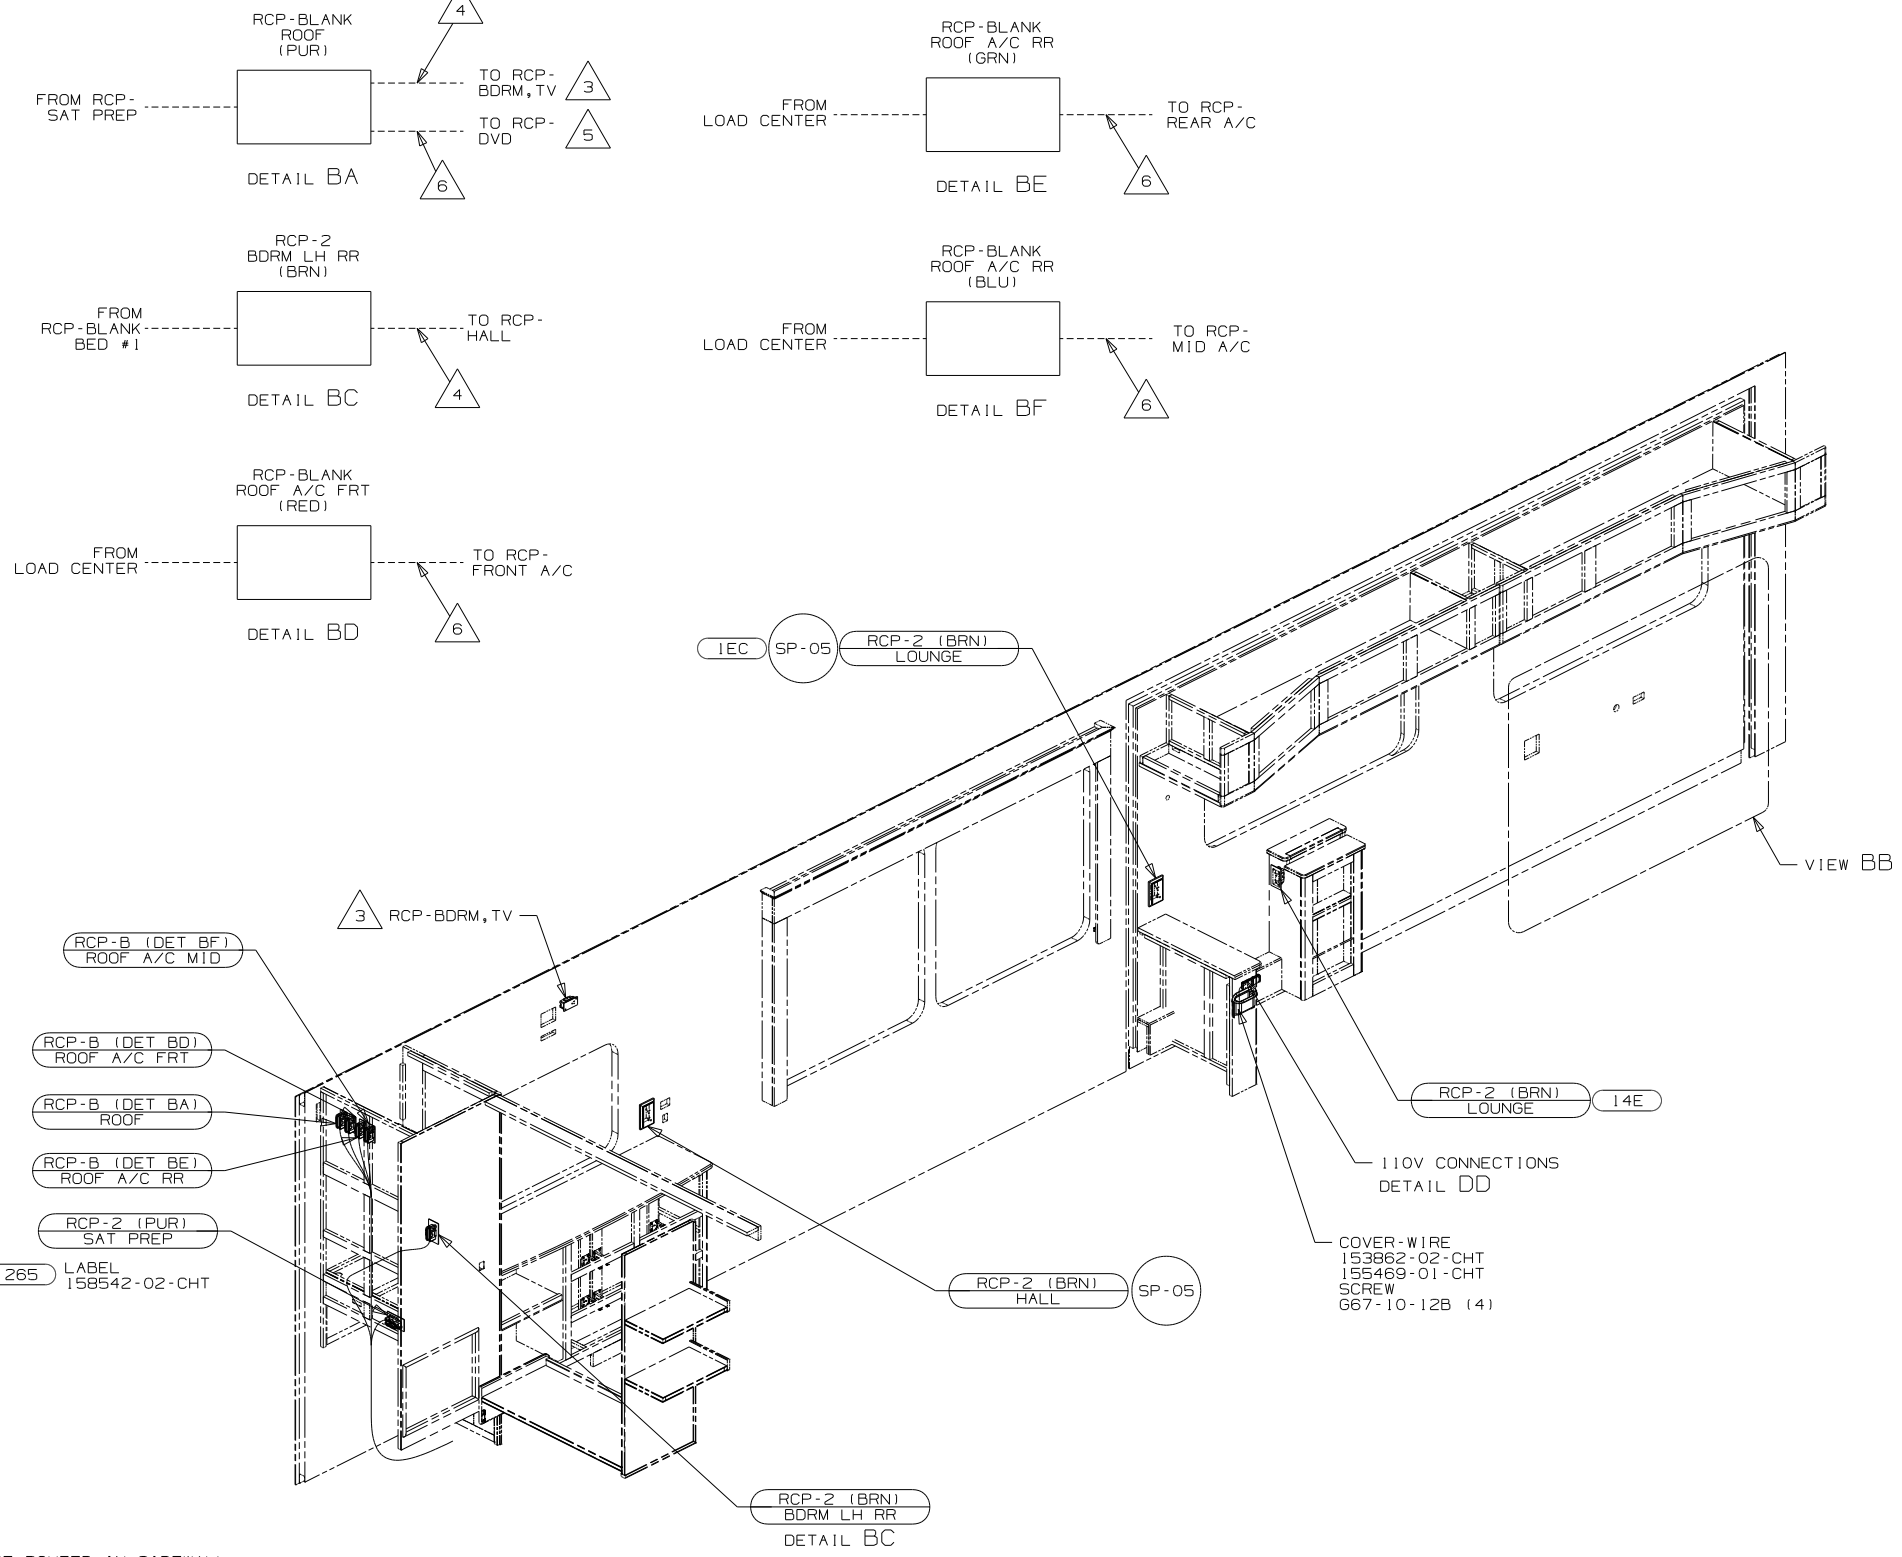

VIEW BB (21P)

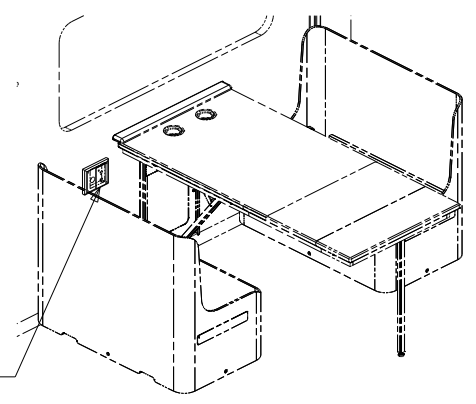

VIEW BB (14W) (14I)

- (14I) DINETTE-EXTENDABLE TABLE/CHR
- (1EC) END TABLE CABINET
- (14E) LOUNGE CHAIRS-2 EURO LEATHER
- (21P) DINING TABLE/BUFFET & CHAIRS
- (14W) DINETTE
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA


181		265	
FIRST USED			
11 P40L			
DO NOT SCALE DRAWING			
TITLE: WIRING INSTL-BODY, 110V			
SHEET 2		PART NO 176314	REV

- NOTES:
- ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
 - ALL 110V WIRES TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.

- (4) WIRE ROUTED IN SIDEWALL.
- (3) SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
- (6) WIRE ROUTED IN ROOF.
- (5) SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

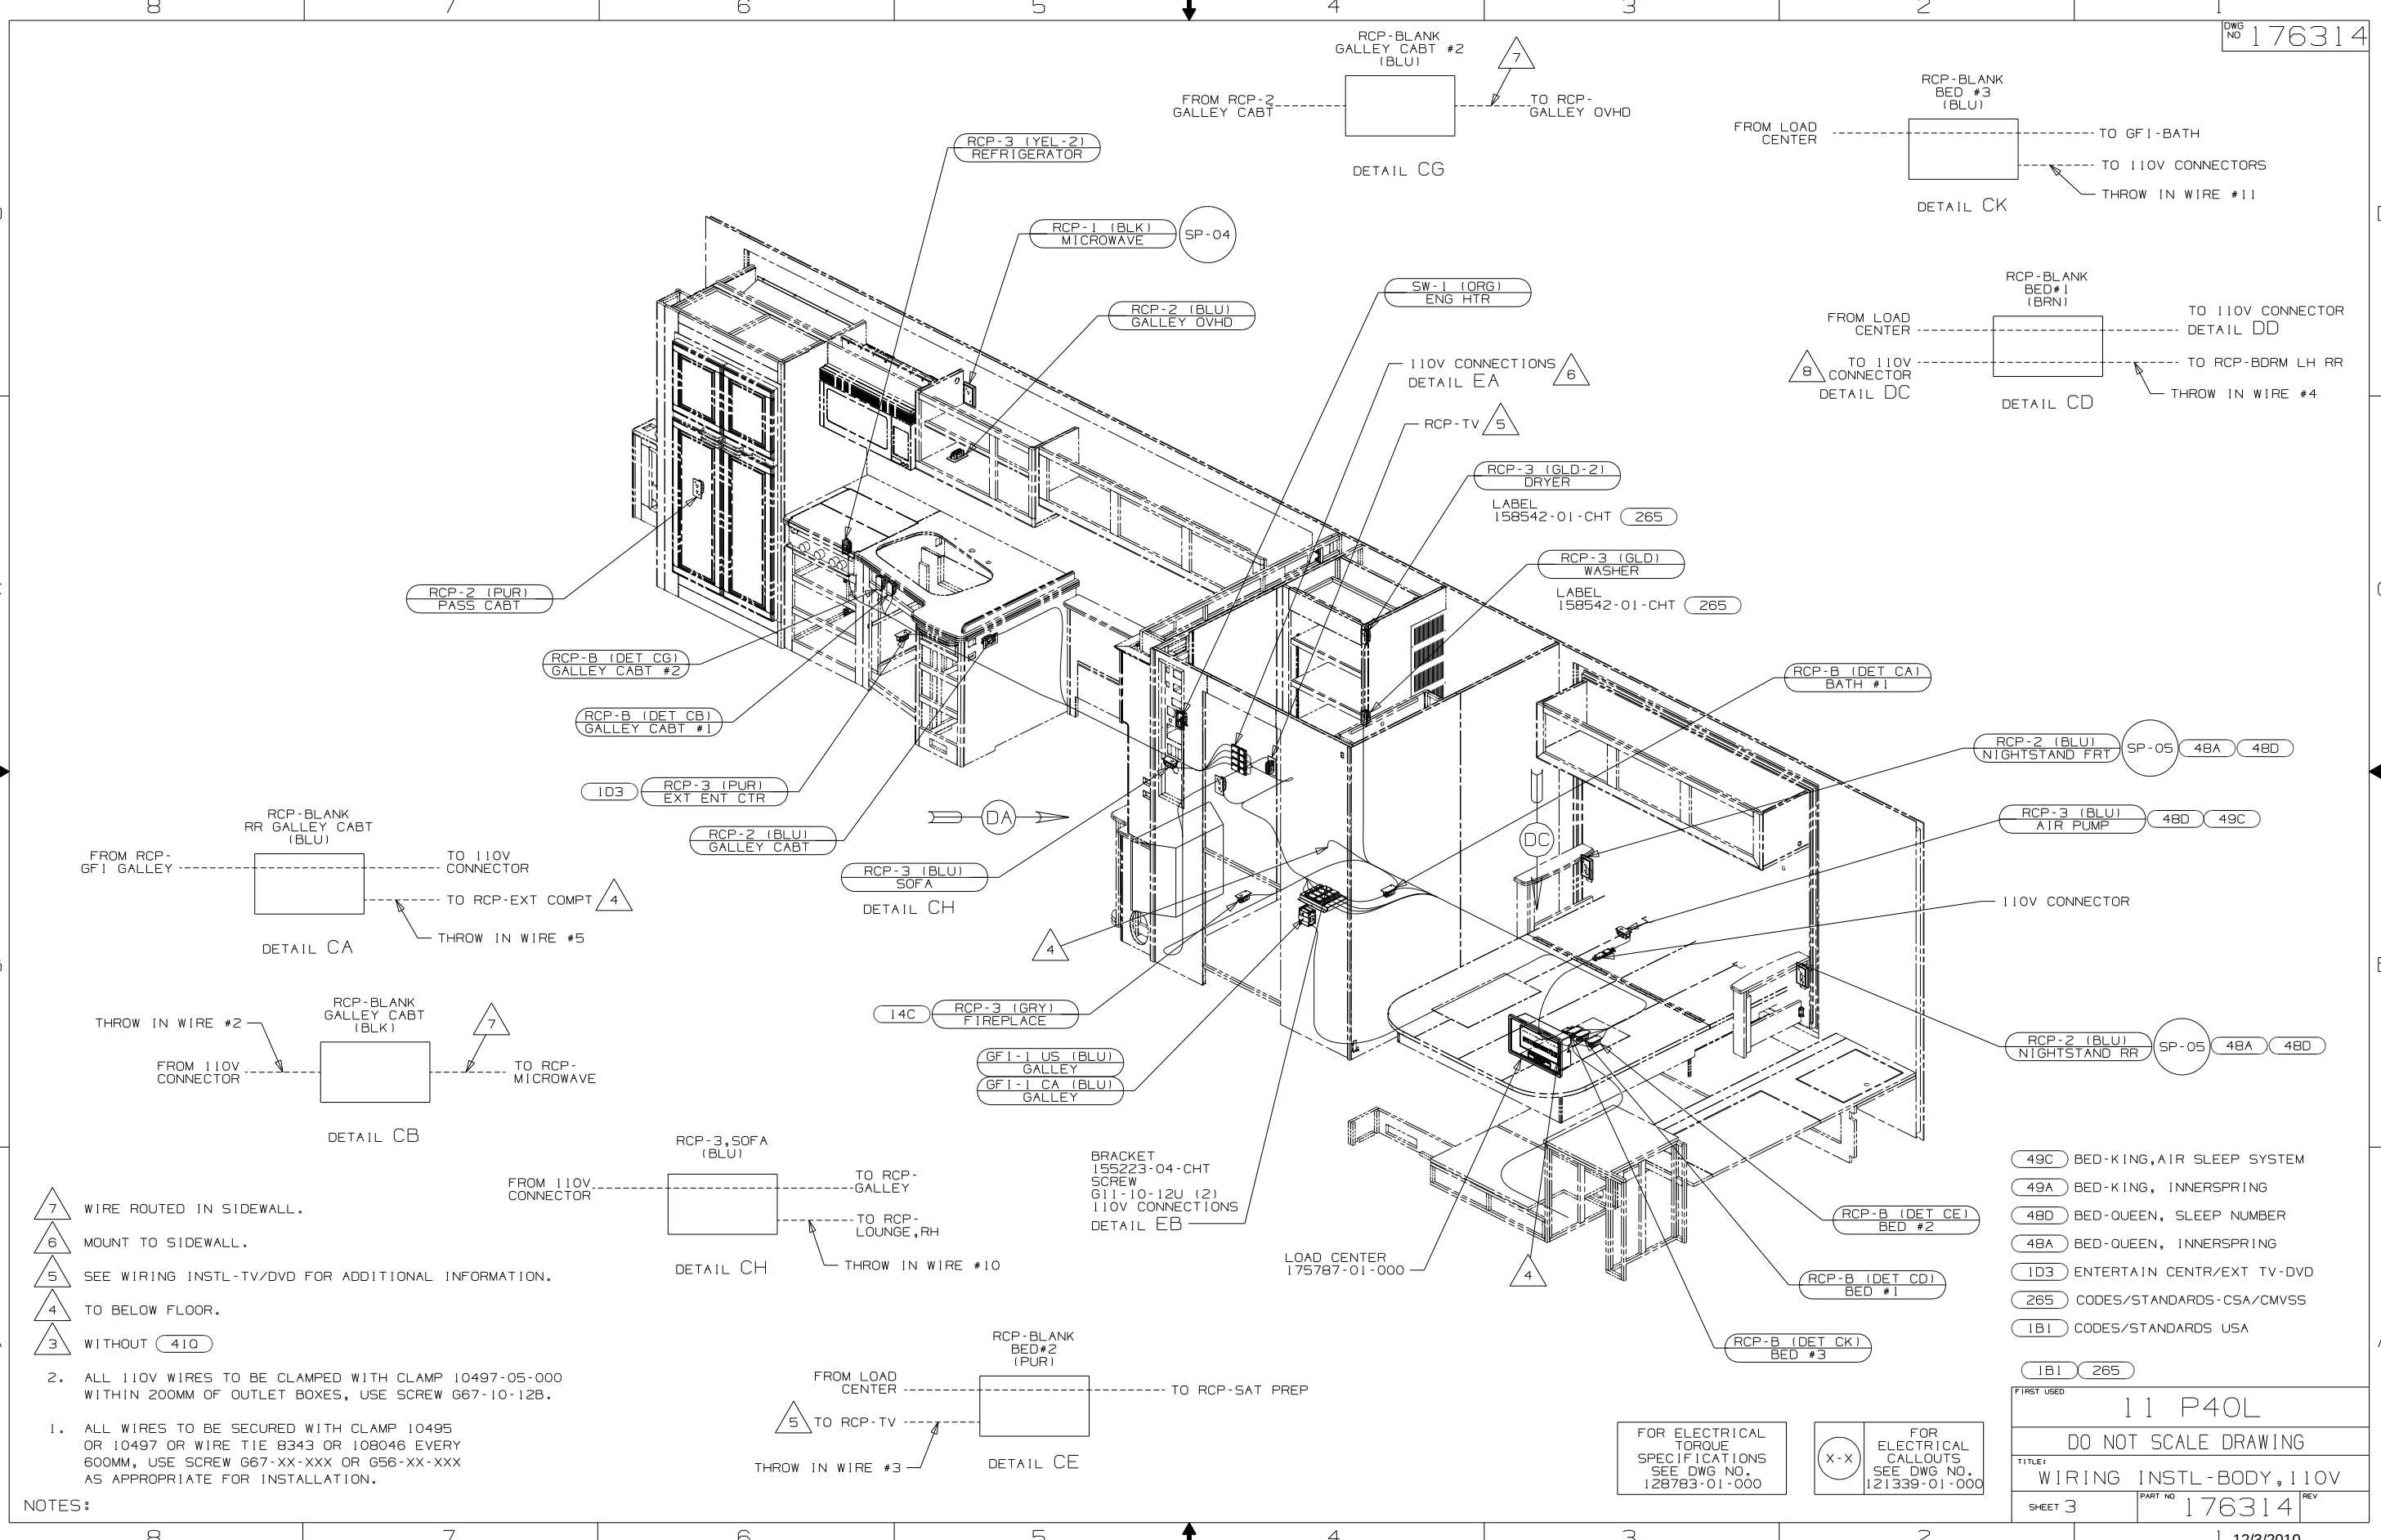


- 7 WIRE ROUTED IN SIDEWALL.
6 MOUNT TO SIDEWALL.
5 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
4 TO BELOW FLOOR.
3 WITHOUT 410
2. ALL 110V WIRES TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
1. ALL WIRES TO BE SECURED WITH CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 EVERY 600MM, USE SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


FIRST USED		11 P40L	
DO NOT SCALE DRAWING		TITLE:	
WIRING INSTL-BODY, 110V		SHEET 3	
PART NO		176314	
REV		12/3/2010	

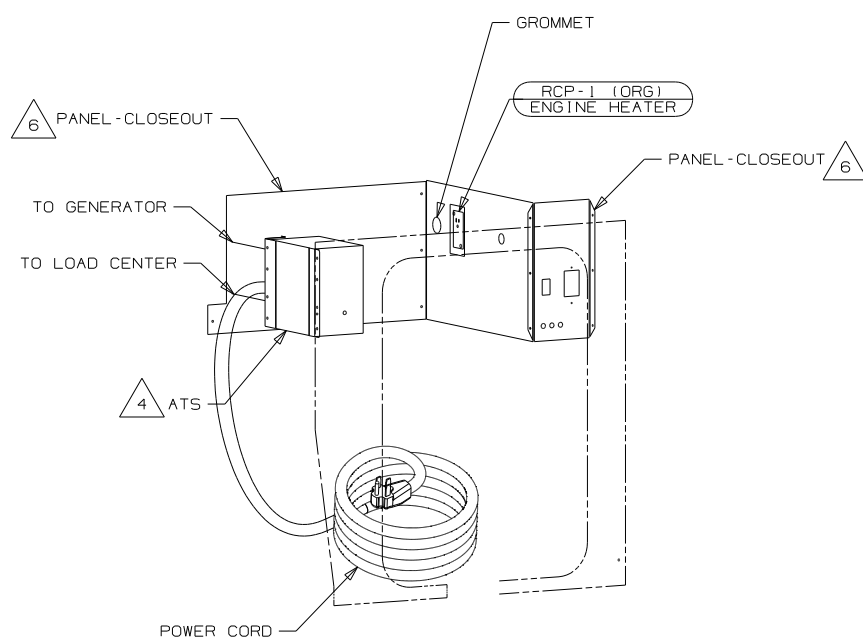


VIEW DA

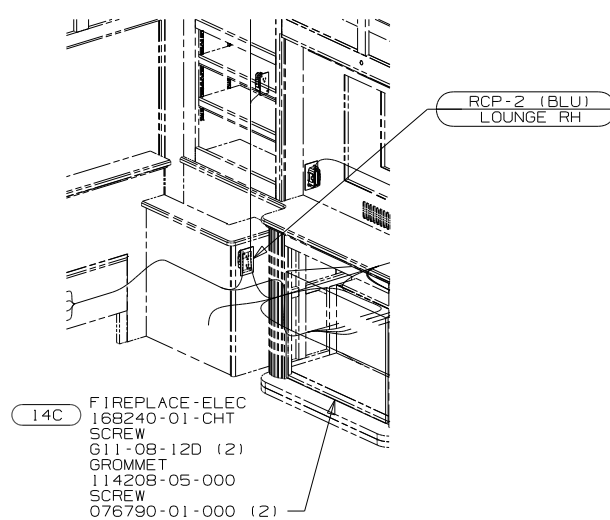

VIEW BA

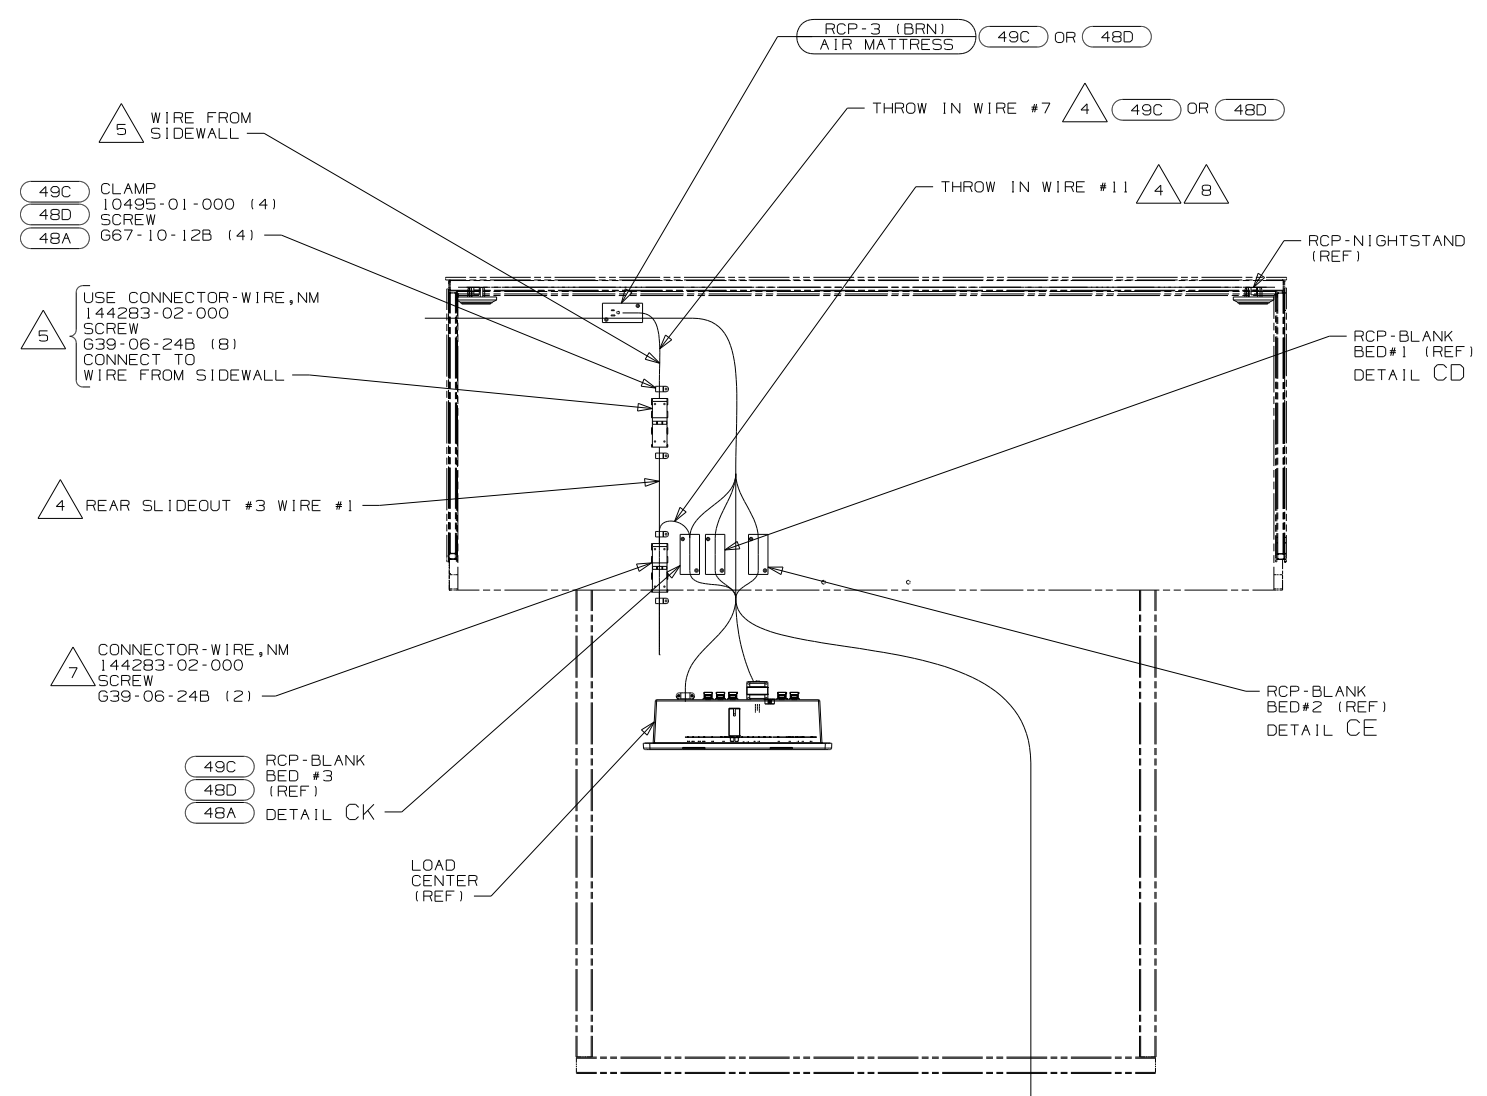

DETAIL DC

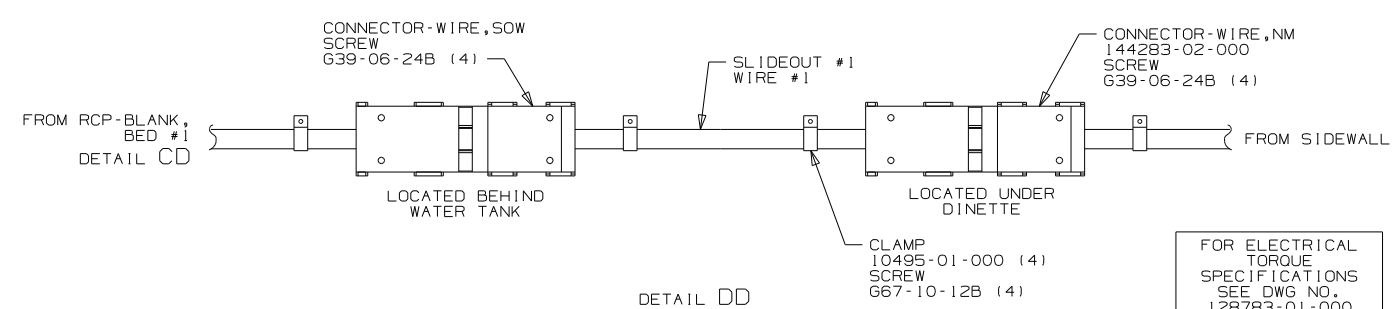

DETAIL DD



- 8 WIRE DEAD ENDS AT RCP-BLANK, BED #1 WITH 49A OR 49B
- 7 WITHOUT 49A OR 49B
- 6 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 5 WITHOUT 49C OR 48D
- 4 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 3 MAKE LOOP AS SMALL AS POSSIBLE WHEN SLIDEOUT IS COMPLETELY RETRACTED.

2. RUN 12V WIRE ALONG WITH REAR SLIDEOUT WIRE.
1. WIRE MUST BE ROUTED THROUGH CLAMPS AS SHOWN.


NOTES:

- 49B BED-KING, MEMORY FOAM
- 49A BED-KING, INNERSPRING
- 14C FIREPLACE-ELECTRIC
- 48A BED-QUEEN, INNERSPRING
- 49C BED-KING, SLEEP NUMBER
- 48D BED-QUEEN, SLEEP NUMBER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED		11 P40L
DO NOT SCALE DRAWING		
TITLE:		WIRING INSTL-BODY, 110V
SHEET 4	PART NO	176314
		REV

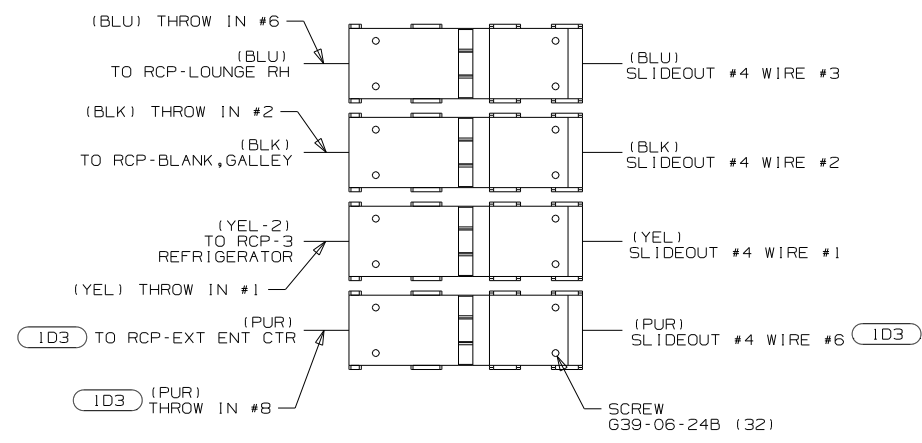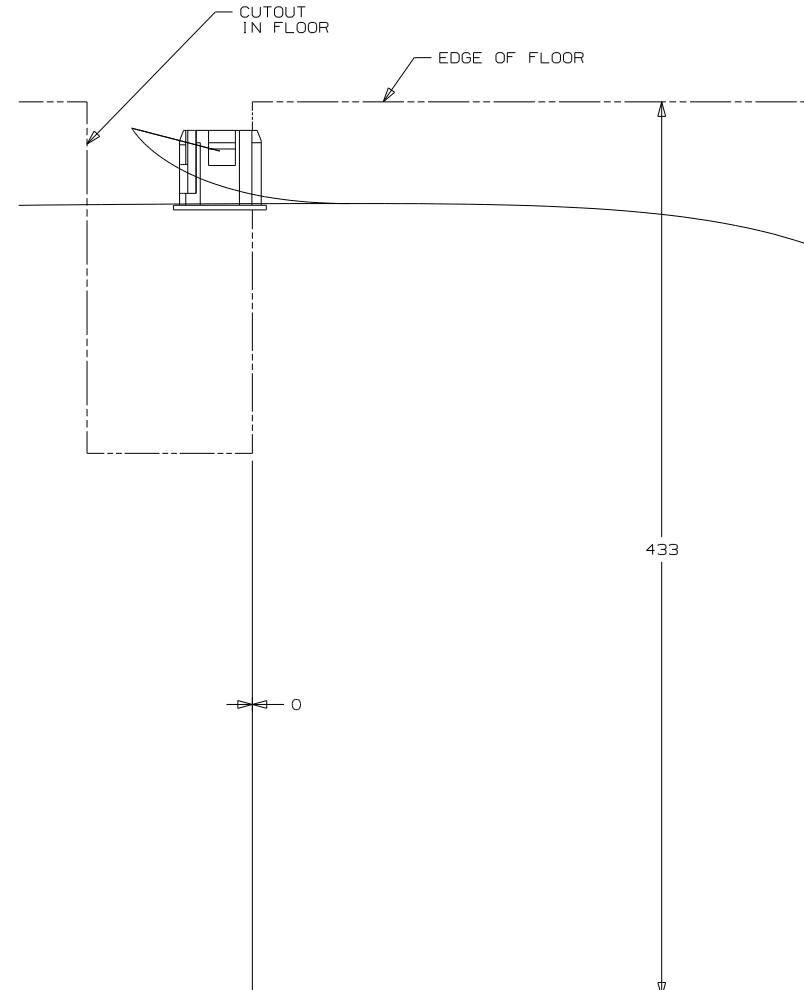

DETAIL EA

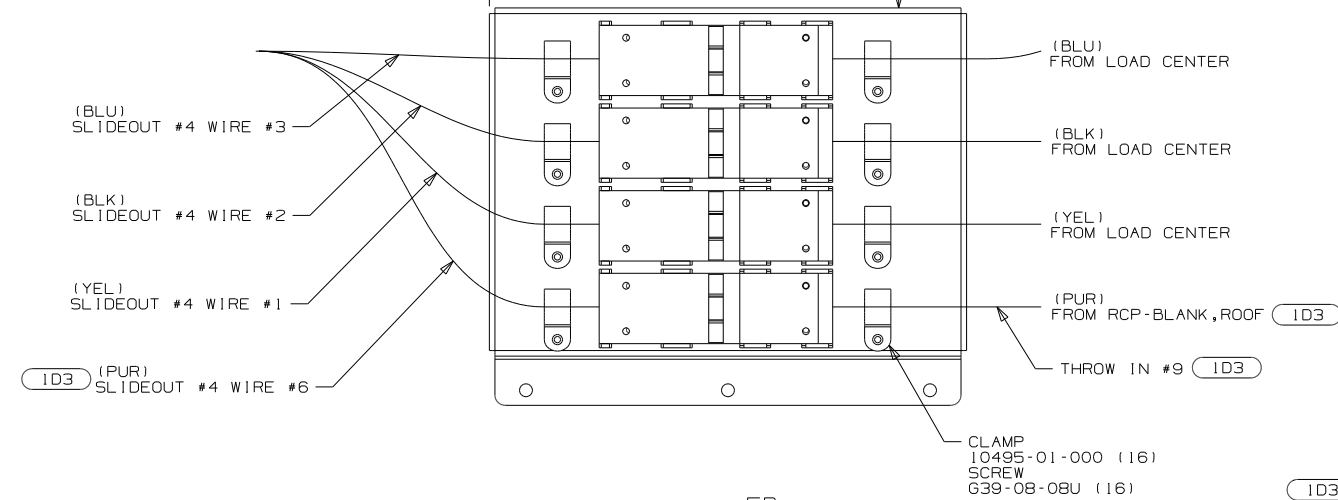


DETAIL EB

NOTES: 1 110V CONNECTORS ARE MOUNTED TO RIGHT SIDEWALL.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

103	ENTERTAIN CENTR/EXT TV-DVD
265	CODES/STANDARDS-CSA/CMVSS
181	CODES/STANDARDS USA
181	265
FIRST USED 11 P40L	
DO NOT SCALE DRAWING	
TITLE: WIRING INSTL-BODY, 110V	
SHEET 5	PART NO 176314
REV 12/3/2010	

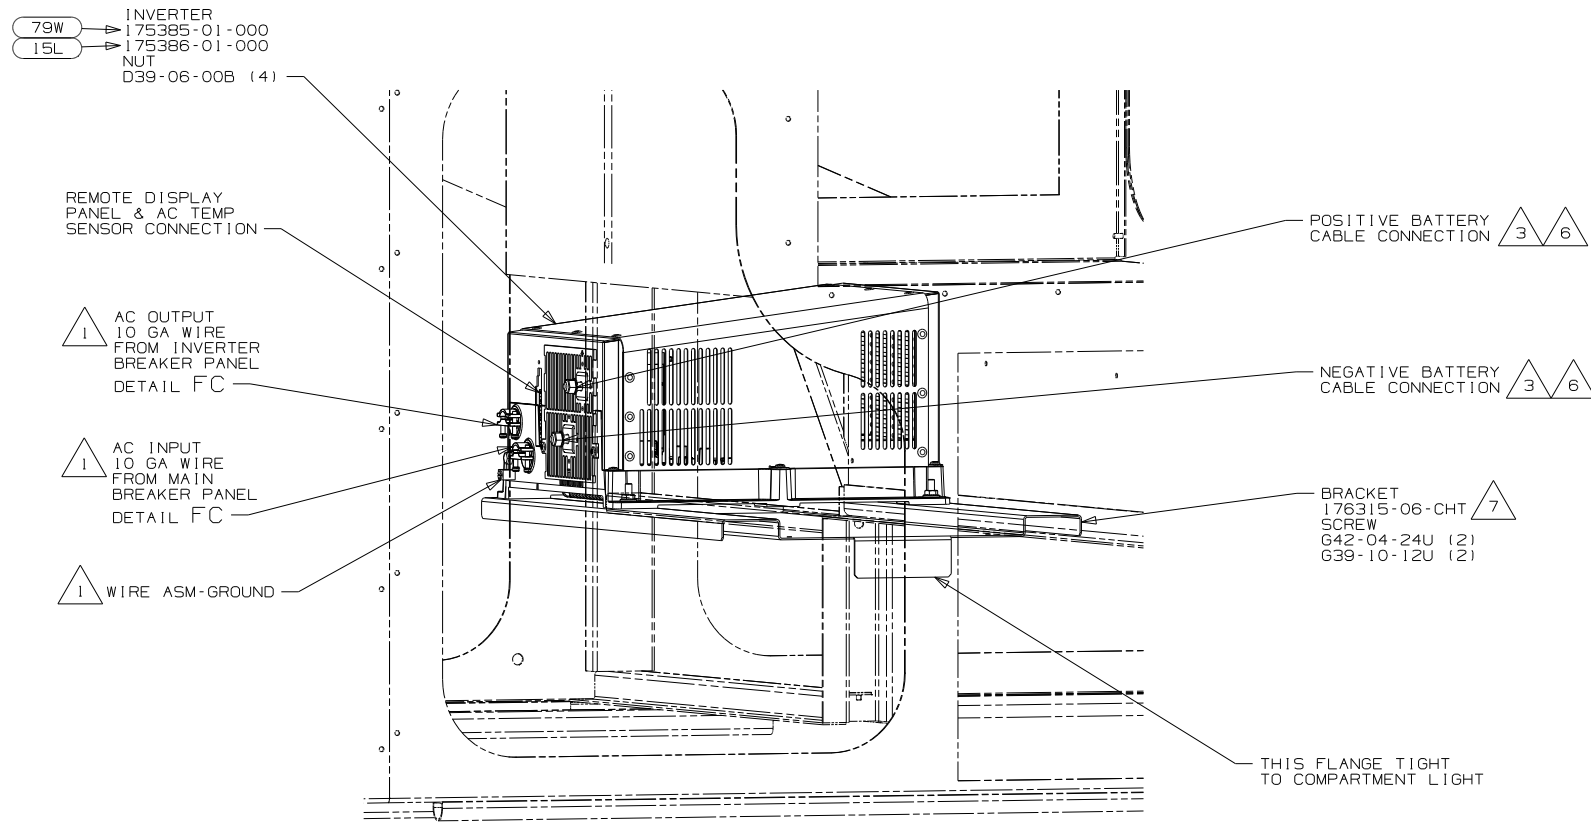

VIEW FA

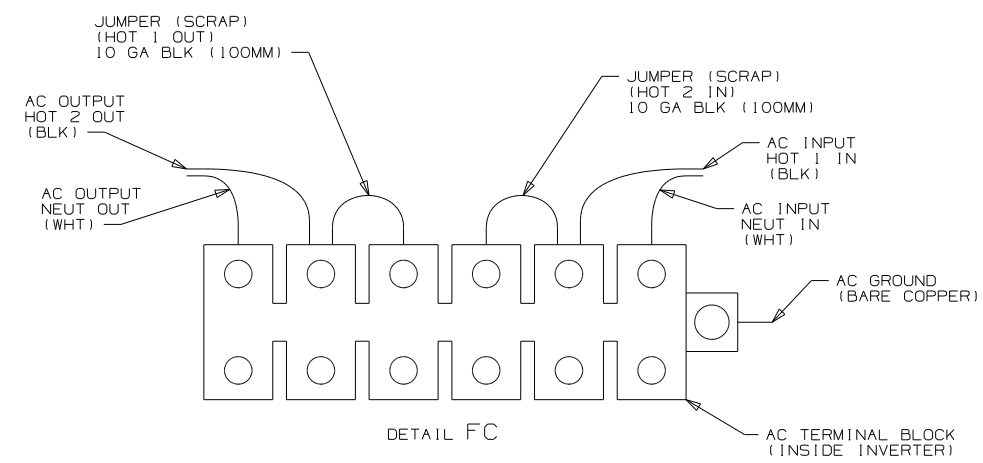

- NOTES:
- 7 BRACKET IS LOCATED BY HOLES ON CLOSEOUT PANEL.
 - 6 DO NOT USE POWER/AIR TOOL TO INSTALL NUT. TORQUE TO 10-12 FT LBS.
 - 5 CABLES PART OF WIRE ASM-COACH.
 - 4 SEE INVERTER/CHARGER OWNER'S MANUAL FOR ADDITIONAL INFORMATION.
 - 3 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 2 USED WITHOUT 13X
 - 1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 79W REFRIGERATOR-4 DOOR
- 15L REFR/FRZR 2DOOR RESIDENTIAL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	11 P40L
TITLE	DO NOT SCALE DRAWING
WIRING INSTL-BODY, 110V	
SHEET 6	PART NO 176314 REV