

LAMP ASM-PORCH  
191677-01-000  
CONNECTOR  
58028-01-000 (2)  
SCREW  
G67-10-12U (2)

LAMP-MARKER,  
W AMBER LENS  
195141-01-CHT  
SCREW  
G11-08-12U (2)

LAMP-MARKER,  
W AMBER LENS  
195141-01-CHT  
SCREW  
G11-08-12U (EXT)(2)  
CONNECTOR  
58028-01-000 (4)

LAMP-MARKER,  
W RED LENS  
195141-02-CHT  
SCREW  
G11-08-12U (2)

LAMP ASM-PORCH  
191677-01-000  
CONNECTOR  
58028-01-000 (2)  
SCREW  
G67-10-12U (2)

LAMP-MARKER,  
W RED LENS  
195141-02-CHT  
SCREW  
G11-08-12U (2)

LAMP-MARKER,  
W AMBER LENS  
195141-01-CHT  
SCREW  
G11-08-12U (EXT)(2)  
CONNECTOR  
58028-01-000 (4)

LAMP-MARKER,  
W AMBER LENS  
195141-01-CHT  
SCREW  
G11-08-12U (2)

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

WEIGHT: (LBS) FIRST USED: 16 P-SER

DESCRIPTION: WIRING INSTL-EXTERIOR LAMPS

SHEET: 1 OF 3 ITEM/PART NO: 000209776 / 30204201000 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

8

7

6

5

4

3

2

1

D

D

C


C

B

B

A

A

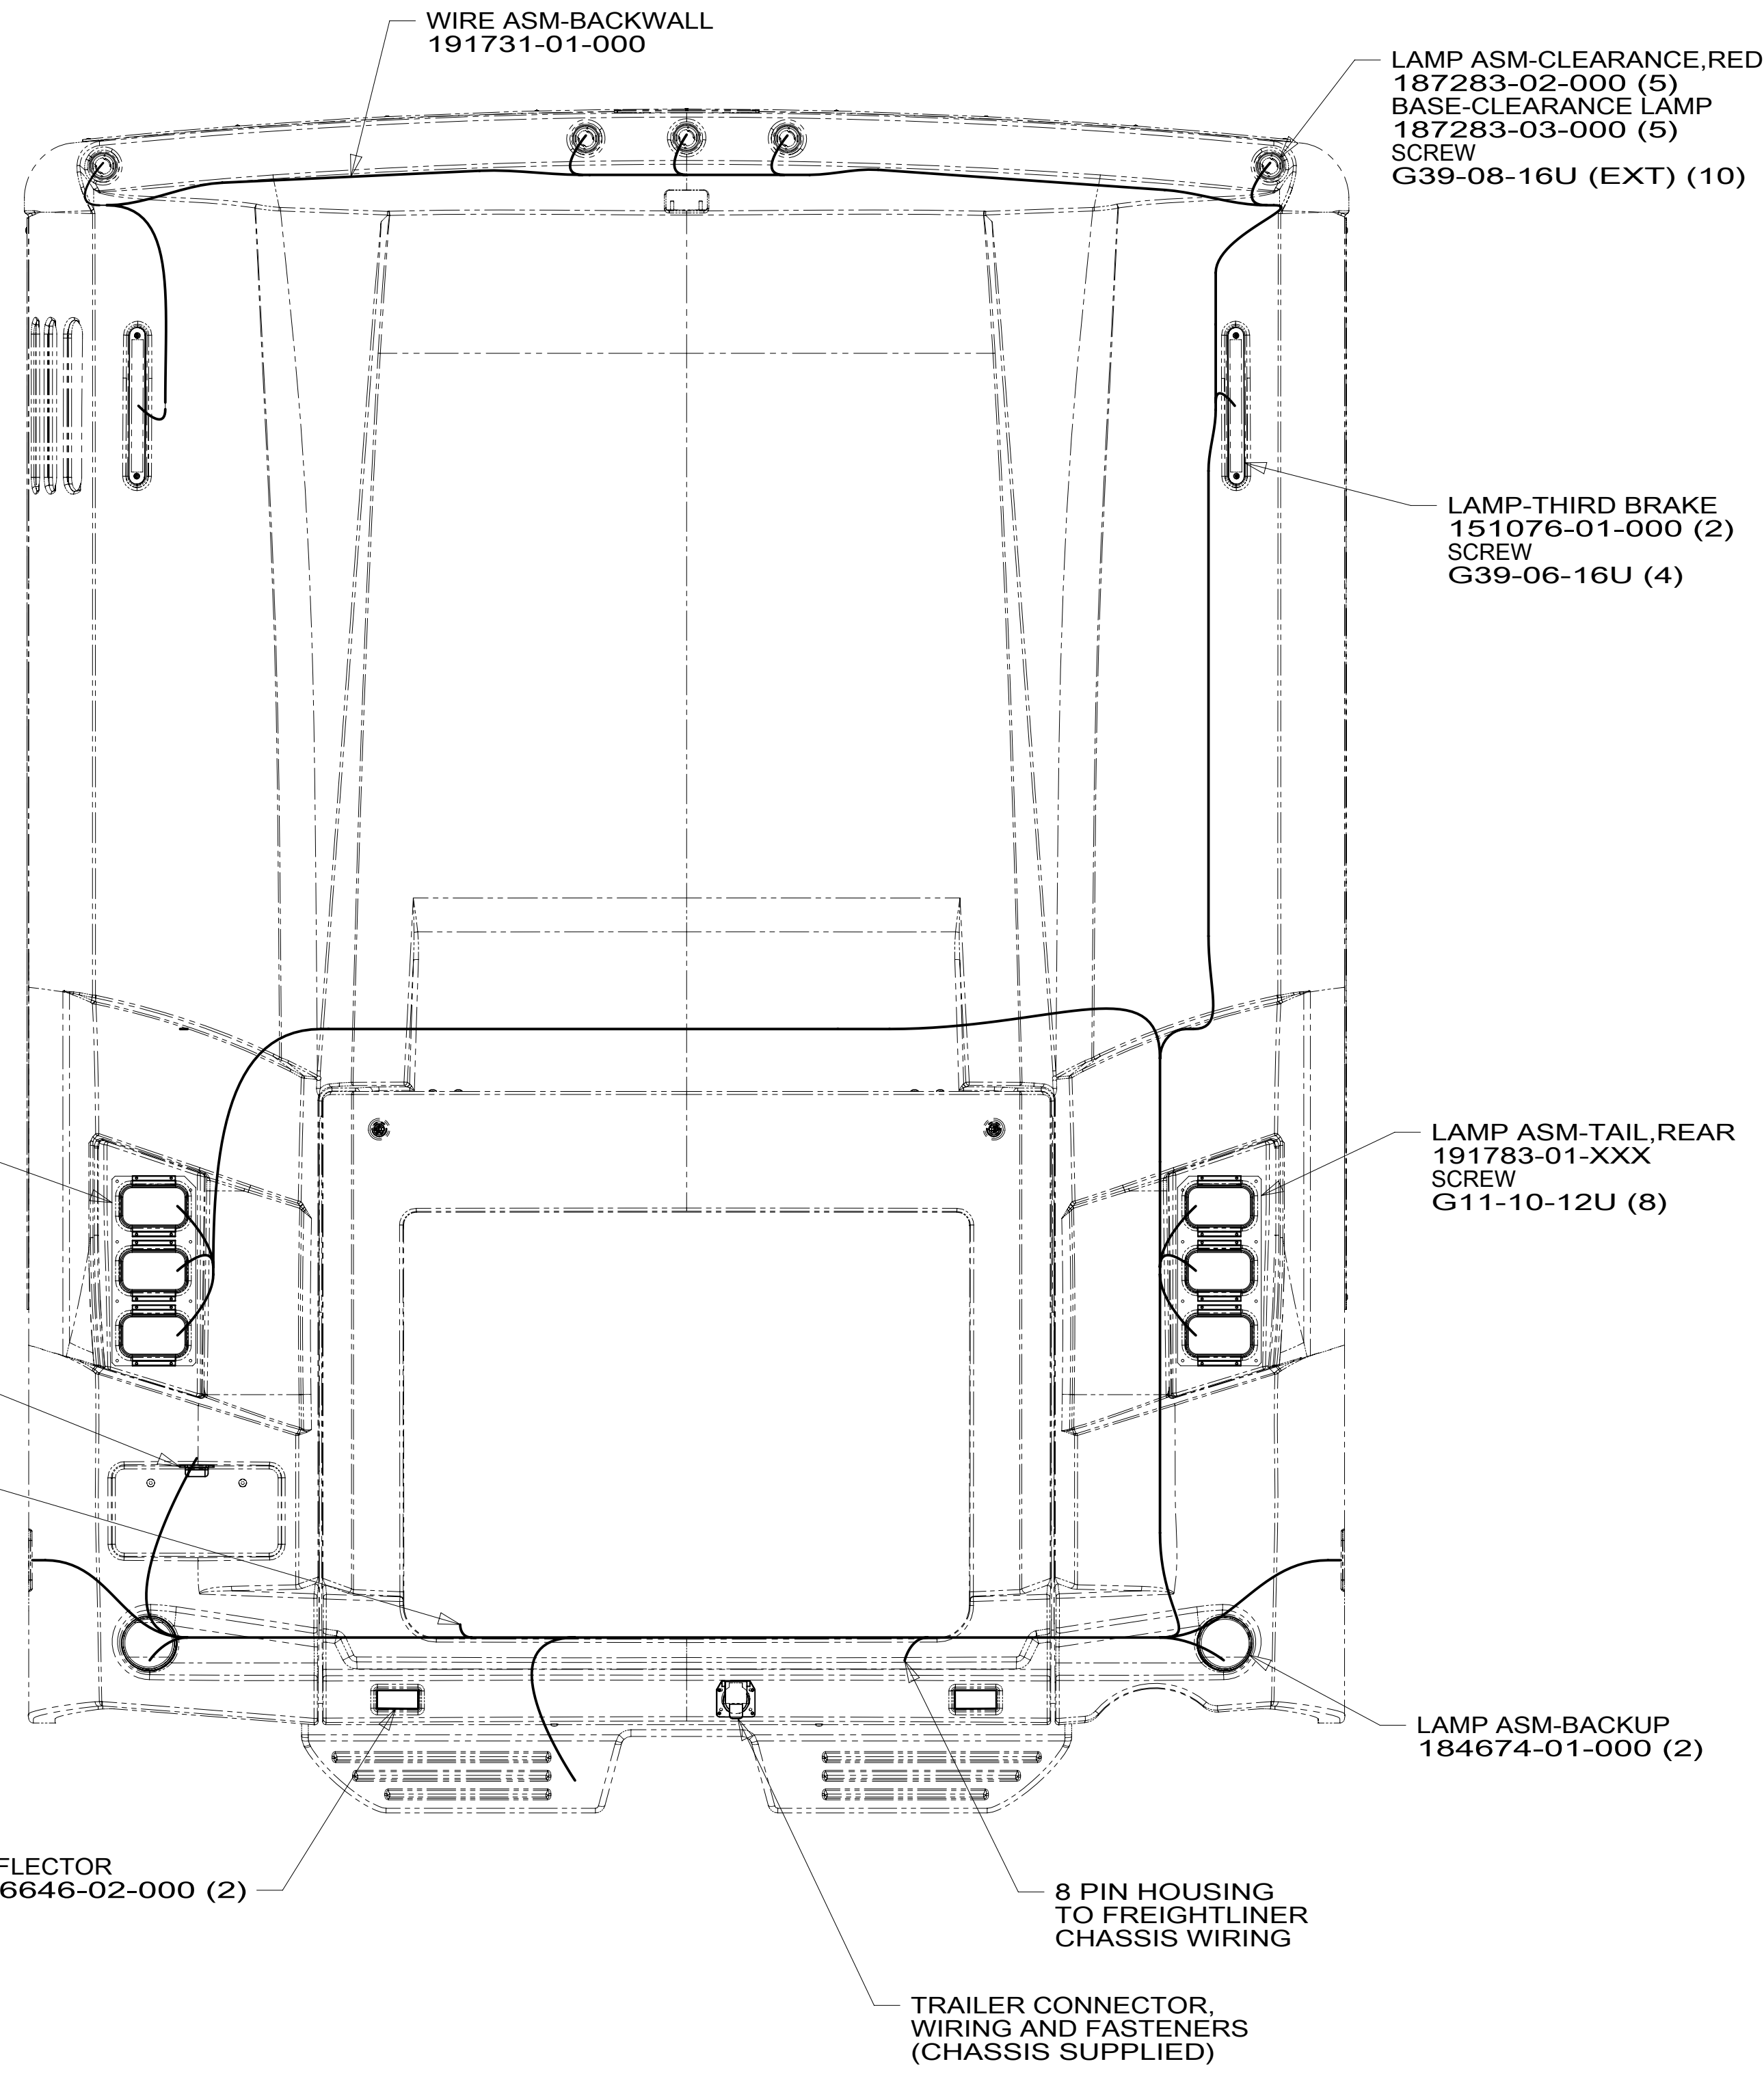

VIEW BA

1 REMOVE PAPER BACKING FROM REFLECTOR AND PREP APPLICATION SURFACE WITH ISOPROPYL ALCOHOL WIPE BEFORE INSTALLATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: <b>WIRING INSTL-EXTERIOR LAMPS</b>	
SHEET: 2 OF 3	ITEM/PART NO: 000209776 / 30204201000
REV	

8

7

6

5

4

3


2

1

05-Apr-2017

8 7 6 5 4 3 2 1

D  
C  
B  
A

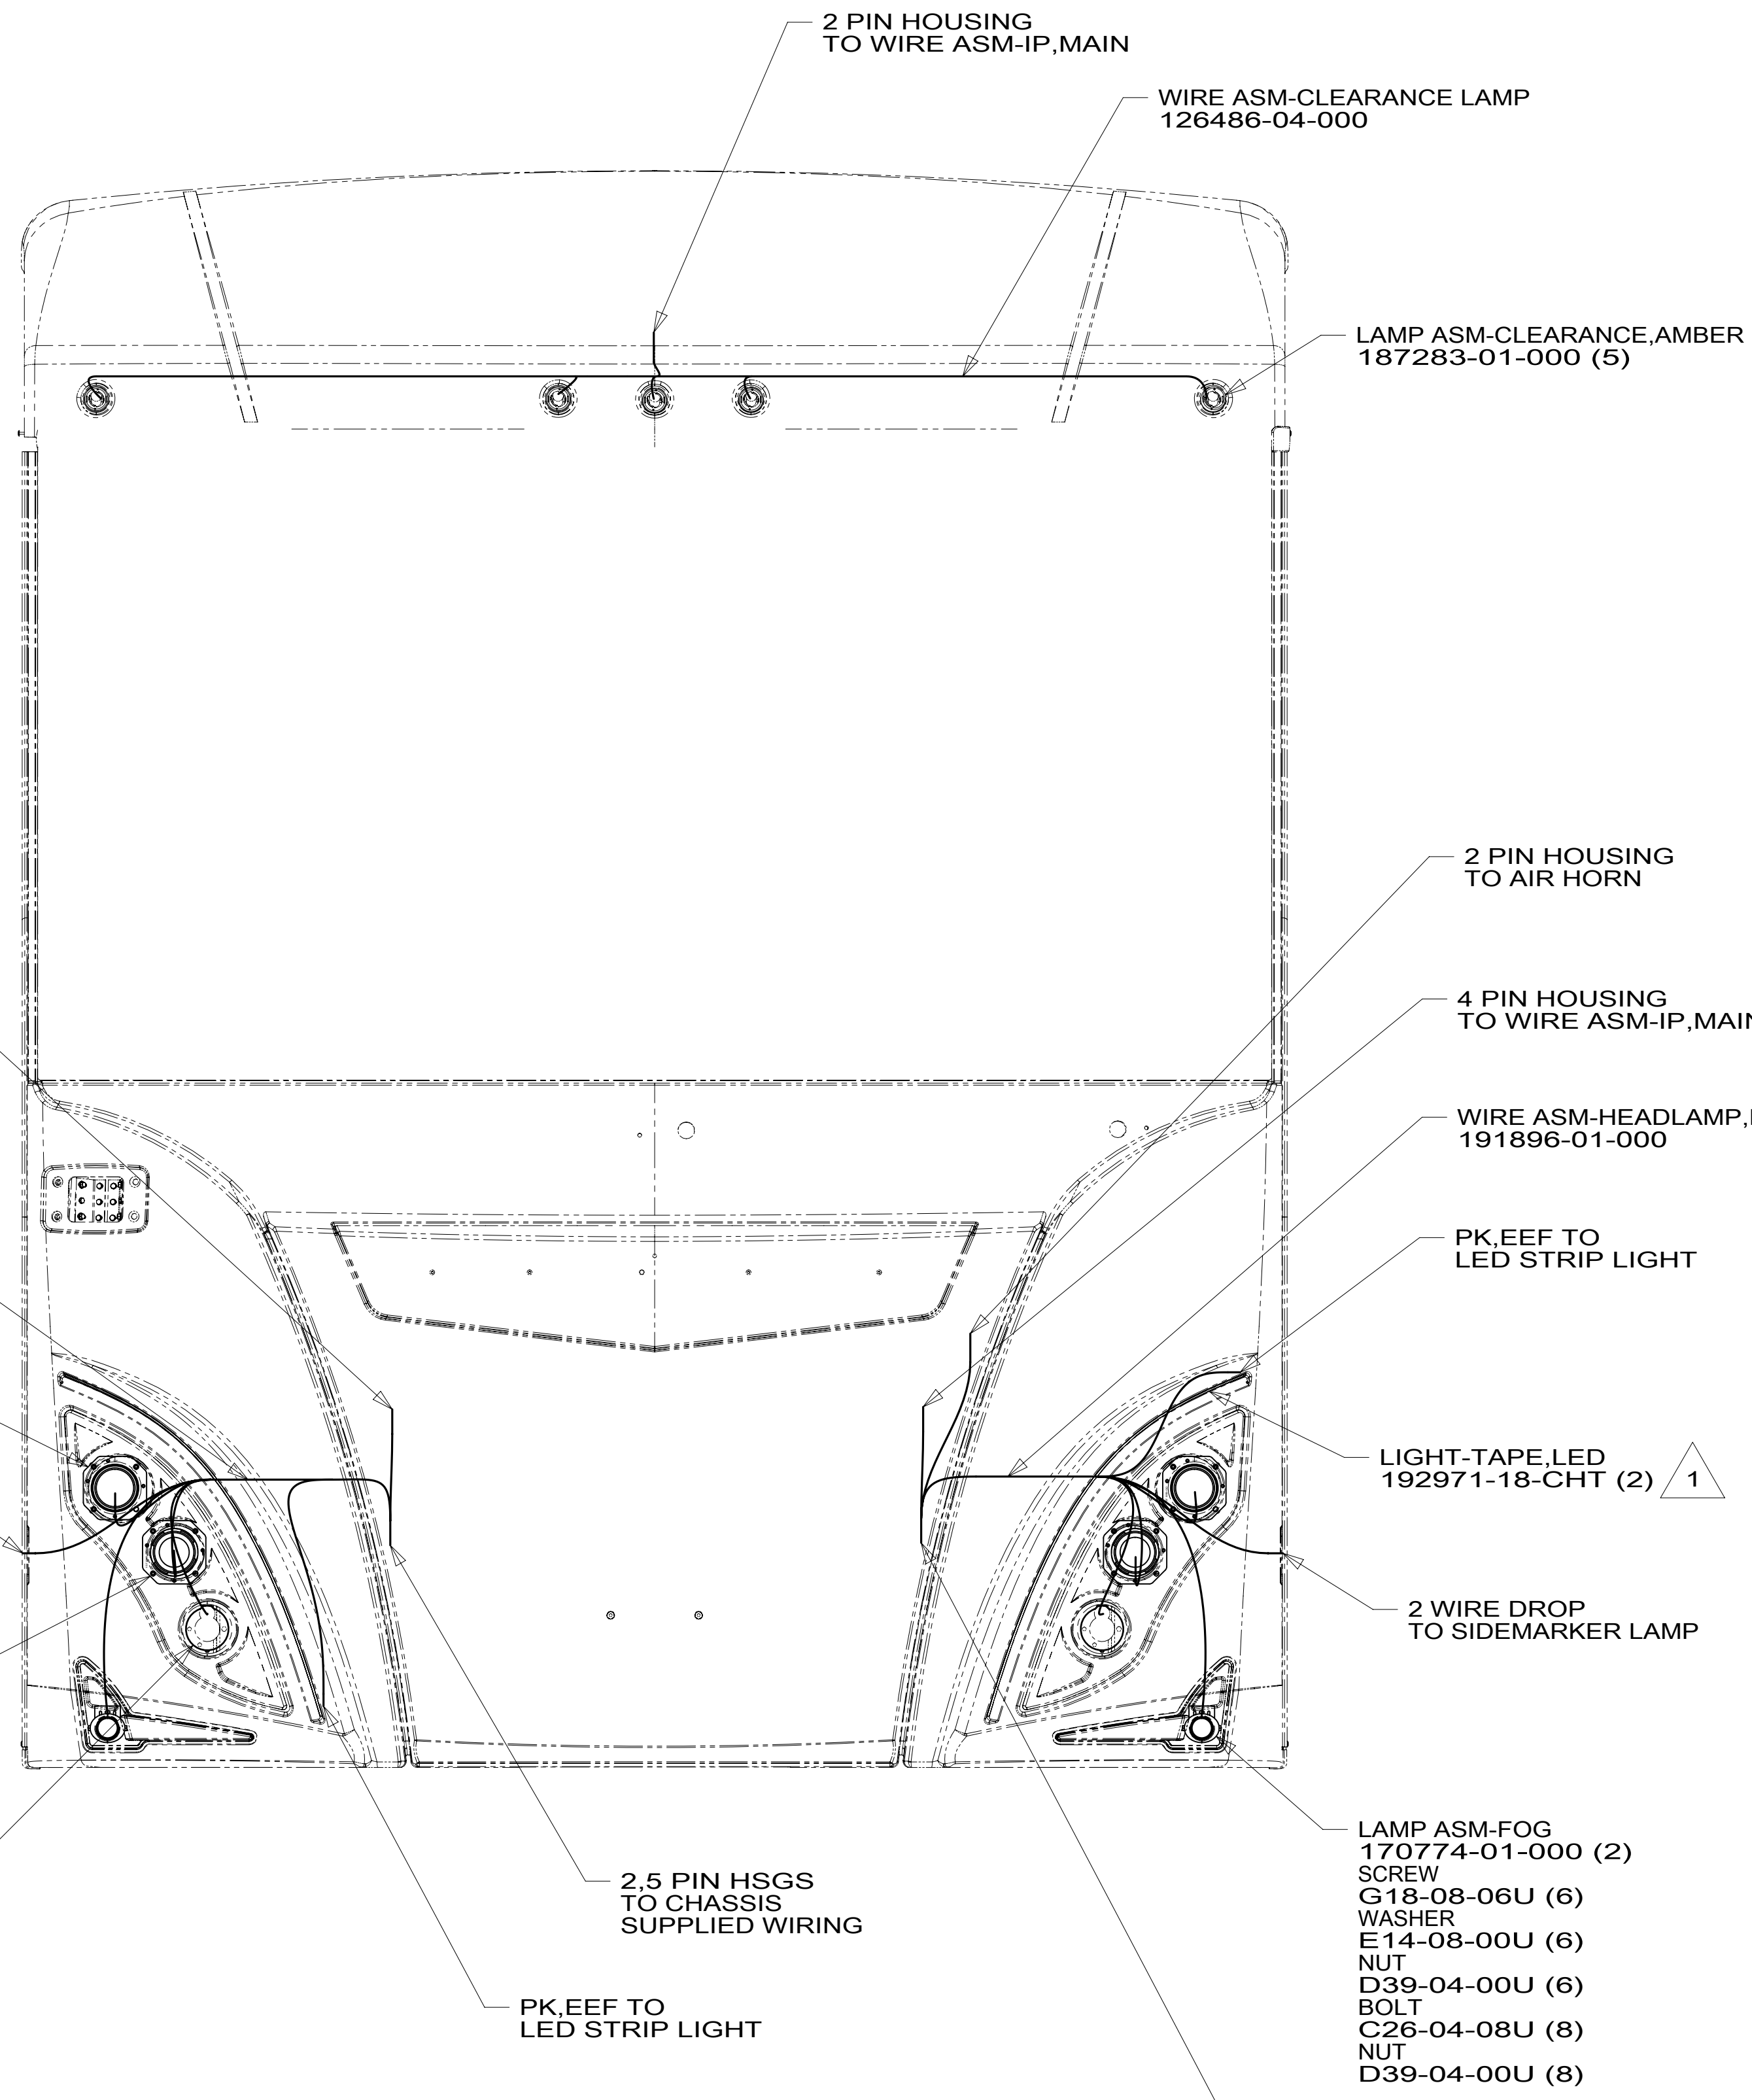

VIEW CA

1 MOUNT TO FIBERGLASS AFTER PAINT AND CLEAR COAT. CLEAN SURFACE WITH ISOPROPYL ALCOHOL. REMOVE SMALL AREA OF TAPE LINER ON TOP AND BOTTOM OF THE BACK SIDE OF LIGHT STRIP. APPLY PRIMER 176823-01-000 TO ENDS OF LIGHT STRIP. LET DRY AND THEN APPLY ADHESIVE 176824-01-000 IN THE SAME AREA. REMOVE REMAINING TAPE LINER AND APPLY TO PAINTED FIBERGLASS SURFACE. DO NOT APPLY PRIMER OR ADHESIVE DIRECTLY ON PAINTED FIBERGLASS SURFACE.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

DESCRIPTION:	
1B1 265	
<b>WIRING INSTL-EXTERIOR LAMPS</b>	
SHEET:	ITEM/PART NO. REV
3 OF 3	000209776 / 30204201000

8 7 6 5 4 3 2 1 05-Apr-2017