





11. REMOVE WATER HEATER DOOR STRAPS AND HARDWARE.
10. INSTALL BYPASS PLUG FOR SYSTEM TESTING AND SHIPPING.
9. ALL CRIMP FITTINGS TO 3/4" PEX TUBING REQUIRE 3/4" CLAMP 000156247 / 326668-01-000.
8. ALL CRIMP FITTINGS TO 1/2" PEX TUBING REQUIRE 1/2" CLAMP 000156249 / 326670-01-000.
7. ALL CRIMP FITTINGS TO 5/8" FLEX TUBING REQUIRE 5/8" CLAMP 000156248 / 326669-01-000.
6. LABEL HOT AND COLD SUPPLY TUBES AND TAPE FITTING TO TUBE BEFORE CABINET SET TO PREVENT MOVEMENT.
5. ADD PIPE WRAP (LADDER SCRAP 110157-02-000) INSULATION.
4. ADD TEFLON TAPE 010405-01-000.
3. ALL TUBING TO BE SECURED AT 1200 INTERVALS MAXIMUM WITH CLAMP 010495-01-000 AND SCREW 000G67-10-12U OR EQUIVALENT.
2. TUBING TO BE INSTALLED WITH SUFFICIENT SLOPE TO PROVIDE DRAINAGE TO NEAREST VALVE.
1. PLASTIC FITTINGS TO BE SEALED WITH SEALANT 084456-01-000.

- 21M WASHER/DRYER PREP
- 21S WASHER & DRYER-PAIR

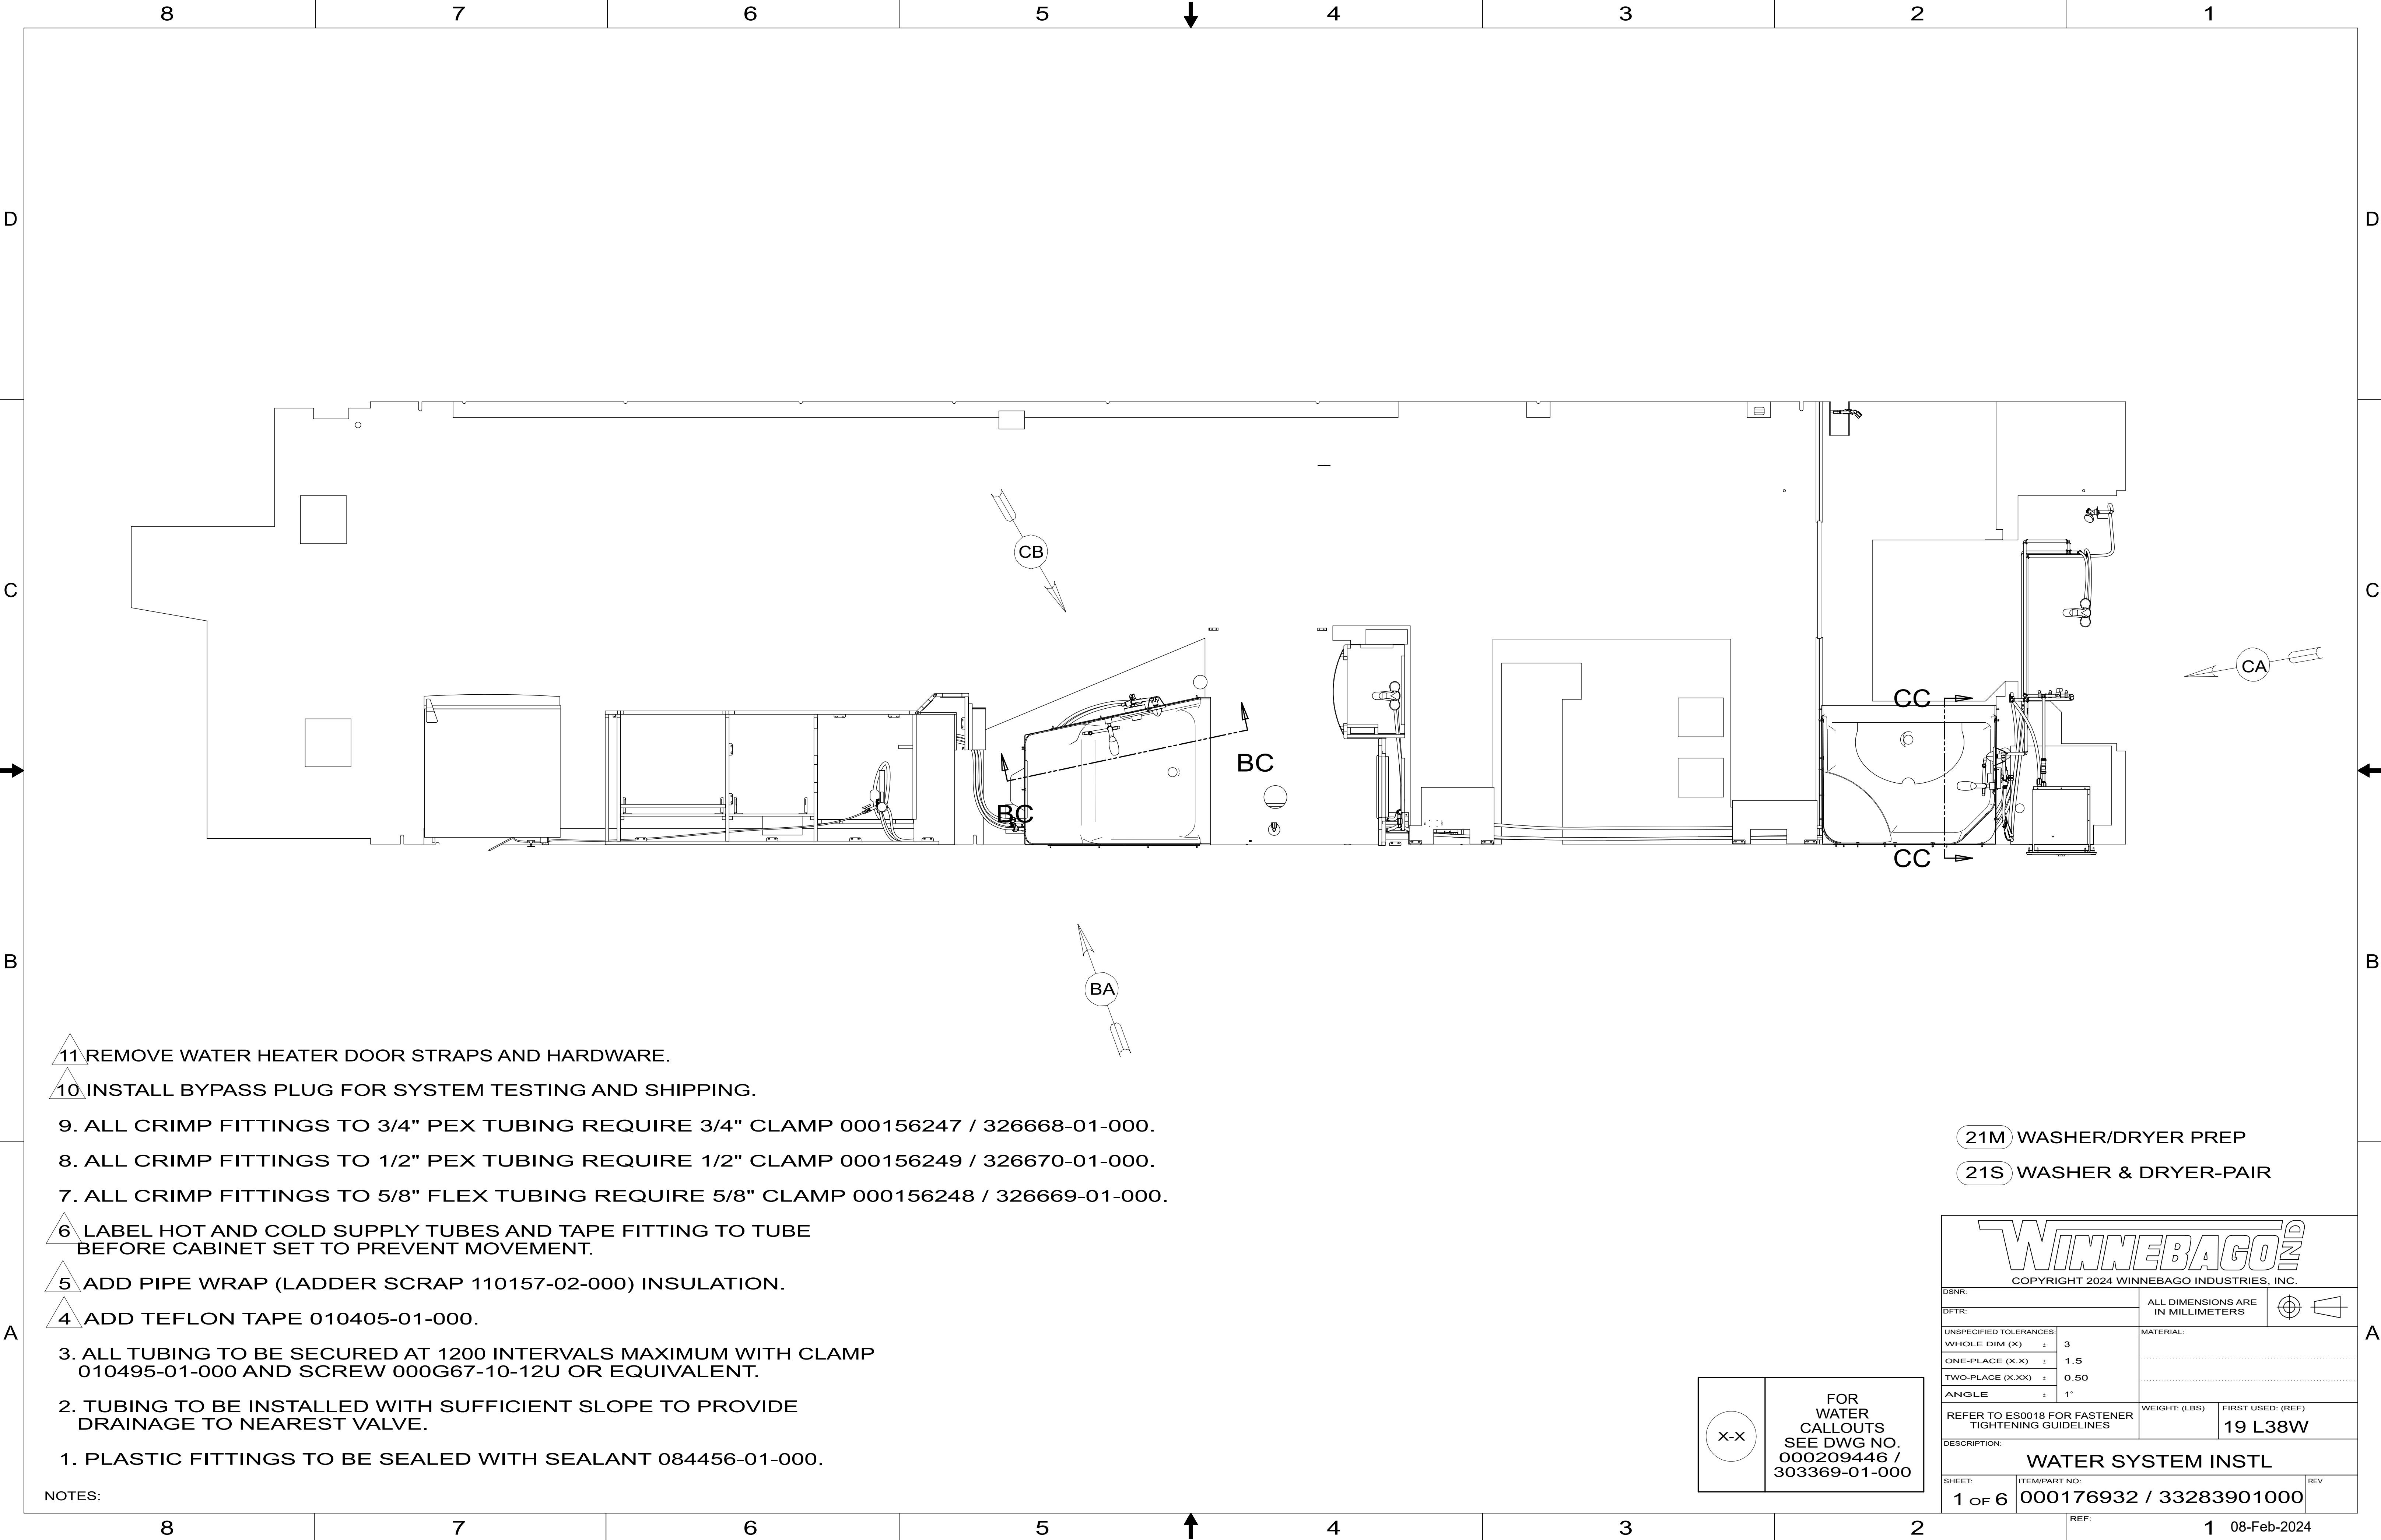


COPYRIGHT 2024 WINNEBAGO INDUSTRIES, INC.

DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS		
DFTR:				
UNSPECIFIED TOLERANCES:		MATERIAL:		
WHOLE DIM (X)	± 3			
ONE-PLACE (X.X)	± 1.5			
TWO-PLACE (X.XX)	± 0.50			
ANGLE	± 1°			
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED: (REF)	
			19 L38W	
DESCRIPTION:				
WATER SYSTEM INSTL				
SHEET:	ITEM/PART NO:	REV		
1 OF 6	000176932 / 33283901000			

X-X

FOR WATER CALLOUTS SEE DWG NO. 000209446 / 303369-01-000

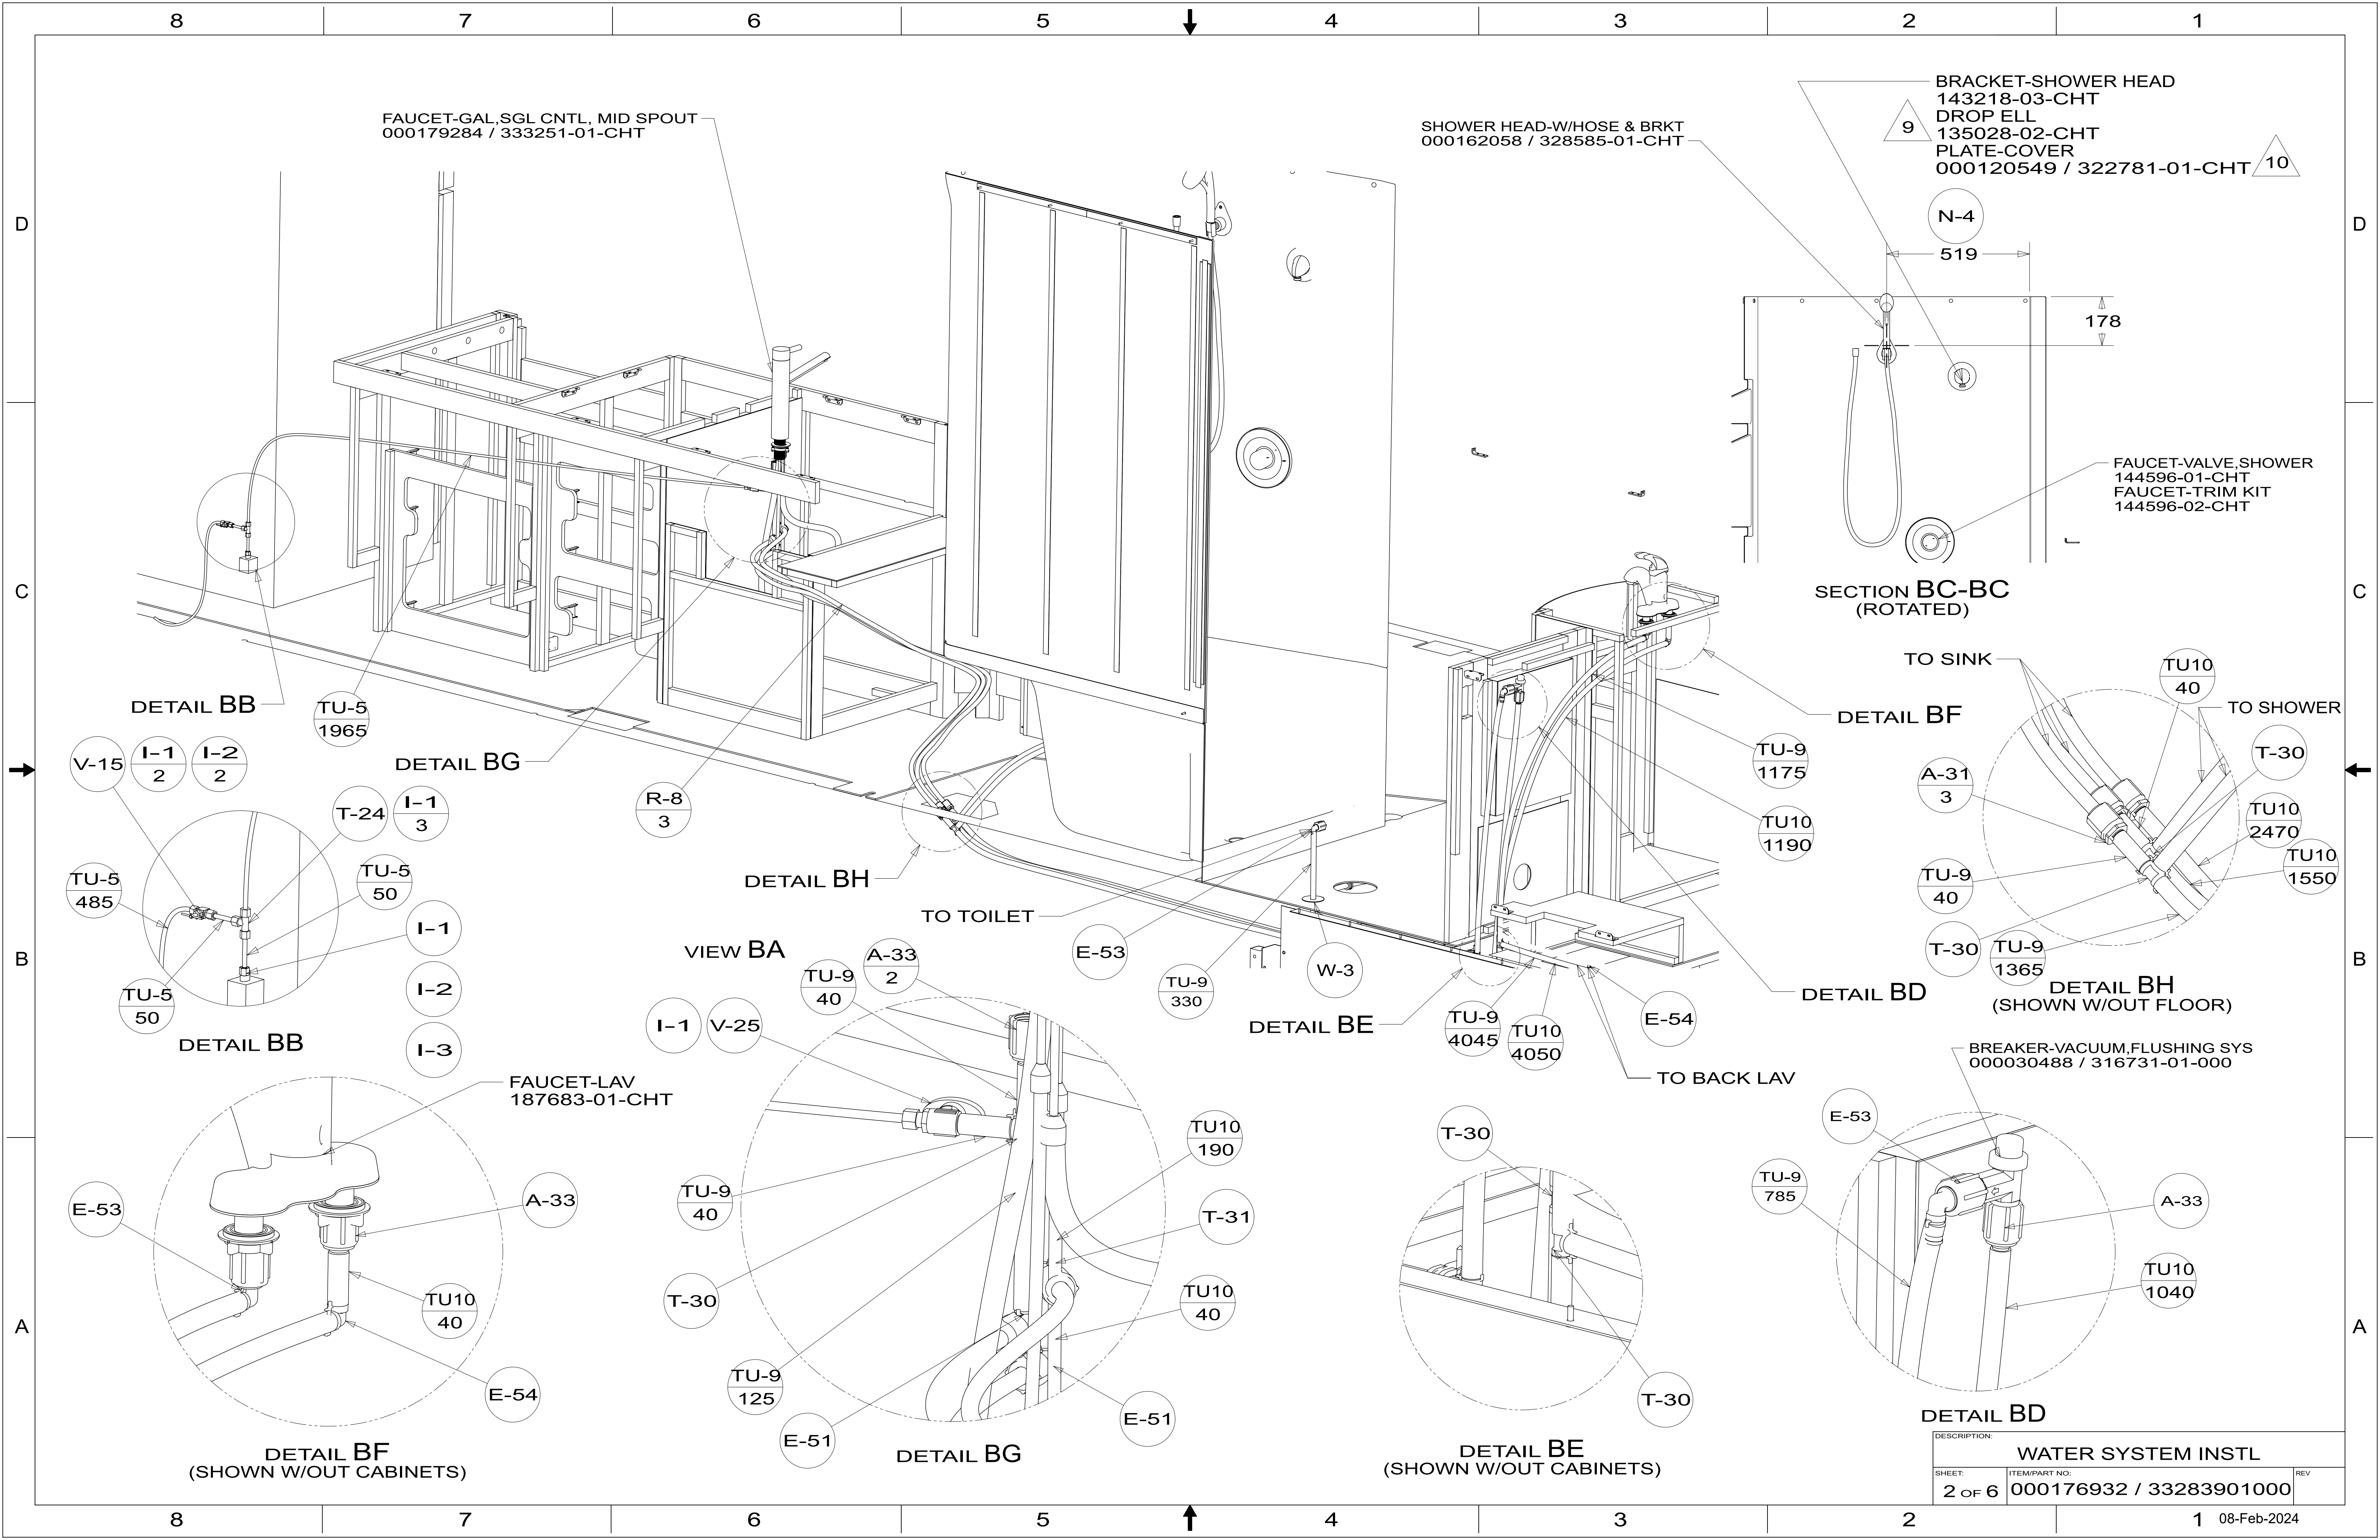

FAUCET-GAL, SGL CNTL, MID SPOUT
000179284 / 333251-01-CHT

SHOWER HEAD-W/HOSE & BRKT
000162058 / 328585-01-CHT

BRACKET-SHOWER HEAD
143218-03-CHT
DROP ELL
135028-02-CHT
PLATE-COVER
000120549 / 322781-01-CHT

FAUCET-VALVE, SHOWER
144596-01-CHT
FAUCET-TRIM KIT
144596-02-CHT

FAUCET-LAV
187683-01-CHT

BREAKER-VACUUM, FLUSHING SYS
000030488 / 316731-01-000


DETAIL BF
(SHOWN W/OUT CABINETS)


DETAIL BG

DETAIL BE
(SHOWN W/OUT CABINETS)

DETAIL BD

DESCRIPTION:		
WATER SYSTEM INSTL		
SHEET:	ITEM/PART NO:	REV
2 OF 6	000176932 / 33283901000	

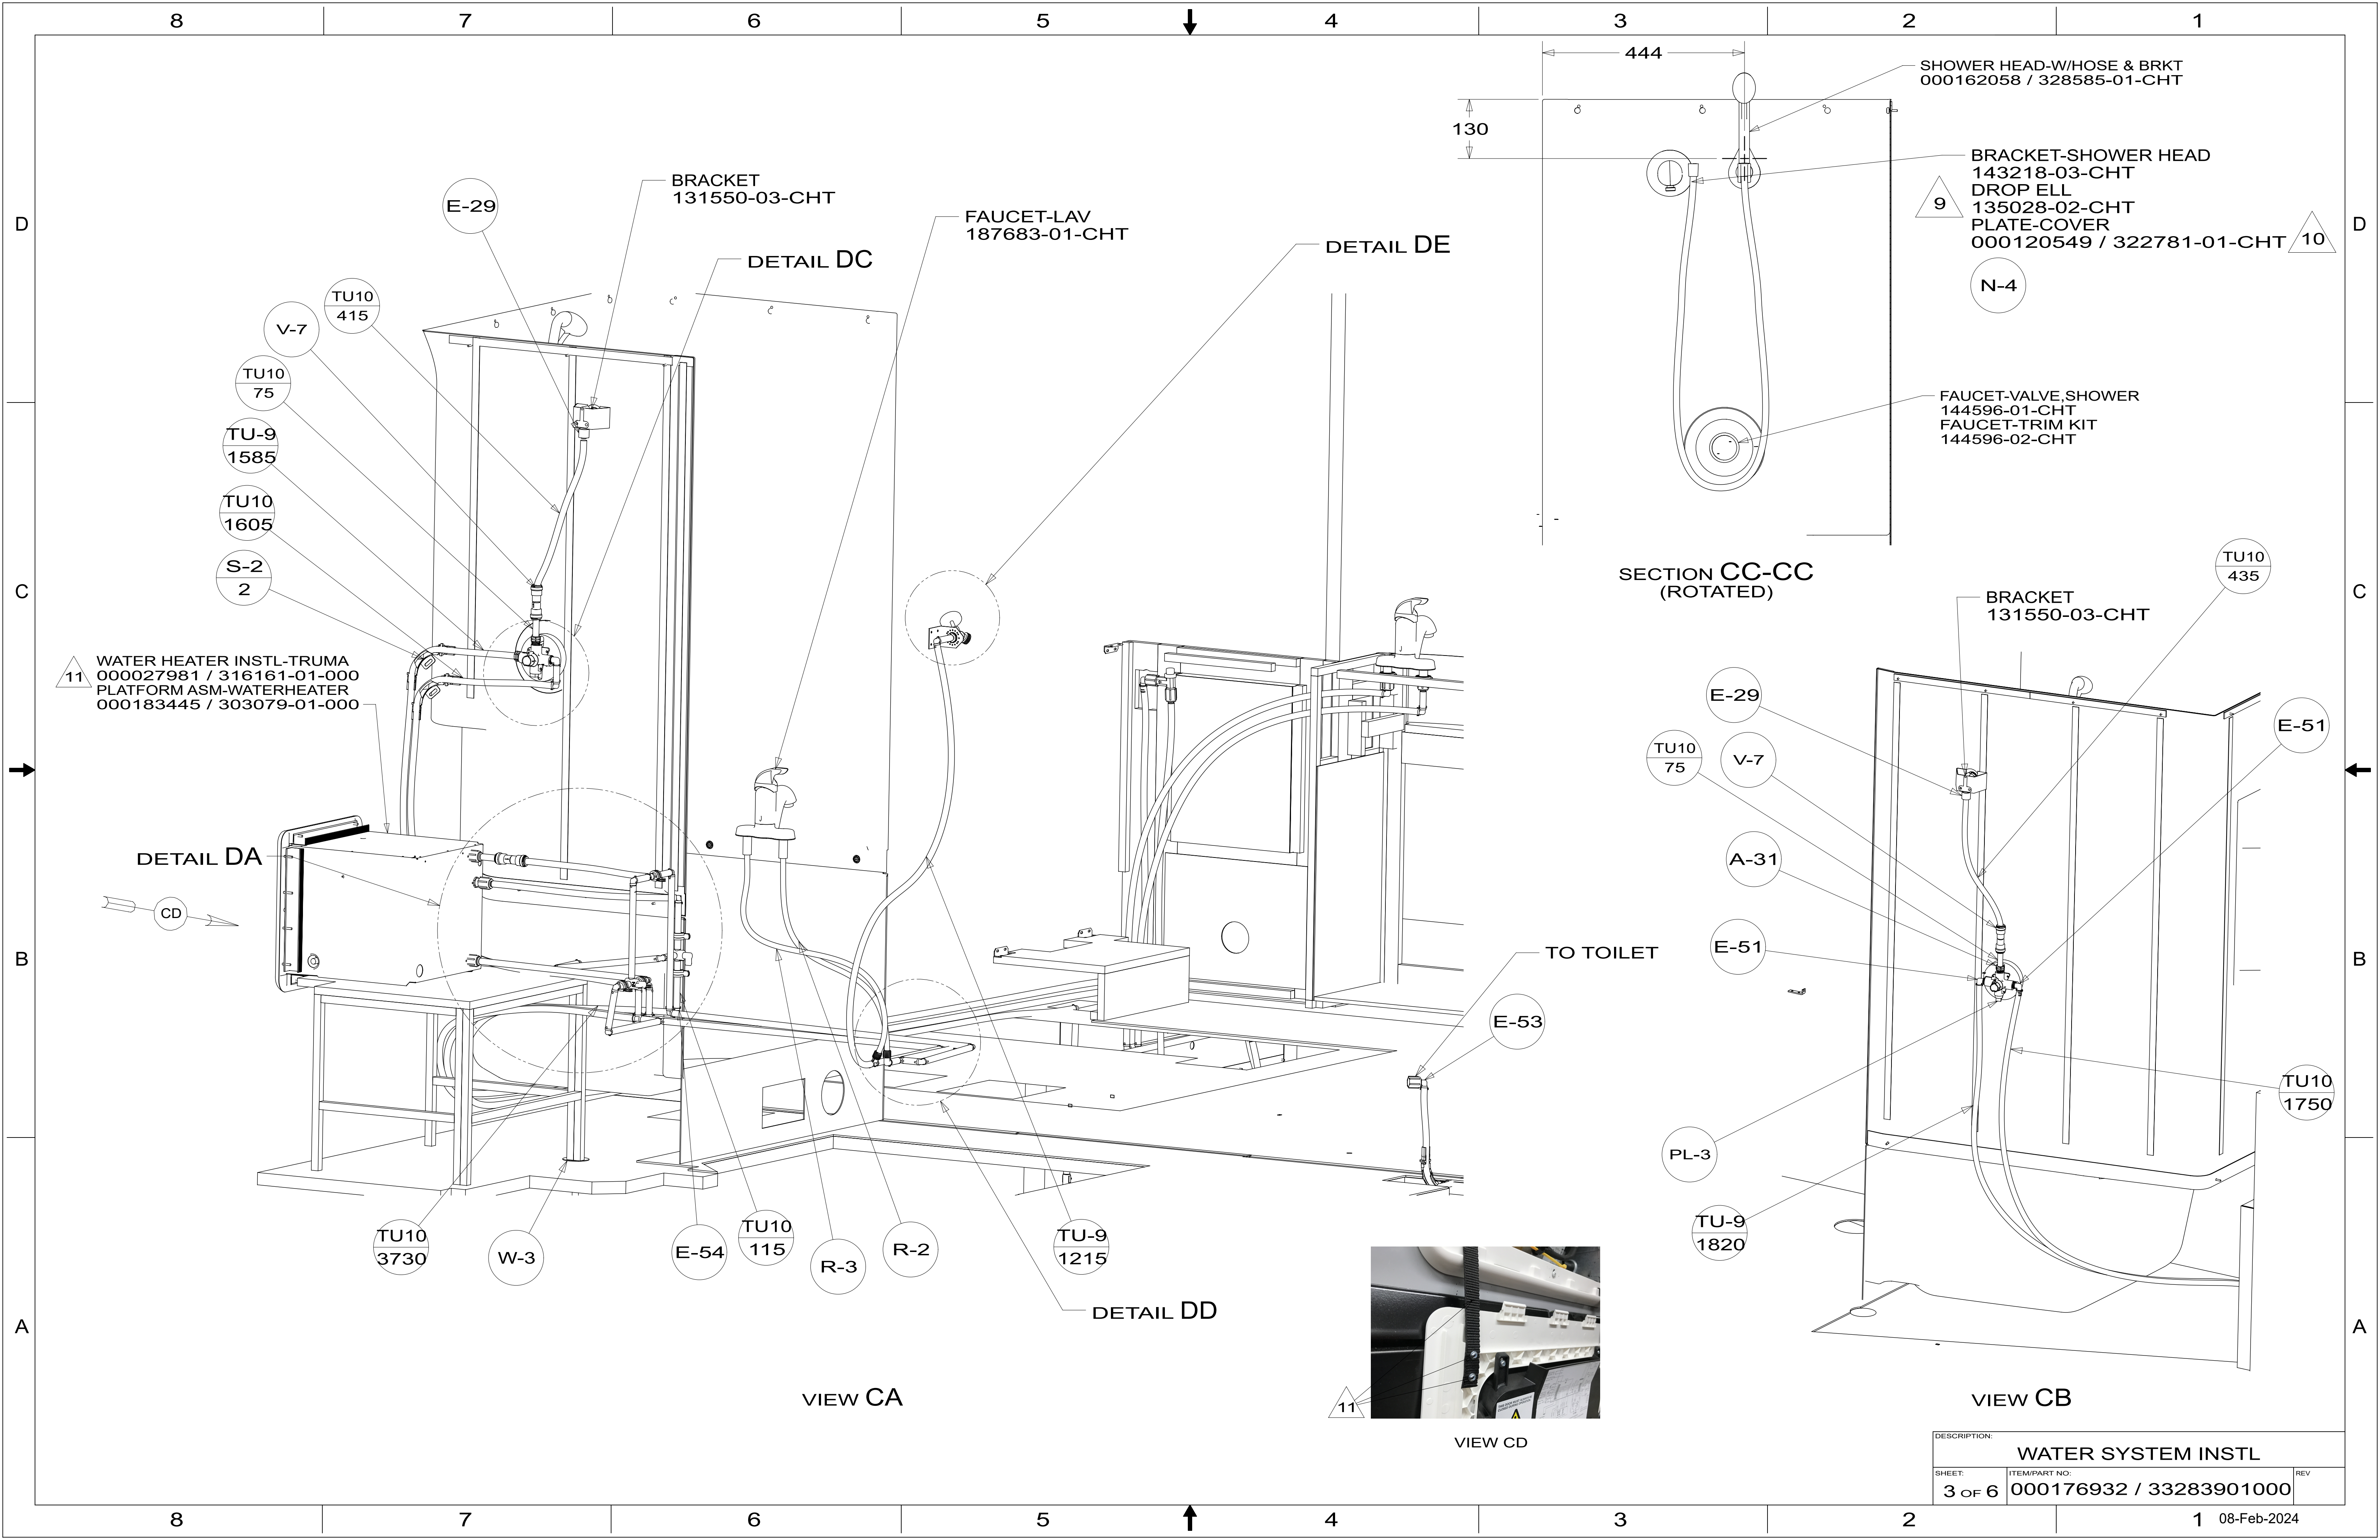

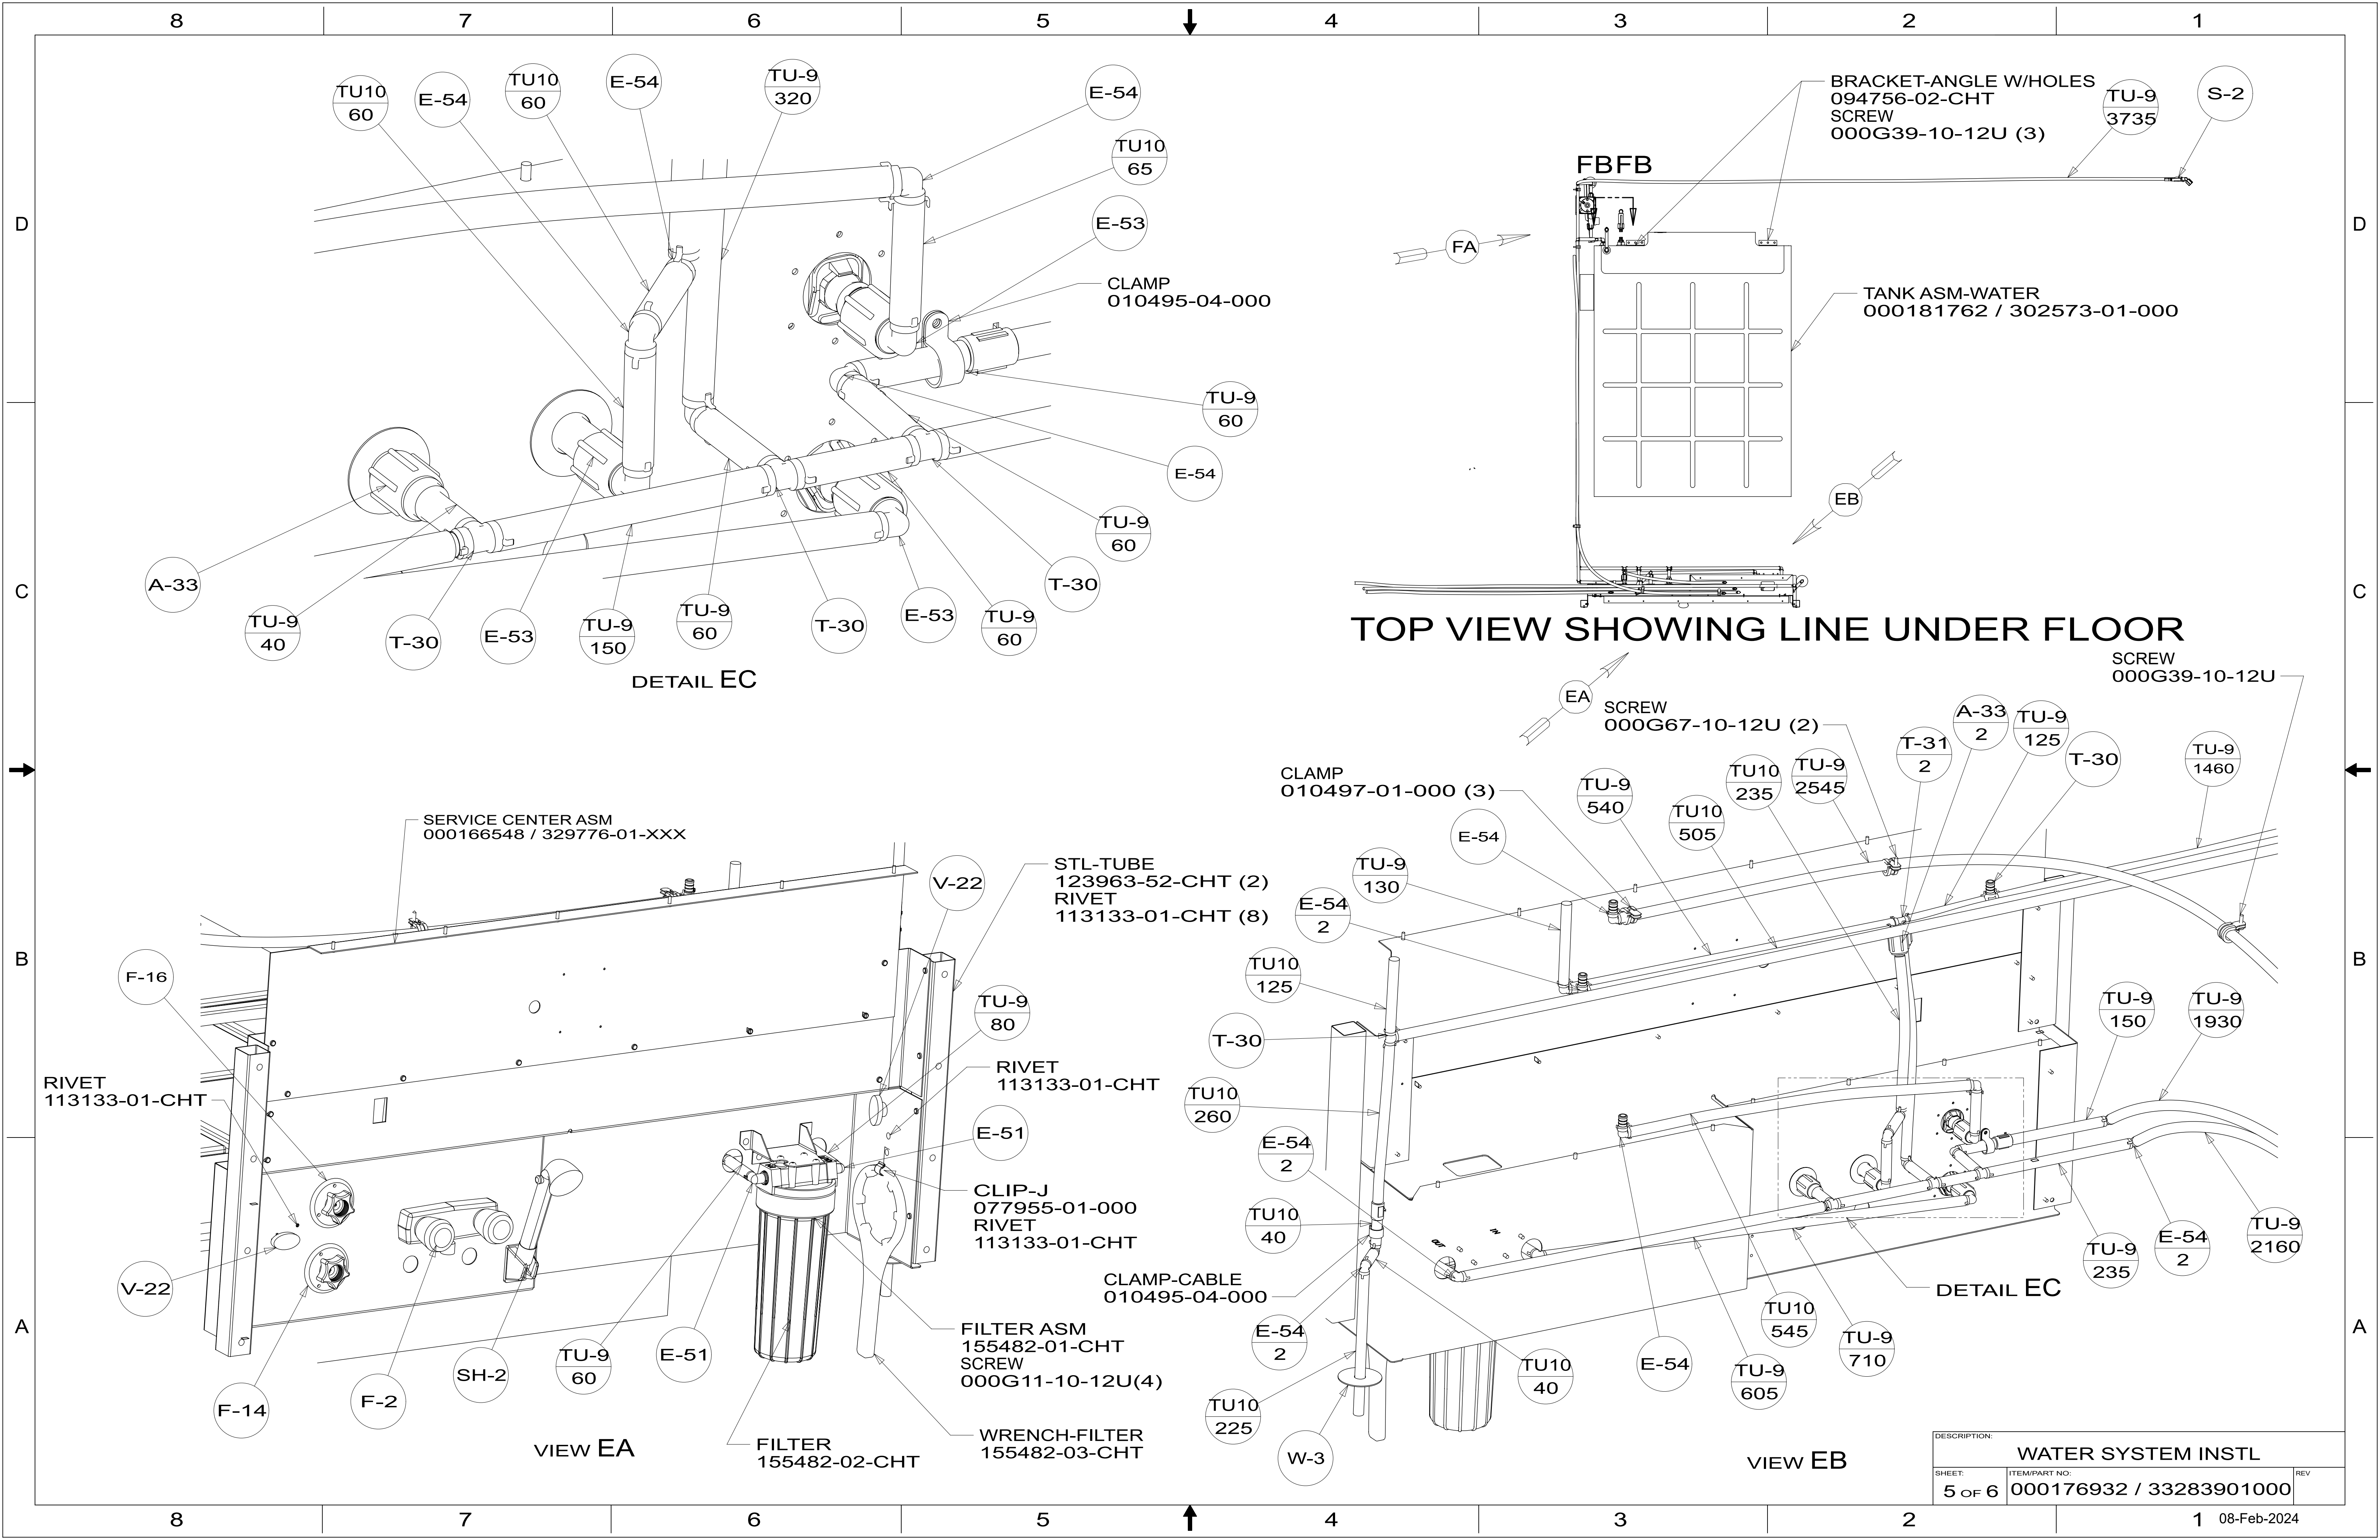

DESCRIPTION:		
WATER SYSTEM INSTL		
SHEET:	ITEM/PART NO:	REV
5 OF 6	000176932 / 33283901000	

