



DWG NO	ROLLER	DIM A	DIM B	SHEET	MODEL
170703-01	171153-03-CHT	187	10'	1,2	524J
170703-02	171153-05-CHT	187	12.5'	1,2	524K
170703-03	171153-03-CHT	198	10'	2,3	524P
170703-04	171153-04-CHT	1118	12'	2,3	524DL
170703-05	171153-06-CHT	198	15'	1,2	524A


RELEASE	REV A	DATE	DWG NO	170703
REV	ZONE	REVISION RECORD	DATE	DFTR-ORIG

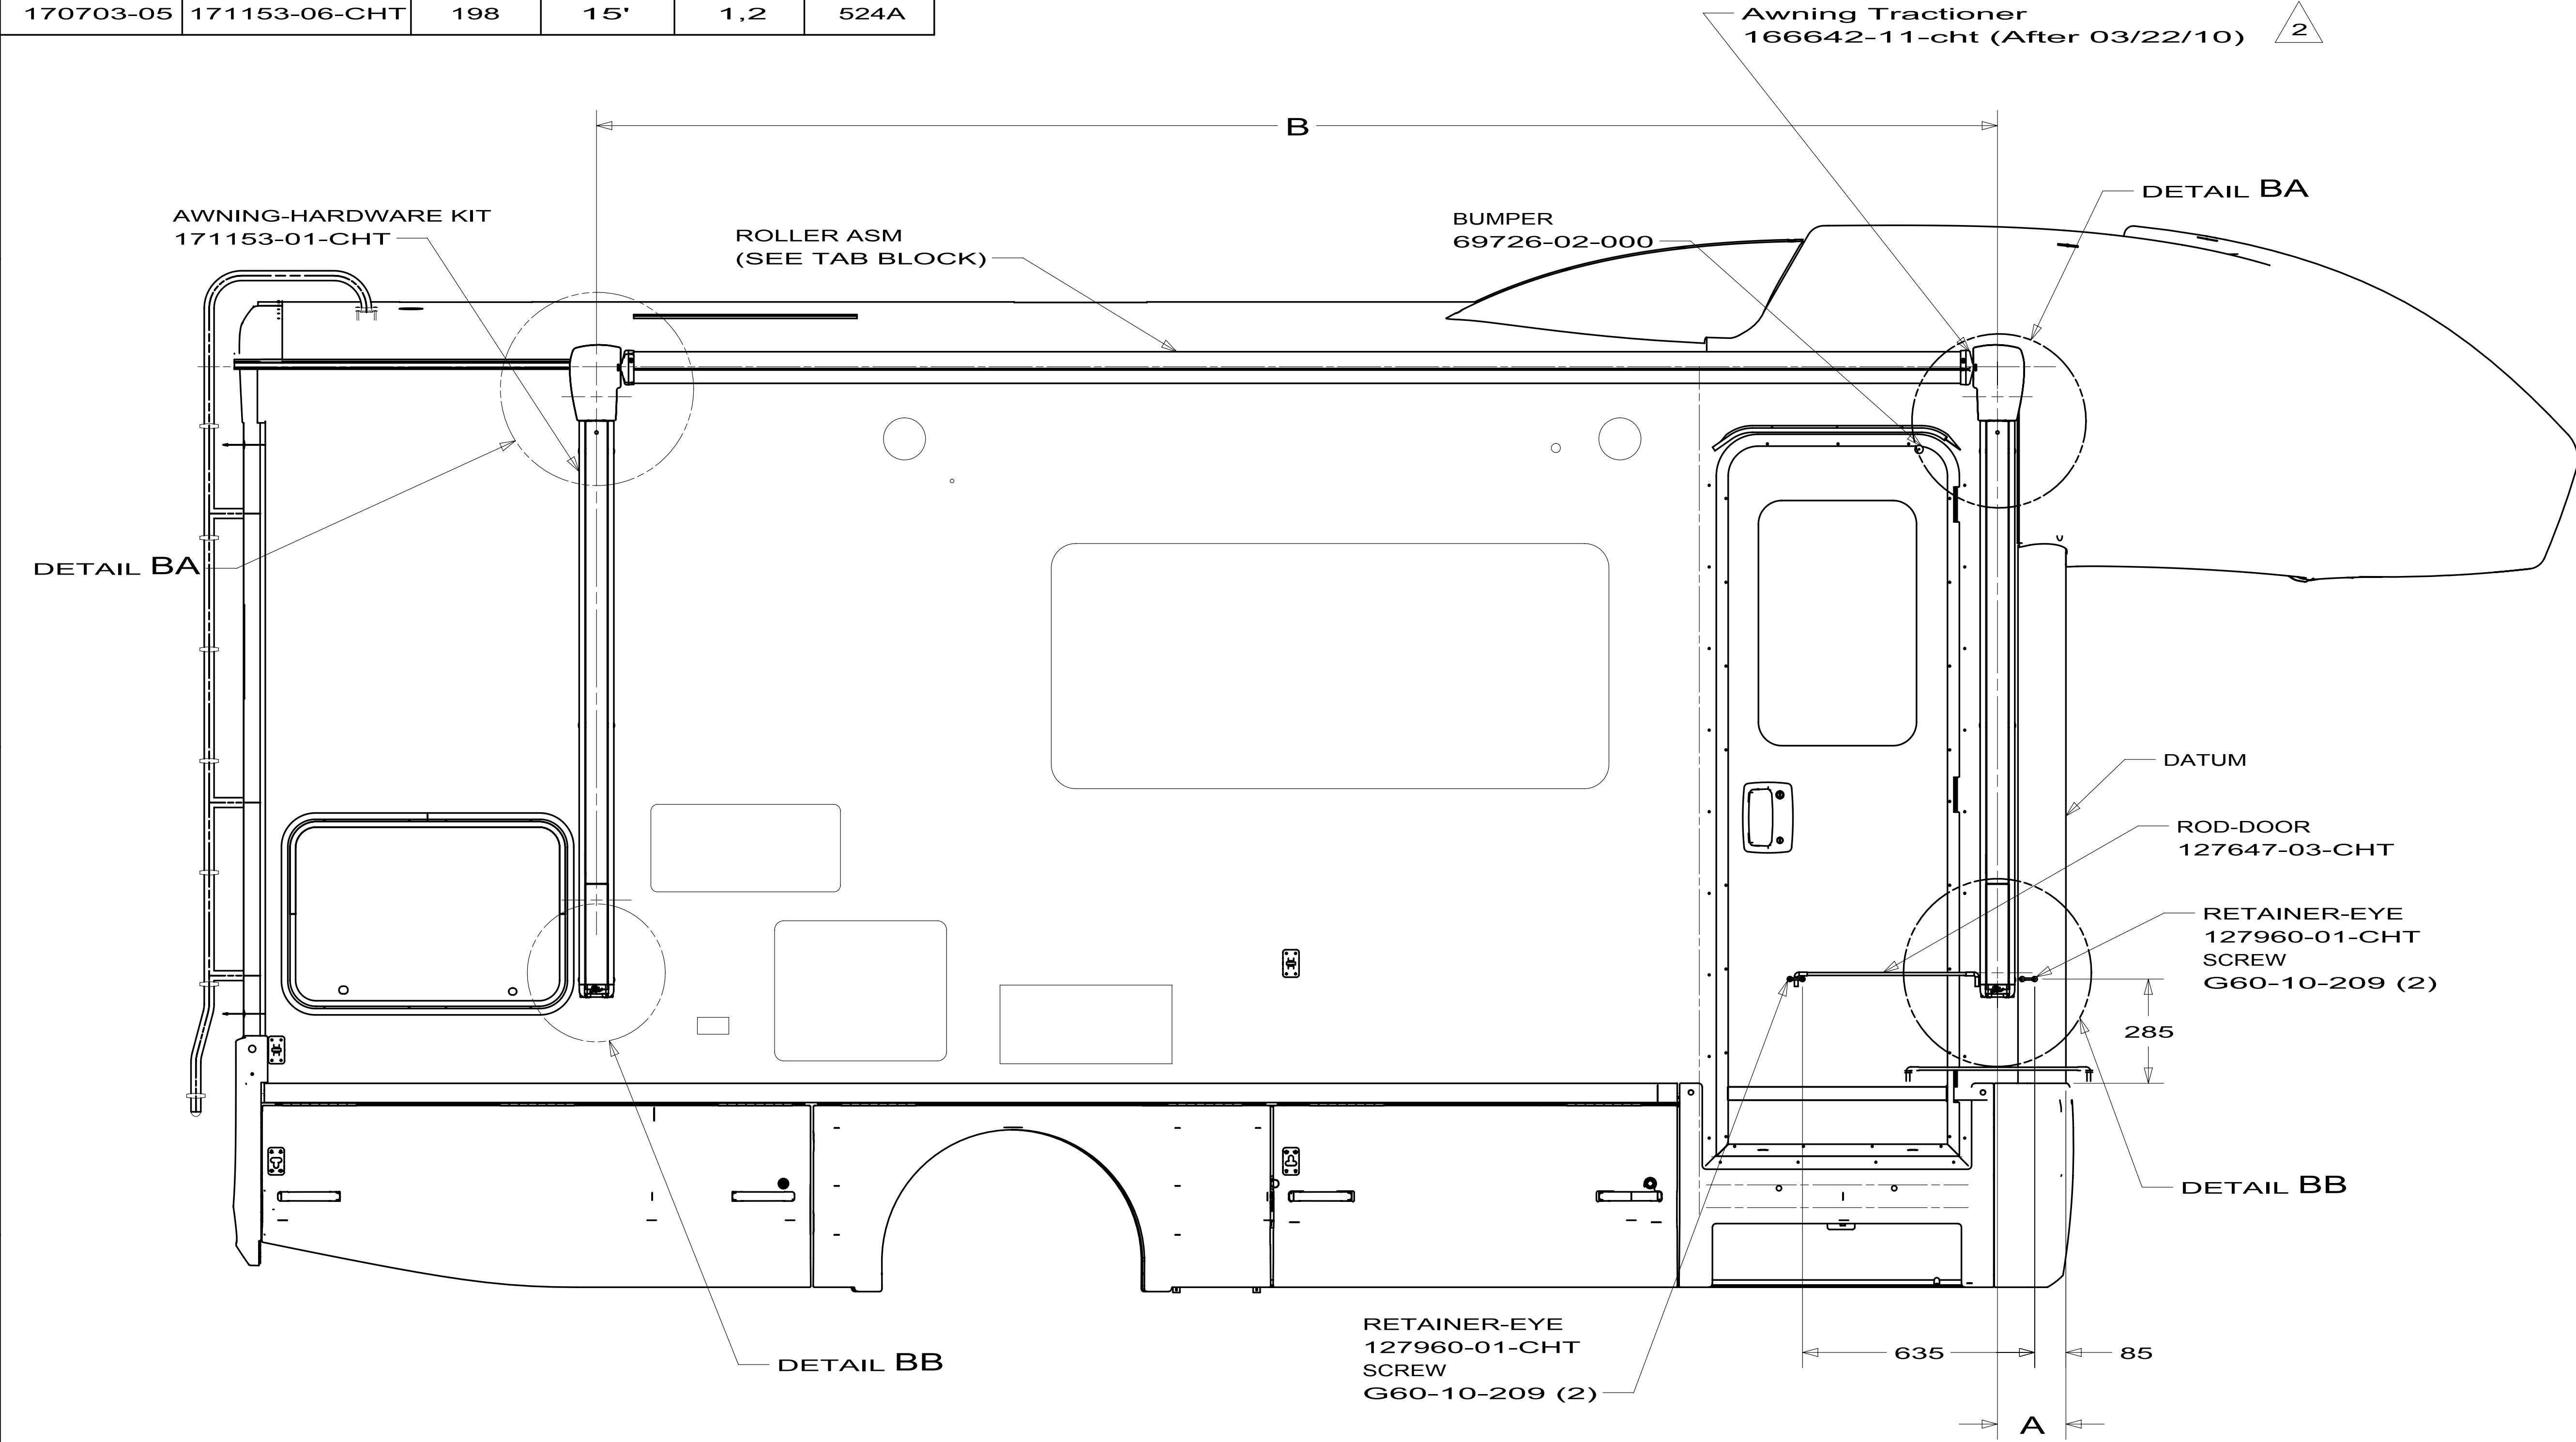


2 USE WITH UNIGUARD COVER ONLY

1. USE IN PLACE OF KIT SUPPLIED.

WINNEBAGO® INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFTR		ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.			
DSNR		FIRST USED	
		10 500-SE	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION		REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
			
DO NOT SCALE DRAWING			
TITLE:		INSTL	
SHEET 1 OF 3		PART NO	REV
		170703	
REF:		1	

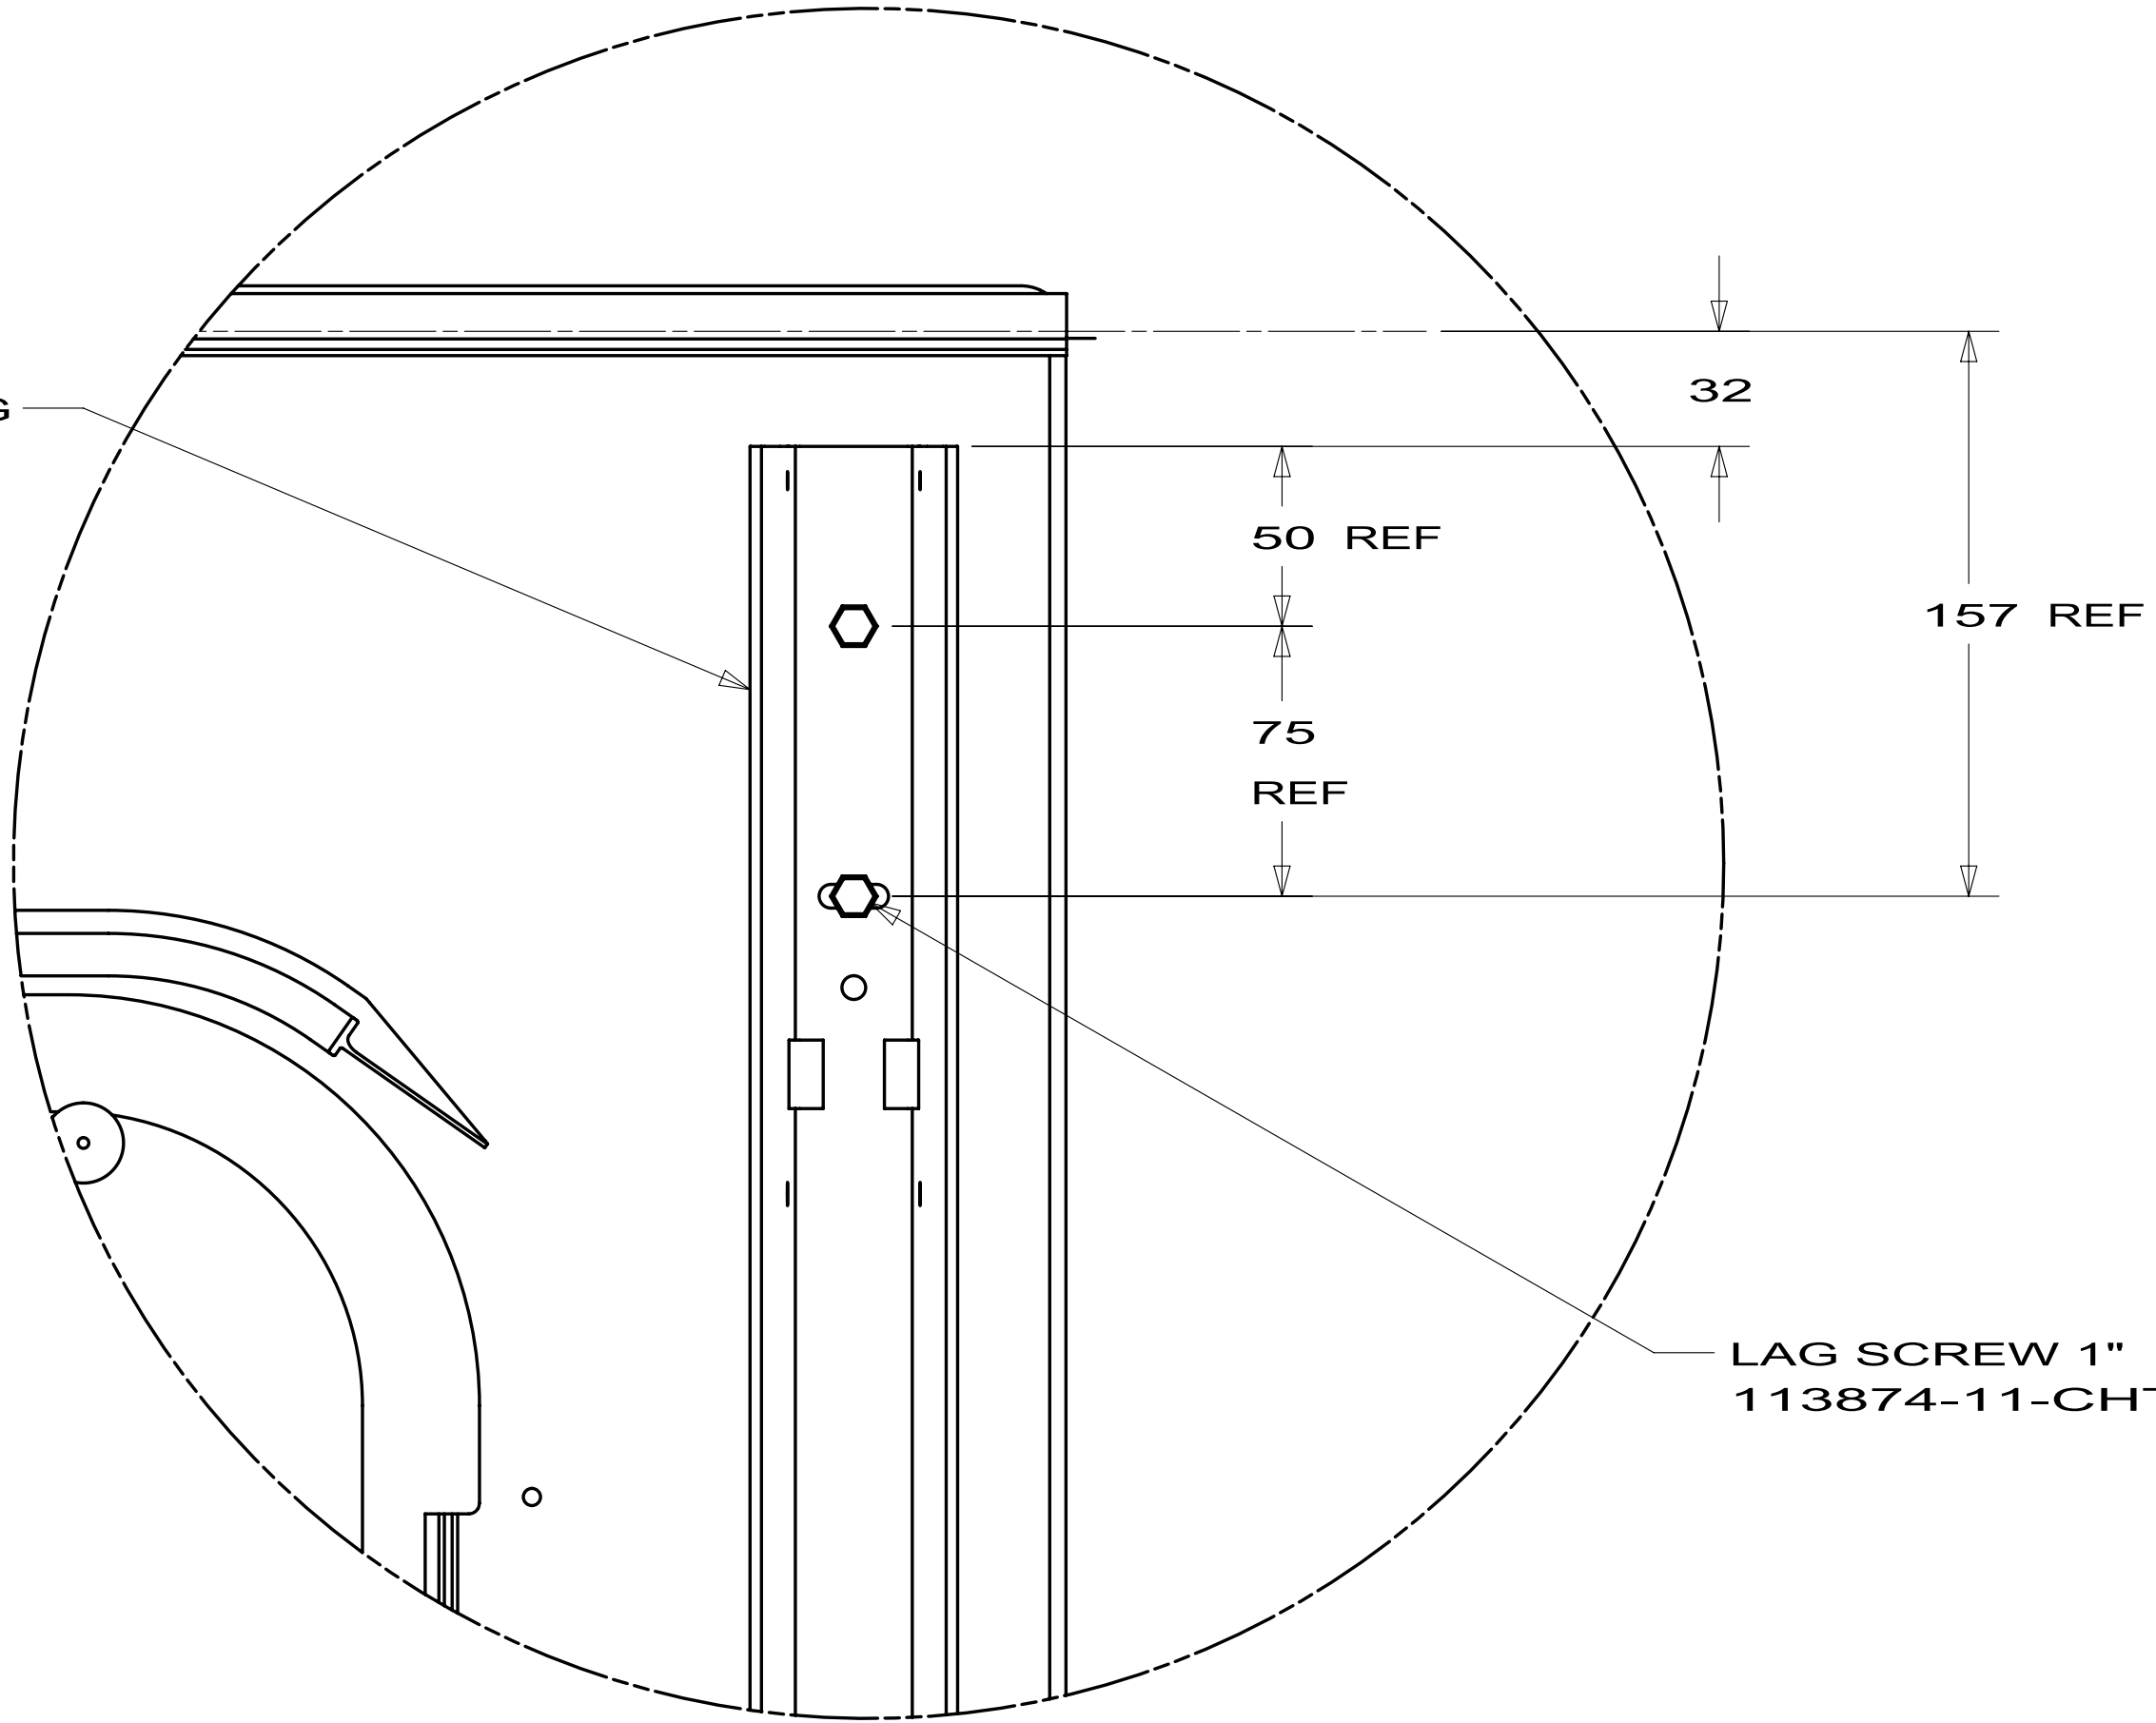


DETAIL BA
(SHOWN WITHOUT COVERS)
(2 PLACES)

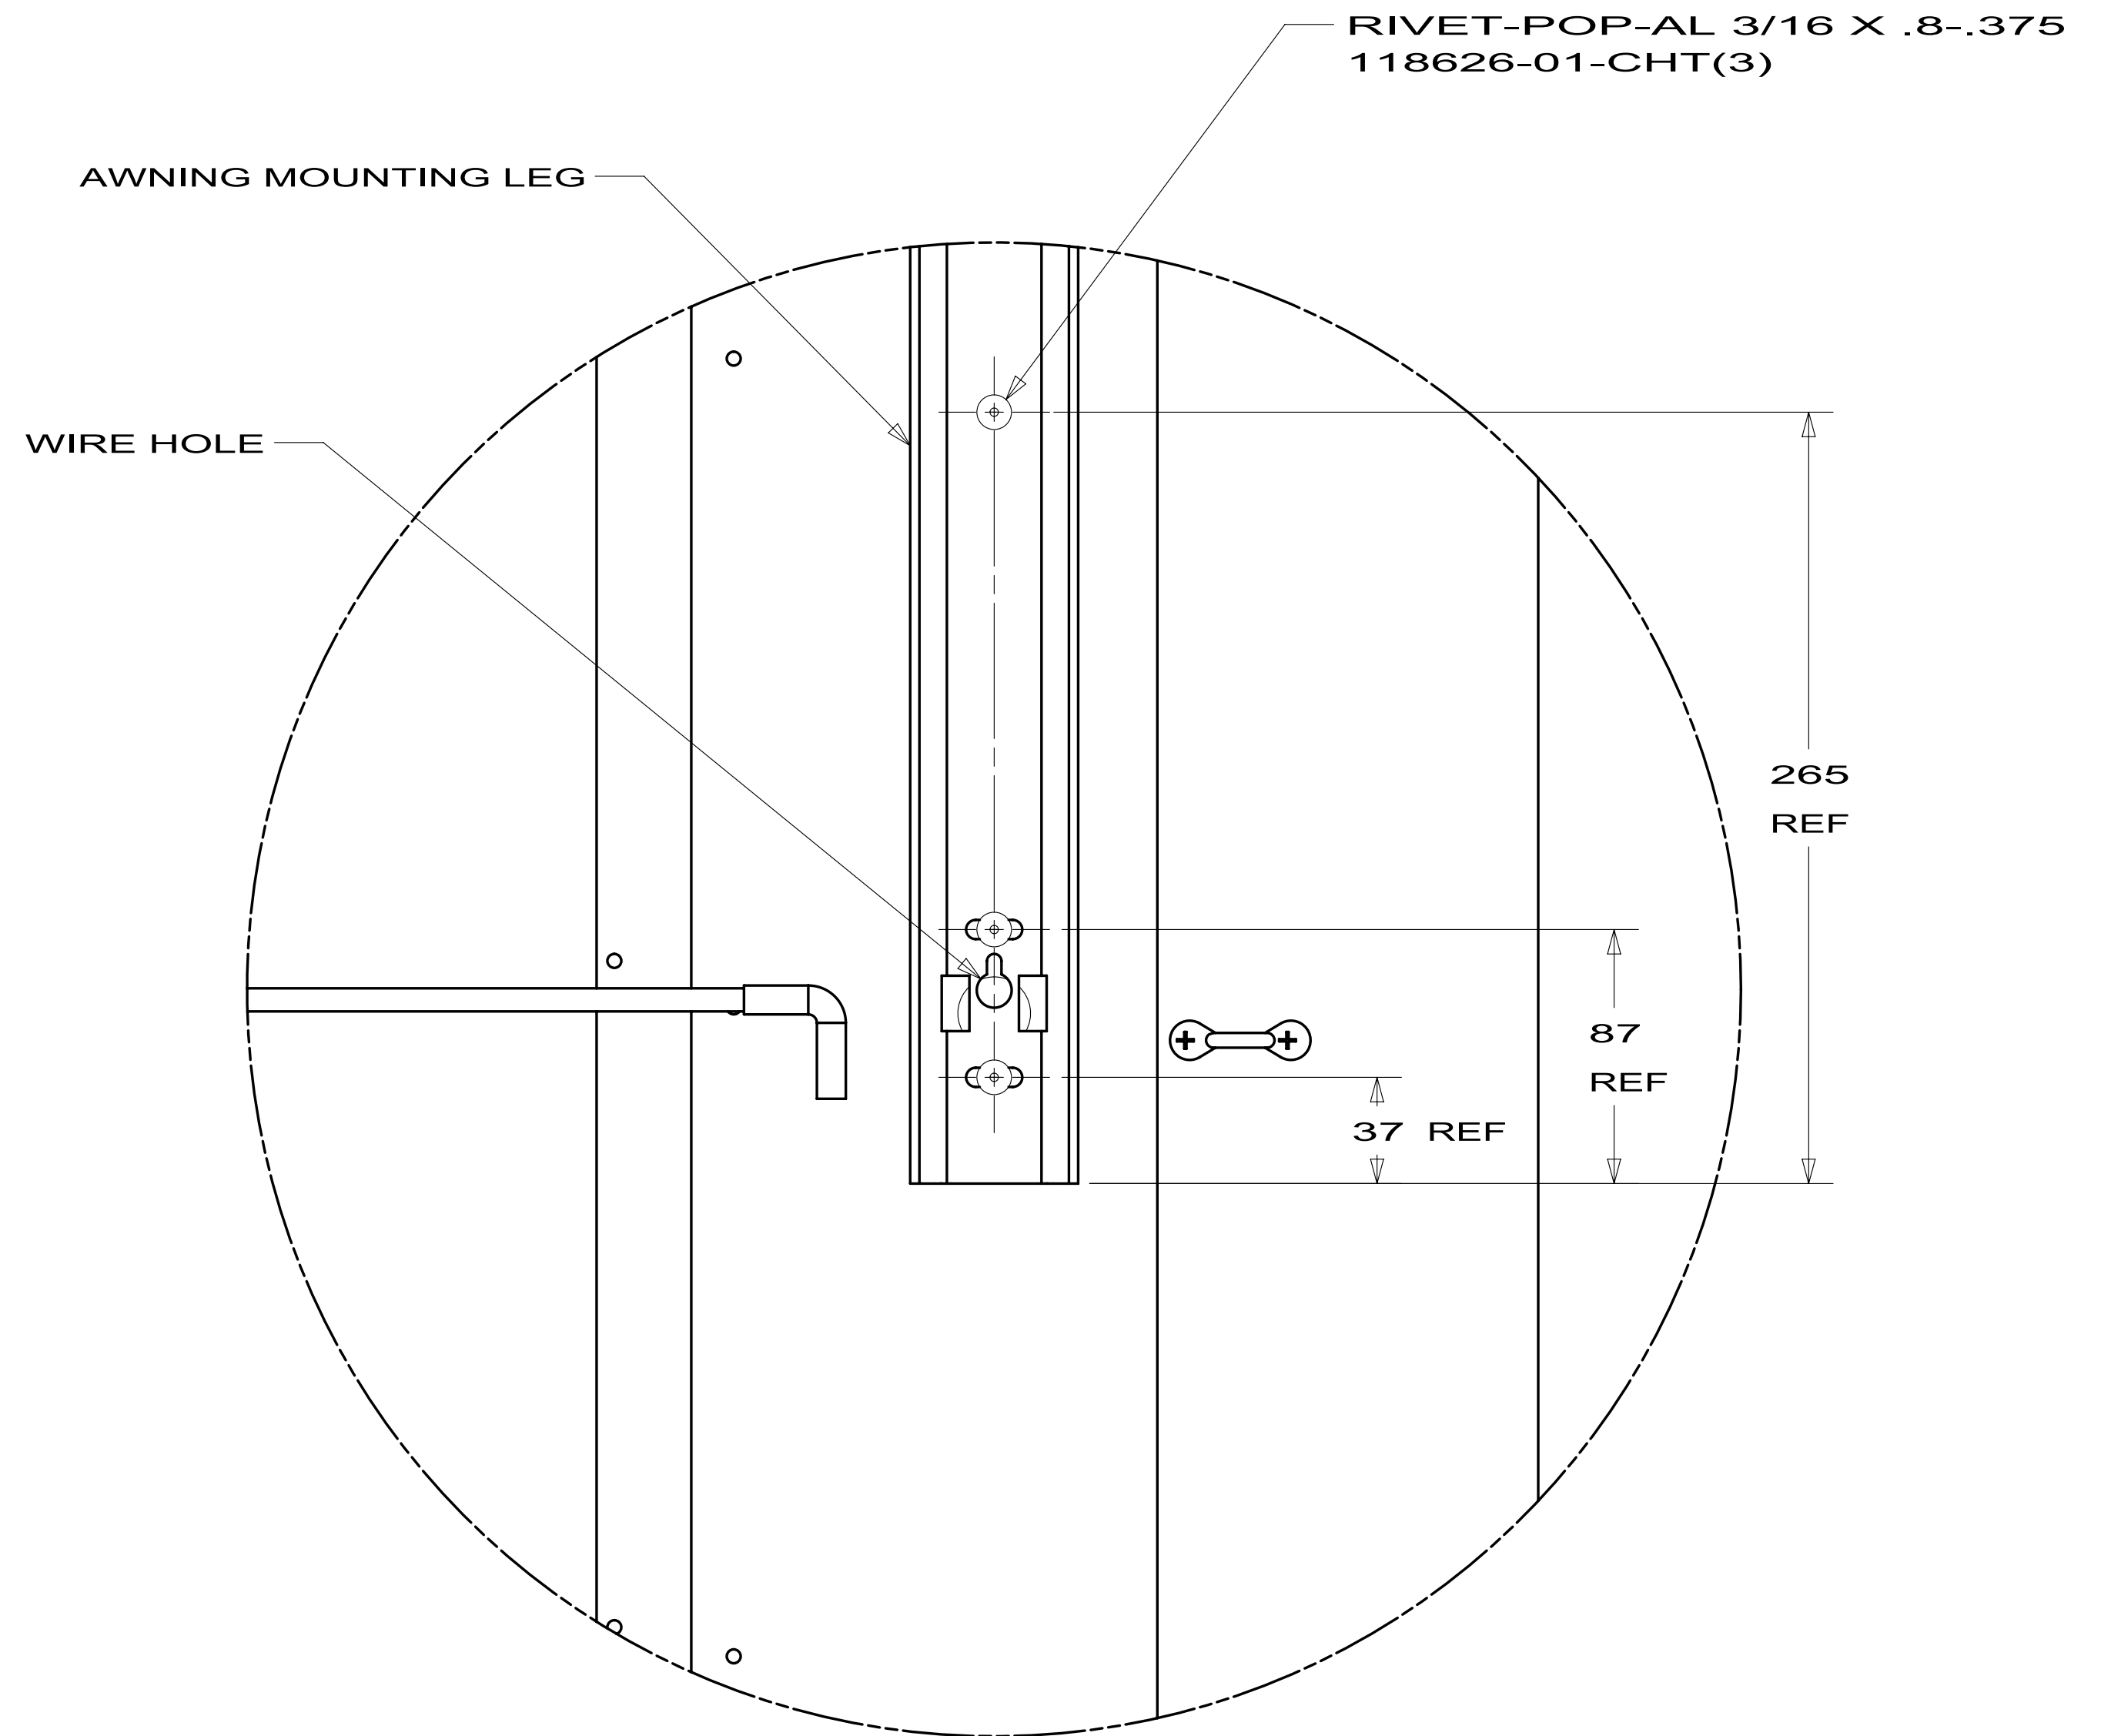


DETAIL BB
(SHOWN WITHOUT COVERS)
(2 PLACES)


FIRST USED			10 500-SE
DO NOT SCALE DRAWING			
TITLE:			AWNING INSTL
SHEET 2	PART NO	170703	REV

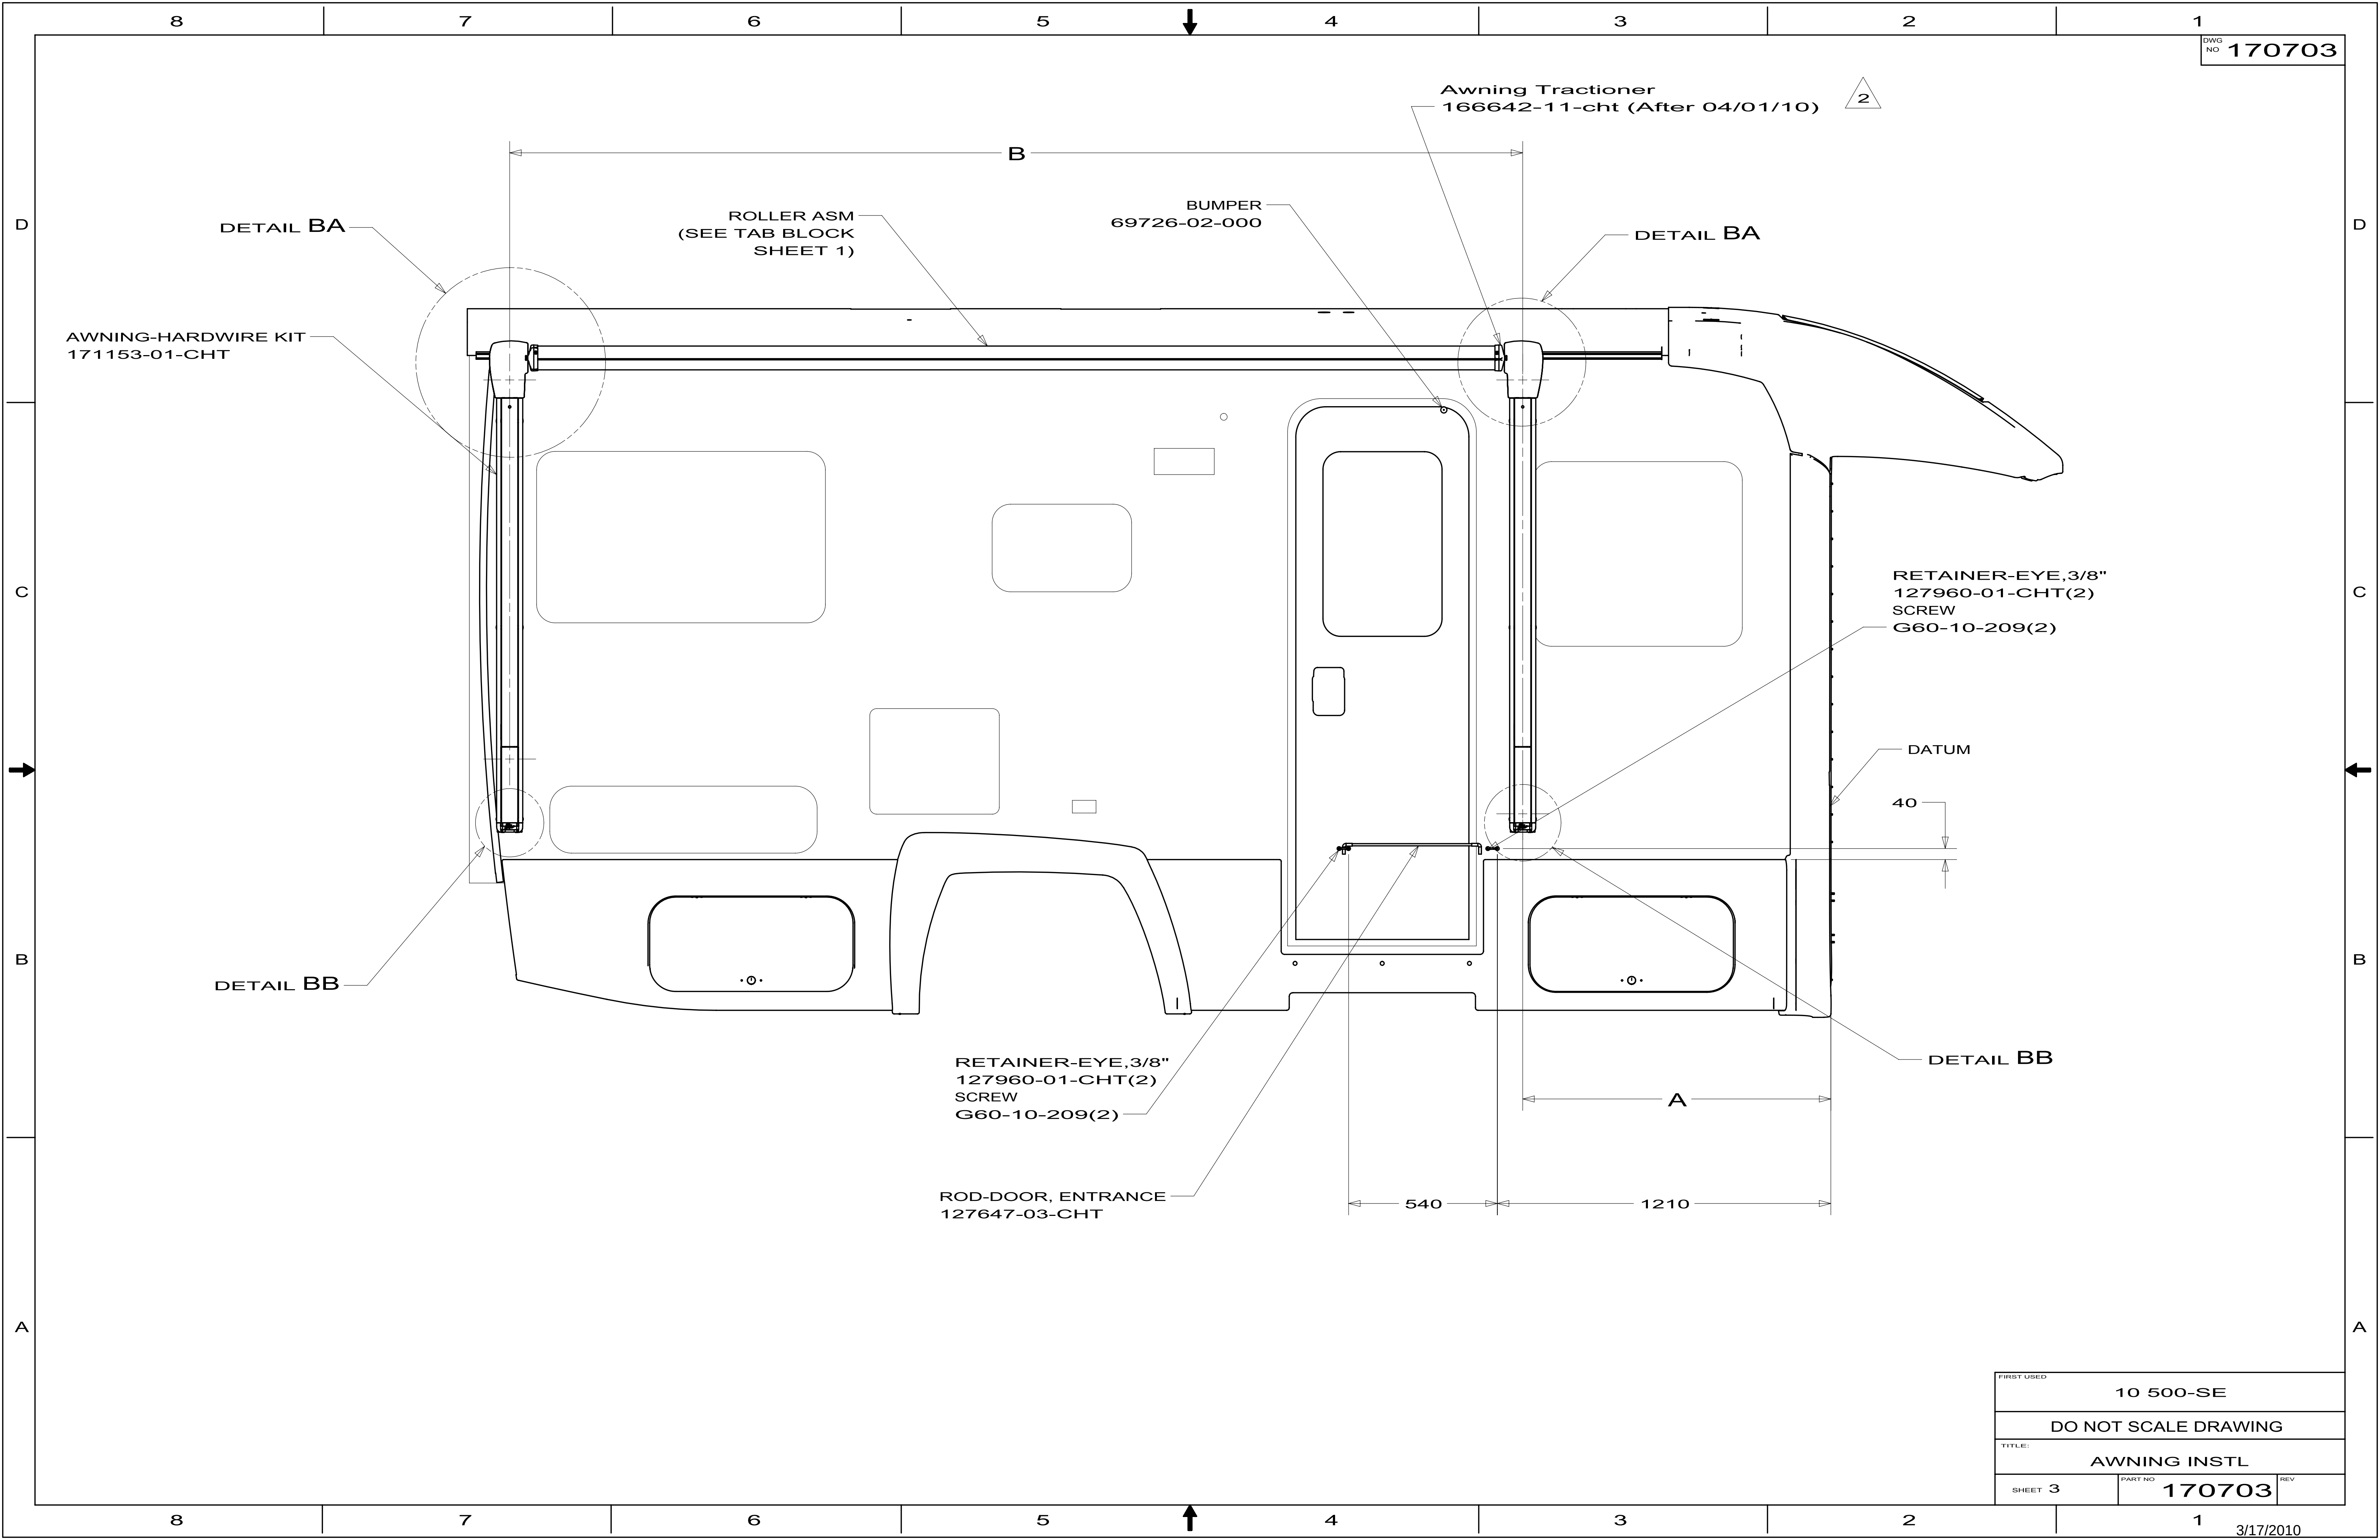


FIRST USED			10 500-SE
DO NOT SCALE DRAWING			
TITLE:			AWNING INSTL
SHEET 3	PART NO	170703	REV

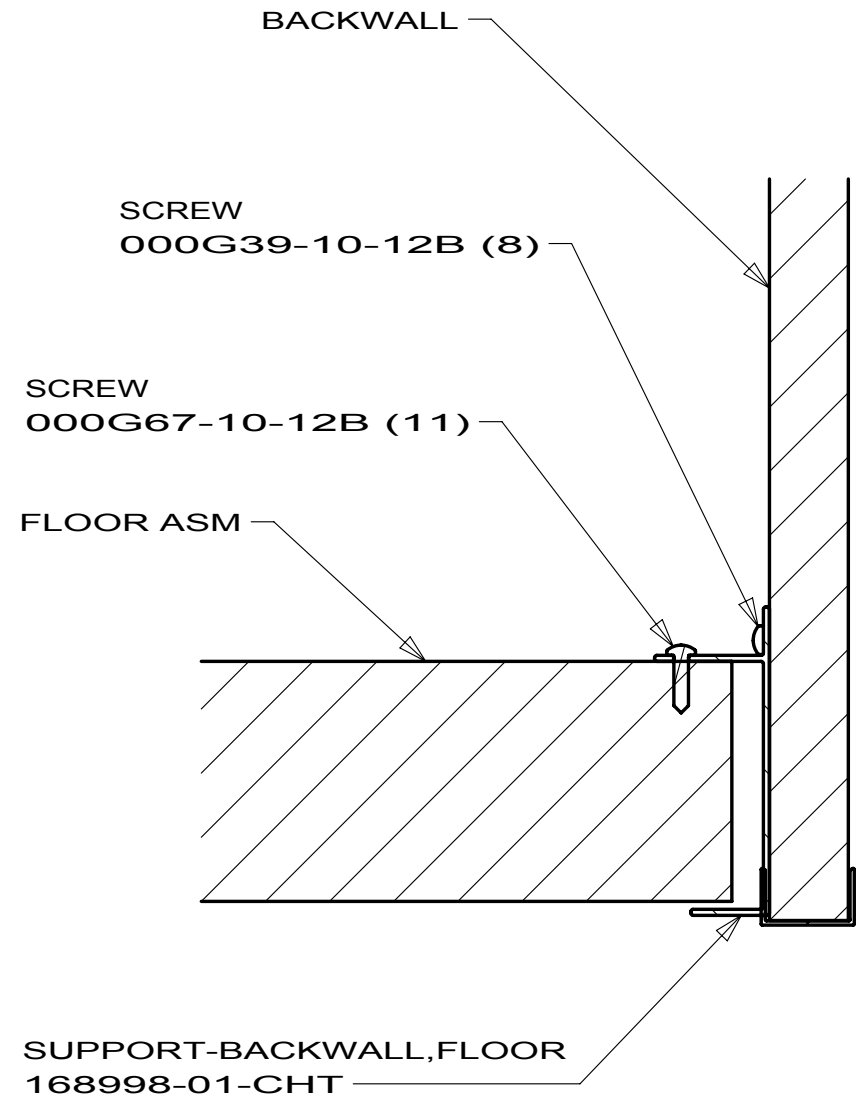


SECTION AA-AA

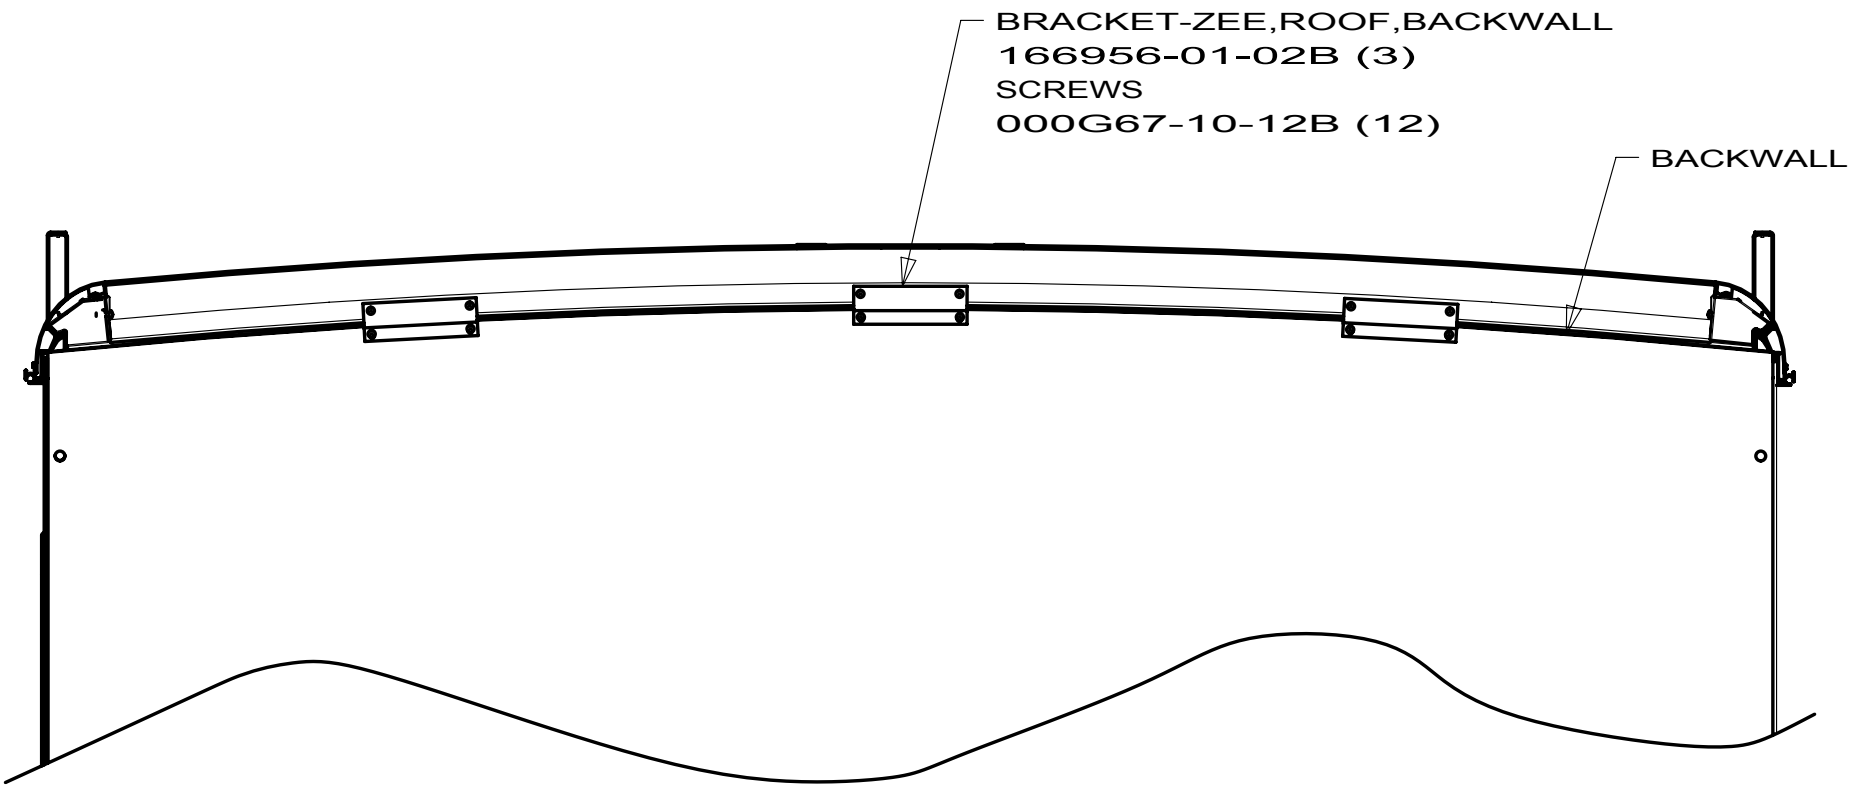


VIEW AB-AB

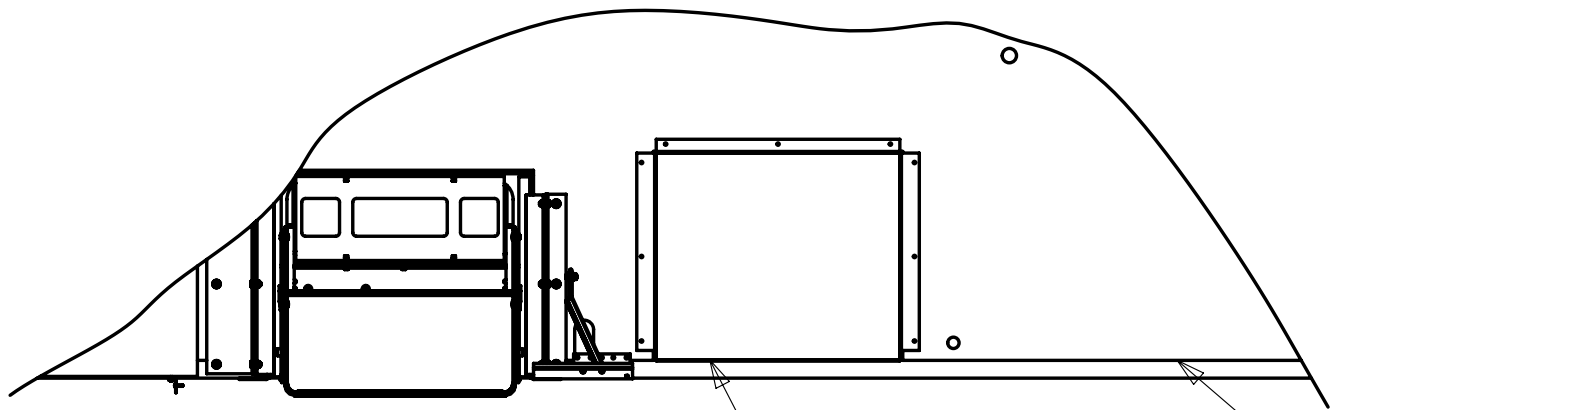


VIEW AE-AE

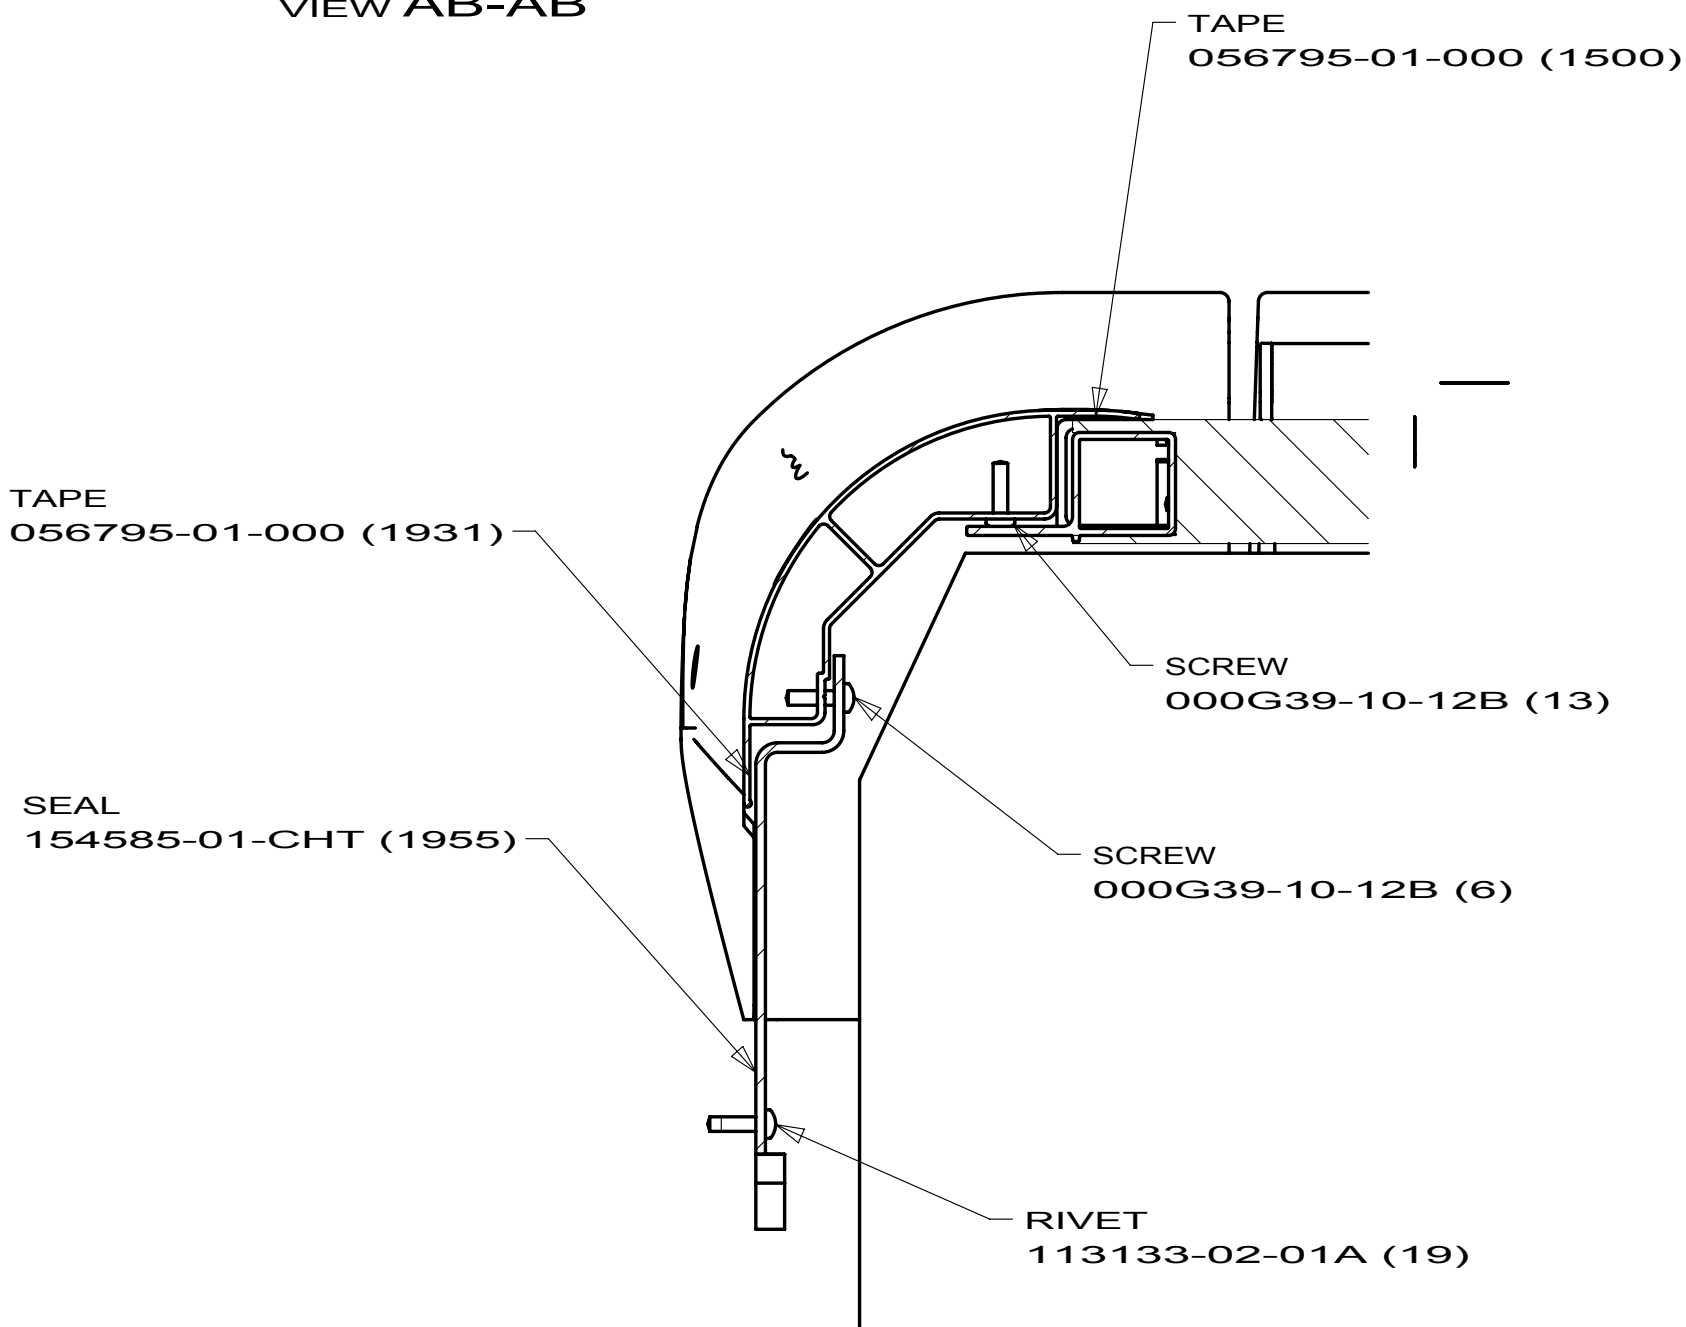


SECTION AF-AF

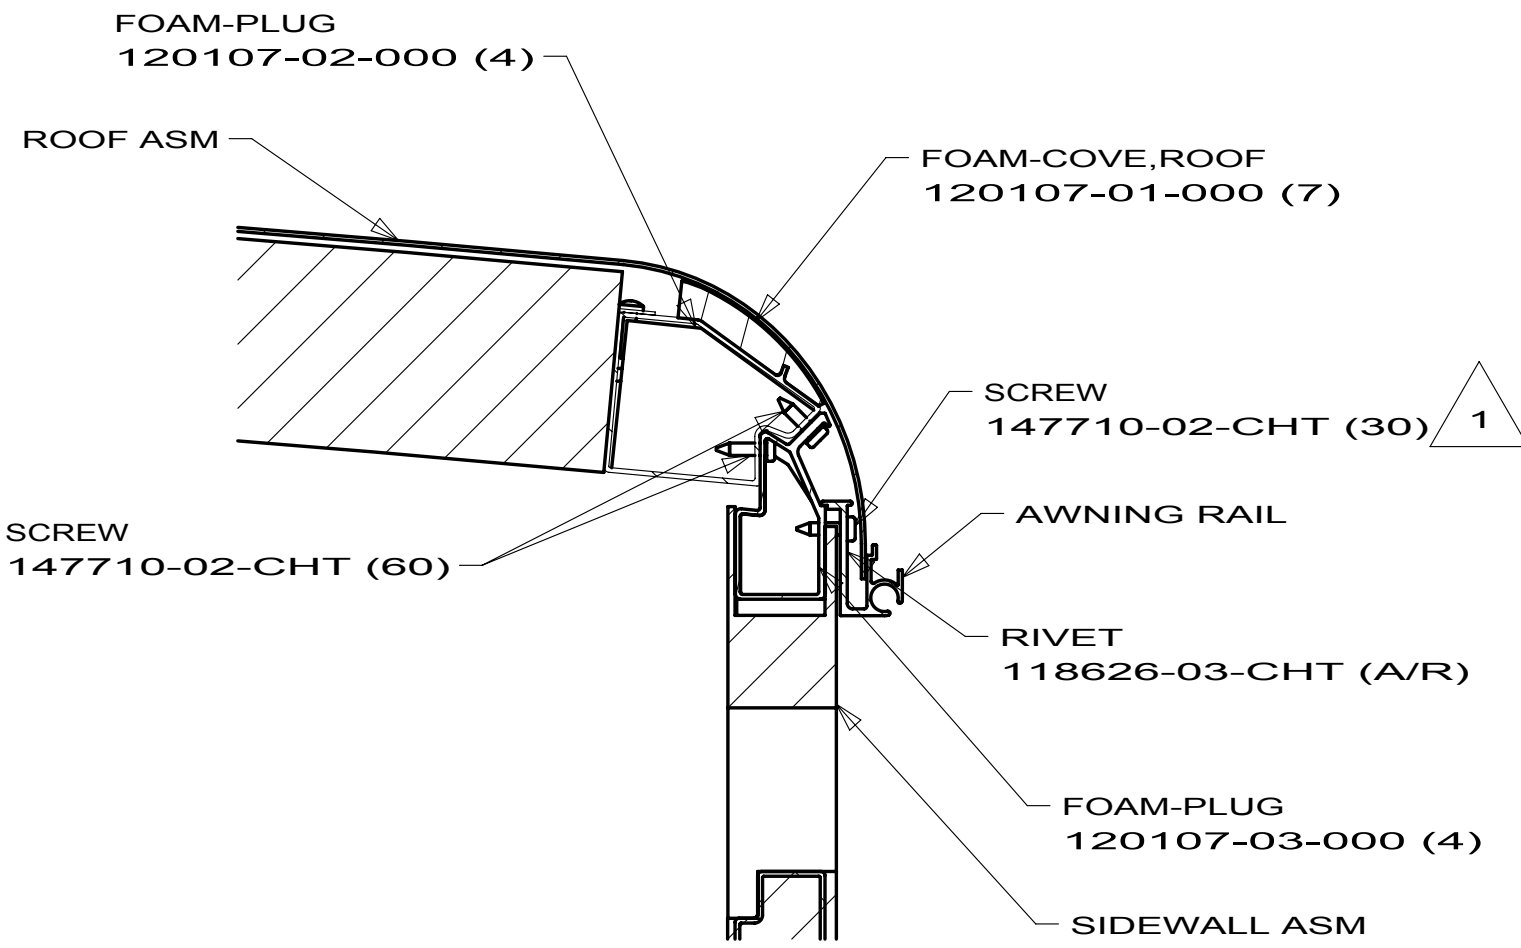


SECTION AC-AC

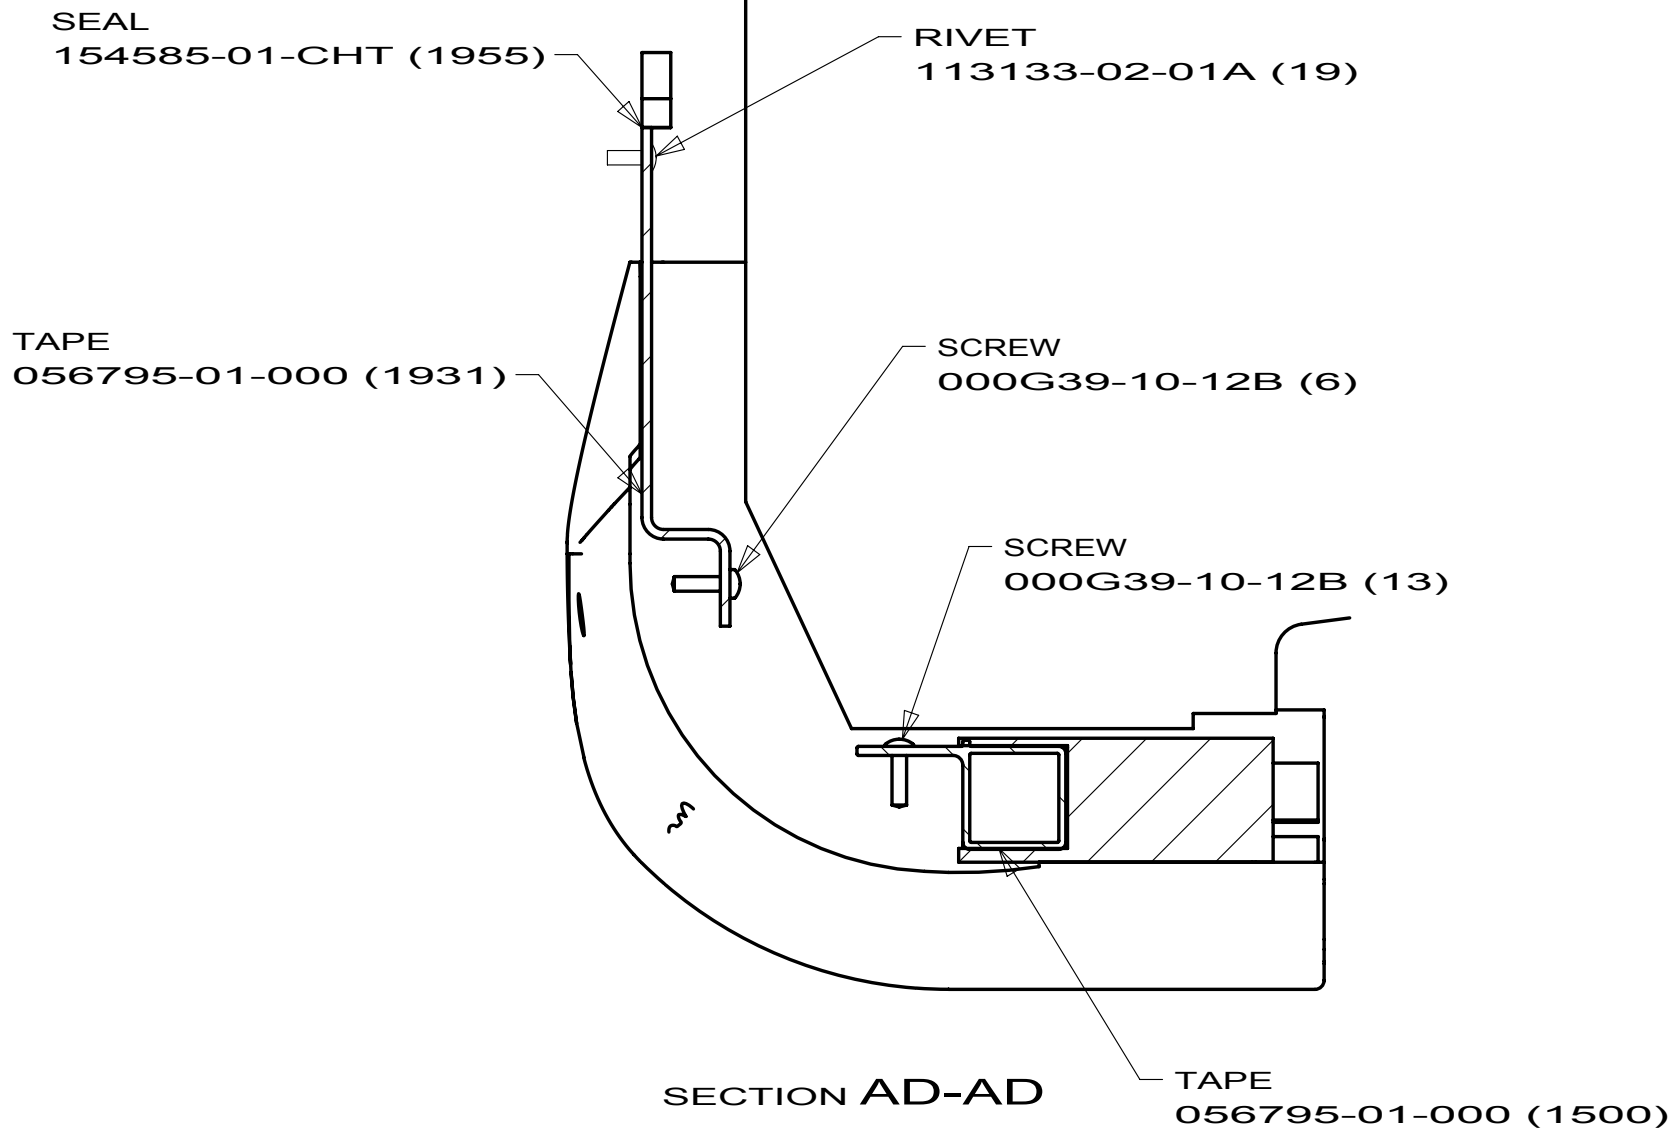

SECTION AD-AD

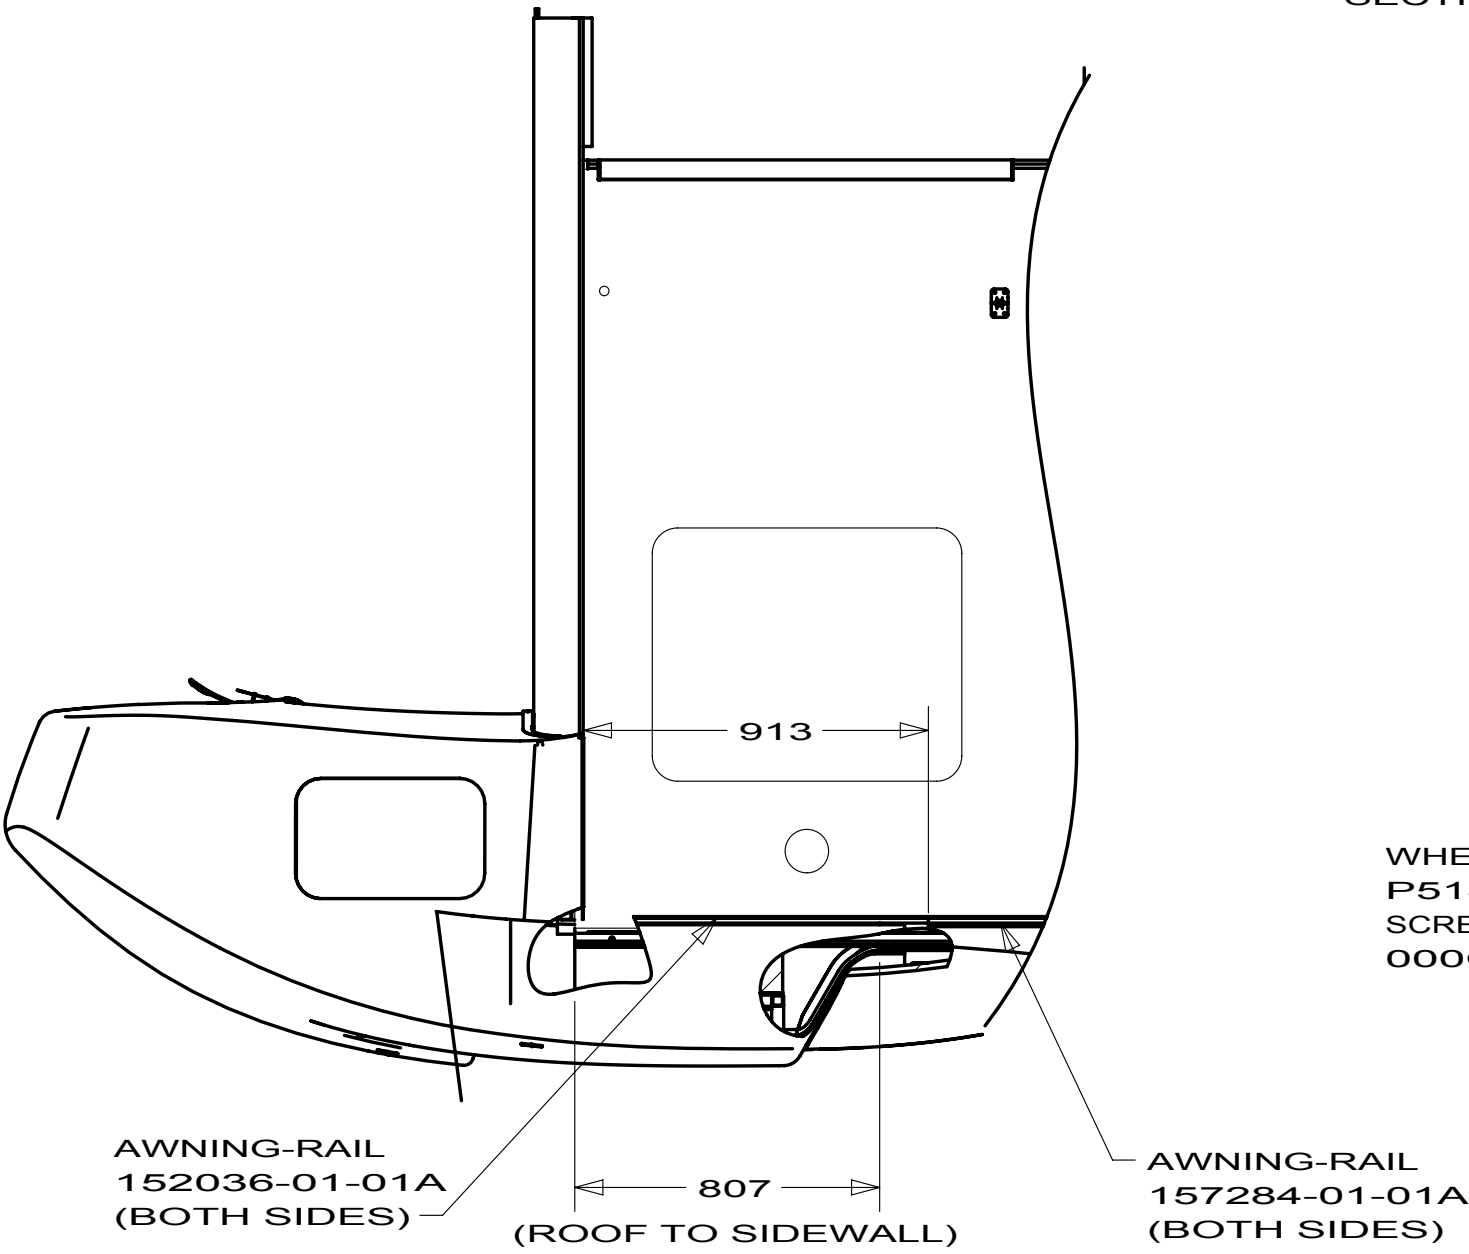

DETAIL AG

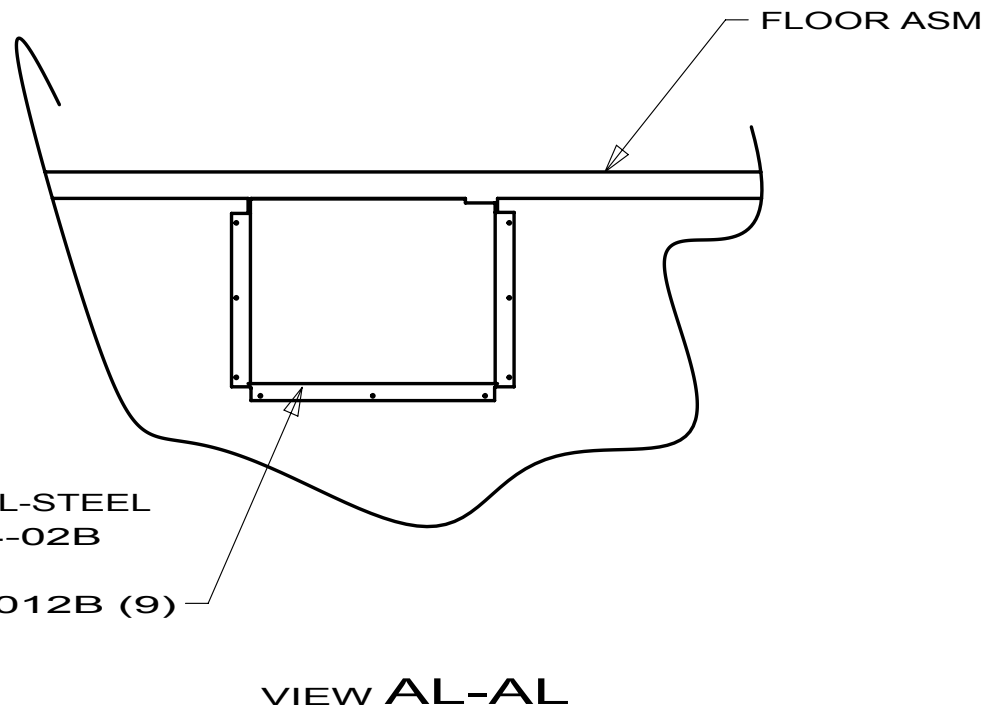


VIEW AL-AL


1. SCREW MUST BE LOCATED WITH 50MM OF RAIL-AWNING SPICE. DRILL ADDITIONAL HOLES AND ADD SCREWS AS REQUIRED.

NOTES:


WINNEBAGO INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFTD	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHRR			
P.E.			
M.E.	FIRST USED		
DSNR	10 524A		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ±			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING		REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: BODY INSTL-SECTIONS			
SHEET 1 OF 4	PART NO 172821	REV	
REF: 1		3/31/2010	

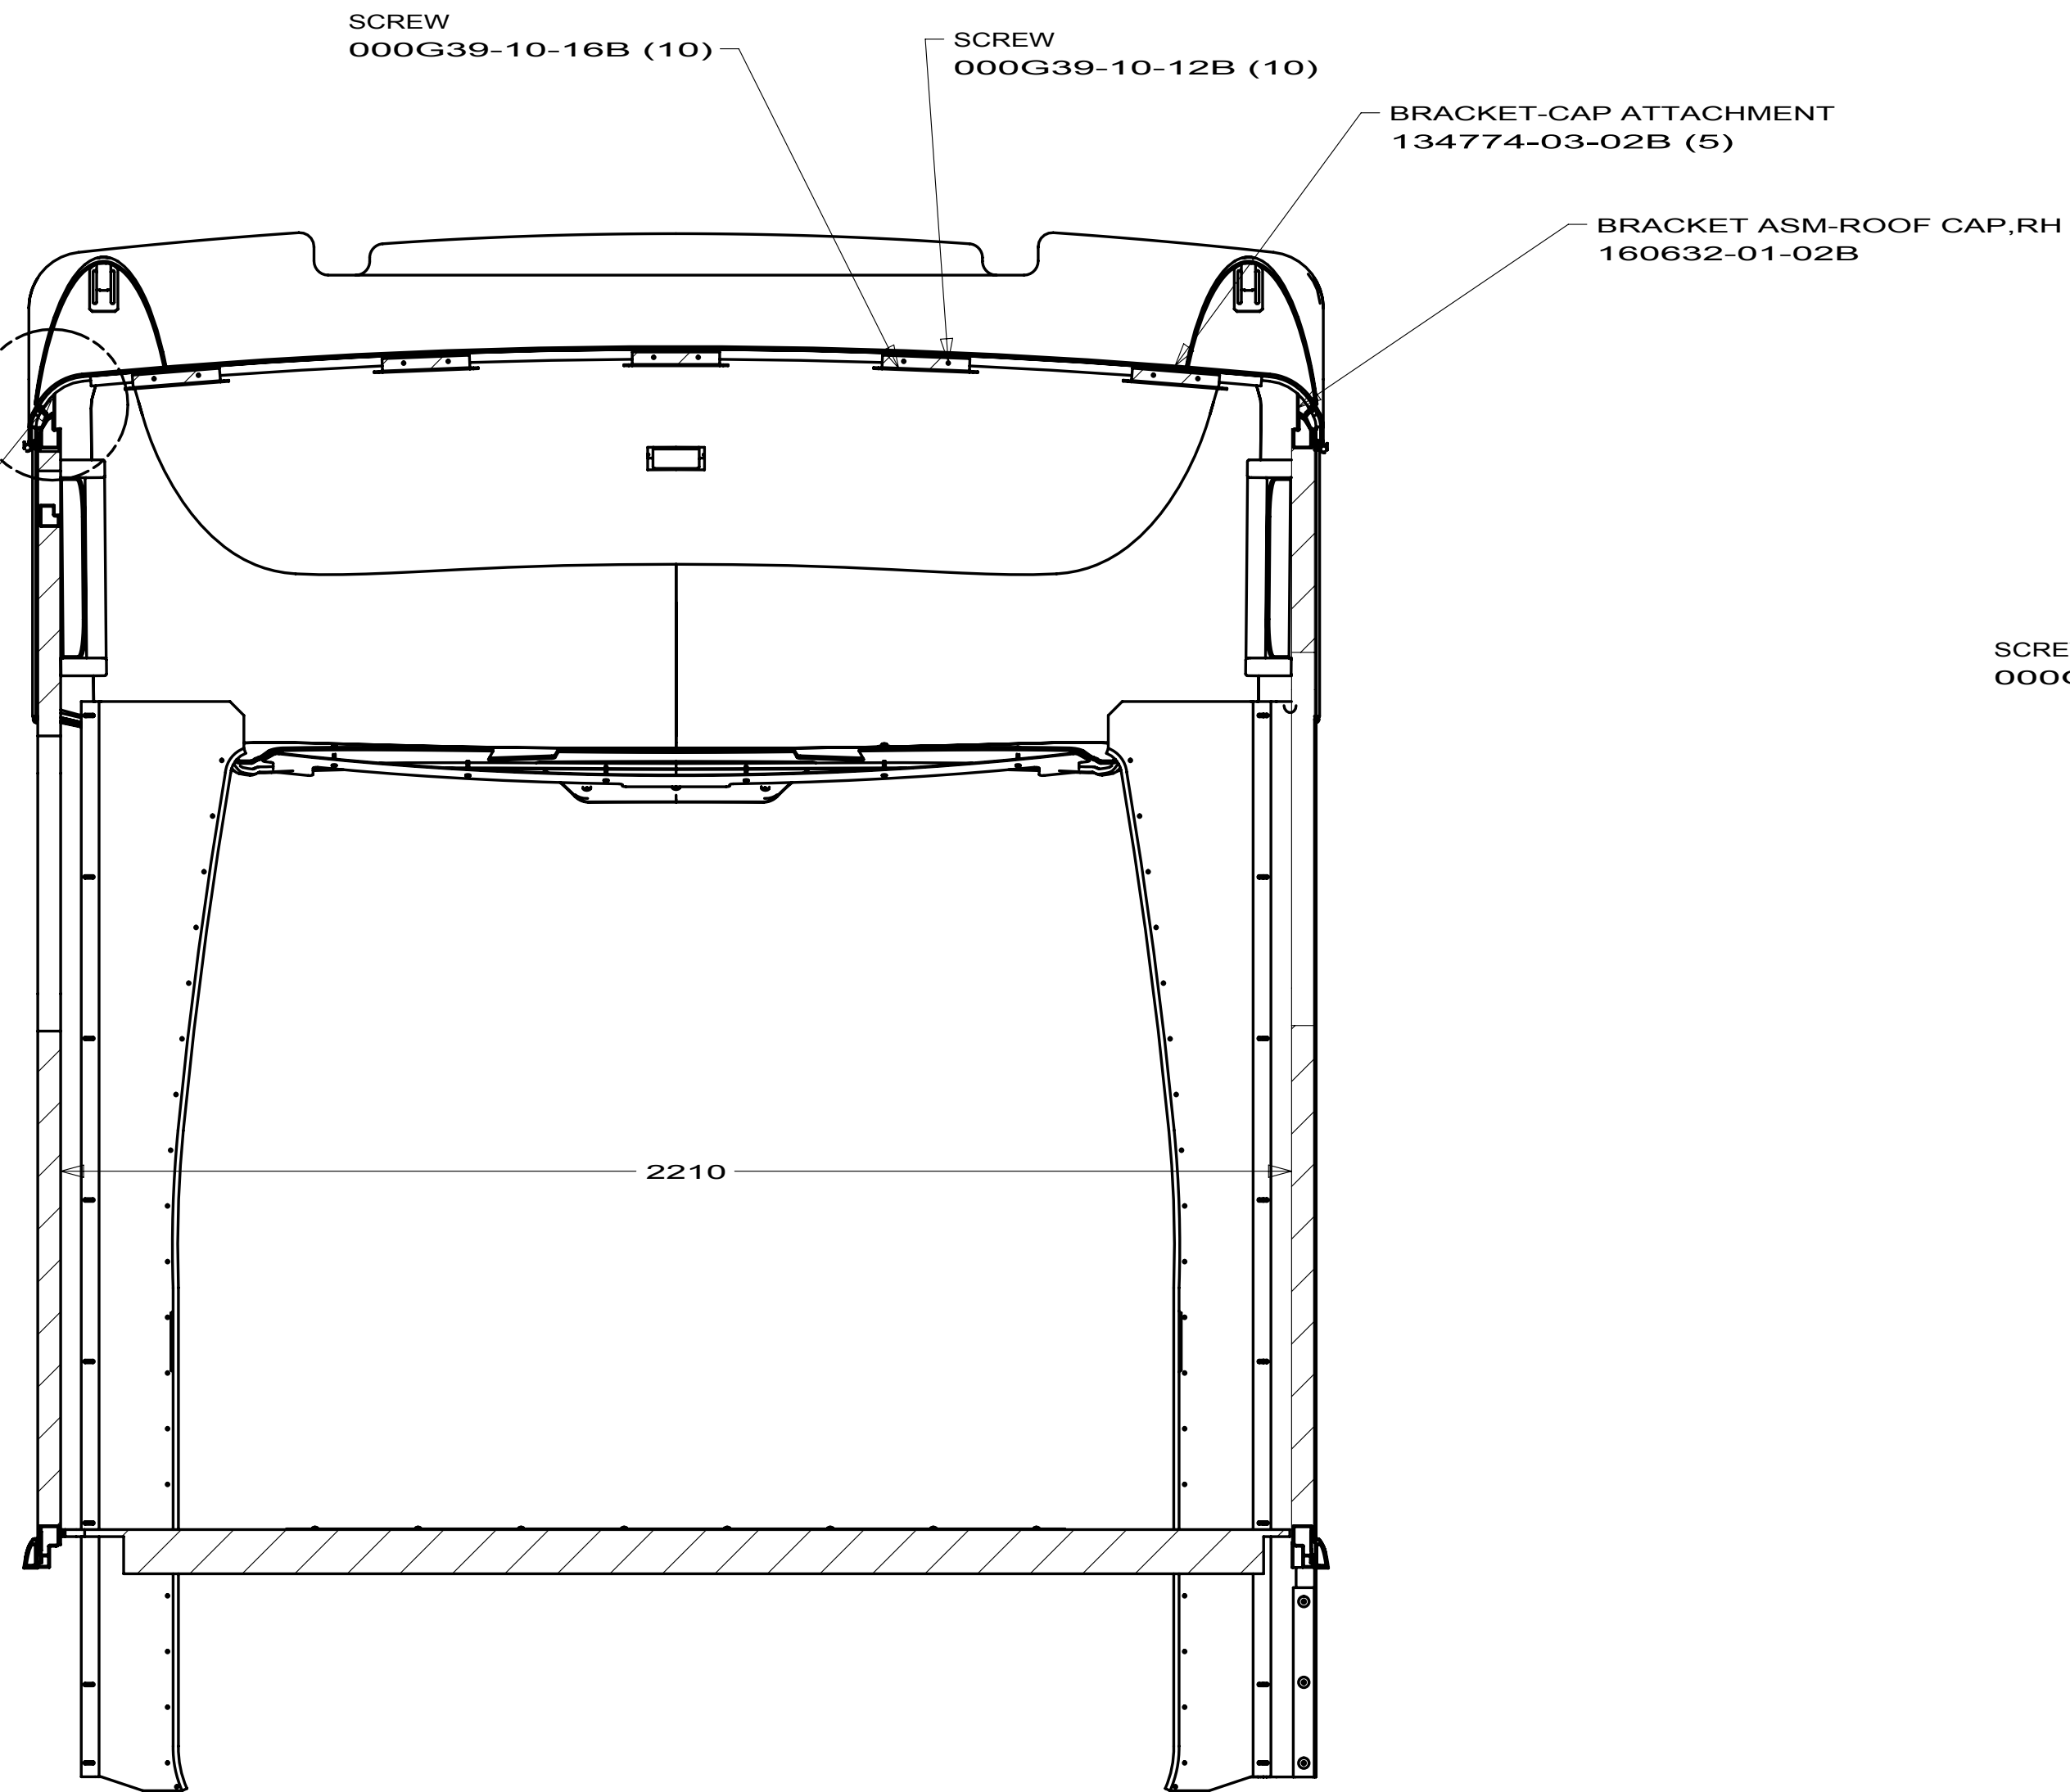

SECTION AH-AH



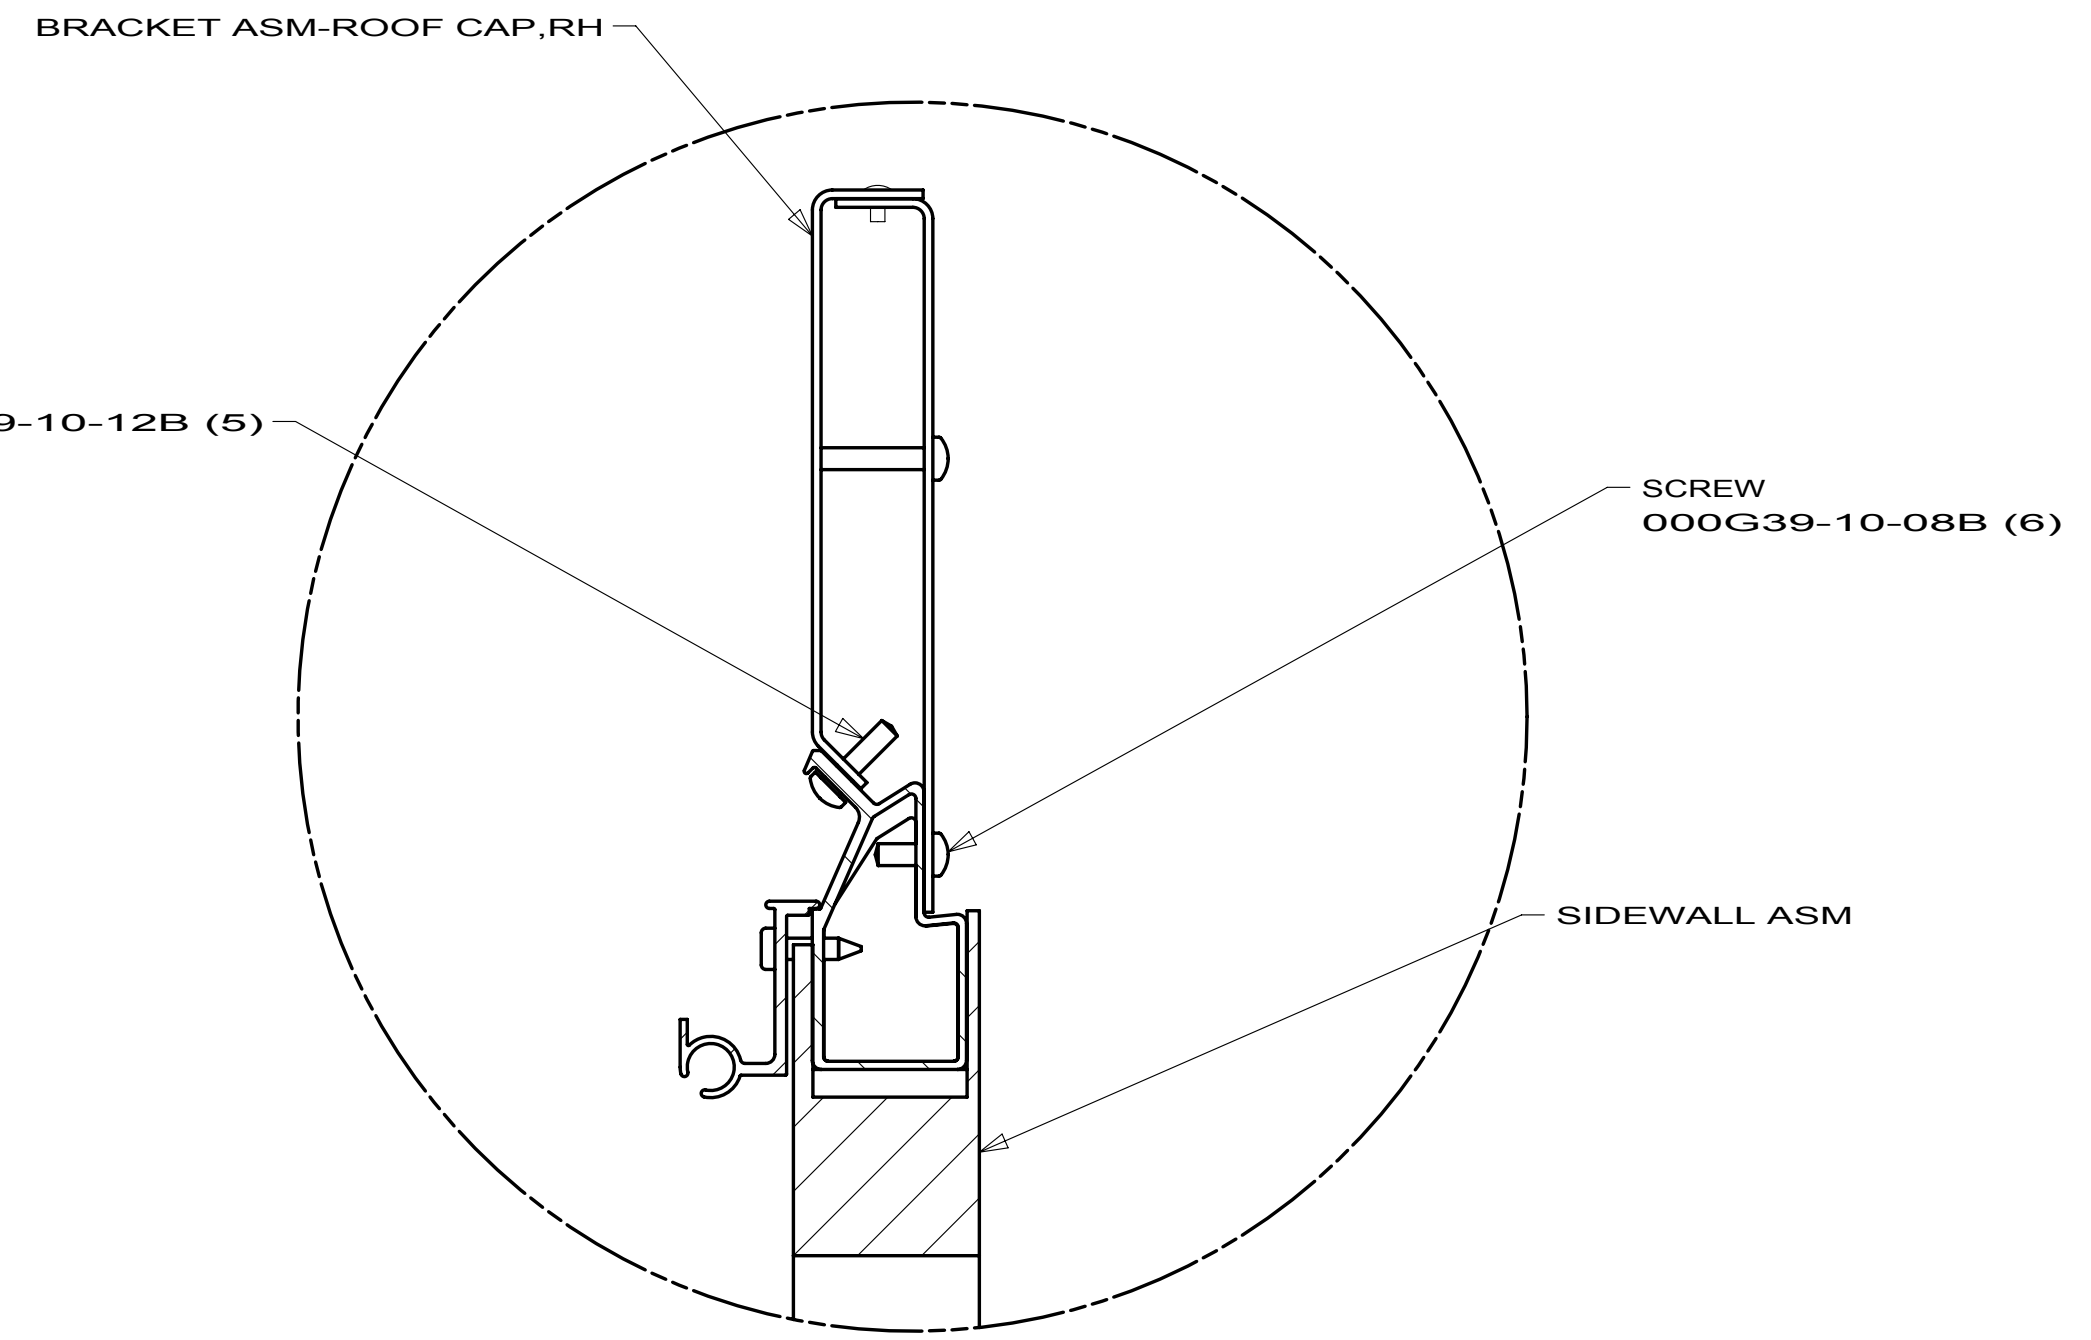


DETAIL AJ (RH SHOWN)
(LH SIMILAR)

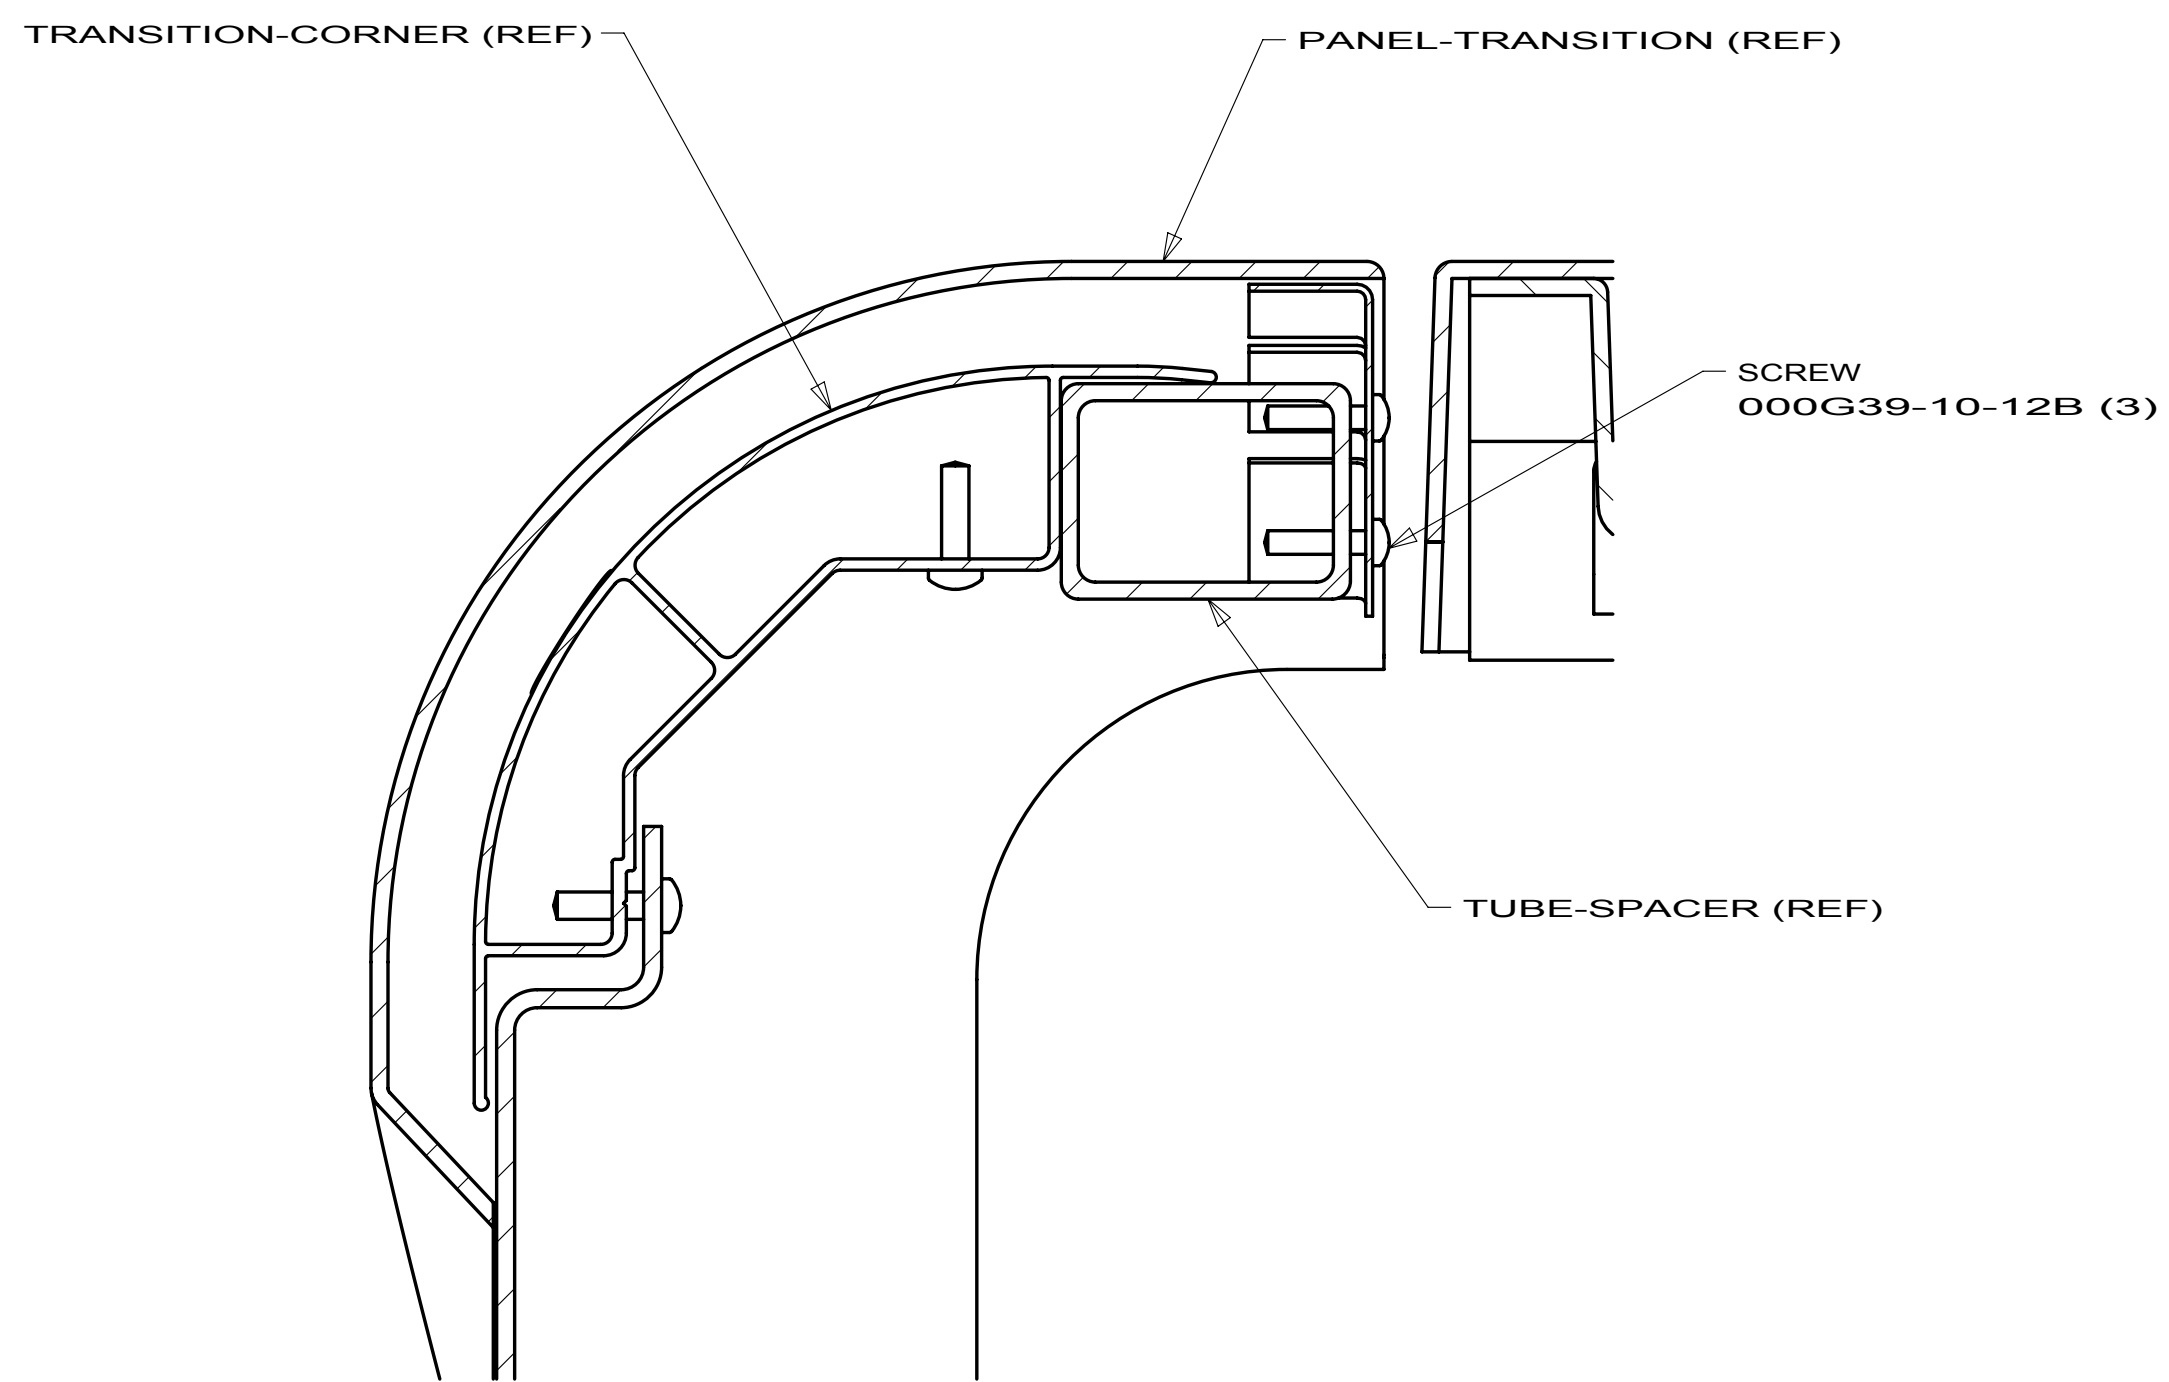

SECTION AK-AK

FIRST USED		10 524A	
DO NOT SCALE DRAWING			
TITLE: BODY INSTL-SECTIONS			
SHEET 2		PART NO 172821	REV

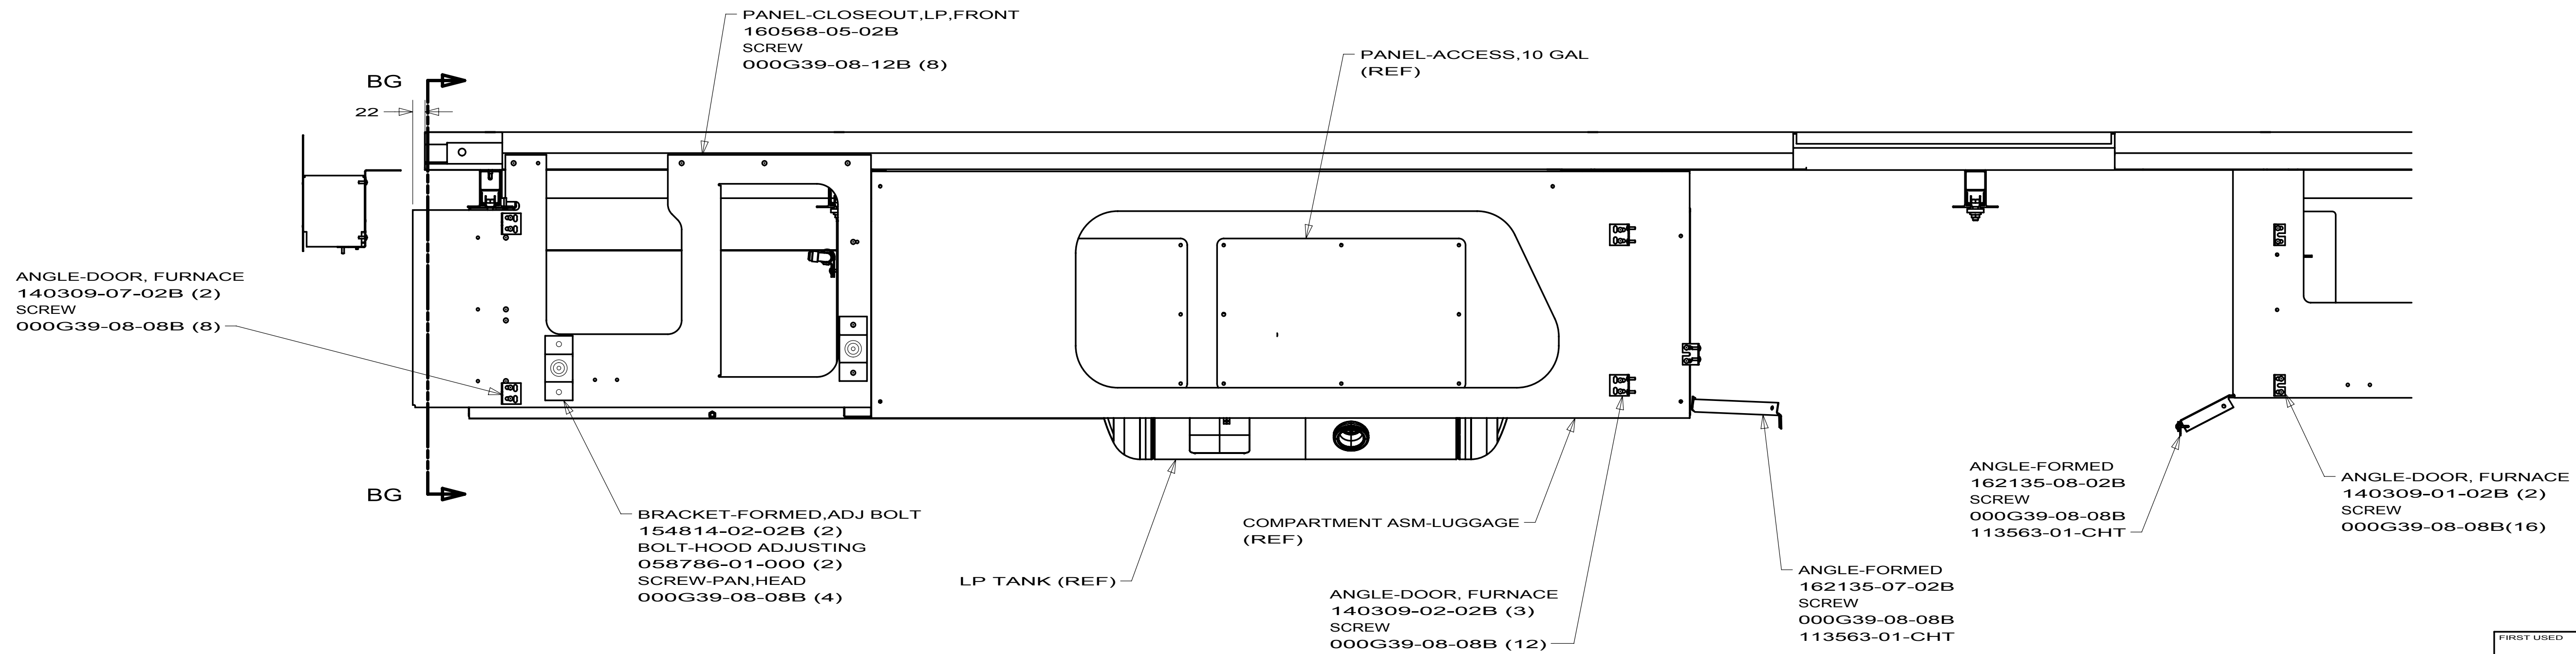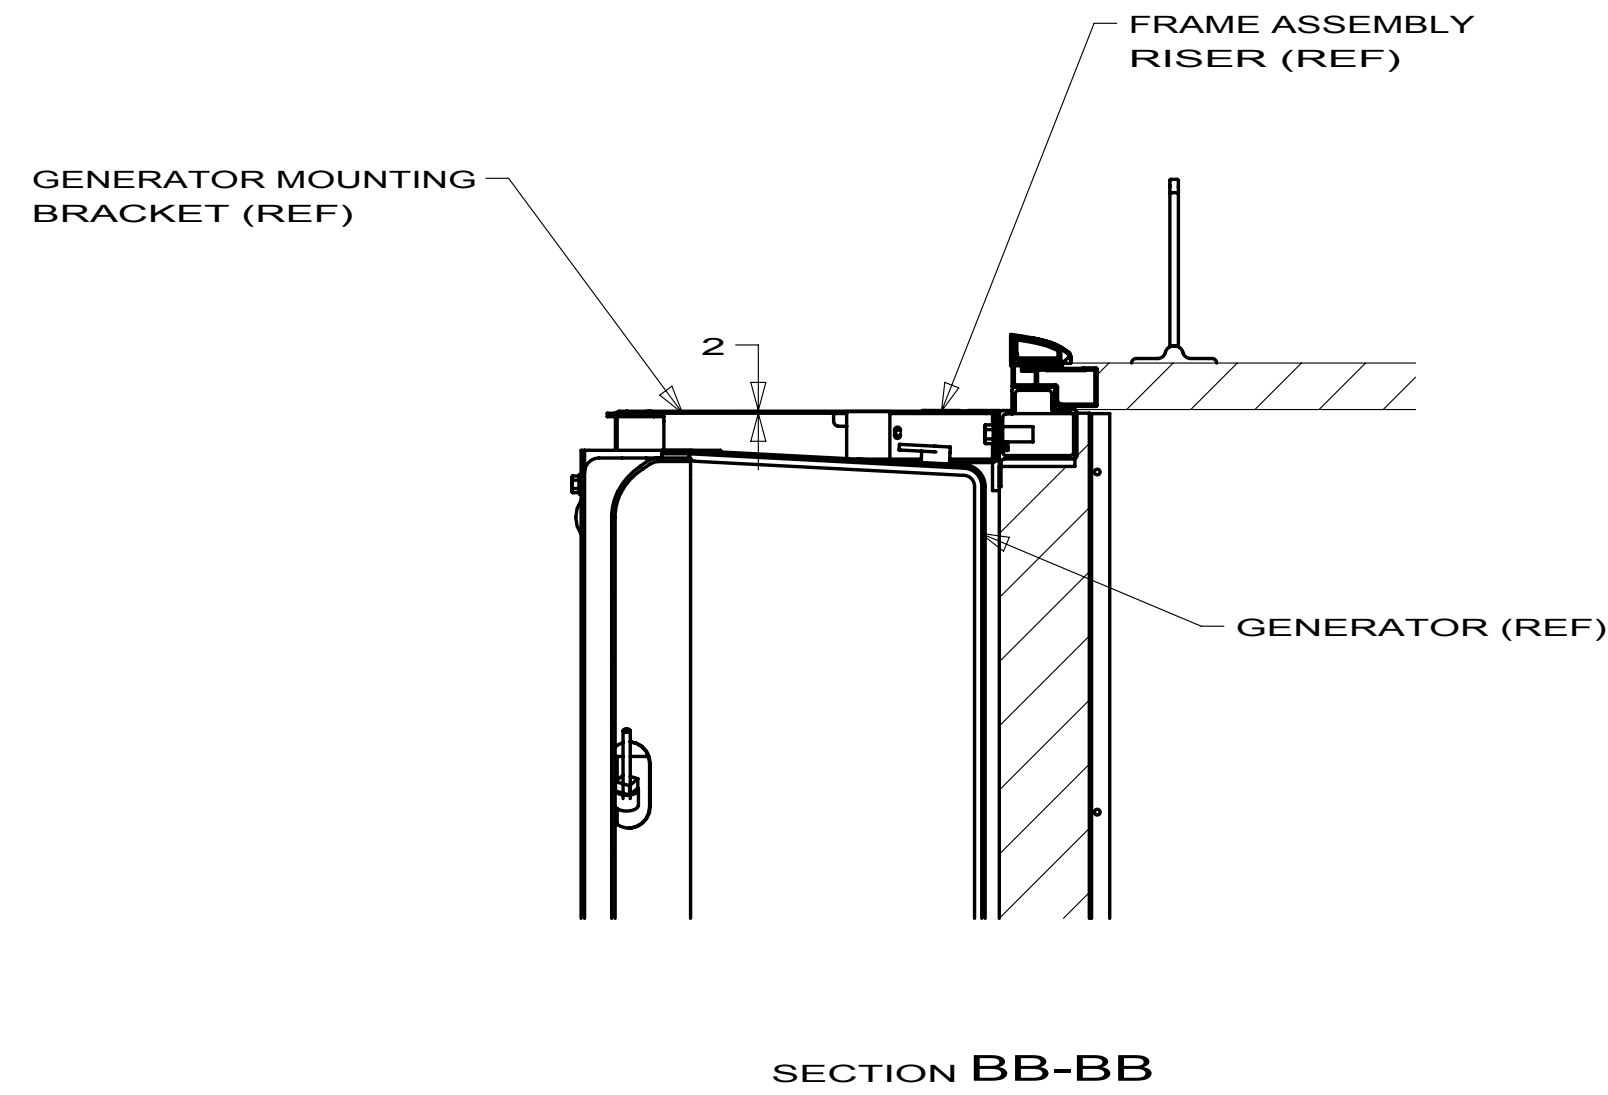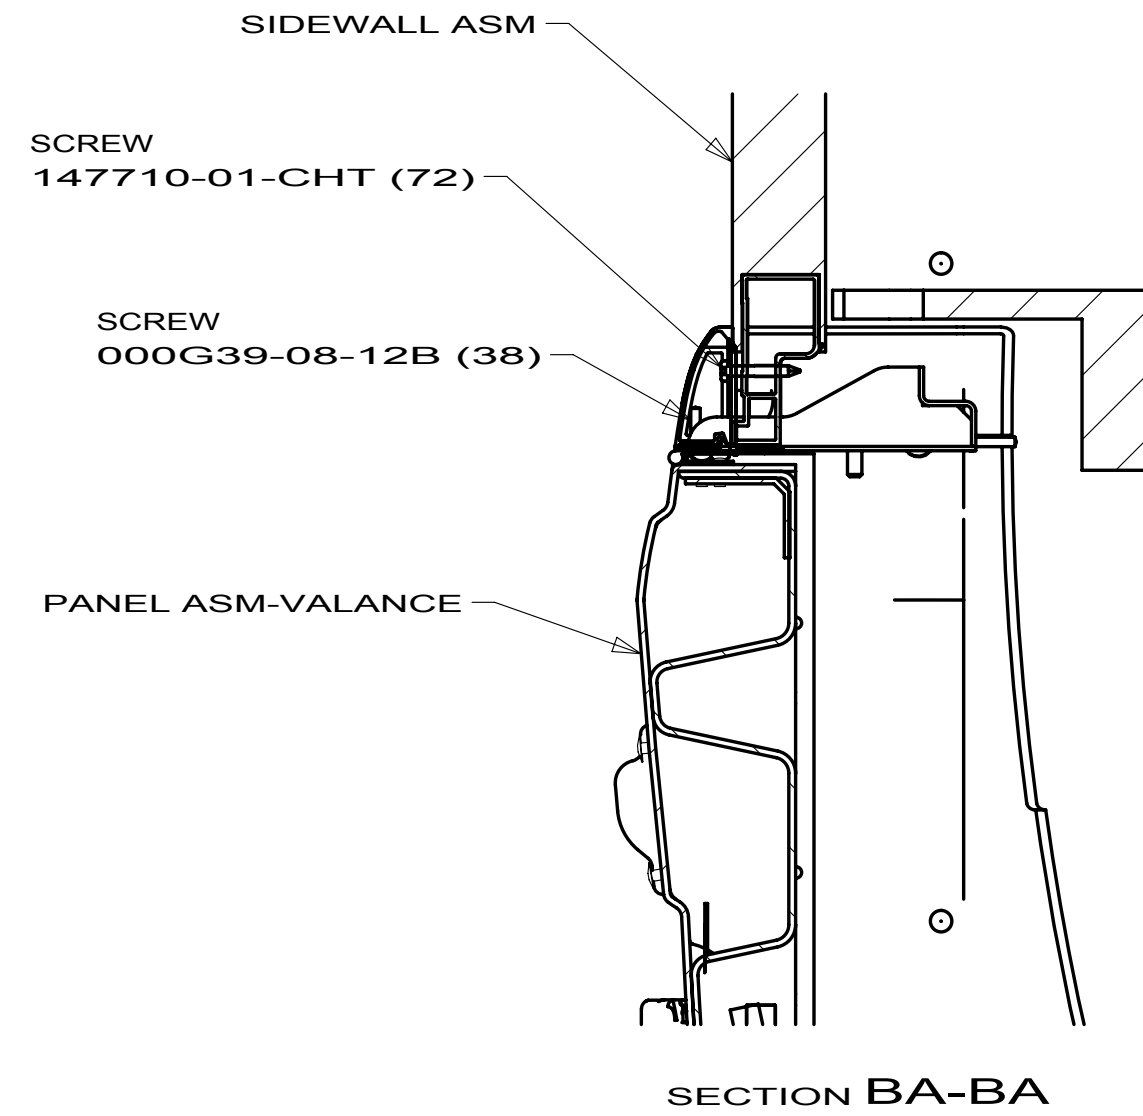

FIRST USED		
10 524A		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 3	PART NO 172821	REV

D

C

B

A


D

C

B

A

GUSSET-TRIM
152243-13-02B
SCREW
000G39-08-12B (4)

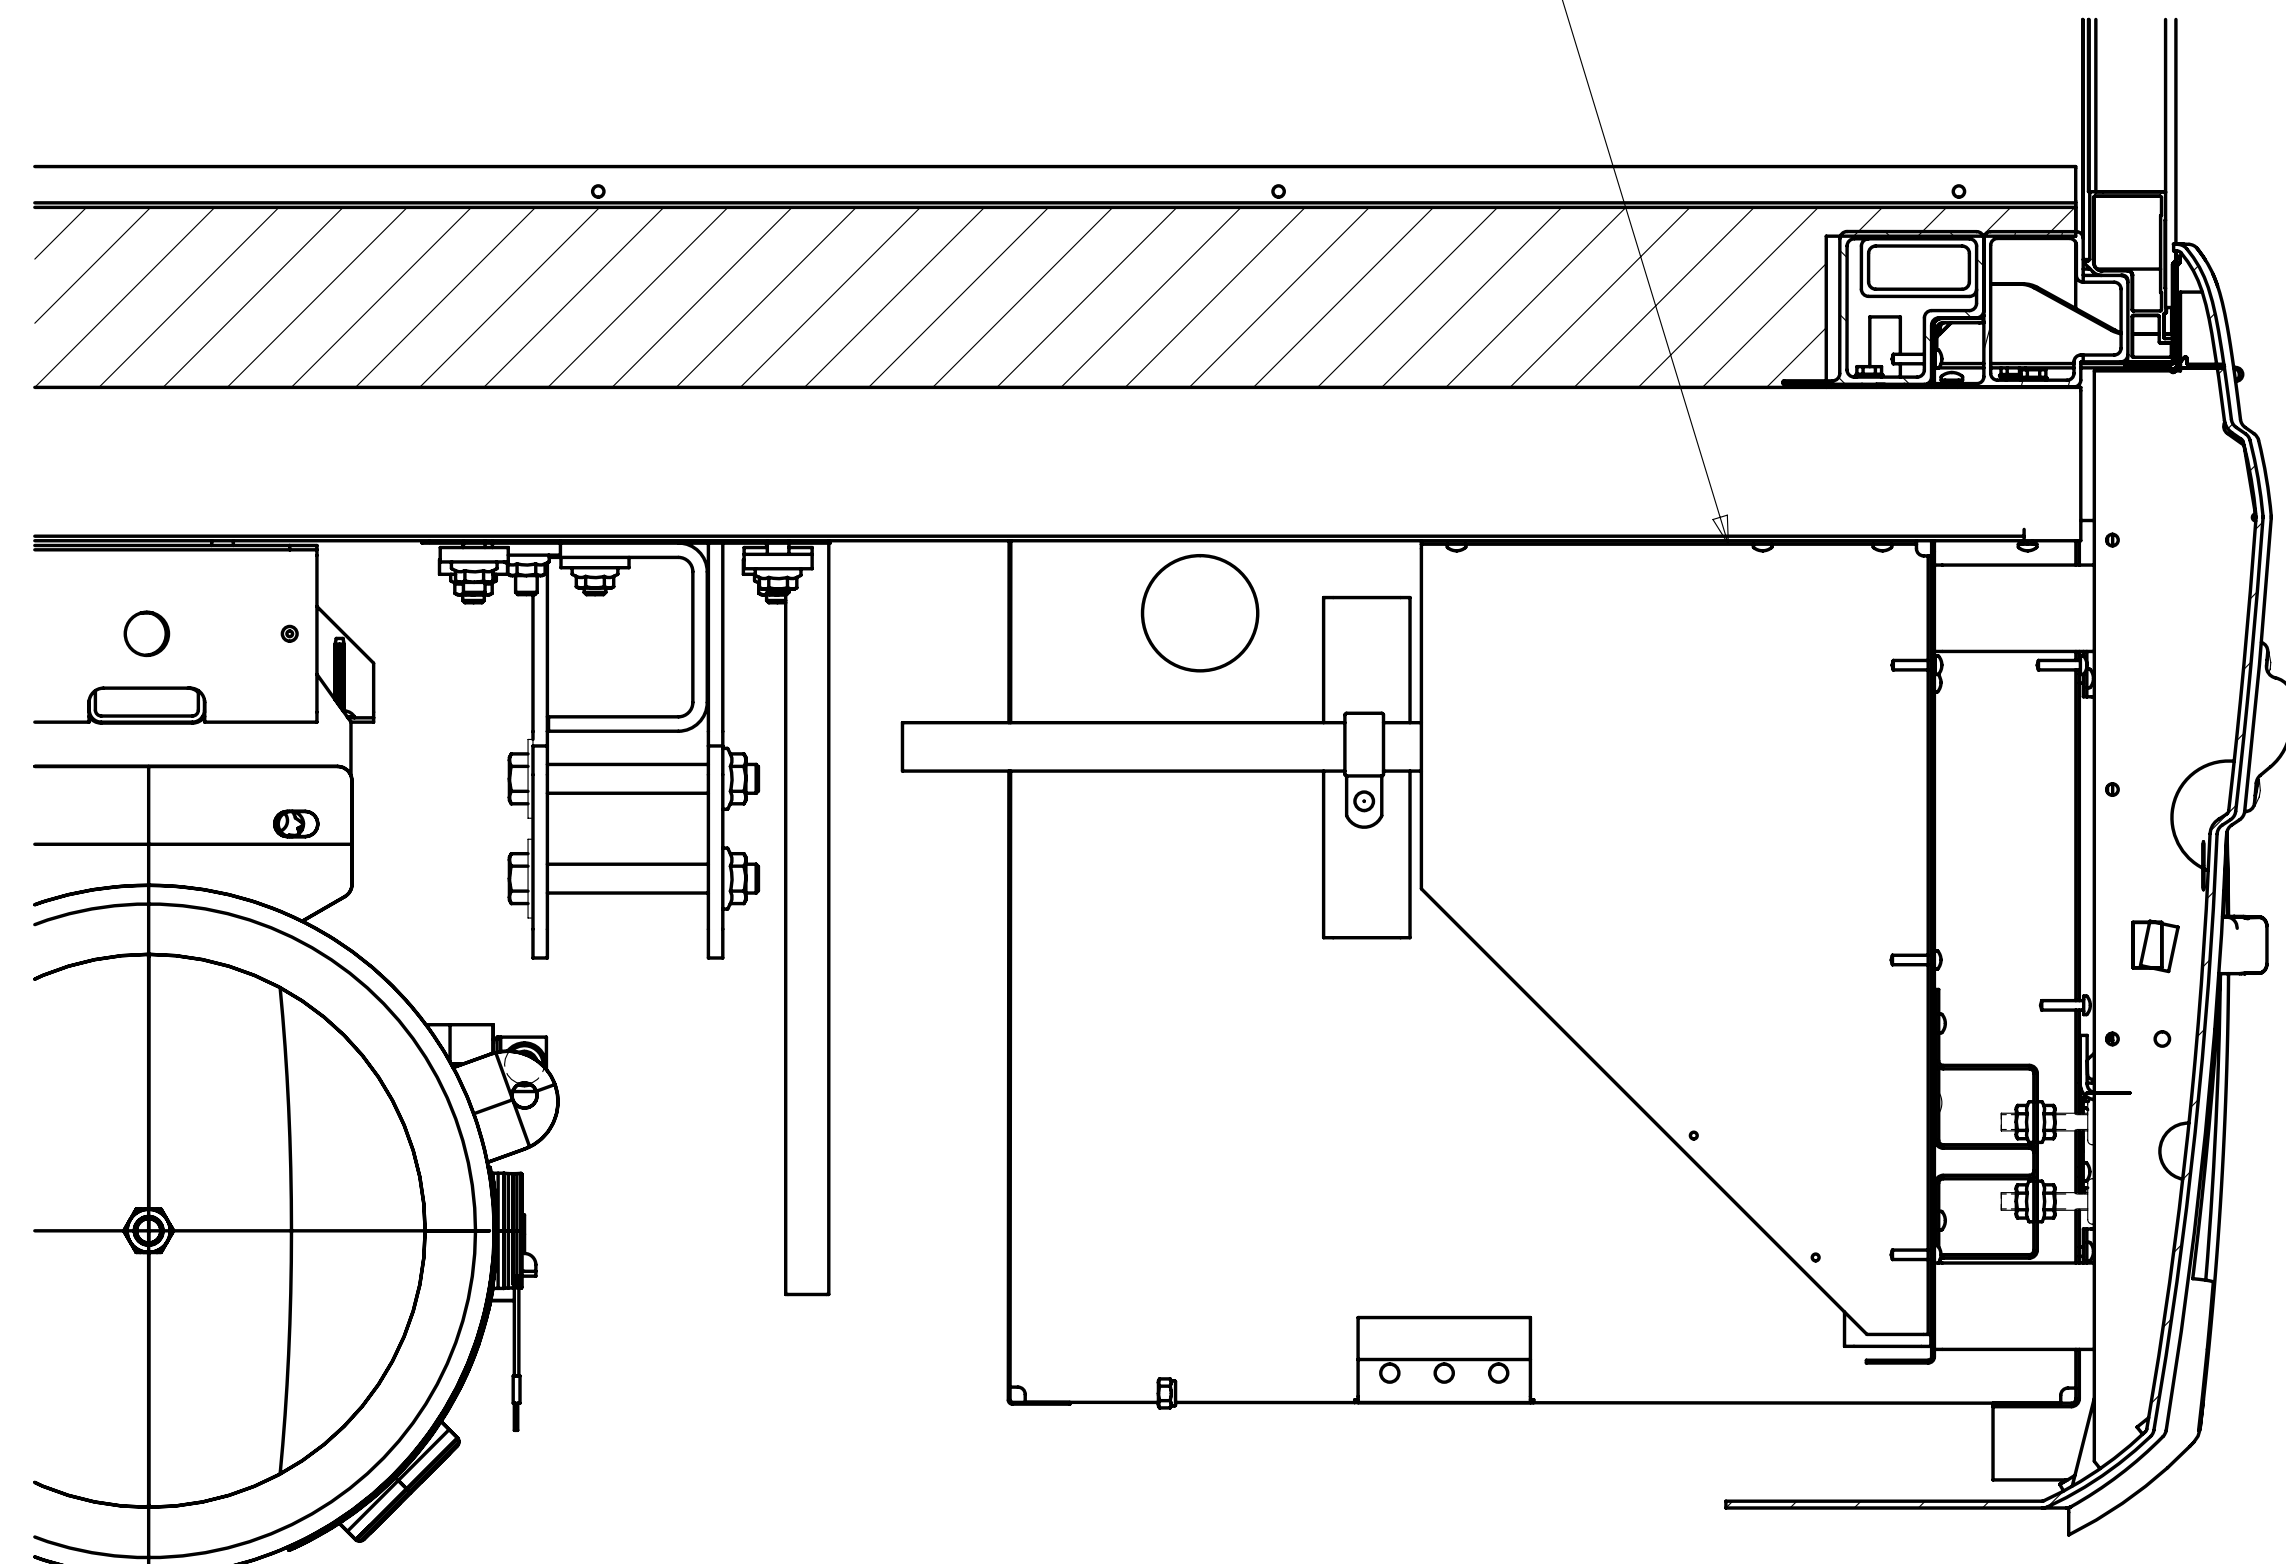


SECTION BG-BG

ANGLE-FORMED, WHEEL LIP
162135-06-02B
SCREW
000G39-08-08B
113563-01-CHT

ANGLE-DOOR, FURNACE
140309-01-02B (2)
SCREW
000G39-08-08B (8)

SECTION BH-BH

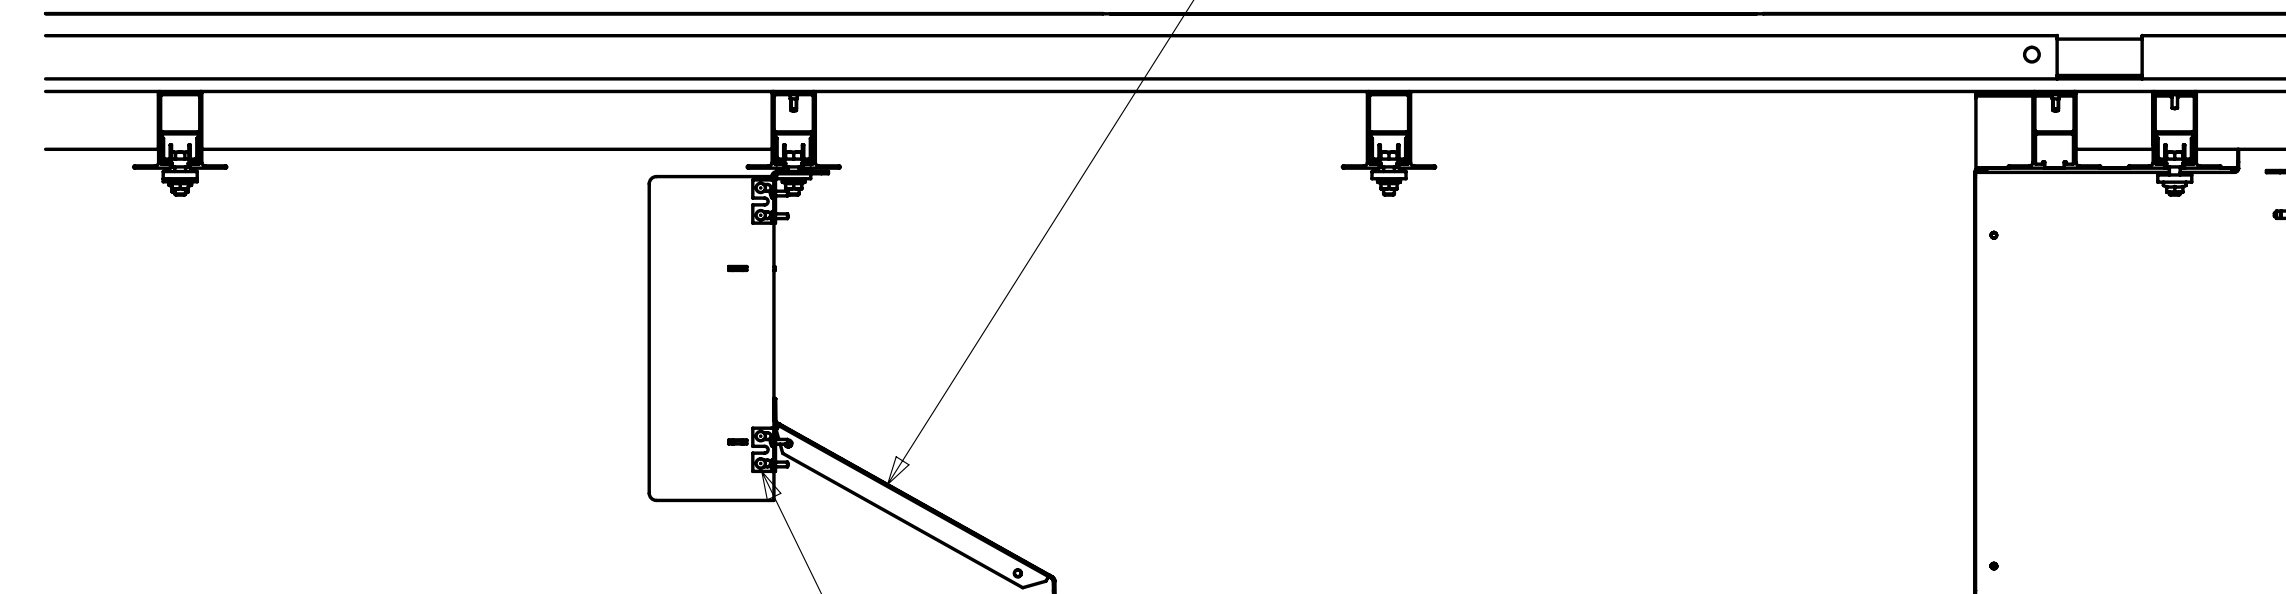

ULOCK-RISER
151437-04-01A
BOLT
000C12-06-20B(3)
NUT
000D39-05-00B(3)

PANEL-SUPPORT, STEP BOX
151335-01-01A
BOLT
000C26-05-12B(2)
NUT
000D39-05-00B(2)

BRACKET-WHEELIP
159433-03-02B
BOLT
000C26-06-12B
NUT
000D39-06-00B
SCREW
000G39-08-08B (2)

BRACKET ASM
163630-02-02B
SCREW
000G42-04-16B (8)
SCREW
000G39-08-12B (2)
STRAP-W/SLOTS
161747-01-02B
SCREW
000G39-08-08B (2)

2359
FROM DATUM


PANEL-SUPPORT, STEP BOX
151335-04-01A
BOLT
000C26-05-12B(2)
NUT
000D39-05-00B(2)

ULOCK-RISER
151437-04-01A
BOLT
000C12-06-20B(3)
NUT
000D39-06-00B(3)



ANGLE
140309-01-02B (4)
SCREW
000G39-08-12B (16)

STEP ASM (REF)

VIEW BF-BF

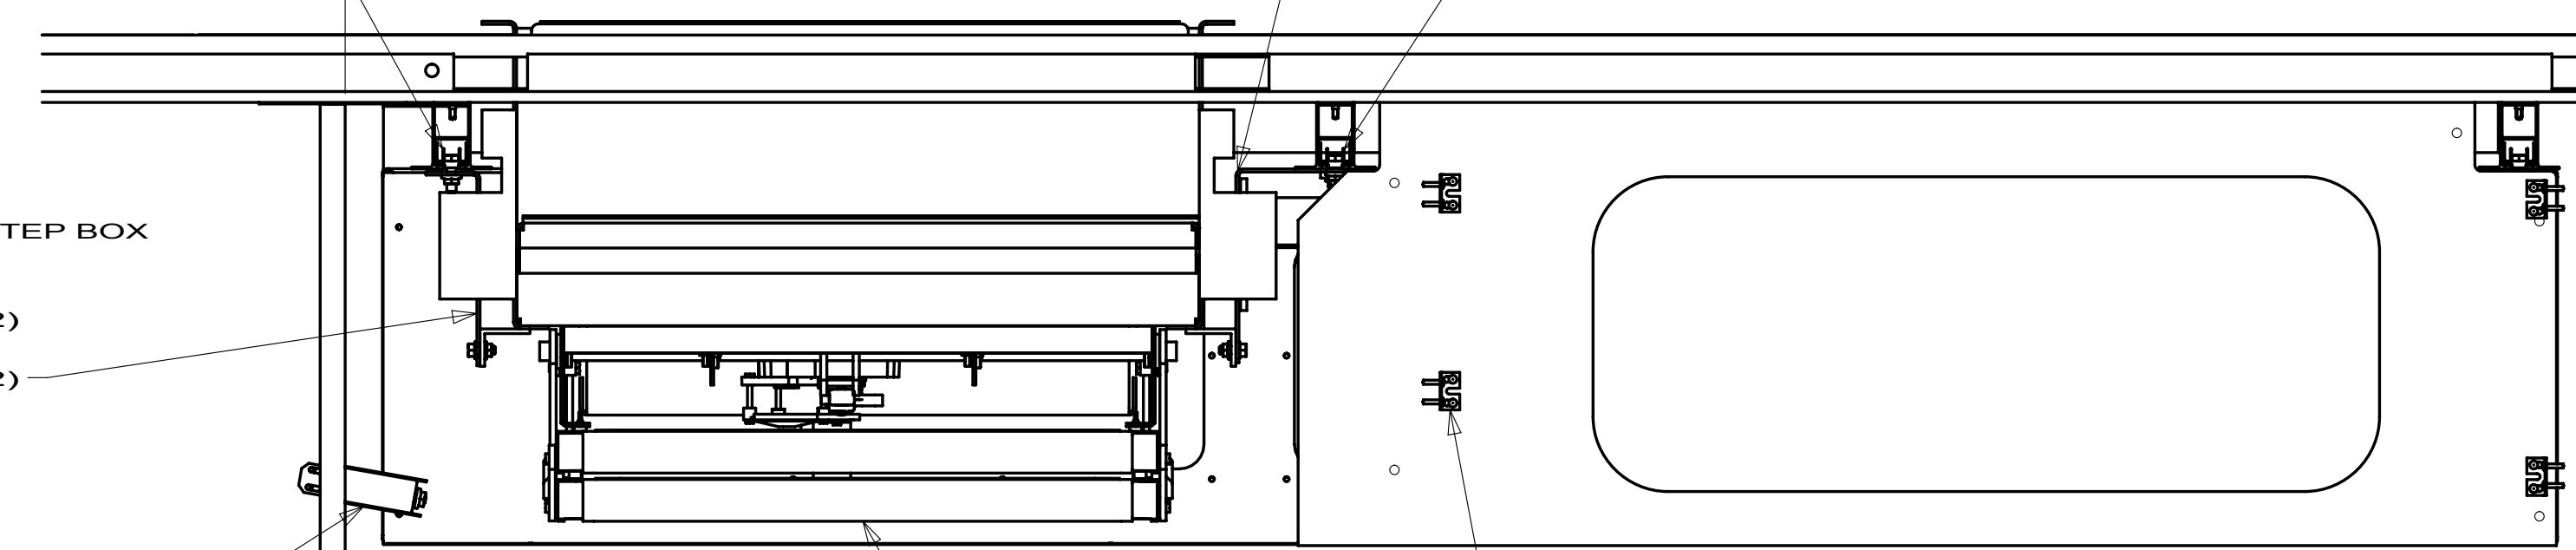


FIRST USED			10 524A
DO NOT SCALE DRAWING			
TITLE: BODY INSTL-SECTIONS			
SHEET 4	PART NO	172821	REV

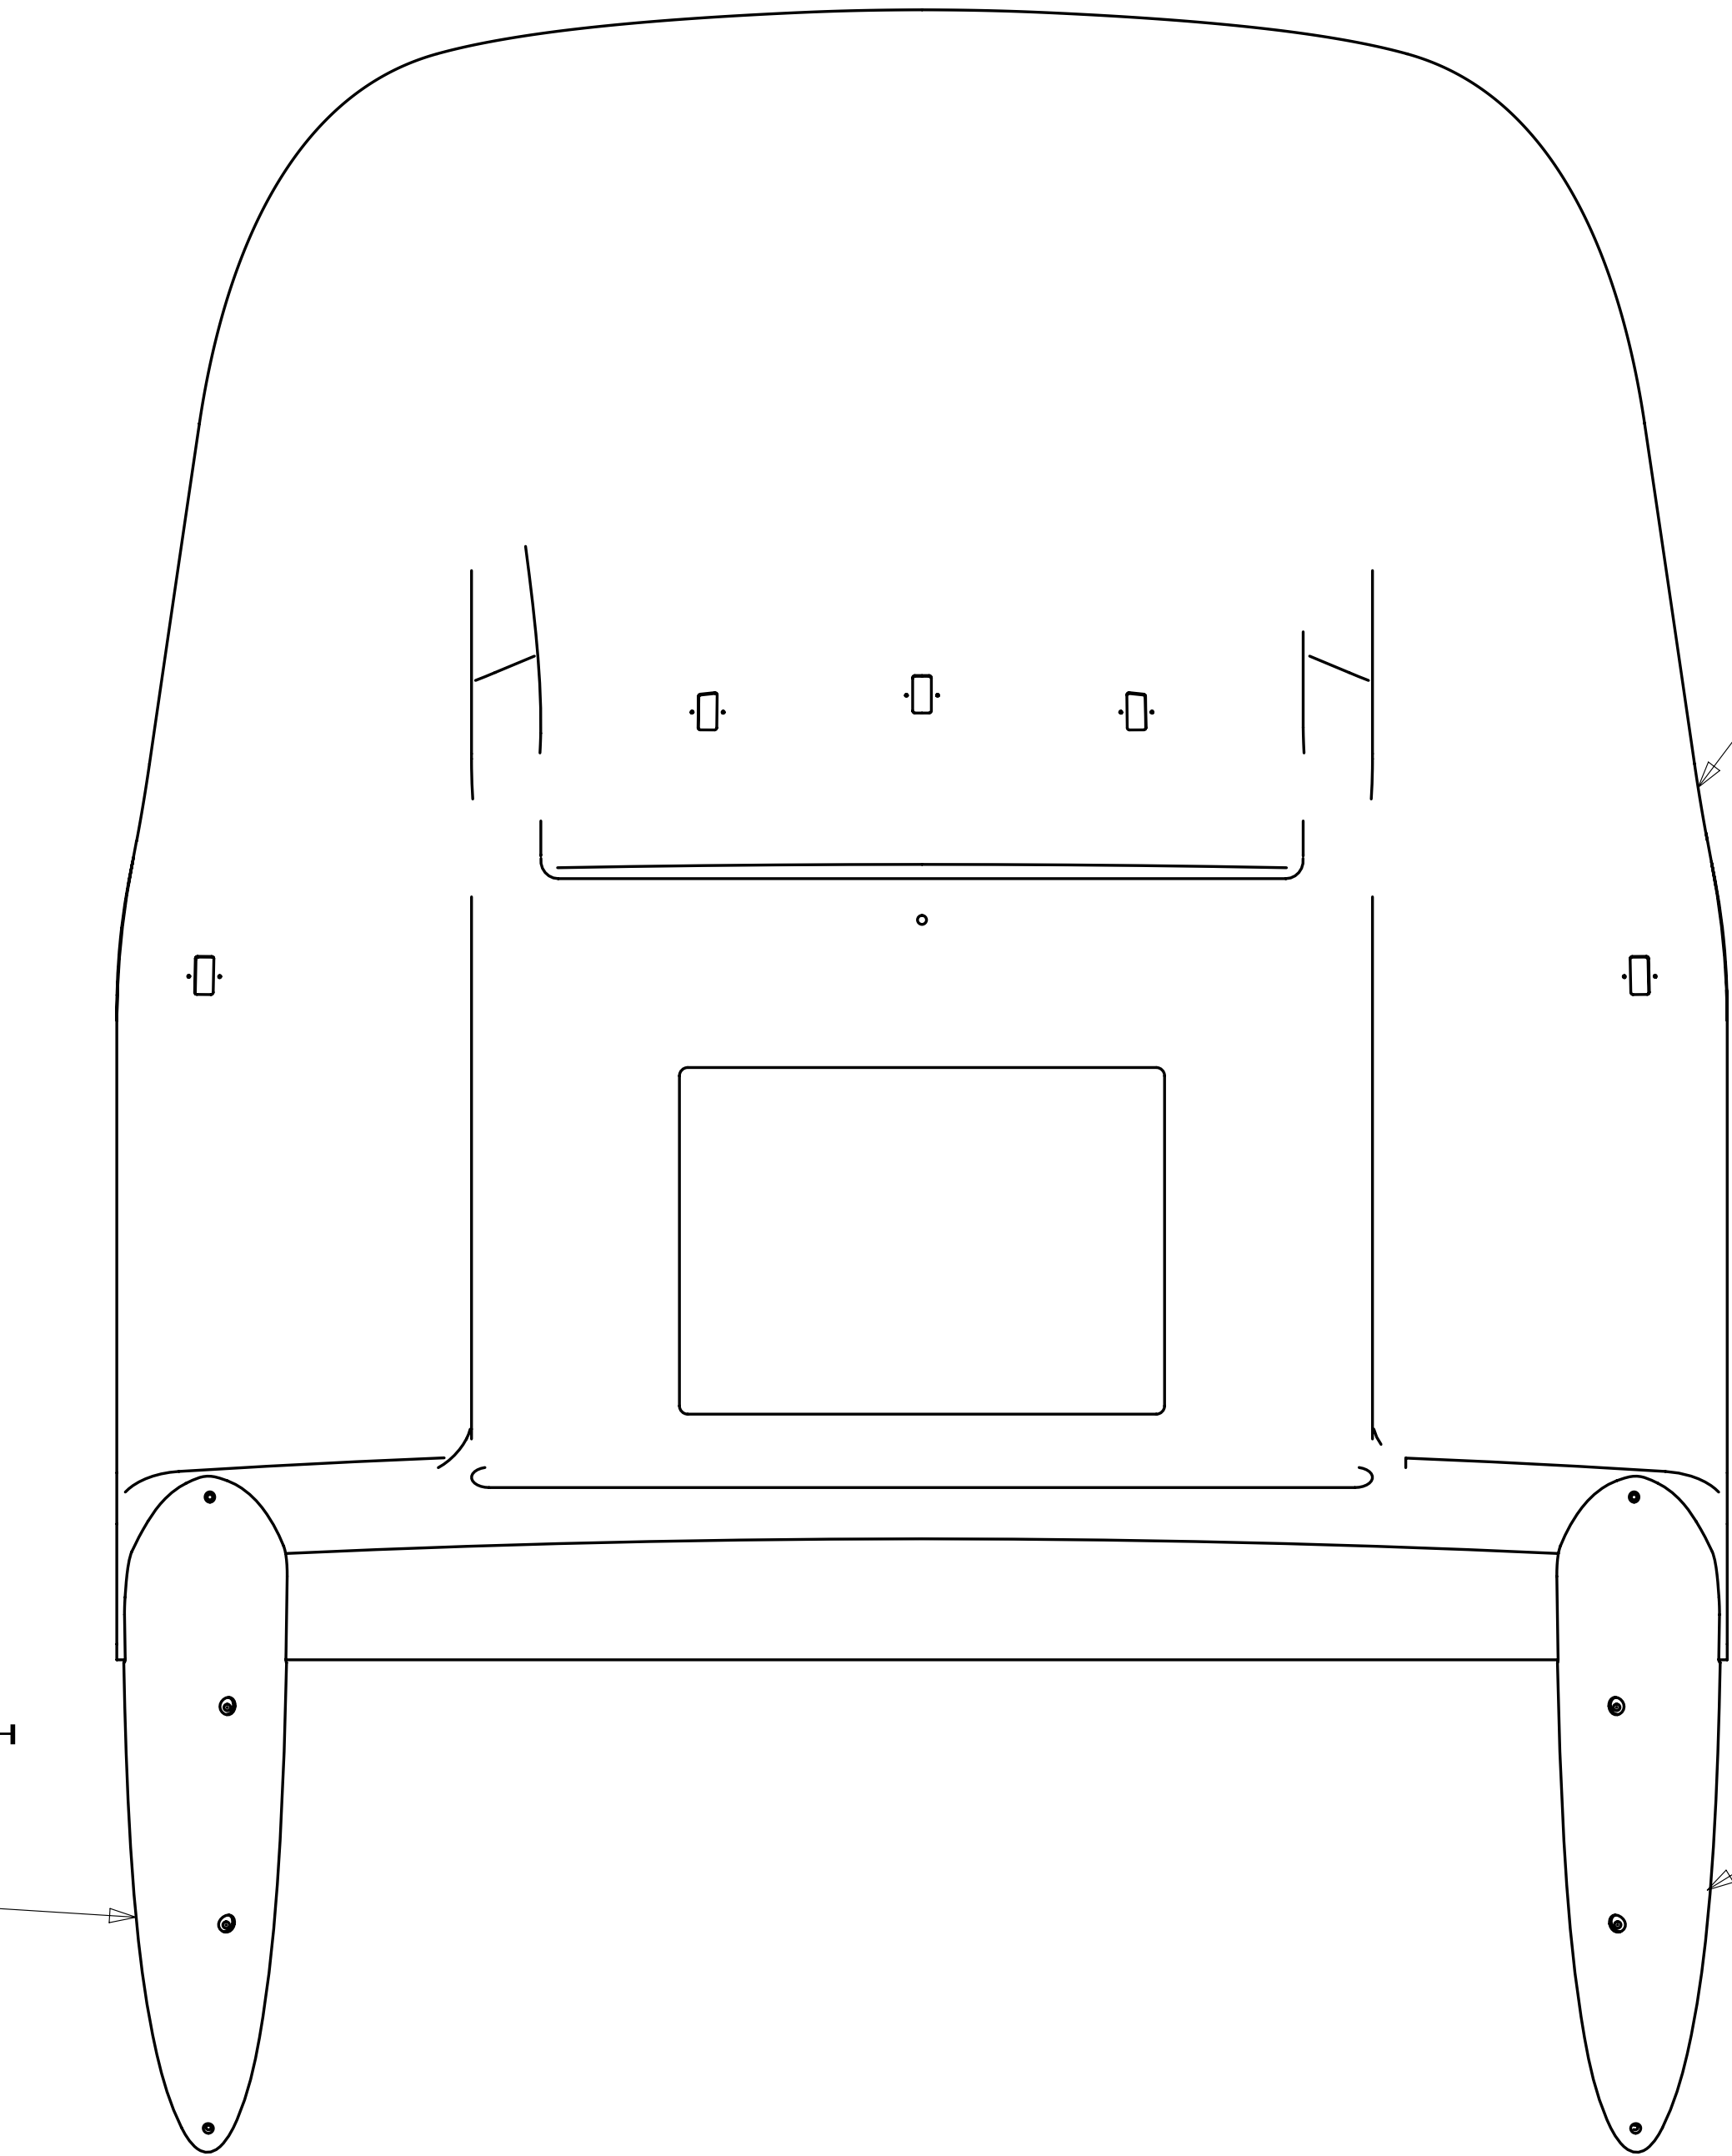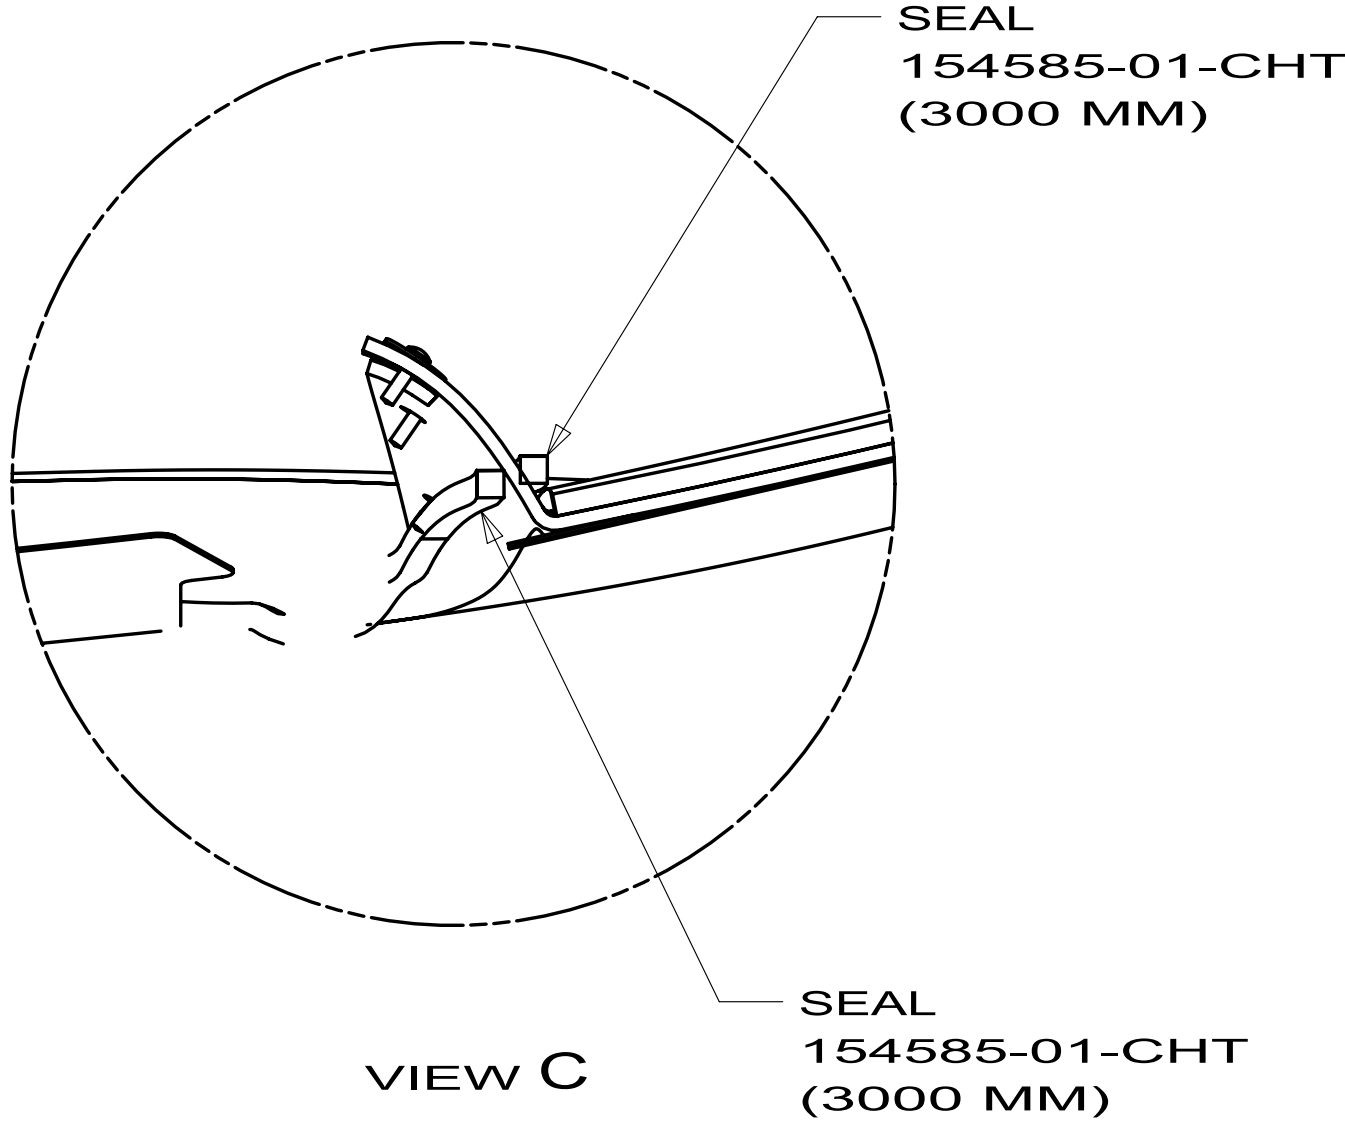

PANEL ASM-FRONT
160591-01-XXX
160591-02-XXX 808 OR 1L9
160591-03-XXX 094
HEADLINER ASM-CARPET W/FOAM
167068-01-01A
INSULATION-AIR POCKET W/FOIL
105290-01-000

5 TRIM ASM-ROOF, APPLIQUE,LH
160510-04-XXX
SCREW
G39-10-20U (2)
G62-08-12U (2)

TRIM ASM-ROOF, APPLIQUE,RH
160510-03-XXX
SCREW
G39-10-20U (2)
G62-08-12U (2)

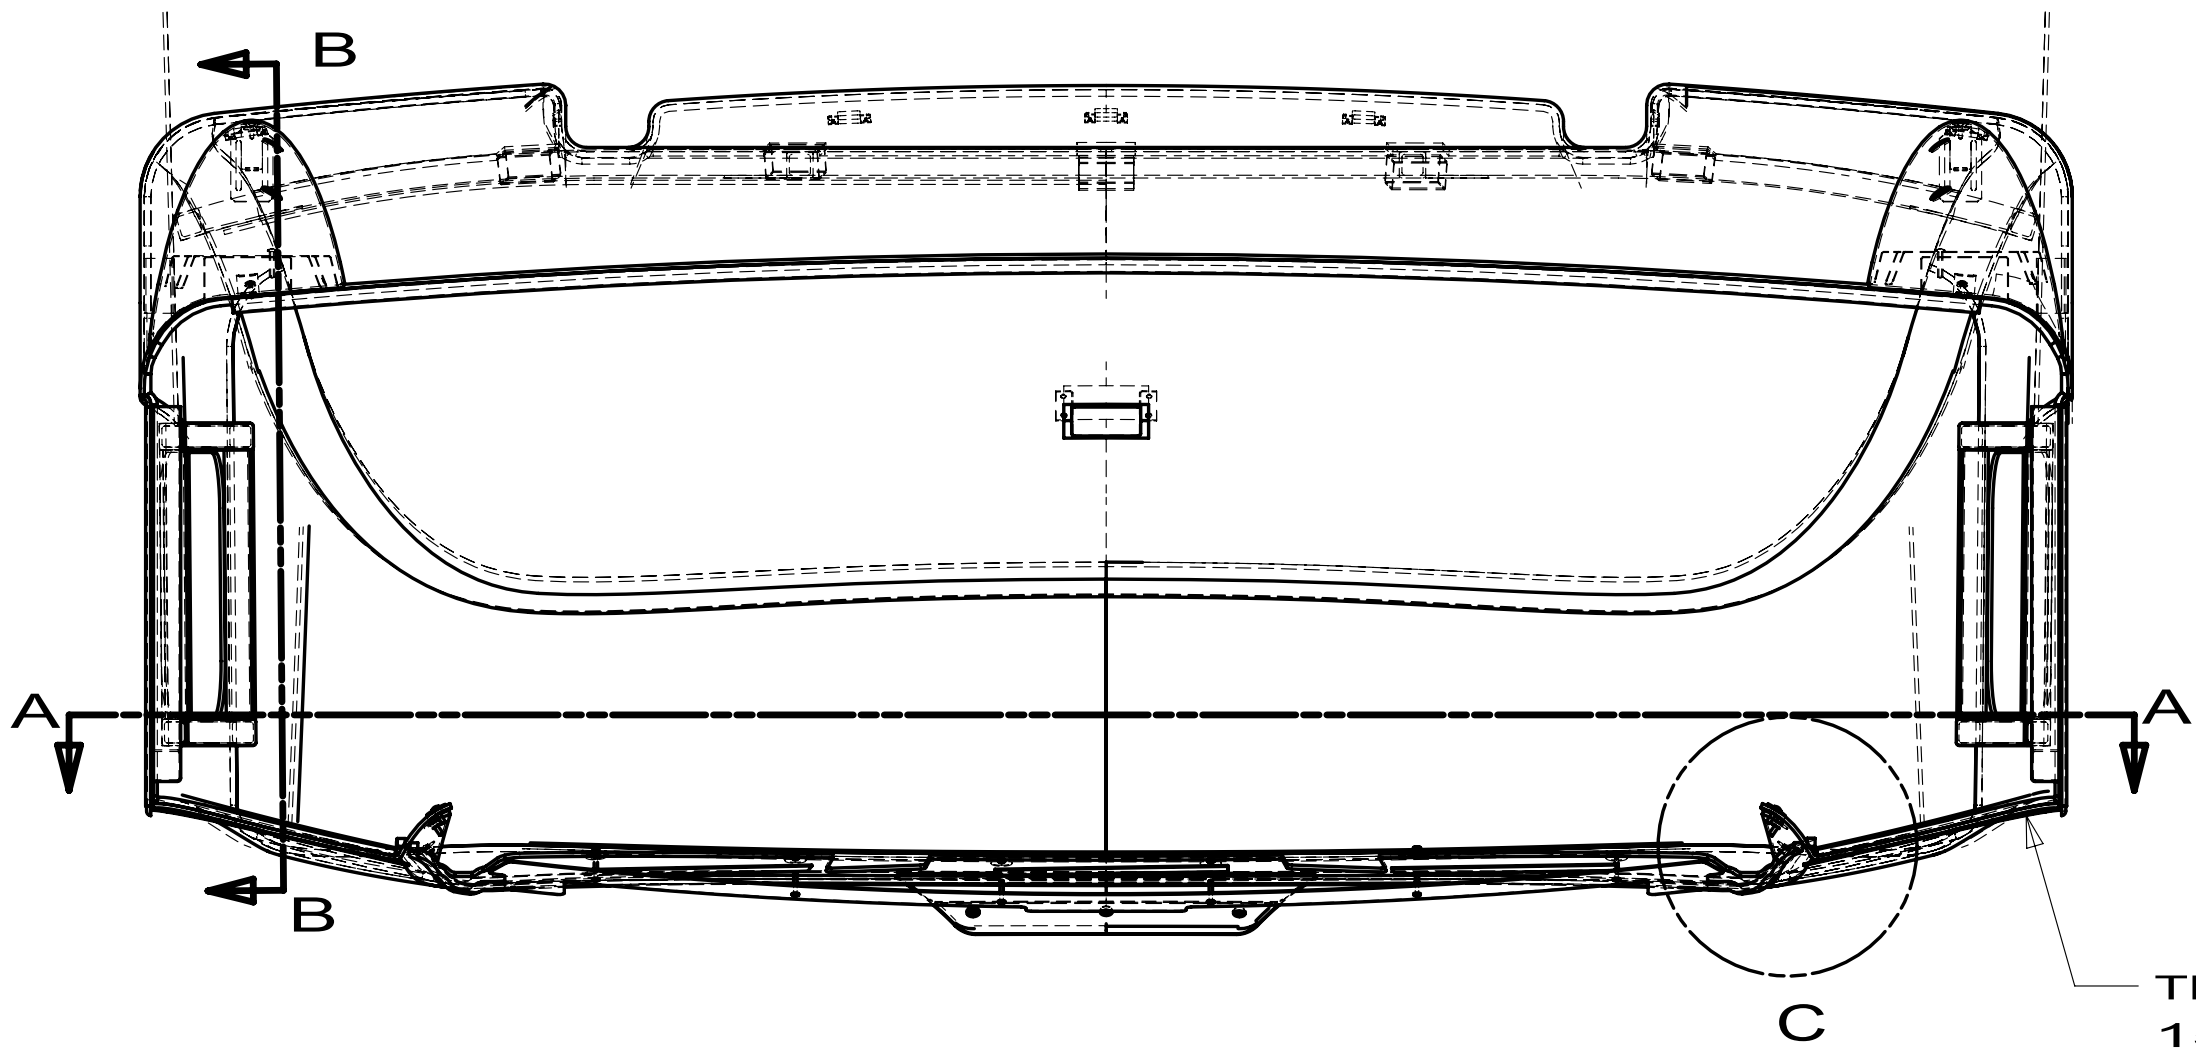

1L9 ENTERTAINMENT CENTER-CABOVER
808 CABINET, FRONT CAB OVERHEAD
094 WINDOWS - SE-GI


- 9 AS REQUIRED.
- 8 REUSE THE DODGE SPRINTER SCREWS AND WASHERS FROM THE RUNNING LIGHTS TO FASTEN TRIM PANEL.
- 7 TORQUE BOLTS TO 2 ft-lbs.
- 6 USE UNDERCOATING 100053-04-000 TO COAT ANY HOLES THAT PENETRATE CAB ROOF.
- 5 USE SILICONE, 131264-01-CHT A/R TO BOND TRIM ASM-ROOF TO CHANNEL-APPLIQUE ROOF.
- 4 CLEAN BOTH SURFACES WITH ISOPROPYL ALCOHOL. USE TAPE-TRANSFER 76322-03-000 TO SECURE.
- 3 USE ADHESIVE-RESIN 112901-03-000 (2) FOR BONDING PARTS.

2. ALL SEALANTS MUST BE APPLIED PER SPECIFICATIONS IN THE MANUFACTURING SEALANT MANUAL.

1. SEE DRAWING 112481-01-000 FOR INSTRUCTIONS ON APPLICATION.


NOTES:

WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE		
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS		
P.E.	FIRST USED		
M.E.	08 500 SERIES		
DSNR	UNSPECIFIED TOLERANCES ARE:		
WHOLE DIM (X) : 3		MATERIAL:	
ONE-PLACE (X.X) : 1.5			
TWO-PLACE (X.XX) : 0.50			
ANGLE : 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: BODY PANEL INSTL-FRONT			
SHEET 1 OF 2	PART NO	160142	REV
REF:		1	

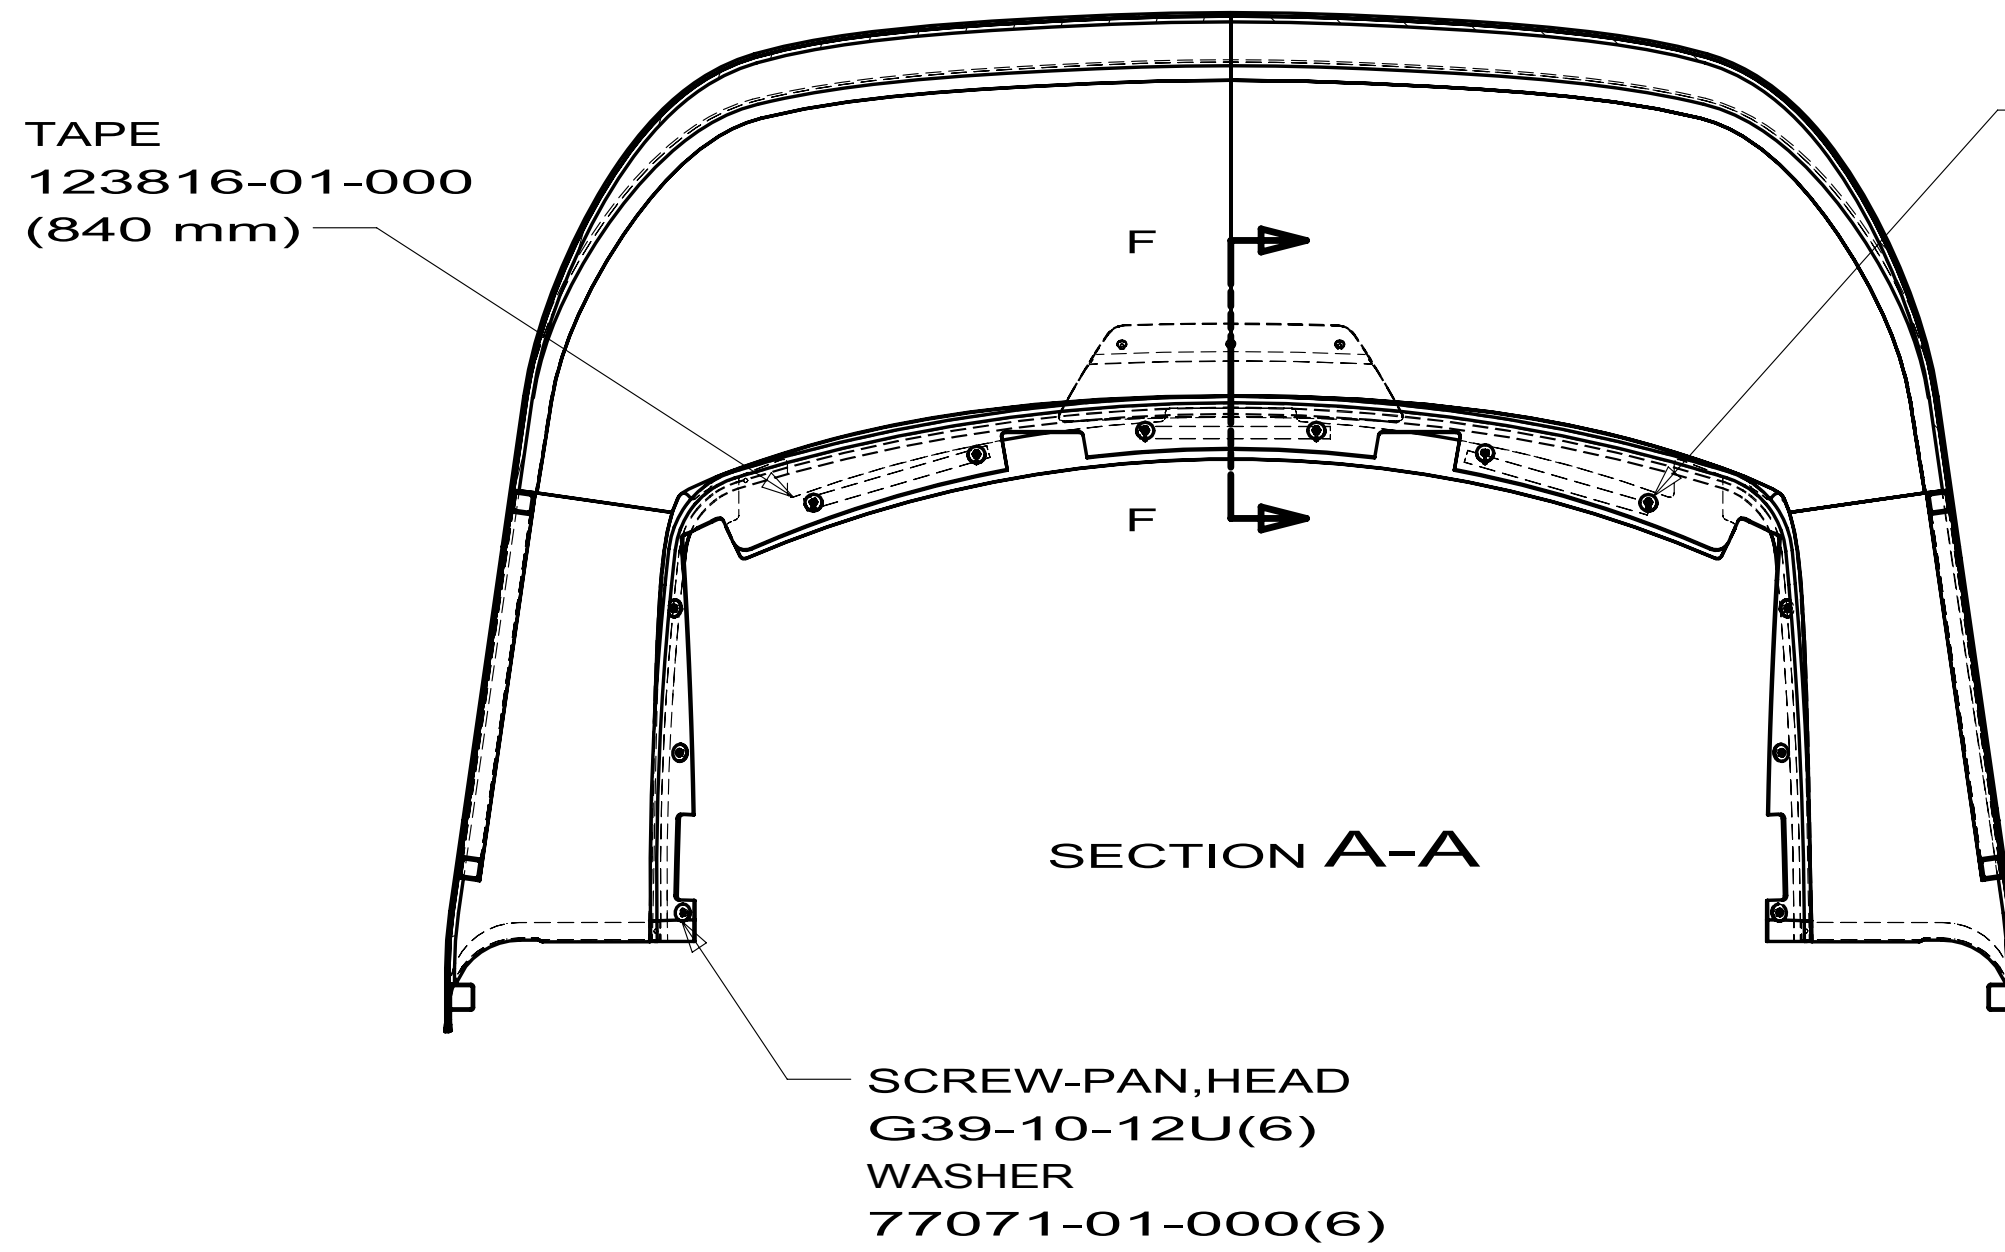


TRIM-CAP, ROOF
167753-01-CHT
TAPE
173983-01-CHT
(400)
TAPE-FOAM
76322-13-000
(50)(2)


SECTION F-F

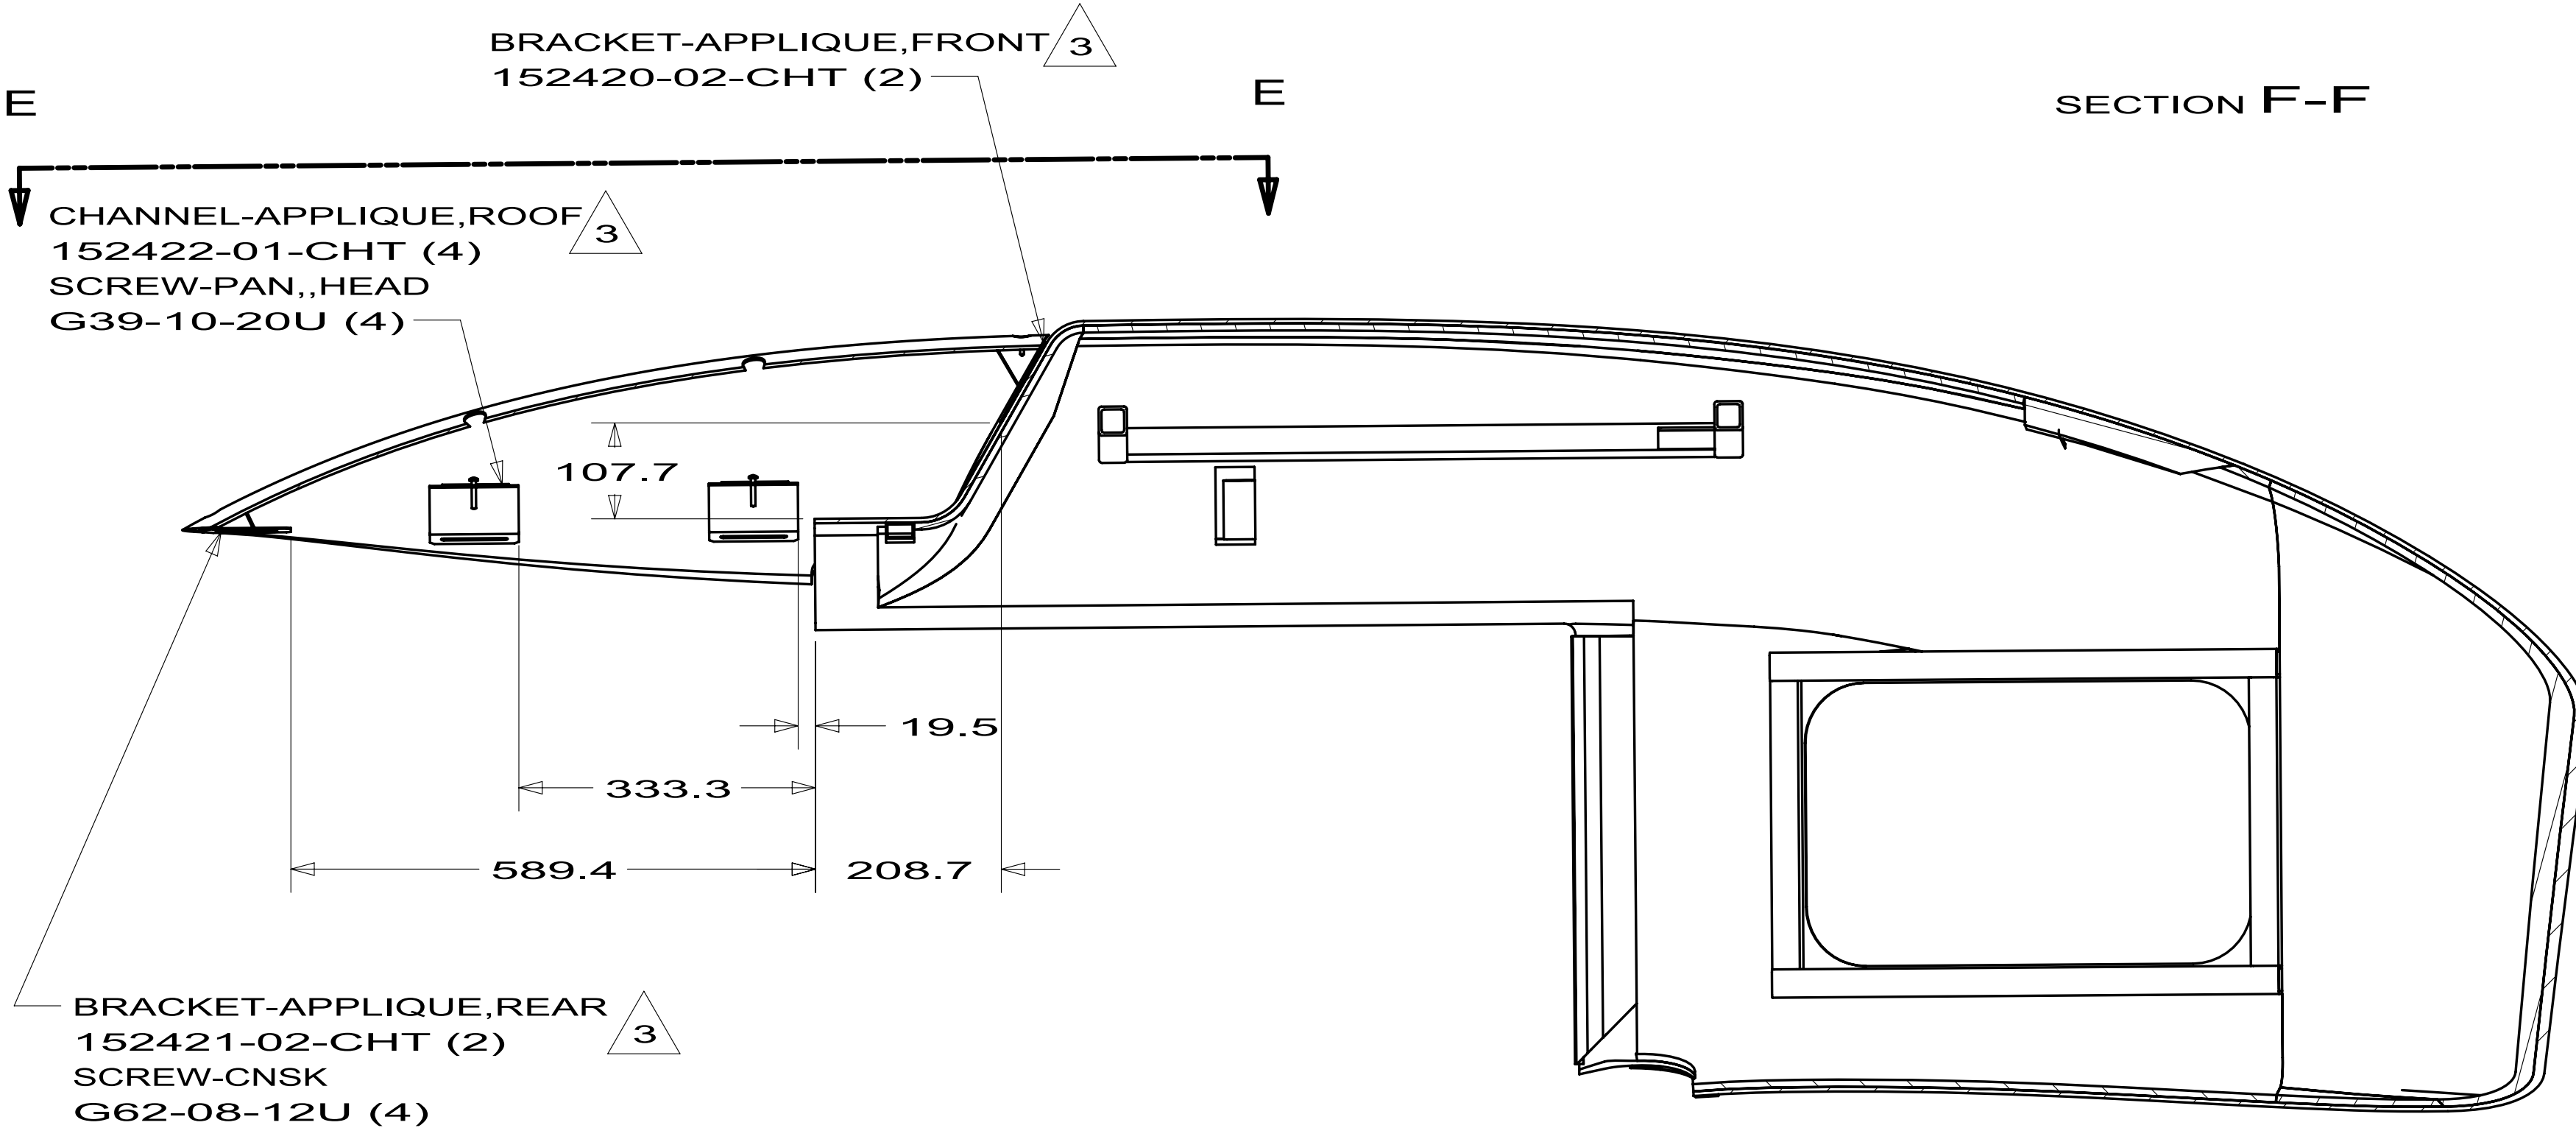

SECTION B-B

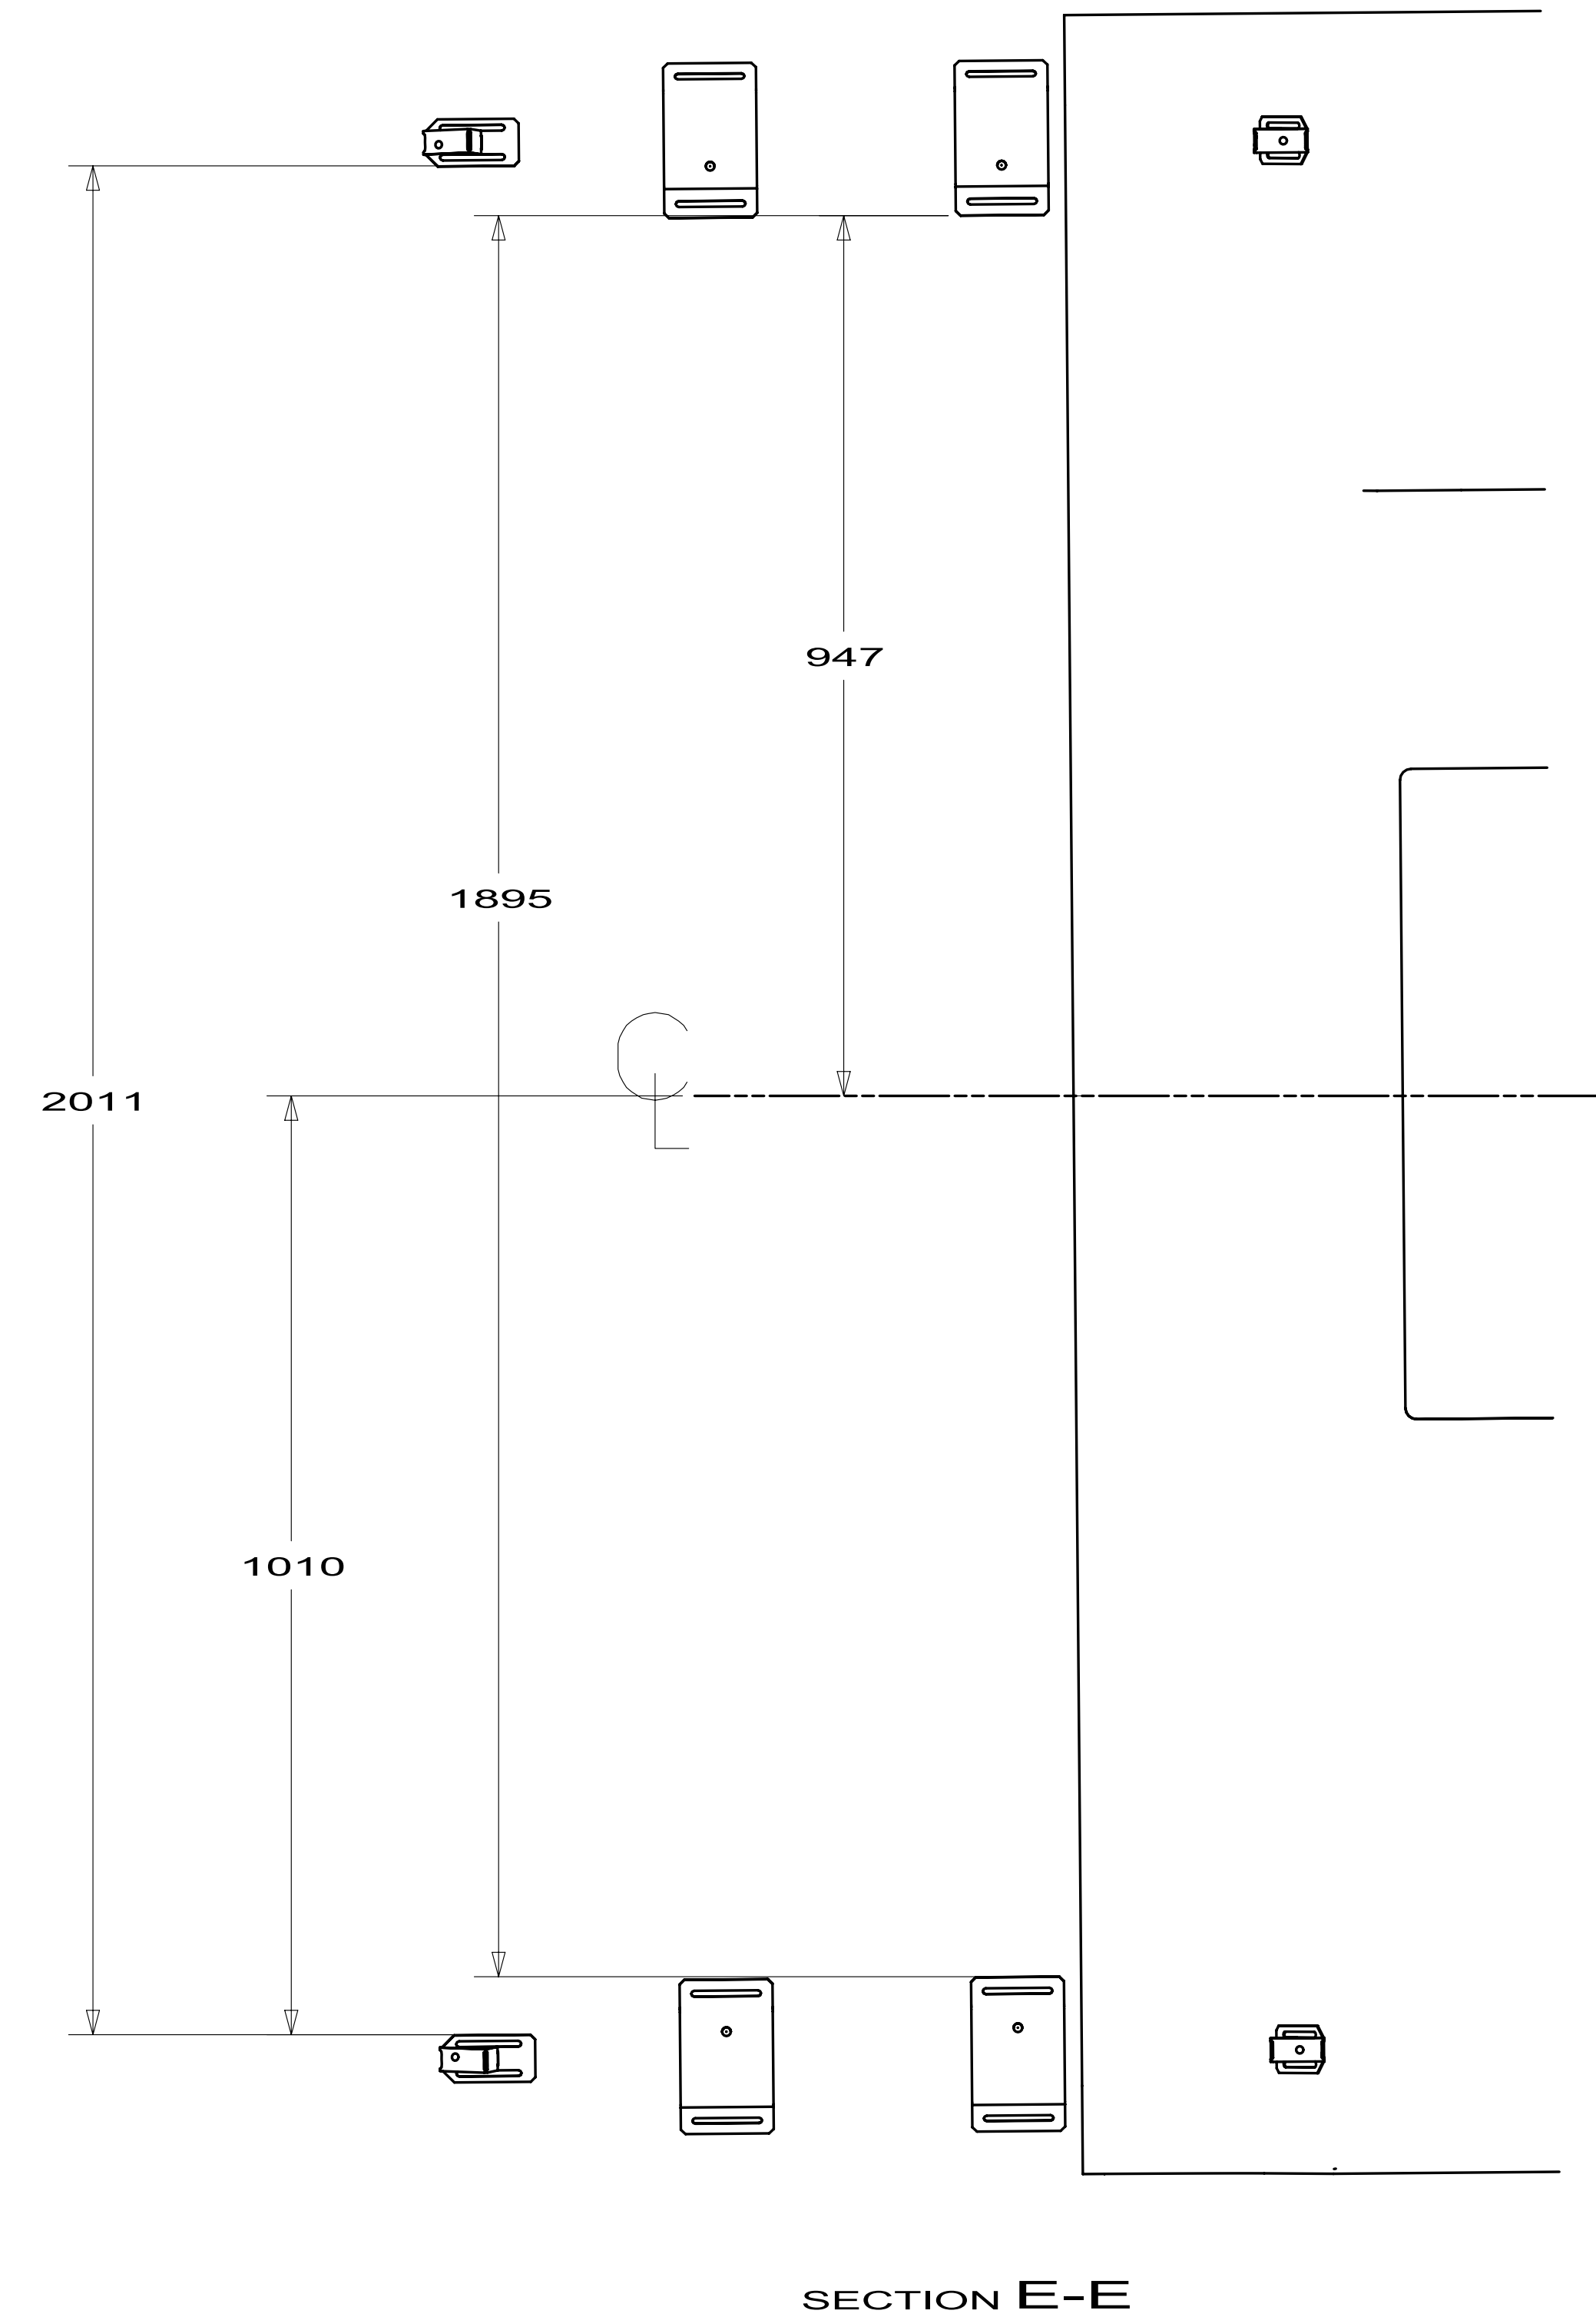

FIRST USED		
08 500 SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 2	PART NO 160142	REV

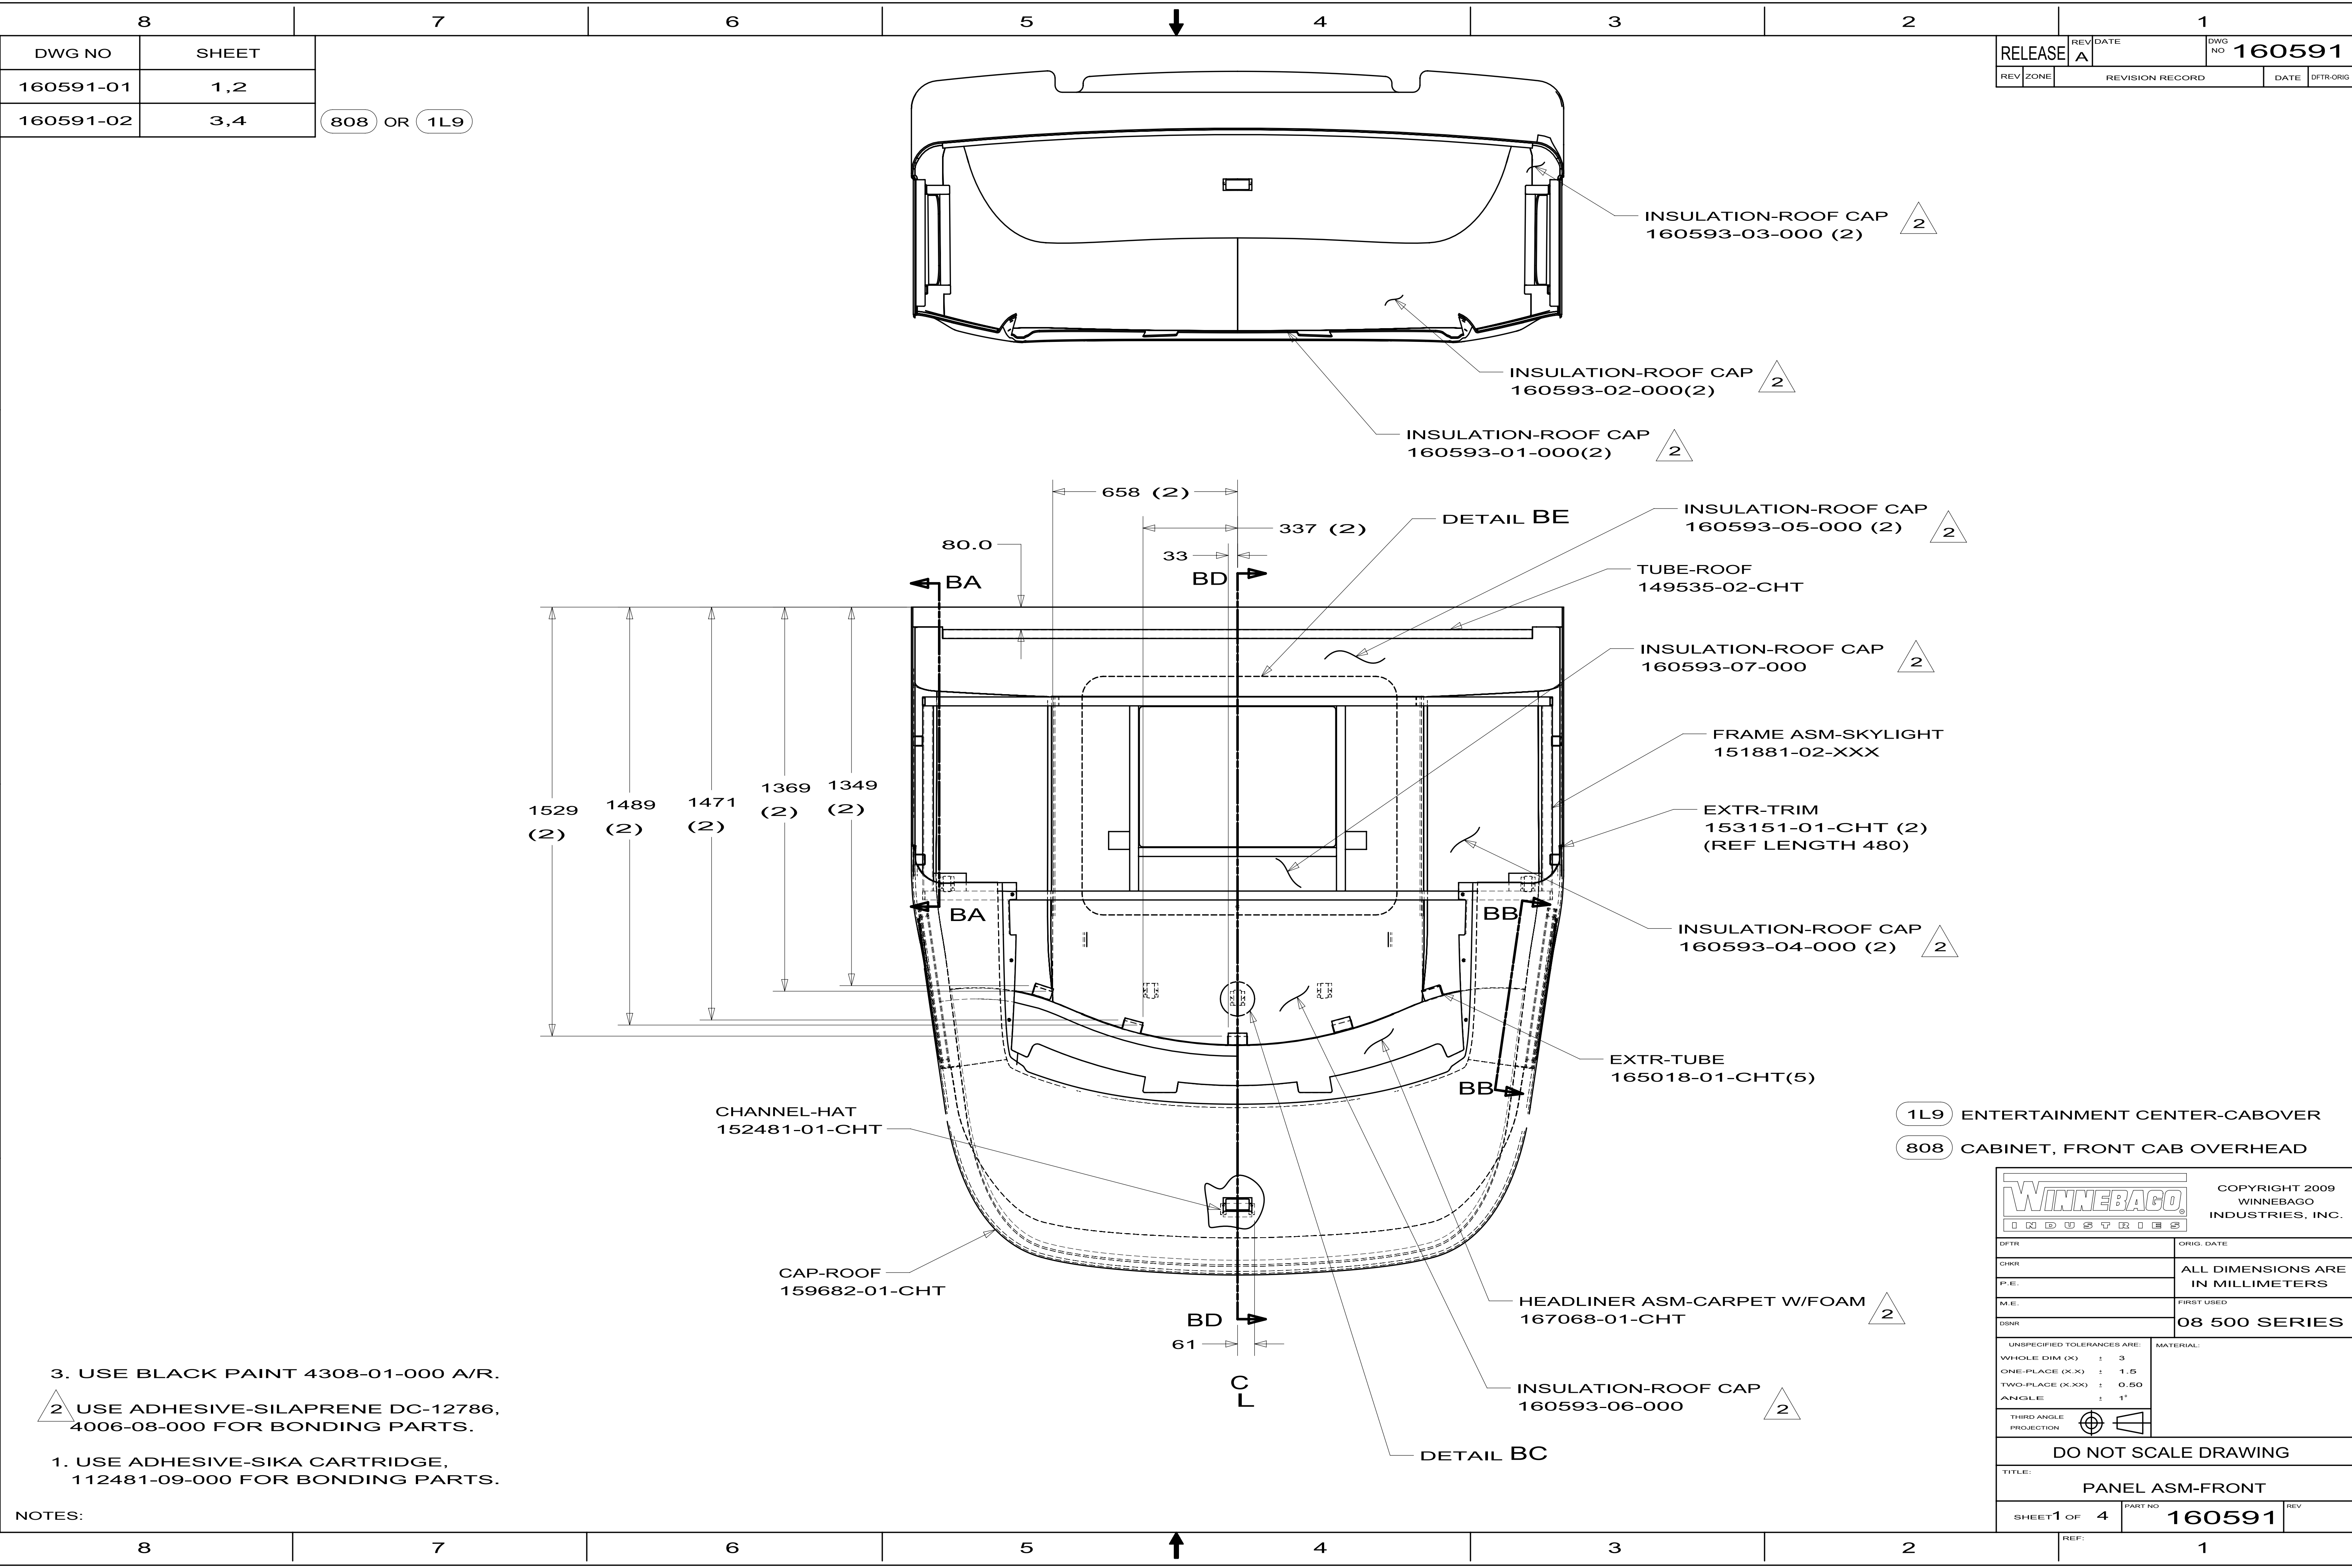


DWG NO	SHEET
160591-01	1,2
160591-02	3,4


808 OR 1L9

RELEASE	REV	DATE	DWG NO	160591
	A			
REV	ZONE	REVISION RECORD	DATE	DTR-ORIG


3. USE BLACK PAINT 4308-01-000 A/R.
2. USE ADHESIVE-SILAPRENE DC-12786, 4006-08-000 FOR BONDING PARTS.
1. USE ADHESIVE-SIKA CARTRIDGE, 112481-09-000 FOR BONDING PARTS.

1L9 ENTERTAINMENT CENTER-CABOVER
808 CABINET, FRONT CAB OVERHEAD


WINNEBAGO® INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT#		ORIG. DATE	
CHK#		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DS#R		08 500 SERIES	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
PANEL ASM-FRONT			
SHEET1 OF 4		PART NO	REV
		160591	

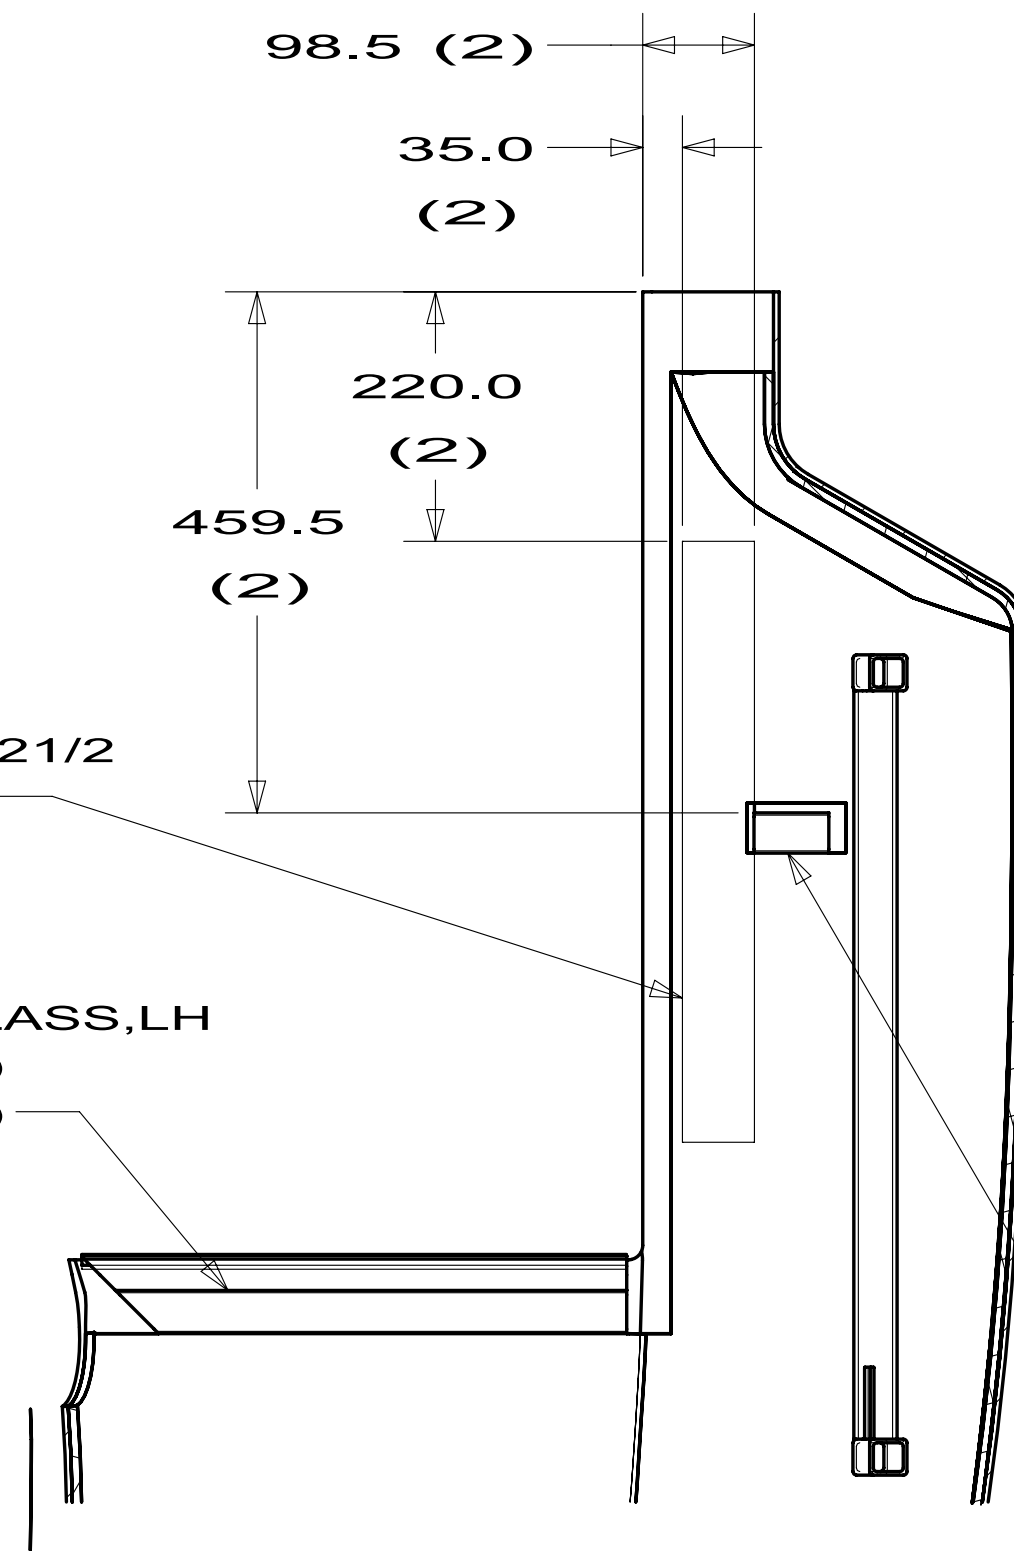

SECTION BA-BA
LH SHOWN
RH OPPOSITE

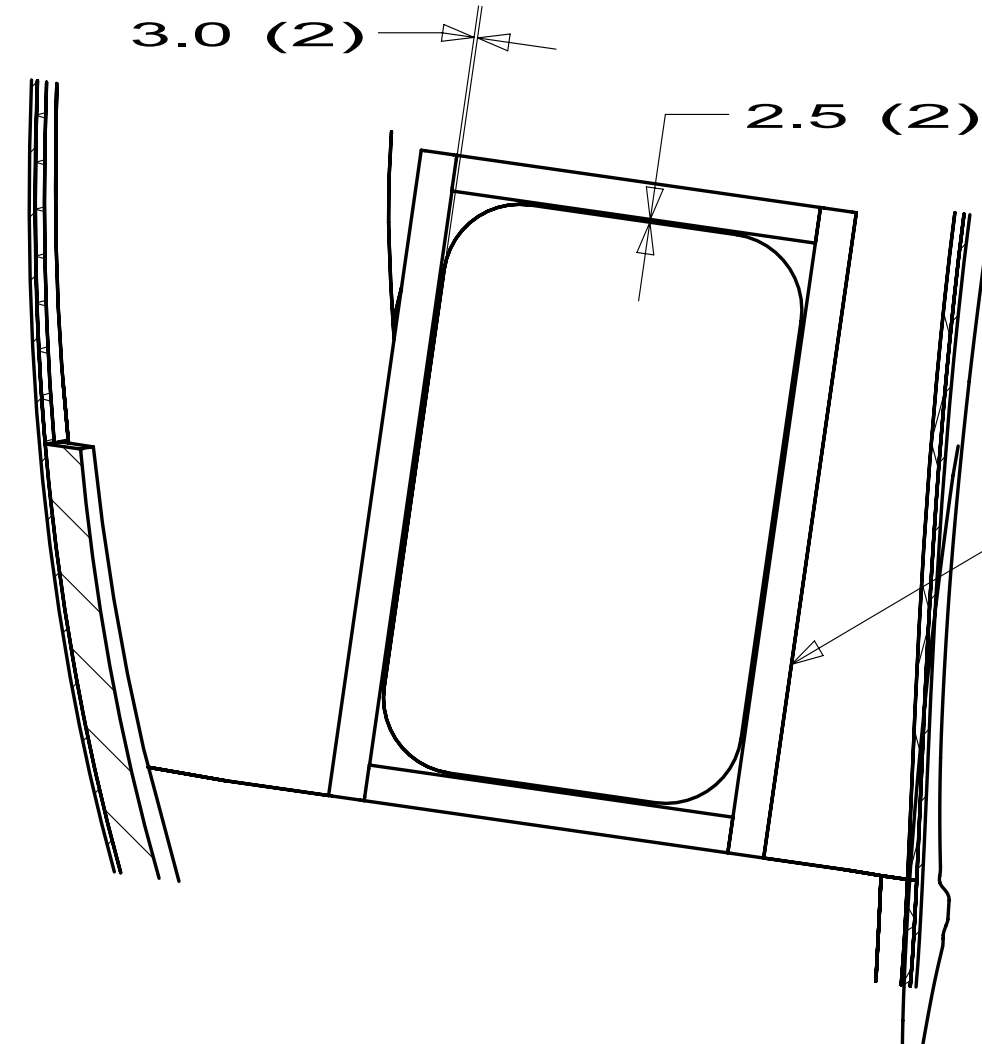


SECTION BB-BB
RH SHOWN
LH OPPOSITE

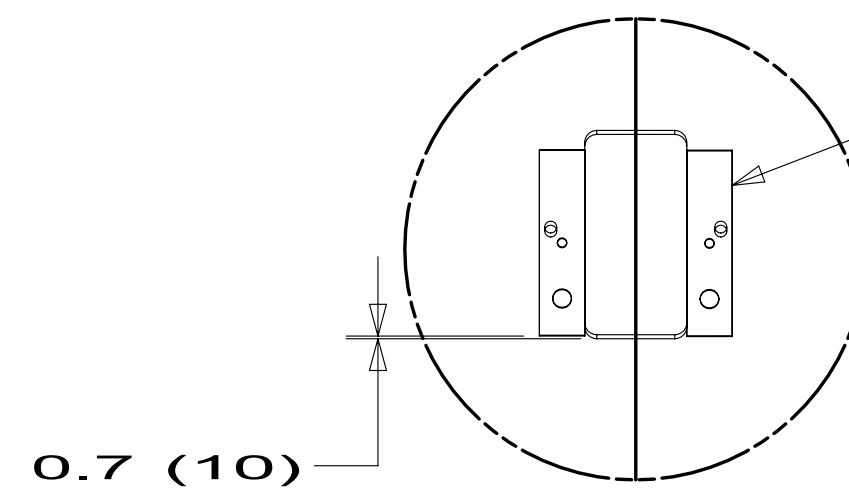


DETAIL BC

STRAP - W/HOLES
120840-26-CHT (10)

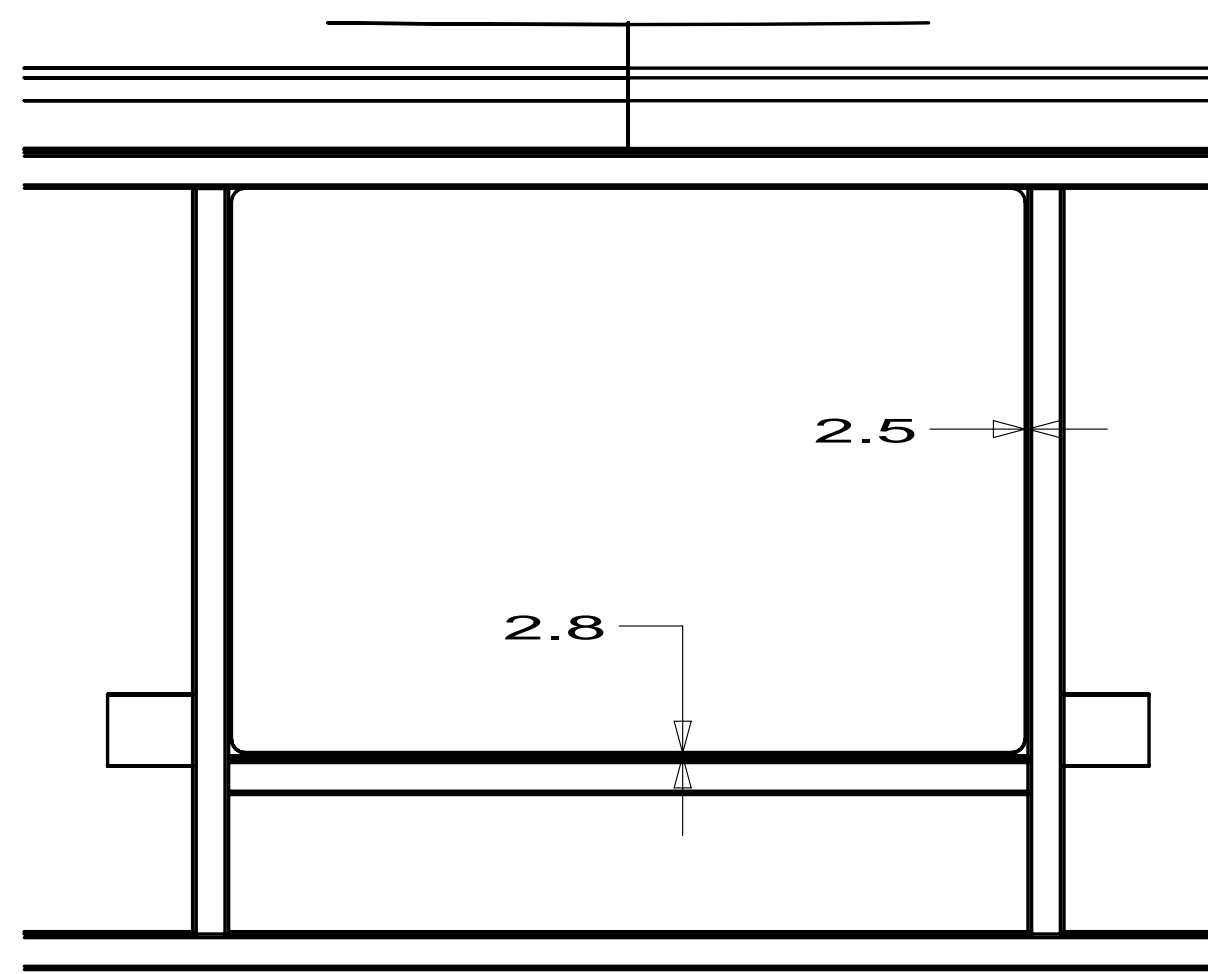


DETAIL BE

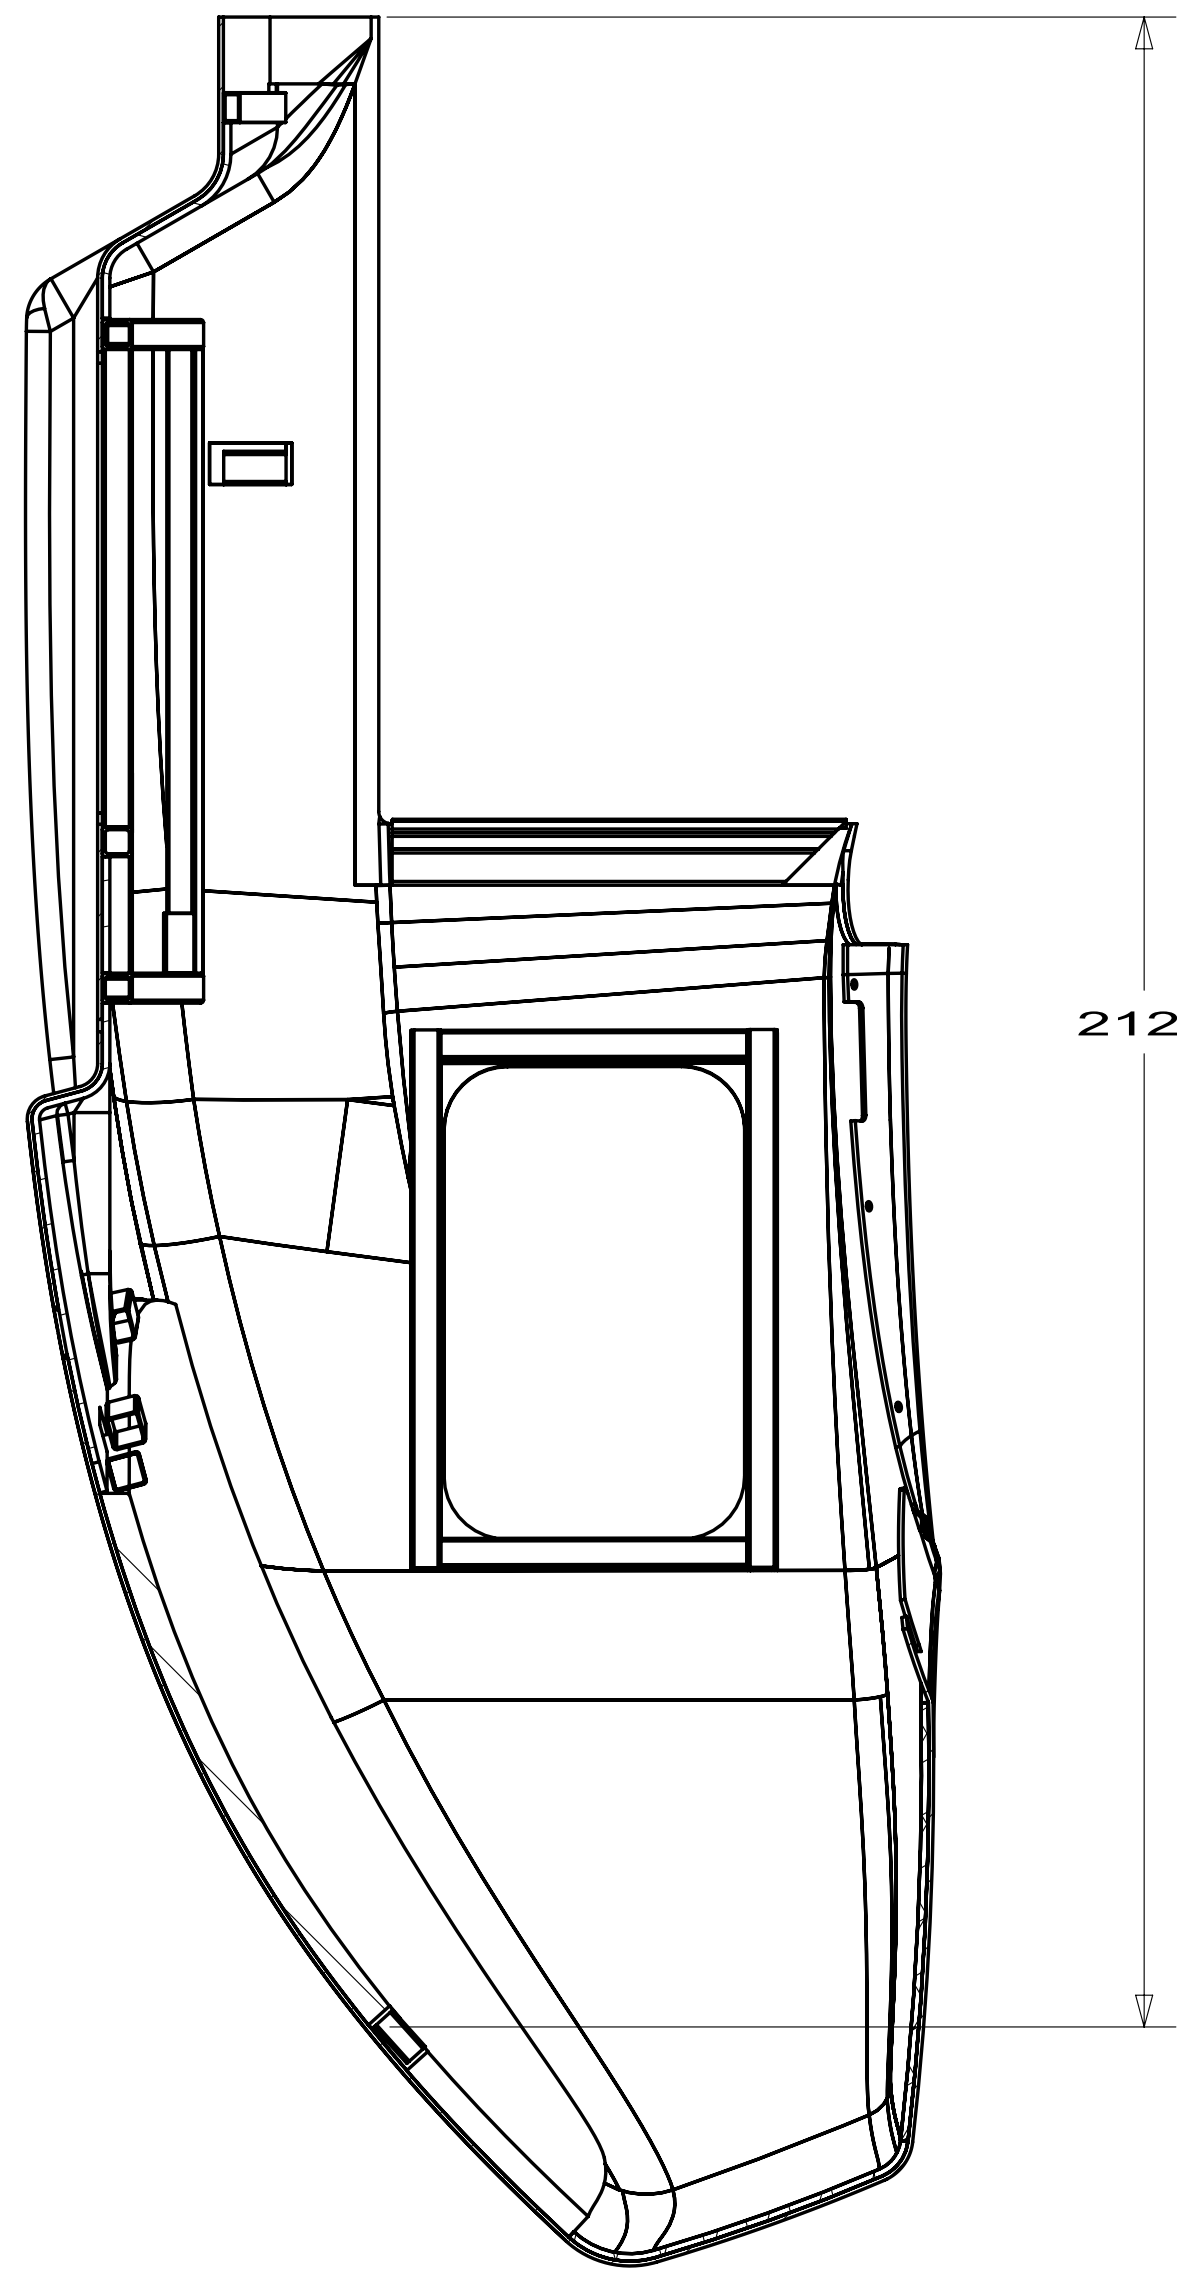


SECTION BD-BD


FIRST USED		
08 500 SERIES		
DO NOT SCALE DRAWING		
TITLE:		
PANEL ASM-FRONT		
SHEET 2	PART NO	REV
	160591	

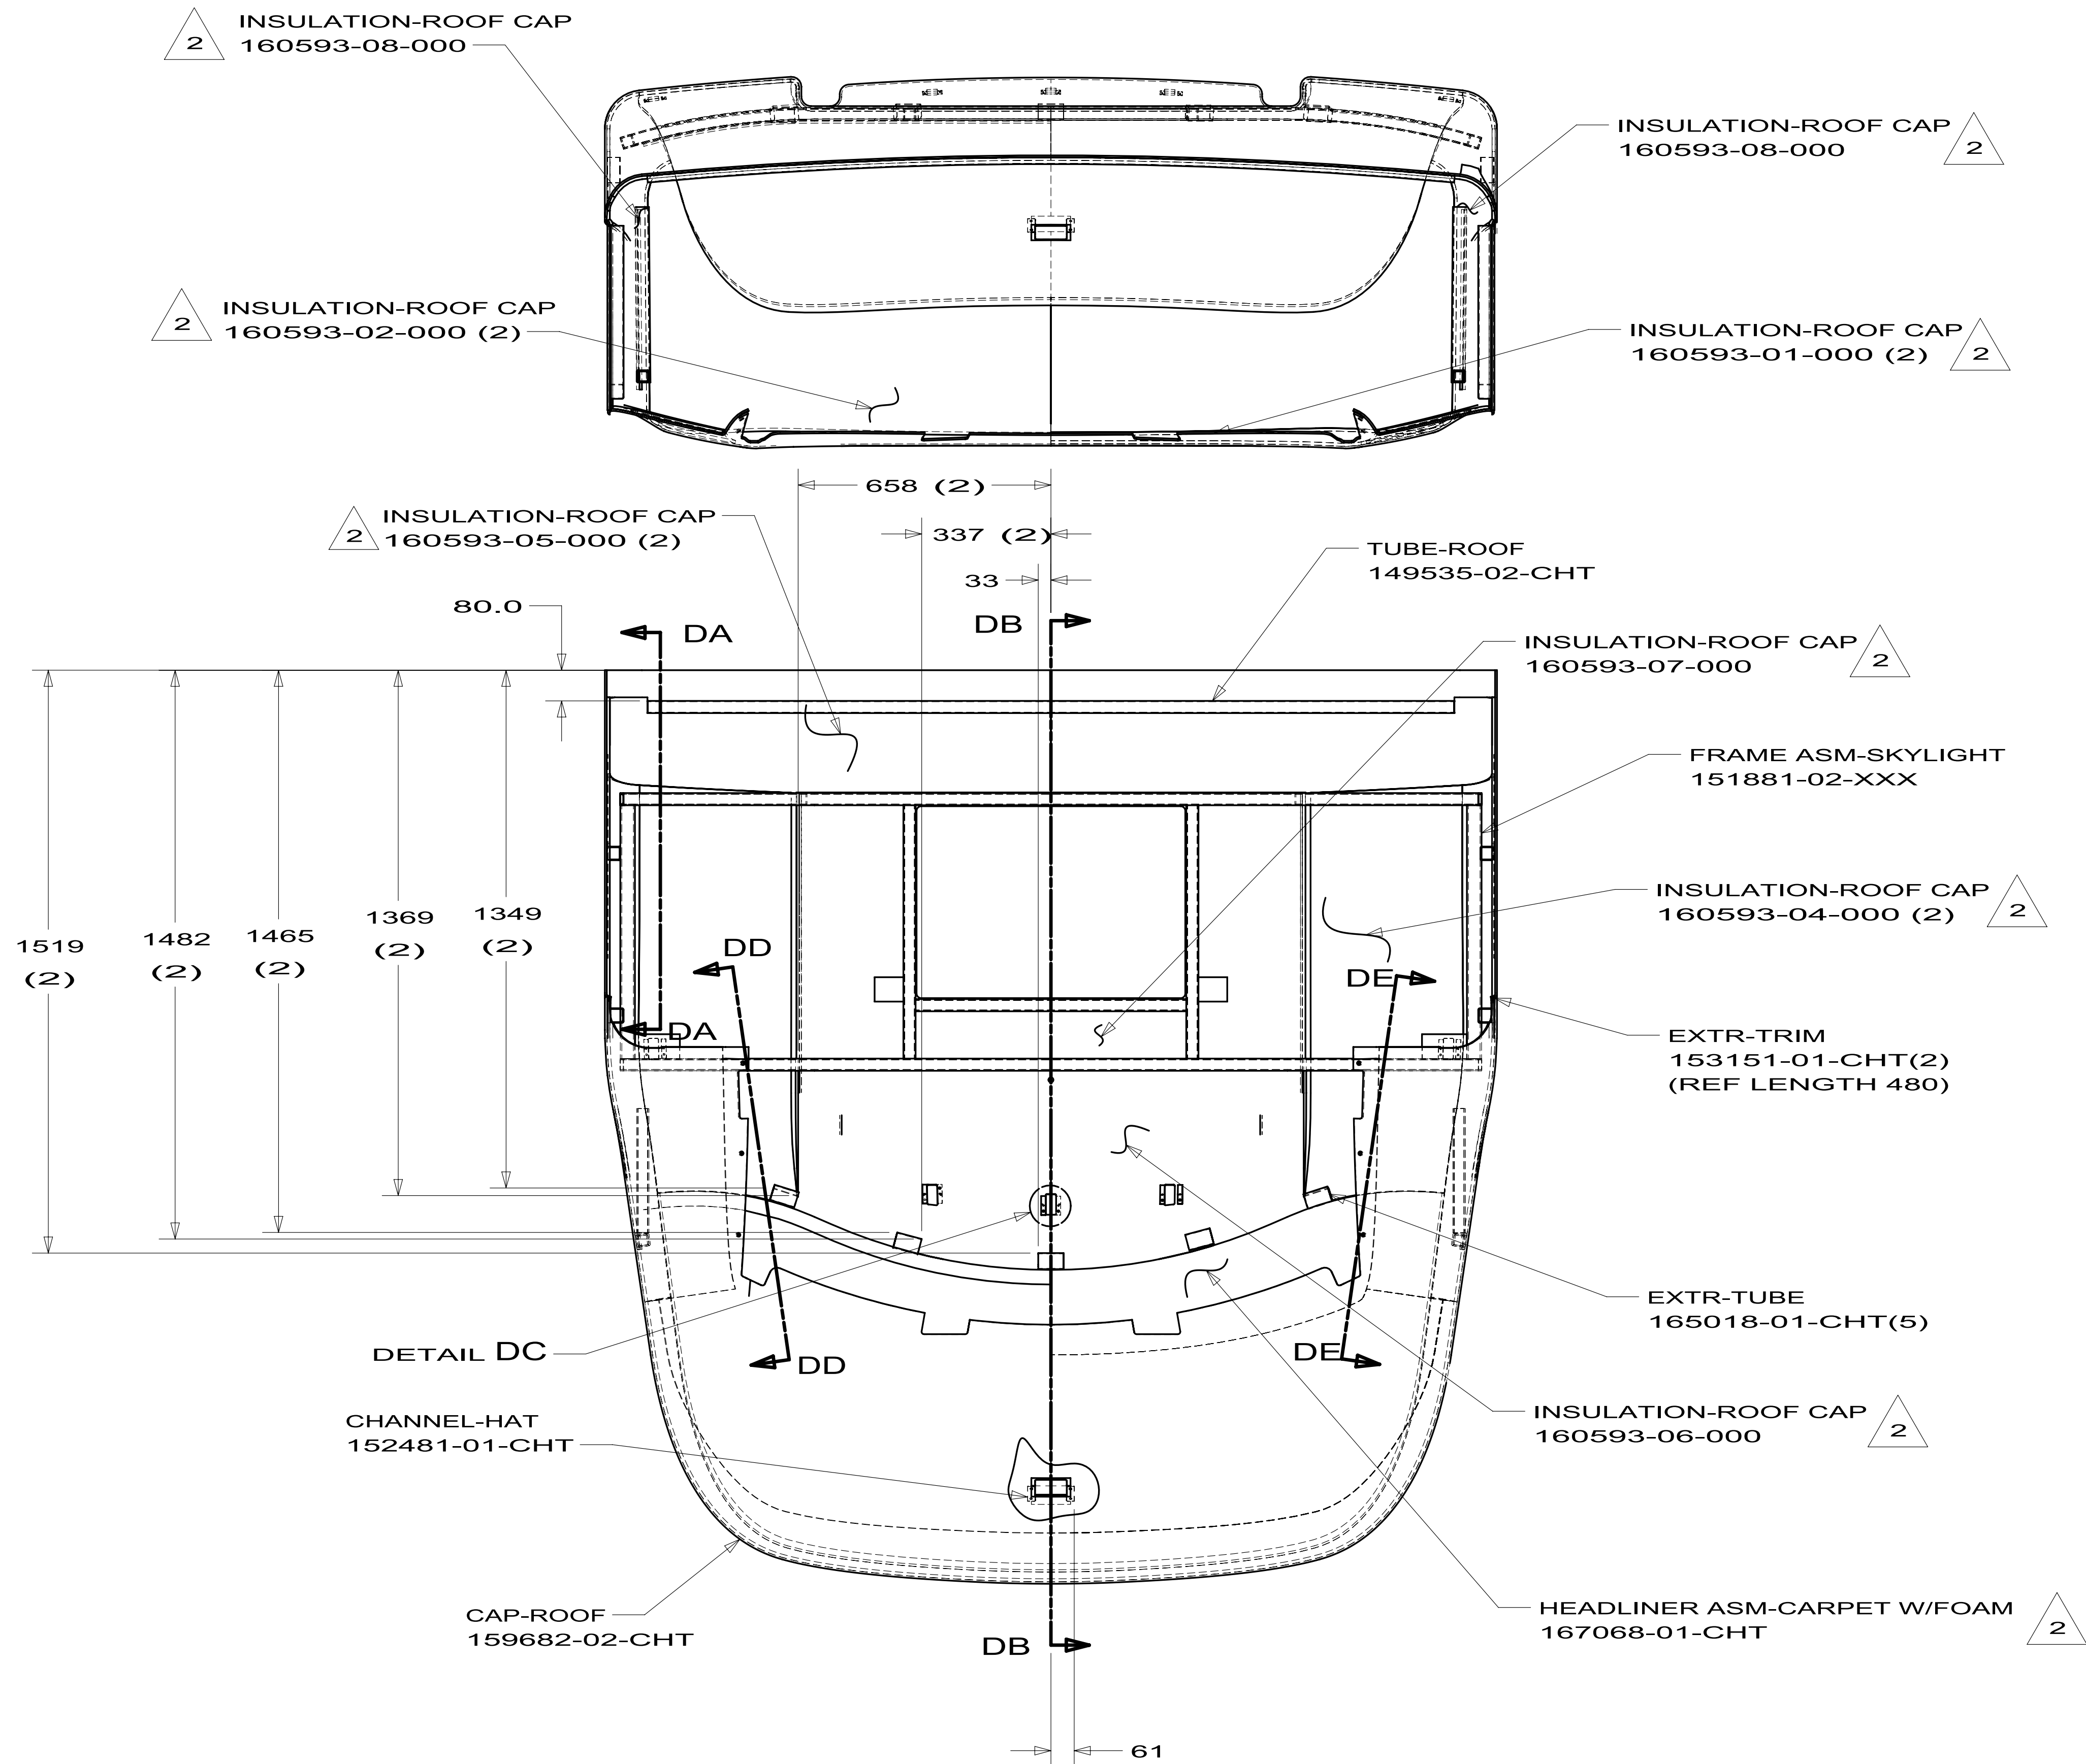



FIRST USED		
08 500 SERIES		
DO NOT SCALE DRAWING		
TITLE:		
PANEL ASM-FRONT		
SHEET 3	PART NO	REV
	160591	

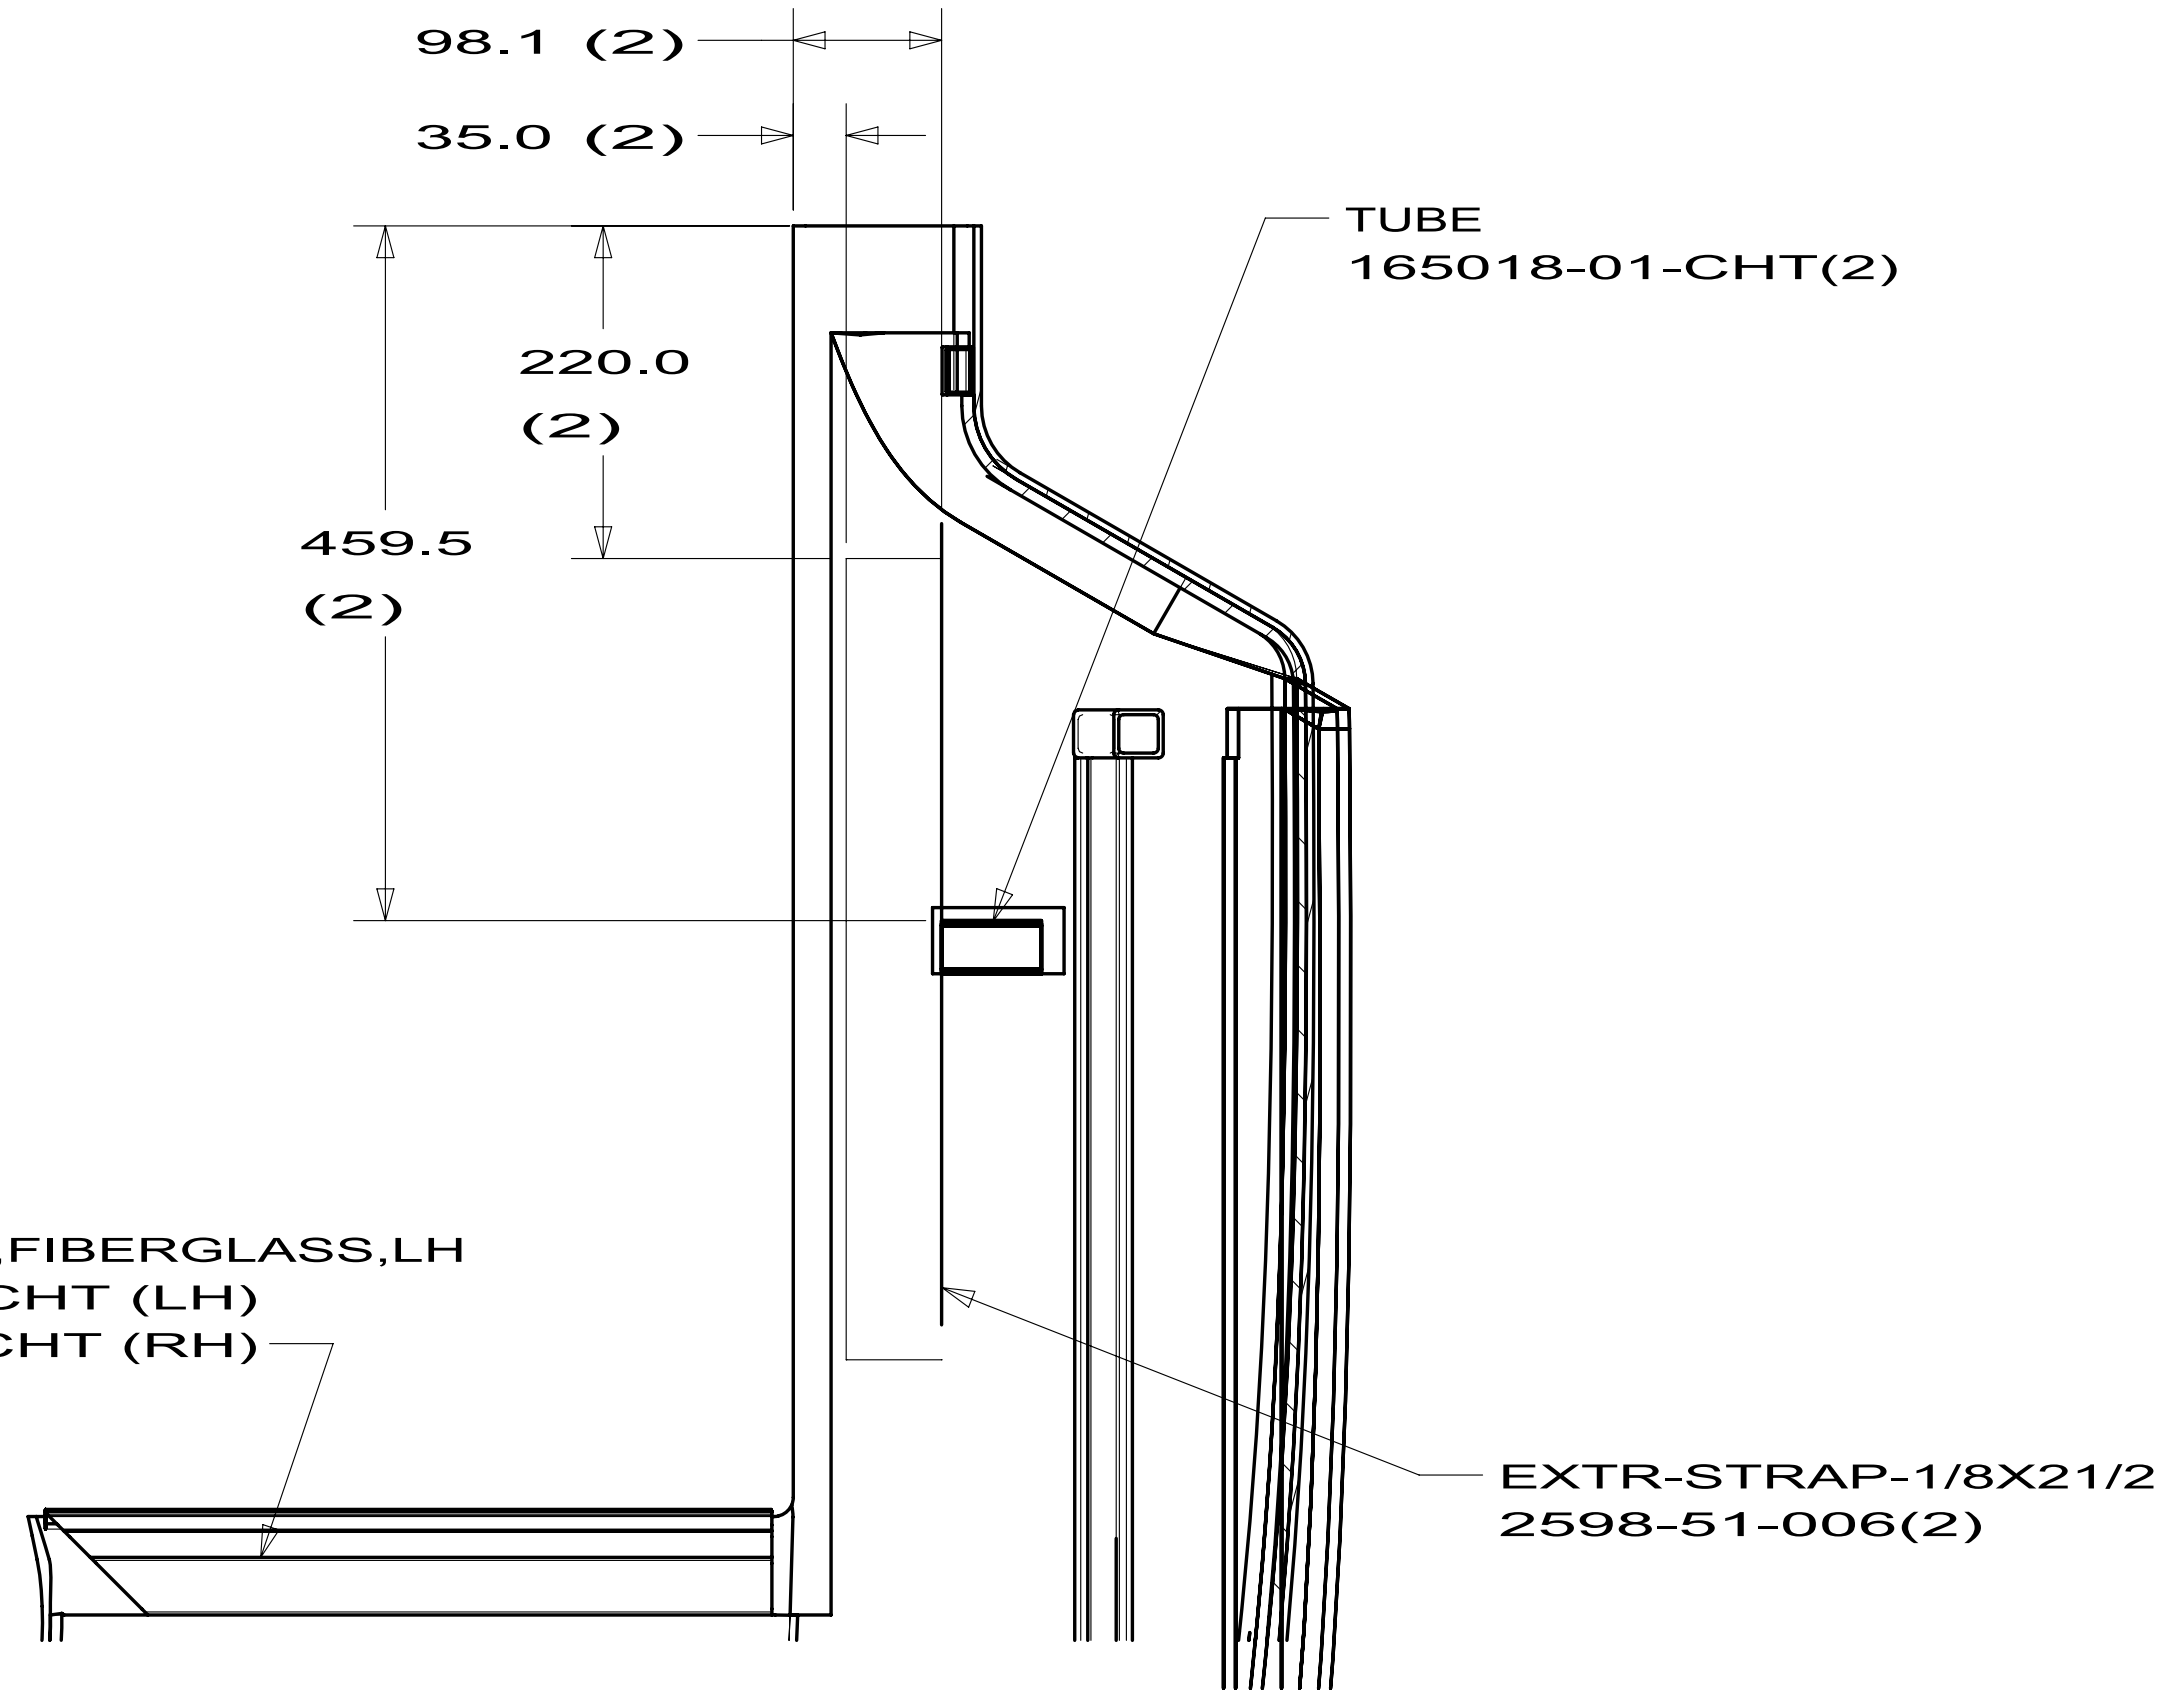


SECTION DA-DA

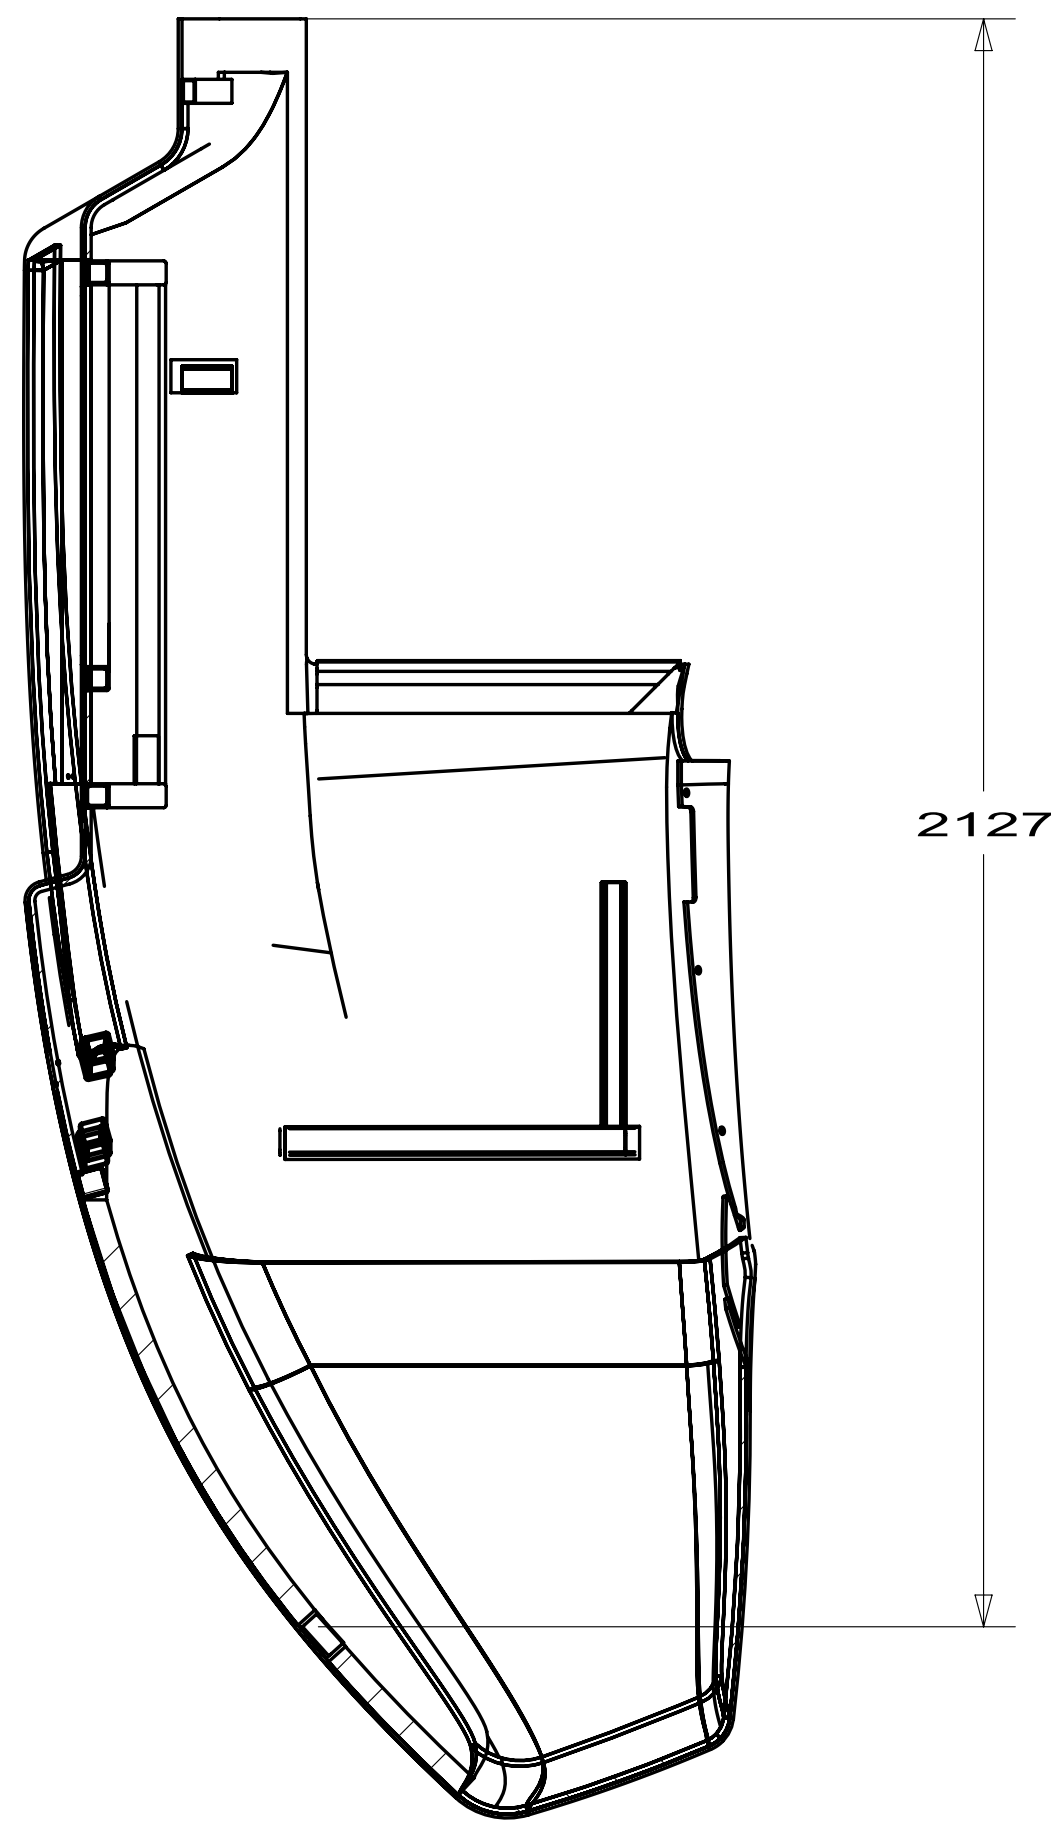

SECTION DB-DB

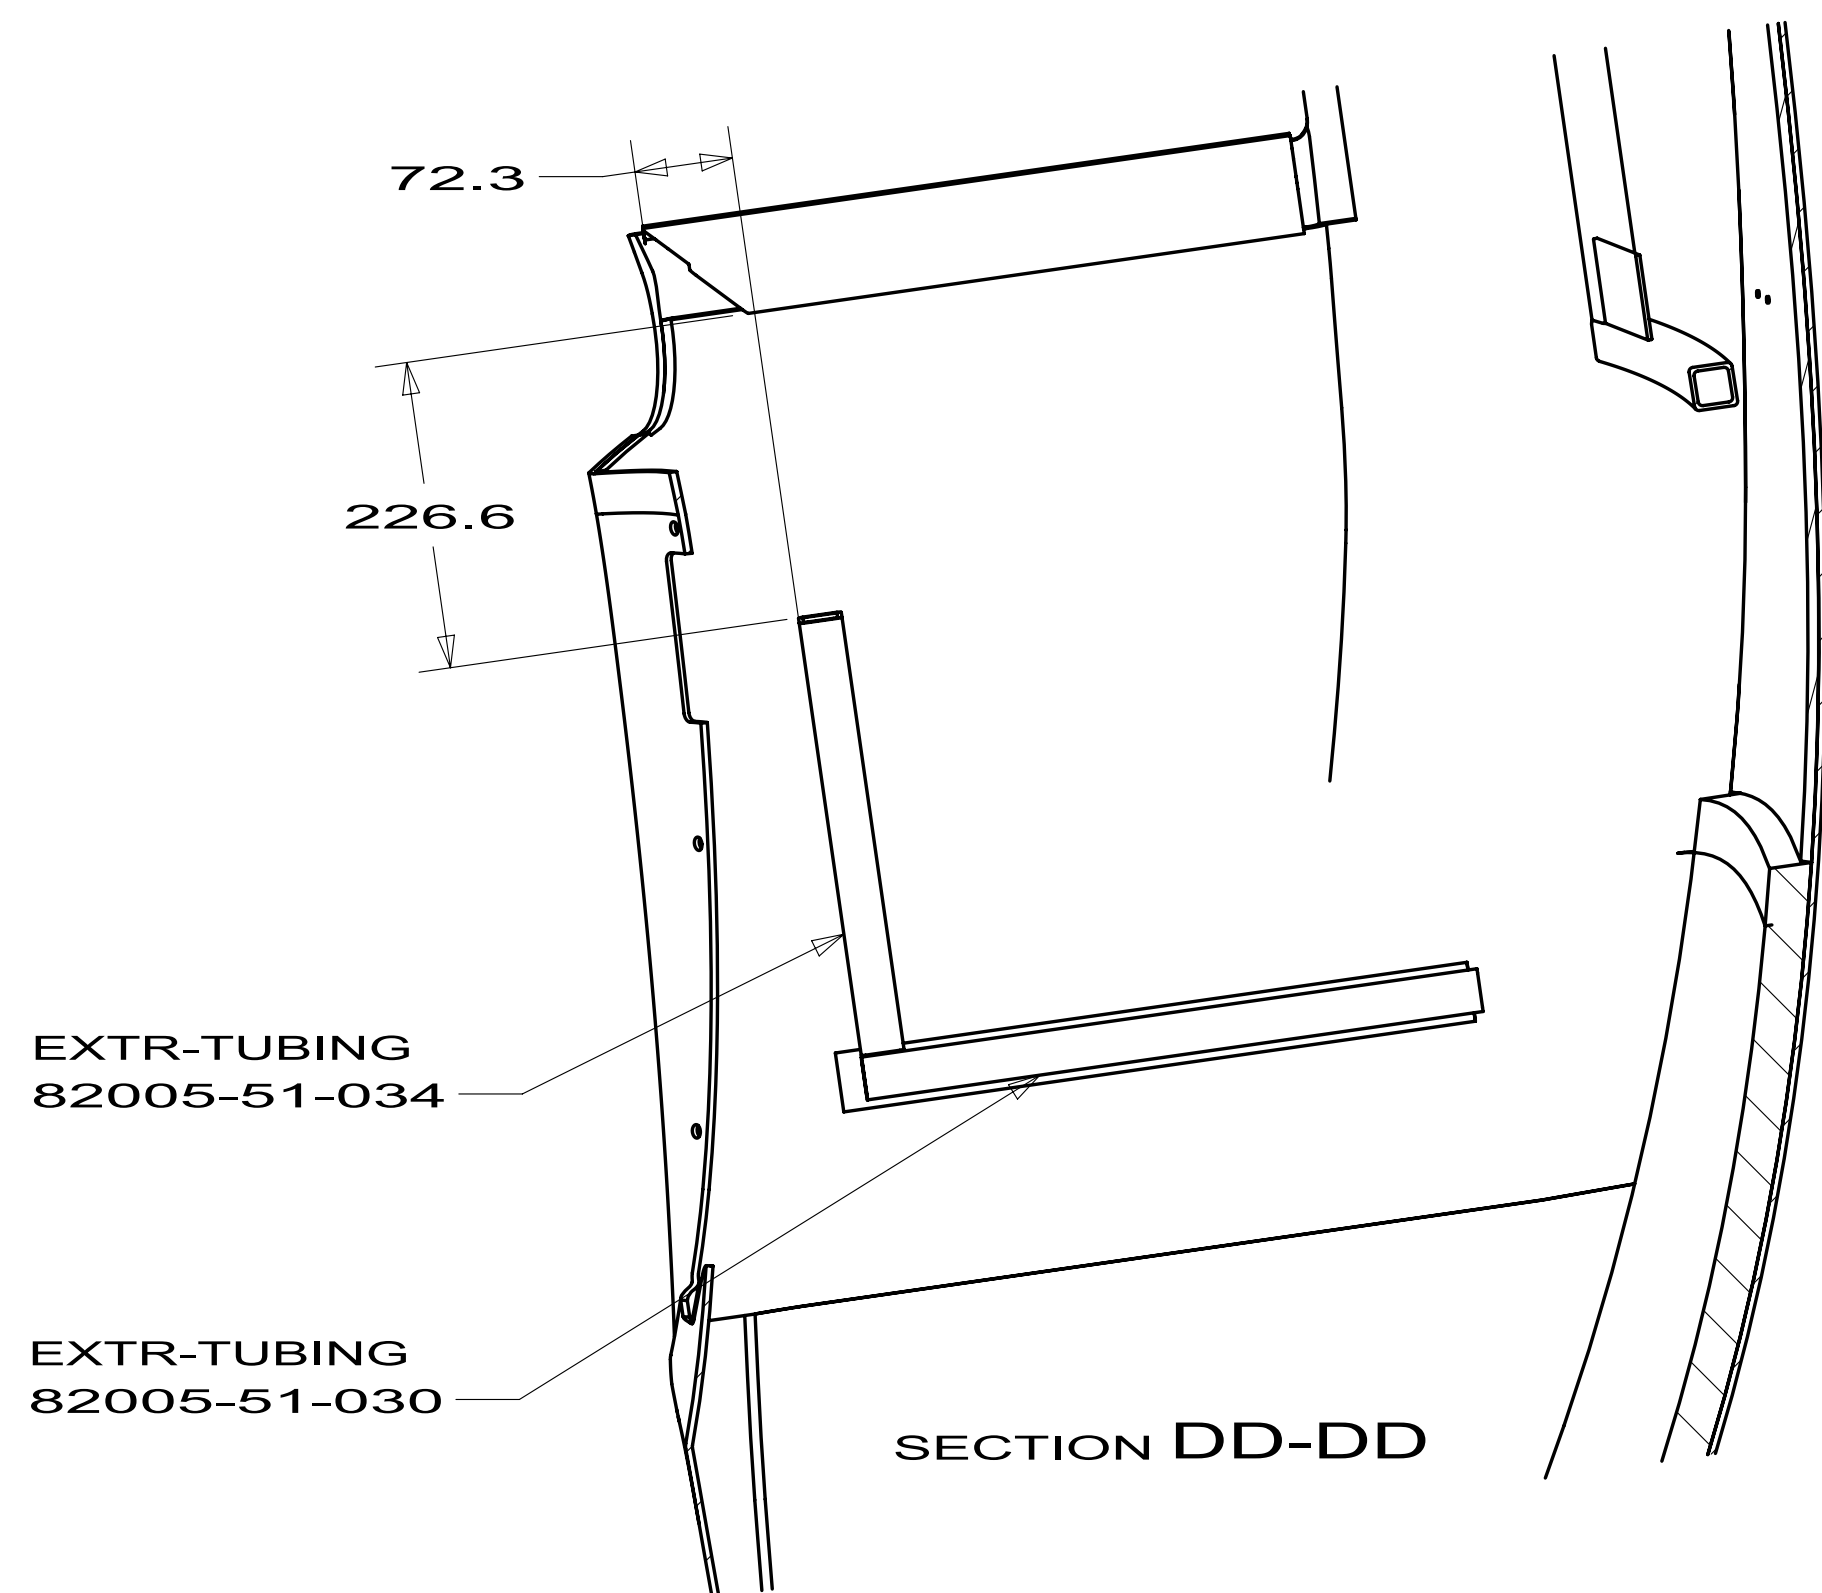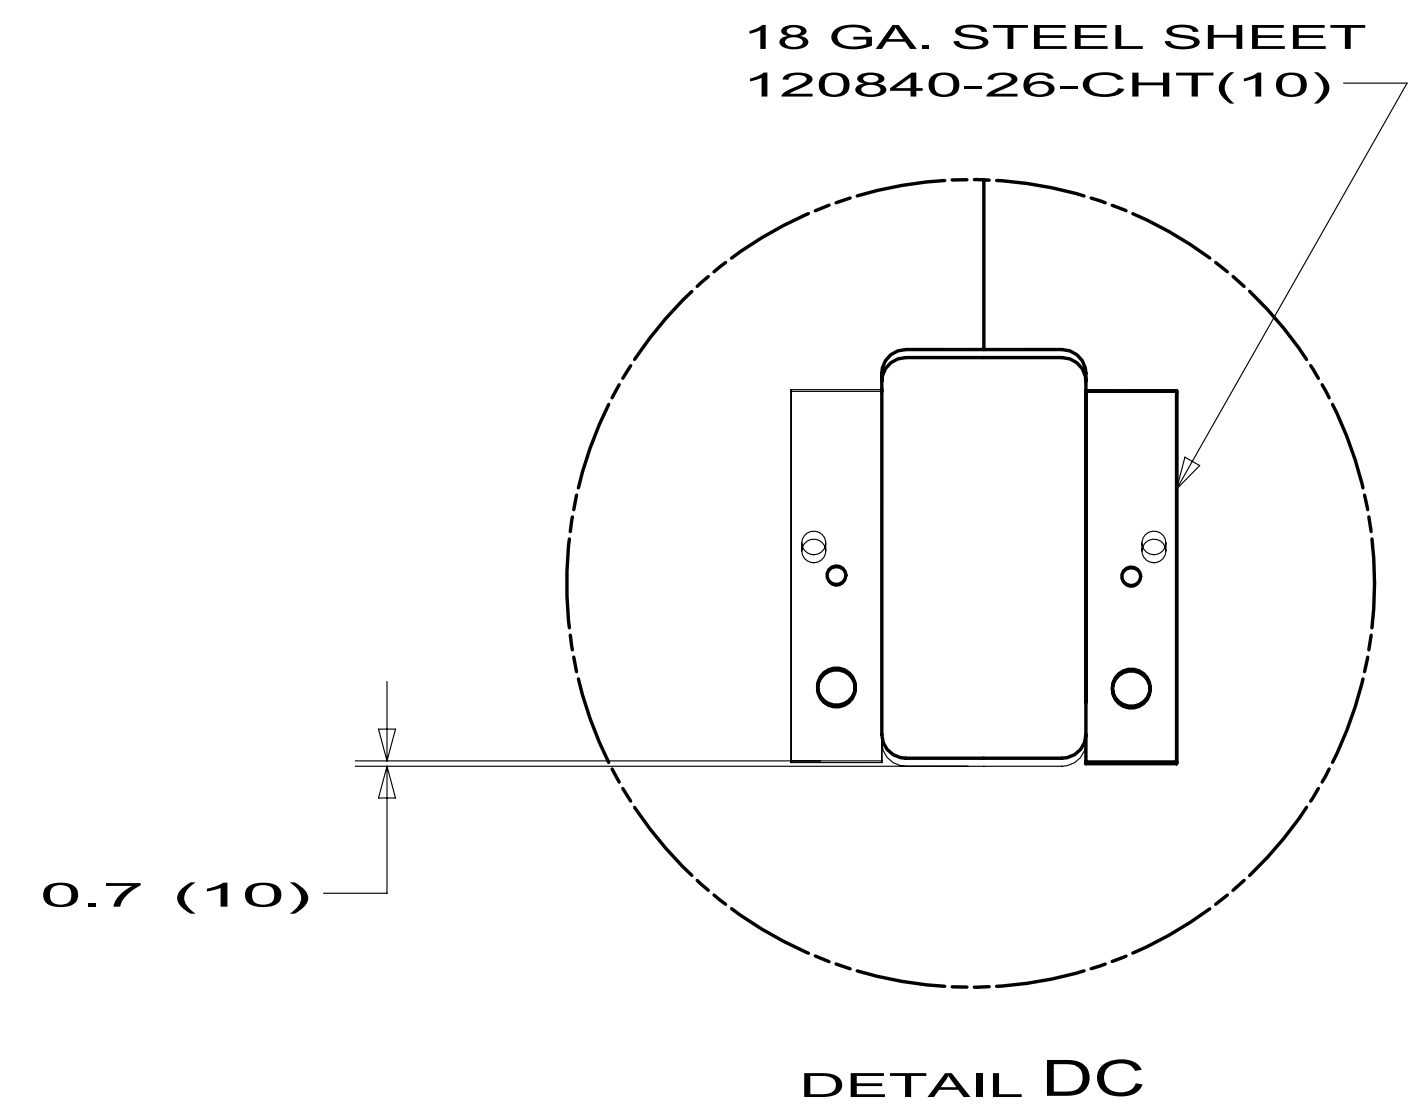

SECTION DD-DD

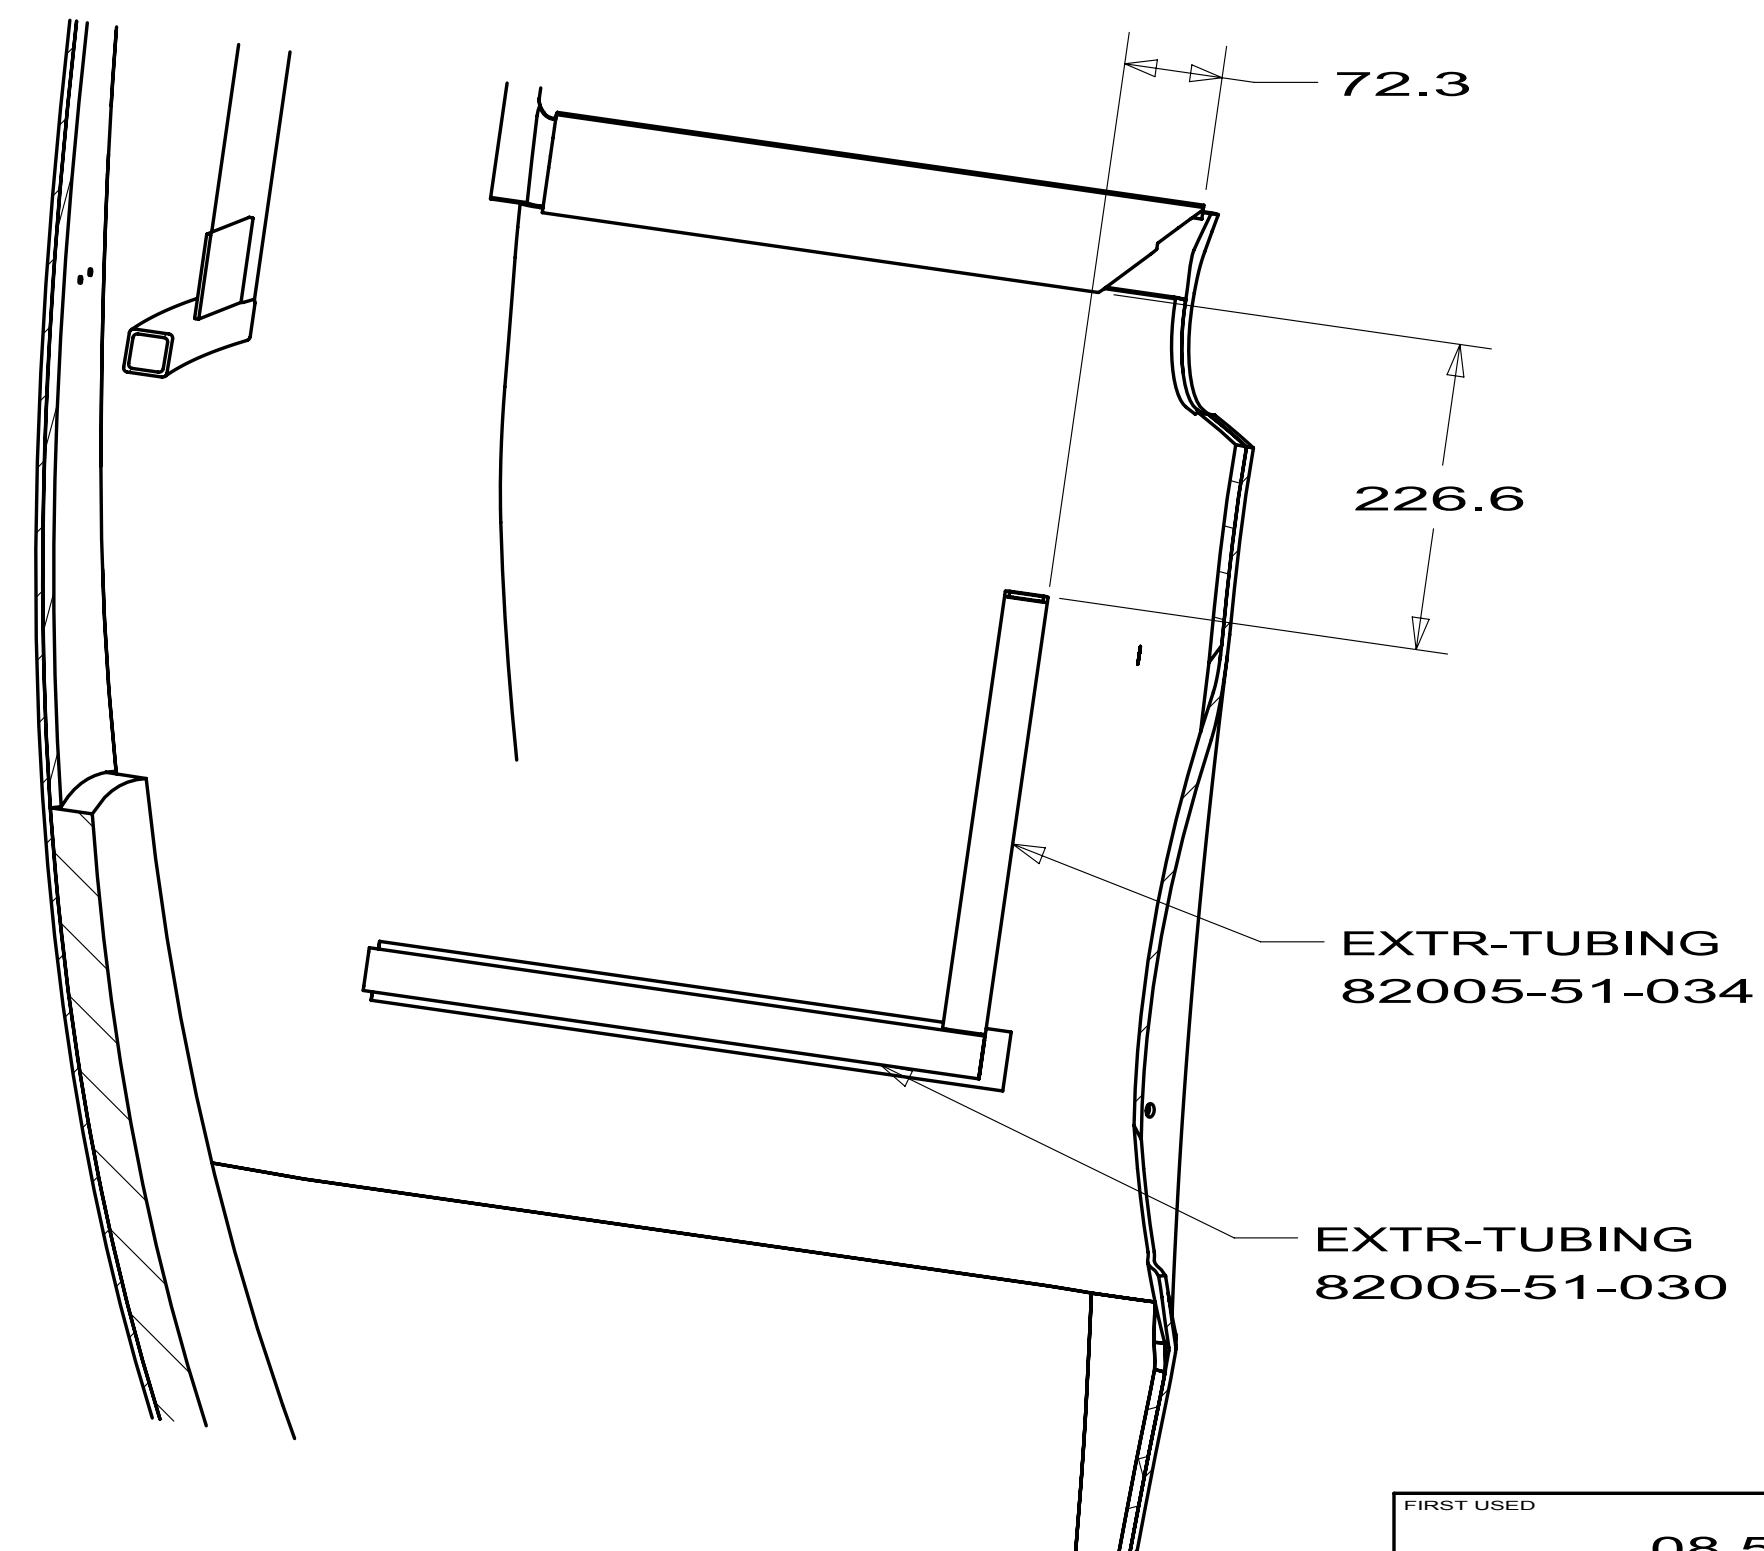

SECTION DE-DE

FIRST USED		
08 500 SERIES		
DO NOT SCALE DRAWING		
TITLE:		
PANEL ASM-FRONT		
SHEET 4	PART NO 160591	REV



RELEASE		REV A	DATE	DWG NO	170268	
REV	ZONE	REVISION RECORD			DATE	DFTR-ORIG

KEY	PART NUMBER (27G)	PART NUMBER (92K)	DESCRIPTION
1	132664-02-01A		DECAL-LOGO DOMED WINNEBAGO
2	144587-02-44A	144587-02-35A	DECAL-ITASCA
3	144587-03-29A	144587-03-30A	DECAL-LOGO ITASCA
4	151631-01-09A	151631-01-10A	DECAL-NAVION, LG
5	151631-02-05A	151631-02-06A	DECAL-NAVION, SML
6	151687-02-01A		DECAL/BEZEL DOMED NAMEPLATE ITASCA
7	170245-01-01A	170245-01-02A	DECAL-FRONT & BACK
8	170246-01-01A	170246-01-02A	DECAL-CAB DOOR, RH
9	170246-02-01A	170246-02-02A	DECAL-CAB DOOR, LH
10	170247-01-01A	170247-01-02A	DECAL-MAIN SWEEPS, RH
11	170247-02-01A	170247-02-02A	DECAL-MAIN SWEEPS, LH
12	170248-01-01A	170248-01-02A	DECAL-SWEEP #1, RH
13	170248-02-01A	170248-02-02A	DECAL-SWEEP #1, LH
14	170249-01-01A	170249-01-02A	DECAL-SWEEP #2, RH
15	170249-02-01A	170249-02-02A	DECAL-SWEEP #2, LH
16	170250-01-01A	170250-01-02A	DECAL-SWEEP #3, RH
17	170250-02-01A	170250-02-02A	DECAL-SWEEP #3, LH
18	170251-01-01A	170251-01-02A	DECAL-UPPER SWEEPS, RH
19	170251-02-01A	170251-02-02A	DECAL-UPPER SWEEPS, LH
20	141599-B5-000 (26F)(26J)	141599-96-000 (26H)	PAINT
21	141599-66-000 (26F) (26H) 141599-C1-000 (26J)		PAINT
22	165266-02-01A (26F)(26H)(26J)		PAINT MASK-REFIG VENT
23	165266-01-01A (26F)(26H)(26J)		PAINT MASK-REFRIG VENT

12. DO NOT PAINT VALANCE PANEL TOP HINGE, LEAVE BLACK.

11 USE FLAT EDGE OF TRIM TO ALIGN WITH FLAT EDGE OF DECAL.

10 PLASTIC AND STEEL PARTS WILL BE COLORED PRIOR TO ASSEMBLY.

9 CENTER ON UNIT.

8 LOCATE DECAL 120mm LEFT OF HOOD EDGE AND 60mm UP FROM FRONT EDGE OF HOOD.

7. VINYL DECAL WILL BE APPLIED WHERE EVER GRAPHIC DESIGN PATTERN IS POSITIONED OVER SLIDEROOM EXTRUSION, BUT WILL NOT BE APPLIED TO VINYL SCREW COVER INSERTS.

6. PAINT AREA IS TO BE BELOW FEATURE STRIP FOR OPTIONAL PAINTED MODELS AND CONTINUES ON CAB DOORS TO WHEEL WELL, INCLUDING RUNNING BOARD.

5. NO VINYL OR PAINT ON SLIDEOUT ROOM END PANELS.


4. ALL LOGOS ARE TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).

3. CLEAR COAT 141599-C2-000 TO BE APPLIED ON ALL PAINTED AREAS.

2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.


1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.


- 26J EXT GRAPH/PAINT DLX PKG 3
- 26H EXT GRAPHIC/PAINT-DLX PKG 2
- 26F EXT GRAPHIC/PAINT DLX PKG 1
- 92K EXTERIOR GRAPHICS PACKAGE #2
- 27G EXTERIOR GRAPHICS PACKAGE #1

		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTFR		ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		10 500 NAVION	
DSNR			
UNSPECIFIED TOLERANCES ARE: WHOLE DIM (X) ± 20 ONE-PLACE (X.X) ± 10 TWO-PLACE (X.XX) ± 5 ANGLE ± 5		MATERIAL:	
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
GRAPHICS INSTALLATION			
SHEET 1 of 4		PART NO 170268	REV

SEE CHART

FOR COLOR VARIATIONS
OF THIS PART



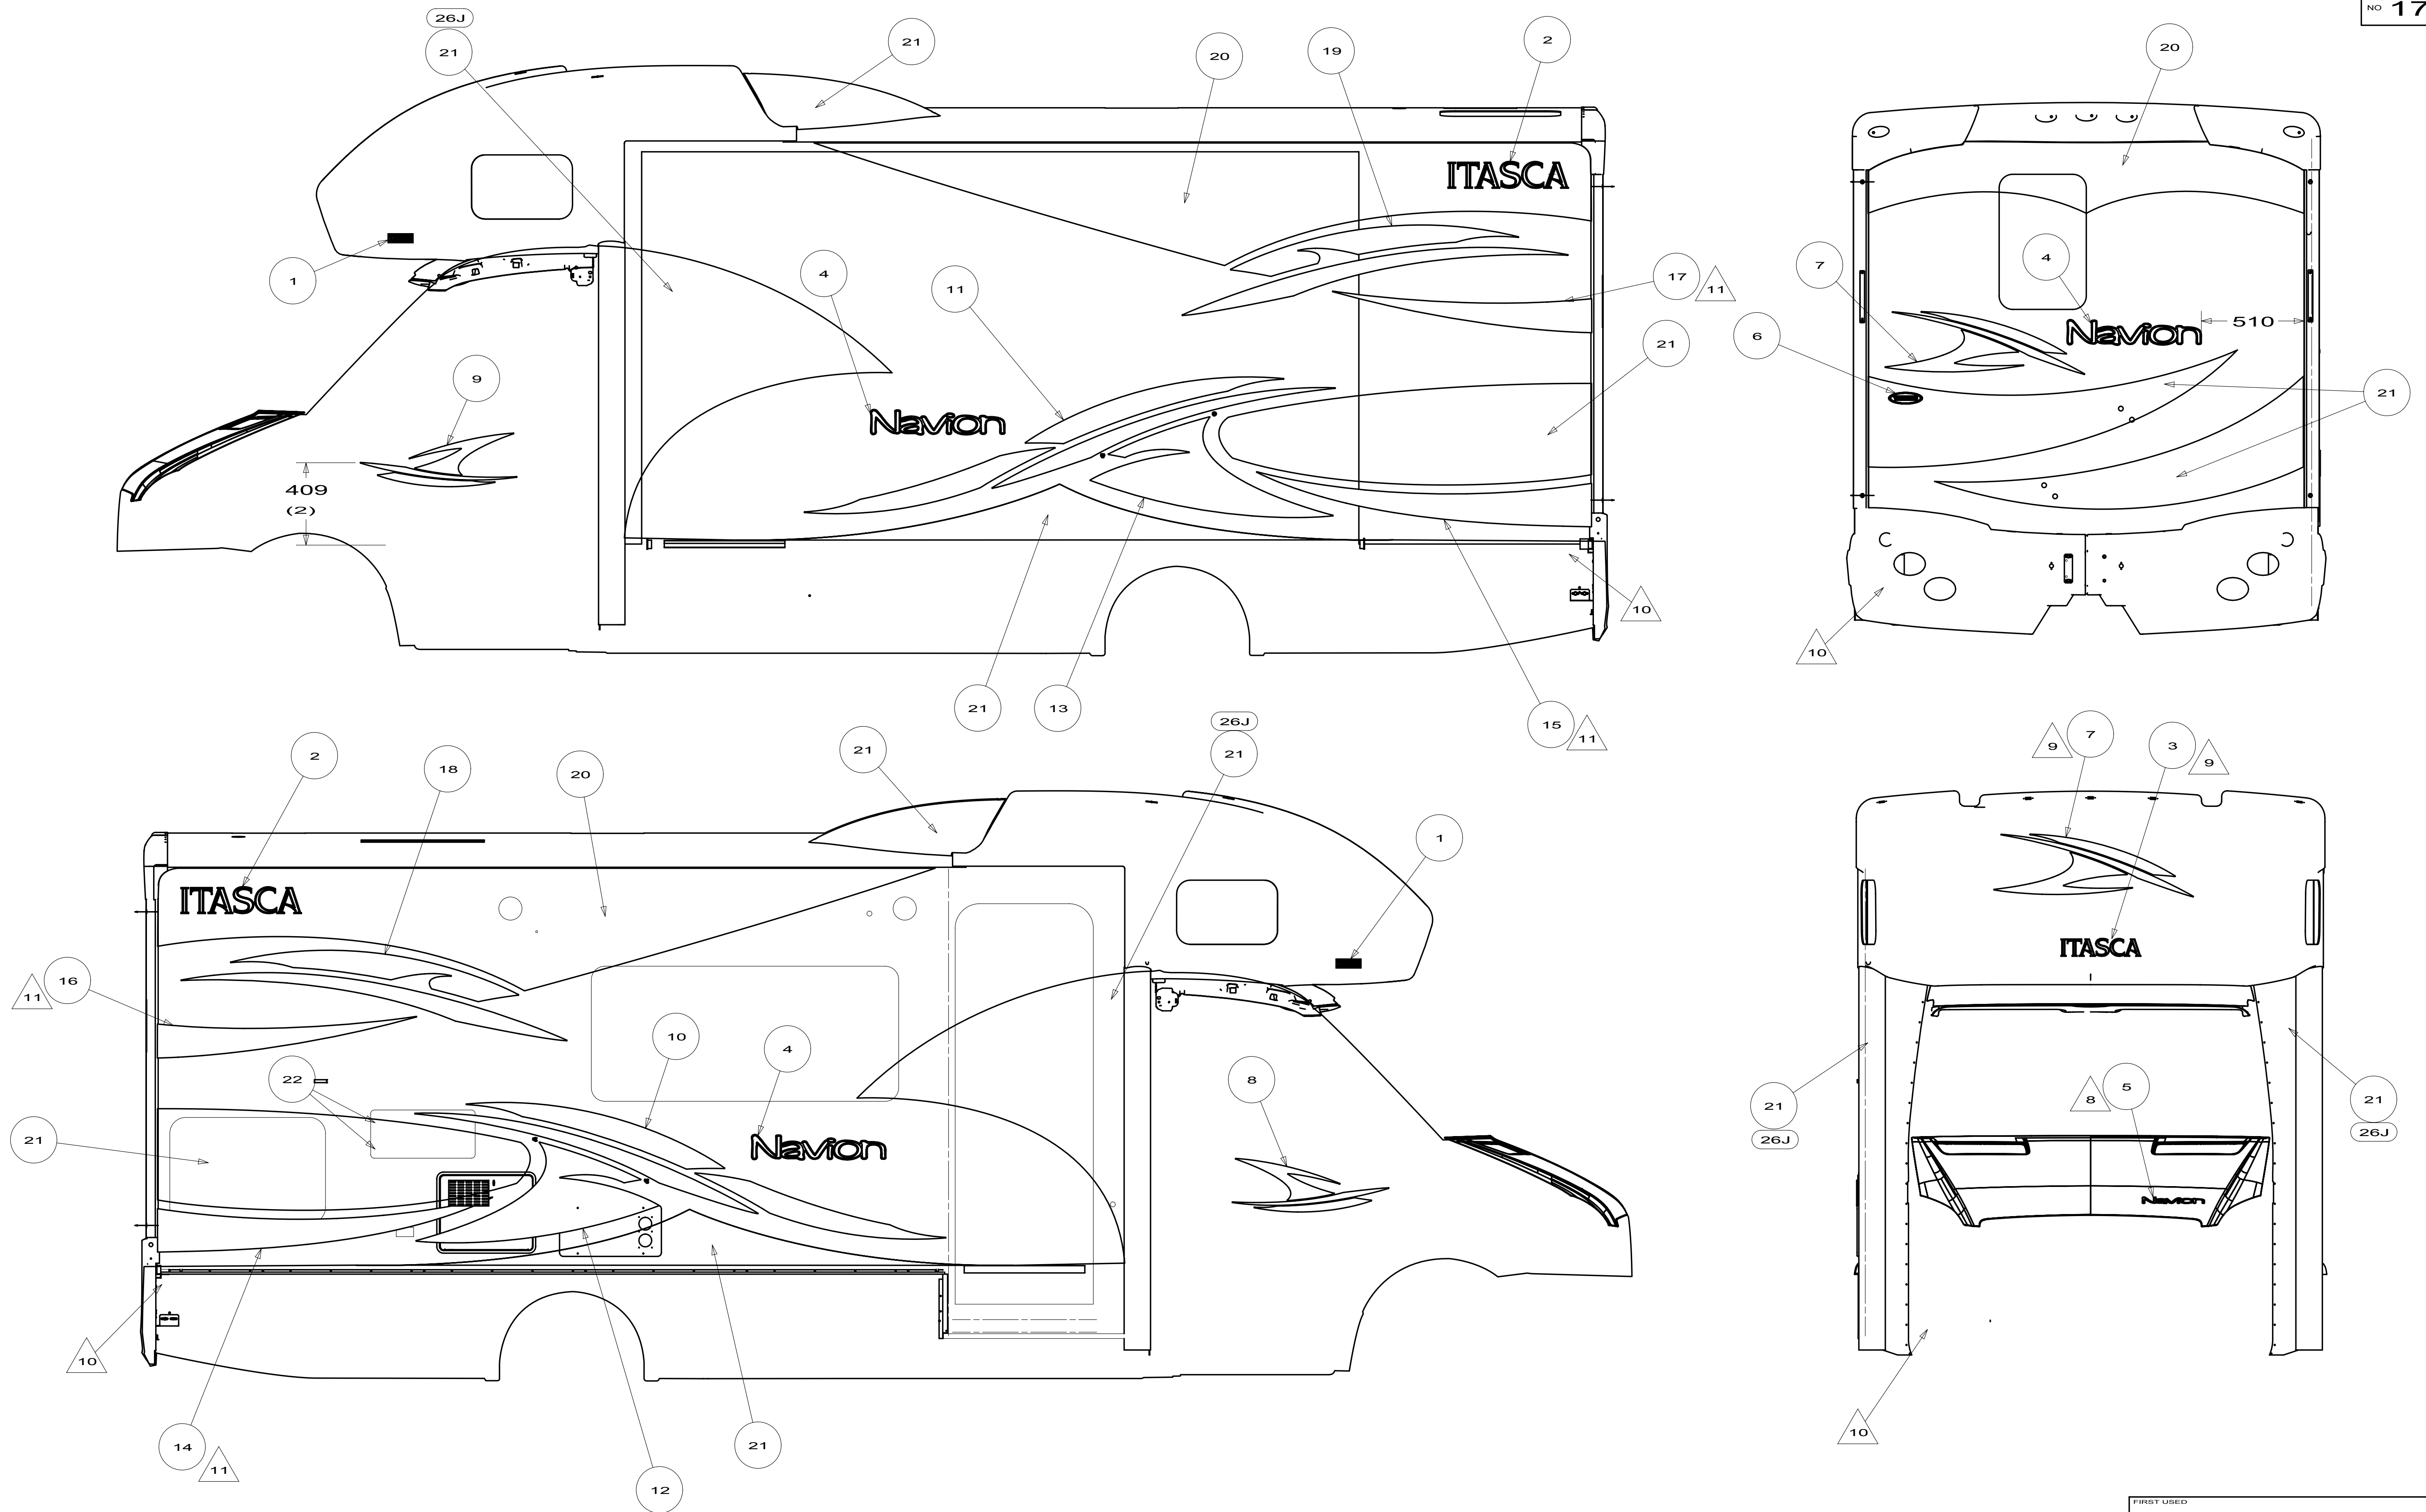

FIRST USED		
10 524K (NAVION)		
DO NOT SCALE DRAWING		
TITLE:		
GRAPHICS INSTALLATION		
SHEET 2	PART NO 170268	REV

8

7

6

5

4

3

2

1

DWG NO	UNIT
171296-01	524K
171296-02	524A
171296-03	524J

RELEASE

REV

DATE

09--19--08

DWG NO

171296

REV

ZONE

REVISION RECORD

DATE

DETR-ORIG

250

200

DECAL/BEZEL DOMED
151687-02-01A

890 (2)

DECAL-LOGO DOMED
132664-02-01A (2)

110 (2)

11. DO NOT PAINT VALANCE PANEL TOP HINGE, LEAVE BLACK.

10. LOGO IS LEFT AS BODY COLOR OR PAINTED ACCORDING TO DESIGN.

9. DIE CUT ACRYLIC FILMS TO PROTECT PAINT. RH & TRANSITION PANEL AND KIT-PAINT PROTECTION.

8. PASSENGER SIDE OF UNIT SHOWN, DRIVER’S SIDE OPPOSITE.

7. FOR ALL UNITS EXCEPT THE 524A, END PANELS OF SLIDEOUT ROOMS WILL BE PAINTED WITH BASECOAT AND CLEAR COAT ONLY. THERE WILL BE NO COLORED DESIGN GRAPHICS ELEMENTS PAINTED ON THE END PANELS.
ON THE 524A, END PANELS WILL NOT BE PAINTED UNLESS THE UNIT HAS THE “SILVER CAB” OPTION; THEN THE END PANELS WILL NEED TO BE PRE-PAINTED SILVER.

6. APPLY SEALER BODY SEAM CLEAR 94401-04-000 TO HELP SECURE EDGES.

5. USE 174664-01-000 (100 FT) TO COVER UNSEALED ROOF SEAMS.

4. CLEAR COAT TO BE APPLIED ON ENTIRE UNIT TO PROTECT PAINT.

3. TOLERANCE FOR DIMENSIONS IS +/-20mm.
LOGO IS TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).

2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.

1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.

WINNEBAGO

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

ORIG. DATE

09/17/08

FIRST USED

10 500
(NAVION)

MATERIAL:

SPECIFICATION PRINT
DO NOT SCALE

TITLE

GRAPHICS INSTL - FBP

SHEET

1

OF

3

PART NO

171296

REV

08/26/09

8

7

6

5

4

3

2

1

↑

8

7

6

5

4

3

2

1

DWG
NO 171296



BRIGHT PLATINUM MET
#48823-3

MED PLATINUM MET
#44094



BLACK MIST MET
#75377

VERMILLION
#39068

(27A)
LOGOS ARE CARRYOVER
2010 NAVION FBP - PLATINUM



SANDSTONE BEIGE MET
#43482-3

GOLD FIREMIST MET
#54697-1



MOJAVE MIST MET
#64139-1

CYPRESS GOLD MET
#51229-6

(92A)
LOGOS ARE CARRYOVER
2010 NAVION FBP - MOJAVE MIST



PEWTER MET
#76573

WINTERGREEN MET
#51108



GRANITE MET
#78001

LT. ALMOND PRL MET
#75226

(24C)
LOGOS ARE CARRYOVER
2010 NAVION FBP - WINTERGREEN



SILVER SKY MET
#62444

OPAL BLUE MET
#52970-1



SILVER MET
#48459

HARVEST GOLD MET
#57343

(24B)
LOGOS ARE CARRYOVER
2010 NAVION FBP - BLUE REFLECTION

FIRST USED		
2010 500 SERIES (NAVION)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	PART NO	REV
2	171296	

8

7

6

5

4

3

2

1



BRILLIANT SILVER MET
#45696-4

BRIGHT PLATINUM MET
#48823-3

MED PLATINUM MET
#44094



BLACK MIST MET
#75377

VERMILLION
#39068

2010 NAVION FBP - SILVER/ PLATINUM

(24H)

LOGOS ARE CARRYOVER



BRILLIANT SILVER MET
#45696-4

SILVER SKY MET
#52444

OPAL BLUE MET
#52970-1



SILVER MET
#48459

HARVEST GOLD MET
#57343

2010 NAVION FBP - SILVER/ BLUE REFLECTION

(24L)

LOGOS ARE CARRYOVER

FIRST USED		
2010 500 SERIES (NAVION)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE		
GRAPHICS INSTL - FBP		
SHEET	PART NO	REV
3	171296	

DWG NO	UNIT	SHEET
170267-01	500S	1,2

KEY	PART NUMBER (27G)	PART NUMBERS (92K)	DESCRIPTION
1	120700-10-26A	120700-10-21A	DECAL-W
2	120702-03-66A 120702-03-33A(26F)(26J)	120702-03-66A	DECAL-WINNEBAGO
3	132664-02-01A		DECAL-LOGO DOMED WINNEBAGO
4	151611-01-05A		DECAL-LOGO VIEW,LG
5	151611-02-05A		DECAL-LOGO VIEW,SML
6	151687-01-01A		DECAL/BEZEL-DOMED NAMEPLATE WINNEBAGO
7	170270-01-01A	170270-01-02A	DECAL-FRONT OVHD W/ LOGO
8	170271-01-01A	170271-01-02A	DECAL-CAB DOOR, RH
9	170271-02-01A	170271-02-02A	DECAL-CAB DOOR, LH
10	170272-01-01A	170272-01-02A	DECAL-SWEEP #1, RH
11	170272-02-01A	170272-02-02A	DECAL-SWEEP #1, LH
12	170273-01-01A	170273-01-02A	DECAL-SWEEP #2, RH
13	170273-02-01A	170273-02-02A	DECAL-SWEEP #2, LH
14	170274-01-01A	170274-01-02A	DECAL-STROKE, RH
15	170274-02-01A	170274-02-02A	DECAL-STROKE, LH
16	170275-01-01A	170275-01-02A	DECAL-STROKE #2, RH
17	170275-02-01A	170275-02-02A	DECAL-STROKE #2, LH
18	170276-01-01A	170276-01-02A	DECAL-BACKWALL
19	141599-95-000(26F)(26J)	141599-68-000 (26H)	PAINT
20	141599-66-000 (26F)(26H) 141599-C1-000(26J)		PAINT
21	170277-01-01A (26F)(26H)(26J)		PAINT MASK-UPPER SIDEWALL, RH
22	170277-02-01A (26F)(26H)(26J)		PAINT MASK-UPPER SIDEWALL, LH
23	170278-01-01A (26F)(26H)(26J)		PAINT MASK-UPPER BACKWALL
24	170279-01-01A (26F)(26H)(26J)		PAINT MASK-LOWER BACKWALL
25	165266-01-01A (26F)(26H)(26J)		PAINT MASK-REFRIG VENT

12. DO NOT PAINT VALANCE PANEL TOP HINGE, LEAVE BLACK.

11 USE FLAT EDGE OF TRIM TO ALIGN WITH FLAT EDGE OF DECAL.

10 COLORED PLASTIC AND STEEL PARTS WILL BE COLORED PRIOR TO ASSEMBLY.

9 CENTER ON UNIT.

8 LOCATE DECAL 120mm LEFT OF HOOD EDGE AND 60mm UP FROM FRONT EDGE OF HOOD.

7. VINYL DECAL WILL BE APPLIED WHERE EVER GRAPHIC DESIGN PATTERN IS POSITIONED OVER SLIDEROOM EXTRUSION, BUT WILL NOT BE APPLIED TO VINYL SCREW COVER INSERTS OR PLASTIC CORNER TRIM ON SLIDEROOM.

6. PAINT AREA IS TO BE BELOW FEATURE STRIP FOR OPTIONAL PAINTED MODELS AND CONTINUES ON CAB DOORS TO WHEEL WELL, INCLUDING RUNNING BOARD.

5. NO VINYL OR PAINT ON SLIDEOUT ROOM END PANELS.

4. ALL LOGOS ARE TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).





3. CLEAR COAT 141599-C2-000 TO BE APPLIED ON ALL PAINTED AREAS.

2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.

1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.

NOTES:

- 26J EXT GRAPH/PAINT DLX PKG 3
- 26H EXT GRAPHIC/PAINT-DLX PKG 2
- 26F EXT GRAPHIC/PAINT DLX PKG 1
- 92K EXTERIOR GRAPHICS PACKAGE #2
- 27G EXTERIOR GRAPHICS PACKAGE #1

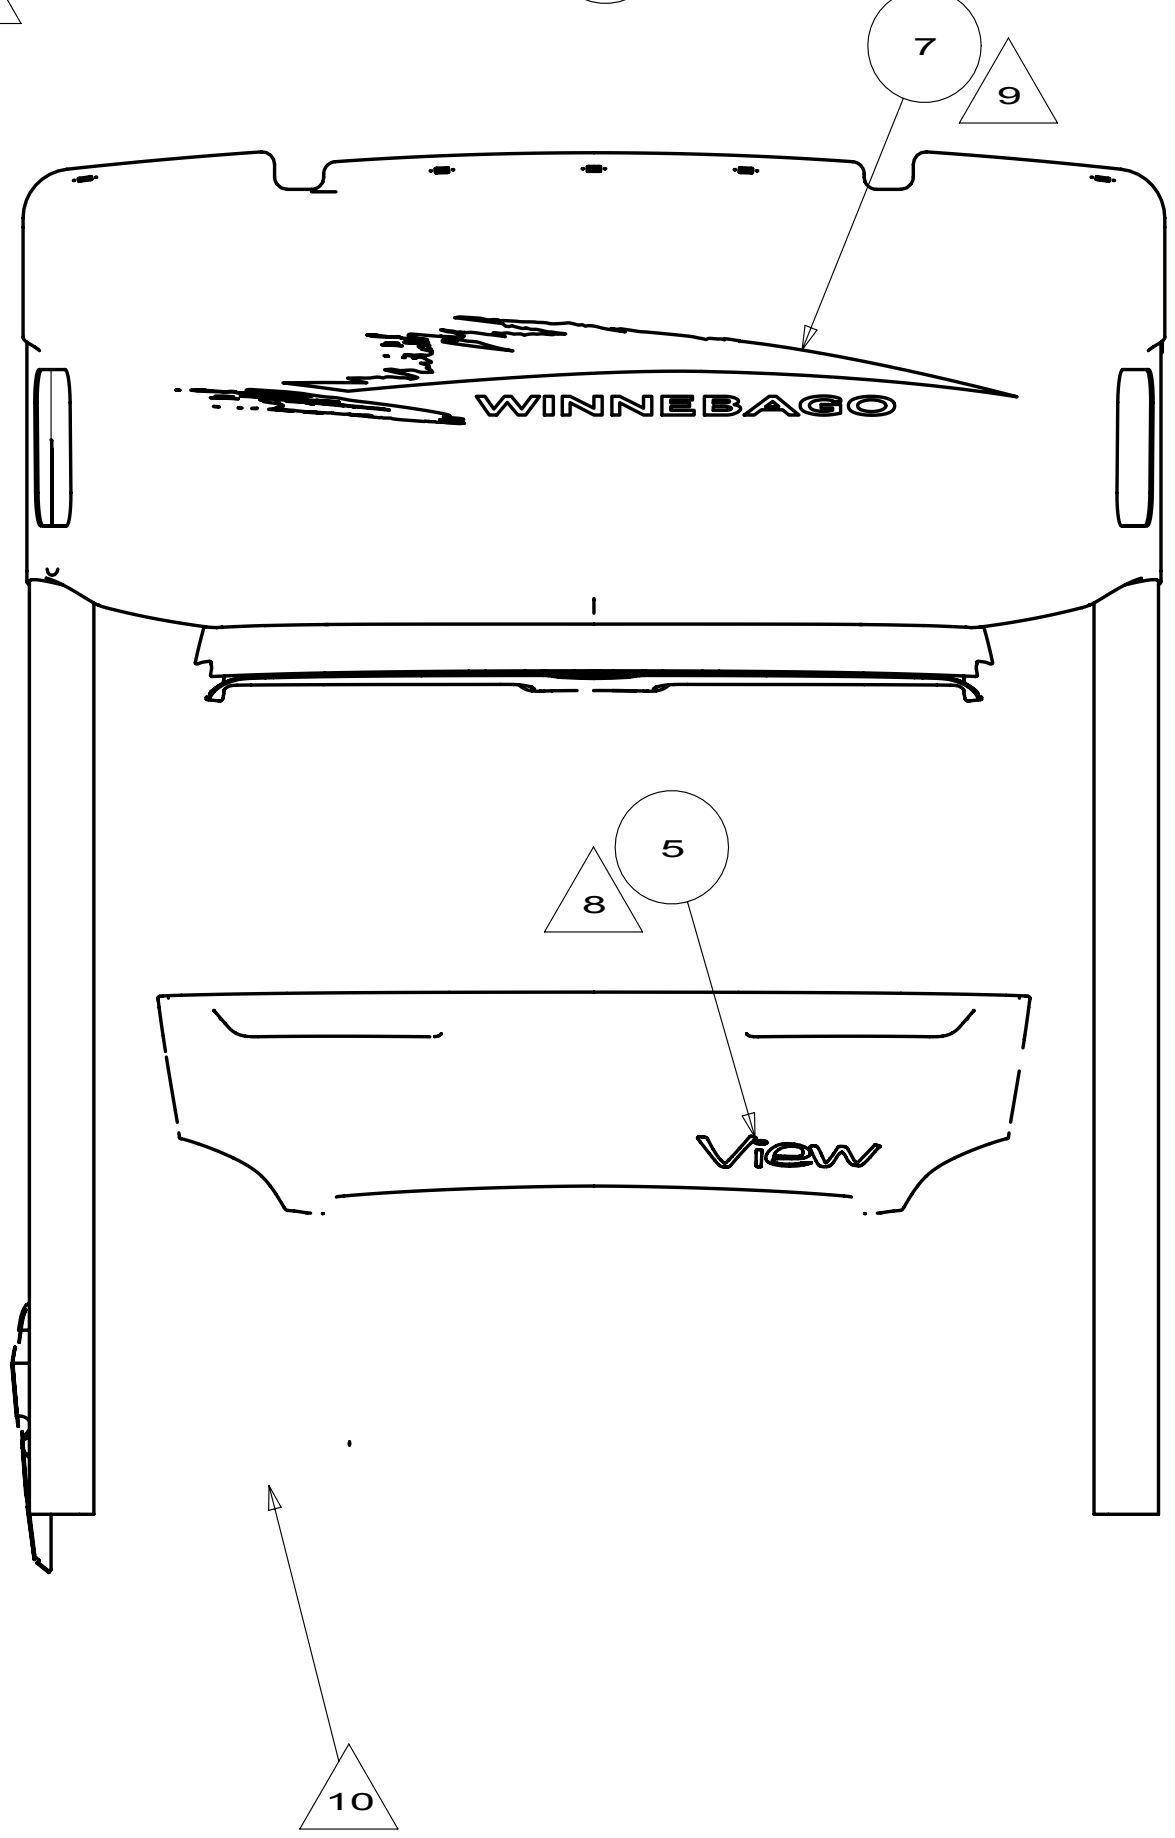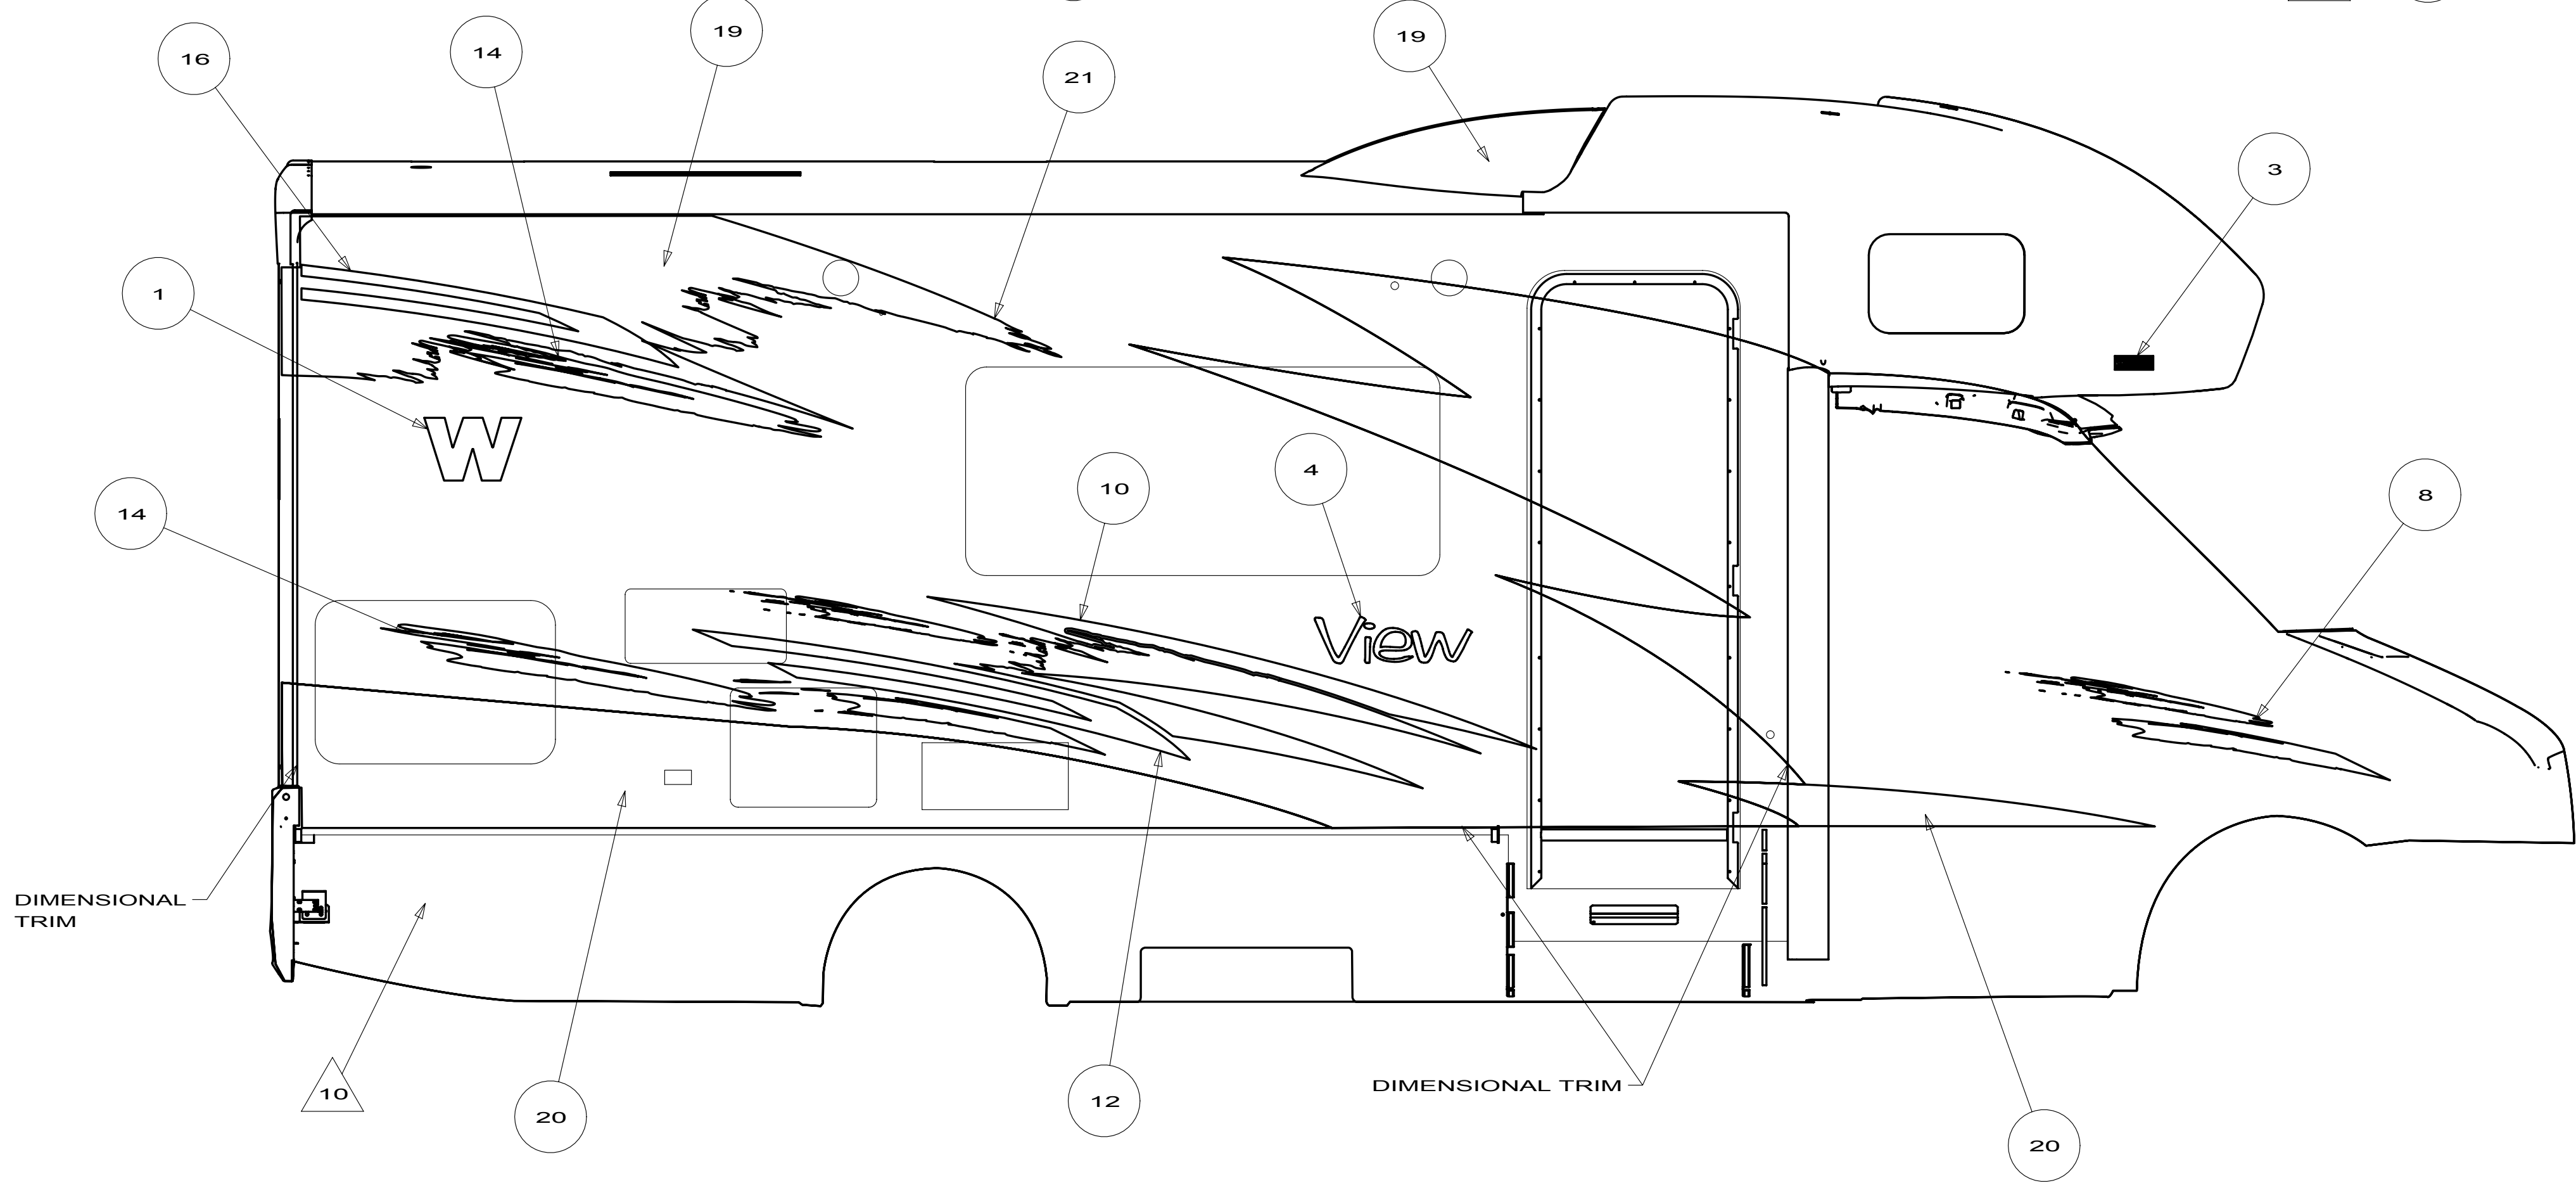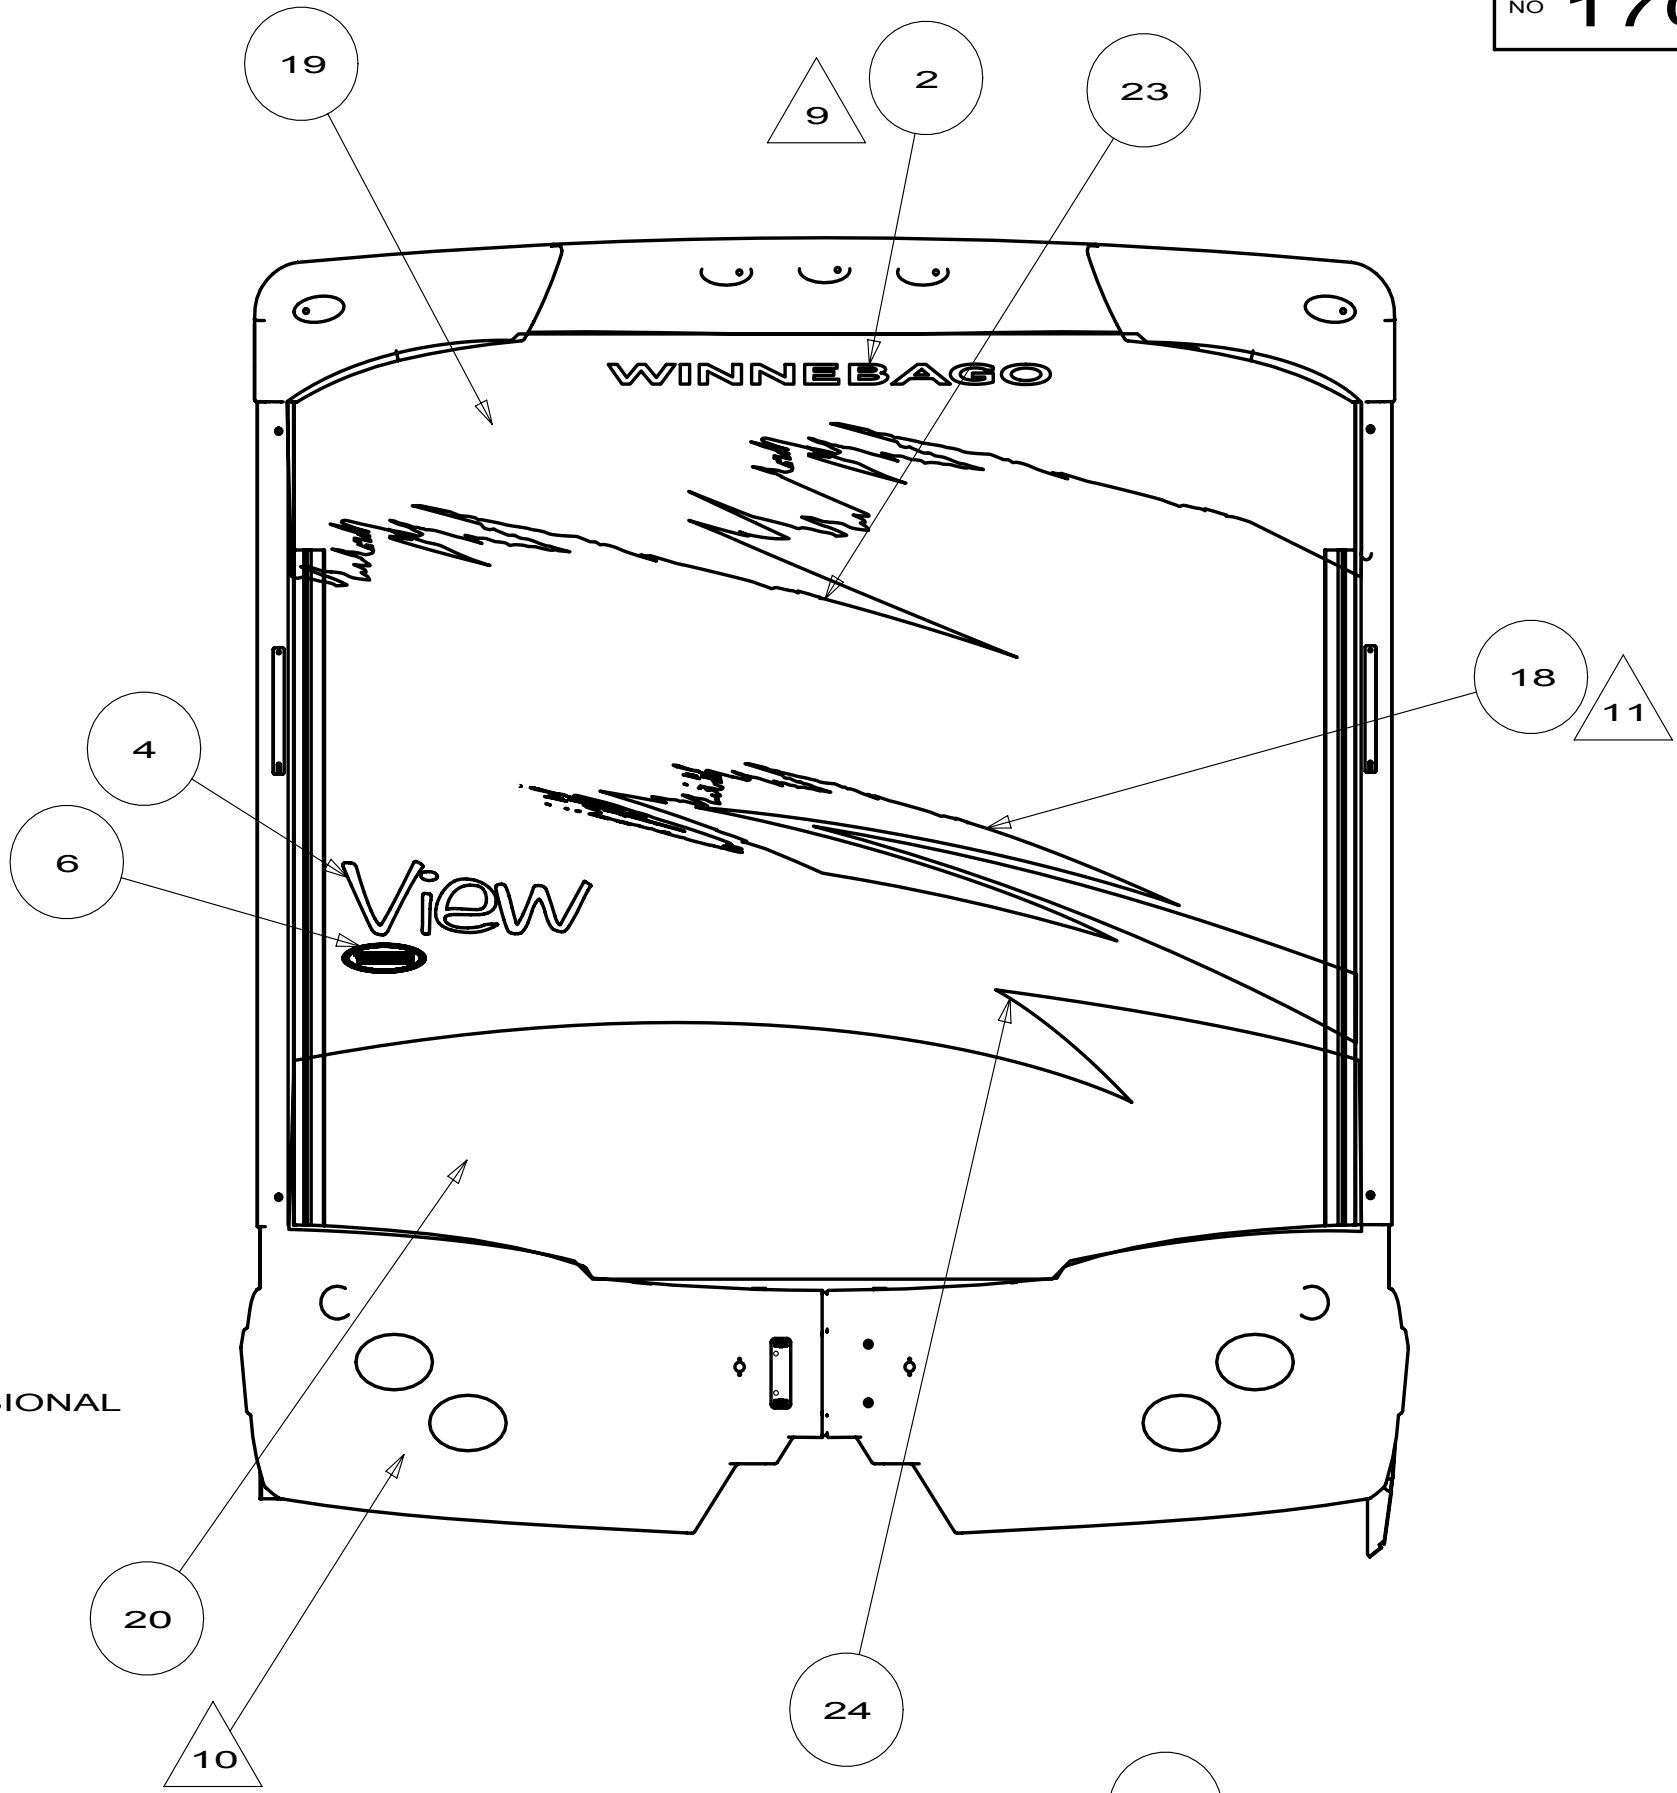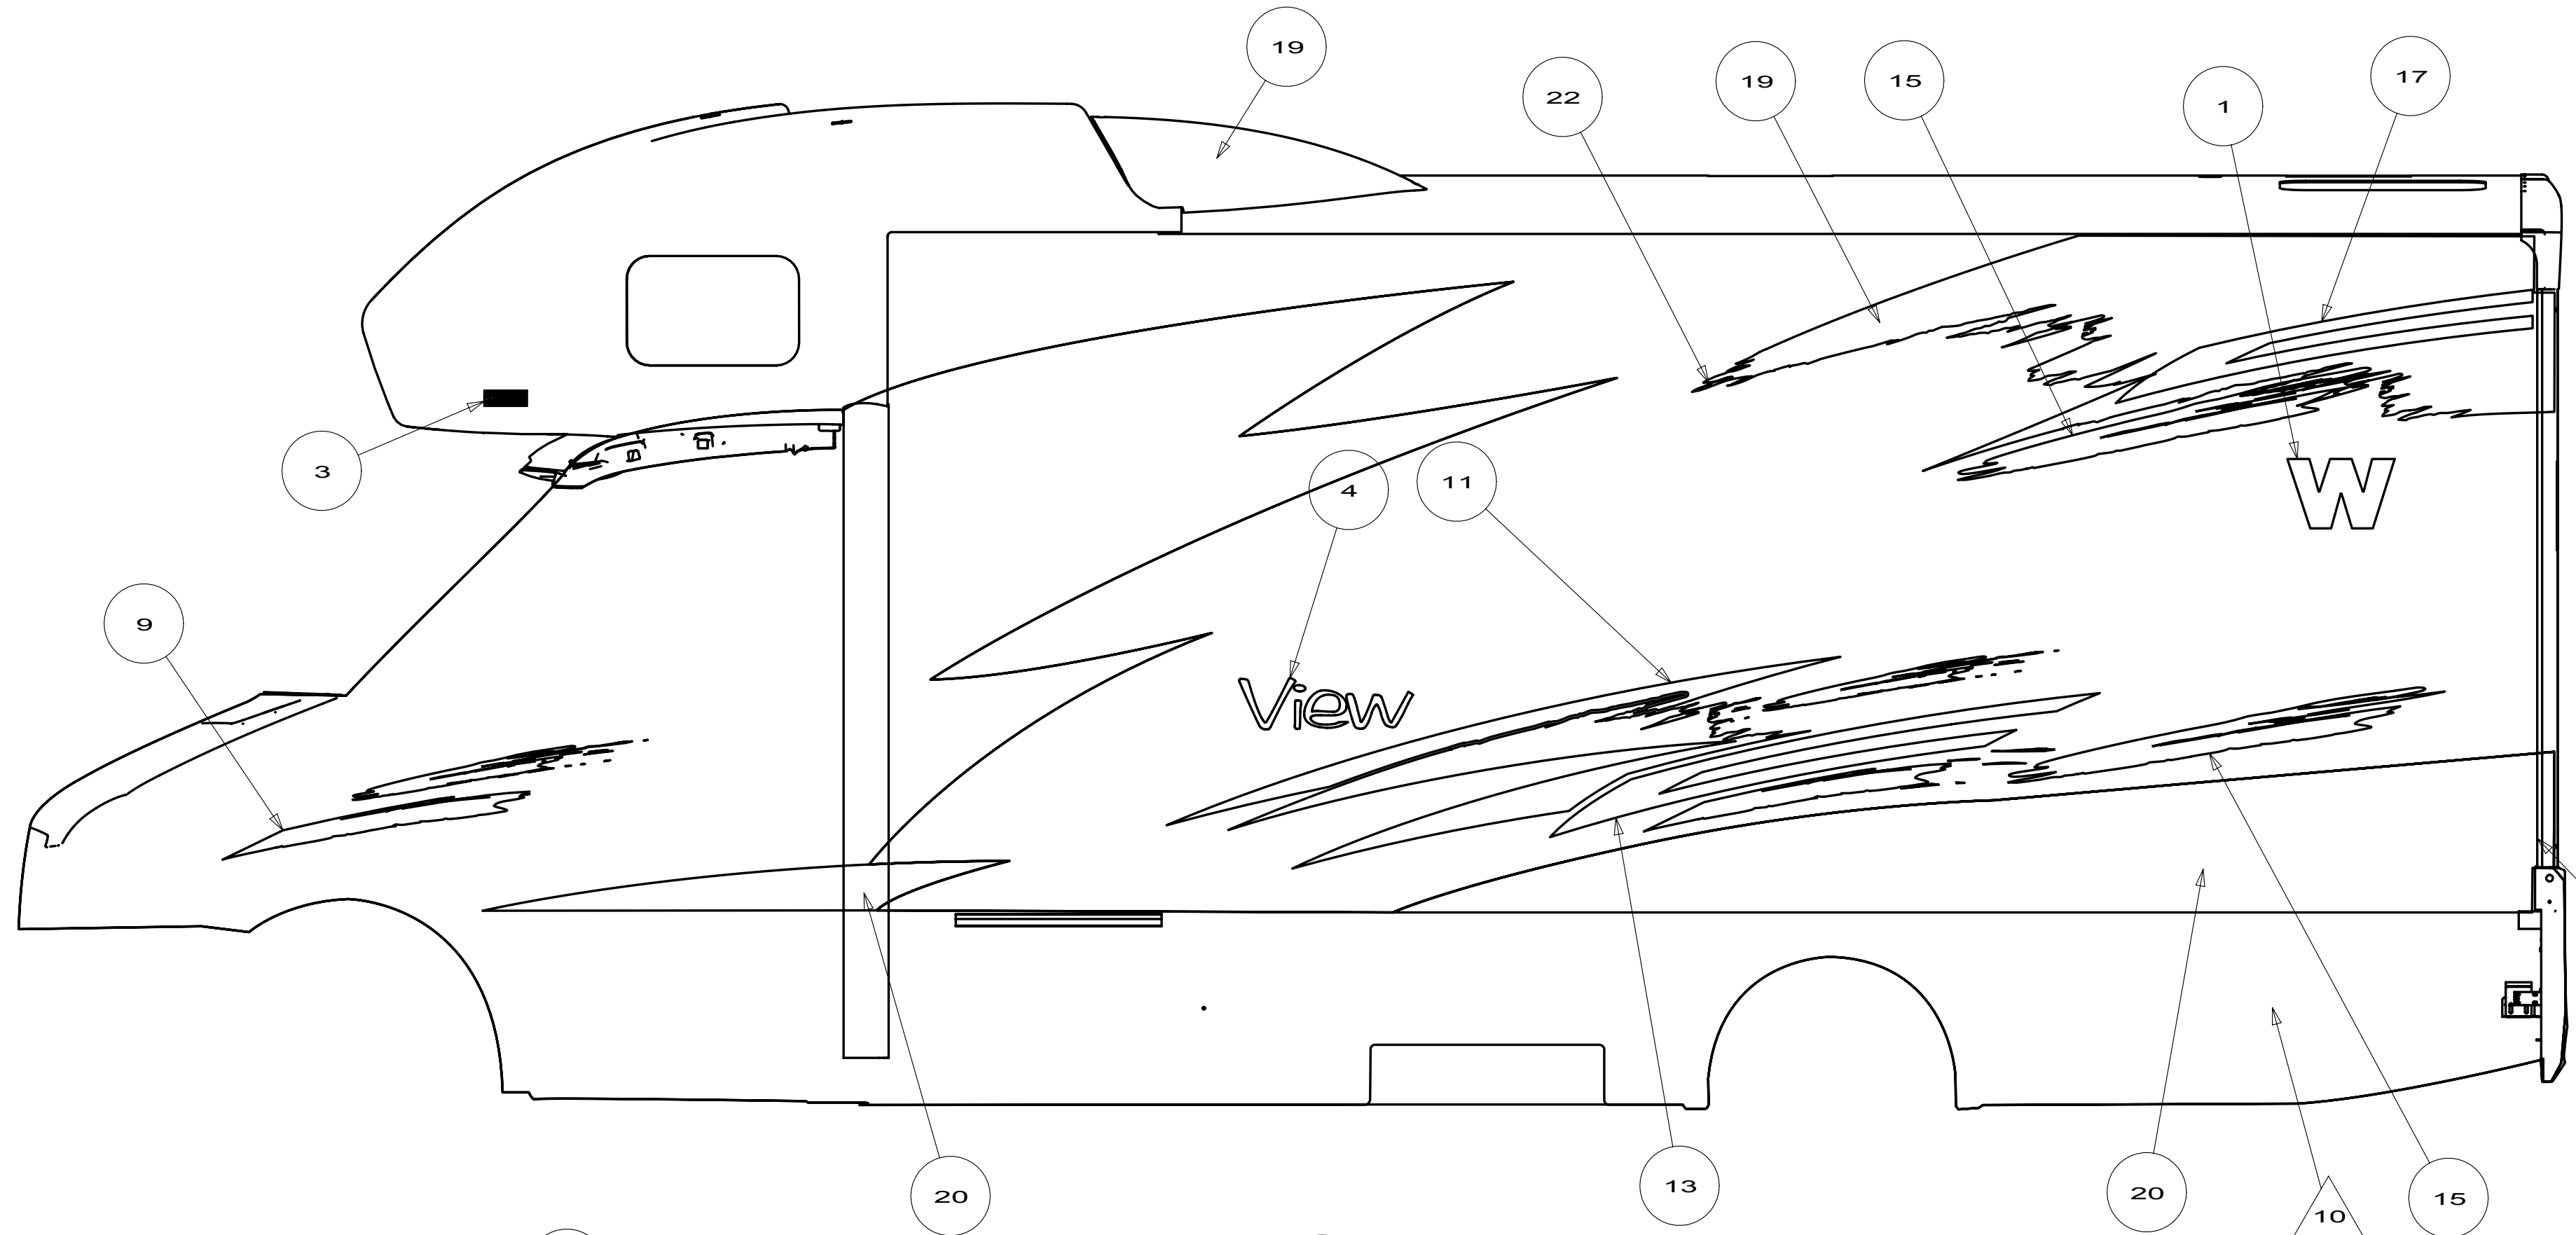

FIRST USED			10 524K (VIEW)
TITLE:			DO NOT SCALE DRAWING
GRAPHICS INSTALLATION			
SHEET 2	PART NO	170267	REV

8

7

6

5

4

3

2

1

DWG NO	UNIT
171293-01	524K
171293-02	524P
171293-03	524A
171293-04	524J

250

200

DECAL/BEZEL DOMED
151687-01-01A

890 (2)

DECAL-LOGO DOMED
132664-02-01A (2)

110 (2)

11. DO NOT PAINT VALANCE PANEL TOP HINGE, LEAVE BLACK.

10. LOGO IS LEFT AS BODY COLOR OR PAINTED ACCORDING TO DESIGN.

9. DIE CUT ACRYLIC FILMS TO PROTECT PAINT. RH & LH TRANSITION PANEL AND KIT-PAINT PROTECTION.

8. PASSENGER SIDE OF UNIT SHOWN, DRIVER'S SIDE OPPOSITE.

7. FOR ALL UNITS EXCEPT THE 524A, END PANELS OF SLIDEOUT ROOMS WILL BE PAINTED WITH BASECOAT AND CLEAR COAT ONLY. THERE WILL BE NO COLORED DESIGN GRAPHIC ELEMENTS PAINTED ON THE END PANELS.
ON THE 524A, END PANELS WILL NOT BE PAINTED UNLESS THE UNIT HAS THE "SILVER CAB" OPTION; THEN THE END PANELS WILL NEED TO BE PRE-PAINTED SILVER.

6. APPLY SEALER BODY SEAM CLEAR 94401-04-000 TO HELP SECURE EDGES.

5. USE 174664-01-000 (100 FT) TO COVER UNSEALED ROOF SEAMS.

4. CLEAR COAT TO BE APPLIED ON ENTIRE UNIT TO PROTECT PAINT.

3. TOLERANCE FOR DIMENSIONS IS +/-20mm.
LOGO IS TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).

2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.

1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.

NOTES:

RELEASE

REV

DATE

09--19--08

DWG NO

171293

REV

ZONE

REVISION RECORD

DATE

DETR-ORIG

WINNEBAGO INDUSTRIES

ORIG DATE

09/17/08

FIRST USED

10 500 (VIEW)

MATERIAL:

SPECIFICATION PRINT
DO NOT SCALE

TITLE

GRAPHICS INSTL - FBP

SHEET

1

OF

3

PART NO

171293

REV

8

7

6

5

4

3

2

1

08/26/09

8

7

6

5

4

3

2

1

DWG
NO 171293



AUTUMNWOOD MET
#48507-1

BROWN MET
#75295

LT BRONZE MET
#75392

SUNRAY GOLD MET
#60585-1

(27A)

LOGOS ARE CARRYOVER

2010 VIEW FBP - AUTUMNWOOD

MED PLATINUM MET
#44094

NOCTURNE BLUE MET
#51139




BRIGHT PLATINUM MET
#48823-3

SOLID GOLD MET
#64548

LOGOS ARE CARRYOVER
(92A)

2010 VIEW FBP - OPAL
REV. B 10/17/08



SILVER SAGE MET
#50540

BLACK MIST MET
#75377


DK TOREADOR RED MET
#75387

MED GARNET RED MET
#35894-7

(24C)

LOGOS ARE CARRYOVER

2010 VIEW FBP - GARNET RED



BLACK MIST MET
#75377

CITRUS GOLD MET
#58303-1



MED PLATINUM MET
#75387

BRIGHT PLATINUM MET
#35894-7

(24B)

LOGOS ARE CARRYOVER

2010 VIEW FBP - GOLD PLATINUM

FIRST USED		
2010 500 SERIES (VIEW)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	2	PART NO
		171293
		REV

8

7

6

5

4

3

2

1

8

7

6

5

↓

4

3

2

1

DWG
NO 171293



MED PLATINUM MET
#44094

NOCTURNE BLUE MET
#51139

BRILLIANT SILVER MET.
45696-4



BRIGHT PLATINUM MET
#48823-3

SOLID GOLD MET
#64548

(24H)
LOGOS ARE CARRYOVER
2010 VIEW FBP - SILVER/ OPAL



BLACK MIST MET
#75377

CITRUS GOLD MET
#58303-1

BRILLIANT SILVER MET.
45696-4



MED PLATINUM MET
#44094

BRIGHT PLATINUM MET
#48823-3

(24L)
LOGOS ARE CARRYOVER
2010 VIEW FBP - SILVER/GOLD PLATINUM

D

D

C

C

B

B

A

A

8

7

6

5

↑


4

3

2

1


FIRST USED		
2010 500 SERIES (VIEW)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE: GRAPHICS INSTL - FBP		
SHEET 3	PART NO 171293	REV

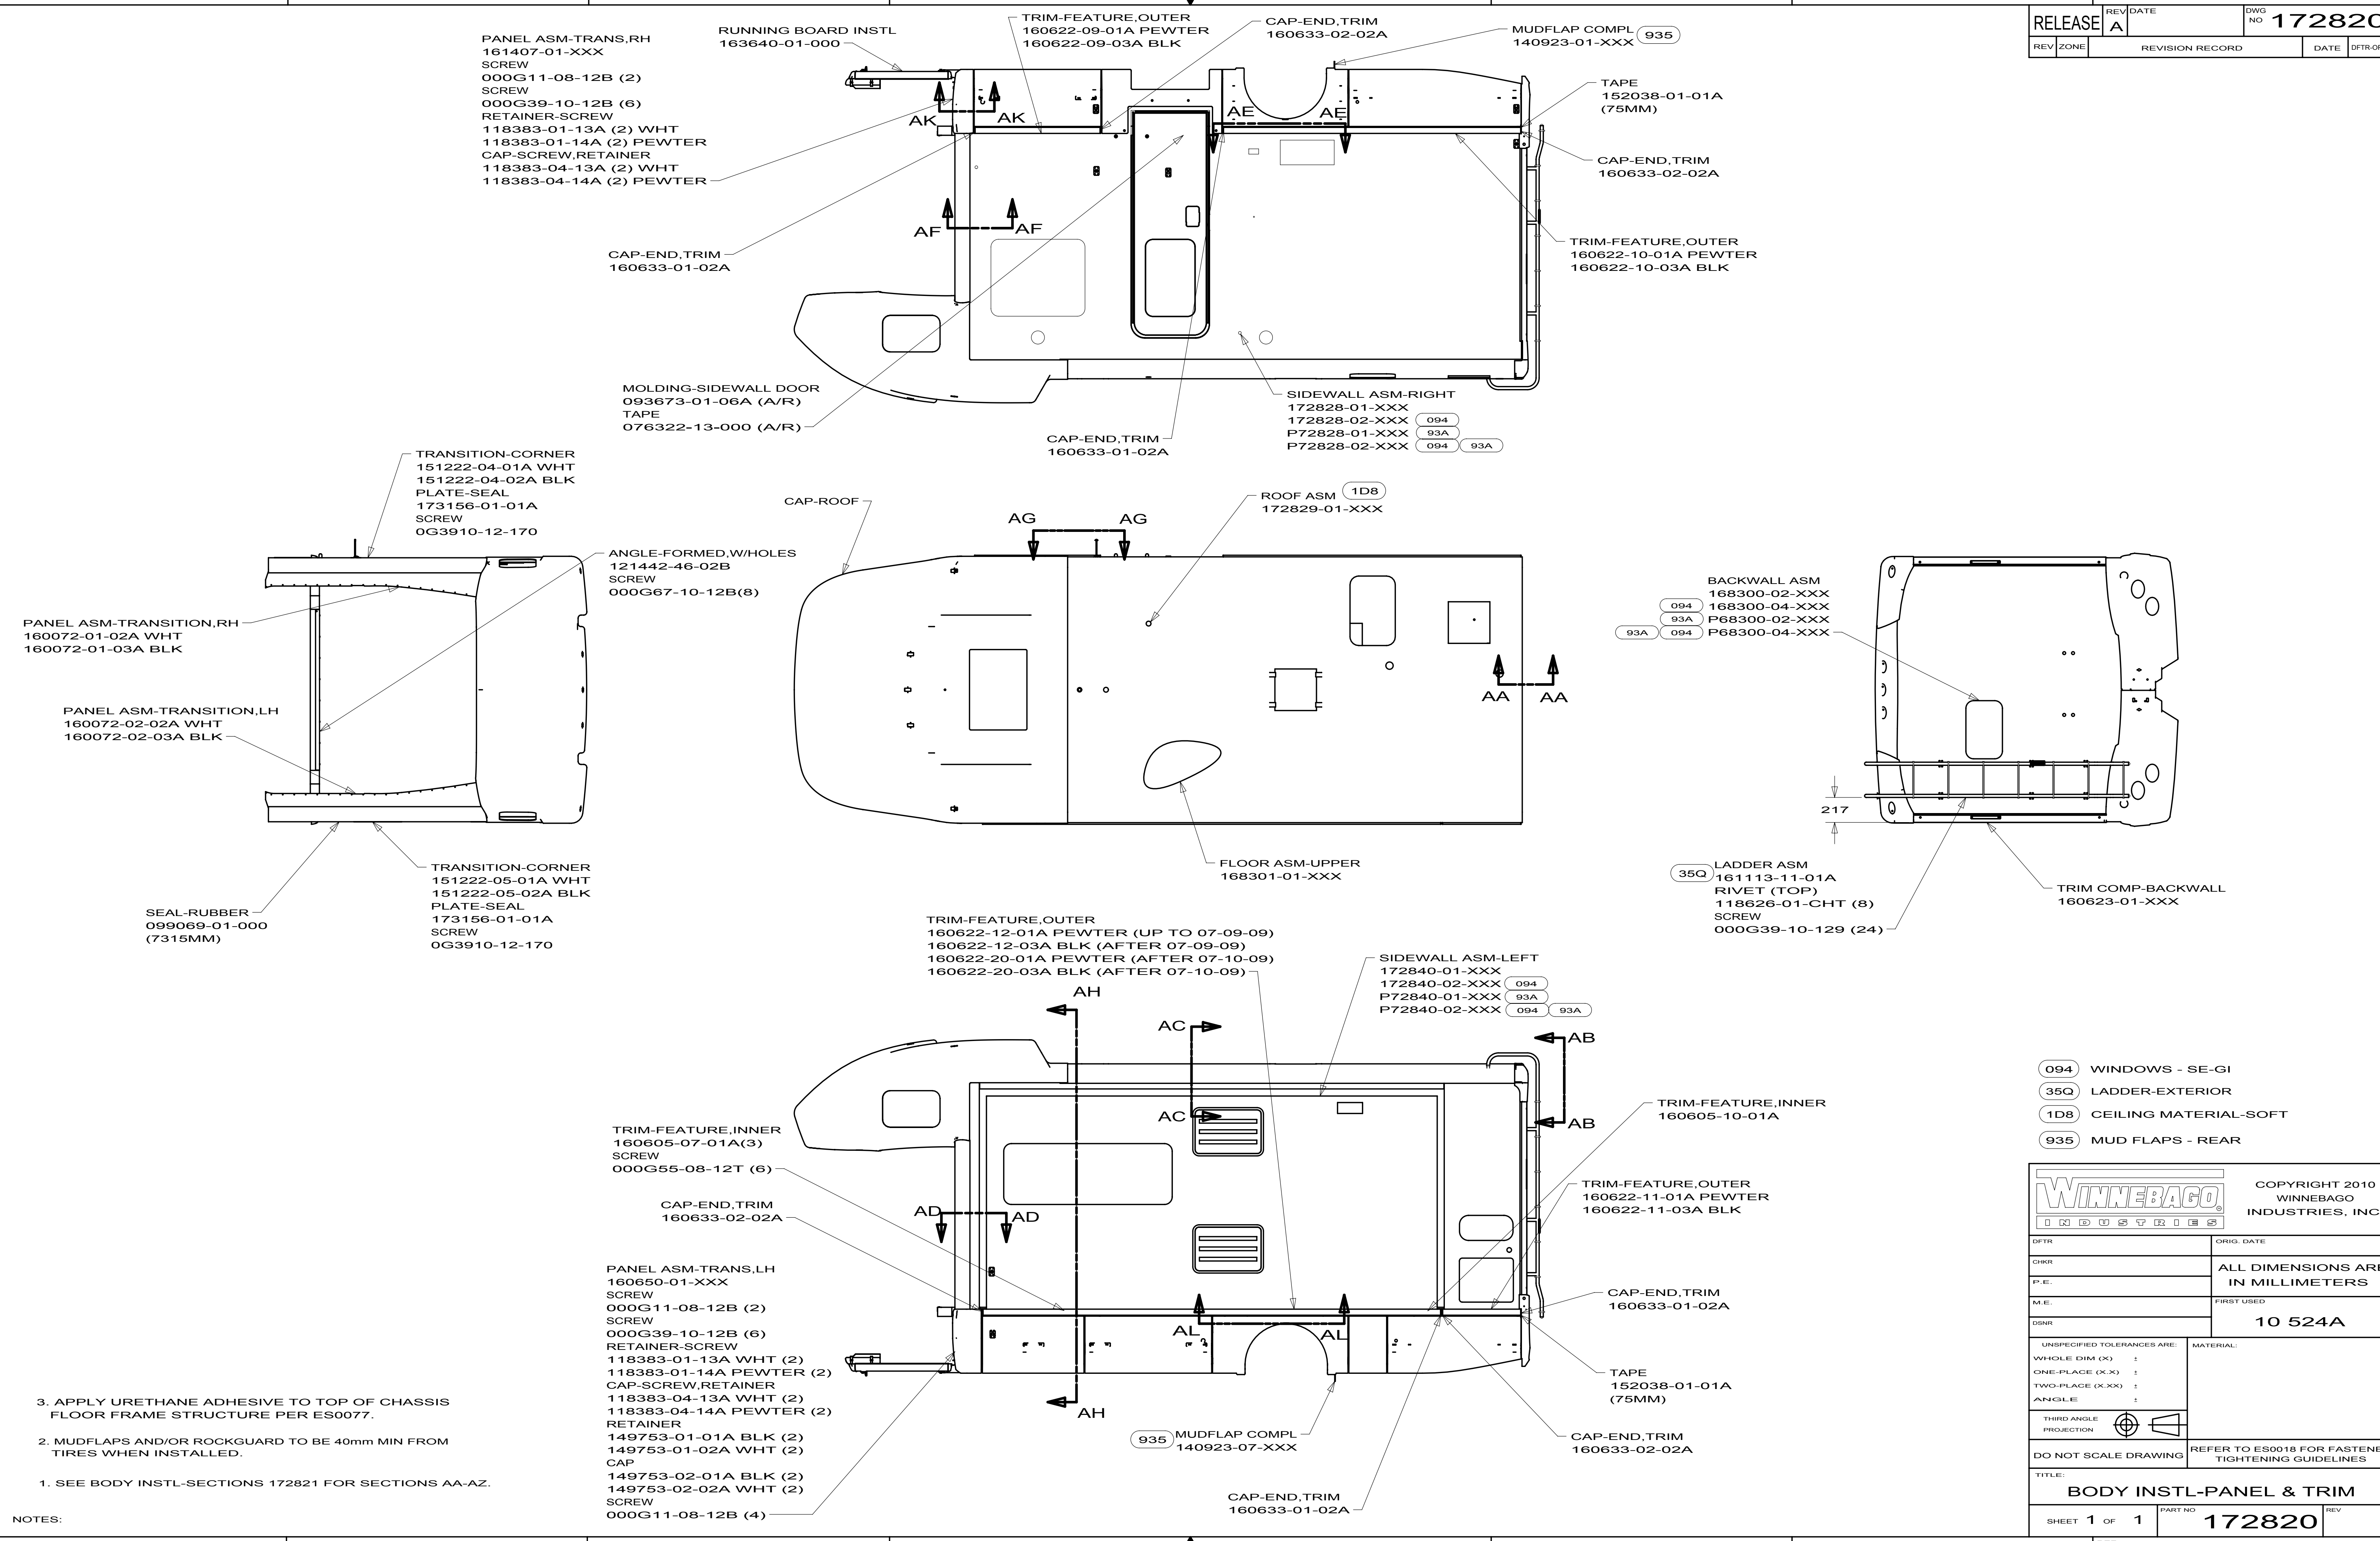

3. APPLY URETHANE ADHESIVE TO TOP OF CHASSIS FLOOR FRAME STRUCTURE PER ES0077.
2. MUDFLAPS AND/OR ROCKGUARD TO BE 40mm MIN FROM TIRES WHEN INSTALLED.
1. SEE BODY INSTL-SECTIONS 172821 FOR SECTIONS AA-AZ.

- | | |
|------------|-----------------------|
| 094 | WINDOWS - SE-GI |
| 35Q | LADDER-EXTERIOR |
| 1D8 | CEILING MATERIAL-SOFT |
| 935 | MUD FLAPS - REAR |

		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.
DFT#	ORIG. DATE	
CH#	ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.	10 524A	
M.E.		
DIS#		
UNSPECIFIED TOLERANCES ARE:	MATERIAL:	
WHOLE DIM (X) ±	REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
ONE-PLACE (X,X) ±		
TWO-PLACE (X,XX) ±		
ANGLE ±		
THIRD ANGLE PROJECTION		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-PANEL & TRIM		
SHEET 1 OF 1	PART NO	REV
172820		

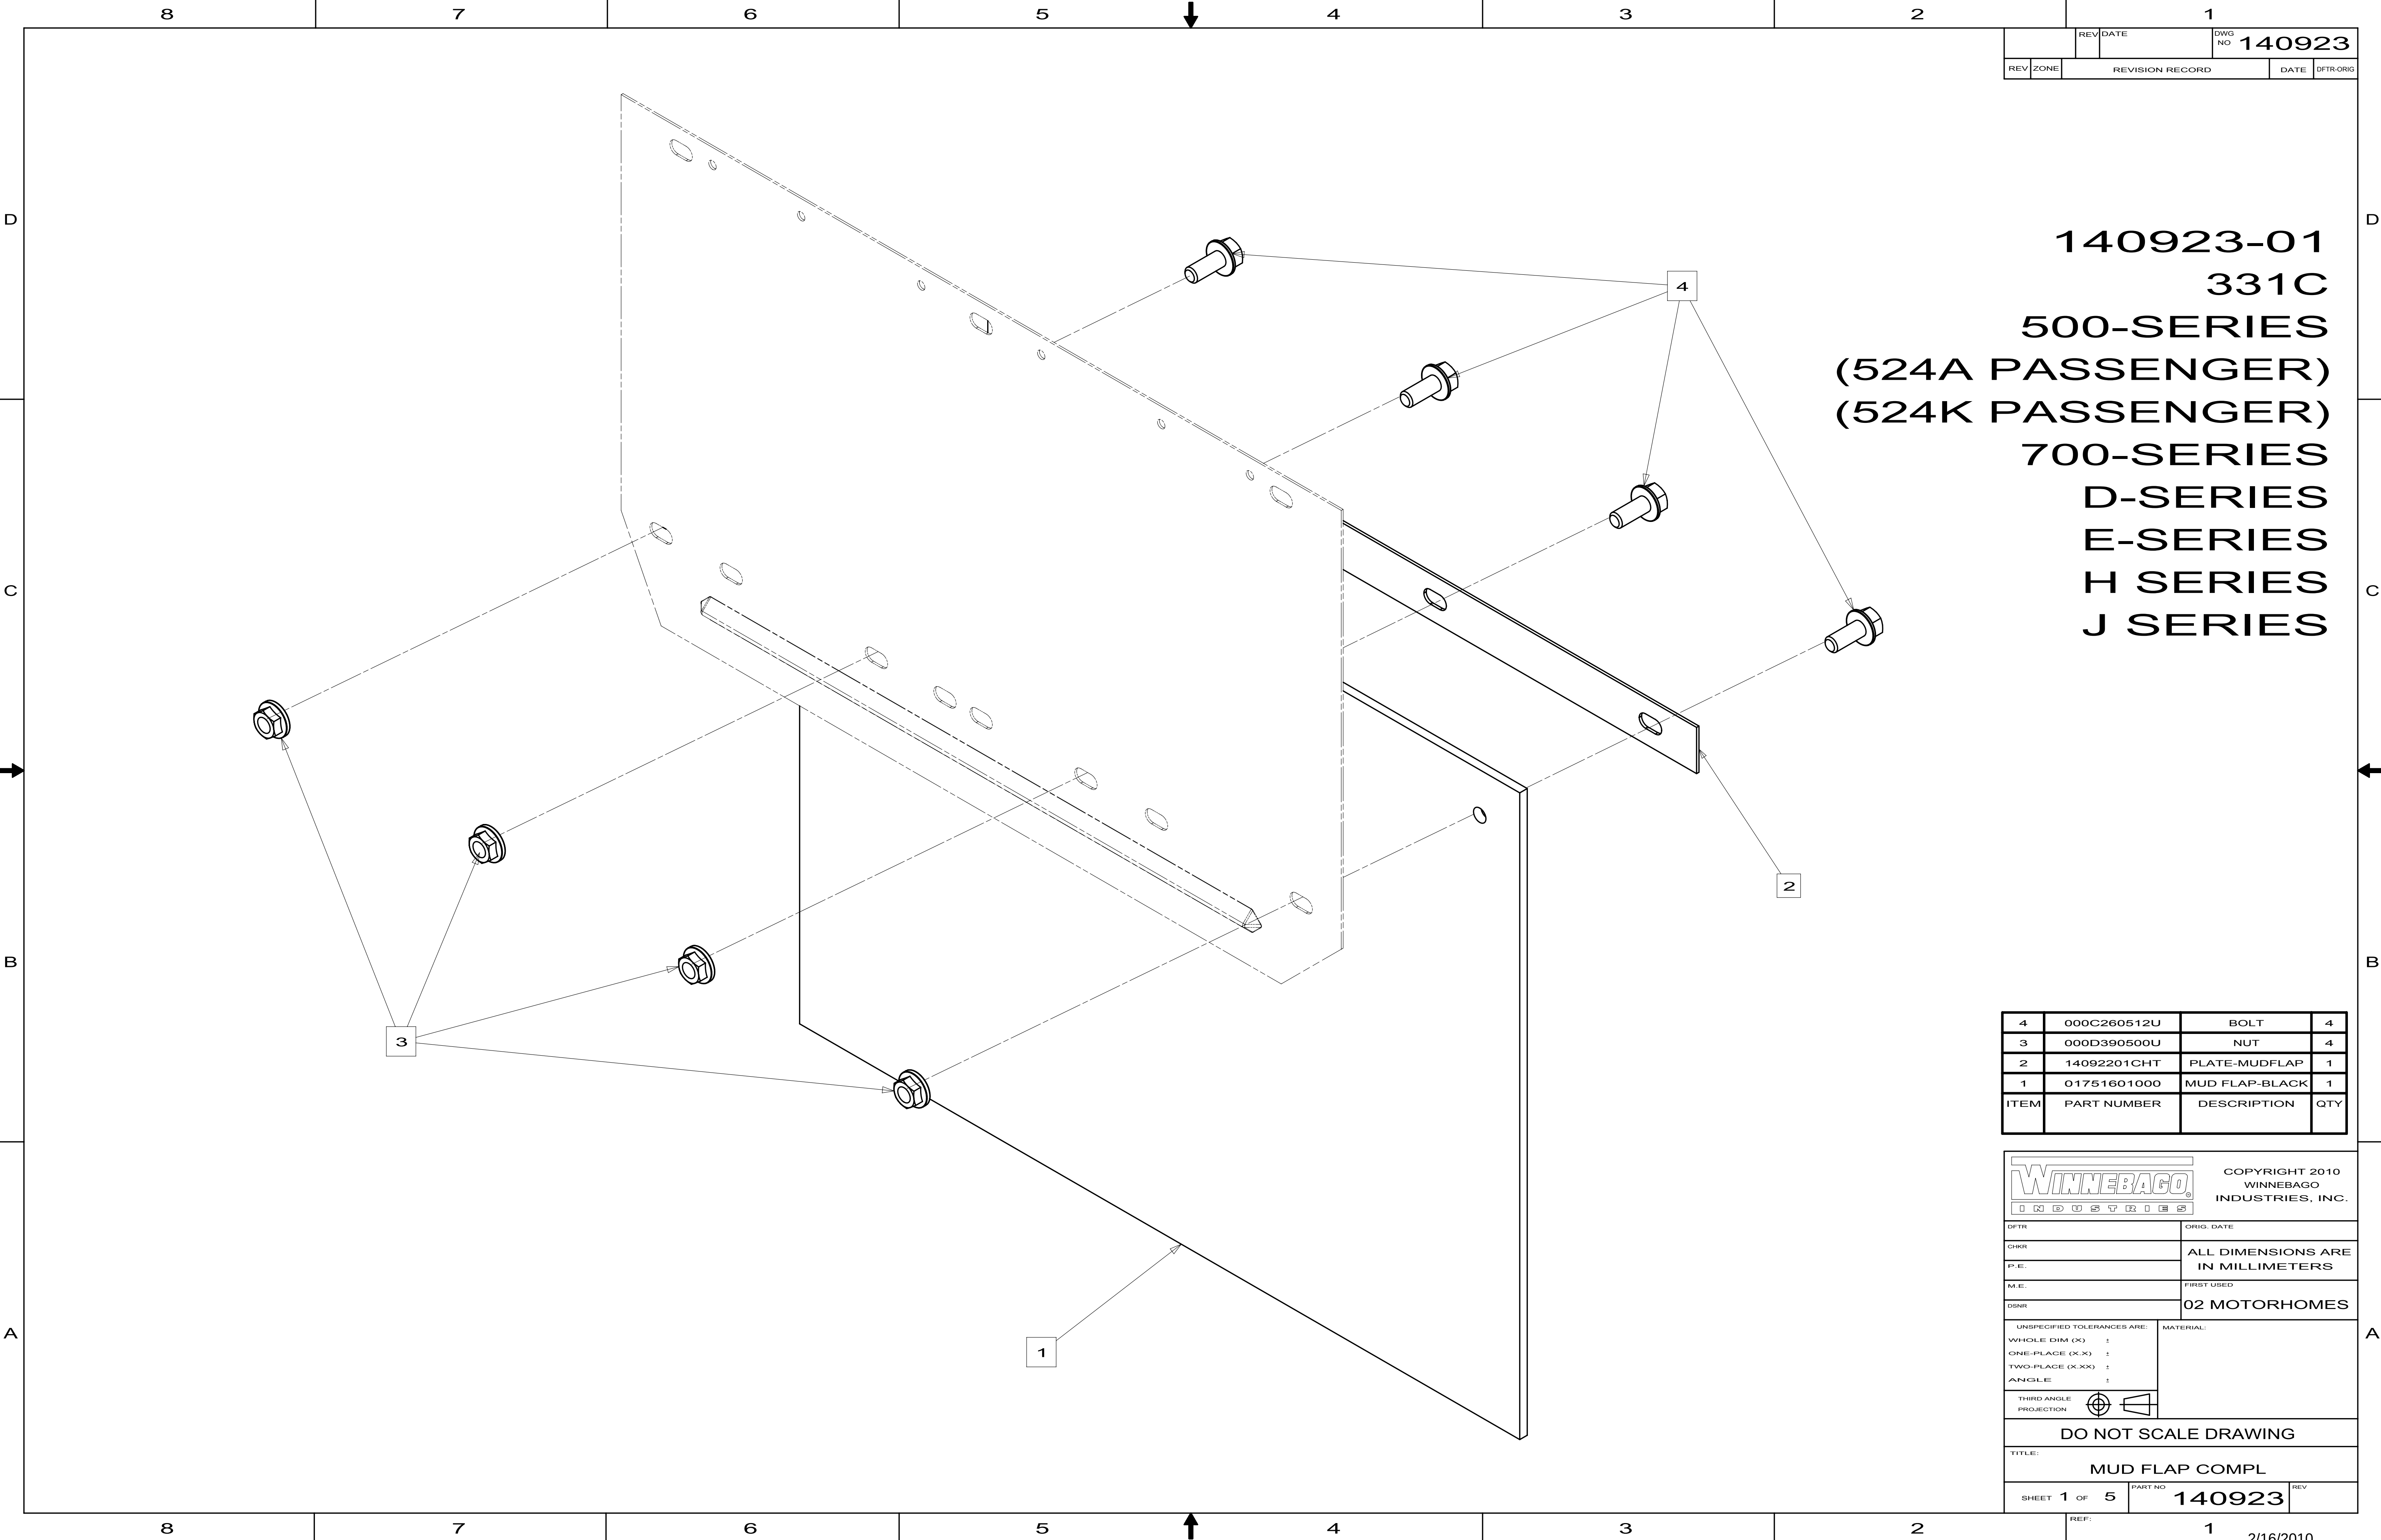


140923-01
331C
500-SERIES
(524A PASSENGER)
(524K PASSENGER)
700-SERIES
D-SERIES
E-SERIES
H SERIES
J SERIES

4	000C260512U	BOLT	4
3	000D390500U	NUT	4
2	14092201CHT	PLATE-MUDFLAP	1
1	01751601000	MUD FLAP-BLACK	1
ITEM	PART NUMBER	DESCRIPTION	QTY

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.


DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	02 MOTORHOMES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	:
ONE-PLACE (X.X)	:
TWO-PLACE (X.XX)	:
ANGLE	:
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: MUD FLAP COMPL	
SHEET 1 OF 5	PART NO 140923 REV

REF: 1 2/16/2010

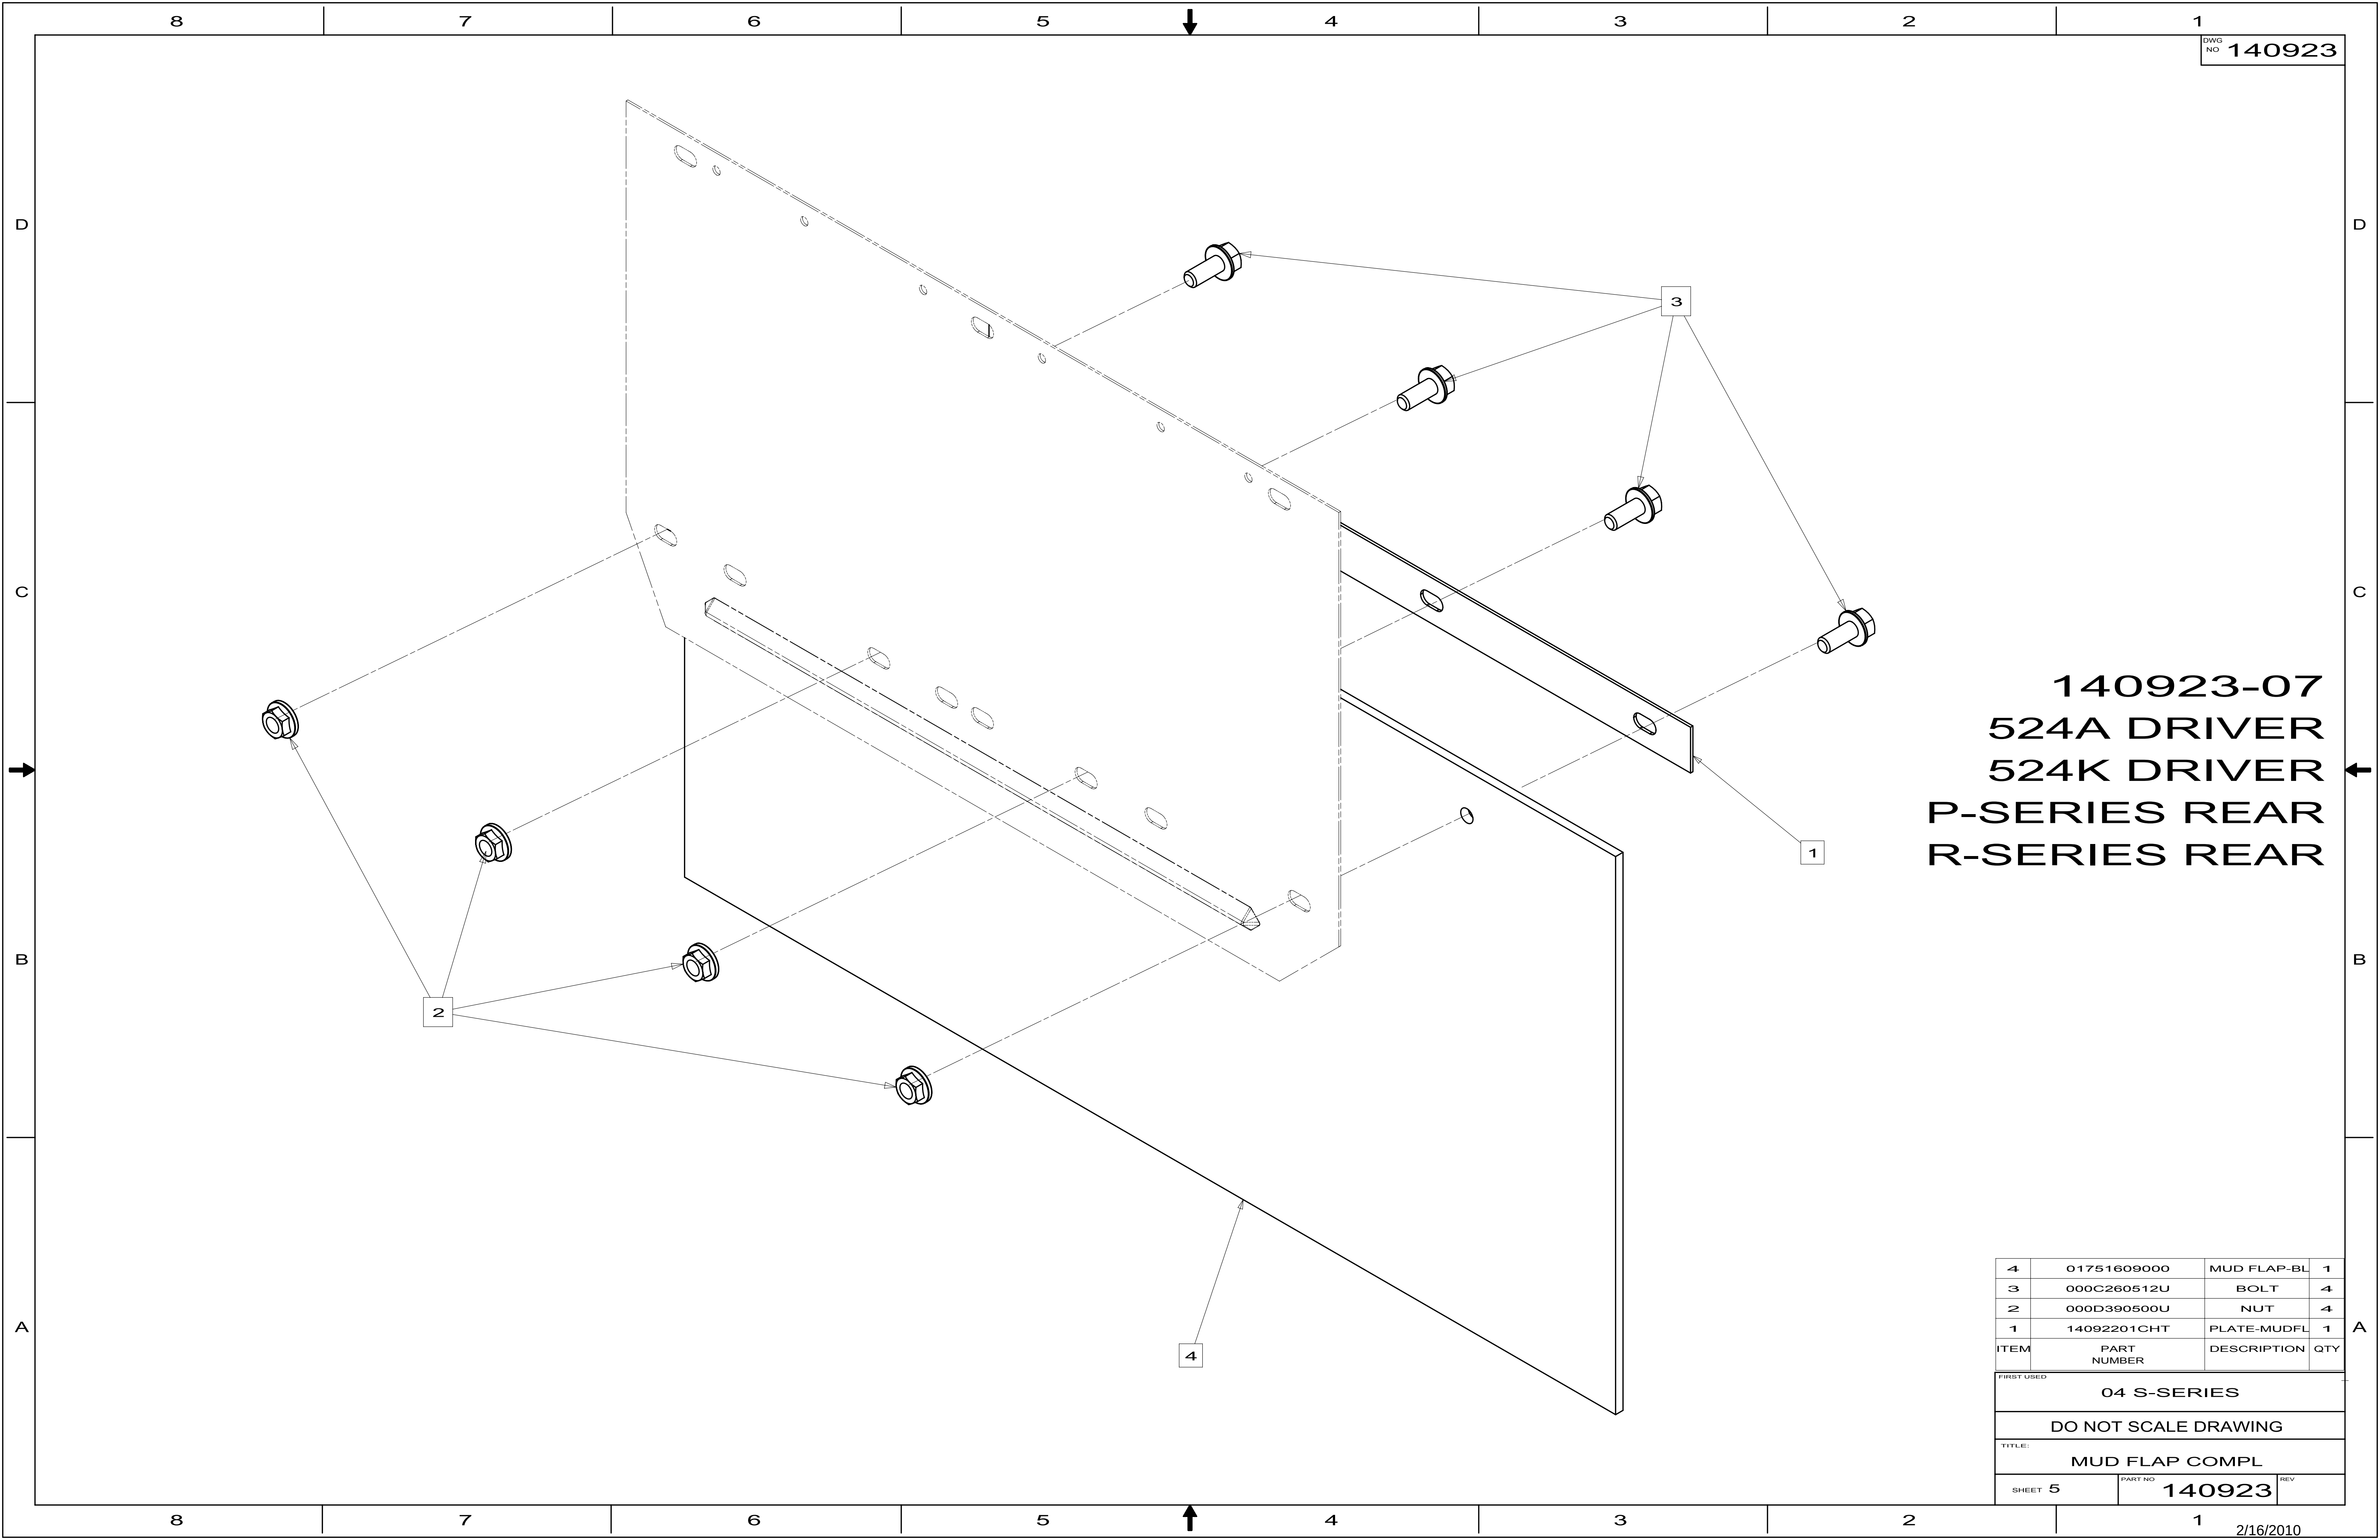

140923-07
524A DRIVER
524K DRIVER
P-SERIES REAR
R-SERIES REAR


4	01751609000	MUD FLAP-BL	1
3	000C260512U	BOLT	4
2	000D390500U	NUT	4
1	14092201CHT	PLATE-MUDFL	1
ITEM	PART NUMBER	DESCRIPTION	QTY
FIRST USED			
04 S-SERIES			
DO NOT SCALE DRAWING			
TITLE:			
MUD FLAP COMPL			
SHEET 5	PART NO 140923	REV	

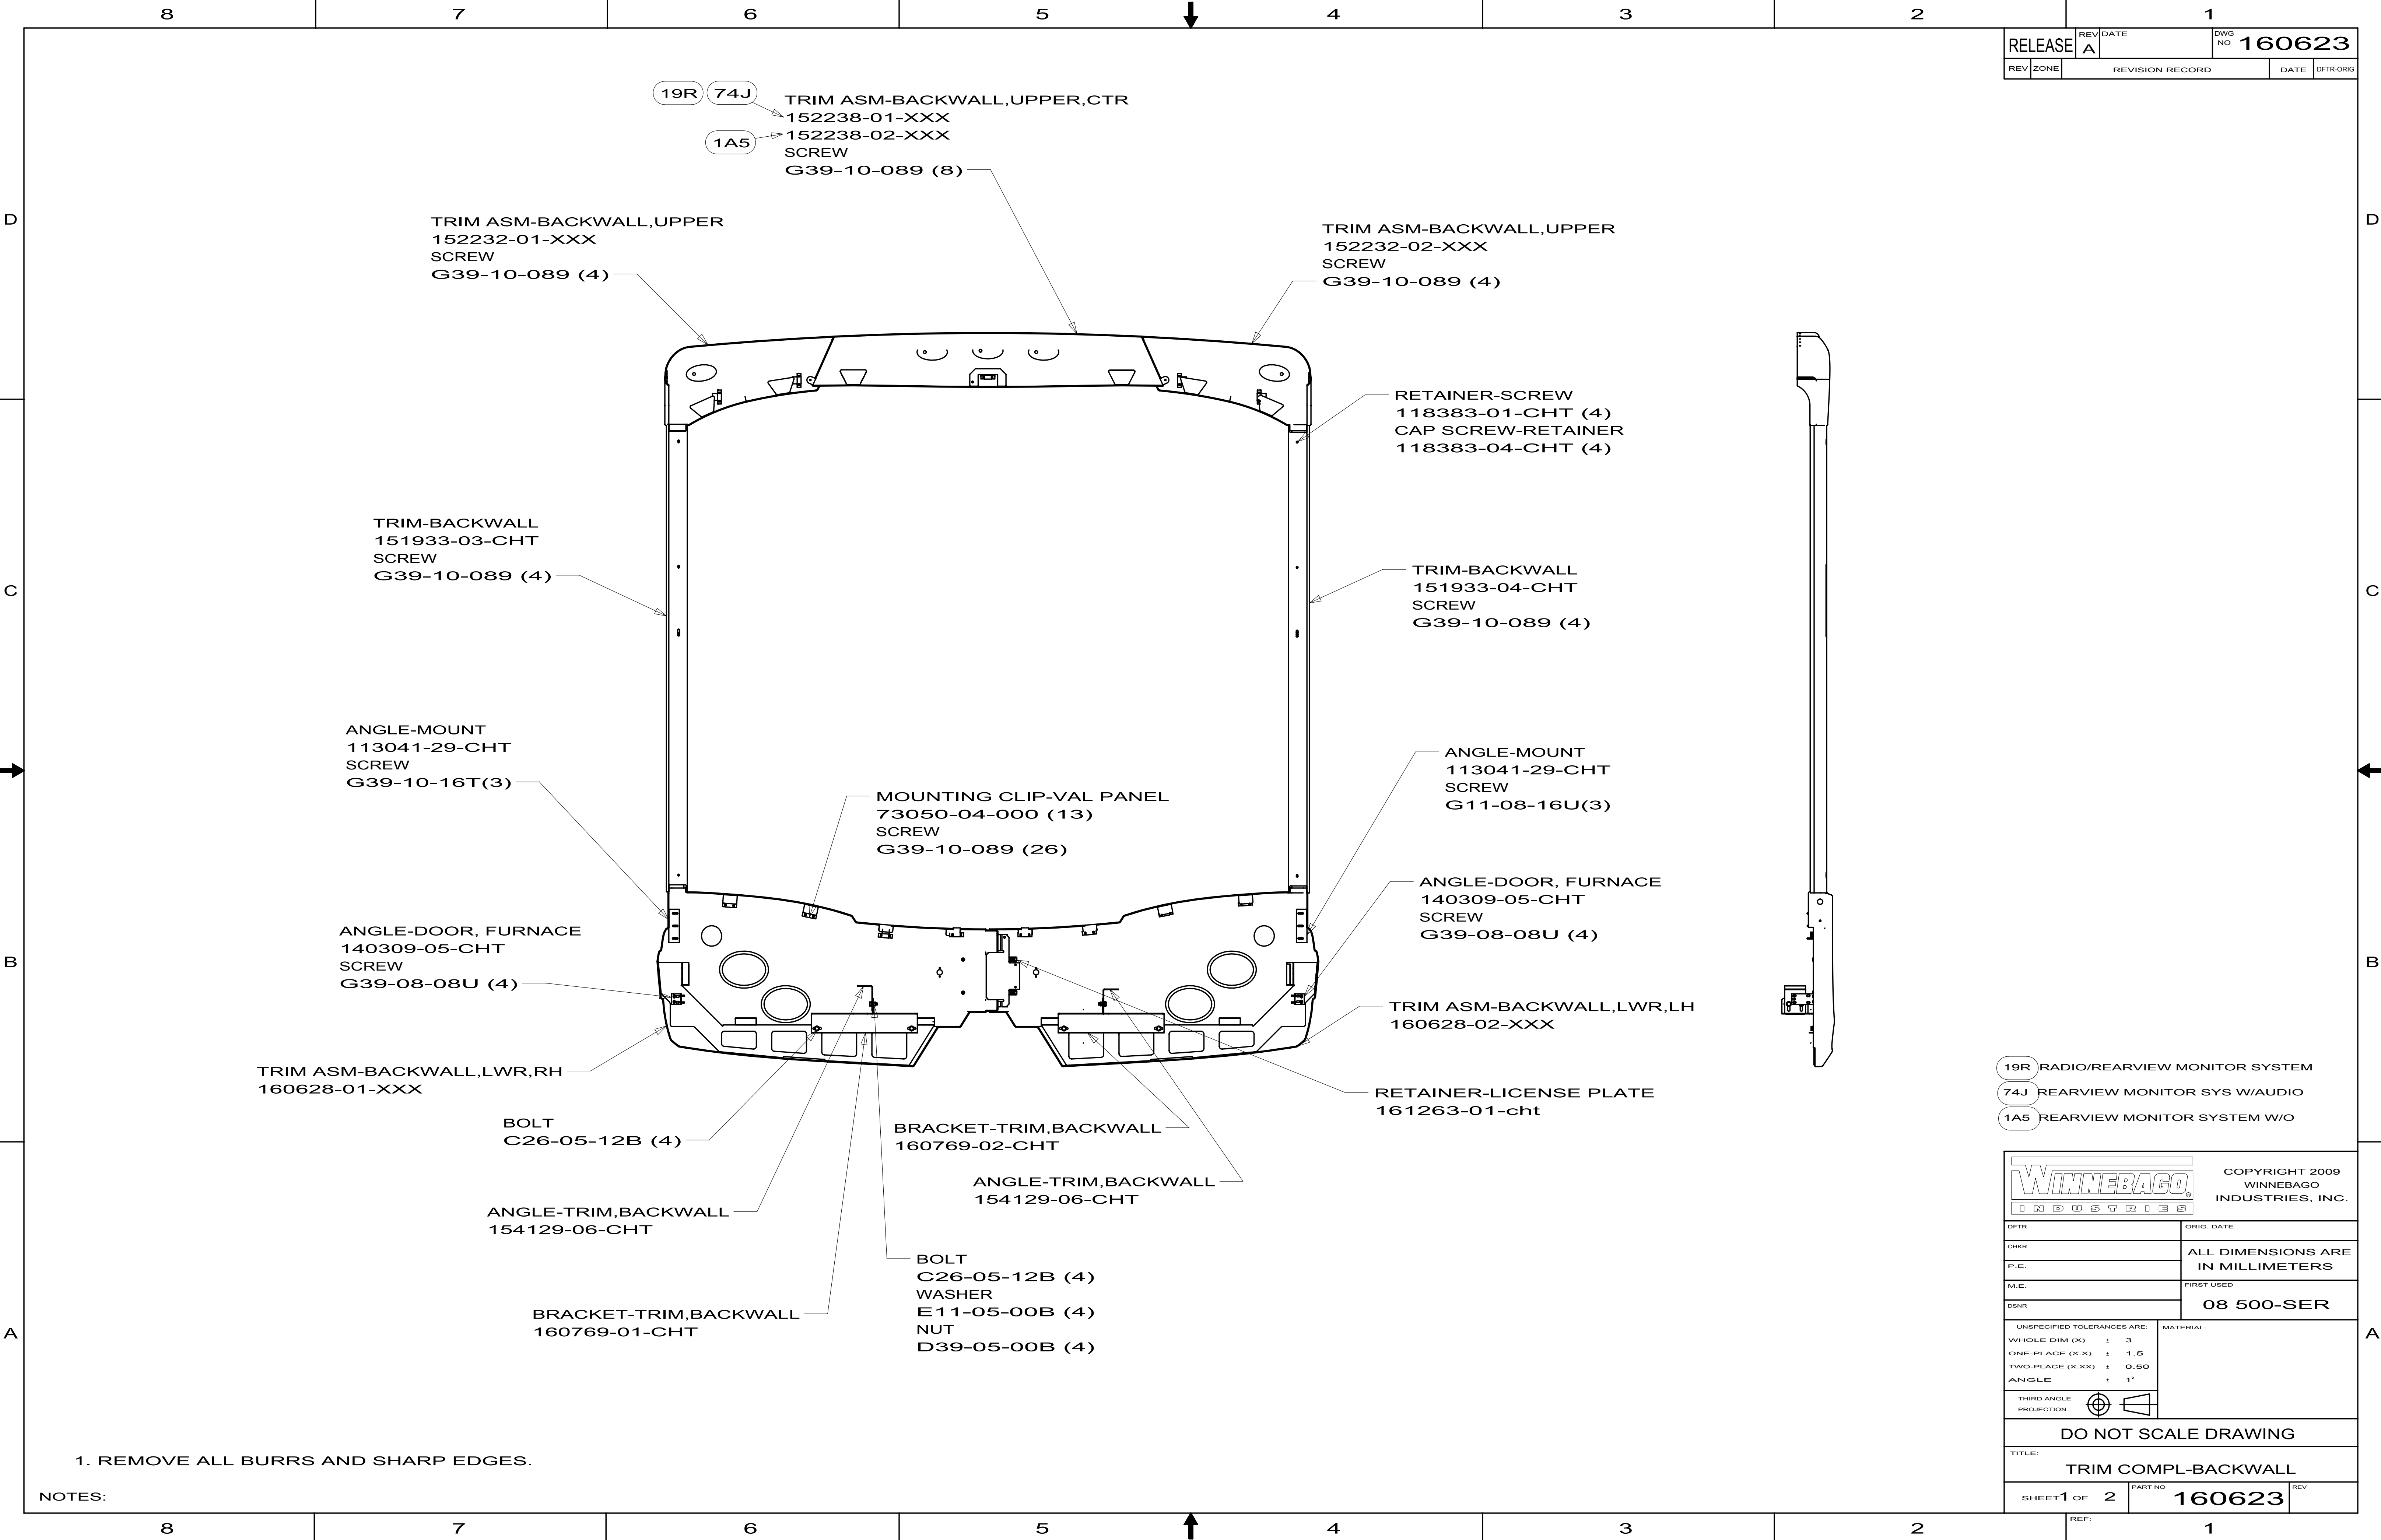

RELEASE		REV	DATE	DWG NO	160623
REV	ZONE	REVISION RECORD			DATE

- 19R RADIO/REARVIEW MONITOR SYSTEM
- 74J REARVIEW MONITOR SYS W/AUDIO
- 1A5 REARVIEW MONITOR SYSTEM W/O

WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTD		ORIG. DATE	
CHKD		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DSNR		08 500-SER	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) : 3			
ONE-PLACE (X.X) : 1.5			
TWO-PLACE (X.XX) : 0.50			
ANGLE : 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: TRIM COMPL-BACKWALL			
SHEET 1 OF 2		PART NO 160623	
REF:		1	

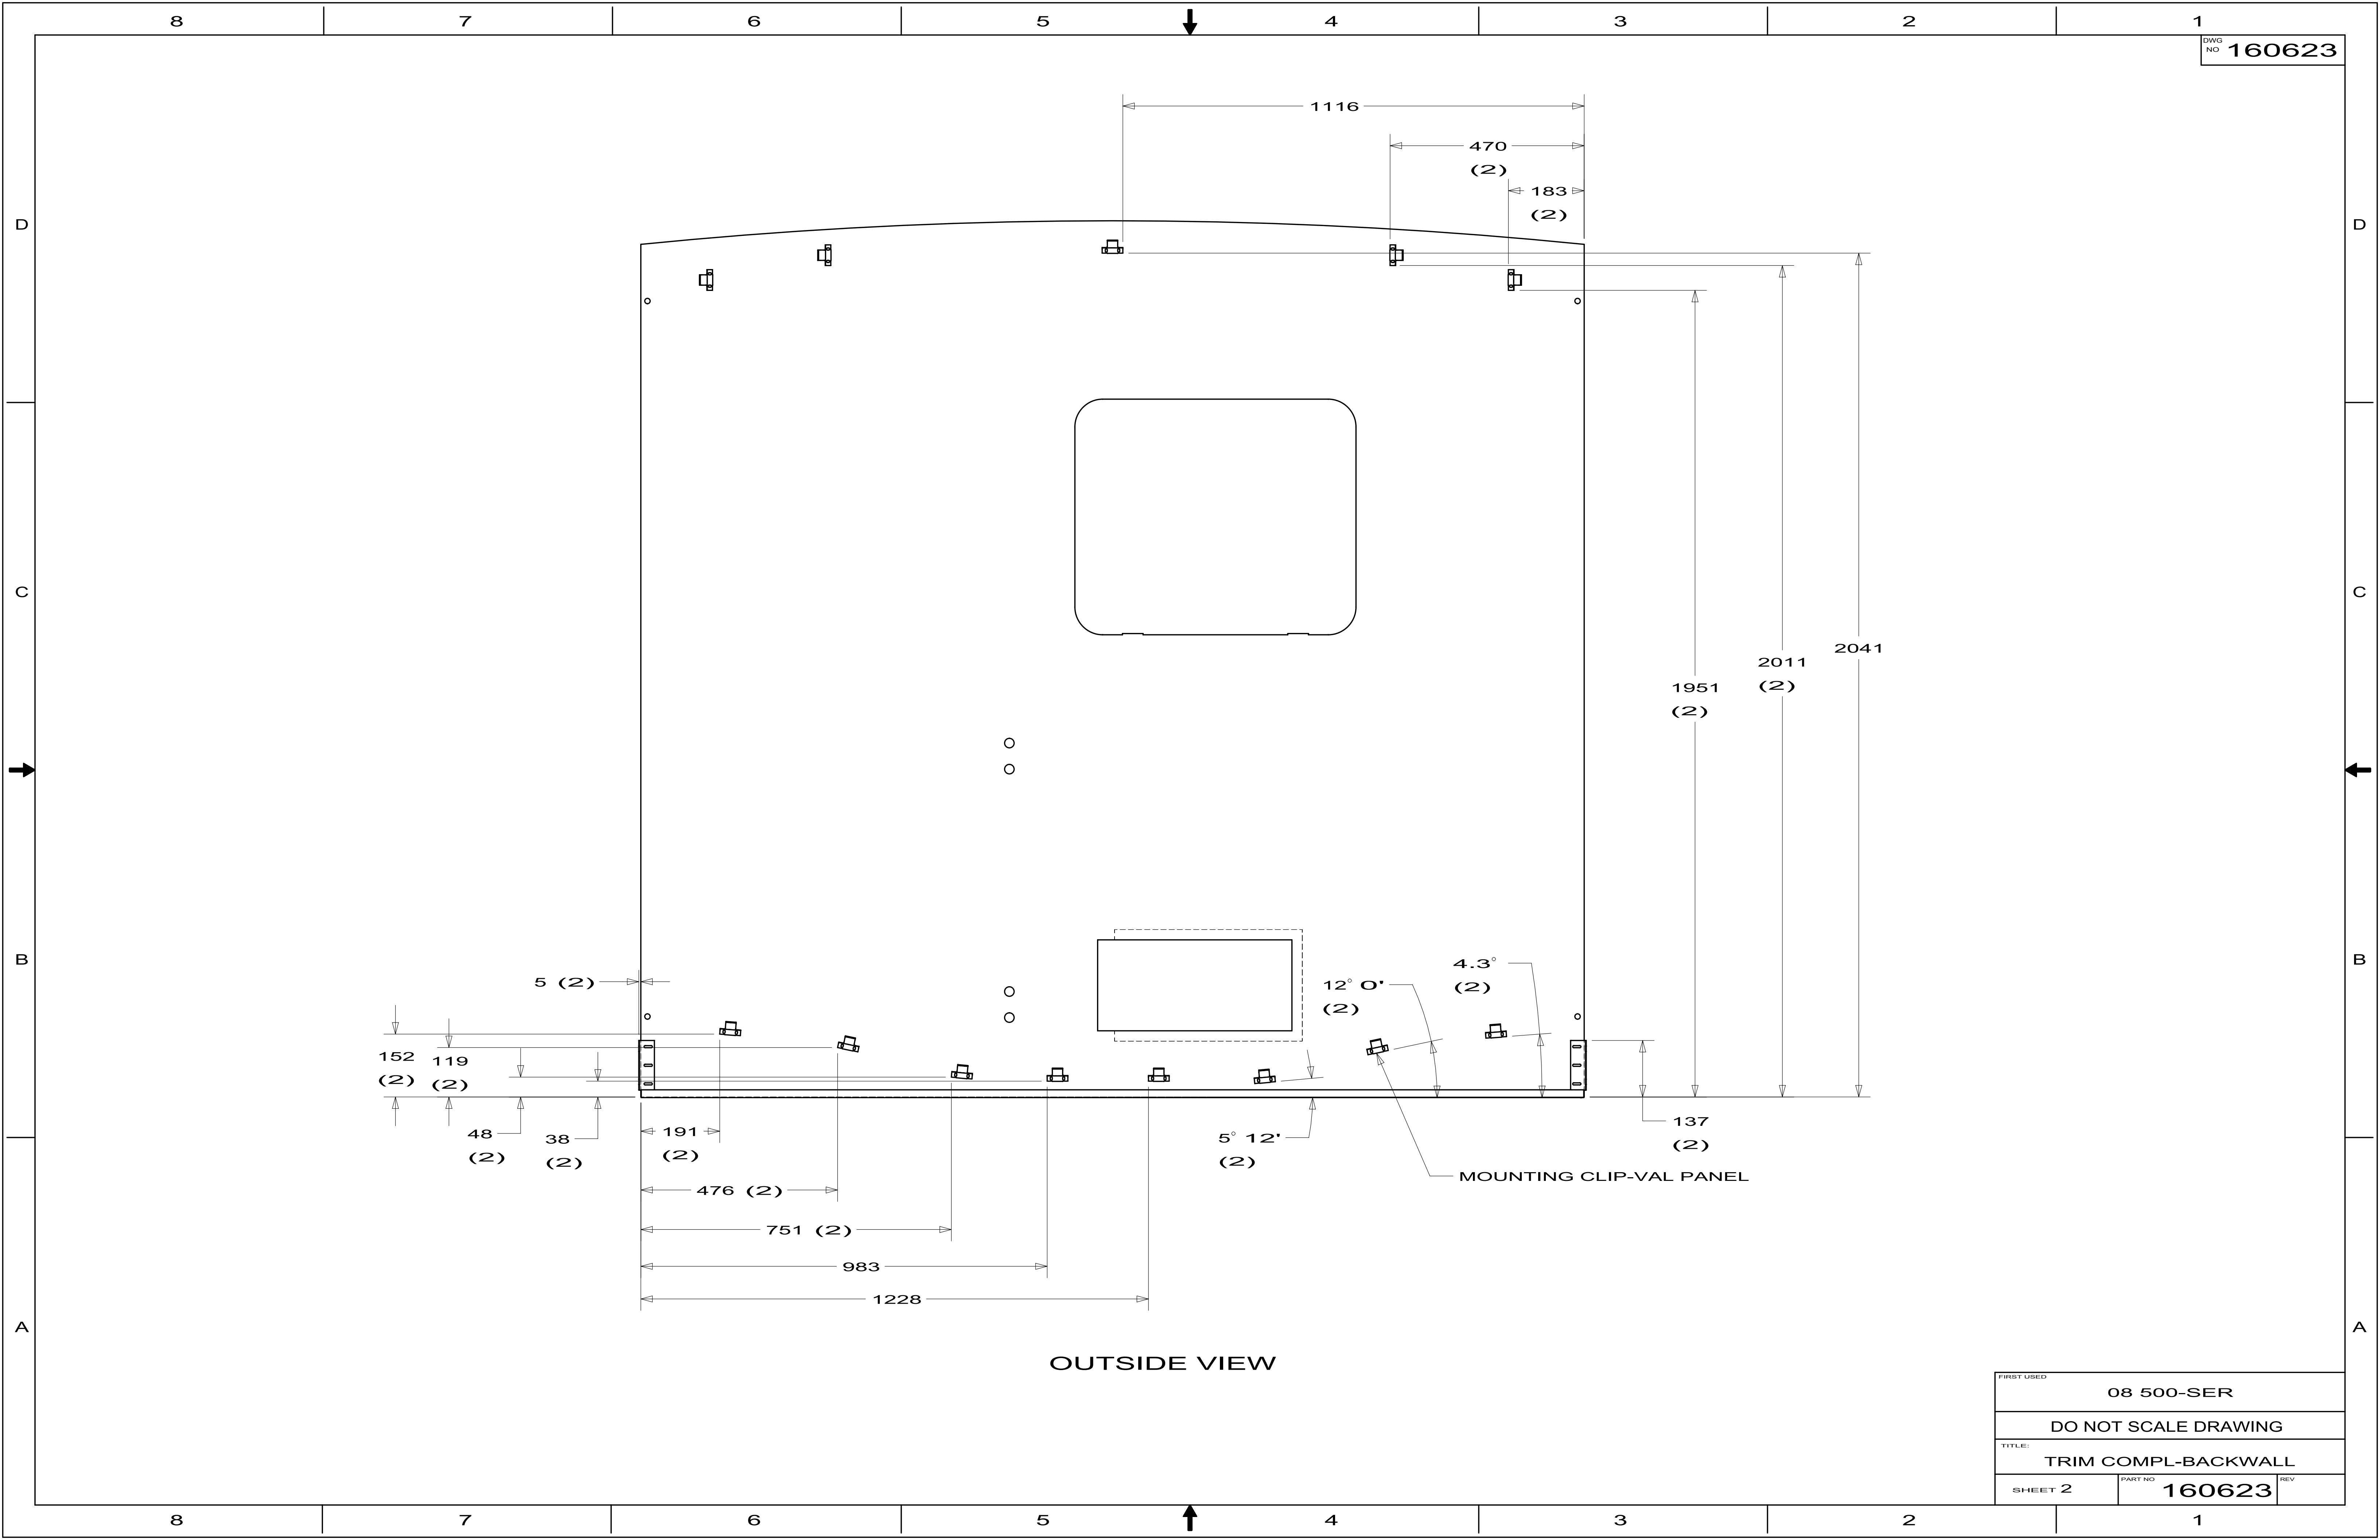

FIRST USED			08 500-SER					
DO NOT SCALE DRAWING								
TITLE: TRIM COMPL-BACKWALL								
SHEET 2		PART NO 160623		REV				

DWG NO	SHEET
163640-01	1
163640-02	2

524A,J,K,P

524DL

RELEASE	REV DATE	DWG NO	163640
REV ZONE	REVISION RECORD	DATE	DTFR.Orig

524A,J,K,P
163640-01

CAP-END,STEP,CAB,REAR,BLK
163254-03-01A

TAPE-ANTI SLIP
038327-01-000
(125MM)

TAPE-ANTI SLIP
038327-01-000
(340MM)

VIEW E
(RH SHOWN)
(LH OPPOSITE)

1 2 3
BOLT-HEX-SER FLG
C26-05-40B (2)
WING-TOGGLE
163691-01-01A (2)

BOLT-HEX-SER FLG
C26-06-16T (2)

BRACKET ASM-STEP,CAB,FRT
172267-01-04B (RH)
172267-02-04B (LH)

BOLT-HEX-SER FLG
C26-06-16T (2)

BRACKET ASM-STEP,CAB,RR
172271-01-04B (RH)
172271-02-01B (LH)

4
RIVET-MONOBOLT,3/16
163664-01-01A
(8 TOTAL)

B
STEP ASM-ENTRY,CAB
163241-01-02A
TREAD-STEP,ENTRY,CAB
163252-01-01A

CAP-END,STEP,CAB,RH,FRT,BLK
163254-01-01A
CAP-END,STEP,CAB,LH,FRT,BLK
163254-02-01A

6. APPLY TAPE TO FORWARD FACING SURFACE.

5. TORQUE TO 9 FT-LBS.

4. RIVET HOLES TO BE Ø 4.85 - 5.11.


3. TORQUE TO 13 FT-LBS.

2. APPLY UNDERCOATING 100053-04-000 TO EDGES OF ENLARGED HOLES
BEFORE BRACKET INSTALLATION. ALSO APPLY TO BOLT HEADS AFTER INSTALLATION.

1. Ø 20.0 MM HOLES IN CAB TO BE ENLARGED TO Ø 22.2 MM (4 PLACES).









NOTES:

VIEW A
(RH SHOWN)
(LH OPPOSITE)



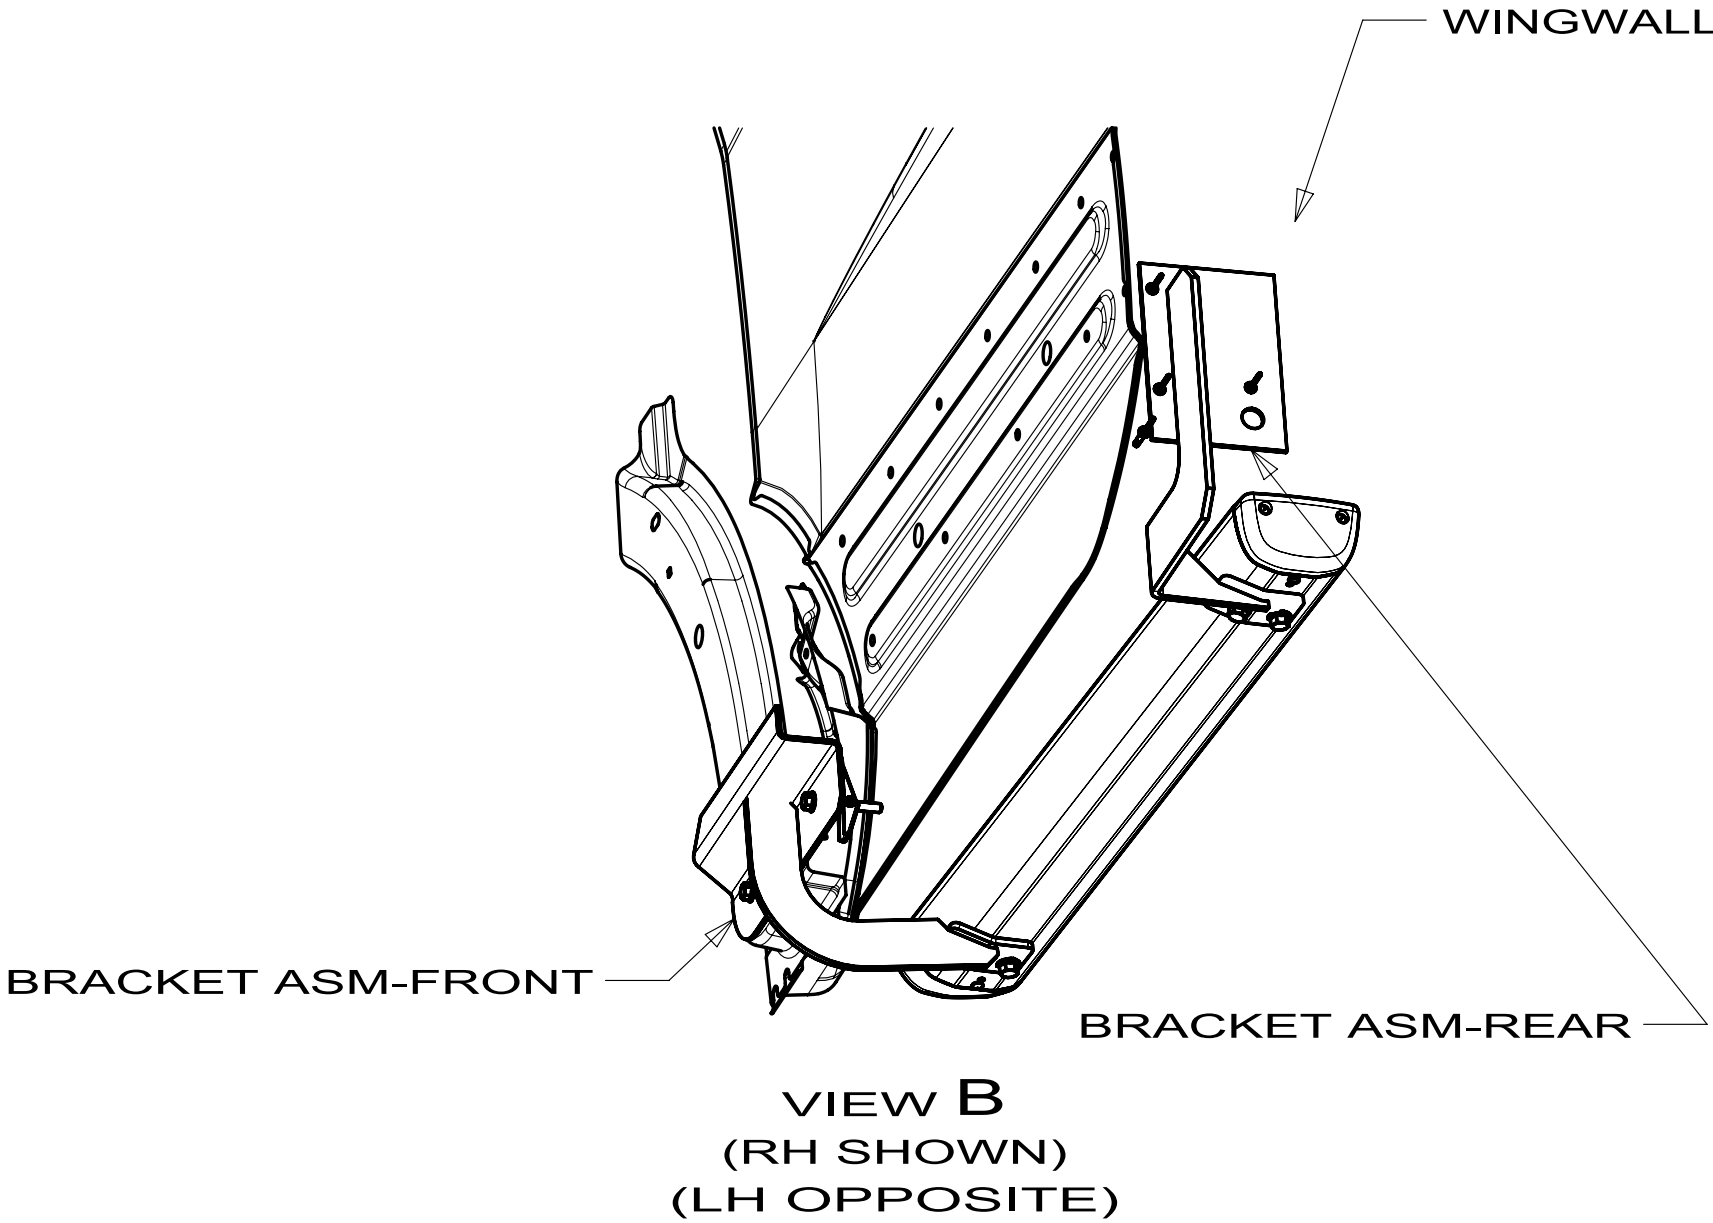


WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DTFR	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHRR			
P.E.			
M.E.	FIRST USED		
DSNR	08 500-SERIES		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: RUNNING BOARD INSTL			
SHEET 1 OF 2	PART NO	163640	REV
REF:		1	

524DL 163640-02

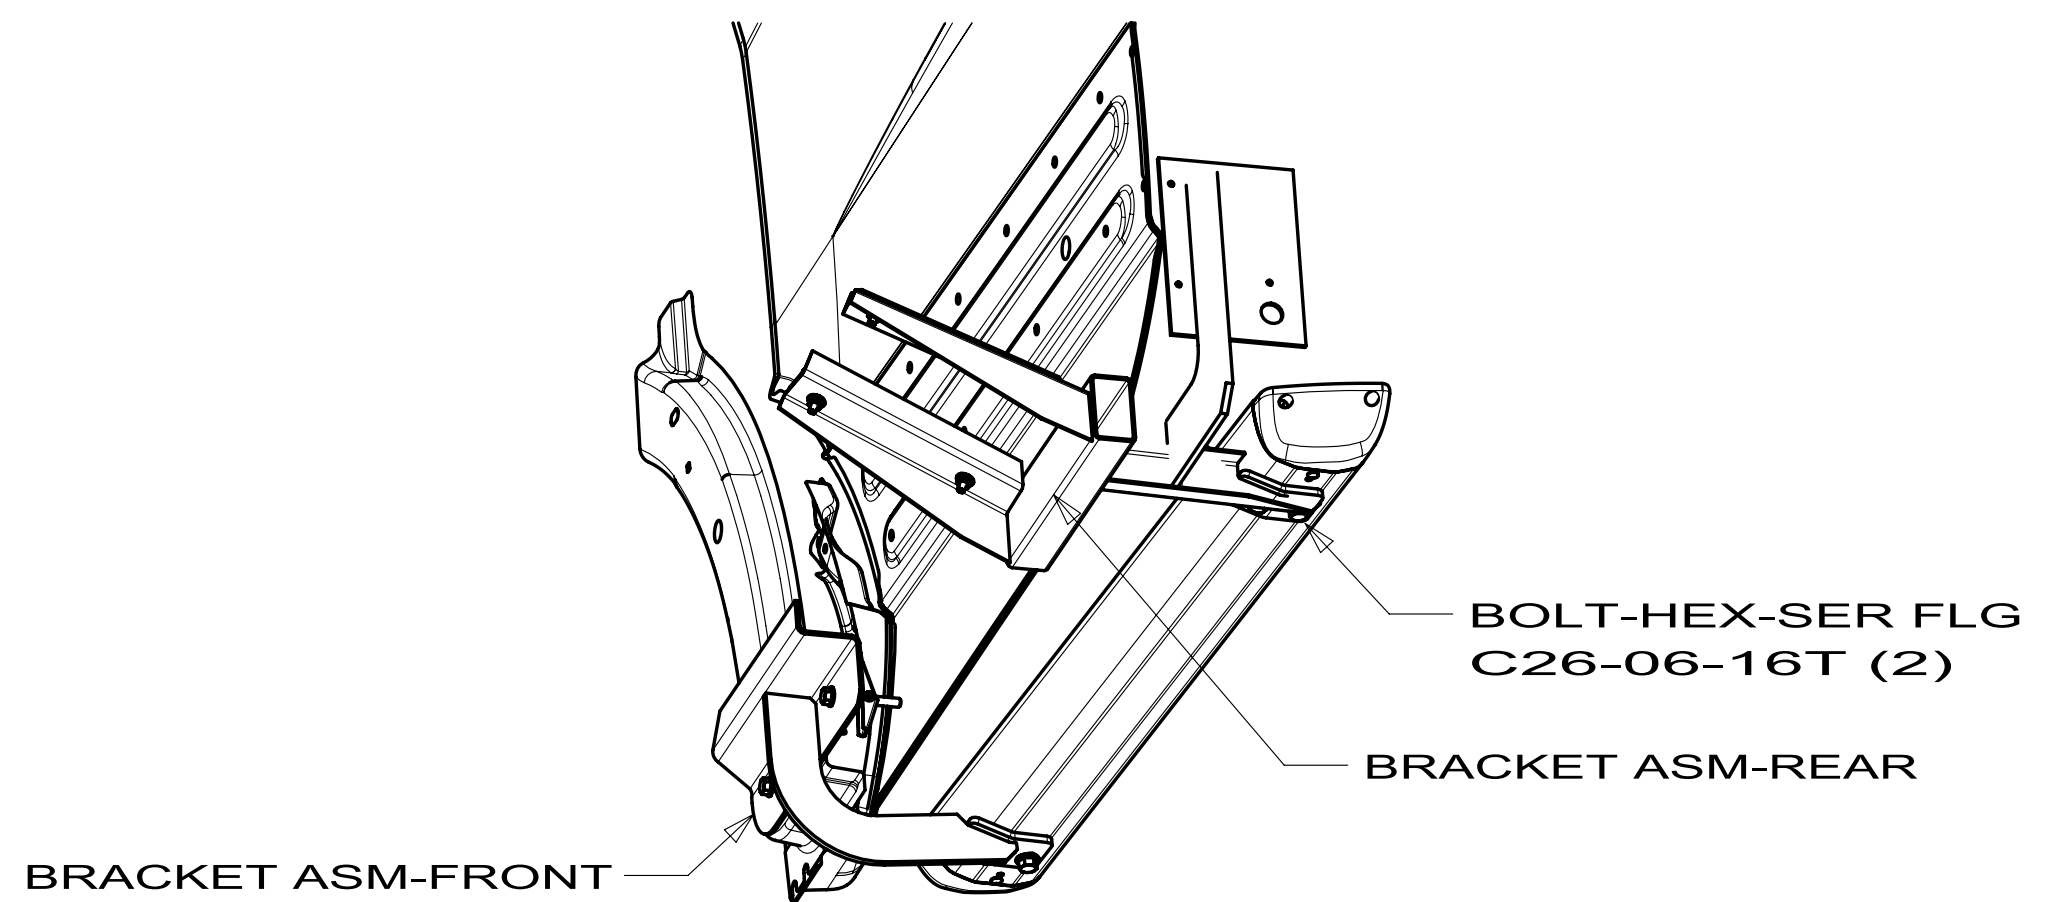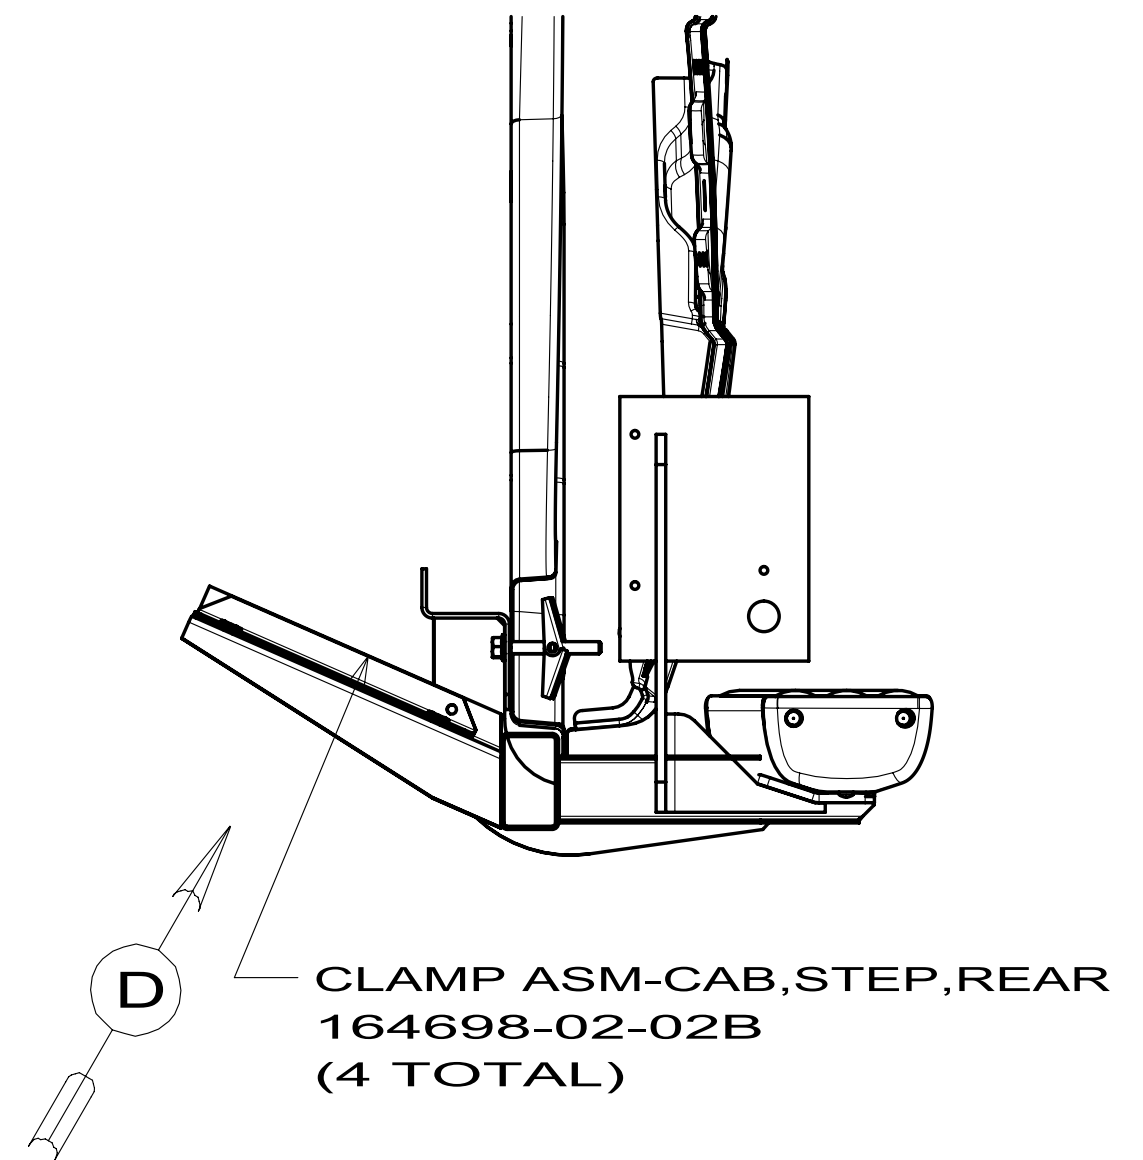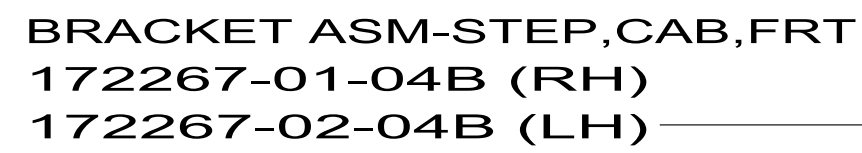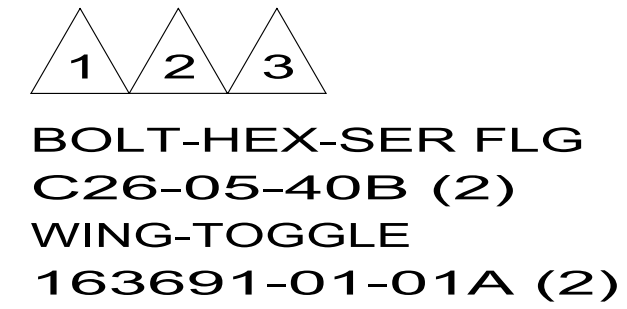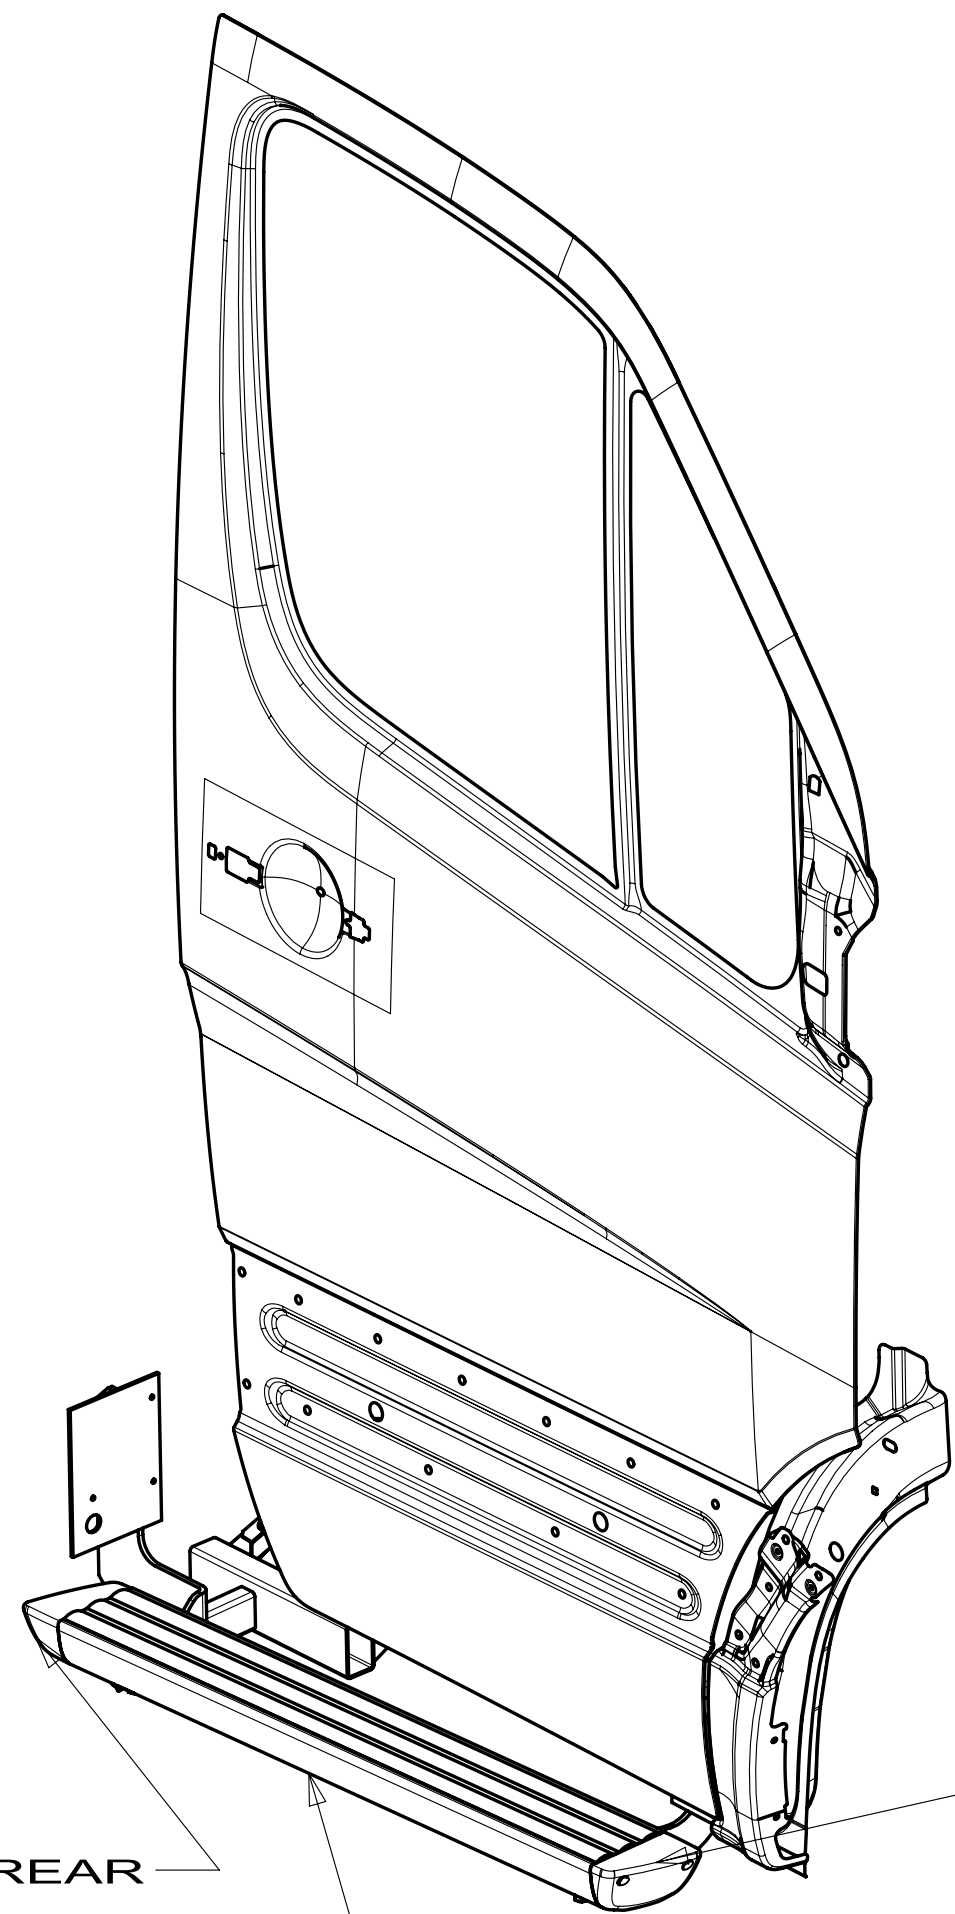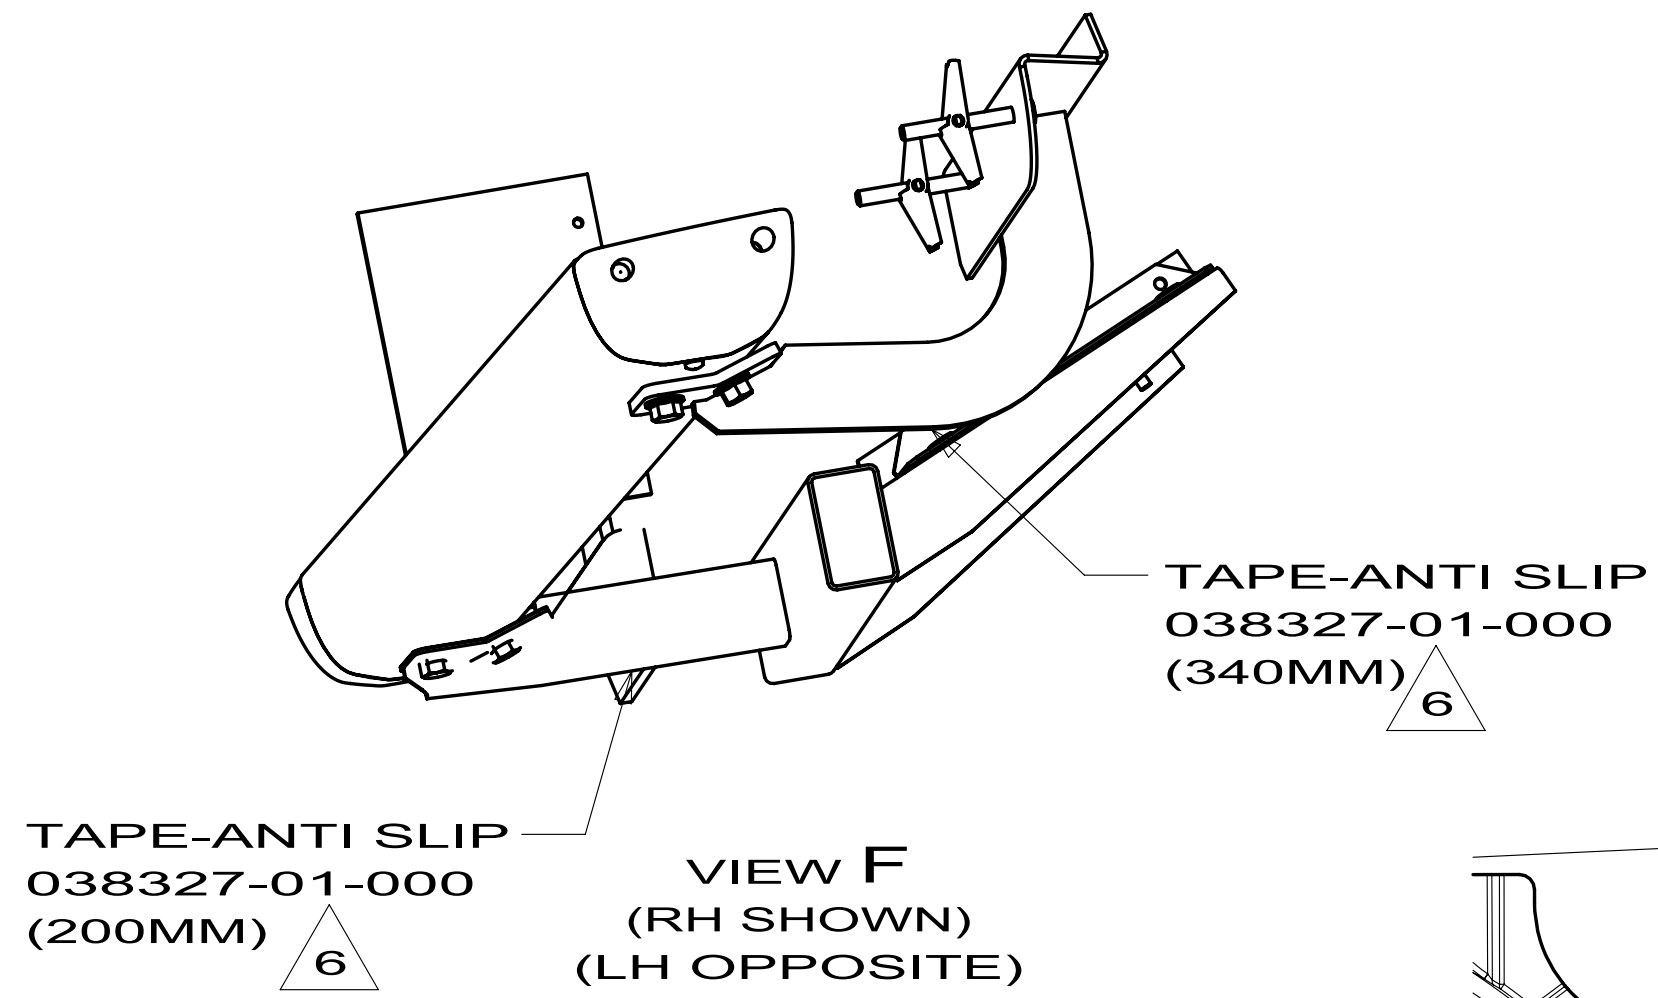

FIRST USED		
08 500-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
RUNNING BOARD INSTL		
SHEET 2	PART NO	REV
	163640	

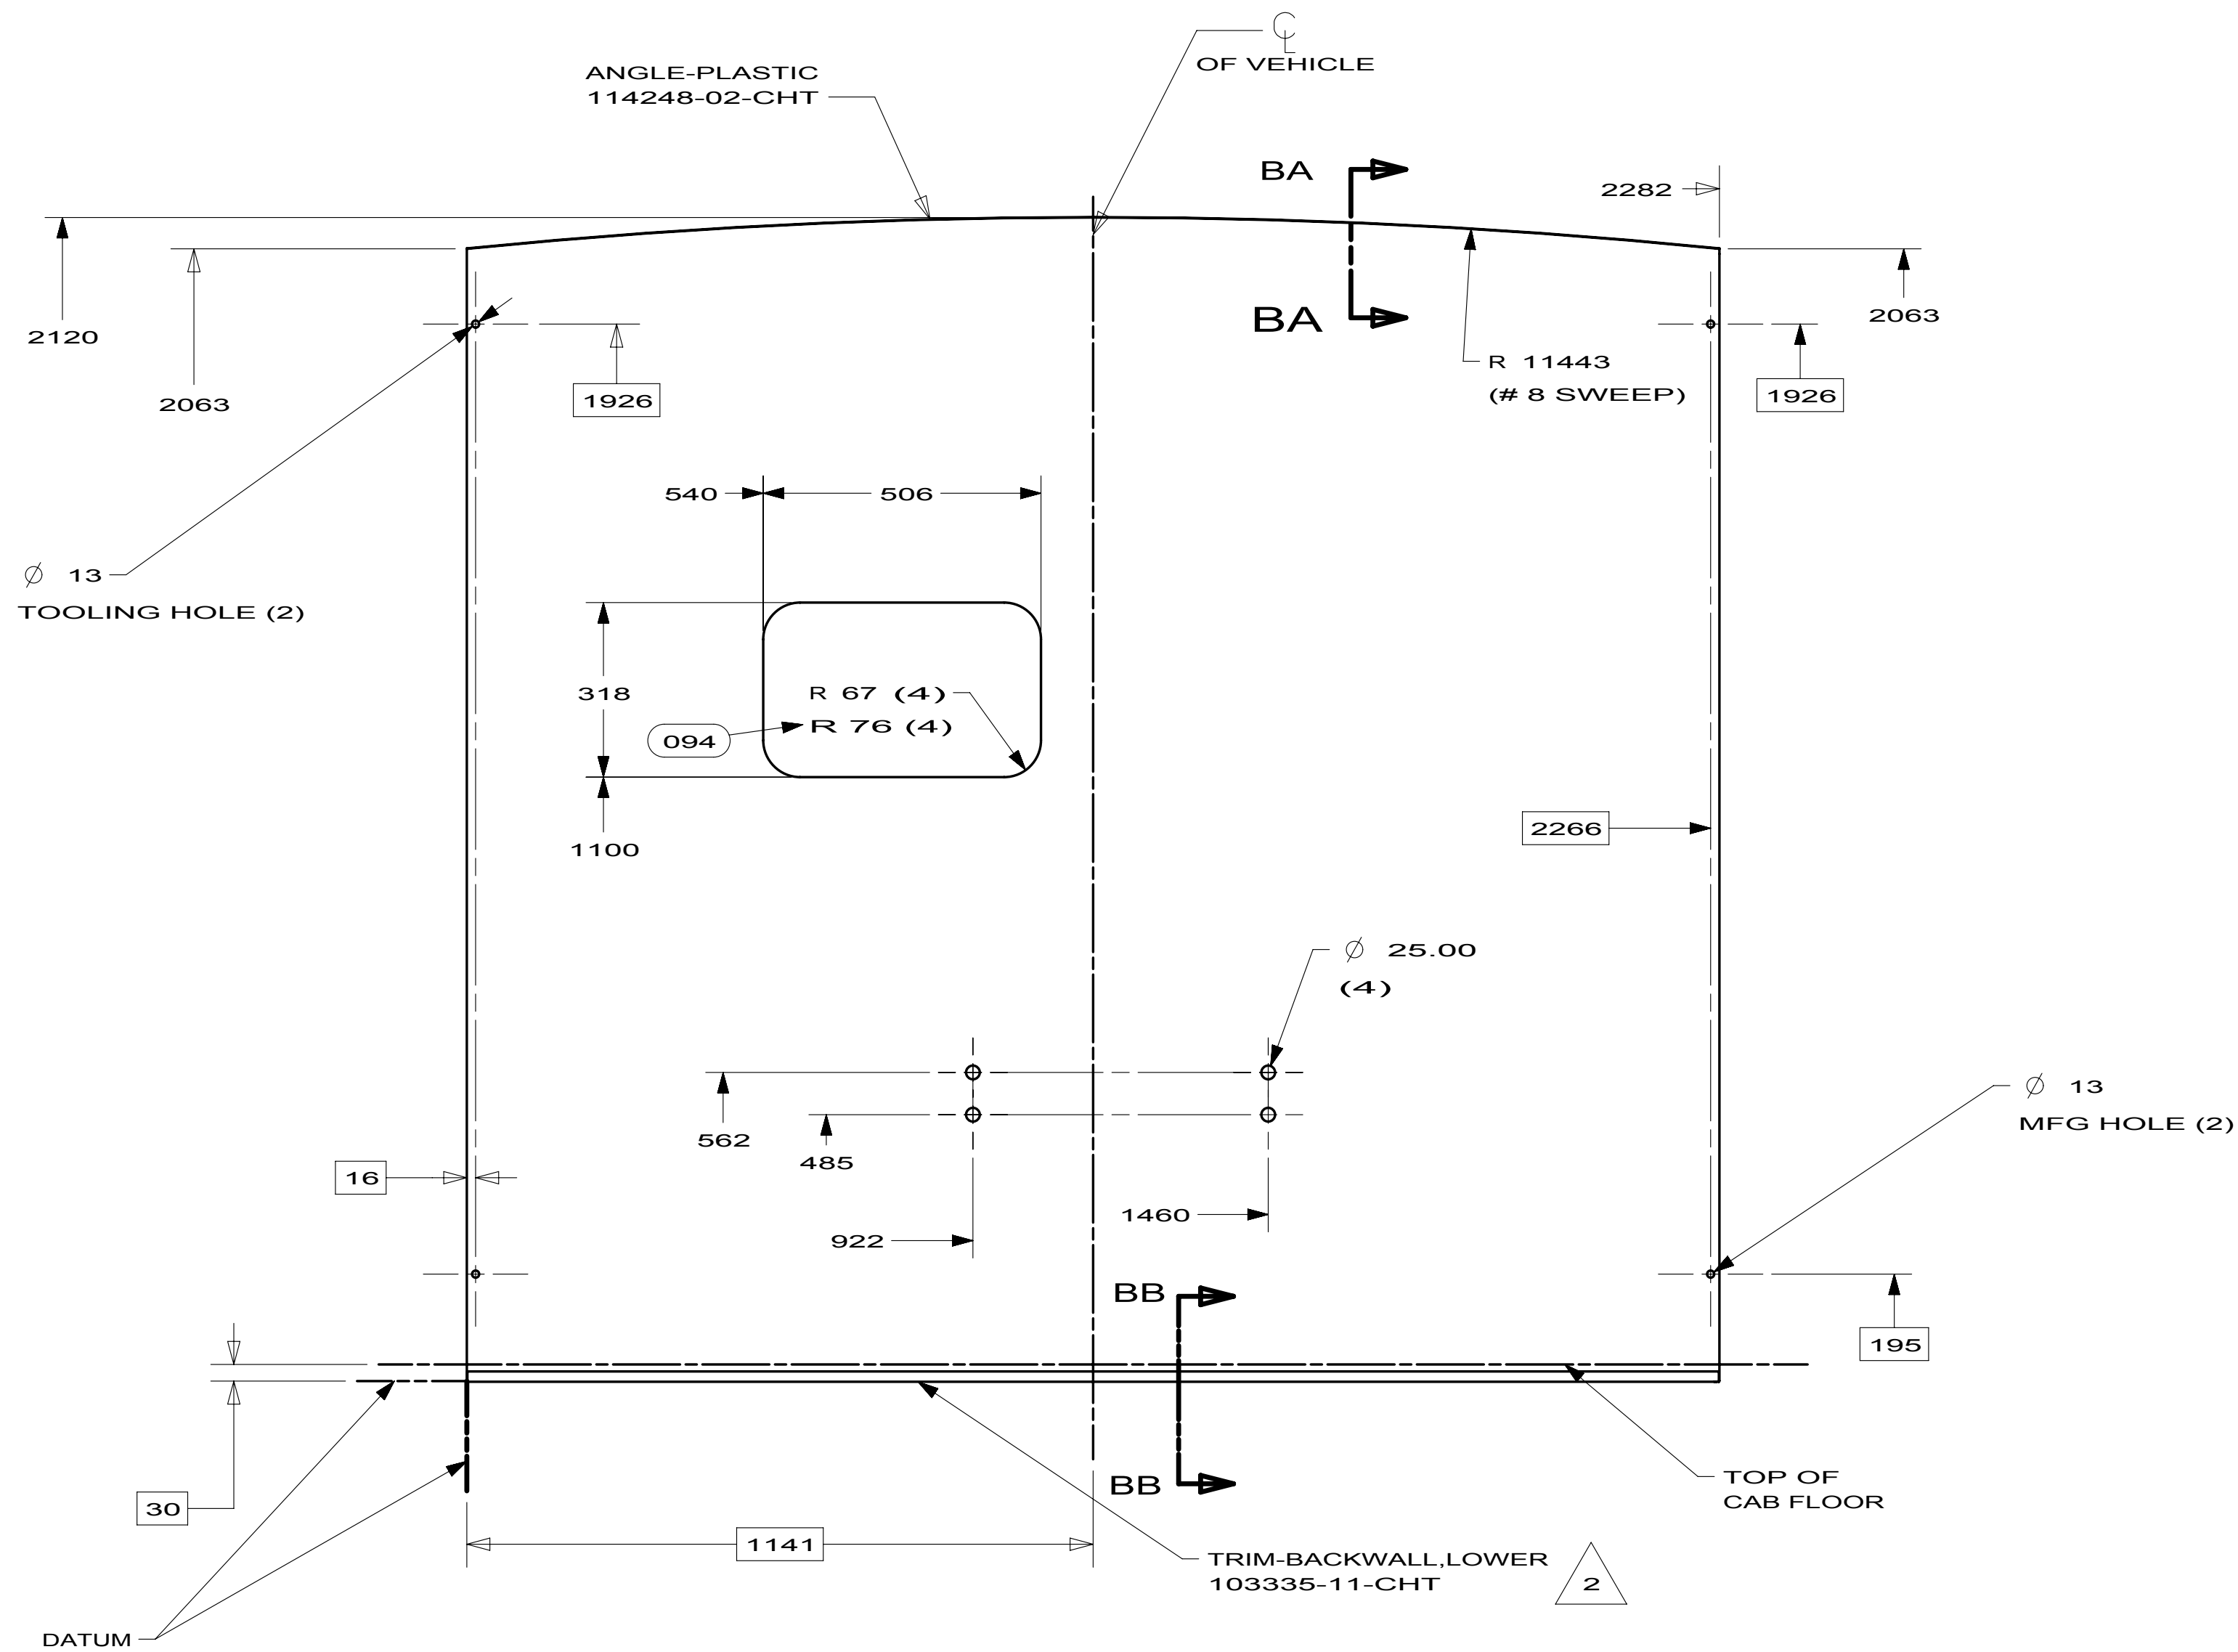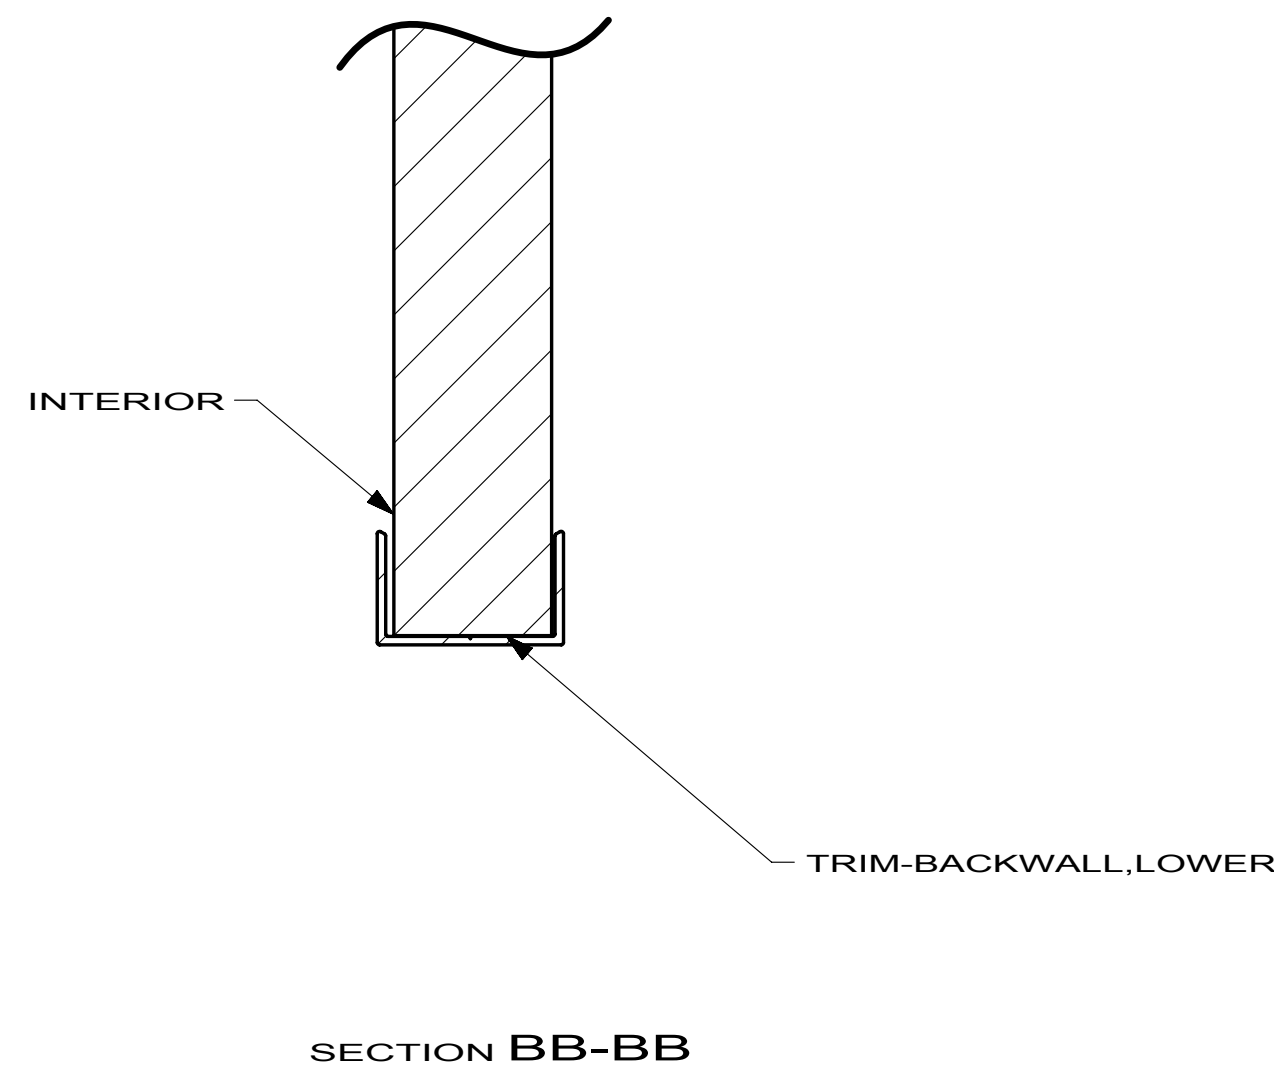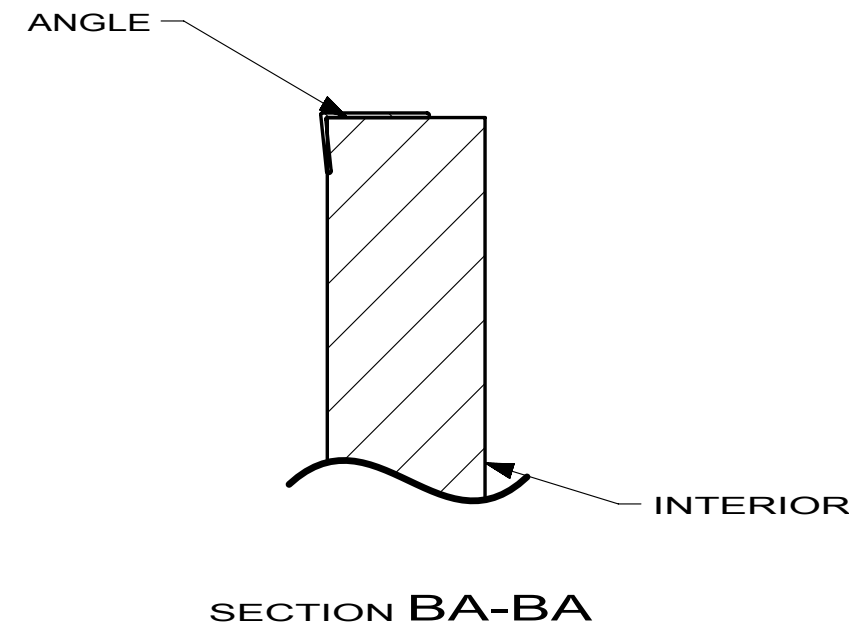


3. TOLERANCE FOR CUTOUT ± 2.5 .
2. CAP SEAL TRIM WITH SEALANT 72889-20-000.
1. PANEL SHOWN FROM EXTERIOR SIDE.

NOTES:

NOTICE
CHANGES TO THIS SHEET
MAY AFFECT OTHERS

FIRST USED		
09 524A		
DO NOT SCALE DRAWING		
TITLE: BACKWALL ASM		
SHEET 2	PART NO 168300	REV

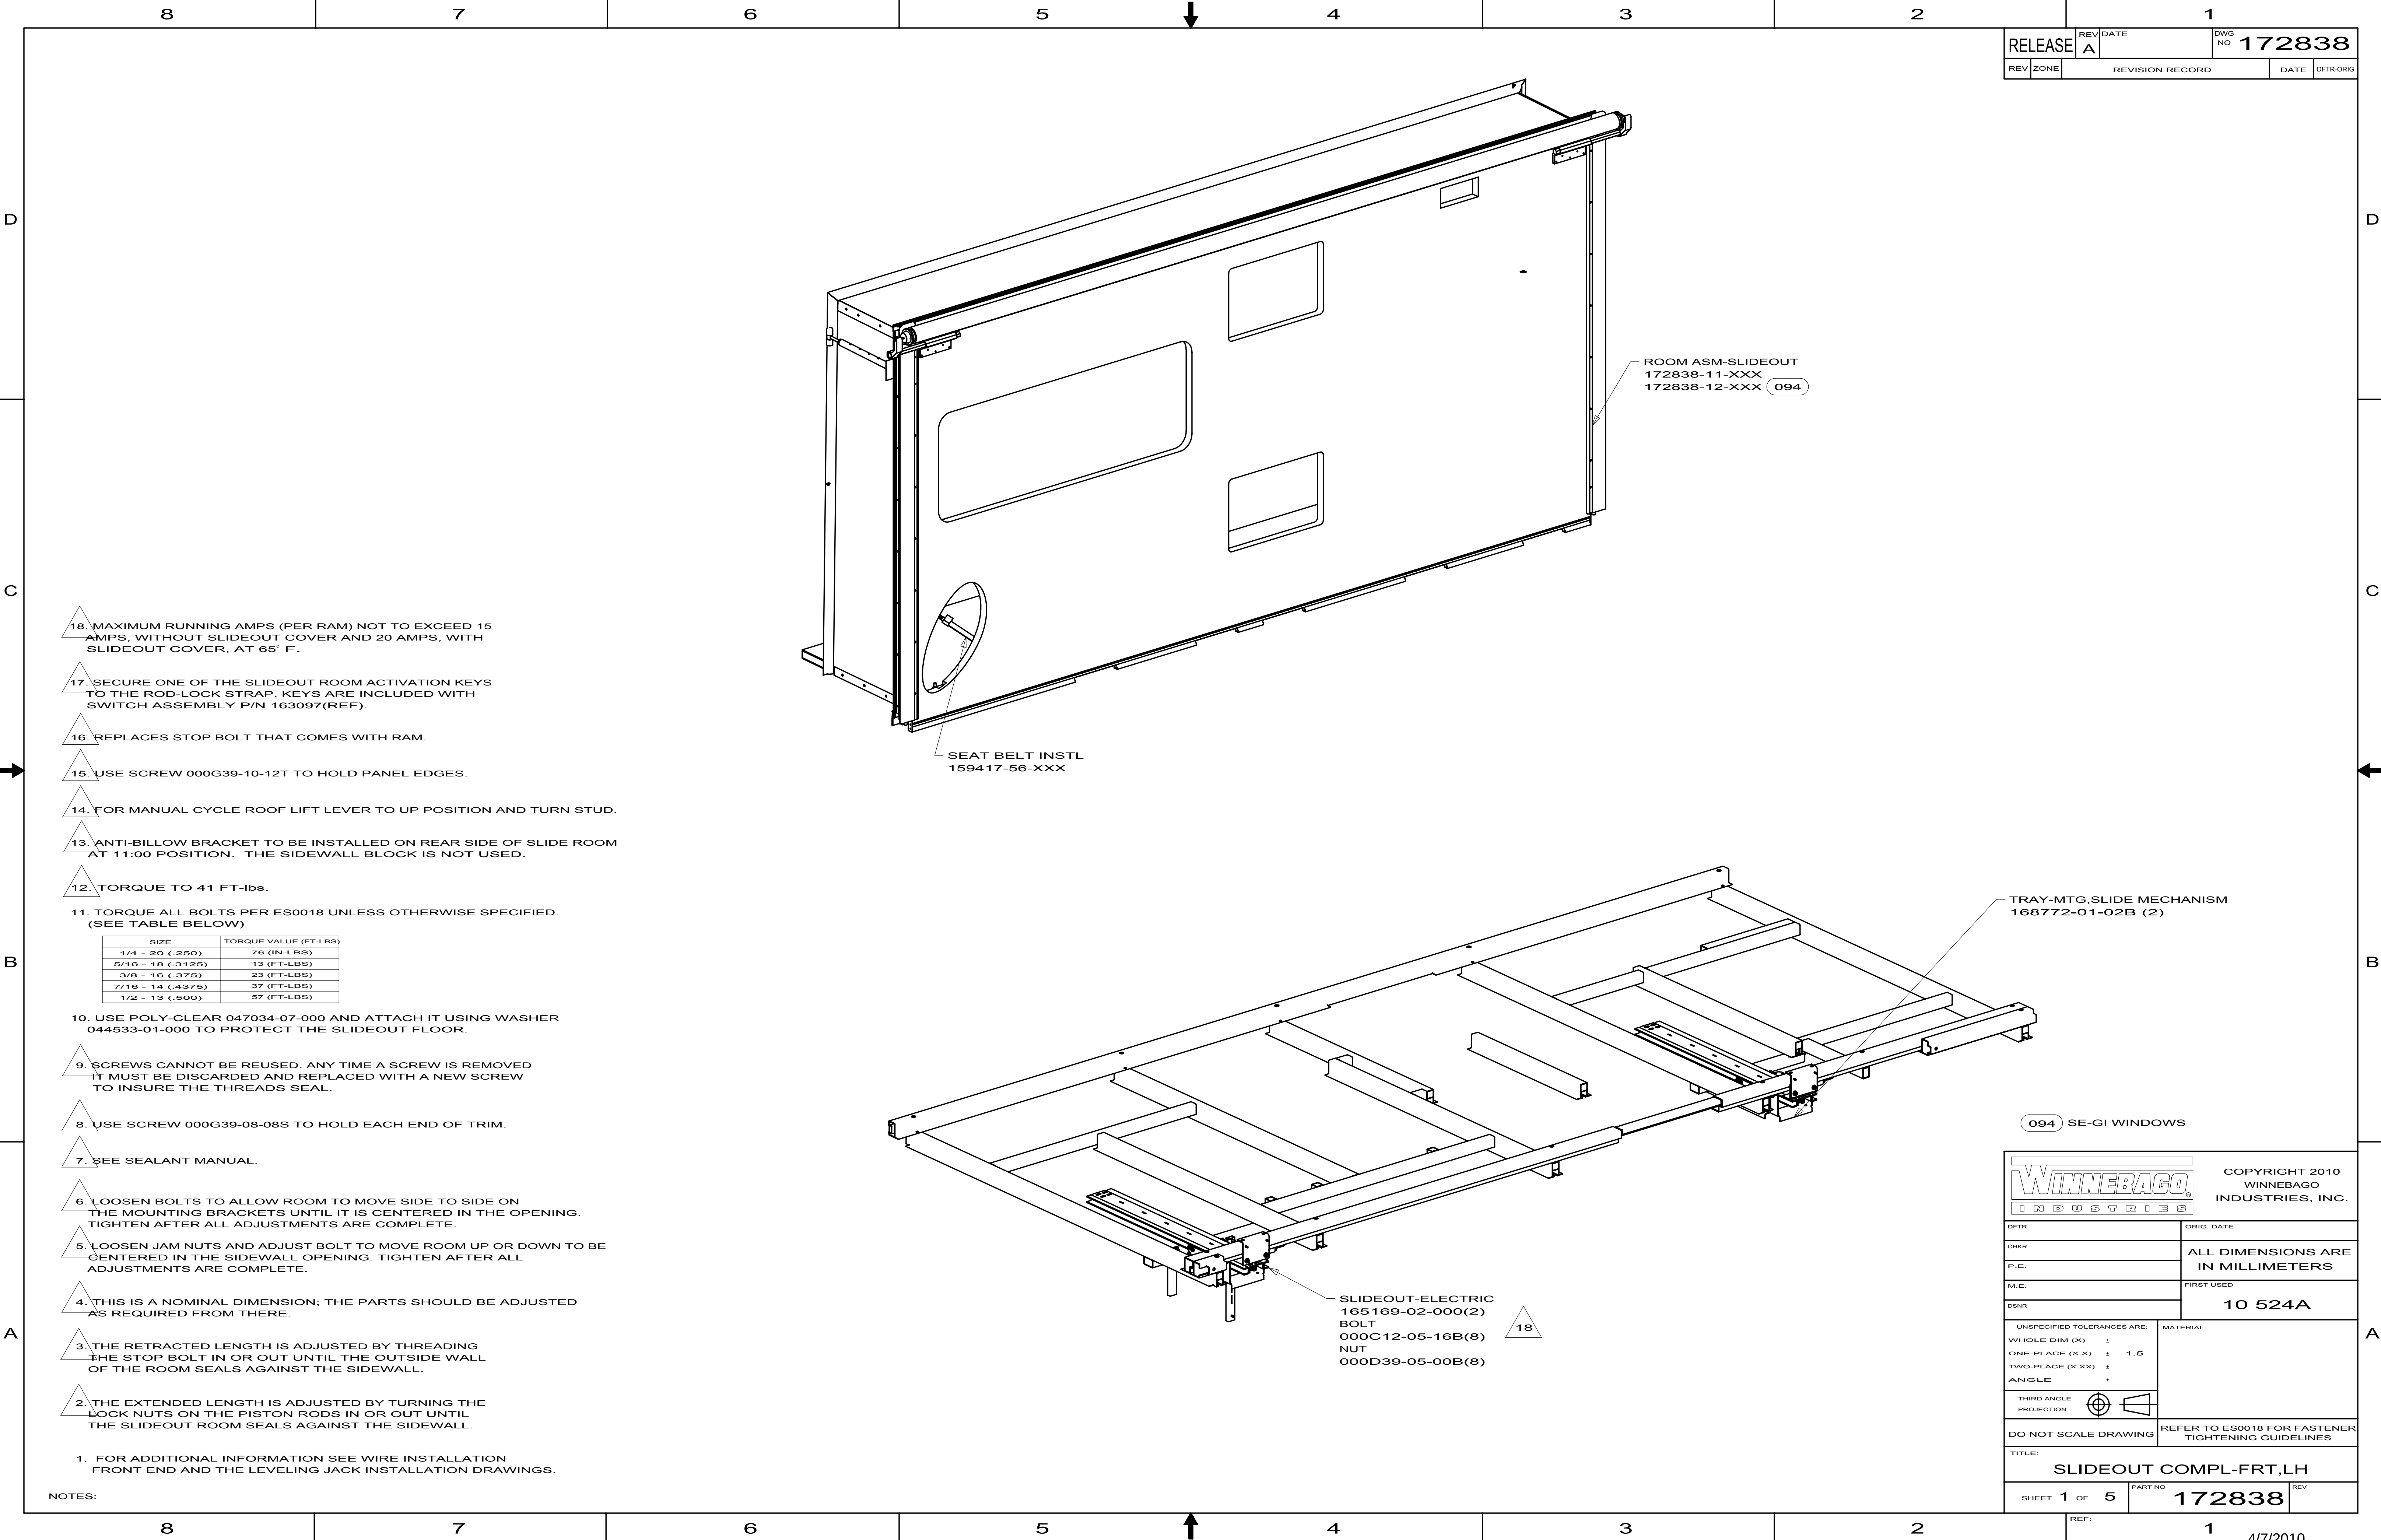

18. MAXIMUM RUNNING AMPS (PER RAM) NOT TO EXCEED 15 AMPS, WITHOUT SLIDEOUT COVER AND 20 AMPS, WITH SLIDEOUT COVER, AT 65° F.
17. SECURE ONE OF THE SLIDEOUT ROOM ACTIVATION KEYS TO THE ROD-LOCK STRAP. KEYS ARE INCLUDED WITH SWITCH ASSEMBLY P/N 163097(REF).
16. REPLACES STOP BOLT THAT COMES WITH RAM.
15. USE SCREW 000G39-10-12T TO HOLD PANEL EDGES.
14. FOR MANUAL CYCLE ROOF LIFT LEVER TO UP POSITION AND TURN STUD.
13. ANTI-BILLOW BRACKET TO BE INSTALLED ON REAR SIDE OF SLIDE ROOM AT 11:00 POSITION. THE SIDEWALL BLOCK IS NOT USED.
12. TORQUE TO 41 FT-lbs.

11. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED. (SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	76 (IN-LBS)
5/16 - 18 (.3125)	13 (FT-LBS)
3/8 - 16 (.375)	23 (FT-LBS)
7/16 - 14 (.4375)	37 (FT-LBS)
1/2 - 13 (.500)	57 (FT-LBS)

10. USE POLY-CLEAR 047034-07-000 AND ATTACH IT USING WASHER 044533-01-000 TO PROTECT THE SLIDEOUT FLOOR.

9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.

8. USE SCREW 000G39-08-08S TO HOLD EACH END OF TRIM.

7. SEE SEALANT MANUAL.

6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

5. LOOSEN JAM NUTS AND ADJUST BOLT TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED AS REQUIRED FROM THERE.

3. THE RETRACTED LENGTH IS ADJUSTED BY THREADING THE STOP BOLT IN OR OUT UNTIL THE OUTSIDE WALL OF THE ROOM SEALS AGAINST THE SIDEWALL.

2. THE EXTENDED LENGTH IS ADJUSTED BY TURNING THE LOCK NUTS ON THE PISTON RODS IN OR OUT UNTIL THE SLIDEOUT ROOM SEALS AGAINST THE SIDEWALL.

1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:


ROOM ASM-SLIDEOUT
172838-11-XXX
172838-12-XXX 094

SEAT BELT INSTL
159417-56-XXX

TRAY-MTG,SLIDE MECHANISM
168772-01-02B (2)

094 SE-GI WINDOWS

WINNEBAGO INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DTR		ORIG. DATE	
CHGR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		10 524A	
DSNR			
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ±			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING		REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: SLIDEOUT COMPL-FRT,LH			
SHEET 1 OF 5		PART NO 172838	
REF:		1	

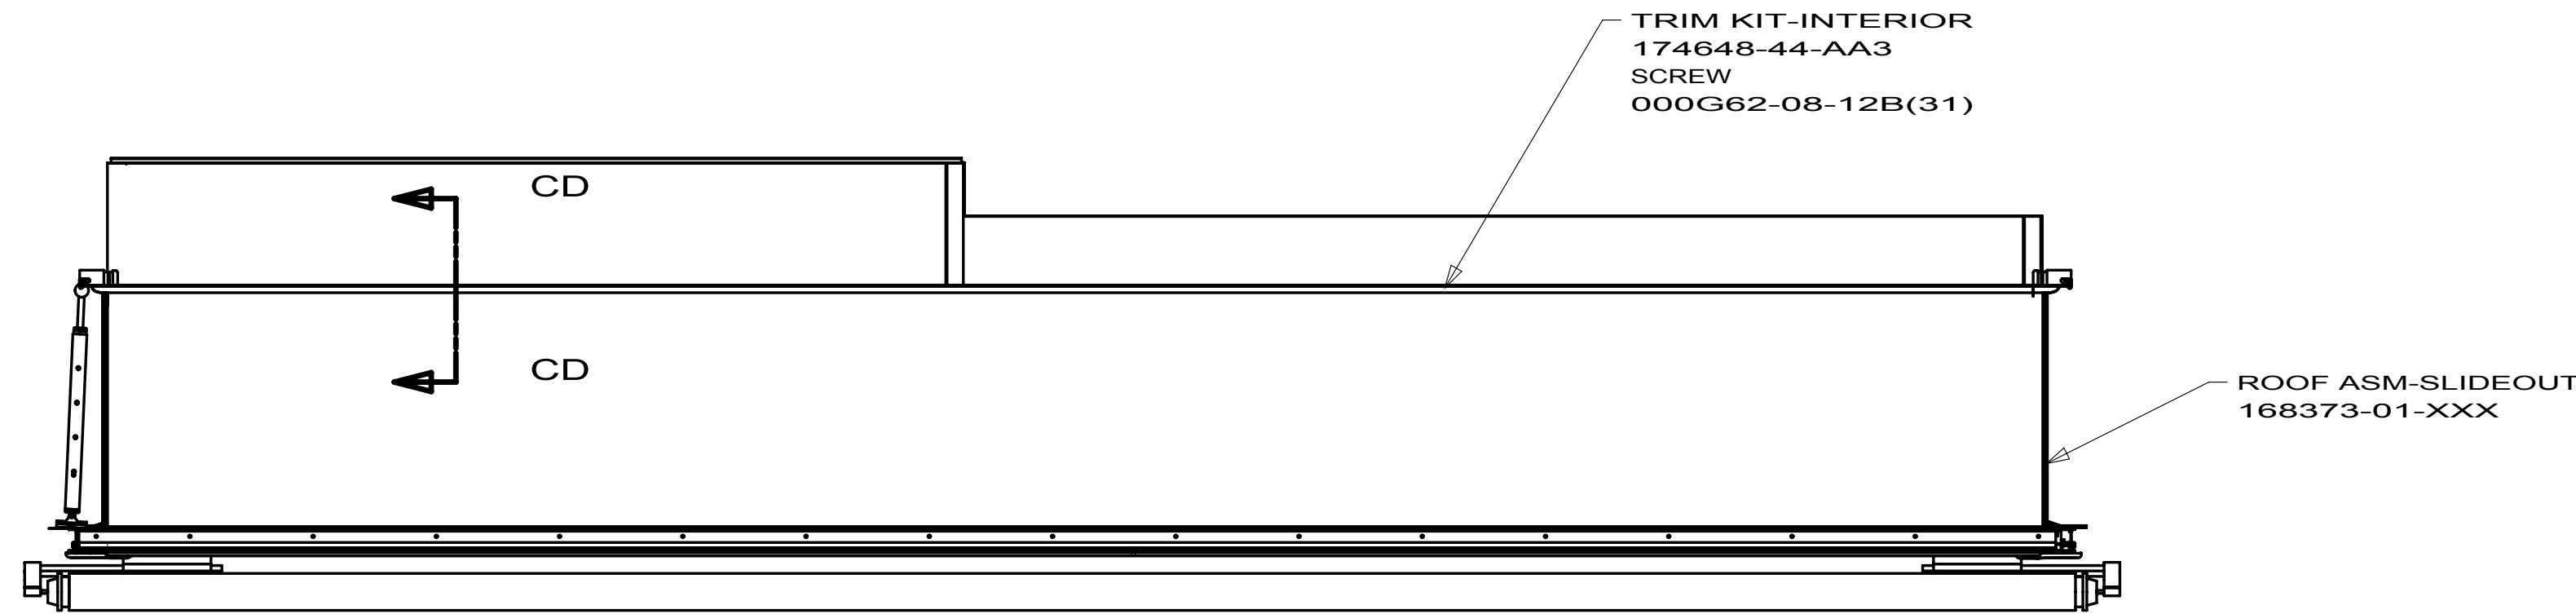

TRIM-FEATURE,UPPER
158375-06-01A WHT (2)
158375-06-02A BLK (2)
SCREW
154938-02-01A WHT (8)
154938-02-02A BLK (8)

PANEL ASM-SLIDEOUT
P62977-05-XXX
SCREW
000G62-08-12B (18)

AWNING BRACKET (2)
SUPPLIED WITH AWNING
SCREW
OG3910-12-170 (4)
RIVET
118626-01-CHT (6)

AWNING
122977-06-CHT
SCREW
000G39-10-12B (4)

TRIM-KIT
162091-73-AA1 BLK
162091-73-AA2 WHT
SCREW
154938-05-03A (32)
INSERT
105312-01-07A WHT
105312-01-13A BLK
SCREW
154938-04-01A WHT (28)
154938-04-02A BLK (28)

COVER-CORNER
156151-01-01A BLK (2)
156151-01-02A WHT (2)
KEY-CORNER
160421-01-01A BLK (2)

FILM
093681-39-01A (2)
(1750)

PANEL ASM-SLIDEOUT
P62977-06-XXX
SCREW
000G62-08-12B (18)

FOAM PLUG
160563-08-000 (2)

COVER-SIDEWALL,END
126546-03-03A (2)

SLUG ASM-SLIDEOUT
172480-11-XXX
172480-12-XXX

RAIL-FLOOR,SLIDEOUT
152641-01-000
(1720)
SCREW
000G62-10-12B (18)

FLOOR ASM-SLIDEOUT
168348-02-XXX









RAMP ASM-SLIDEOUT
134756-01-XXX (UP TO 10-04-09)
174758-01-XXX (AFTER 10-05-09)
SCREW
000G62-10-32B (16)
(SCREW MUST BE COUNTERSUNK
3mm BELOW SURFACE OF WOOD)

TRIM-CARPET
151282-05-01A




- (27A) EXT FULL BODY PAINT PKG #1
(92A) EXT FULL BODY PAINT PKG # 2
(24C) EXT FULL BODY PAINT PKG # 3

ROOM ASM-SLIDEOUT
(SEE TAB)



FIRST USED		
10 524A		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 2	PART NO 172838	REV

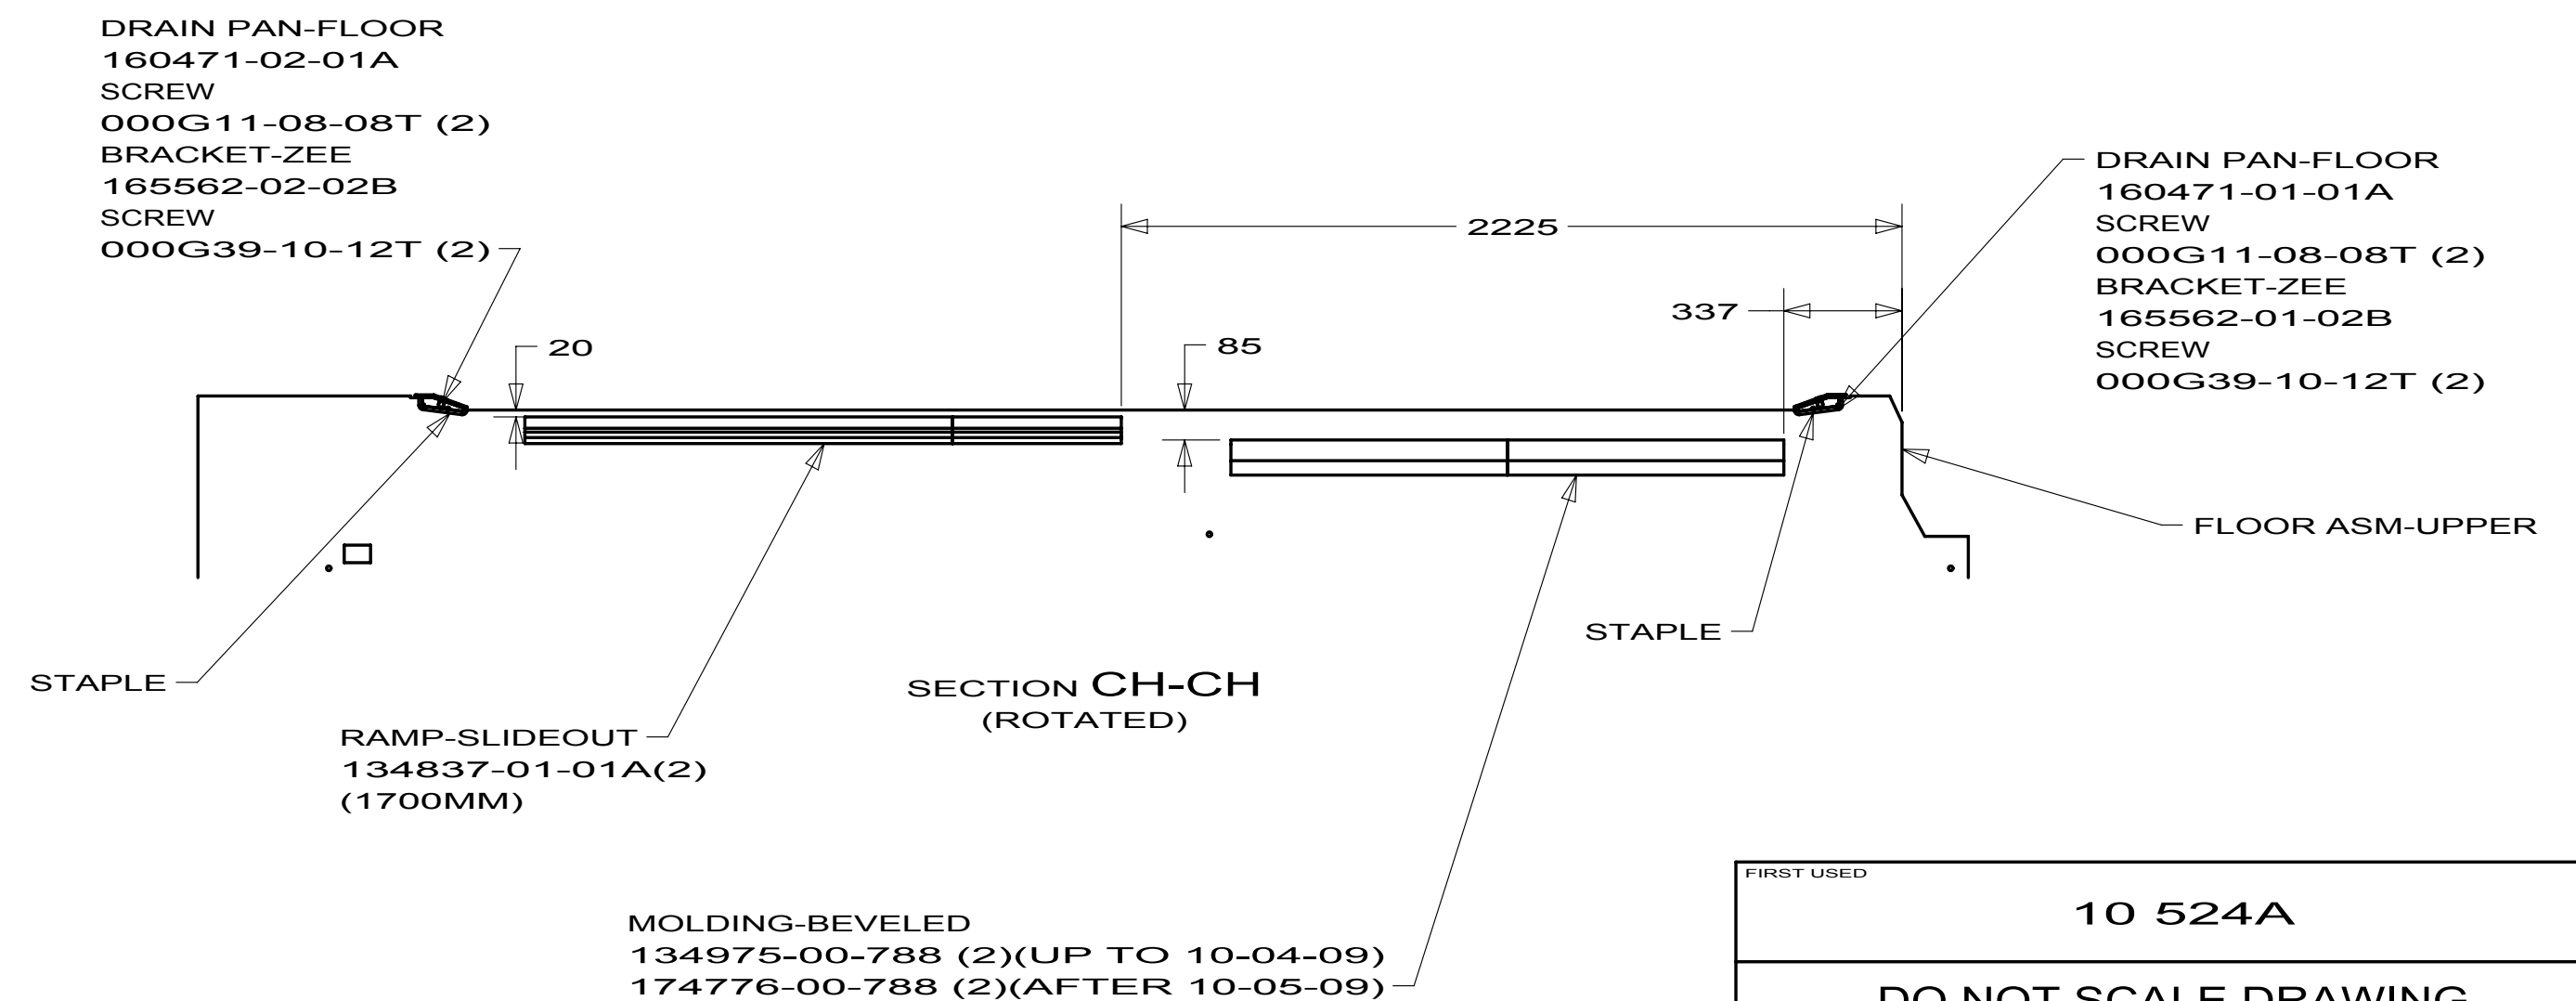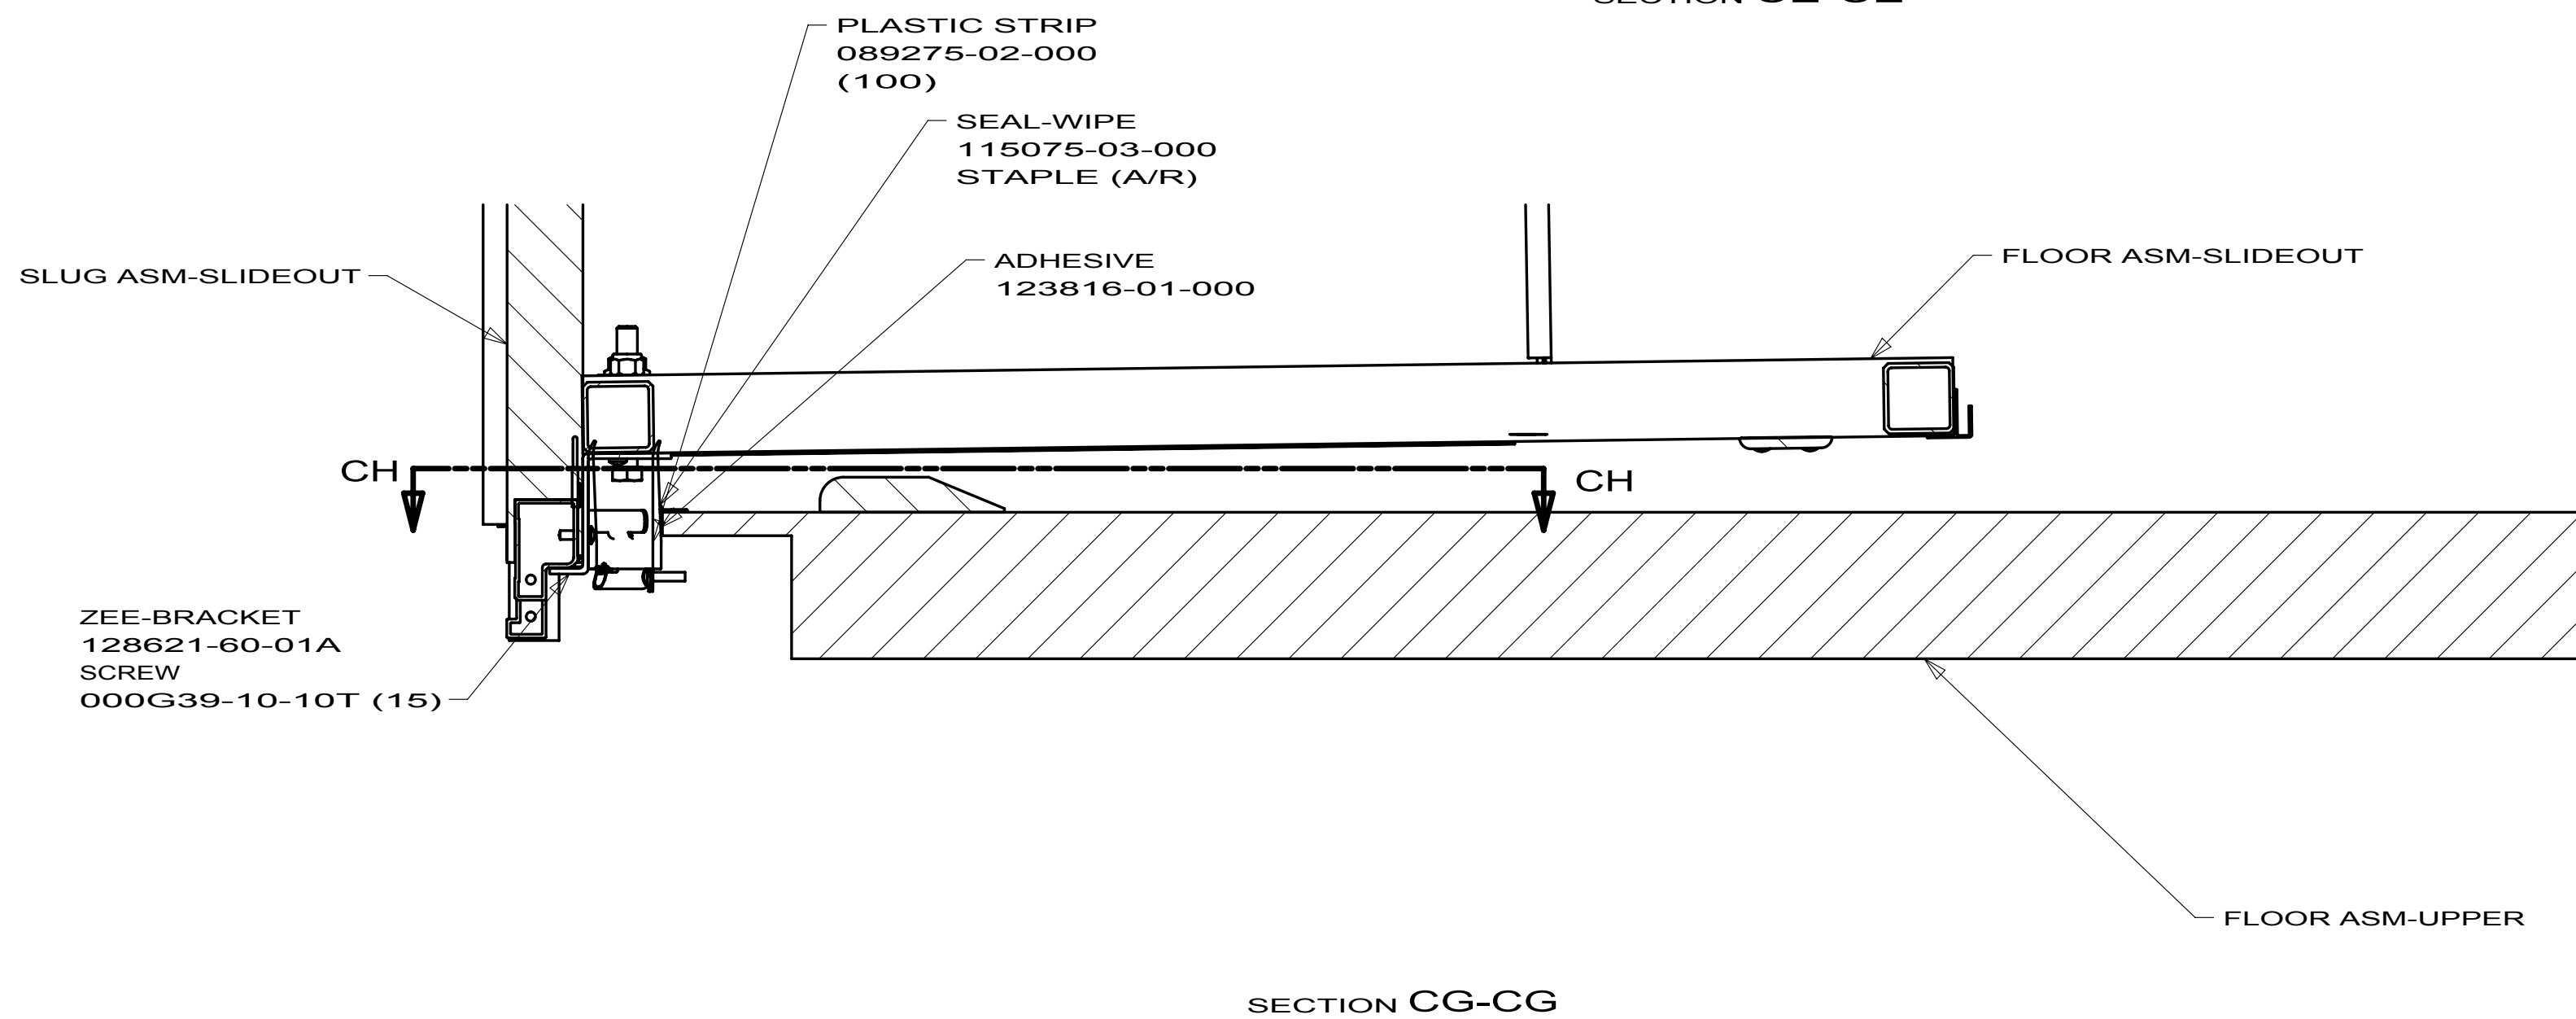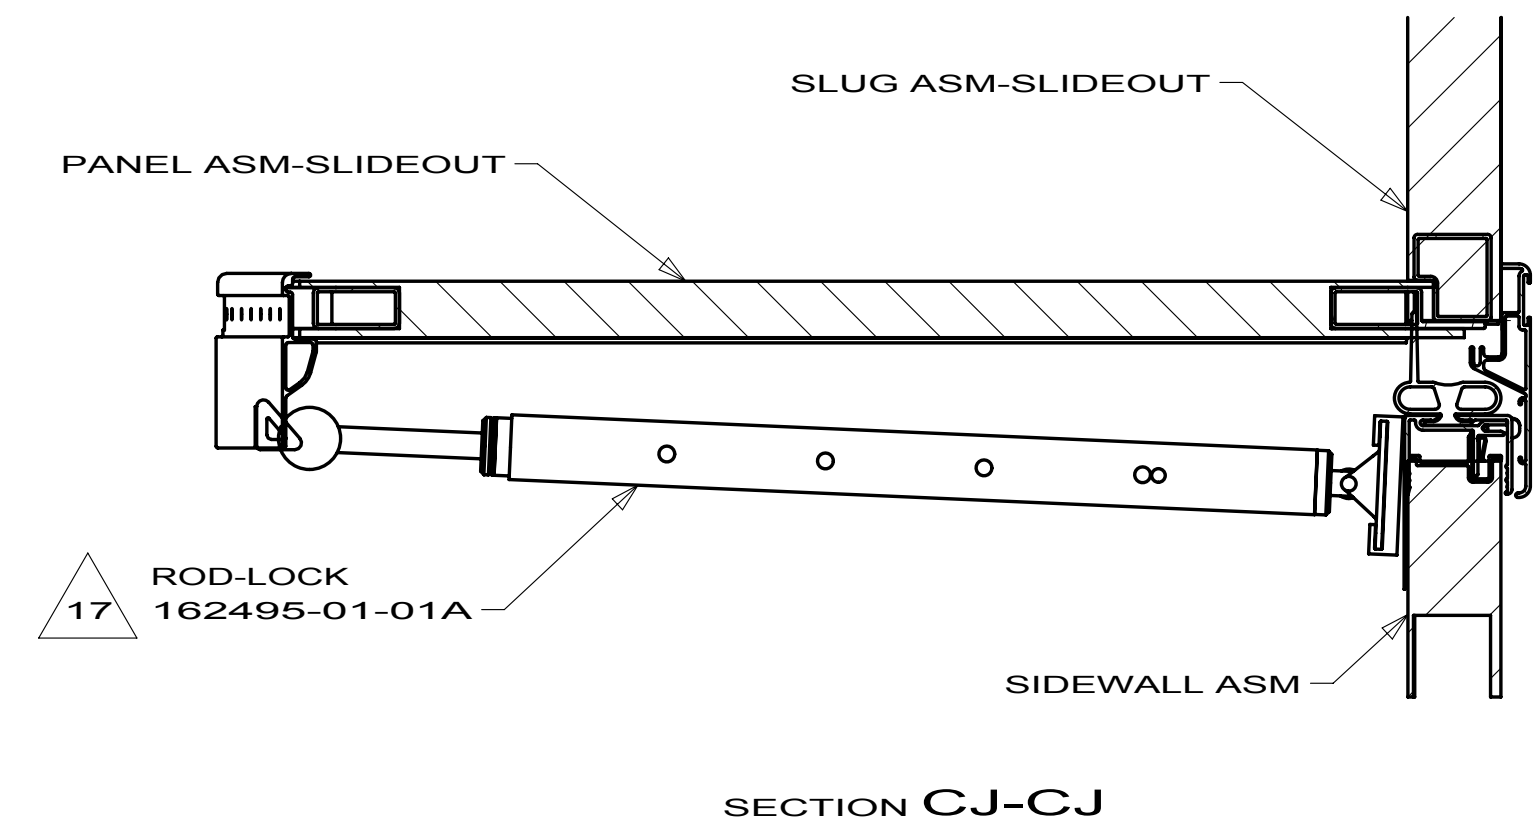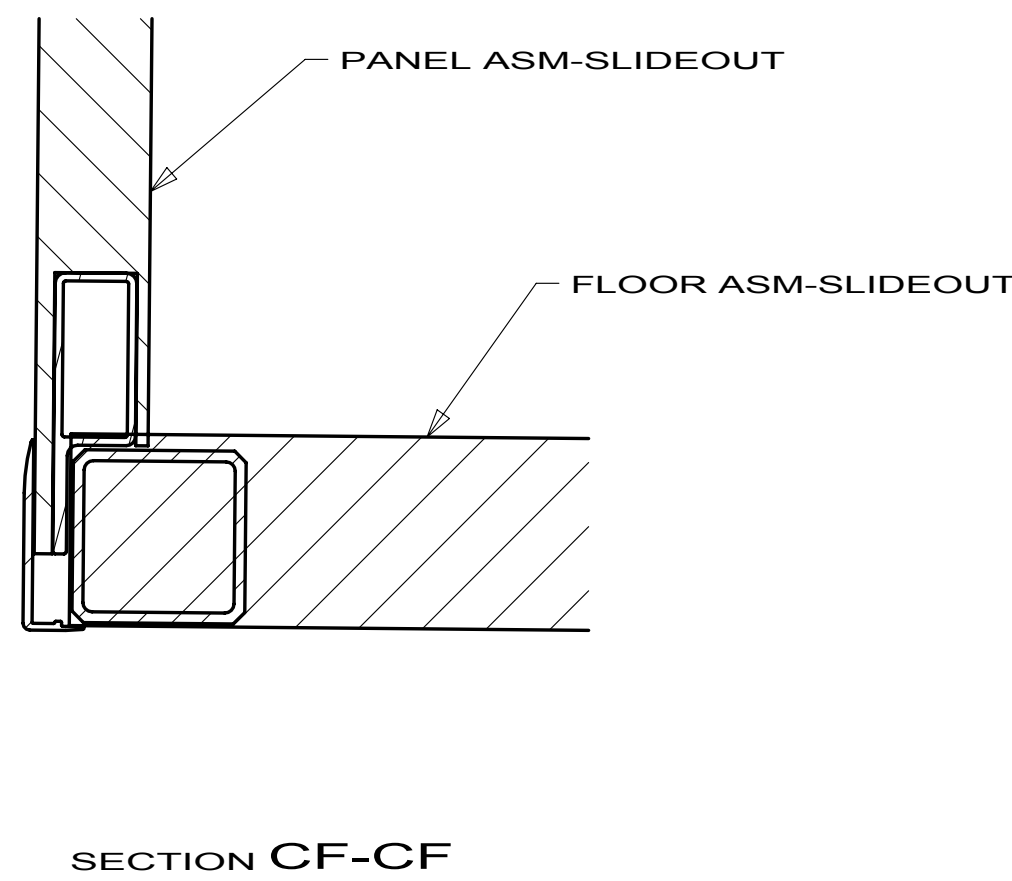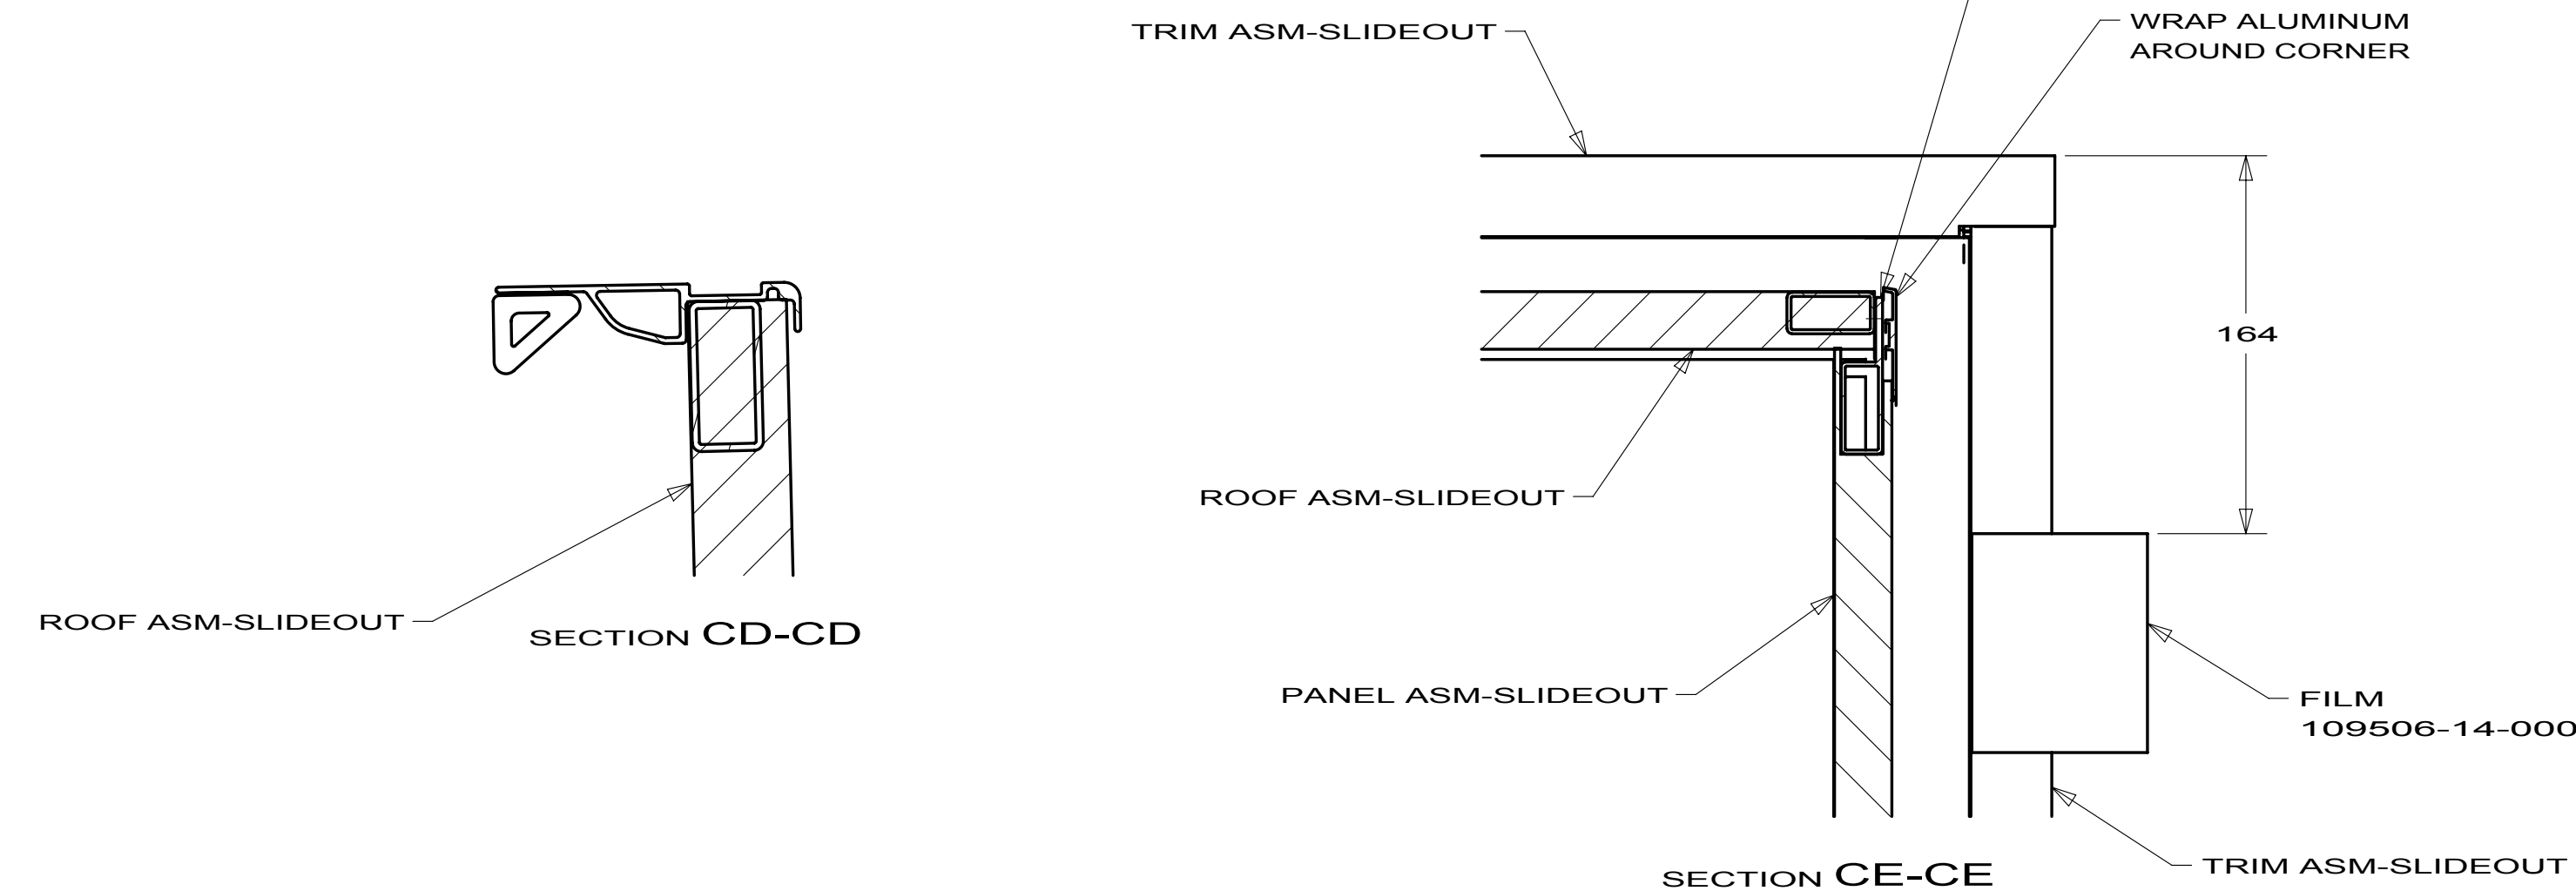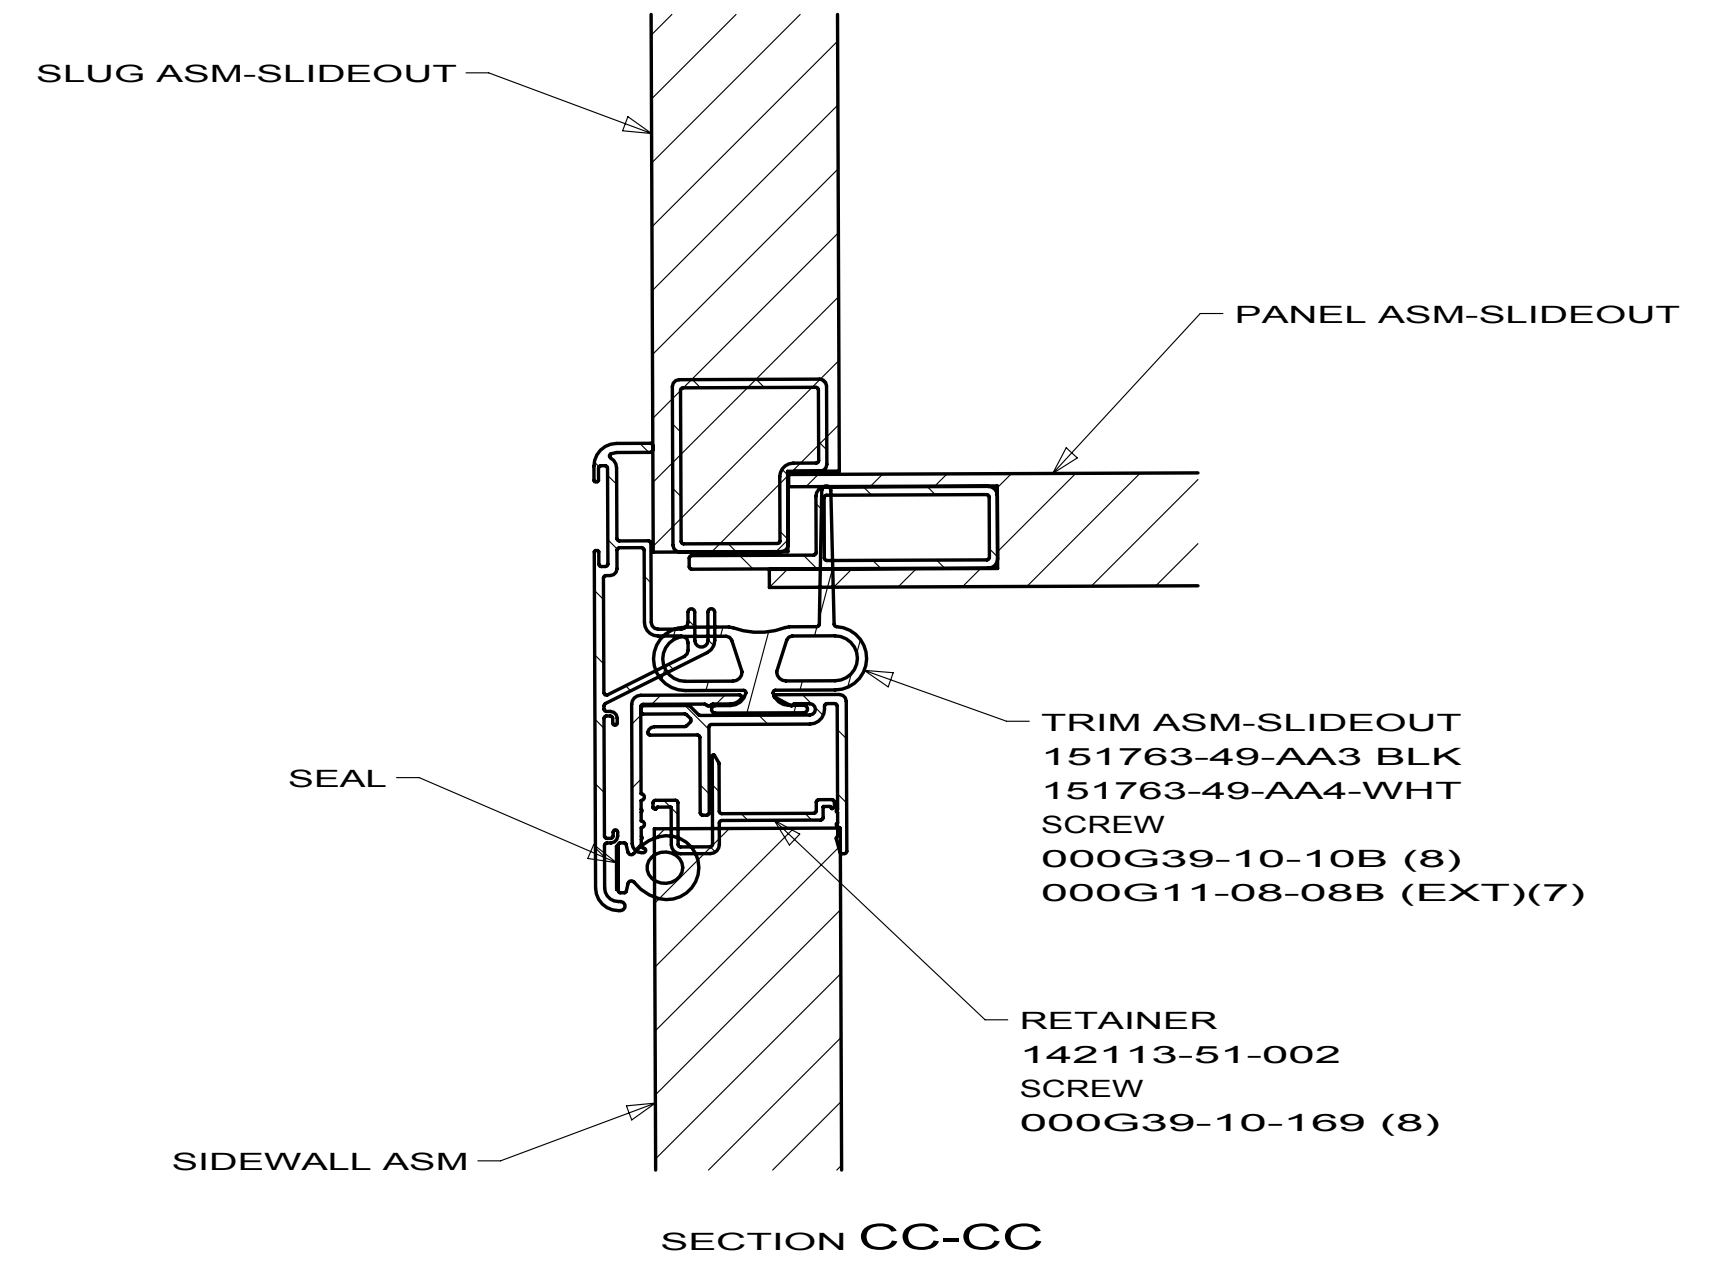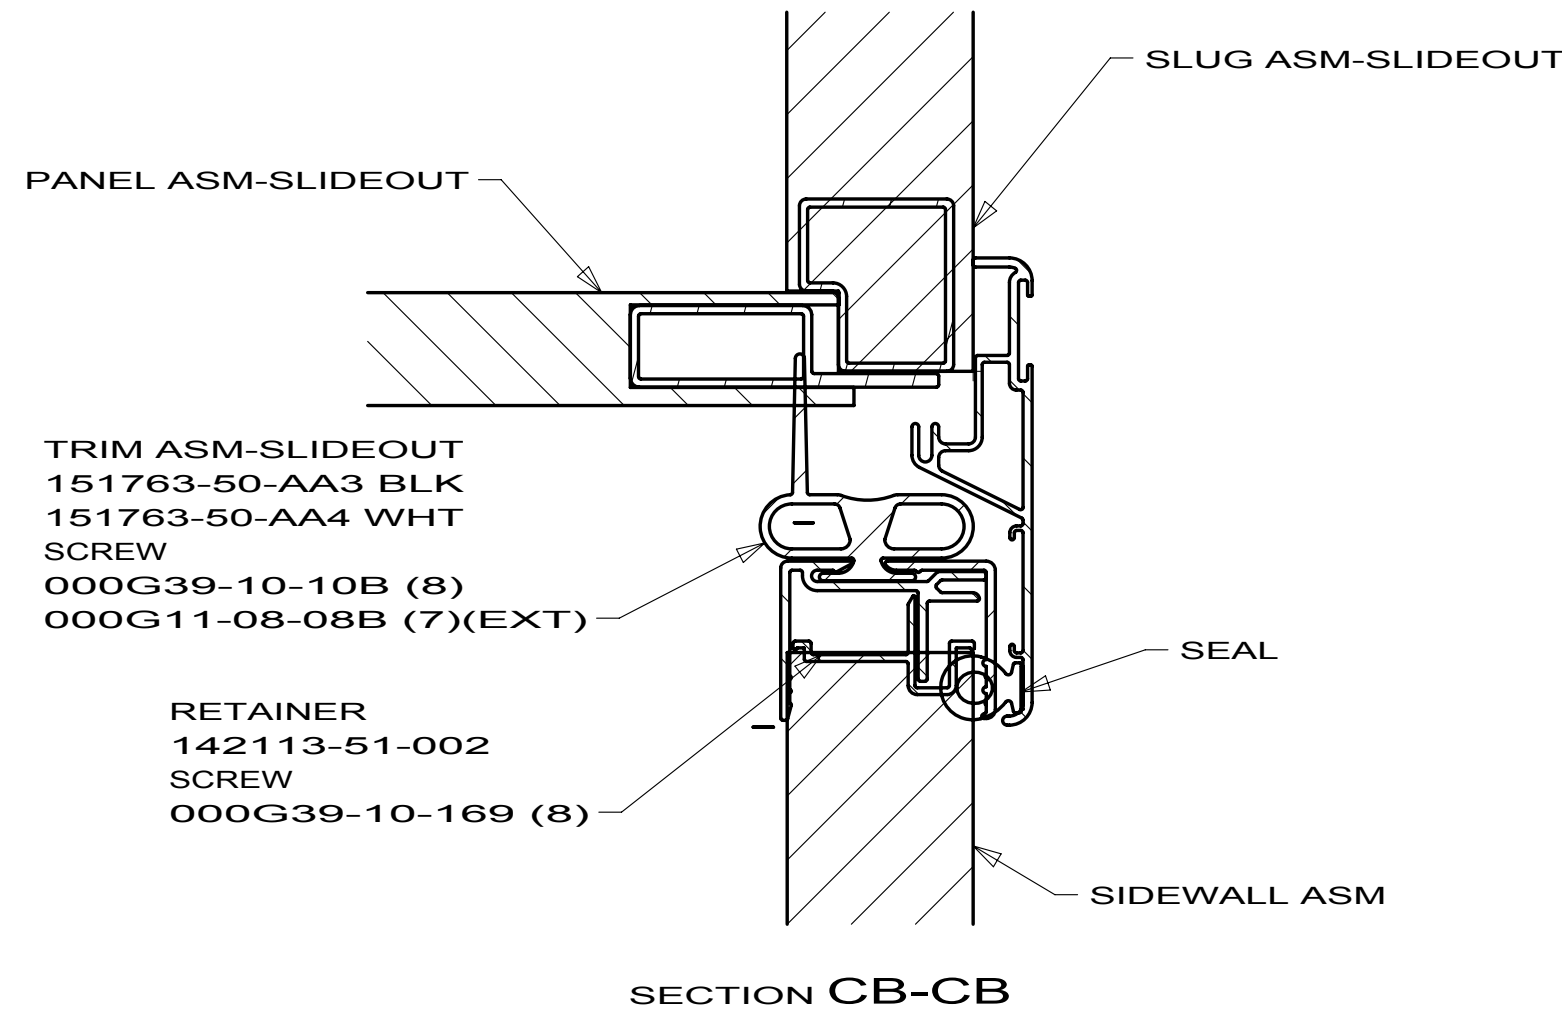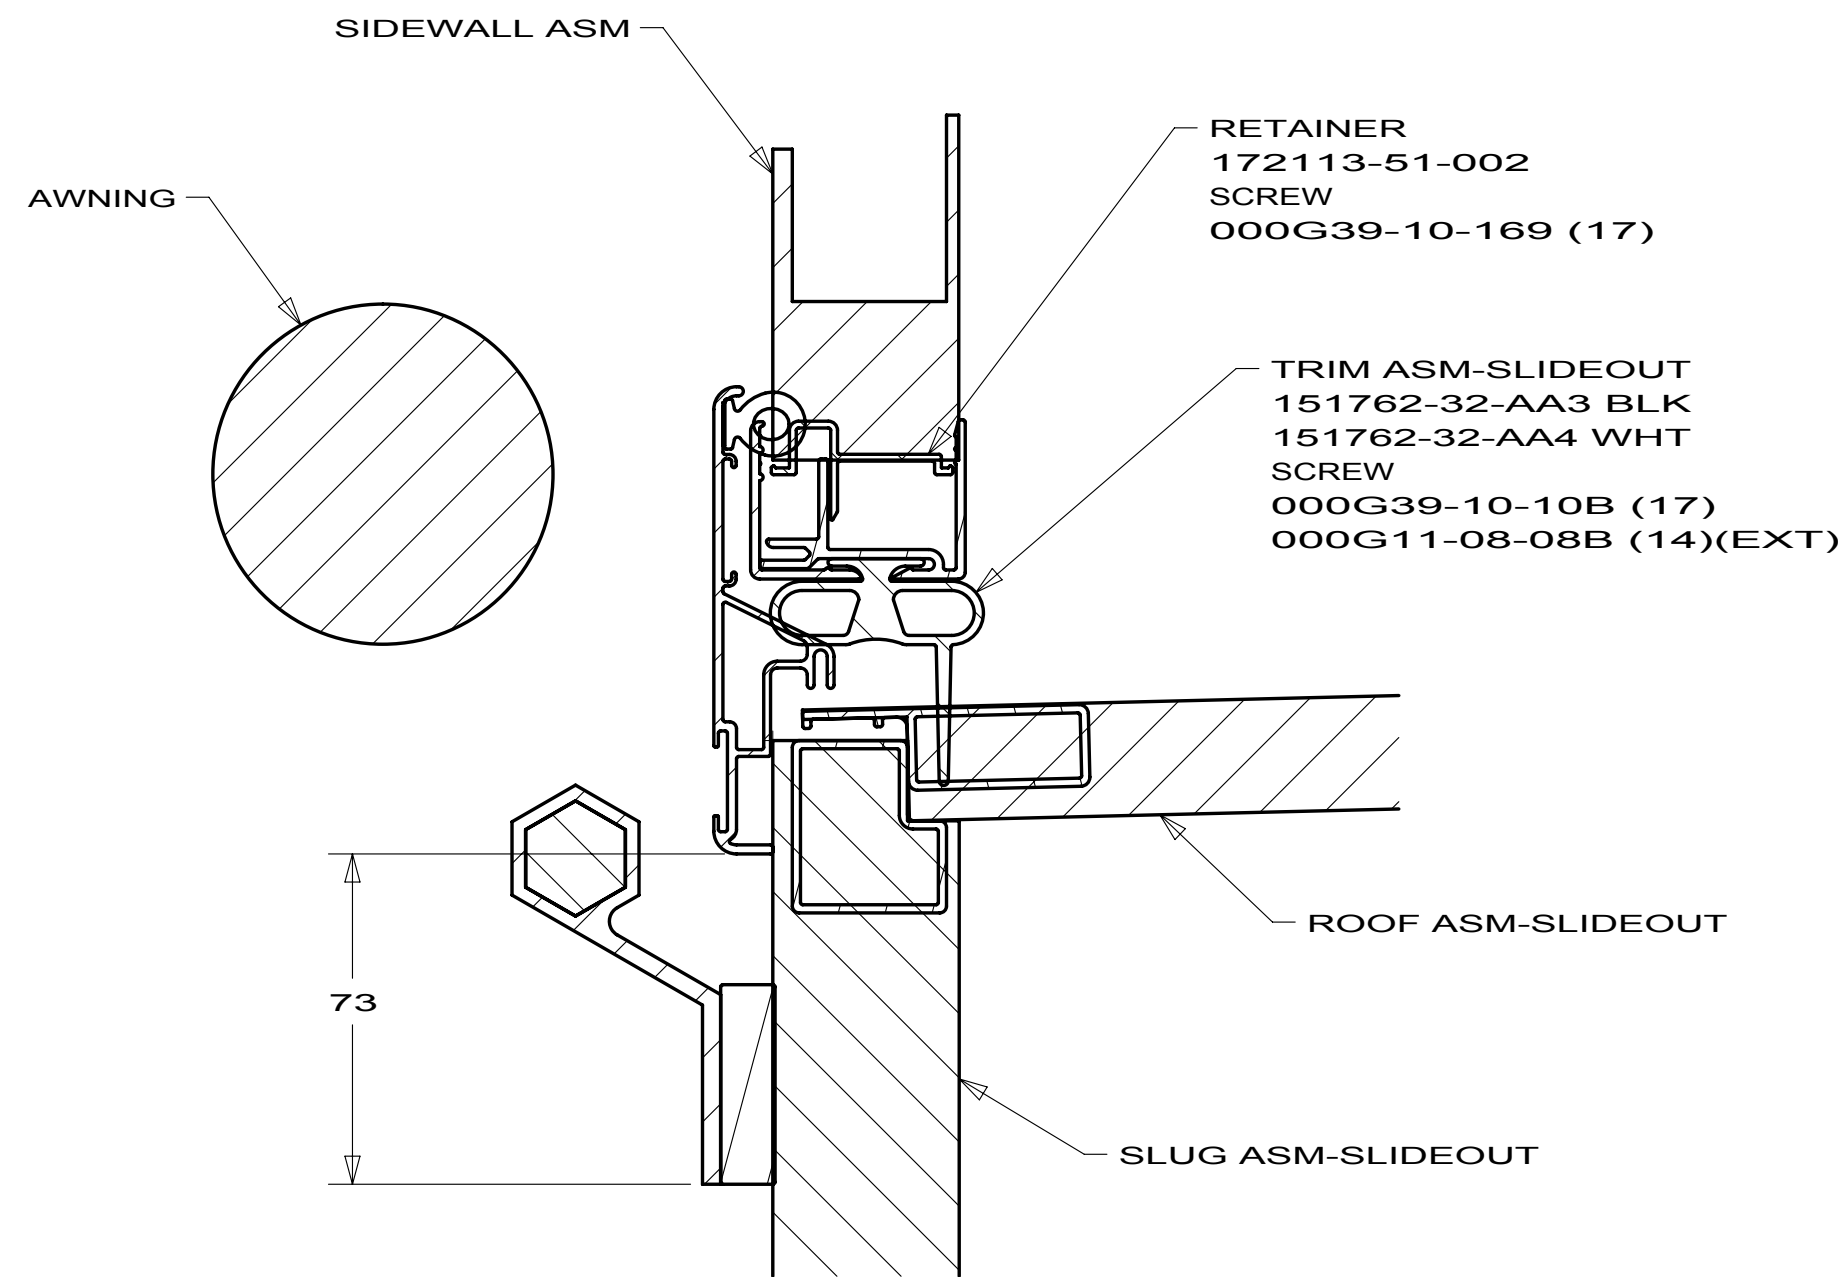




FIRST USED		
10 524A		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 3	PART NO 172838	REV

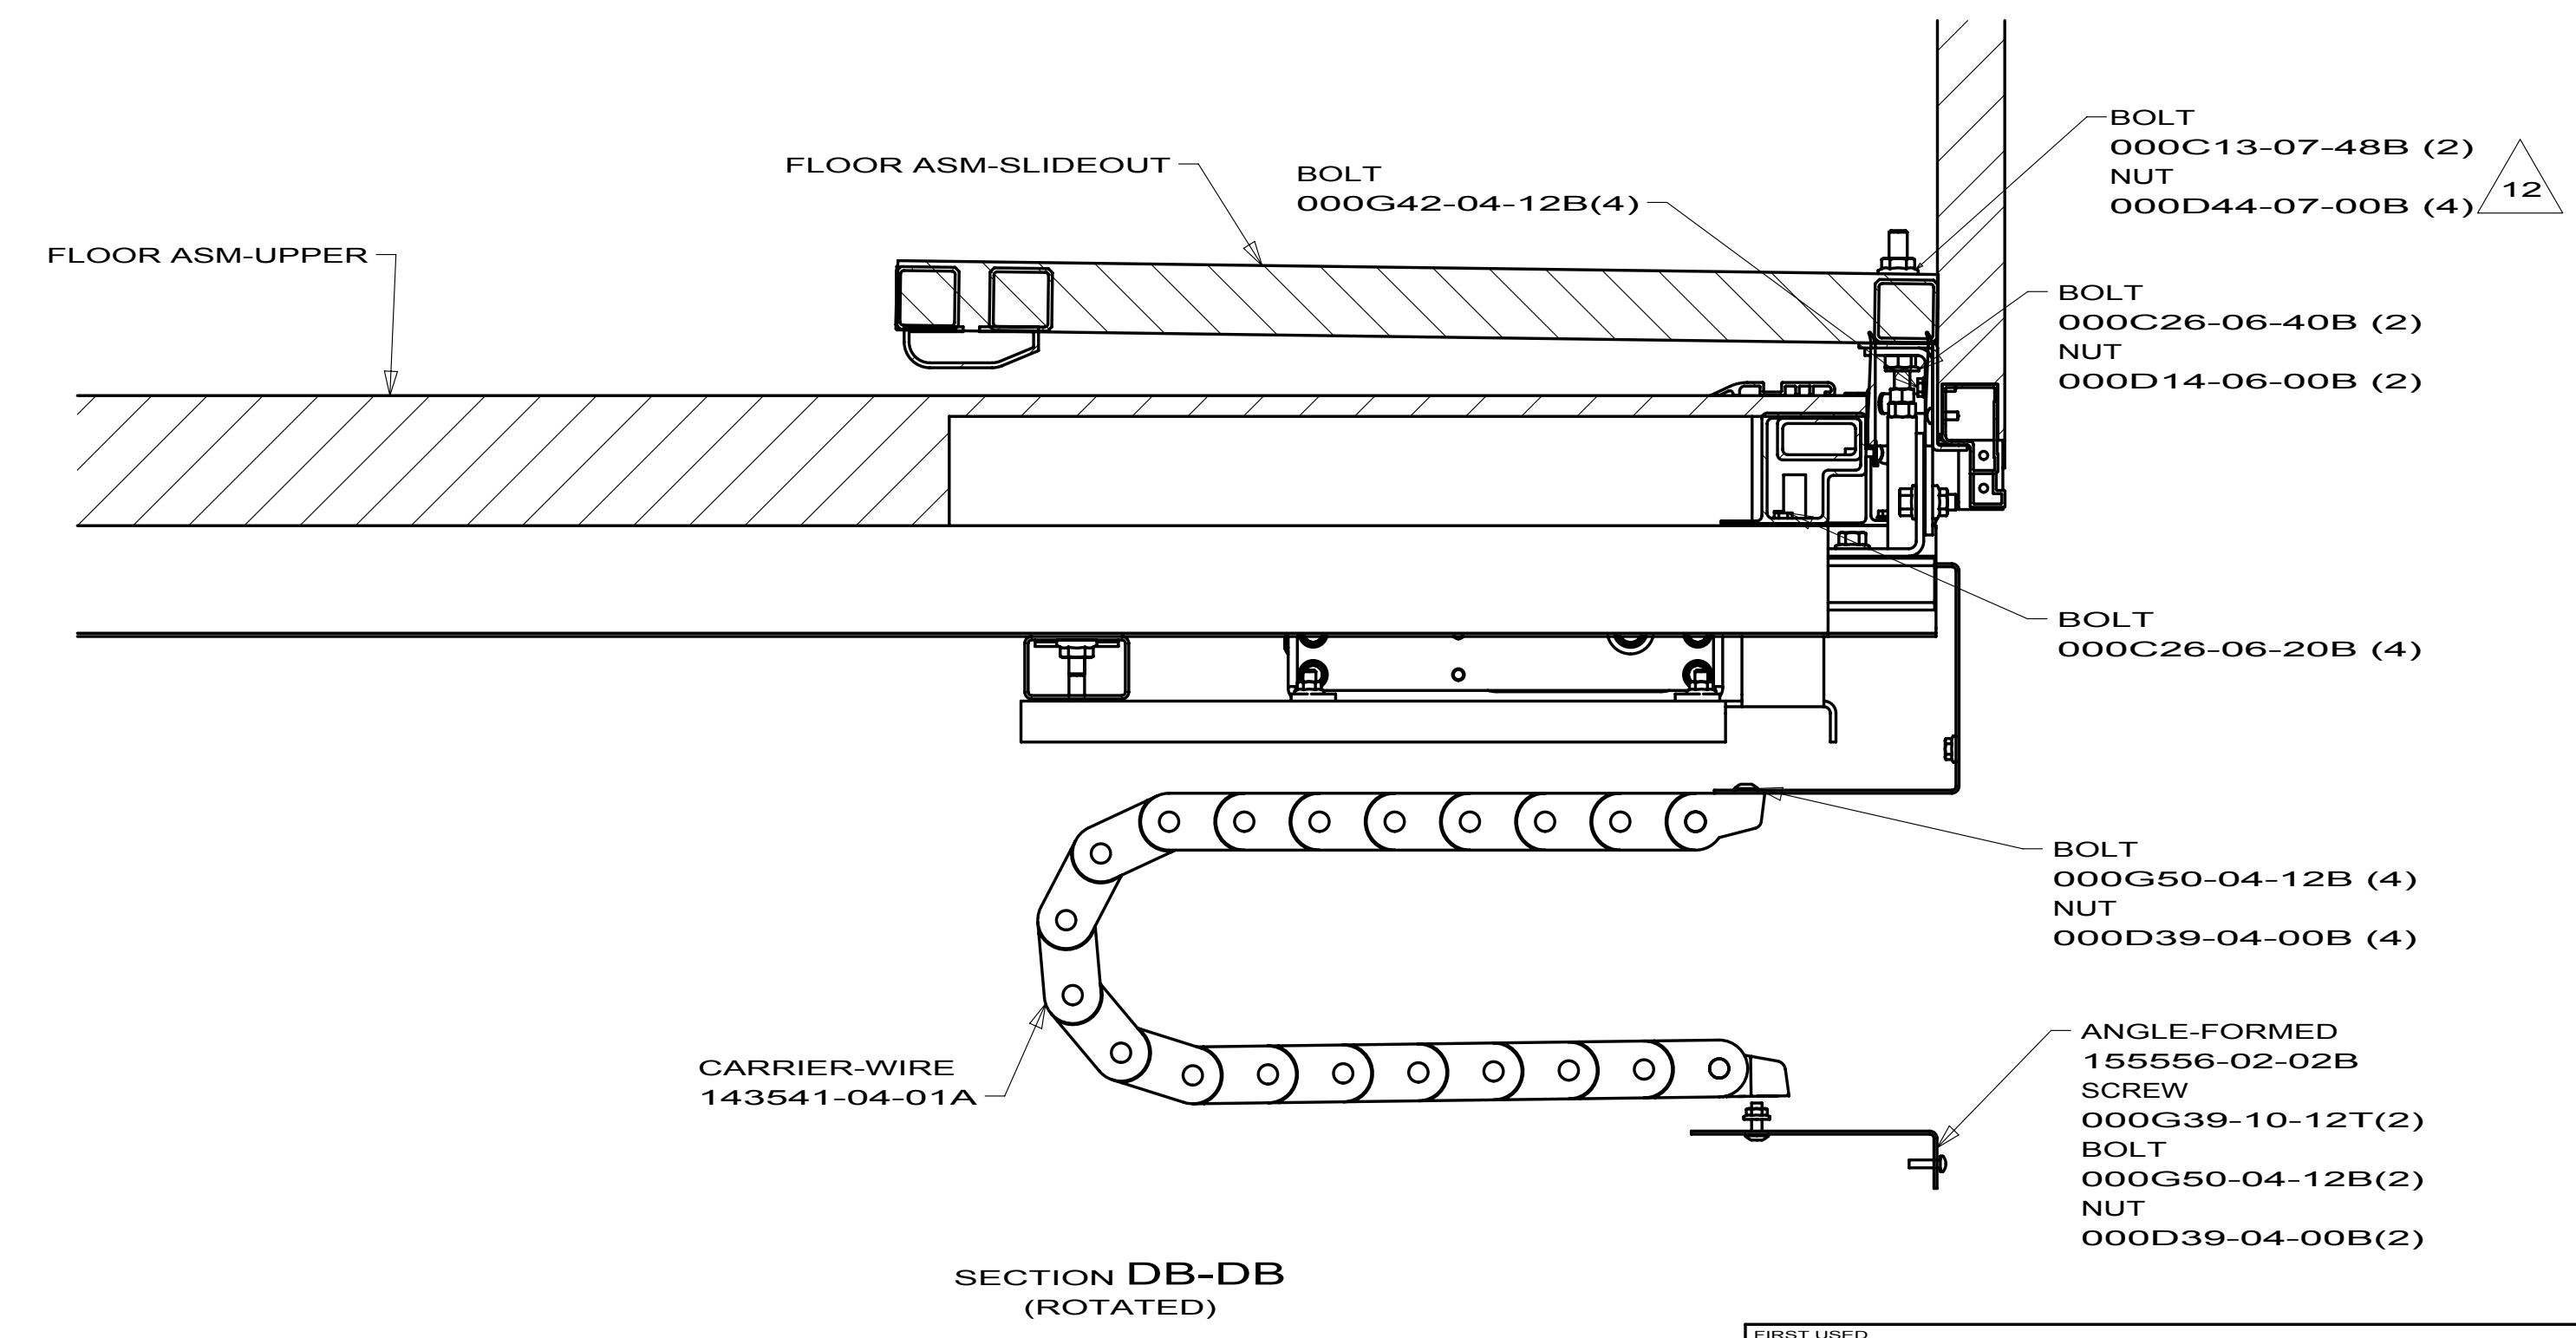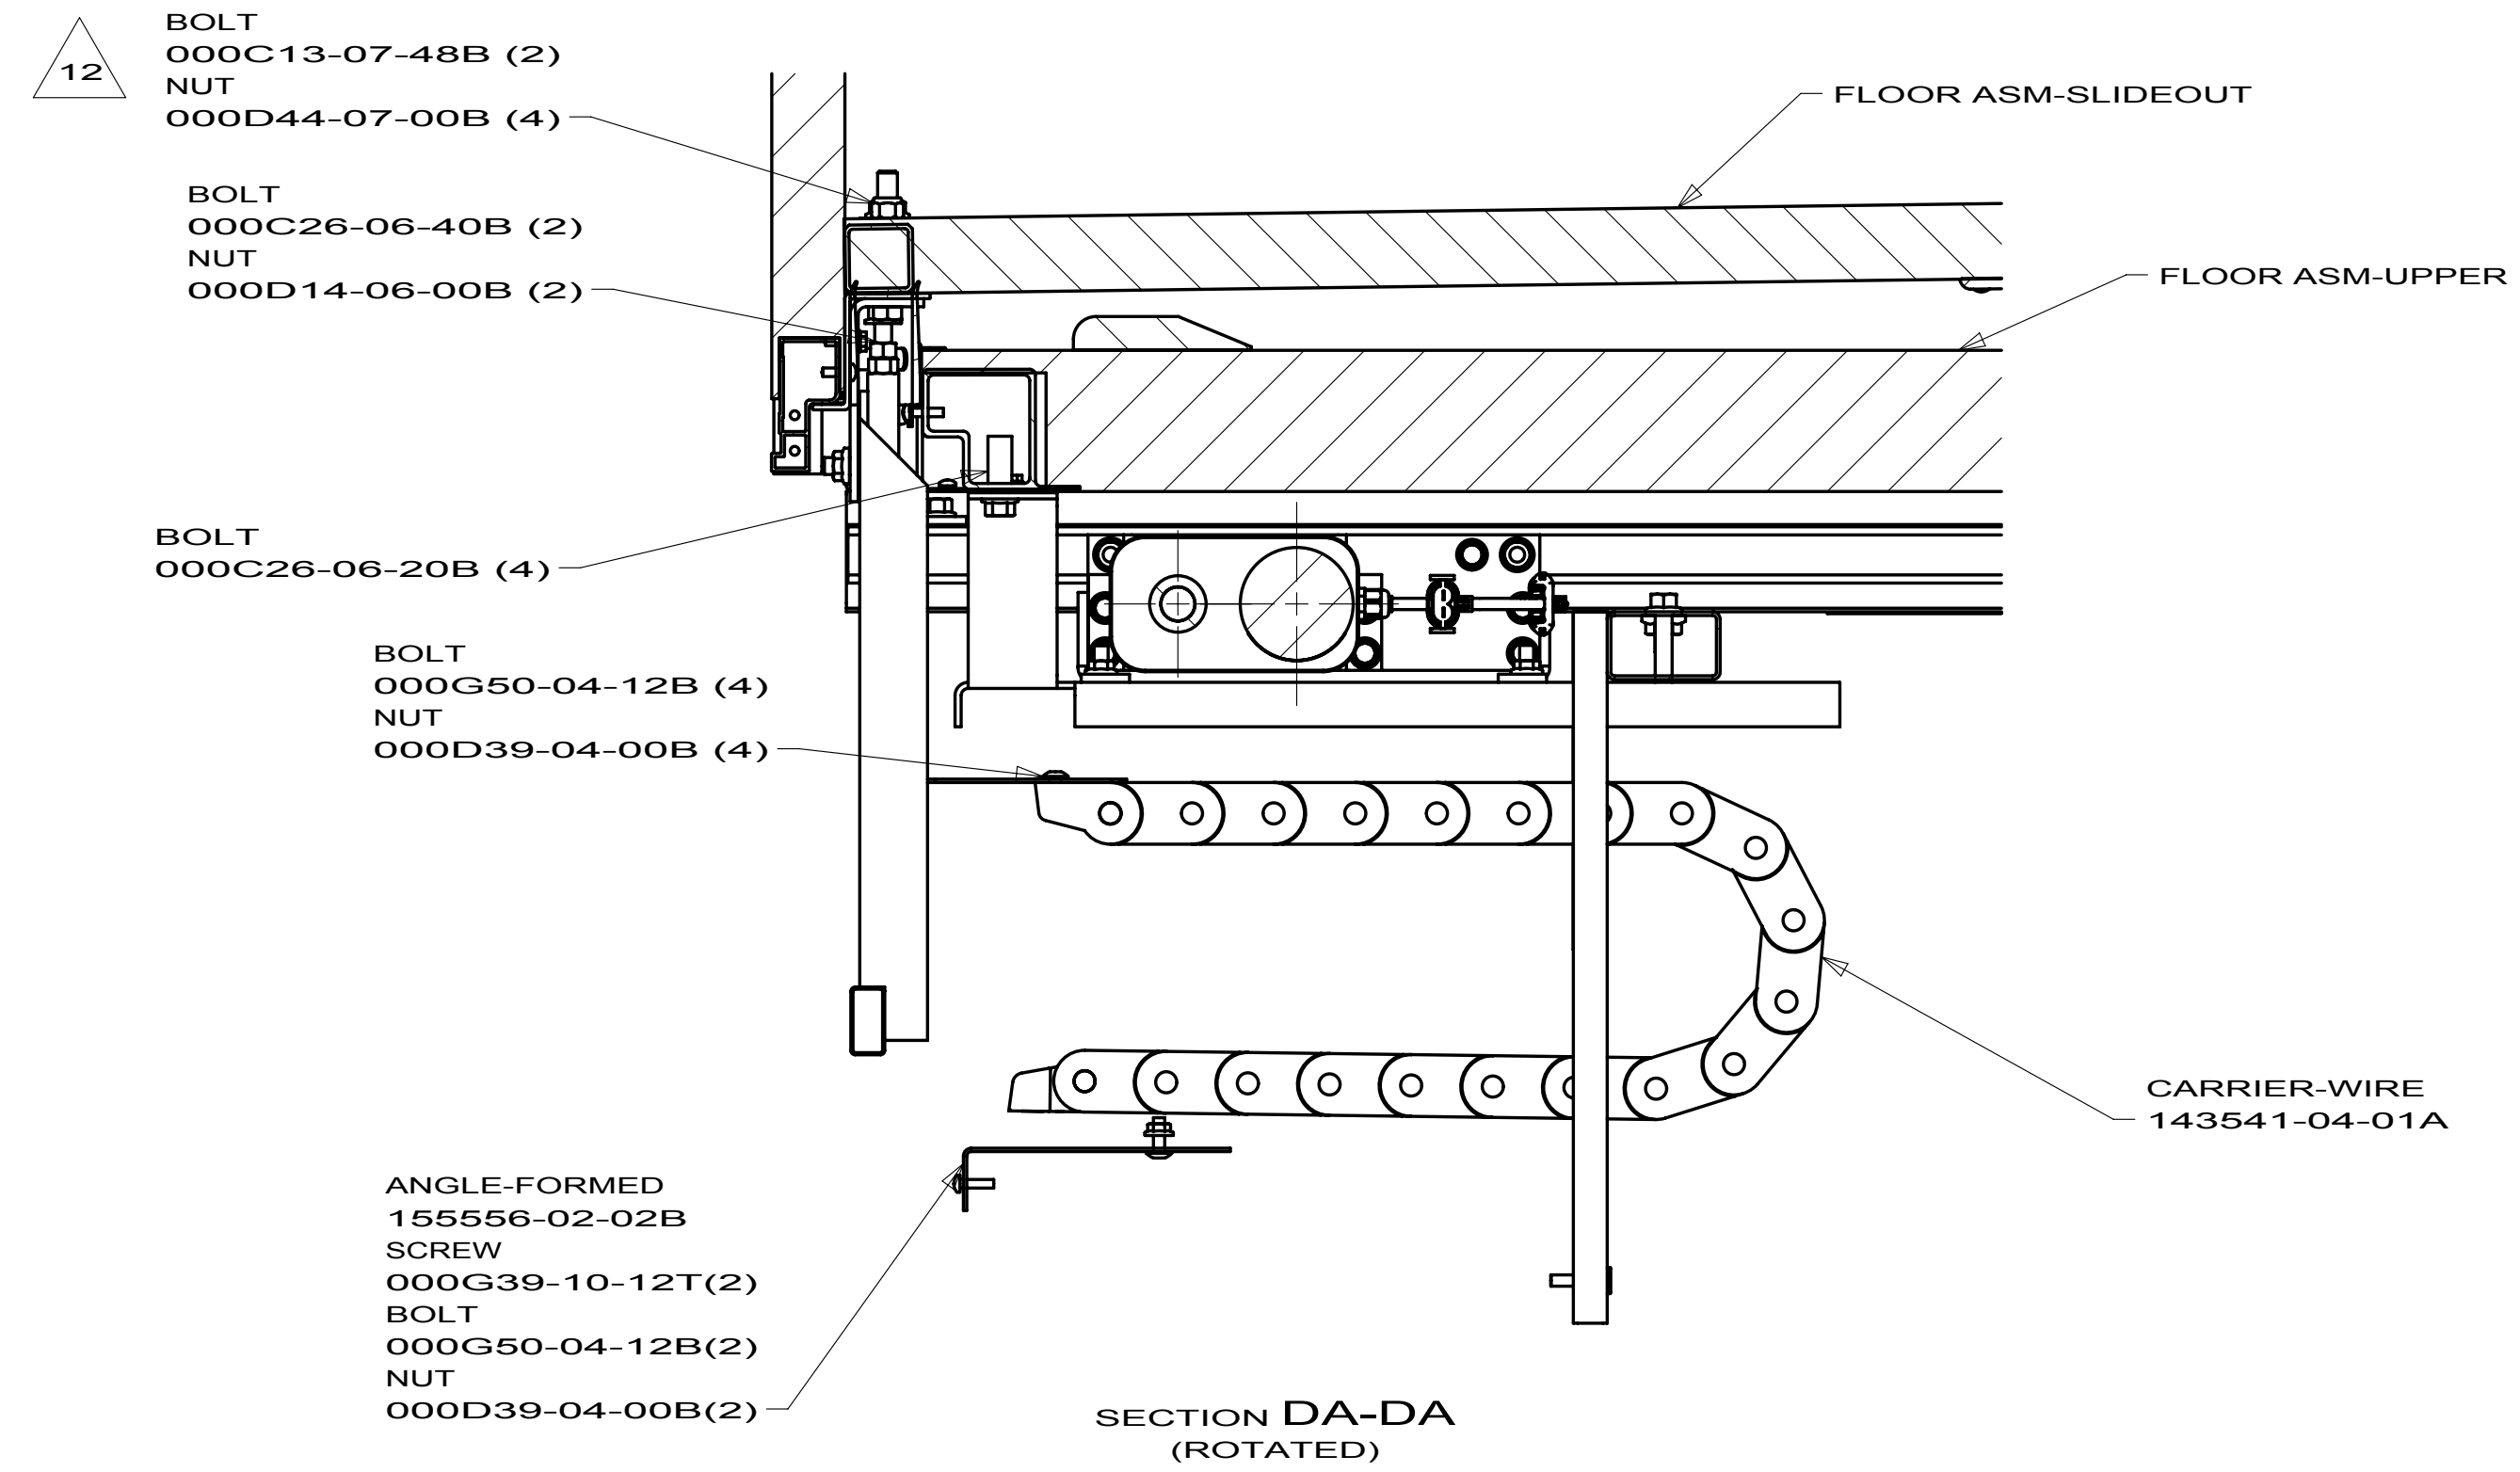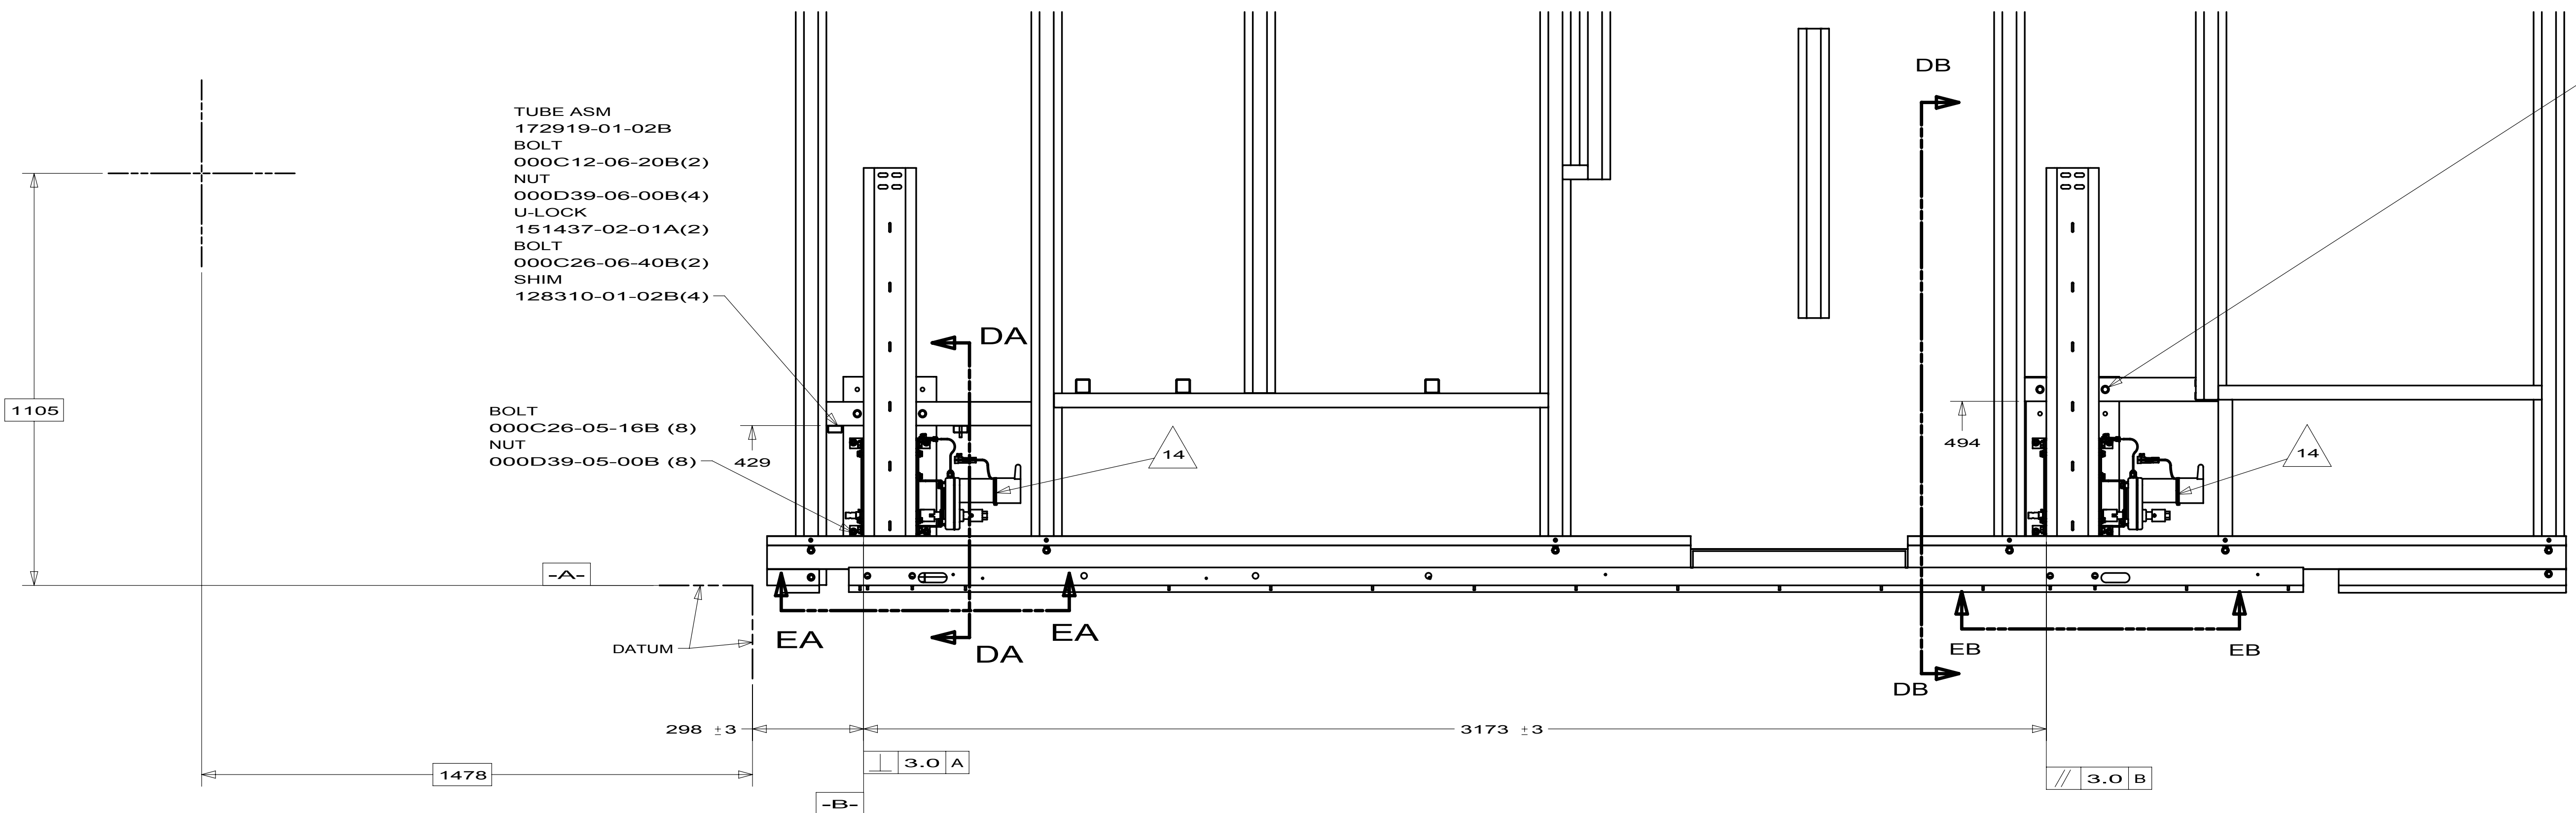




FIRST USED		10 524A
DO NOT SCALE DRAWING		
TITLE:		SLIDEOUT COMPL-FRT,LH
SHEET 4	PART NO	172838

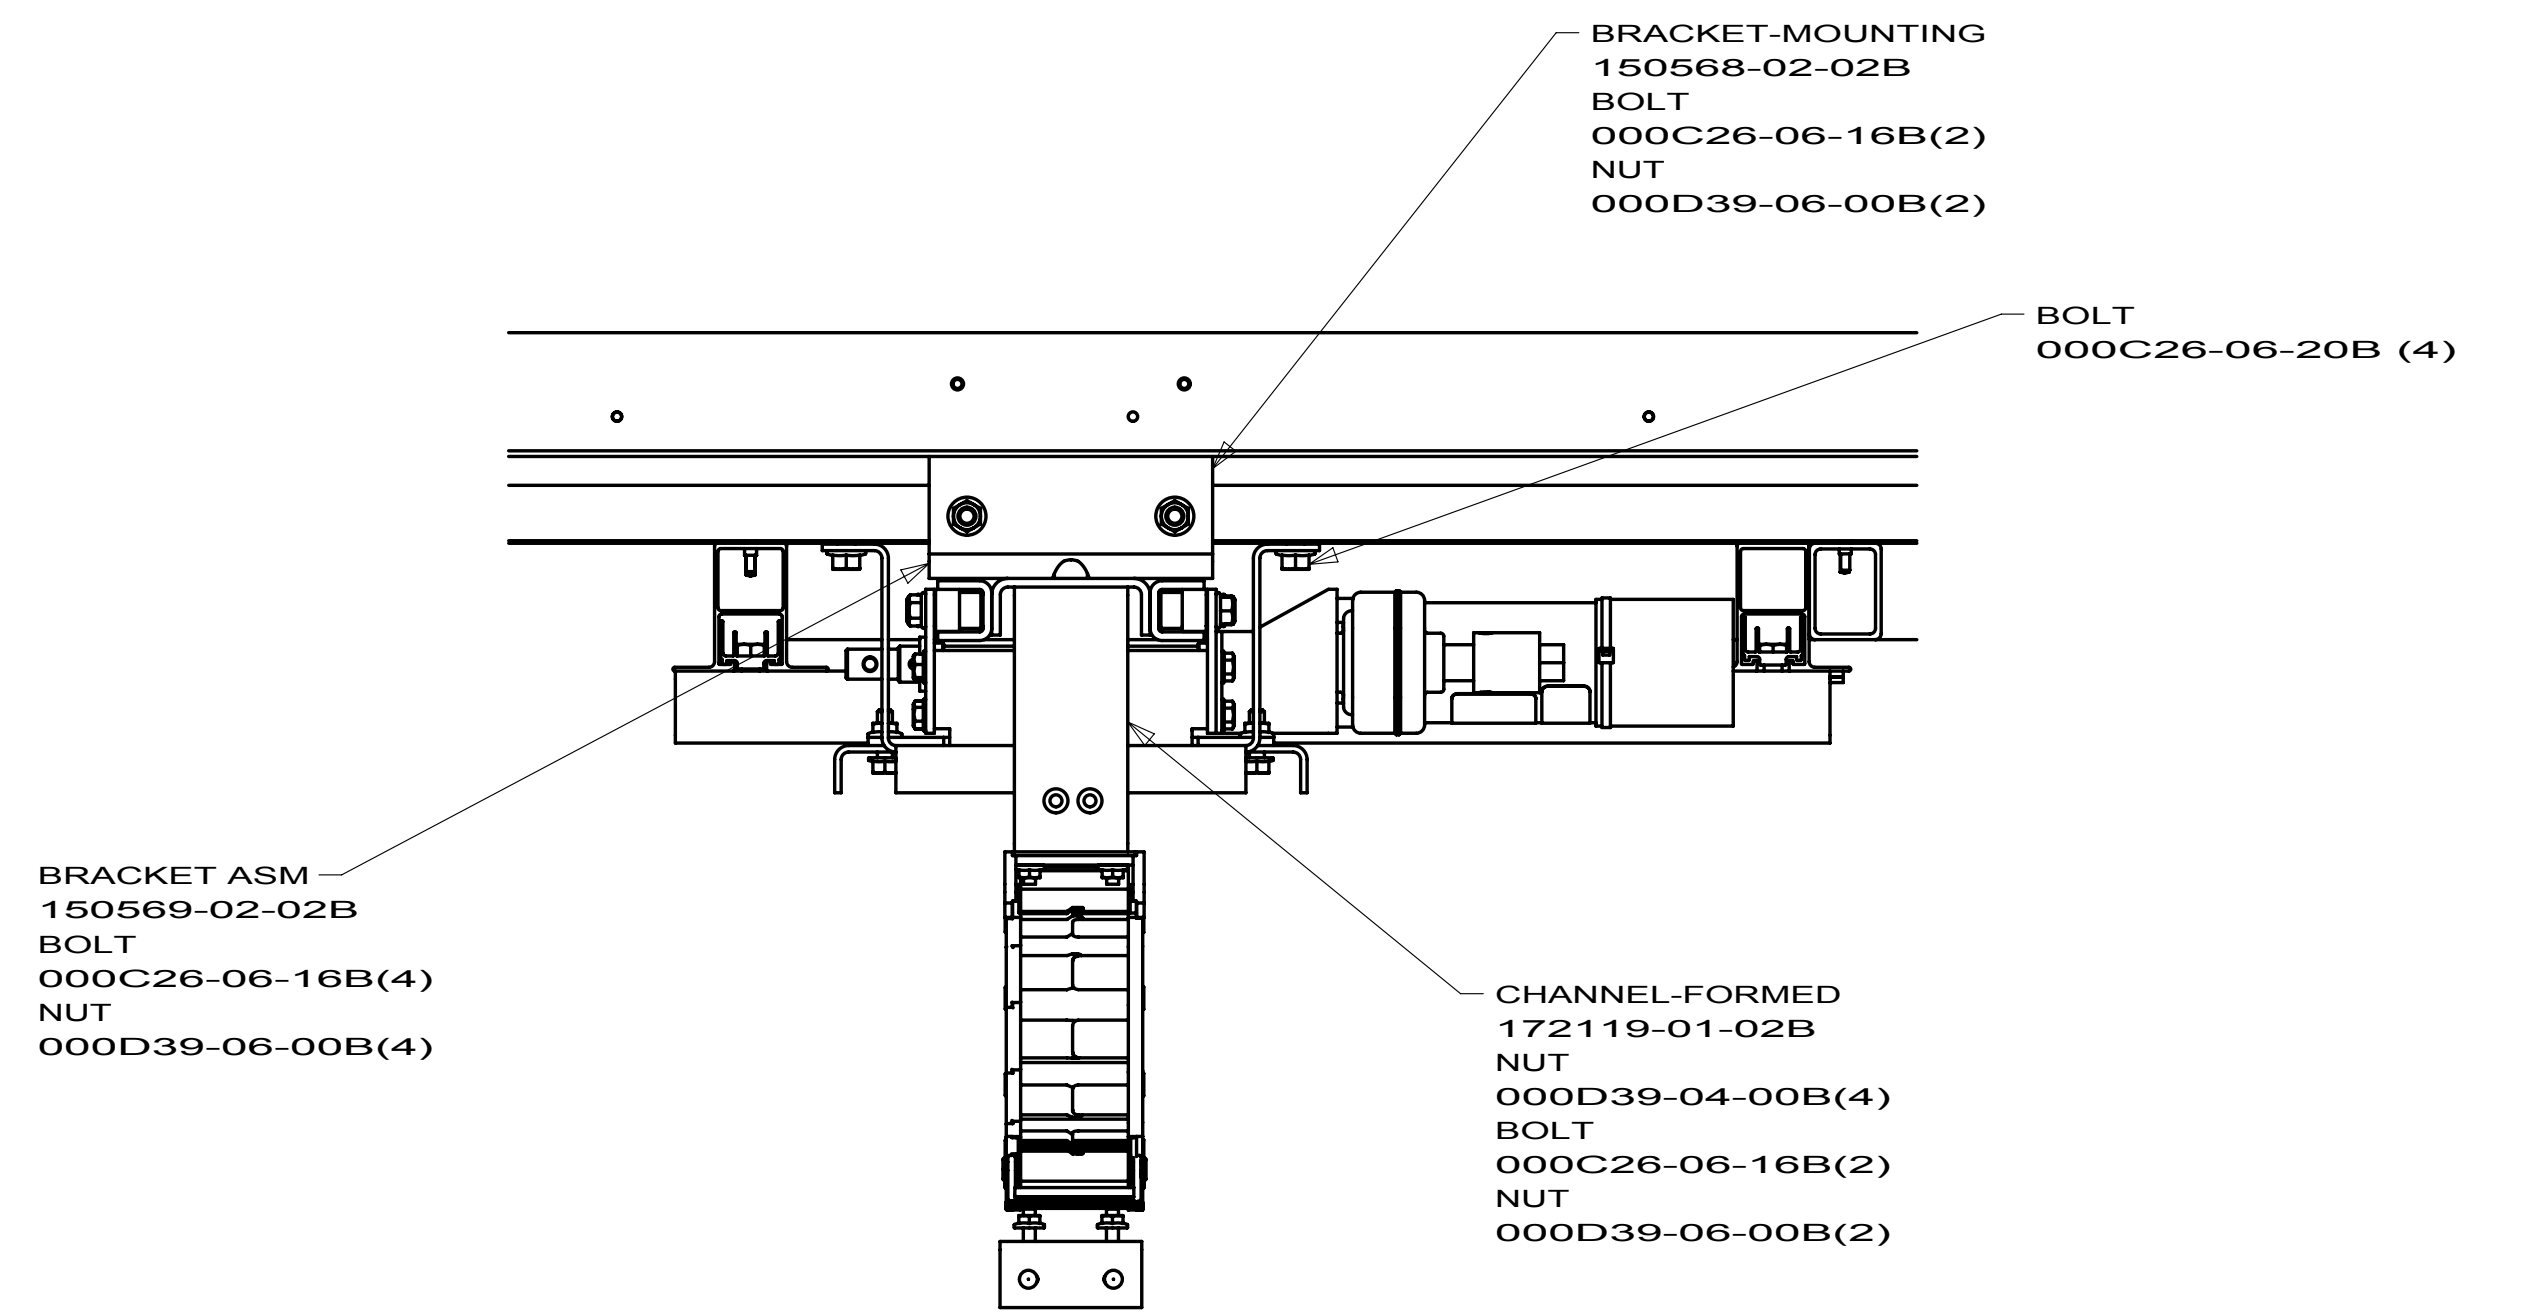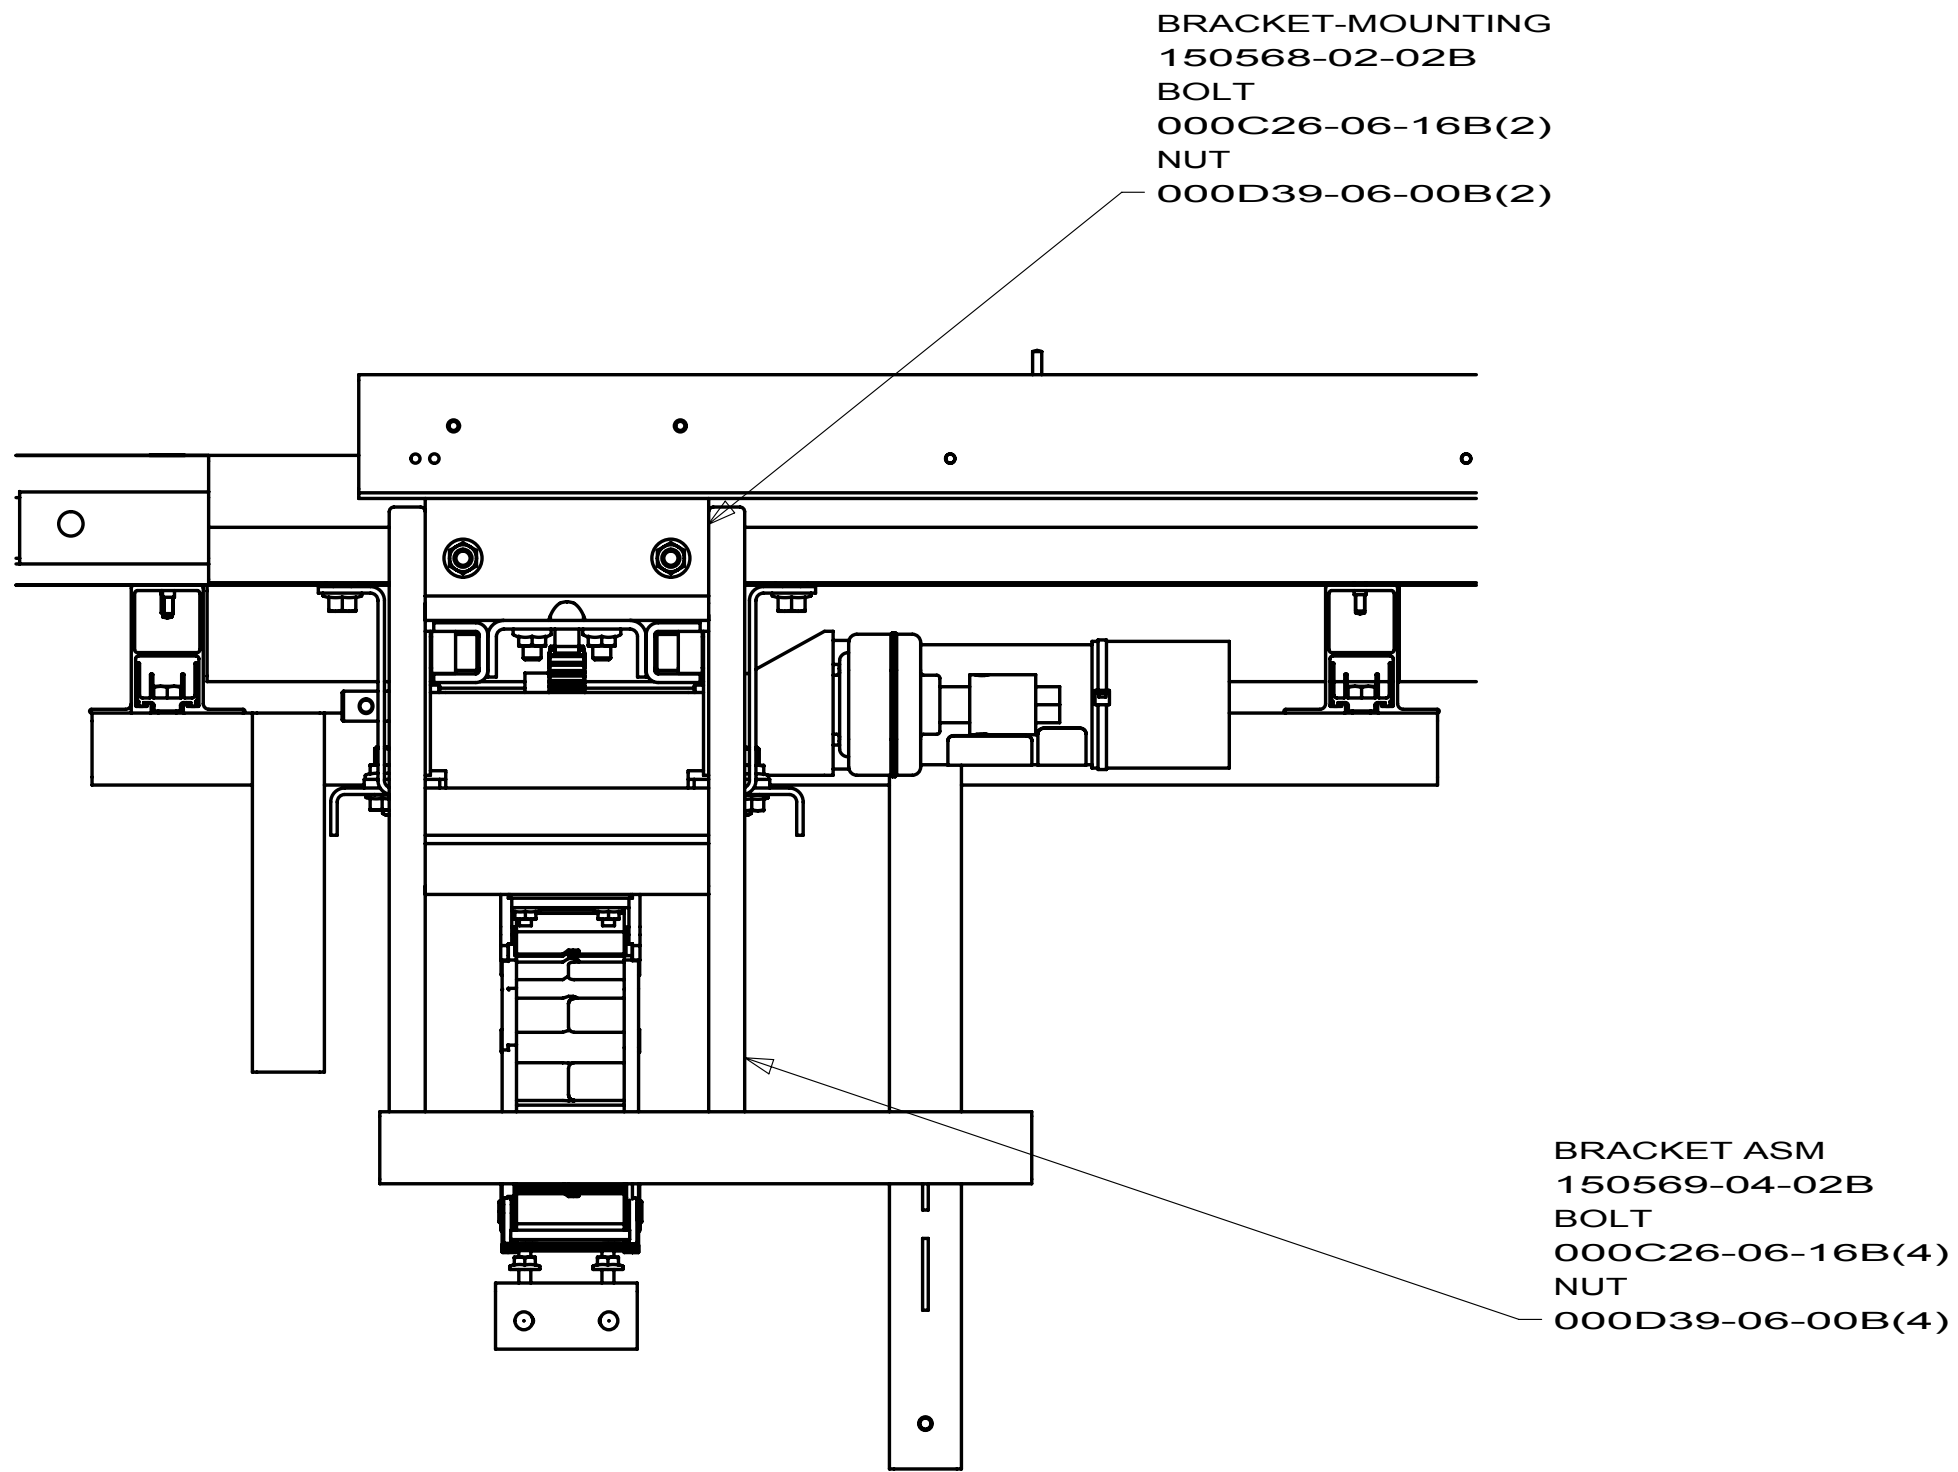

FIRST USED			10 524A
DO NOT SCALE DRAWING			
TITLE:			SLIDEOUT COMPL-FRT,LH
SHEET 5	PART NO	172838	REV

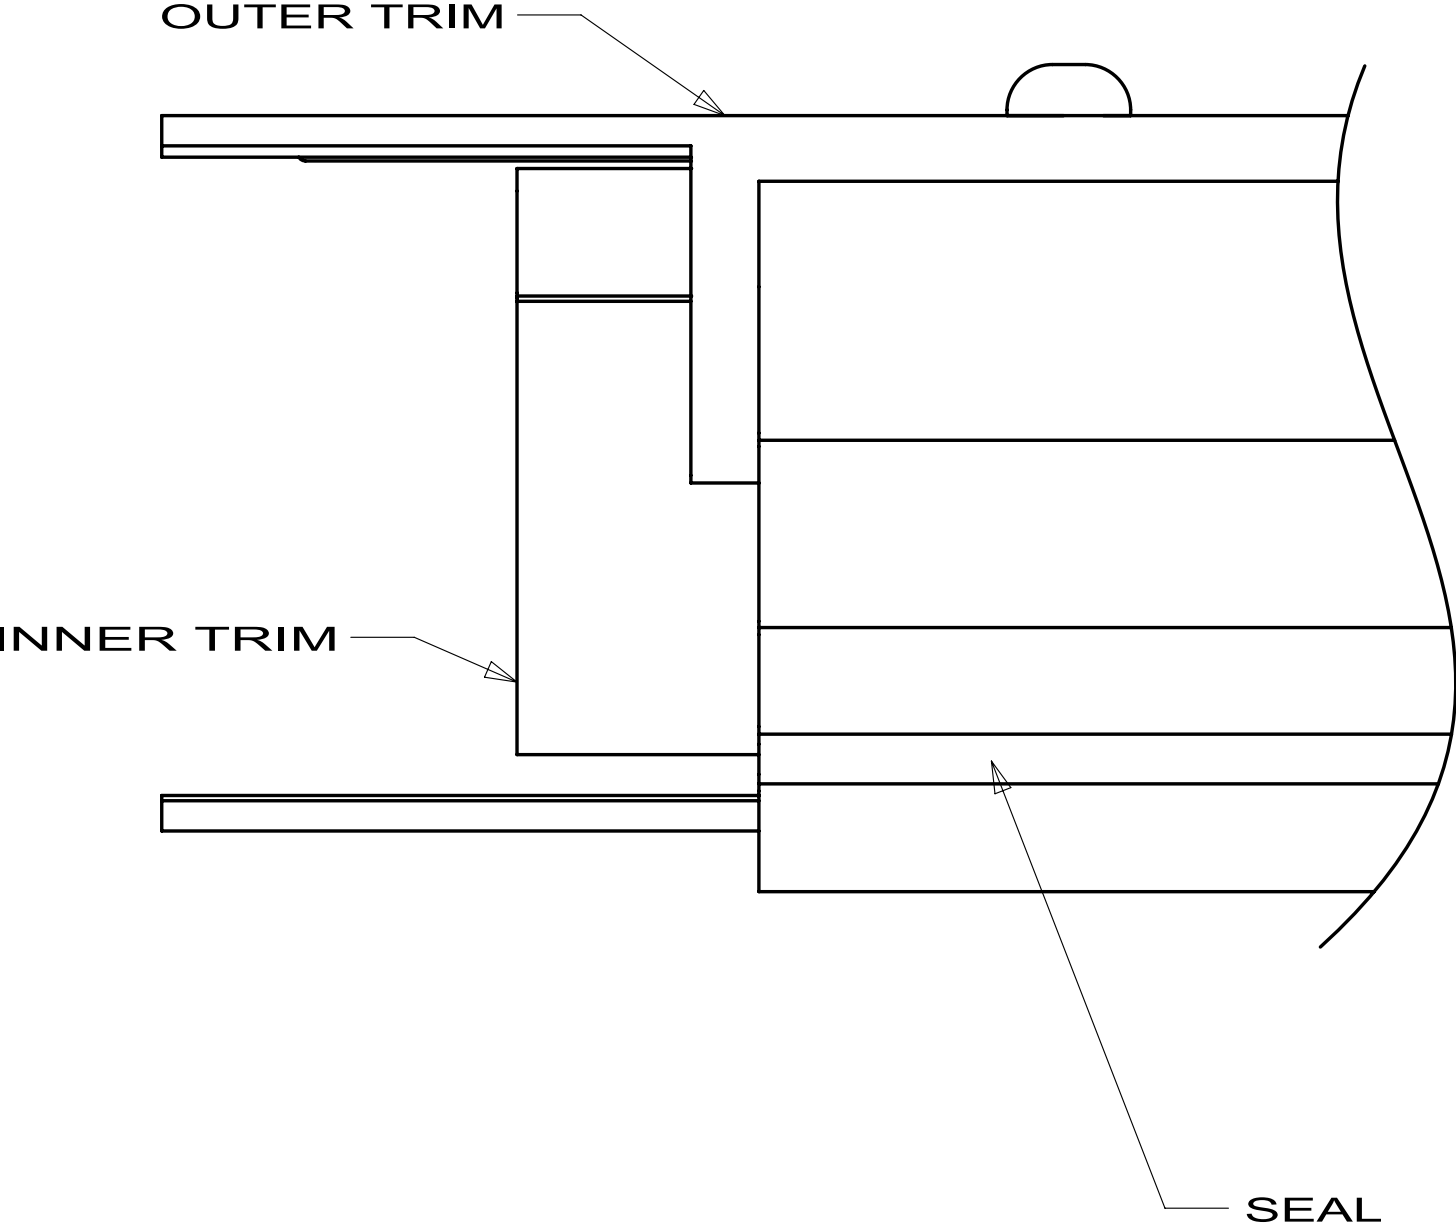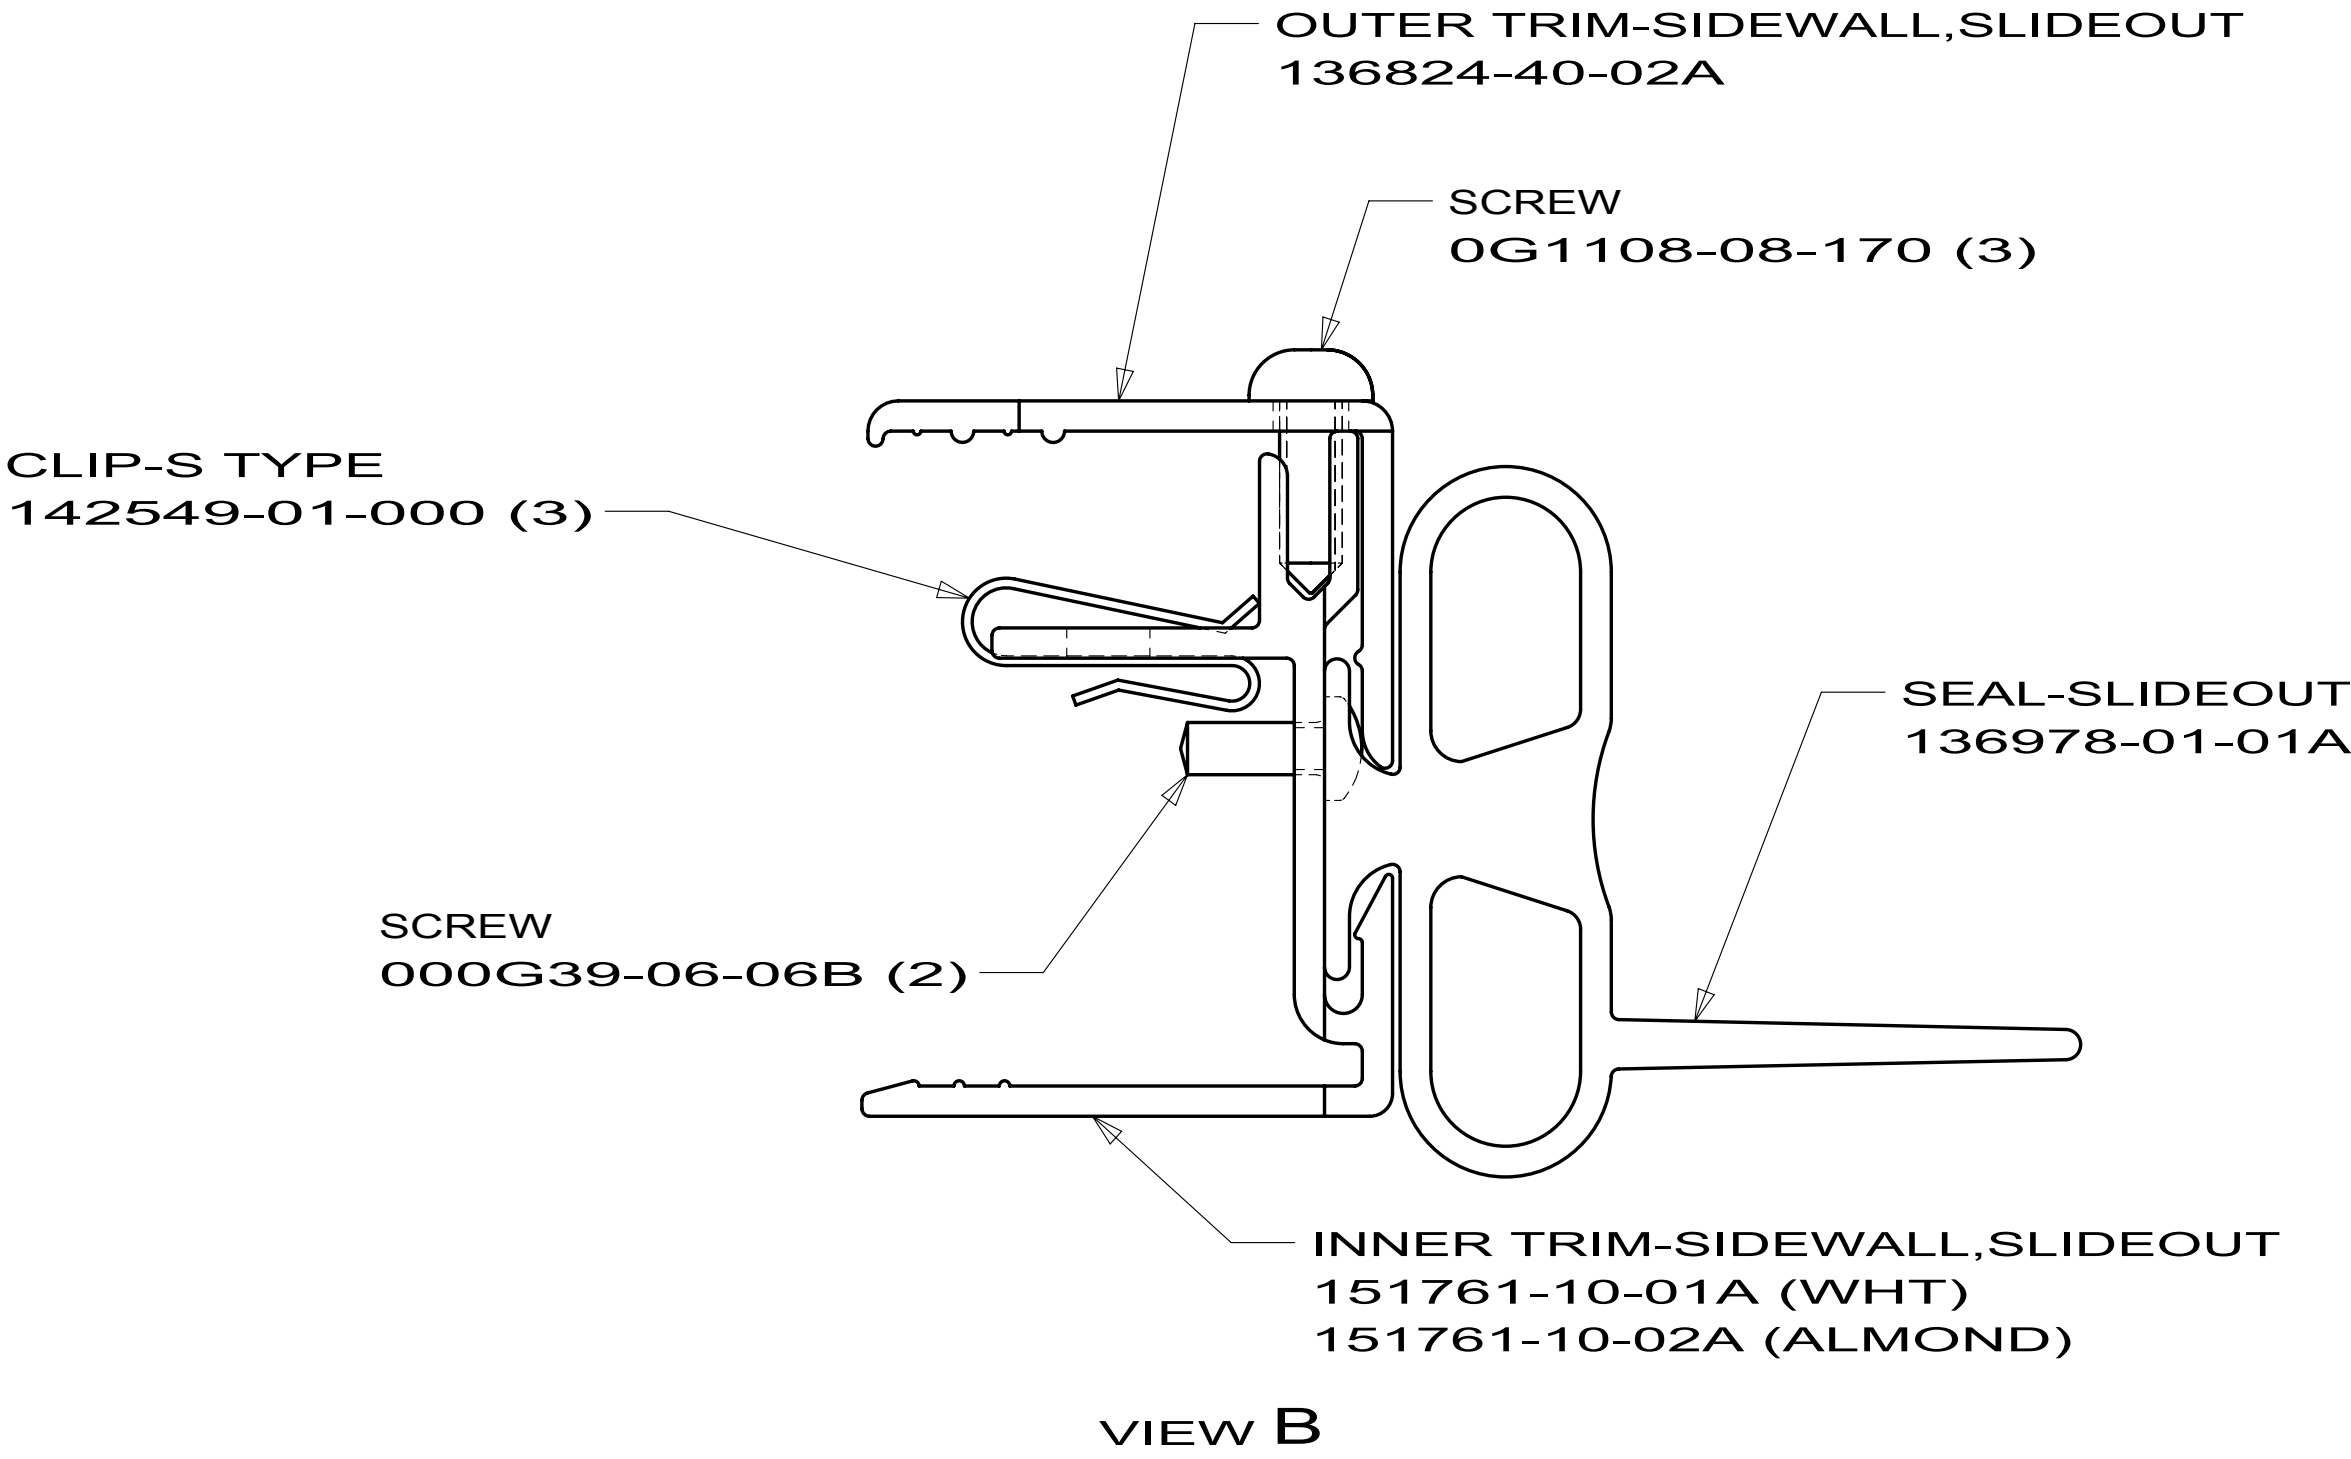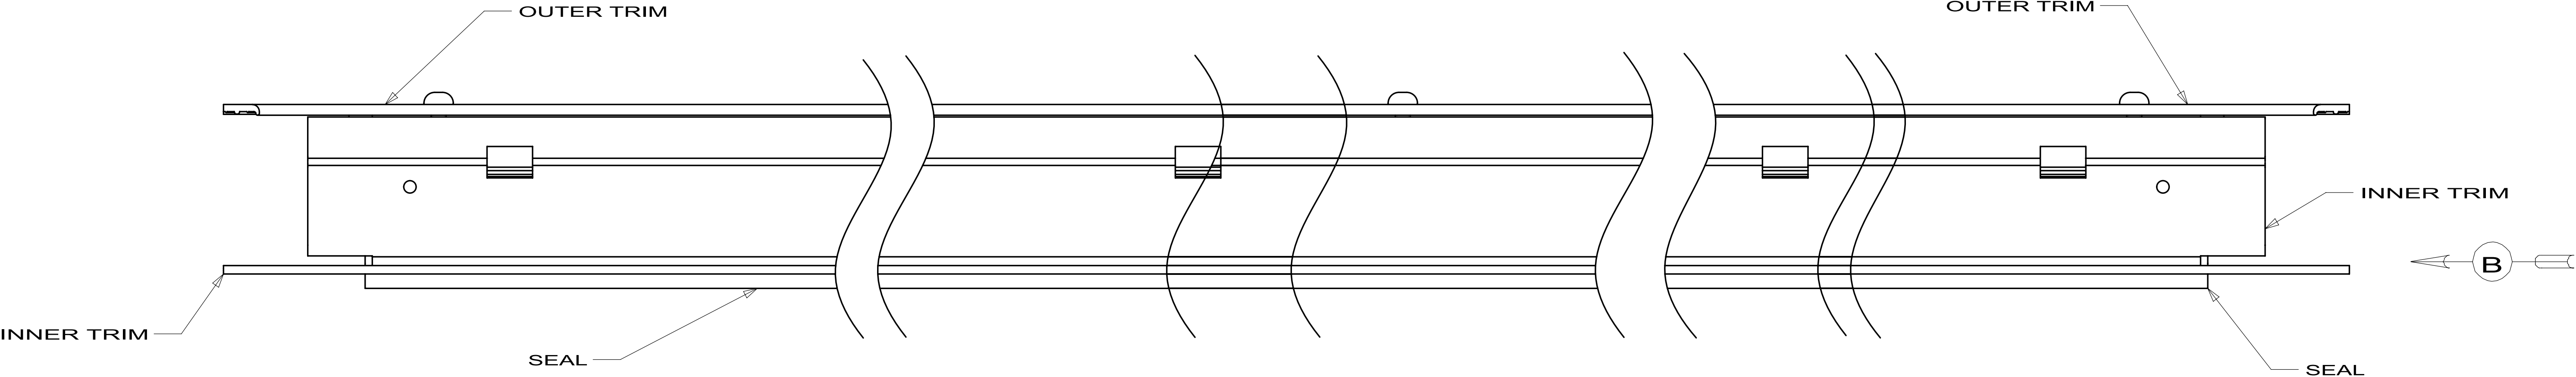

FABWELL SDW

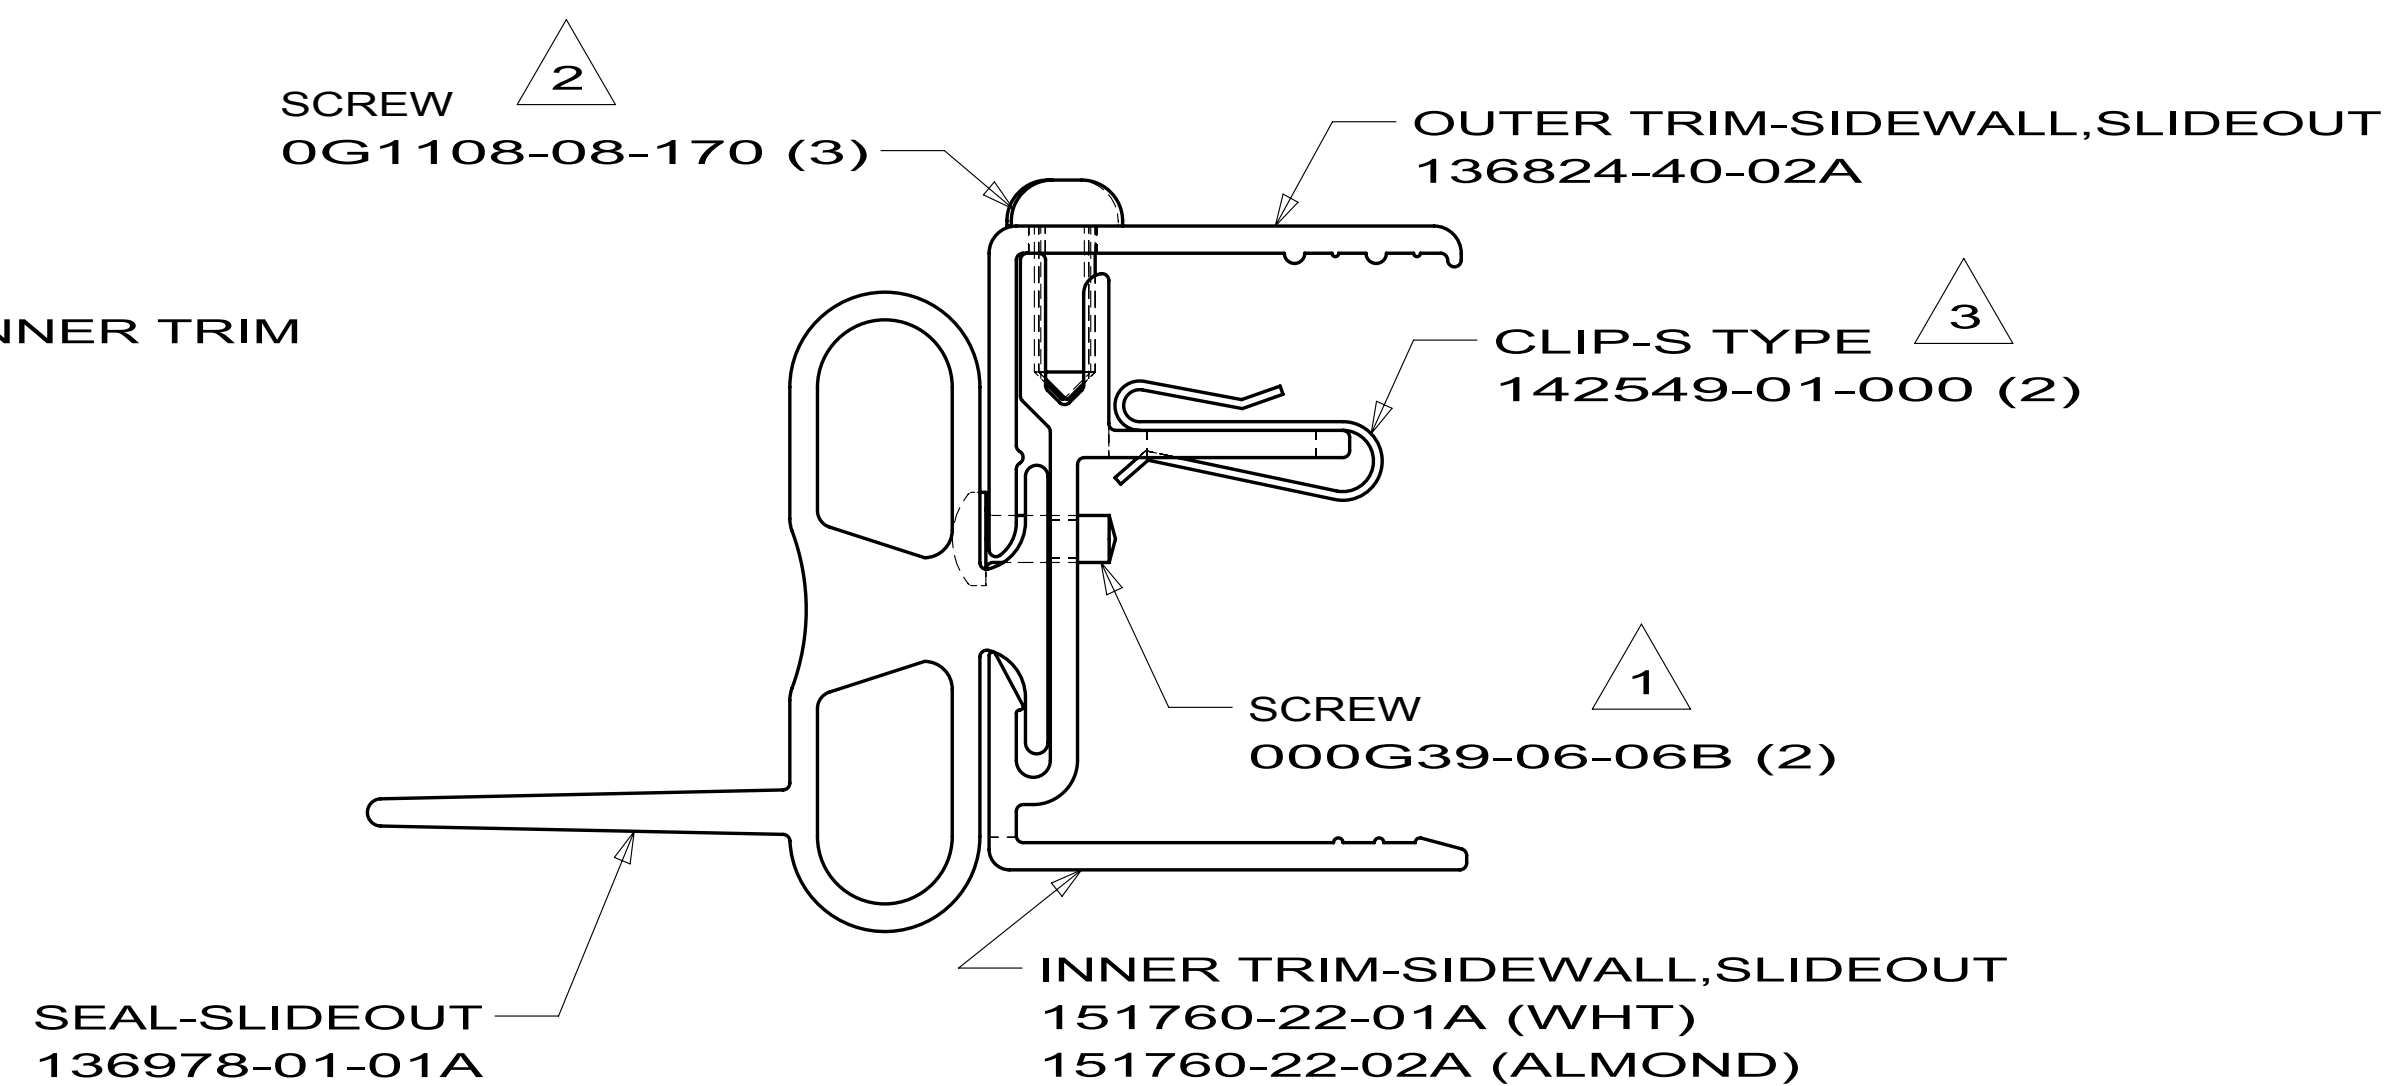
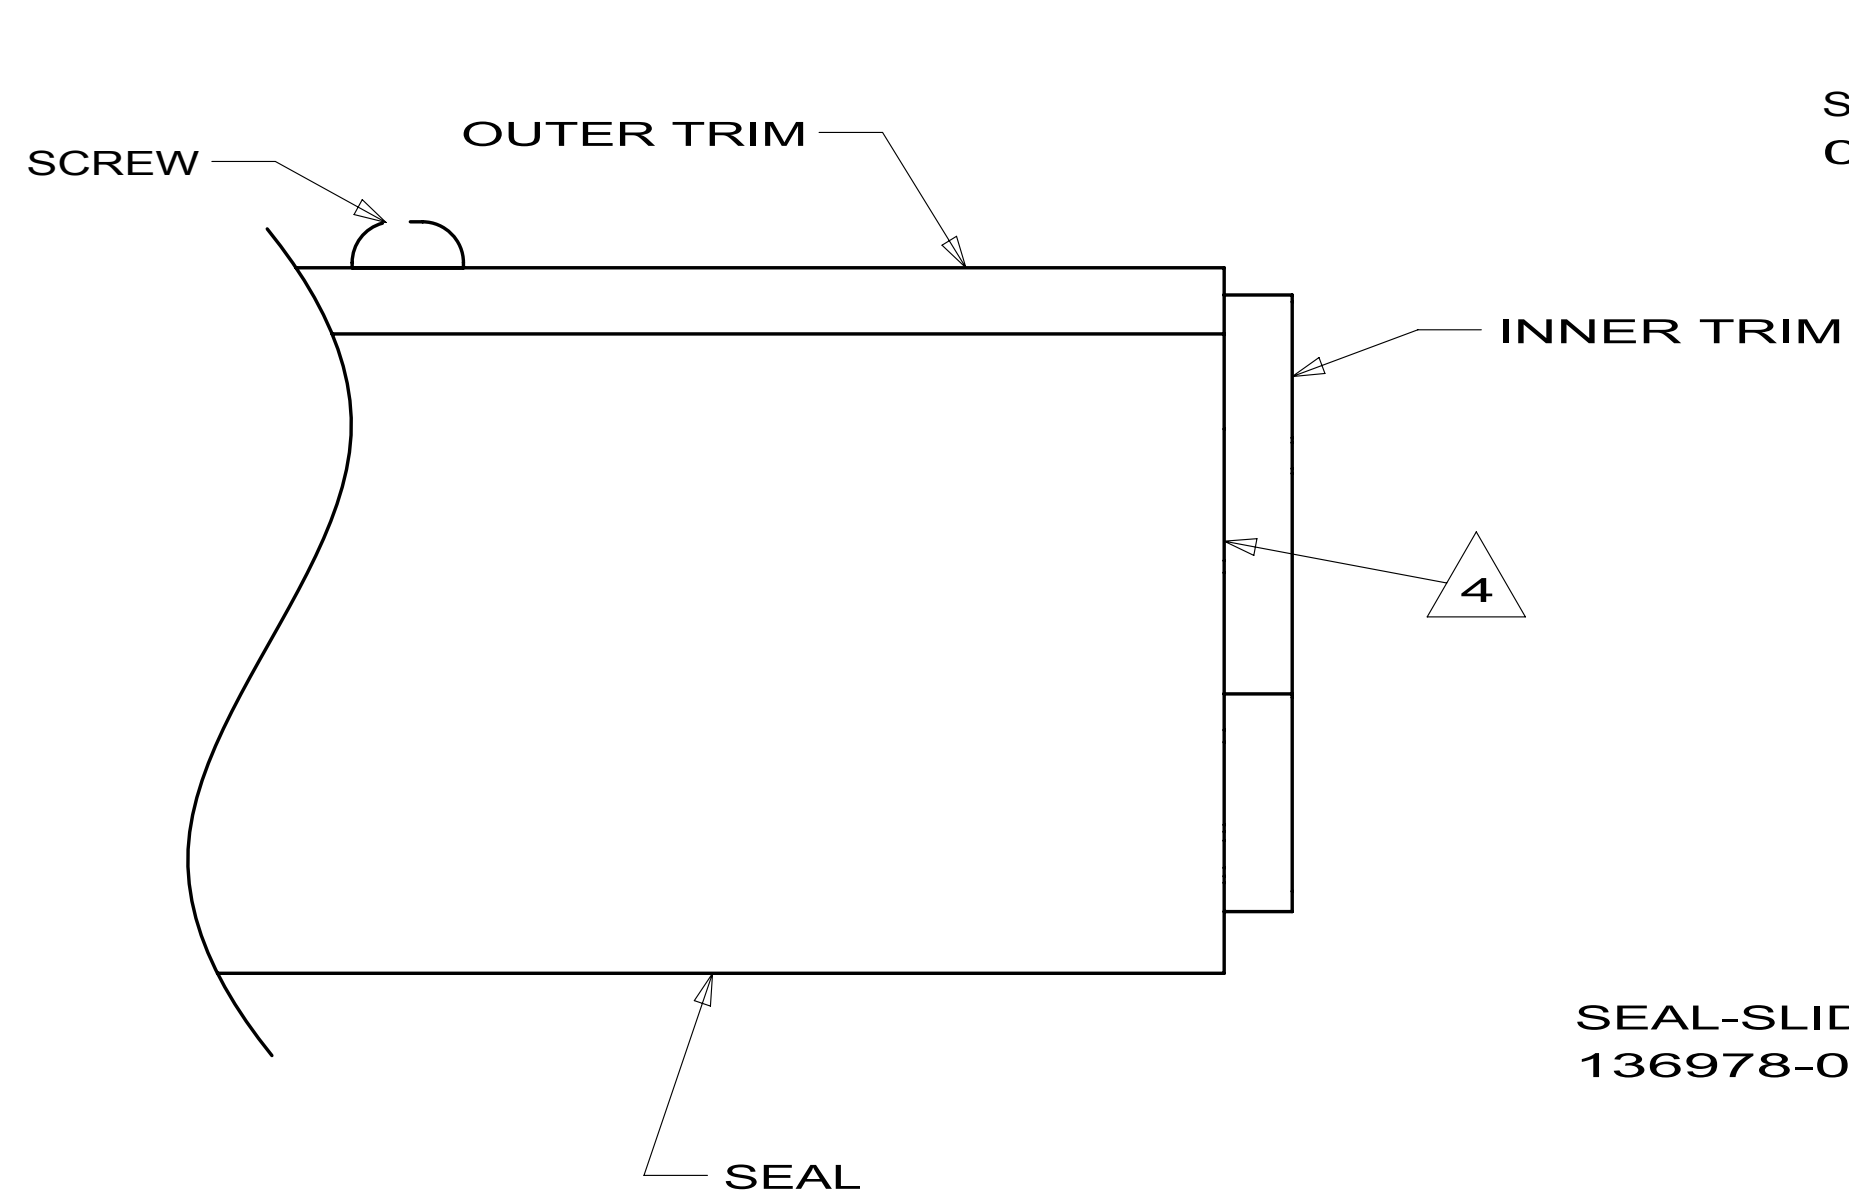
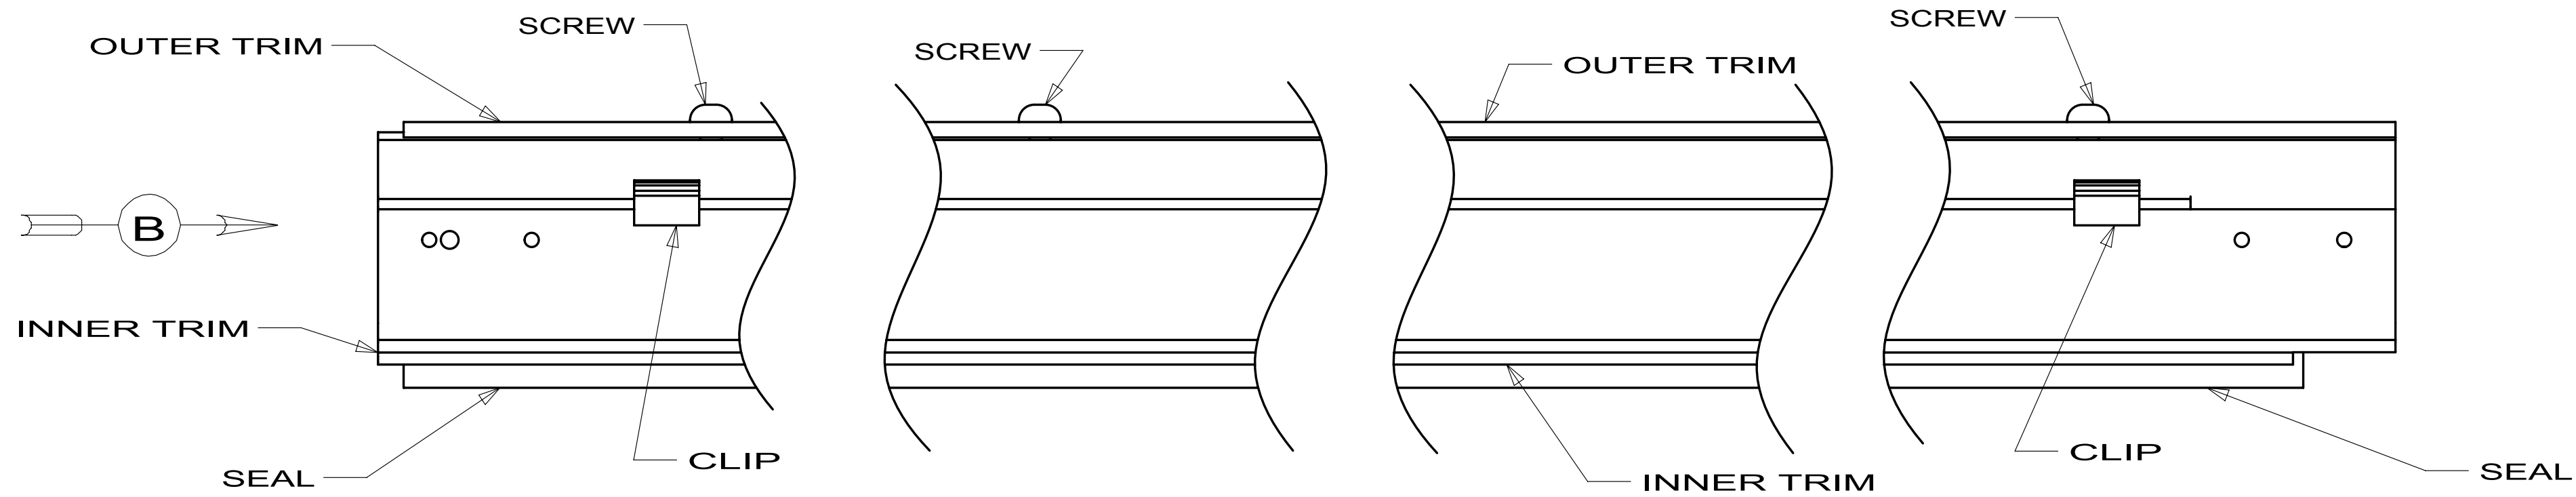



- 4 SEAL TO BE FLUSH WITH OUTER TRIM.
 3 TOLERANCE ON THE CLIP SPACING IS $\pm$ 100.0 MM.
 2 APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 1 APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.

NOTES:


FABWELL SDW

TRIM ASM-SLIDEOUT,SIDE
1 2 **151763**

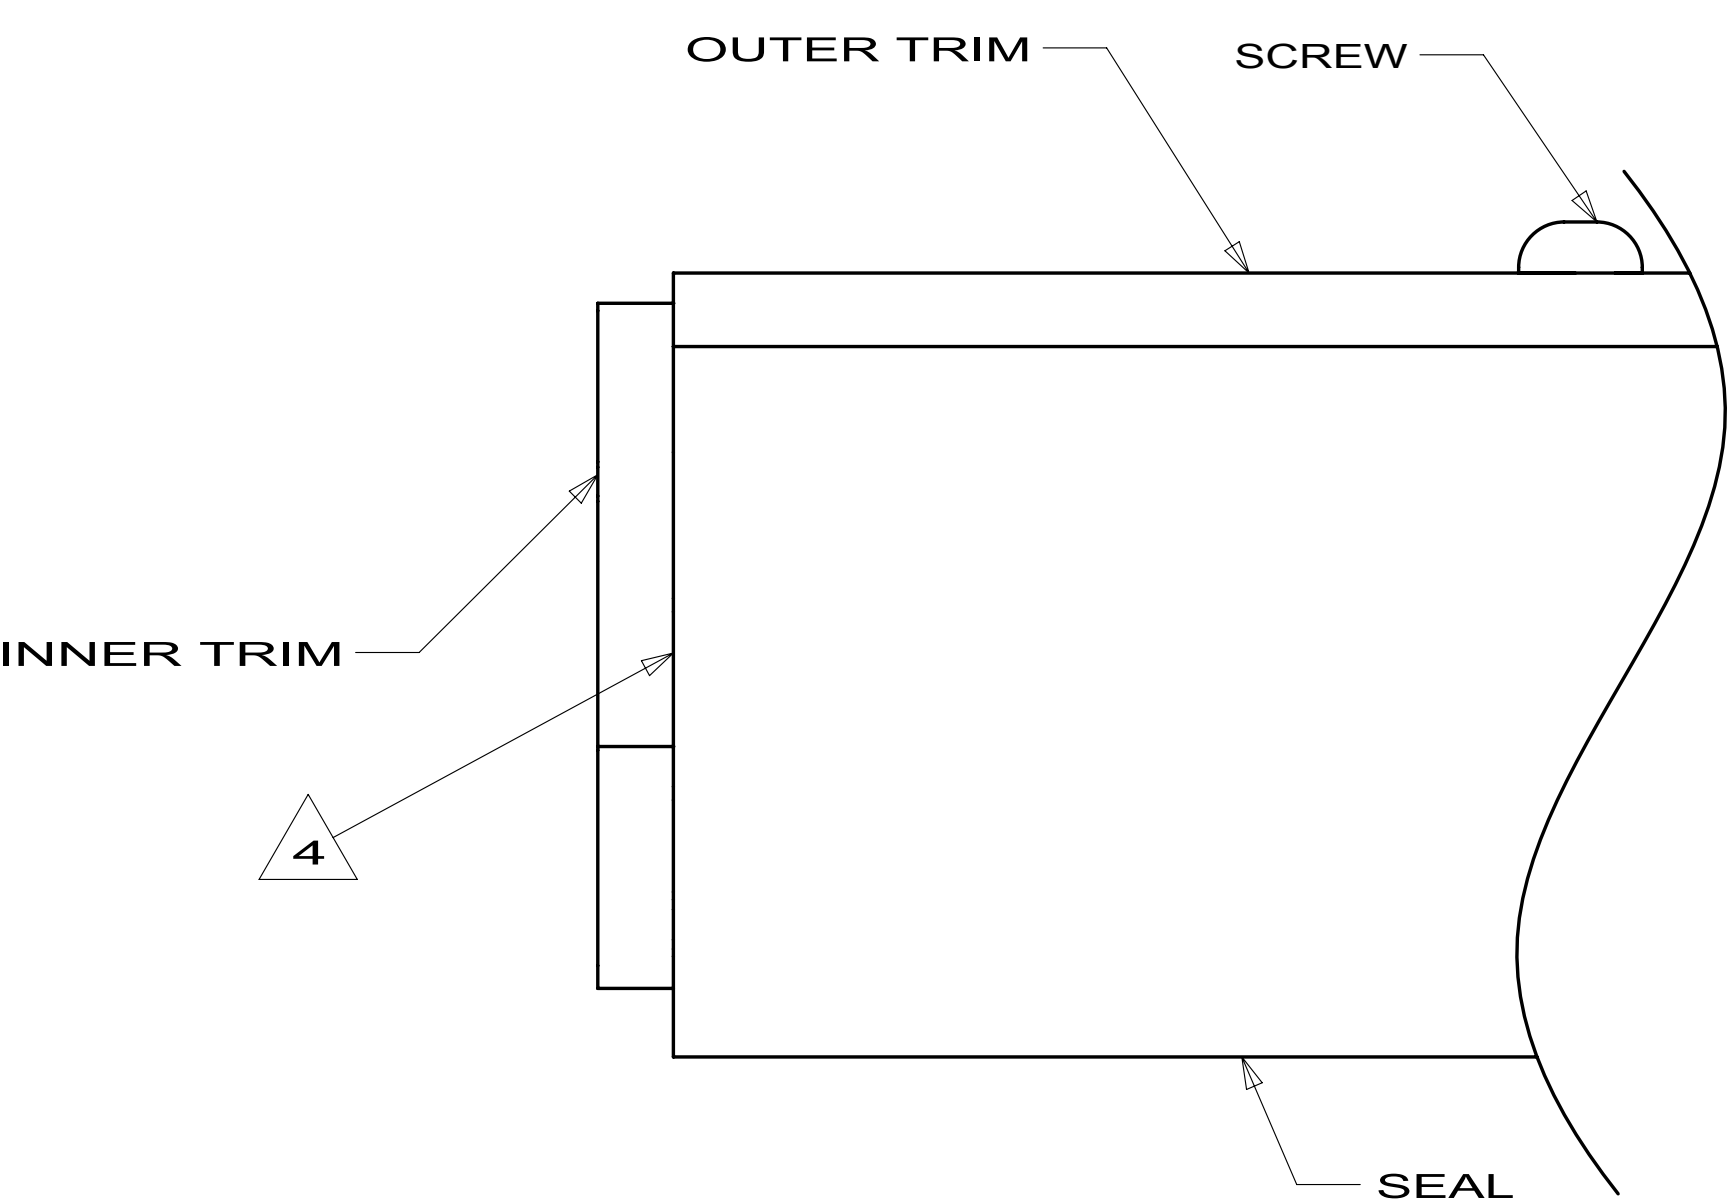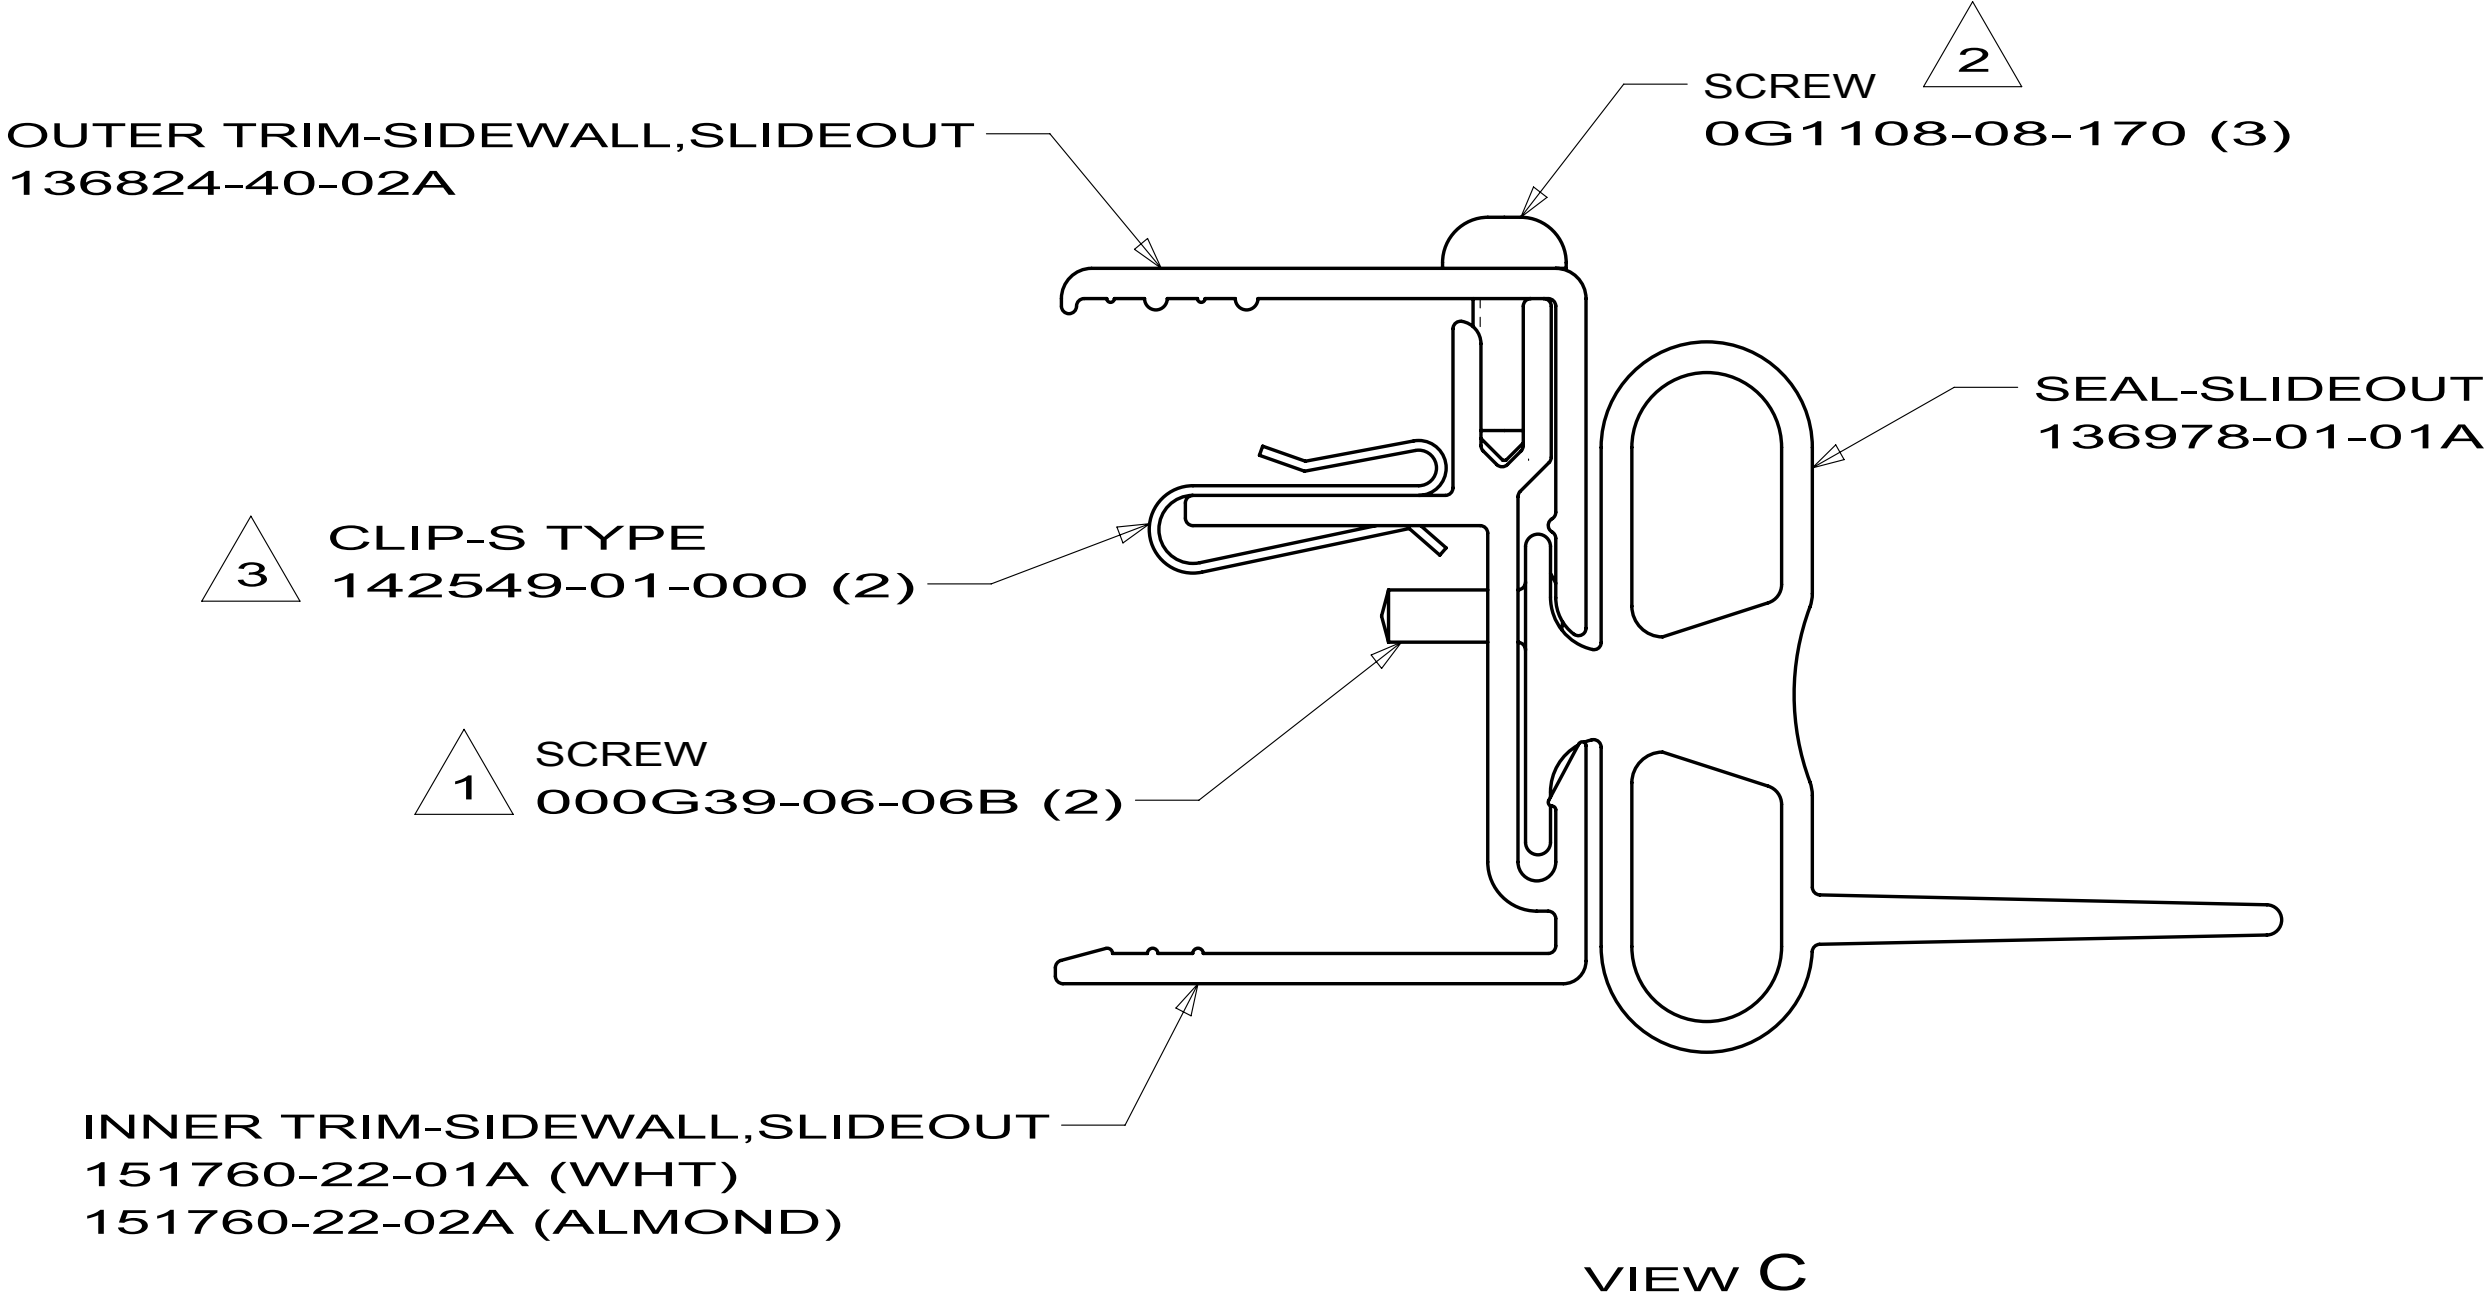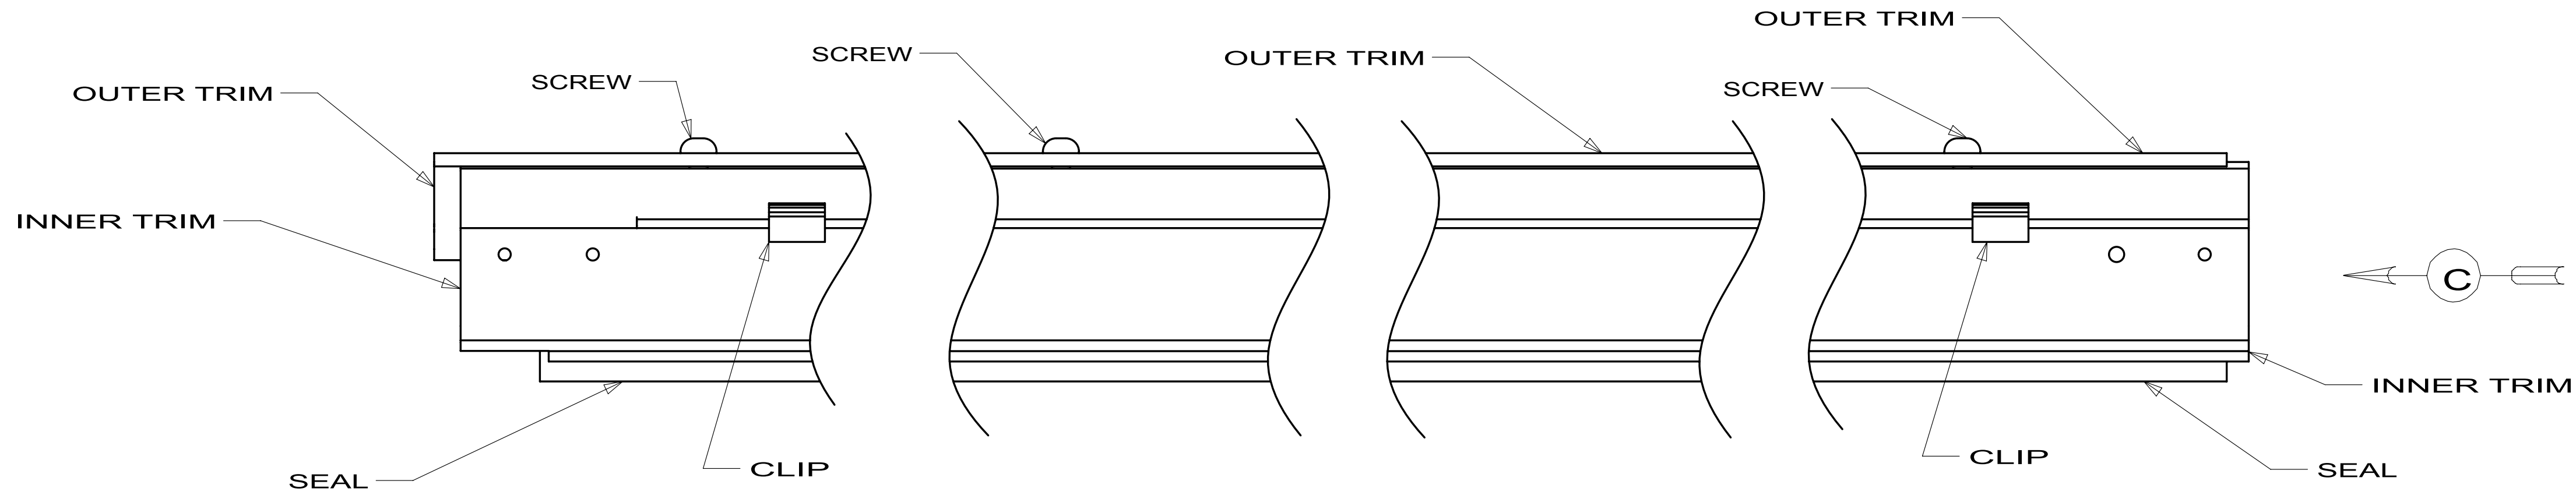

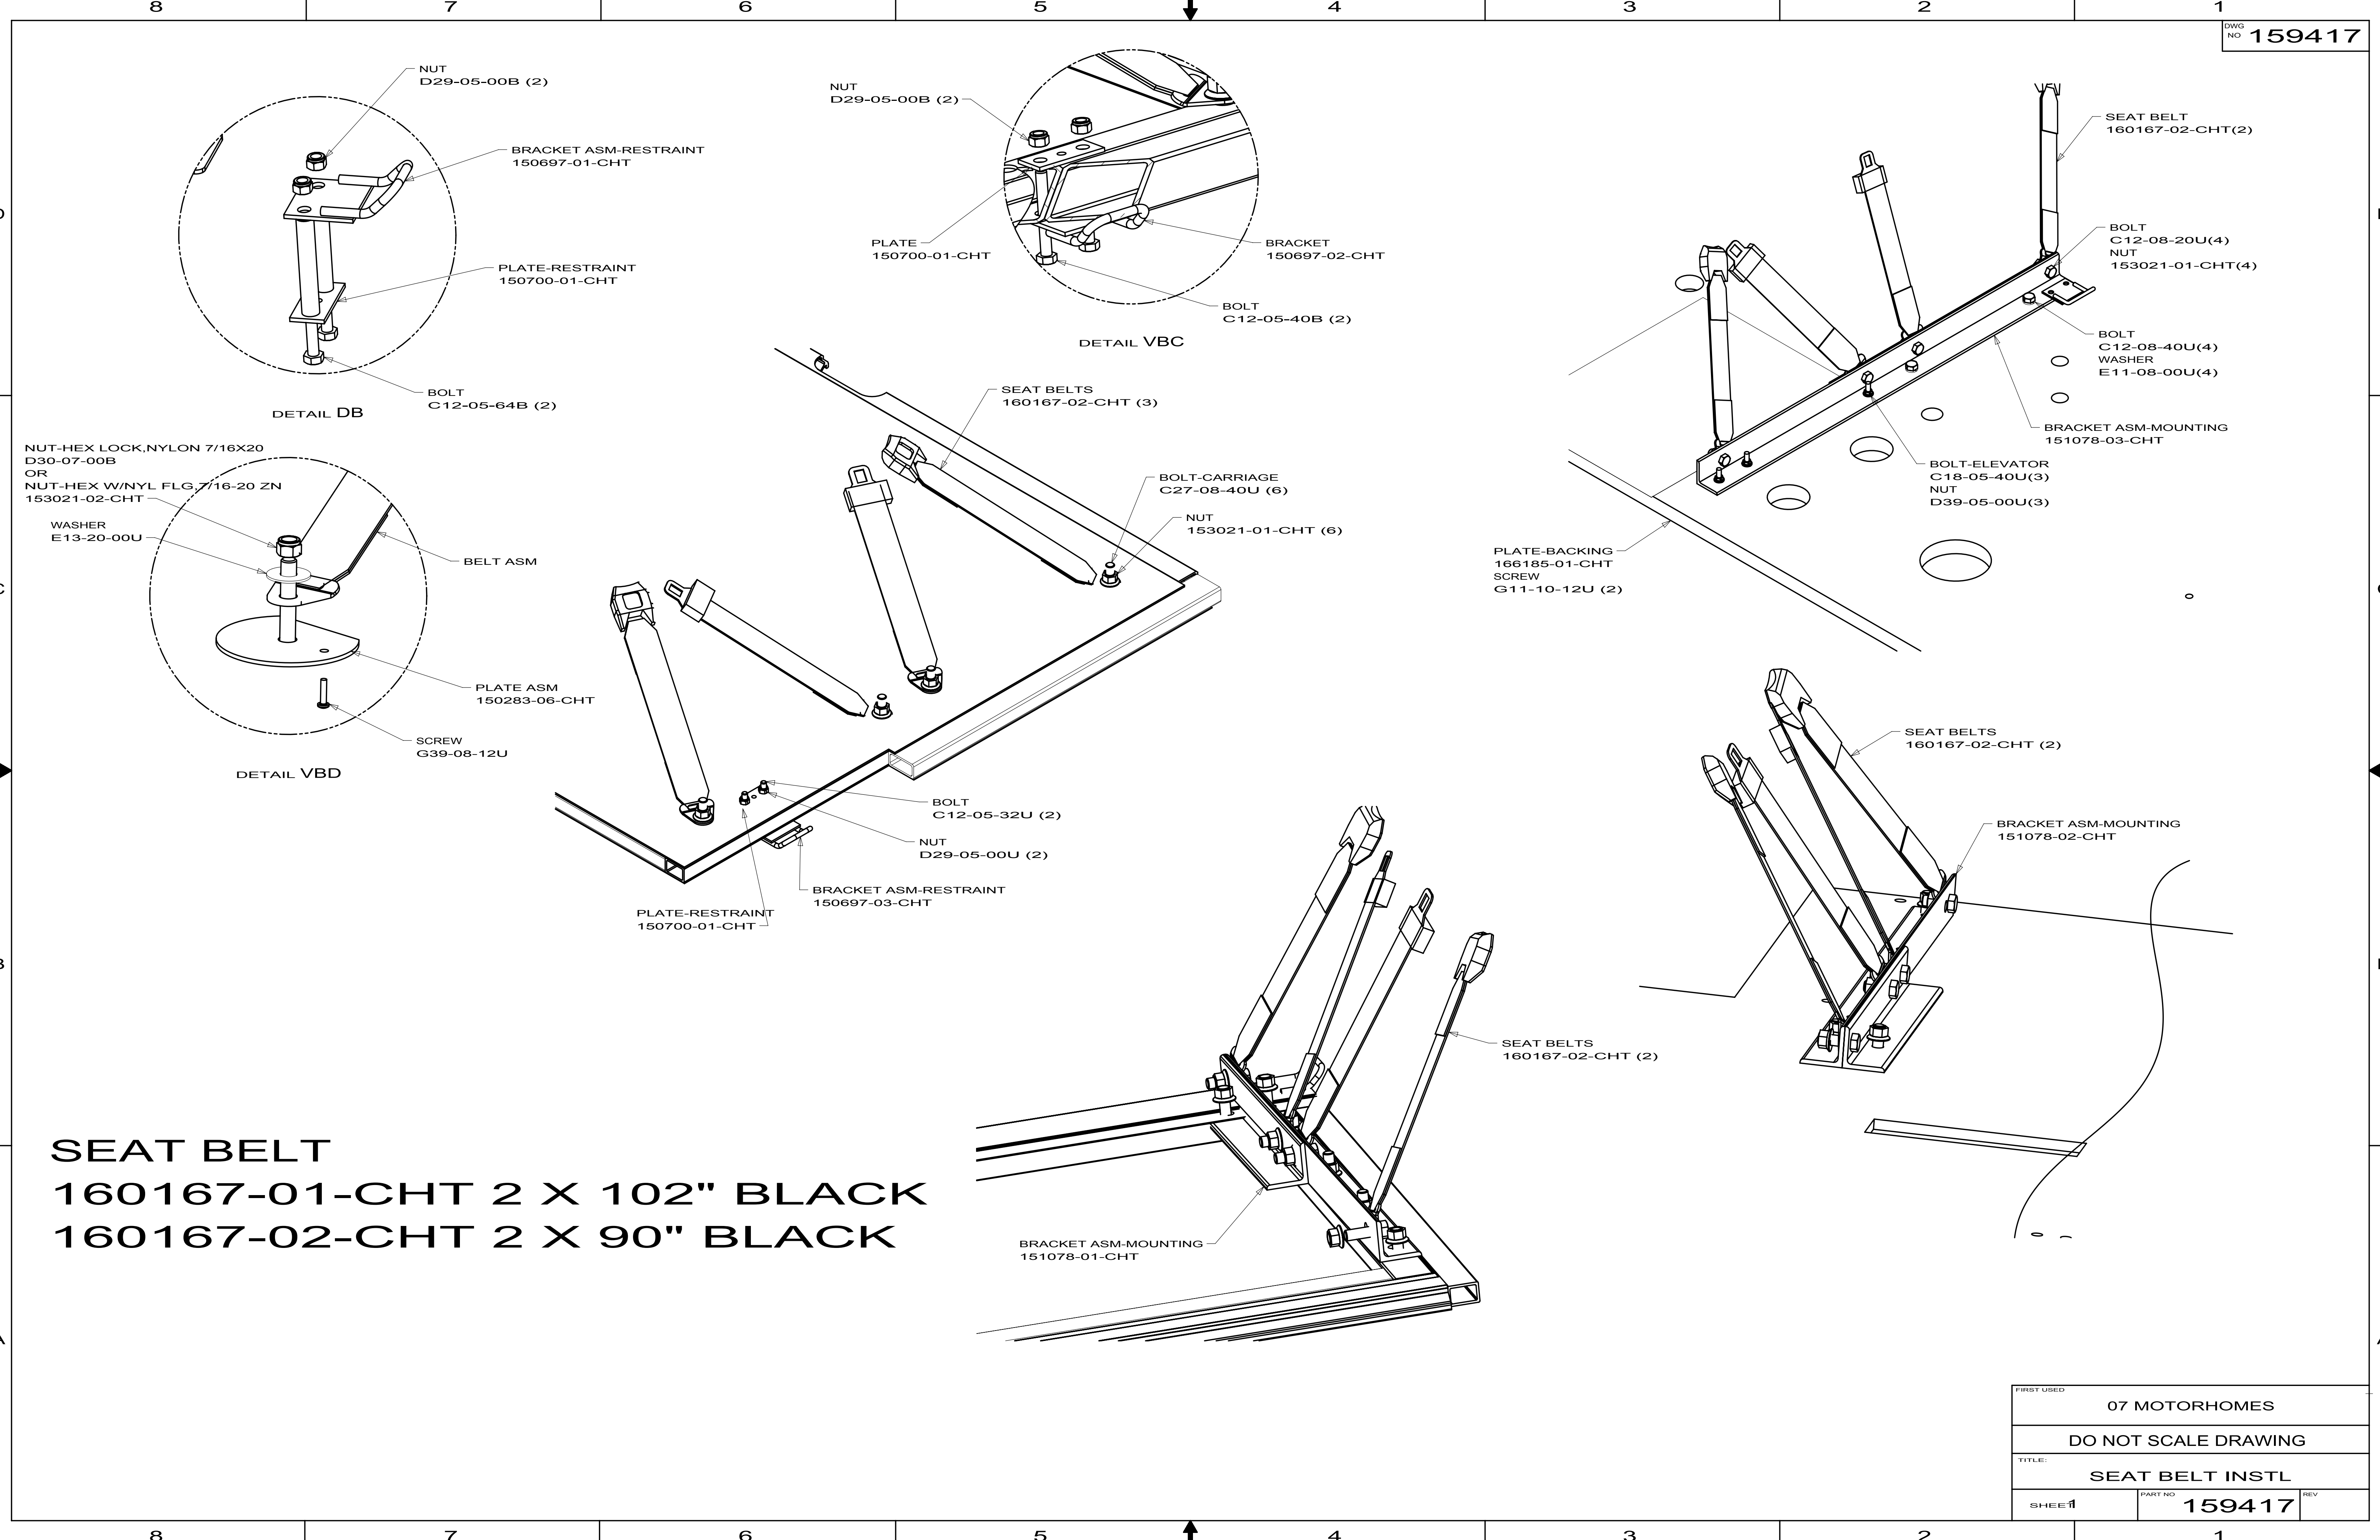

FIRST USED		
07 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
SEAT BELT INSTL		
SHEET 1	PART NO 159417	REV

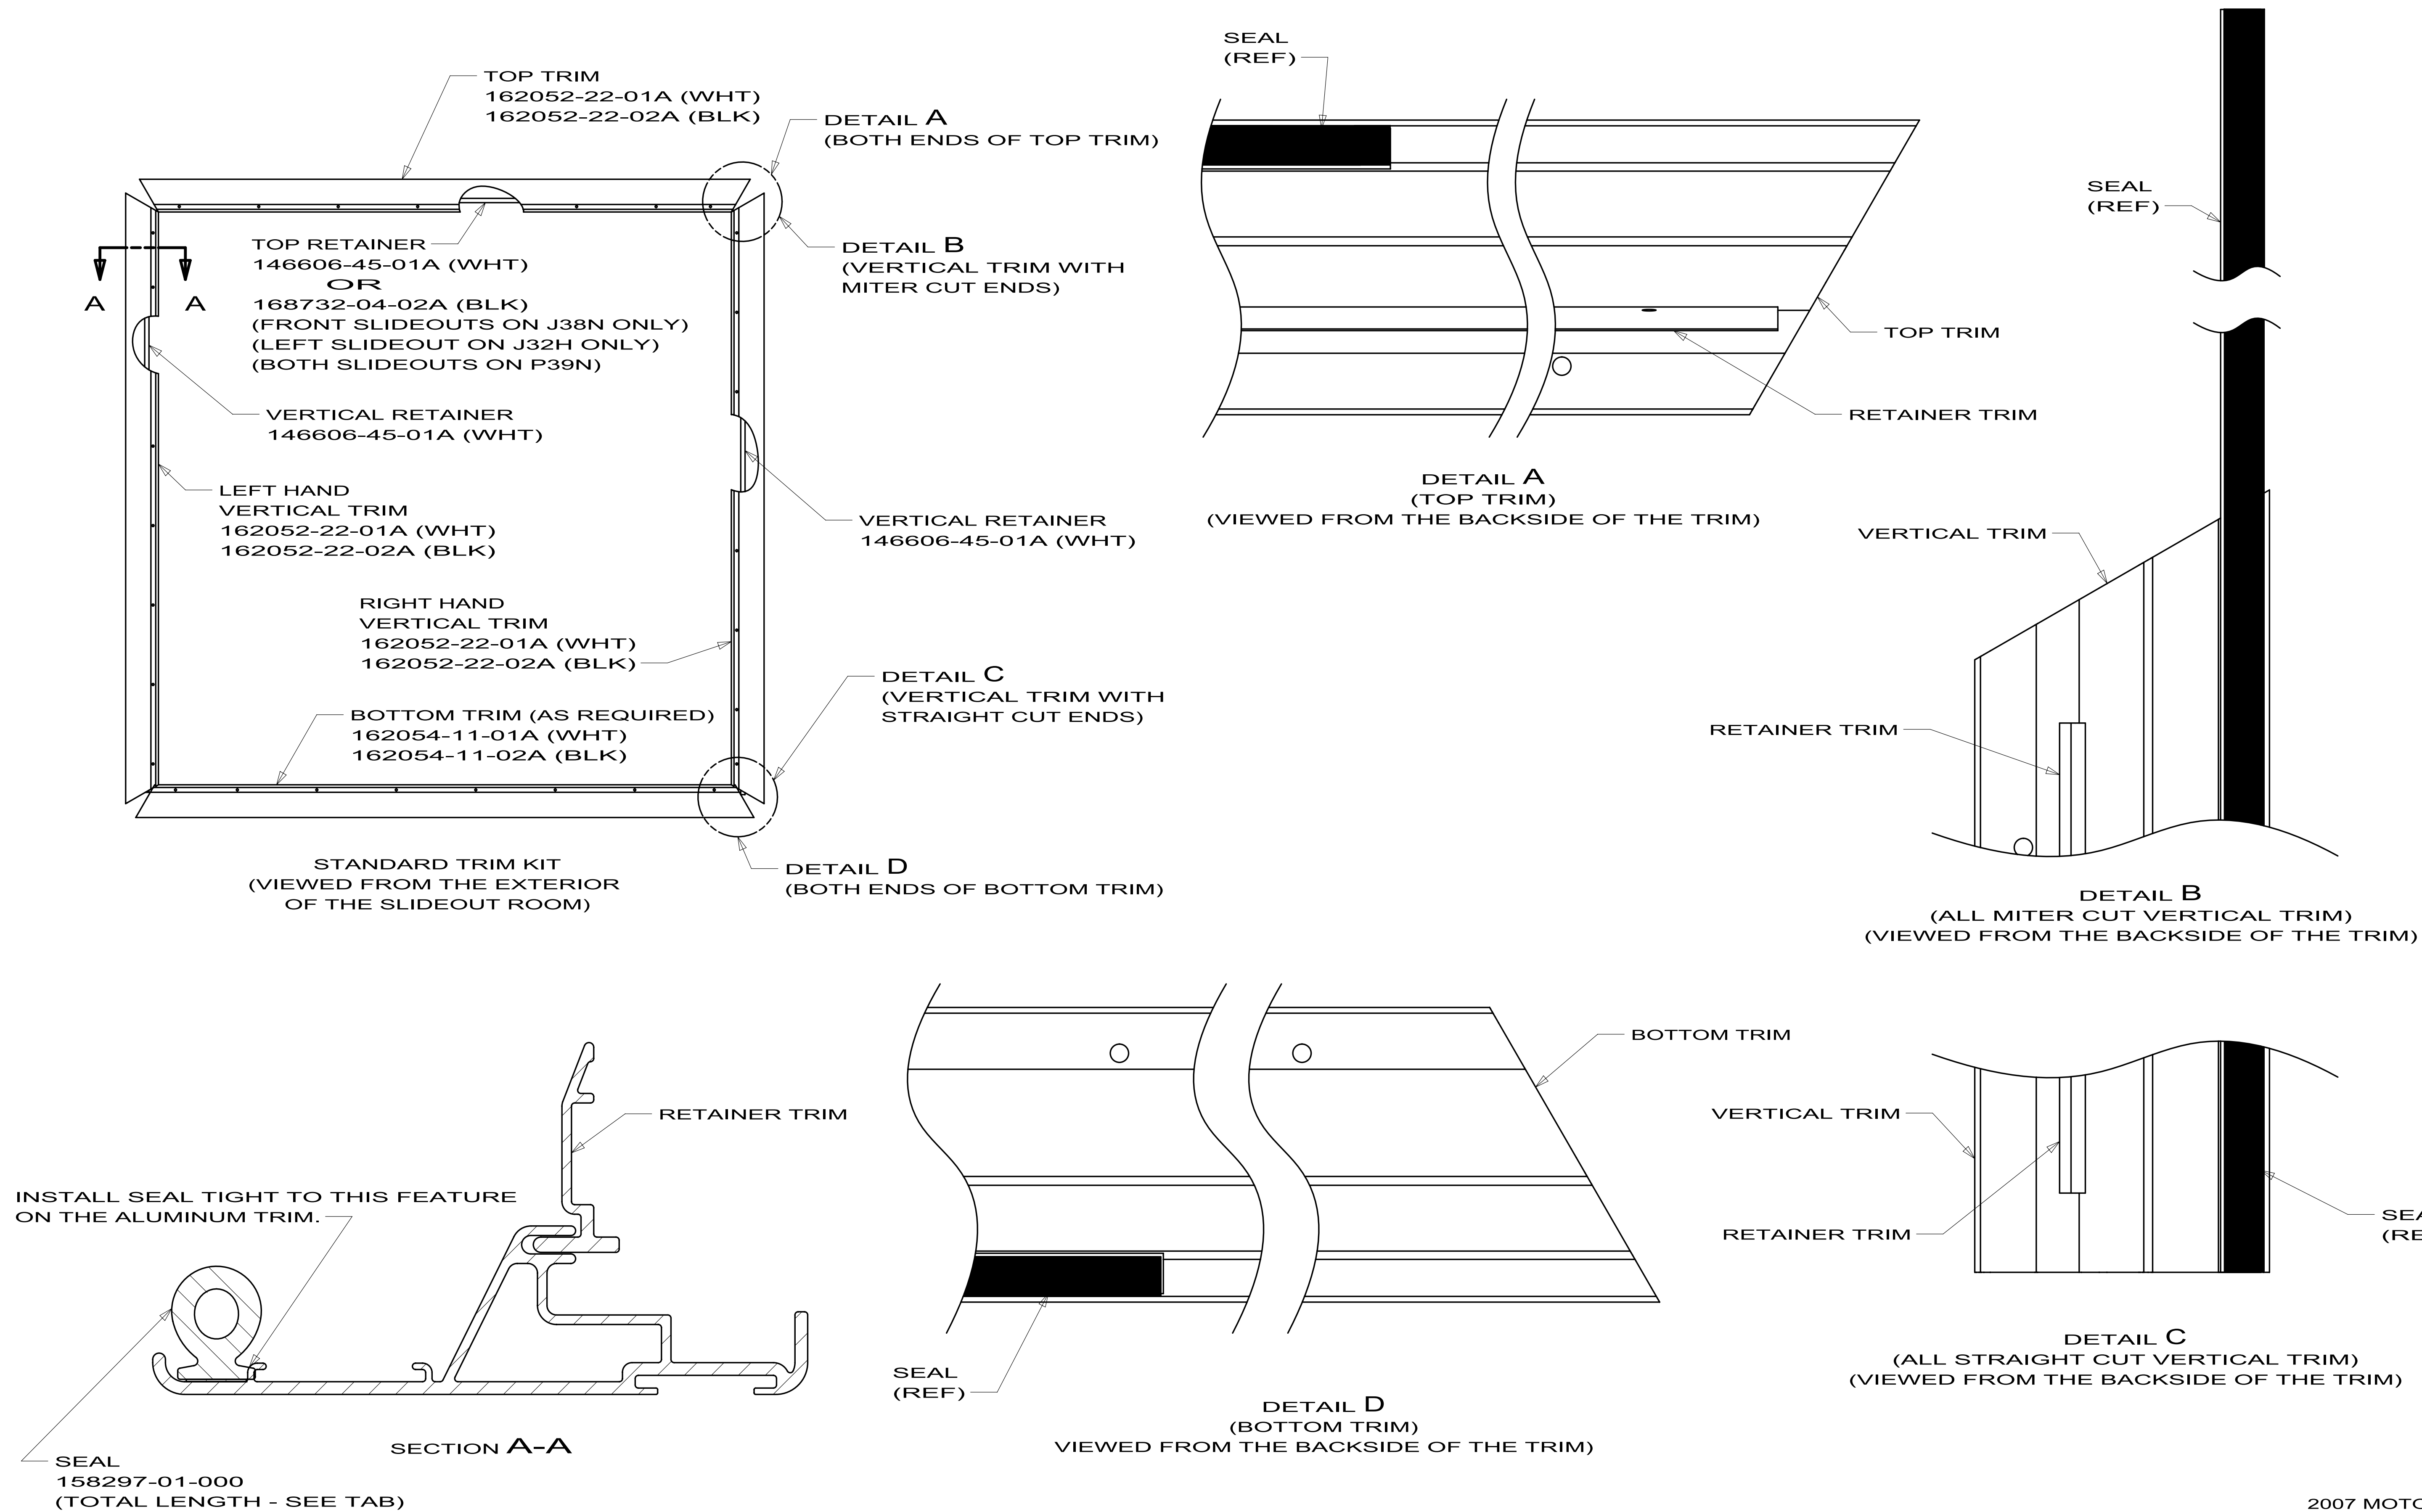

2007 MOTORHOMES



TRIM KIT-EXTERIOR,SLIDEOUT


KEY	PART NUMBER	U/M	DESCRIPTION
	162495-01-700	EA	BUTTON-DBL. PLAS. SNAP

162495-01-01A, 162495-02-01A
VENDOR NO.
DP130

			165169-01-000
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	165169-01-700	EA ROLL PIN 1/8" X 1.25"	18-1036
	165169-01-701	EA ROLL PIN 1/4" X 1.5"	18-1039
	165169-01-702	EA BEARING/FLANGE BRONZE .75"ID	190-1046
	165169-01-703	EA GEAR/SPUR 2.33" X .75" W/HUB	250-0011
	165169-01-704	EA CAM - FOLLOWER.88 OD	532115
	165169-01-705	EA WEAR BUTTON	320-0069
	165169-01-706	EA STOP	524596
	165169-01-707	EA INNER RAIL - 44"	524742
	165169-01-708	EA SHAFT ASSEMBLY	524880
	165169-02-702	EA MOTOR/GEAR BOX F/SINGLE SLD	1010000994

			165169-02-000
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	165169-01-700	EA ROLL PIN 1/8" X 1.25"	18-1036
	165169-01-701	EA ROLL PIN 1/4" X 1.5"	18-1039
	165169-01-702	EA BEARING/FLANGE BRONZE .75"ID	190-1046
	165169-01-703	EA GEAR/SPUR 2.33" X .75" W/HUB	250-0011
	165169-01-704	EA CAM - FOLLOWER.88 OD	532115
	165169-01-705	EA WEAR BUTTON	320-0069
	165169-01-707	EA INNER RAIL - 44"	524742
	165169-01-708	EA SHAFT ASSEMBLY	524880
	165169-02-700	EA MOTOR ASM W/SYNC SENSOR	1010001555
	165169-02-701	EA MODULE	15100000143

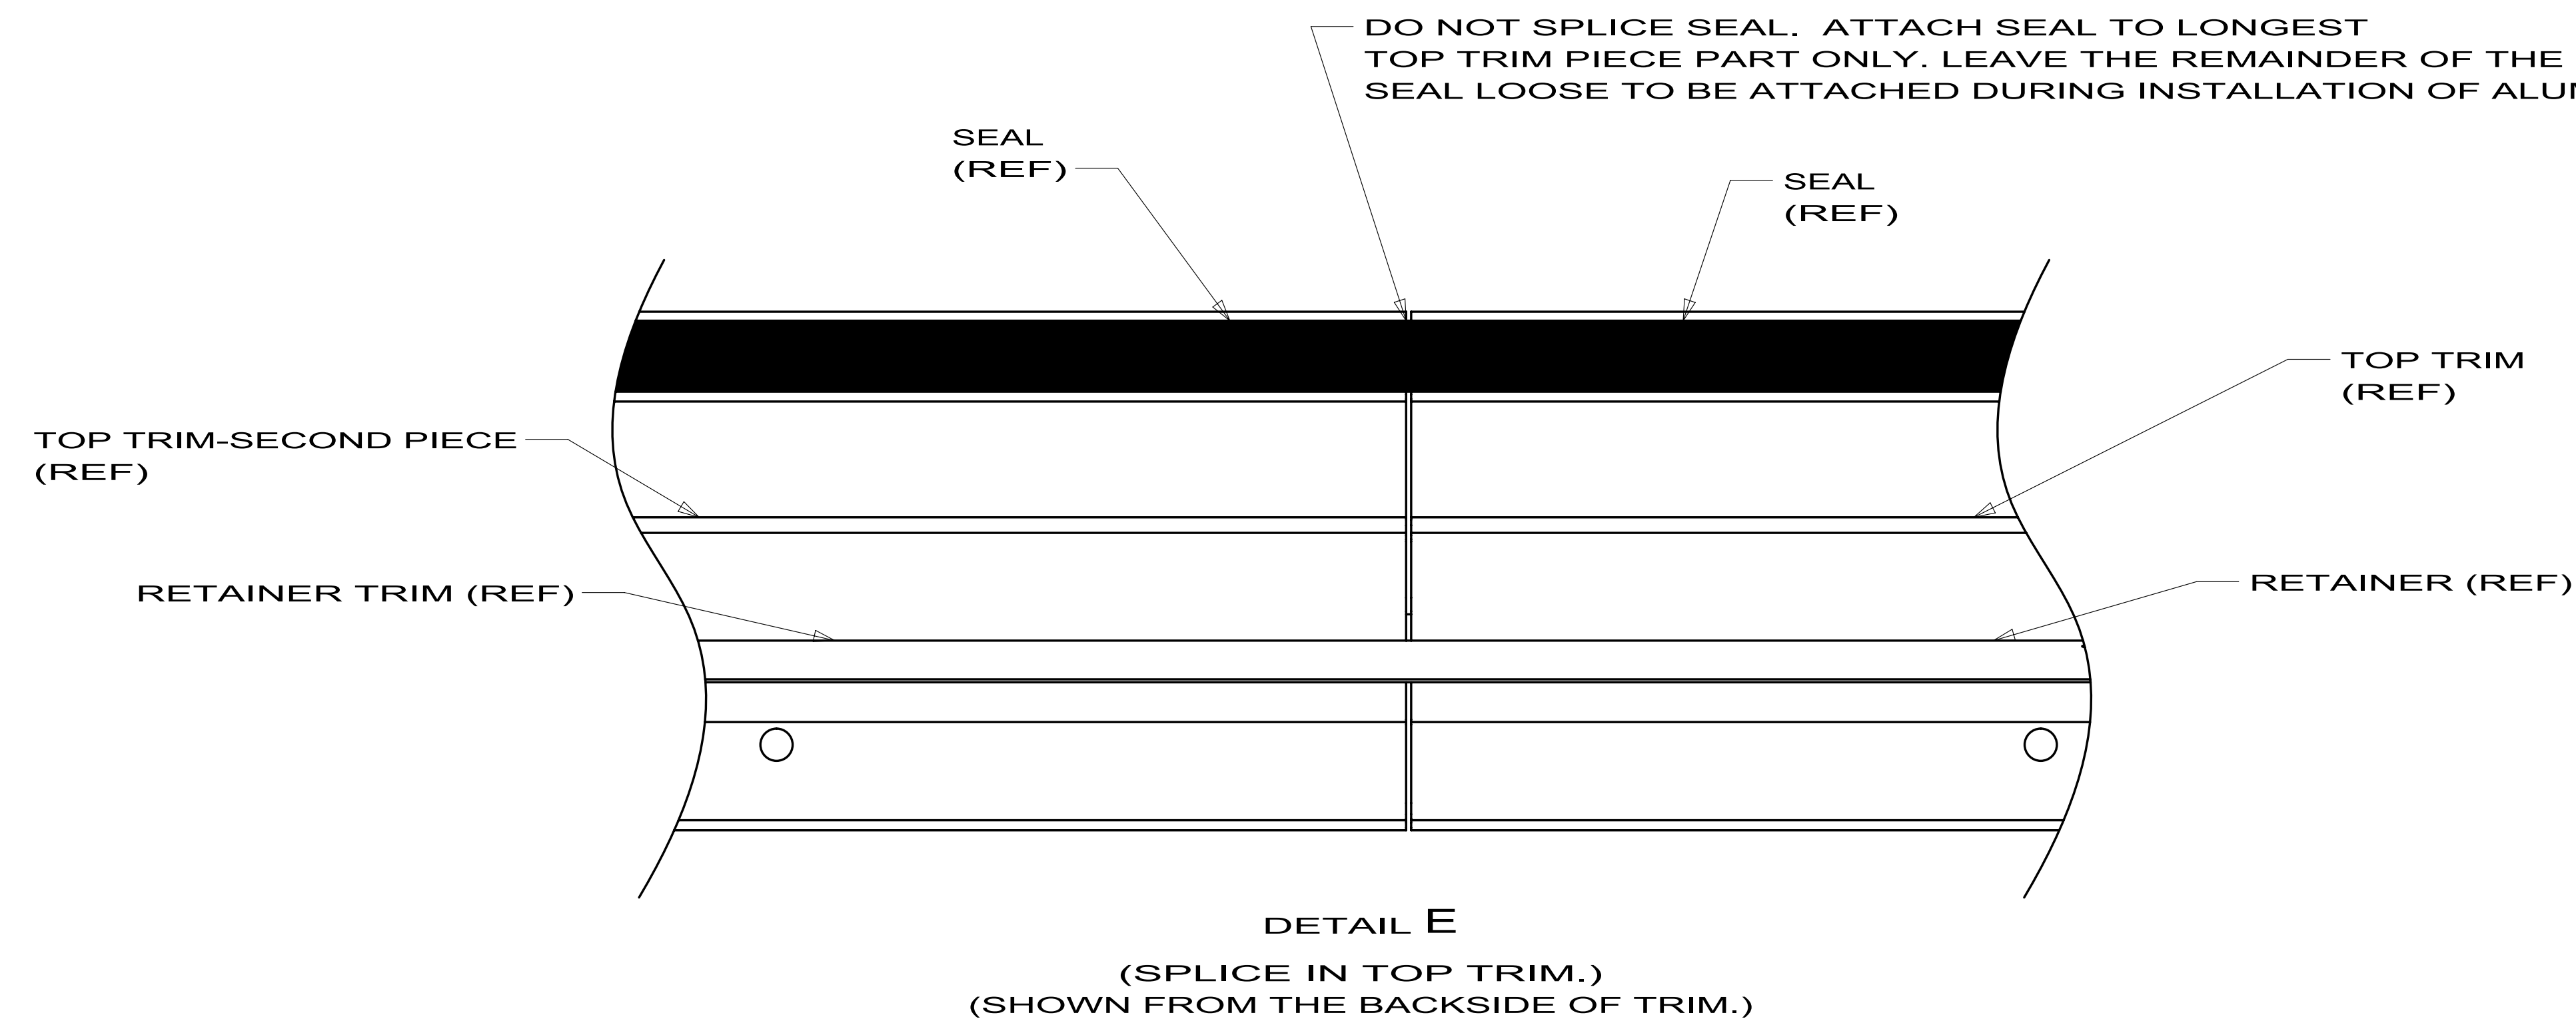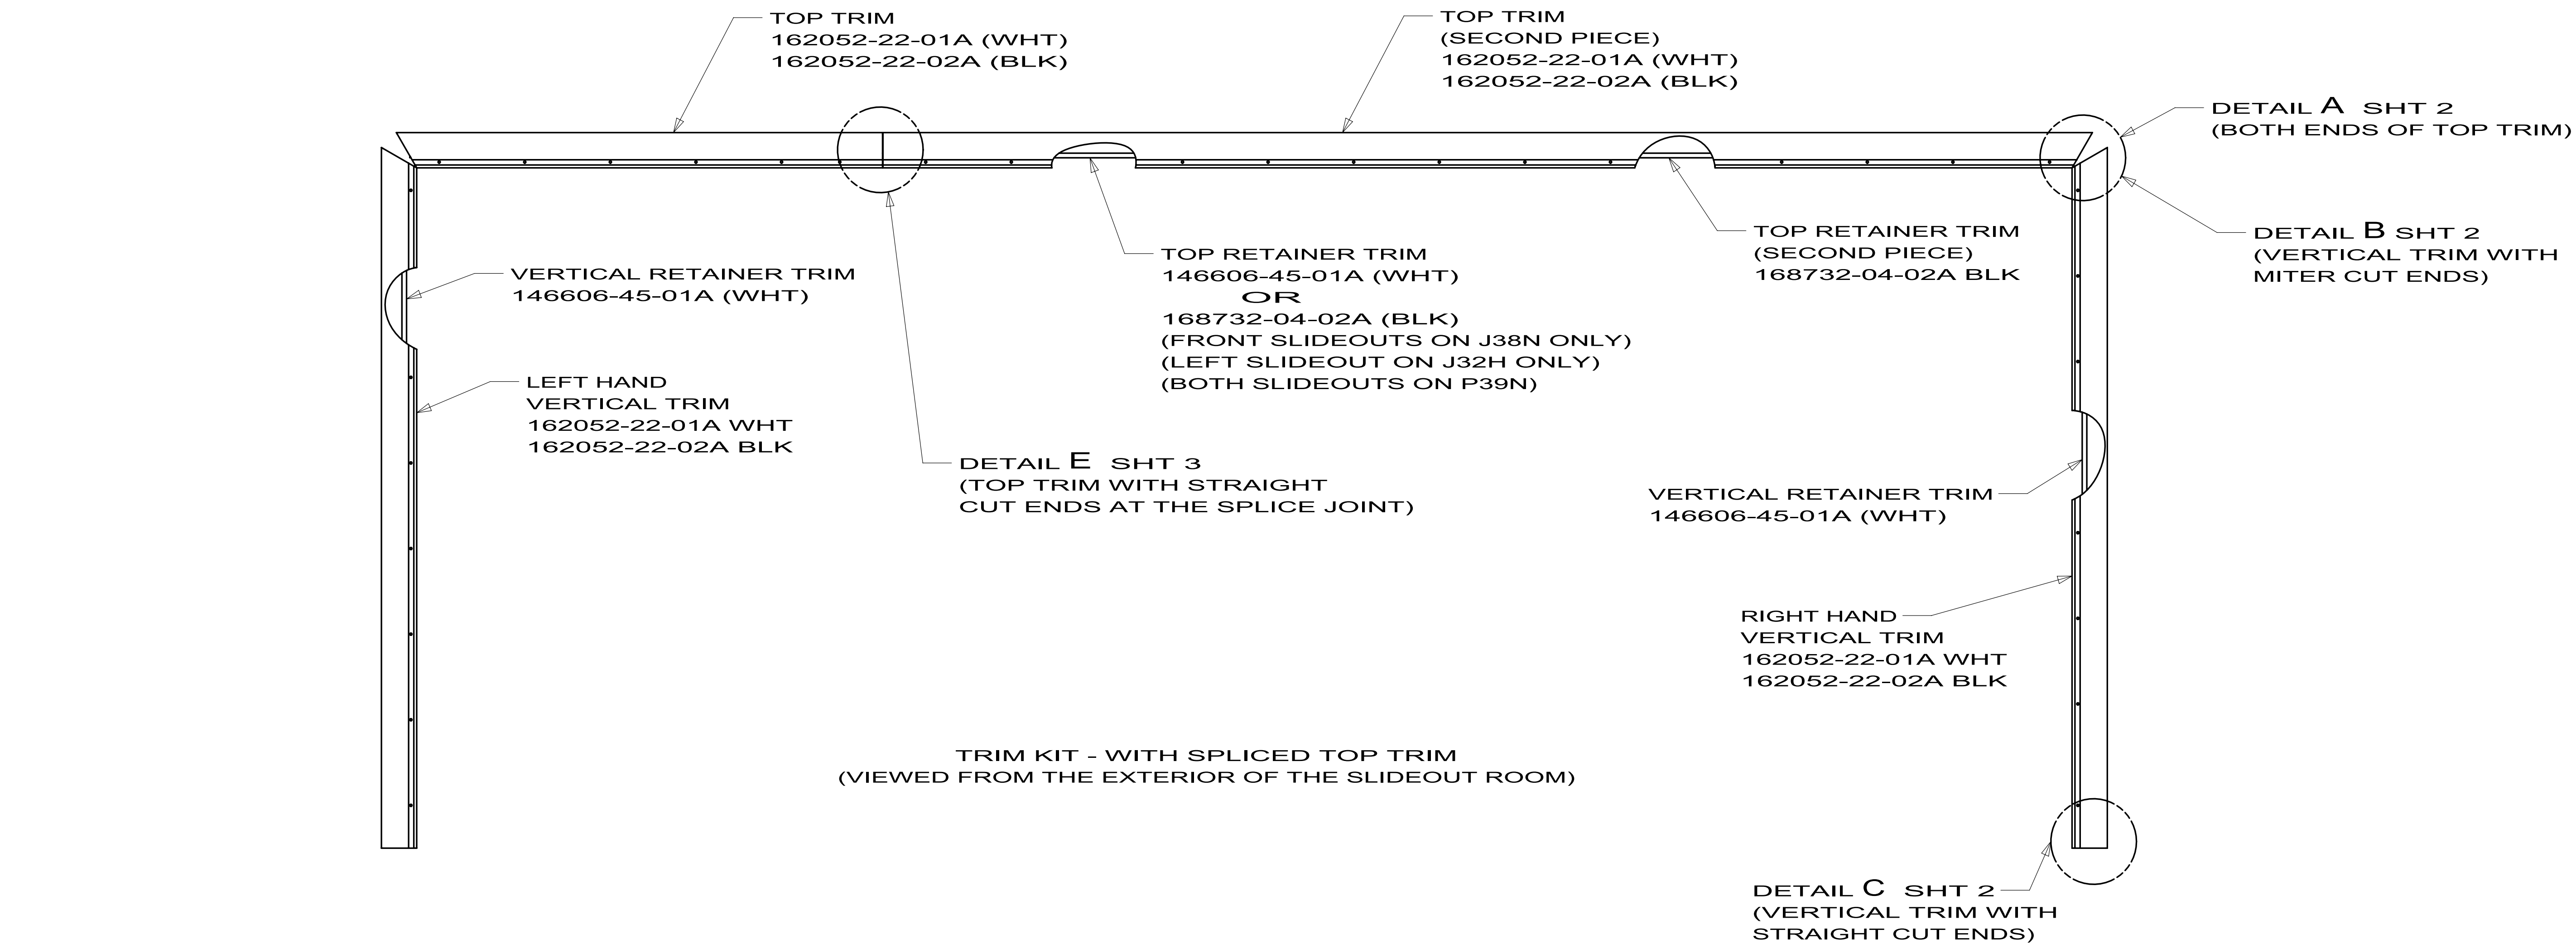

8		7		6		5		4		3		2		1	
DWG NO	SLIDEOUT SLUG SIZE 	TOP TRIM	TOP TRIM (SECOND PIECE)	RH VERT TRIM	LH VERT TRIM	LH VERT TRIM (SECOND PIECE)	SUPPORT-ASM	SUPPORT ASM (SECOND PIECE)	TOTAL SEAL LENGTH 						
174648-01	1907 X 3915	139624-09-CHT	—	139624-01-CHT	139624-02-CHT	—	125466-01-CHT	—	7960						
174648-02	1788 X 1935	169060-02-CHT	—	139624-51-CHT	139624-50-CHT	—	—	—	5750						
174648-03	1907 X 5535	169060-28-CHT	169060-21-CHT	139624-01-CHT	139624-02-CHT	—	125466-22-CHT	155339-17-CHT	9590						
174648-04	1886 X 2835	169329-08-CHT	—	139624-18-CHT	139624-19-CHT	—	—	—	6850						
174648-05	1907 X 1935	169060-02-CHT	—	139624-01-CHT	139624-02-CHT	—	—	—	5990						
174648-06	1886 X 5535	169329-28-CHT	169329-21-CHT	139624-18-CHT	139624-19-CHT	—	—	—	9550						
174648-07	1801 X 2535	139624-23-CHT	—	139624-01-CHT	139624-02-CHT	—	125466-23-CHT	—	6380						
174648-08	1804 X 2939	139624-66-CHT	—	139624-01-CHT	139624-02-CHT	—	125466-13-CHT	—	6790						
174648-09	1801 X 3585	169060-13-CHT	—	139624-01-CHT	139624-02-CHT	—	125466-02-CHT	—	7430						
174648-10	1635 X 2226	139624-82-CHT	—	139624-37-CHT	139624-38-CHT	—	—	—	5740						
174648-11	2057 X 3915	139624-09-CHT	—	139624-47-CHT	139624-46-CHT	—	—	—	8270						
174648-12	1897 X 7263	139624-65-CHT	139624-64-CHT	139624-25-CHT	139624-26-CHT	—	125466-11-CHT	125468-10-CHT	11300						
174648-13	1948 X 3585	139624-04-CHT	—	139624-41-CHT	139624-42-CHT	—	—	—	7720						
174648-14	2057 X 2985	169329-09-CHT	—	139624-45-CHT	139624-44-CHT	—	—	—	7340						
174648-15	1967 X 7485	139624-92-CHT	171623-02-CHT	139624-99-CHT	171623-01-CHT	—	—	—	11660						
174648-16	1635 X 2116	139624-84-CHT	—	139624-37-CHT	139624-38-CHT	—	—	—	5630						
174648-17	2057 X 3585	139624-06-CHT	—	139624-59-CHT	139624-60-CHT	—	125466-02-CHT	—	7940						
174648-18	1948 X 2116	139624-84-CHT	—	139624-41-CHT	139624-42-CHT	—	—	—	6250						
174648-19	2057 X 4213	153113-03-CHT	—	139624-45-CHT	139624-44-CHT	—	—	—	8570						
174648-20	2057 X 3270	153113-05-CHT	—	139624-45-CHT	139624-44-CHT	—	—	—	7630						
174648-21	1948 X 2176	139624-90-CHT	—	139624-41-CHT	139624-42-CHT	—	—	—	6310						
174648-22	2057 X 1821	139624-86-CHT	—	139624-41-CHT	139624-42-CHT	—	—	—	6180						
174648-23	2057 x 4561	153113-11-CHT	—	139624-45-CHT	139624-44-CHT	—	—	—	8920						
174648-24	2057 x 3780	153113-10-CHT	—	139624-45-CHT	139624-44-CHT	—	—	—	8140						
174648-25	2057 x 3735	169329-17-CHT	—	139624-45-CHT	139624-44-CHT	—	—	—	8090						
174648-26	2057 x 4635	169060-20-CHT	—	139624-41-CHT	139624-42-CHT	—	125466-02-CHT	—	8990						
174648-27	1635 x 1935	169060-02-CHT	—	139624-37-CHT	139624-38-CHT	—	—	—	5450						
174648-28	2057 x 6735	169329-36-CHT	169329-21-CHT	139624-45-CHT	139624-44-CHT	—	—	—	11090						
174648-29	2057 x 4935	169329-24-CHT	169329-21-CHT	139624-45-CHT	139624-44-CHT	—	—	—	9290						
174648-30	2057 x 3850	169060-15-CHT	—	139624-47-CHT	139624-46-CHT	—	125466-18-CHT	—	8200						
174648-31	1978 x 7785	169329-36-CHT	169329-22-CHT	139624-94-CHT	139624-93-CHT	—	169689-02-CHT	169689-01-CHT	11980						
174648-32	1801 x 2235	169060-04-CHT	—	139624-51-CHT	139624-50-CHT	—	—	—	6080						
174648-33	2057 x 4185	169060-17-CHT	—	139624-47-CHT	139624-80-CHT	139624-81-CHT	125466-19-CHT	—	8540						
174648-34	2057 x 4935	169060-24-CHT	169060-21-CHT	139624-47-CHT	139624-46-CHT	—	169719-01-CHT	—	9290						
174648-35	2057 x 3735	169060-14-CHT	—	139624-47-CHT	139624-46-CHT	—	125466-20-CHT	—	8090						
174648-36	2057 x 4035	169060-16-CHT	—	139624-47-CHT	139624-46-CHT	—	125466-21-CHT	—	8390						
174648-37	2057 x 4935	169329-24-CHT	169329-21-CHT	139624-45-CHT	139624-44-CHT	—	169689-03-CHT	—	9290						
174648-38	1801 x 1935	169060-02-CHT	—	139624-25-CHT	139624-26-CHT	—	—	—	5780						
174648-39	2057 x 4335	169060-18-CHT	—	139624-41-CHT	139624-42-CHT	—	125466-26-CHT	—	8690						
174648-40	2057 x 5085	169329-25-CHT	169329-21-CHT	139624-45-CHT	139624-44-CHT	—	—	—	9440						
174648-41	1718 x 2583	139624-73-CHT	—	139624-75-CHT	139624-74-CHT	—	—	—	6260						
174648-42	1907 x 3435	139624-95-CHT	—	139624-25-CHT	139624-26-CHT	—	125466-24-CHT	—	7490						
174648-43	1908 x 1590	139624-72-CHT	—	139624-25-CHT	139624-26-CHT	—	—	—	5650						
174648-44	1907 x 3925	139624-91-CHT	—	139624-25-CHT	139624-26-CHT	—	—	—	7980						
174648-45	1804 x 2566	139624-23-CHT	—	139624-01-CHT	139624-02-CHT	—	125466-09-CHT	—	6420						
174648-46	1718 x 3495	139624-07-CHT	—	139624-13-CHT	139624-14-CHT	—	125466-03-CHT	—	7170						
174648-47	1475 x 1926	139624-04-CHT	—	139624-20-CHT	139624-21-CHT	—	—	—	5120						
174648-48	1804 x 2535	169060-06-CHT	—	139624-01-CHT	139624-02-CHT	—	—	—	6390						
174648-49	1804 x 3495	139624-07-CHT	—	139624-01-CHT	139624-02-CHT	—	125466-03-CHT	—	7350						
174648-50	1804 x 1926	139624-04-CHT	—	139624-01-CHT	139624-02-CHT	—	—	—	5780						
174648-51	1718 x 1865	139624-35-CHT	—	139624-13-CHT	139624-14-CHT	—	—	—	5540						

3. TOTAL SEAL LENGTH = (SLUG HEIGHT X 2) + SLUG LENGTH + 240mm

2. SLIDEOUT SLUG SIZE IS MEASURED TO THE SURFACE OF THE ALUMINUM TUBES AND LISTED BY HEIGHT X LENGTH.

1. TRIM VIEWED FROM THE INSIDE OF THE SLIDEOUT ROOM UNLESS NOTED.

NOTES:

WINNEBAGO

INDUSTRIES

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DWTR

ORIG. DATE

CHRR

ALL DIMENSIONS ARE
IN MILLIMETERS

P.E.

M.E.

FIRST USED

DSNR

2010 MOTORHOMES

UNSPECIFIED TOLERANCES ARE:

MATERIAL:


WHOLE DIM (X) ± 3

ONE-PLACE (X.X) ± 1.5

TWO-PLACE (X.XX) ± 0.50

ANGLE ± 1°

THIRD ANGLE
PROJECTION



DO NOT SCALE DRAWING

TITLE:
TRIM KIT-INTERIOR,SLIDEOUT


SHEET 1 OF 4


PART NO
174648

REV

REF:
1

10/15/2009

8		7		6		5		4		3		2		1	
DWG NO	SLIDEOUT SLUG SIZE 	TOP TRIM	TOP TRIM (SECOND PIECE)	RH VERT TRIM	LH VERT TRIM	LH VERT TRIM (SECOND PIECE)	SUPPORT-ASM	SUPPORT ASM (SECOND PIECE)	TOTAL SEAL LENGTH 	DWG NO 174648					
174648-52	1788 x 1926	139624-04-CHT	–	139624-25-CHT	139624-26-CHT	–	–	–	5750						
174648-53	1804 x 1865	139624-35-CHT	–	139624-01-CHT	139624-02-CHT	–	–	–	5720						
174648-54	1922 x 3495	139624-07-CHT	–	139624-01-CHT	139624-02-CHT	–	125466-03-CHT	–	7580						
174648-55	1718 x 3495	139624-07-CHT	–	139624-18-CHT	139624-19-CHT	–	125466-03-CHT	–	7170						
174648-56	1718 x 2167	139624-32-CHT	–	139624-13-CHT	139624-14-CHT	–	–	–	5850						
174648-57	1428 x 1782	139624-76-CHT	–	139624-83-CHT	139624-78-CHT	–	–	–	4880						
174648-58	1718 x 2583	139624-28-CHT	–	139624-13-CHT	139624-14-CHT	–	125466-17-CHT	–	6260						
174648-59	1718 x 1828	139624-79-CHT	–	139624-13-CHT	139624-14-CHT	–	–	–	5510						
174648-60	1428 x 1782	139624-76-CHT	–	139624-77-CHT	139624-78-CHT	–	–	–	4880						
174648-61	1635 x 2085	169060-03-CHT	–	139624-37-CHT	139624-38-CHT	–	–	–	5595						
174648-62	1804 x 2805	139264-27-CHT	–	139624-01-CHT	139624-02-CHT	–	125466-08-CHT	–	6660						
174648-63	1907 x 3585	139624-06-CHT	–	139624-01-CHT	139624-02-CHT	–	125466-02-CHT	–	7640						
174648-64	2057 x 2835	169329-08-CHT	–	139624-45-CHT	139624-44-CHT	–	–	–	7190						
174648-65	1978 x 7185	169060-39-CHT	169060-21-CHT	139624-94-CHT	139624-93-CHT	–	125466-11-CHT	–	11380						
174648-66	1907 x 2685	169060-07-CHT	–	139624-25-CHT	139624-26-CHT	–	–	–	6740						
174648-67	1801 x 2685	169060-07-CHT	–	139624-01-CHT	139624-02-CHT	–	125466-25-CHT	–	6530						
174648-68	1801 x 1935	169060-02-CHT	–	139624-01-CHT	139624-02-CHT	–	–	–	5777						
174648-69	1935 x 1935	169060-02-CHT	–	171623-05-CHT	171623-04-CHT	–	–	–	6045						
174648-70	1417 x 1935	169060-03-CHT	–	171623-09-CHT	171623-10-CHT	–	–	–	5010						
174648-71	1723 x 2235	169060-04-CHT	–	171623-11-CHT	171623-12-CHT	–	–	–	5920						
174648-72	1723 x 1935	169060-02-CHT	–	171623-11-CHT	171623-12-CHT	–	–	–	5620						
174648-73	1688 x 3885	169060-15-CHT	–	139624-96-CHT	139624-97-CHT	–	125466-18-CHT	–	7500						
174648-74	1688 x 1420	139624-98-CHT	–	139624-96-CHT	139624-97-CHT	–	–	–	5045						
174648-75	1978 x 7185	139624-64-CHT	171623-08-CHT	171623-07-CHT	171623-06-CHT	–	125468-10-CHT	125466-11-CHT	11380						
174648-76	1978 x 7485	139624-92-CHT	171623-02-CHT	171623-07-CHT	171623-06-CHT	–	–	–	11680						

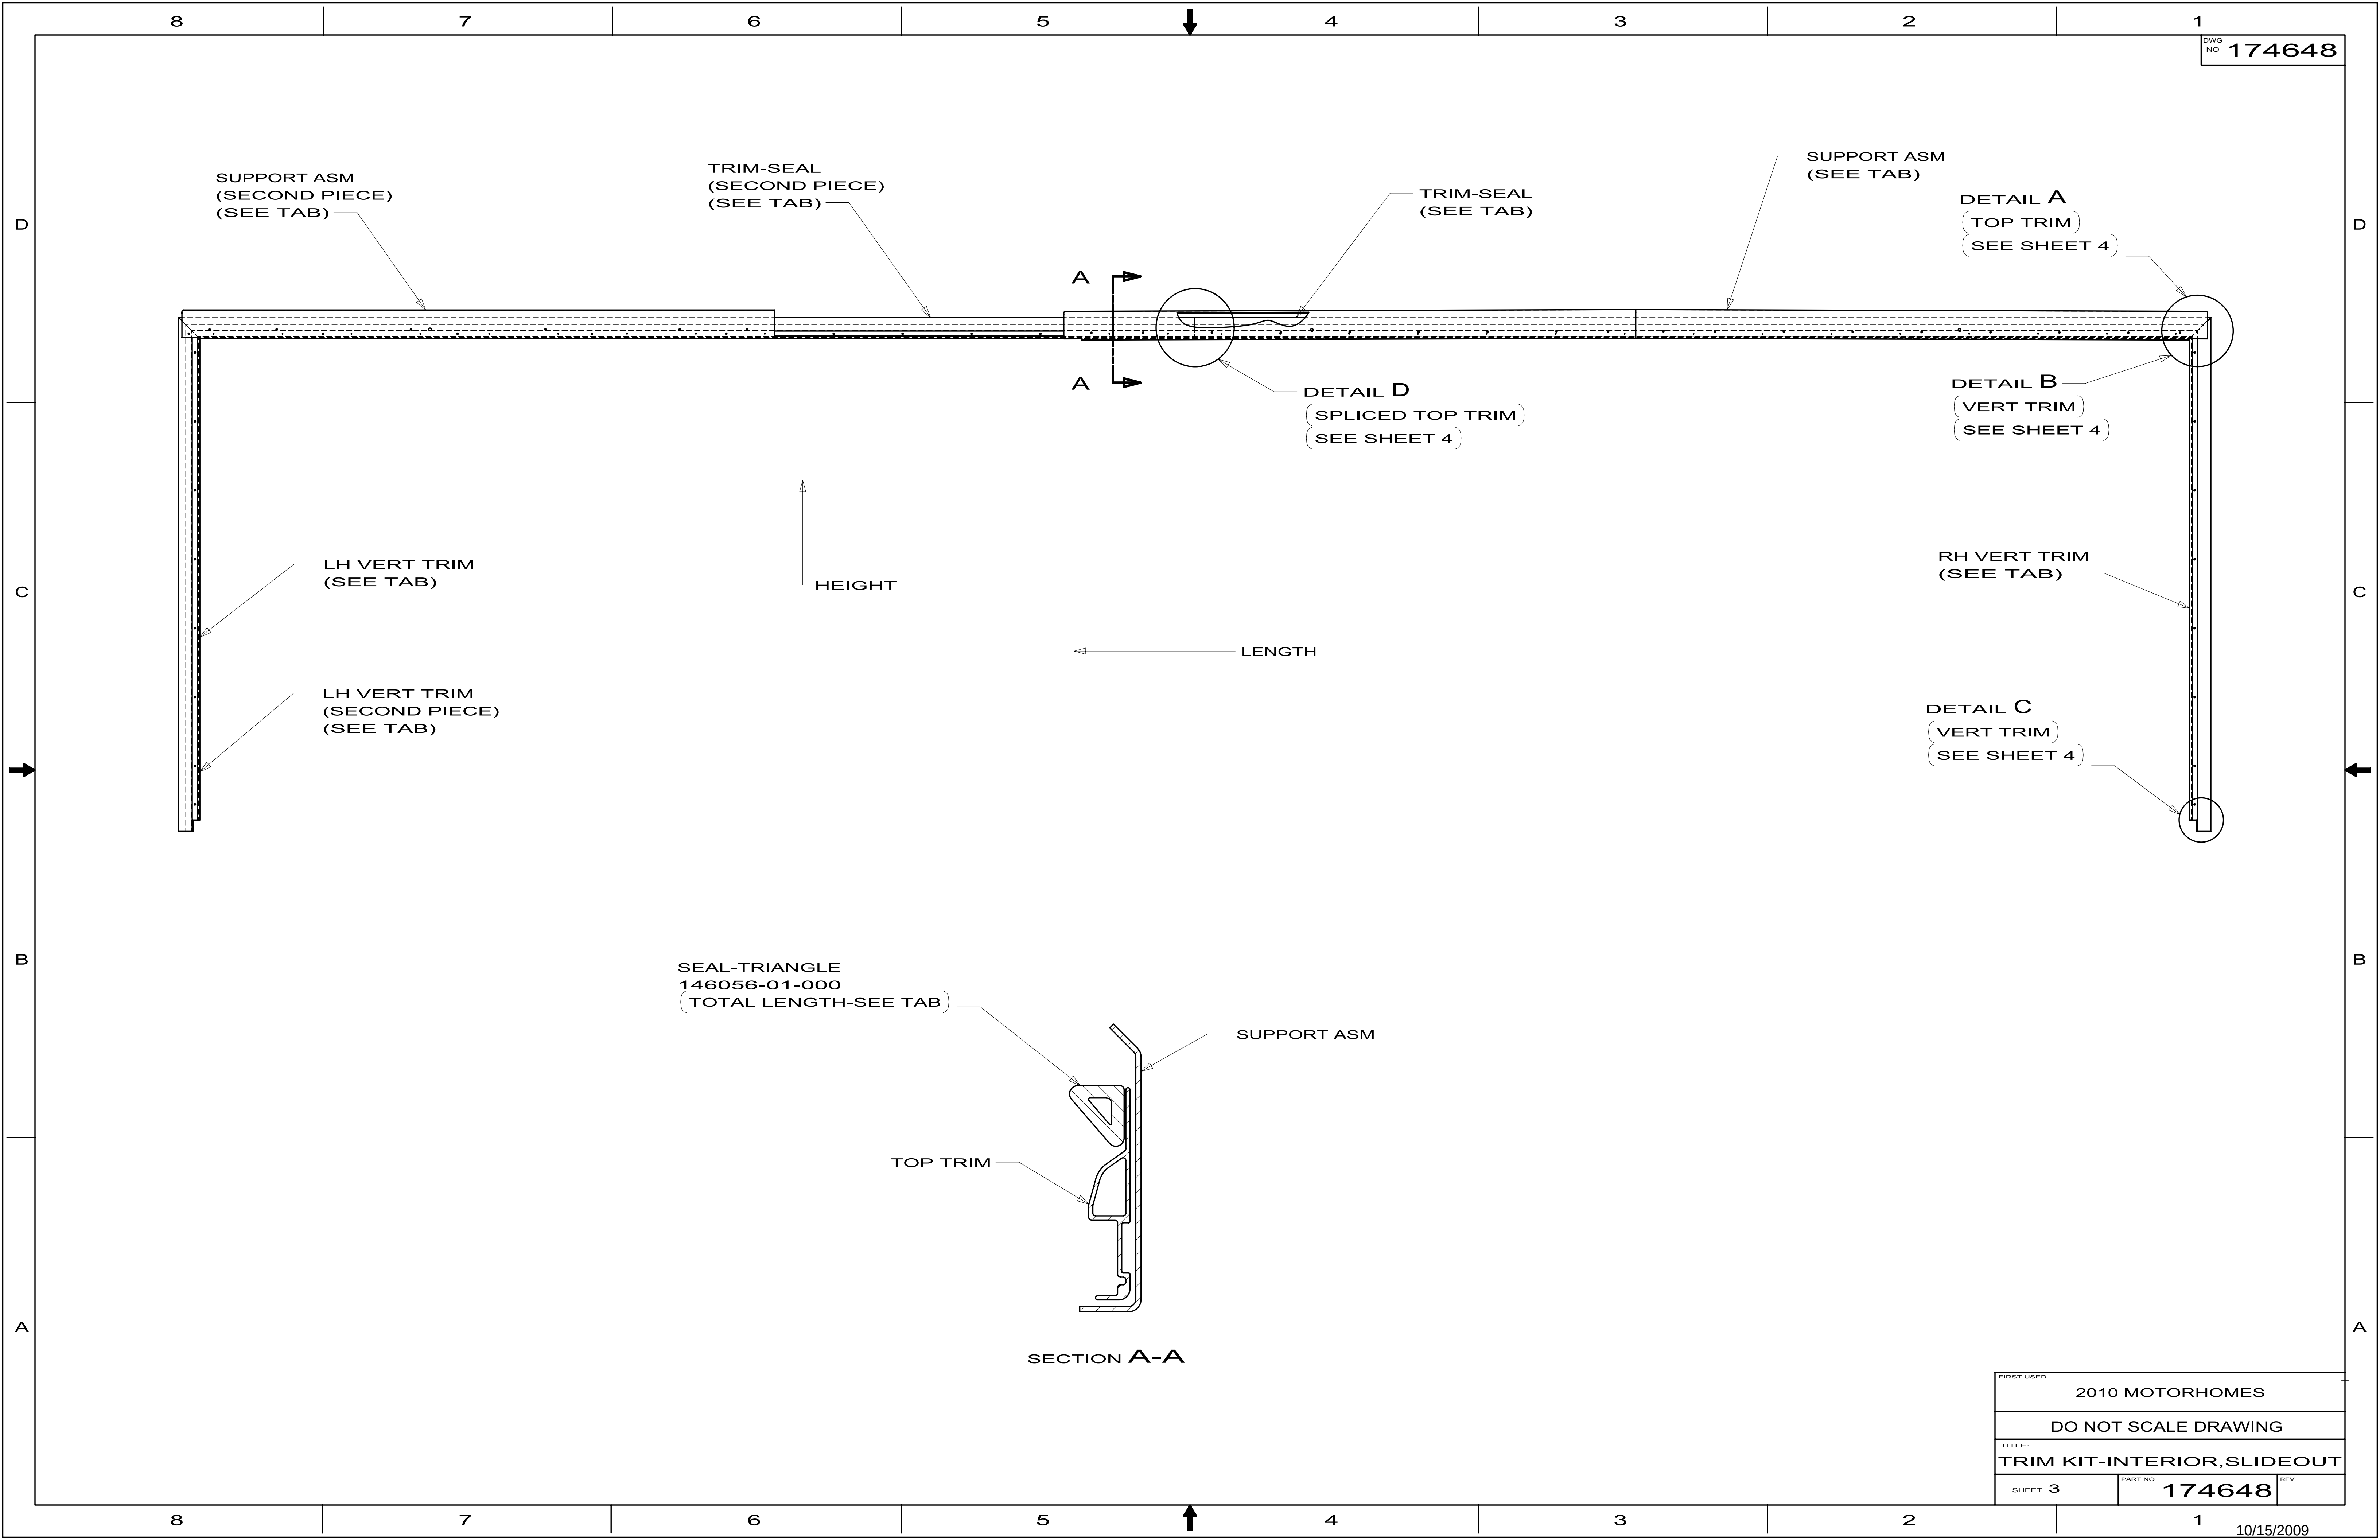

FIRST USED			2010 MOTORHOMES		
TITLE:			DO NOT SCALE DRAWING		
SHEET 3			TRIM KIT-INTERIOR,SLIDEOUT		
PART NO		REV		174648	

TRIM SEAL FLUSH WITH STRAIGHT
CUT ENDS OF TOP TRIM

SEAL-TRIANGLE

SEAL-TRIANGLE

TOP TRIM

TOP TRIM

DETAIL D

(USE WITH SPLICED TOP TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

SEAL-TRIANGLE

305 ± 25

TOP TRIM

DETAIL A

(MITERED ENDS TOP TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

SEAL-TRIANGLE

425 ± 25

LEAVE PLASTIC BACKING
ON SEAL IN THIS AREA.
REMOVE TO ATTACH
SEAL TO TOP TRIM.

VERTICAL TRIM

SEAL-TRIANGLE

TRIM SEAL FLUSH WITH END
OF VERTICAL TRIM

DETAIL C

(BOTTOM OF VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

VERTICAL TRIM

SEAL-TRIANGLE

DO NOT CUT THROUGH SEAL

90°

17 ± 3

DETAIL E

SEAL IS NOTCHED DURING THE INSTALLATION
OF THE TRIM AND ATTACHED TO THE TOP TRIM

VERTICAL TRIM

E

125 ± 25

LEAVE PLASTIC BACKING
ON SEAL IN THIS AREA.
REMOVE AFTER SEAL
HAS BEEN NOTCHED.

DETAIL B

(MITERED ENDS OF VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

FIRST USED		
2010 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
TRIM KIT-INTERIOR,SLIDEOUT		
SHEET 4	PART NO 174648	REV