


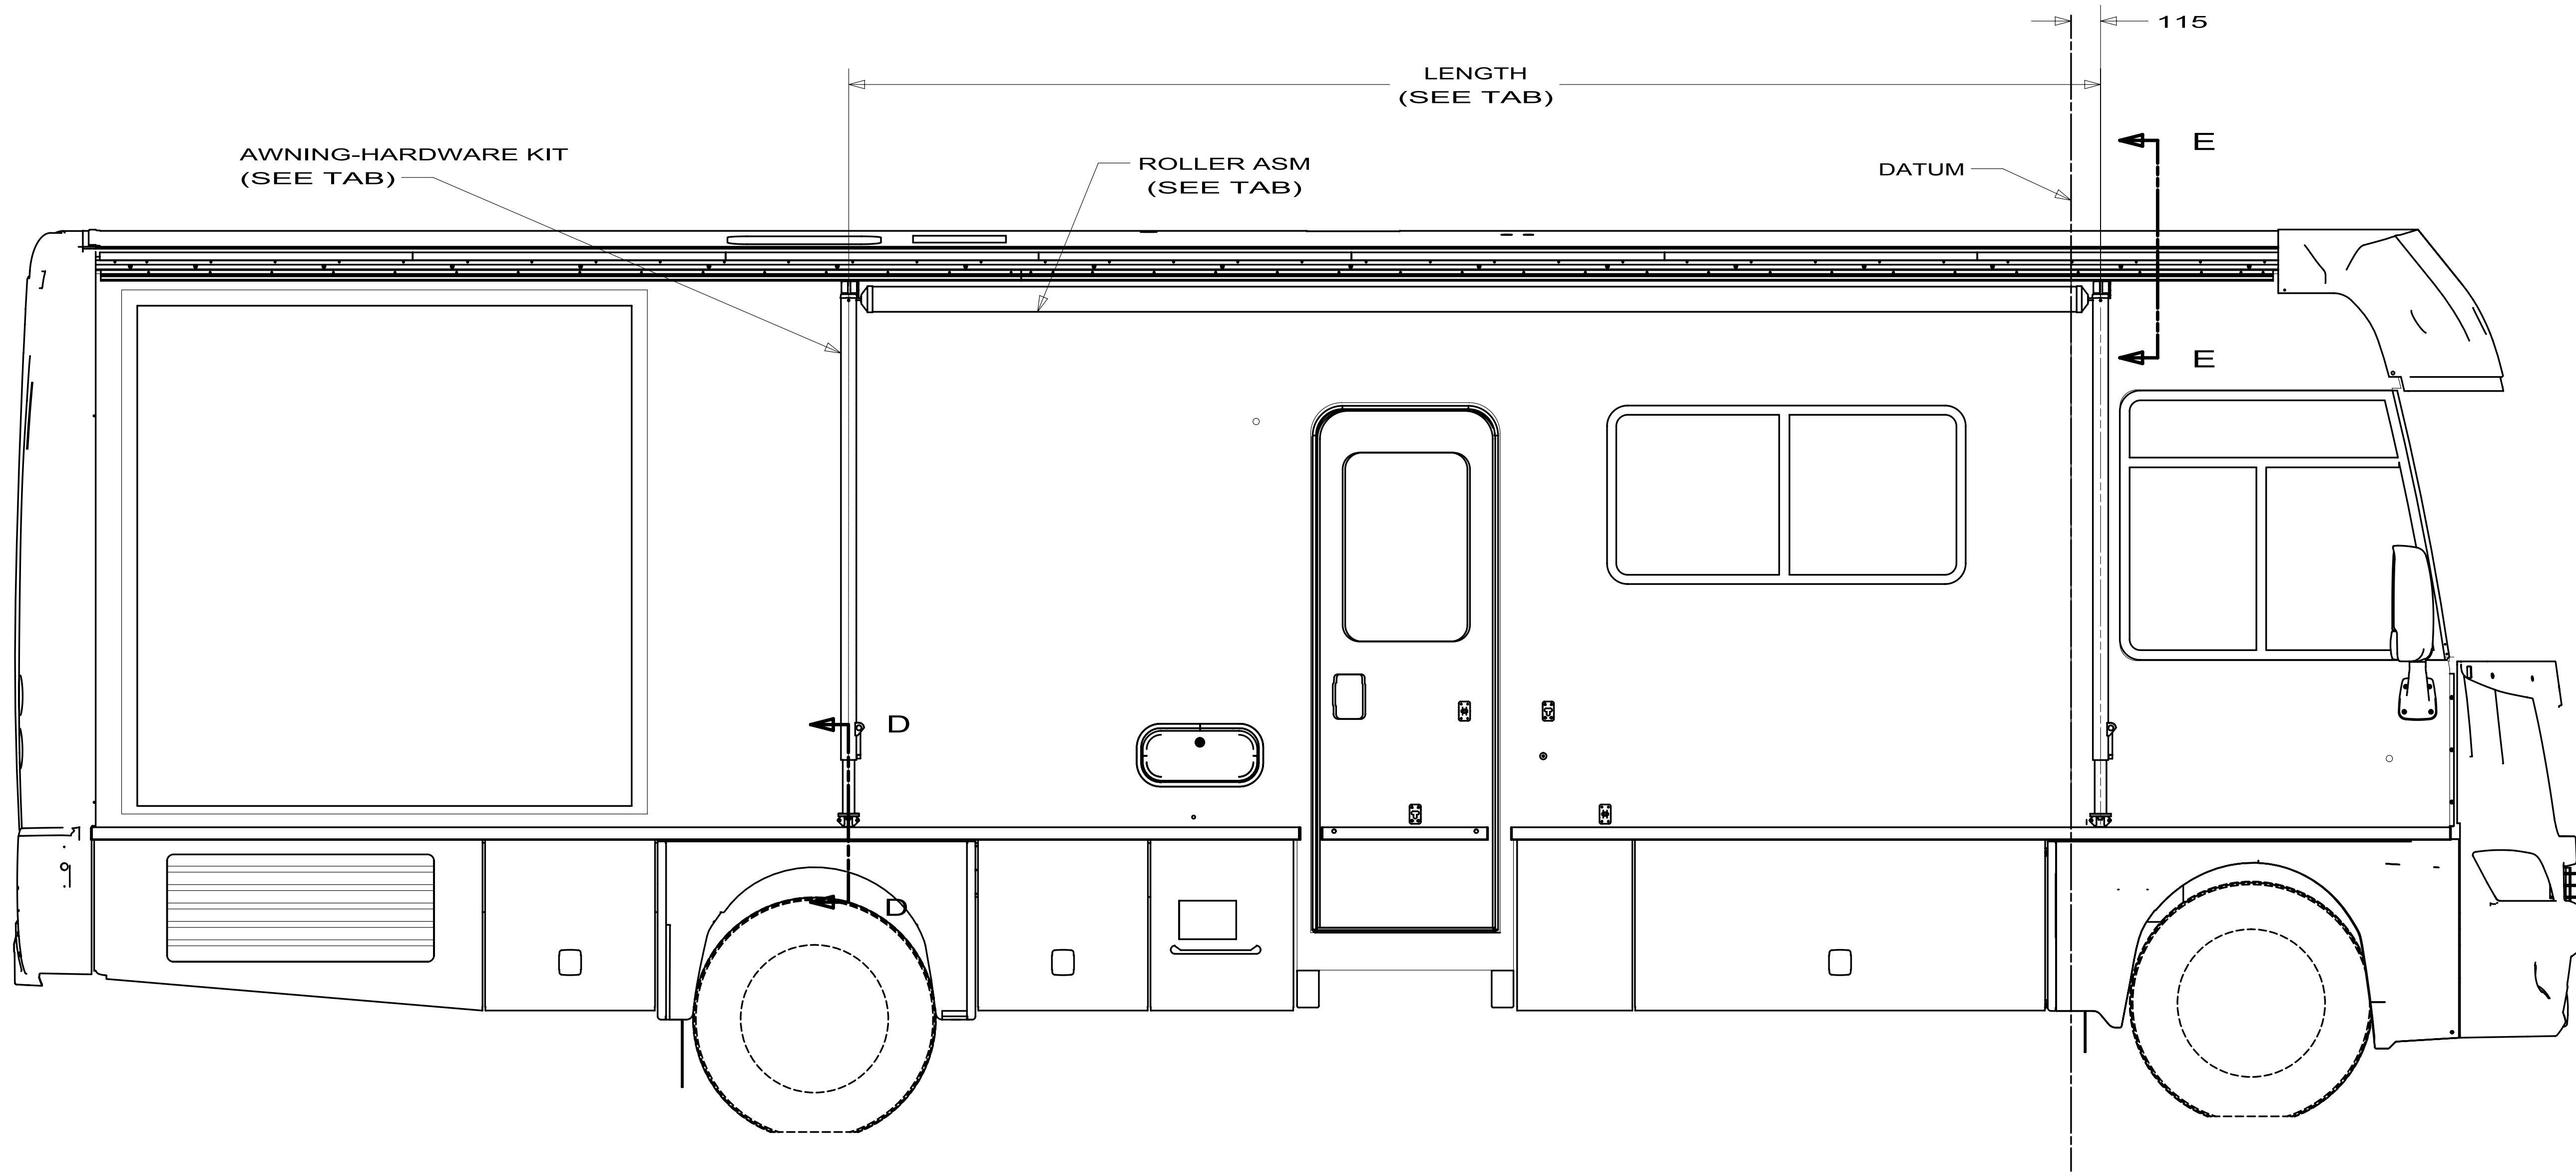

DOMETIC A&E
AWNINGS

52F

J32H



FIRST USED			10 J-SERIES
DO NOT SCALE DRAWING			
TITLE:			AWNING INSTL J-SERIES
SHEET 4	PART NO	170828	REV

D

C

B

A

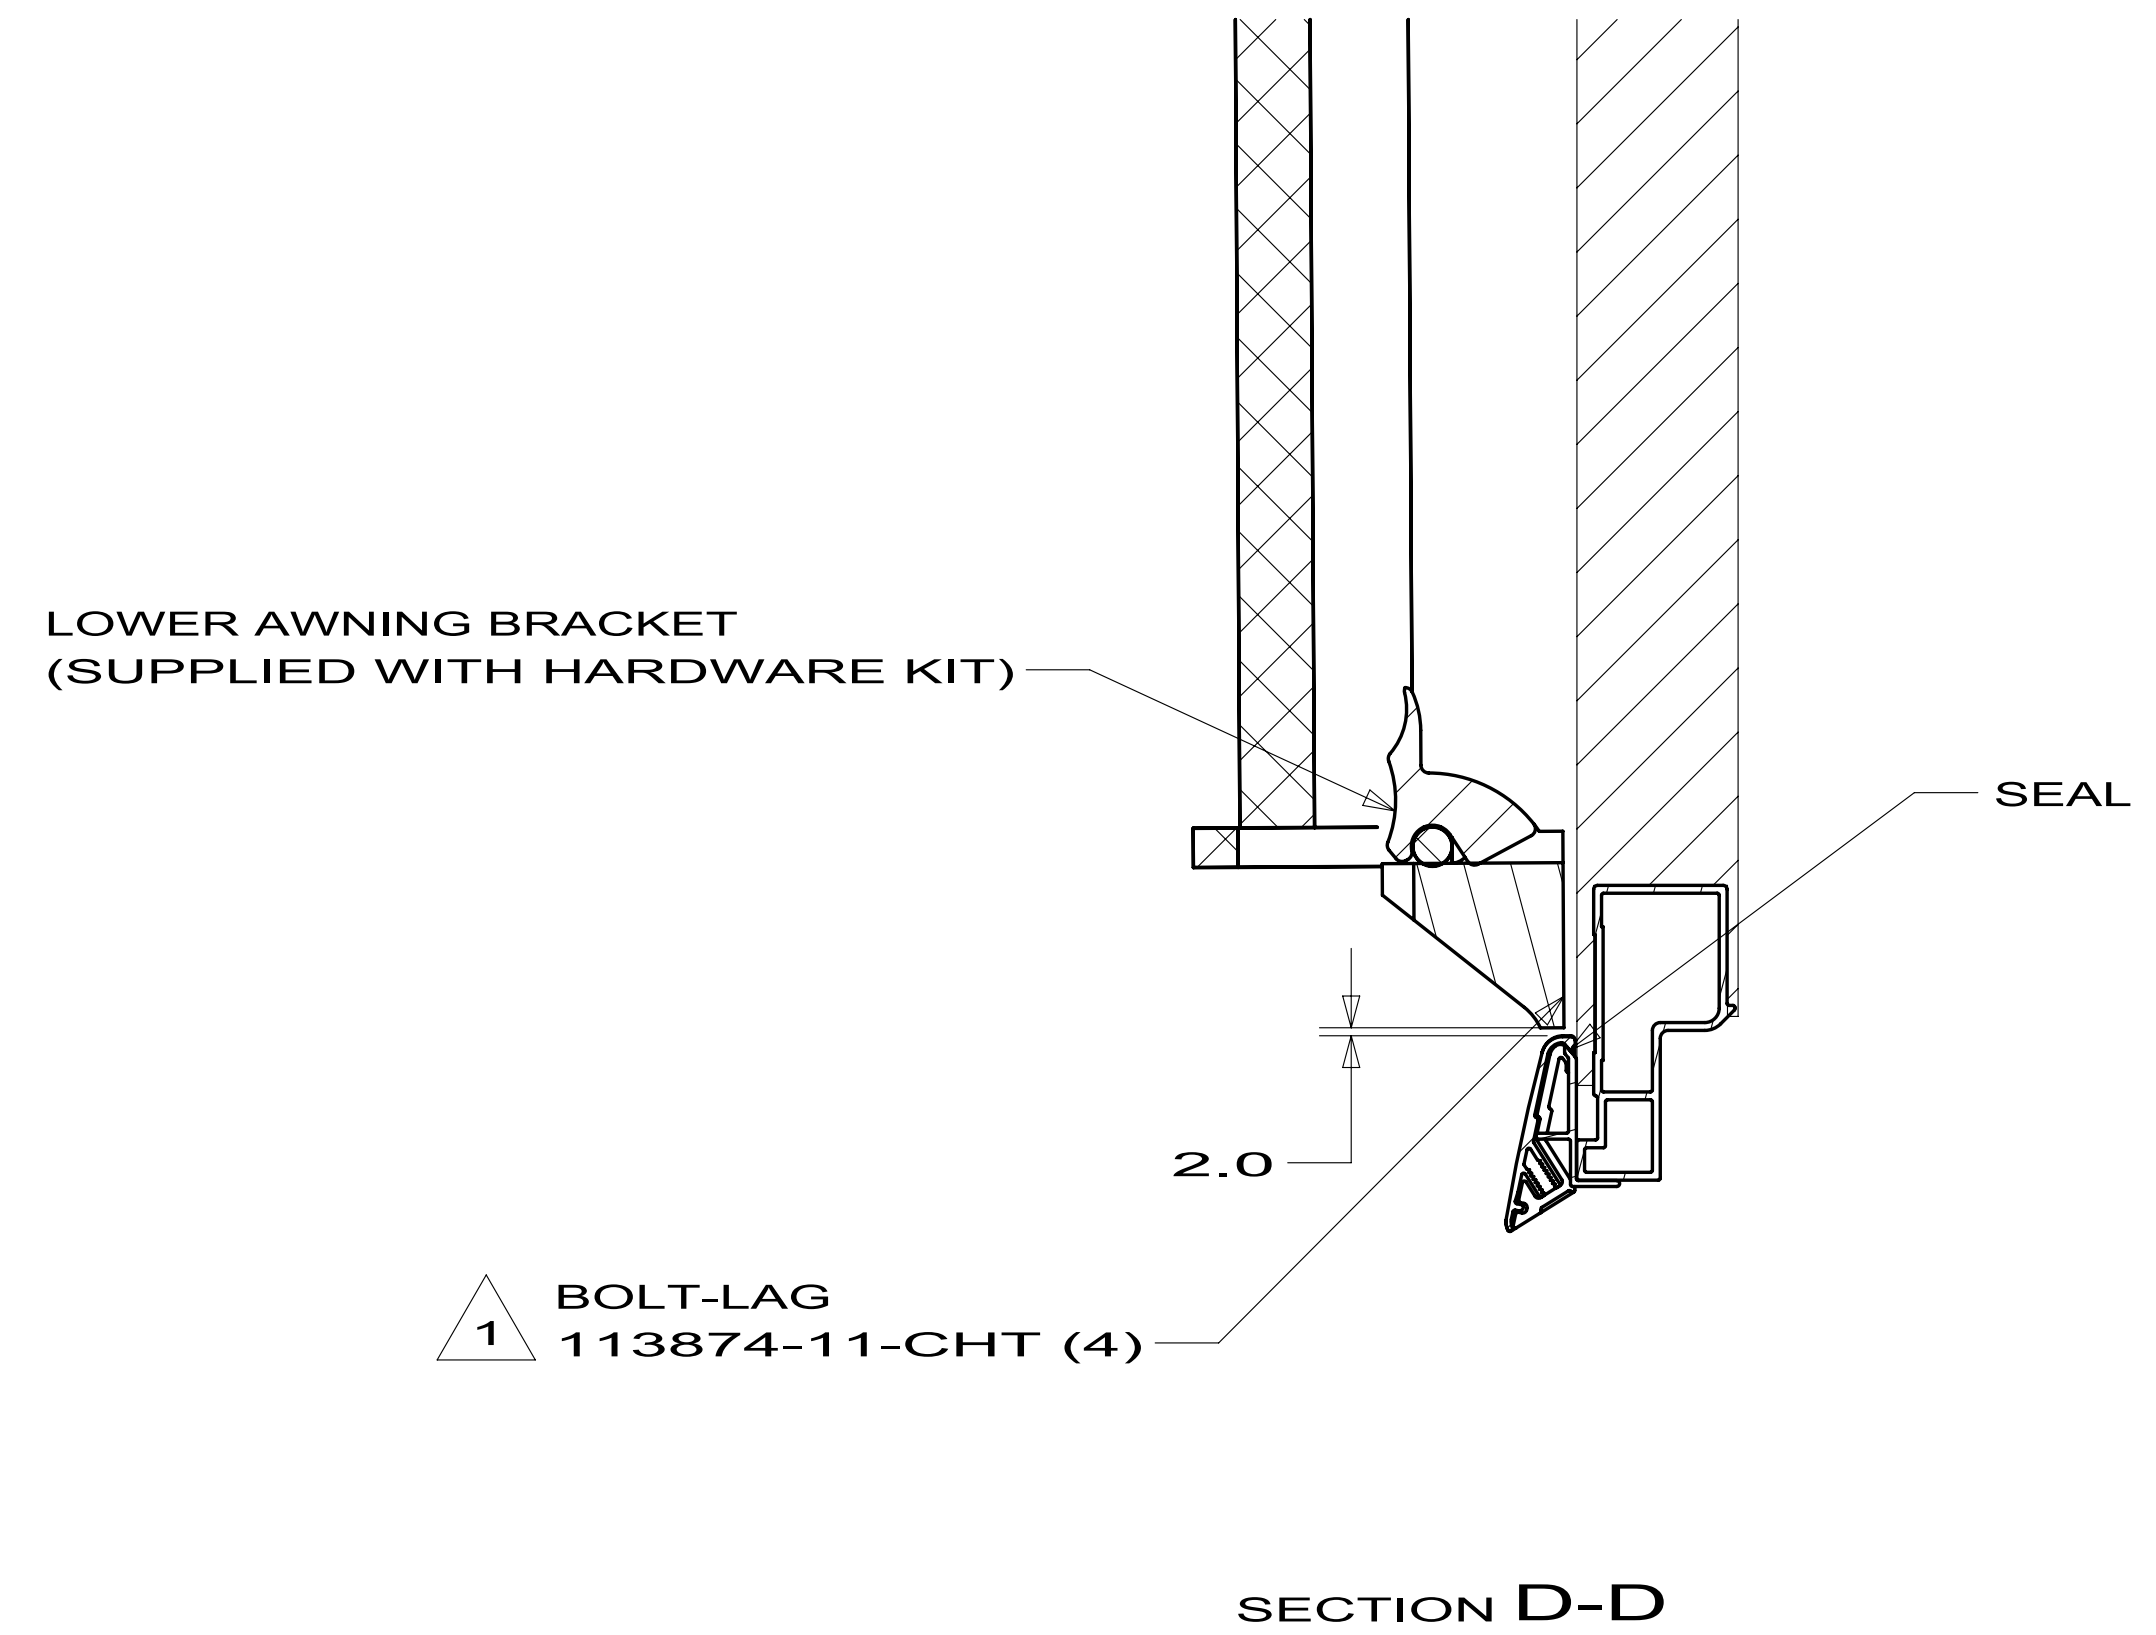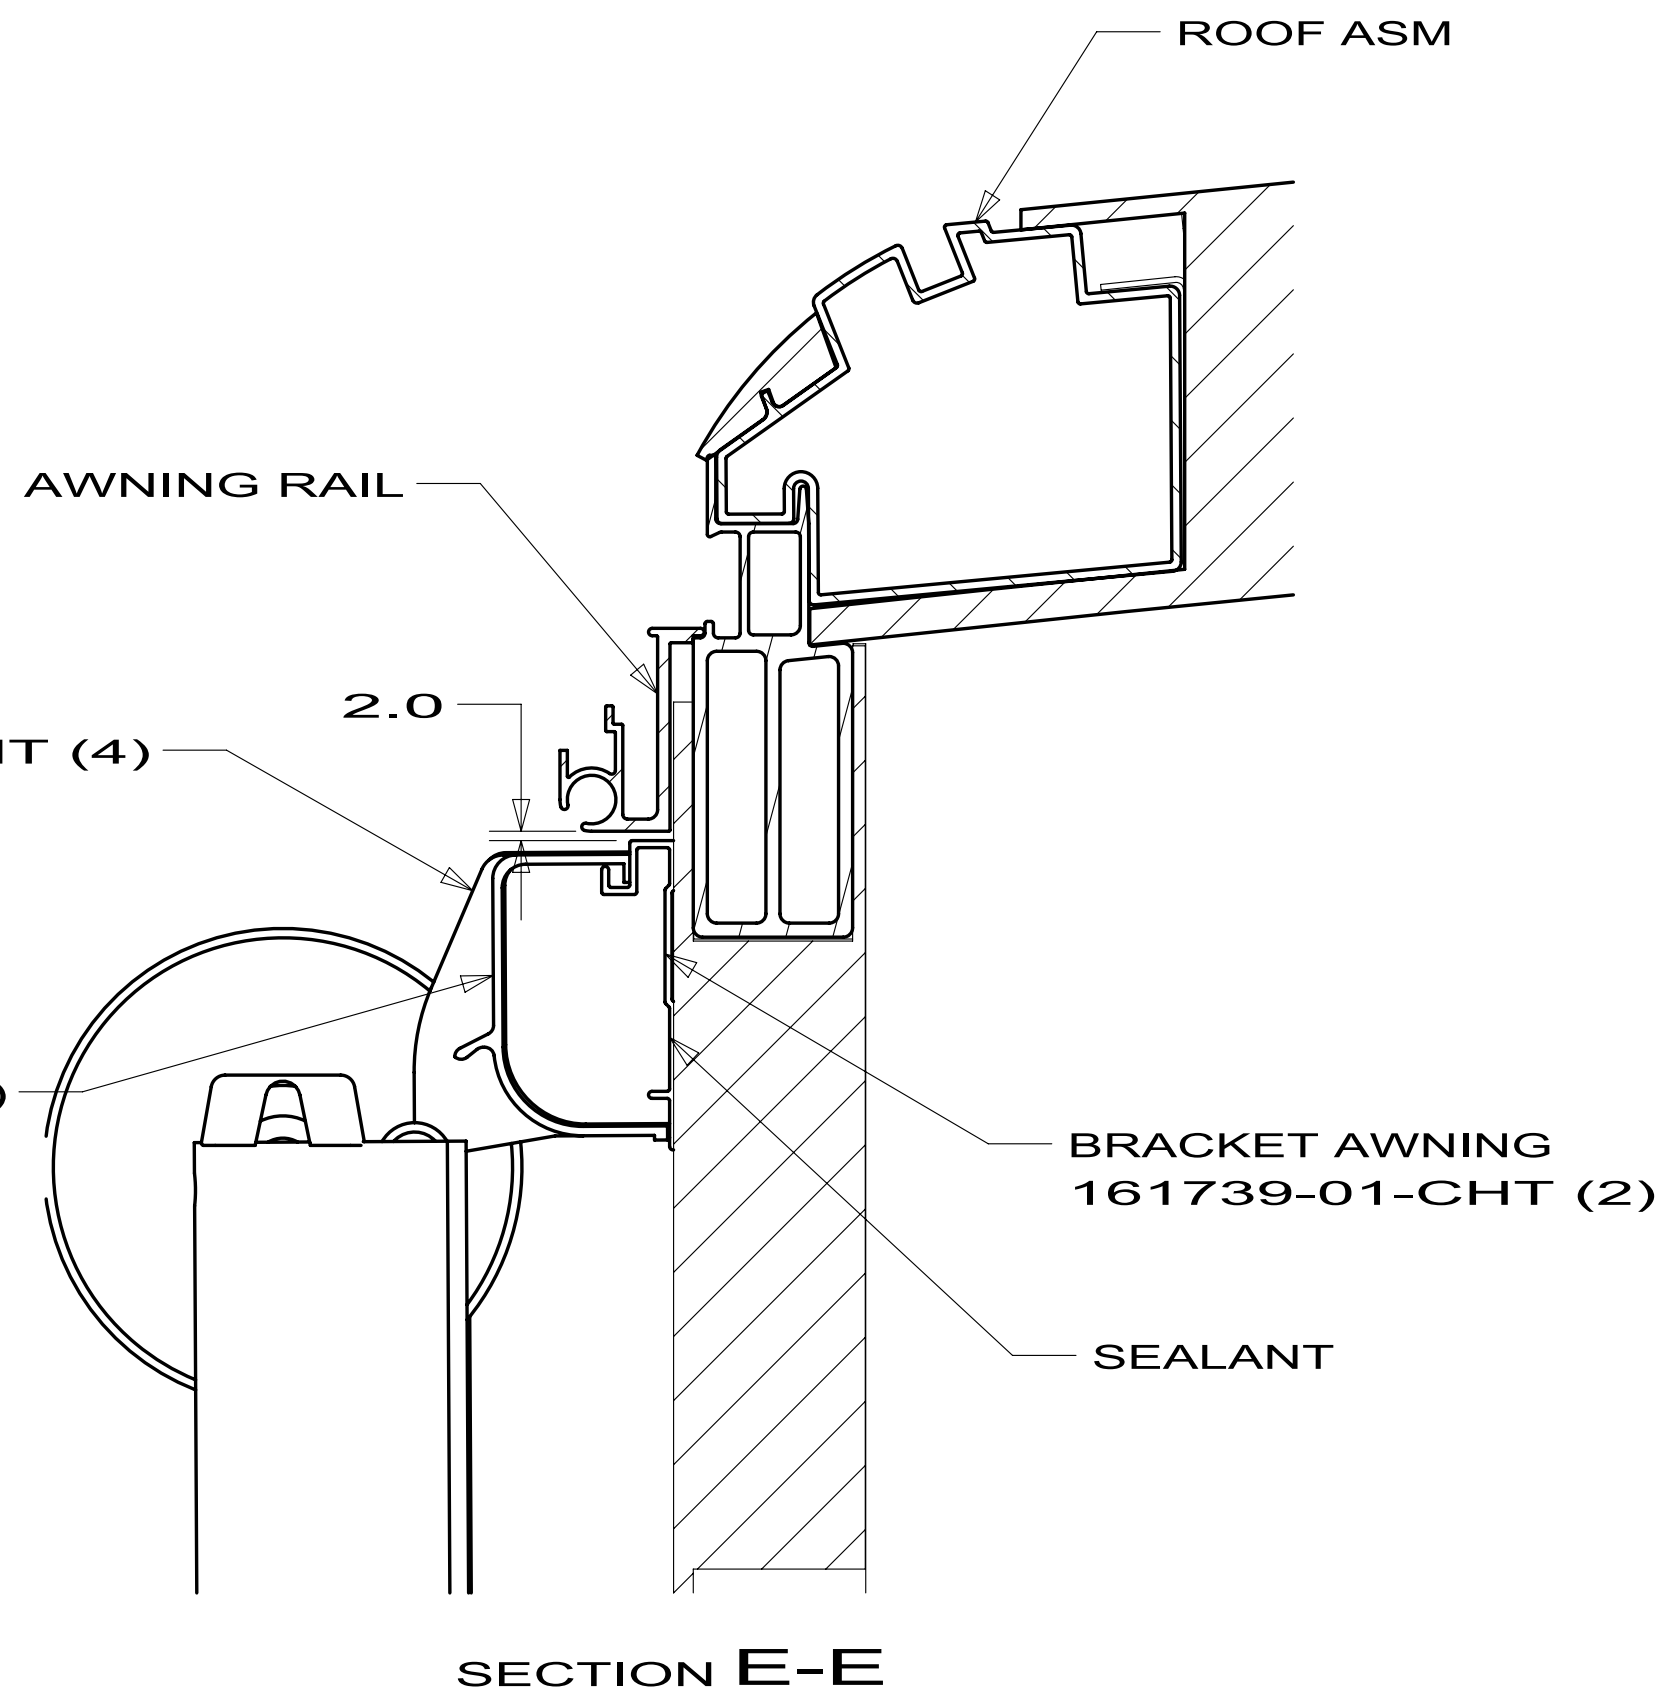

FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
AWNING INSTL J-SERIES		
SHEET 5	PART NO 170828	REV

8

7

6


5

4

3

2

1

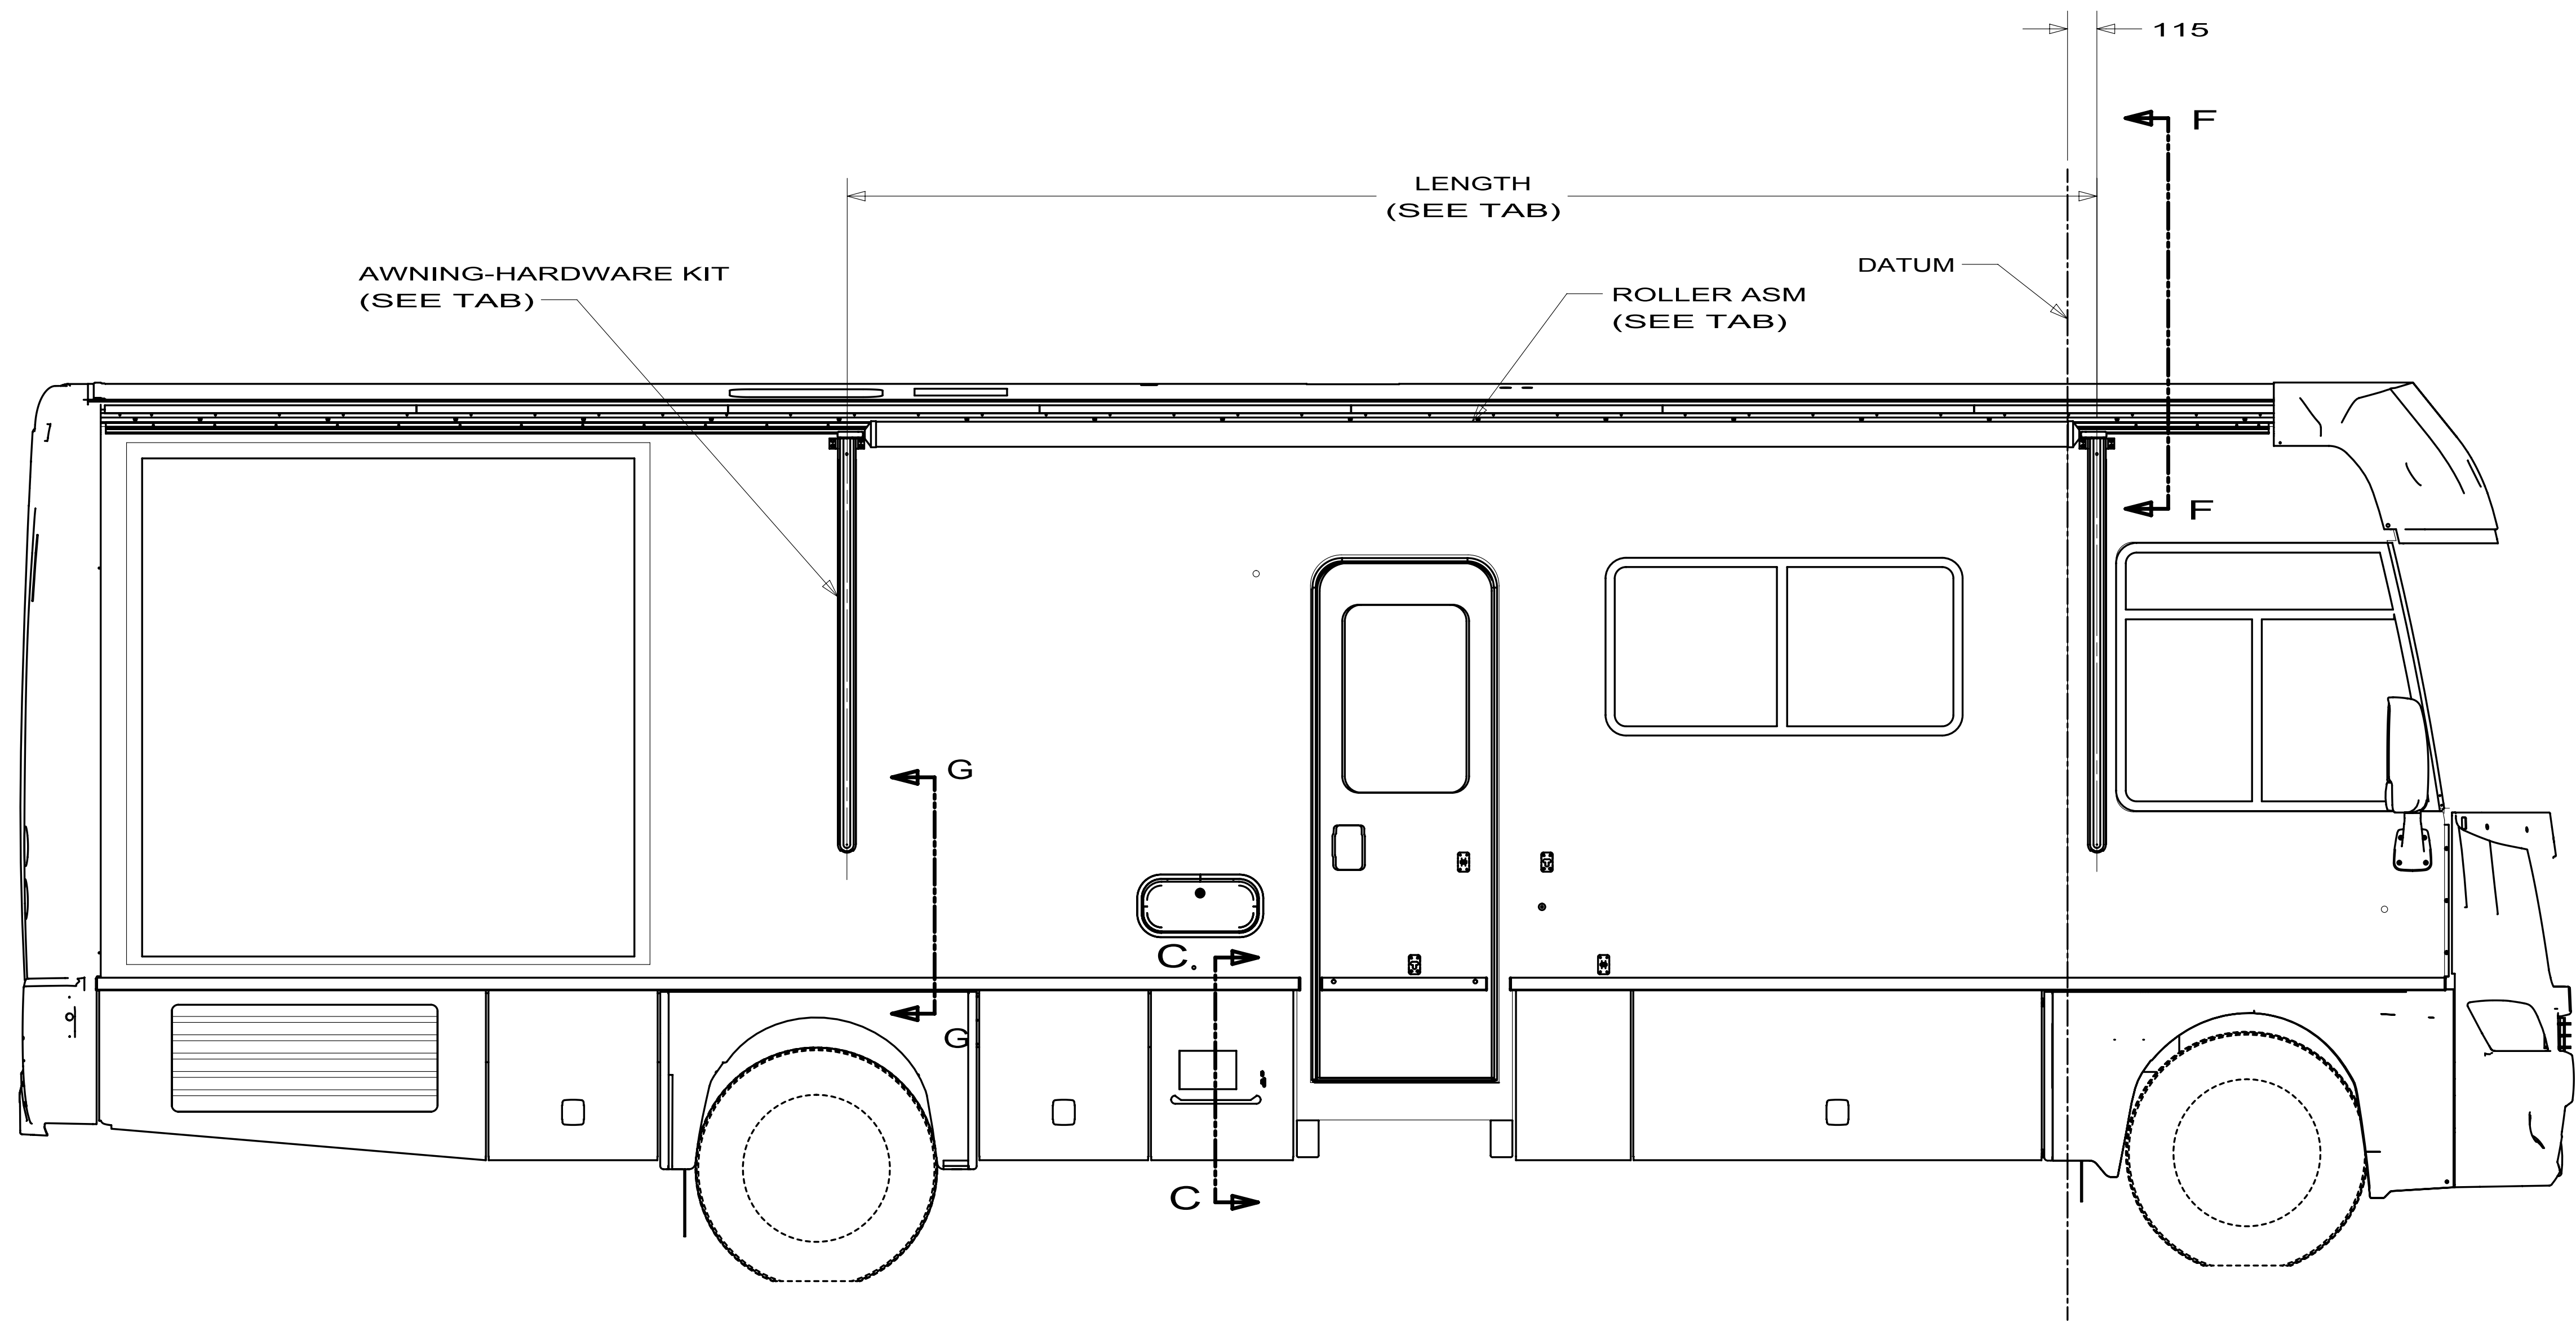



DOMETIC A&E AWNINGS
WEATHER PRO

J32H








FIRST USED		10 J-SERIES	
DO NOT SCALE DRAWING			
TITLE: AWNING INSTL J-SERIES			
SHEET 6		PART NO	REV
		170828	

D
C
B
A

D
C
B
A

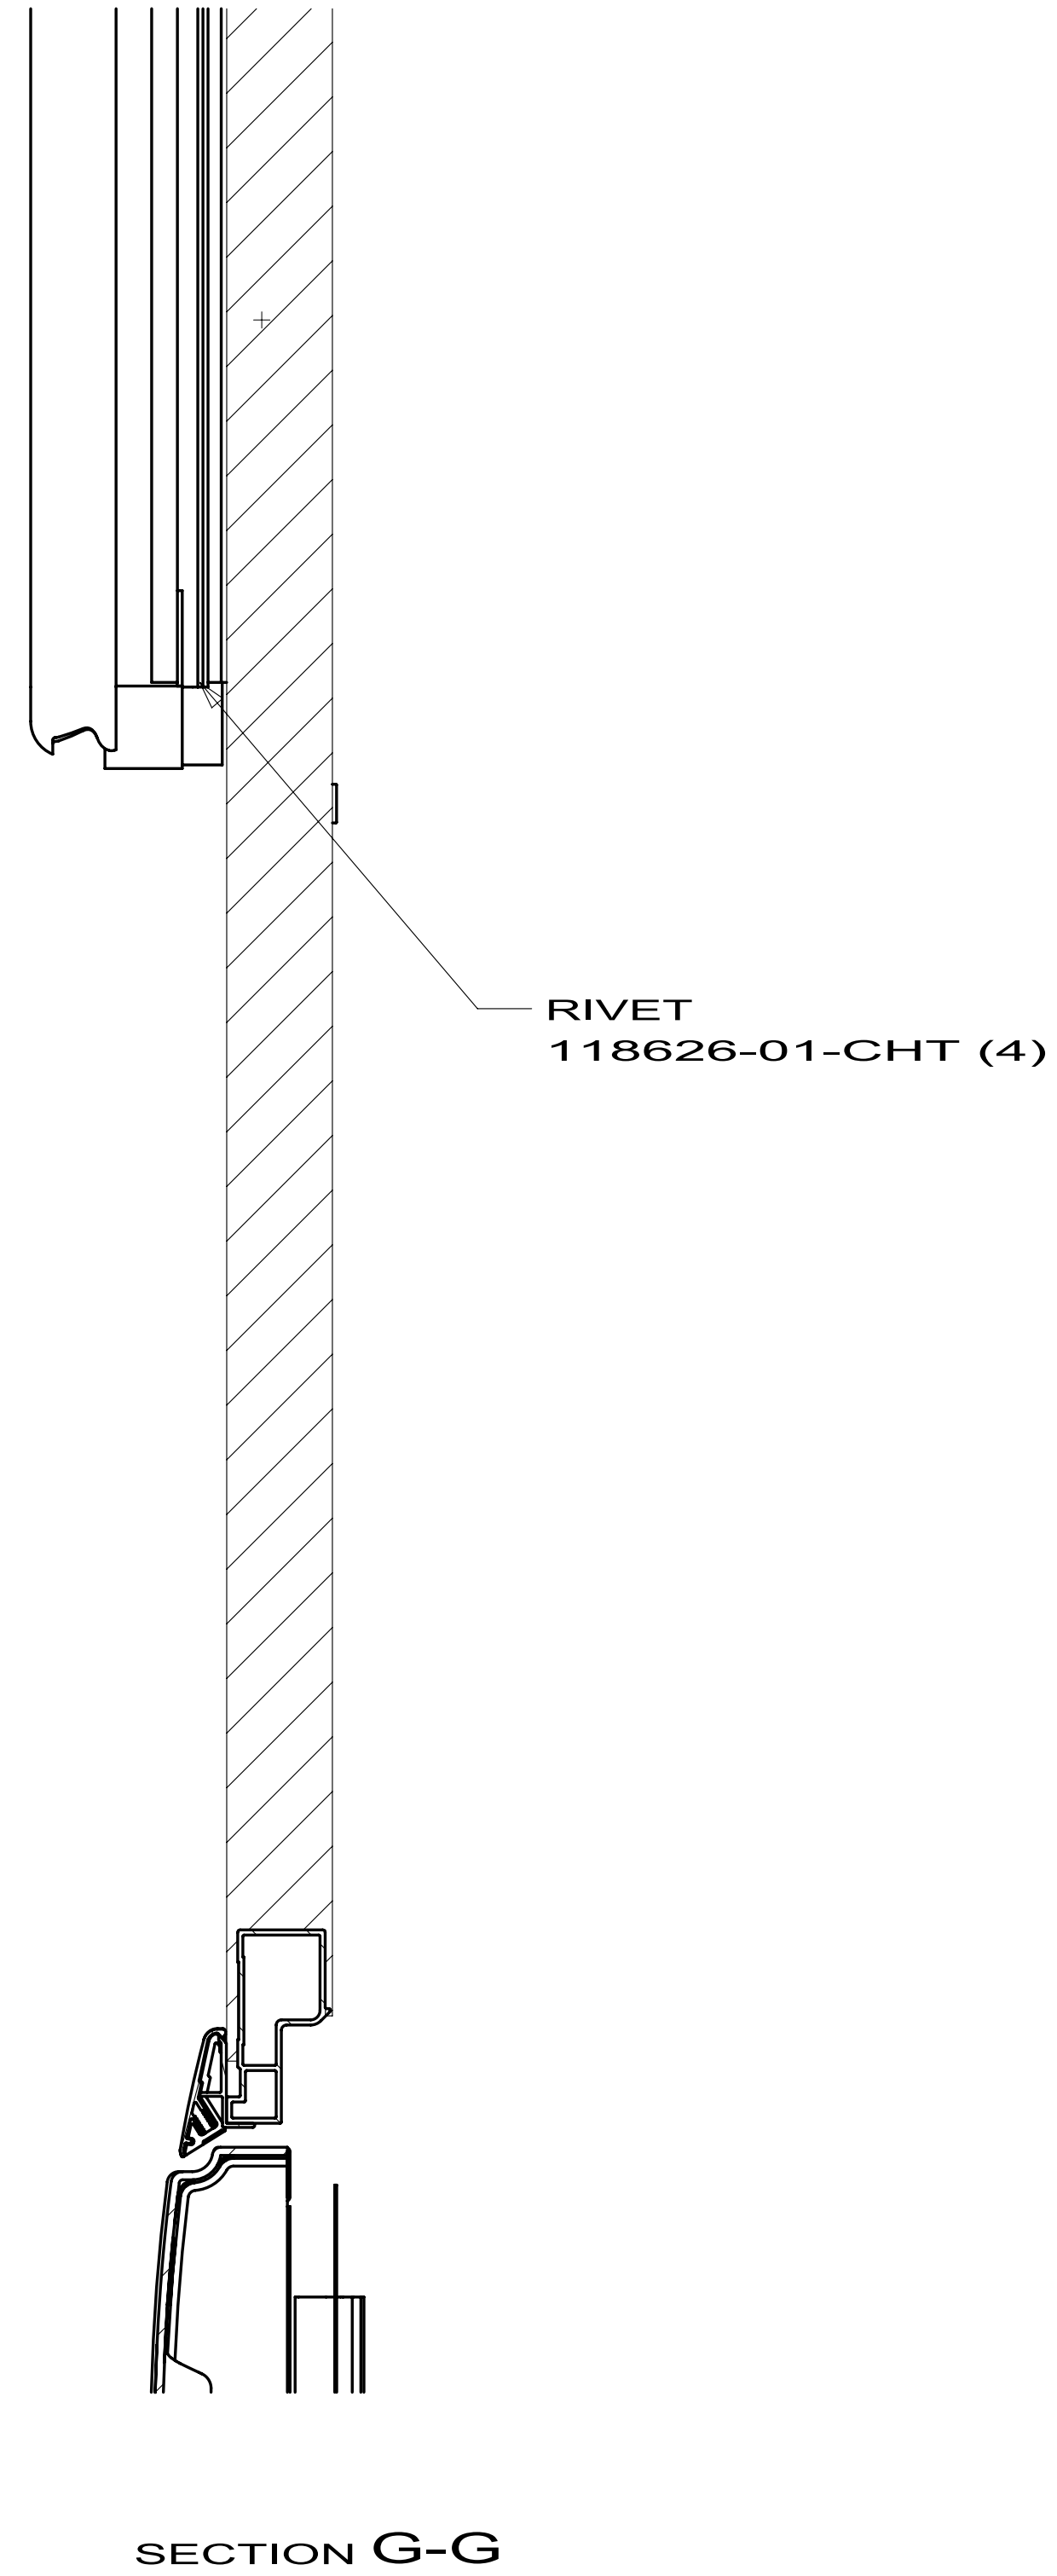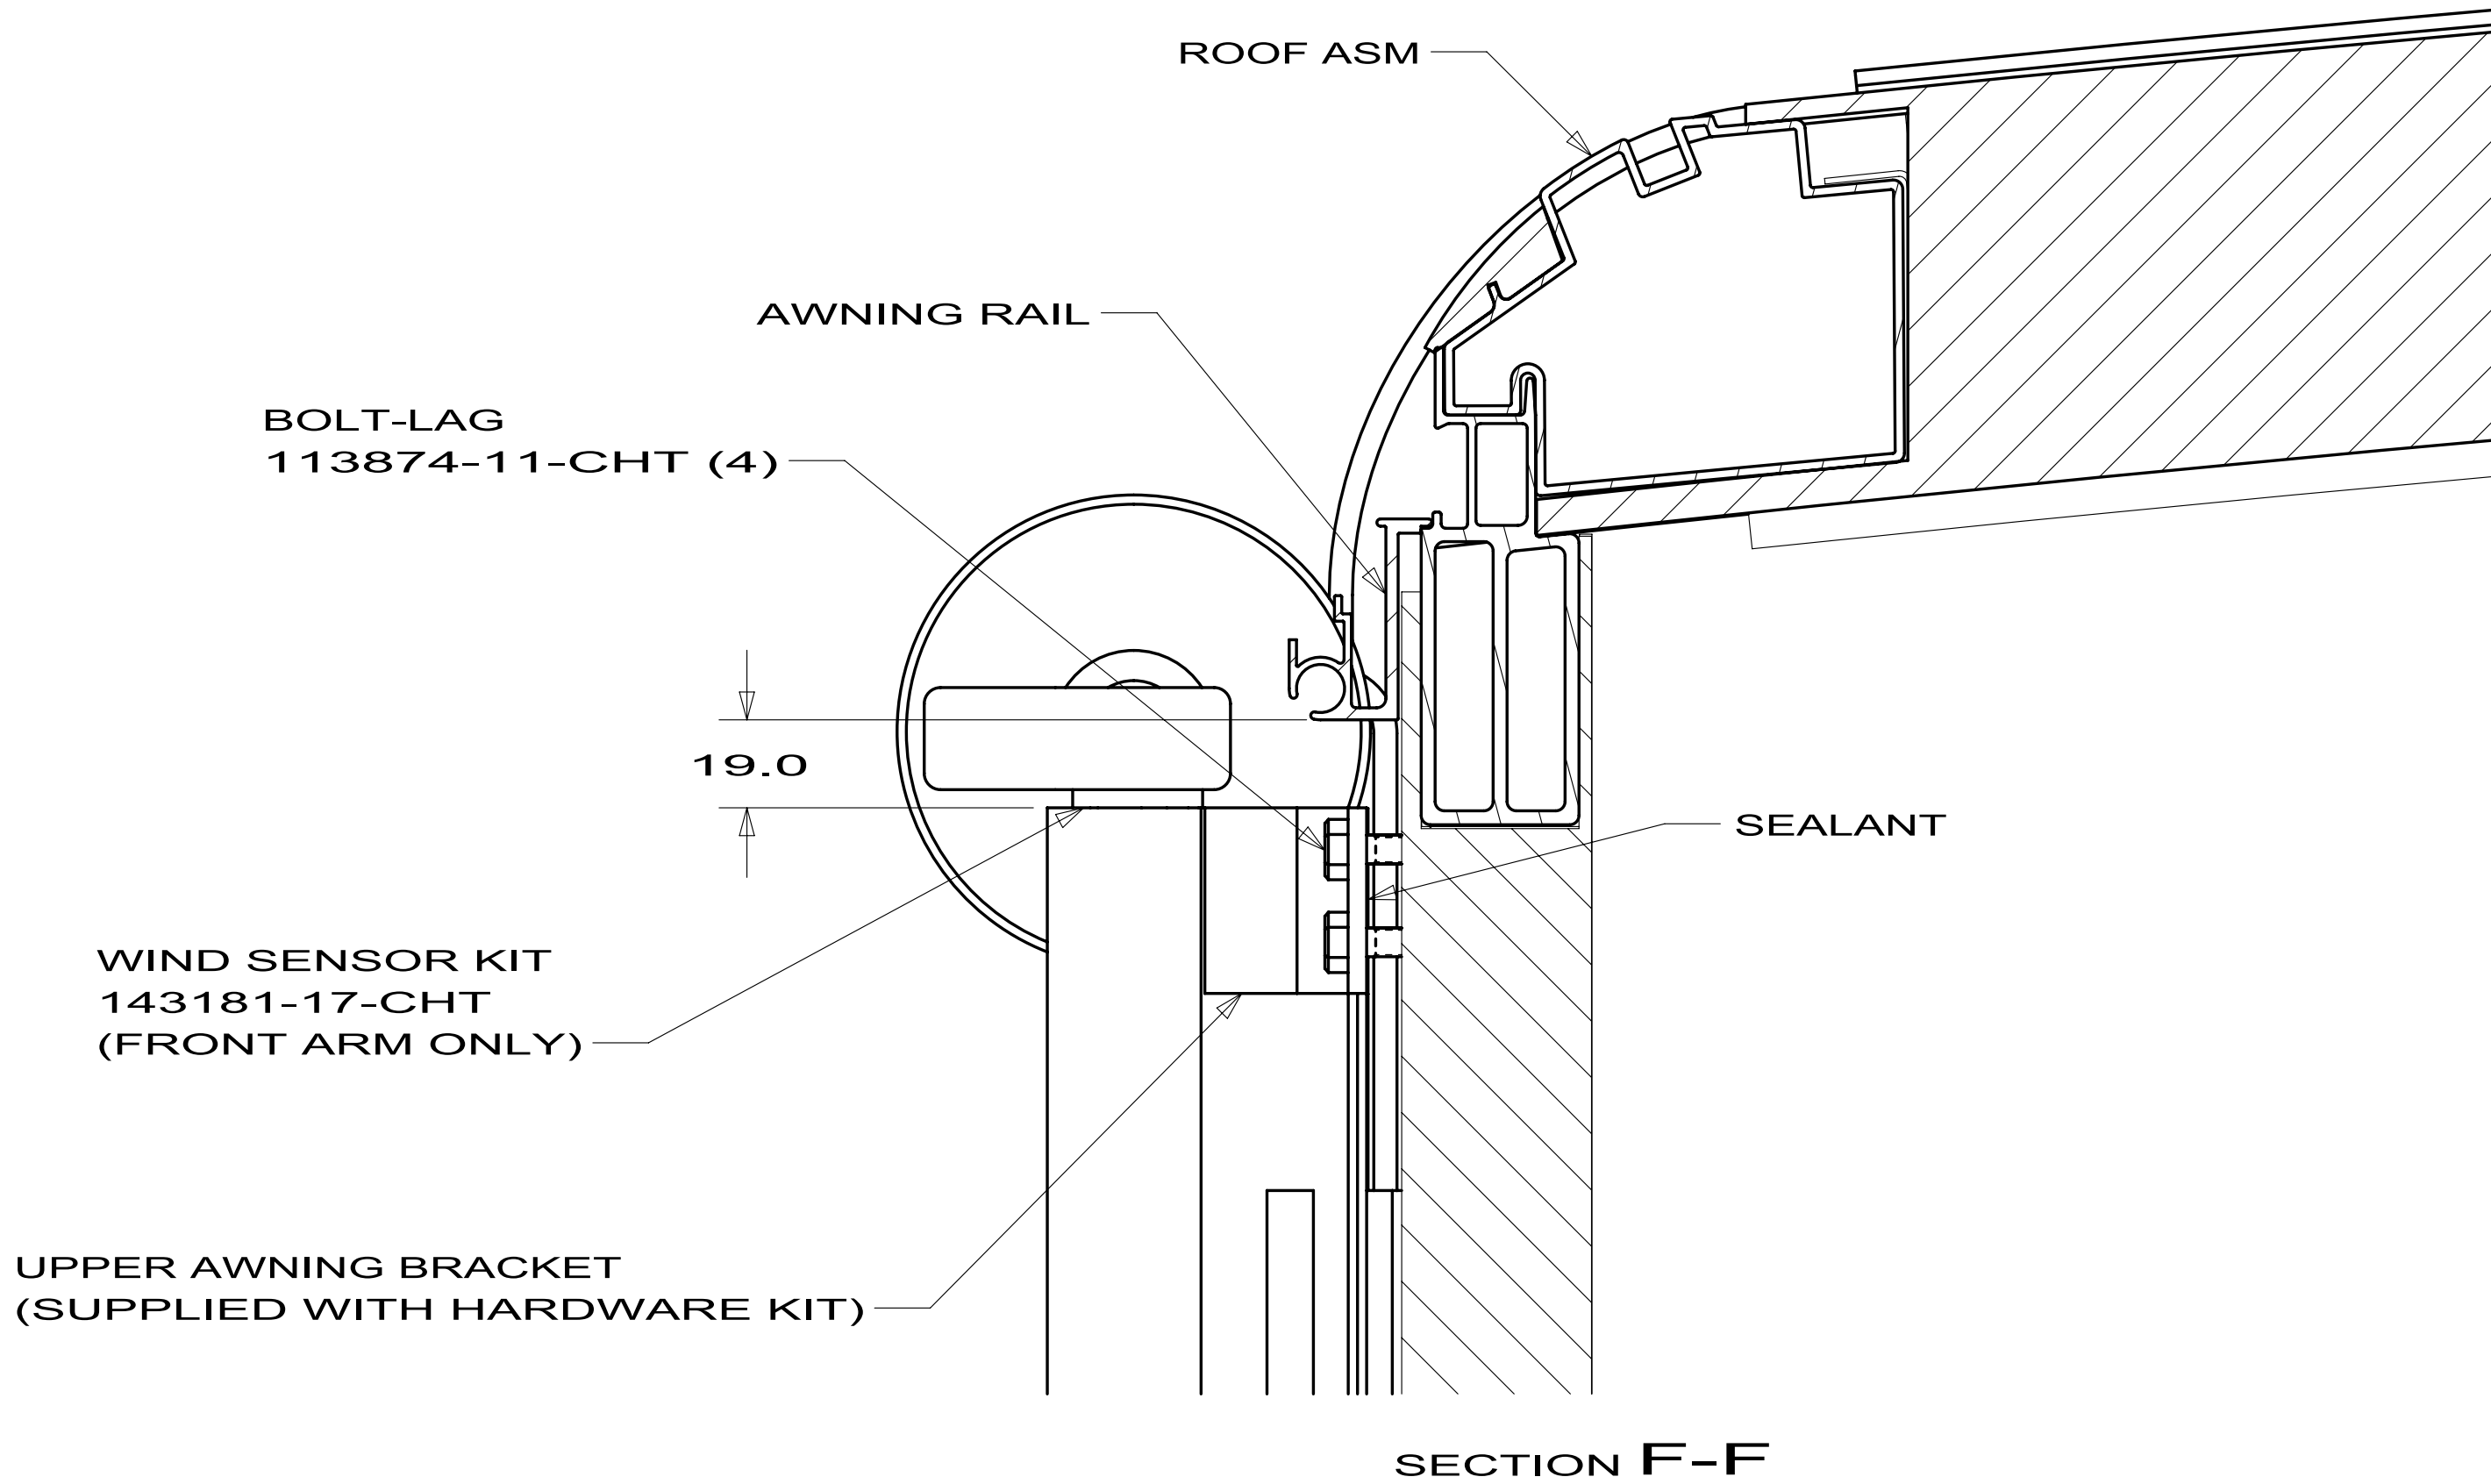


FIRST USED		
10 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: AWNING INSTL J-SERIES		
SHEET 7	PART NO 170828	REV

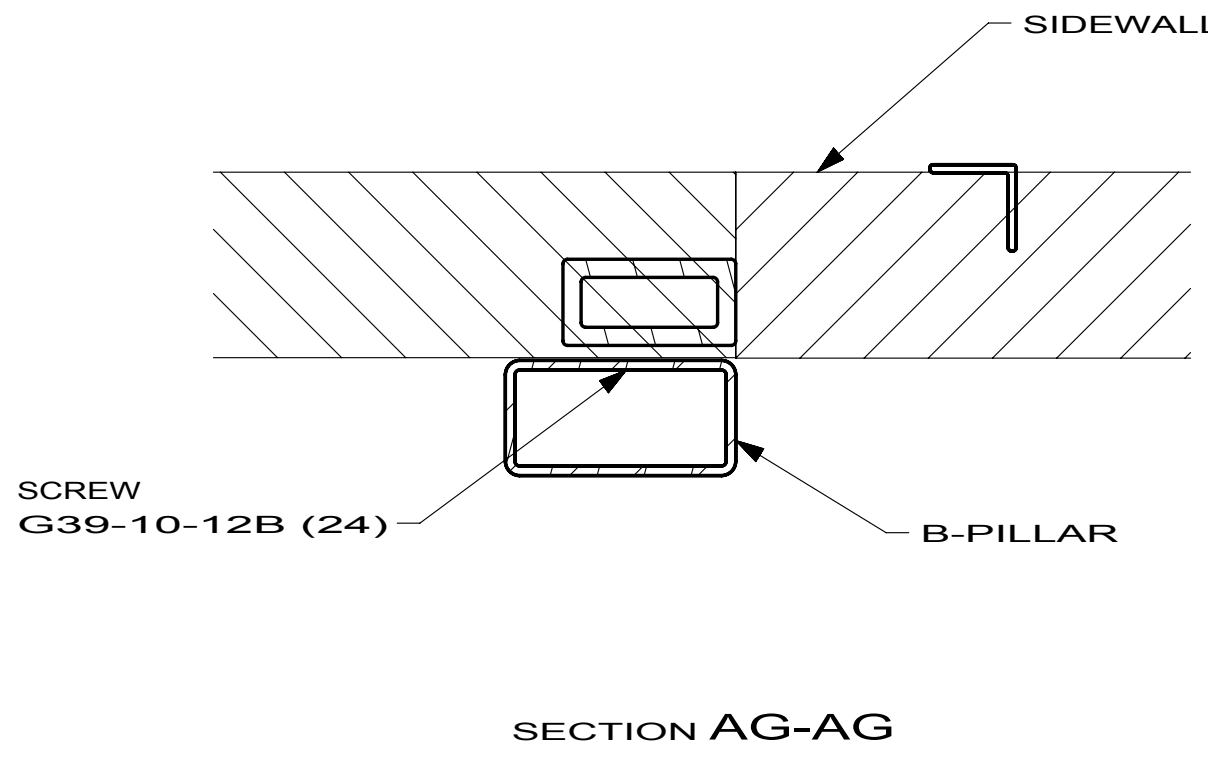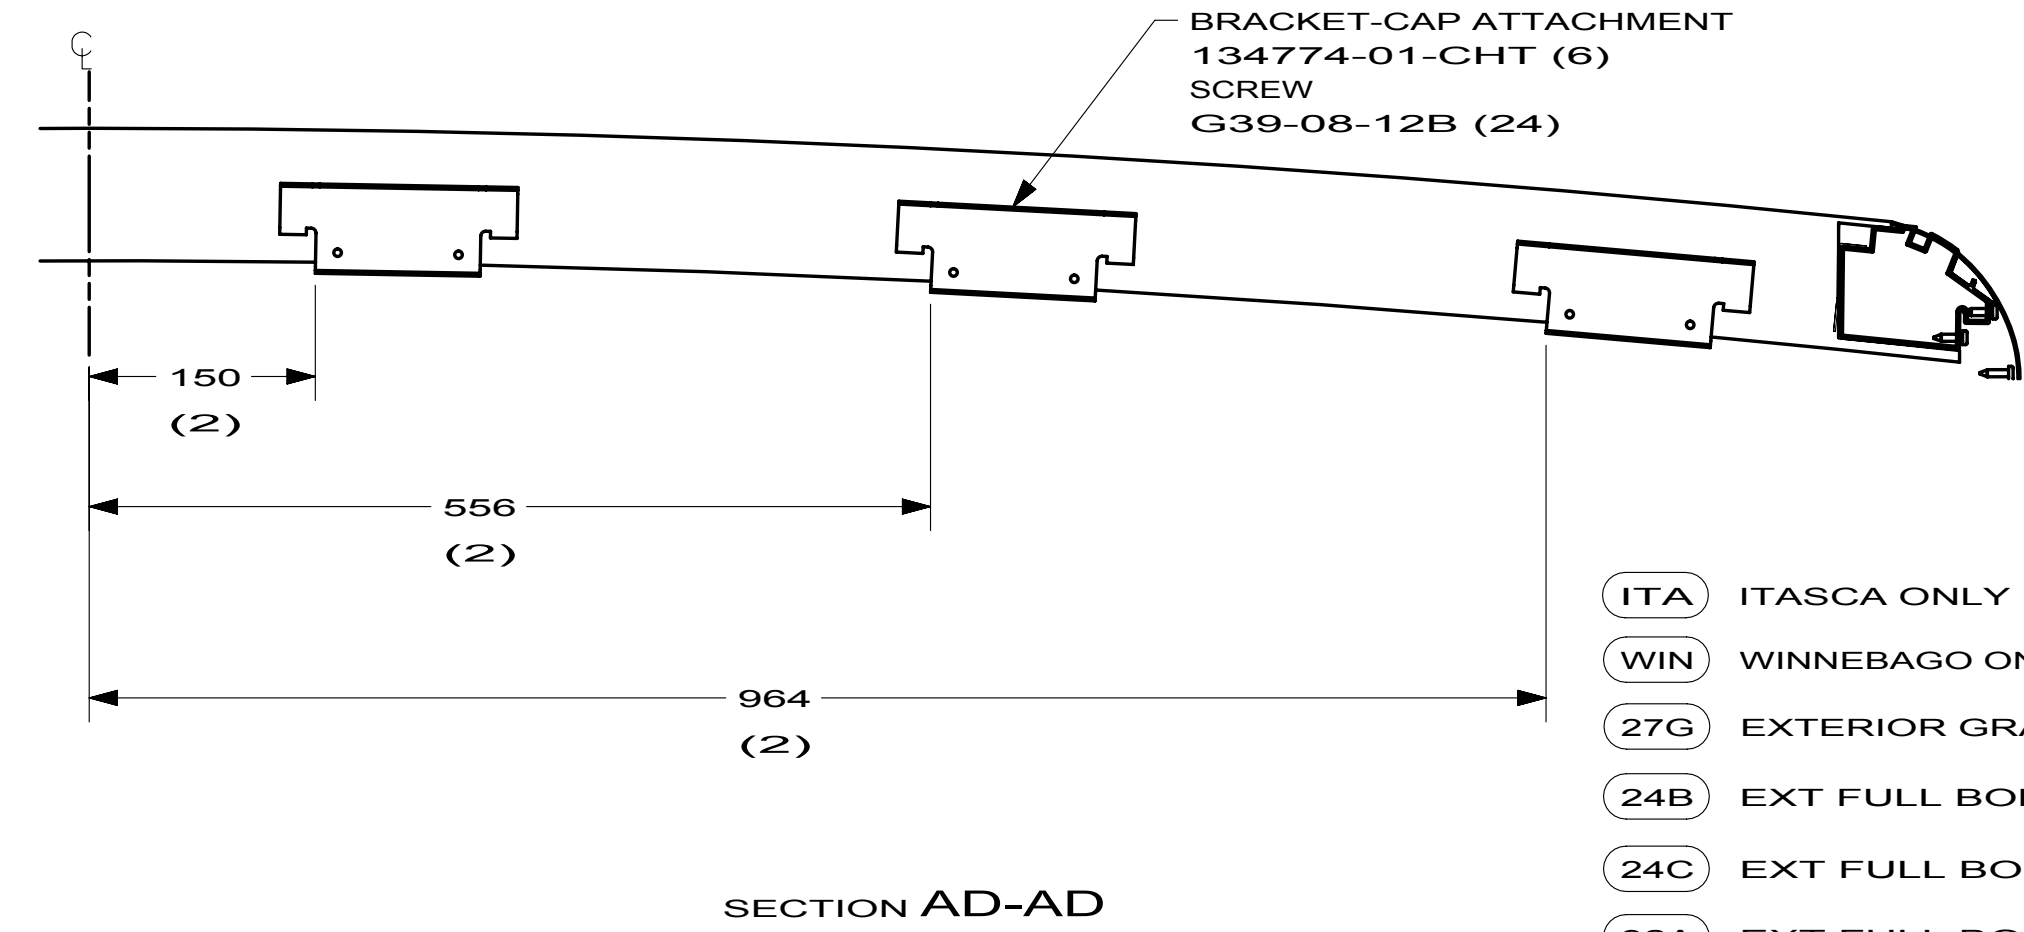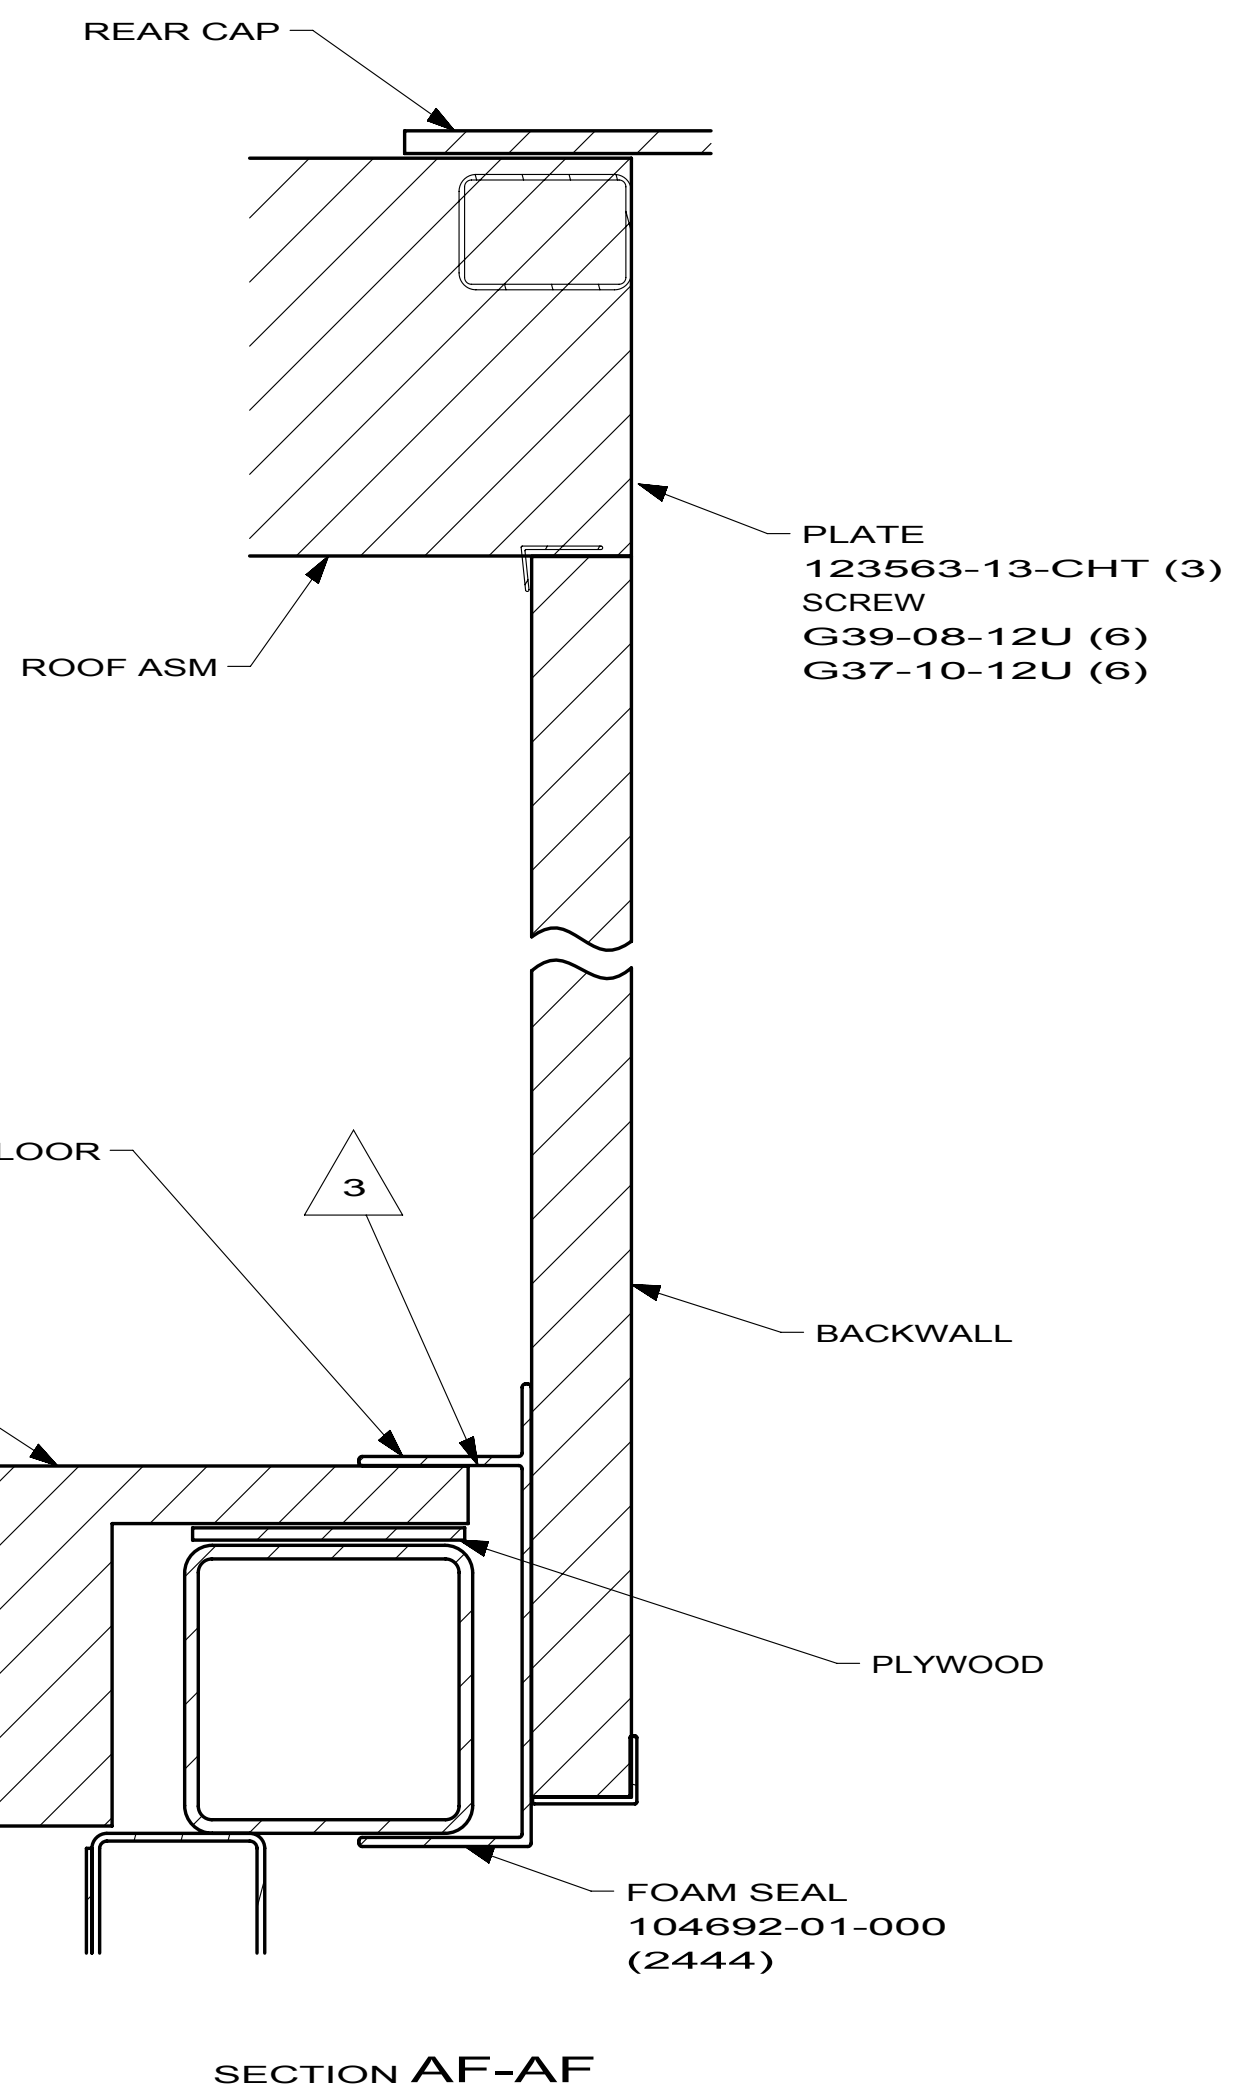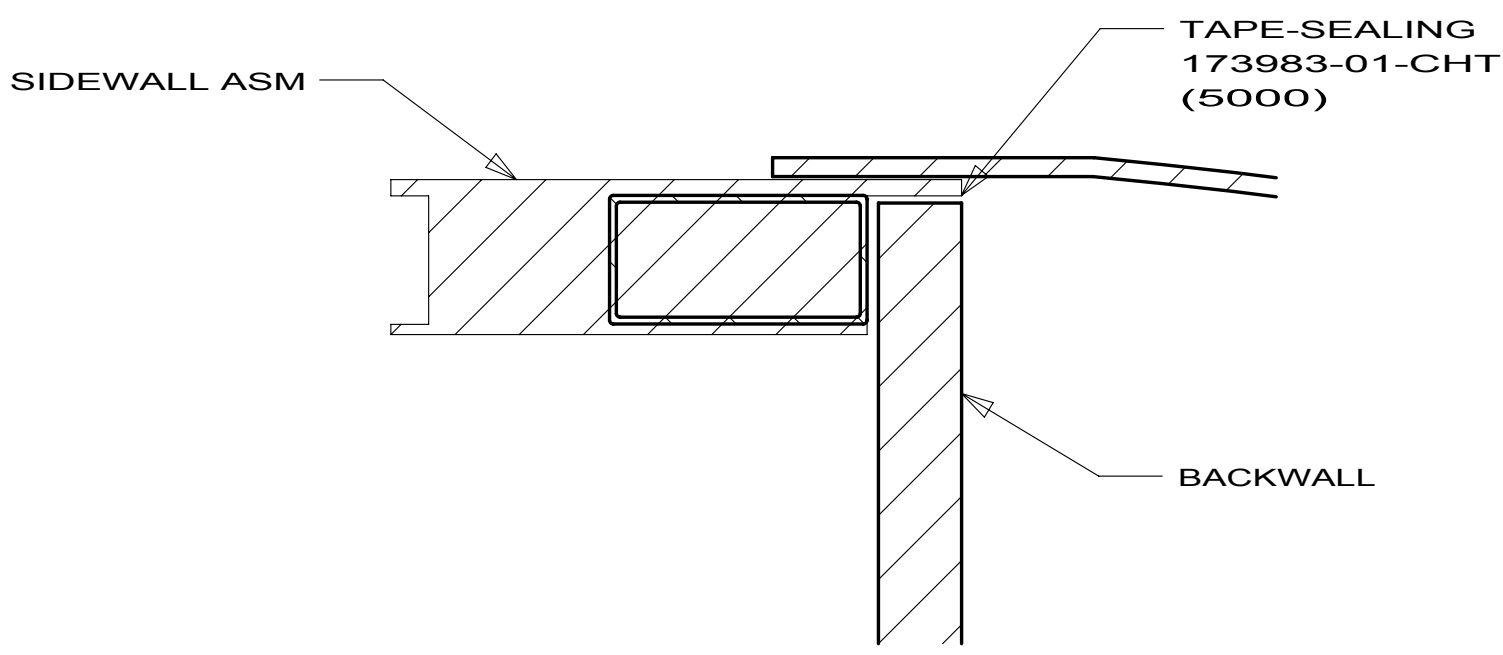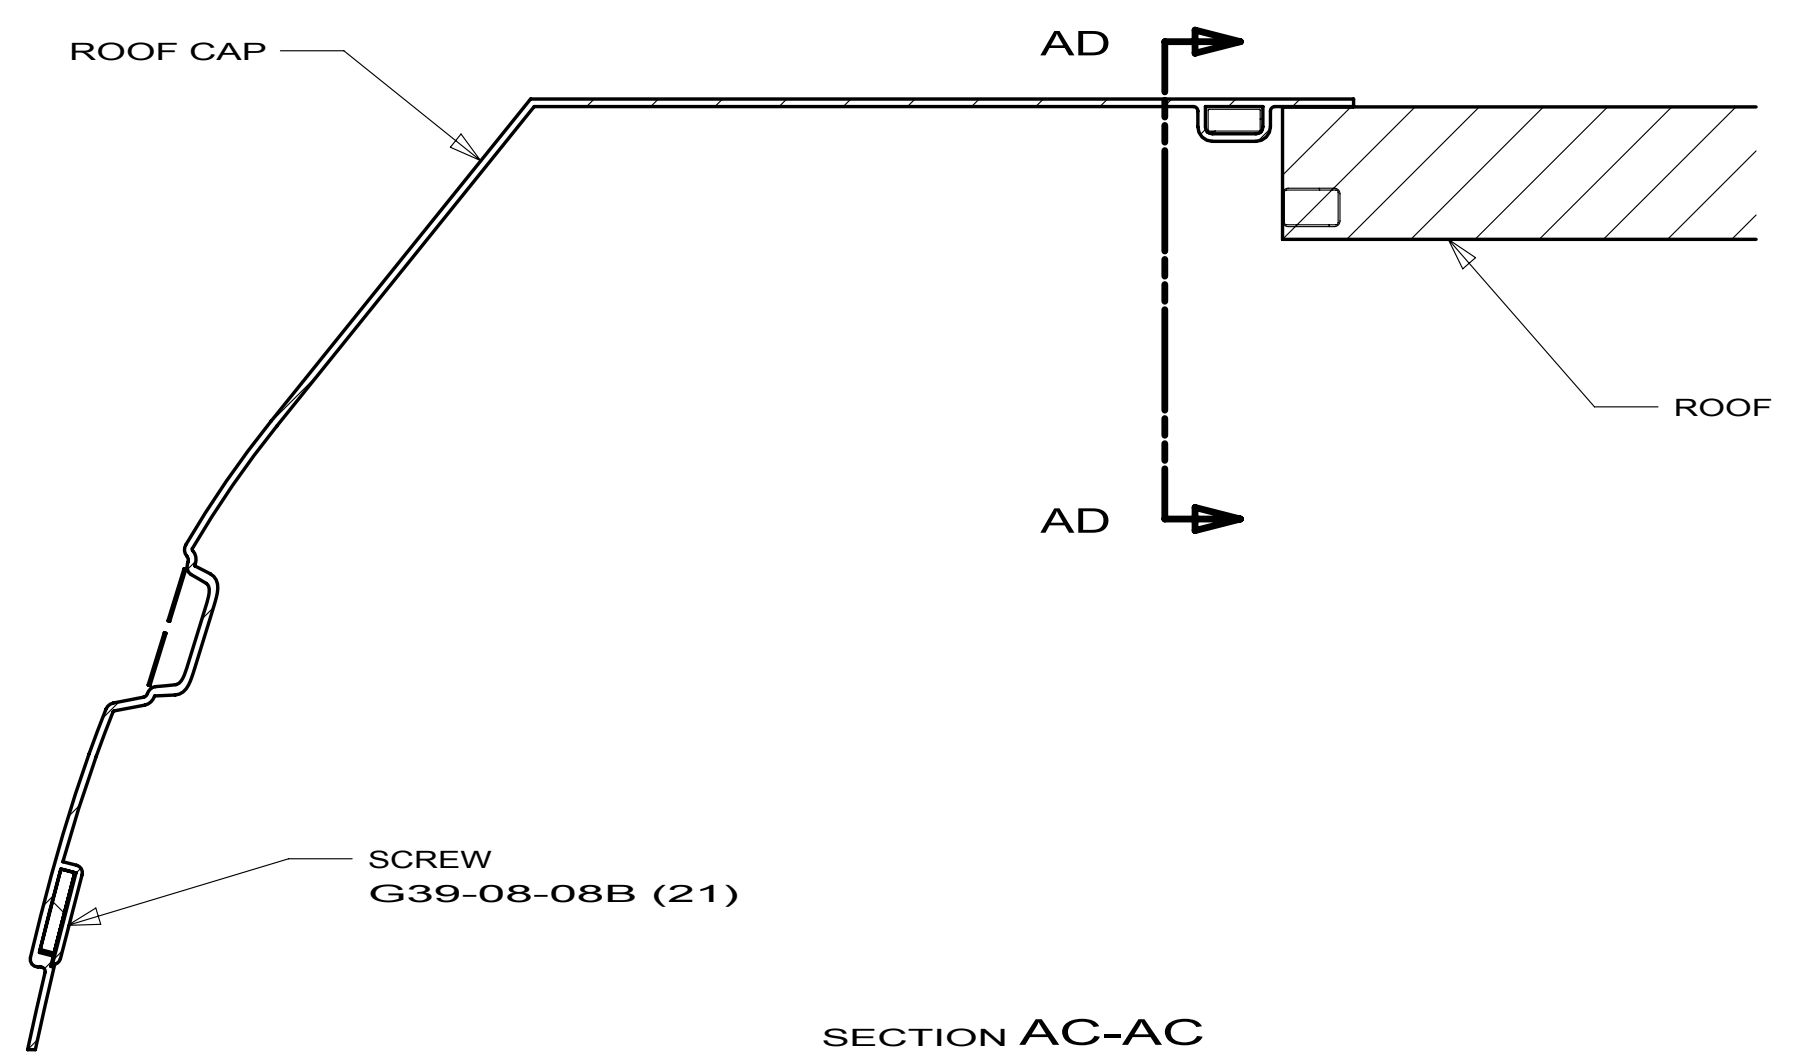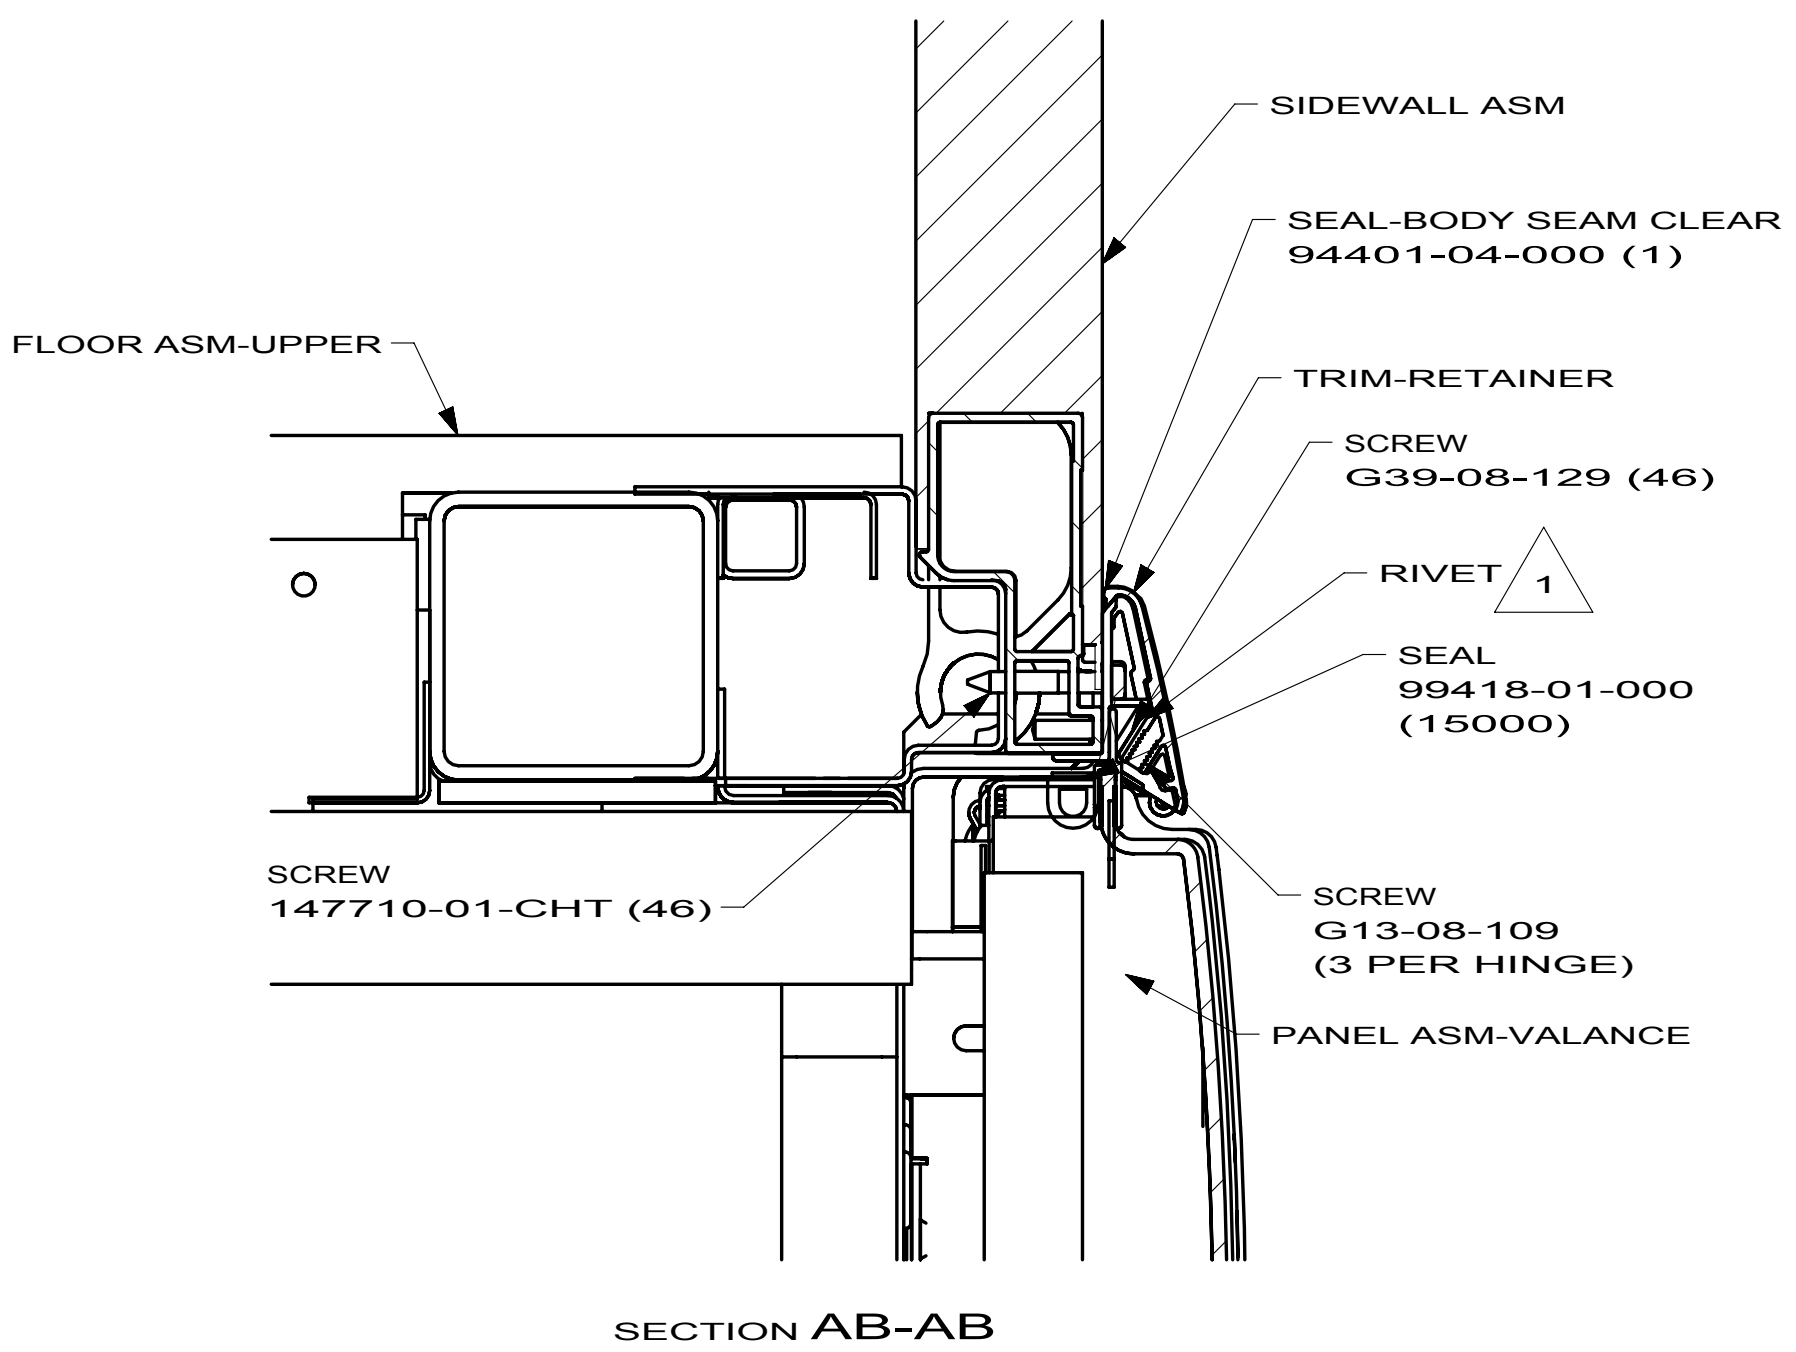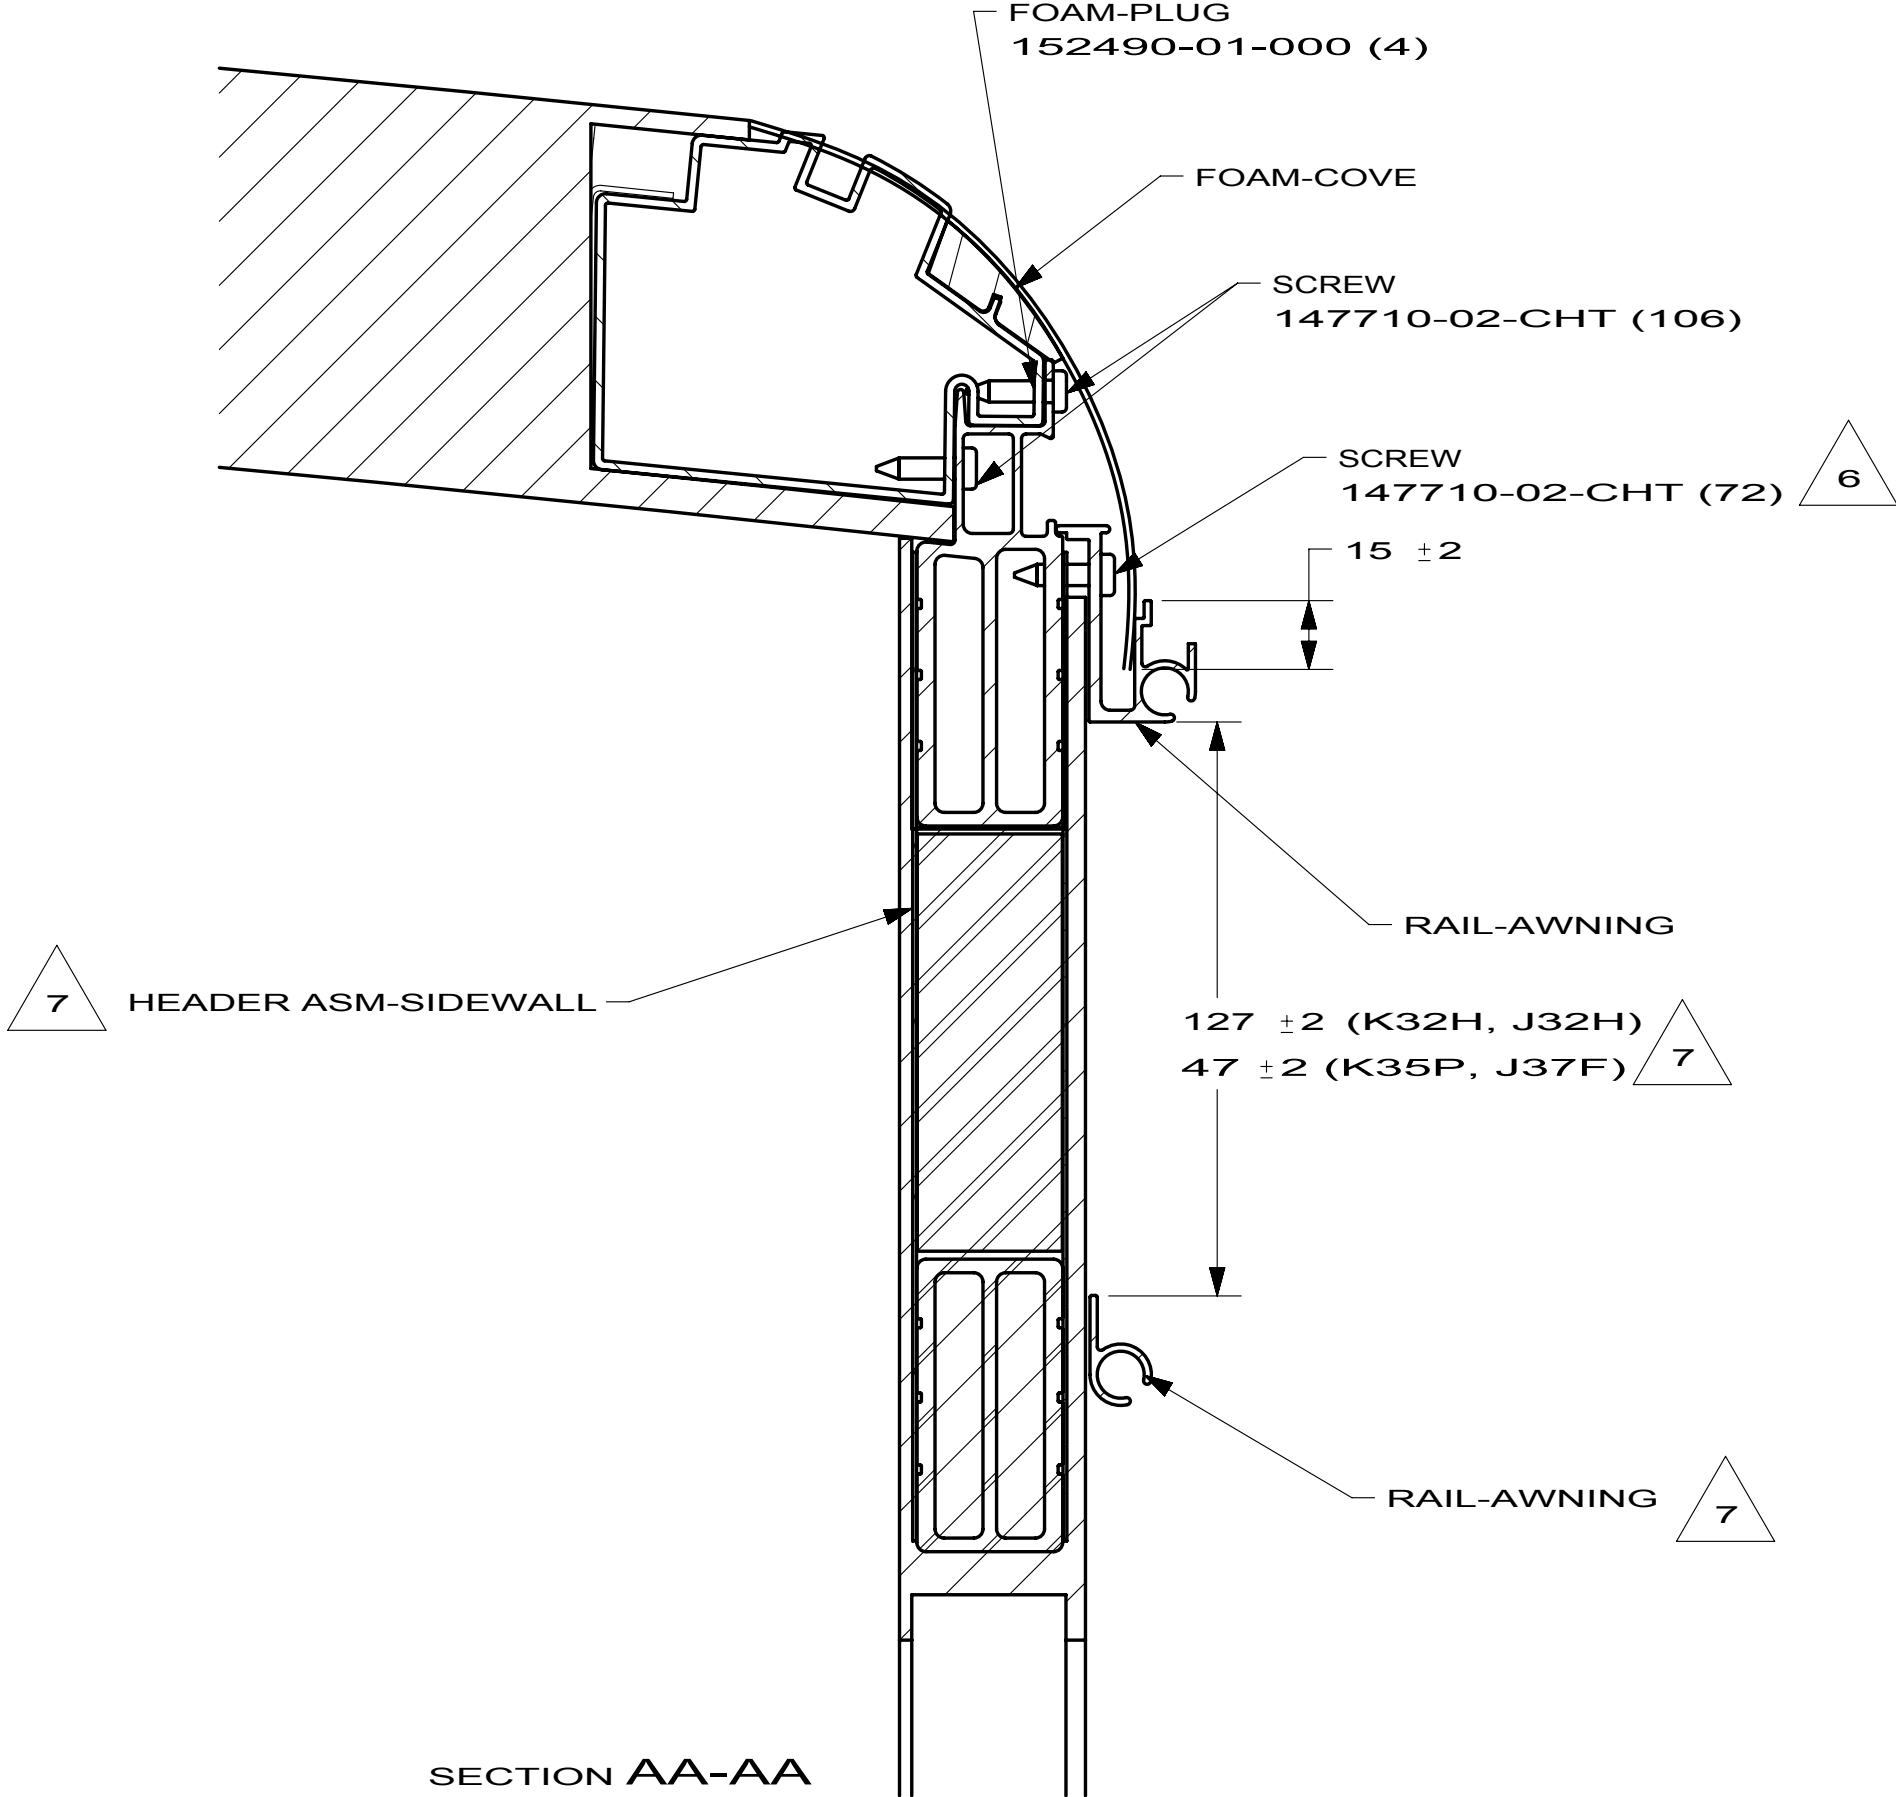

8. VIEW TYPICAL FOR ALL SIDE HINGE DOORS.
7. LEFT SIDEWALL ONLY.
6. SCREW MUST BE LOCATED WITHIN 50 mm OF RAIL-AWNING SPLICE. DRILL ADDITIONAL HOLES AND ADD SCREWS AS REQUIRED.
5. THIS IS A NOMINAL DIMENSION. ADJUST AS REQUIRED SUCH THAT DOORS LINE UP IN THE OPEN POSITION.
4. DIMENSIONS ARE FROM THE EDGE OF THE DOOR CUTOUT AND THE TOP OF THE FEATURE STRIP TO THE UPPER HOLE OF THE LOWEST SET OF HOLES CLOSEST TO THE DOOR.
3. SEE ES0061 FOR CARPET ATTACHMENT AT BACKWALL.
2. USE VENDOR SUPPLIED SCREWS.
1. DRILL A 4.88-4.98 DIA HOLE USING THE HOLES LOCATED EITHER SIDE OF THE TOOLING HOLES AS A TEMPLATE. INSTALL RIVET 142980-01-CHT (46).


- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY
- 27G EXTERIOR GRAPHICS PACKAGE #1
- 24B EXT FULL BODY PAINT PKG #4
- 24C EXT FULL BODY PAINT PKG #3
- 92A EXT FULL BODY PAINT PKG #2
- 27A EXT FULL BODY PAINT PKG #1

Winnebago Industries		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTD	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHRR			
P.E.			
M.E.	FIRST USED		
DSNR		10J32H/10K32H	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: BODY INSTL-SECTIONS			
SHEET 1 of 4		PART NO 169434	REV
REF:		1	

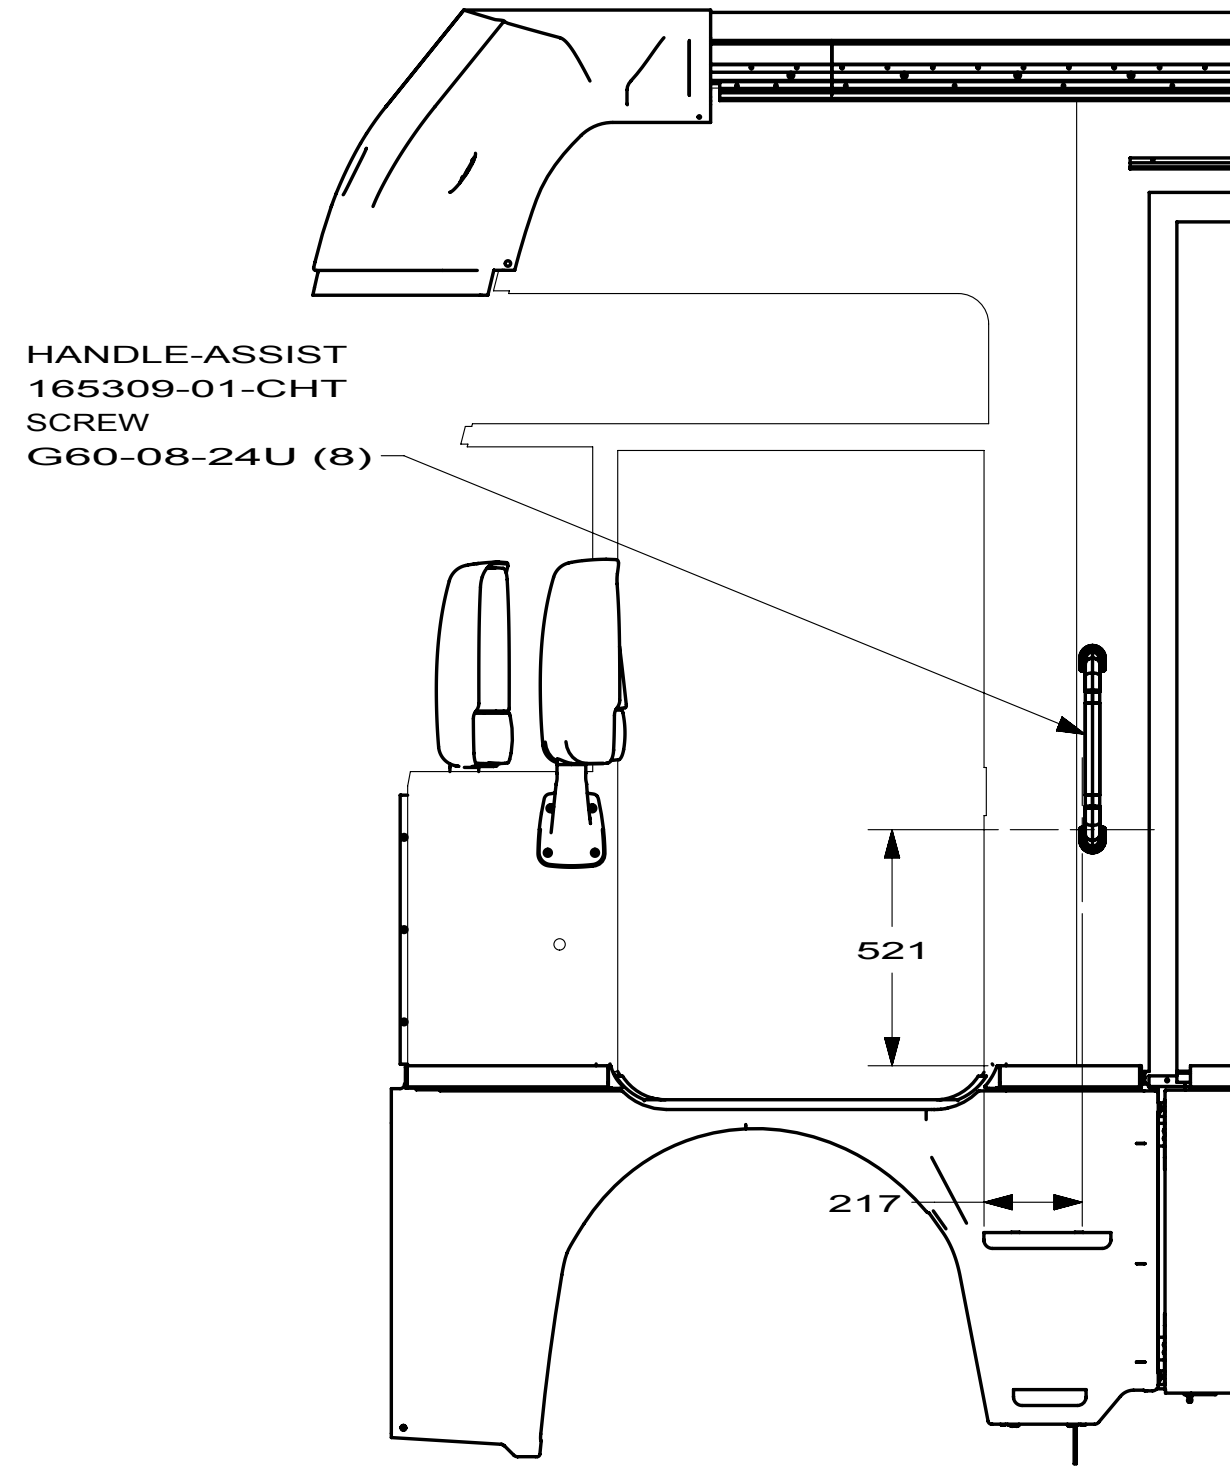


SECTION AH-AH 4

24B 24C 27A 92A

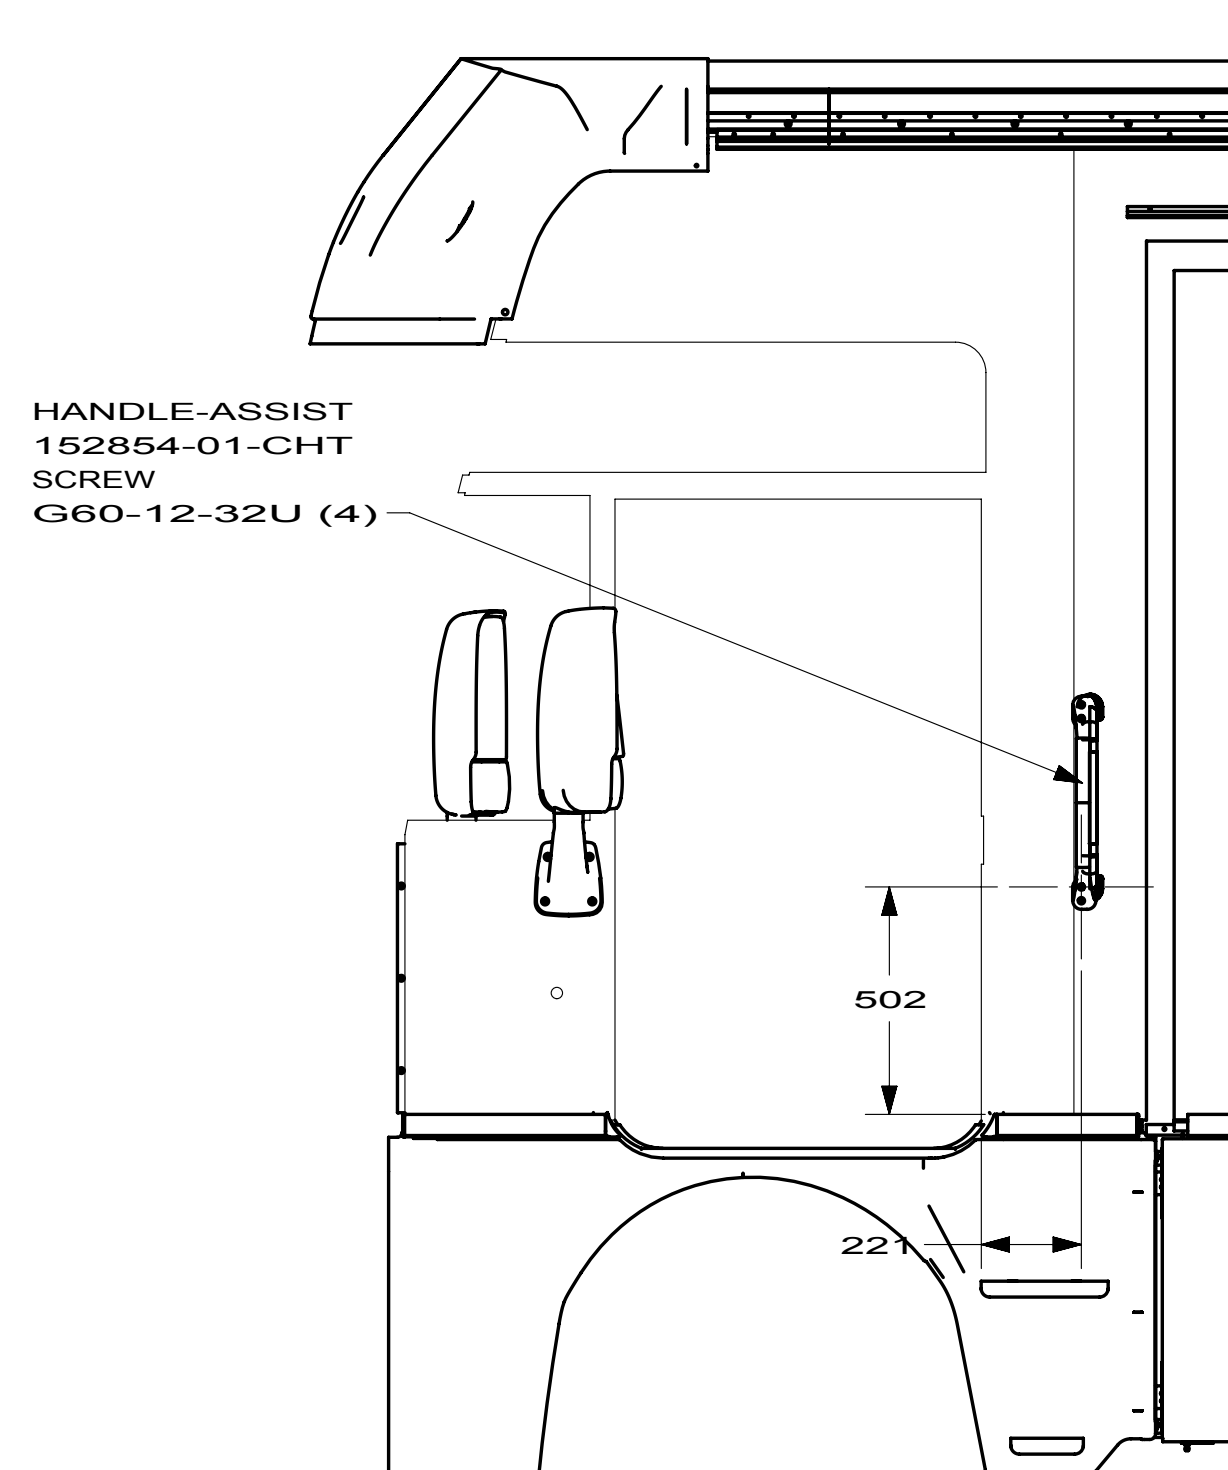


SECTION AH-AH 4


27G

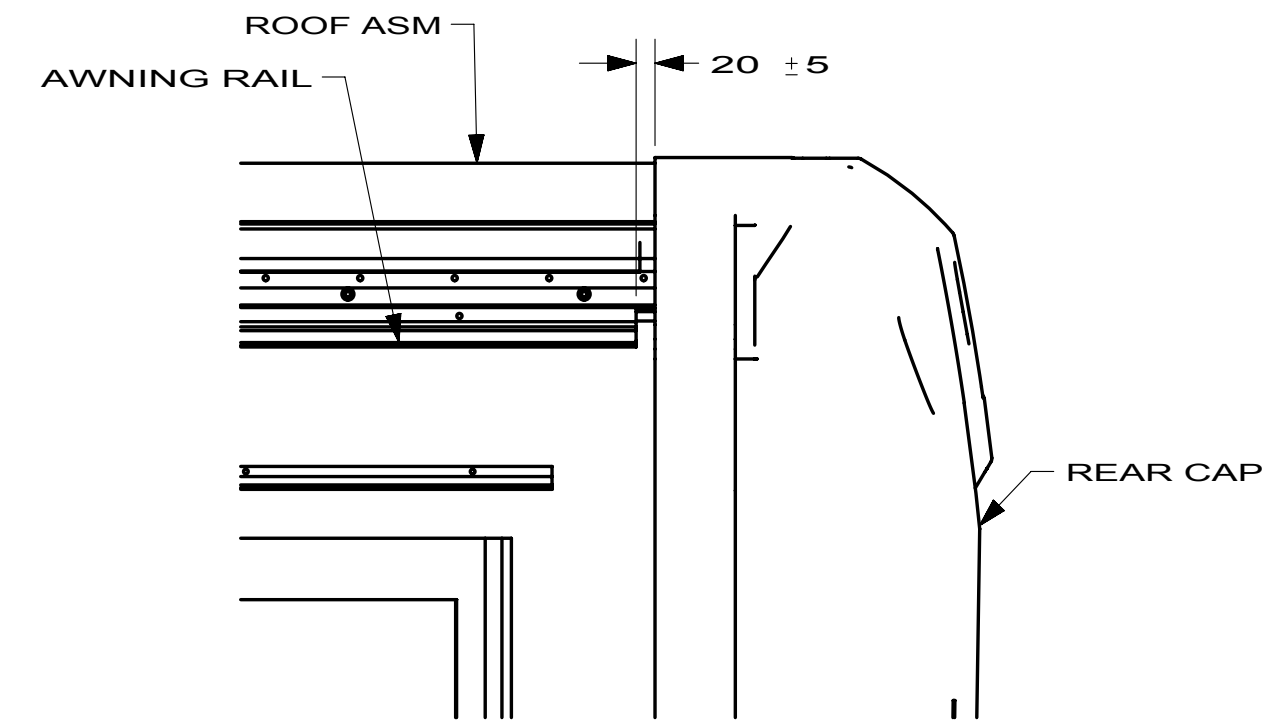

VIEW AJ-AJ

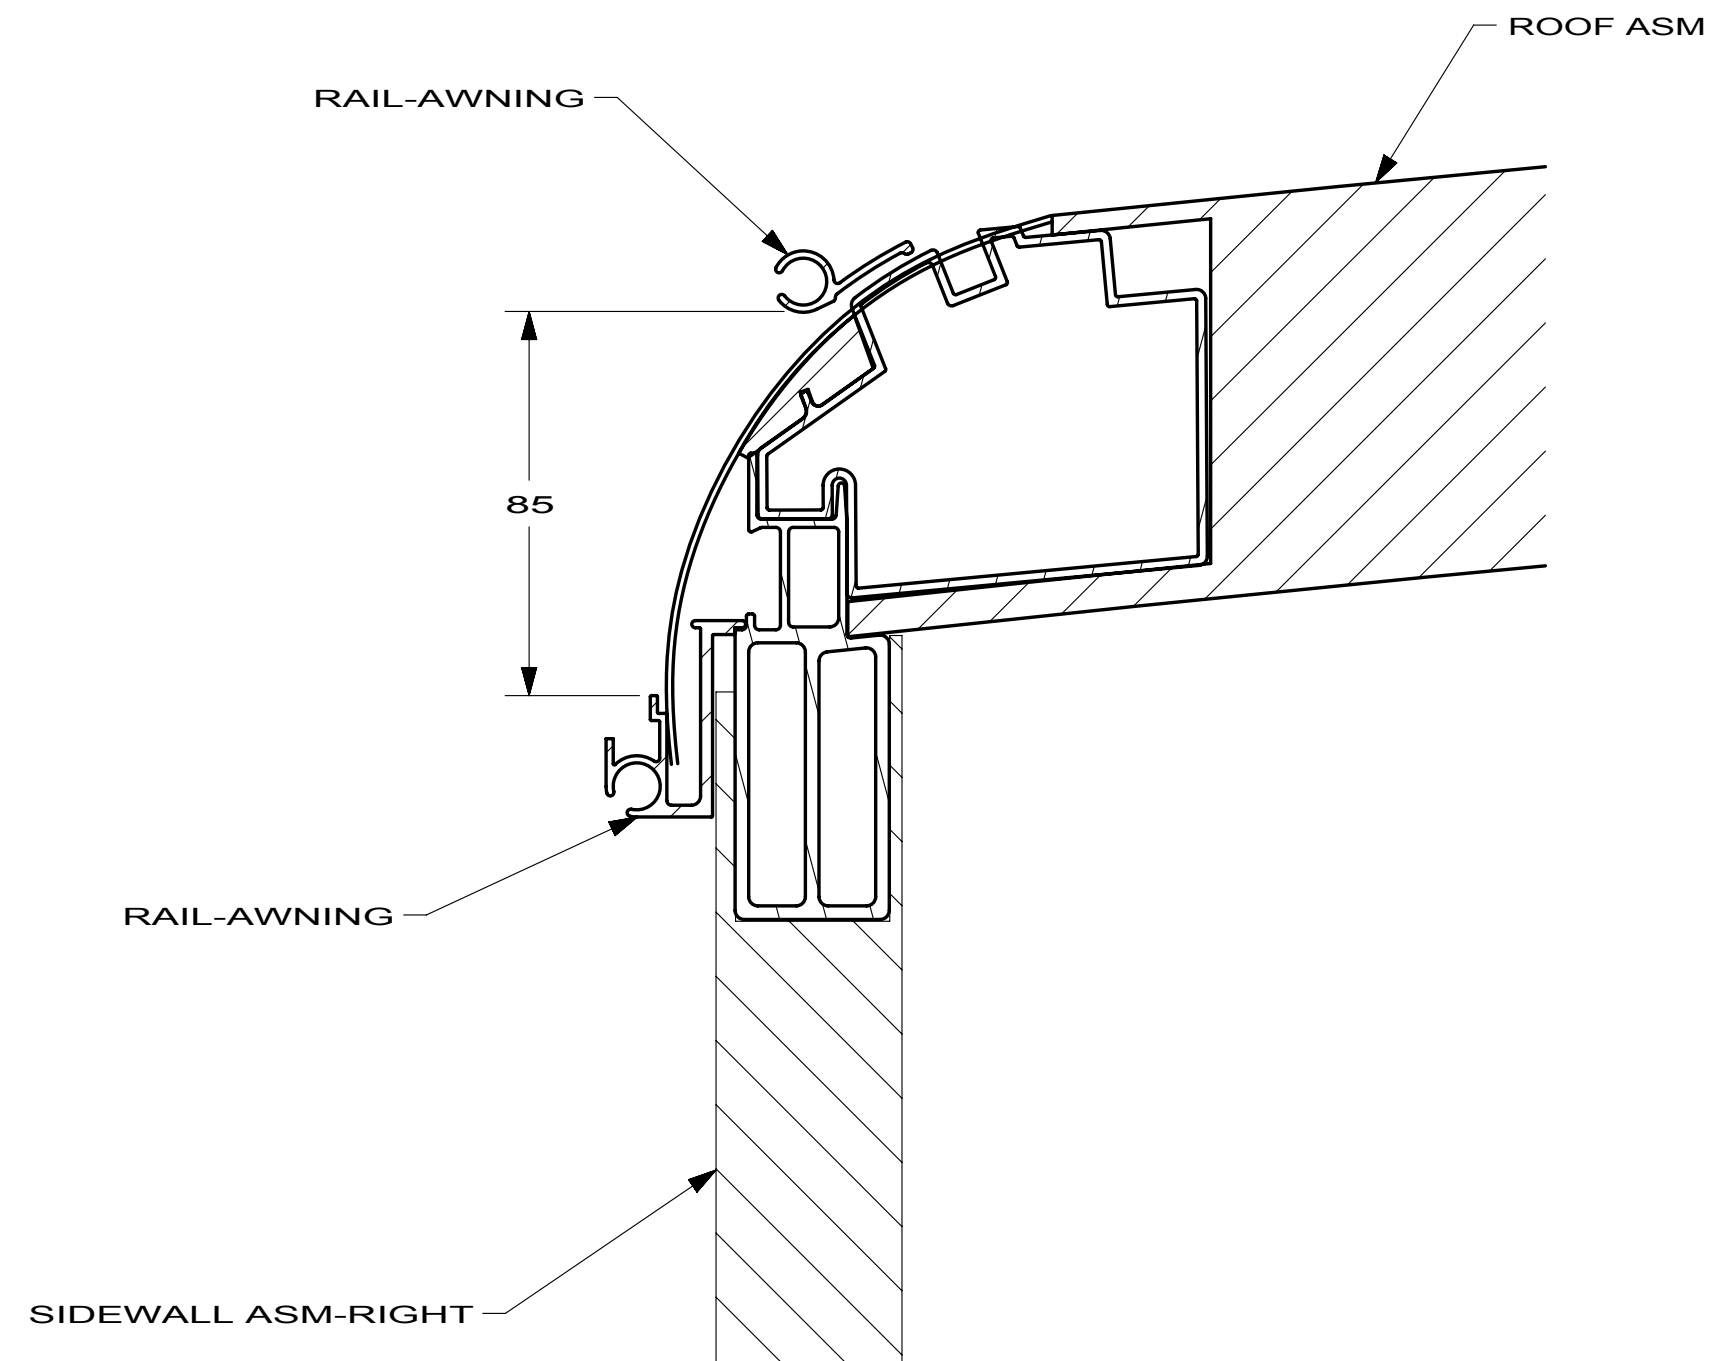


SECTION AL-AL

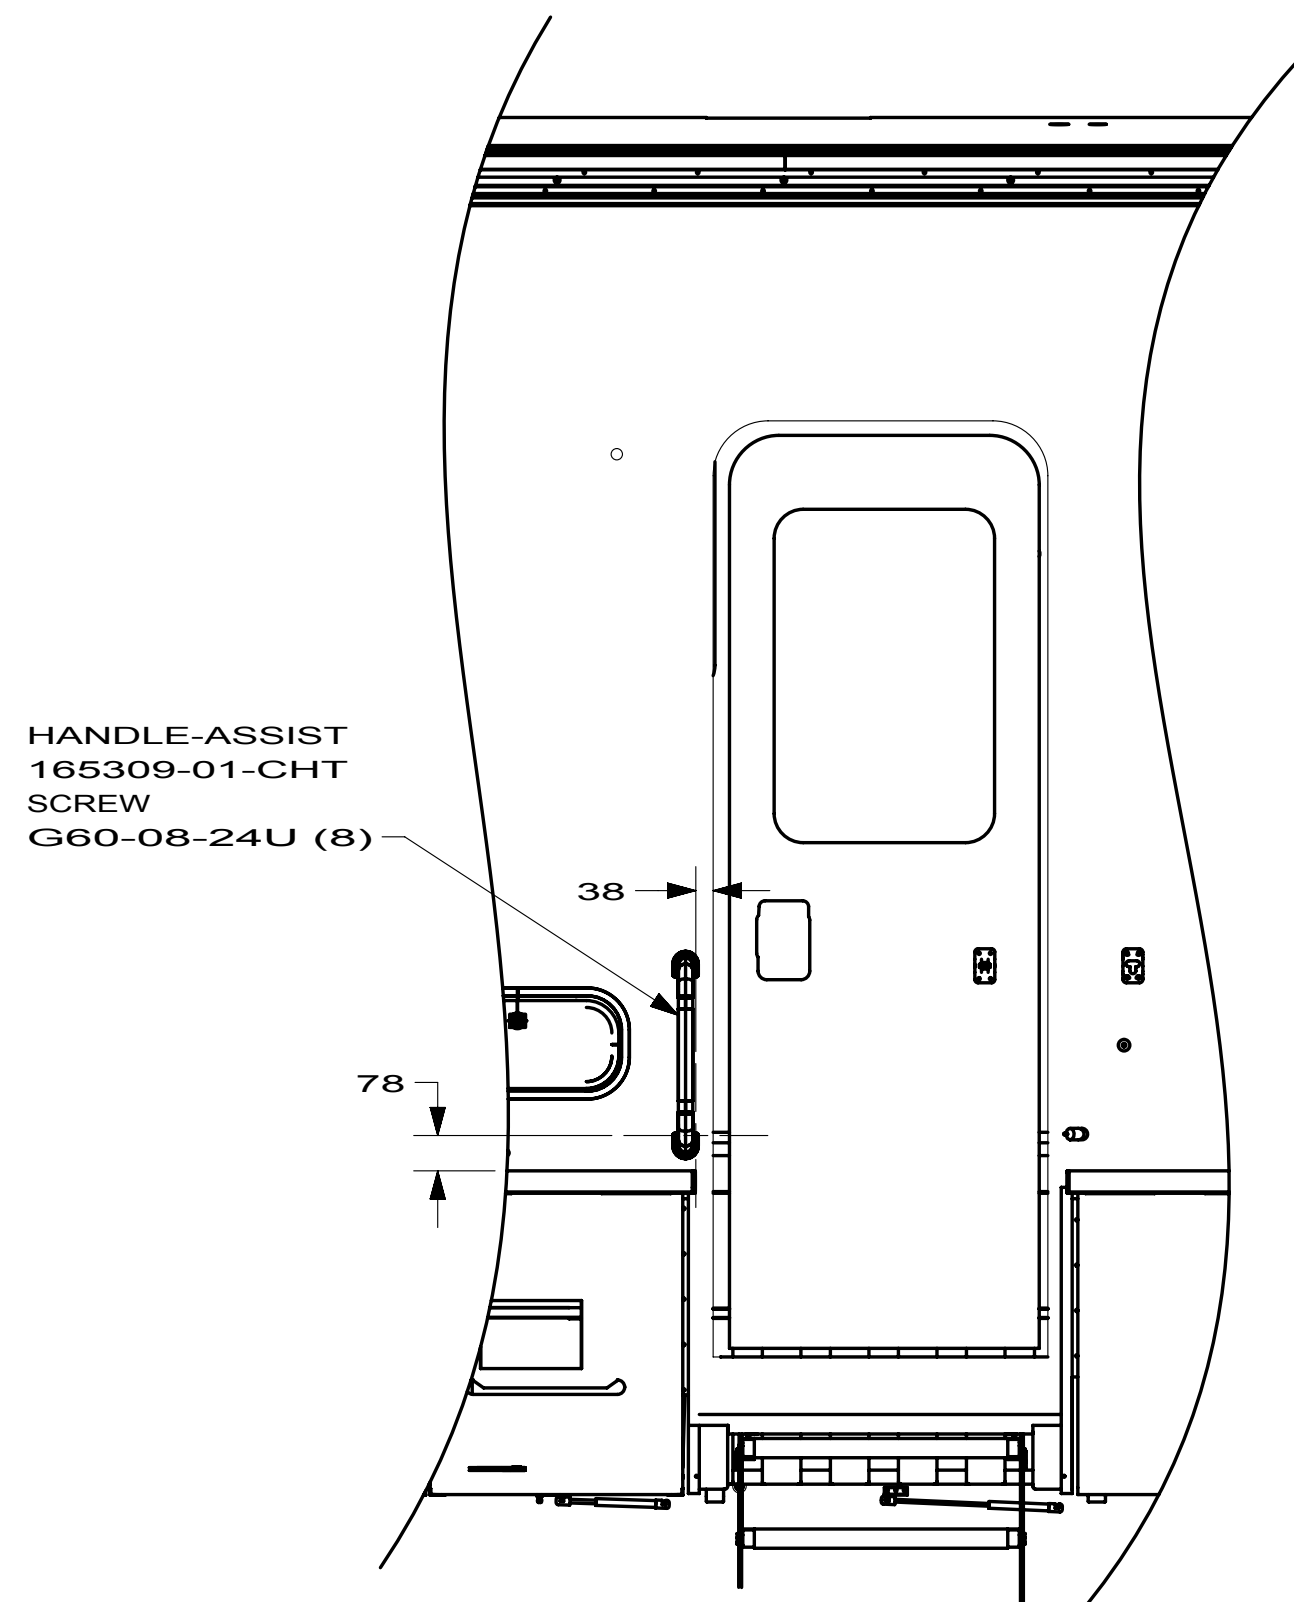

VIEW AK-AK 4

WIN ITA 24B 24C 27A 92A




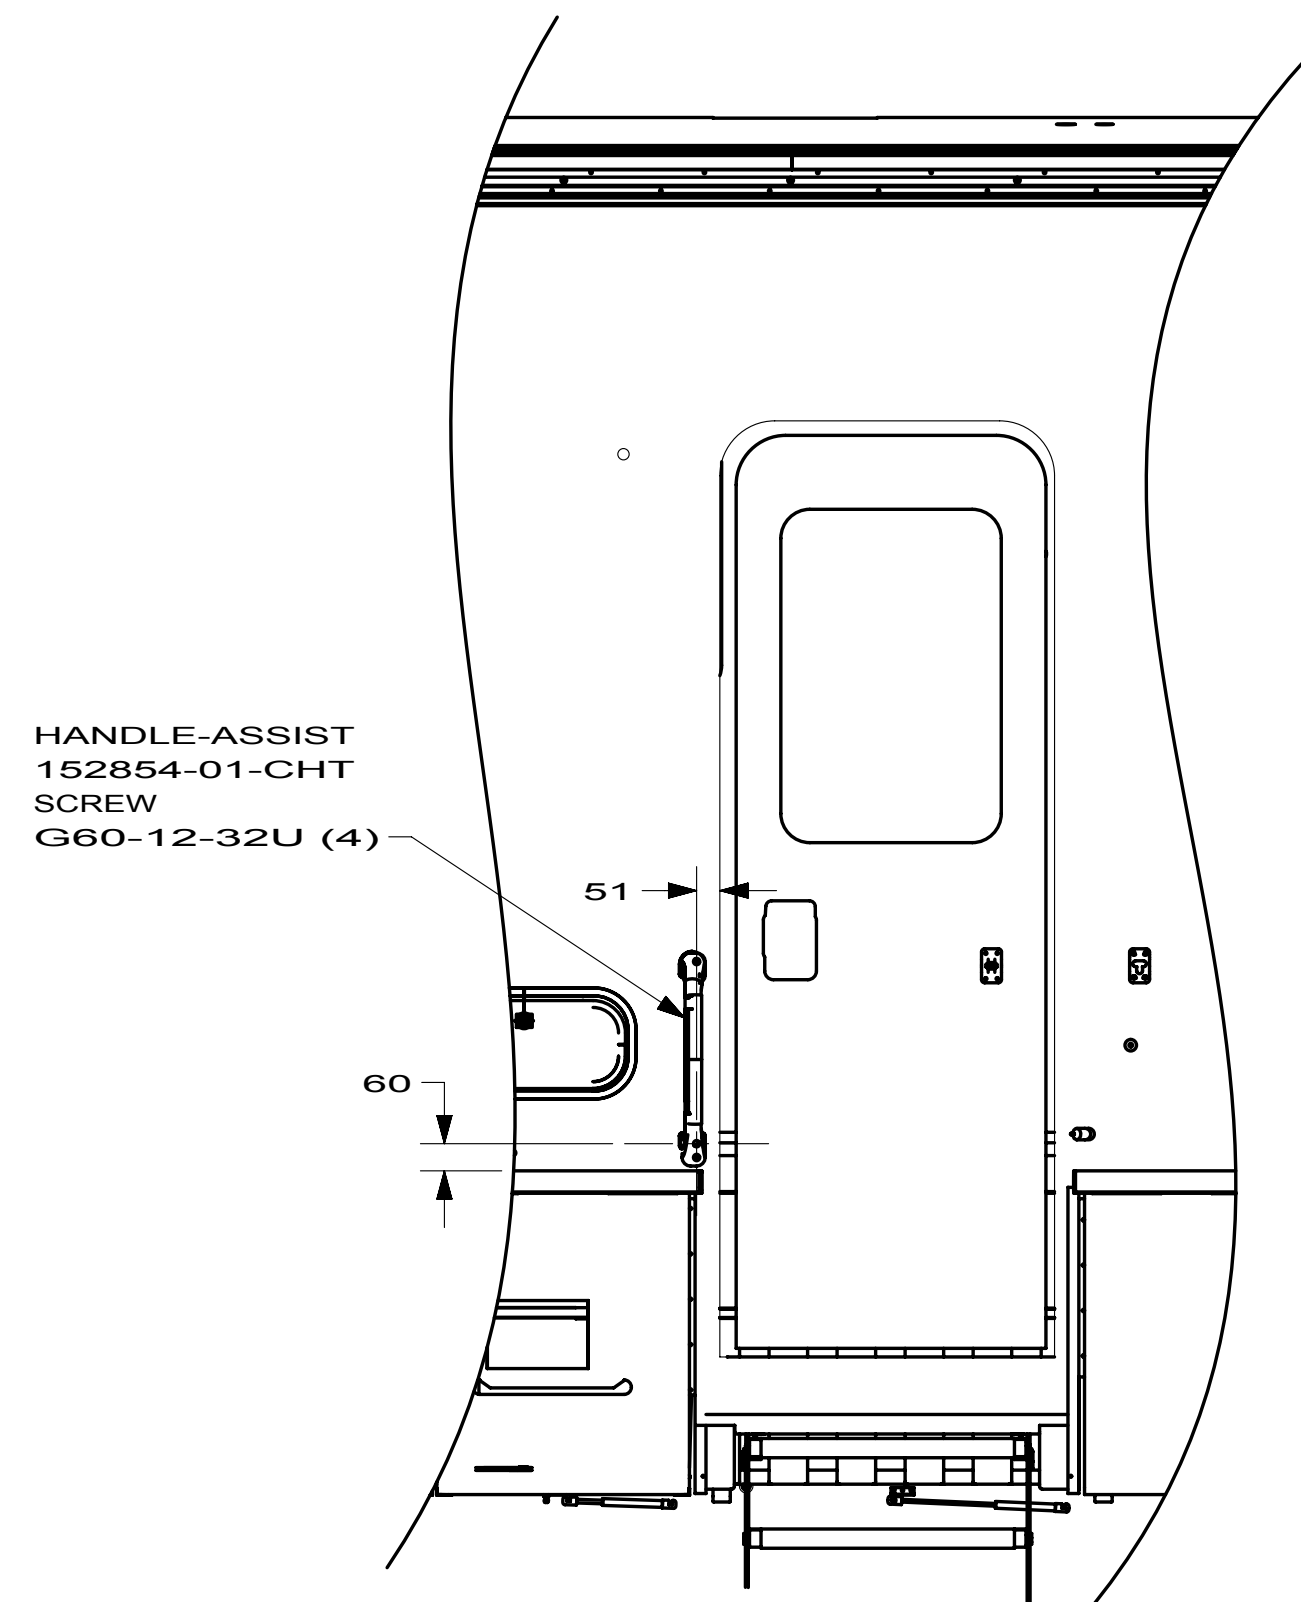


VIEW AK-AK 4


WIN 27G

- 27G EXTERIOR GRAPHICS PACKAGE #1
- 92A EXT FULL BODY PAINT PKG # 2
- 27A EXT FULL BODY PAINT PKG #1
- 24C EXT FULL BODY PAINT PKG # 3
- 24B EXT FULL BODY PAINT PKG #4
- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY


FIRST USED		
10J32H/10K32H		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 2	PART NO	REV
	169434	

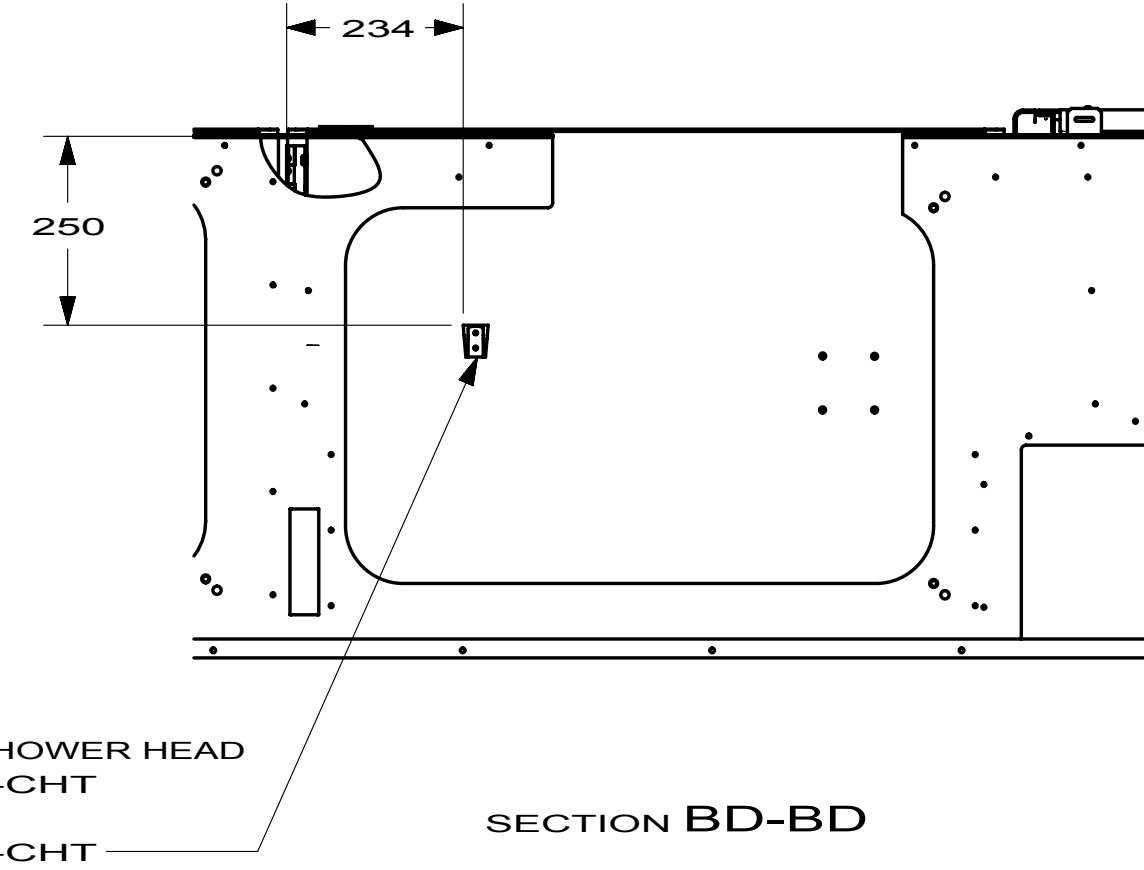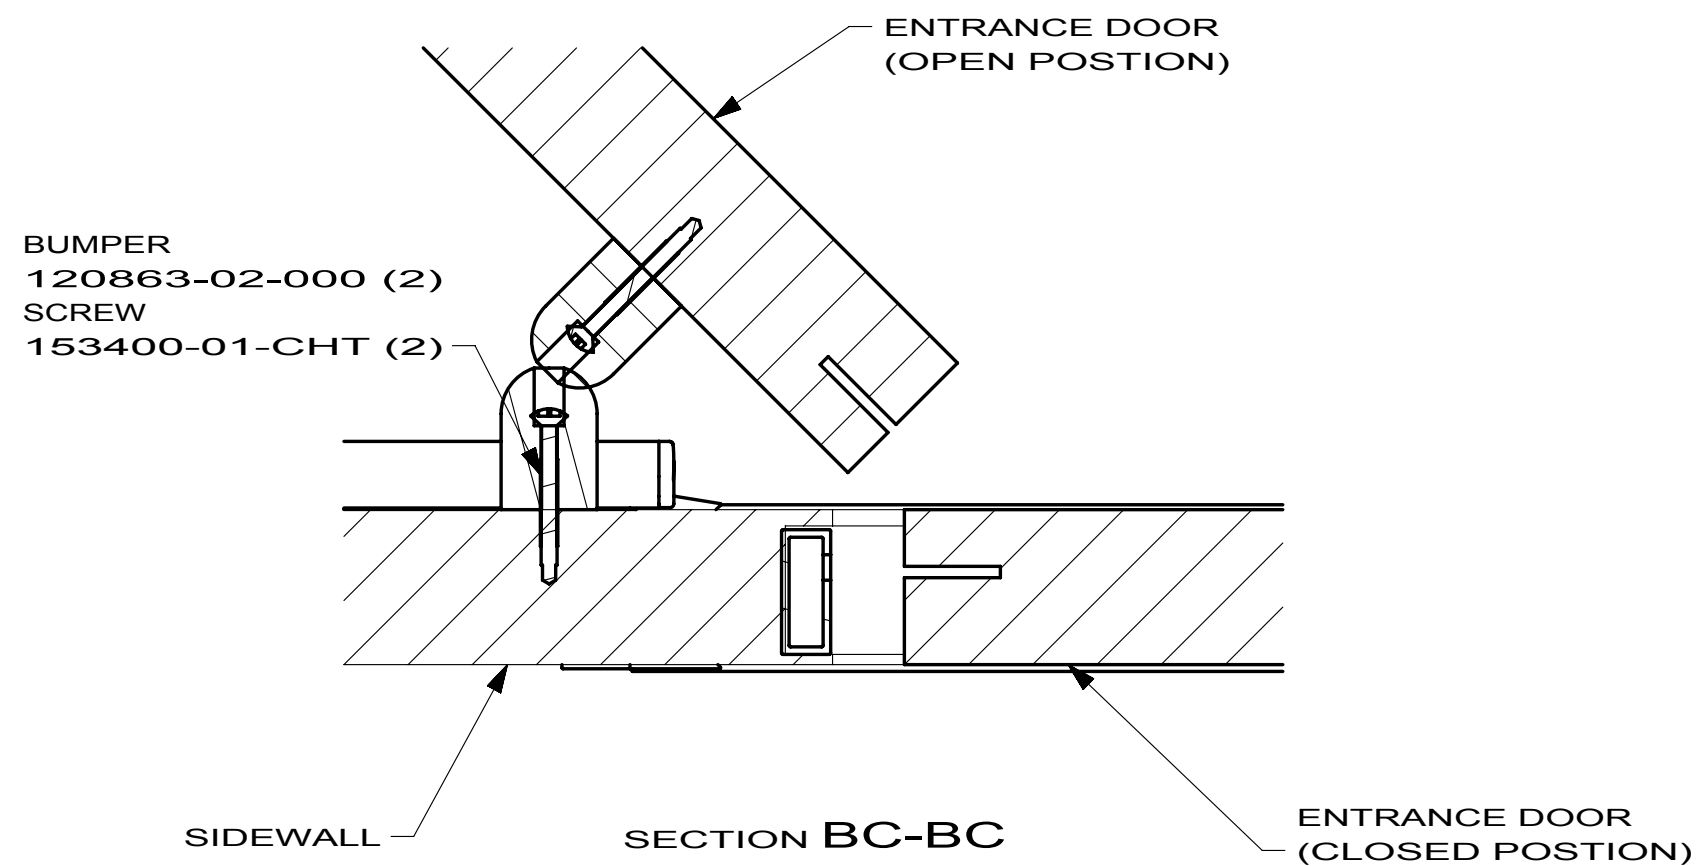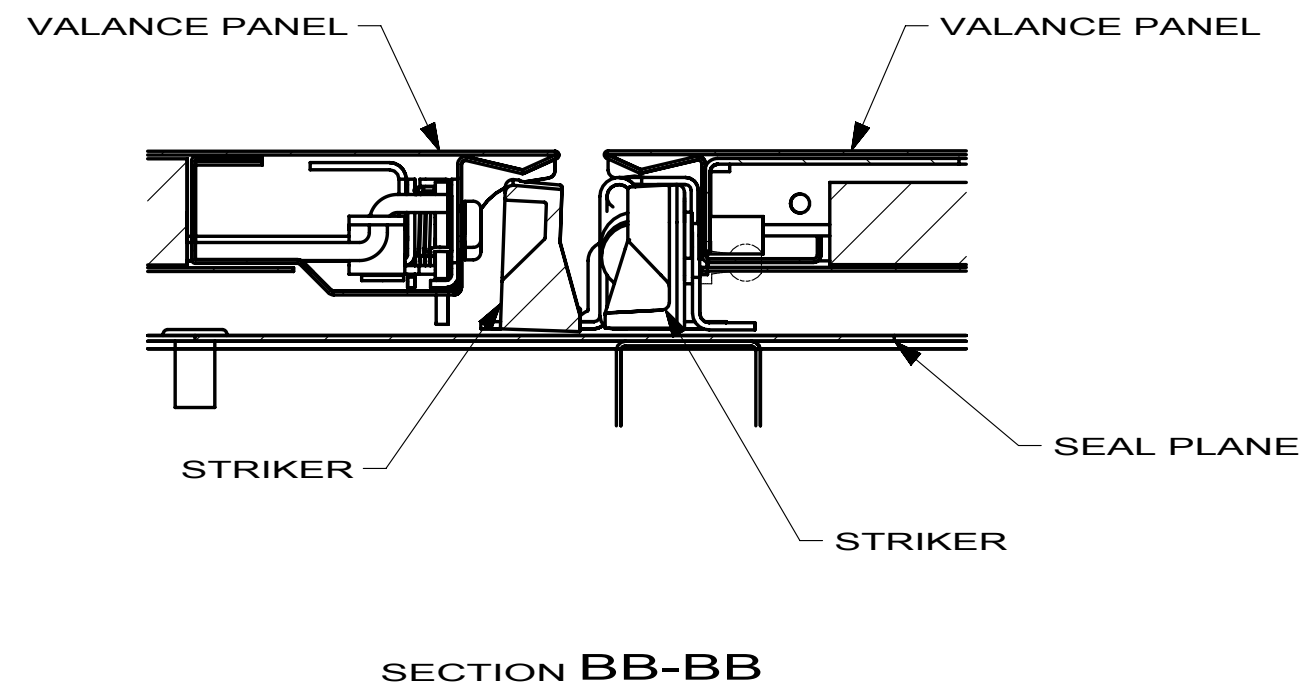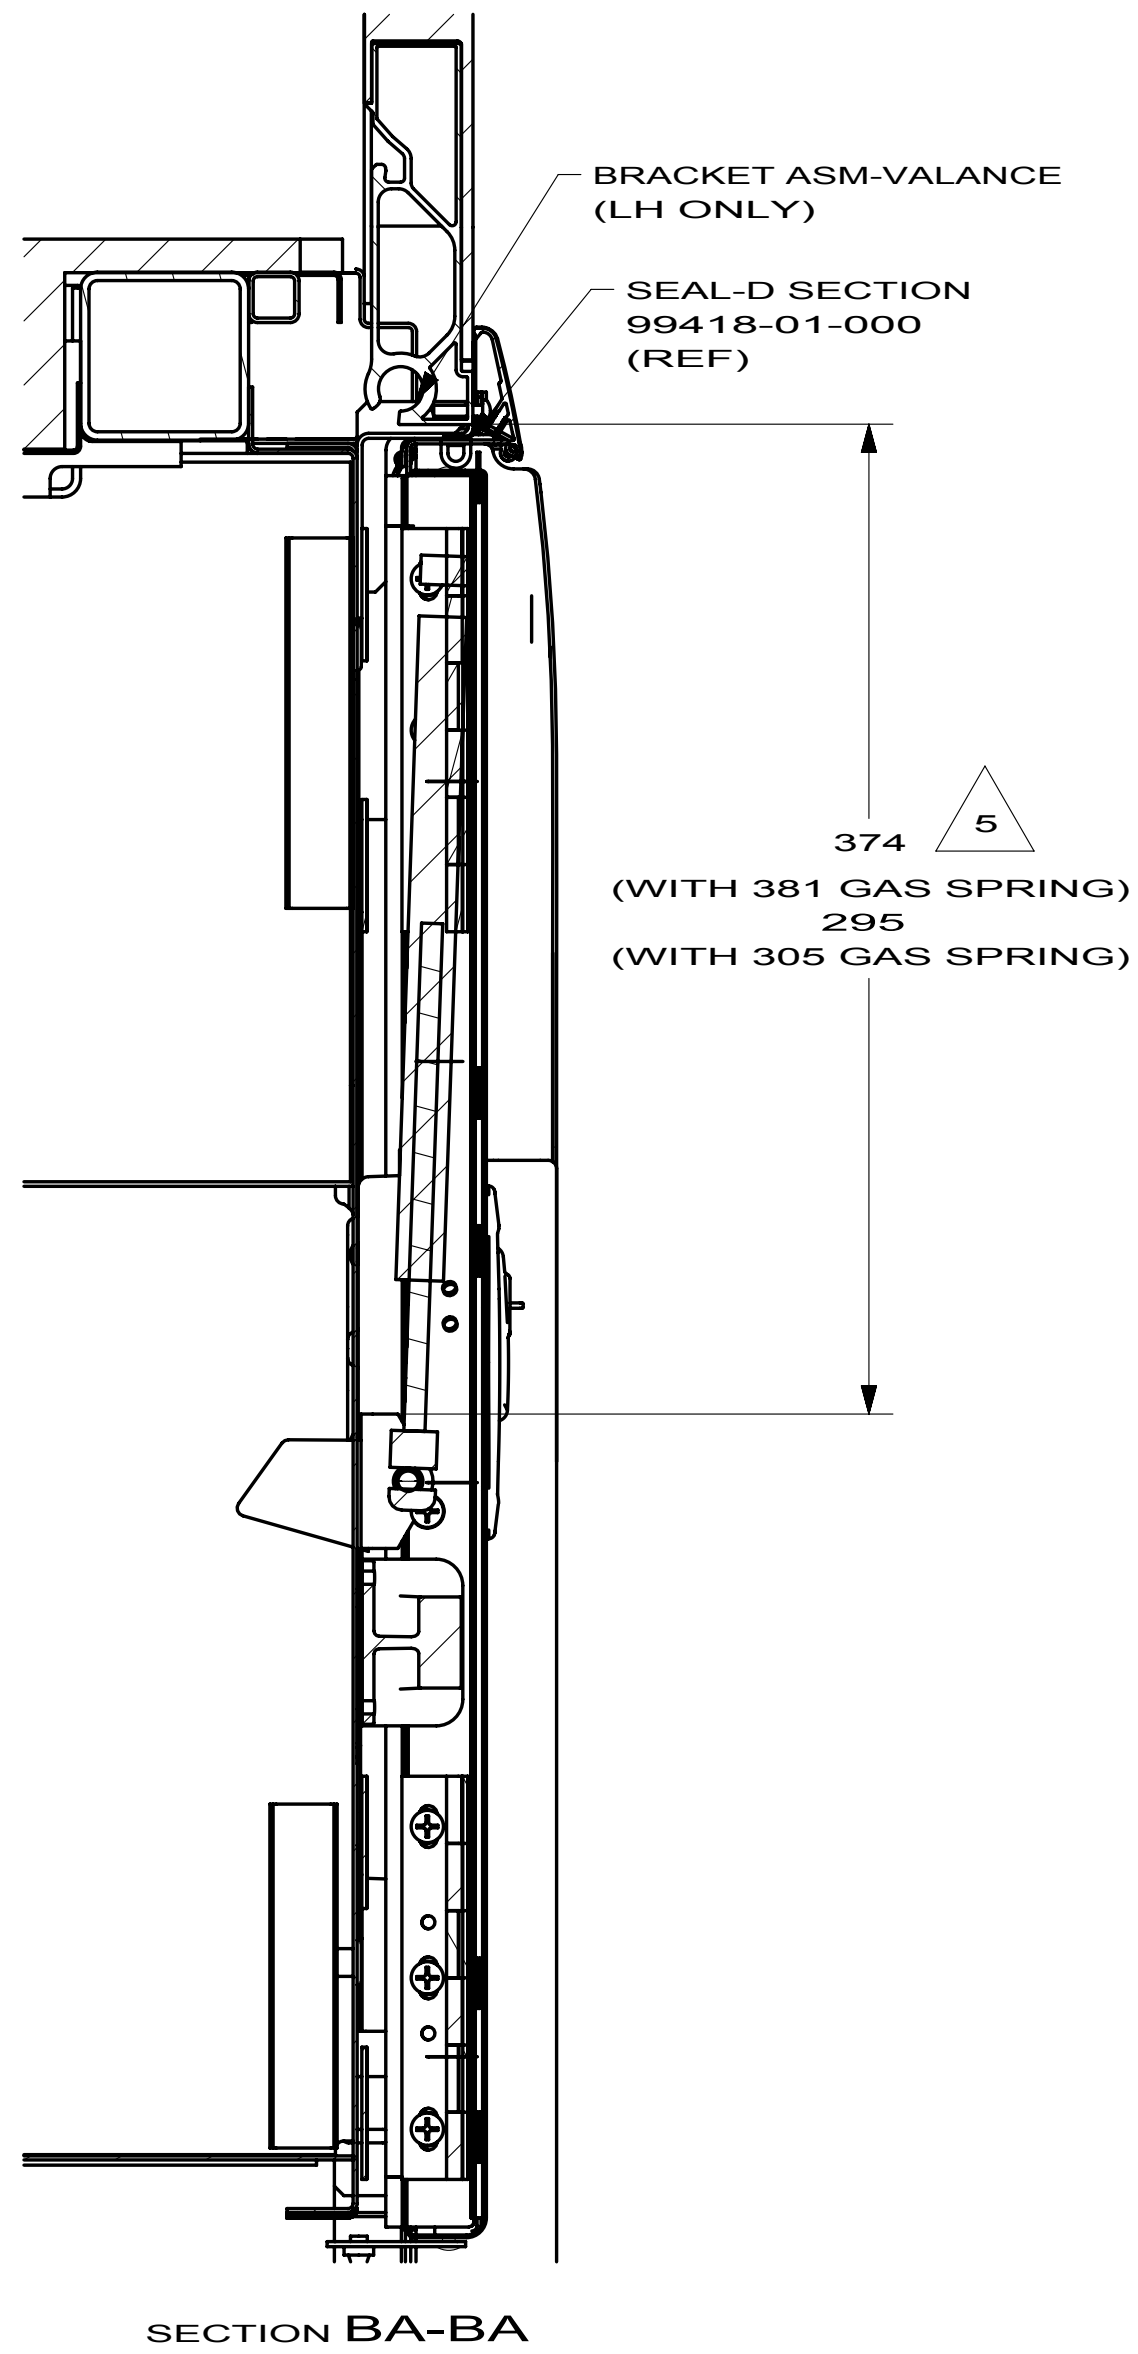


FIRST USED		
10J32H/10K32H		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 3	PART NO 169434	REV

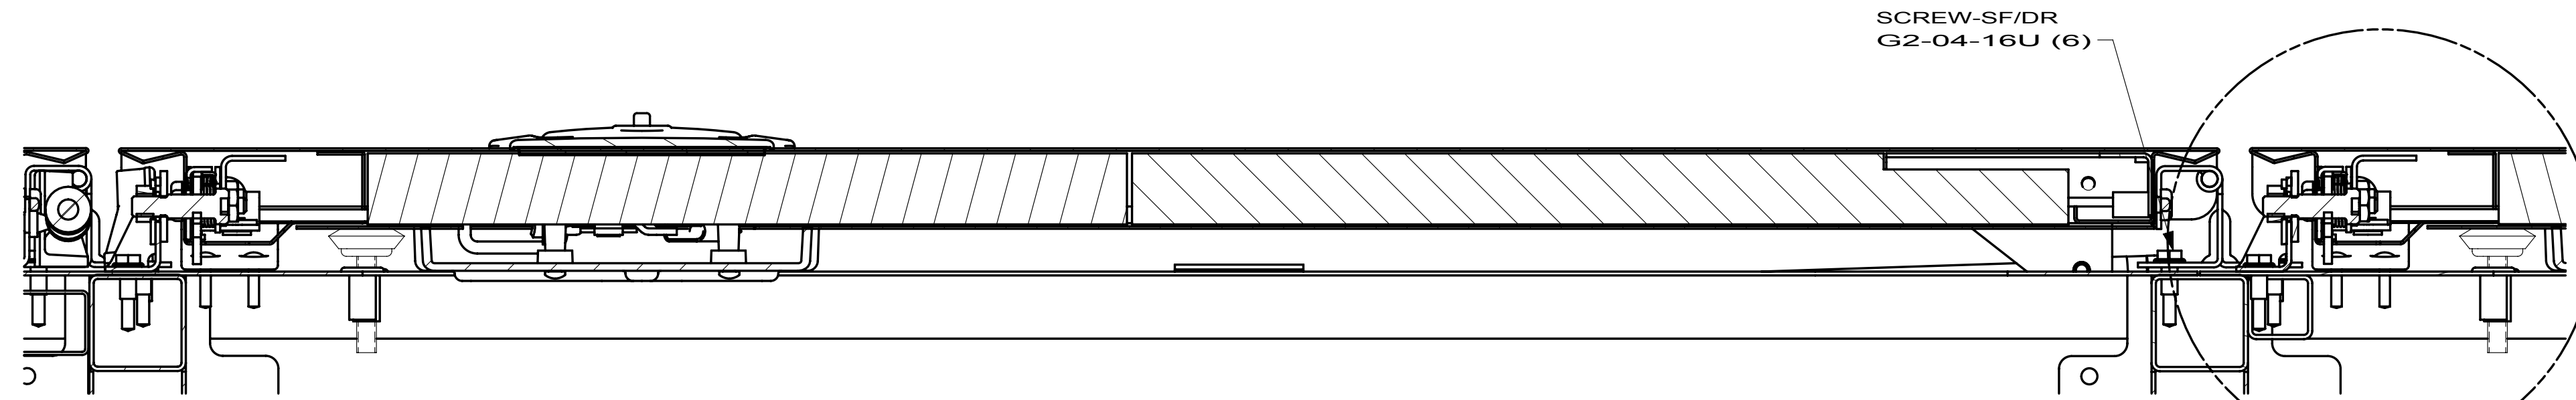


SECTION BG-BG 8

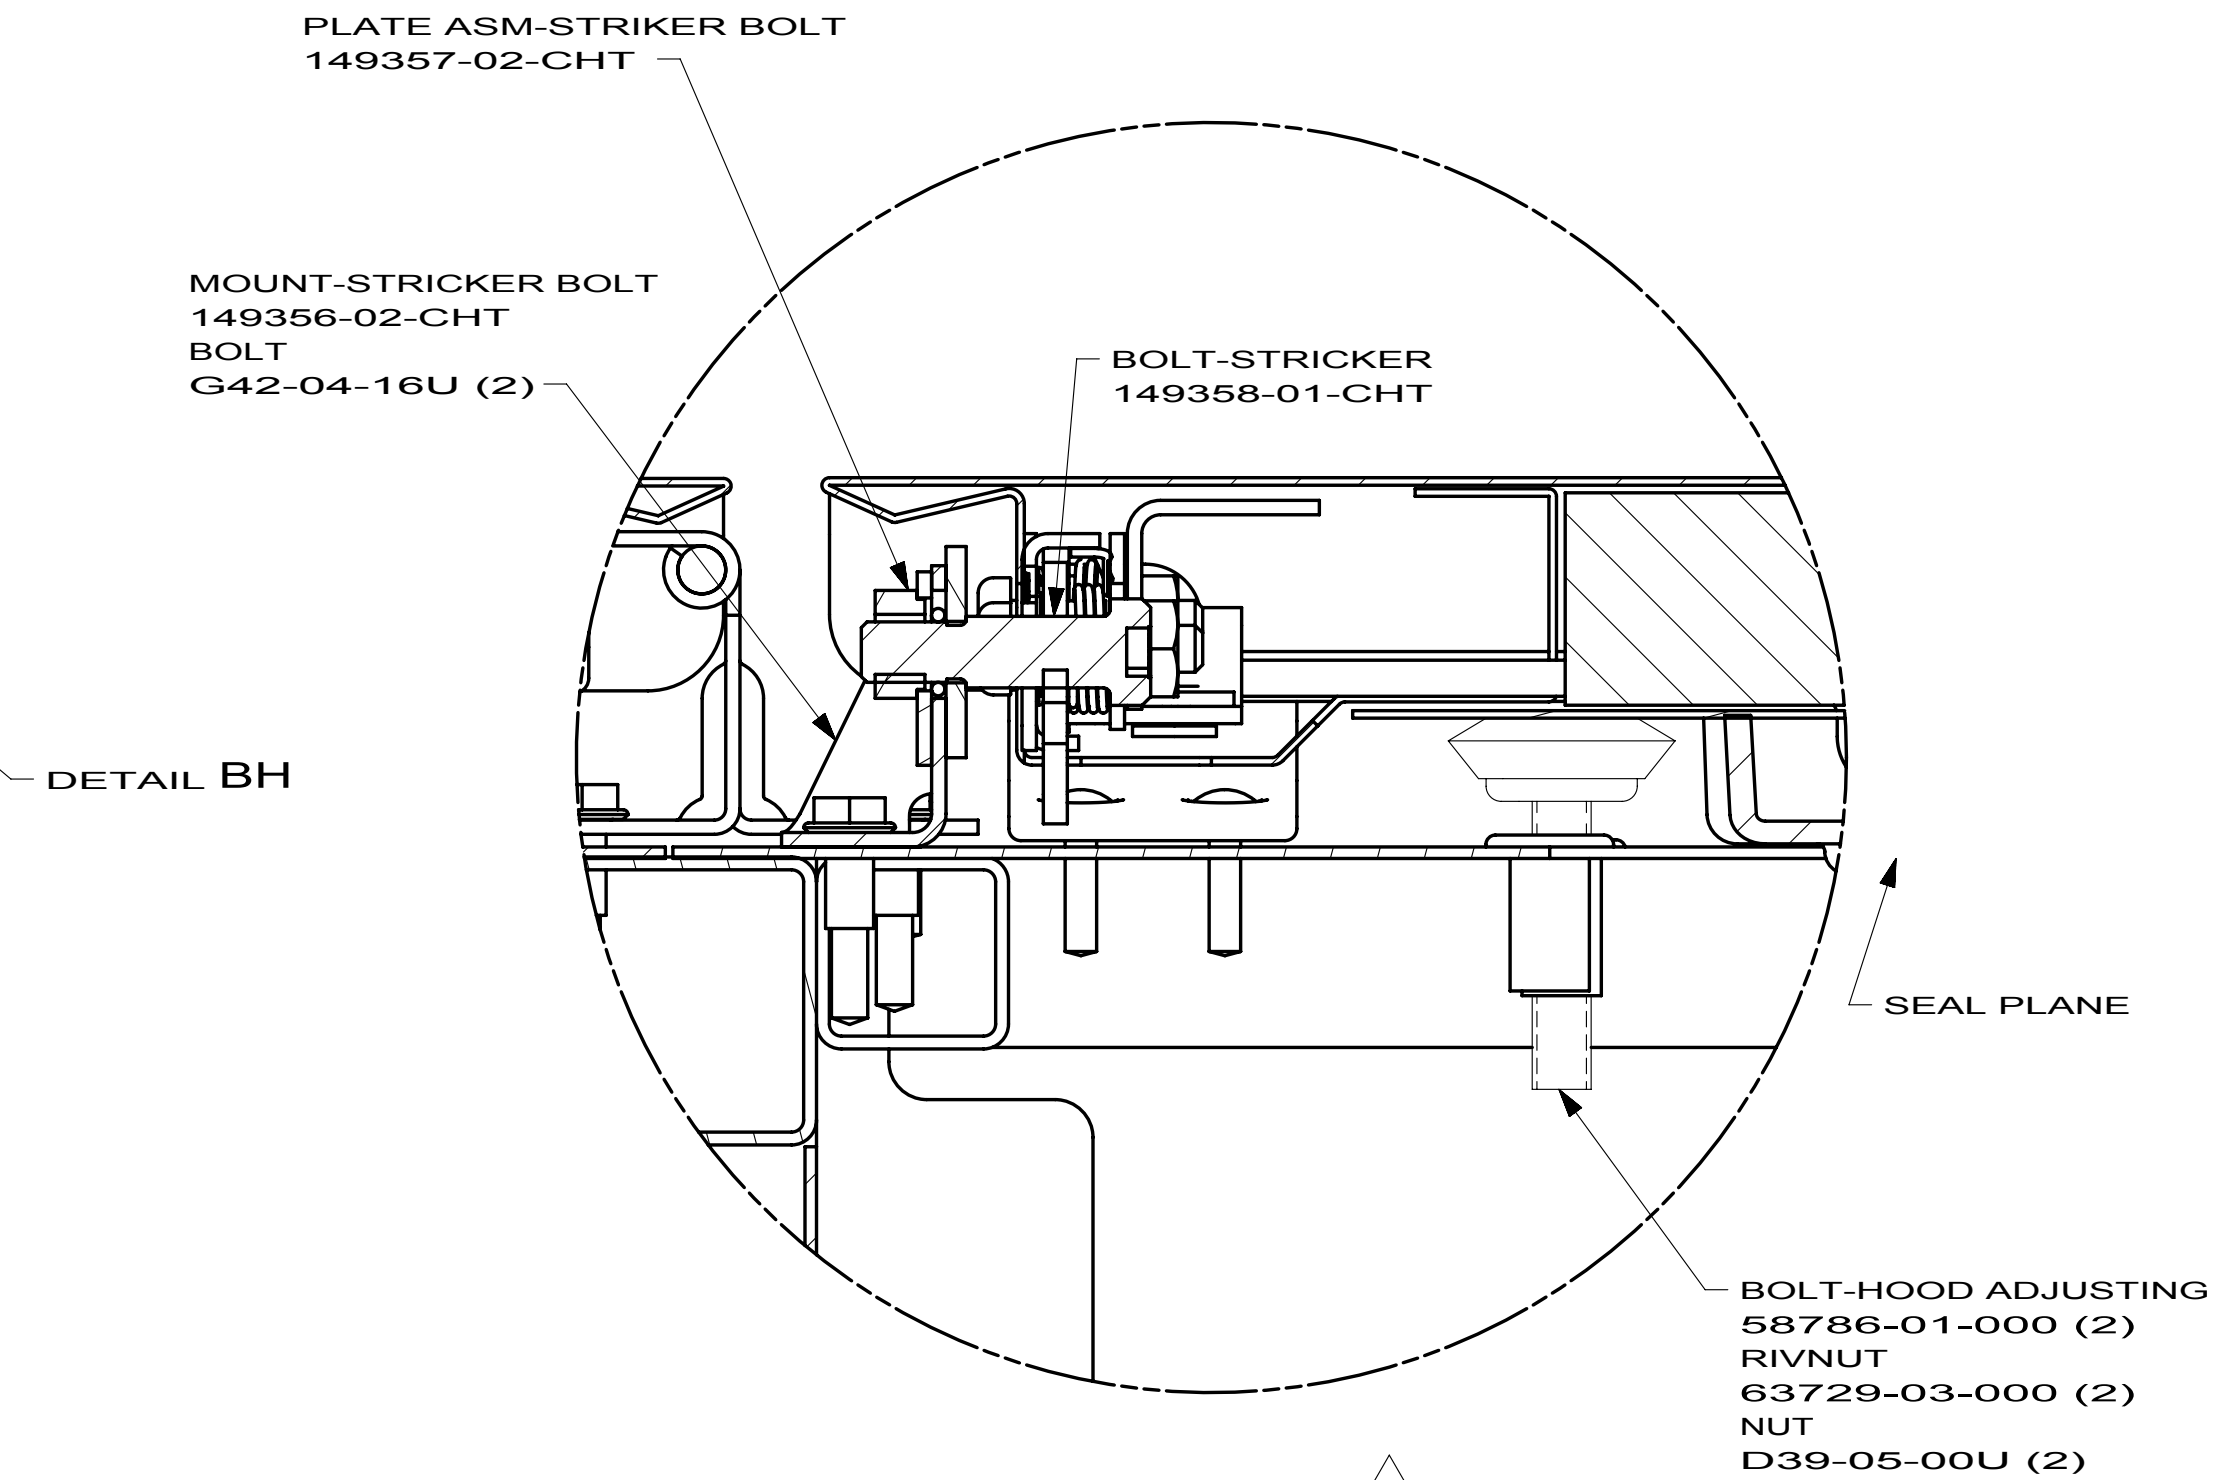

DETAIL BH 8

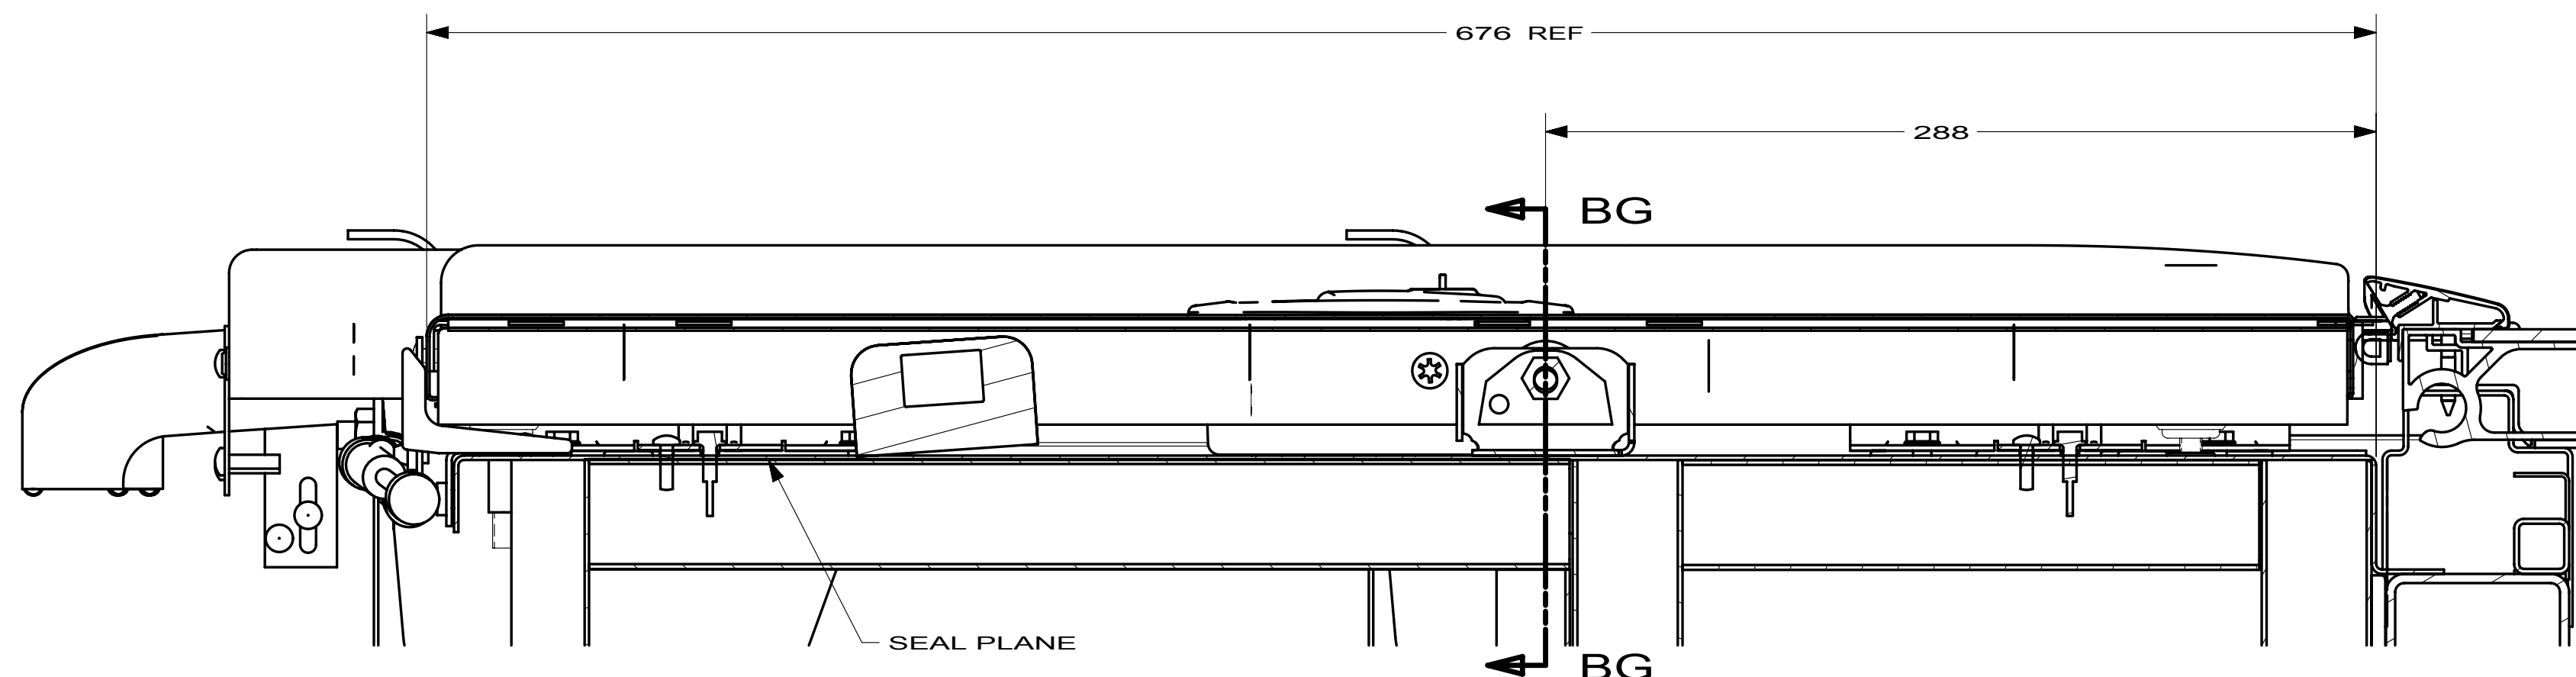


SECTION BF-BF 8



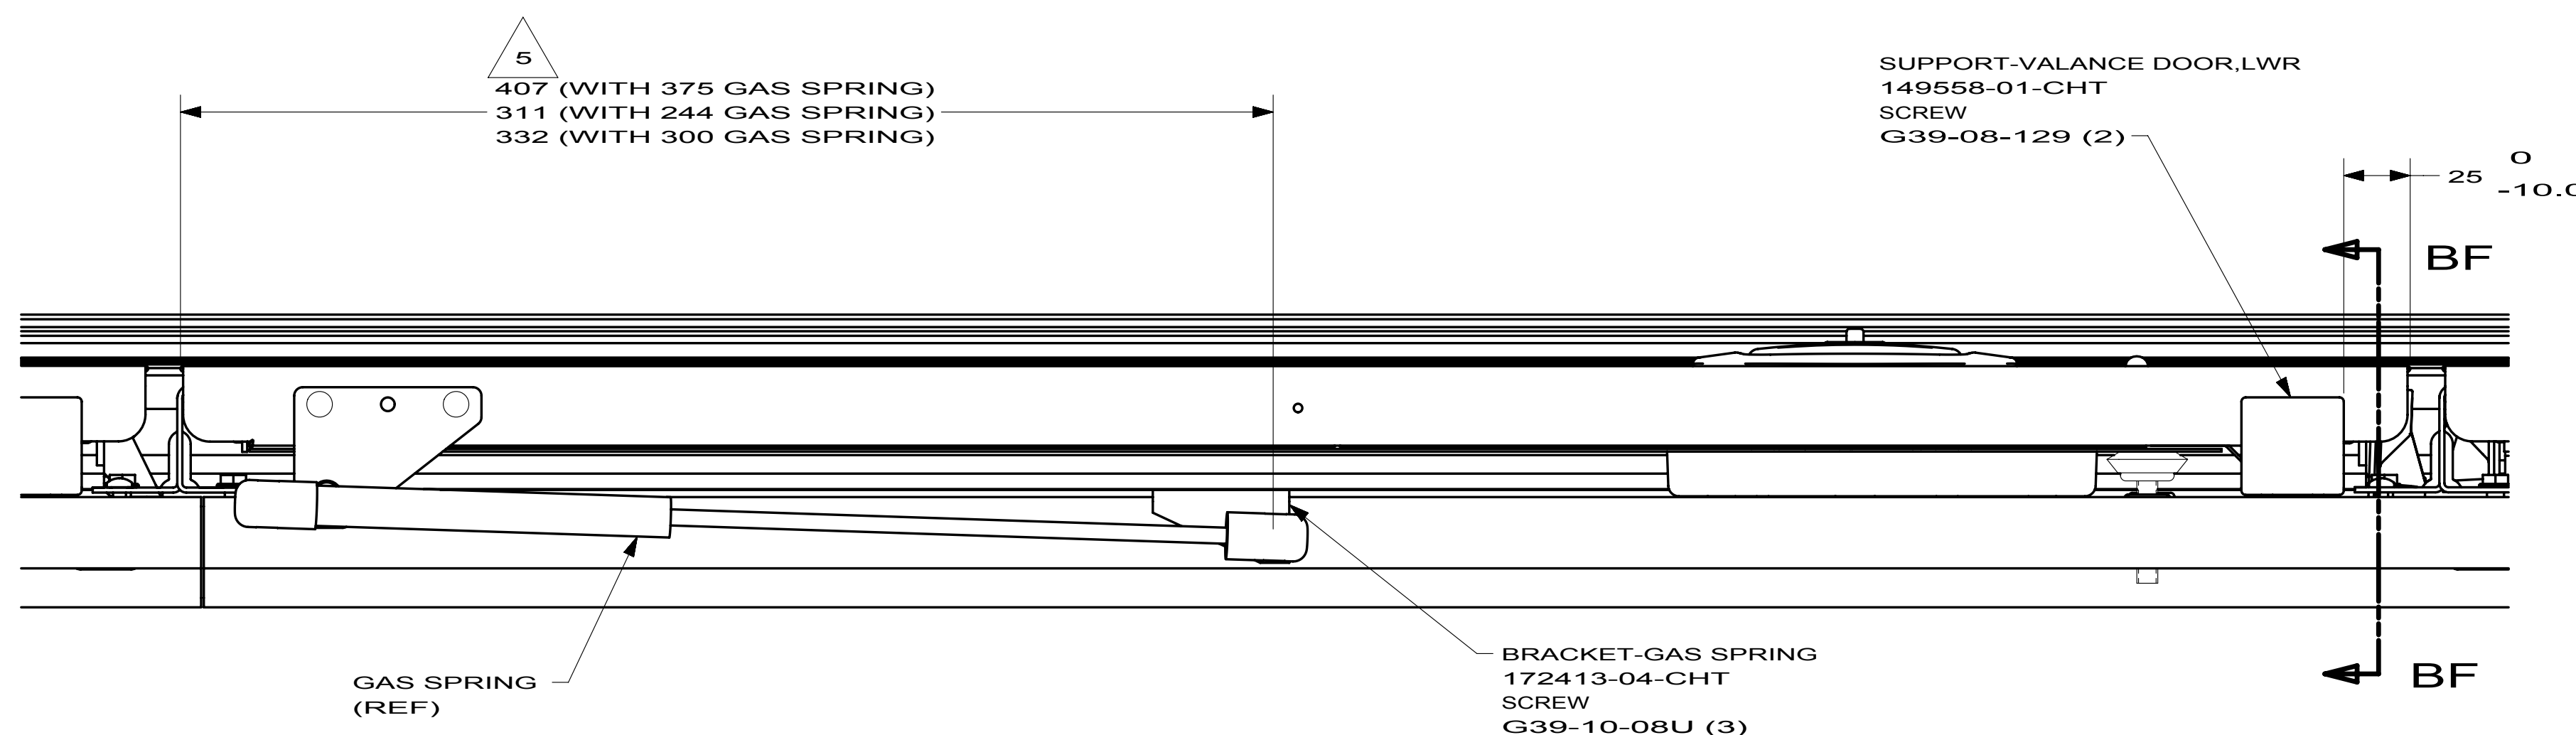


SECTION BE-BE 8

FIRST USED		
10J32H/10K32H		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-SECTIONS		
SHEET 4	PART NO 169434	REV

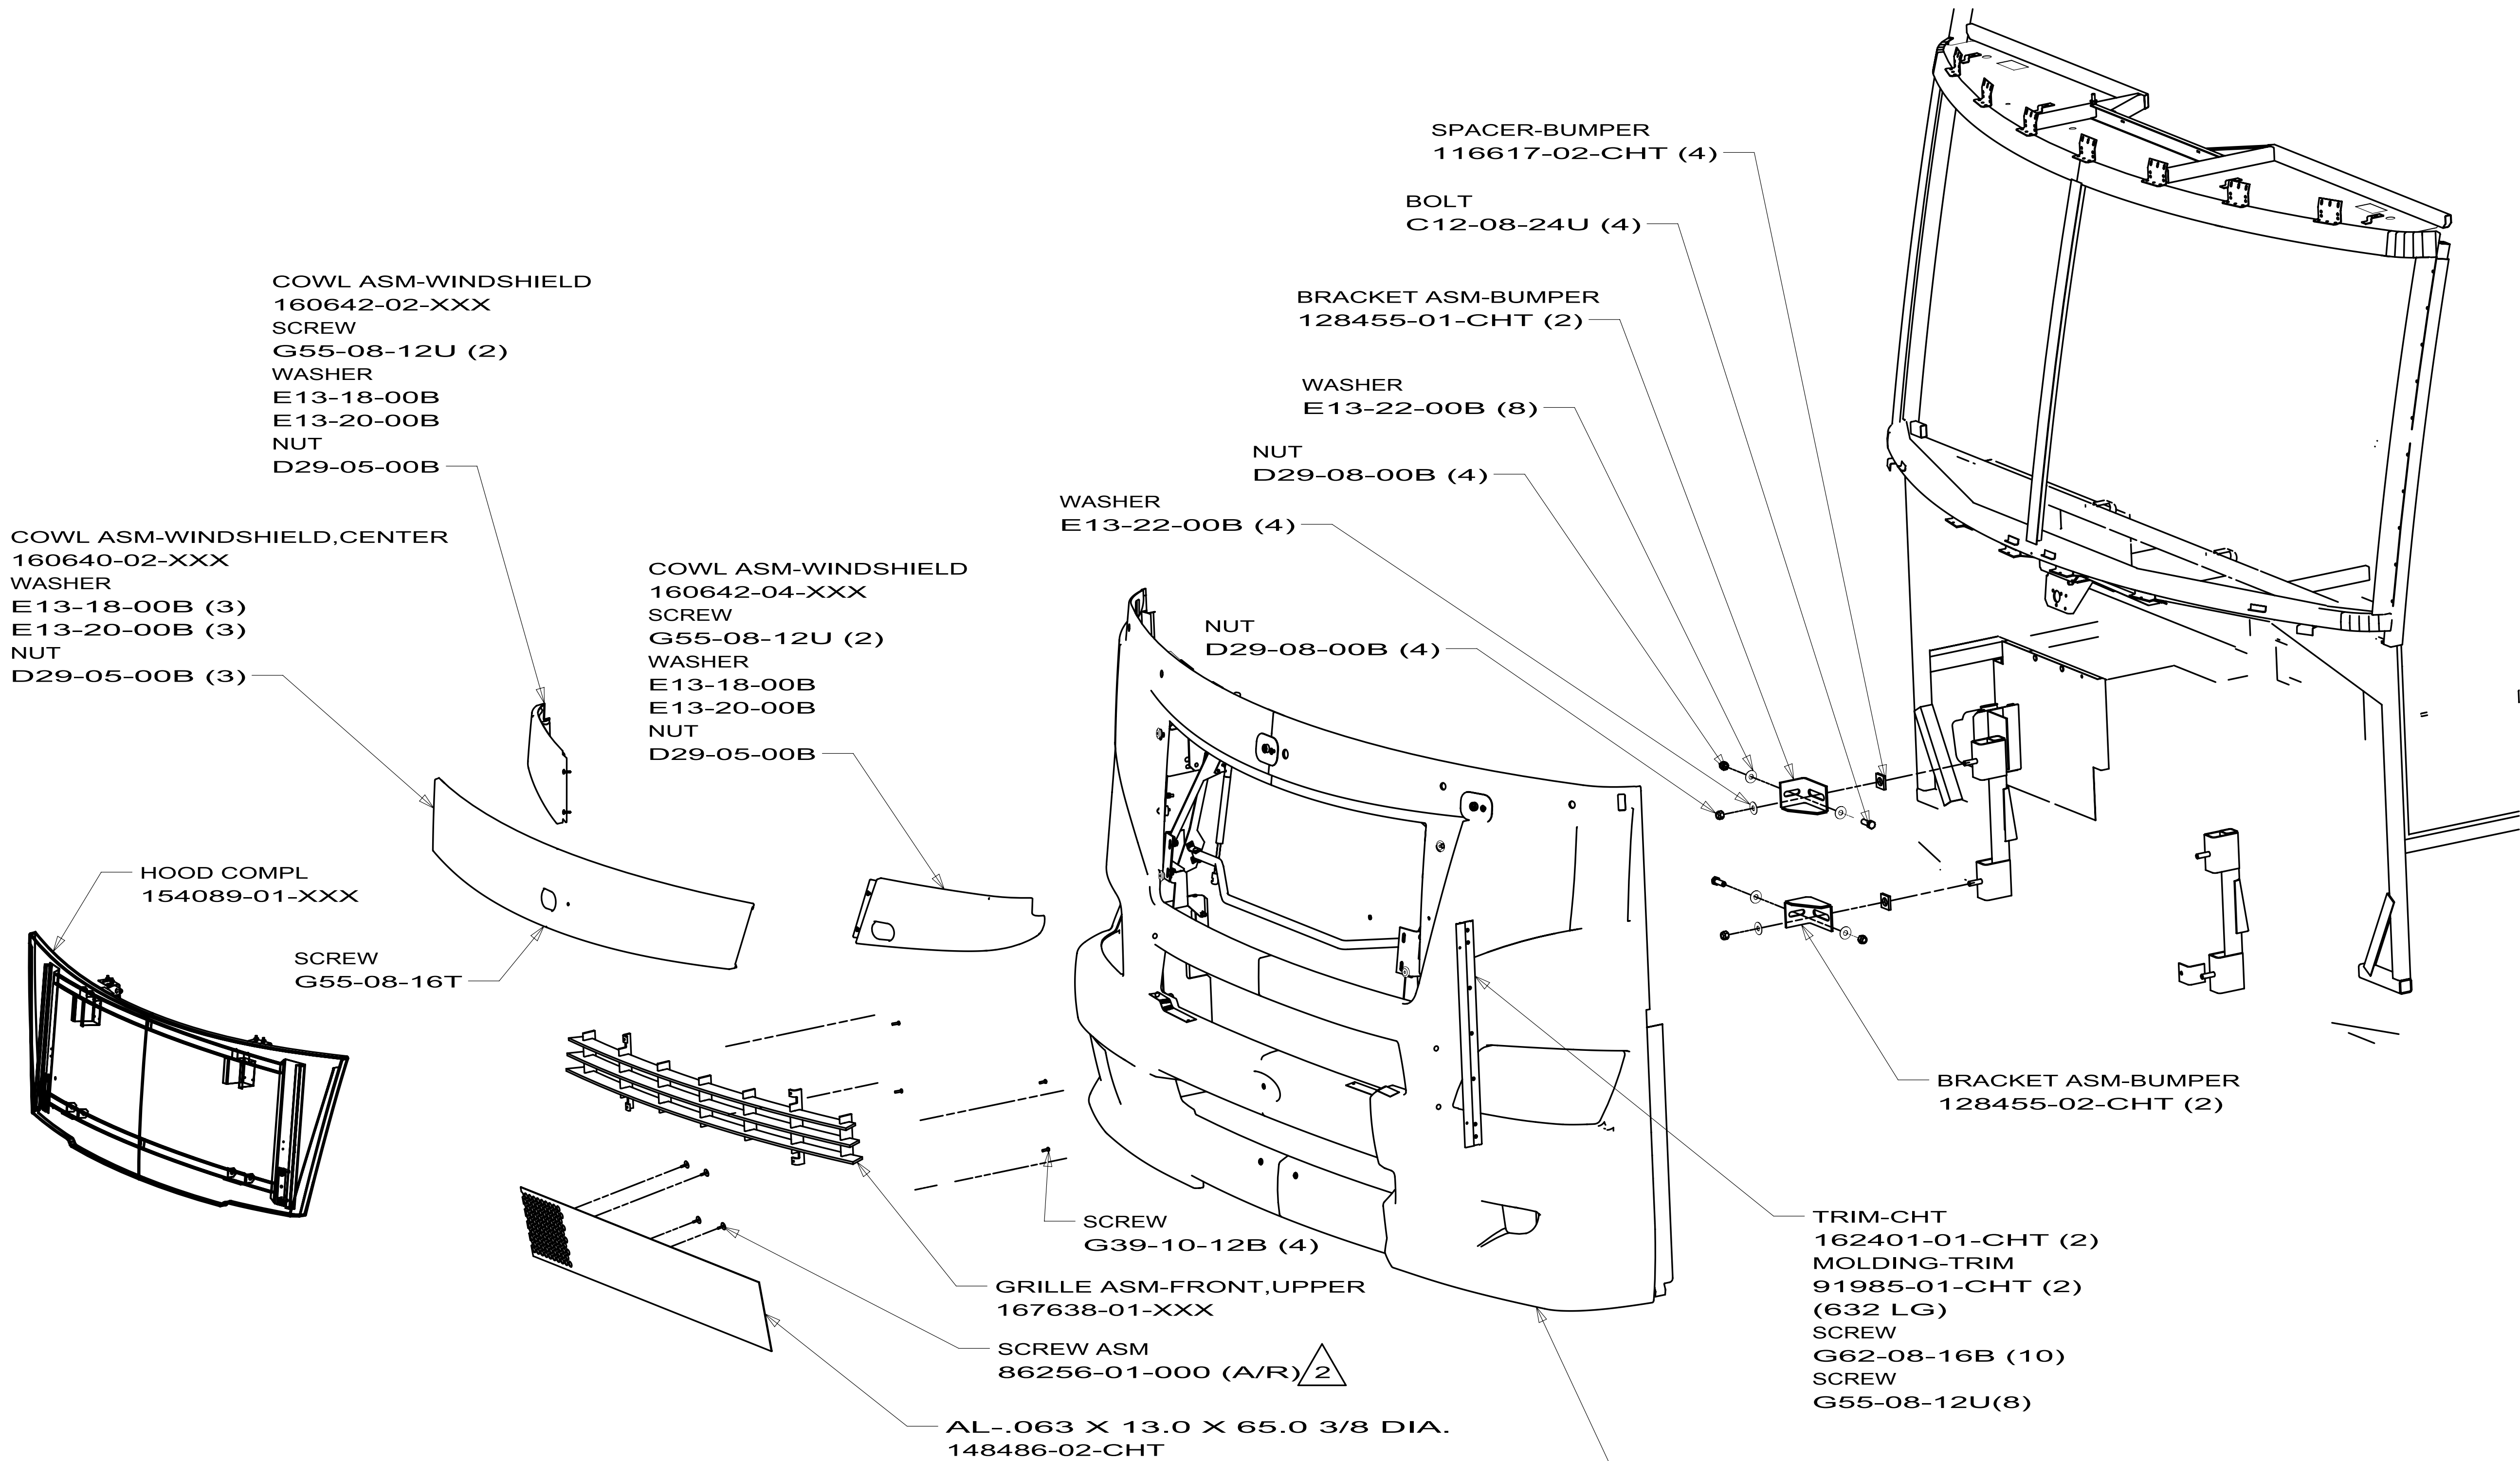

- NOTES:
1. TOP OF PANEL ASM-FRONT, LOWER TO BE ALIGNED WITH BOTTOM EDGE OF WINDSHIELD.
 2. MINIMUM 2 SCREWS PER MOUNTING FLANGE WITH A SCREW WITHIN 20.0 EF EACH FLANGE END.
 3. AFTER HOOD ADJUSTMENT, THE BUMPER MUST CONTACT HINGE LINK IN THE CLOSED POSITION.
 4. DRIVER SIDE BUMPER TO BE REMOVED WHEN USED WITH FORD CHASSIS.
 5. BUMPER MUST CONTACT HOOD IN THE CLOSED POSITION.

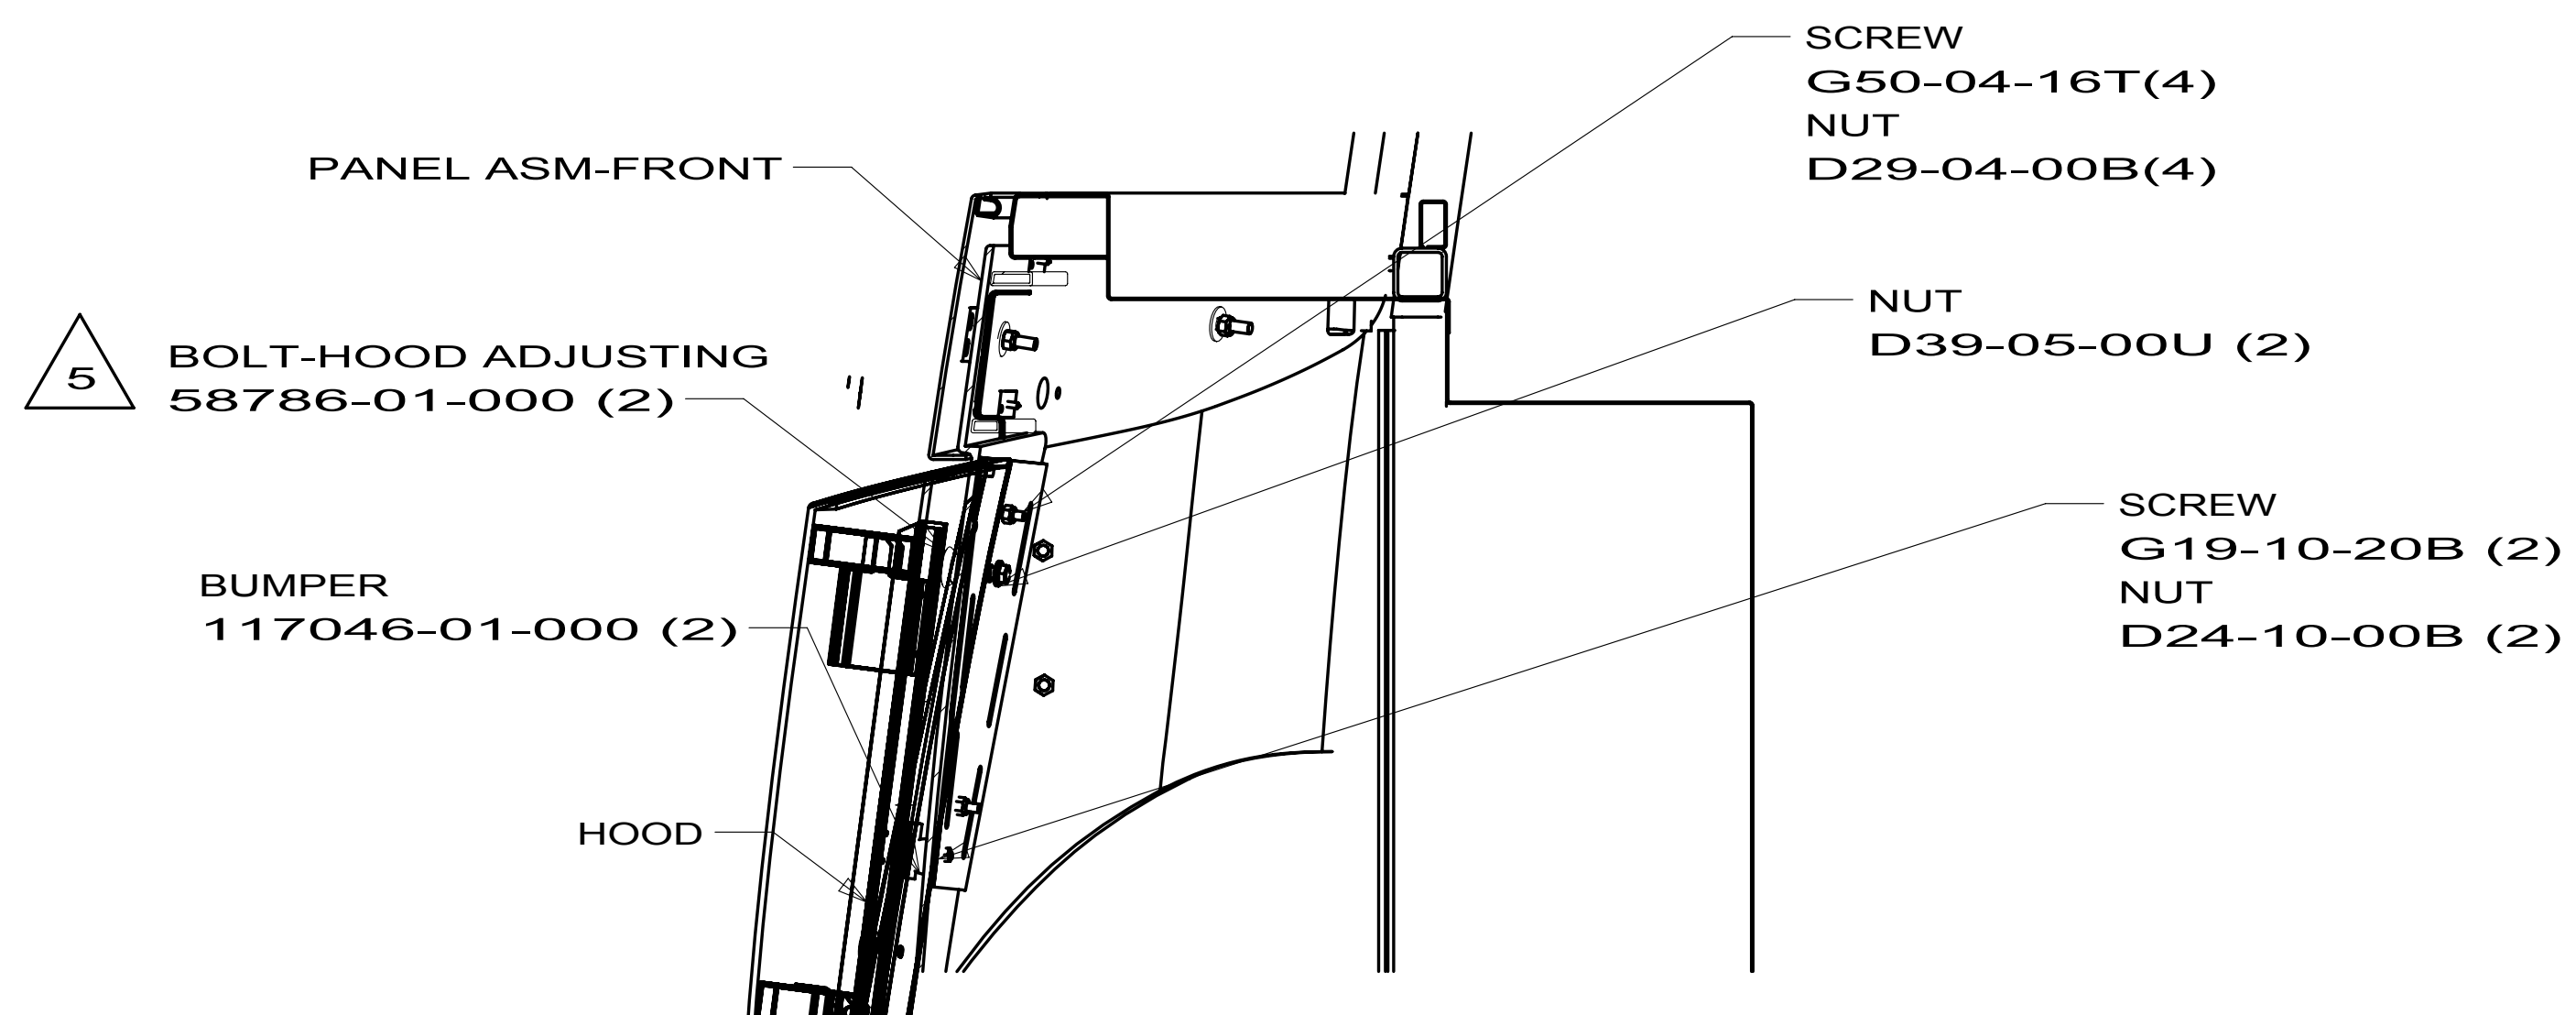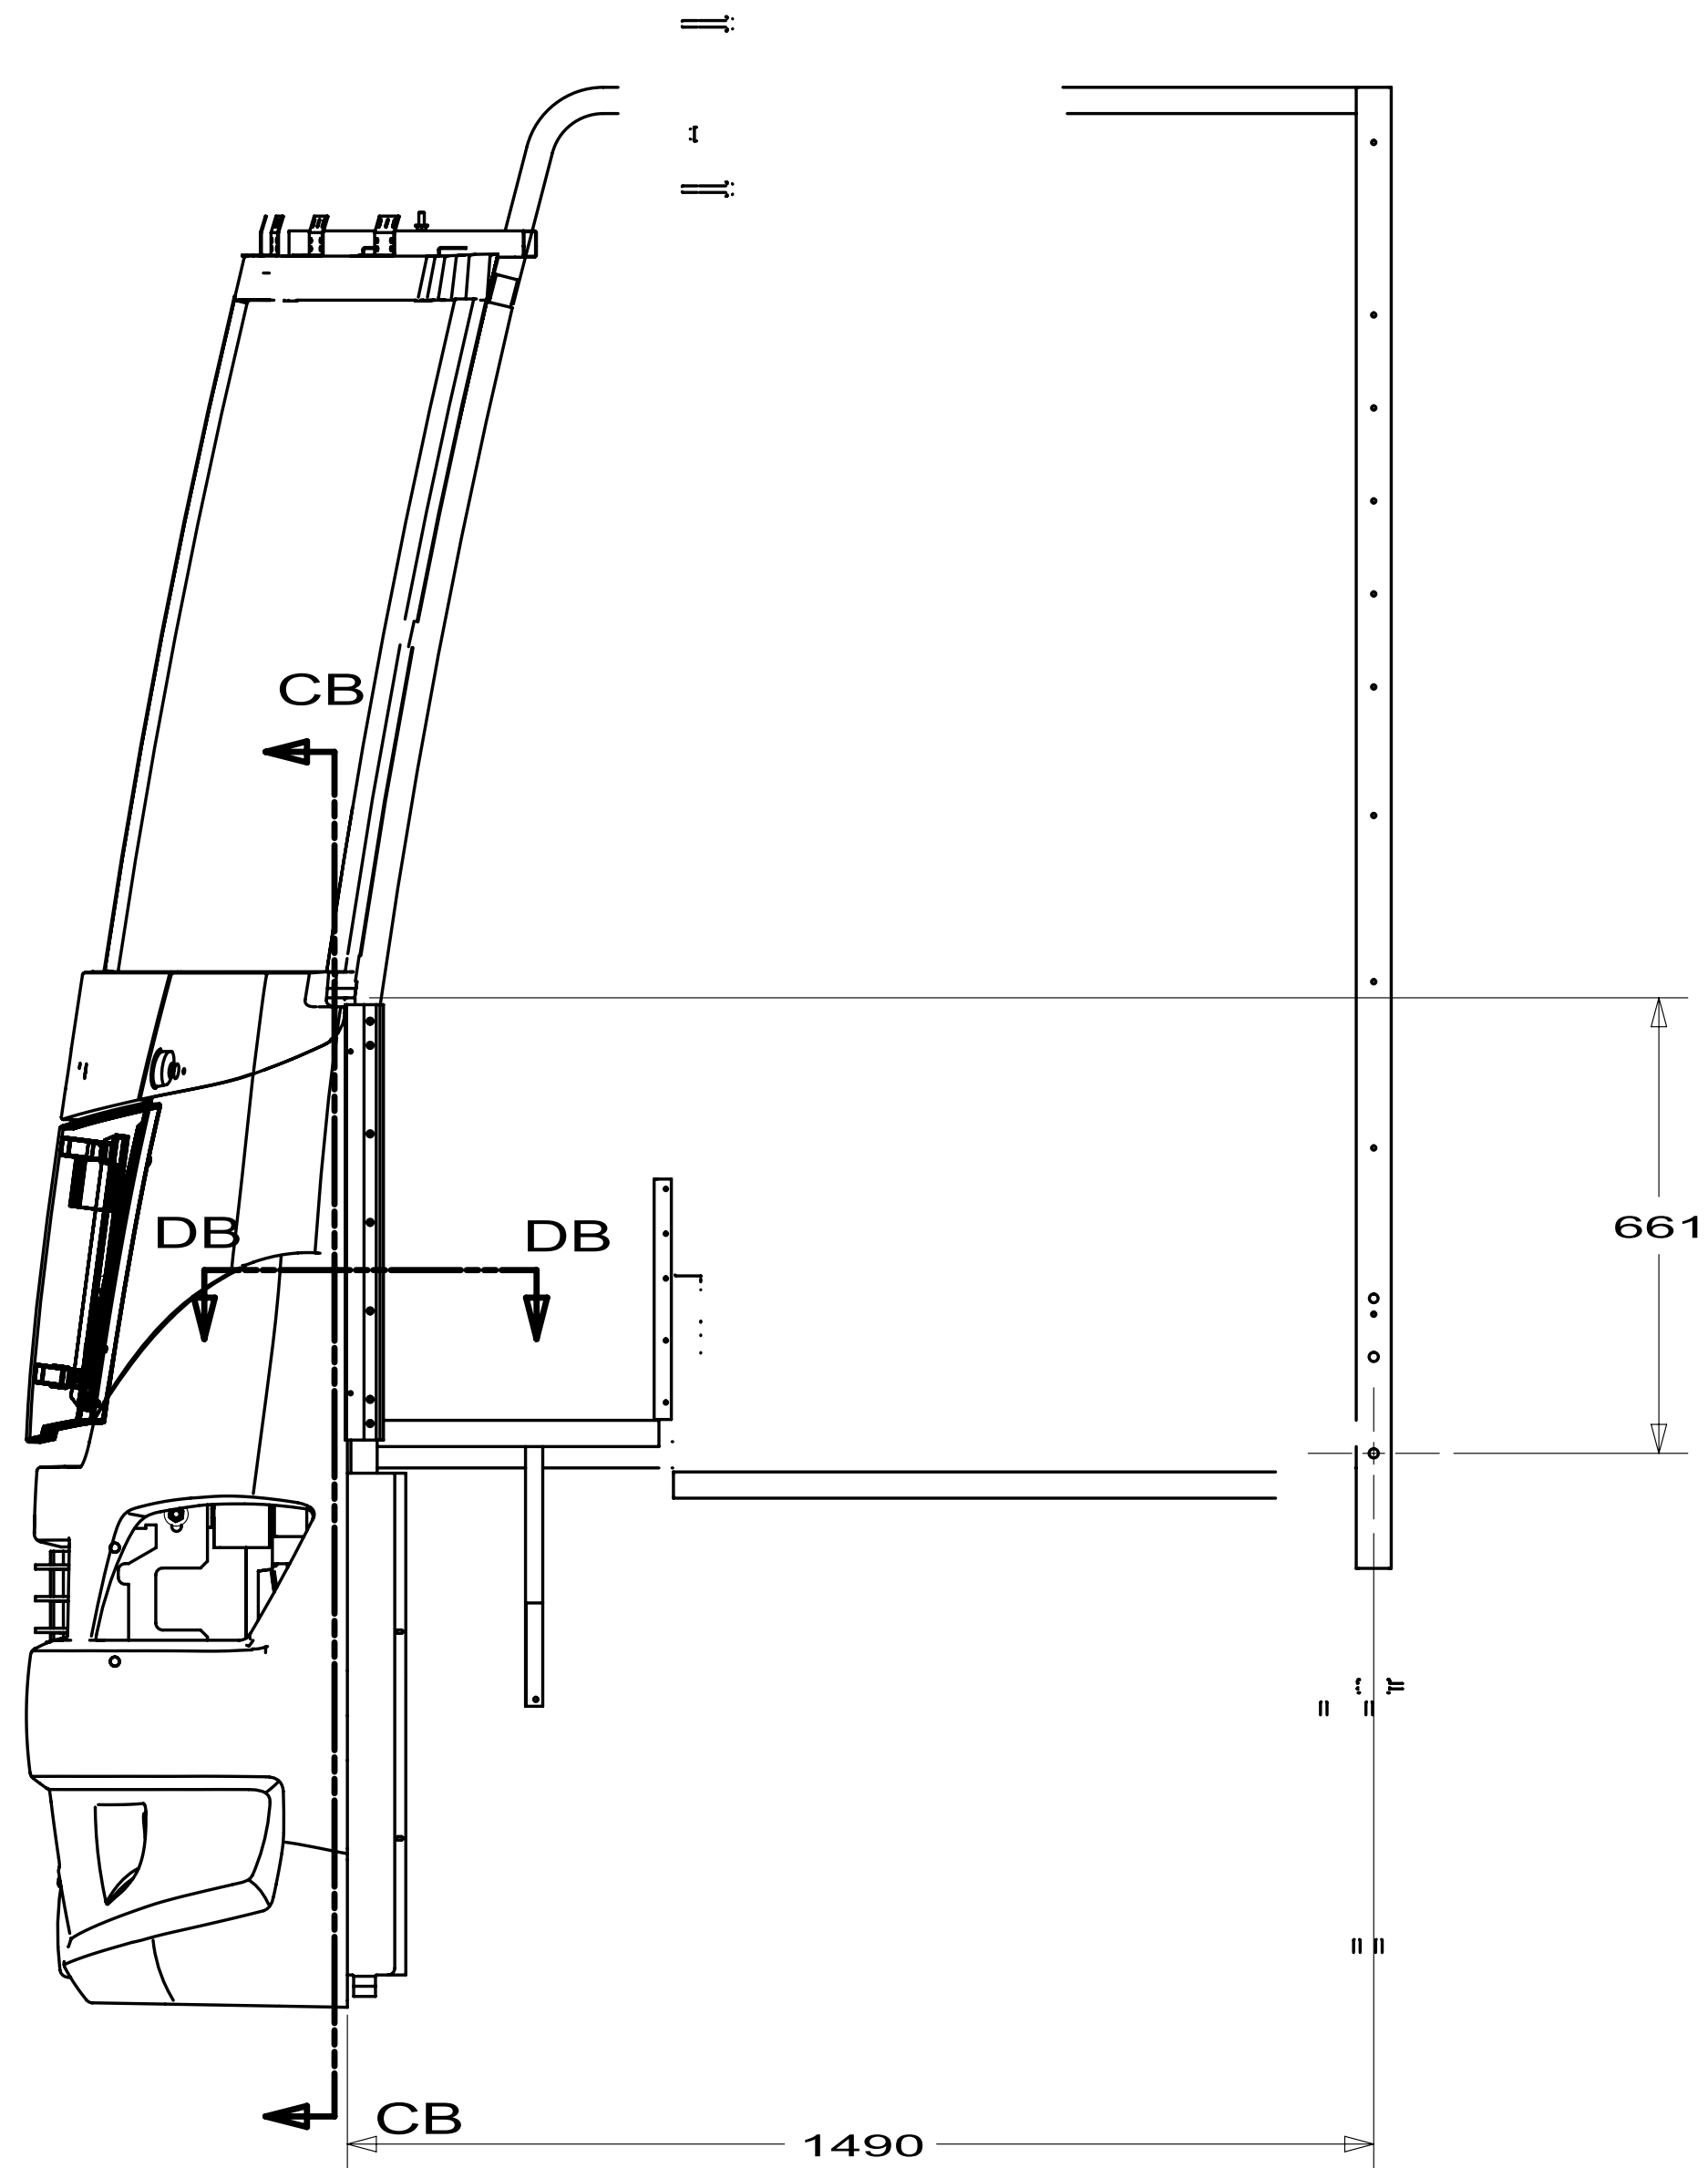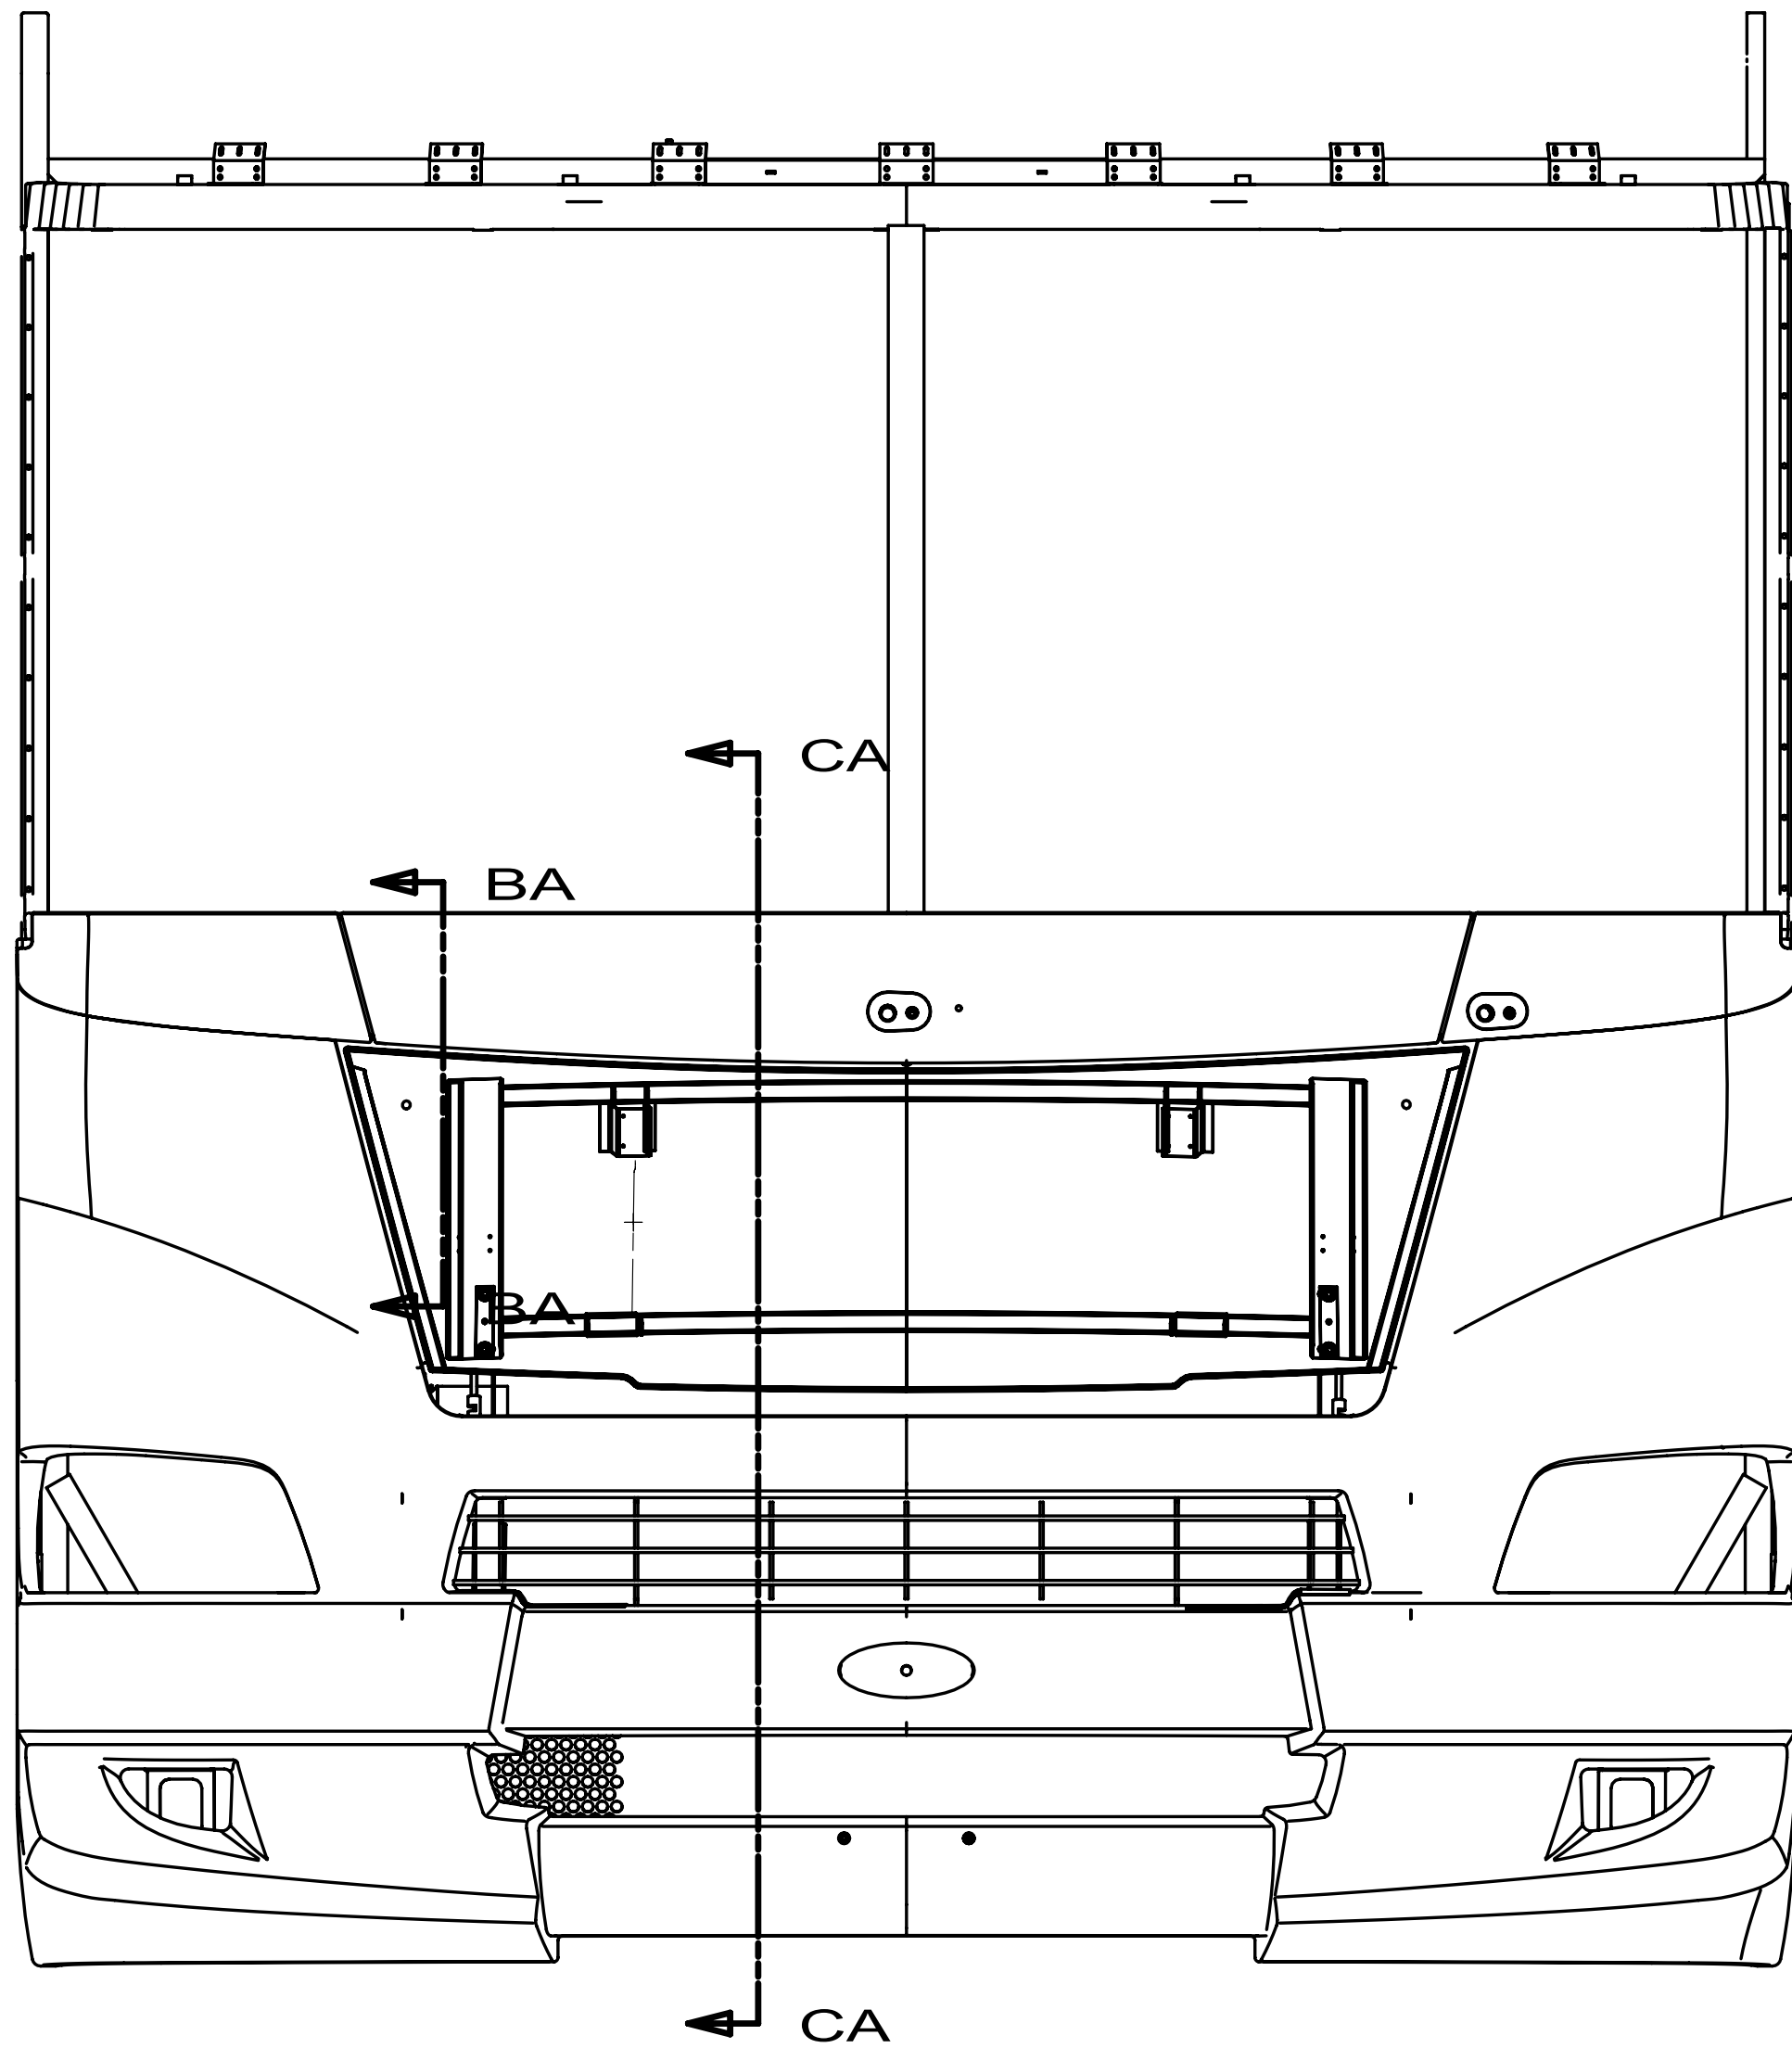

SECTION BA-BA

FIRST USED		
09 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 2	PART NO 164444	REV

BRACKET-SUPPORT,STRIKER
156216-04-CHT
SCREW
G39-10-12T (2)

TUBE-TIMING,HOOD
154091-03-CHT
SCREW-MACH
G16-04-24B (2)
NUT
D29-04-00B (2)

BRACKET-SUPPORT,STRIKER
156216-03-CHT
SCREW
G39-10-12T(2)

HINGE-ASM
137072-09-CHT (RH)
137072-10-CHT (LH)

ANGLE-STRIKER,HOOD
144209-02-CHT (2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

STRIKER-DOOR,LUGGAGE
130053-01-CHT (2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

VIEW CC


SECTION CB-CB

SECTION CA-CA

WINDSHIELD

PANEL ASM
-FRONT,
LOWER

FIRST USED		
09 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 3	PART NO 164444	REV

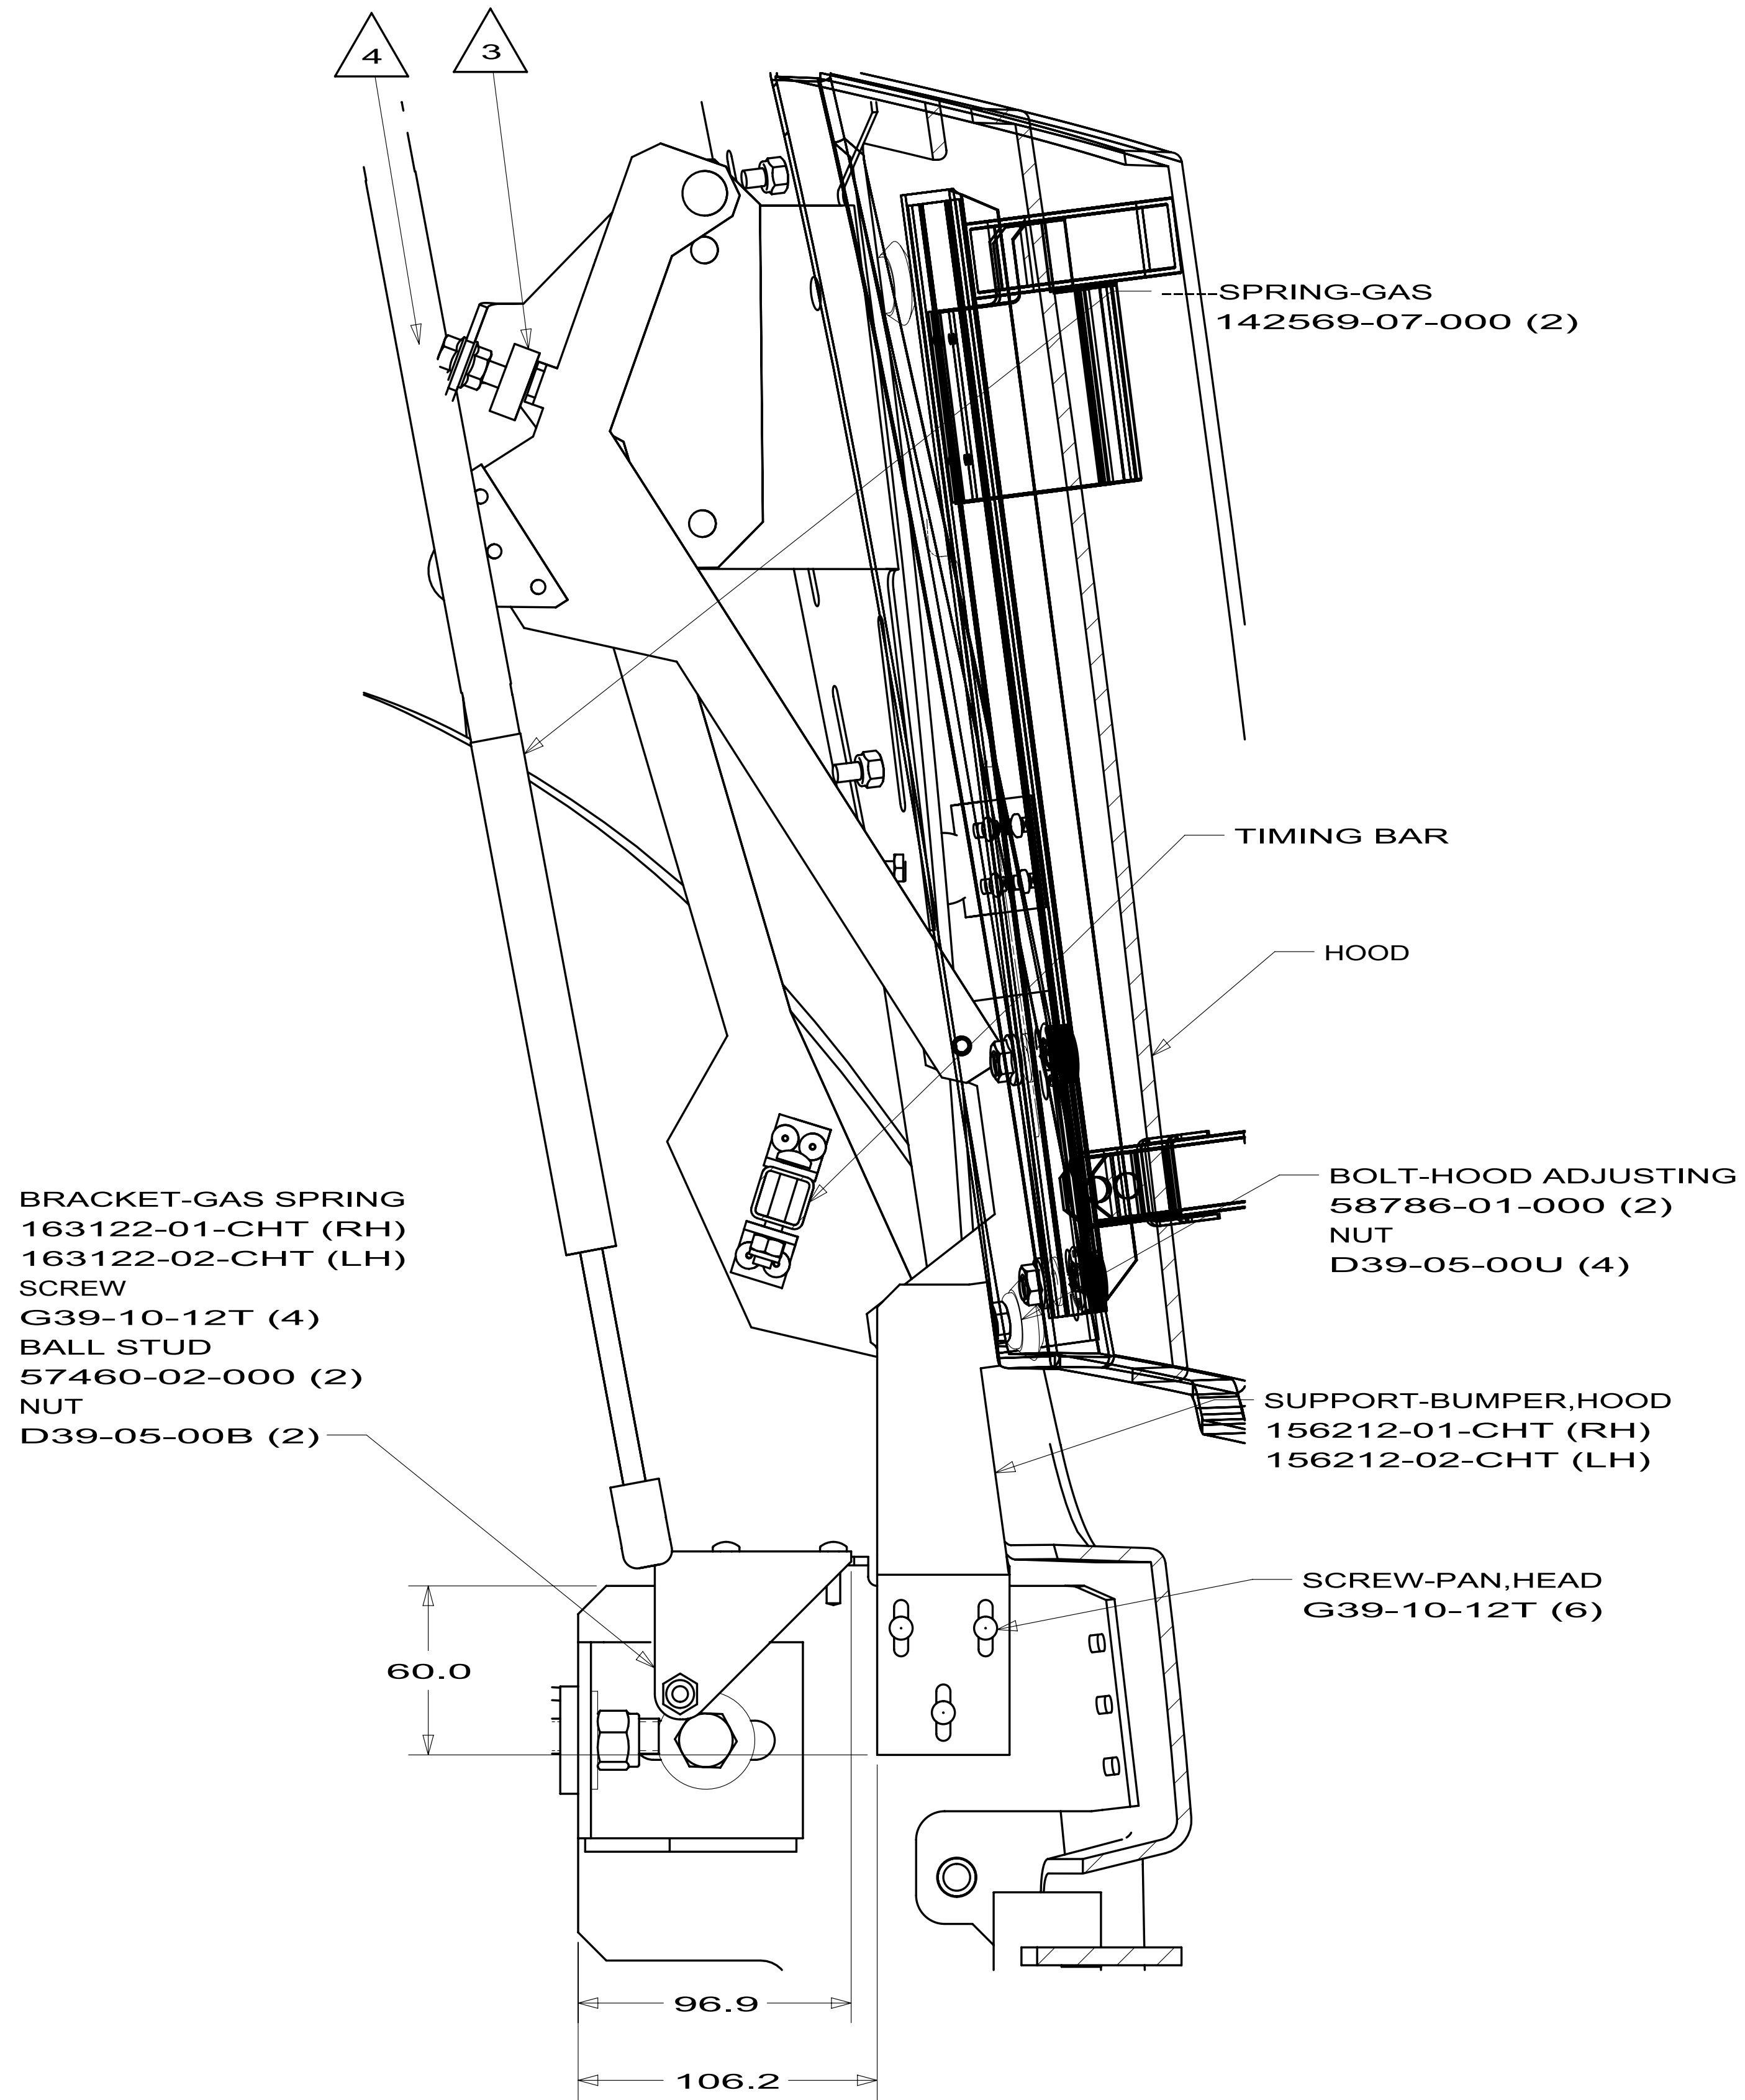

SECTION DA-DA


PANEL ASM-FRONT

SCREW-PAN, HEAD
G39-10-12T (6)

A-PILLAR




SECTION DB-DB

FIRST USED		
09 J-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 4	PART NO 164444	REV

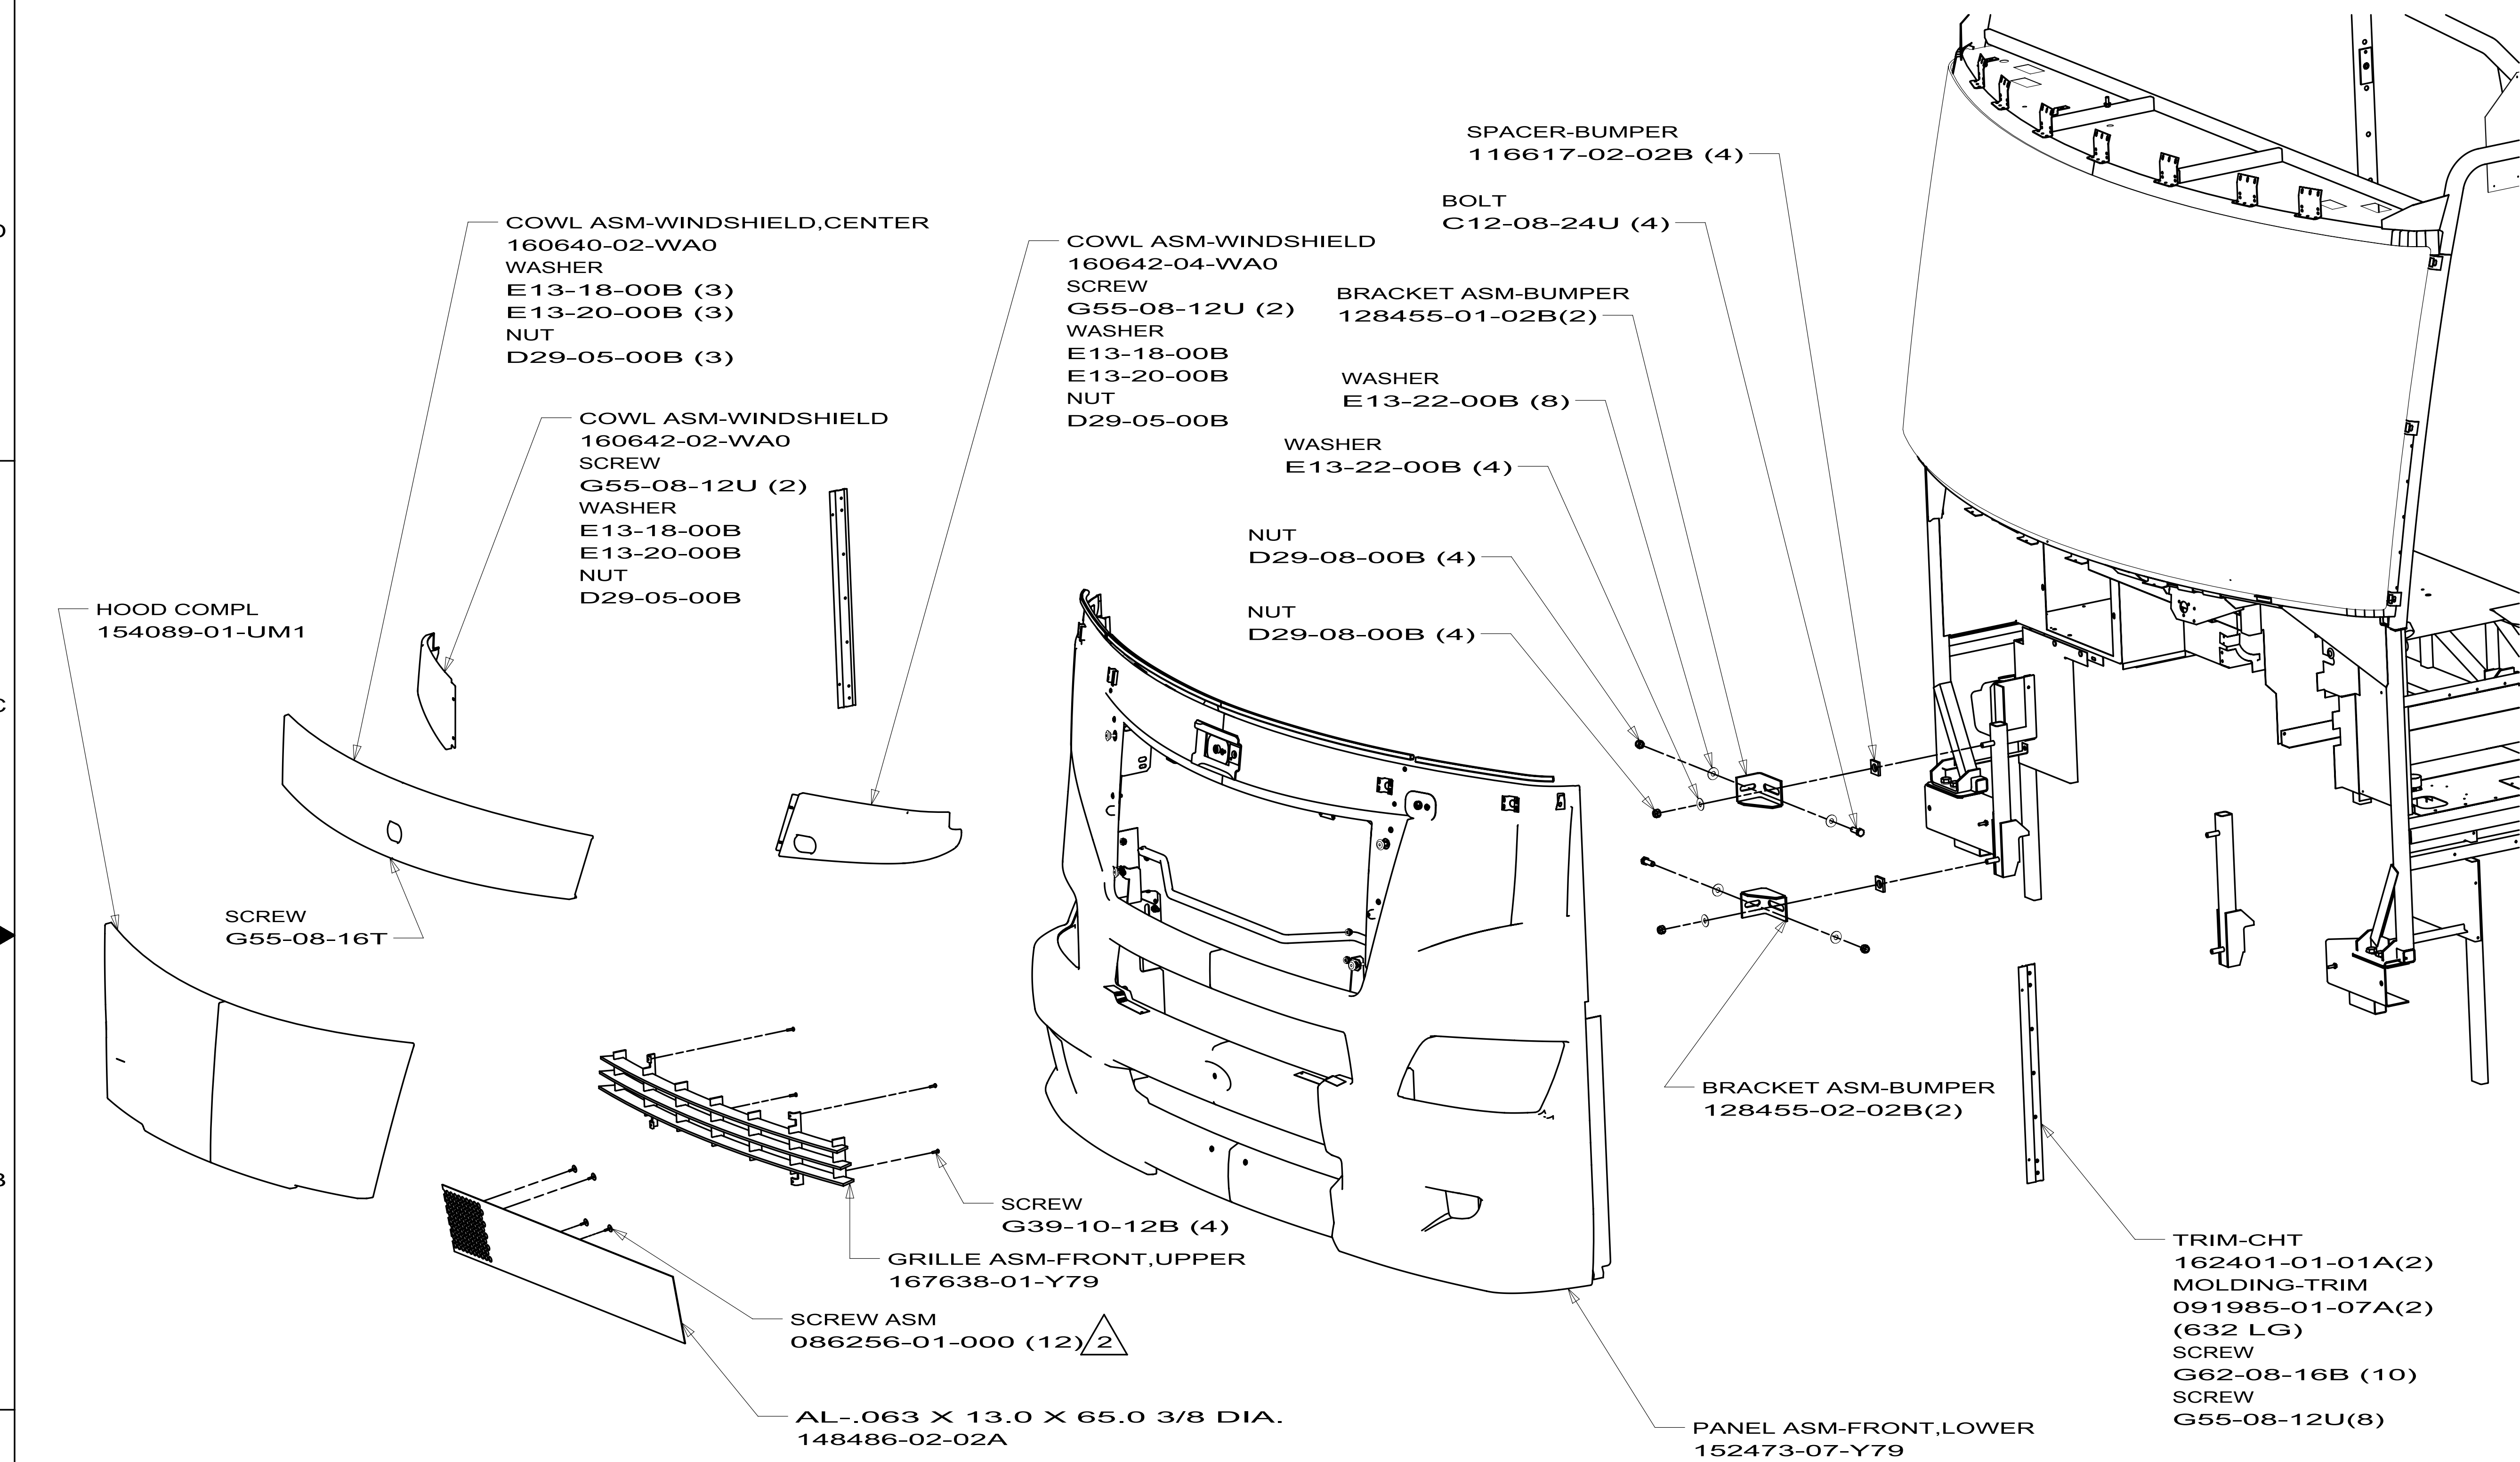

5. BUMPER MUST CONTACT HOOD IN THE CLOSED POSITION.
4. DRIVER SIDE BUMPER TO BE REMOVED WHEN USED WITH FORD CHASSIS.
3. AFTER HOOD ADJUSTMENT, THE BUMPER MUST CONTACT HINGE LINK IN THE CLOSED POSITION.
2. MINIMUM 2 SCREWS PER MOUNTING FLANGE WITH A SCREW WITHIN 20.0 EF EACH FLANGE END.
1. TOP OF PANEL ASM-FRONT, LOWER TO BE ALIGNED WITH BOTTOM EDGE OF WINDSHIELD.

WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DTR	ORIG. DATE		
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS		
P.E.			
M.E.	FIRST USED		
DSNR	09 J-SERIES, FL		
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) : 3			
ONE-PLACE (X.X) : 1.5			
TWO-PLACE (X.XX) : 0.50			
ANGLE : 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: BODY PANEL INSTL-FRONT			
SHEET 1 OF 4		PART NO 169237 REV	
REF:		1	

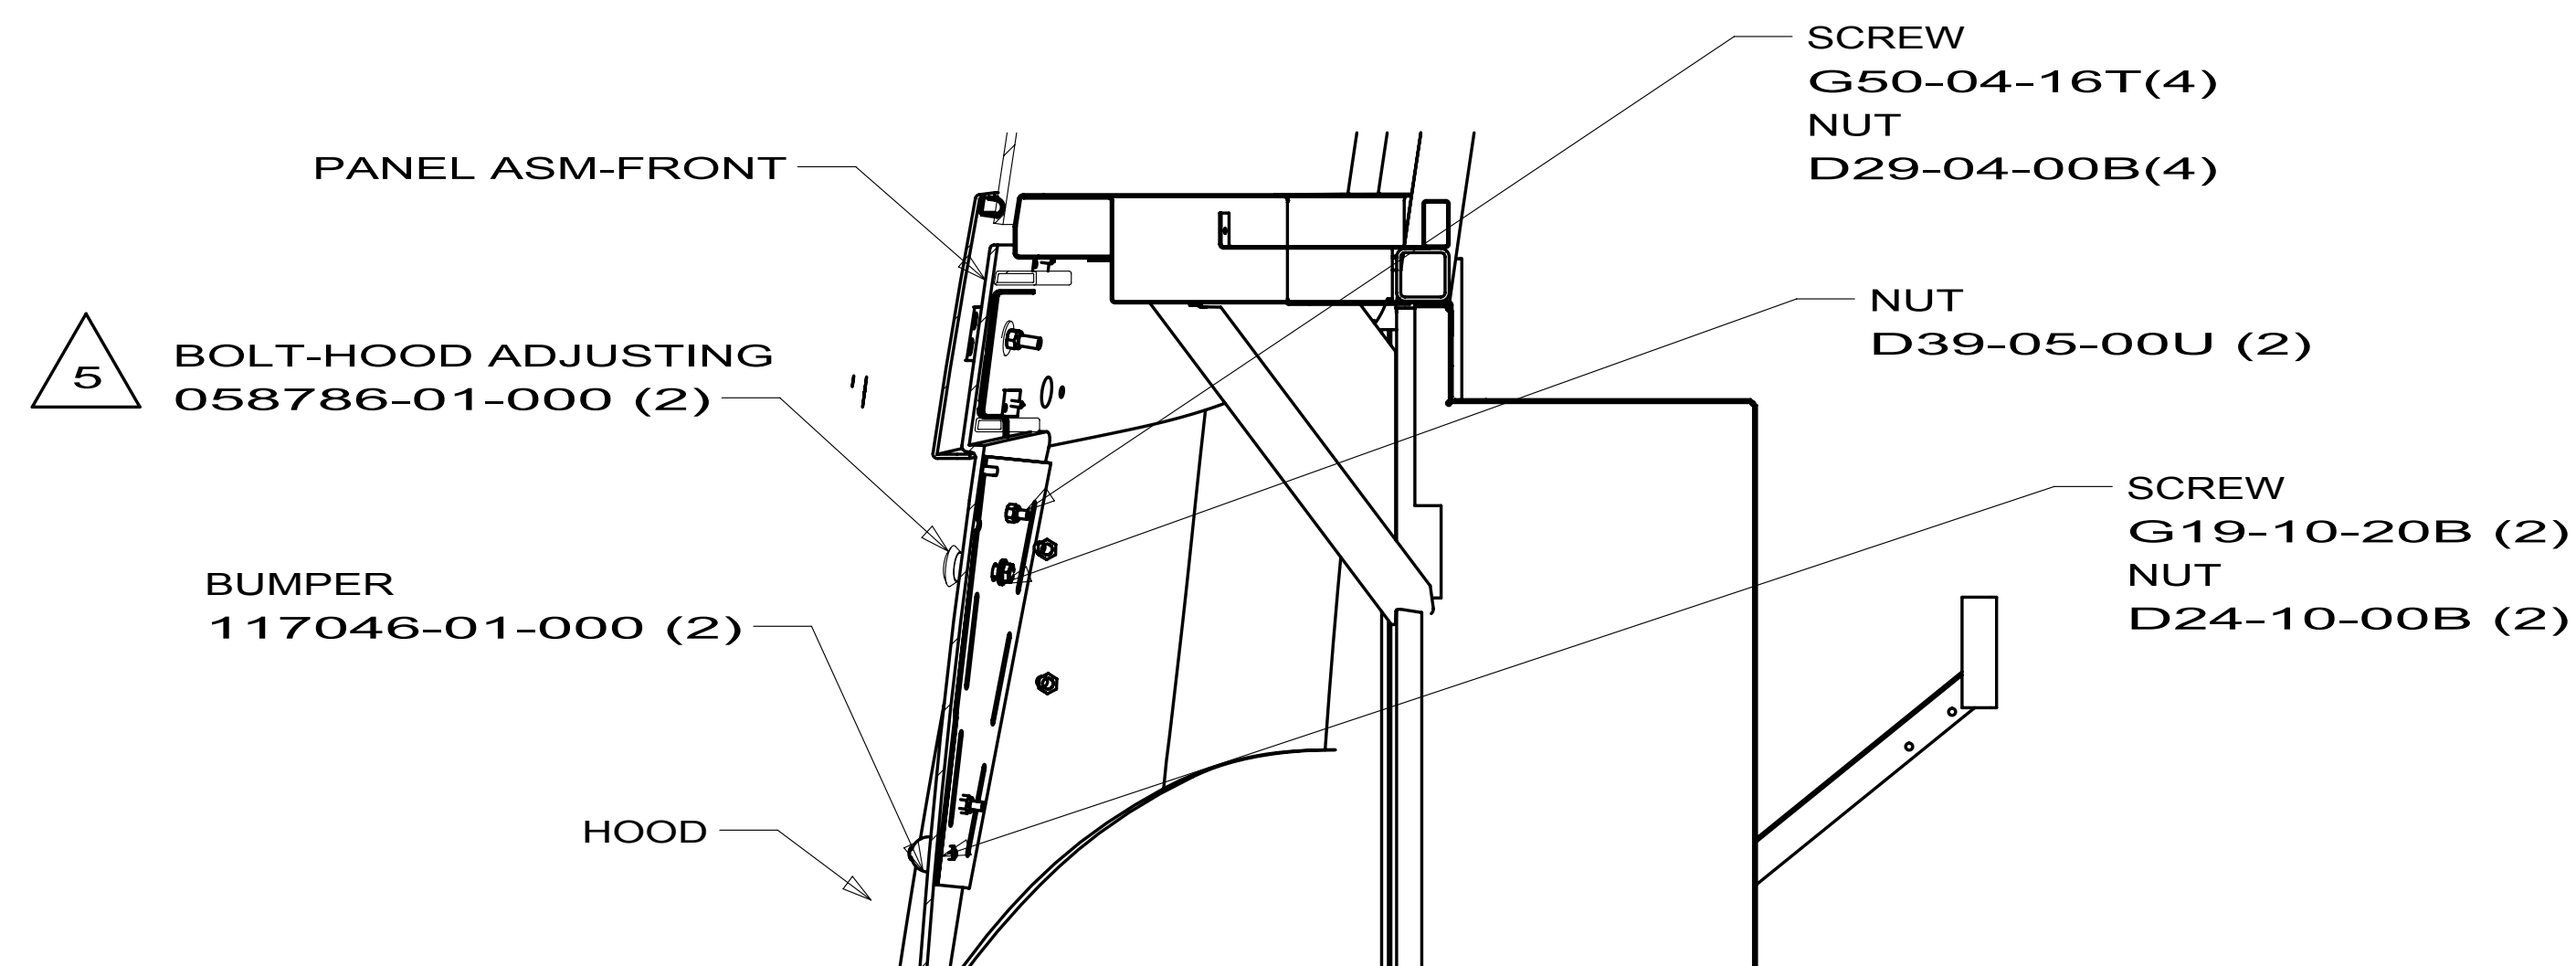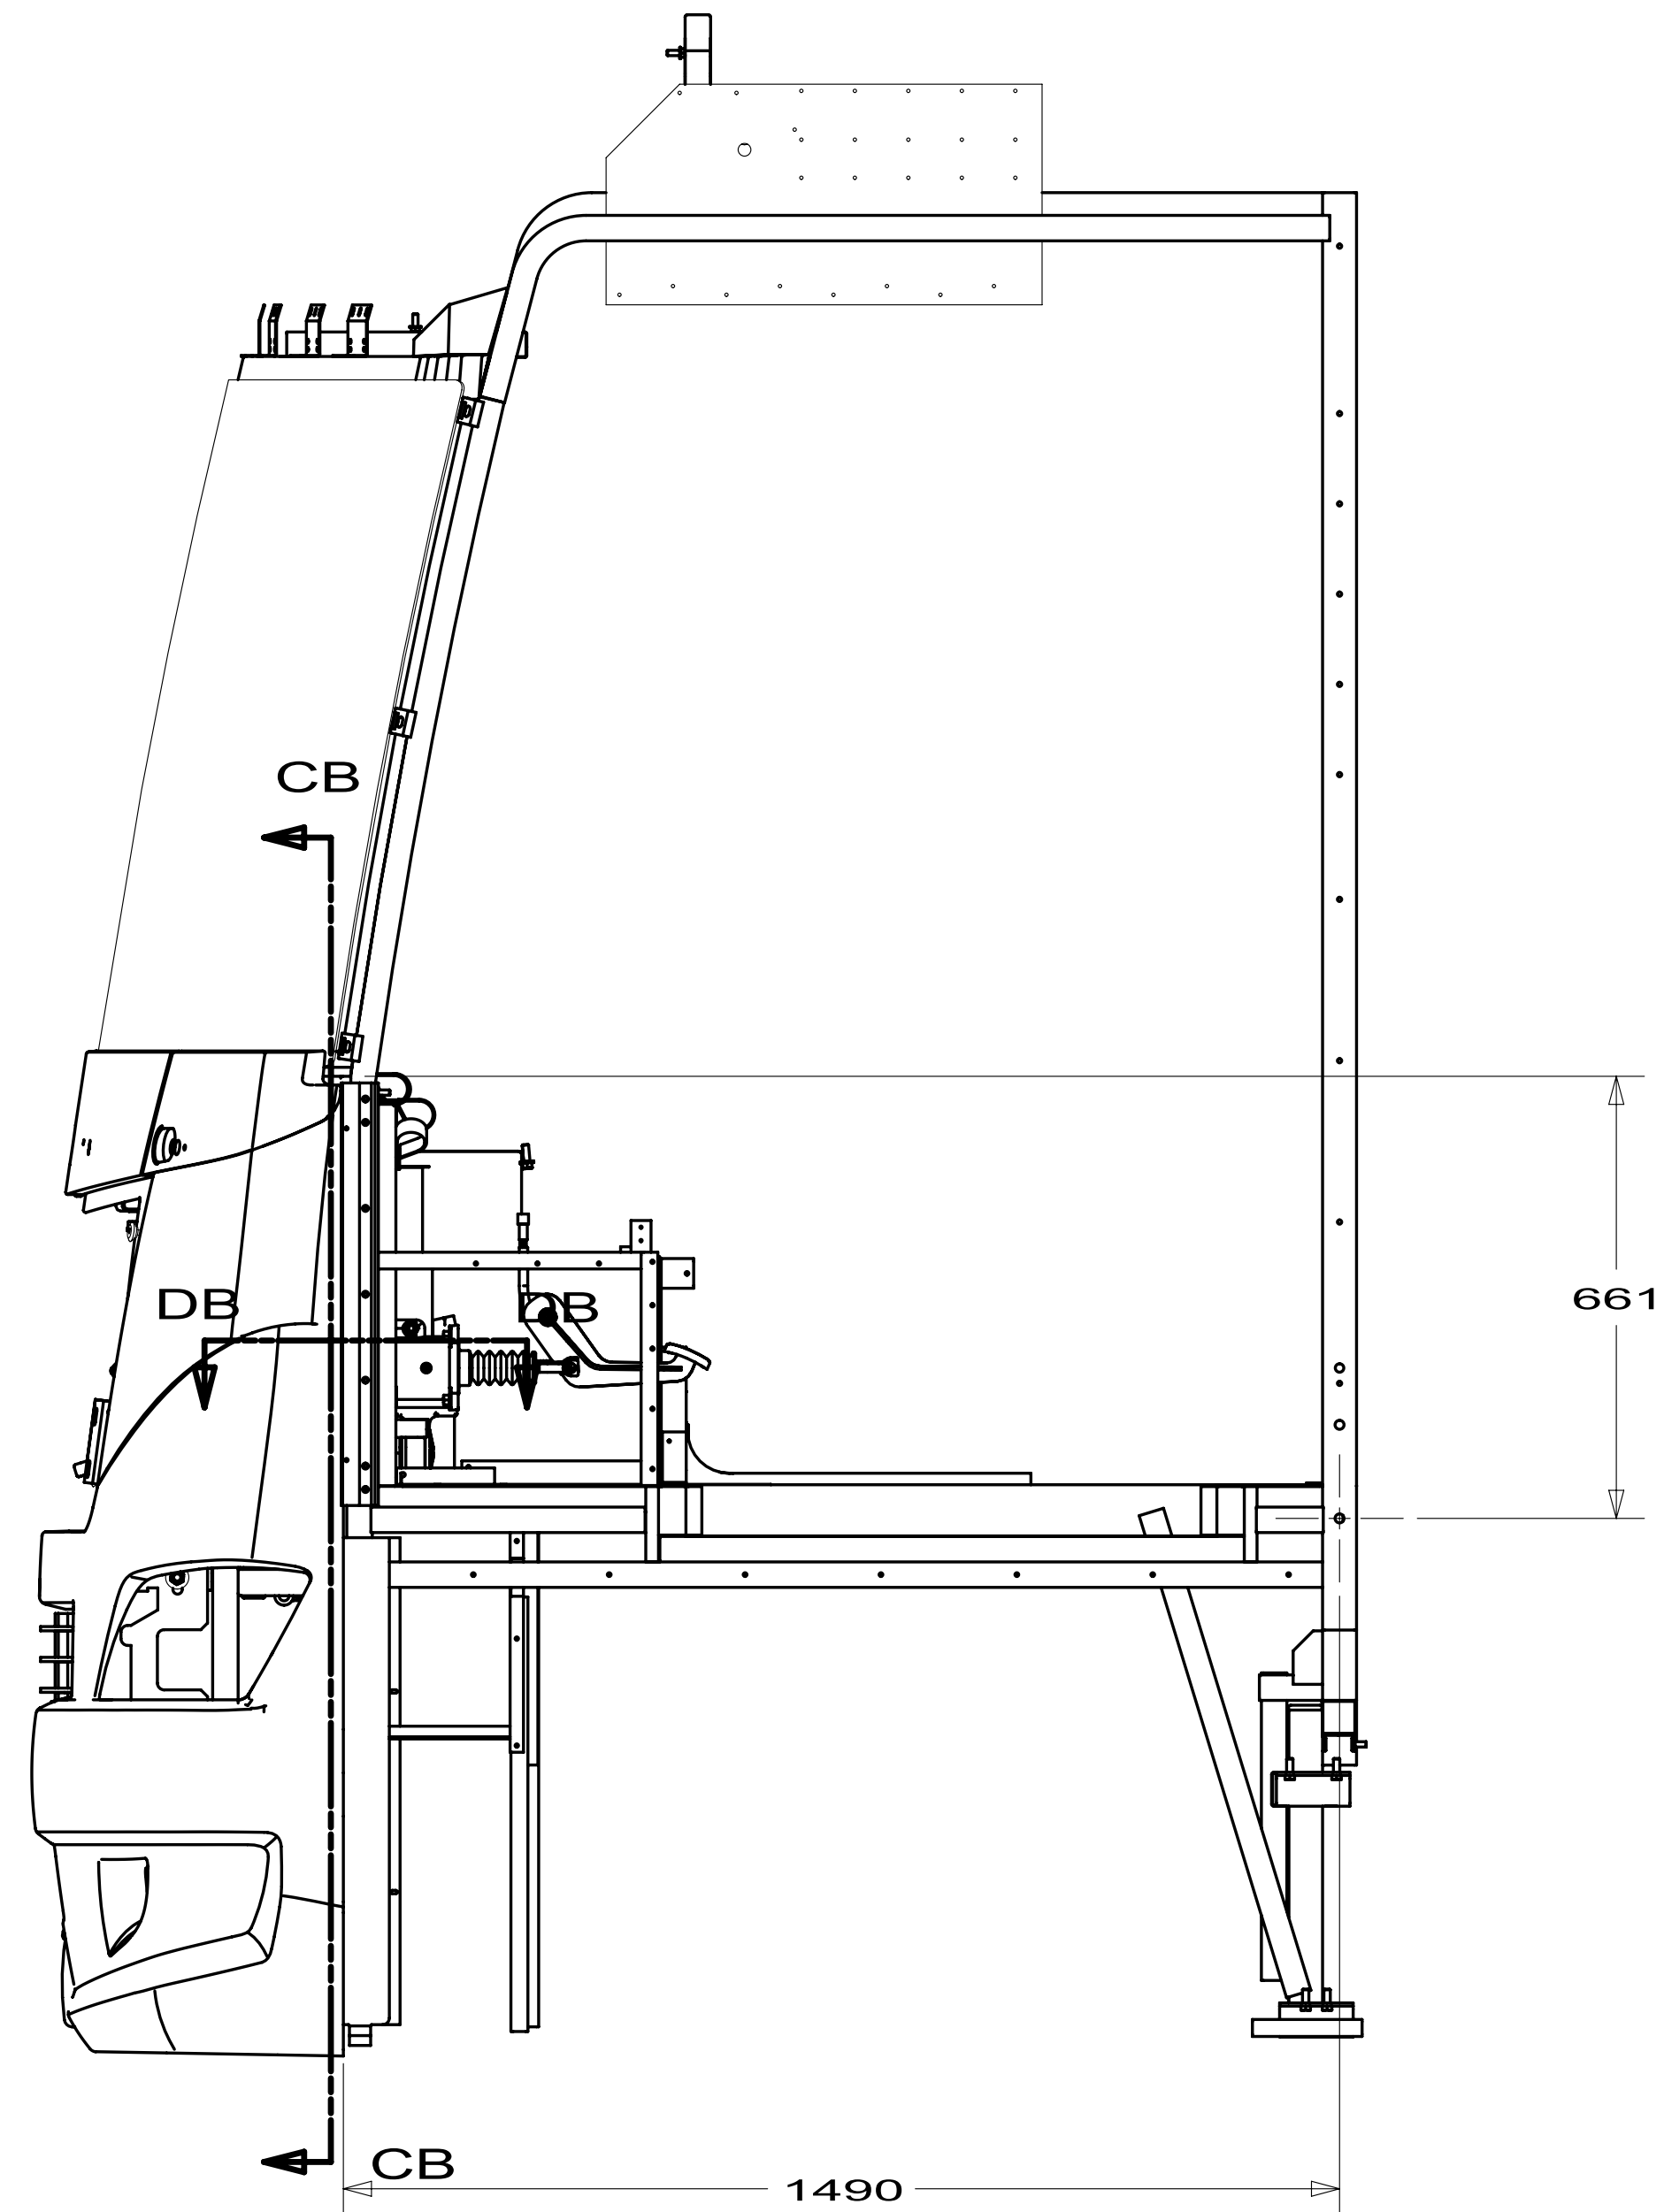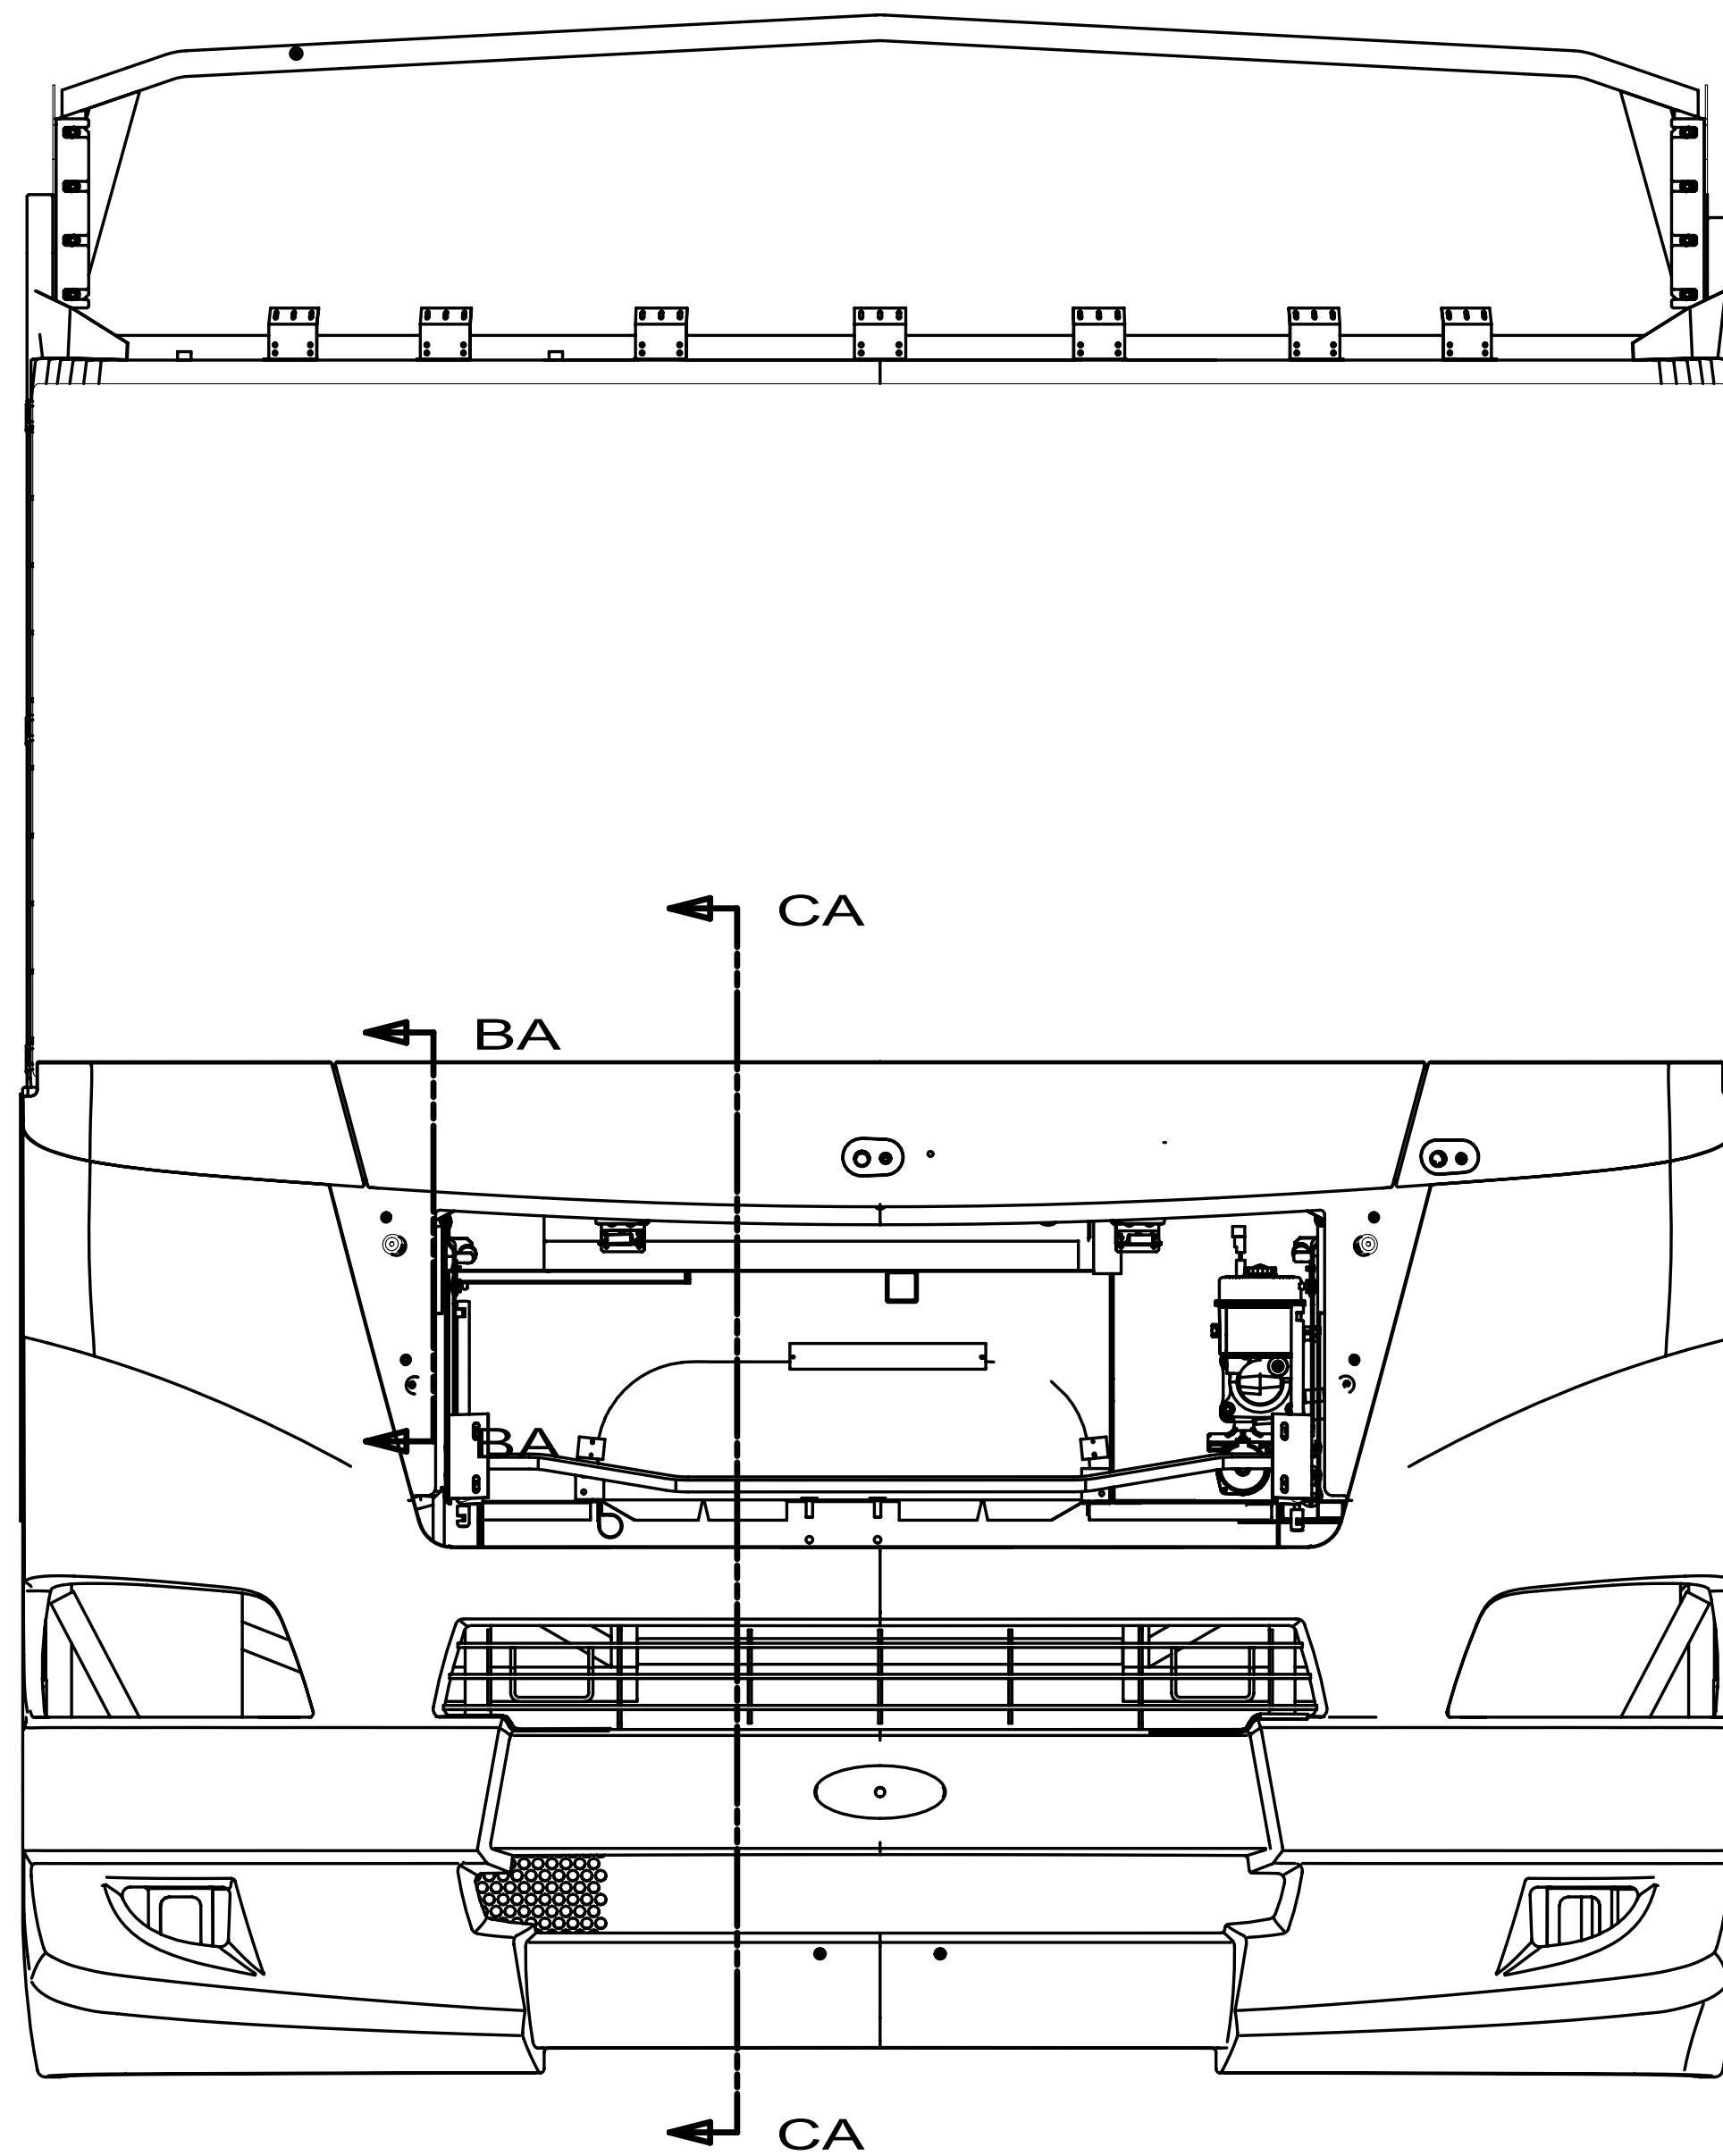

SECTION BA-BA

FIRST USED		
09 J-SERIES,FL		
DO NOT SCALE DRAWING		
TITLE:		
BODY PANEL INSTL-FRONT		
SHEET 2	PART NO 169237	REV

BRACKET-SUPPORT,STRIKER
156216-04-02B
SCREW
G39-10-12T (2)

TUBE-TIMING,HOOD
154091-03-CHT
SCREW-MACH
G16-04-24B (2)
NUT
D29-04-00B (2)

BRACKET-SUPPORT,STRIKER
156216-03-02B
SCREW
G39-10-12T(2)

HINGE-ASM
137072-15-01A(RH)
137072-16-01A(LH)

ANGLE-STRIKER,HOOD
144209-02-02B(2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

STRIKER-DOOR,LUGGAGE
130053-01-01A(2)
SCREW
G19-10-10B (4)
NUT
D24-10-00B (4)
WASHER
E13-10-00B (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

WASHER
E13-15-00U (4)

NUT
D39-05-00U (4)

VIEW CC

SECTION CB-CB

SECTION CA-CA

WINDSHIELD

PANEL ASM
-FRONT,
LOWER

FIRST USED		09 J-SERIES,FL	
DO NOT SCALE DRAWING			
TITLE: BODY PANEL INSTL-FRONT			
SHEET 3	PART NO	169237	REV

BRACKET-GAS SPRING
163122-03-02B(RH)
163122-04-02B(LH)
SCREW
G39-10-12T (4)
BALL STUD
057460-02-000 (2)
NUT
D39-05-00B (2)

SPRING-GAS
142569-28-000 (2)

TIMING BAR

BOLT-HOOD ADJUSTING
058786-01-000 (2)
NUT
D39-05-00U (4)

SUPPORT-BUMPER,HOOD
156212-01-02B(RH)
156212-02-02B(LH)

SCREW-PAN,HEAD
G39-10-12T (6)

PANEL ASM-FRONT

SCREW-PAN,HEAD
G39-10-12T (6)

A-PILLAR

SECTION DB-DB

60.0

96.9

106.2



SECTION DA-DA

FIRST USED		09 J-SERIES,FL	
DO NOT SCALE DRAWING			
TITLE: BODY PANEL INSTL-FRONT			
SHEET 4	PART NO	169237	REV

FORD/WORKHOUSE
152473-06

24	15703802XXX	SUPPORT ASM.	1
23	12356324CHT	PLATE-W/HOLE	4
22	15708001CHT	BOOT-COWL	2
21	15399806CHT	SUPPORT-HING	1
20	15955001CHT	REINFORCEMEN	2
19	15542301CHT	ANGLE-SUPPOR	2
18	14356106CHT	BRACKET ASM.	1
17	14356105CHT	BRACKET ASM.	1
16	13286401CHT	SUPPORT-FRON	2
15	08723401000	NUT-JACK	2
14	000G500412U	SCREW	2
13	15394313CHT	ANGLE-SUPPOR	2
12	15394303CHT	ANGLE-SUPPOR	1
11	15394305CHT	ANGLE-SUPPOR	3
10	15394304CHT	ANGLE-SUPPOR	2
9	15394301CHT	ANGLE-SUPPOR	2
8	15317802CHT	NOT DEFINED	1
7	15401601CHT	SUPPORT-FRON	1
6	15399808CHT	SUPPORT ASM.	1
5	15401602CHT	SUPPORT-FRON	1
4	15305704CHT	SUPPORT ASM.	1
3	15317801CHT	BRACKET-FOGL	1
2	15305702CHT	SUPPORT ASM.	1
1	15247305CHT	PANEL-FRONT	1
ITEM	PART NUMBER	DESCRIPTION	QTY

FIRST USED			
09 J SERIES			
DO NOT SCALE DRAWING			
TITLE: PANEL-FRONT,LOWER			
SHEET 3	PART NO	152473	REV

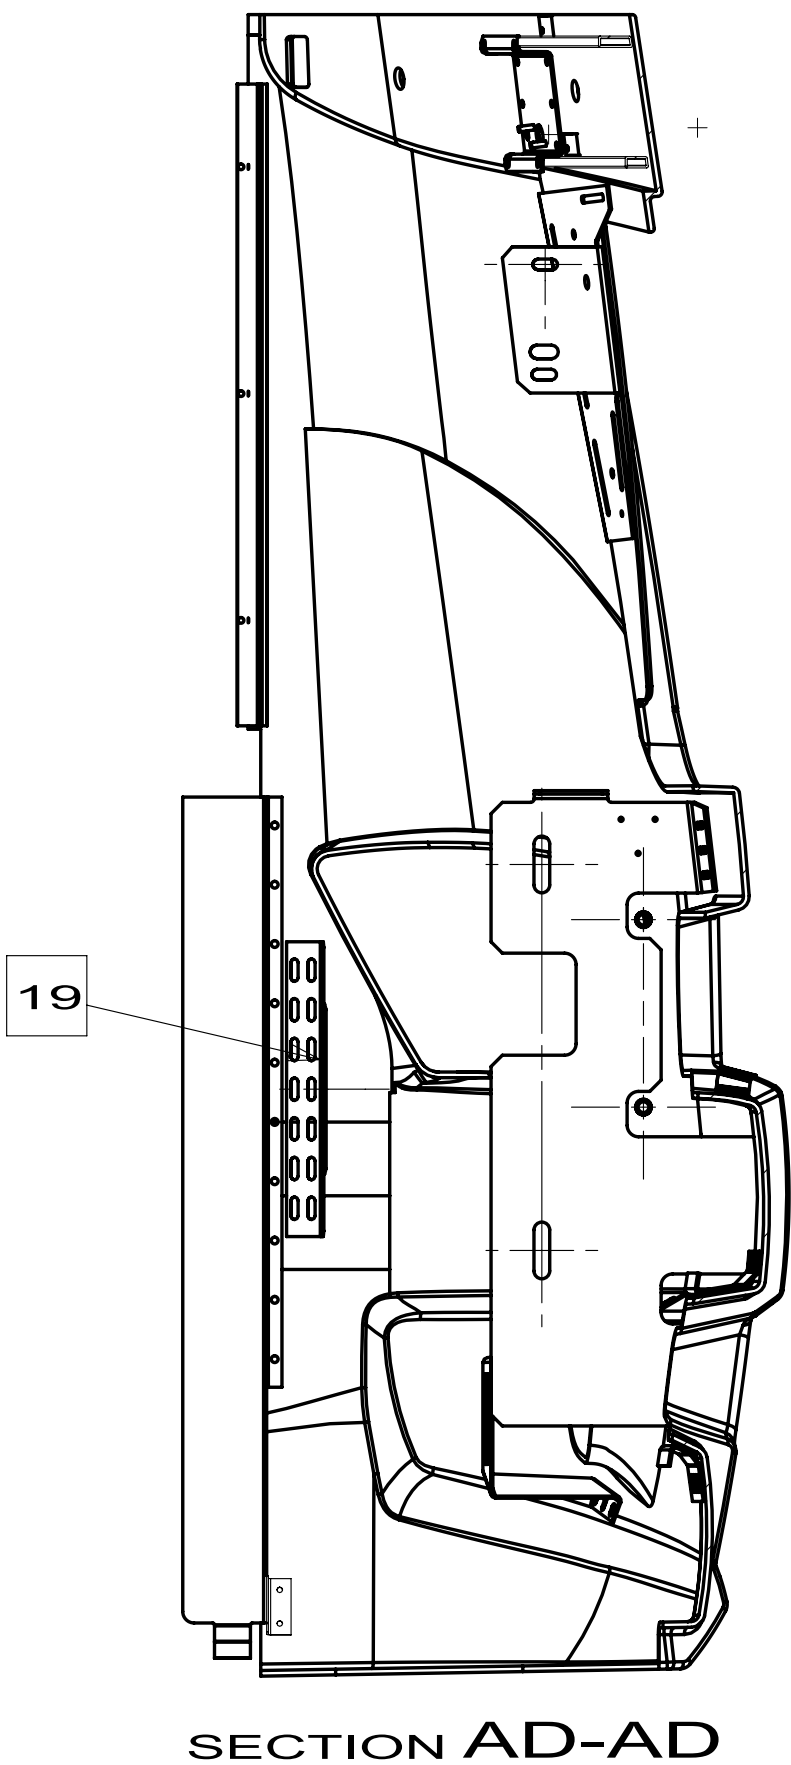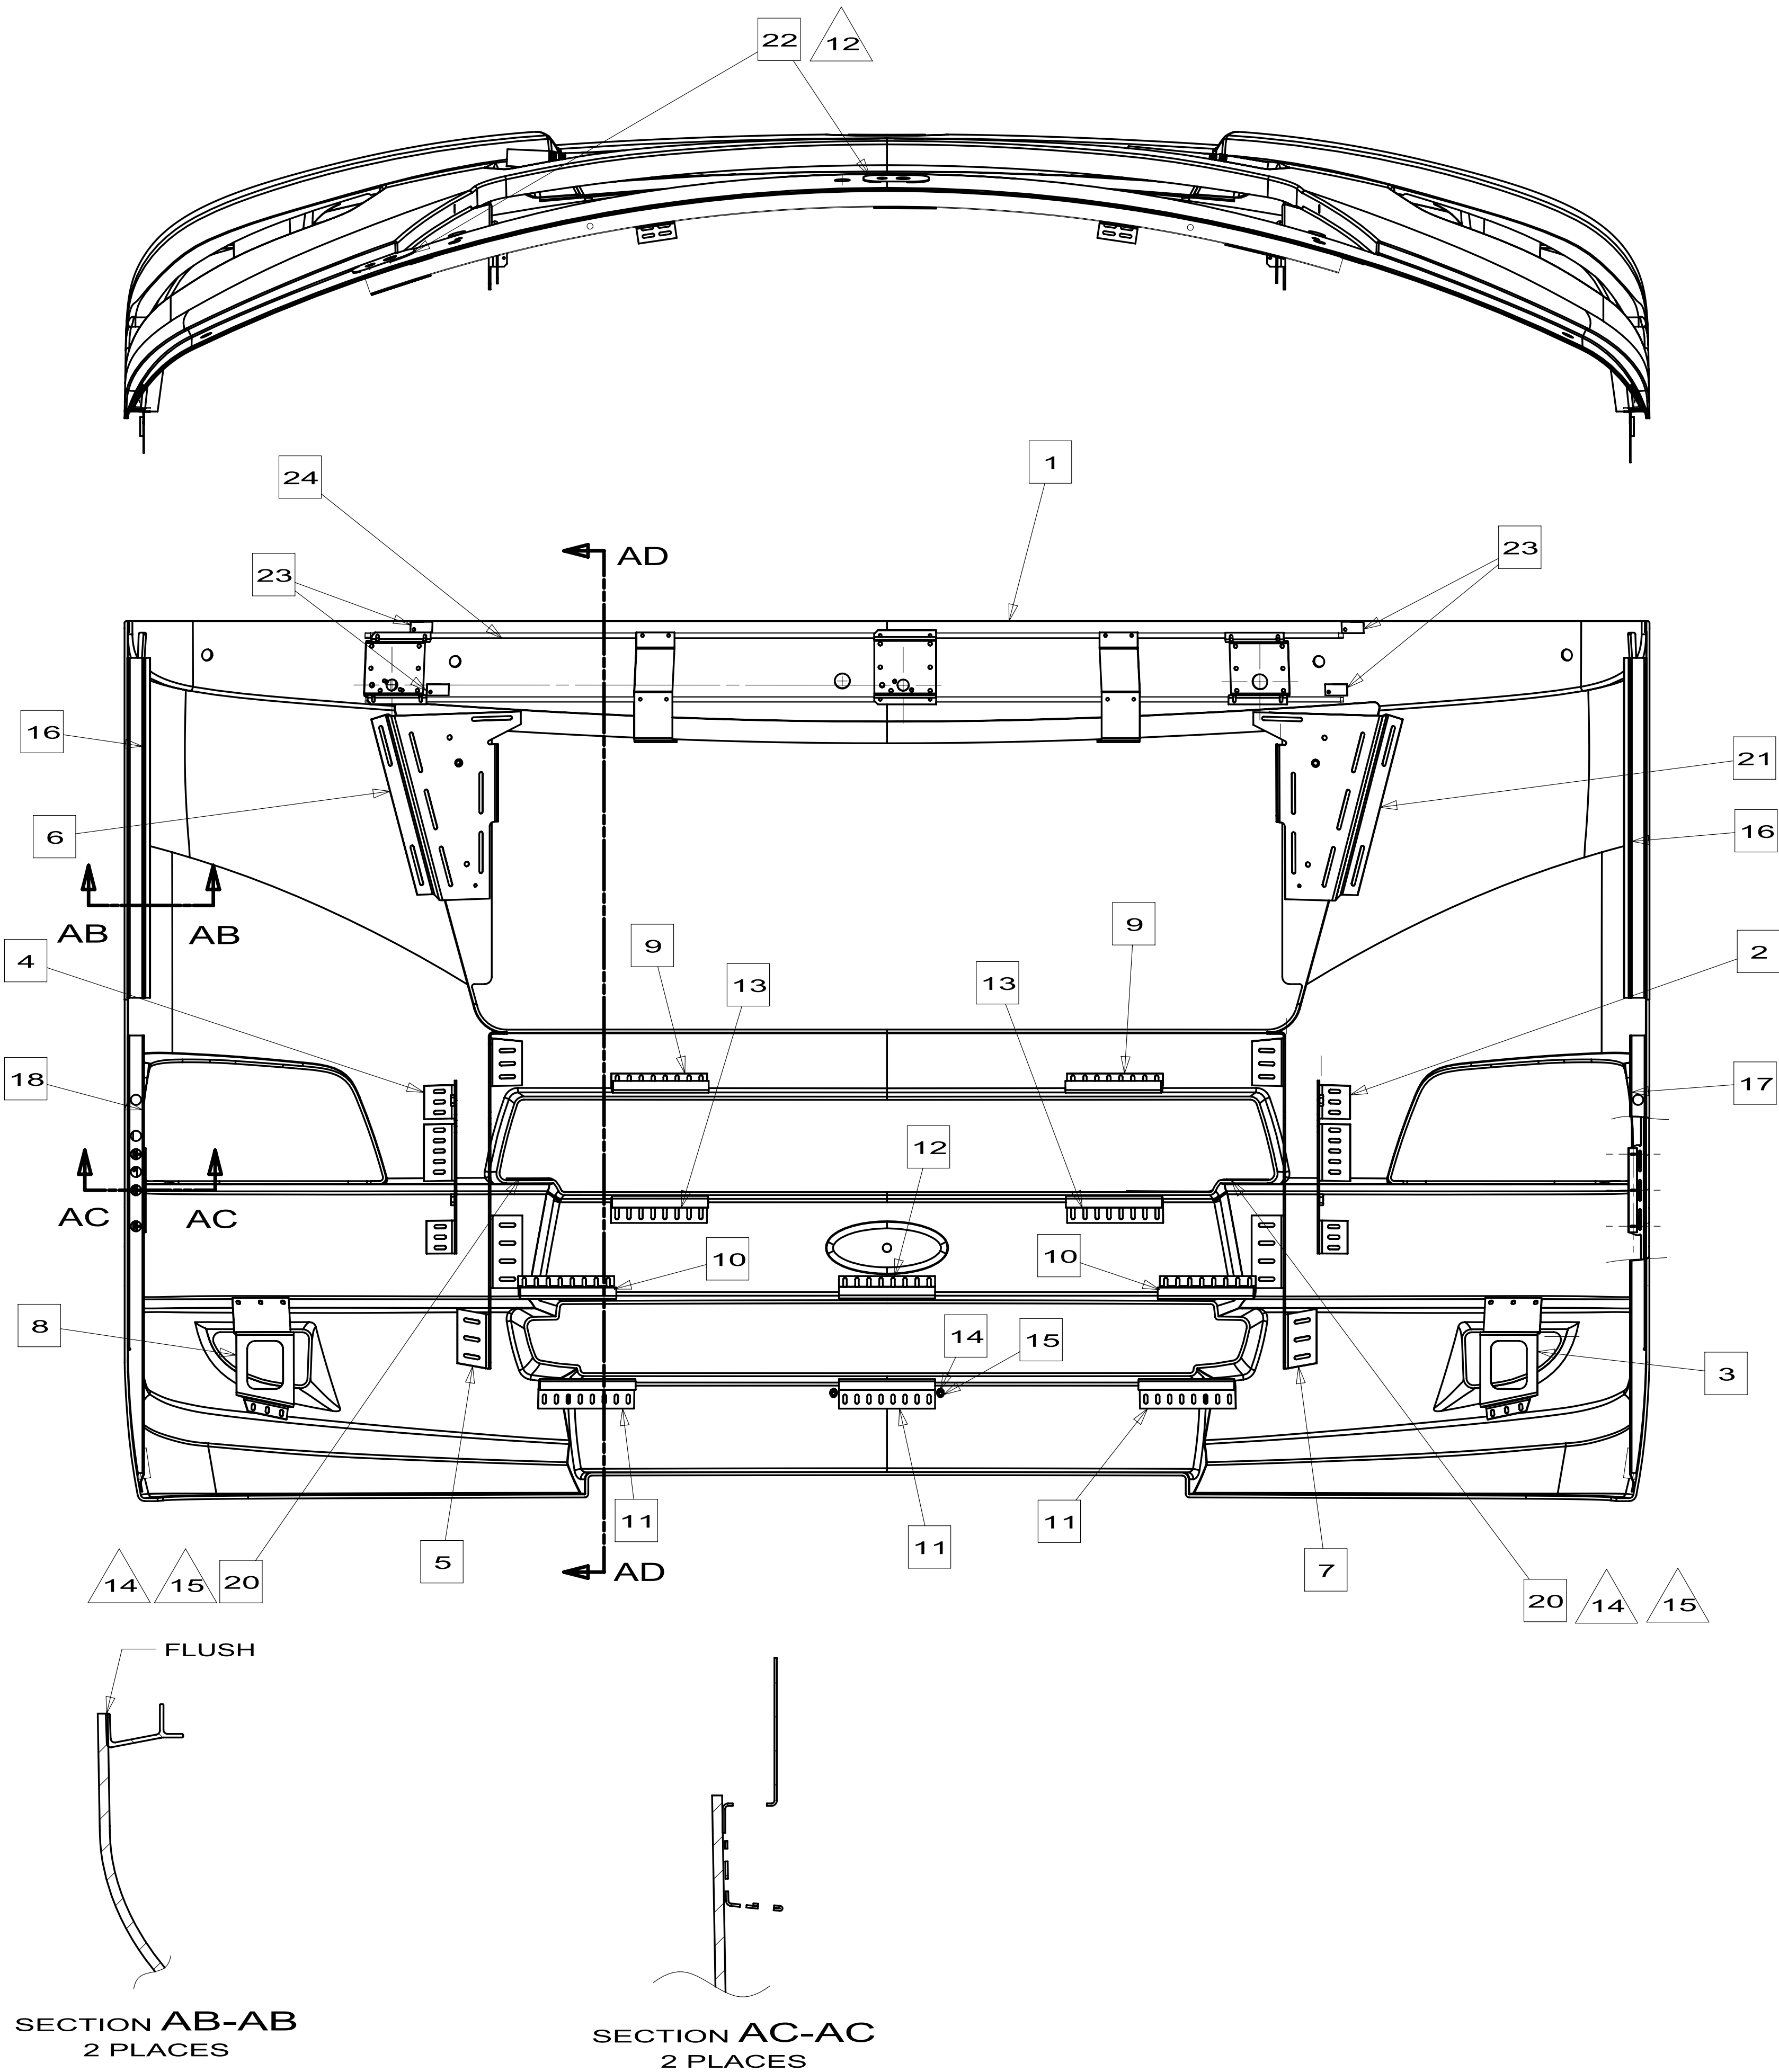

SECTION AB-AB
2 PLACES



SECTION AC-AC
2 PLACES

SECTION AD-AD


FREIGHTLINER
152473-07

24	15401603CHT	SUPPORT-FRON	1
23	15703802XXX	SUPPORT ASM.	1
22	12356324CHT	PLATE-W/HOLE	4
21	15708001CHT	BOOT-COWL	2
20	15399806CHT	SUPPORT-HING	1
19	15955001CHT	REINFORCEMEN	2
18	15542301CHT	ANGLE-SUPPOR	2
17	14356106CHT	BRACKET ASM.	1
16	14356105CHT	BRACKET ASM.	1
15	13286401CHT	SUPPORT-FRON	2
14	08723401000	NUT-JACK	2
13	000G500412U	SCREW-MACH	2
12	15394313CHT	ANGLE-SUPPOR	2
11	15394303CHT	ANGLE-SUPPOR	1
10	15394305CHT	ANGLE-SUPPOR	3
9	15394304CHT	ANGLE-SUPPOR	2
8	15394301CHT	ANGLE-SUPPOR	2
7	15317802CHT	NOT DEFINED	1
6	15399808CHT	SUPPORT ASM.	1
5	15401602CHT	SUPPORT-FRON	1
4	15305704CHT	SUPPORT ASM.	1
3	15317801CHT	BRACKET-FOGL	1
2	15305702CHT	SUPPORT ASM.	1
1	15247305CHT	PANEL-FRONT	1
ITEM	PART NUMBER	DESCRIPTION	QTY


FIRST USED			
09 J SERIES			
DO NOT SCALE DRAWING			
TITLE: PANEL-FRONT,LOWER			
SHEET 4	PART NO	152473	REV

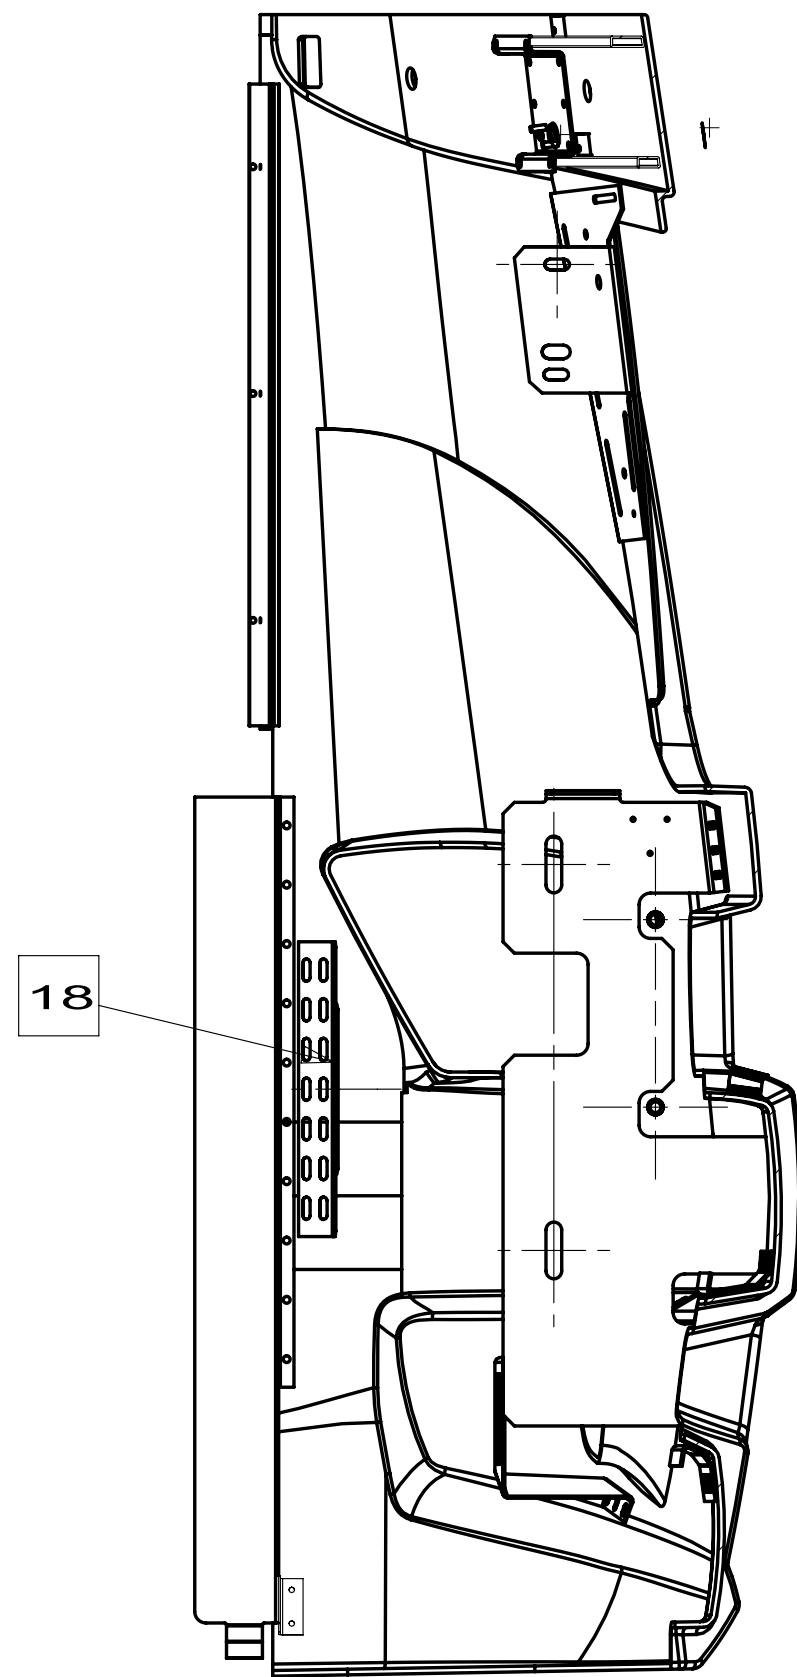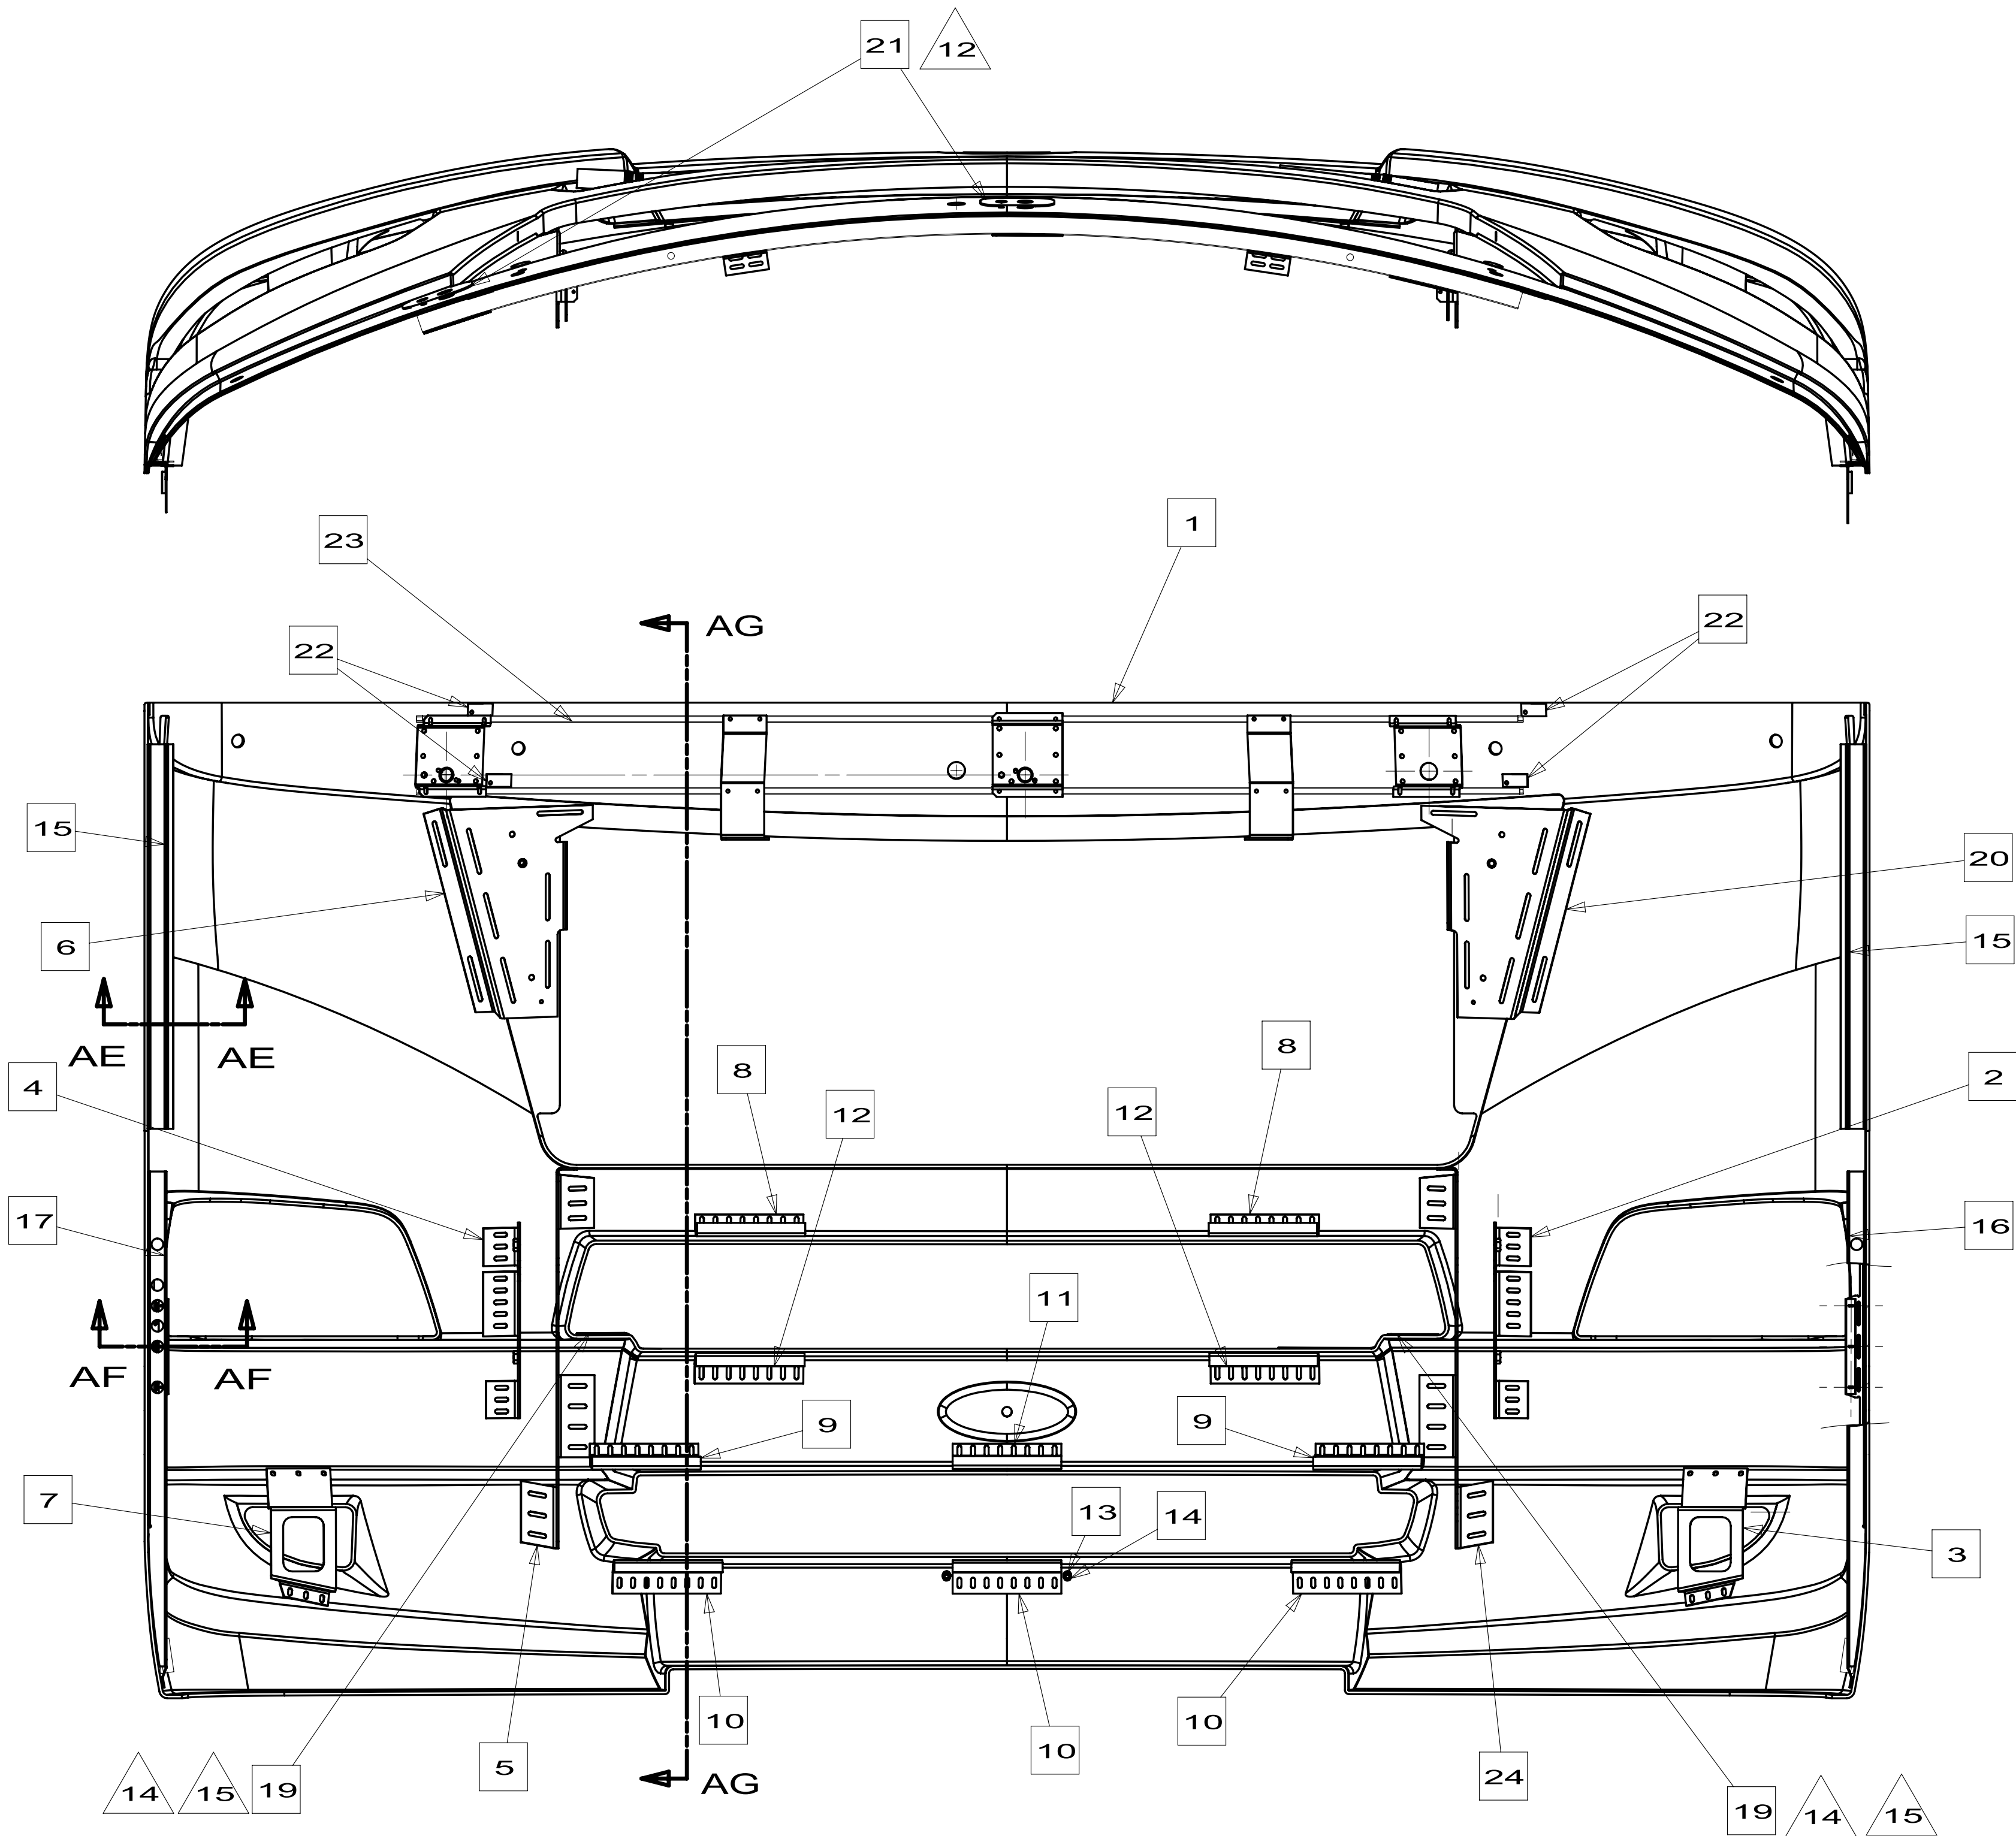


SECTION AG-AG

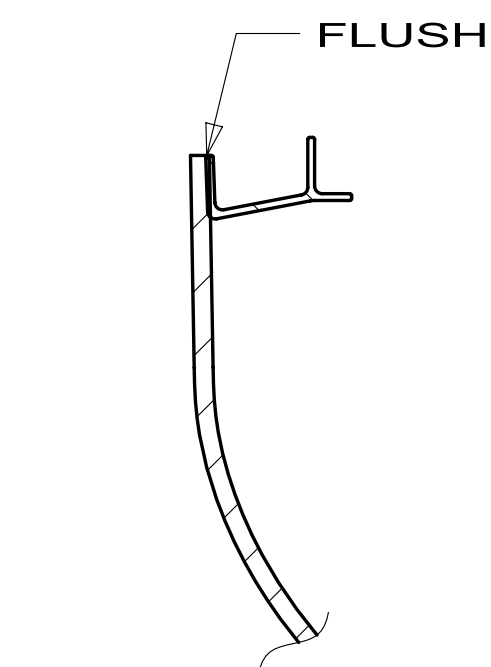

SECTION AE-AE
2 PLACES

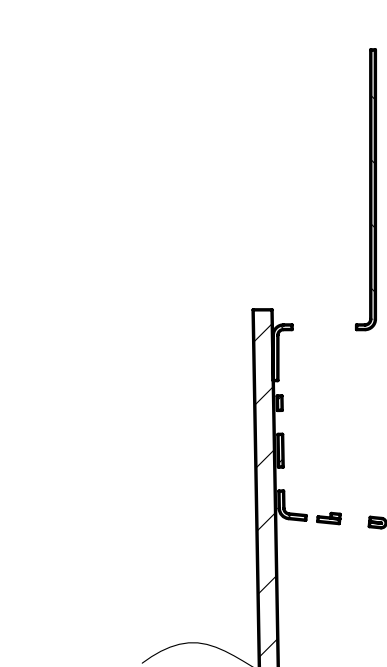

SECTION AF-AF
2 PLACES

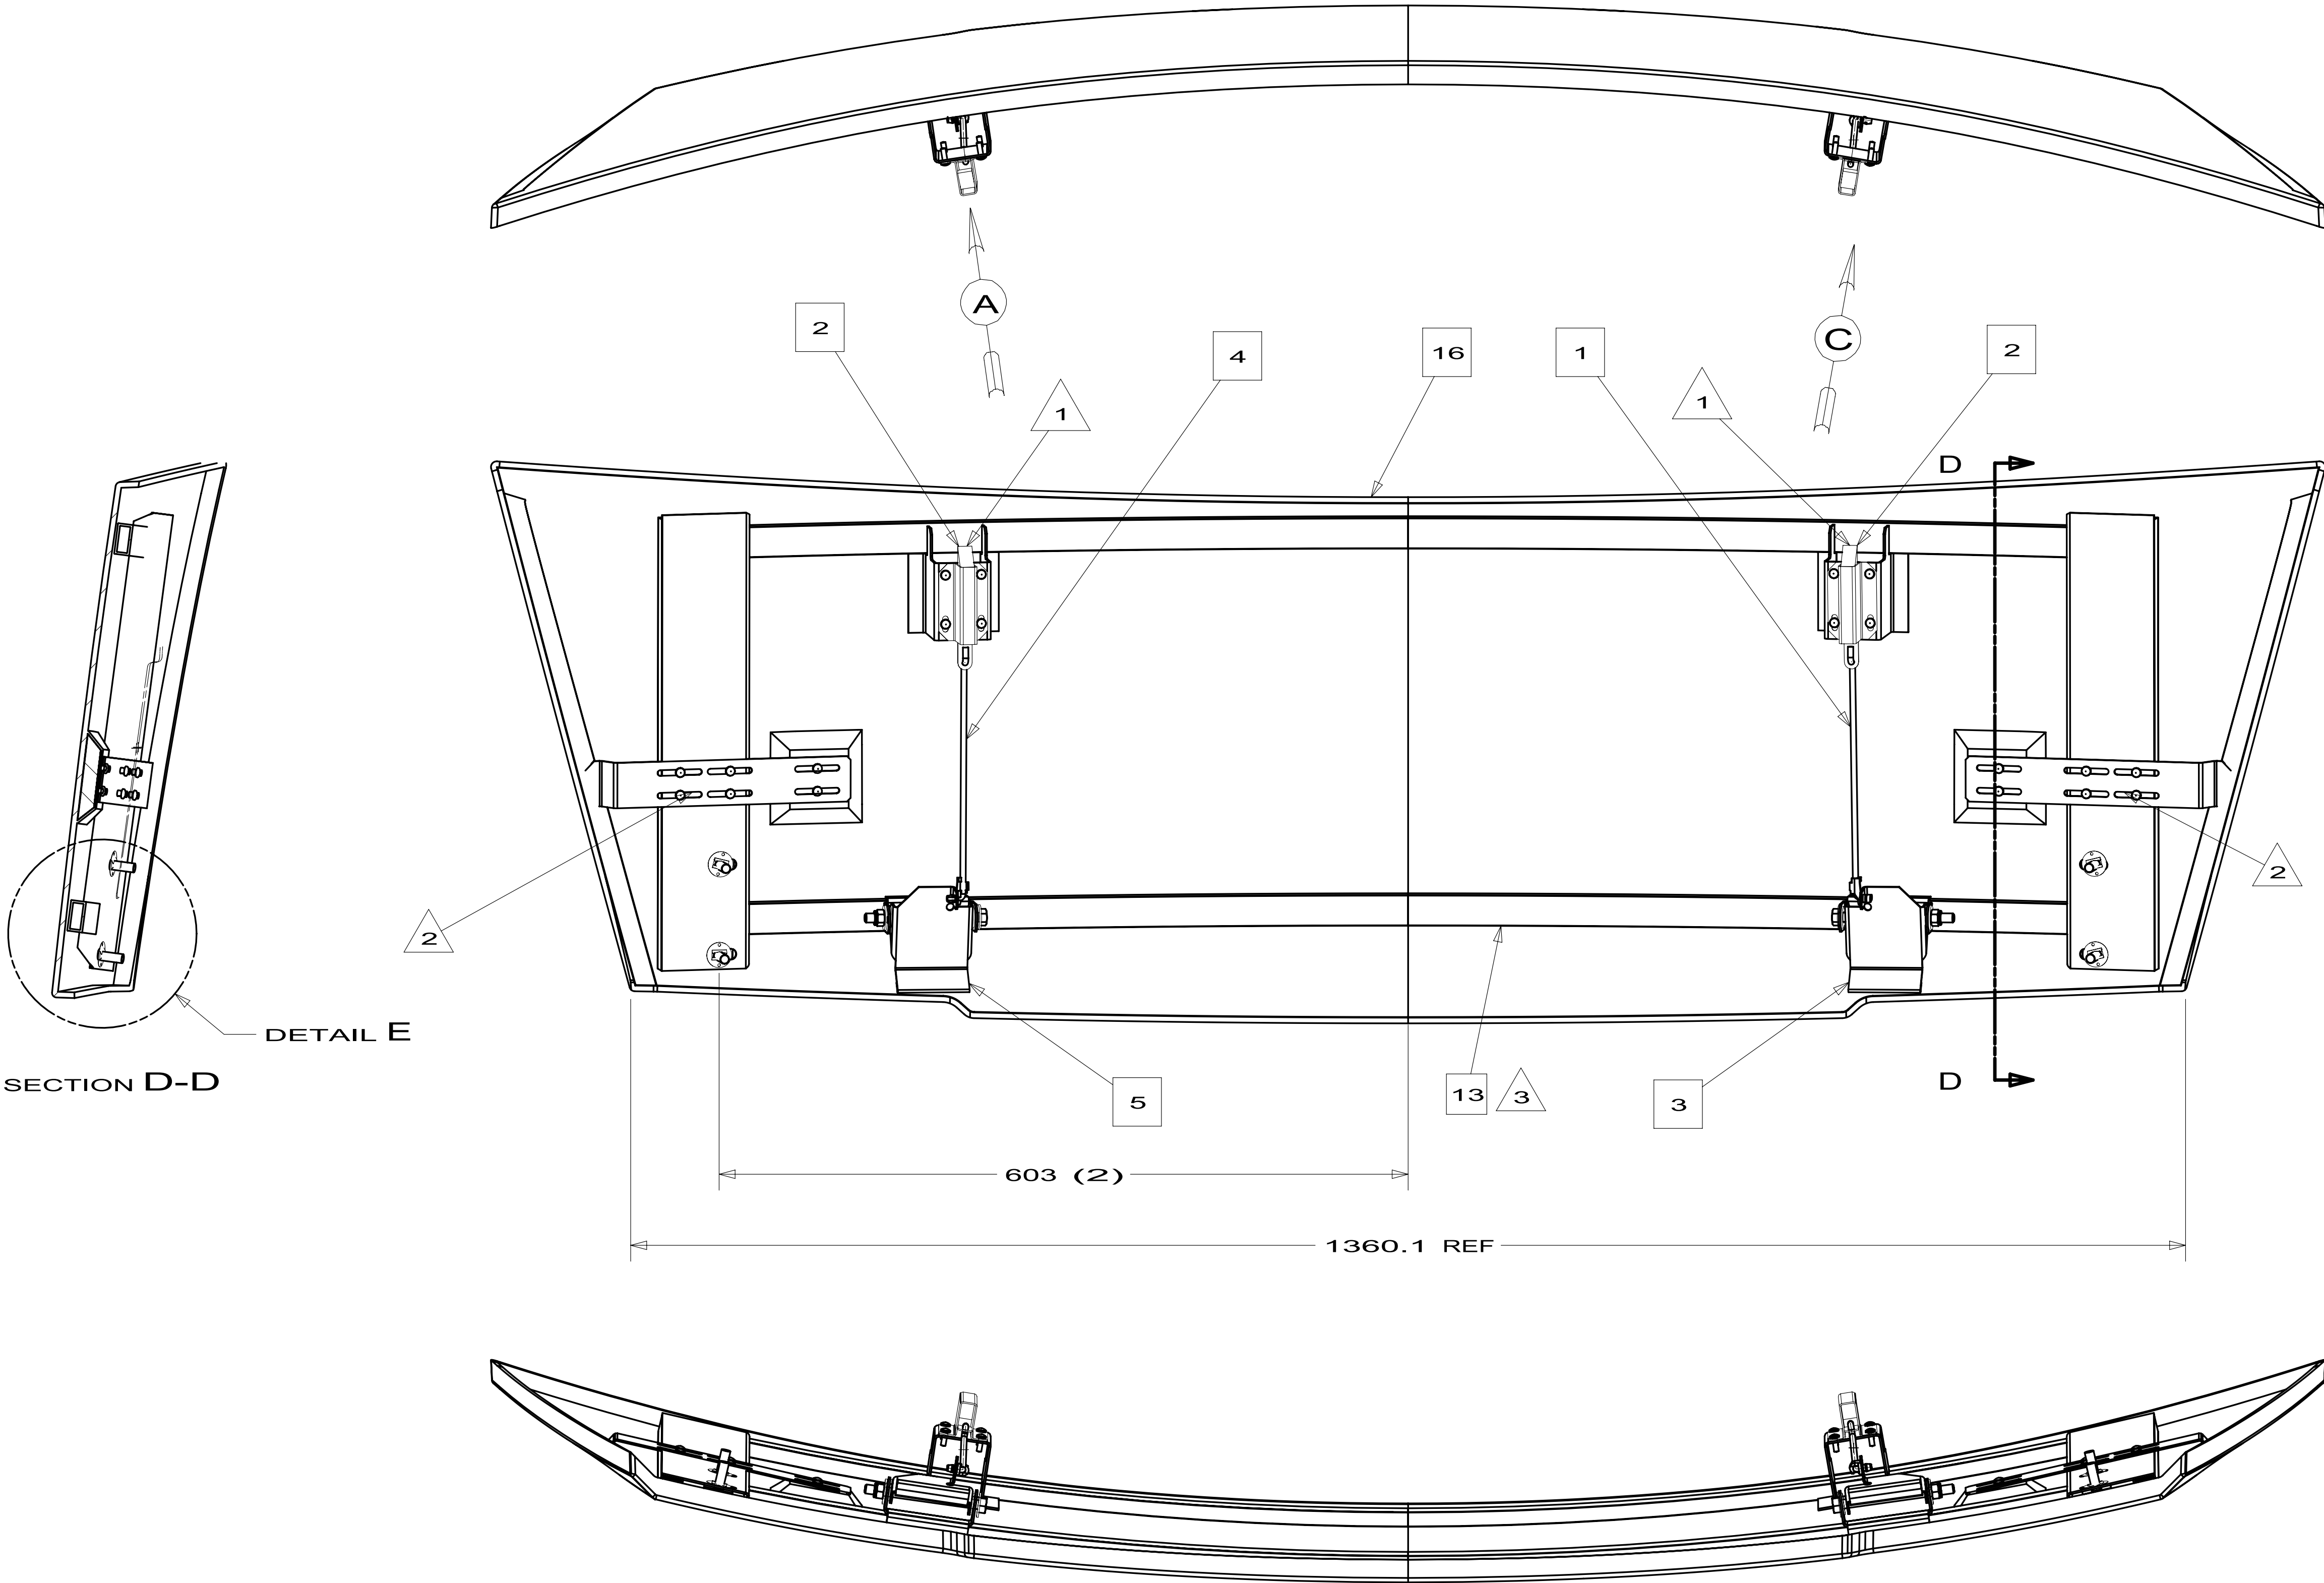

16	15338501CHT	PANEL-HOOD,C	1
15	14634710CHT	PLATE-STUD	2
14	04436402000	NUT-SPEED, F	4
13	15408801CHT	HOOD ASM-INN	1
12	15620001CHT	ADJUSTER-HOC	2
11	10226501000	CLIP-ROD END	2
10	05871602000	WASHER-FLAT	4
9	000E131600U	WASHER	4
8	000C120564U	BOLT	2
7	000D290500A	NUT	2
6	000G390808U	SCREW-PAN,HE	24
5	14738801CHT	LATCH-PADDLE	1
4	14552105CHT	ROD-HOOD,LAT	1
3	14738802CHT	LATCH-PADDLE	1
2	11390802000	PLUNGER ASM	2
1	14552106CHT	ROD-HOOD,LAT	1
ITEM	PART NUMBER	DESCRIPTION	QTY

WINNEBAGO

INDUSTRIES

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFTR

ORIG DATE

CHGR

ALL DIMENSIONS ARE
IN MILLIMETERS

P.E.

FIRST USED

M.E.

06 G-SERIES,W

DSNR

UNSPECIFIED TOLERANCES ARE:

MATERIAL:

WHOLE DIM (X) : 3

ONE-PLACE (X.X) :

TWO-PLACE (X.XX) :

ANGLE :

THIRD ANGLE
PROJECTION

DO NOT SCALE DRAWING

TITLE:

HOOD COMPL-FRONT

SHEET 1 OF 2

PART NO 154089

REV

REF:

1




NOTES:

3. USE ADHESIVE-RESIN 112481-03-000 AND ADHESIVE-CURATIVE 112481-04-000 FOR BONDING PARTS.

2. DO NOT APPLY GLUE.

1. LUBRICATE WITH WHITE LITHIUM GREASE.



SEE CHART
FOR COLOR VARIATIONS
OF THIS PART

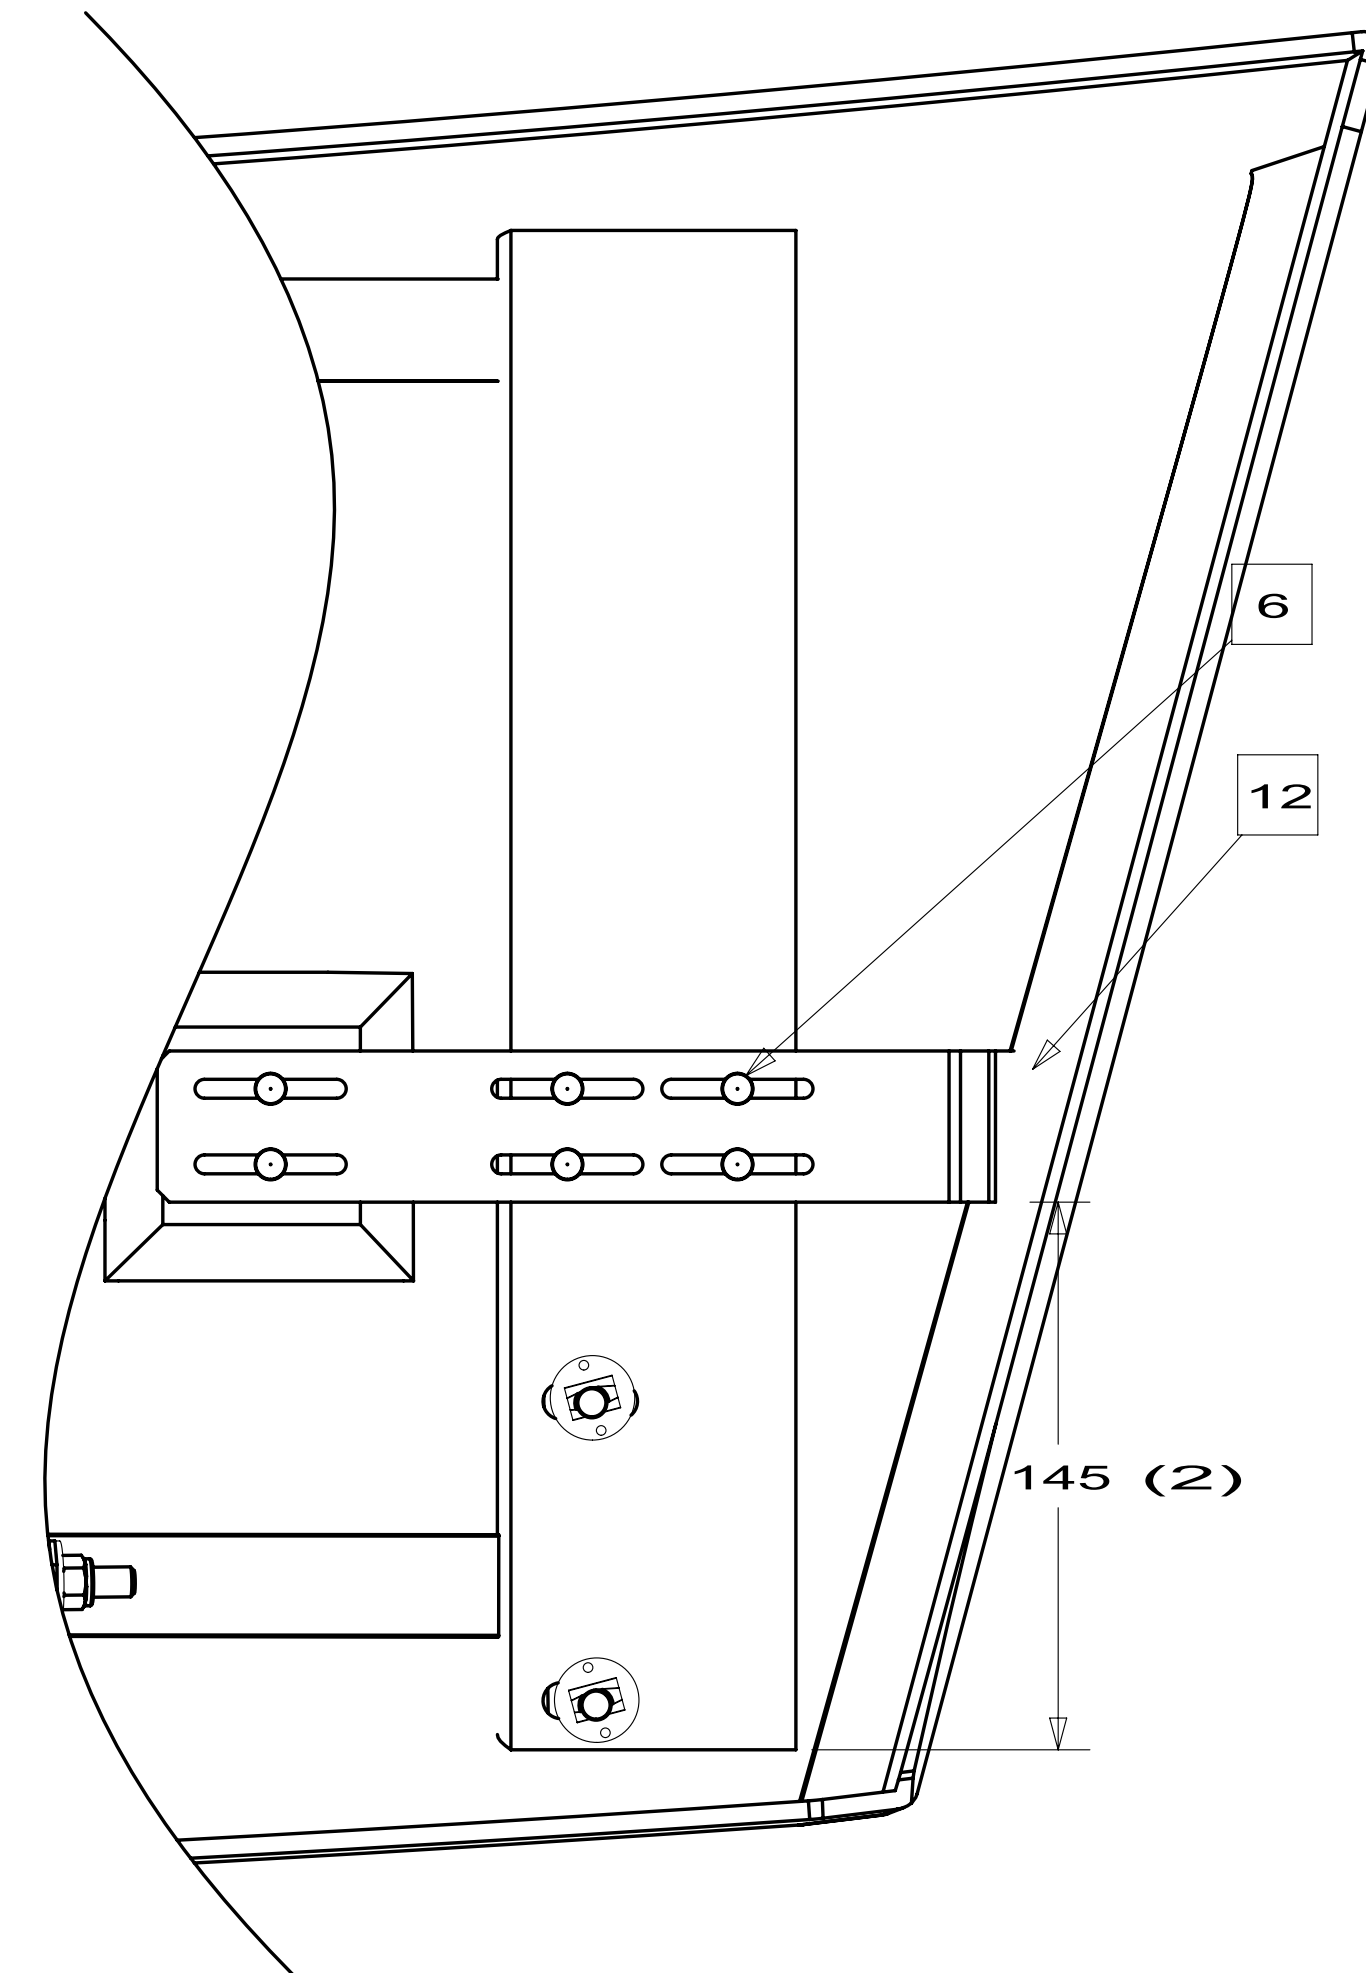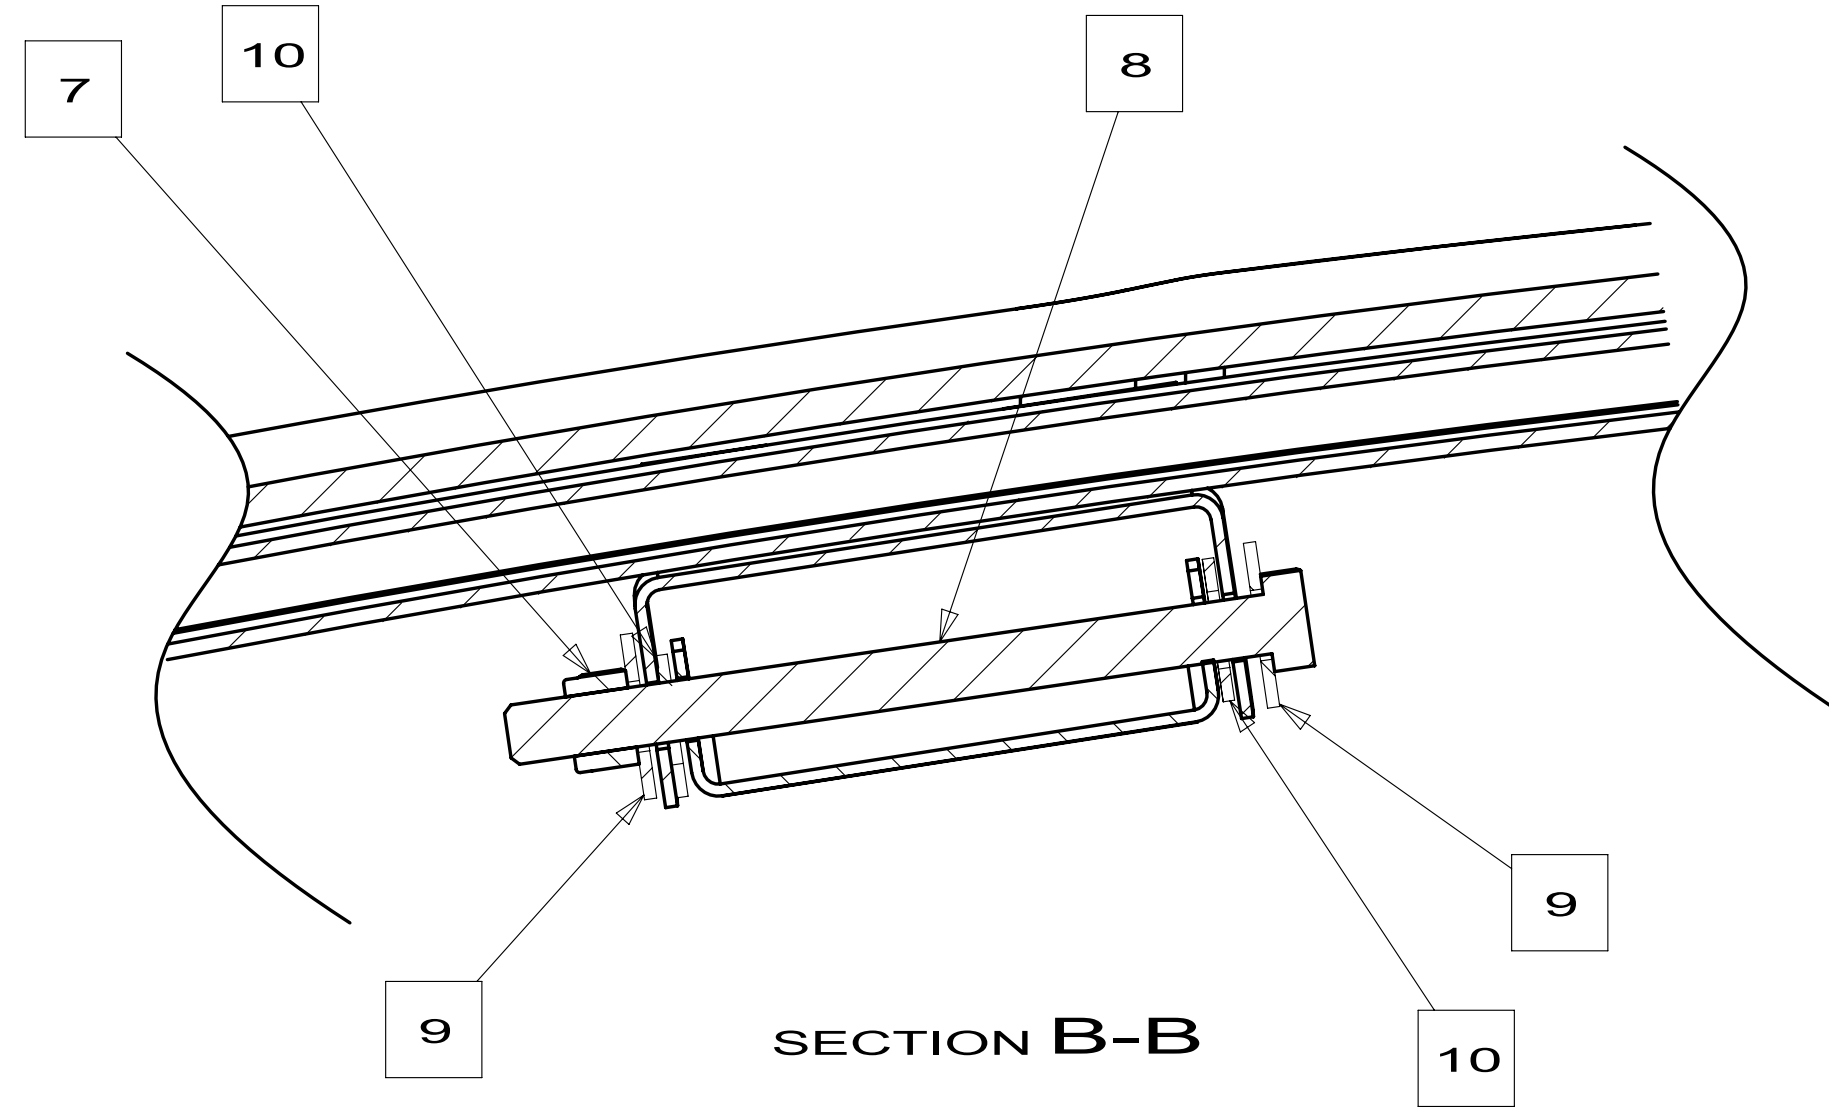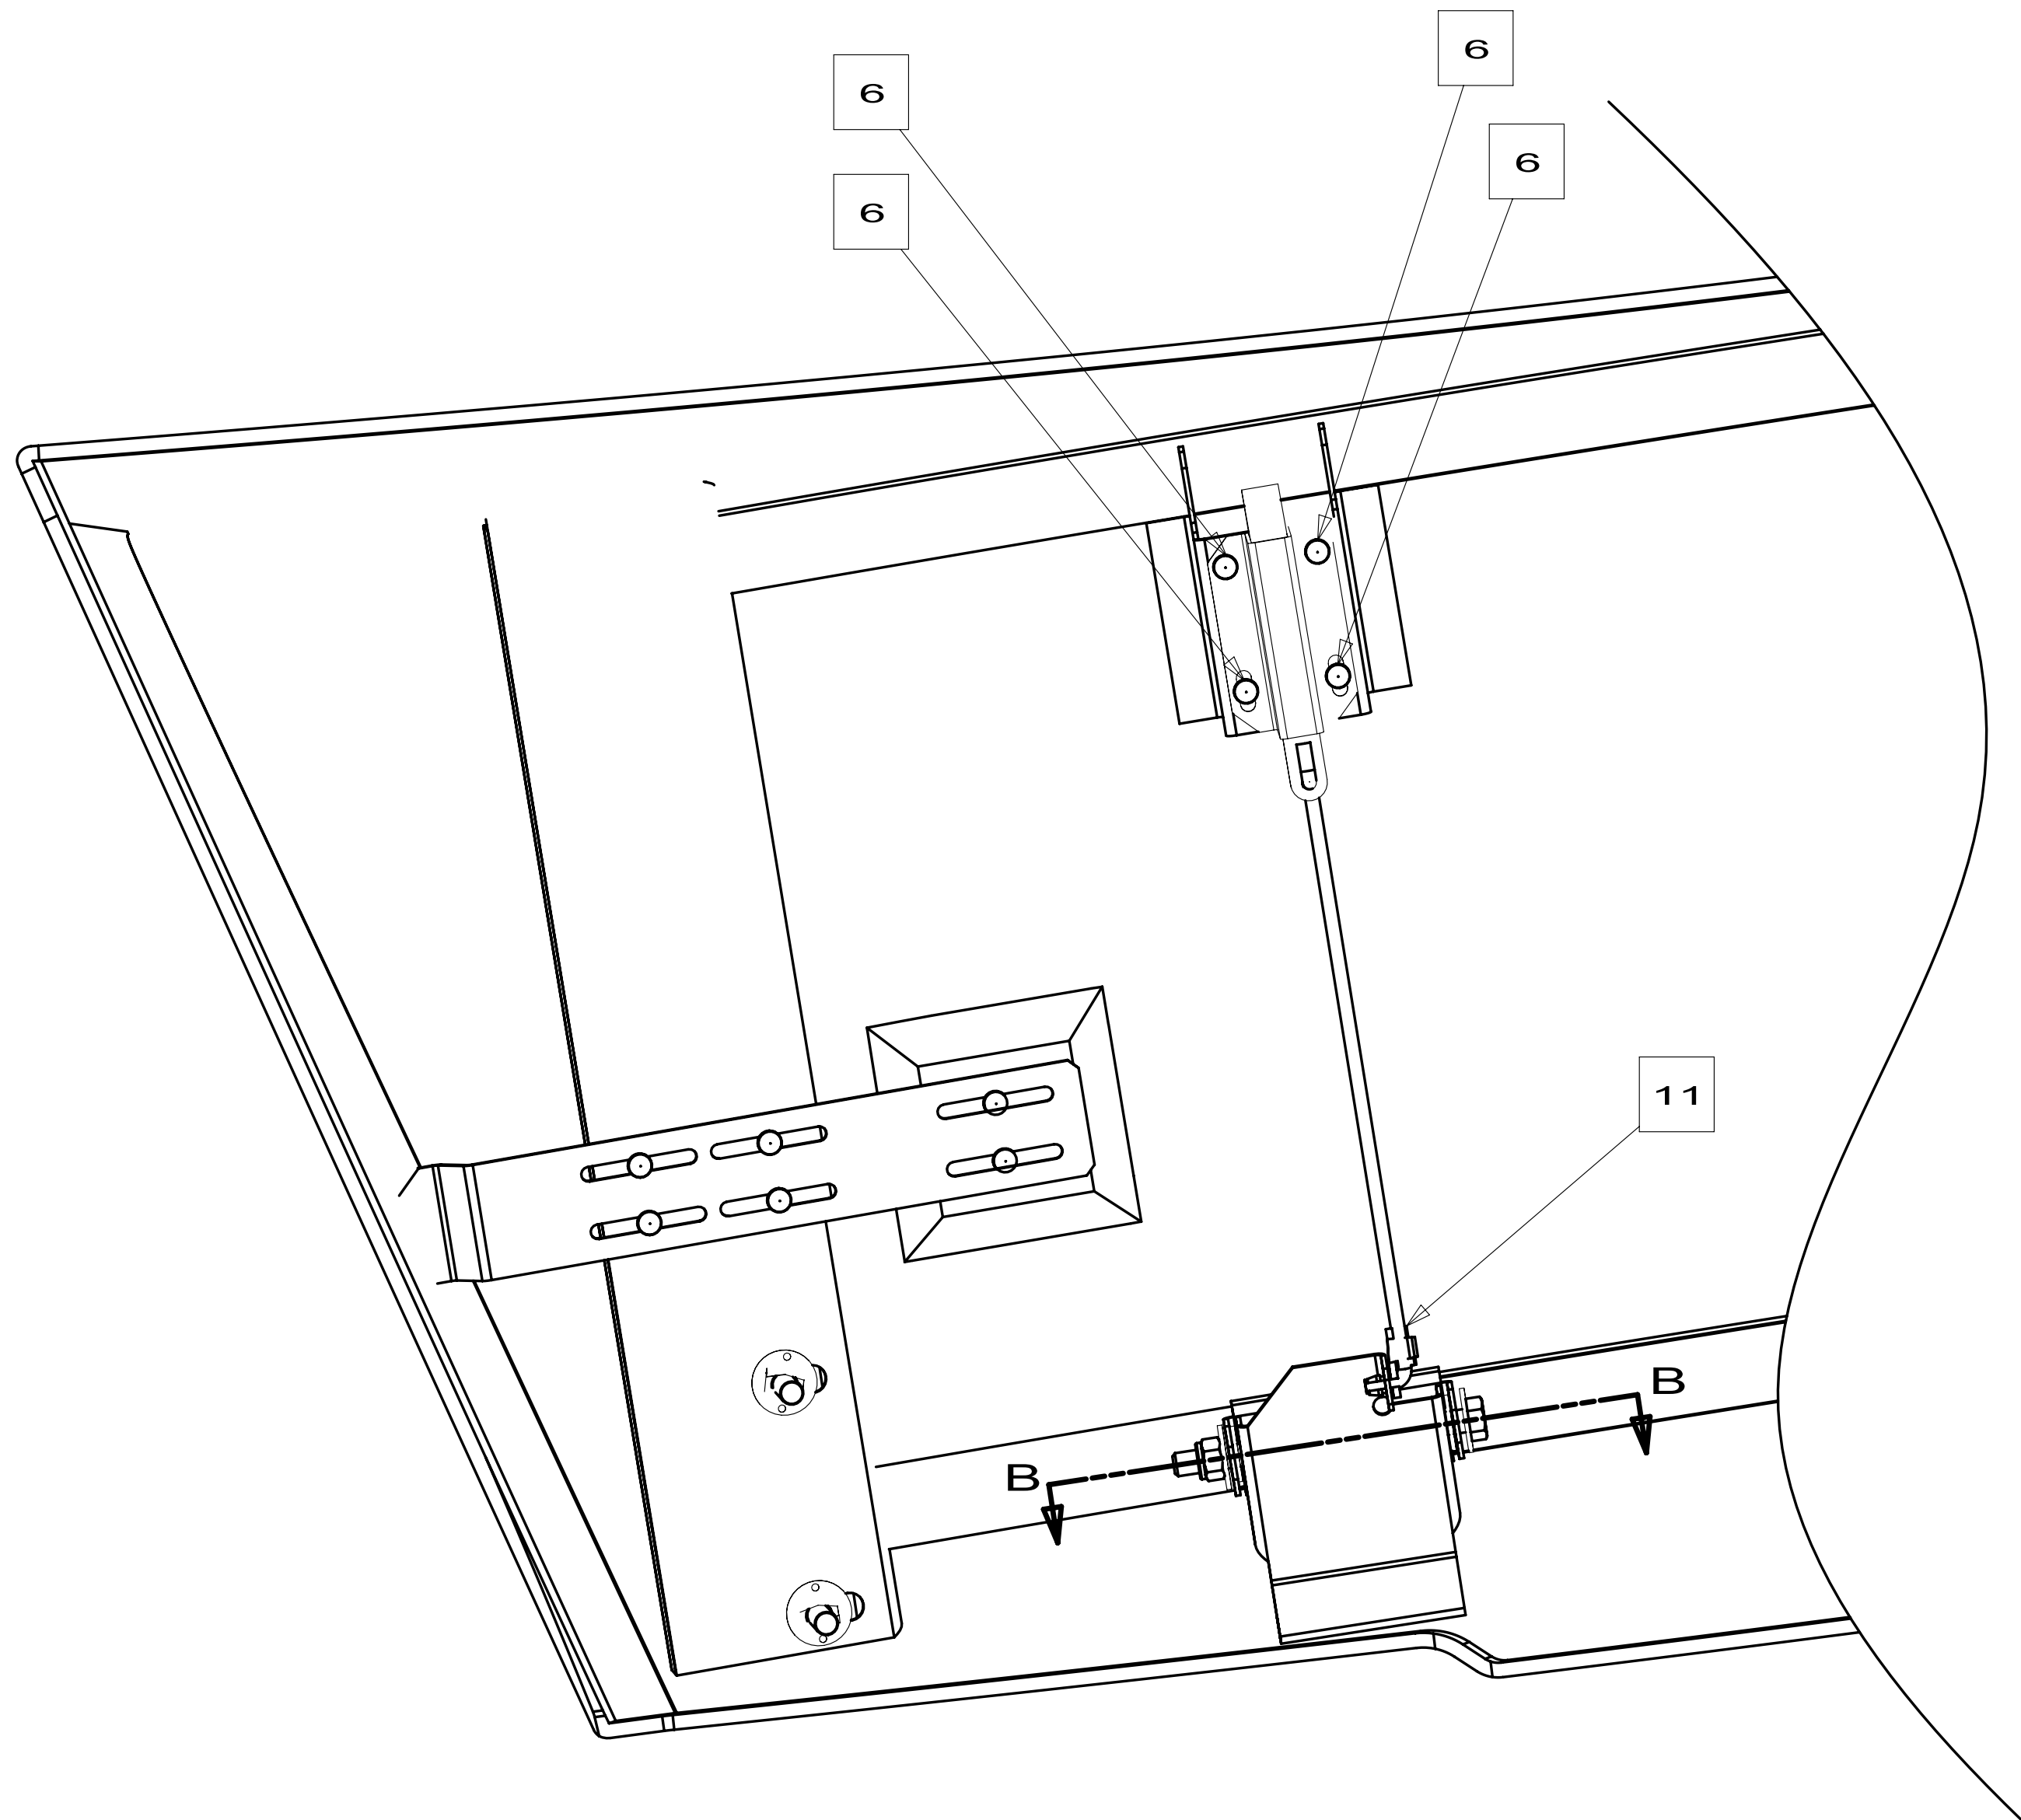

FIRST USED			06 G-SERIES,W		
DO NOT SCALE DRAWING					
TITLE:			HOOD COMPL-FRONT		
SHEET 2	PART NO	154089	REV		

8		7			
DWG NO	UNIT	A	B	C	D
171260-01	J32H	990	1000	3310	3180
171260-02	J35P	---	---	---	---
171260-03	J37F	1090	1015	3650	3900

1		2		3		4		5		6		7		8	
RELEASE	REV	DATE	DWG NO	171260											
REV	ZONE	REVISION RECORD		DATE	DATE	DTR-ORG									



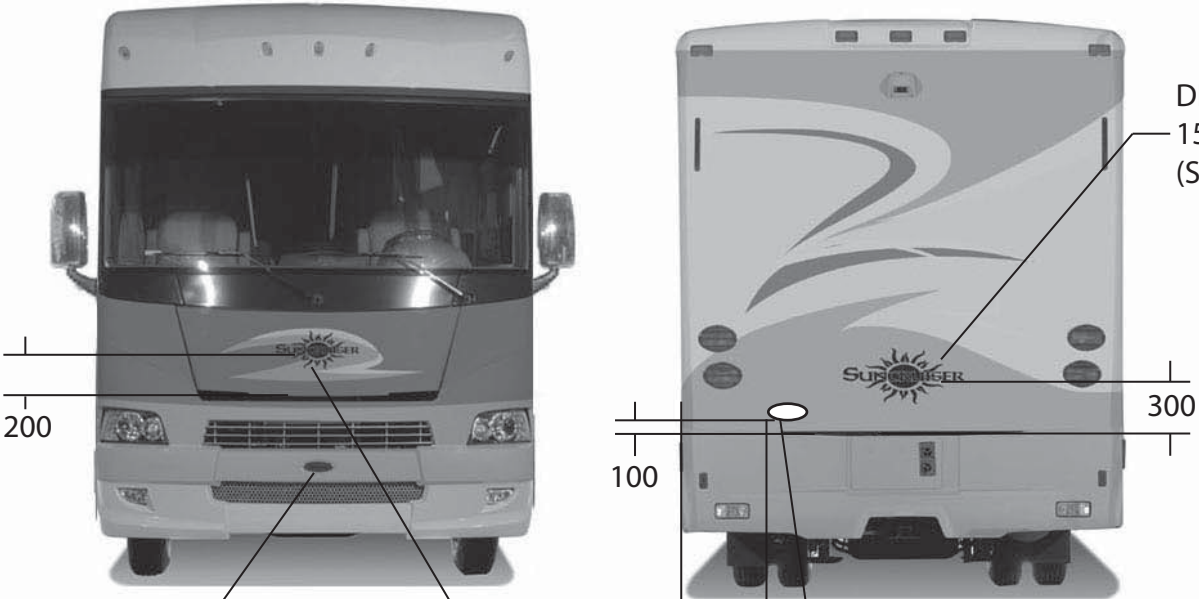
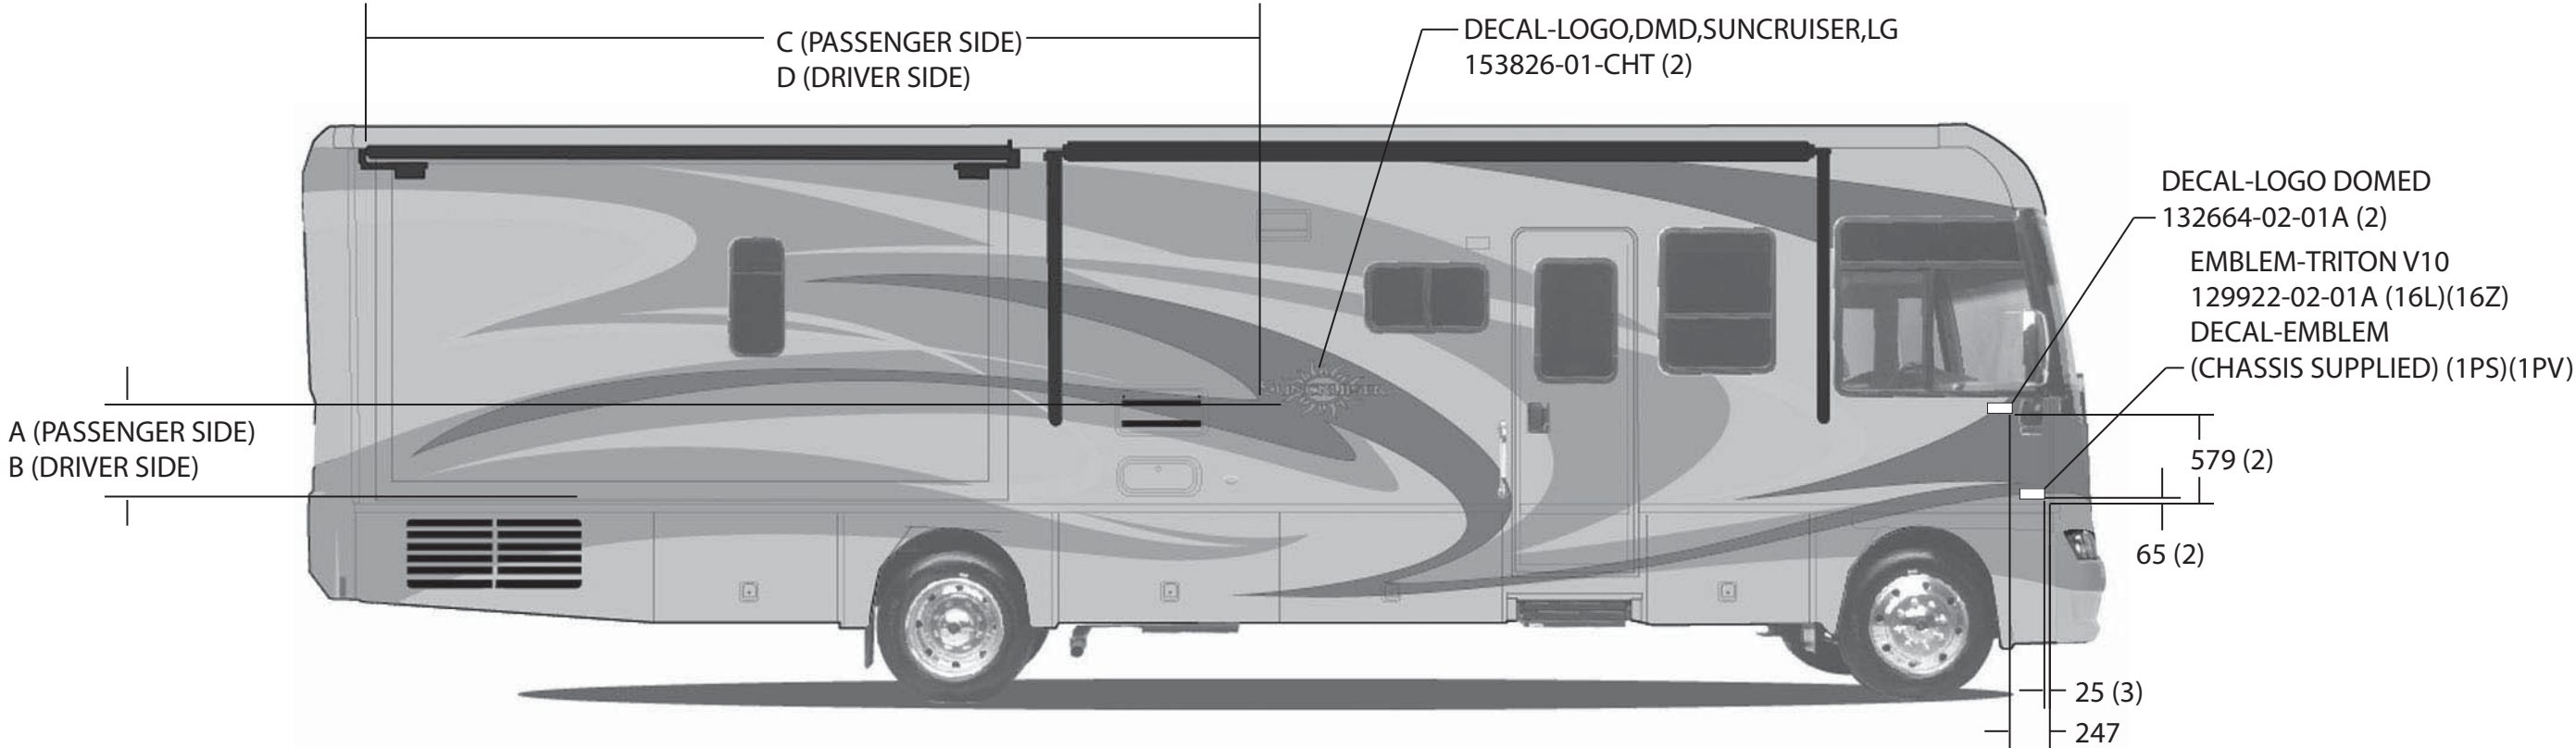


△ CENTER ON UNIT.


1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.
2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.
3. TOLERANCE FOR DIMENSIONS IS +/-20mm.
LOGO IS TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).
4. CLEAR COAT TO BE APPLIED ON ENTIRE UNIT TO PROTECT PAINT.
5. USE 174664-01-000 (100 FT) TO COVER UNSEALED ROOF SEAMS.
6. APPLY SEALER BODY SEAM CLEAR 94401-04-000 TO HELP SECURE EDGES.
7. END PANELS OF SLIDEOUT ROOMS WILL BE PAINTED WITH BASECOAT AND CLEAR COAT ONLY. THERE WILL BE NO COLORED DESIGN GRAPHIC ELEMENTS PAINTED ON THE END PANELS.
8. PASSENGER SIDE OF UNIT SHOWN, DRIVER'S SIDE OPPOSITE.
9. DIE CUT ACRYLIC FILM TO PROTECT UNIT (KIT-PAINT PROTECTION 157825-02-000)


- (16L) FORD 22,000#-22.5 AL WHL
(16Z) FORD 24,000#-22.5 ALUM WHEEL
(1PS) WORKHORSE 22,000#-22.5 TIRE
(1PV) WORKHORSE 24,000#-22.5 TIRE
(24P) MASK FRONT EXT PROTECTIVE
(27A) EXT FULL BODY PAINT PKG #1
(92A) EXT FULL BODY PAINT PKG #2
(24C) EXT FULL BODY PAINT PKG #3
(24B) EXT FULL BODY PAINT PKG #4

		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
		ORIG. DATE	09/05/08
		FIRST USED	10 J SERIES
			SUNCRUISER
		MATERIAL:	
SPECIFICATION PRINT DO NOT SCALE			
TITLE:			
GRAPHICS INSTL - FBP			
SHEET	1 OF 2	PART NO	171260
			REV

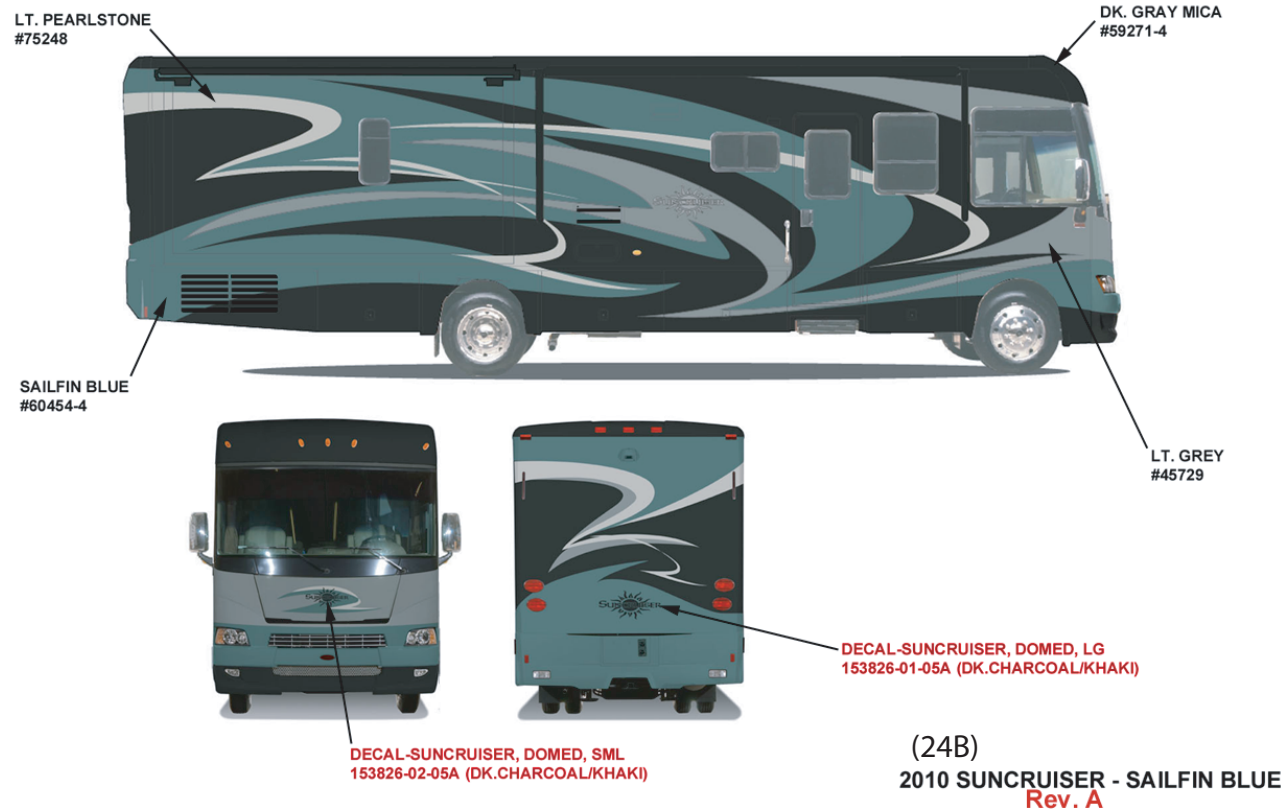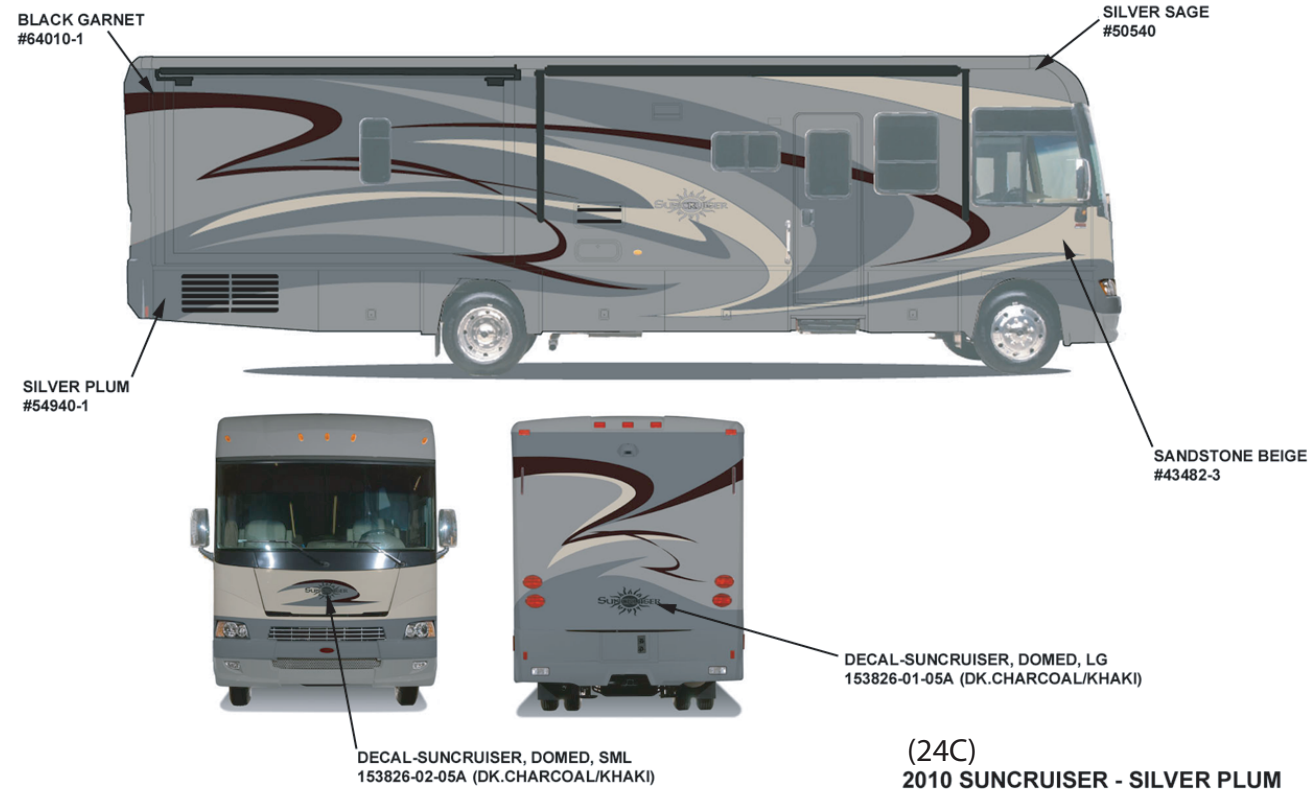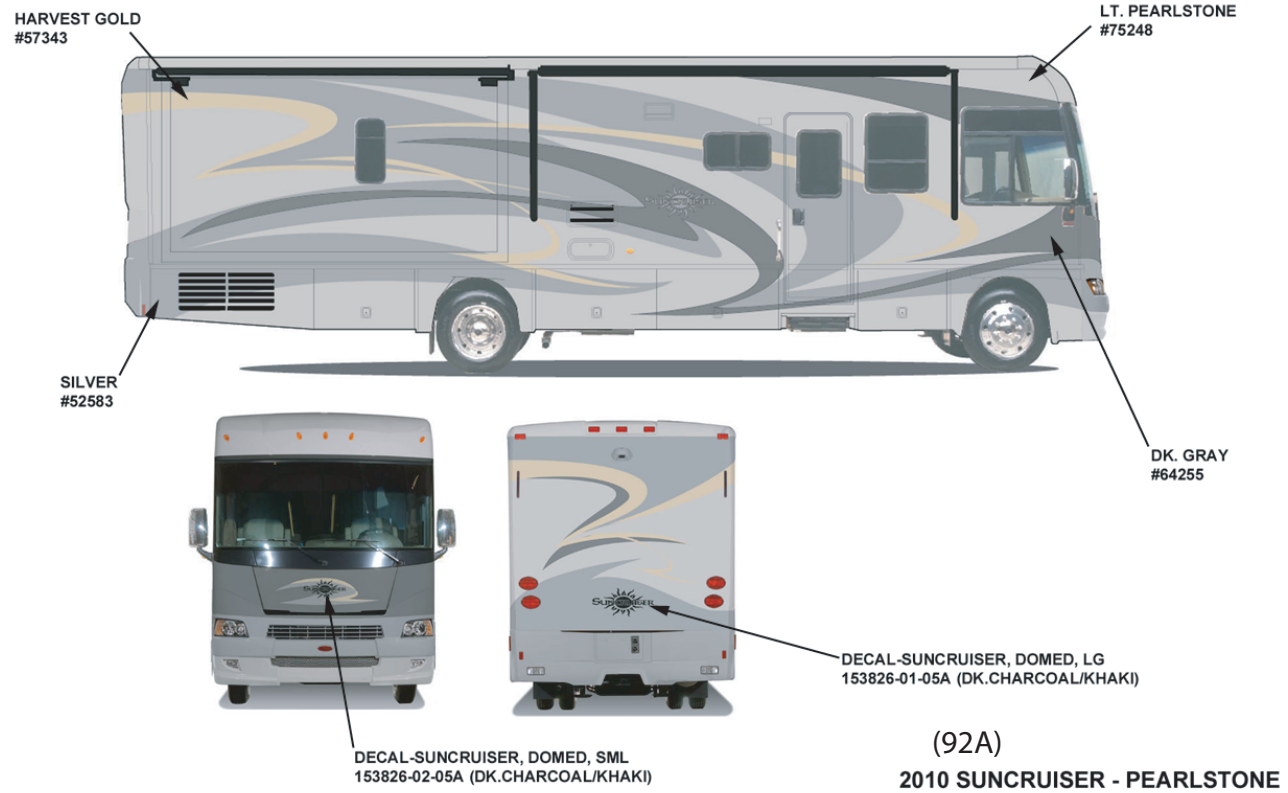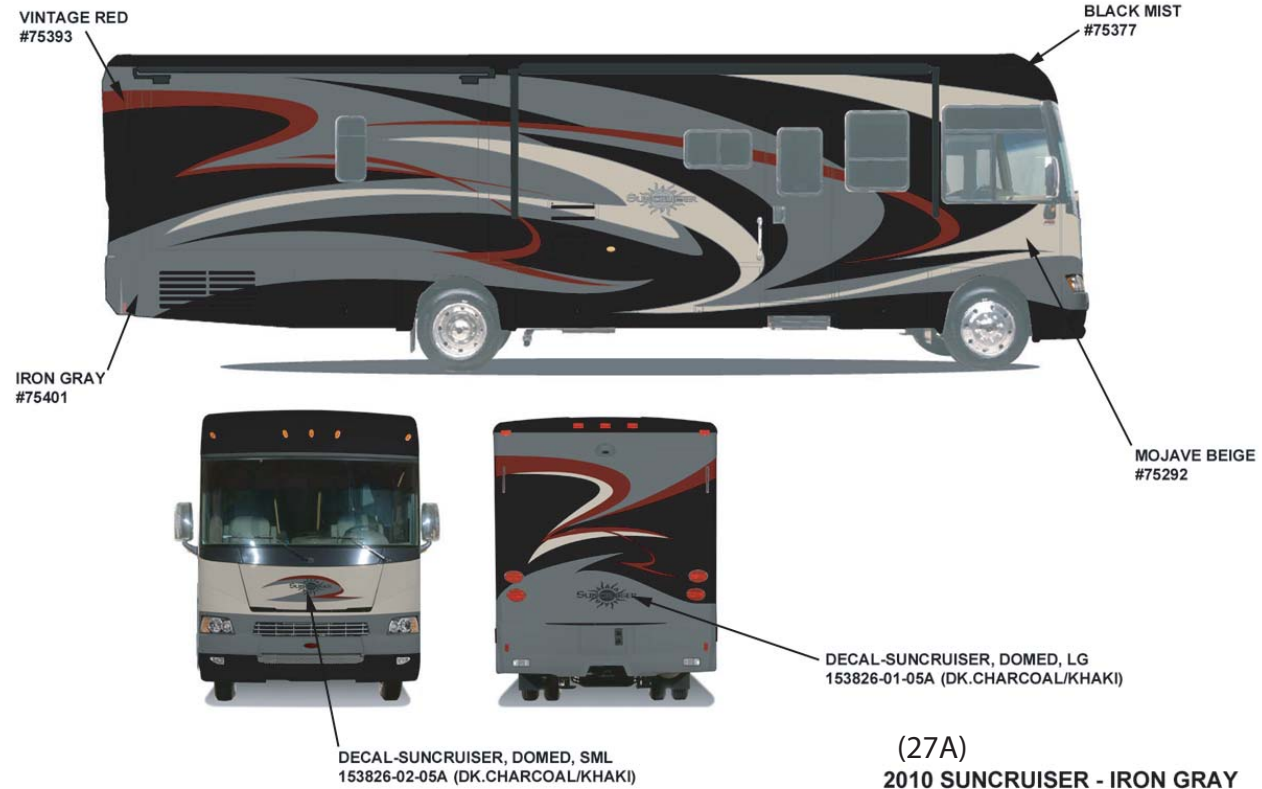

FIRST USED		
2010 J-SERIES (SUNCRUISER)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	2	PART NO
		171260
		REV

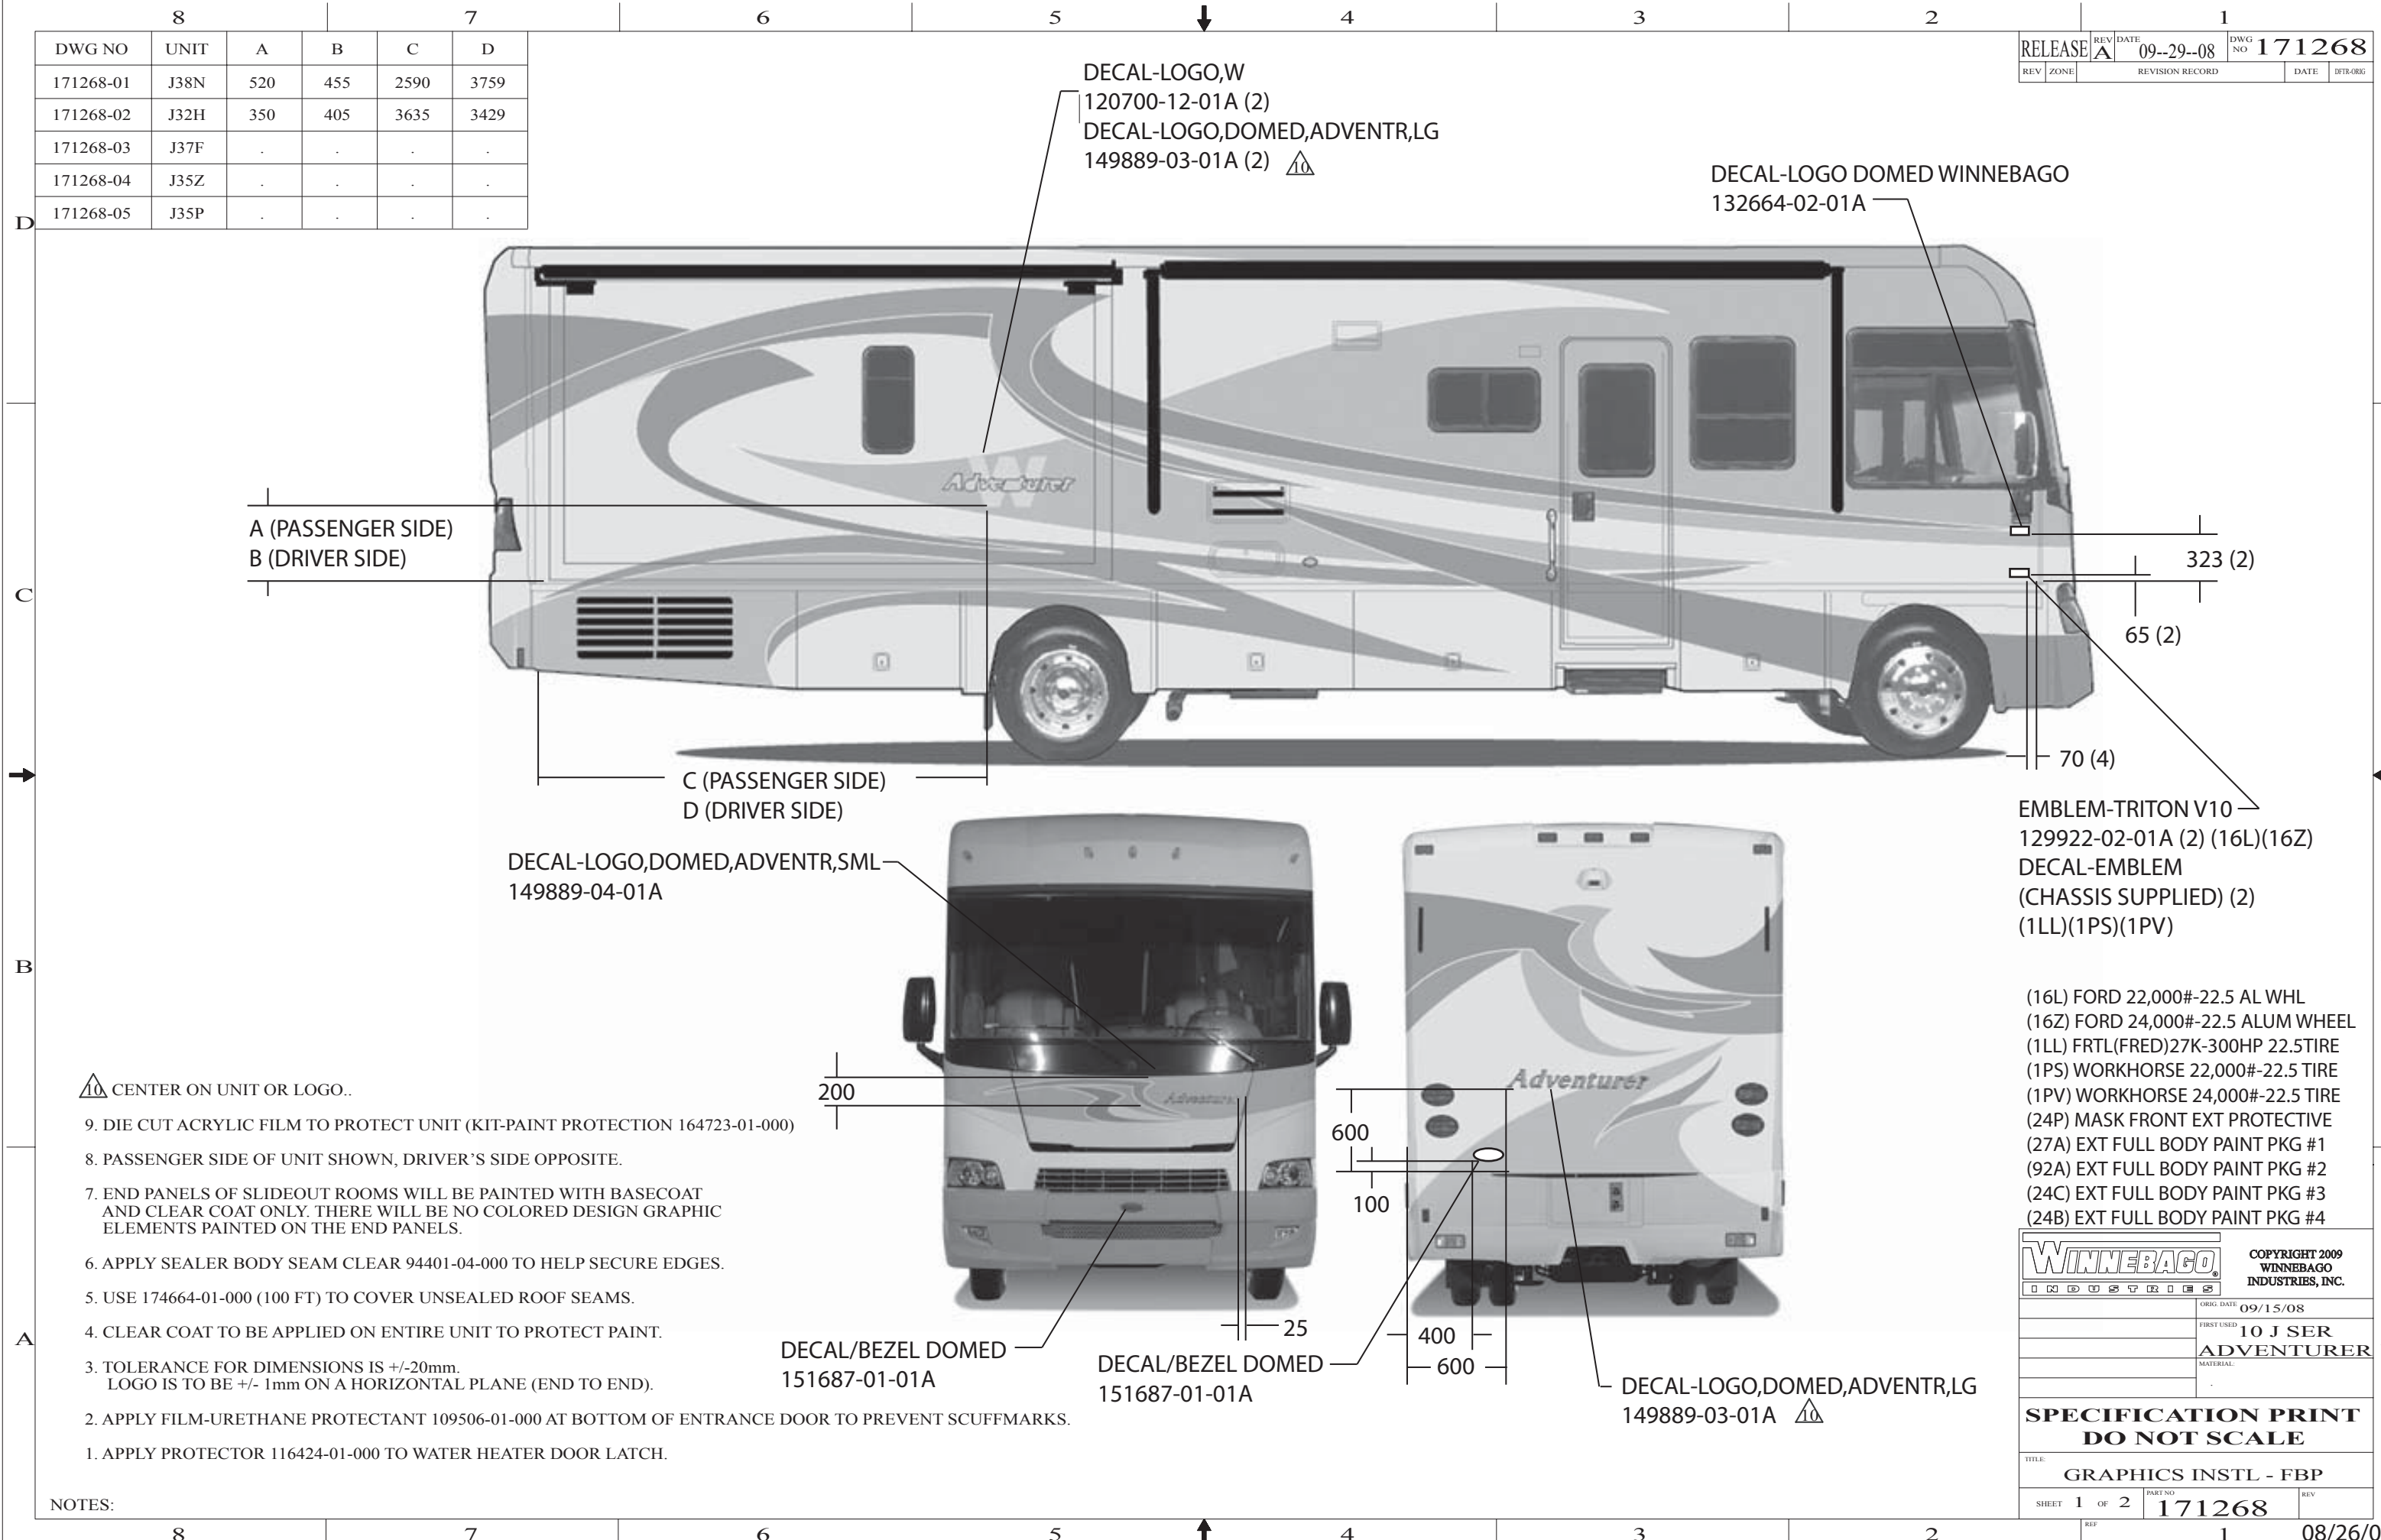

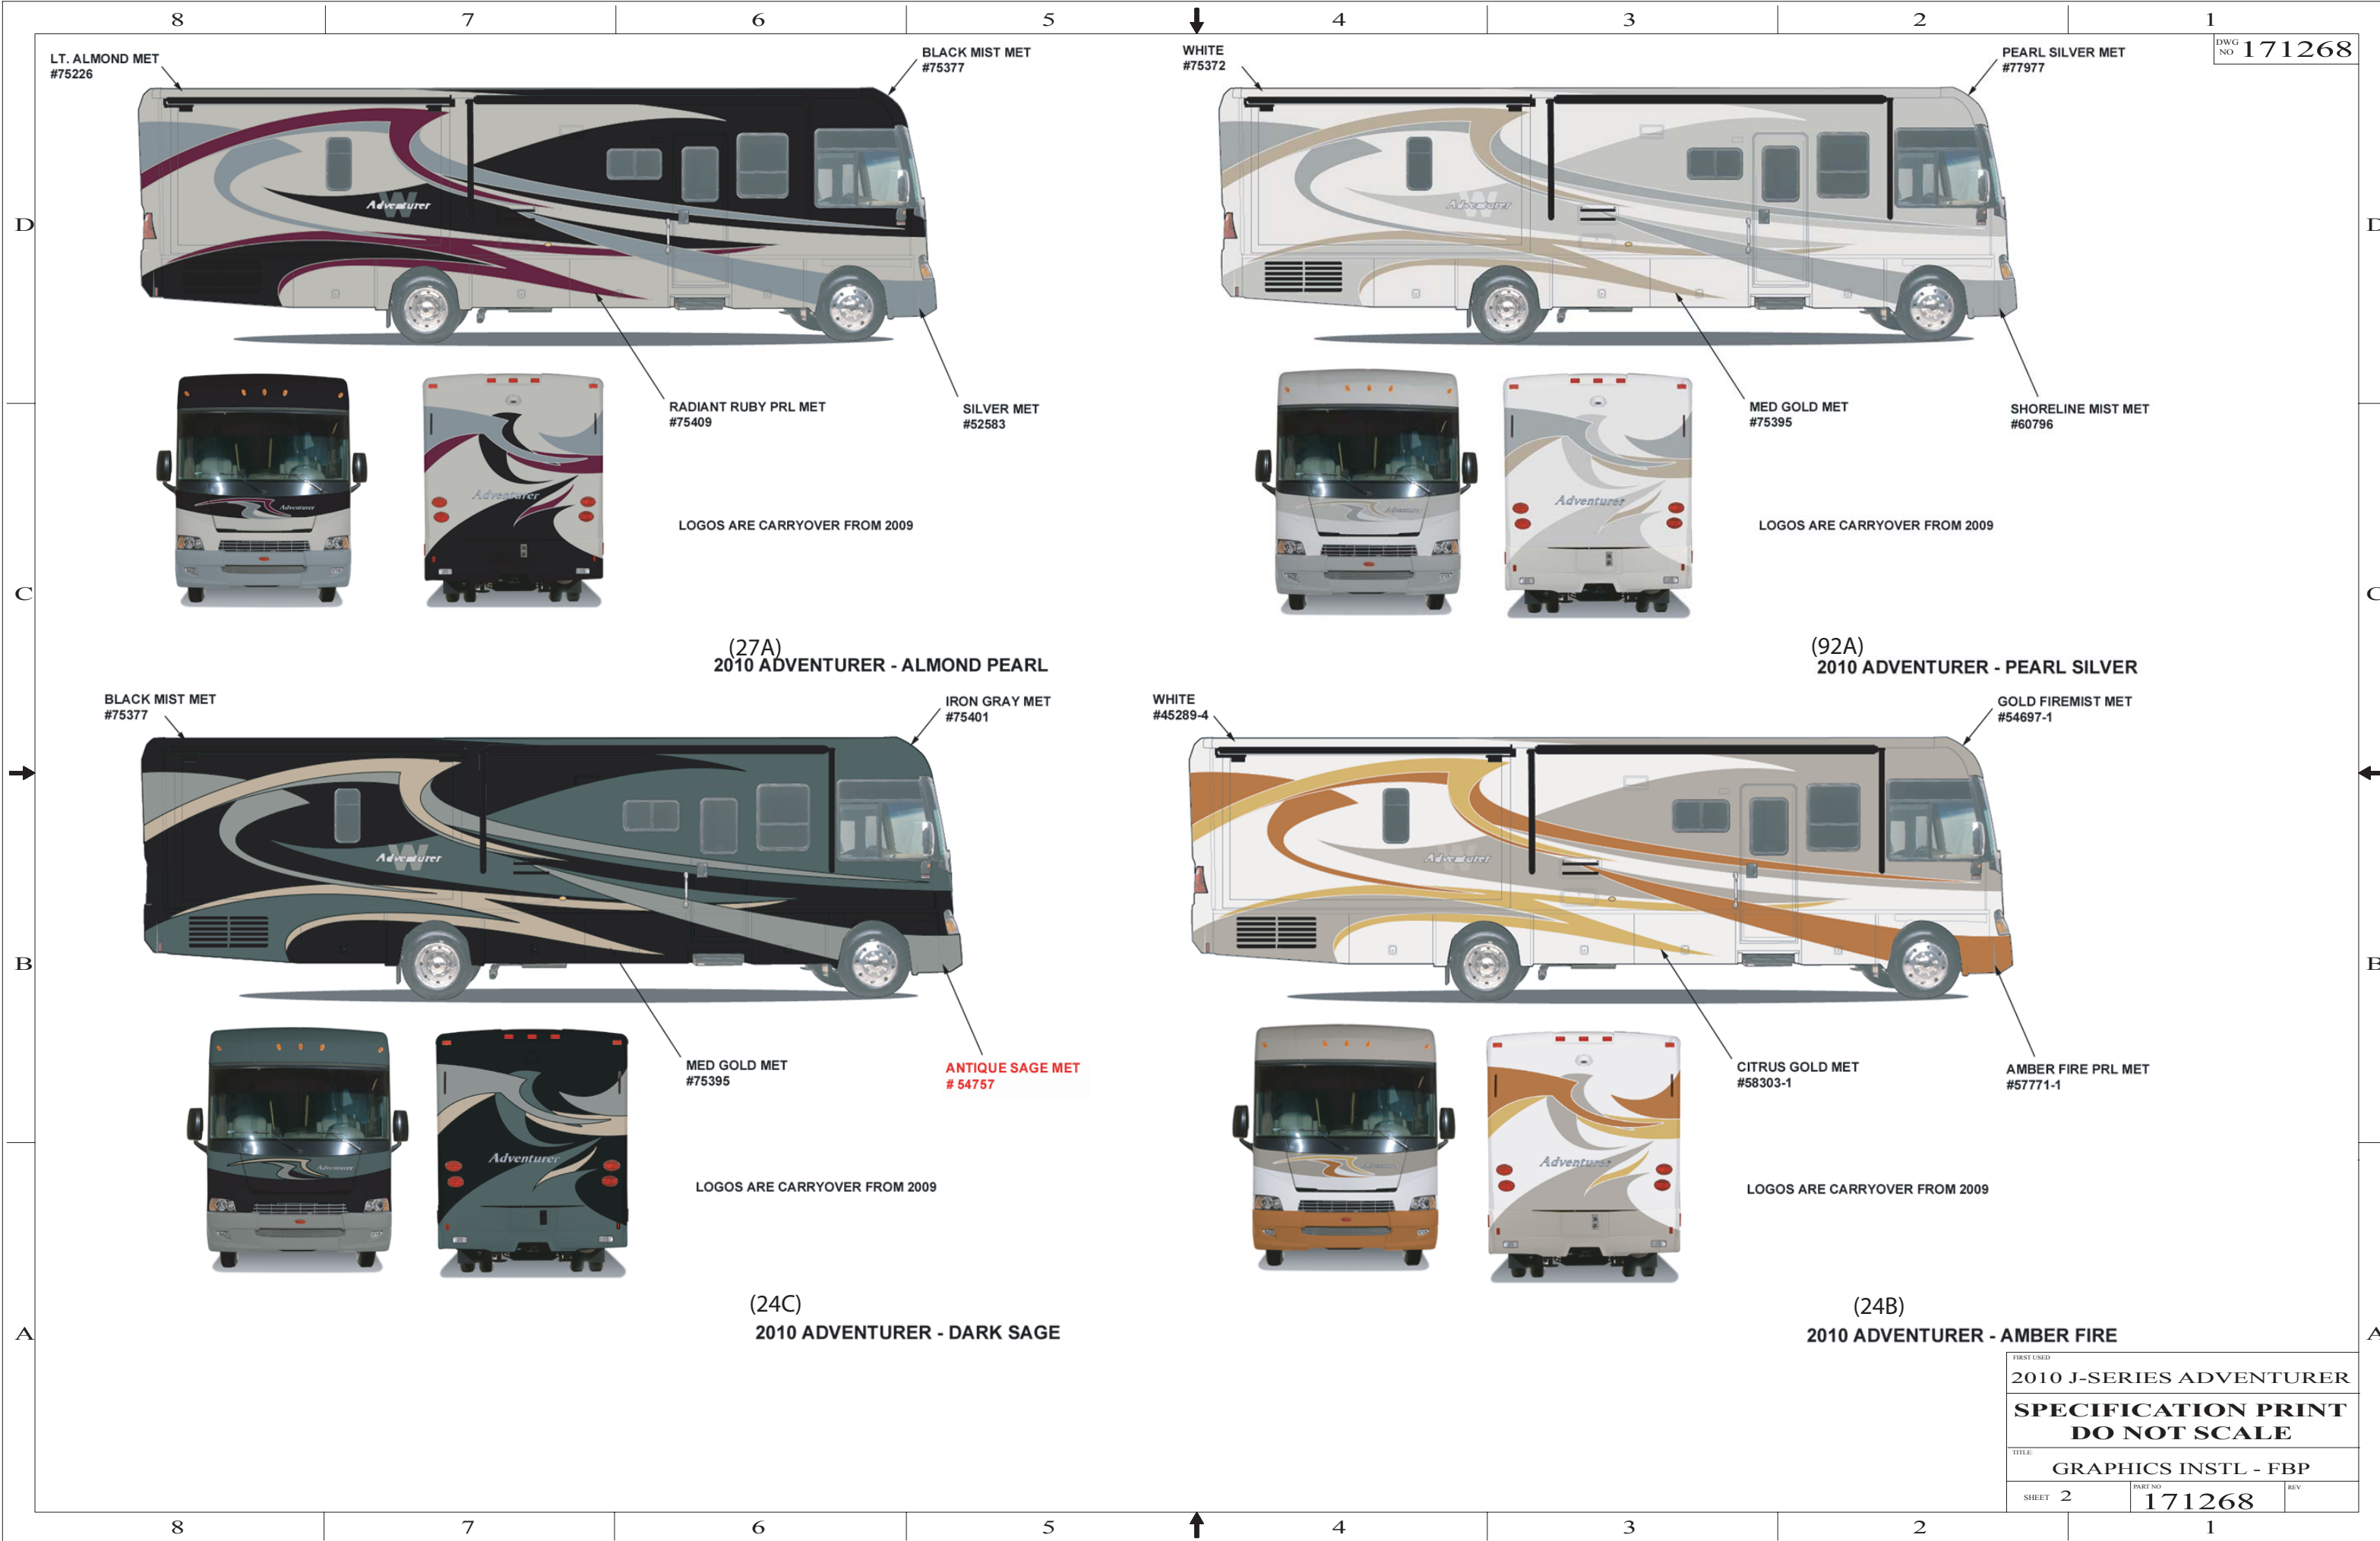


(27A)
2010 ADVENTURER - ALMOND PEARL

(92A)
2010 ADVENTURER - PEARL SILVER


(24C)
2010 ADVENTURER - DARK SAGE


(24B)
2010 ADVENTURER - AMBER FIRE

FIRST USED		
2010 J-SERIES ADVENTURER		
SPECIFICATION PRINT		
DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	2	PART NO
		171268
		REV

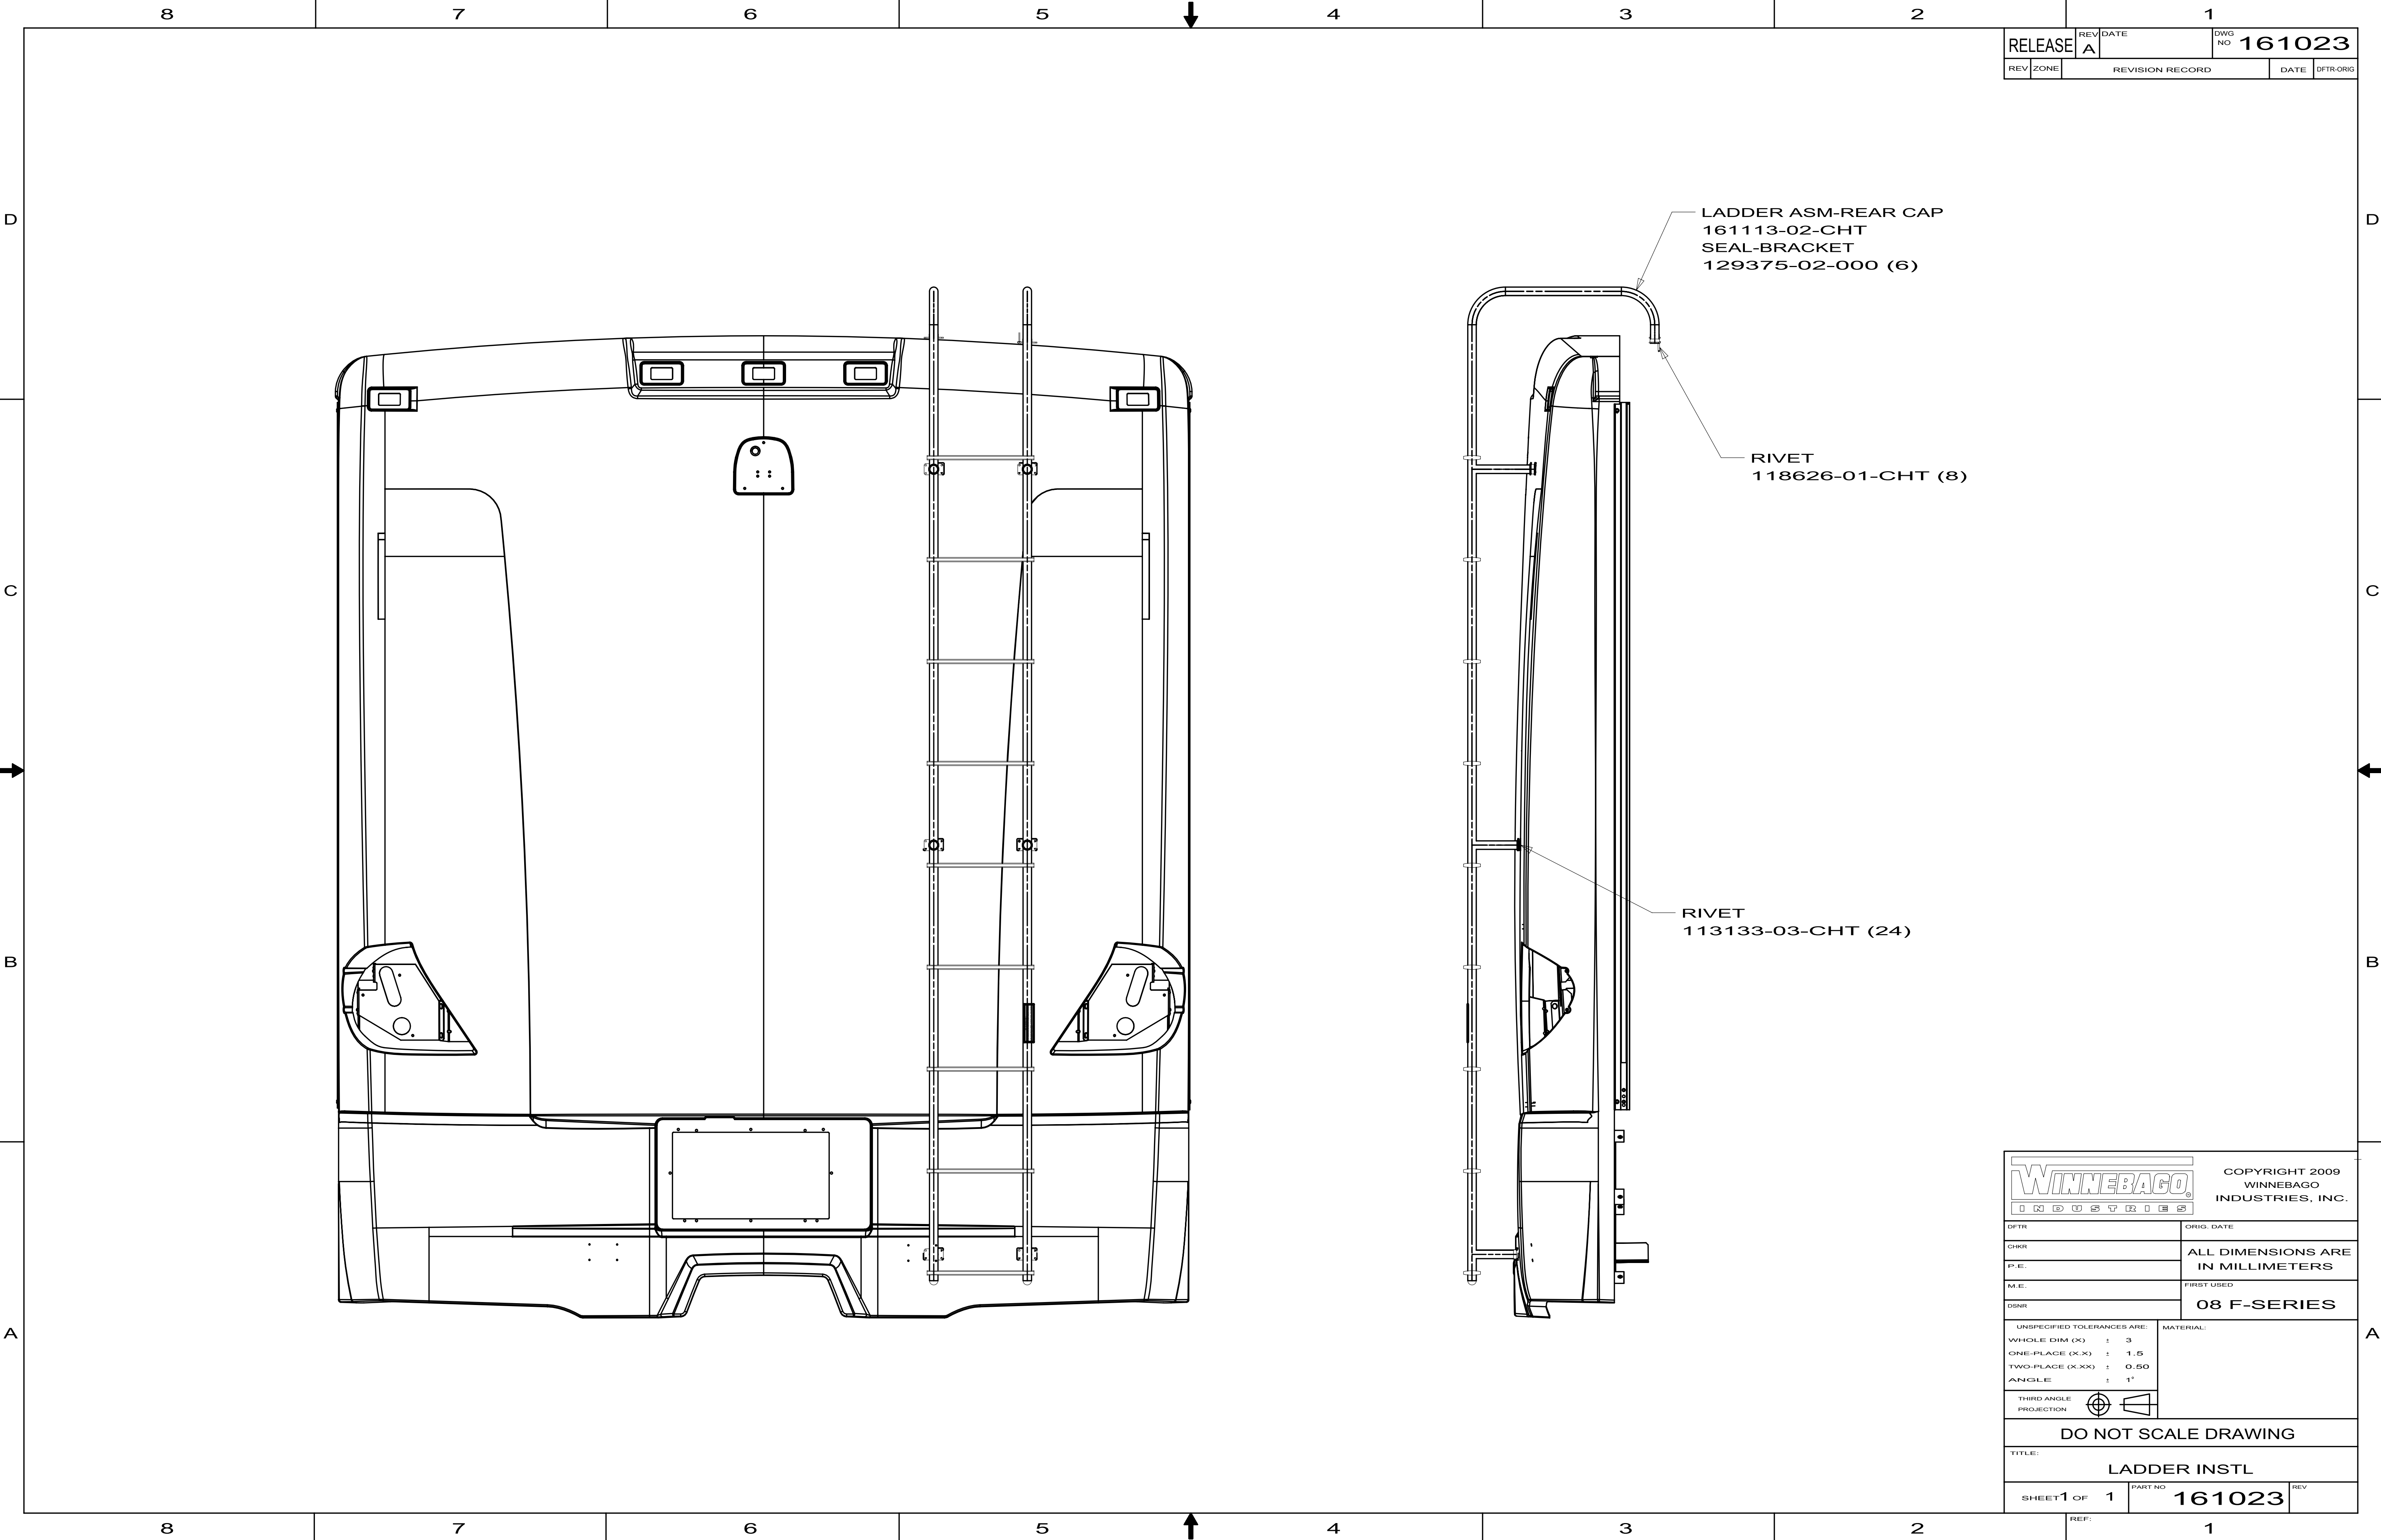



RELEASE		REV	DATE	DWG NO	161023
REV	ZONE	REVISION RECORD			DATE
					DATE
					DATE

WINNEBAGO® INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
D/T/R		ORIG. DATE	
CHKR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DSNR		08 F-SERIES	
UNSPECIFIED TOLERANCES ARE:			
WHOLE DIM (X) ± 3		MATERIAL:	
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
LADDER INSTL			
SHEET 1 OF 1		PART NO	REV
		161023	

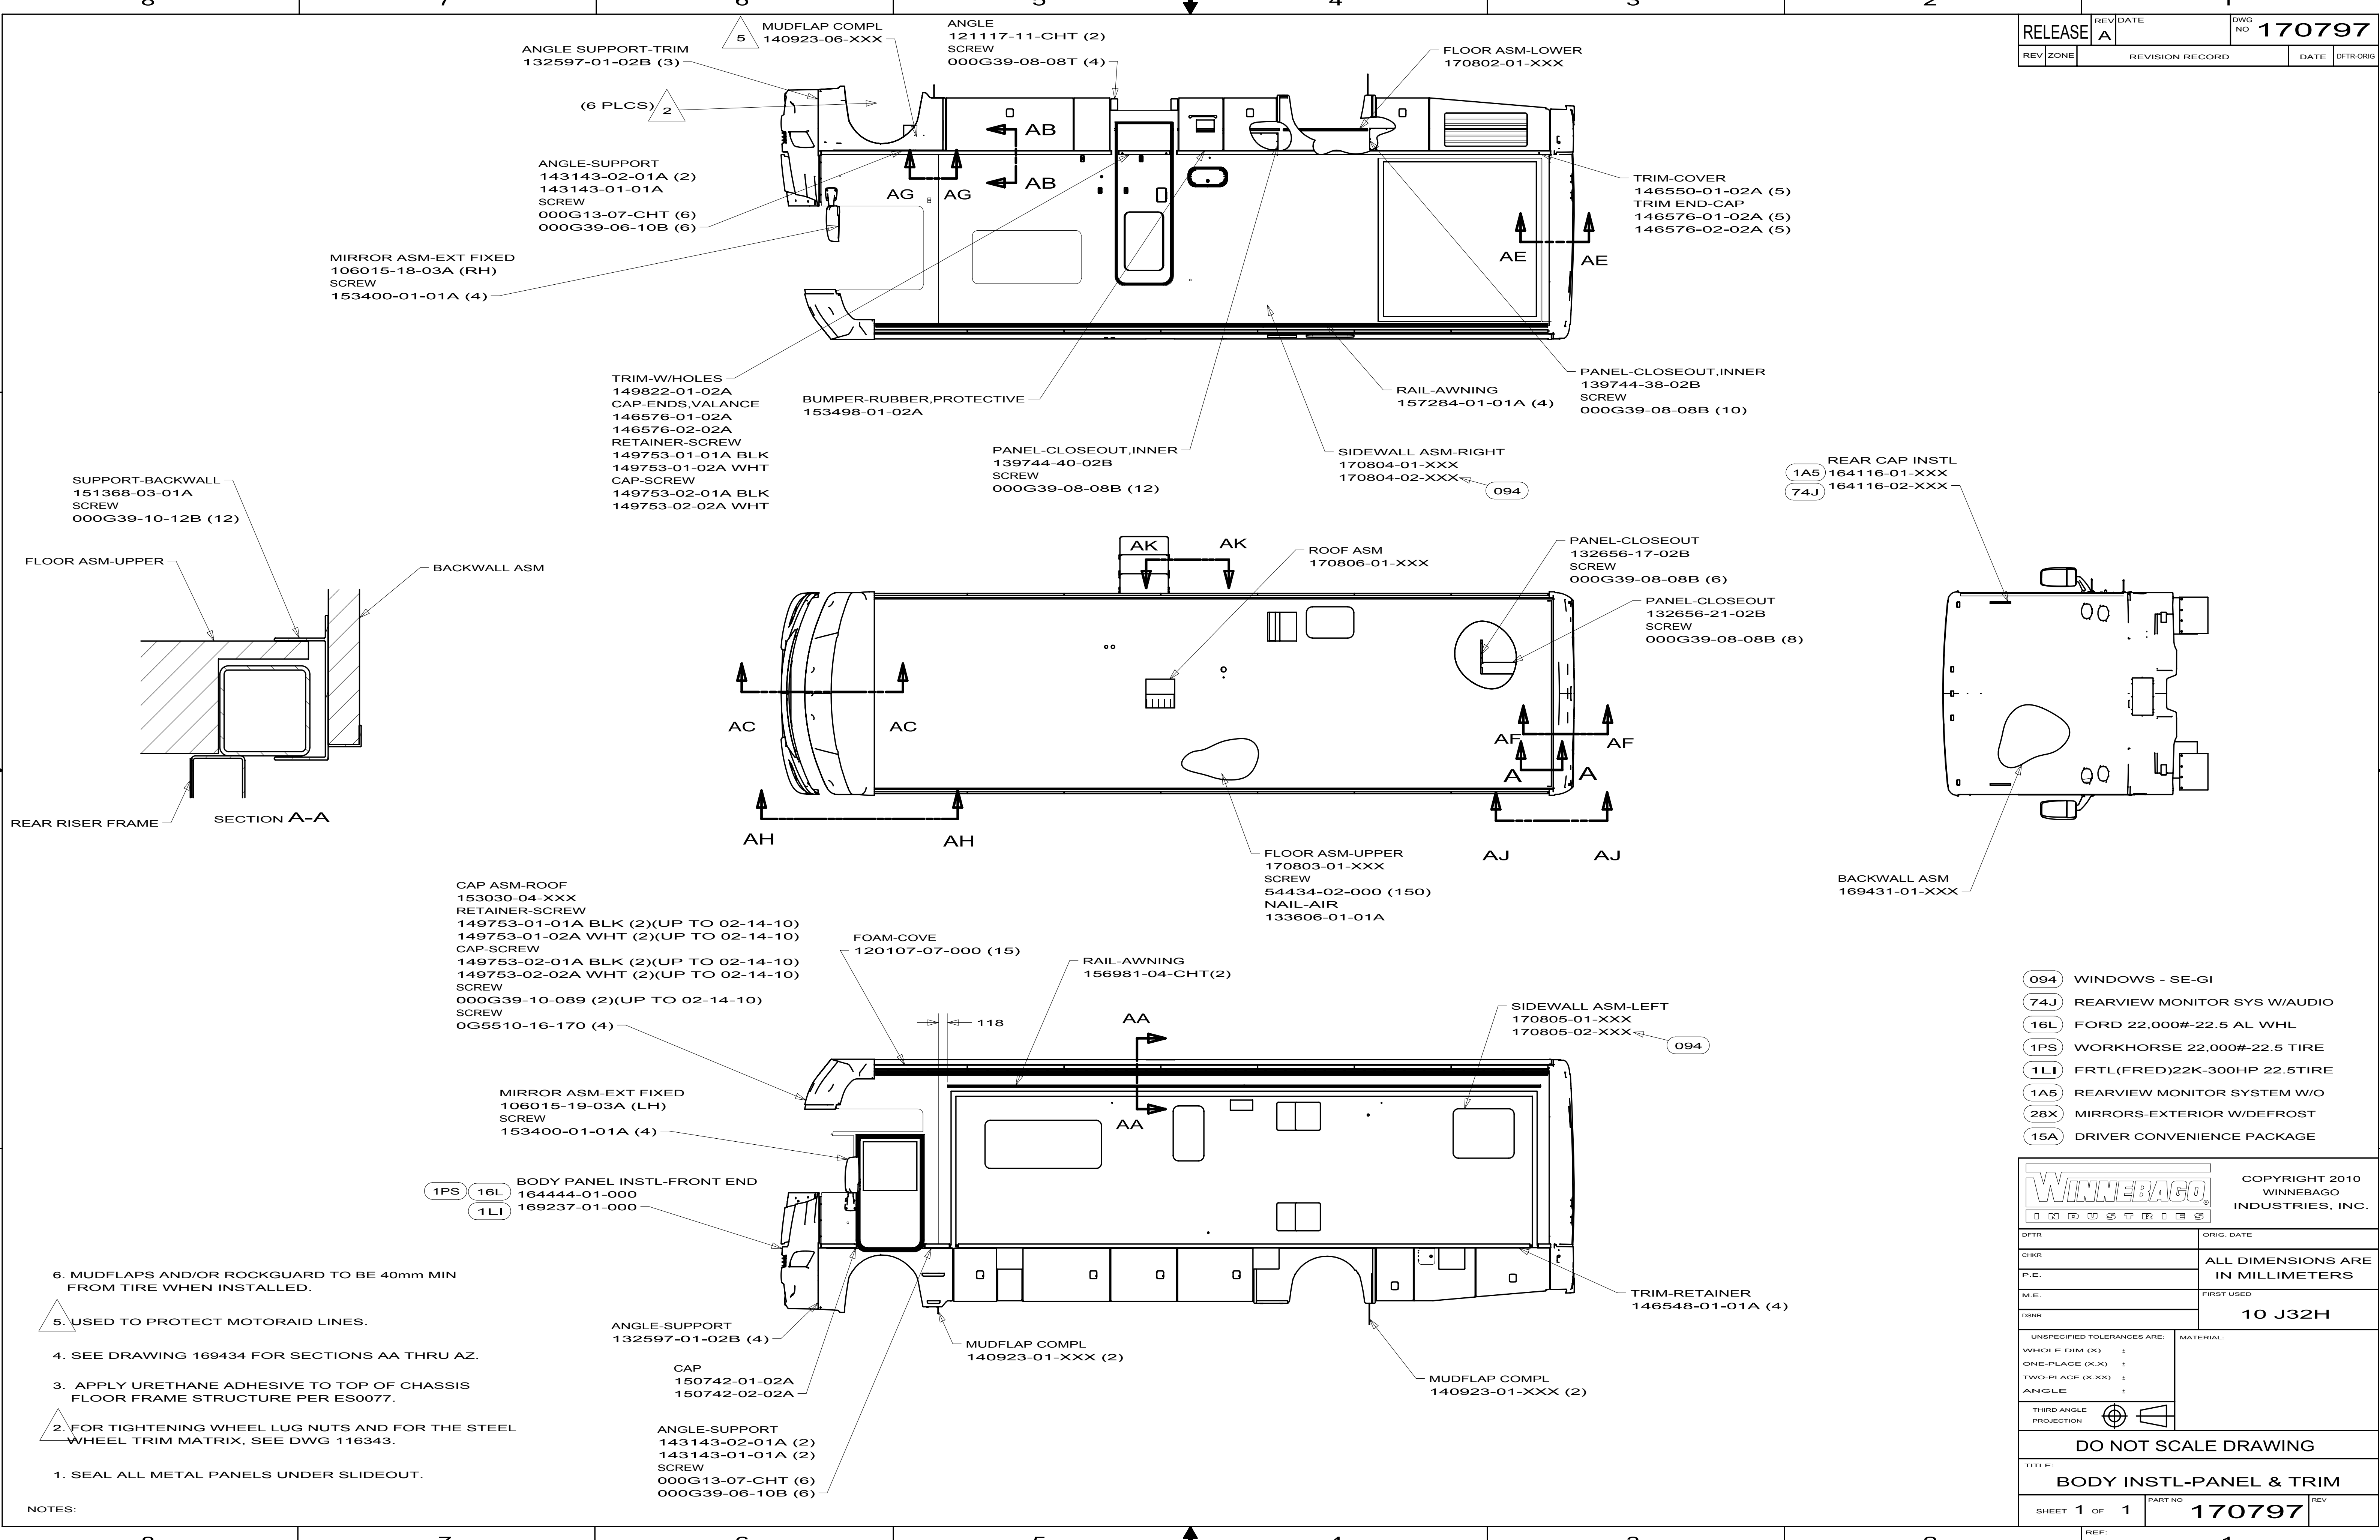

- | | |
|-----|------------------------------|
| 094 | WINDOWS - SE-GI |
| 74J | REARVIEW MONITOR SYS W/AUDIO |
| 16L | FORD 22,000#-22.5 AL WHL |
| 1PS | WORKHORSE 22,000#-22.5 TIRE |
| 1LI | FRTL(FRED)22K-300HP 22.5TIRE |
| 1A5 | REARVIEW MONITOR SYSTEM W/O |
| 28X | MIRRORS-EXTERIOR W/DEFROST |
| 15A | DRIVER CONVENIENCE PACKAGE |

		COPY RIGHT 1990 WINNEBAGO INDUSTRIES, INC.	
DFT#		ORIG. DATE	
CH#		ALL DIMENSIONS ARE IN MILLIMETERS	
P. E.			
M. E.		FIRST USED 10 J32H	
DS#			
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ±			
ONE-PLACE (X,X) ±			
TWO-PLACE (X,XX) ±			
ANGLE ±			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
BODY INSTL-PANEL & TRIM			
SHEET 1 OF 1		PART NO	REV
		170797	

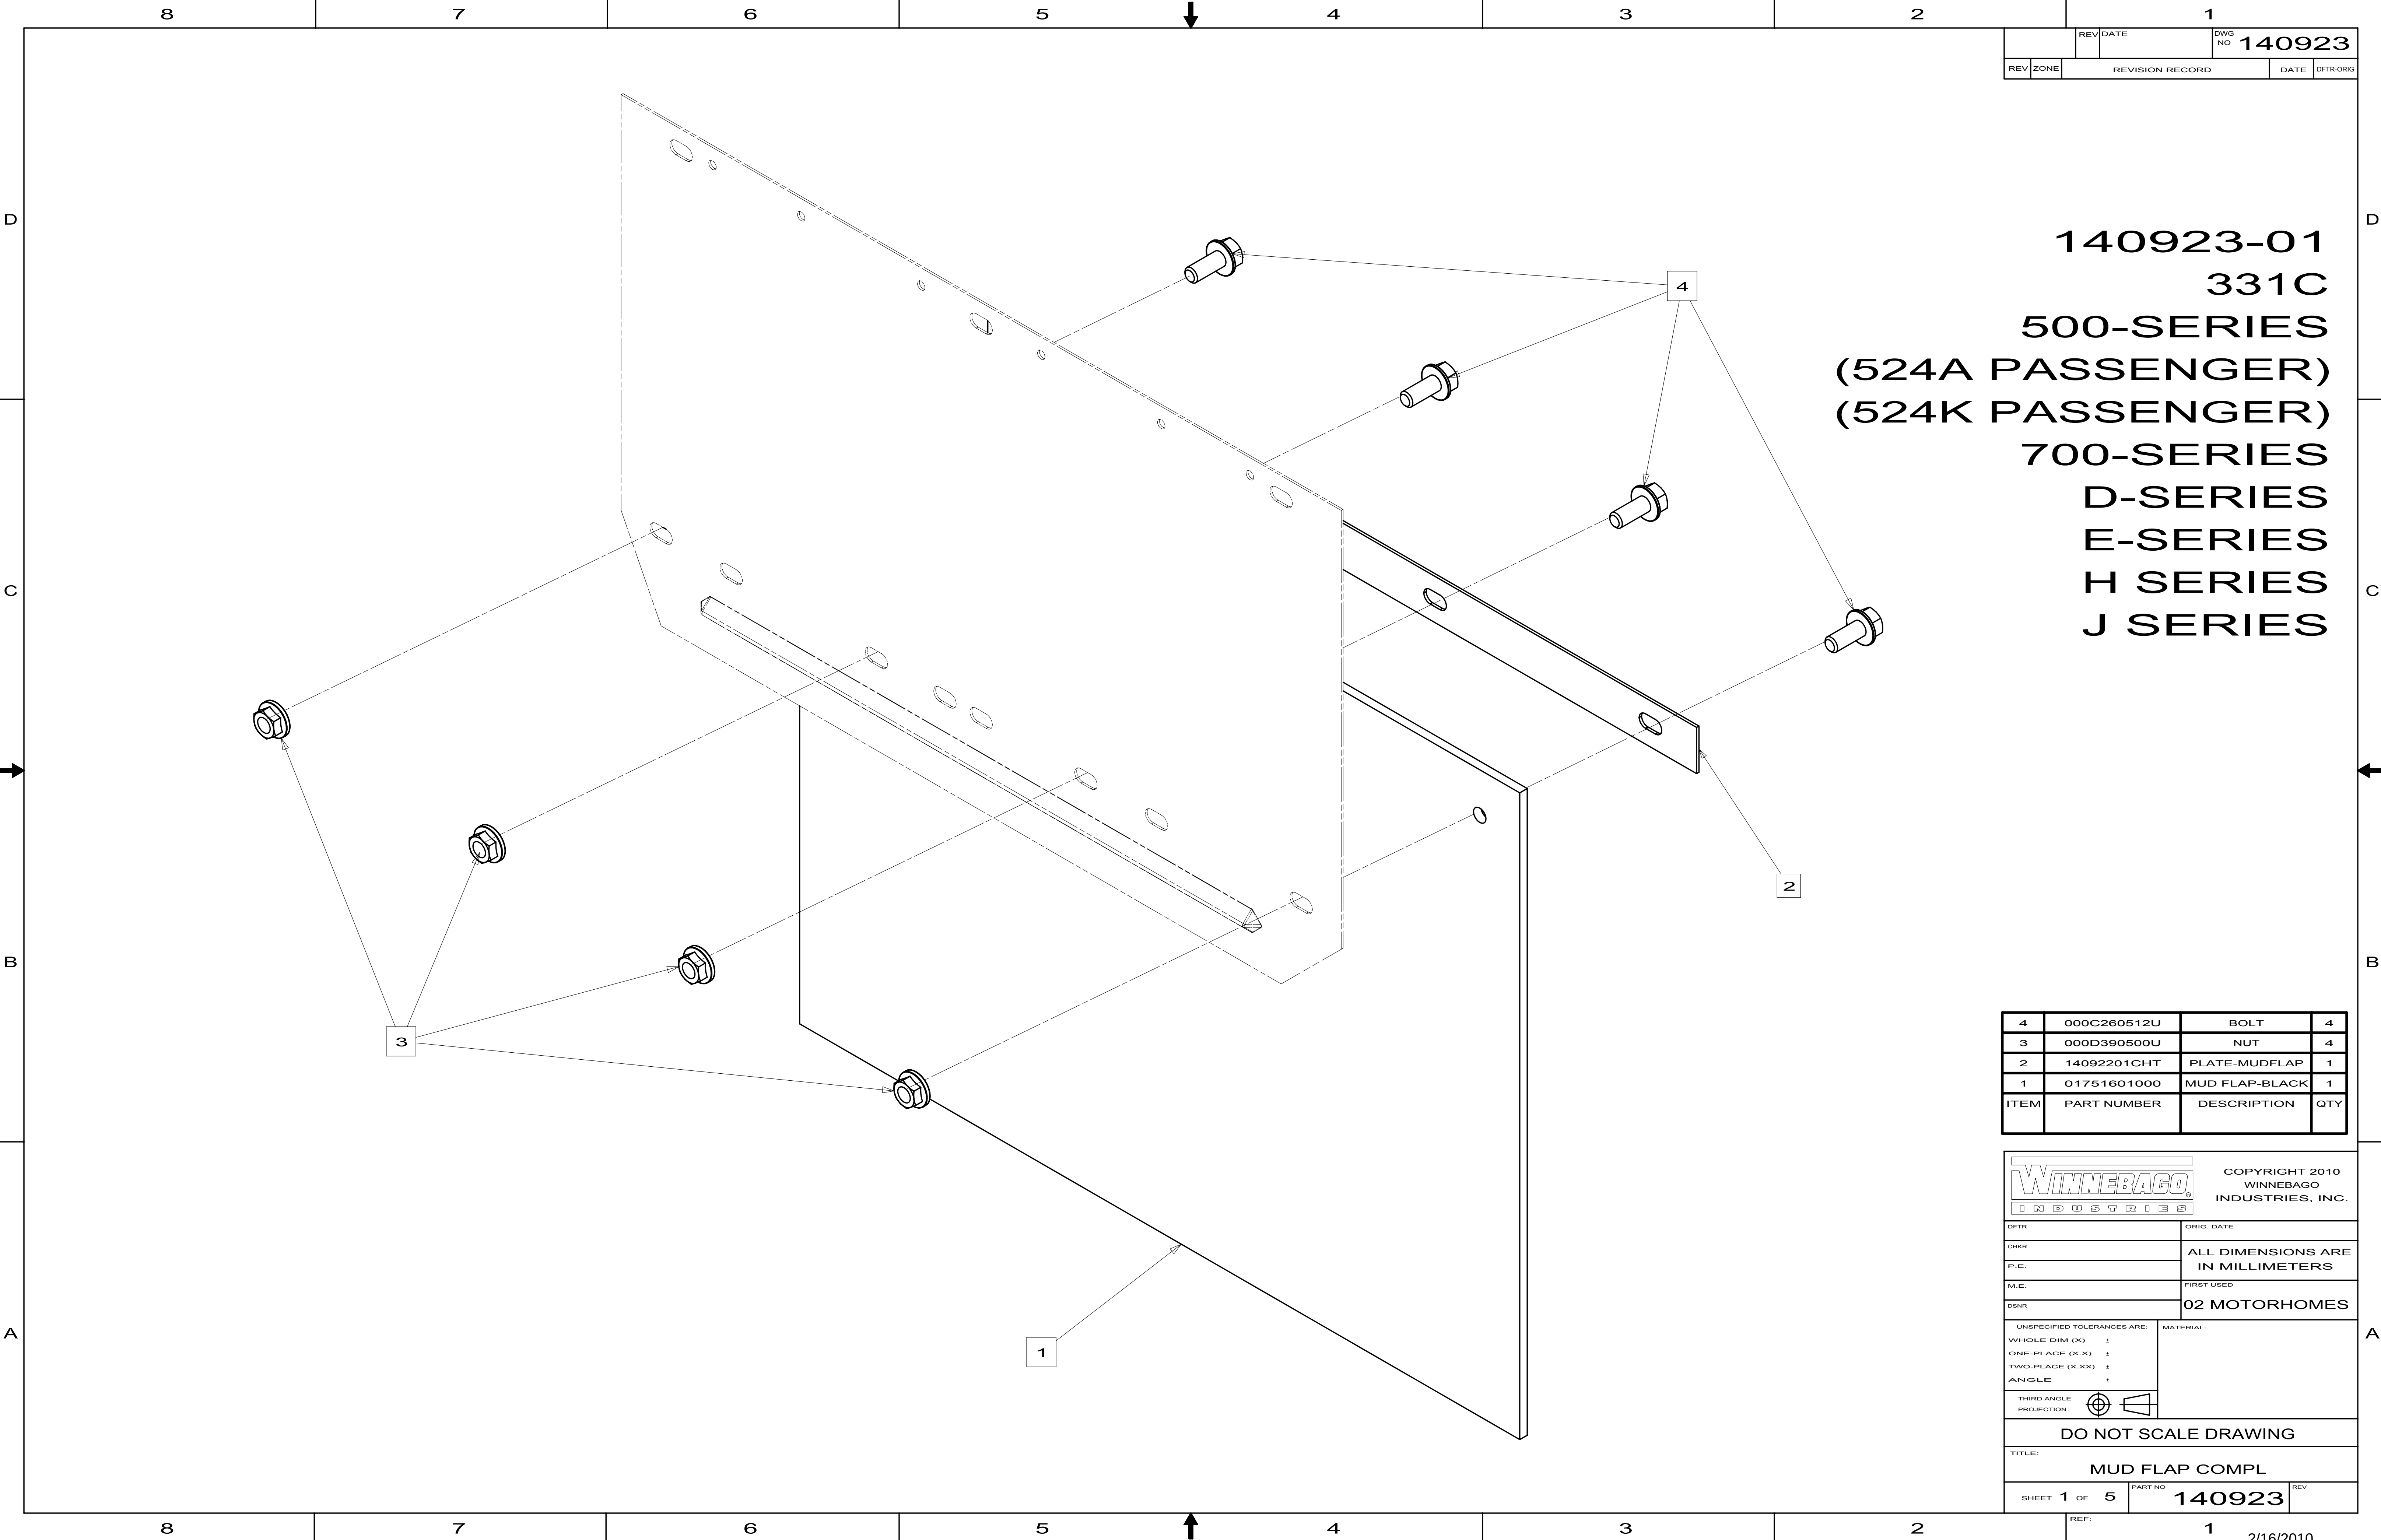


140923-01
331C
500-SERIES
(524A PASSENGER)
(524K PASSENGER)
700-SERIES
D-SERIES
E-SERIES
H SERIES
J SERIES

4	000C260512U	BOLT	4
3	000D390500U	NUT	4
2	14092201CHT	PLATE-MUDFLAP	1
1	01751601000	MUD FLAP-BLACK	1
ITEM	PART NUMBER	DESCRIPTION	QTY

COPYRIGHT 2010
WINNEBAGO
INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	02 MOTORHOMES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	:
ONE-PLACE (X.X)	:
TWO-PLACE (X.XX)	:
ANGLE	:
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: MUD FLAP COMPL	
SHEET 1 OF 5	PART NO 140923 REV

REF: 1 2/16/2010

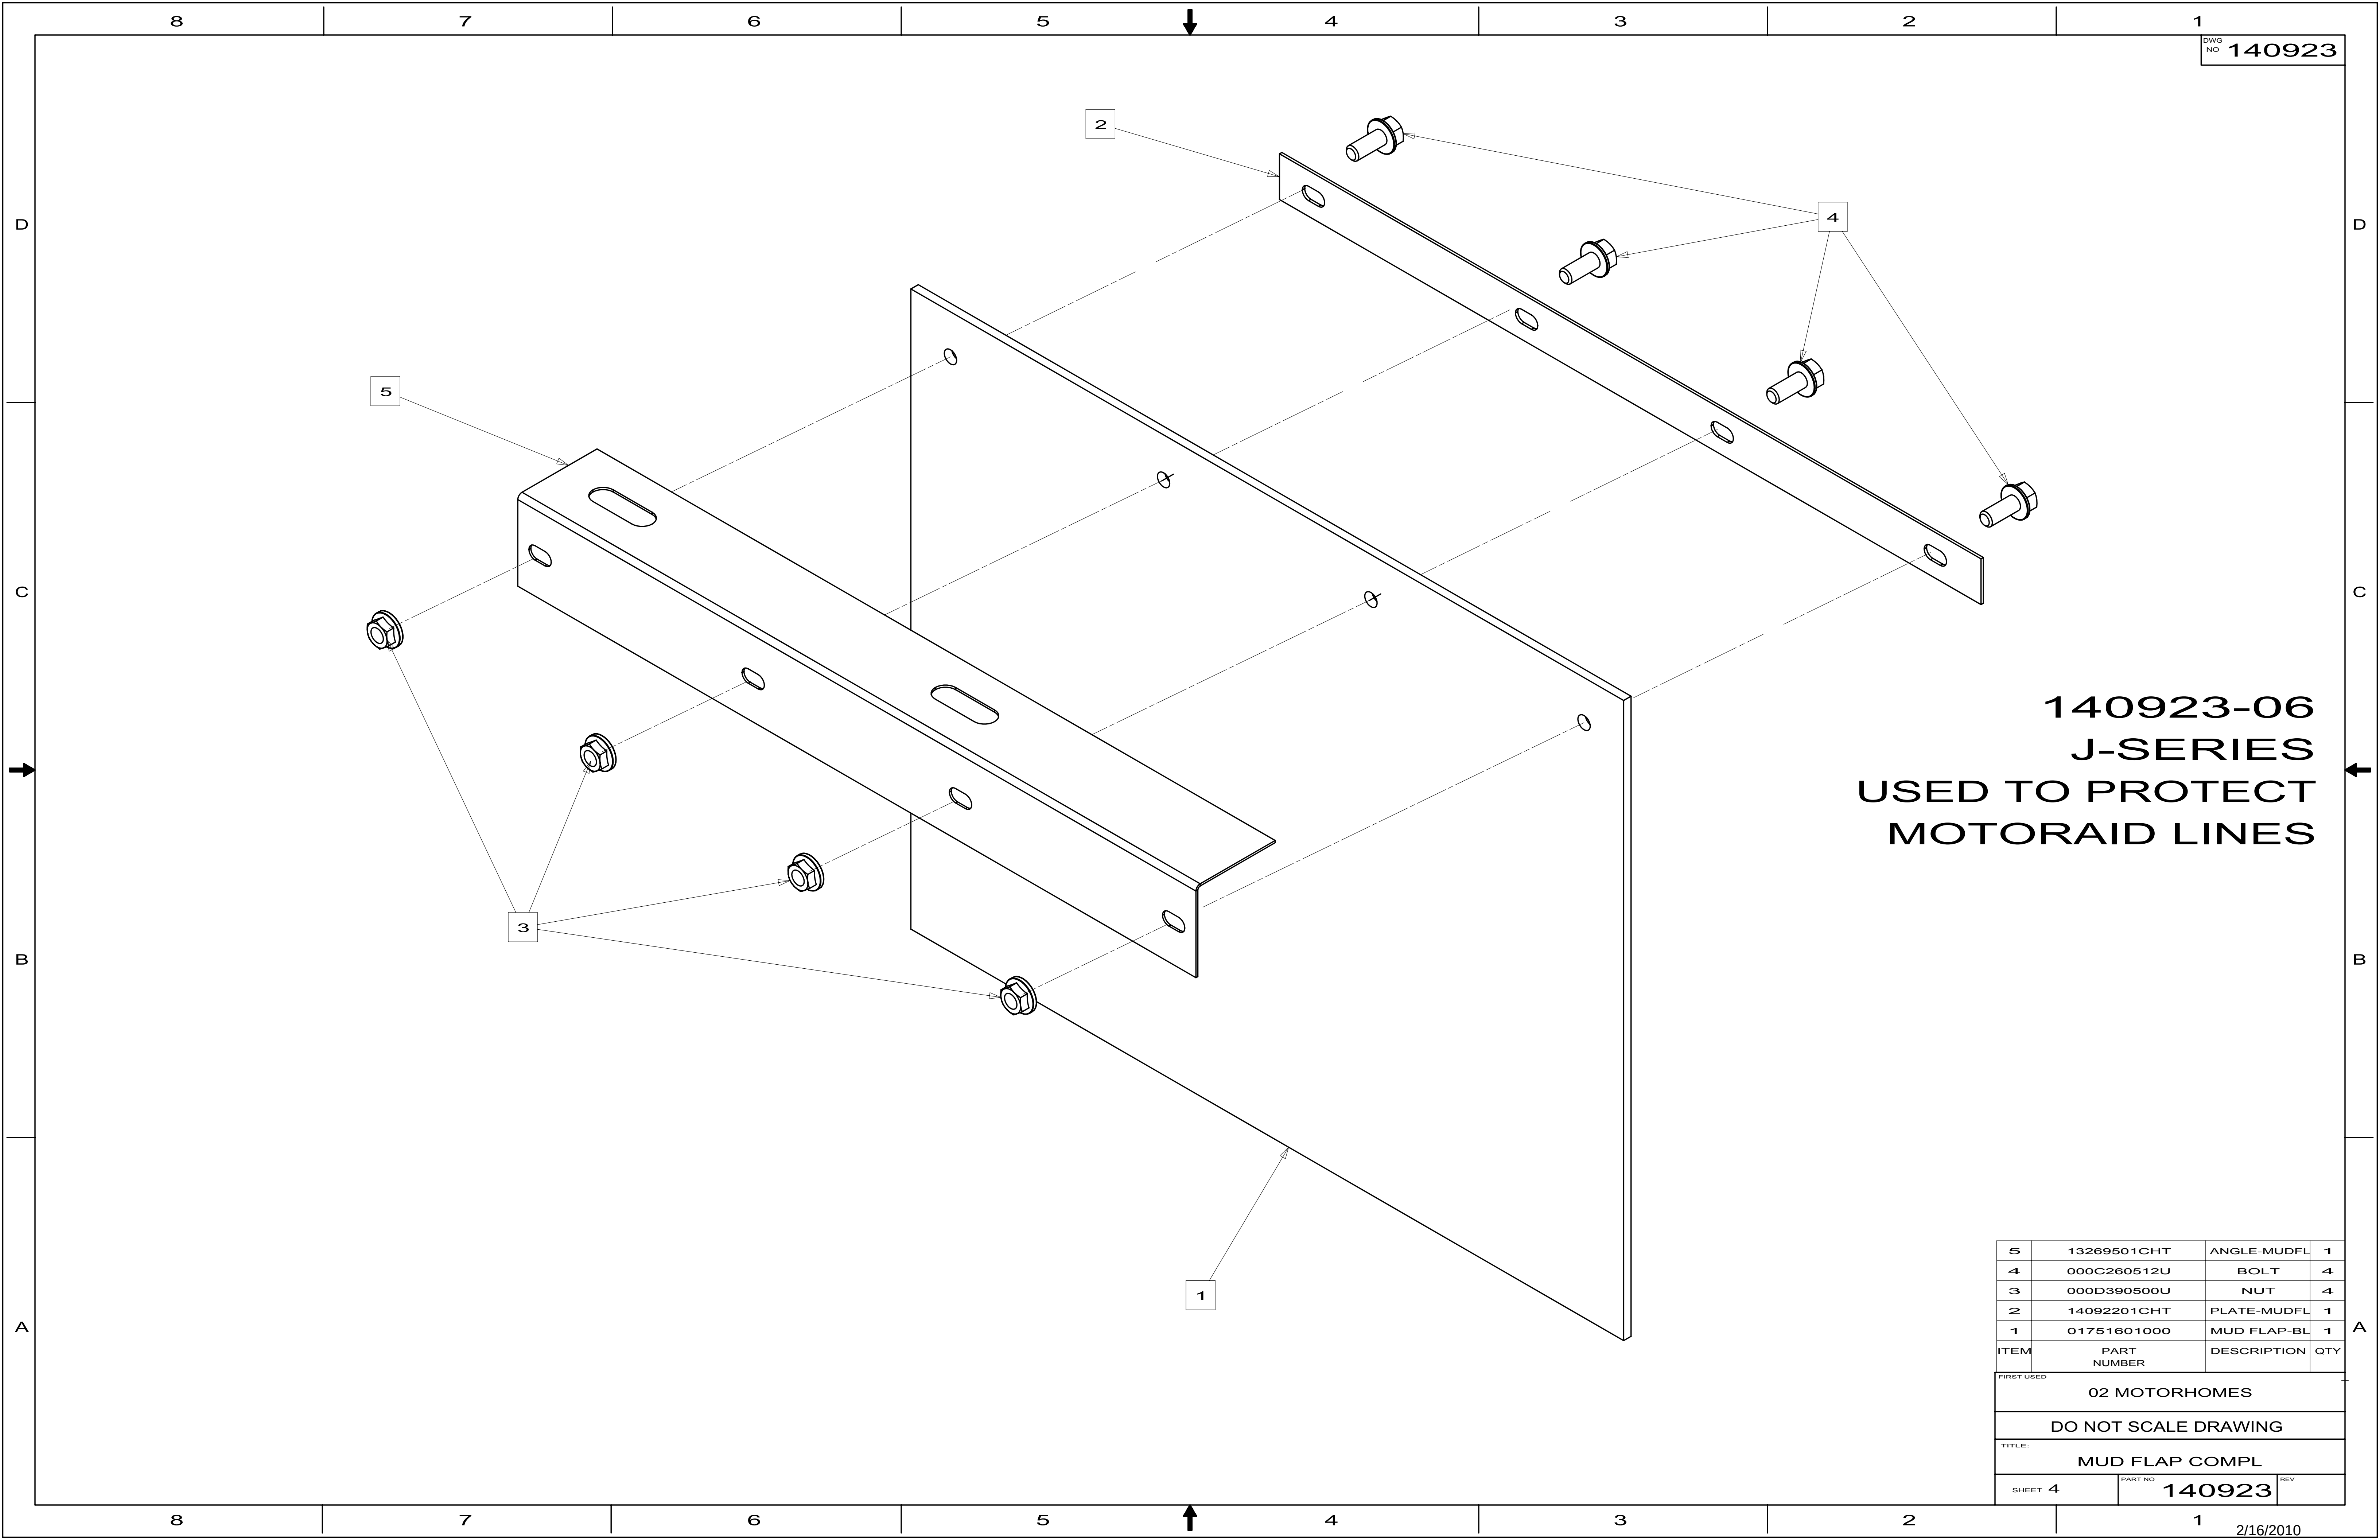


DWG NO	PANEL ASM
164116-01	164035-03-XXX
164116-02	164035-04-XXX


1A5
74J 19R

RELEASE	REV DATE	DWG NO	164116
REV ZONE	REVISION RECORD	DATE	DFTR.Orig

D
C
B
A

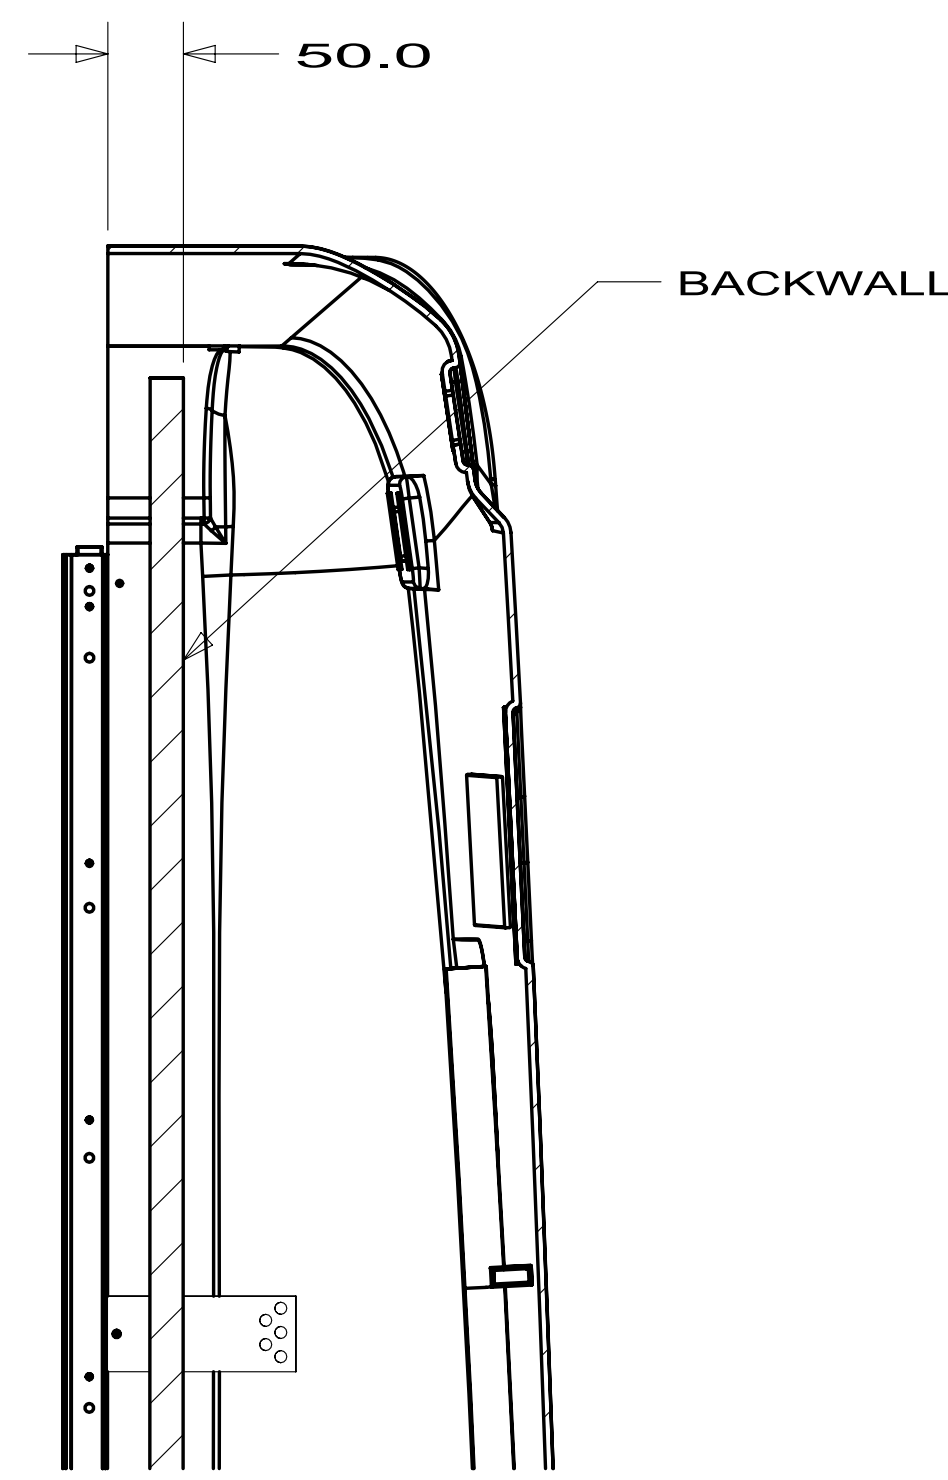

SECTION A-A

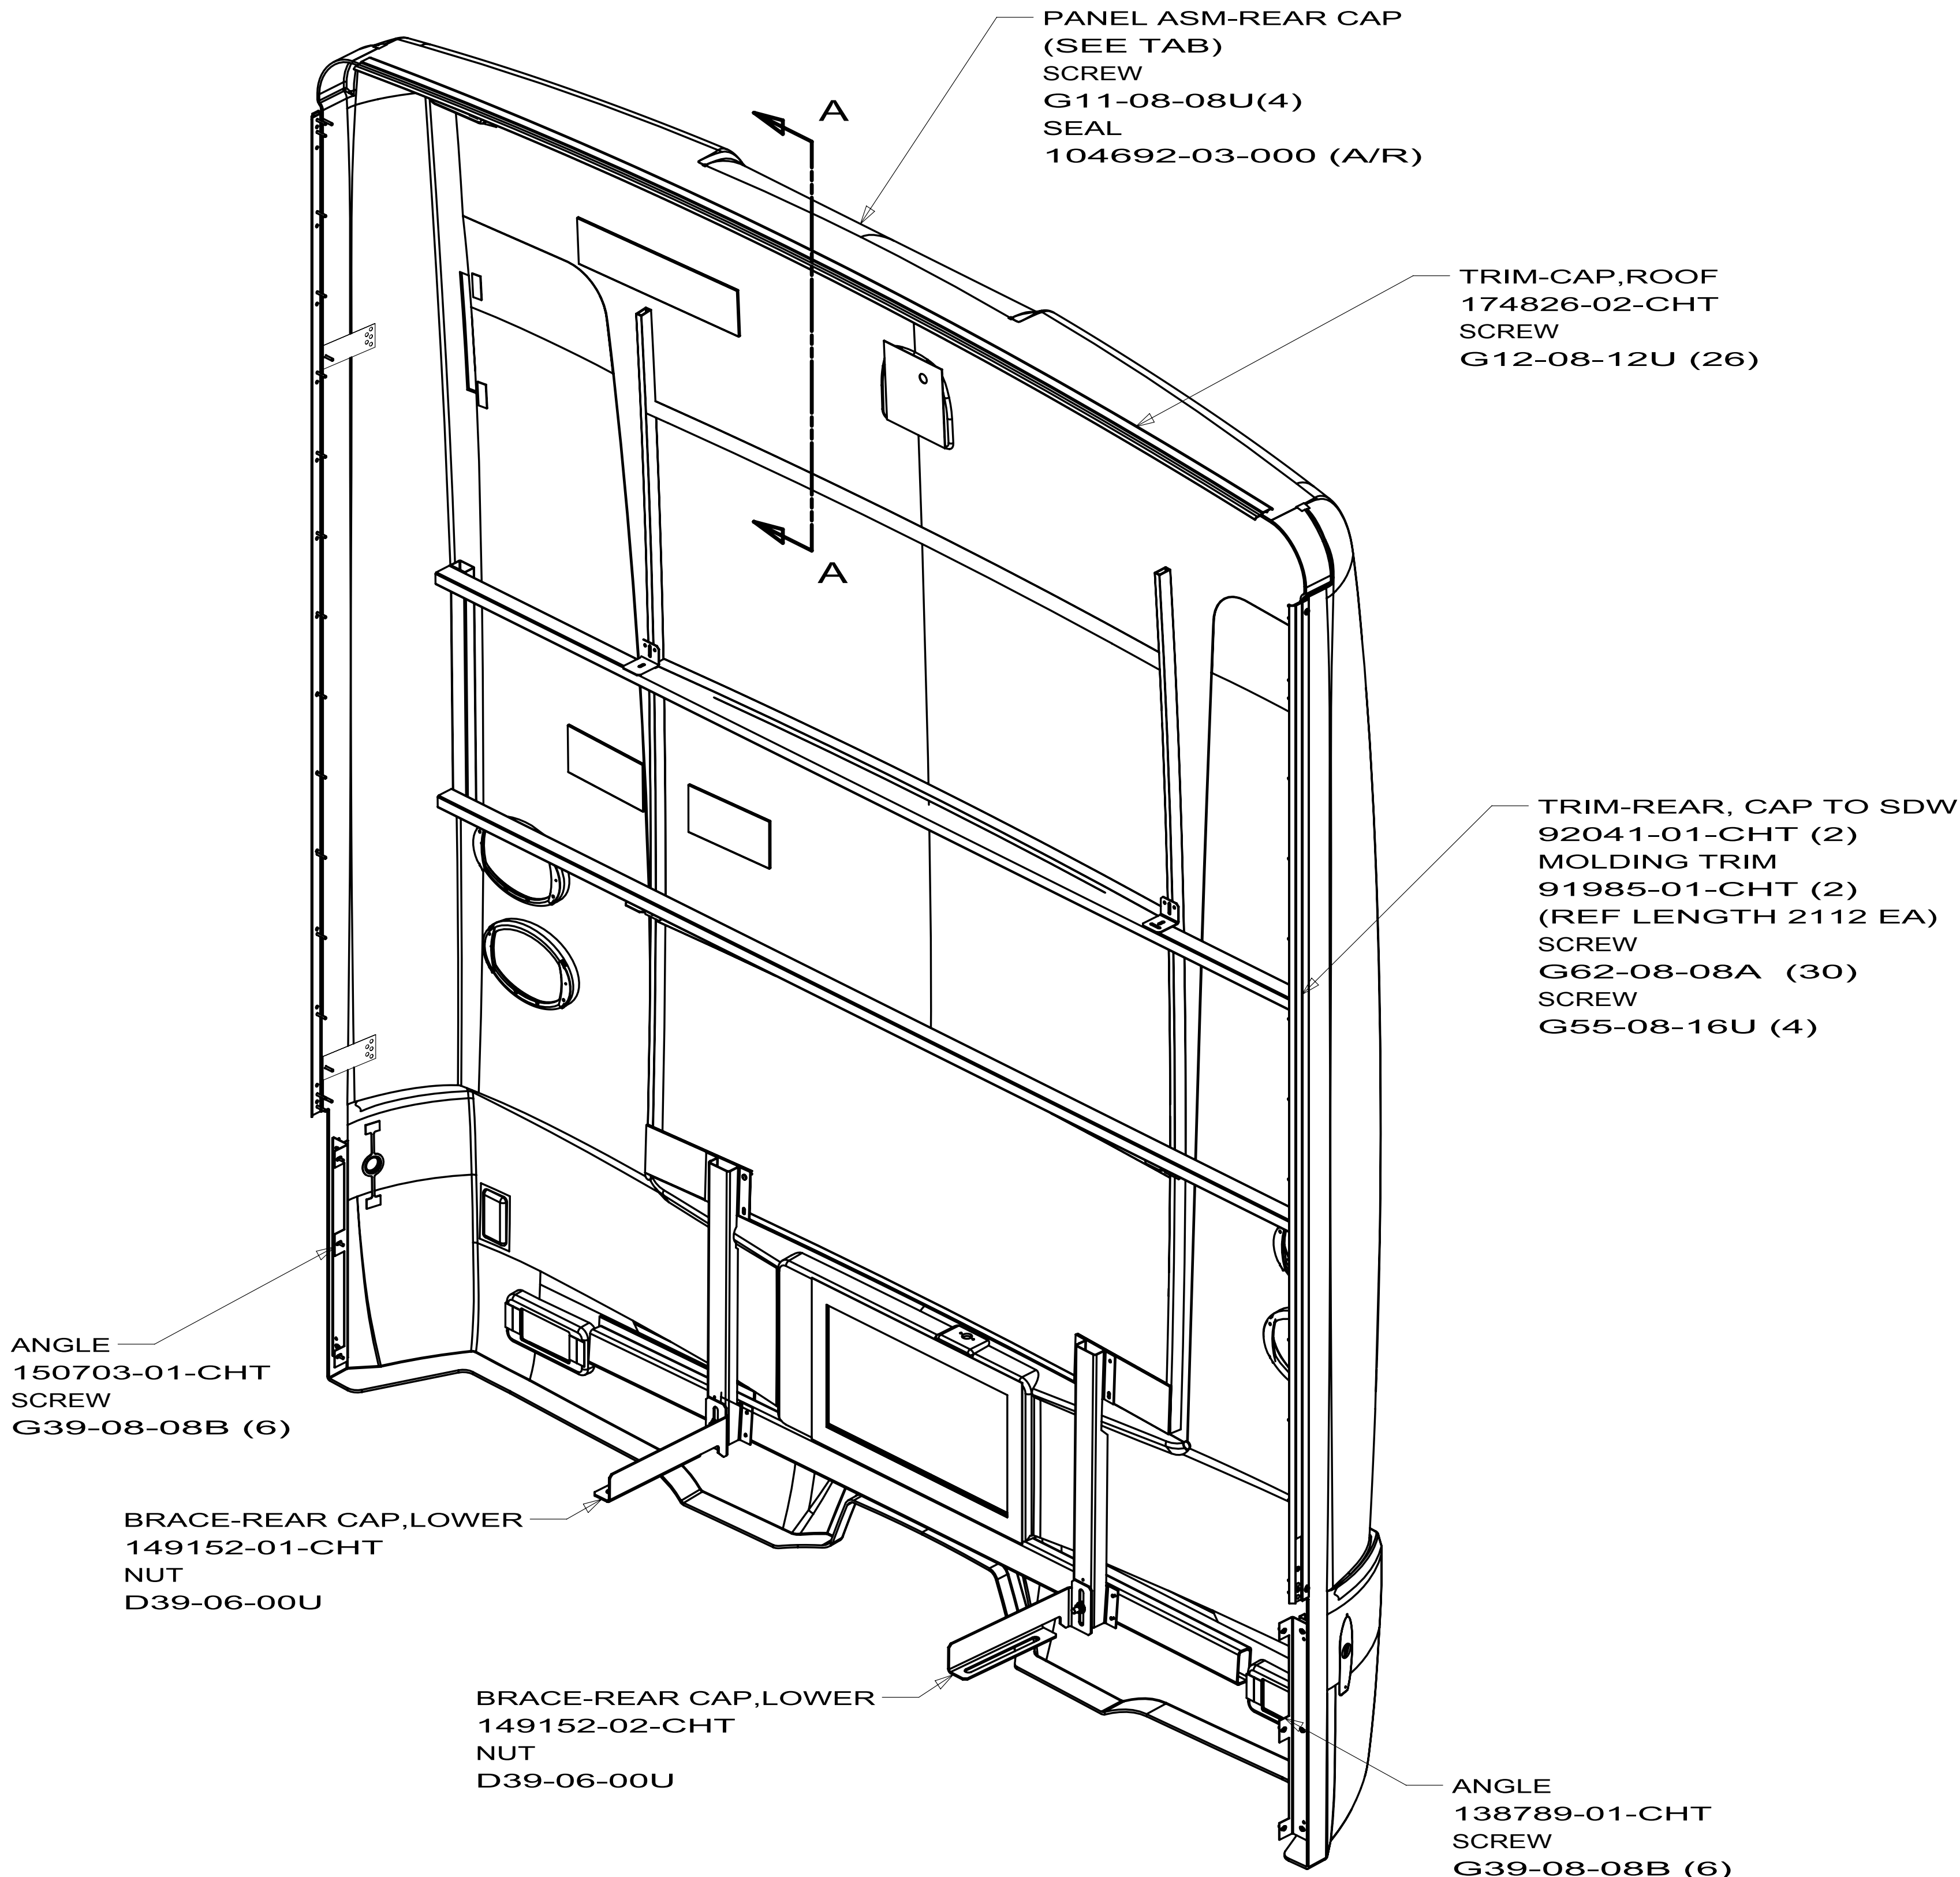

- 19R RADIO/REARVIEW MONITOR SYS
- 1A5 REAR MONITOR SYS W/O
- 74J REAR VIEW MONITOR SYSTEM




1. RE-TORQUE BOLTS TO 75 FT-LBS AFTER ATTACHING THE REAR CAP BRACE TO THE REAR CLIP.

NOTES:

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	09 F-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	: 3
ONE-PLACE (X.X)	: 1.5
TWO-PLACE (X.XX)	: 0.50
ANGLE	: 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: REAR CAP INSTL	
SHEET 1 of 1	PART NO 164116 REV
REF:	1

D
C
B
A

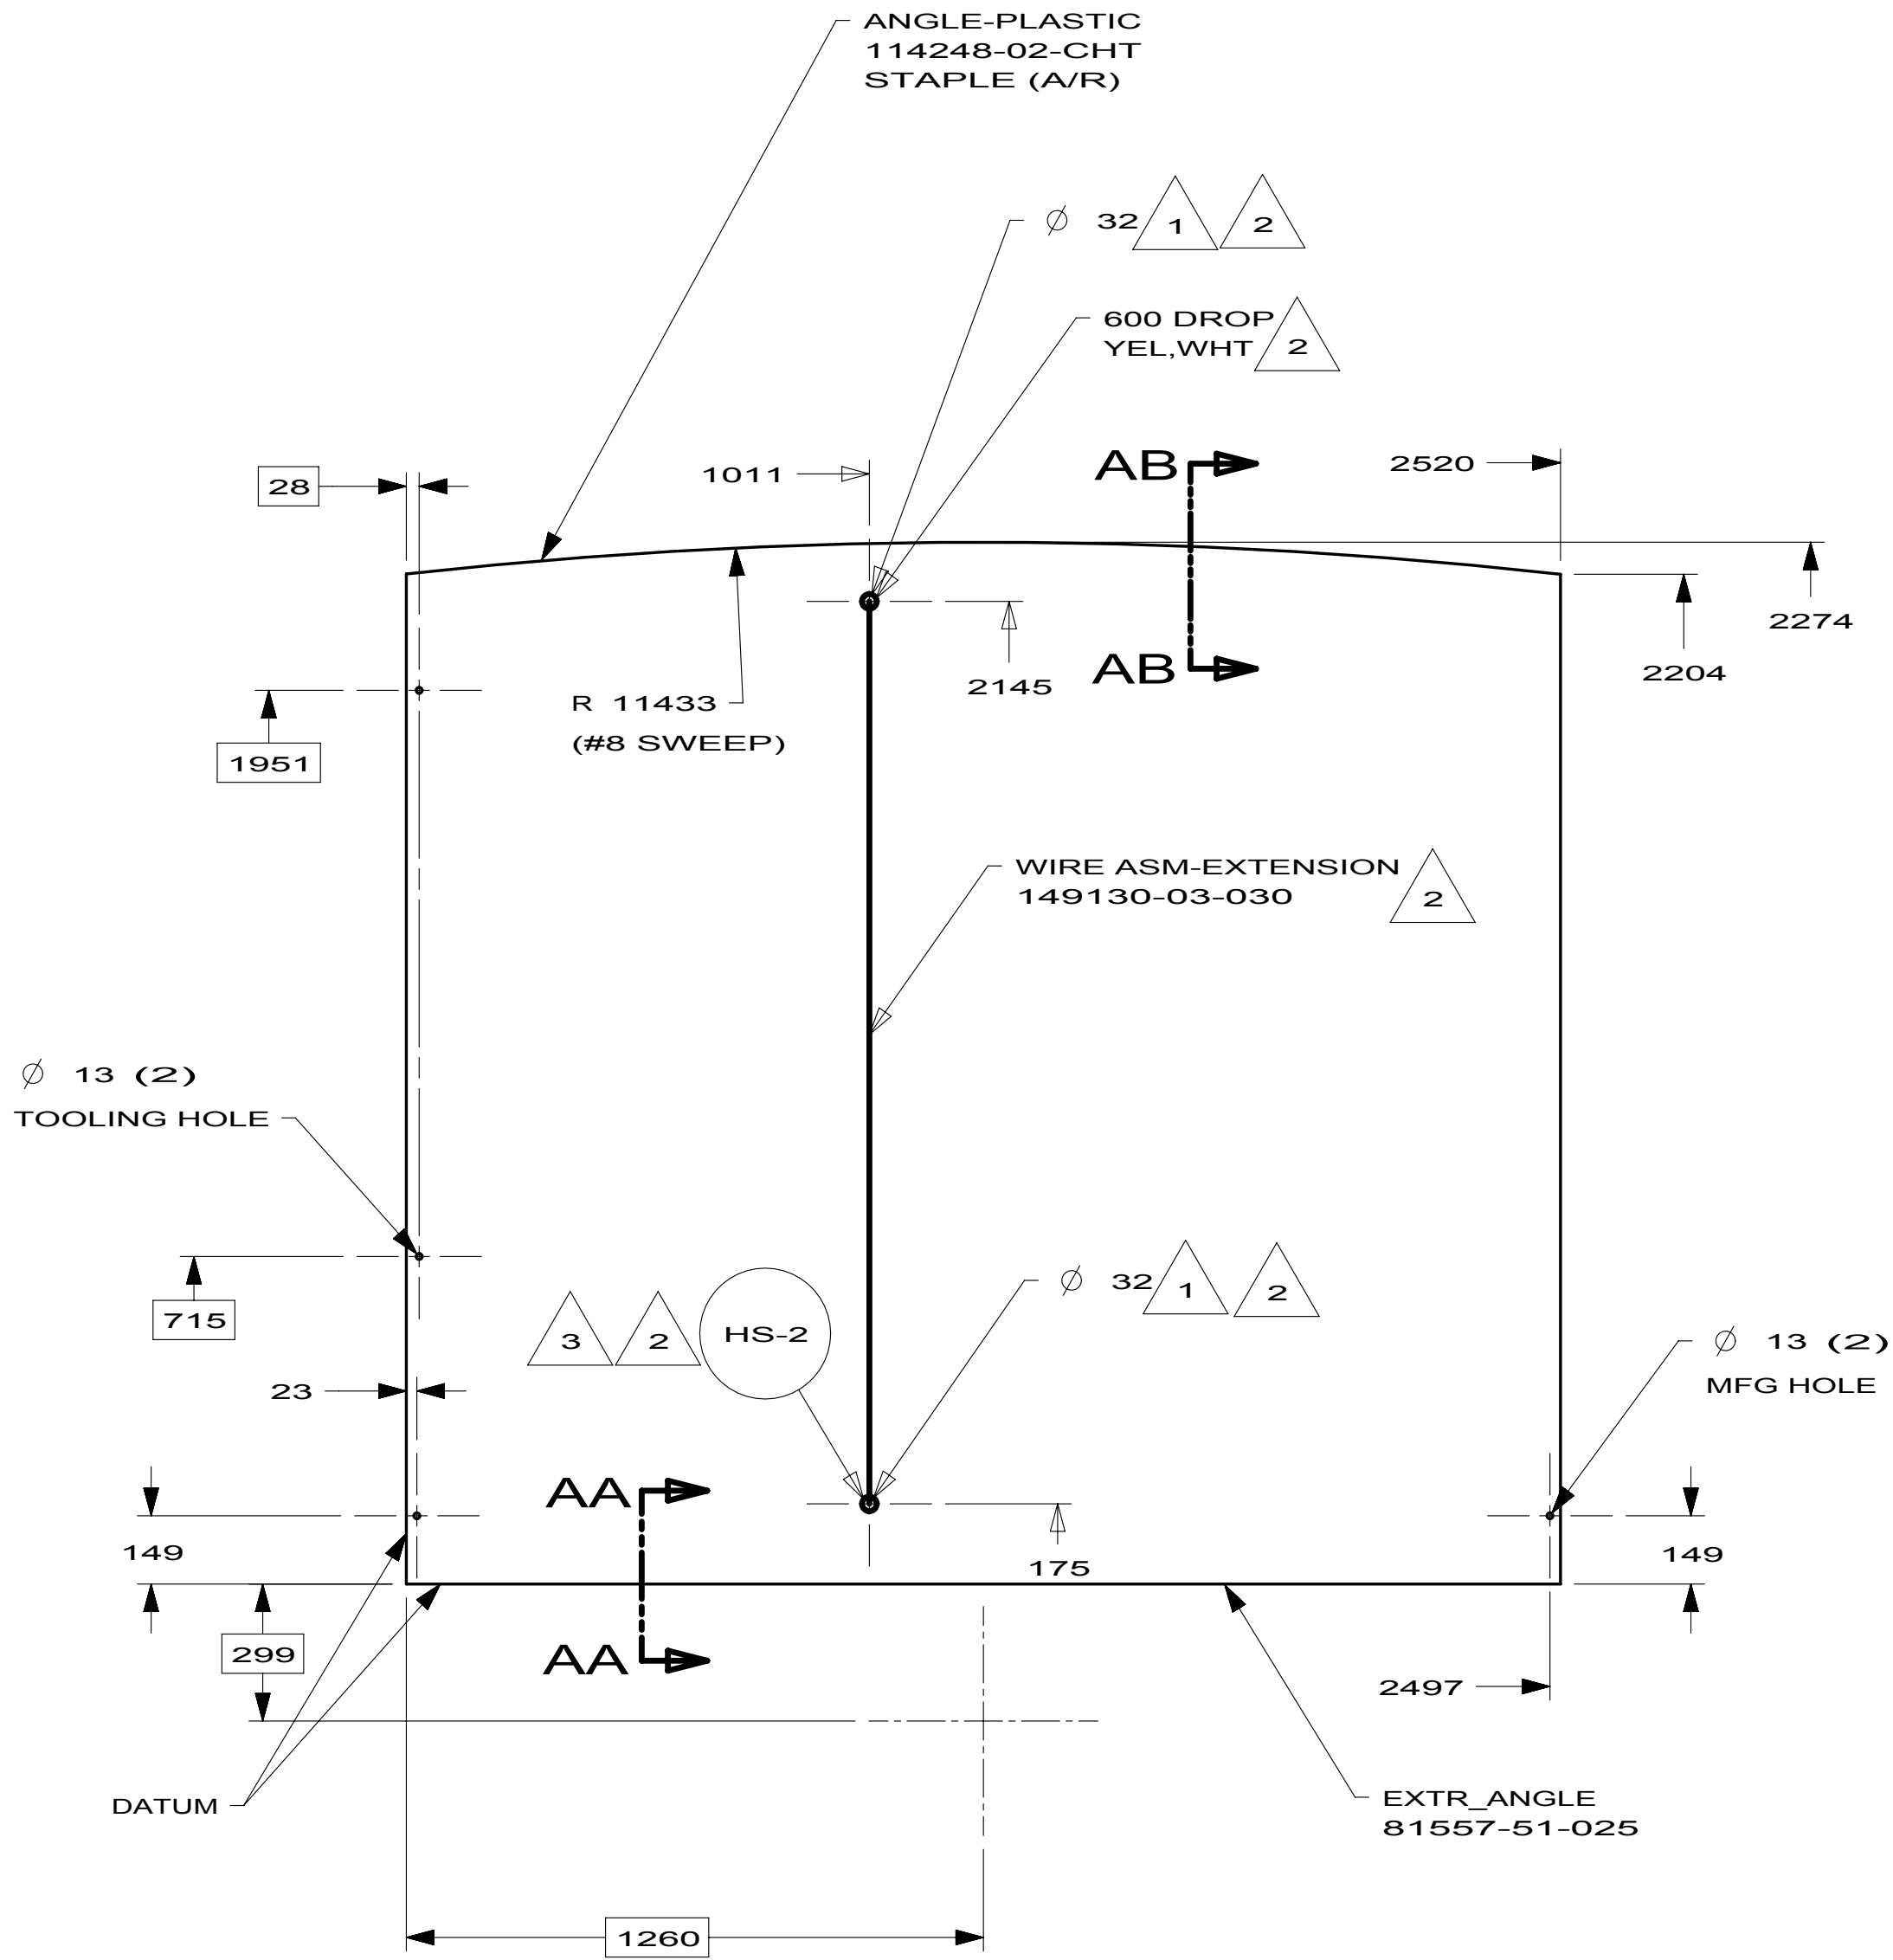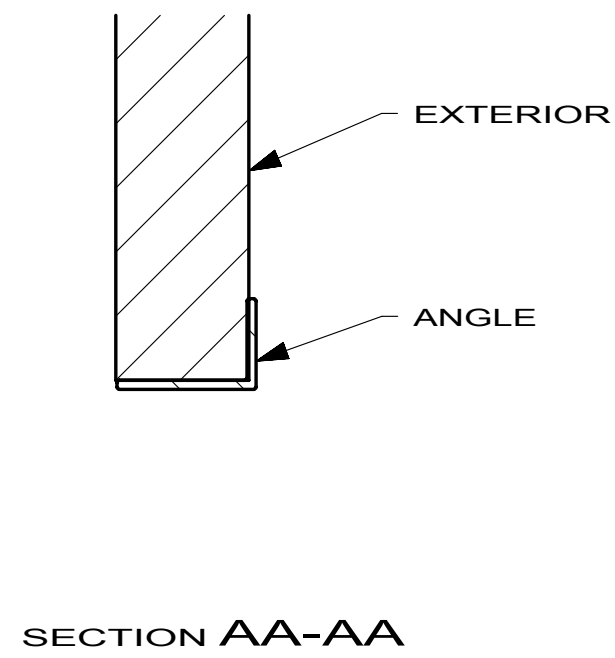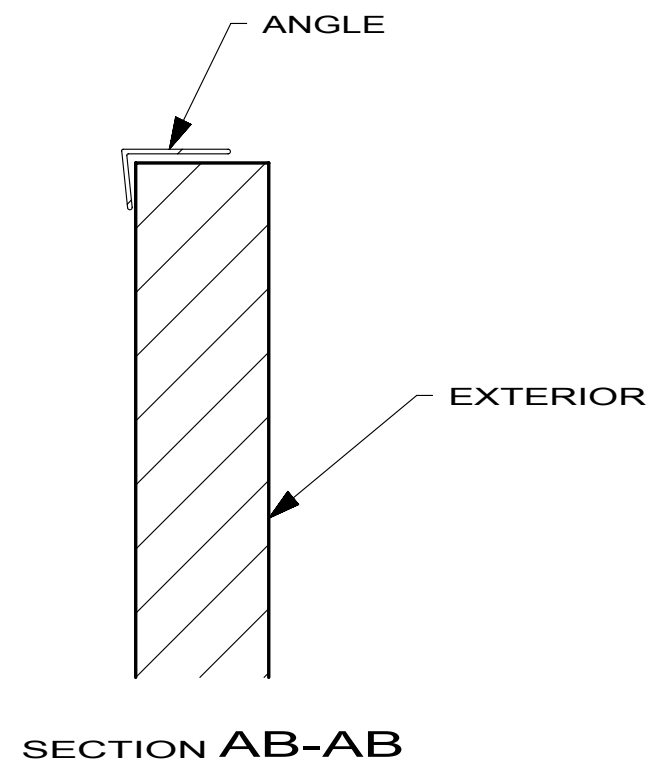

3. 300 DROP. ADD 2 PIN HOUSING TO WIRE-ASM EXTENSION AFTER LAYUP
(YEL) CIRCUIT IN POSITION 1, (WHT) CIRCUIT IN POSITION 2



2. USED ON -05 ONLY

1. THROUGH INTERIOR SURFACE AND FOAM

NOTES:




FIRST USED		
10 J/K SERIES		
DO NOT SCALE DRAWING		
TITLE:		
BACKWALL ASM		
SHEET 1	PART NO.	REV
	169431	

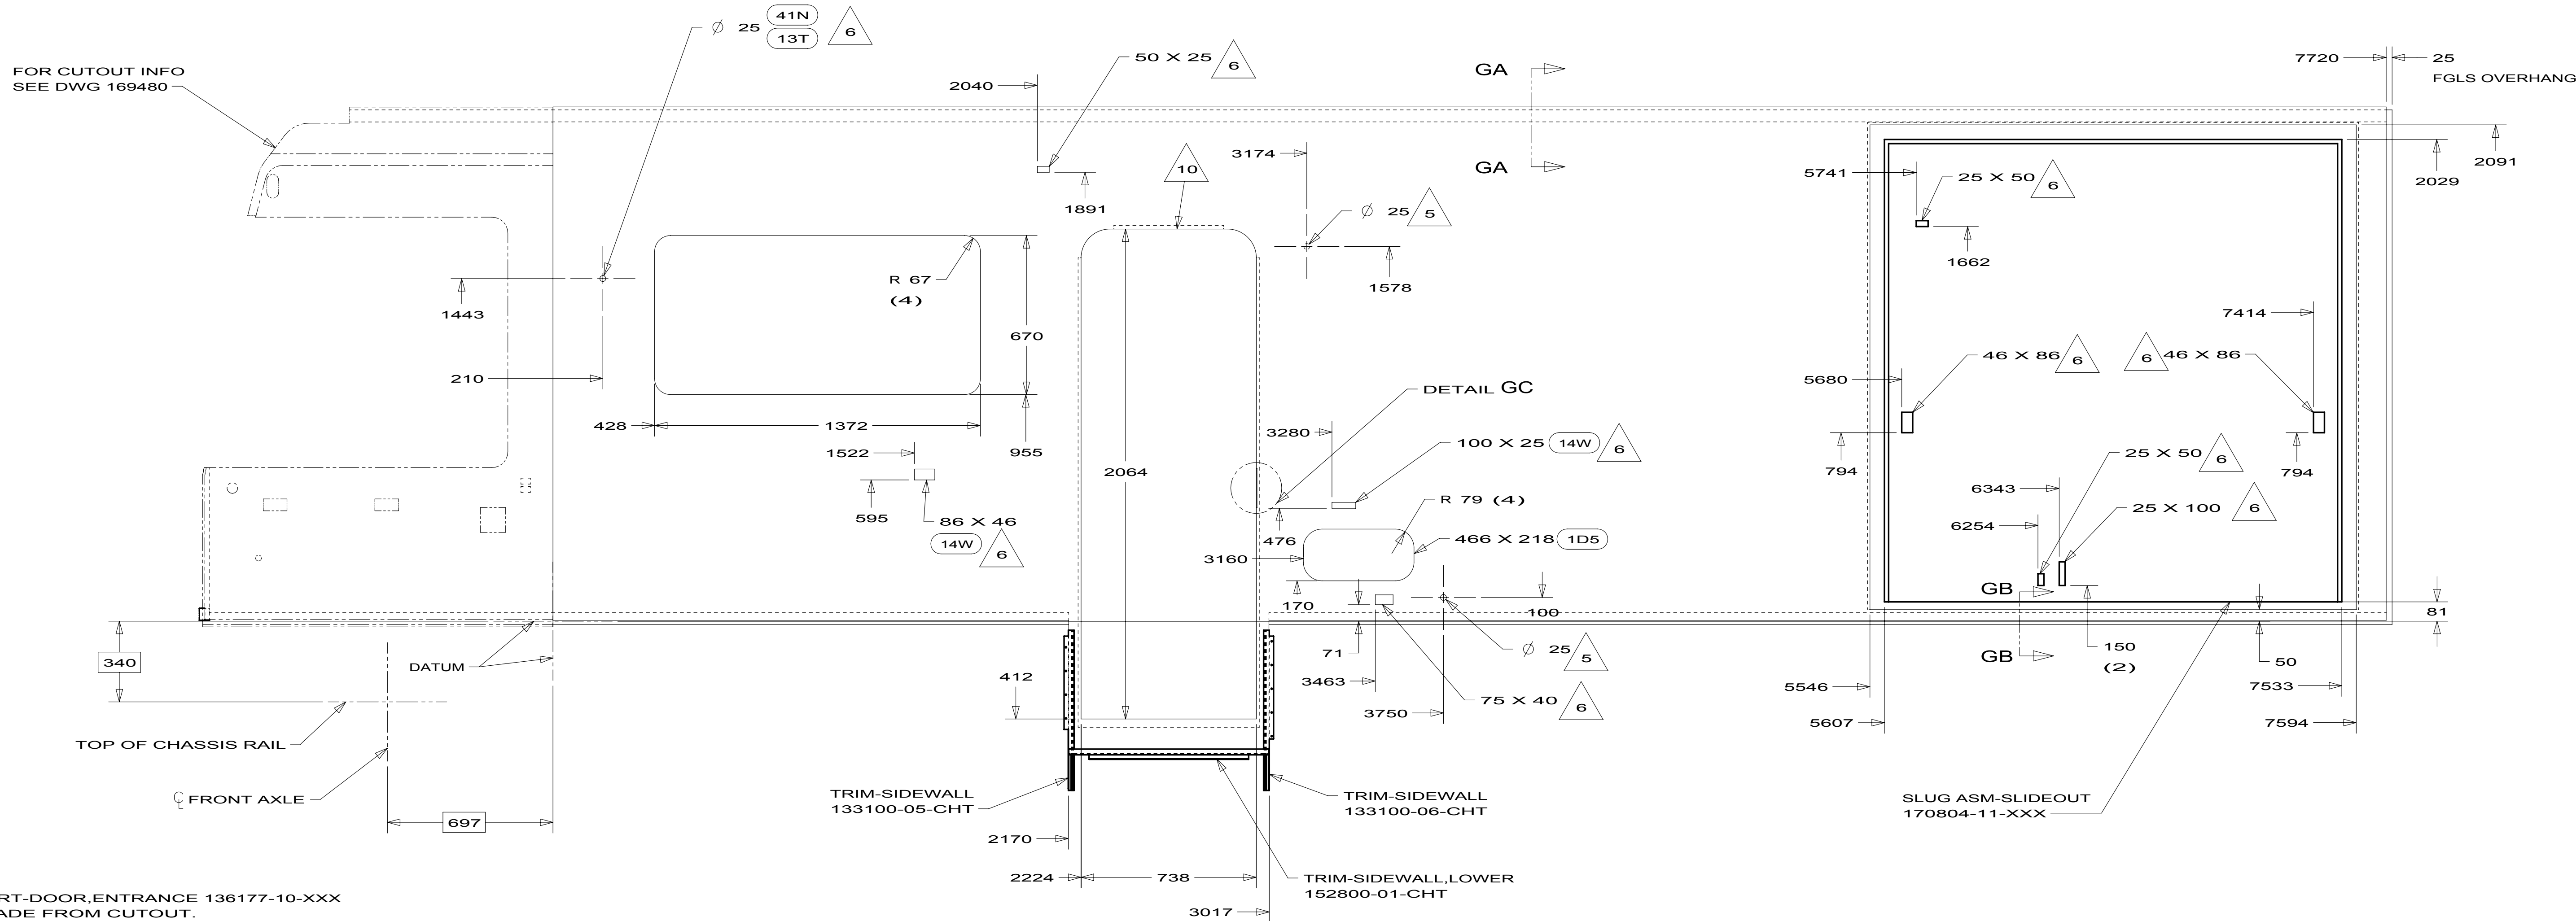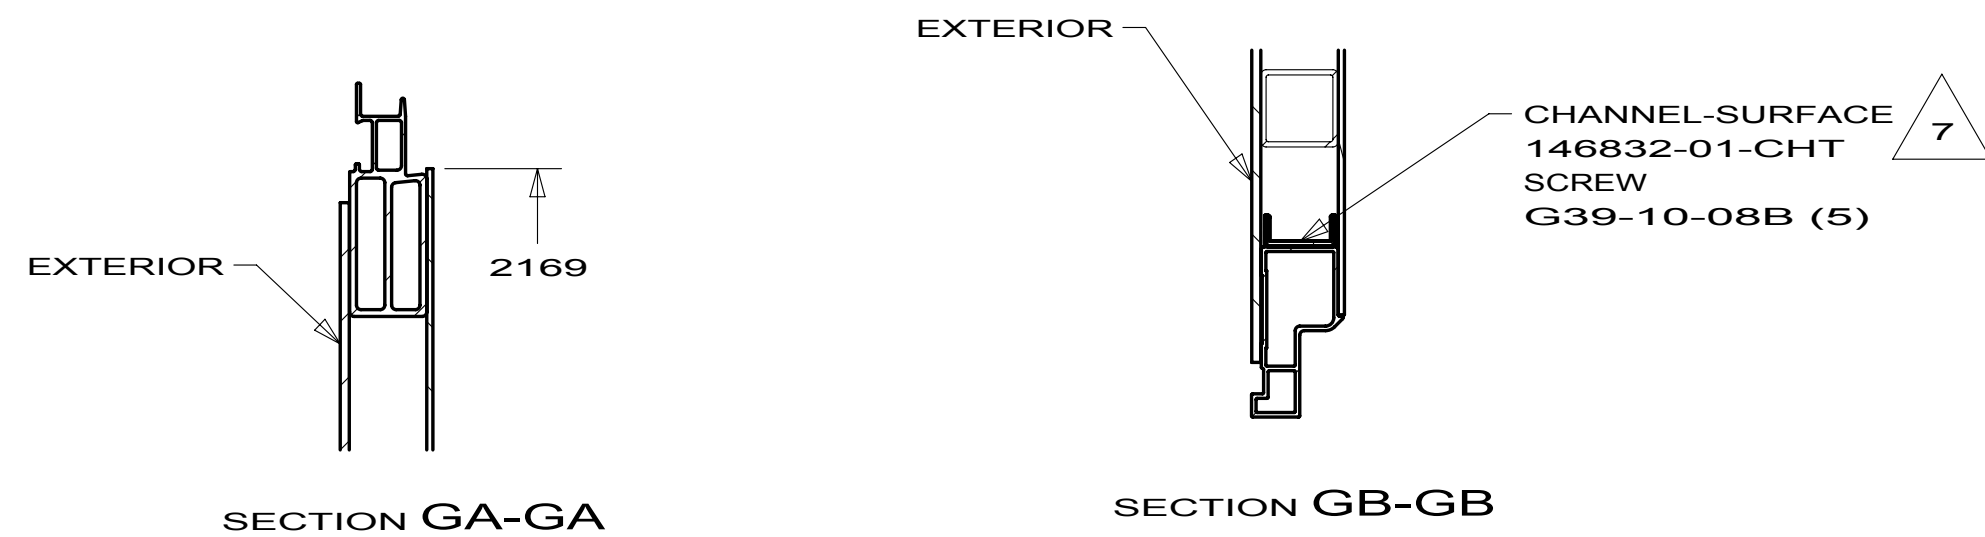

10. INSERT-DOOR, ENTRANCE 136177-10-XXX IS MADE FROM CUTOUT.
9. ATTACH AFTER INSTALLTION OF SIDEWALLS
8. SAW CUT THRU FIBERGLASS
7. INSTALL AFTER FINAL ROUTE.
6. THROUGH INTERIOR SURFACE AND FOAM ONLY.
5. THRU EXTERIOR SURFACE AND FOAM.
4. CUTOUT THRU INNER PANELING ONLY.

3. ALL RADII 9.5 UNLESS OTHERWISE SPECIFIED.
2. PANEL SHOWN FROM INTERIOR SIDE.
1. TOLERANCE FOR CUTOUT ± 1.5 .


NOTES:

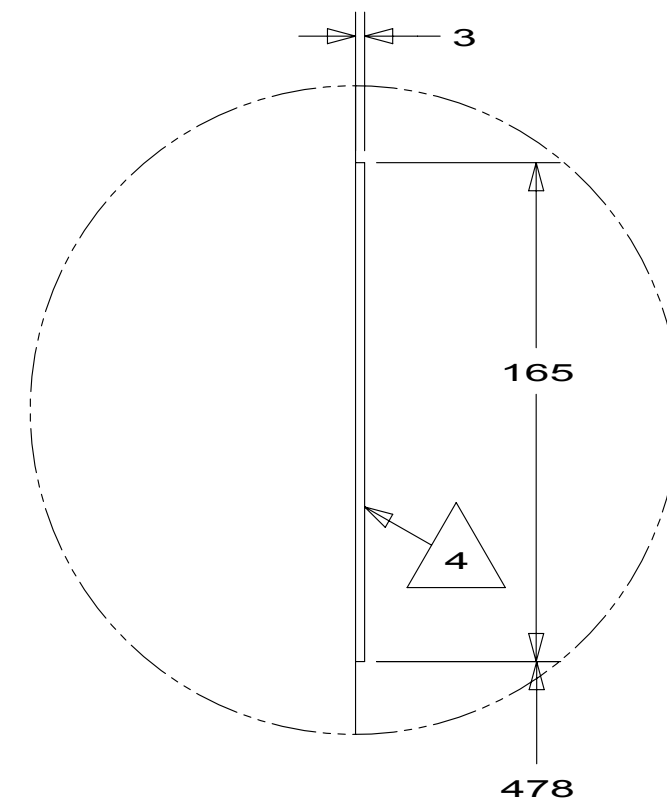


NOTICE
CHANGES TO THIS SHEET
MAY AFFECT OTHERS

- 41N SOFA/BED ULTRALEATHER
- 13T SOFA/BED RH
- 14W DINETTE
- 1D5 ENTERTAINMENT CENTR/EXT W/CD


FIRST USED			10 J32H
DO NOT SCALE DRAWING			
TITLE:			SIDEWALL ASM-RIGHT
SHEET 1	PART NO	170804	REV

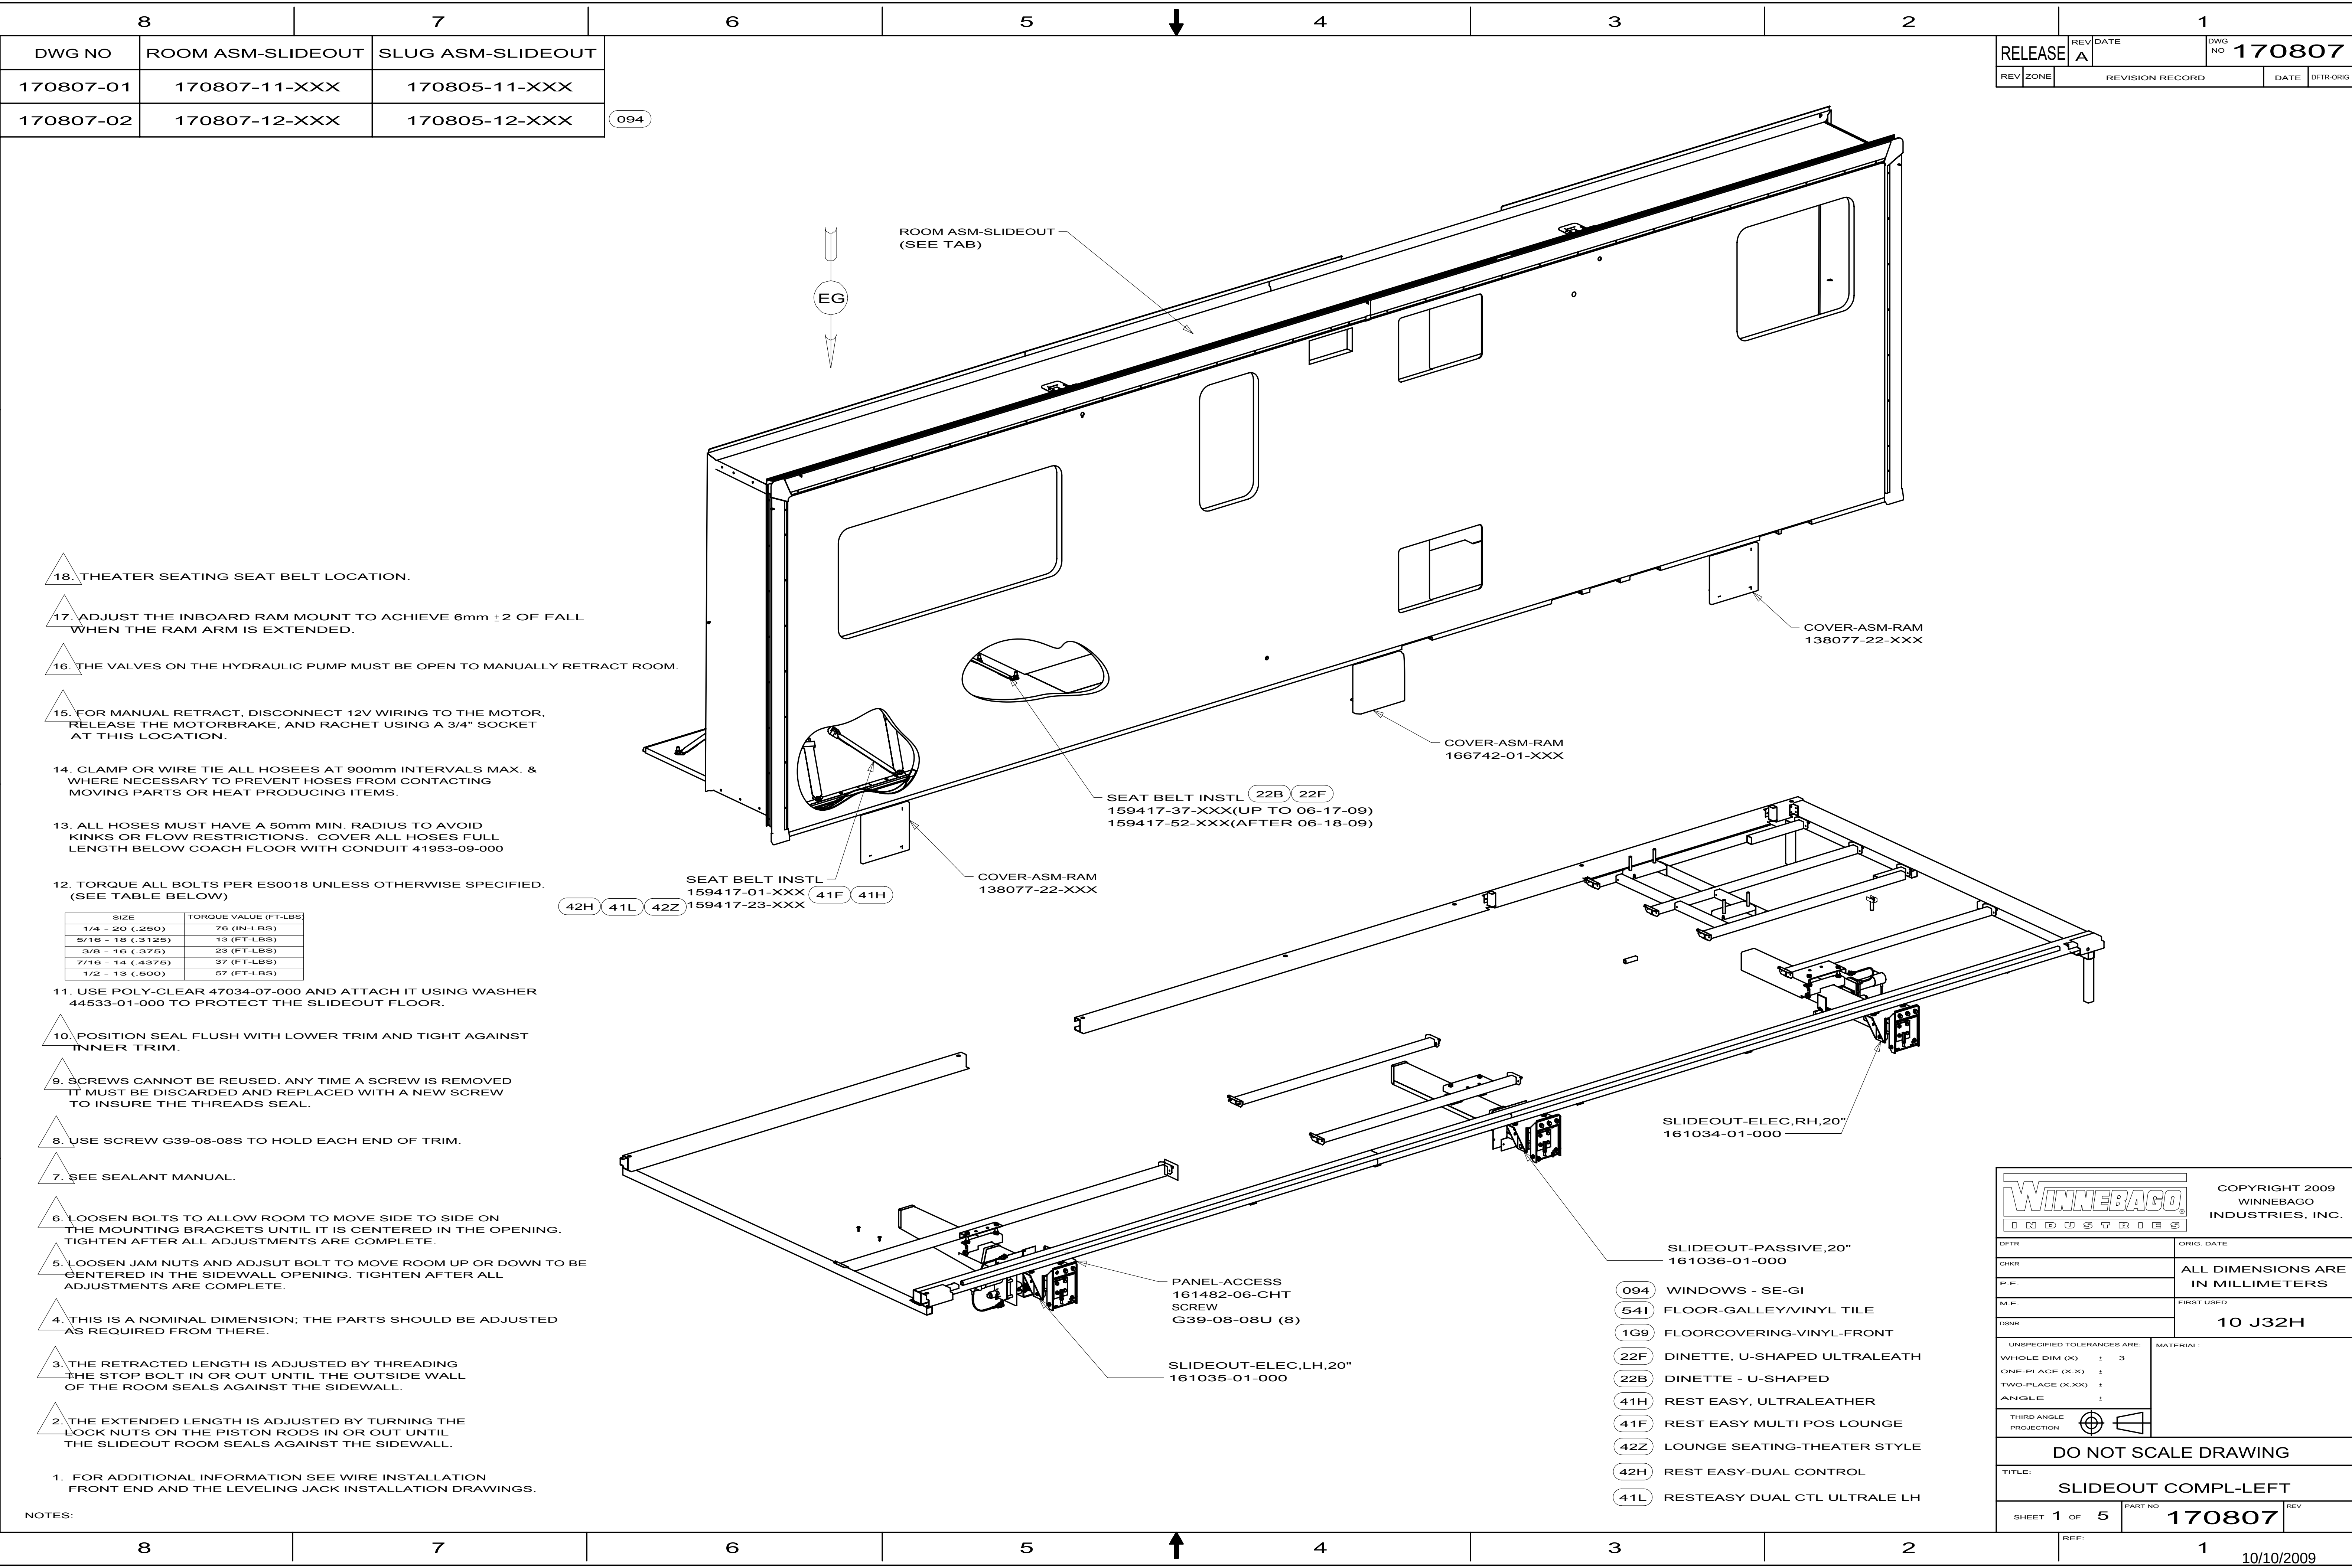

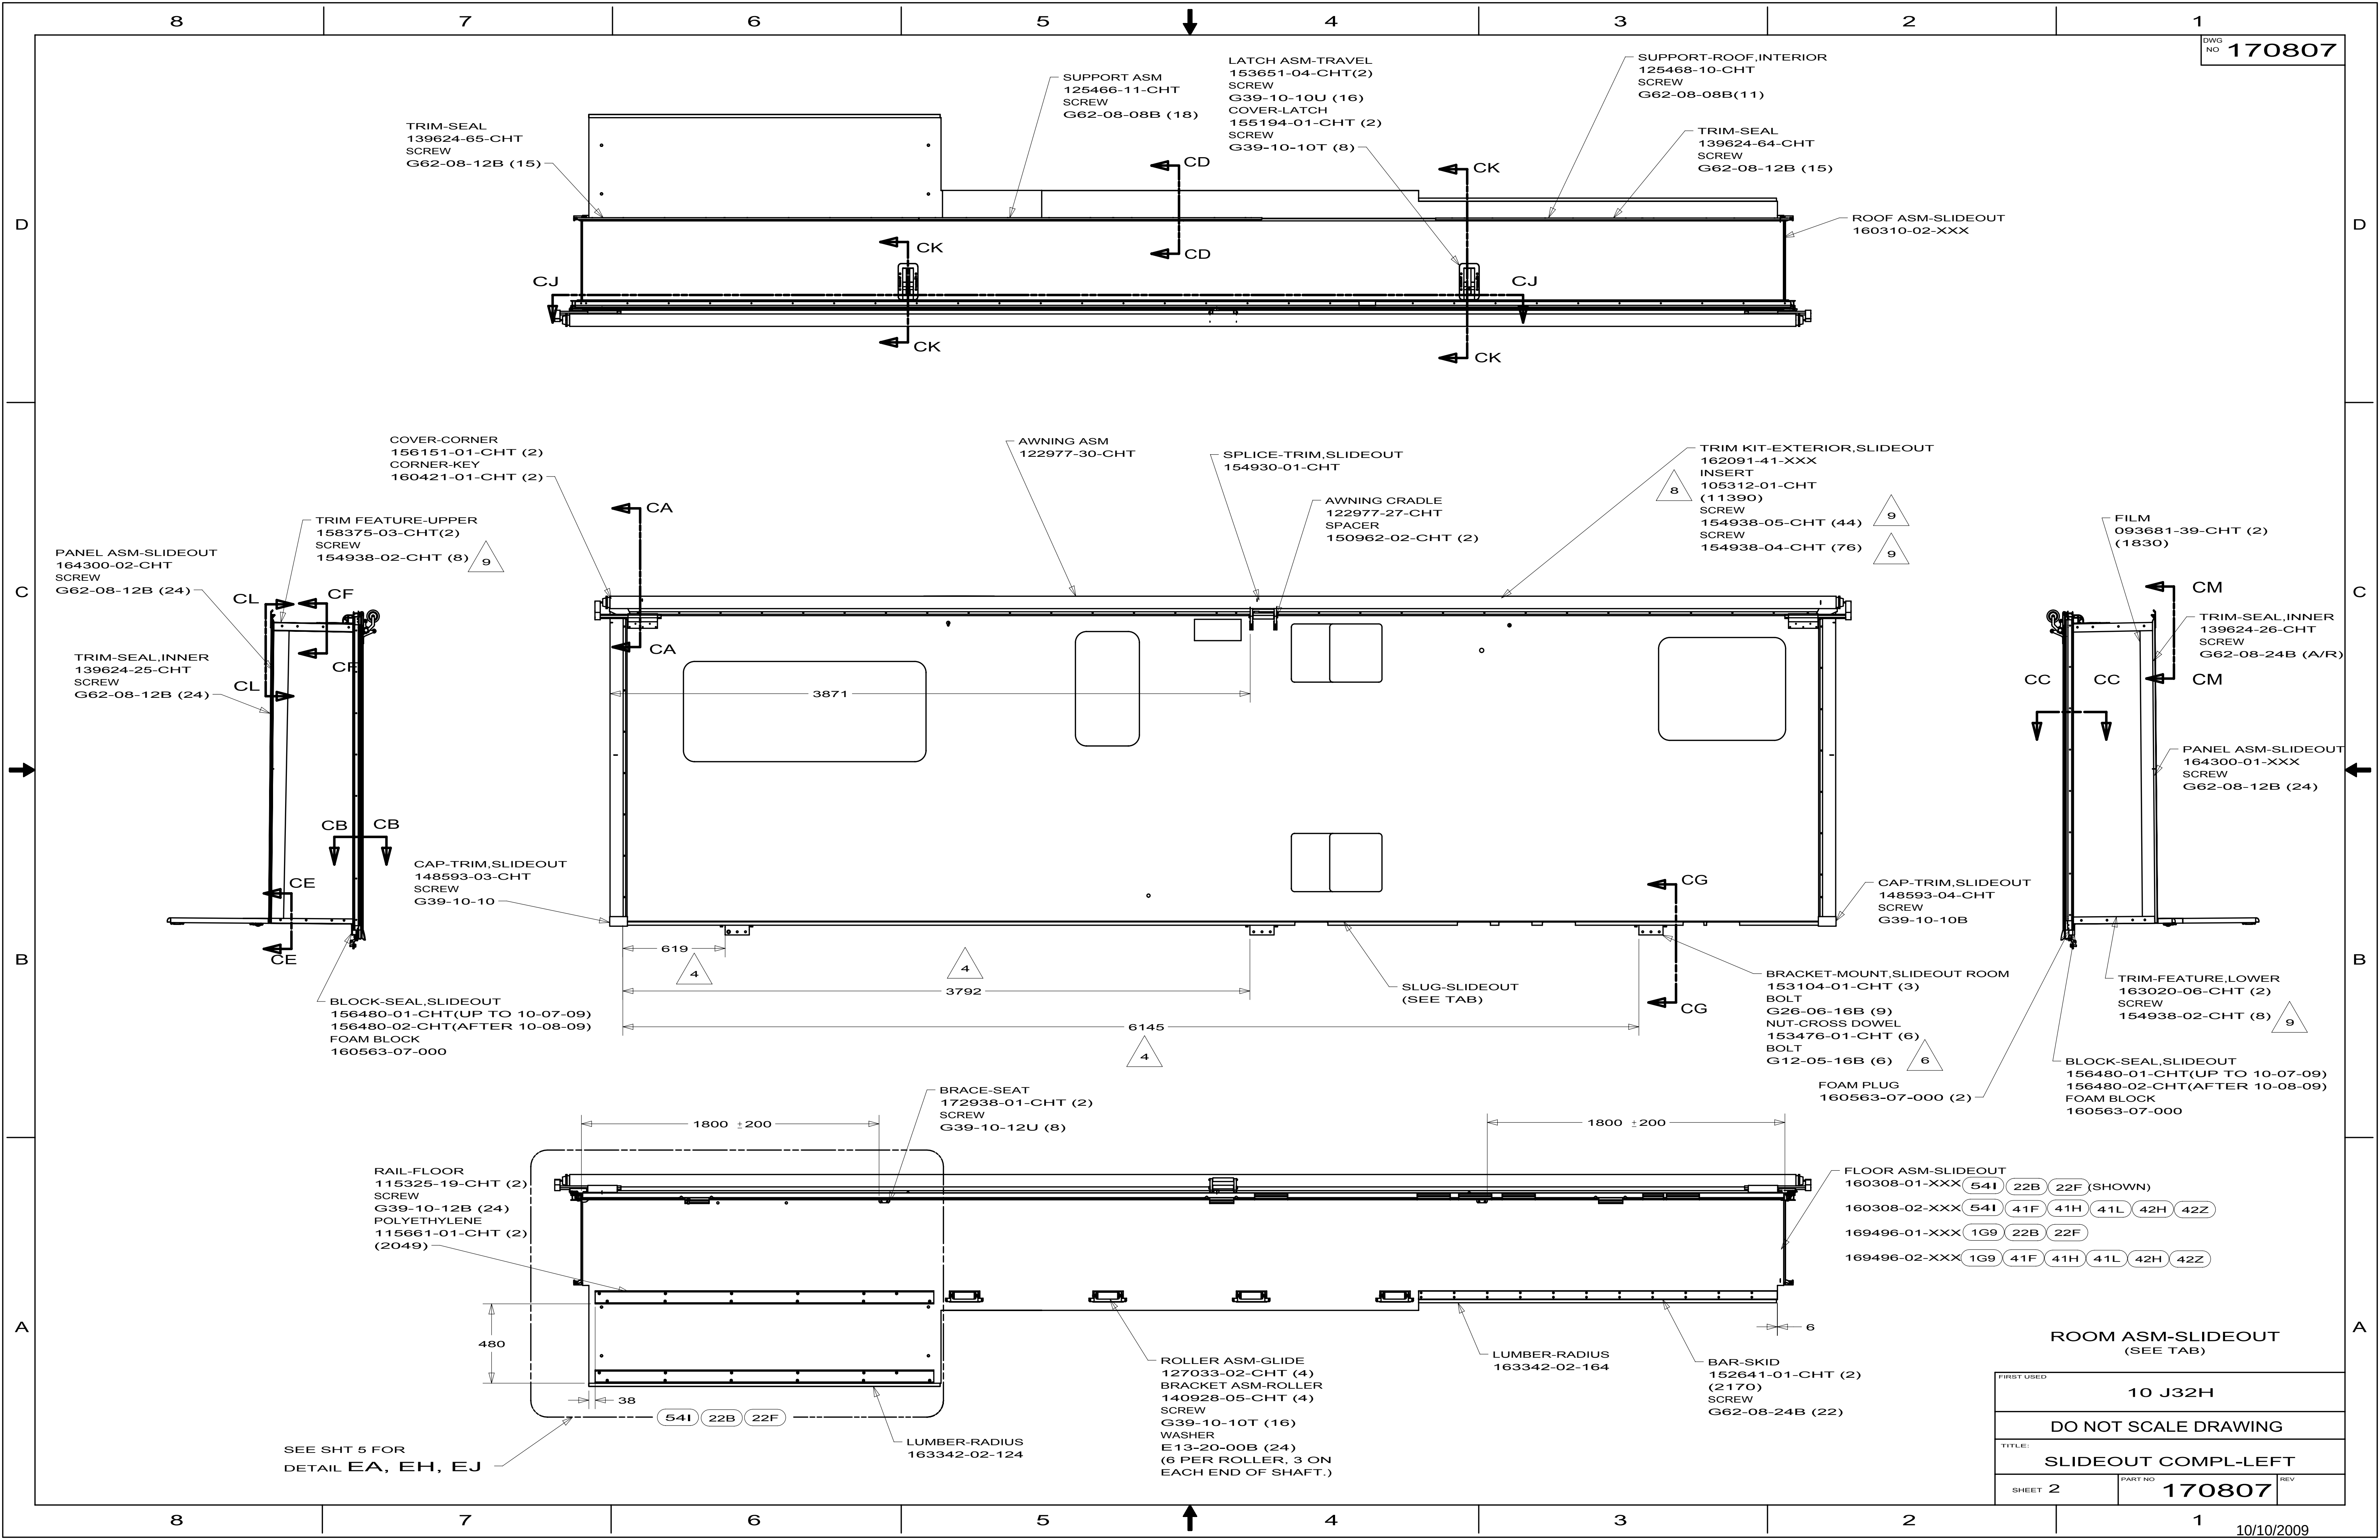



SEE SHT 5 FOR
DETAIL EA, EH, EJ

FIRST USED		
10 J32H		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-LEFT		
SHEET 2	PART NO	REV
	170807	

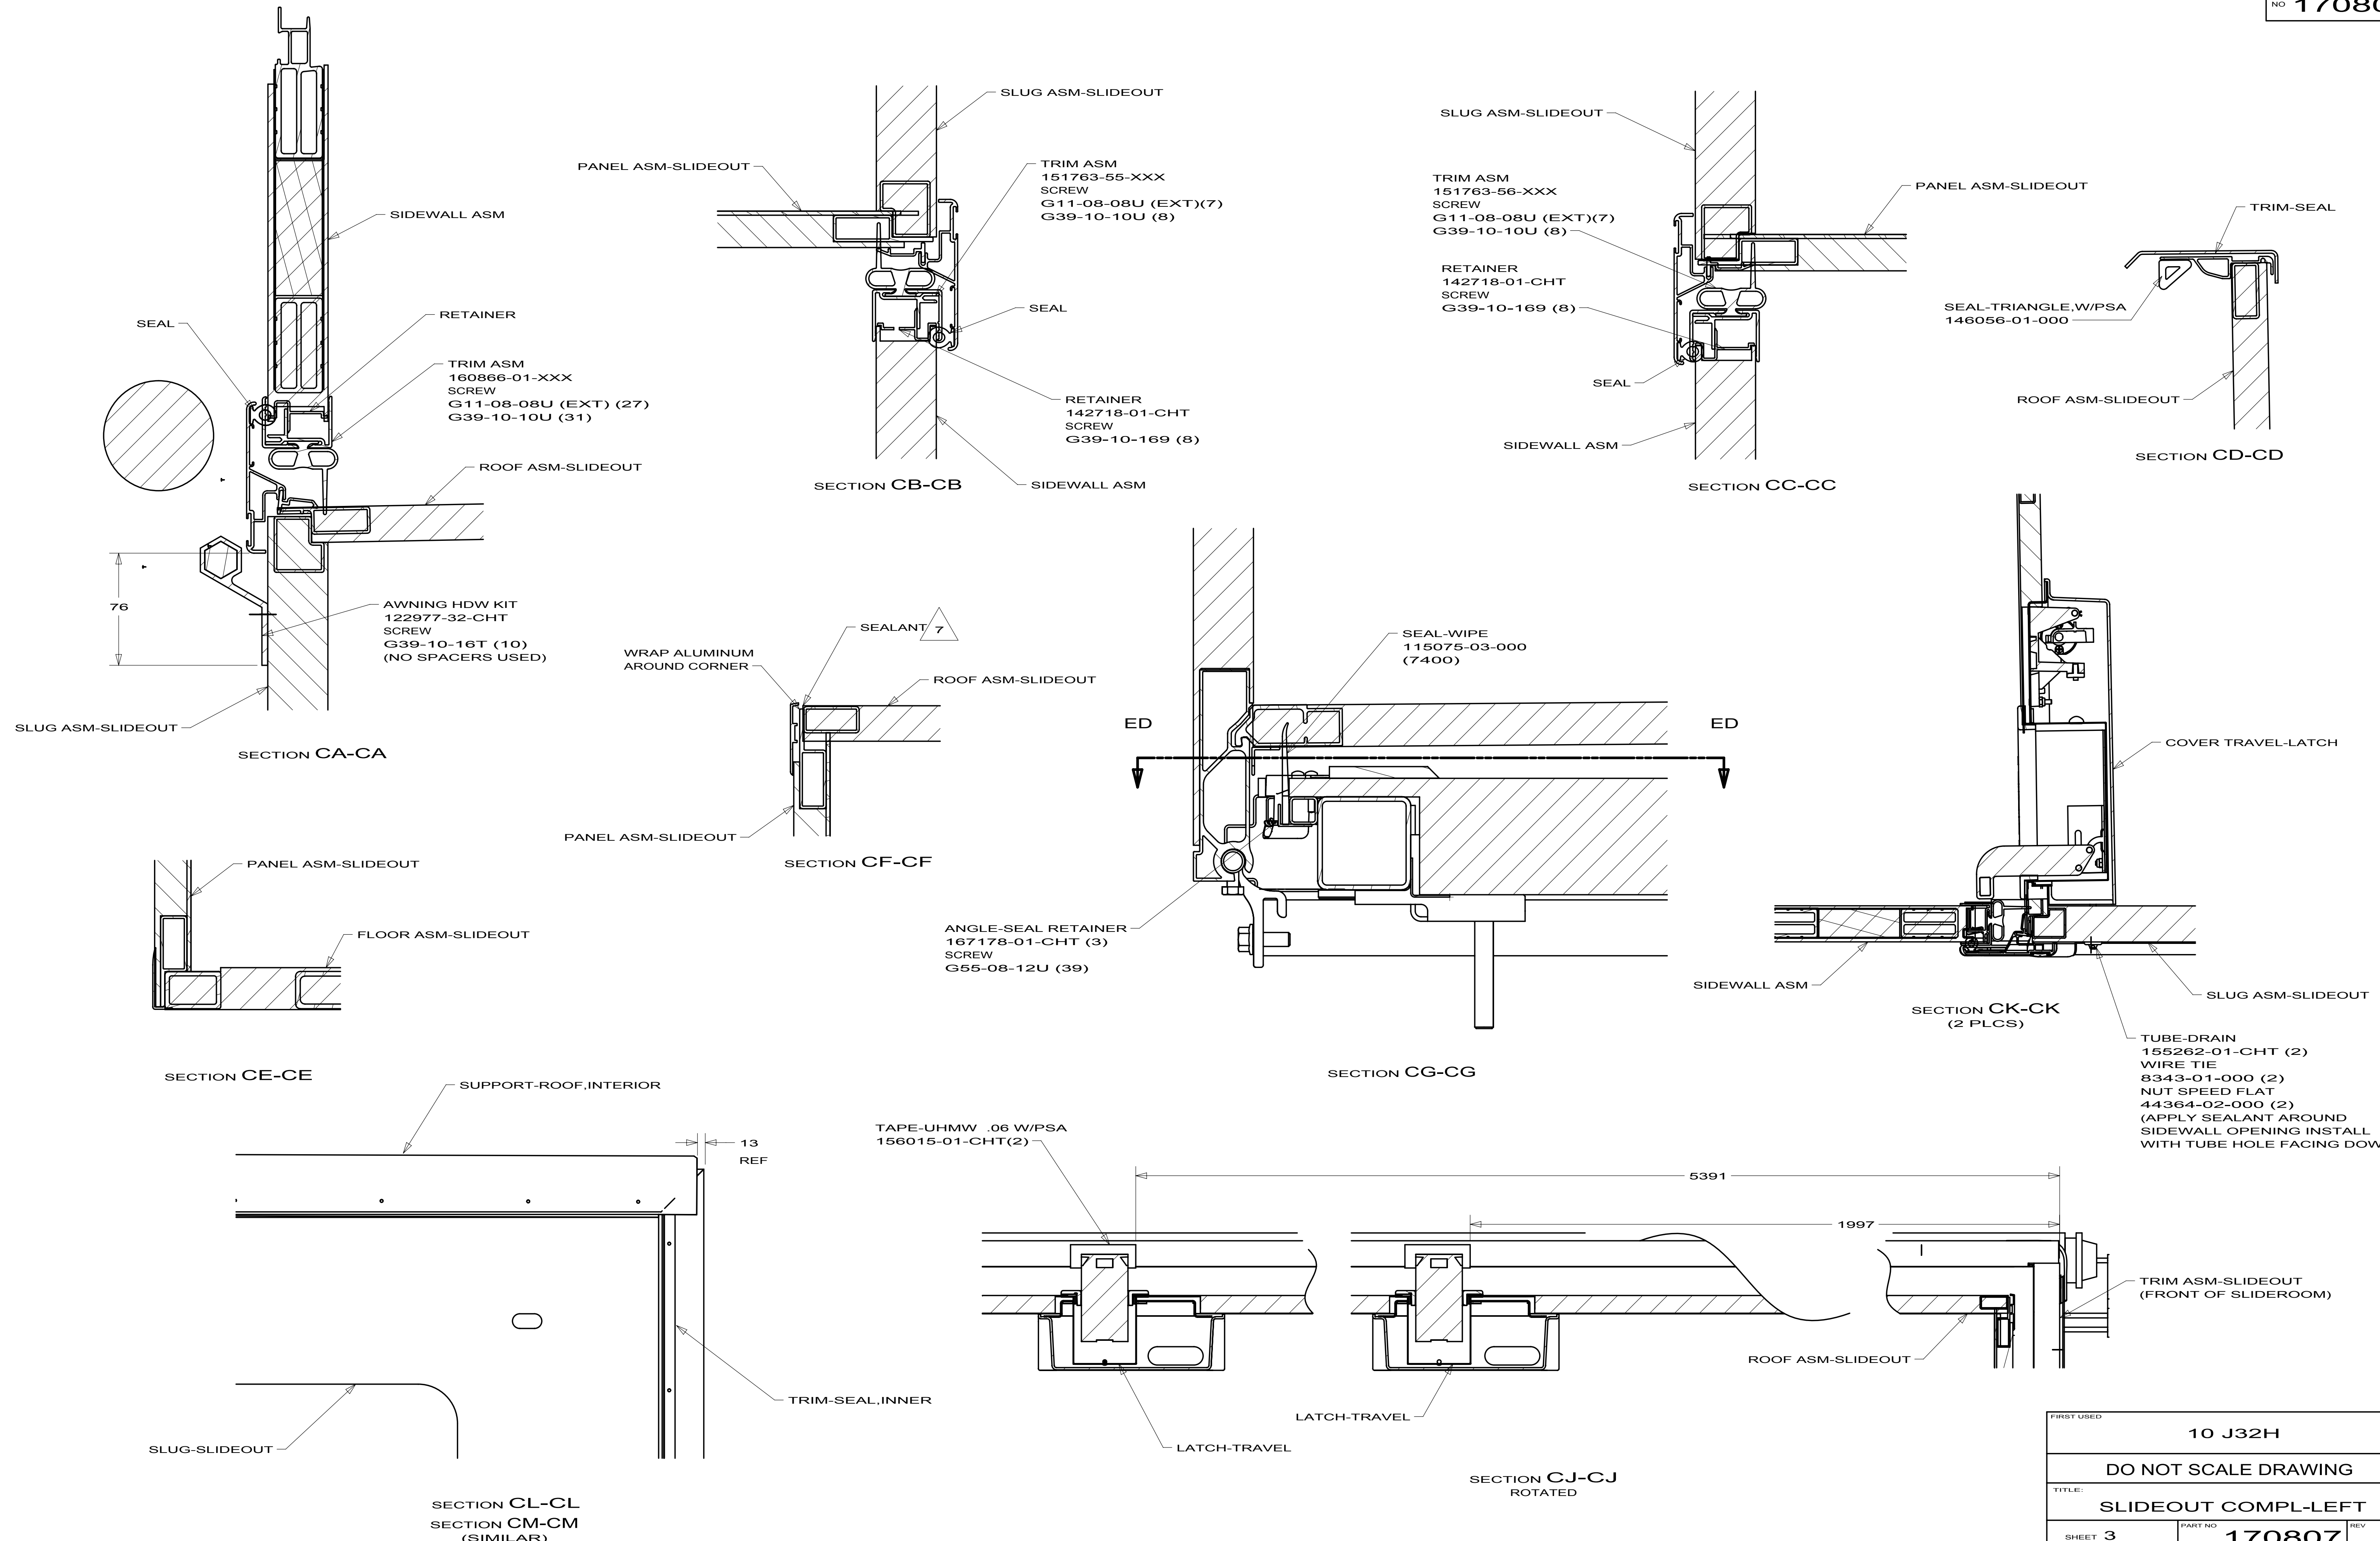


FIRST USED		
10 J32H		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-LEFT		
SHEET 3	PART NO 170807	REV

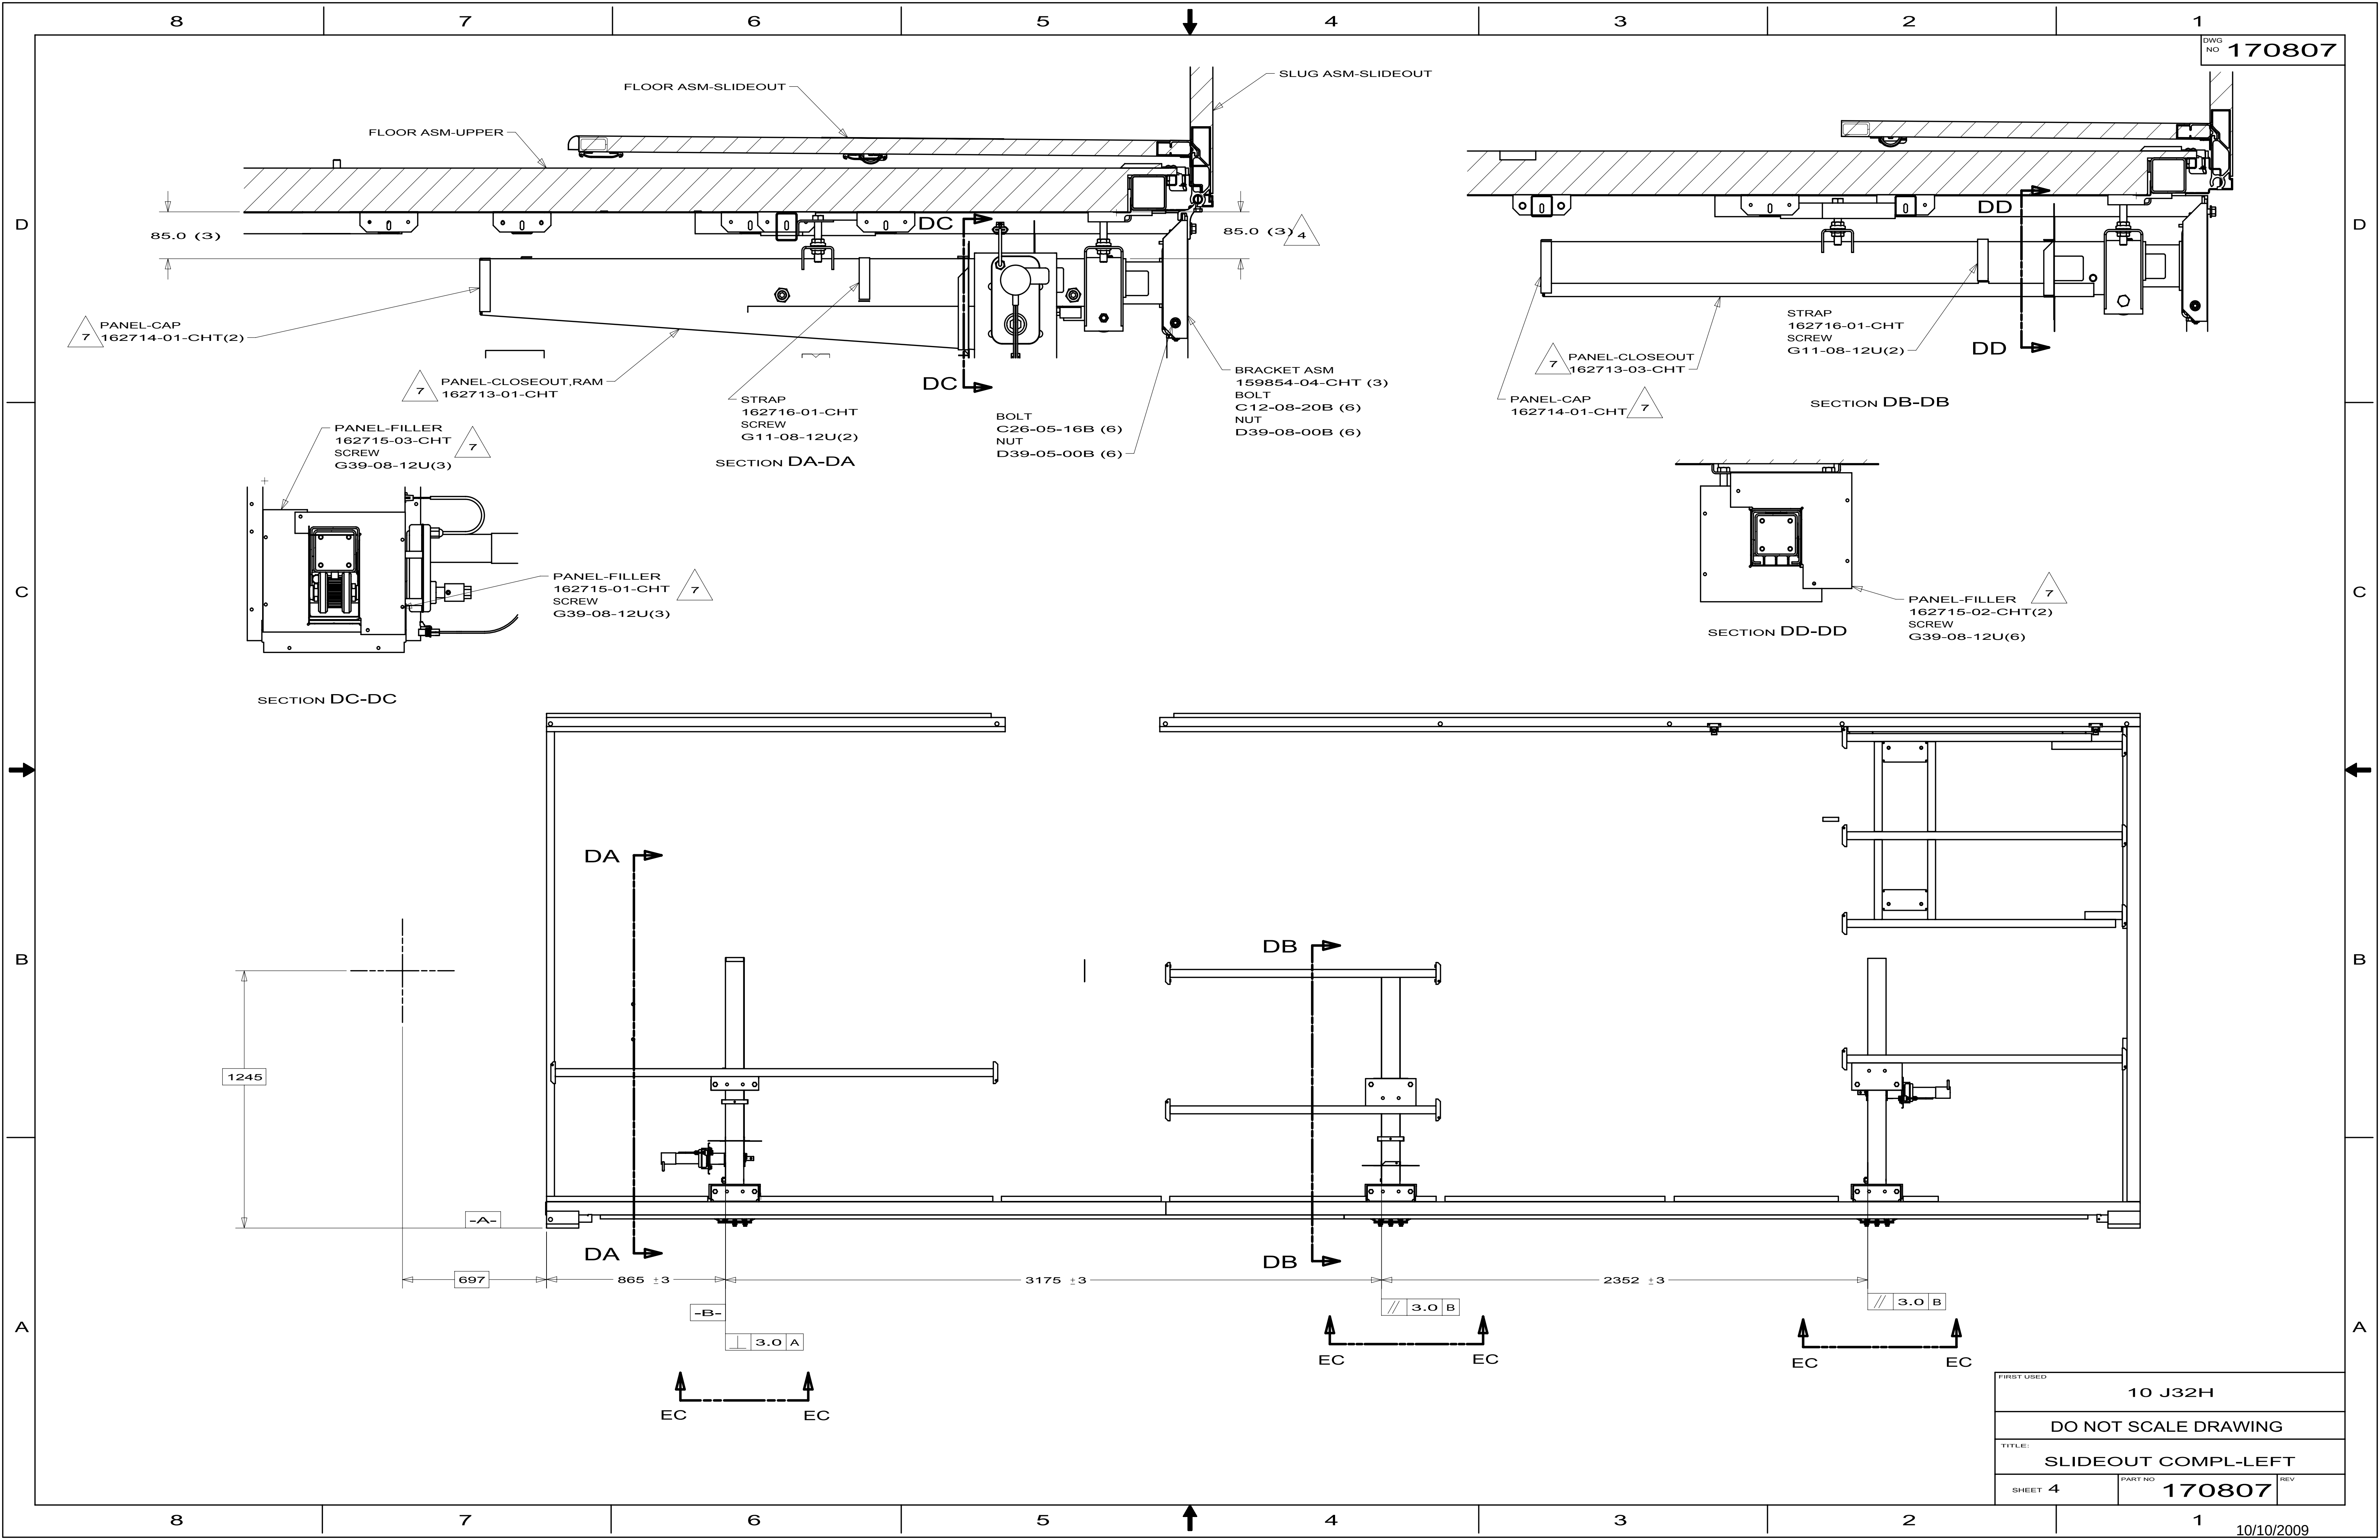

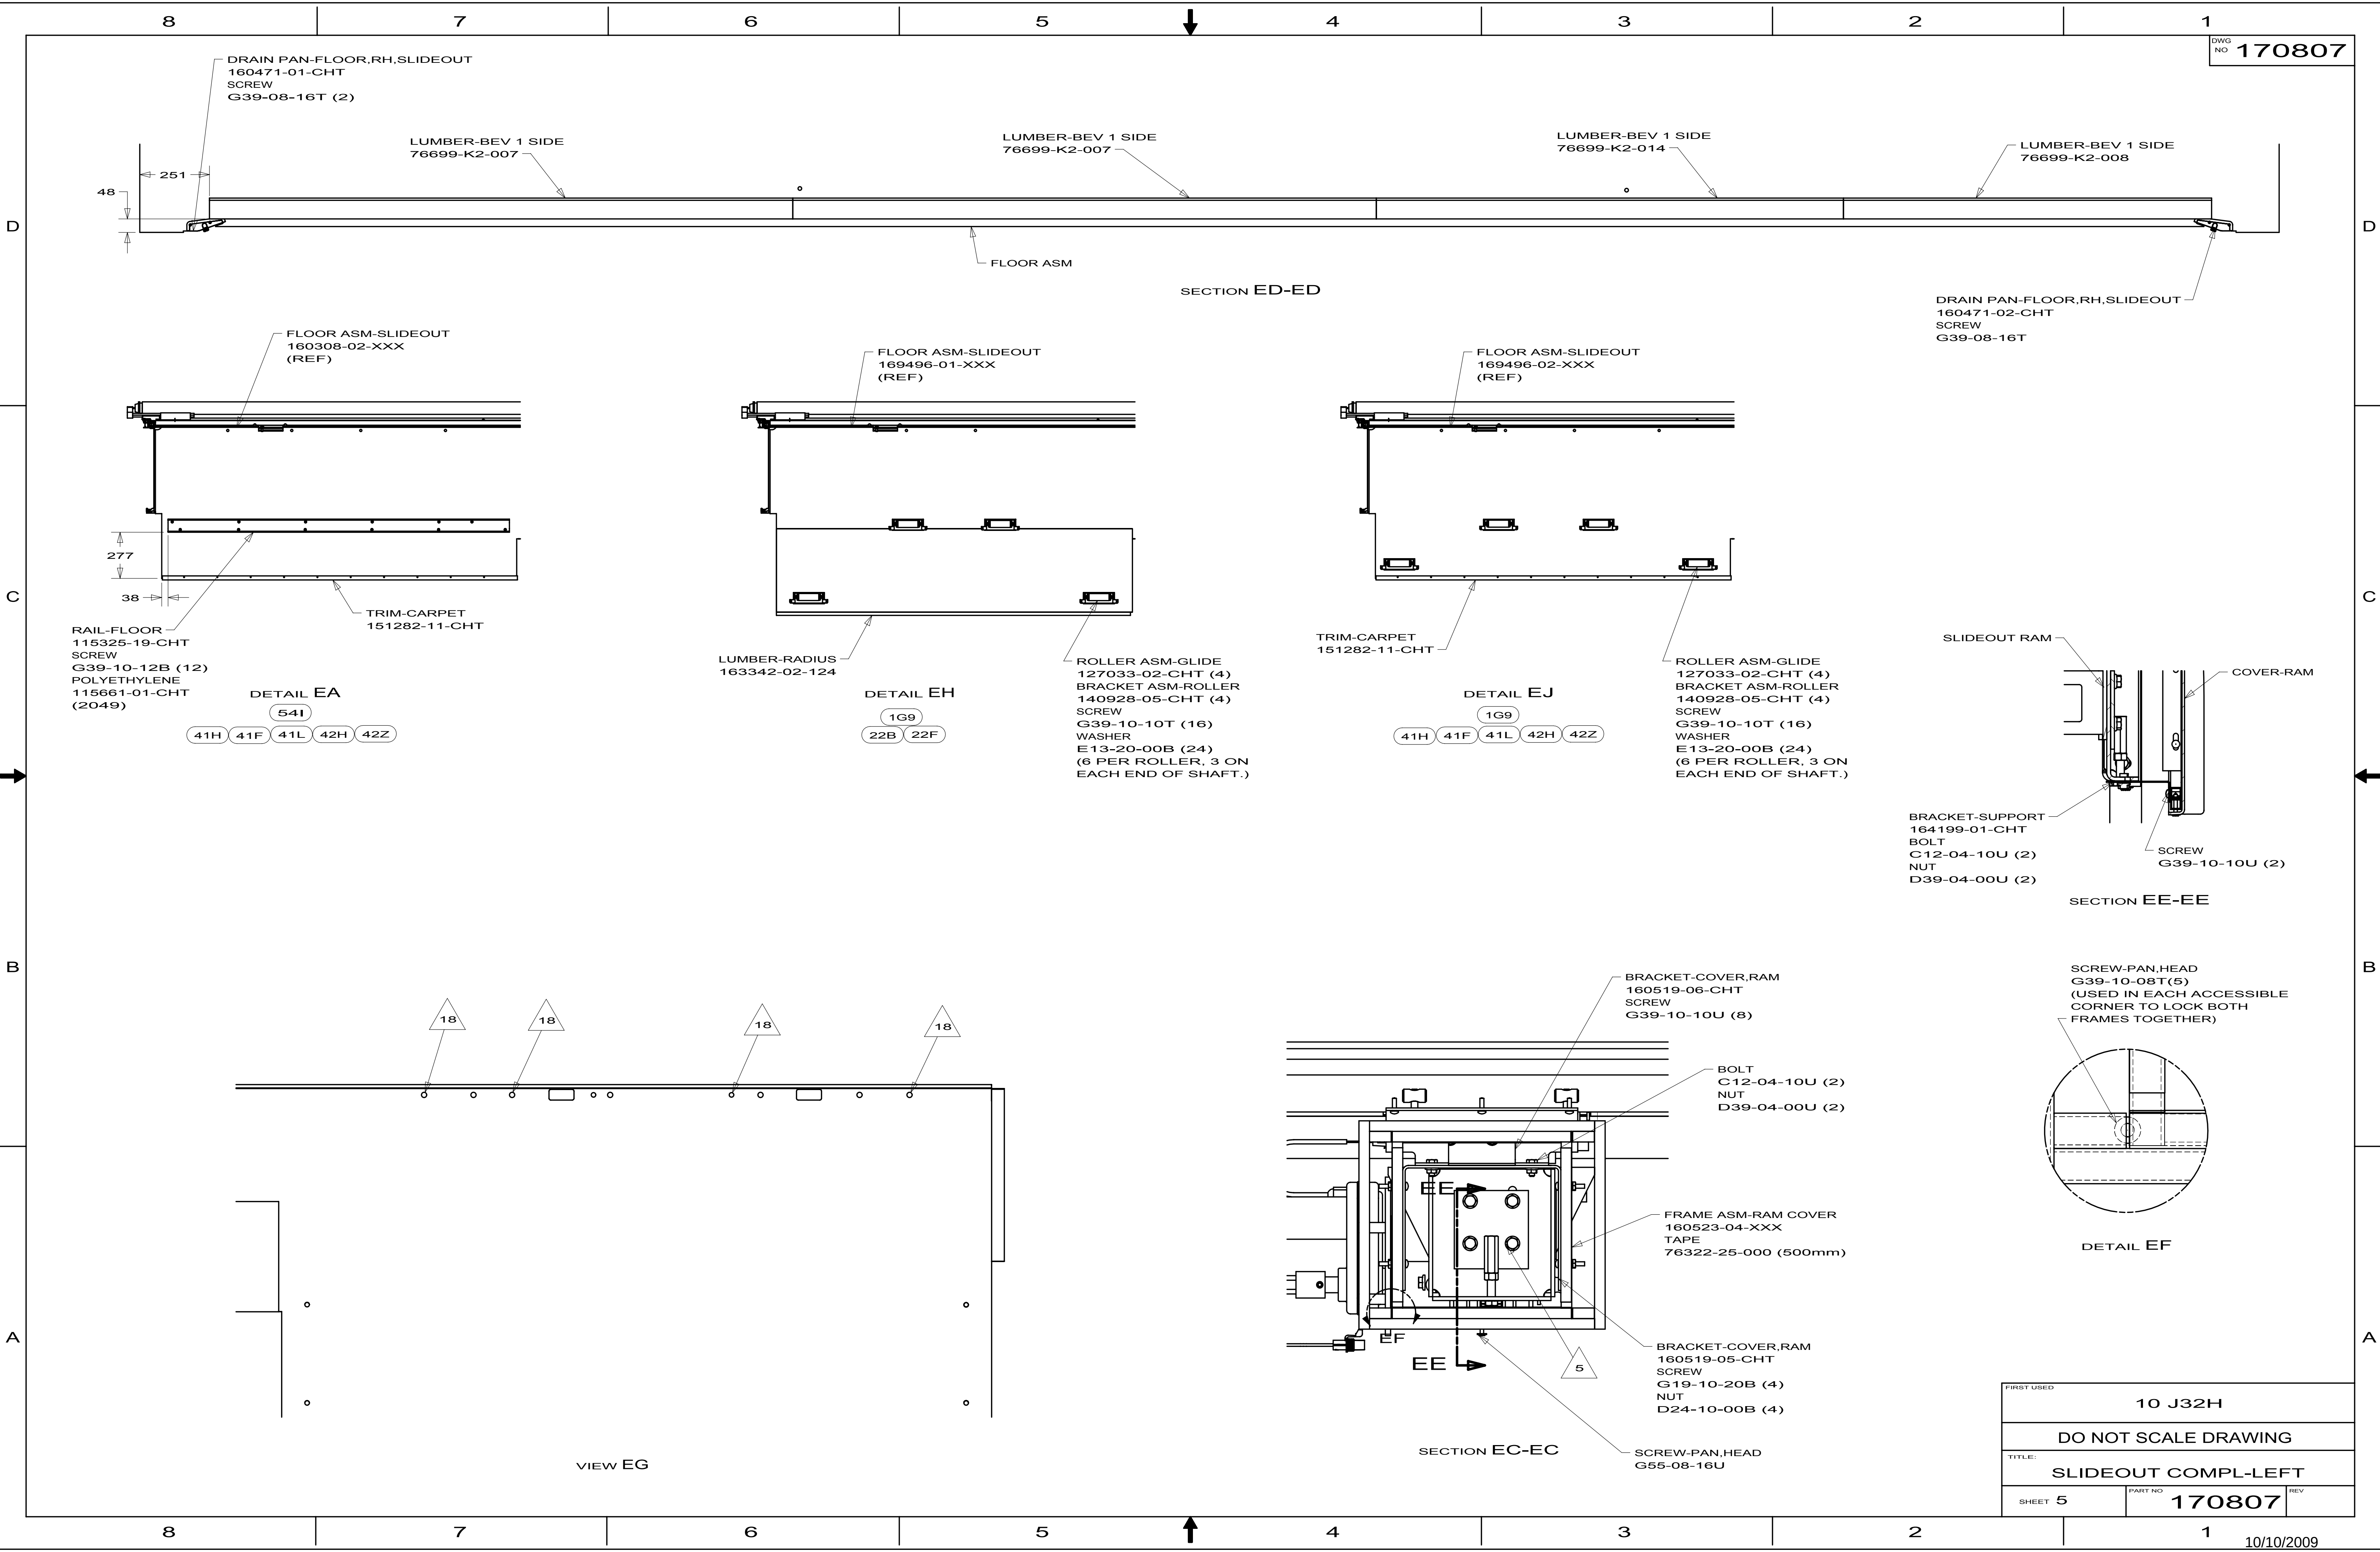

FIRST USED		
10 J32H		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-LEFT		
SHEET 5	PART NO	REV
	170807	

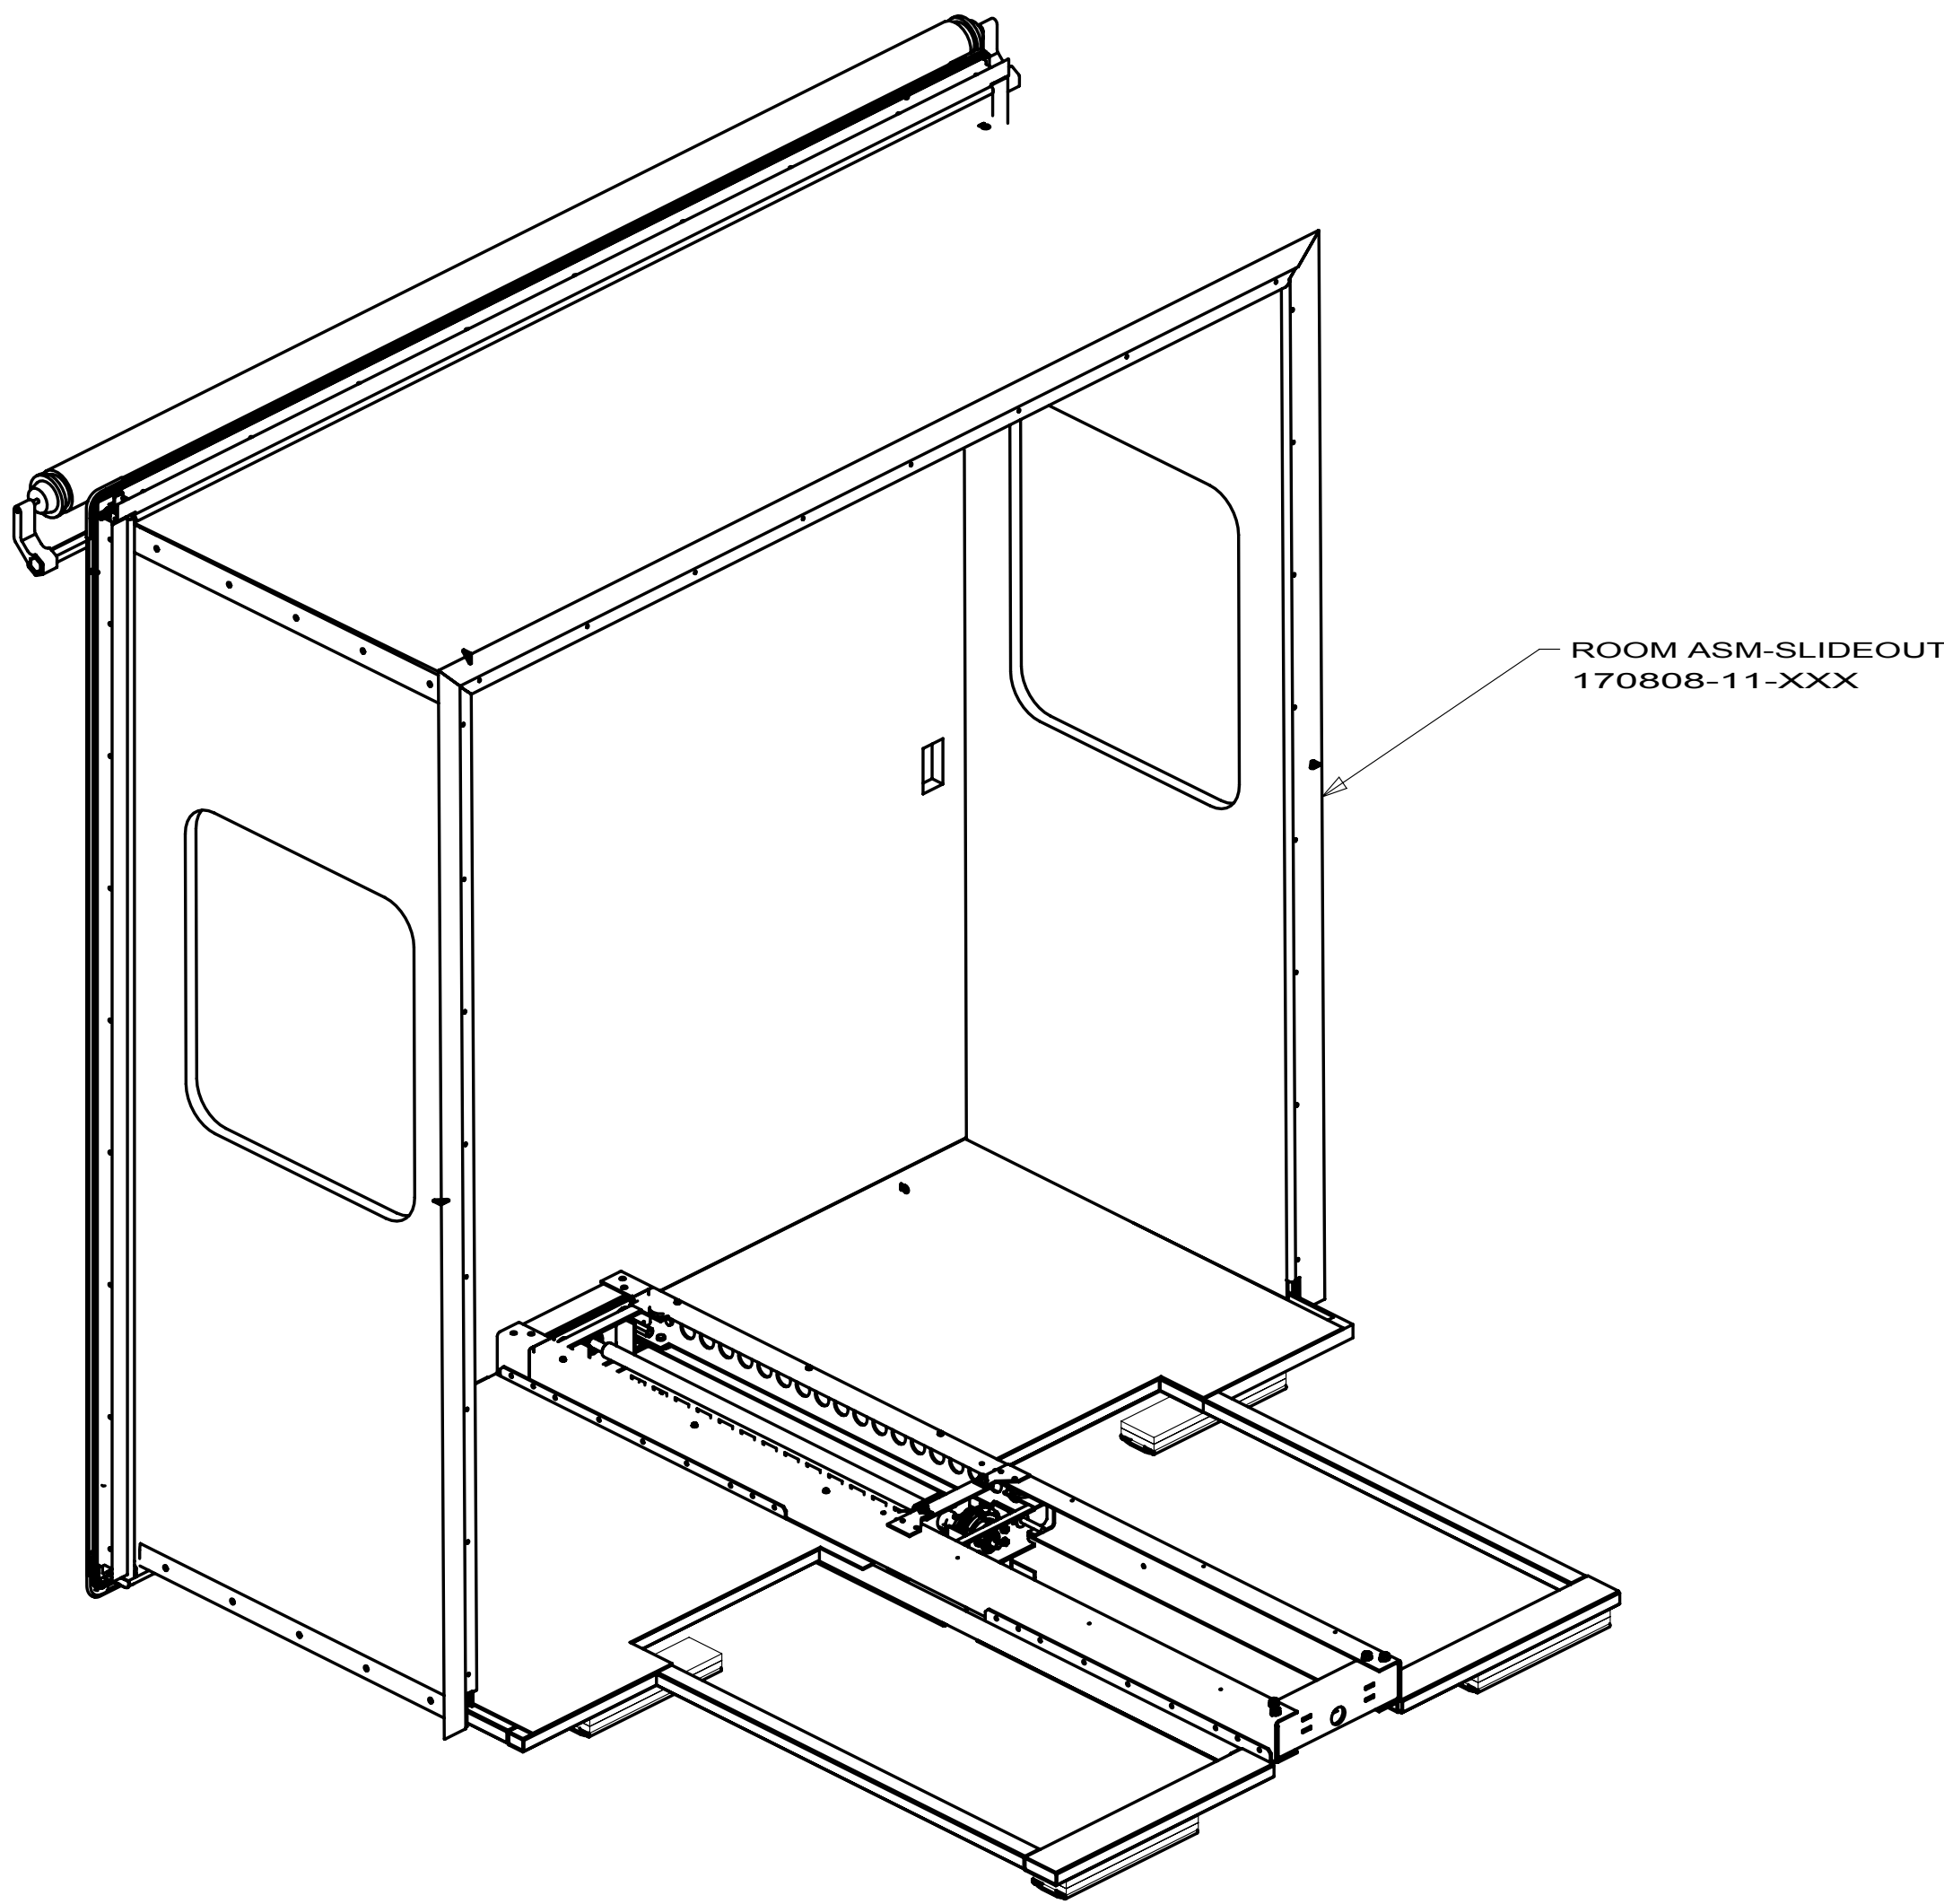

12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED.
(SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	76 (IN-LBS)
5/16 - 18 (.3125)	13 (FT-LBS)
3/8 - 16 (.375)	23 (FT-LBS)
7/16 - 14 (.4375)	37 (FT-LBS)
1/2 - 13 (.500)	57 (FT-LBS)

11. USE POLY-CLEAR 47034-07-000 AND ATTACH IT USING WASHER 44533-01-000 TO PROTECT THE SLIDEOUT FLOOR.

10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST INNER TRIM.

9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.

8. USE SCREW G39-08-08S TO HOLD EACH END OF TRIM.

7. SEE SEALANT MANUAL..

6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

5. ADJUST BOLT TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED AS REQUIRED FROM THERE.

3. THE RETRACTED LENGTH IS ADJUSTED UNTIL THE OUTSIDE TRIM OF THE ROOM SEALS AGAINST THE OUTSIDE OF THE SIDEWALL.



2. THE EXTENDED LENGTH IS ADJUSTED UNTIL THE INSIDE TRIM OF THE ROOM SEALS AGAINST THE INSIDE OF THE SIDEWALL.

1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:

SLIDEOUT CRANK
140464-03-000
(PLACE IN LUGGAGE RACK)

SLIDEOUT-ELECTRIC
162833-01-000

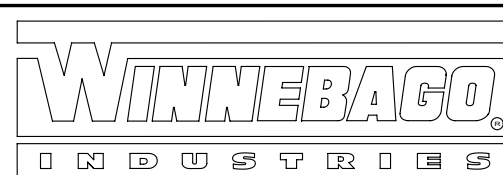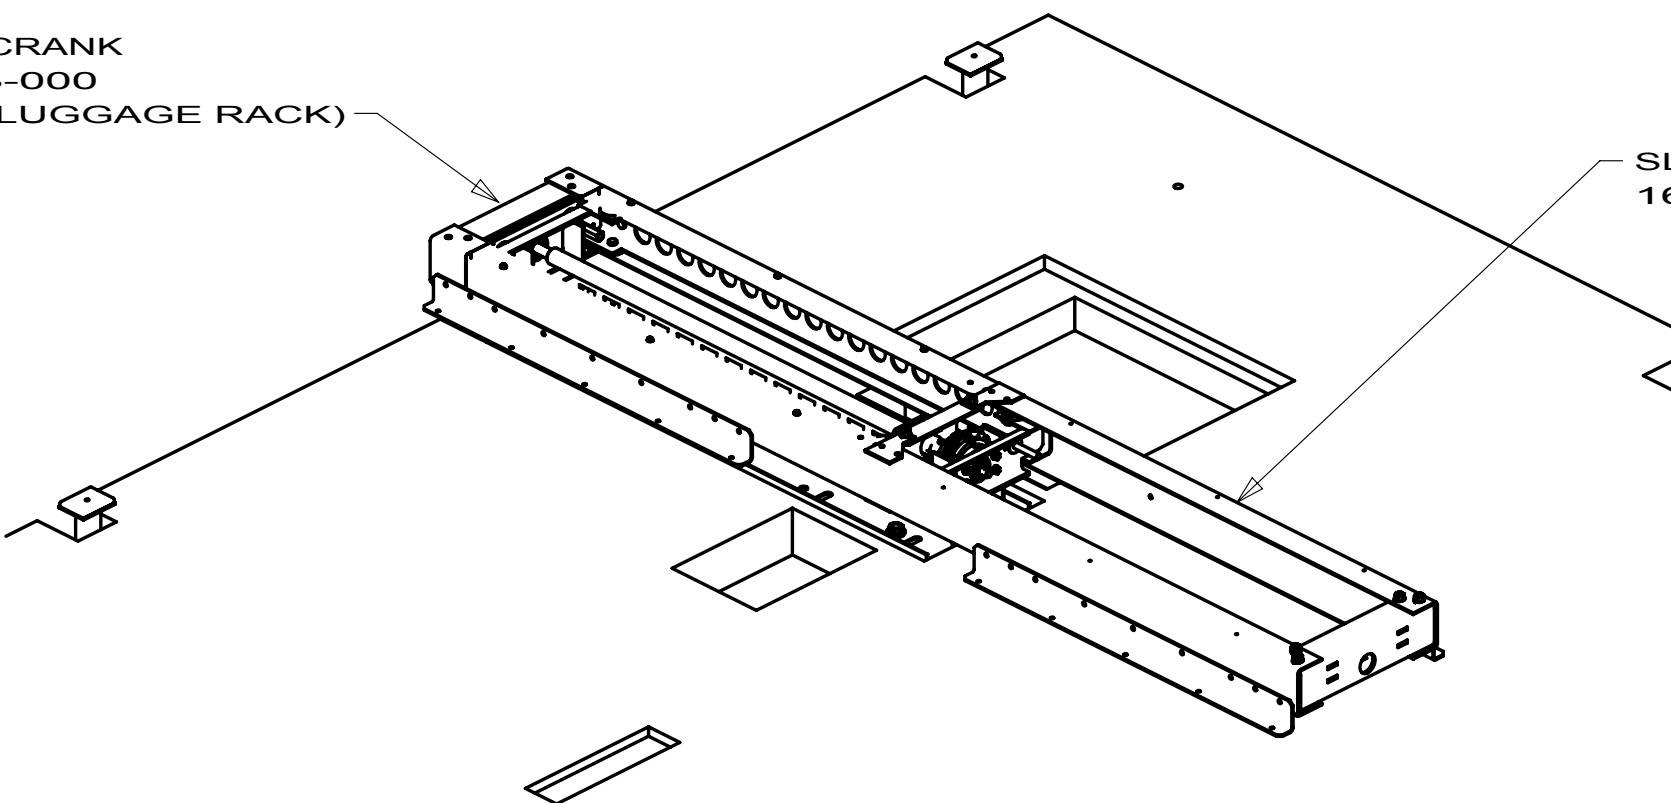

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DFTR	ORIG. DATE
CHRR	
P.E.	
M.E.	
DSNR	

ALL DIMENSIONS ARE
IN MILLIMETERS

FIRST USED
10 J32H

UNSPECIFIED TOLERANCES ARE:	MATERIAL:
WHOLE DIM (X) ± 3	
ONE-PLACE (X.X) ±	
TWO-PLACE (X.XX) ±	
ANGLE ±	


THIRD ANGLE
PROJECTION

DO NOT SCALE DRAWING

TITLE:
SLIDEOUT COMPL-REAR,RH









SHEET 1 OF 4	PART NO 170808	REV
--------------	----------------	-----

SEE CHART
FOR COLOR VARIATIONS
OF THIS PART

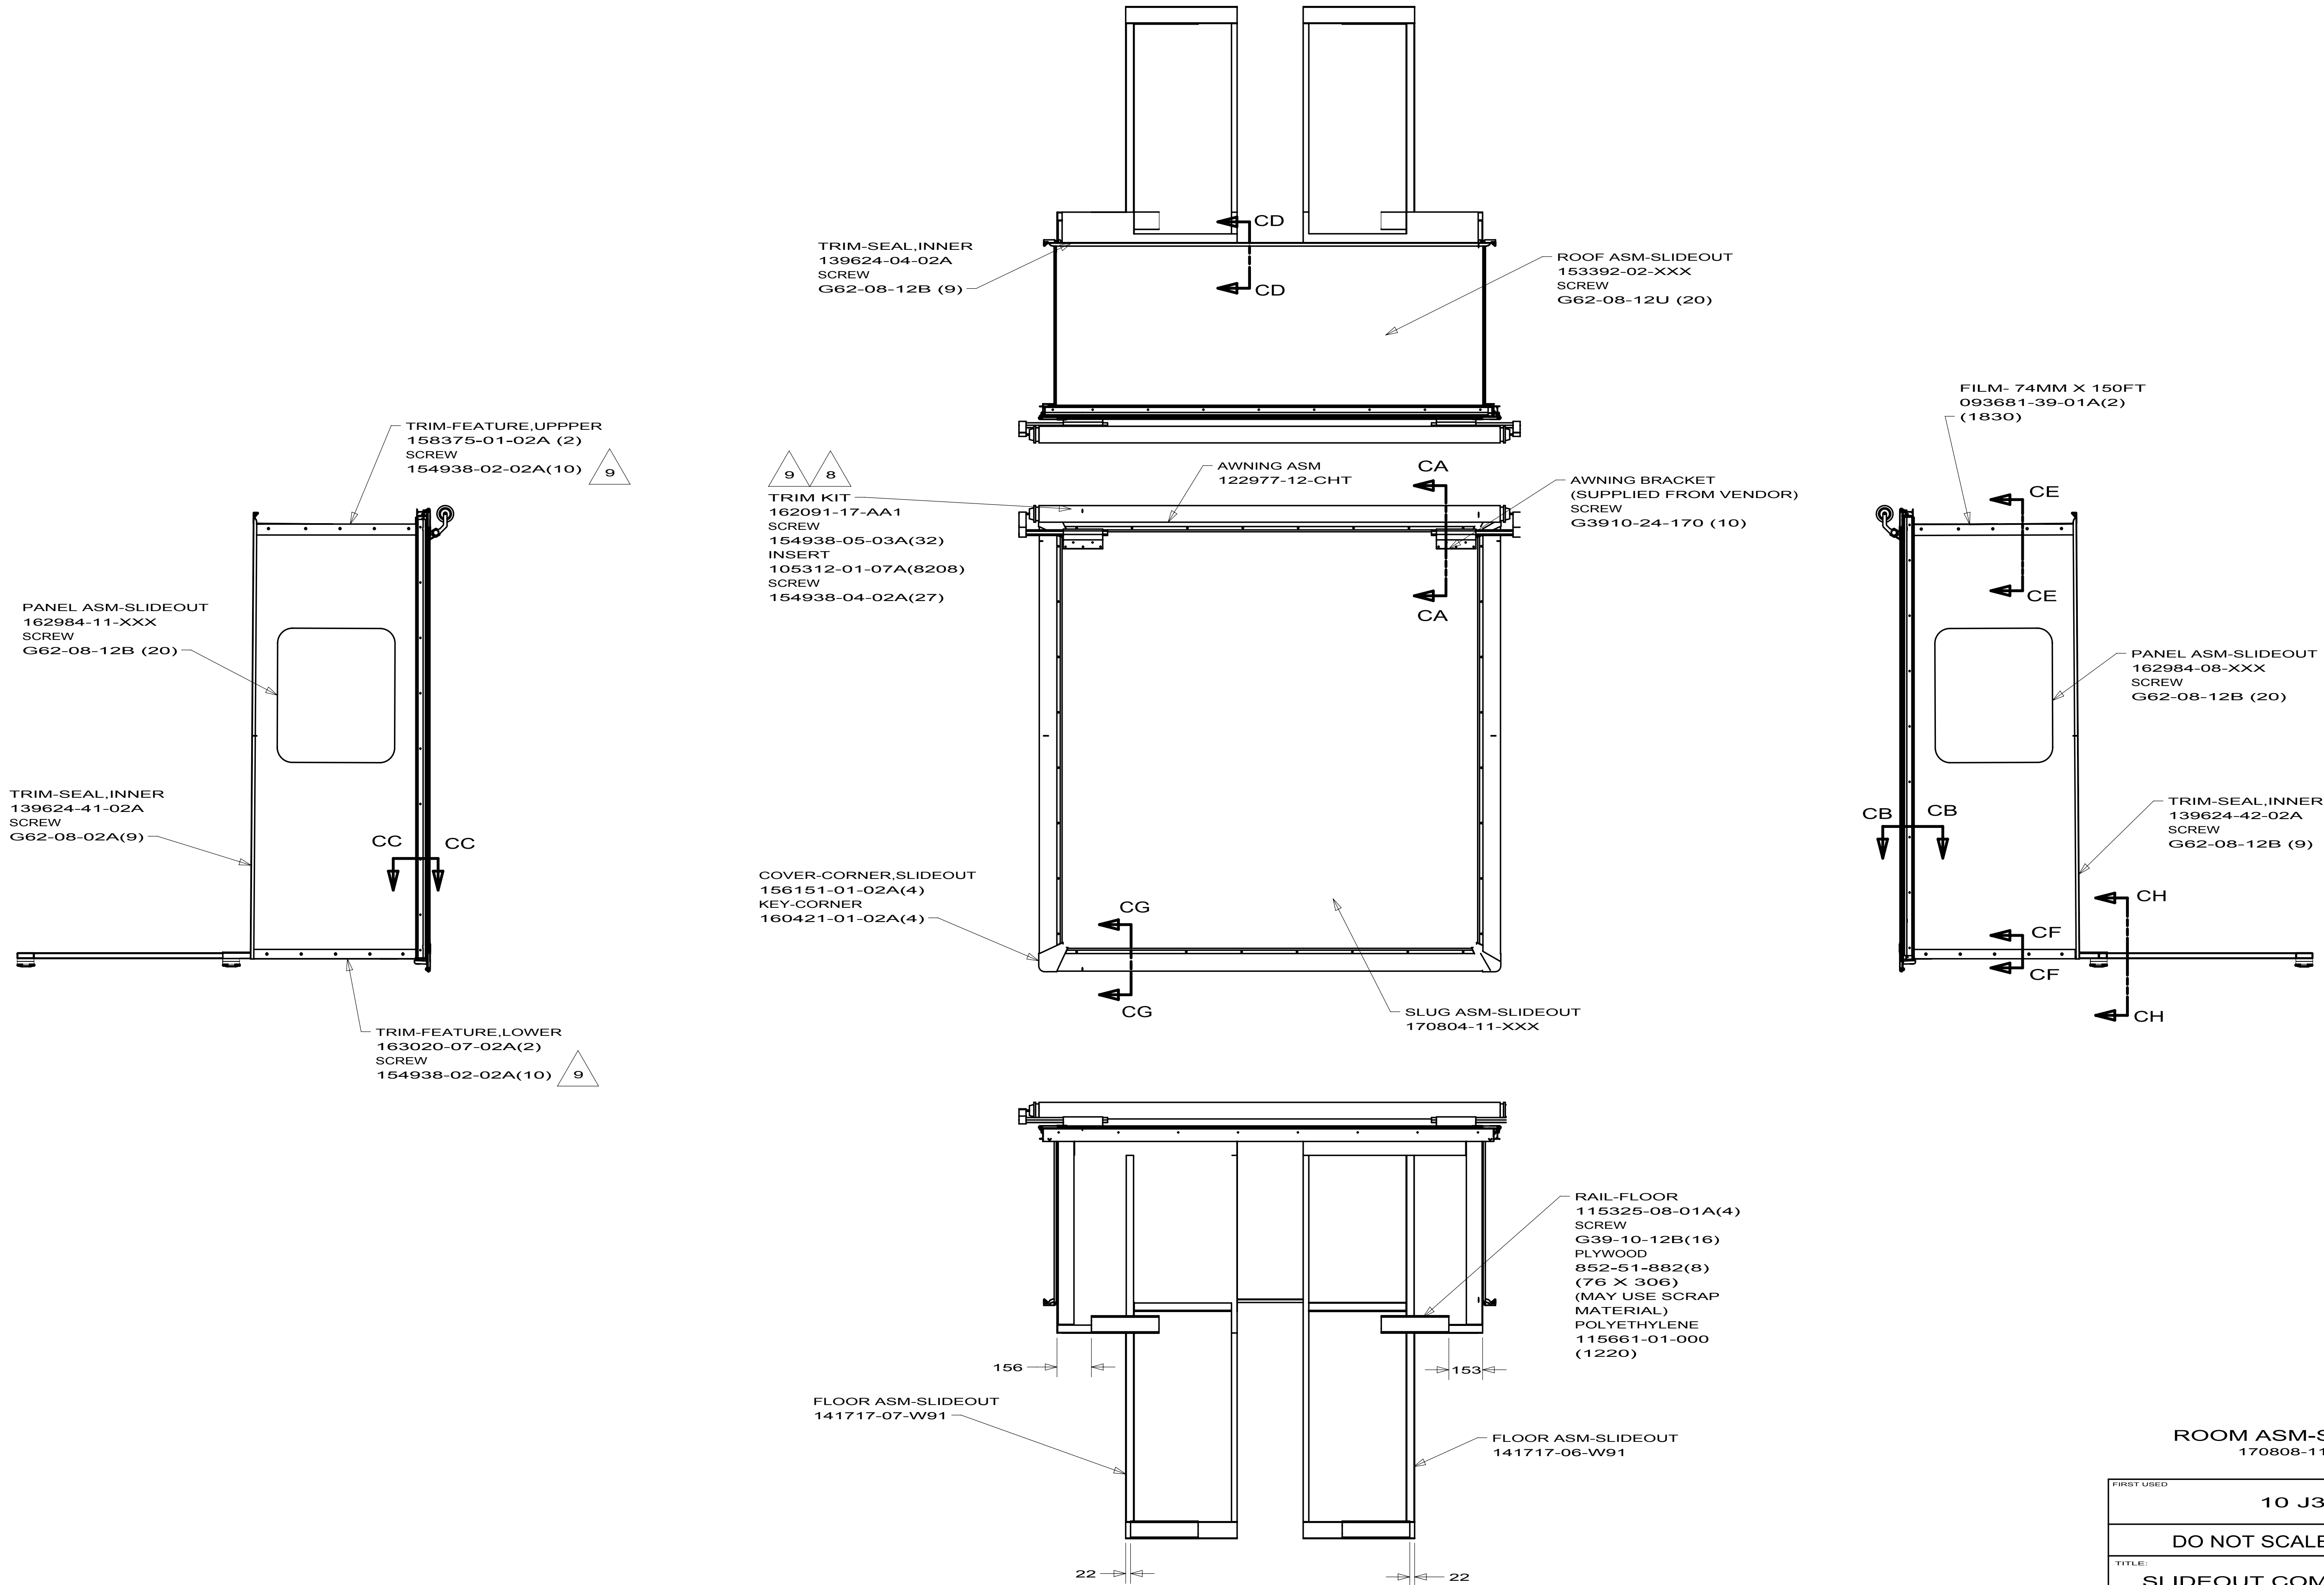





ROOM ASM-SLIDEOUT
170808-11-XXX

FIRST USED		
10 J32H		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-REAR,RH		
SHEET 2	PART NO 170808	REV

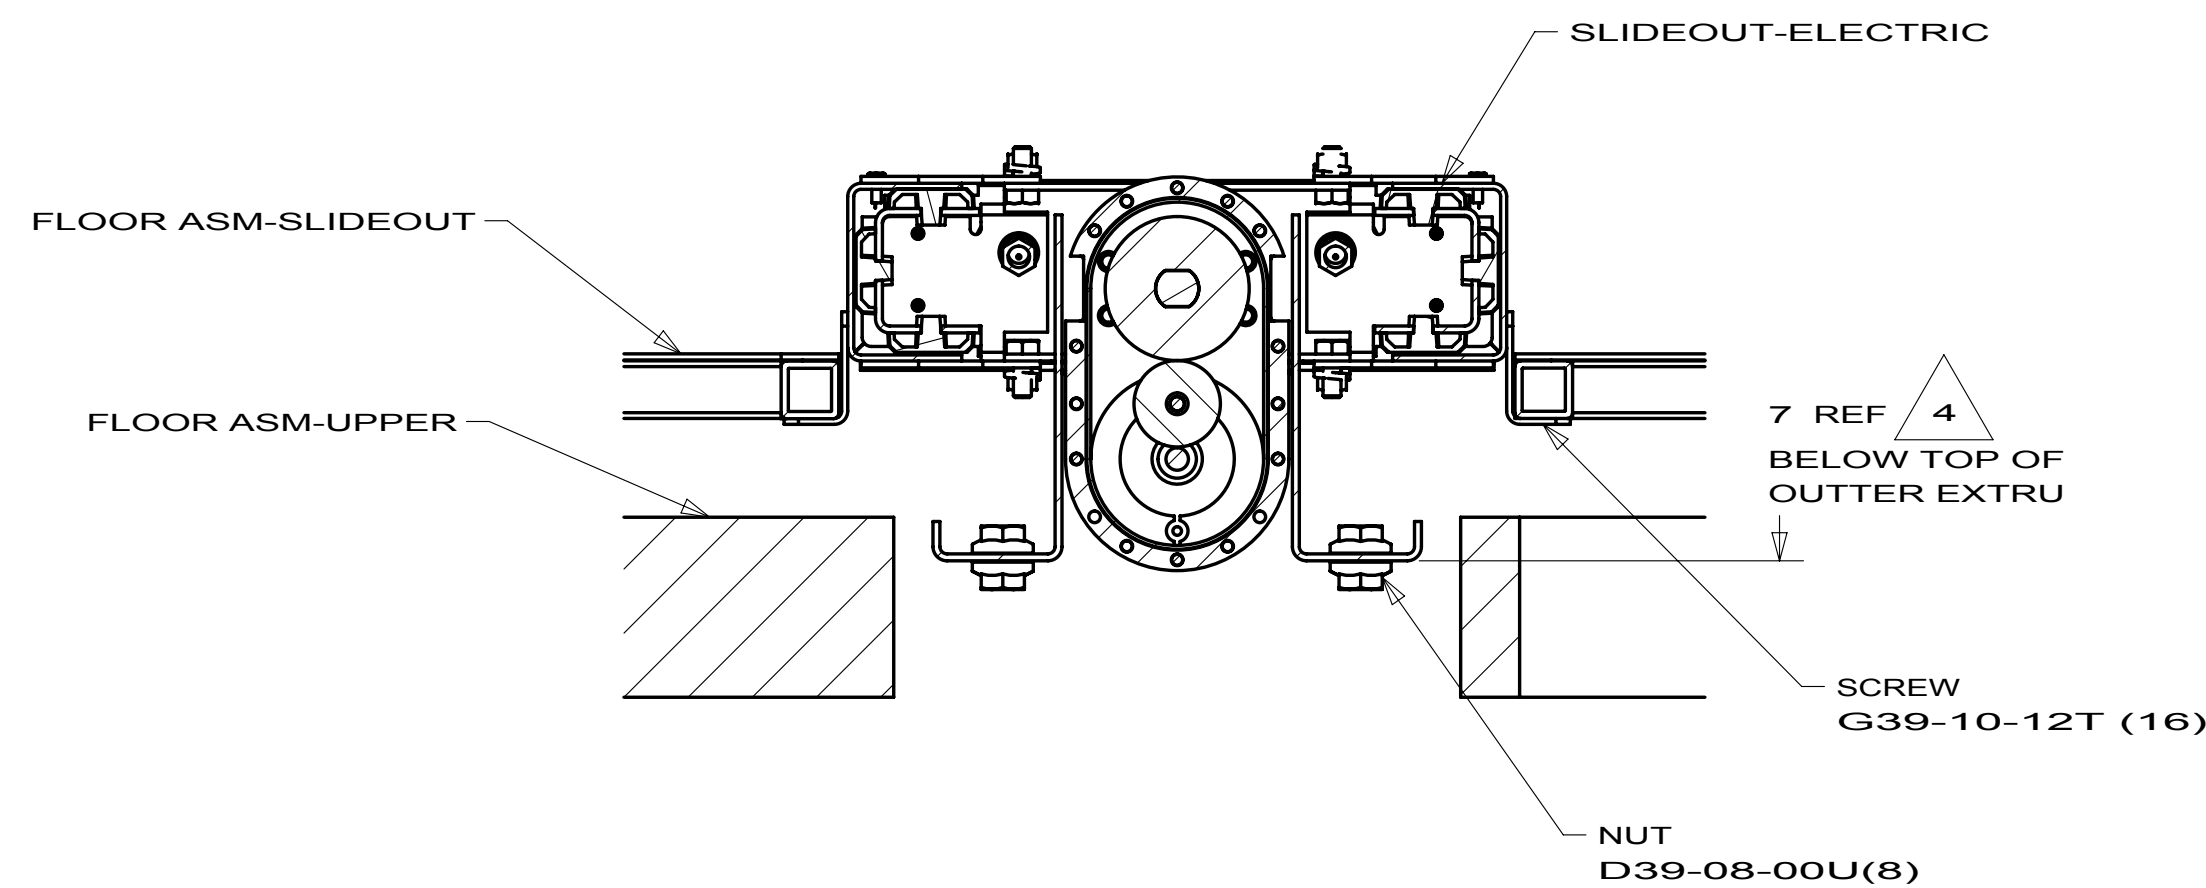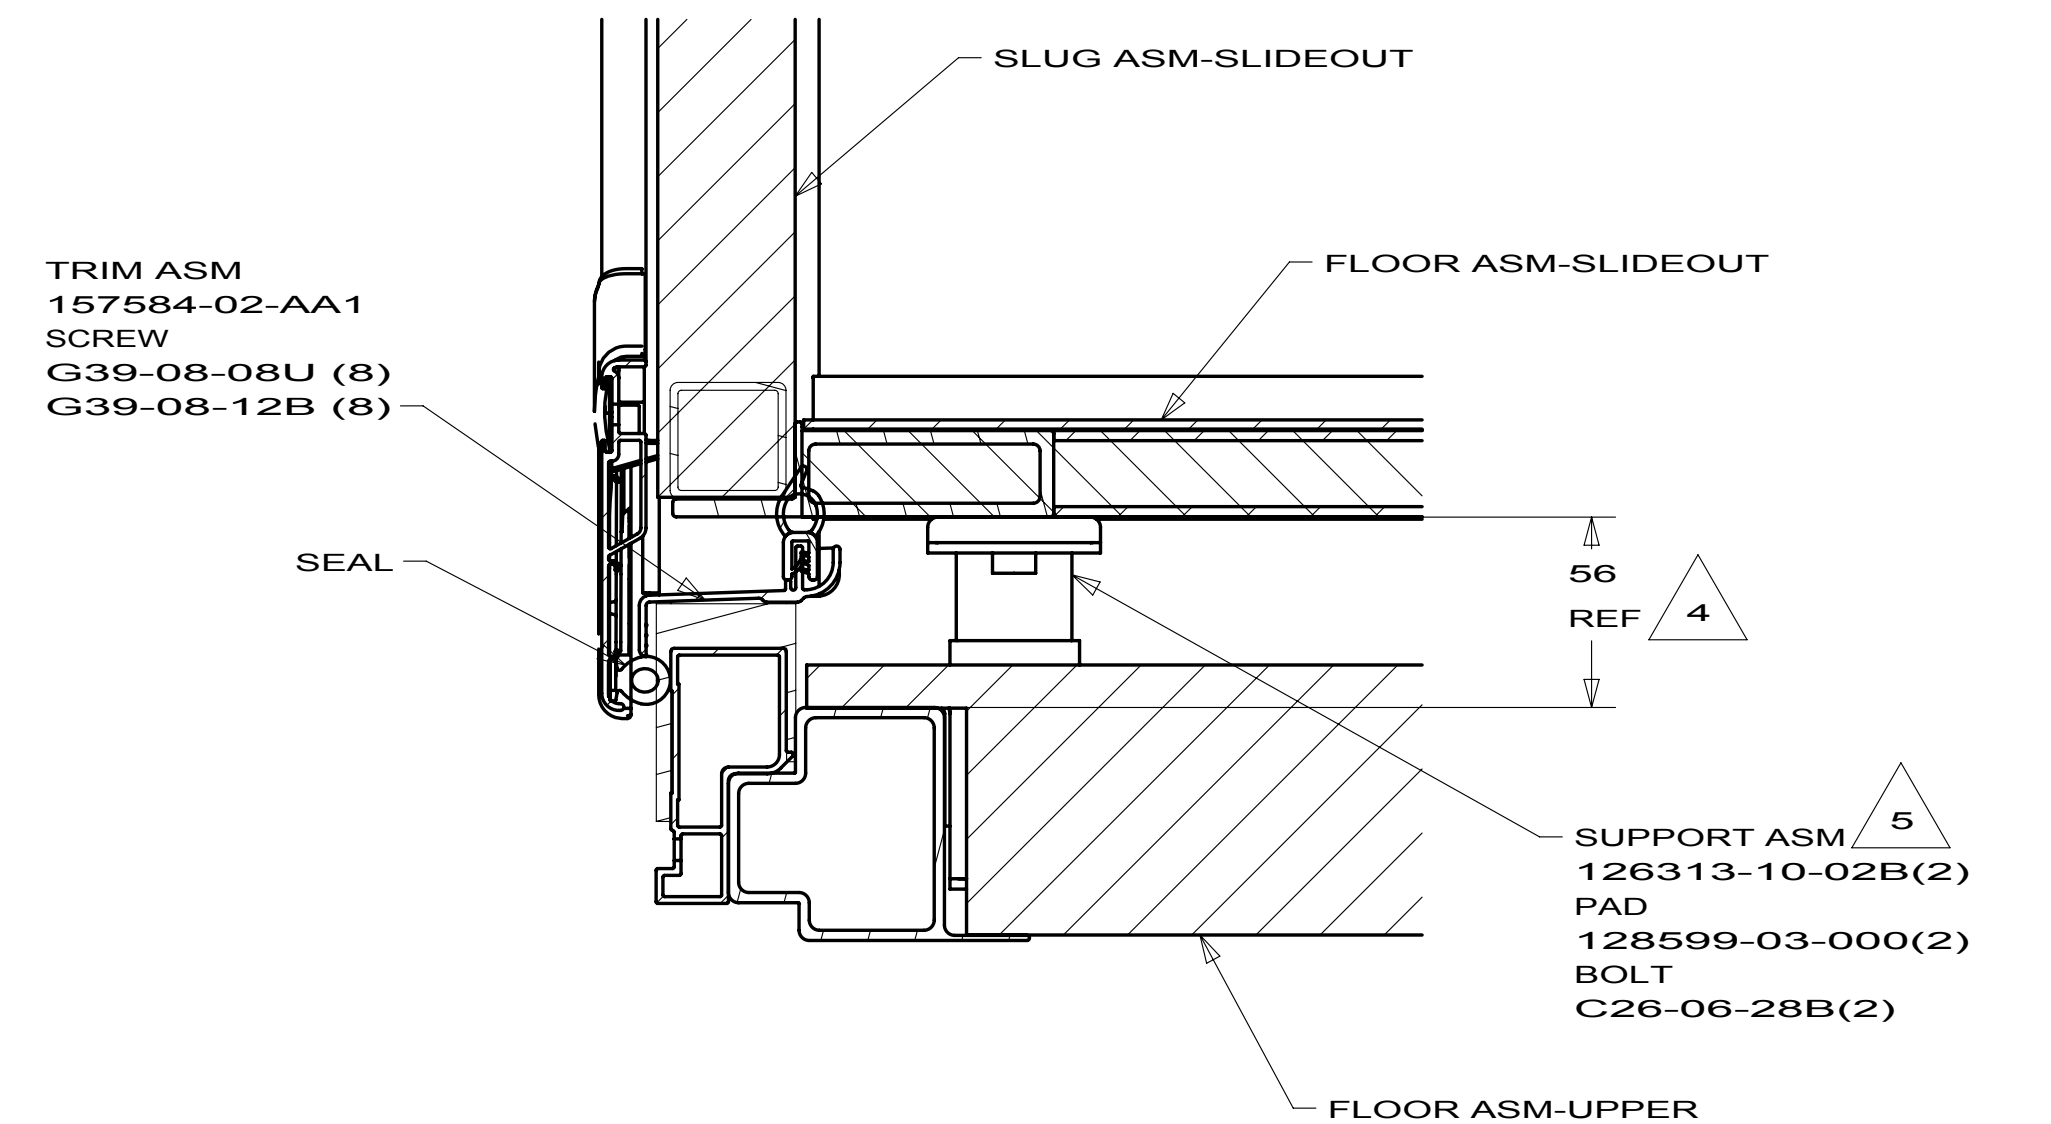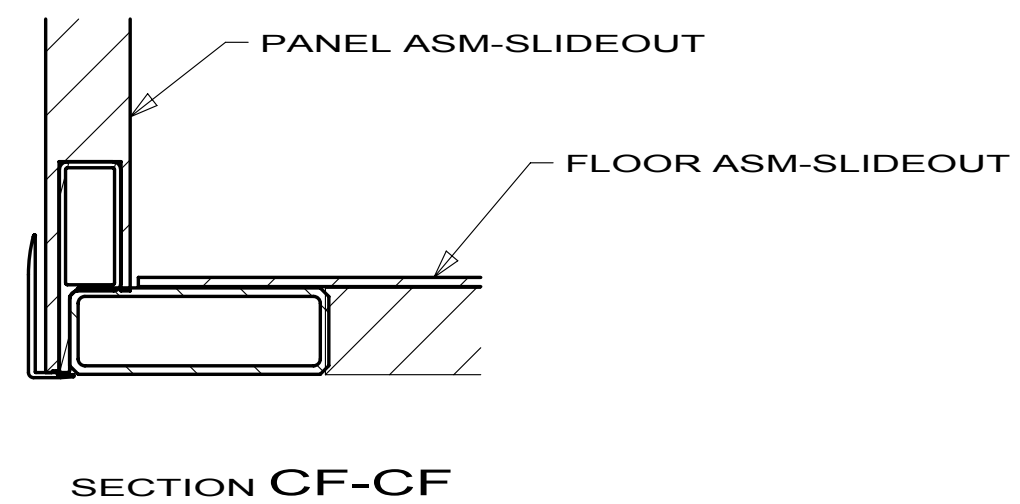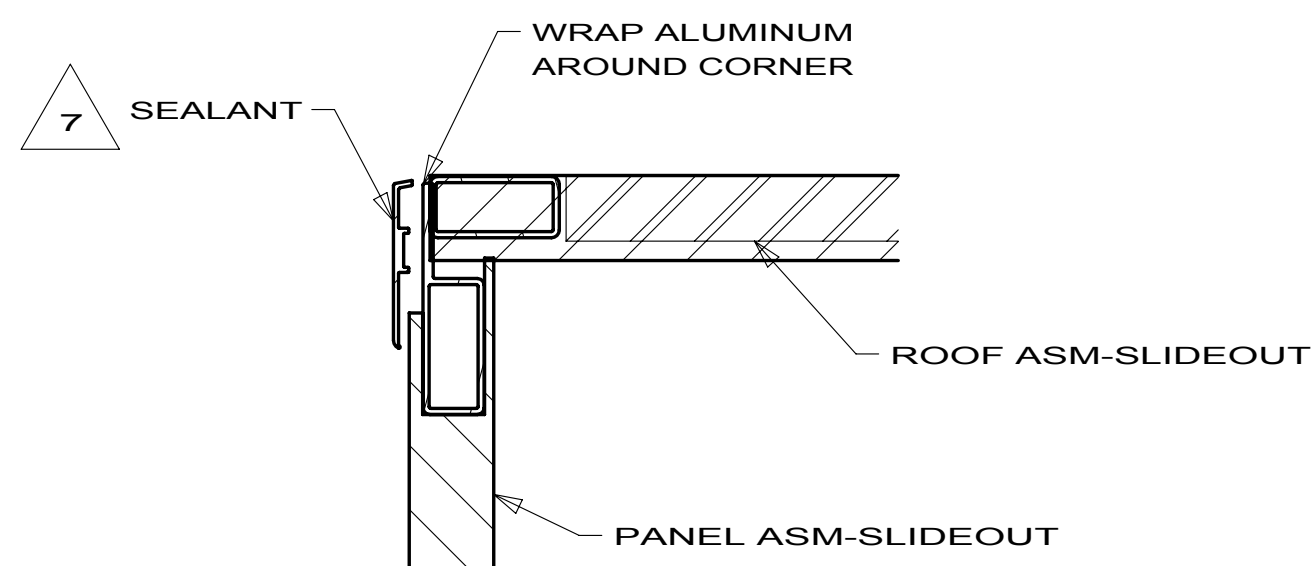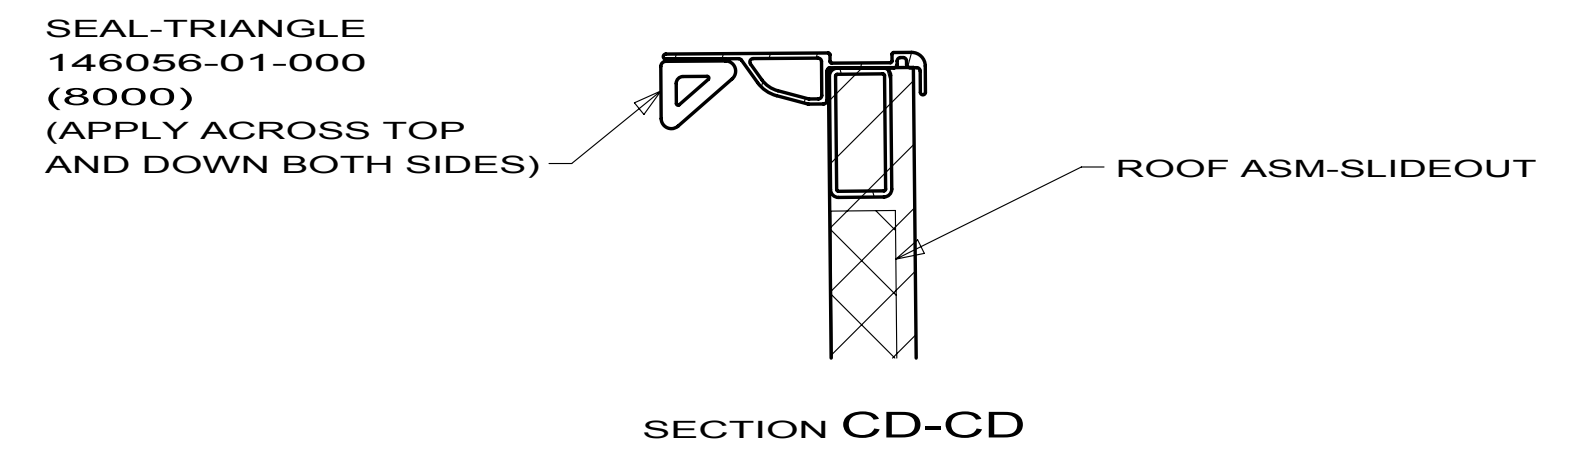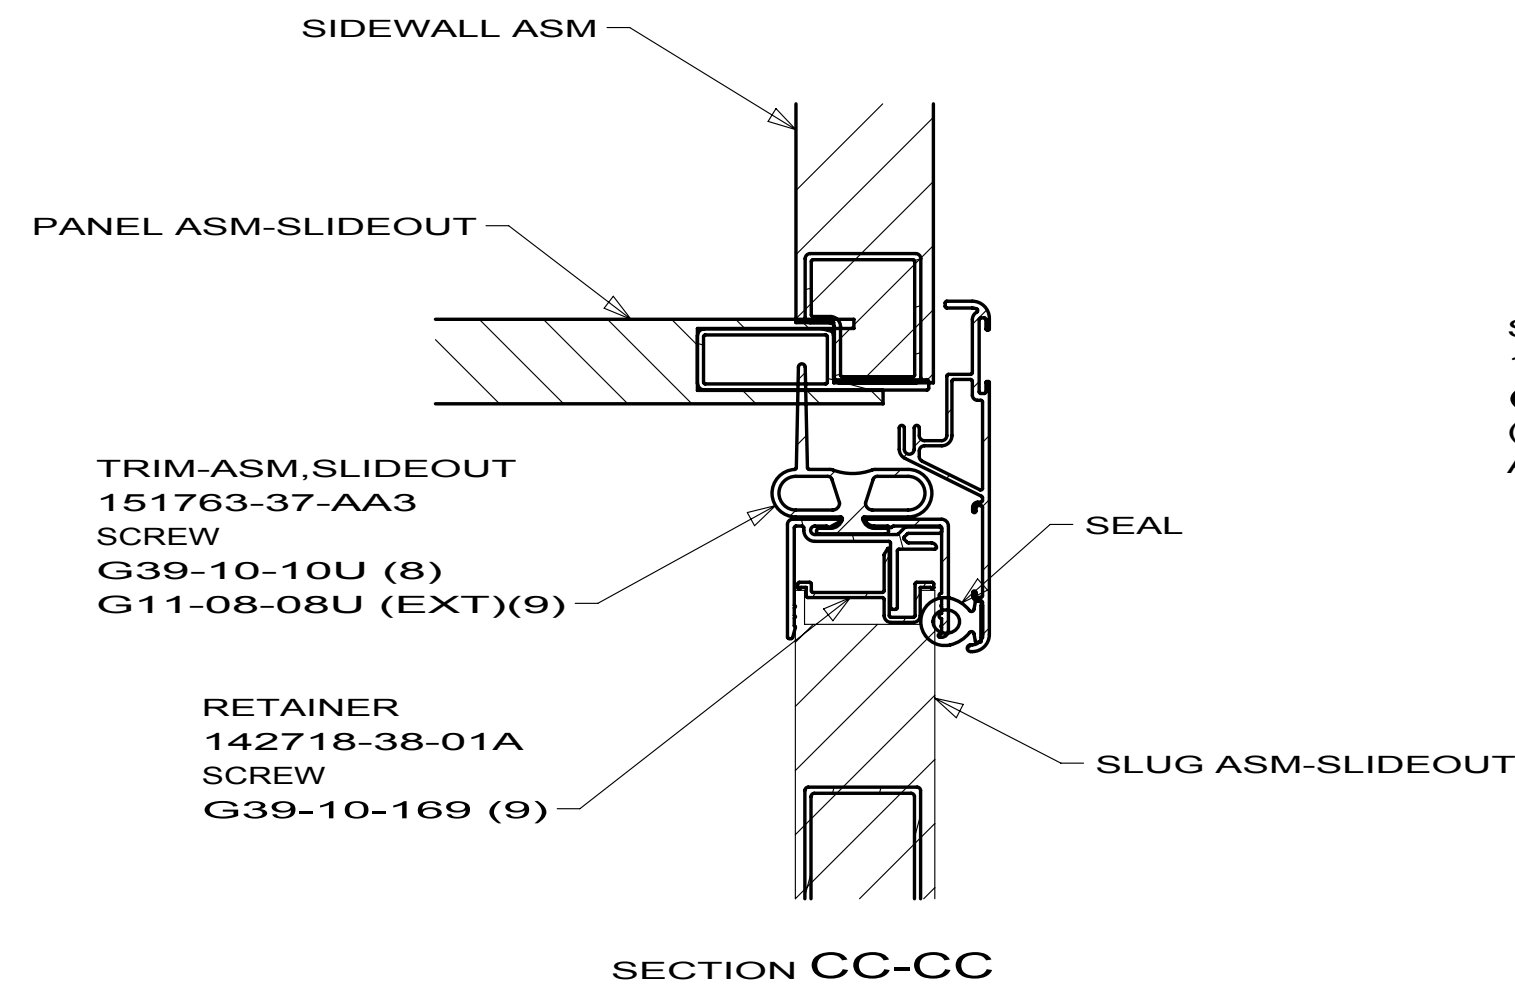
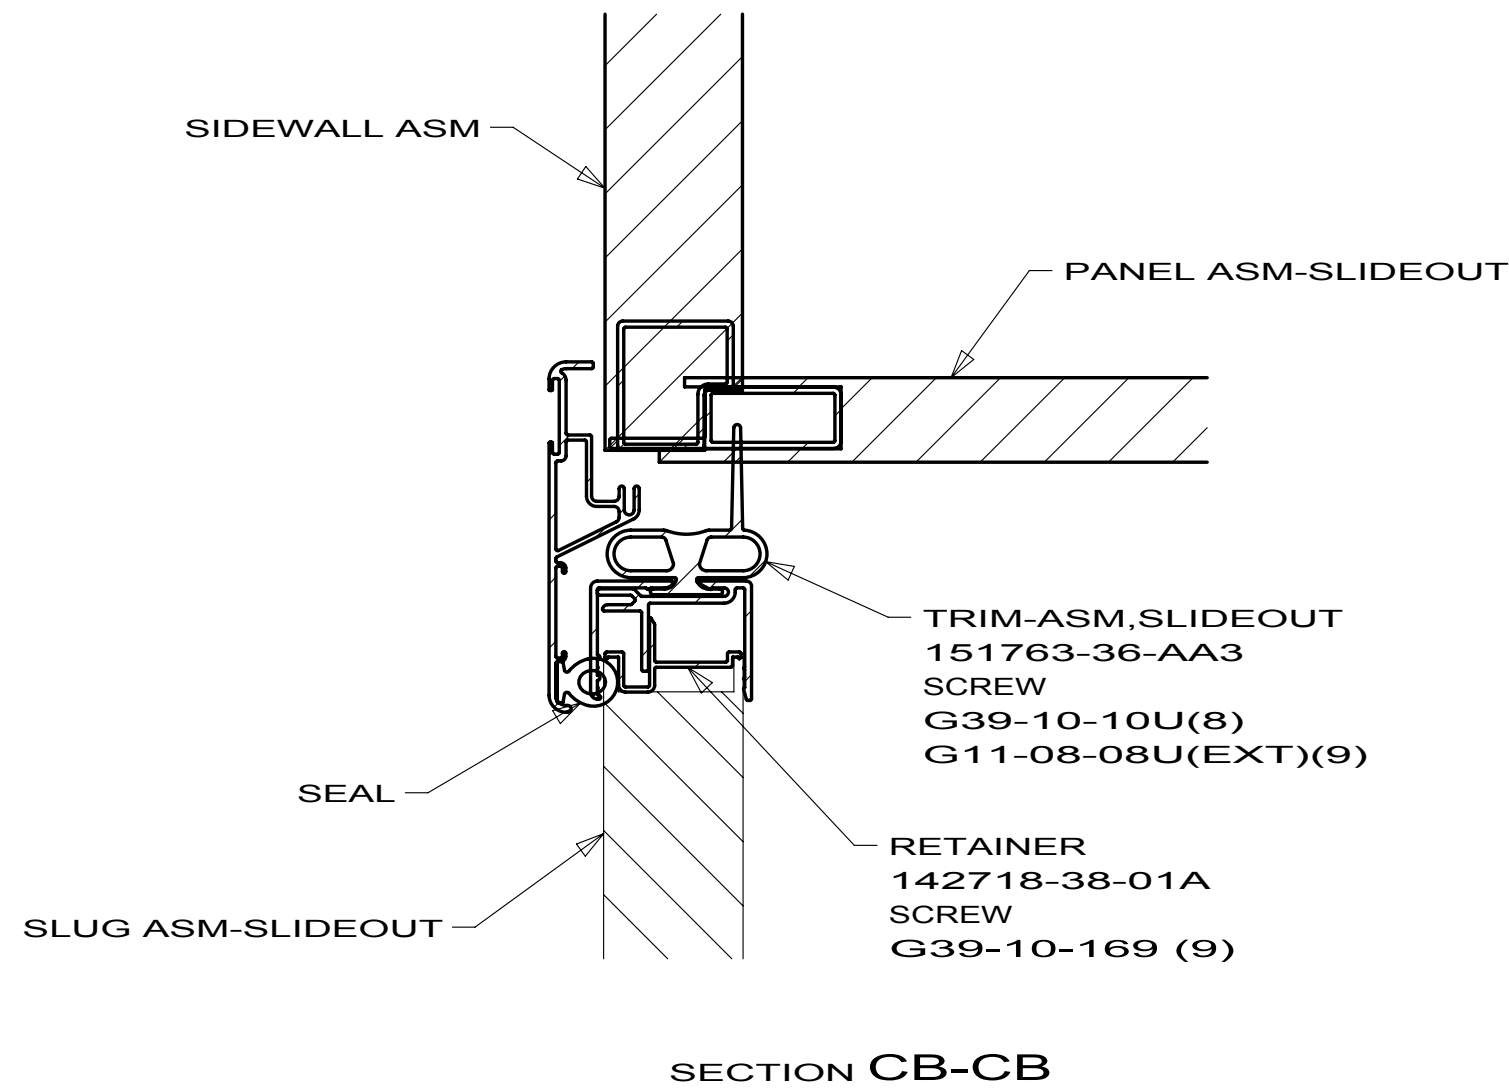
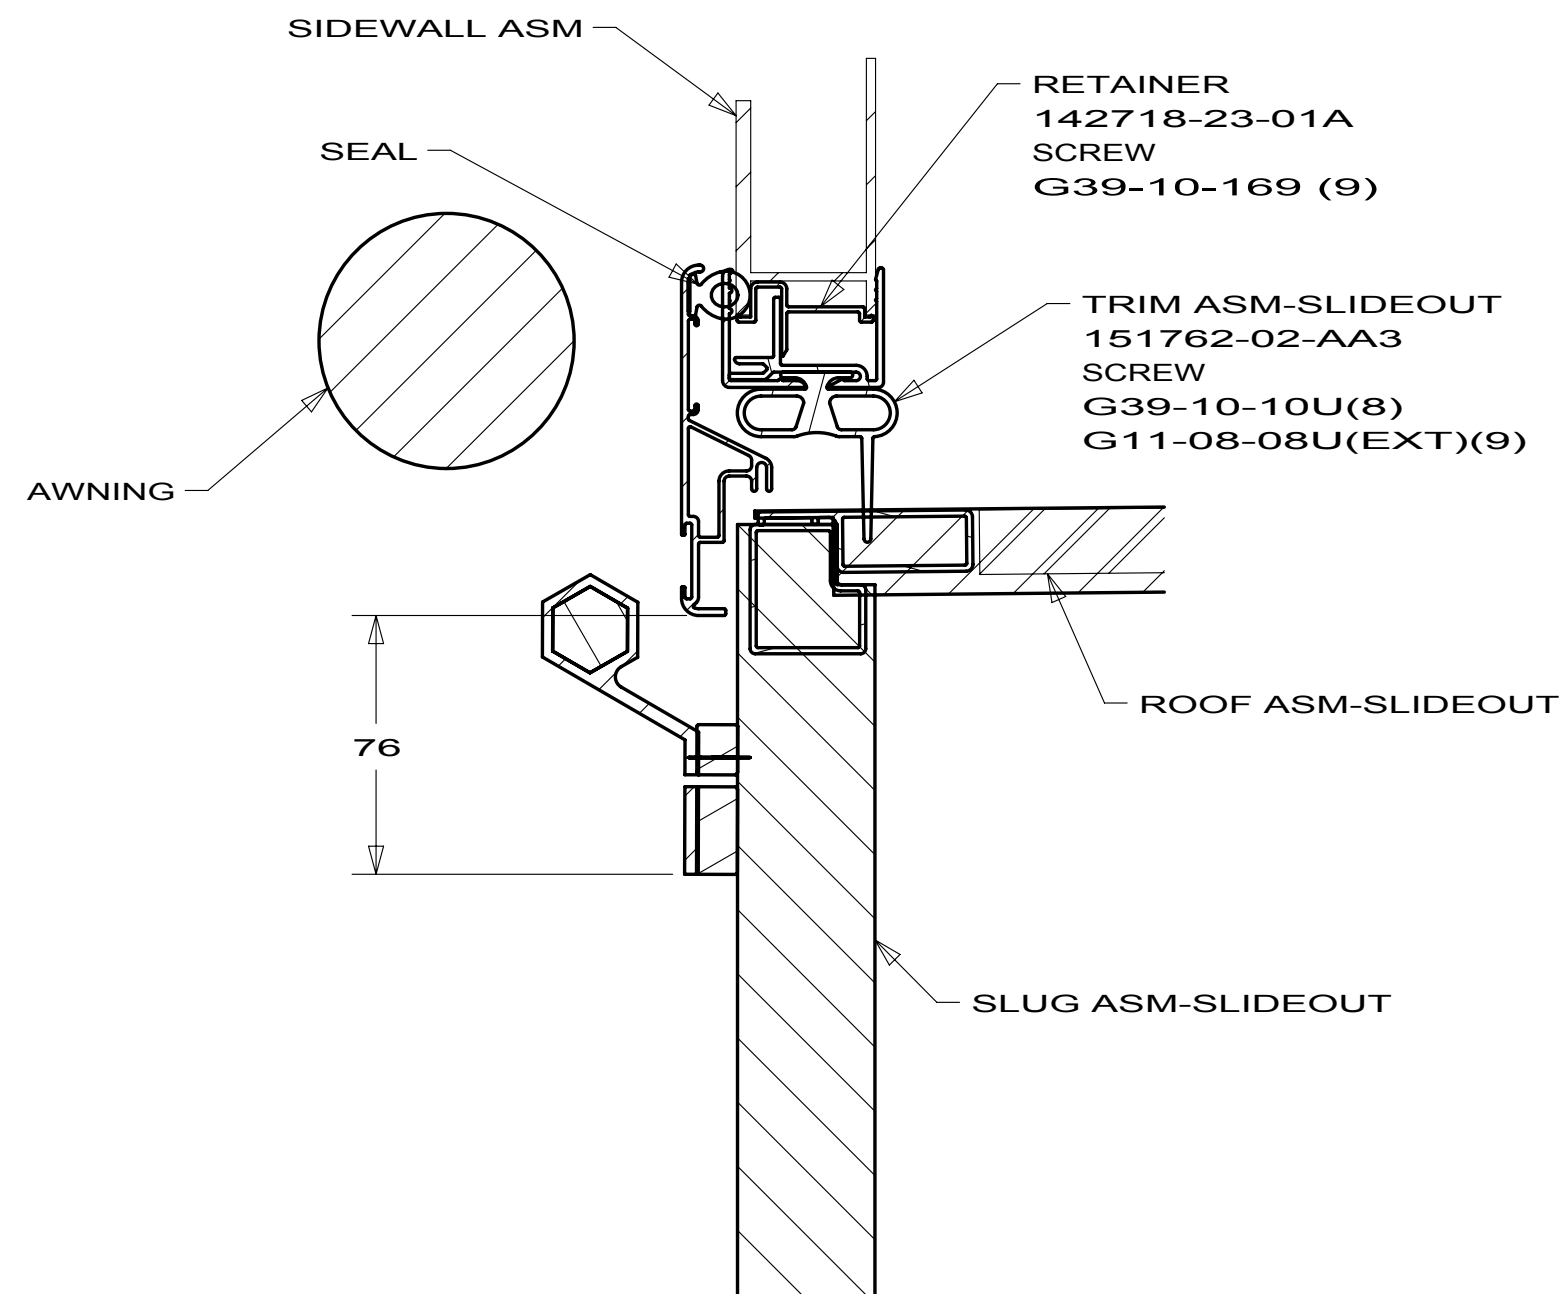


FIRST USED		10 J32H	
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-REAR,RH			
SHEET 3	PART NO	170808	REV

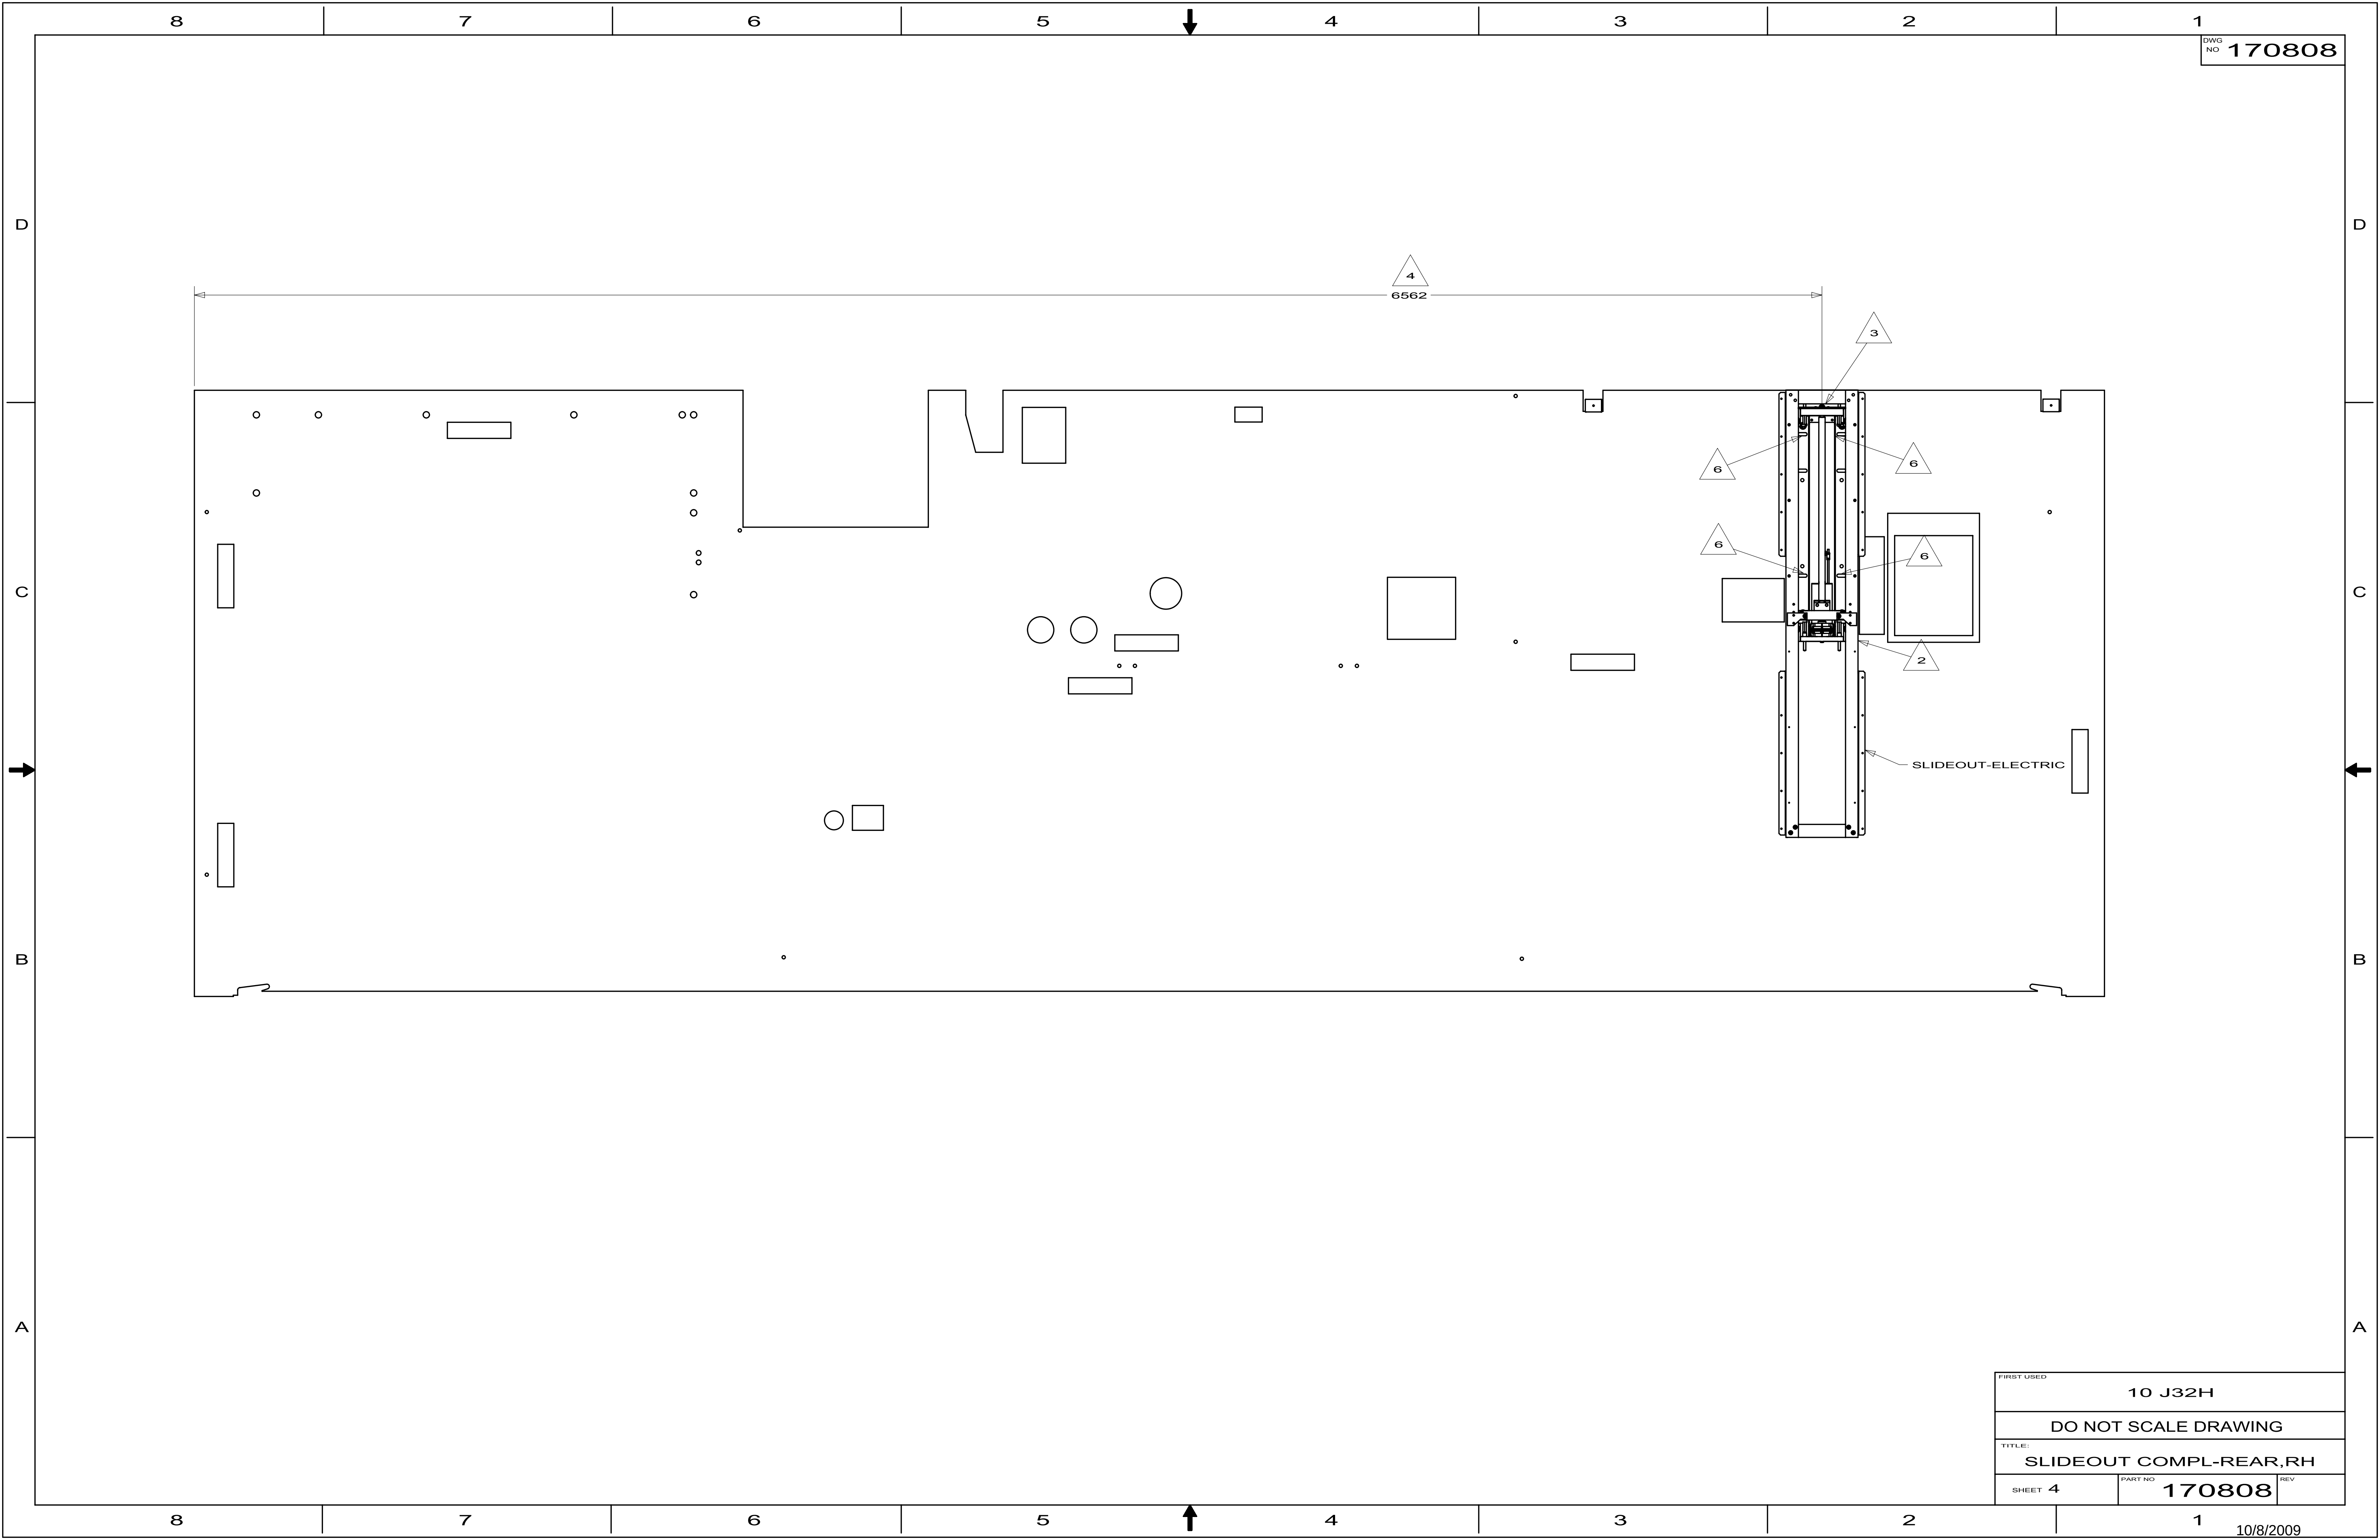

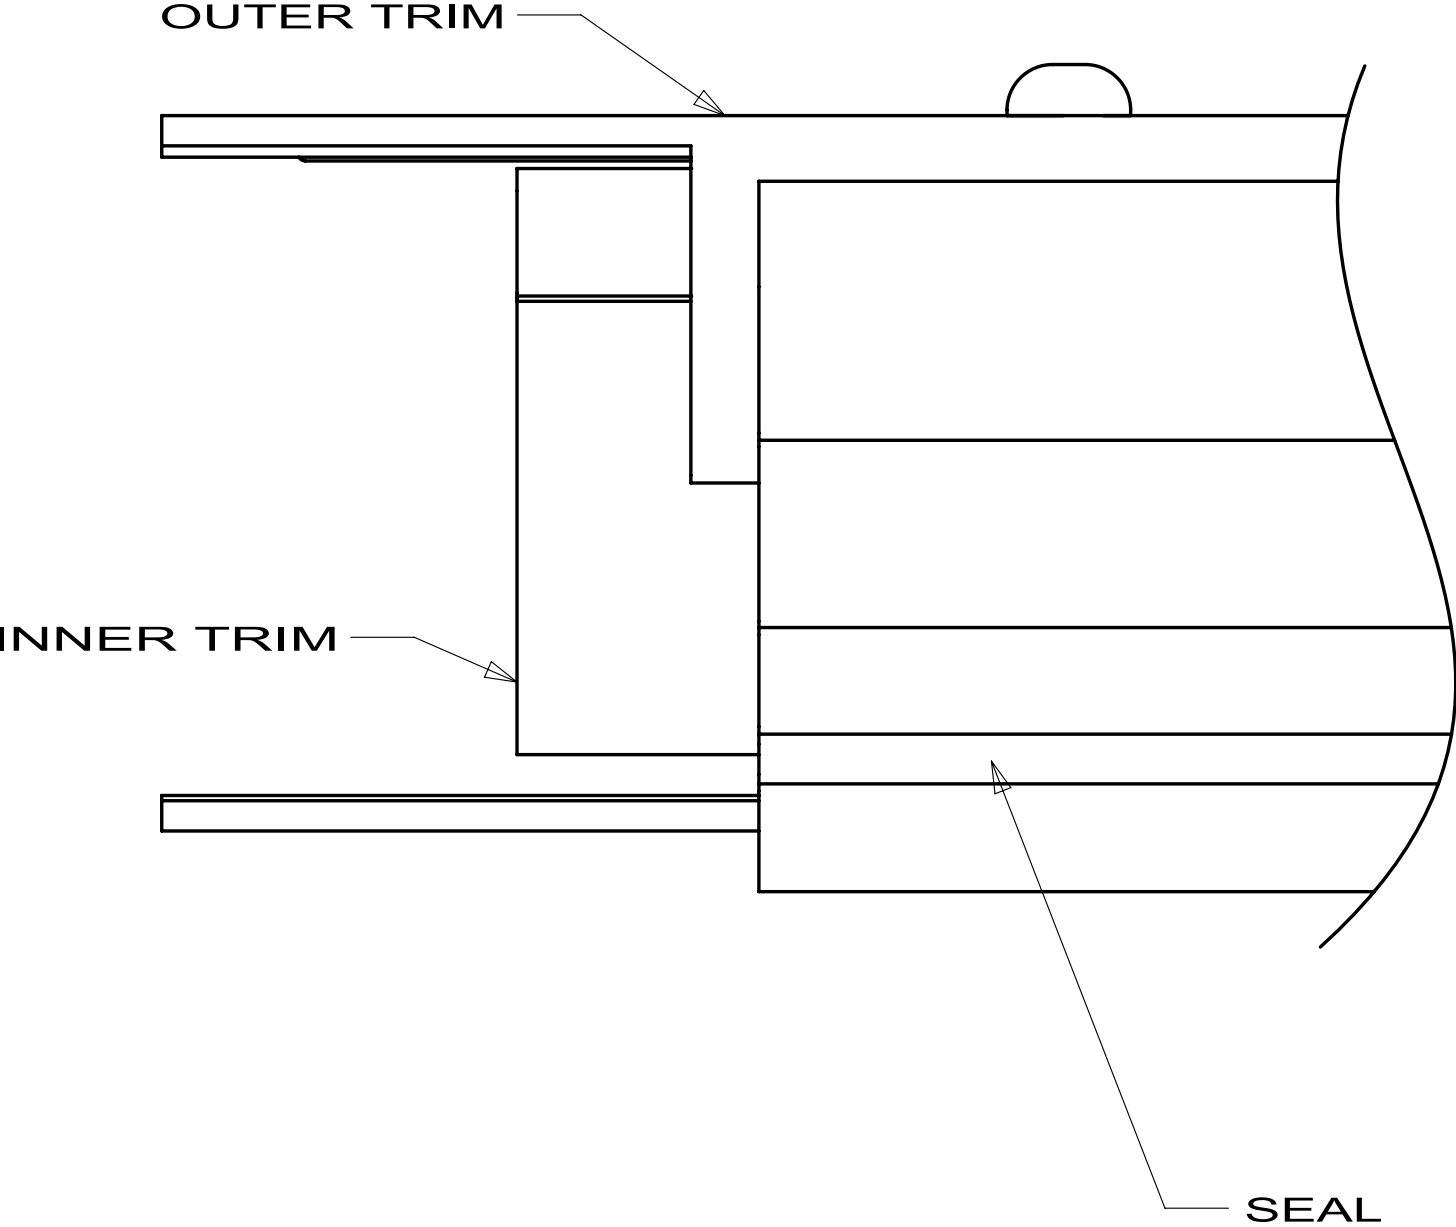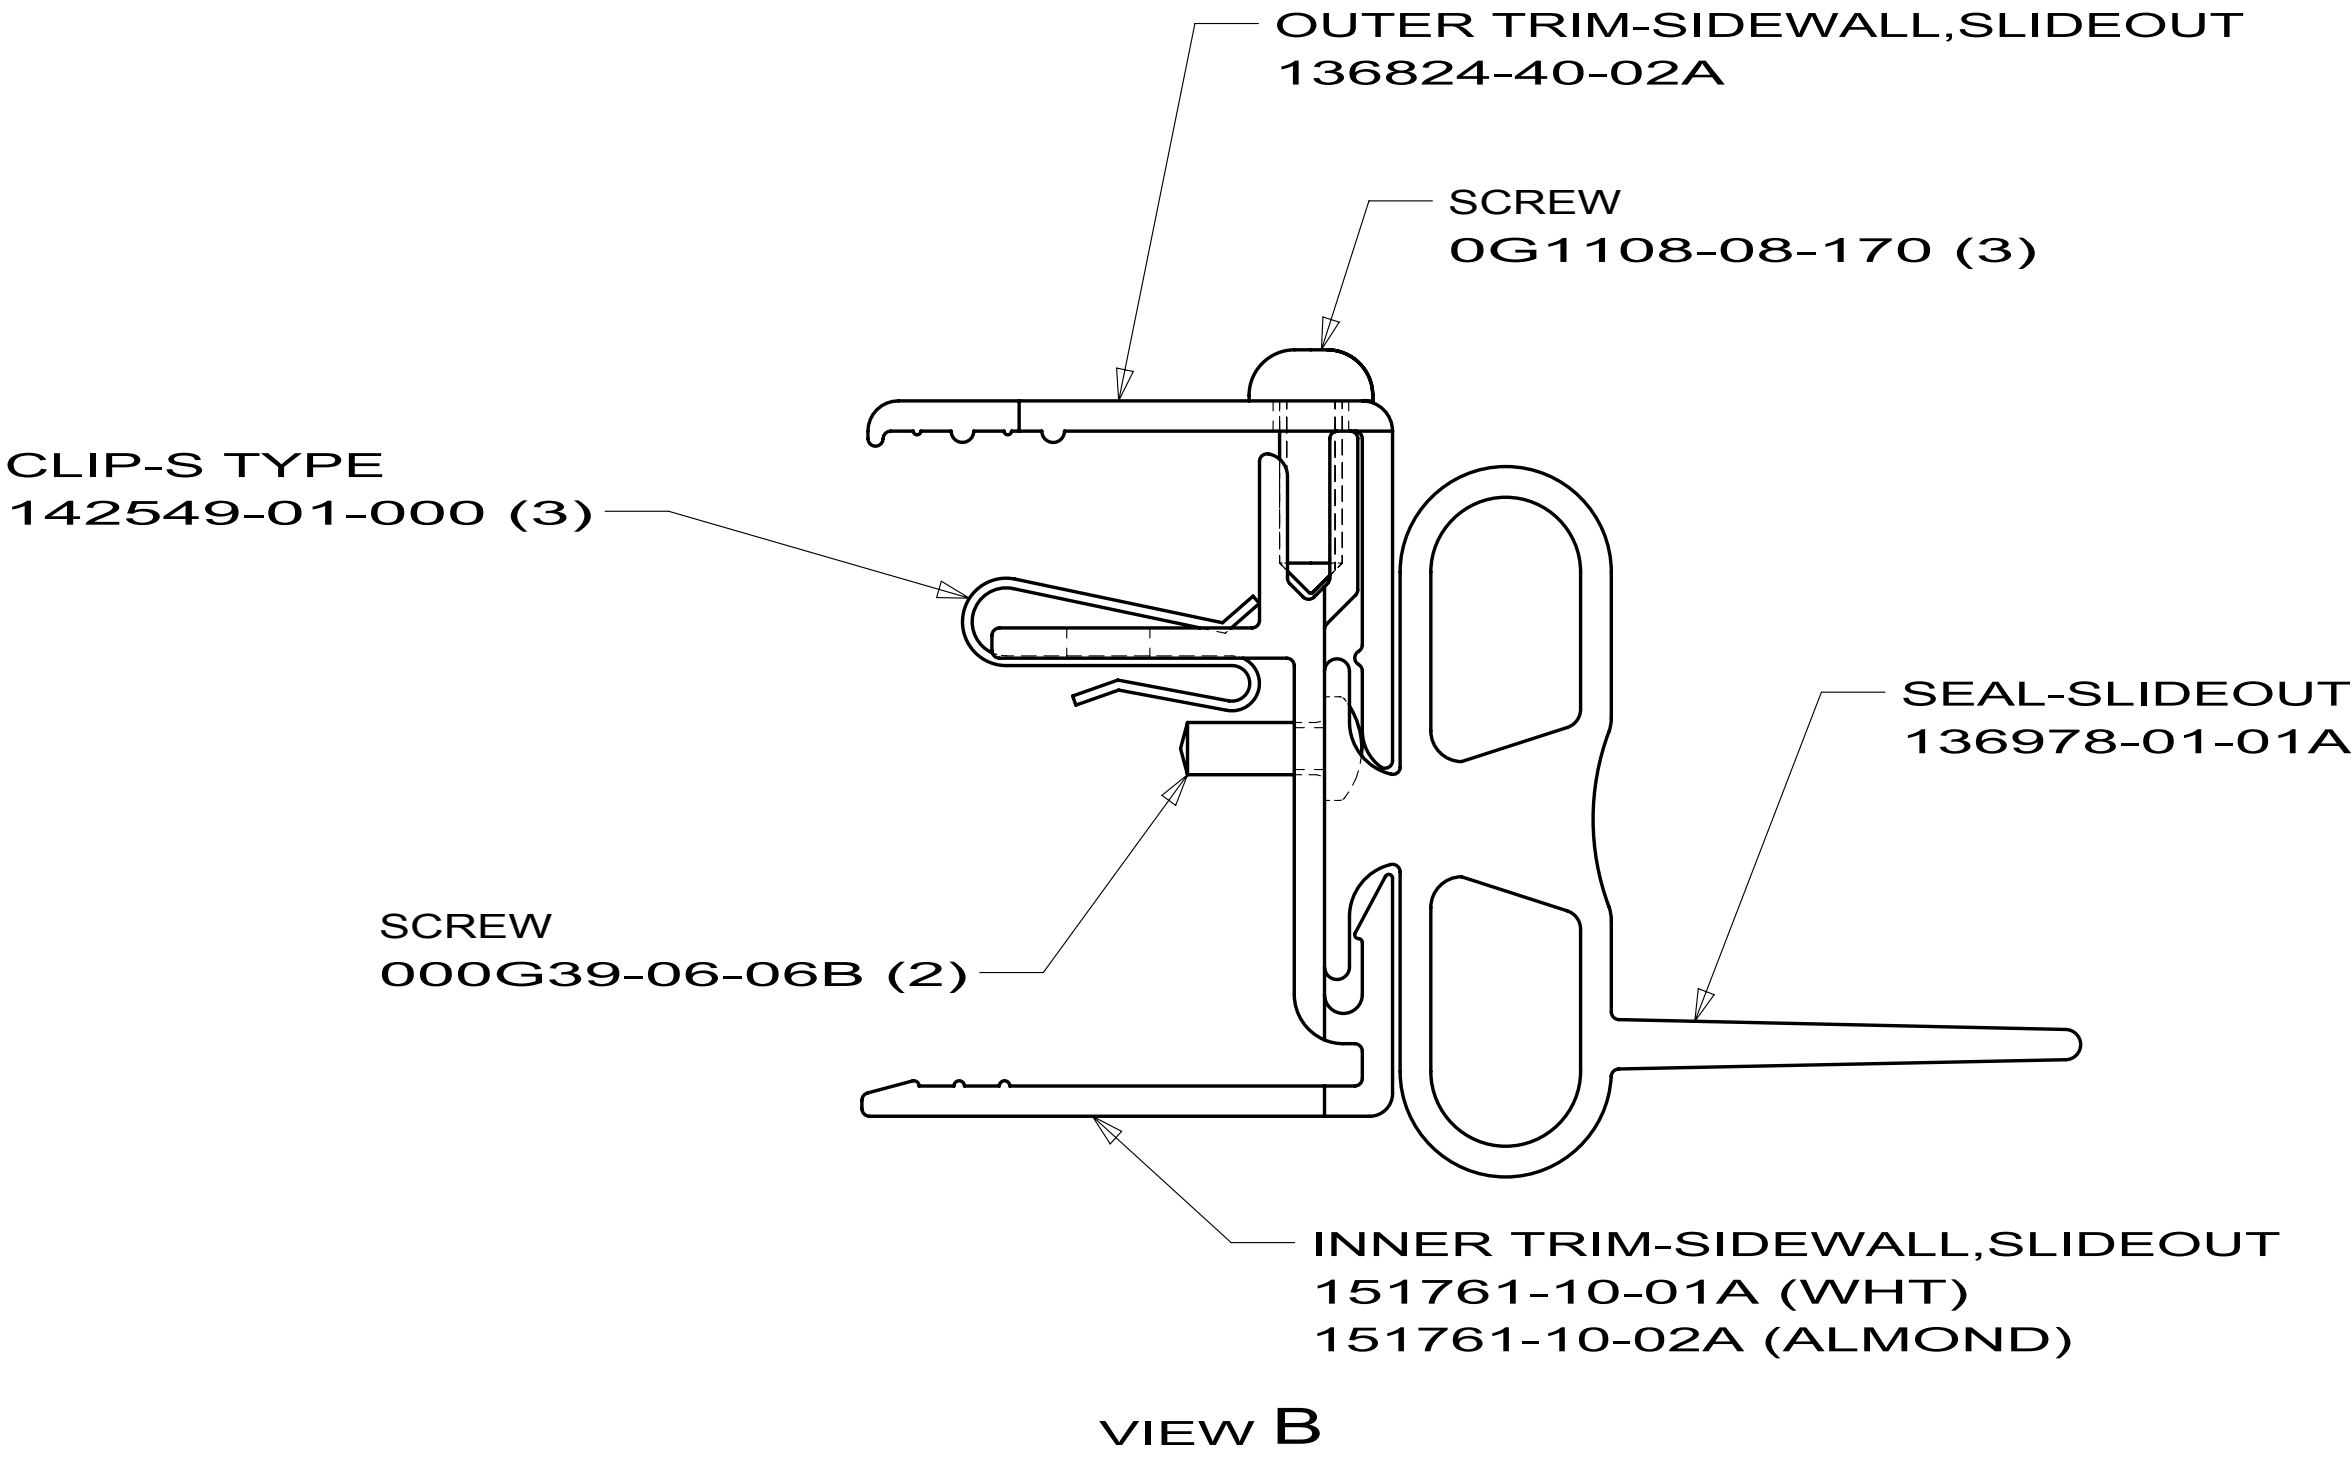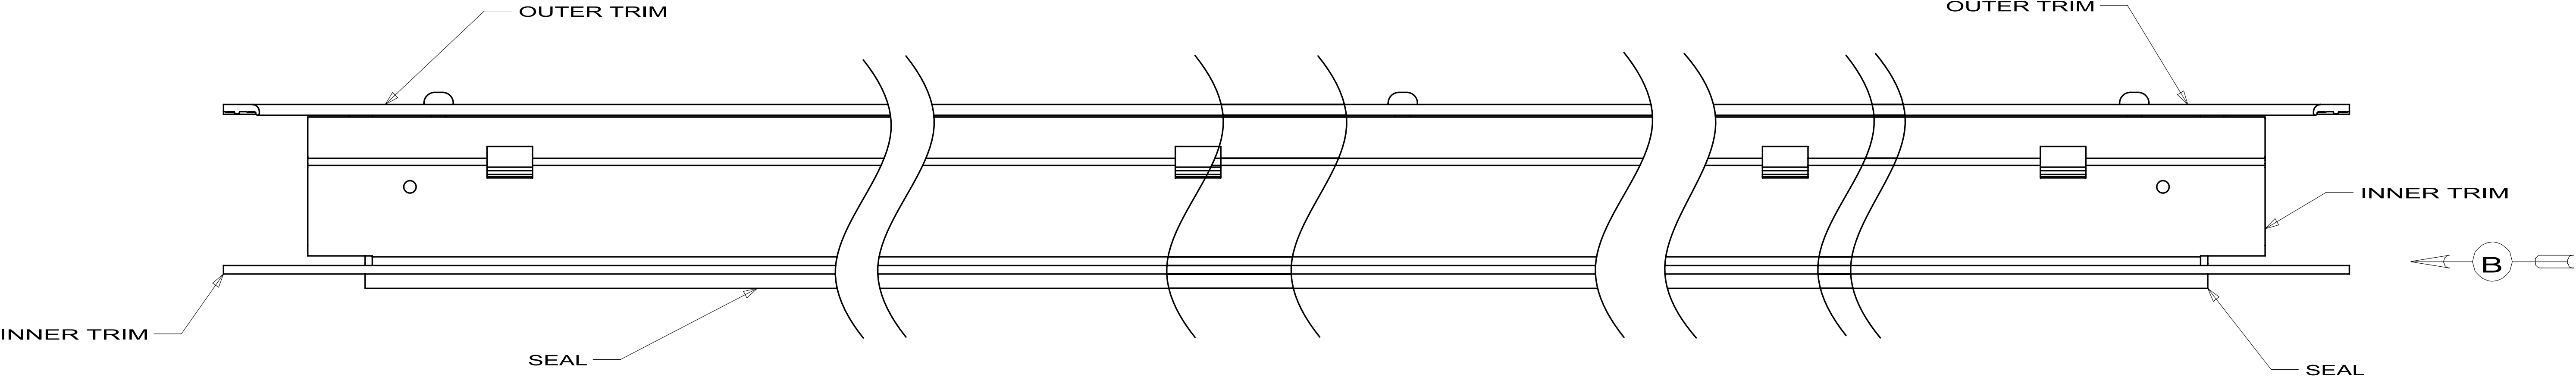

FABWELL SDW

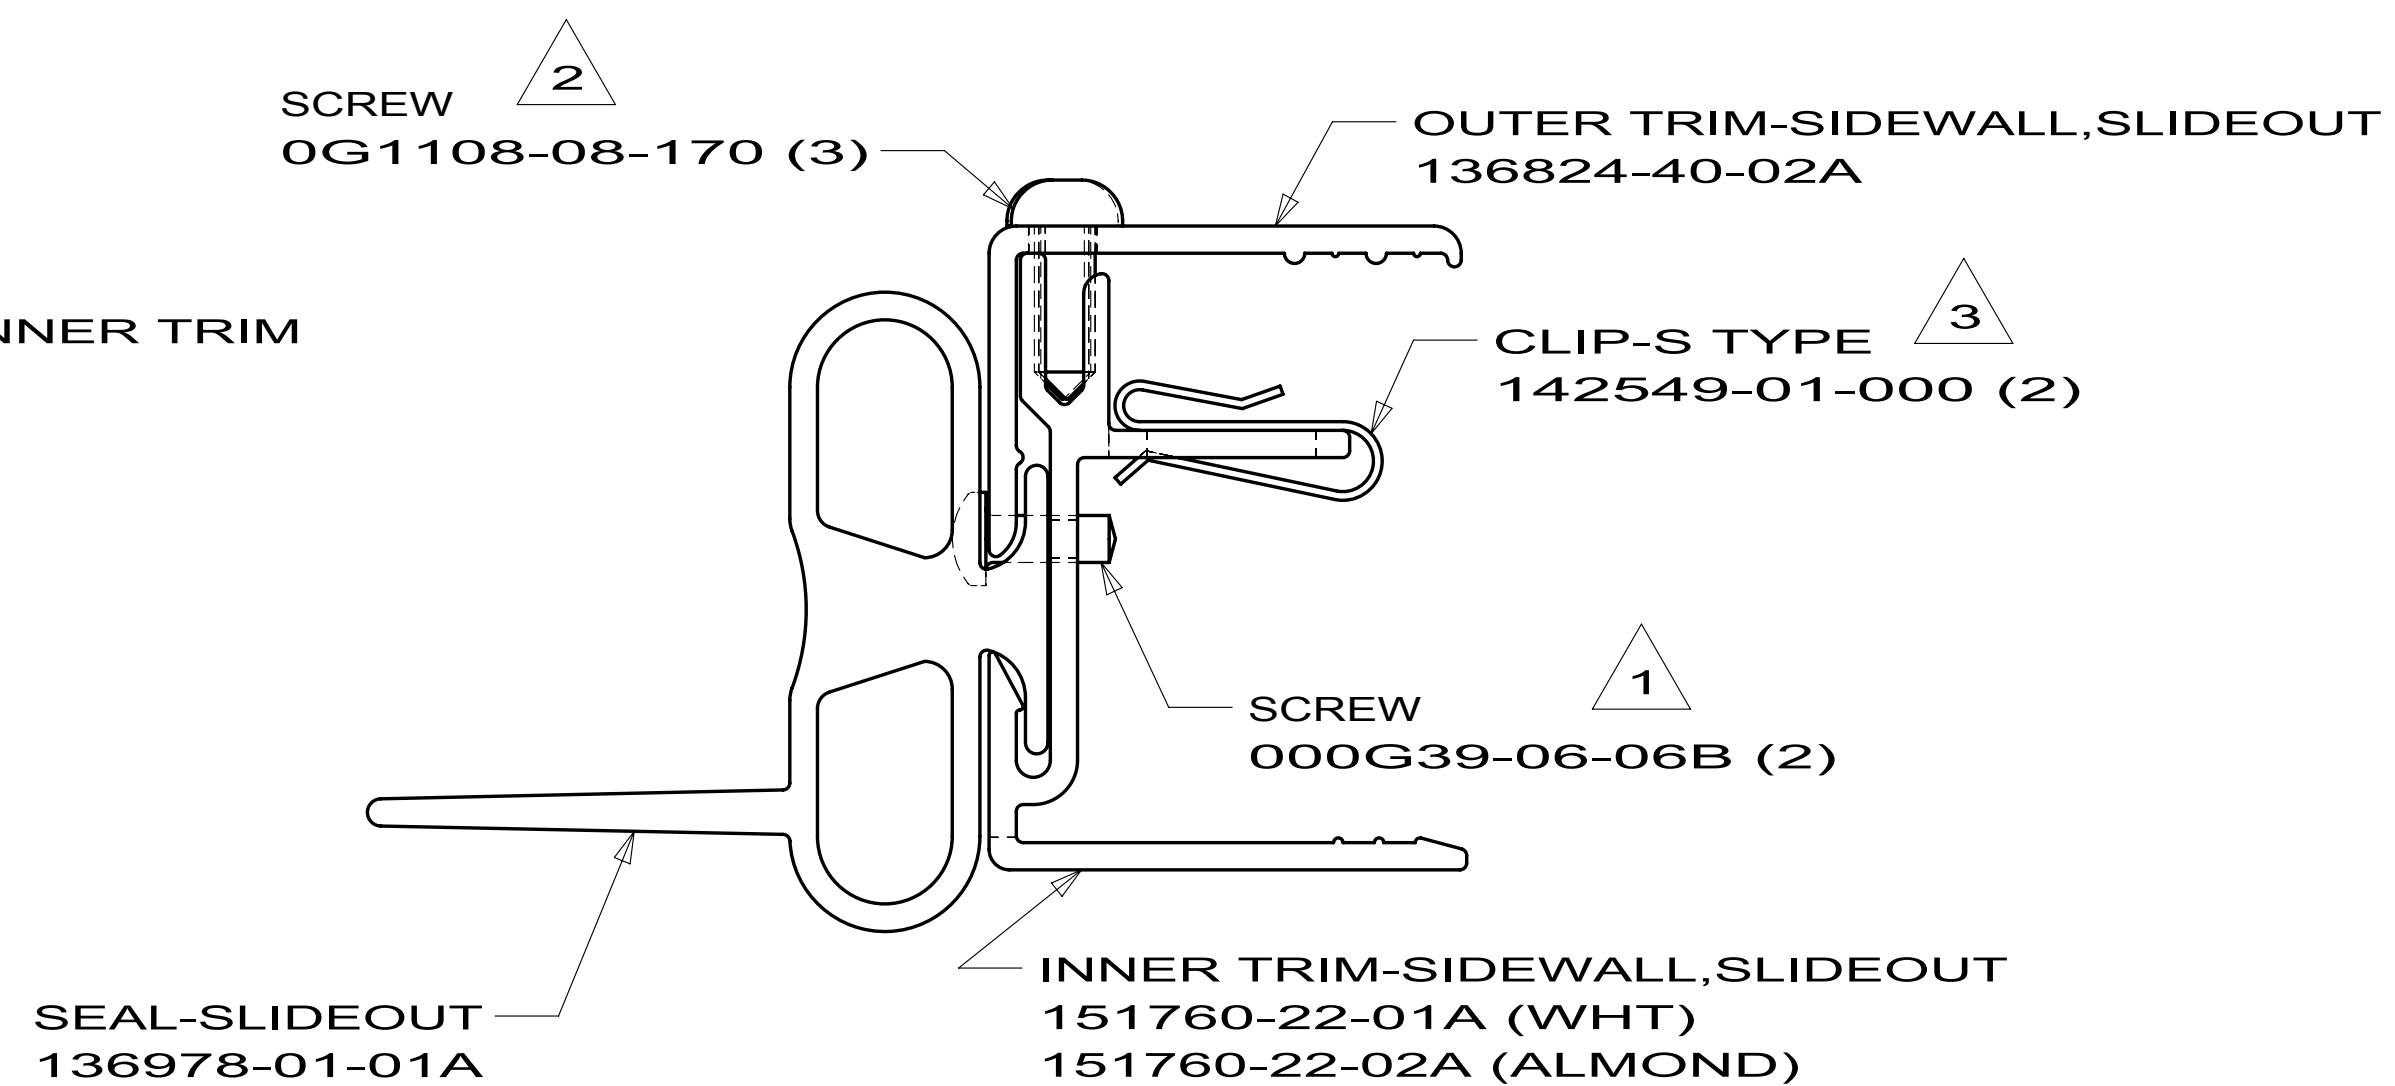
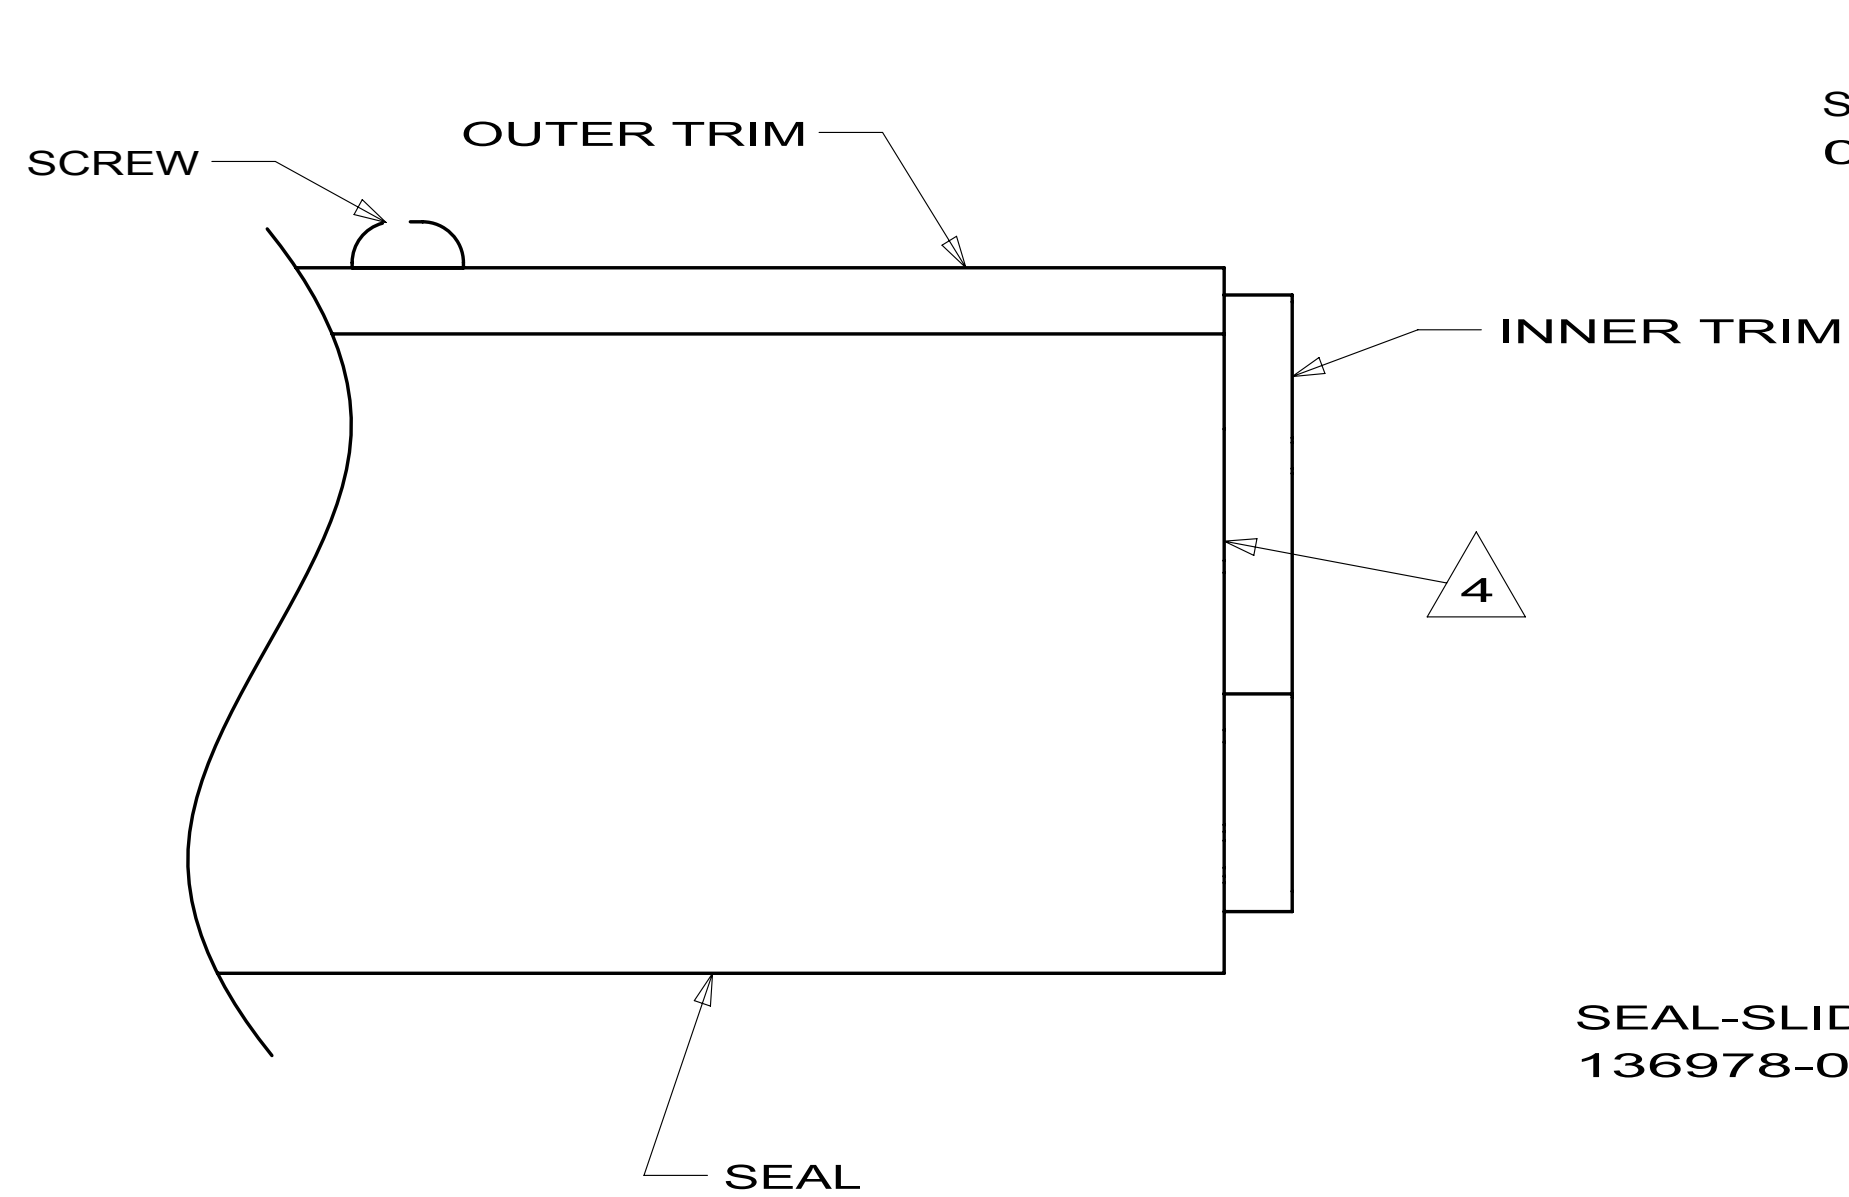
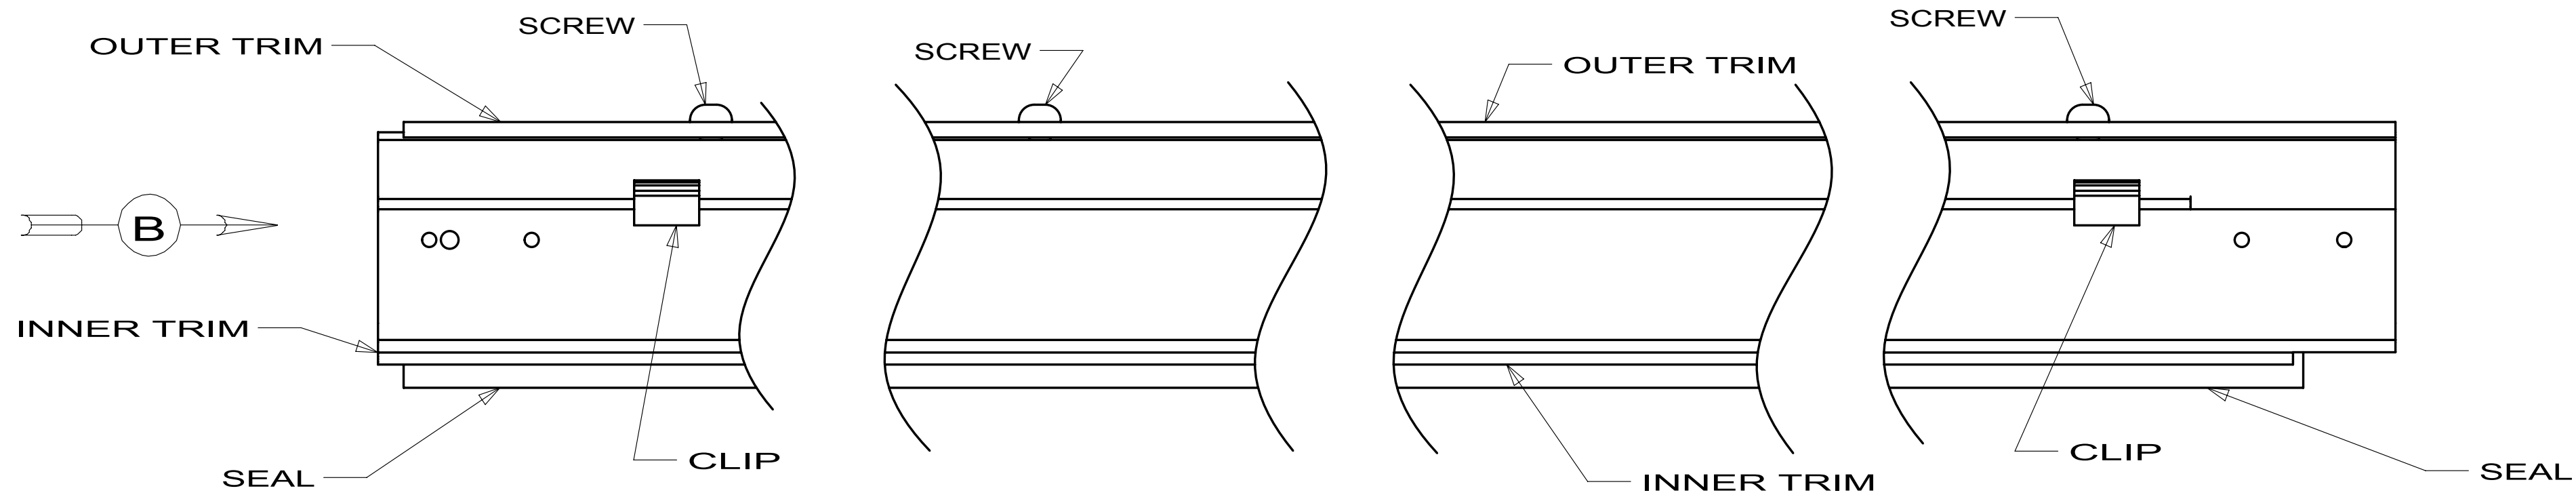


- 4 SEAL TO BE FLUSH WITH OUTER TRIM.
- 3 TOLERANCE ON THE CLIP SPACING IS ± 100.0 MM.
- 2 APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
- 1 APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.

NOTES:


FABWELL SDW

TRIM ASM-SLIDEOUT,SIDE
1 2 **151763**

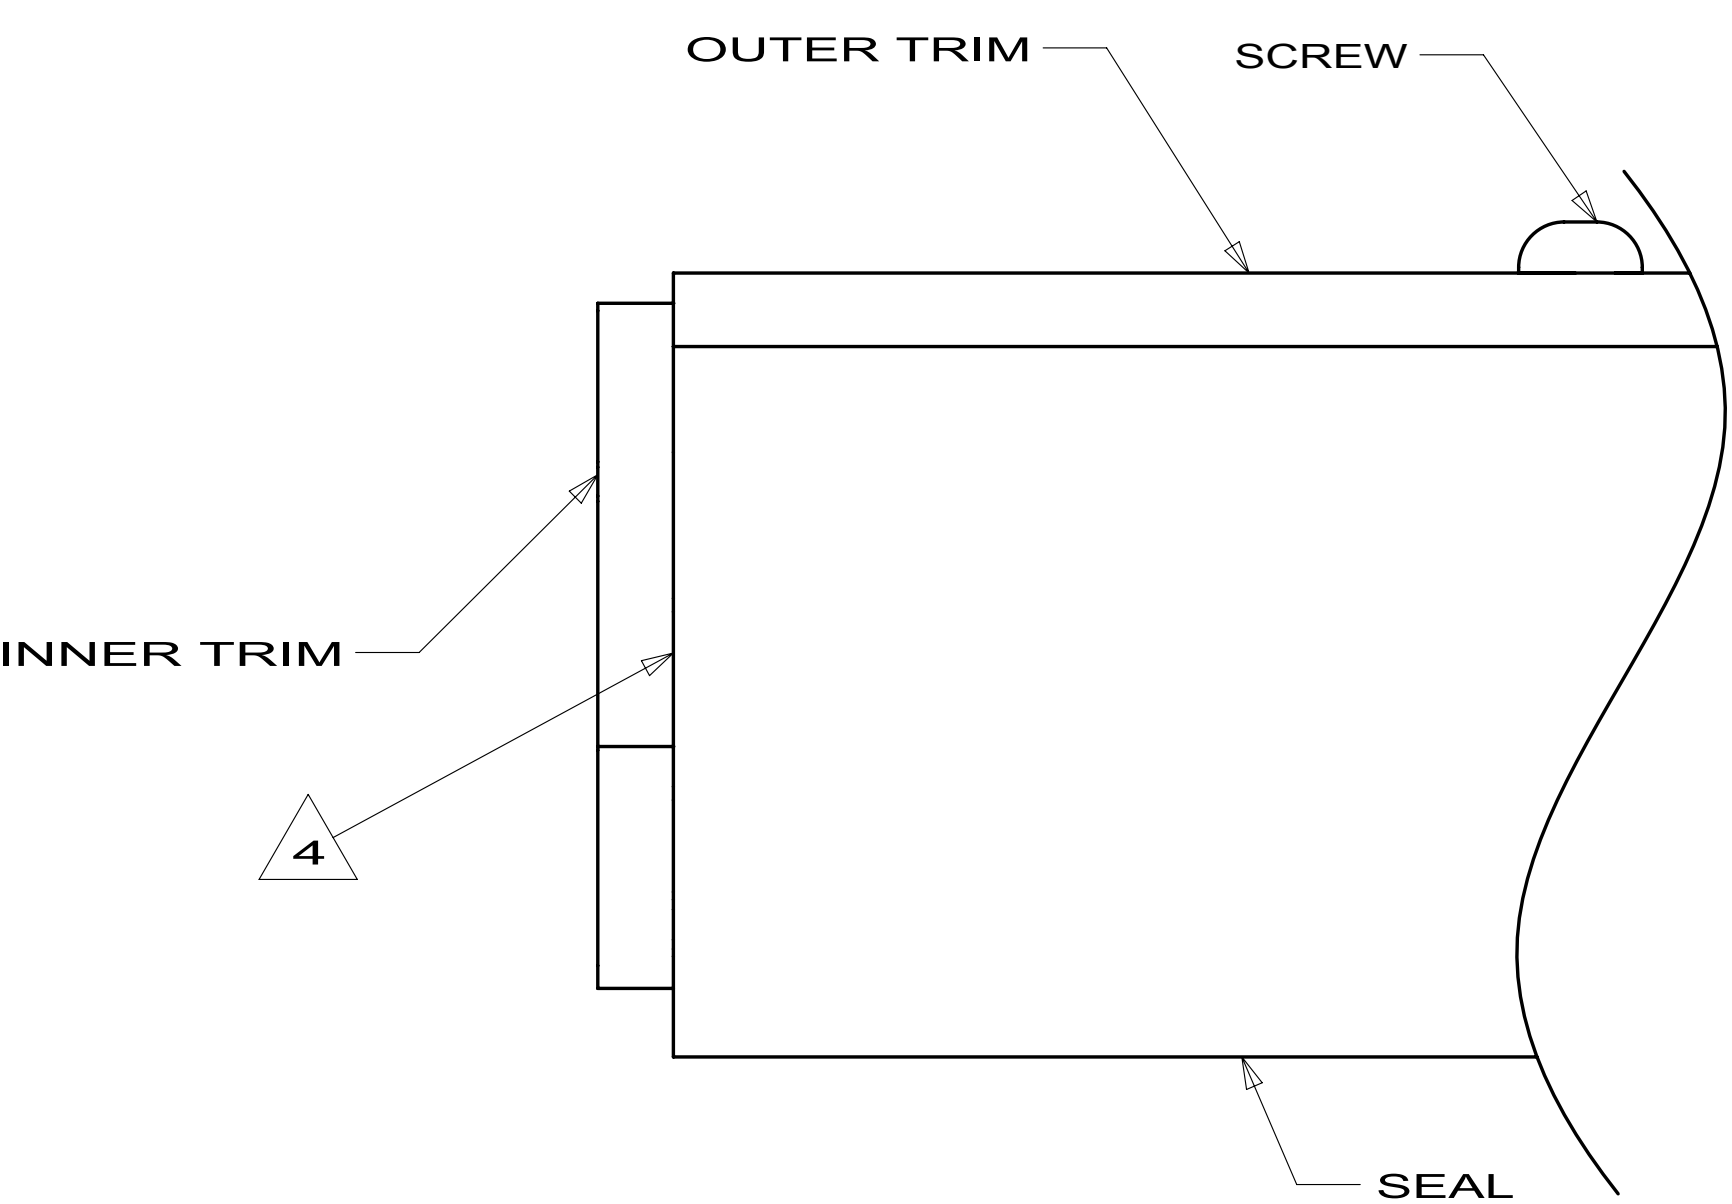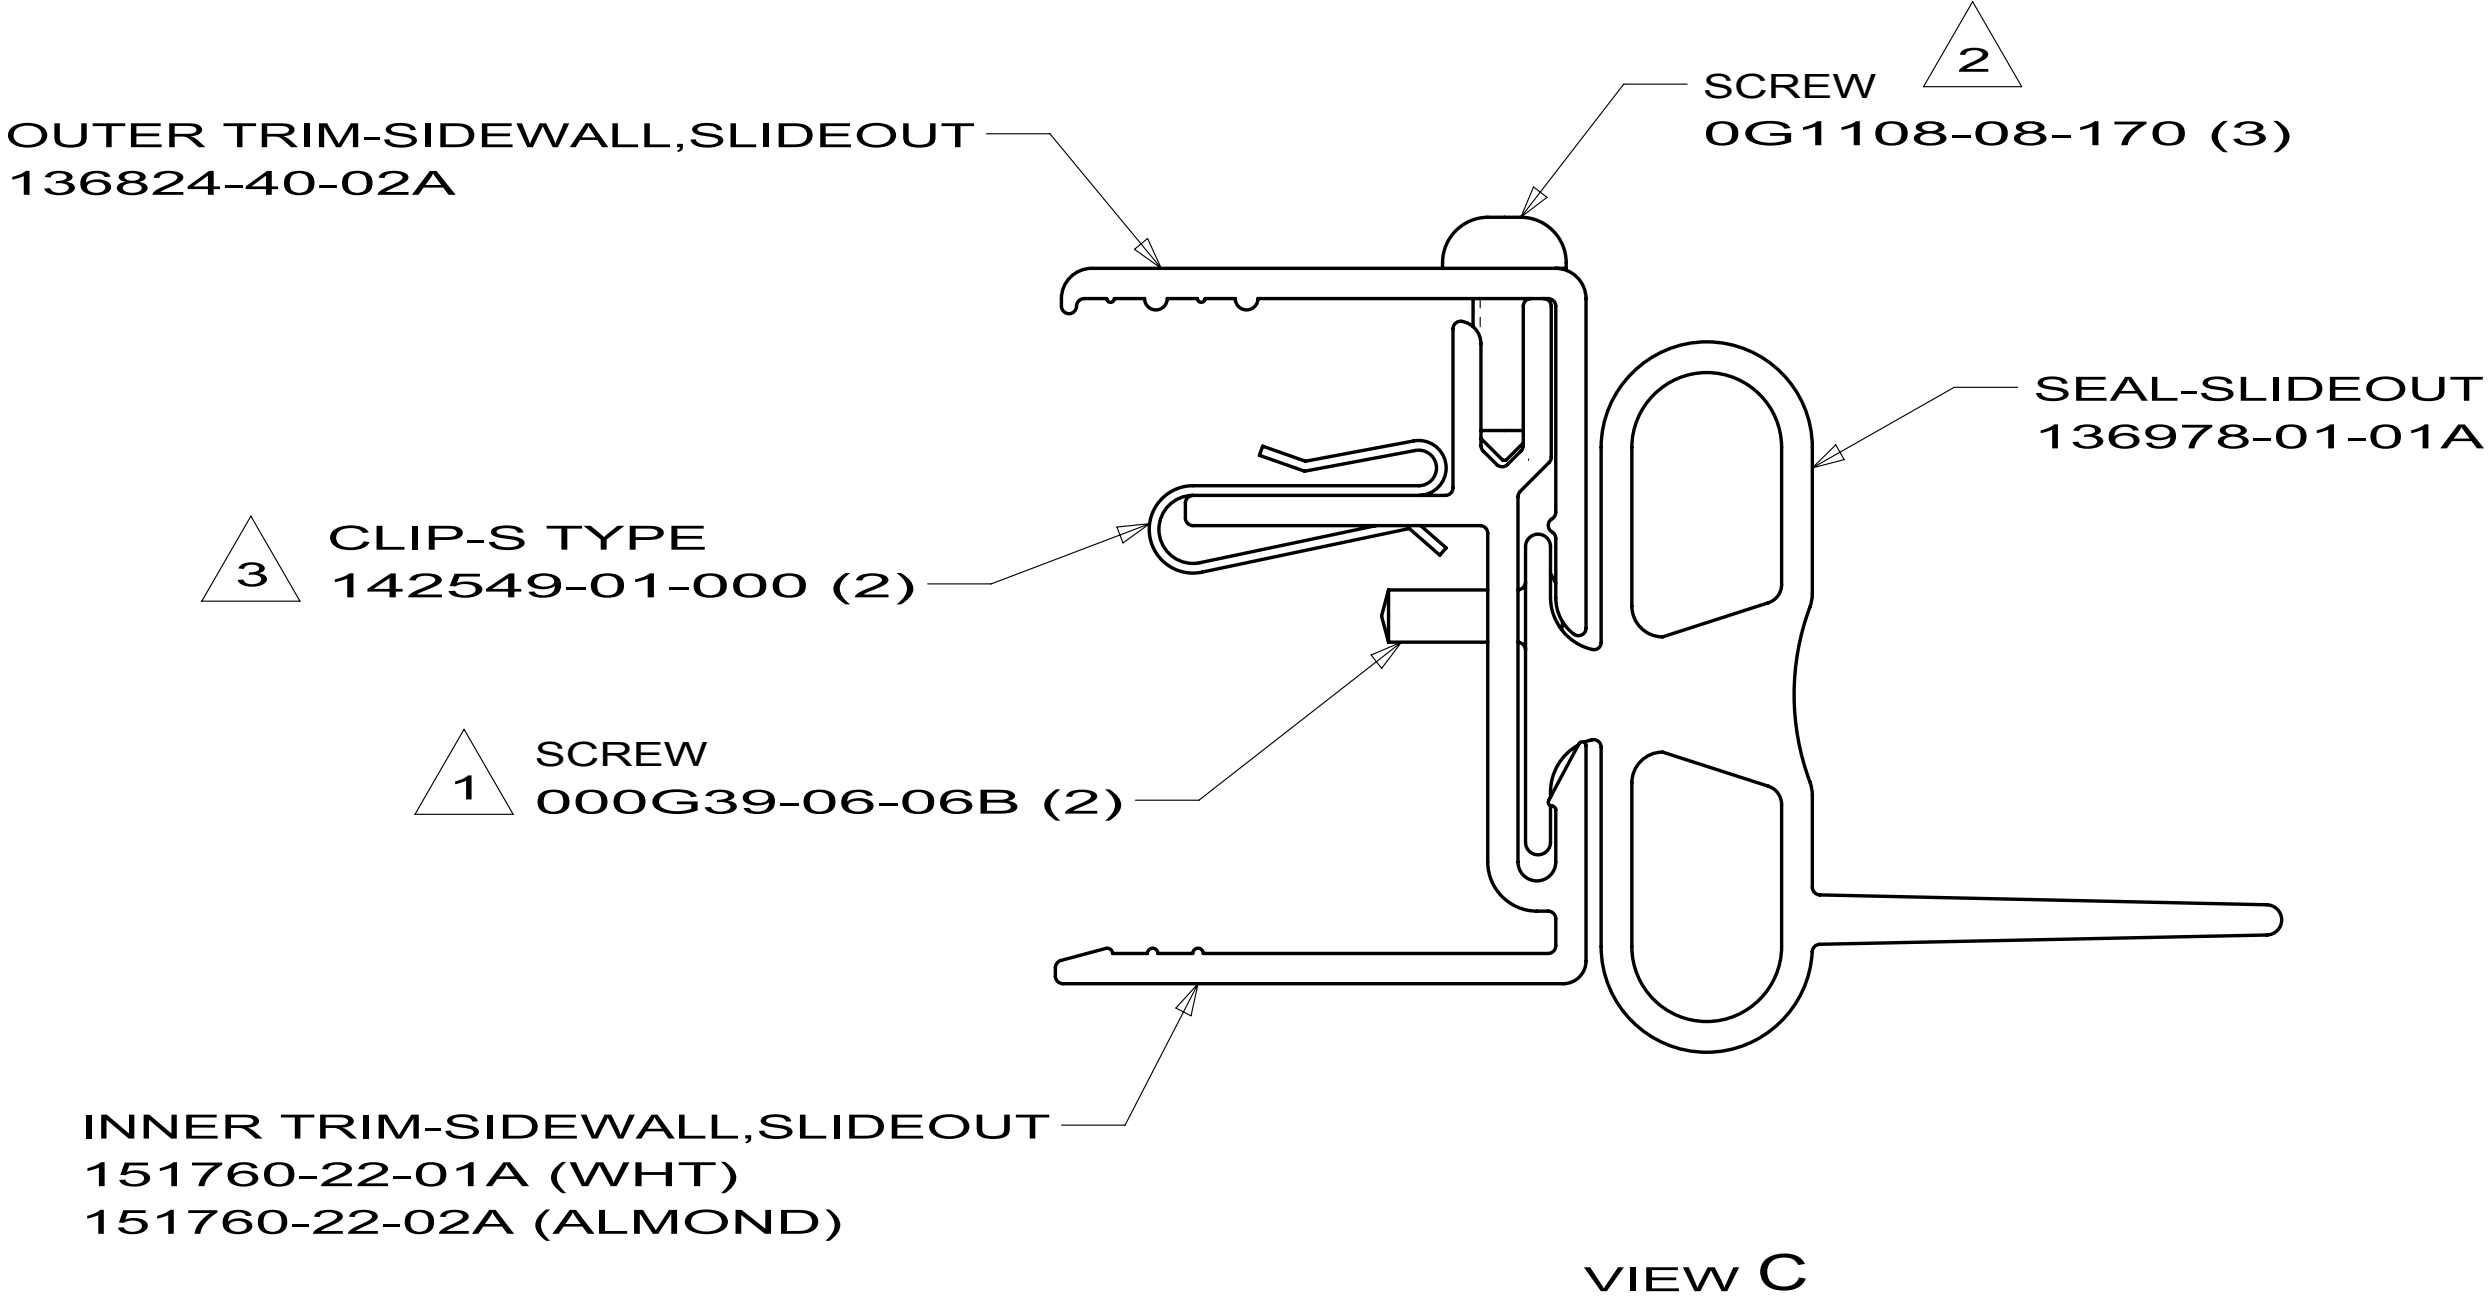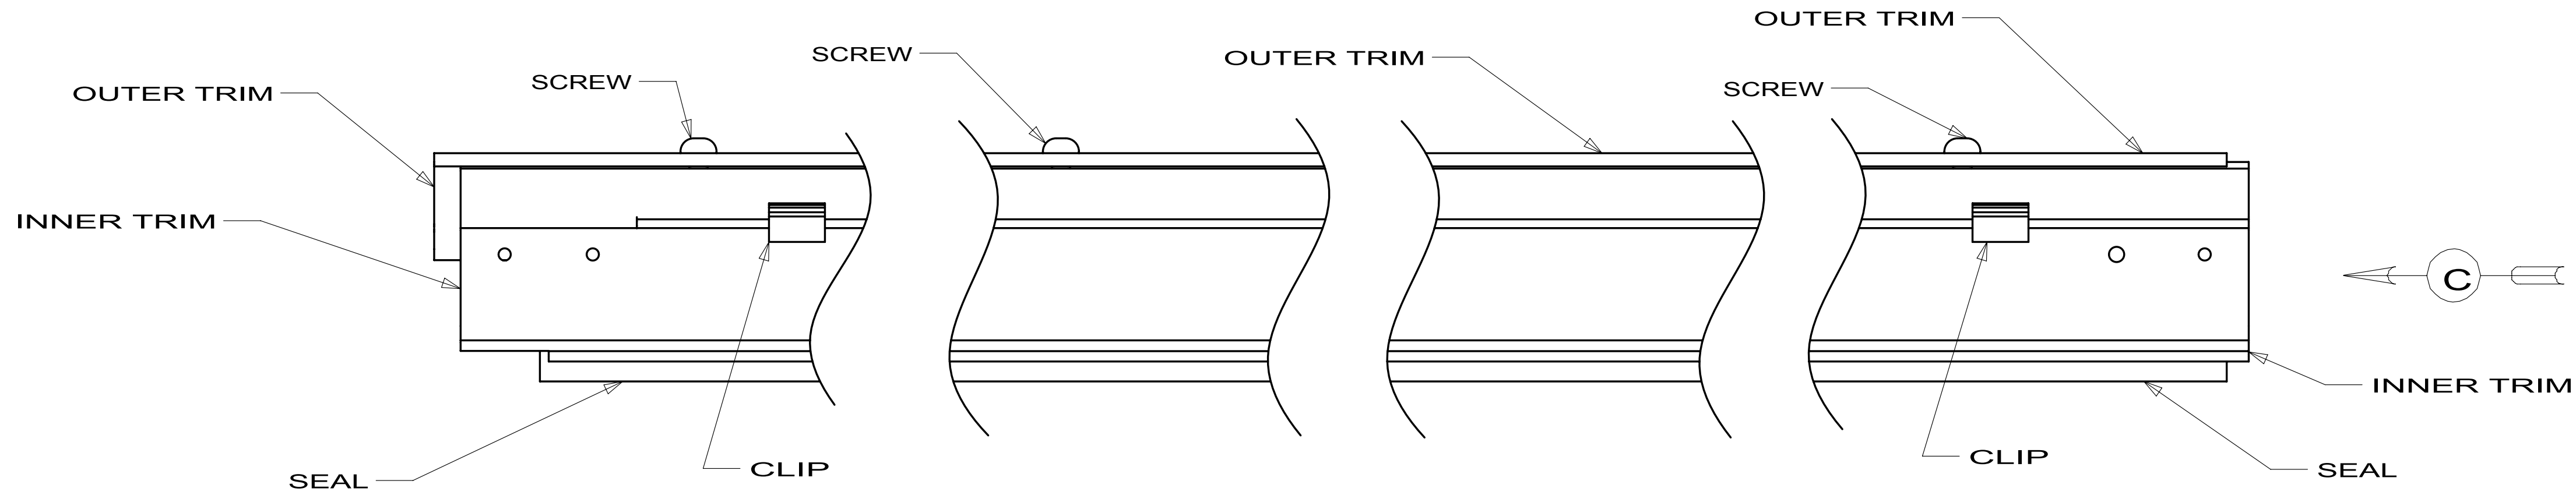

153651-02-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT - SWITCH	1812996
	153651-01-702	EA COVER/BOOT - SEAL	1612011
	153651-02-700	EA MOTOR/LH - F/TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223

153651-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT SWITCH	1812996
	153651-02-700	EA MOTOR "R" - F/LH TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223
	153651-04-700	EA COVER/BOOT - SEAL	1612012
	153651-04-701	EA BEZEL F/MAIN HOUSING	1612567



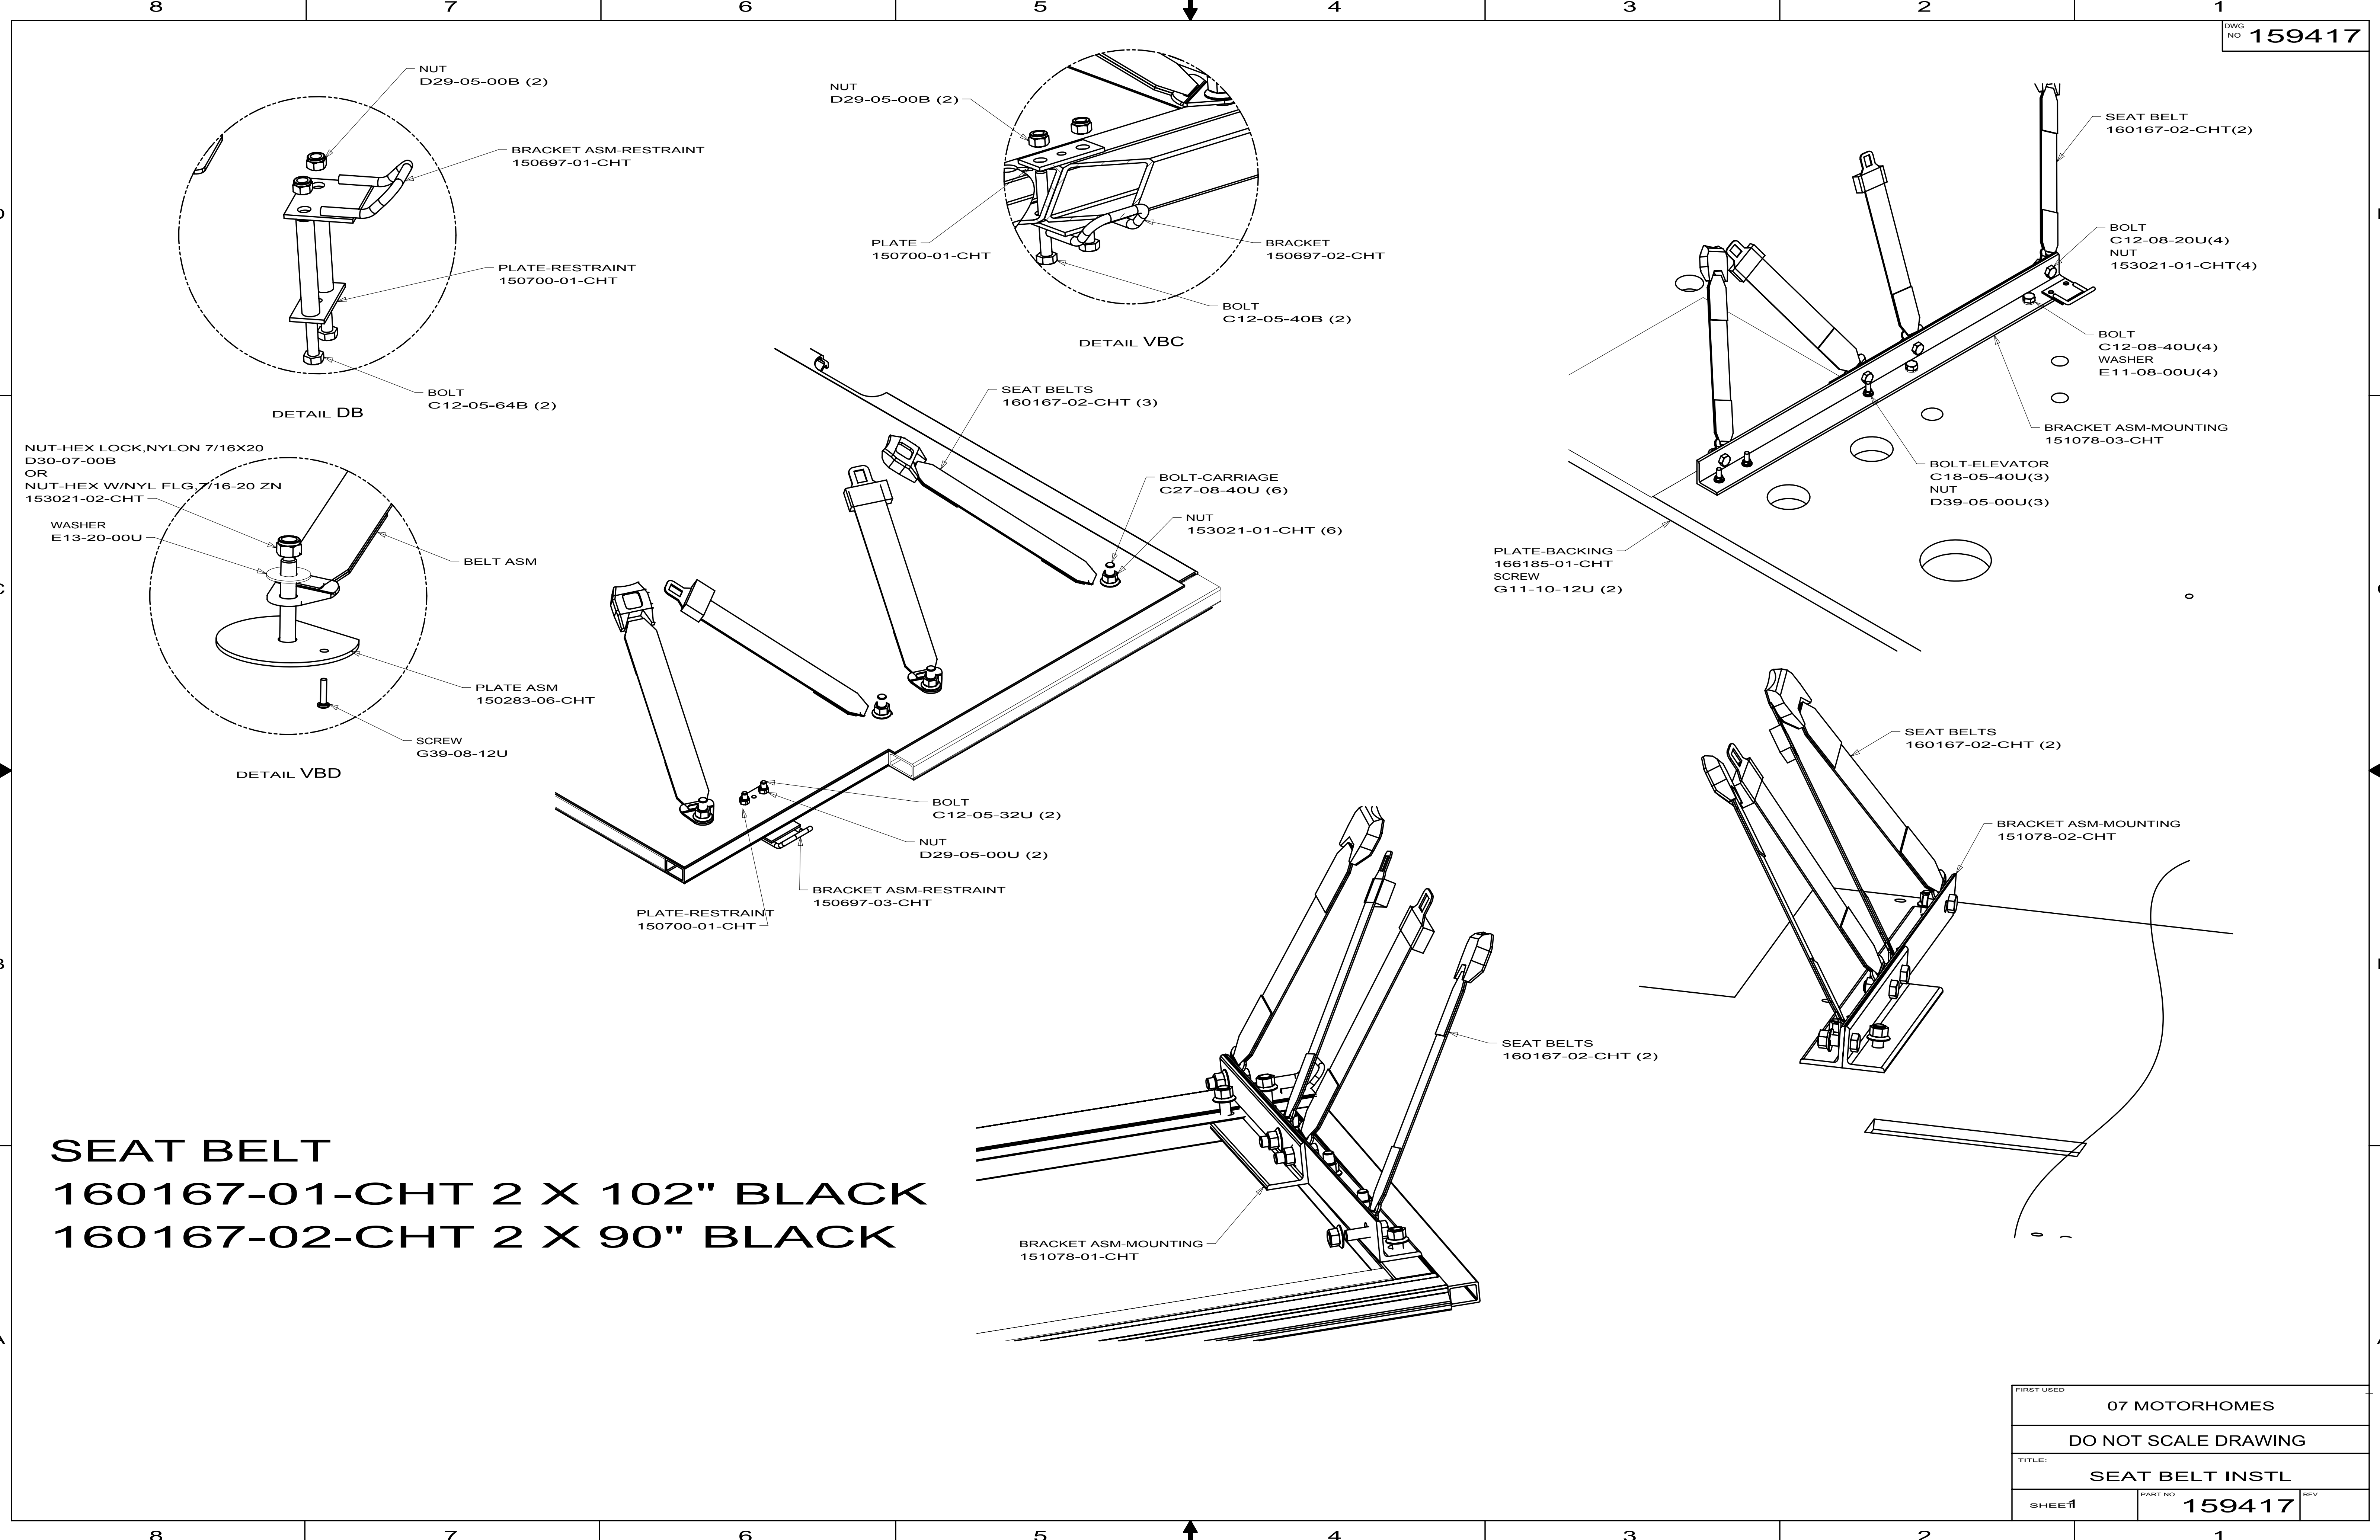


SEAT BELT
160167-01-CHT 2 X 102" BLACK
160167-02-CHT 2 X 90" BLACK


FIRST USED		
07 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
SEAT BELT INSTL		
SHEET 1	PART NO 159417	REV

8	7	6	5	4	3	2	1
DWG NO	TRIM SIDEWALL TOP	TRIM SIDEWALL OUTER	RETAINER	A			
160866-01	154756-01-CHT 154756-05-CHT	154757-01-CHT 154757-05-CHT	142718-47-CHT	7402.0			
160866-02	154756-07-CHT 154756-05-CHT	154757-01-CHT 154757-07-CHT	142718-59-CHT	7319.0			
160866-03	154756-08-CHT 154756-05-CHT	154757-08-CHT 154757-05-CHT	142718-62-CHT	7616.0			

RELEASE	REV	DATE	DWG NO	160866
A				
REV	ZONE	REVISION RECORD	DATE	DFT-ORIG

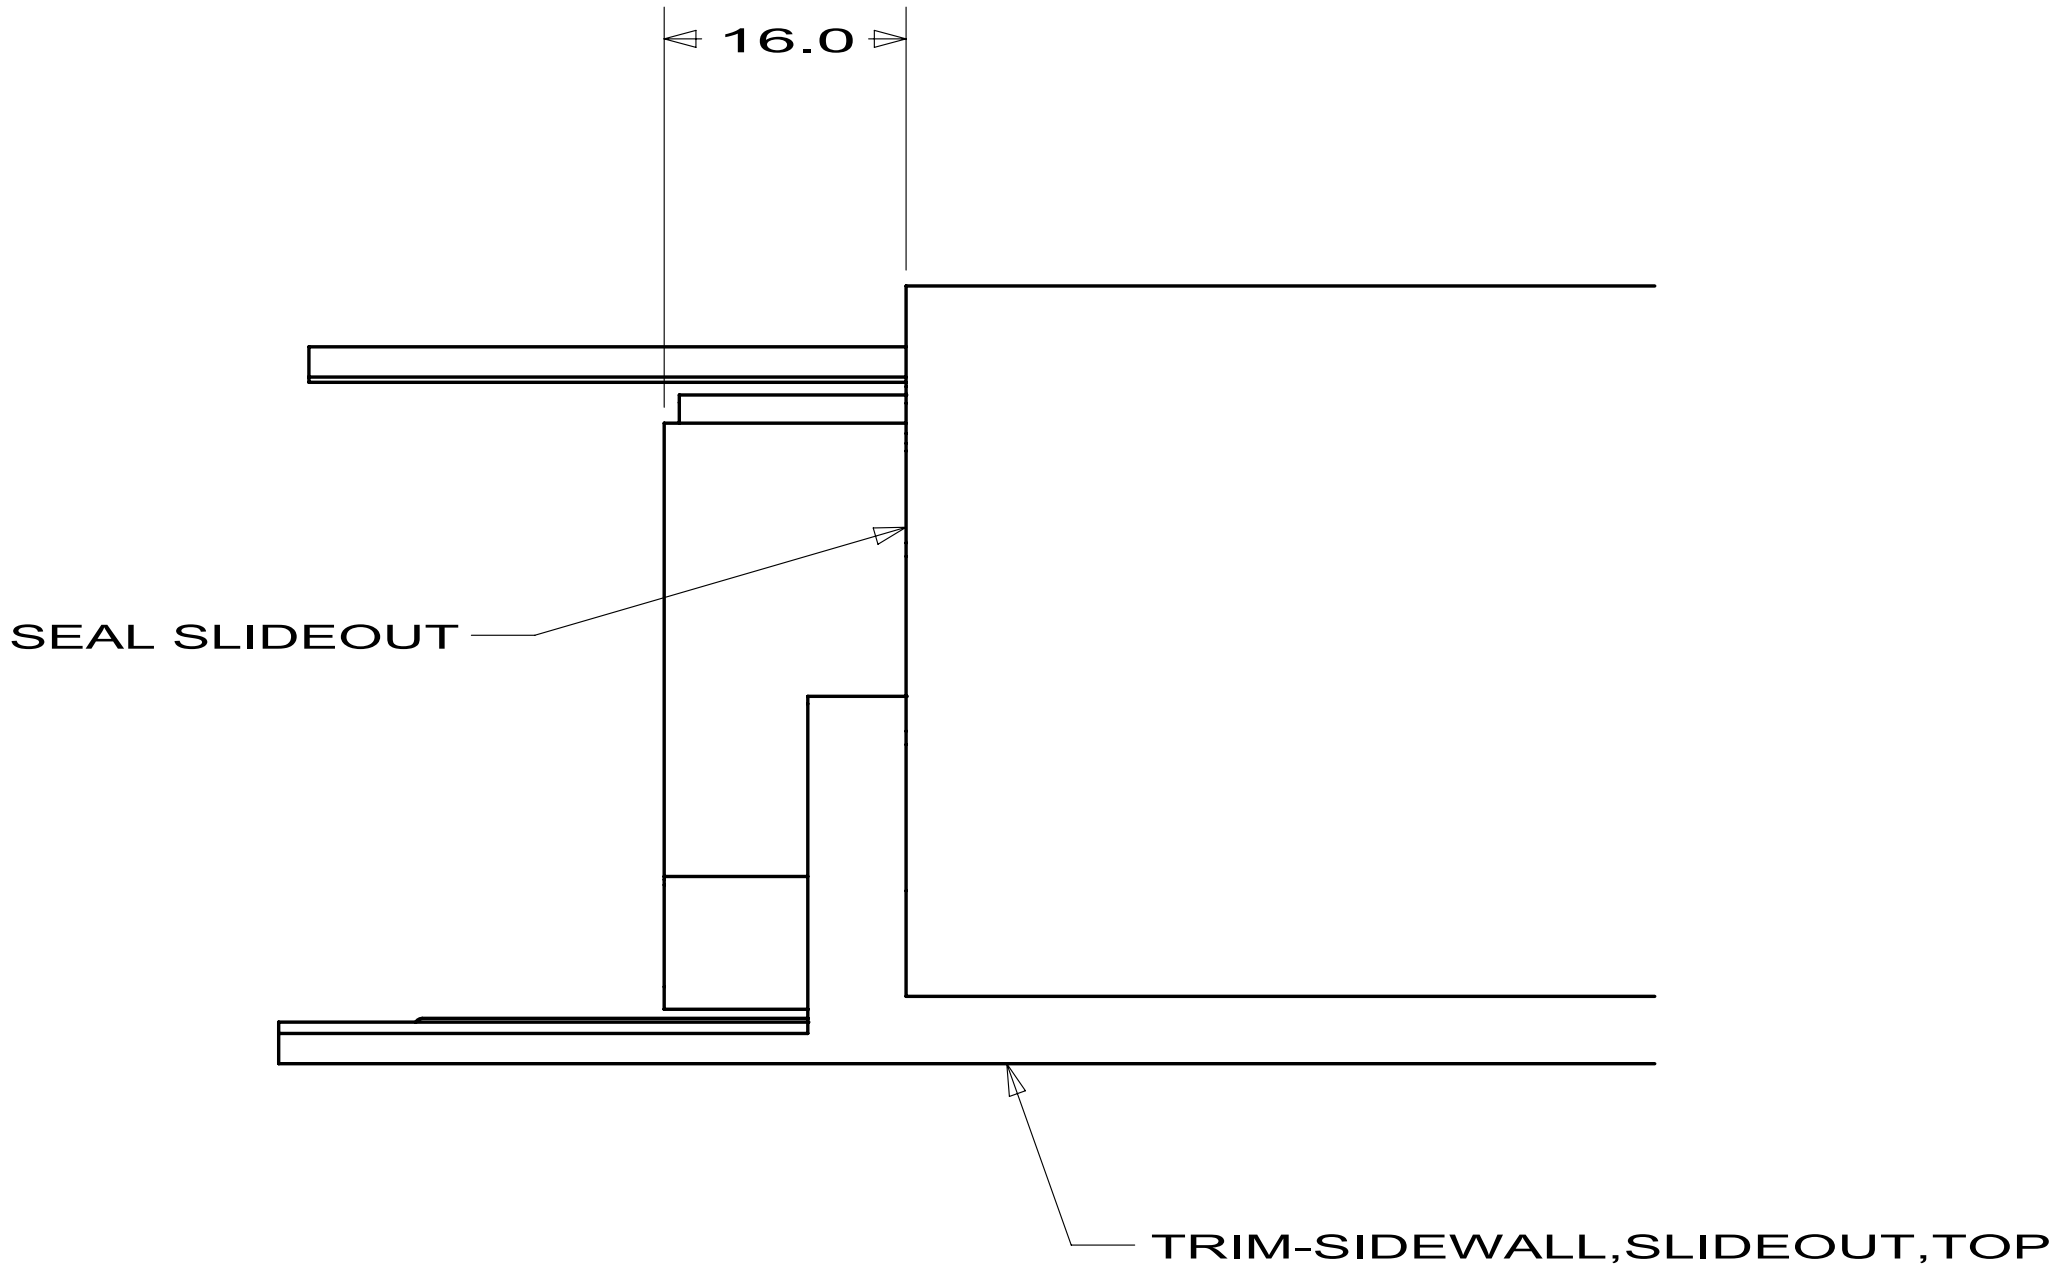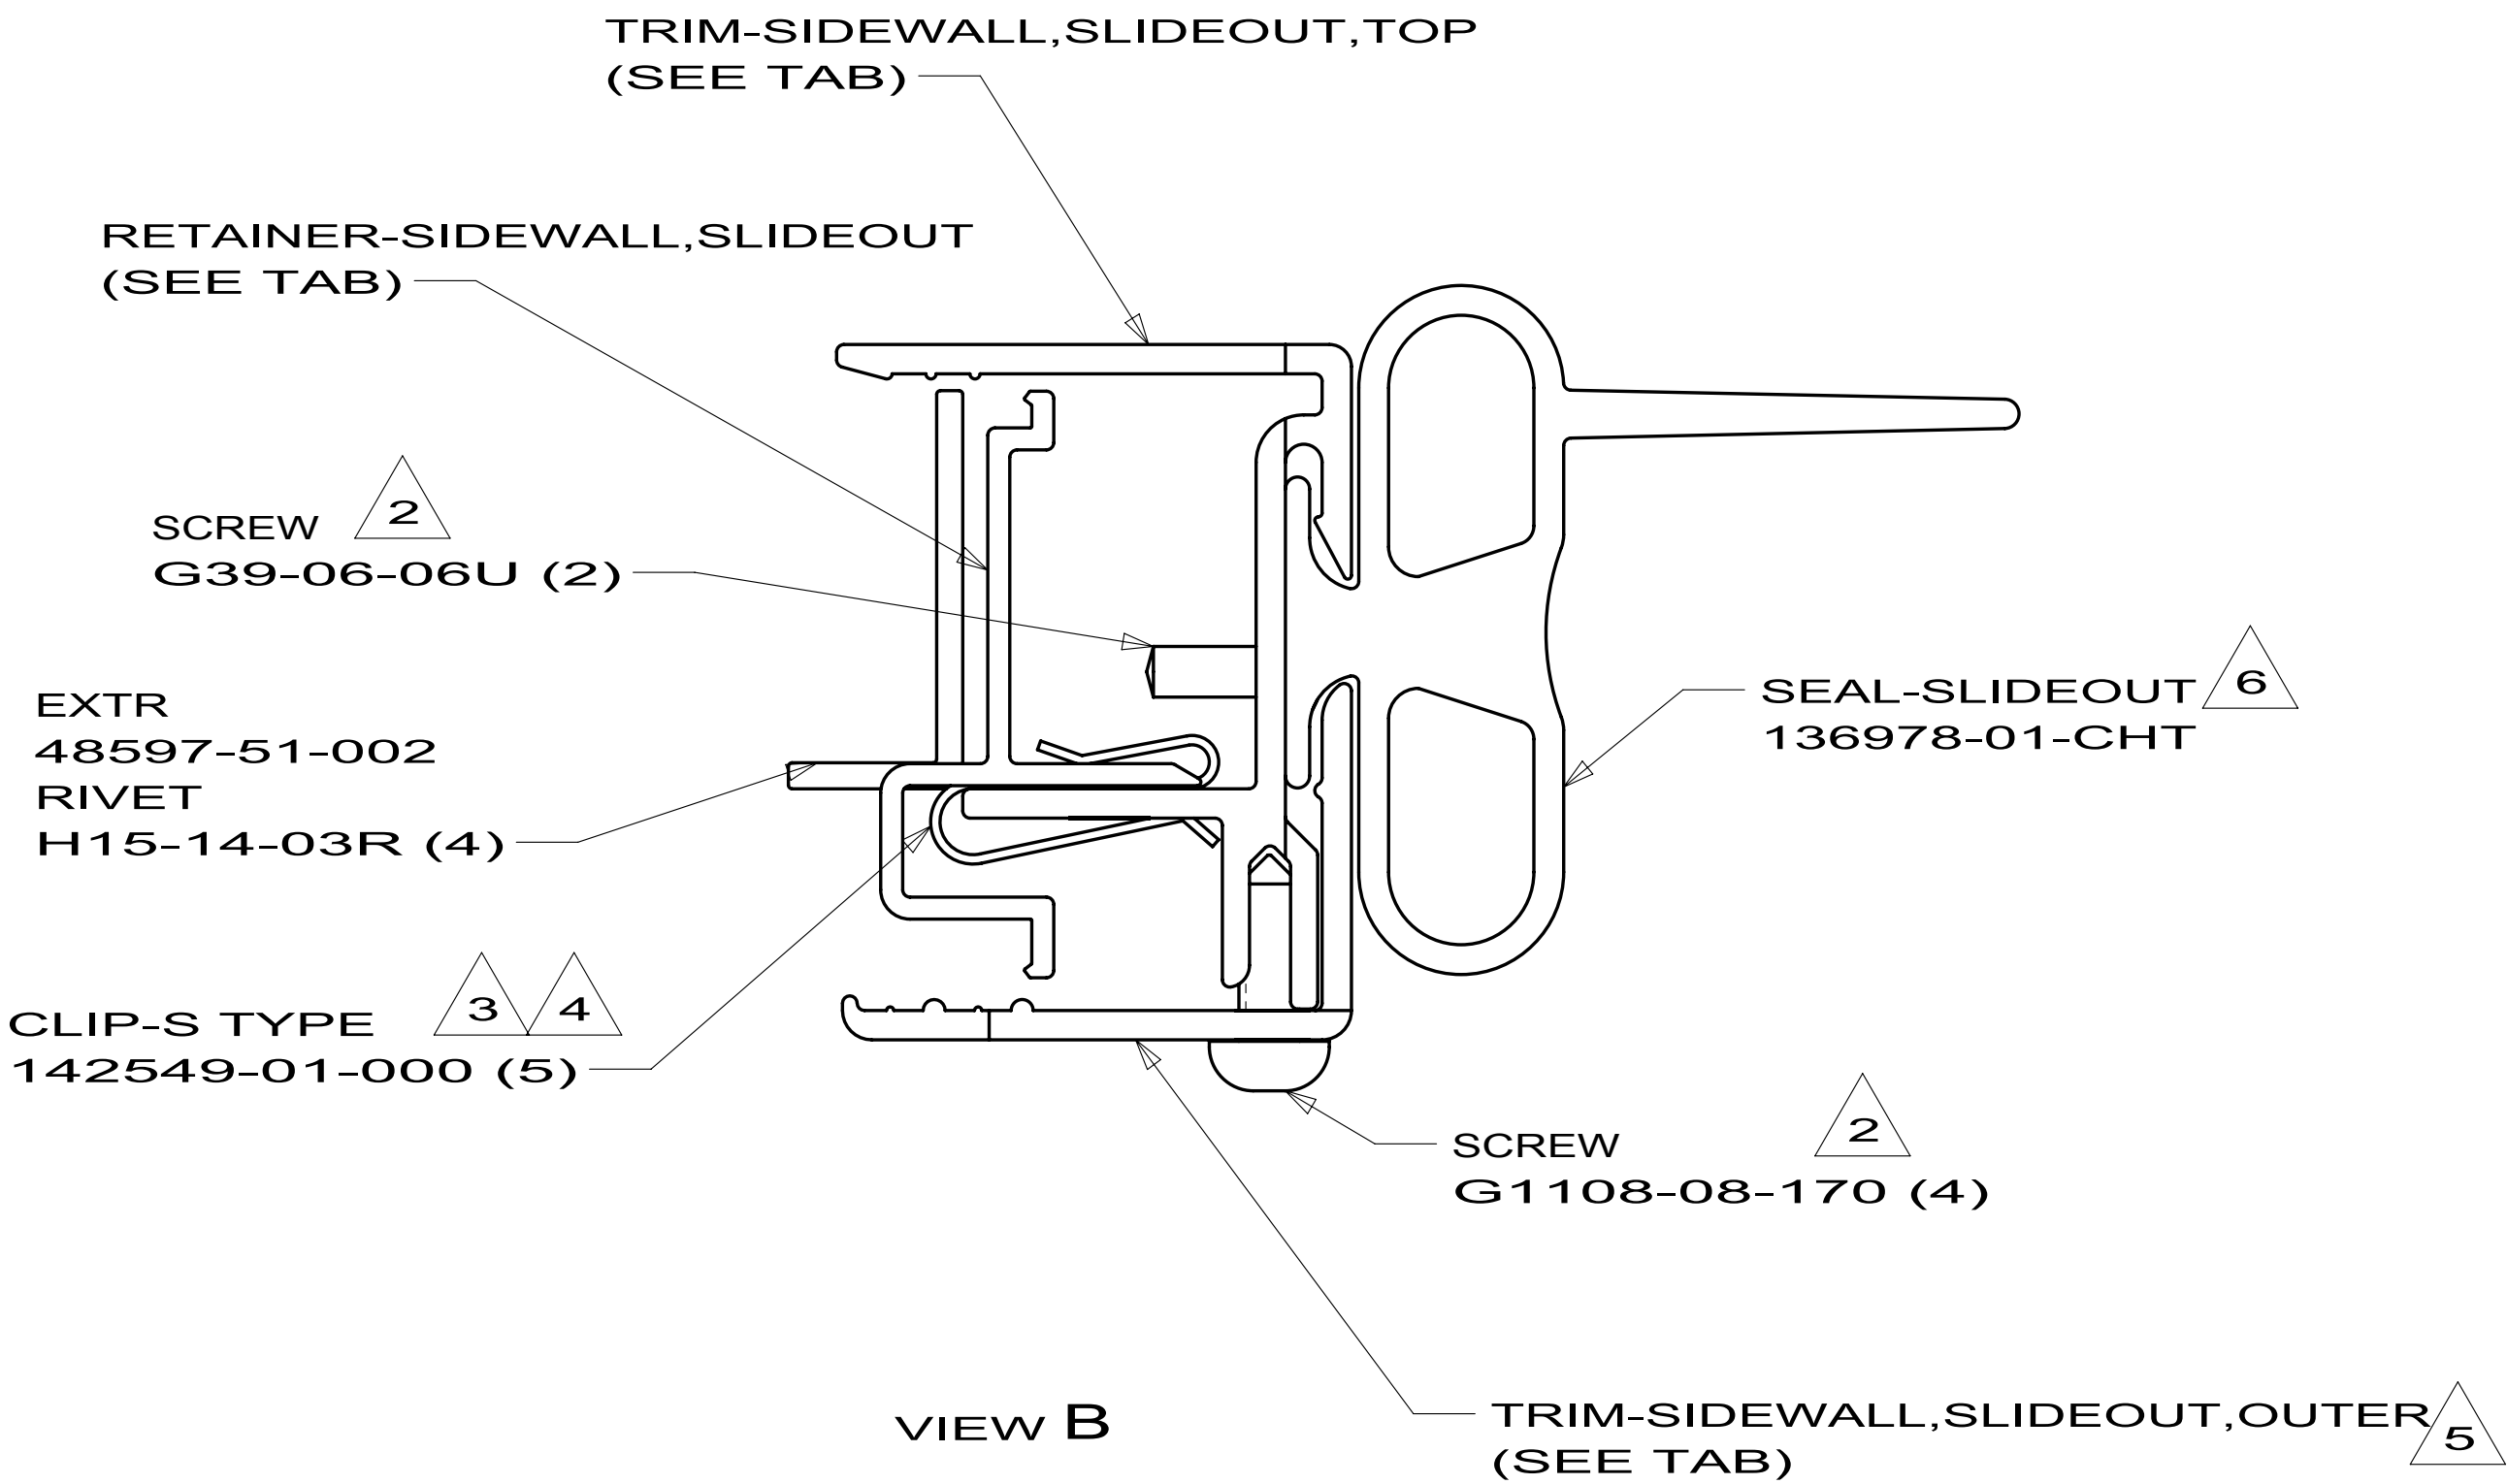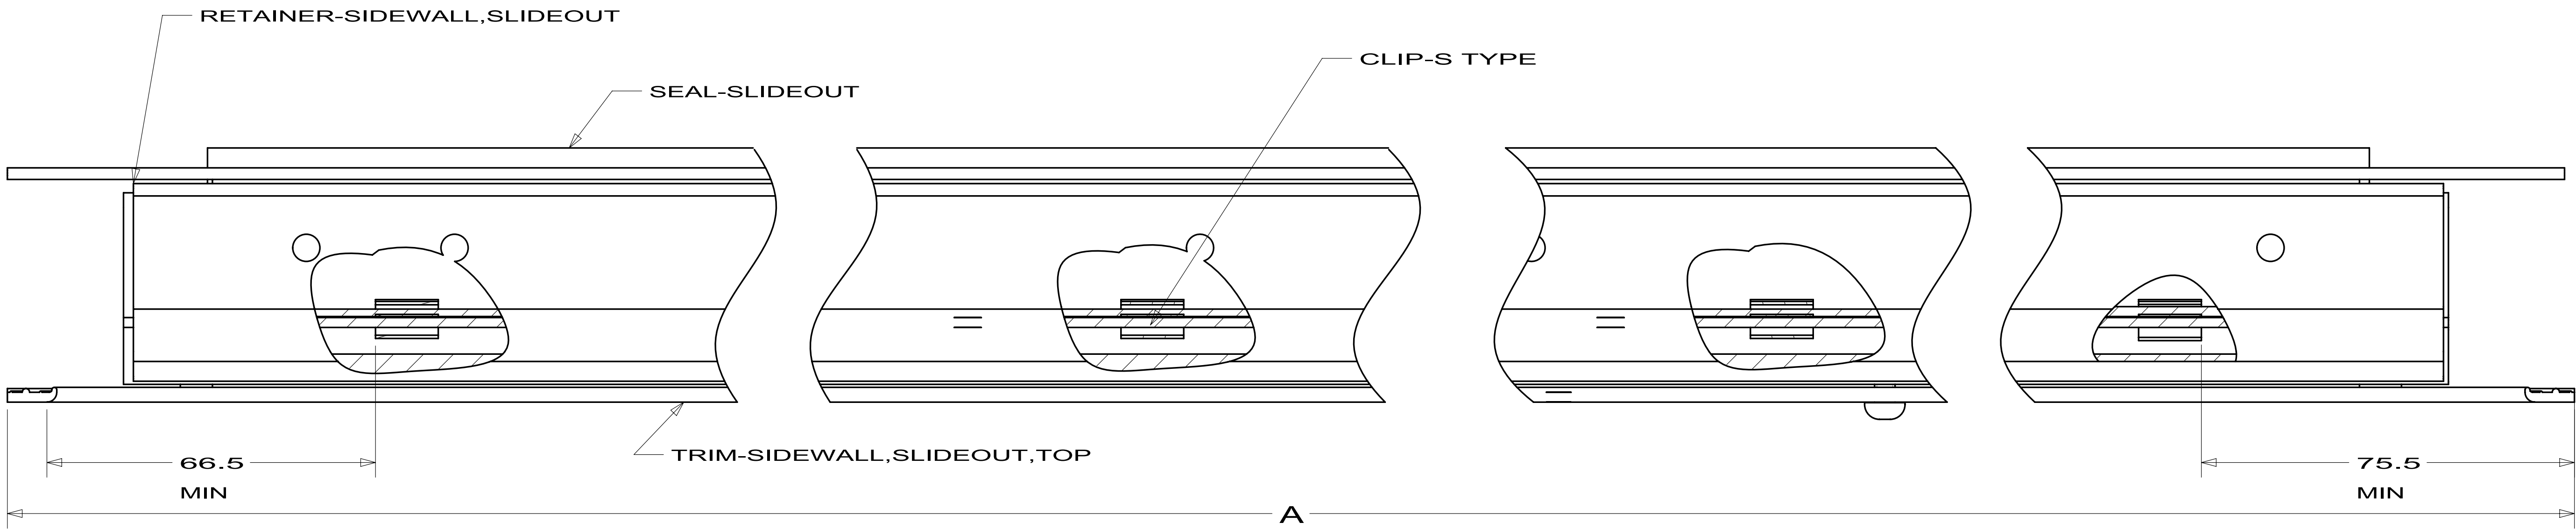


- NOTES:
1. APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.
 2. APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 3. LOCATE CLIPS AT EACH END AND SPACED EQUALLY ALONG THE INNER TRIM.
 4. TOLERANCE ON THE CLIP SPACING IS ± 100.0 mm.
 5. OUTER TRIM MUST BE CENTERED ON THE INNER TRIM WITHIN ± 3.0 .
 6. INSTALL SEAL WITH WIPE LEG TO THE INSIDE OF THE COACH.

WINNEBAGO® INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT-OR		ORIG. DATE	
CHK-OR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.		FIRST USED	
DSNR		08 F32H	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: TRIM ASM-SLIDEOUT,TOP			
SHEET 1 OF 1		PART NO 160866	REV

161034-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	161662-01-703	EA ROLLER - 2"	510022
	161662-01-704	EA PAD/WEAR	DN10936
	161662-01-705	EA BEARING/FLANGE - 3/4" X 1"	2010000049
	161662-01-706	EA GEAR/SPUR - 3/4"ID X 2"OD	3010000400
	161662-01-707	EA KEY/WOODRUFF - #606	521336
	161662-01-708	EA SHAFT W/COUPLER- 3/4 X 6 7/8	1010000402
	161662-01-709	EA WEAR PAD - ROUND	320-0056
	161662-01-710	EA MOTOR ASM - RH	1010000211
	161662-01-711	EA ROLLER/PLASTIC - 3/4" X 2.9"	3010000401



161035-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	161662-01-700	EA ROL PIN - 1/8" X 1 1/4"	18-1036
	161662-01-701	EA CLIP PIN - 1/8"	18-1032
	161662-01-702	EA BOLT/SHOULDER -1/2" X 7/8"	15-1378
	161662-01-703	EA ROLLER - 2"	510022
	161662-01-704	EA PAD/WEAR	DN10936
	161662-01-705	EA BEARING/FLANGE - 3/4" X 1"	2010000049
	161662-01-706	EA GEAR/SPUR - 3/4"ID X 2"OD	3010000400
	161662-01-707	EA KEY/WOODRUFF - #606	521336
	161662-01-708	EA SHAFT W/COUPLER- 3/4 X 6 7/8	1010000402
	161662-01-709	EA WEAR PAD - ROUND	320-0056
	161662-01-711	EA ROLLER/PLASTIC - 3/4" X 2.9"	3010000401
	161662-01-712	EA SPACER	531164
	161662-02-700	EA MOTOR ASM - LH	1010000037

161036-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	161036-01-700	EA FELT PAD- 25MM X 10MM X 20MM	DN12437-002
	161036-01-701	EA STOP	524303
	161036-01-703	EA ROLLER - 2"	510022
	161036-01-704	EA PAD/WEAR	DN10936
	161036-01-709	EA WEAR PAD - ROUND	320-0056

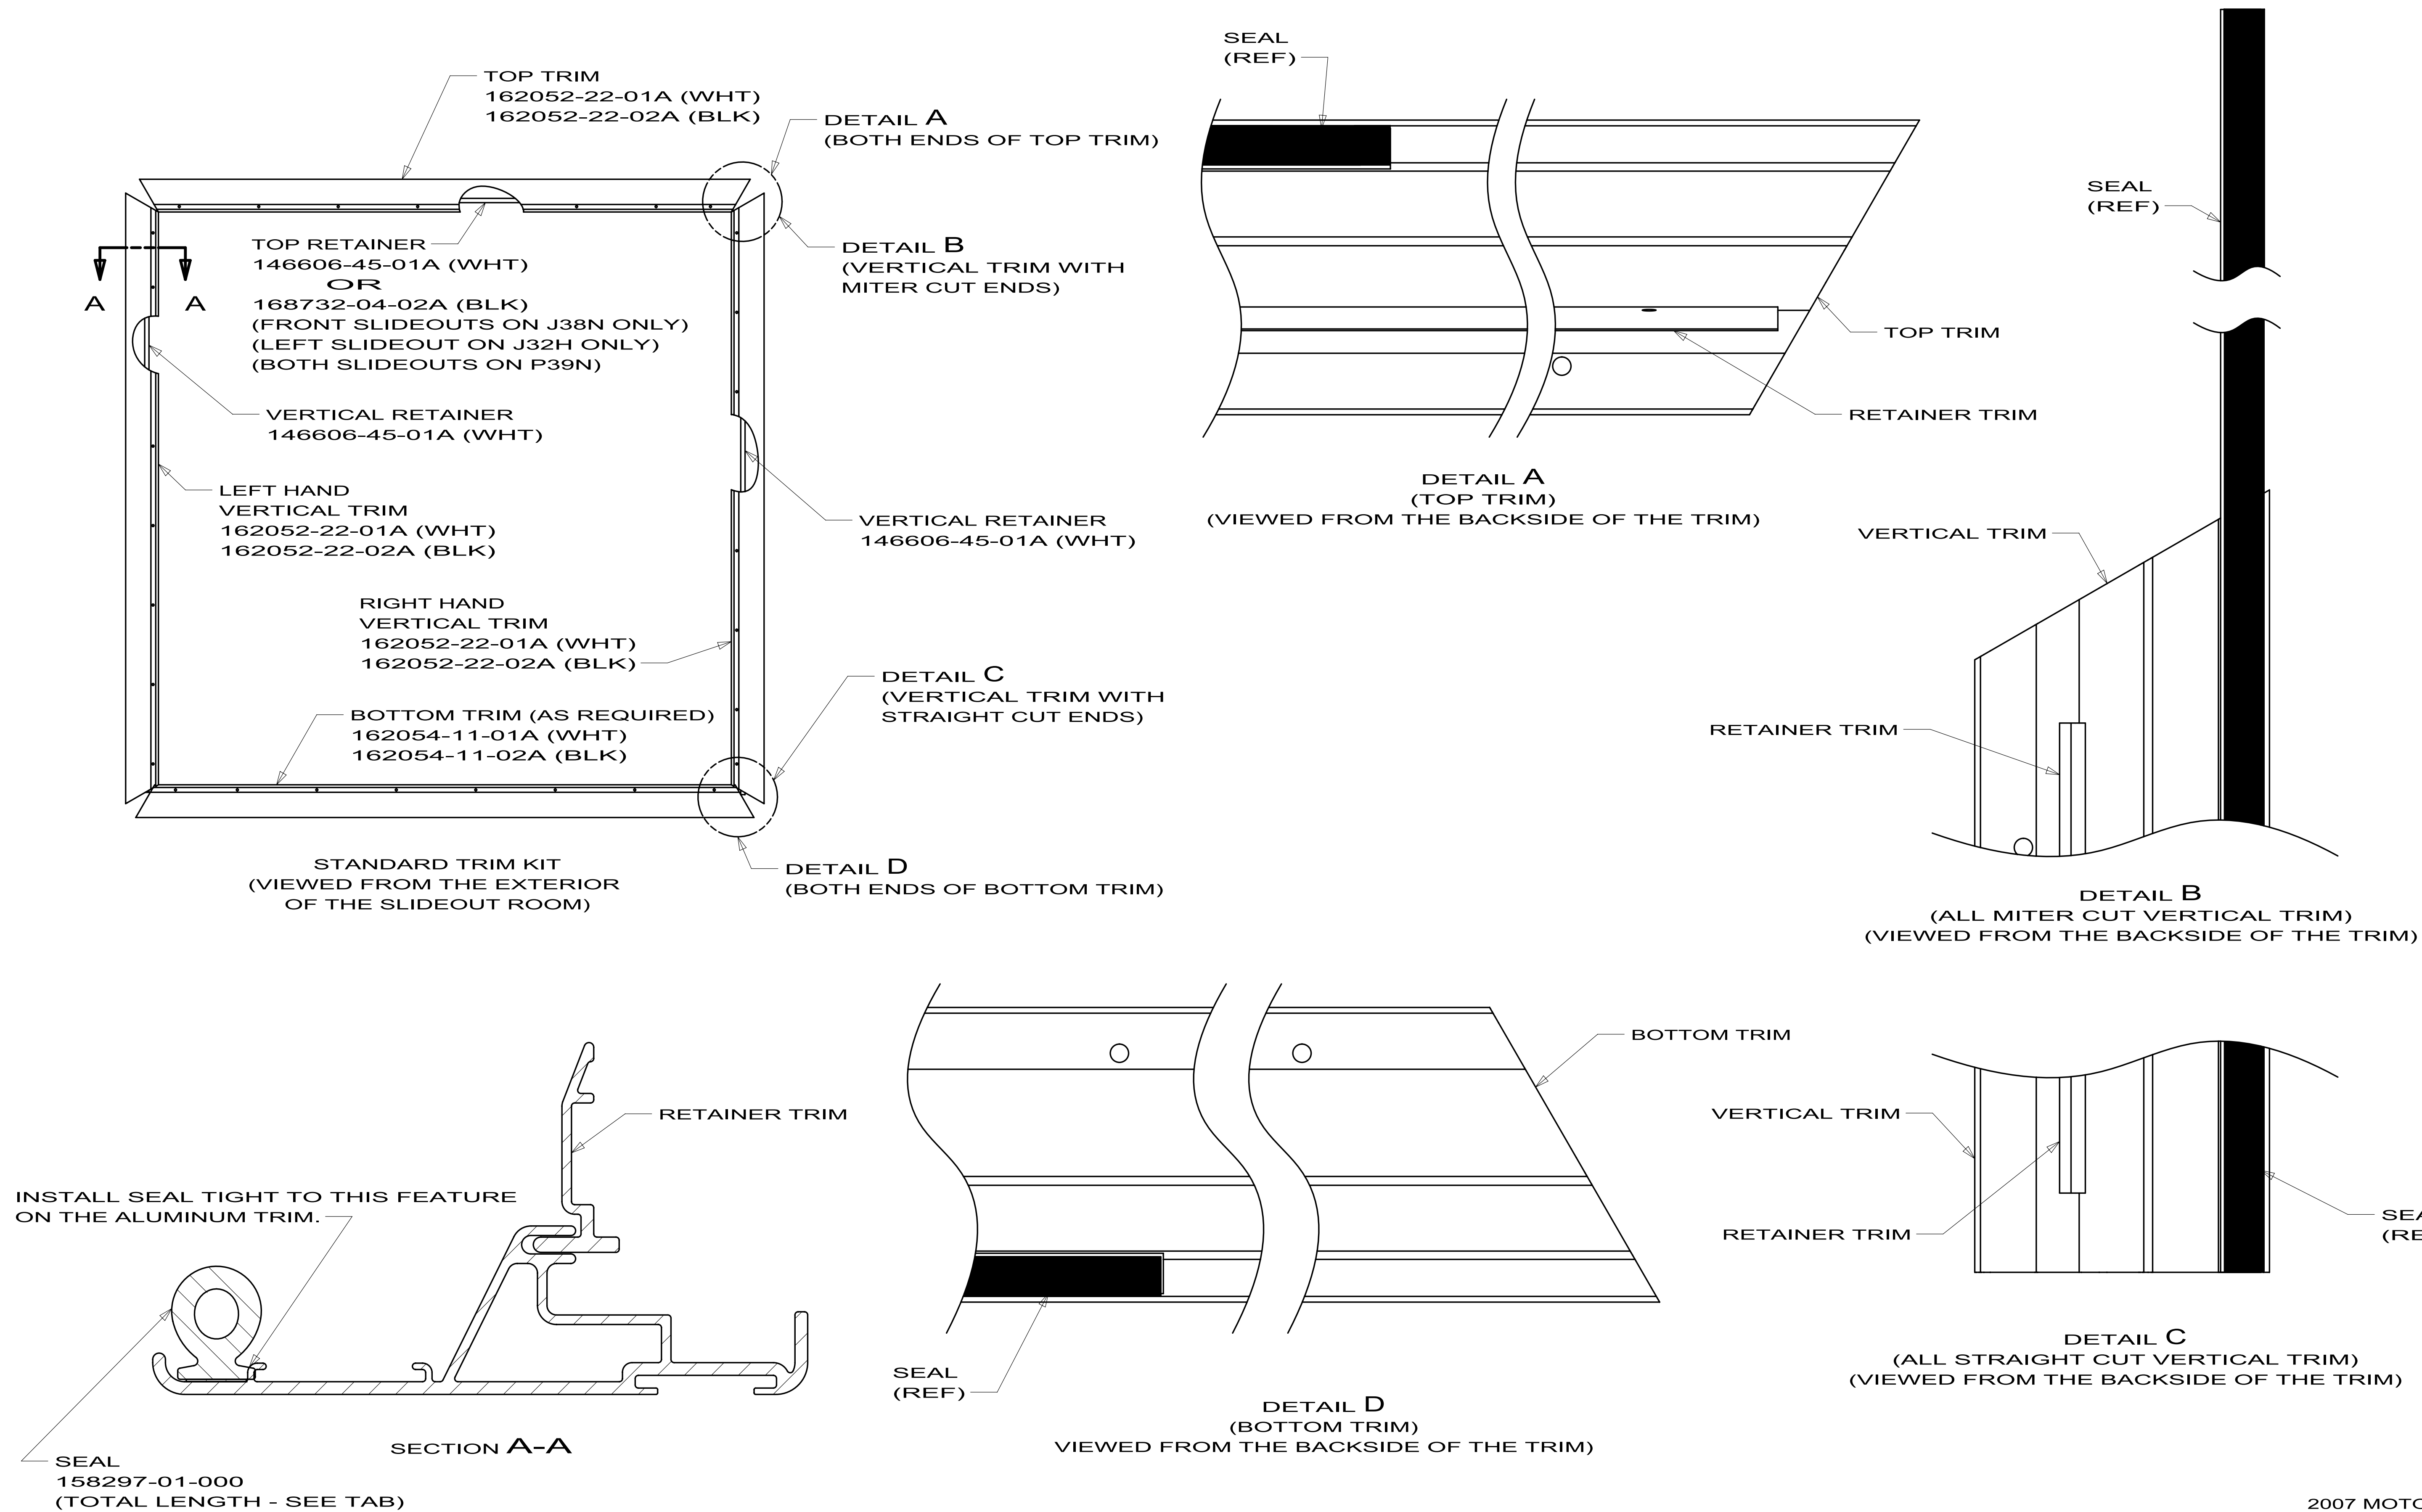

2007 MOTORHOMES

TRIM KIT-EXTERIOR,SLIDEOUT

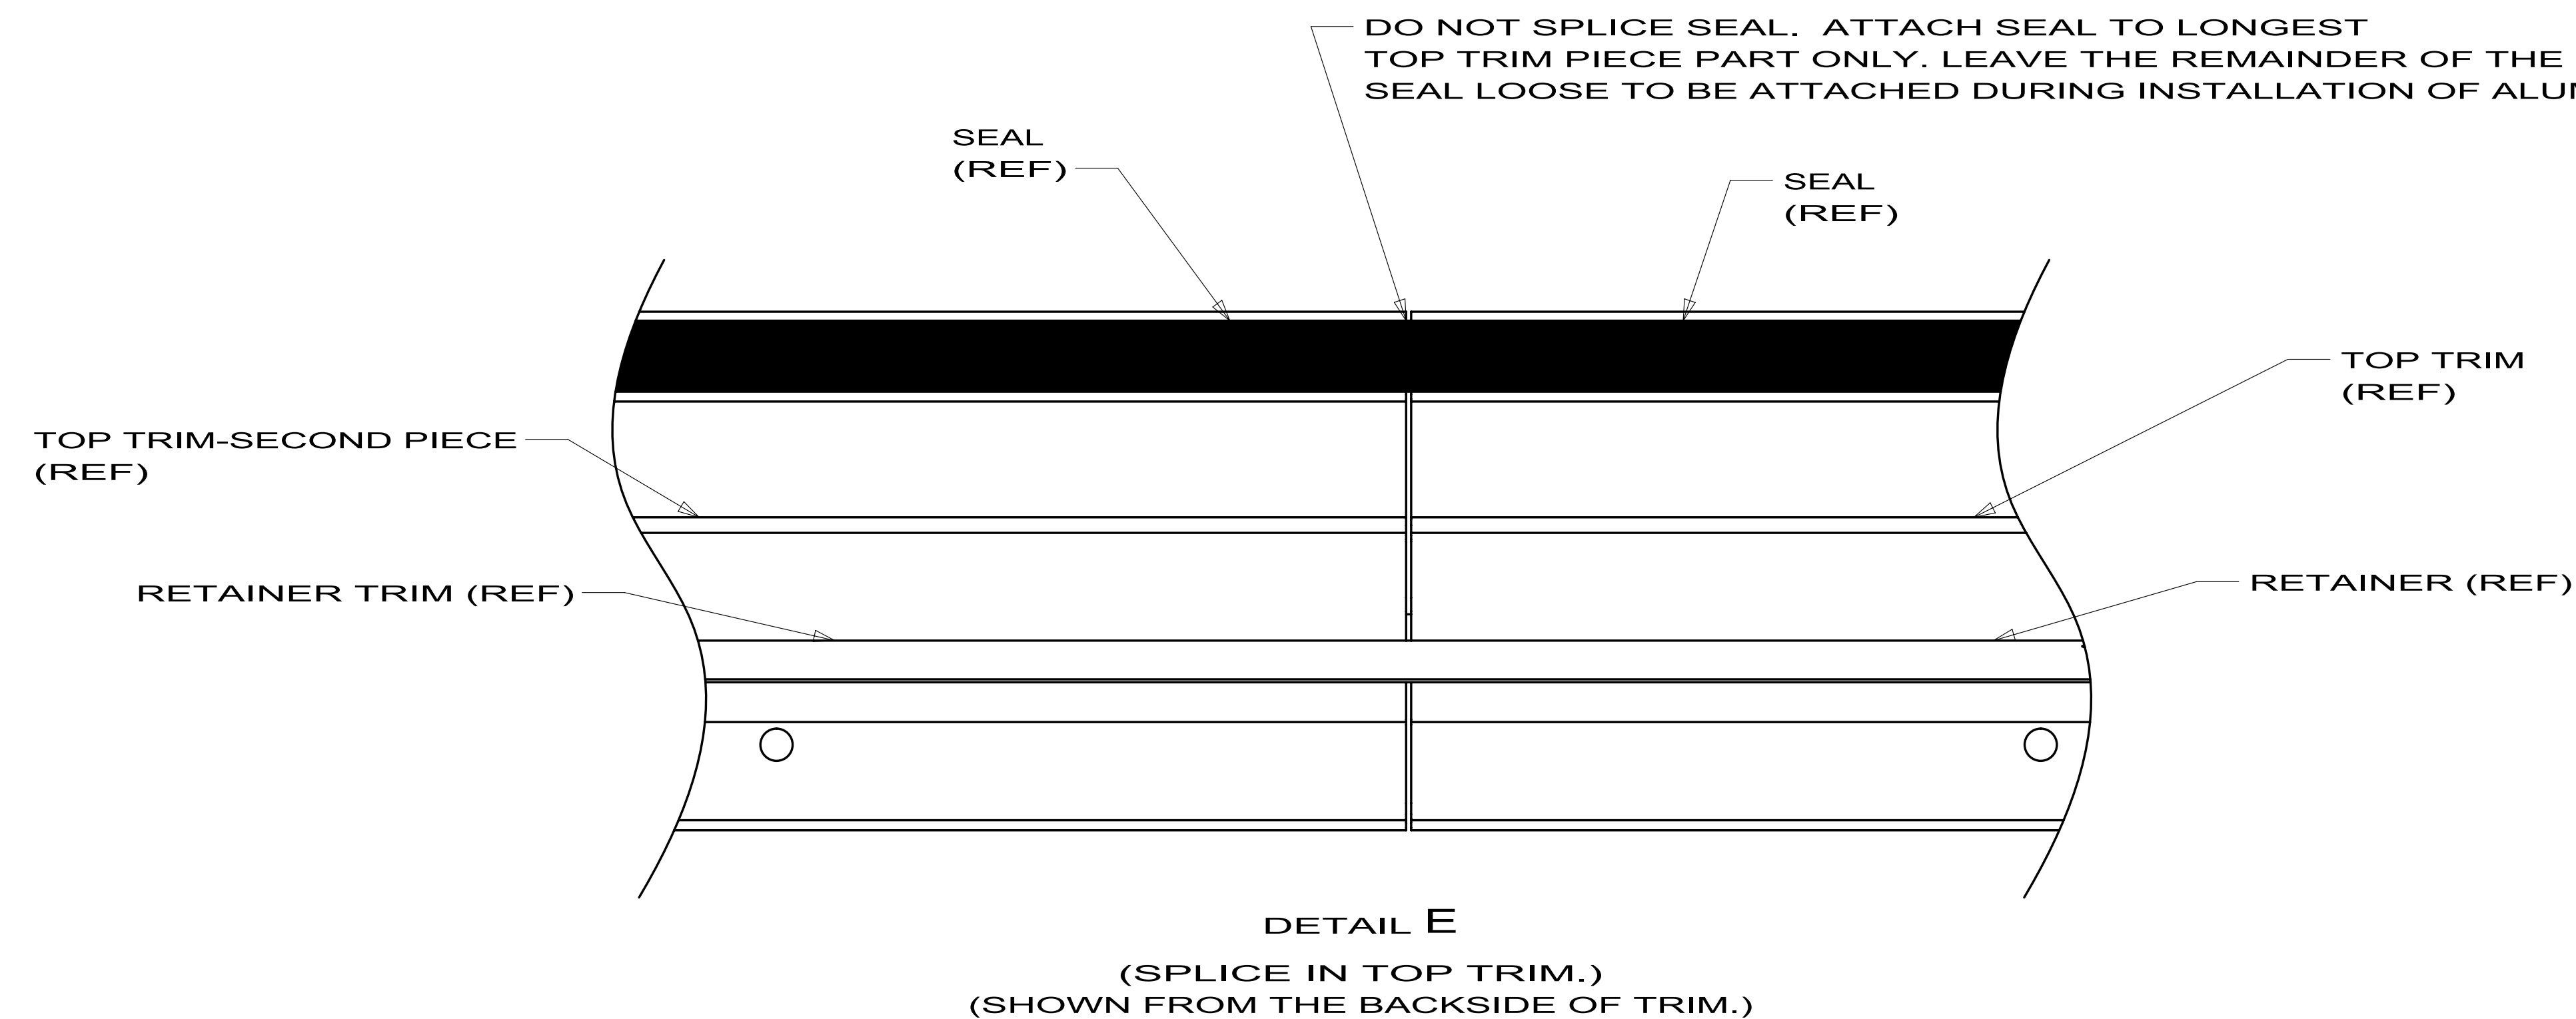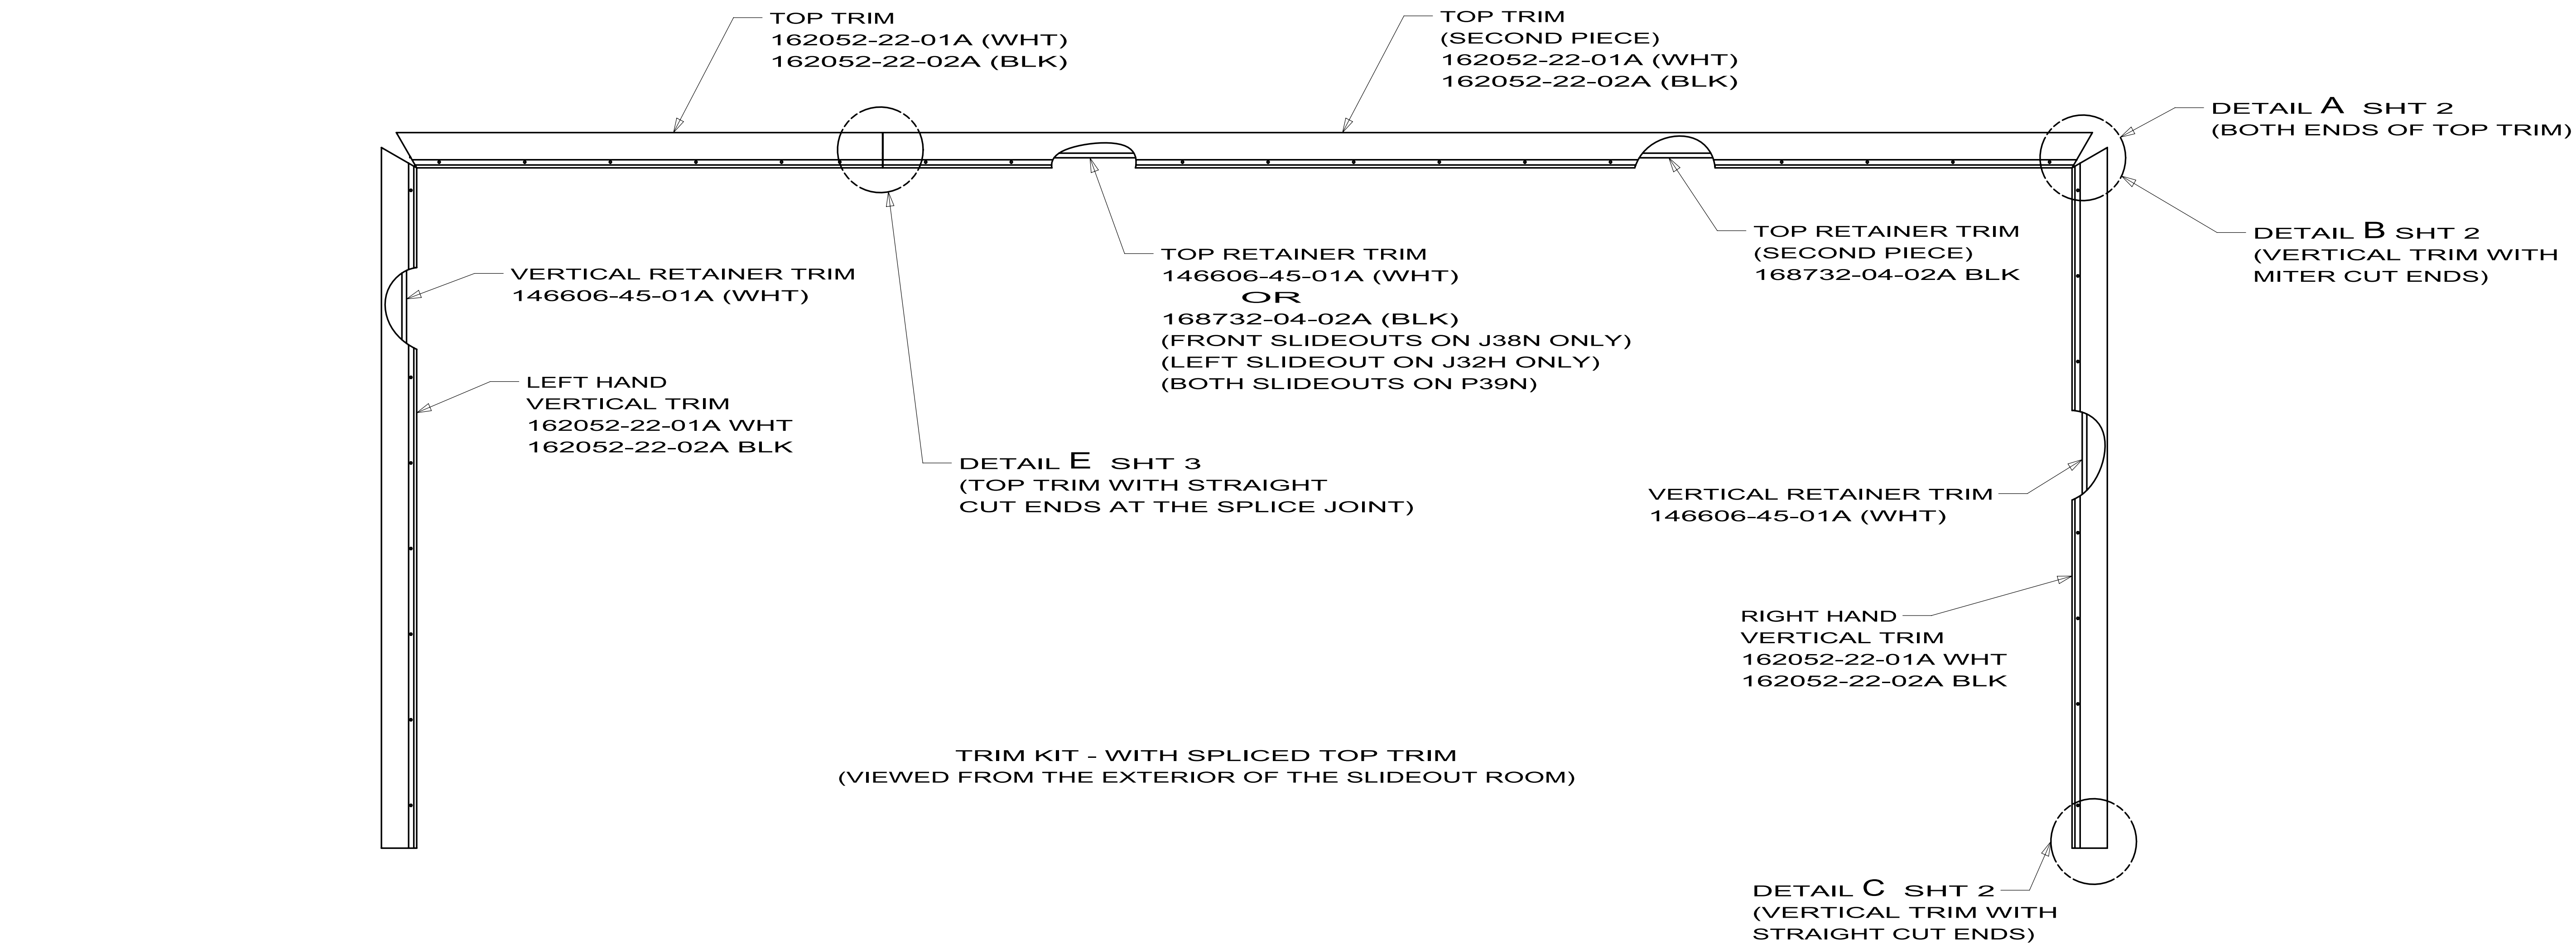

162833-01-000			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	131281-01-702	EA PIN/CLEVIS-1/4" PLATED	1213190
	131281-01-704	EA HAIRPIN/COTTER - 3/8" SPRING	1213460
	138173-01-701	EA POP RIVET - SS 3/16"X1/4"	1214630
	138173-01-707	EA WEAR PUCK - PLASTIC F/DRIVE	1612523
	148875-01-700	EA PIN/COTTER - 3/32" X 1/2"	1213520
	148875-01-705	EA MOTOR/LINEAR - SLIDE ROOM	1820111
	149165-01-700	EA BEARING - 5/8" ID	1102015
	149165-01-702	EA SEAL/RUBBER - LOWER ROOM "Z"	1611999
	149165-01-703	EA SEAL/RUBBER - INNER FRAME	1612007
	149165-01-704	EA SEAL/LOWER ROOM - "Z"	1612009
	149165-01-705	EA DRIVE/WORM SCREW - 30"	1820400
	162832-01-700	EA CLEVIS PIN - 5/16" X 2 1/4"	1213239
	162832-01-702	EA NUT - 1" PLASTIC W/5/16" PIN	1612554