


R-SERIES

ACCESSORY AIR LINE
FROM CHASSIS RESERVOIR
PRESSURE PROTECTION VALVE

03 P-SERIES		
DO NOT SCALE DRAWING		
TITLE: AIR HORN/SUPPLY INSTL		
SHEET 2	PART NO 143049	REV

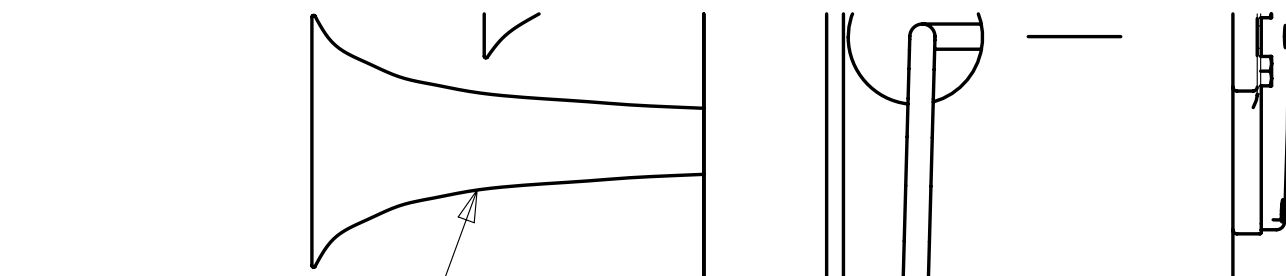

HORN-AIR

COUPLER-QUICK,AIR
142595-01-000

VALVE-BALL,AIR
142597-01-000

FITTING-BULKHEAD
071374-03-000

GUAGE-AIR PRESSURE
142609-01-000

SCREW-PAN,HEAD
000G39-10-10T(3)

BOLT
000C12-06-12U(2)
WASHER
000E13-17-00U(2)

TUBING
071390-07-000
(216 MM)

TEE-MALE
142570-01-000 (2)


TUBING
071390-07-000
(220 MM)

COUPLING-FEMALE
075155-03-000

SOLENOID-VALVE
077497-11-000

BOLT
000C12-04-16B(2)
WASHER
000E13-14-00B(2)

VIEW D

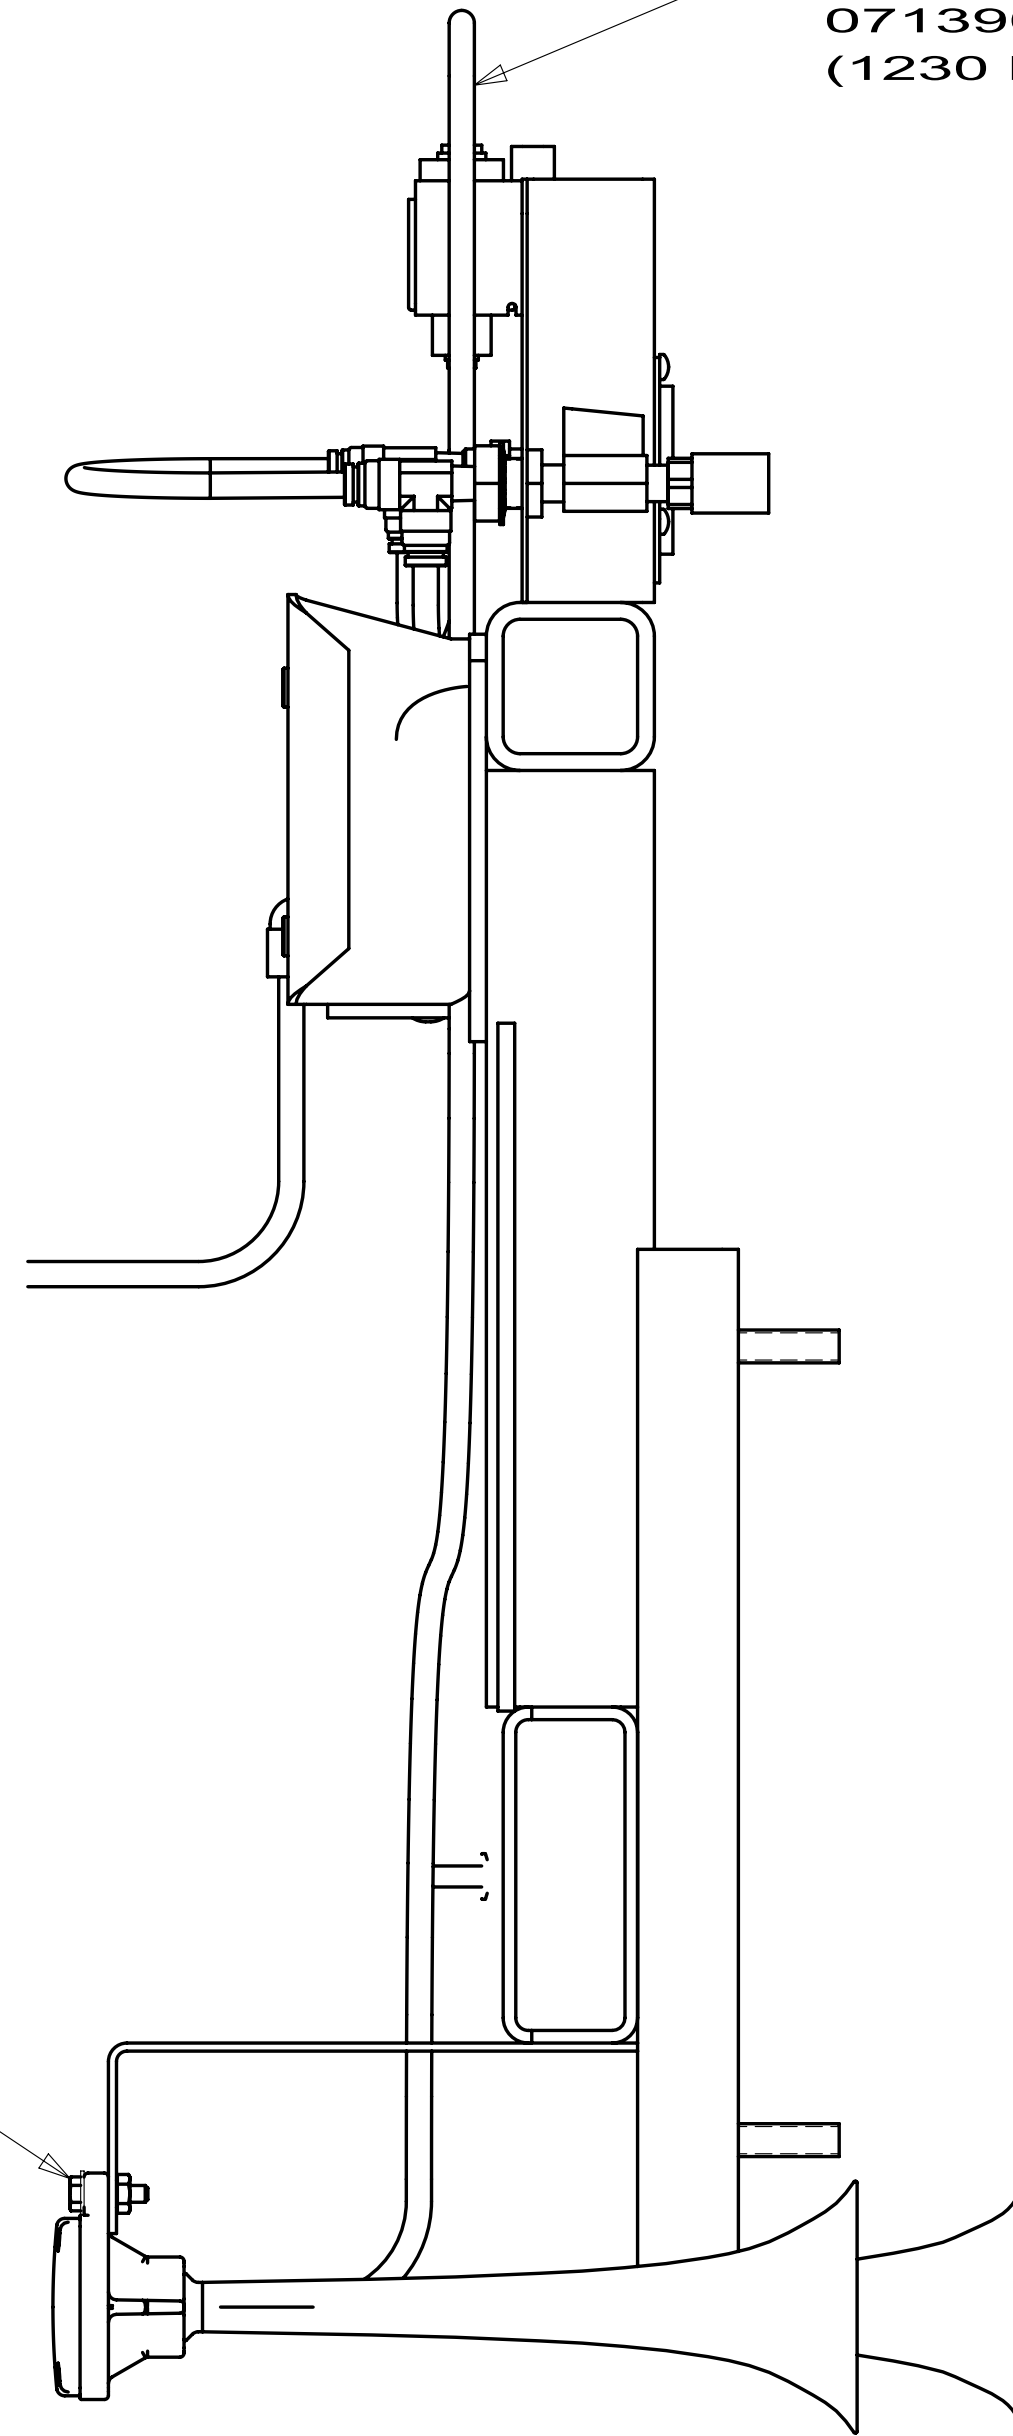

TUBING
071390-04-000
(1230 MM)

VIEW F

HORN-AIR,BLACK,TWIN,SHORT
077497-08-000

CONNECTOR
071386-06-000

VIEW E

AIRSYS-MANIFOLD &
ELBOW (BOTH SUPPLIED
WITH CHASSIS)

TUBING
071390-07-000
(1100 MM)

CONNECTOR-MALE
142571-01-000


VALVE-AIR
086241-01-000

VIEW G


(UP TO 12-20-09)

R-SERIES

FIRST USED		
03 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
AIR HORN/SUPPLY INSTL		
SHEET3A	PART NO	REV
	143049	

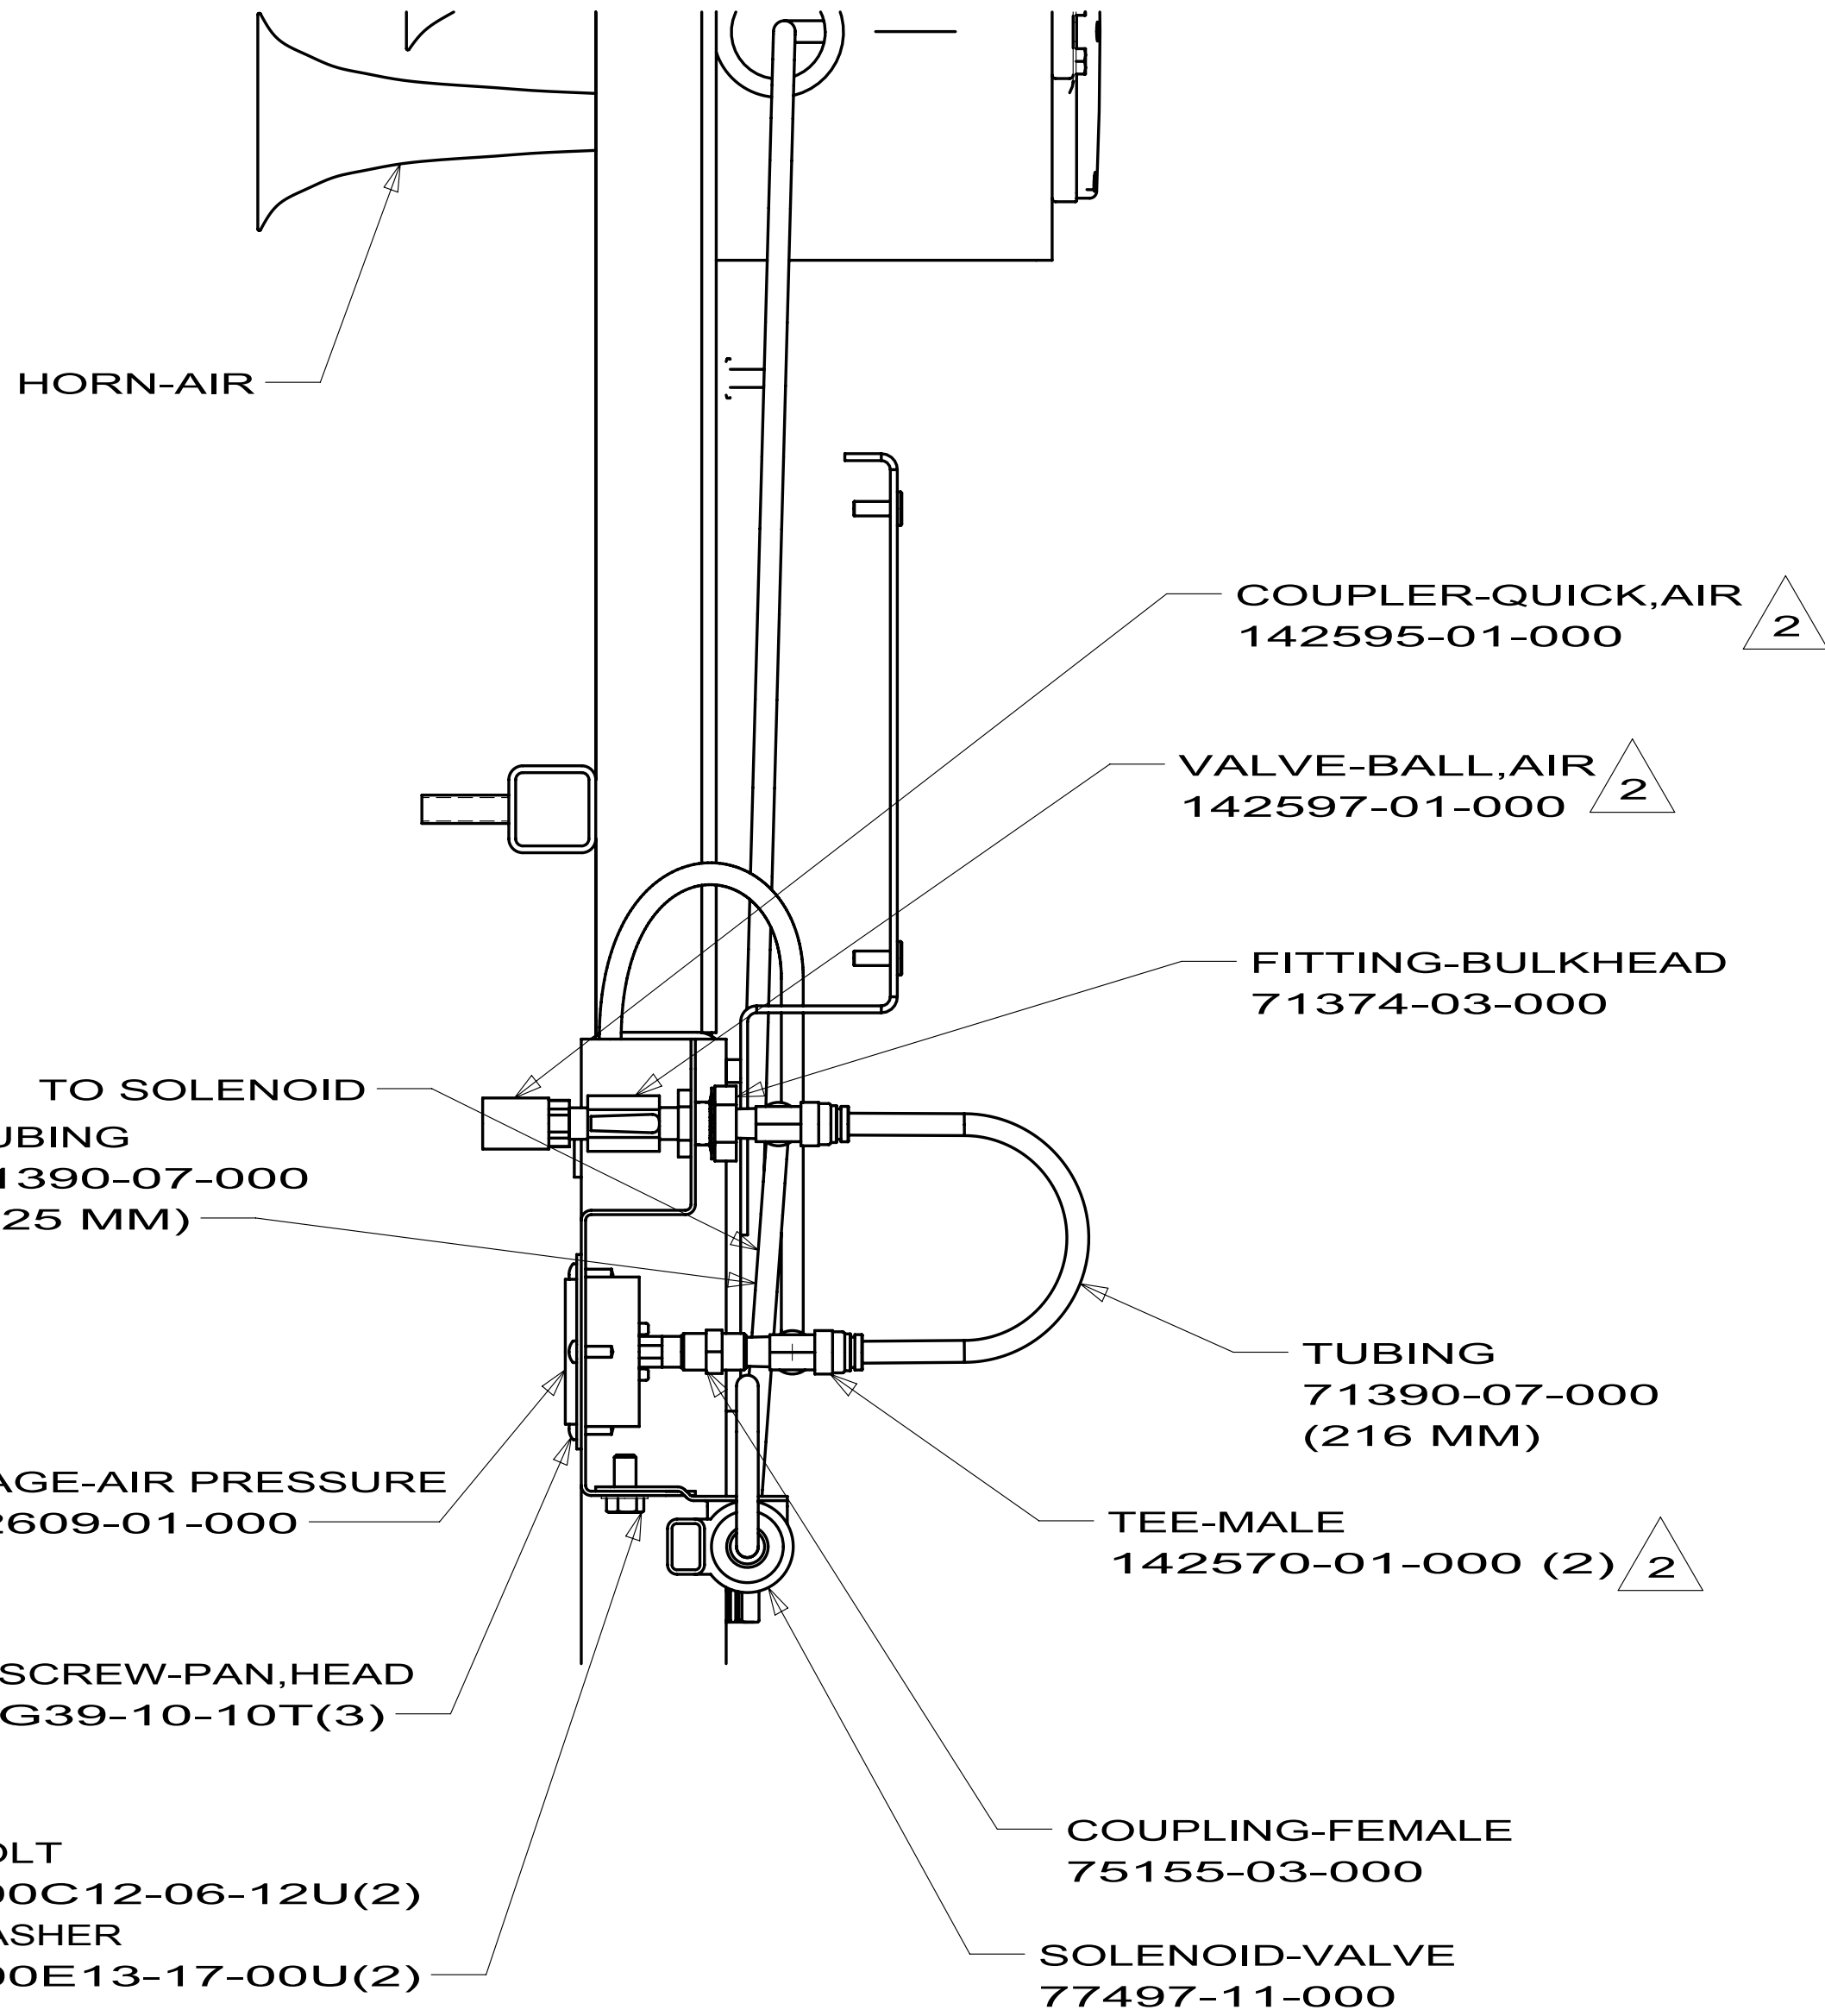

VIEW D

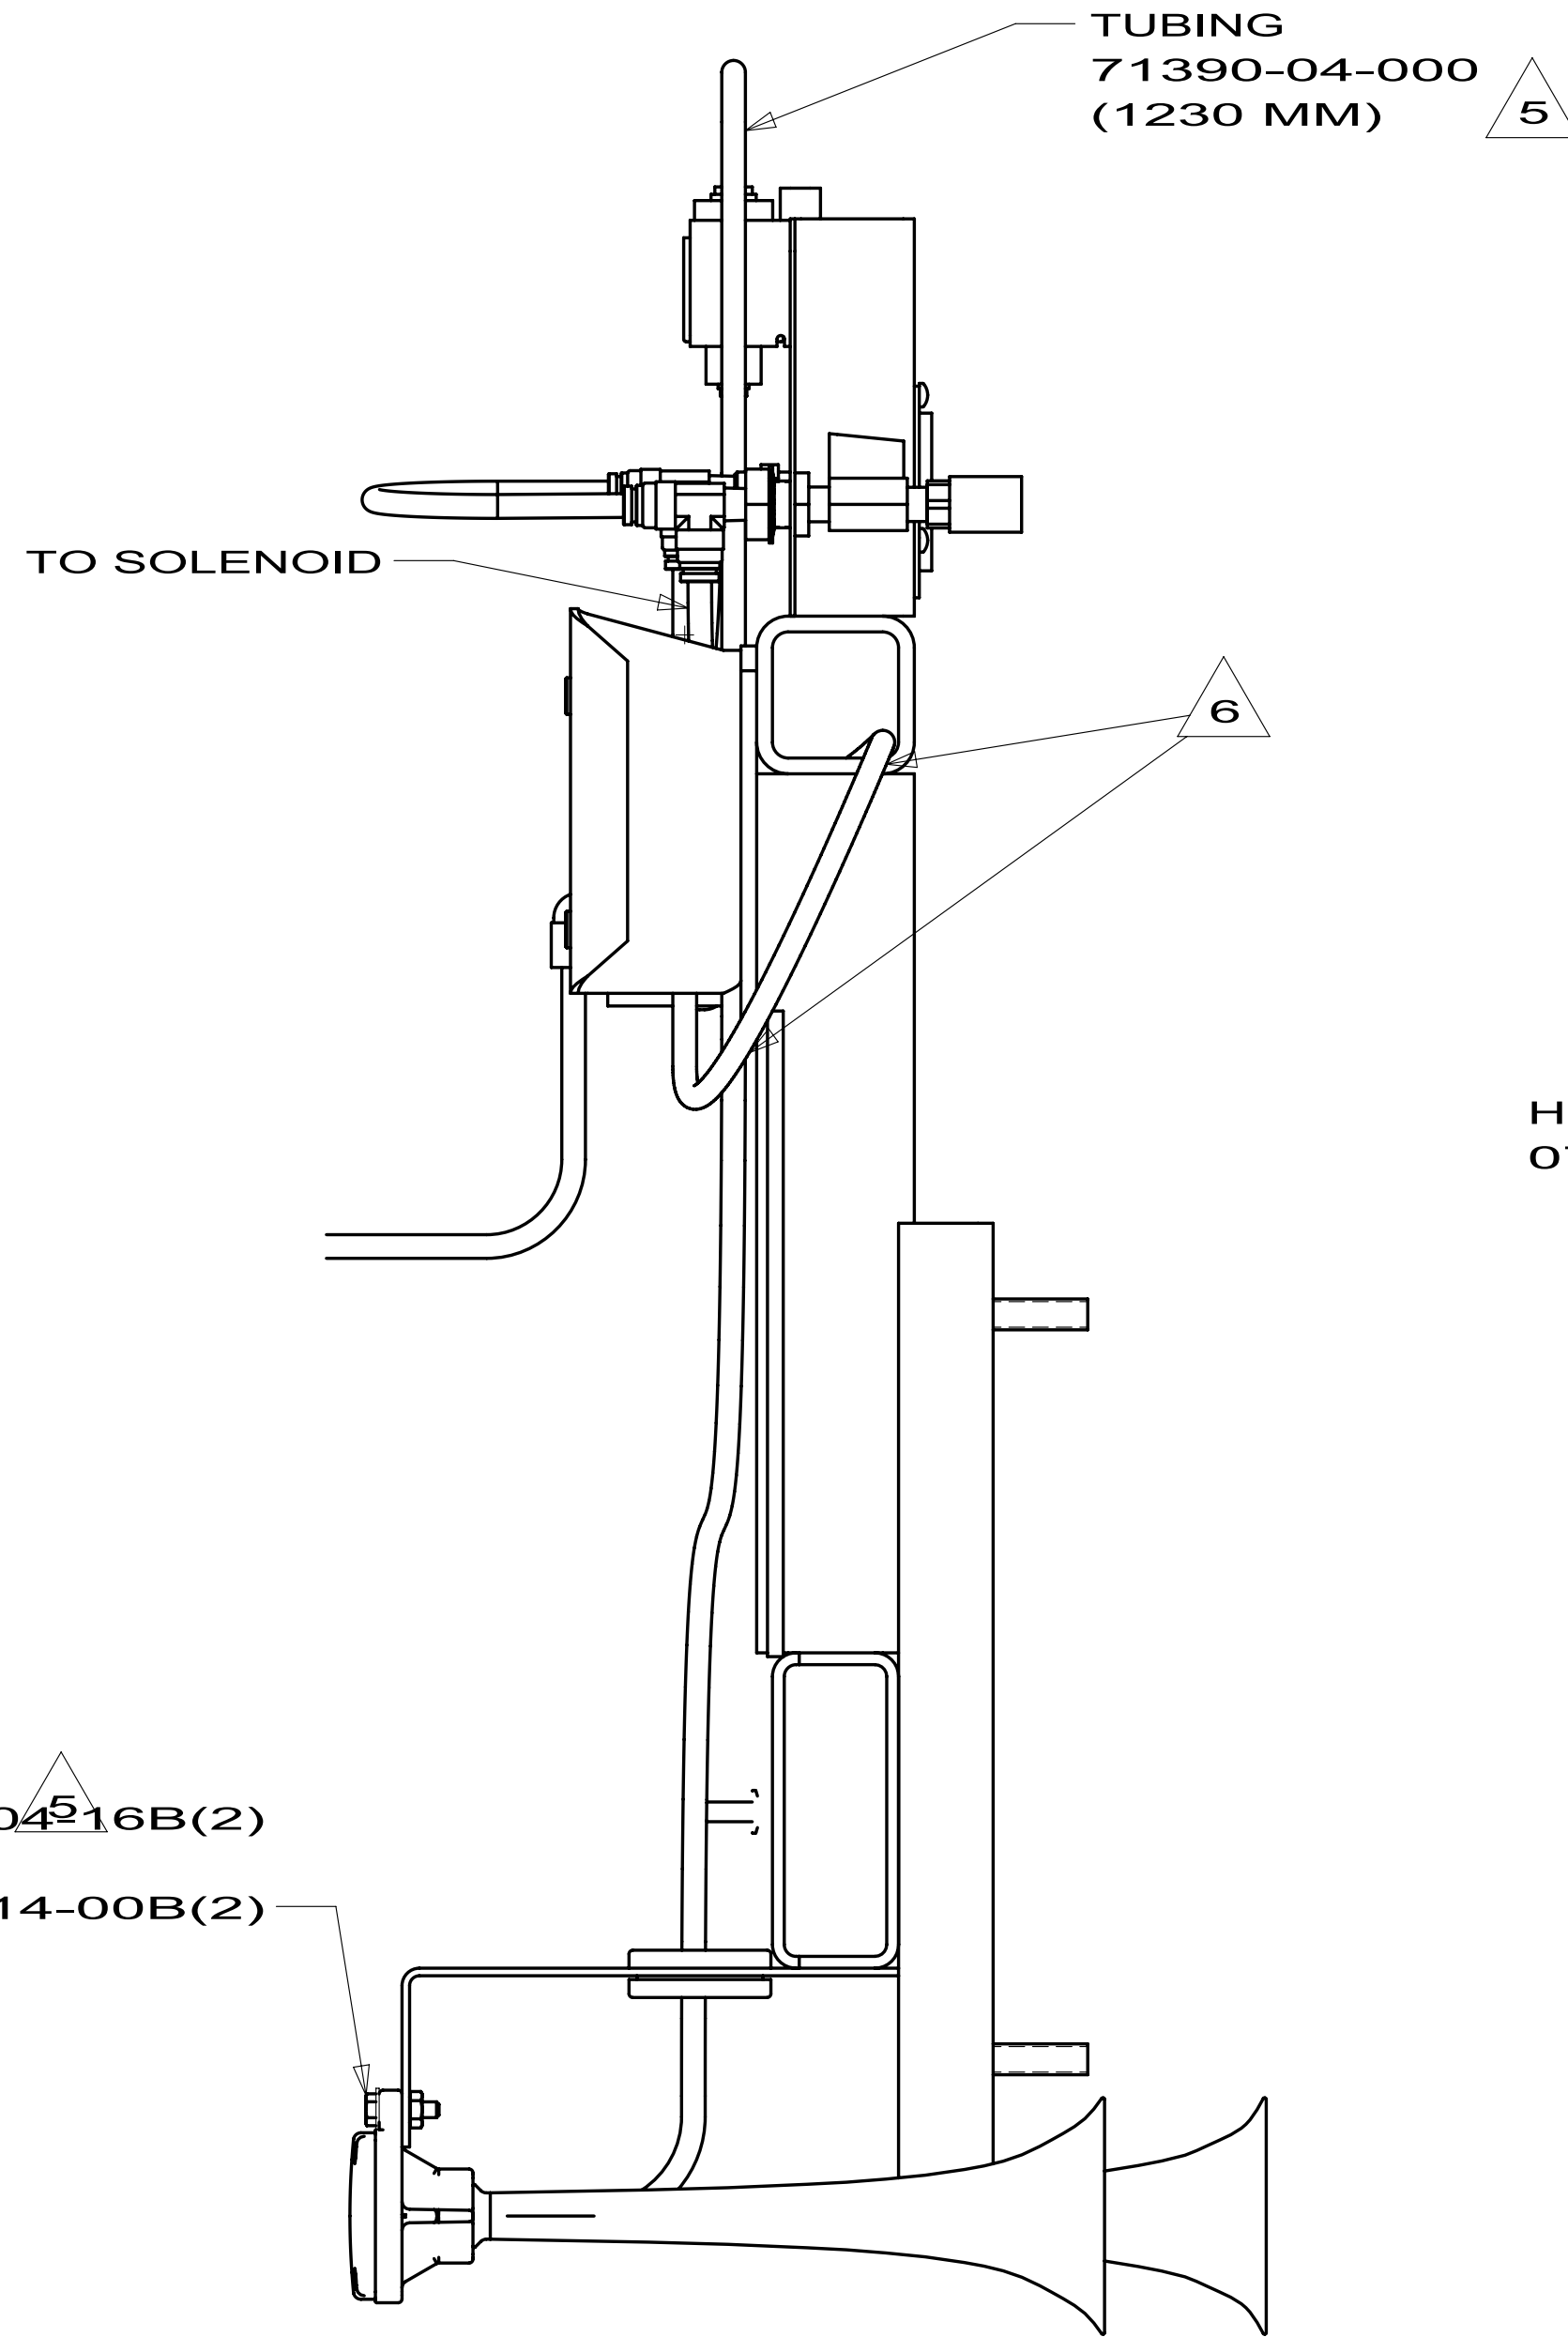


VIEW F

HORN-AIR,BLACK,TWIN,SHORT 077497-08-000

CONNECTOR 071386-06-000

VIEW E

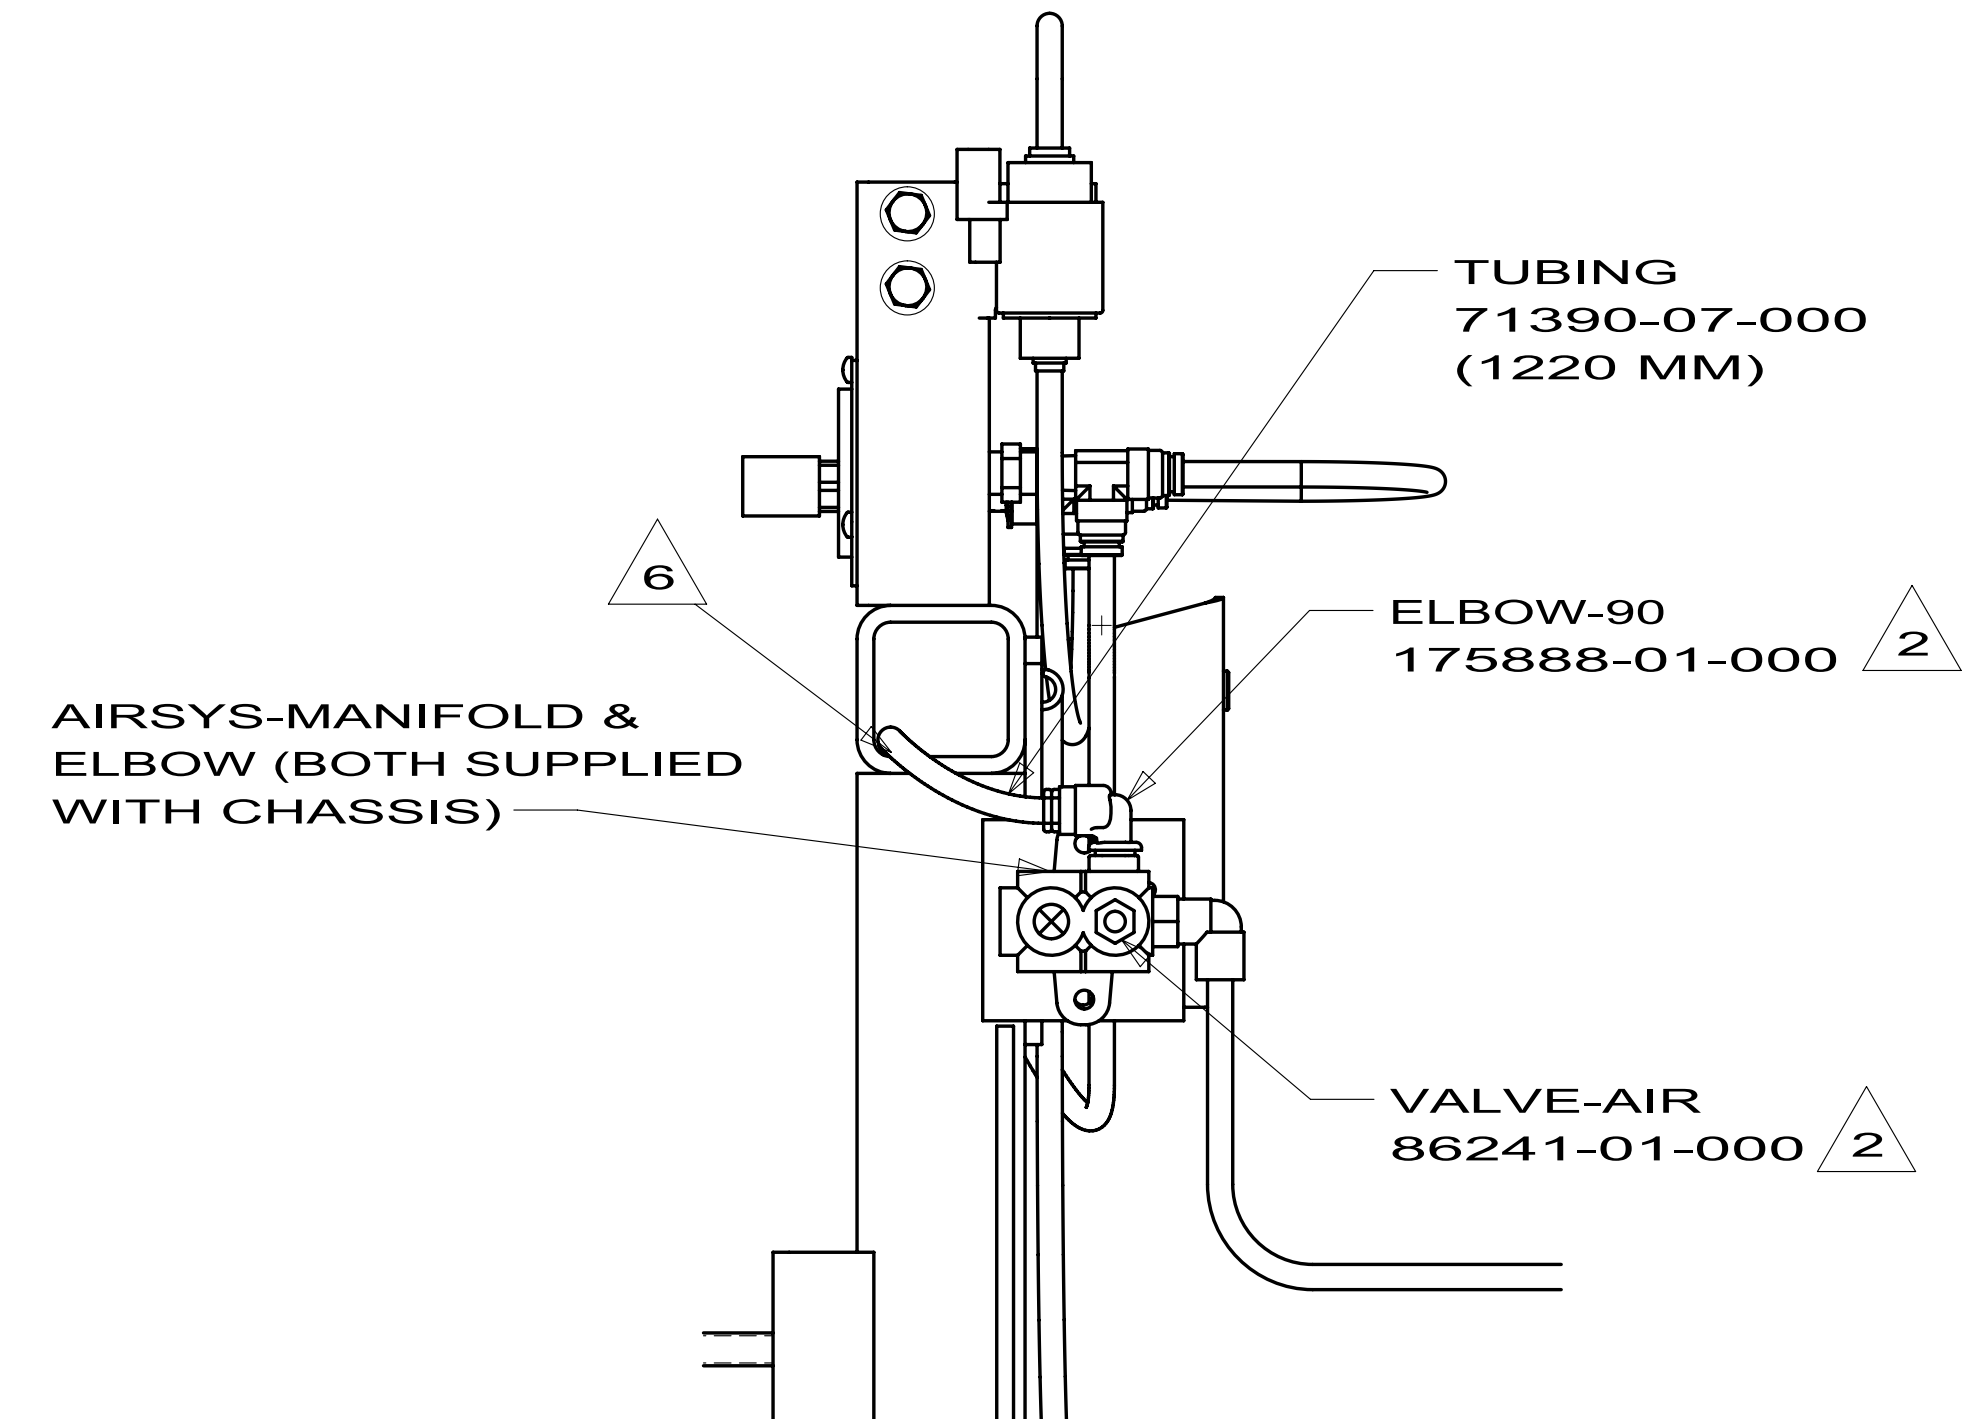

VIEW G


(AFTER 12-21-09)

R-SERIES

FIRST USED		
03 P-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
AIR HORN/SUPPLY INSTL		
SHEET3B	PART NO 143049	REV

DWG NO	MODEL	SHEET
169227-01	R40WD	1,2
169227-02	R40BD	3,2
169227-03	R42AD	4,2


RELEASE		REV DATE	DWG NO 169227	
REV	ZONE	REVISION RECORD		DATE DFTR-ORIG

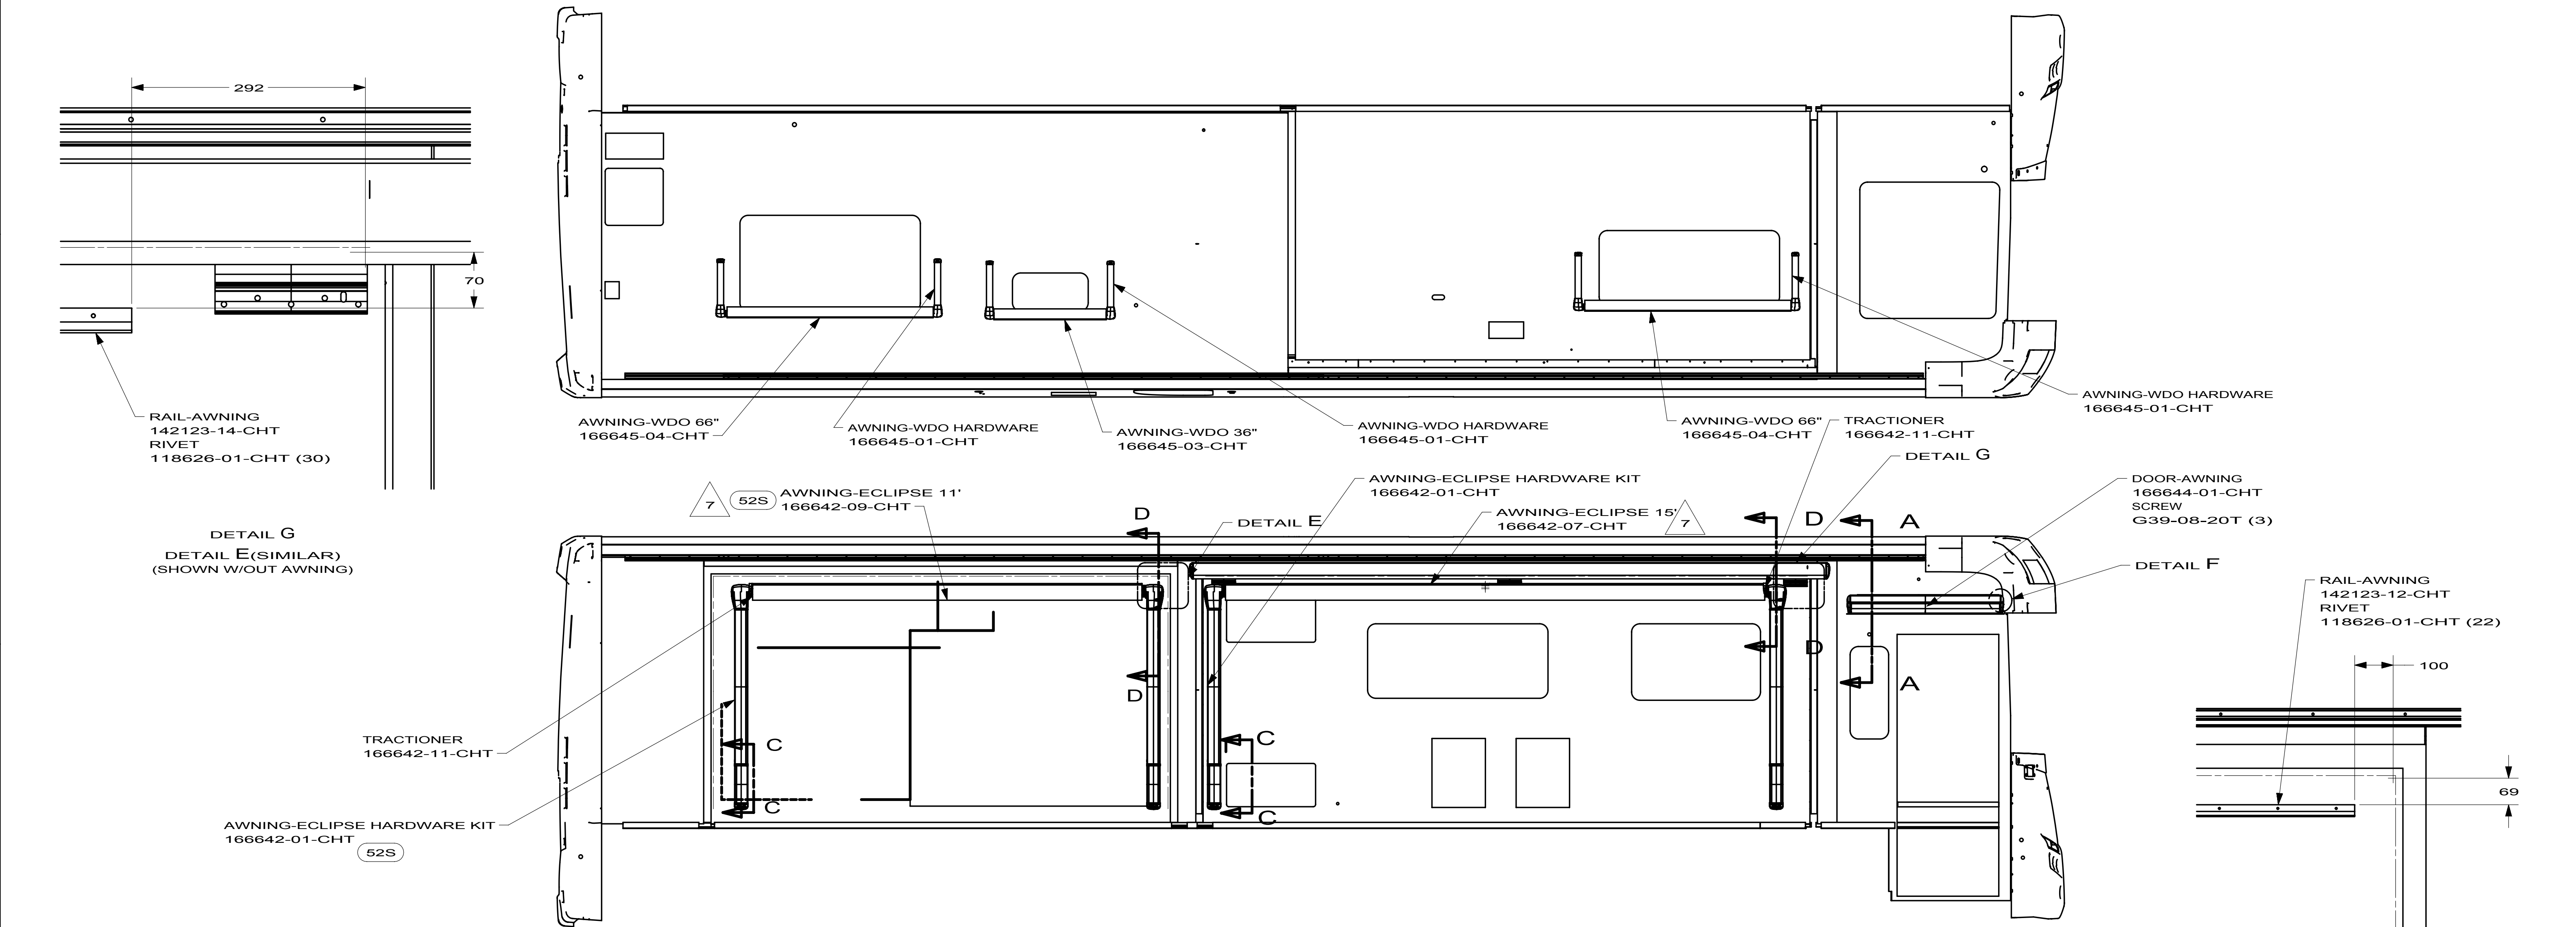

- 10 LOCATE AWNING AS FAR FORWARD AS POSSIBLE.
- 9 PER INSTALLATION INSTRUCTION S DRILL THREE 3/16" HOLES THROUGH THE CASE MOUNTING PLATE, AND INTO WALL USING SCREW 113874-11-CHT.
- 8 USE CONTROL KIT 166643-02-CHT AND REMOTE KIT 166642-03-CHT. SEE WIRING INSTL-BODY, 12V AND WIRING INSTL-BODY 110V FOR ADDITIONAL INFORMATION.
- 7 USE AWNING CONTROL KIT 166642-02 AND REMOTE KIT 166642-03 WITH SCREW G67-10-08U (4). SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
6. FOR WINDOW AWNING FEATURE 295 INCLUDE ONE PULL ROD 166645-08-CHT.
- 5 FRONT EDGE OF AWNING TO ALIGN WITH REAR EDGE OF "A" PILLAR.
- 4 ATTACH WINDOW AWNINGS USING RIVET 118626-01-CHT (4) AND USE SCREW G11-08-12U(2) ON CENTER OF AWNING BRACKET.
- 3 DISTANCE BETWEEN TOP OF MOUNTING BRACKET TO BOTTOM OF AWNING RAIL.
2. FOR WINDOW AWNINGS LOCATE BOTTOM OF AWNING RAIL 76MM ABOVE TOP EDGE OF WINDOW FRAME.
- 1 USE IN PLACE OF KIT SUPPLIED BLOT.

CAREFREE
ECLIPSE
(ON SLIDEOUT ROOM)

CAREFREE
SL WINDOW AWNING

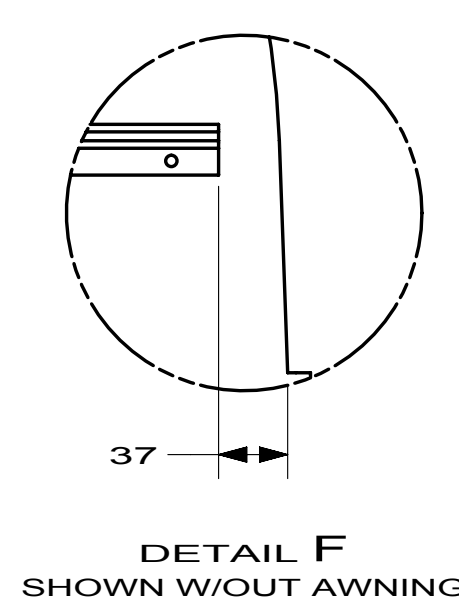

SEE CHART
FOR COLOR VARIATIONS
OF THIS PART


WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTR		ORIG. DATE	
CHRR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.			FIRST USED
DSNR		10 R-SERIES	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE:			
AWNING INSTL R-SERIES			
SHEET 1 OF 4		PART NO	REV
		169227	

D


C

B


A

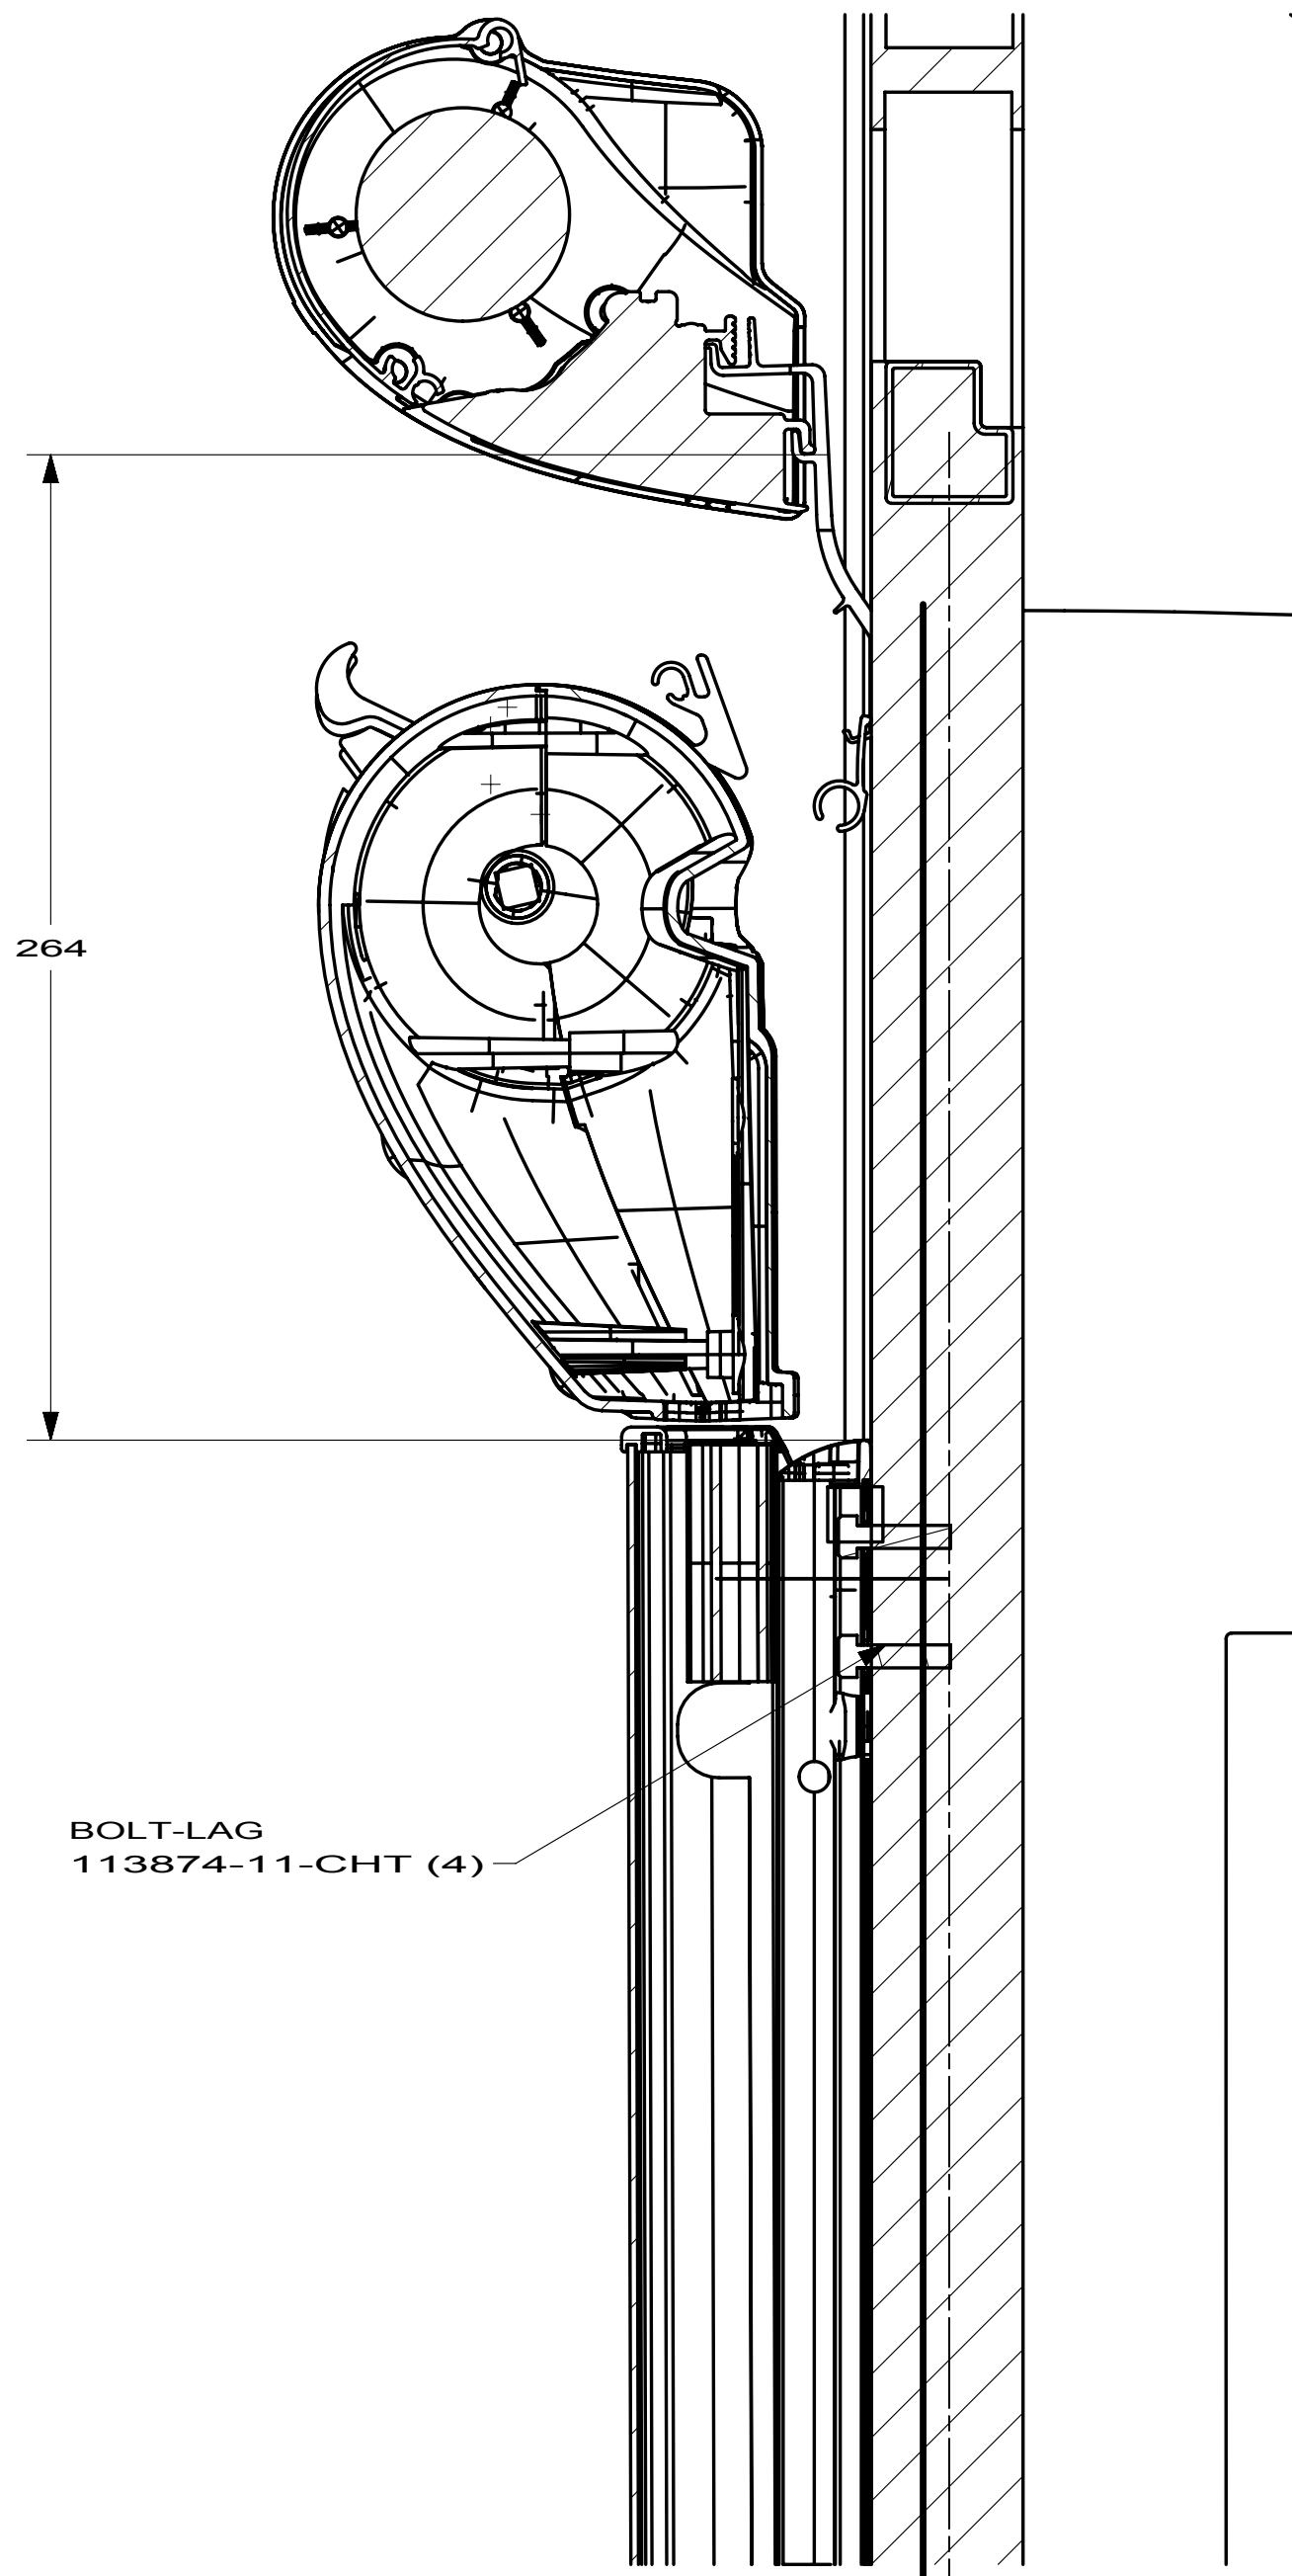

SECTION D-D


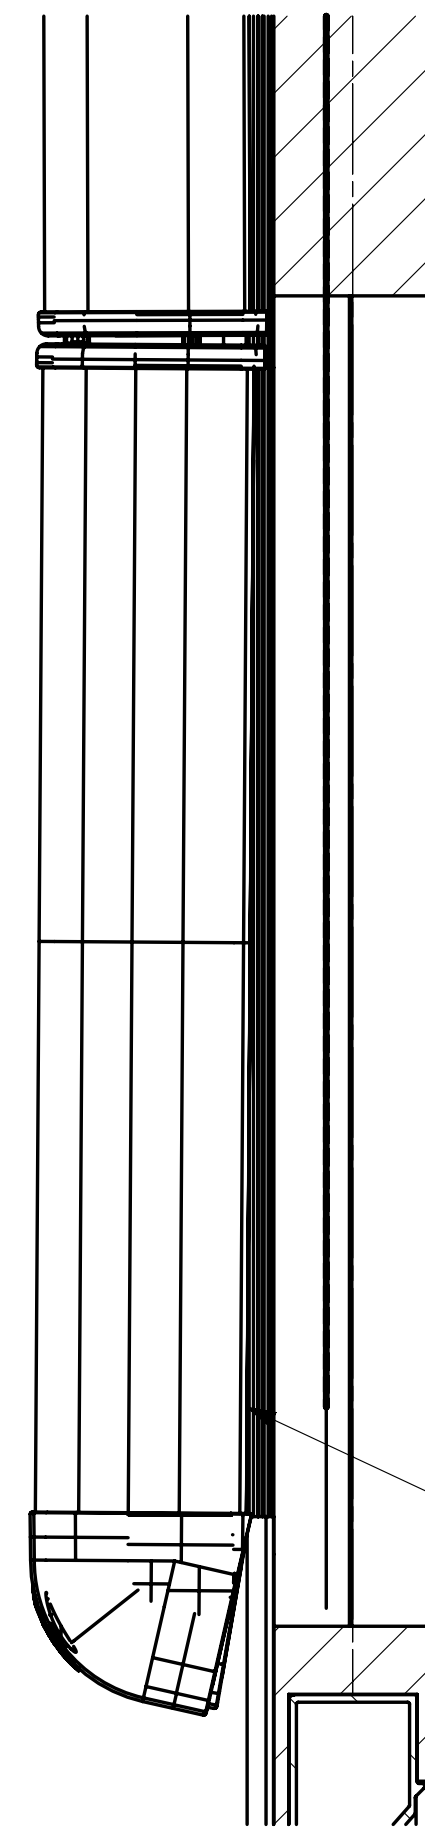


SECTION C-C

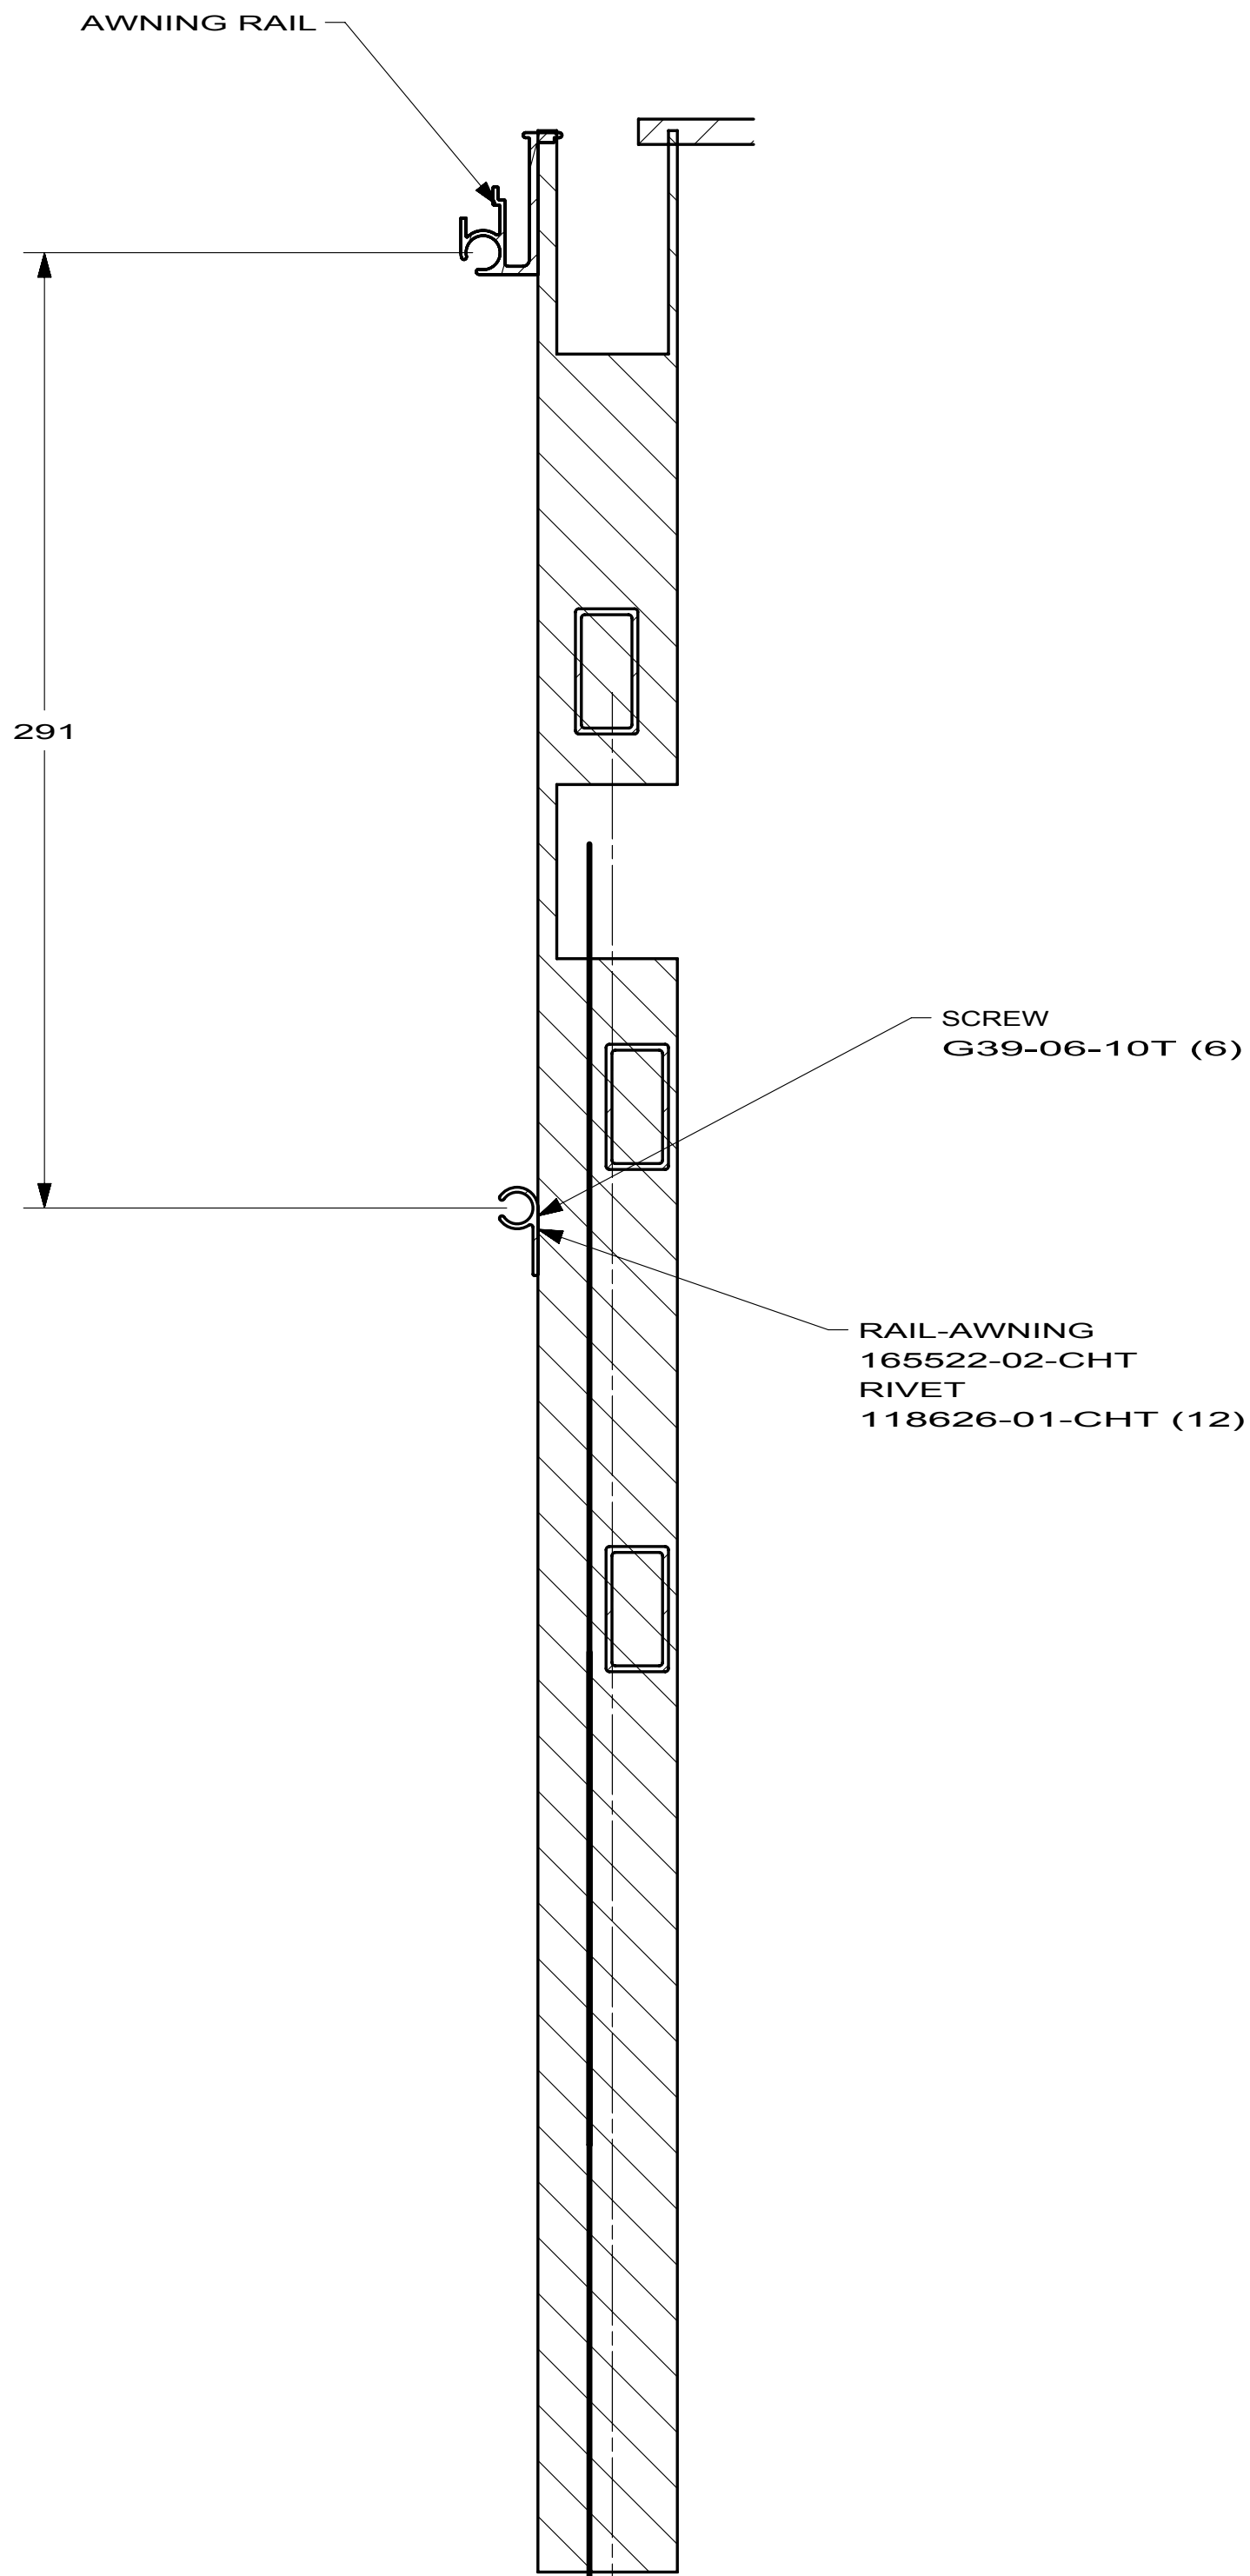

SECTION A-A


FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: AWNING INSTL R-SERIES		
SHEET 2	PART NO 169227	REV

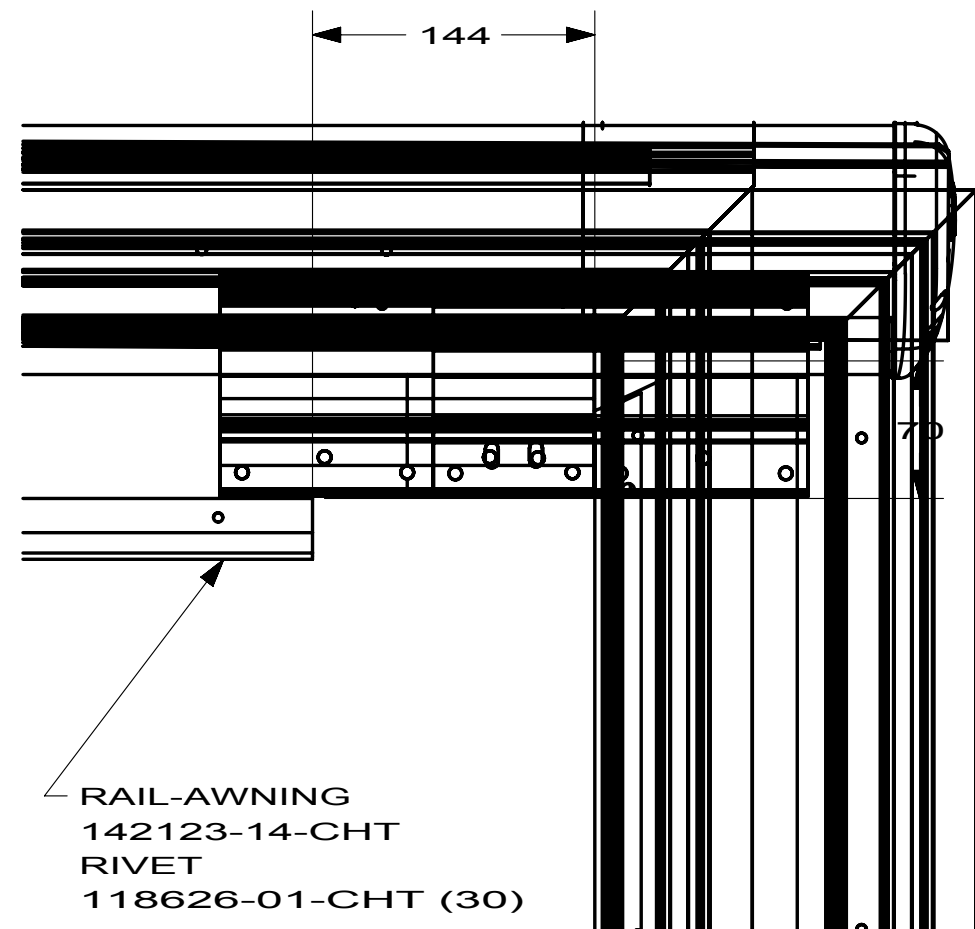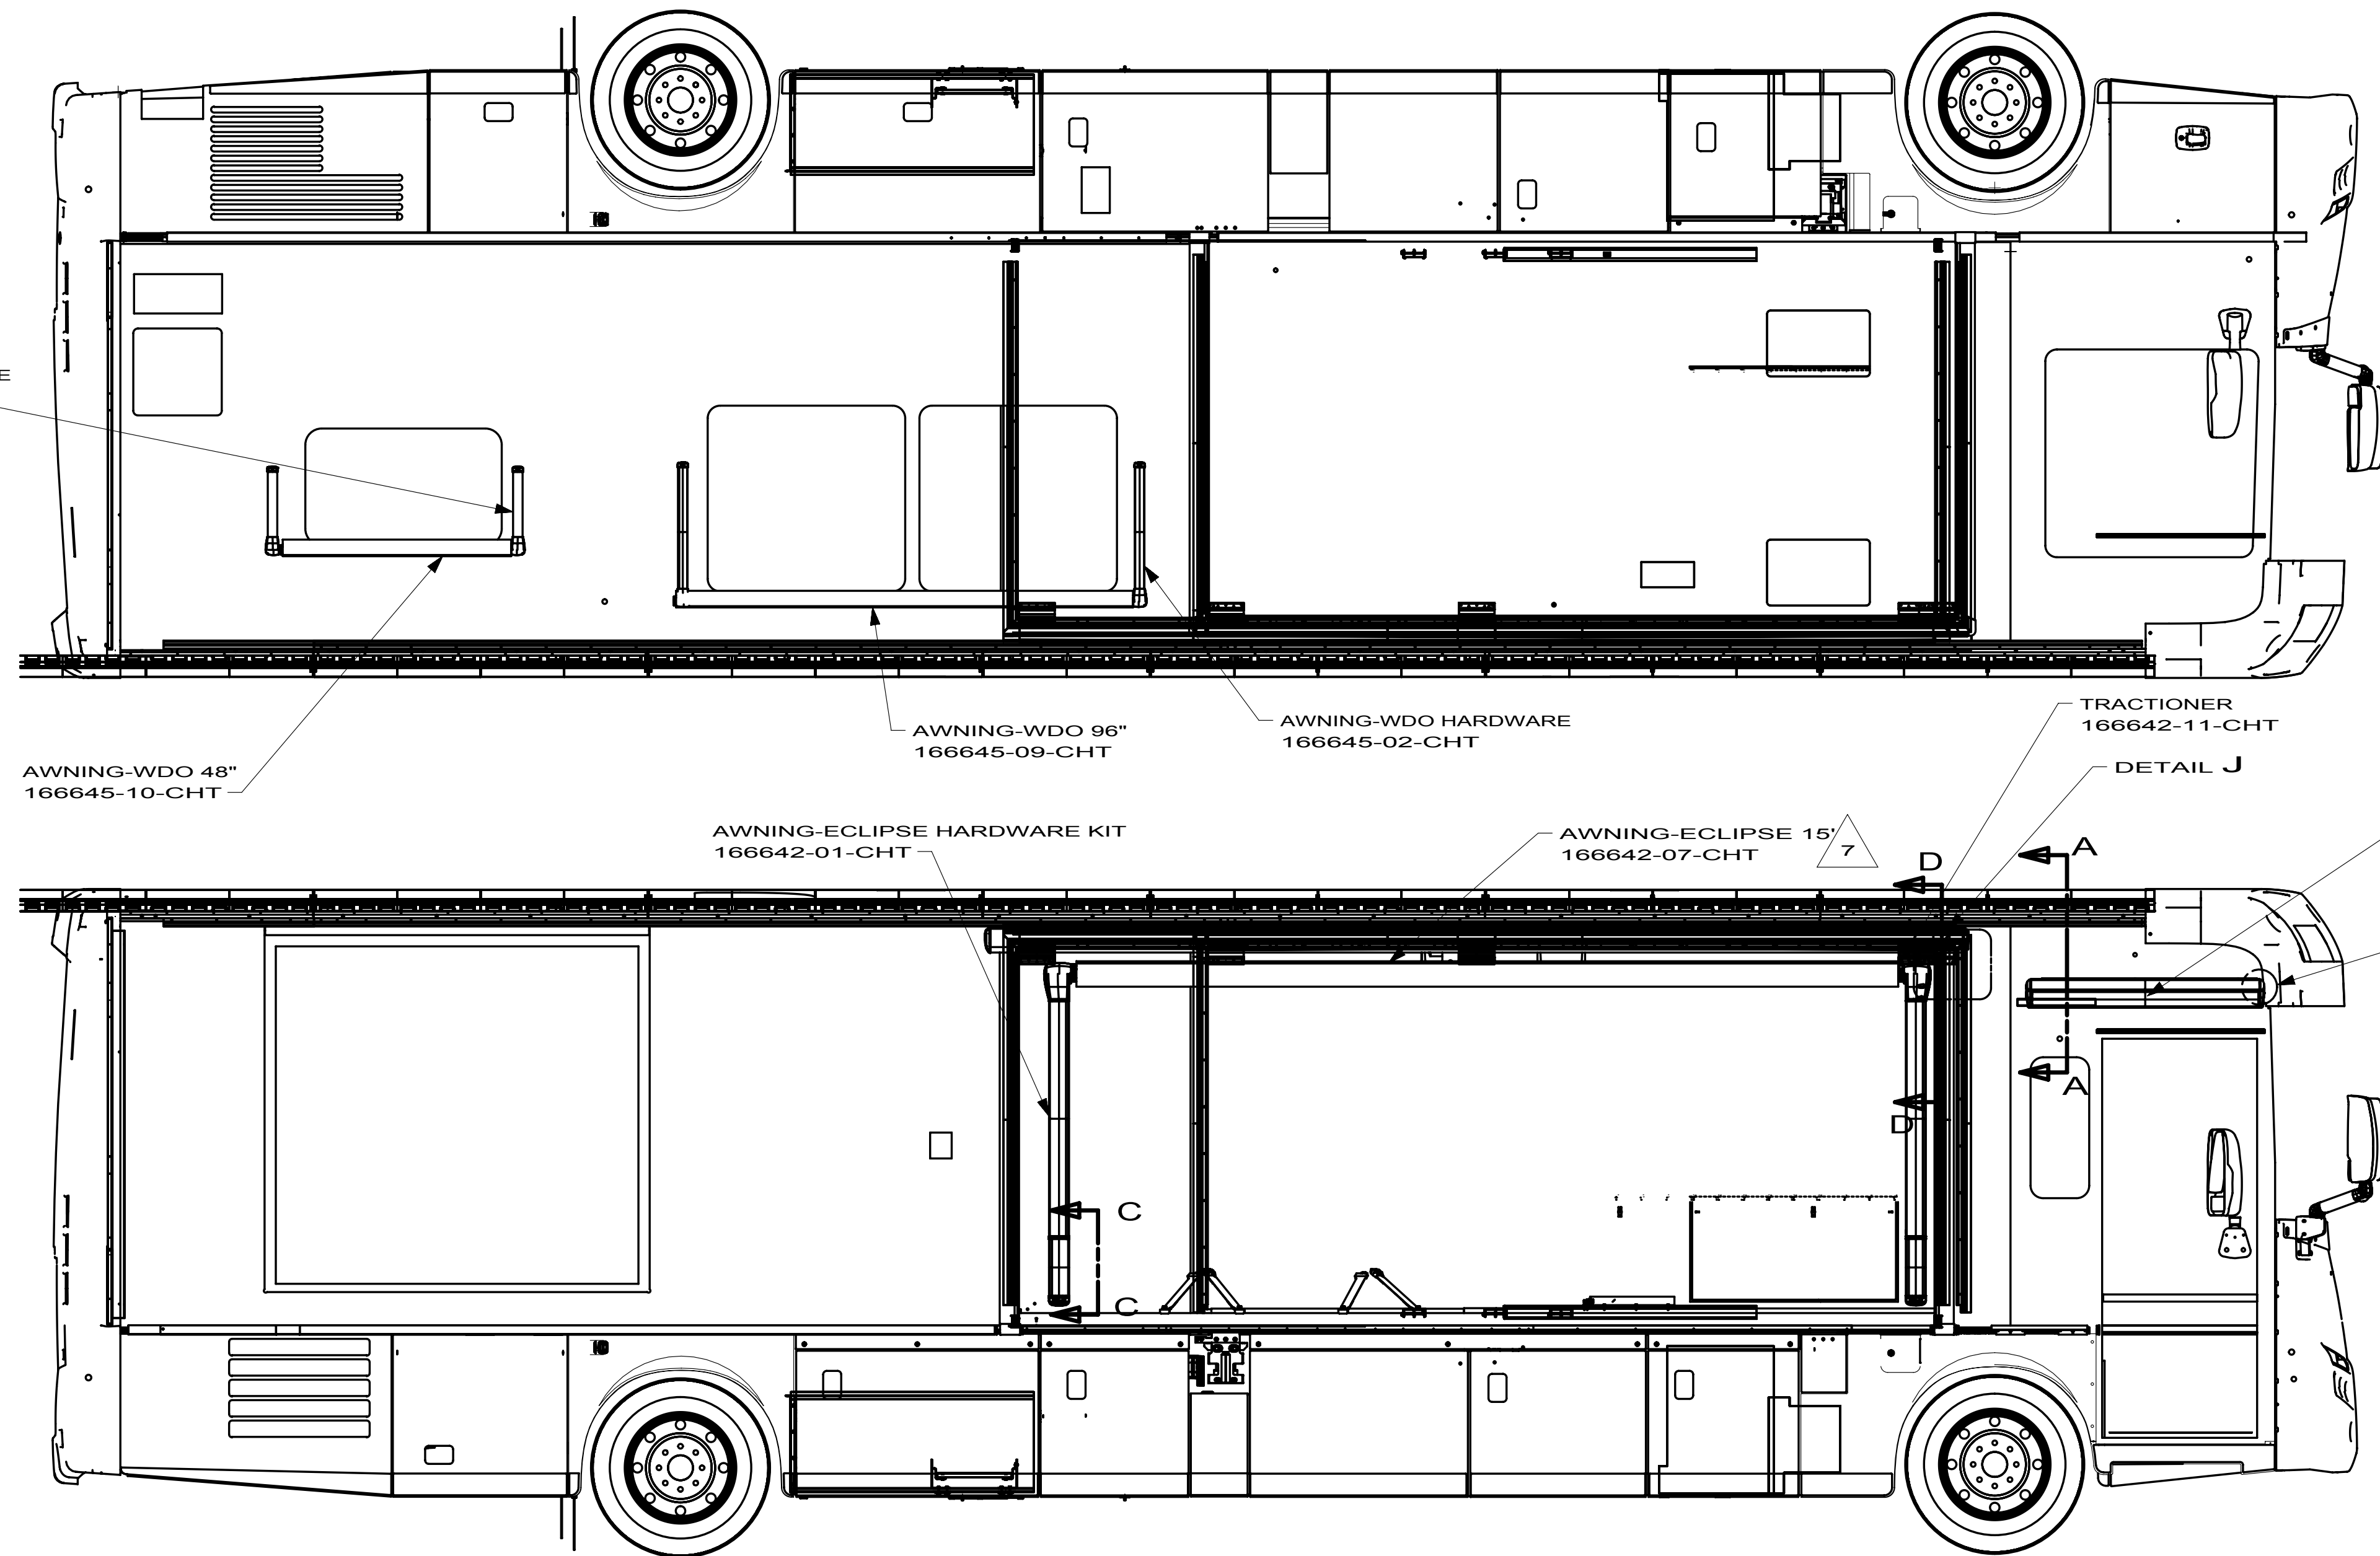

DETAIL J




CAREFREE
ECLIPSE 52N
(ON SLIDEOUT ROOM)

CAREFREE 295
SL WINDOW AWNING

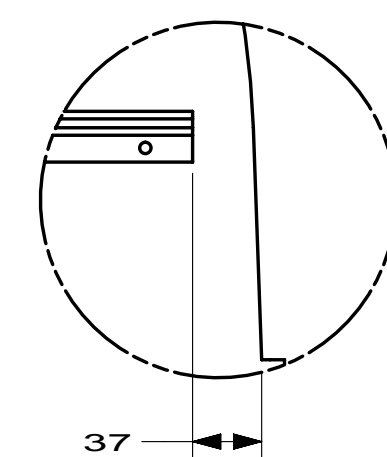


DETAIL L
SHOWN W/OUT AWNING

FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: AWNING INSTL R-SERIES		
SHEET 3	PART NO 169227	REV

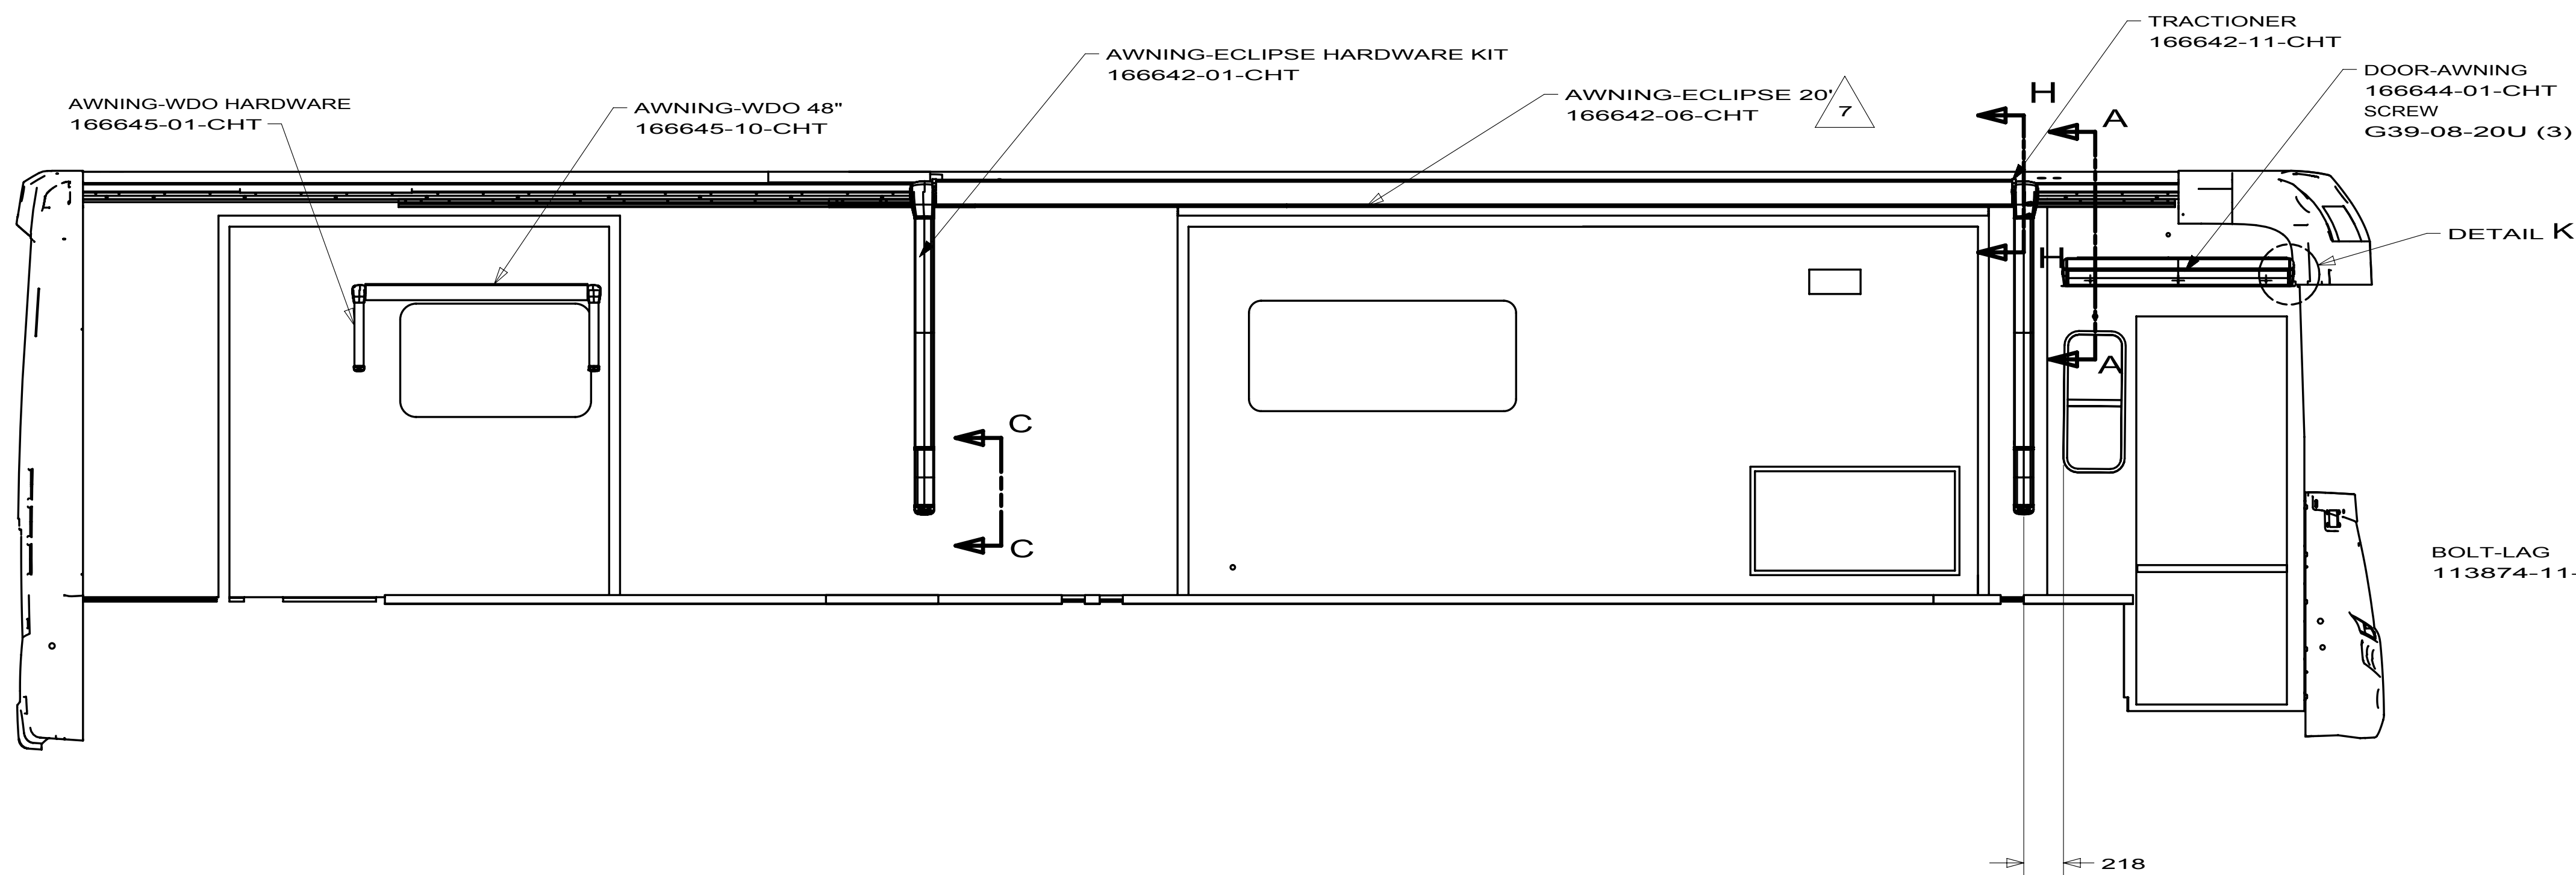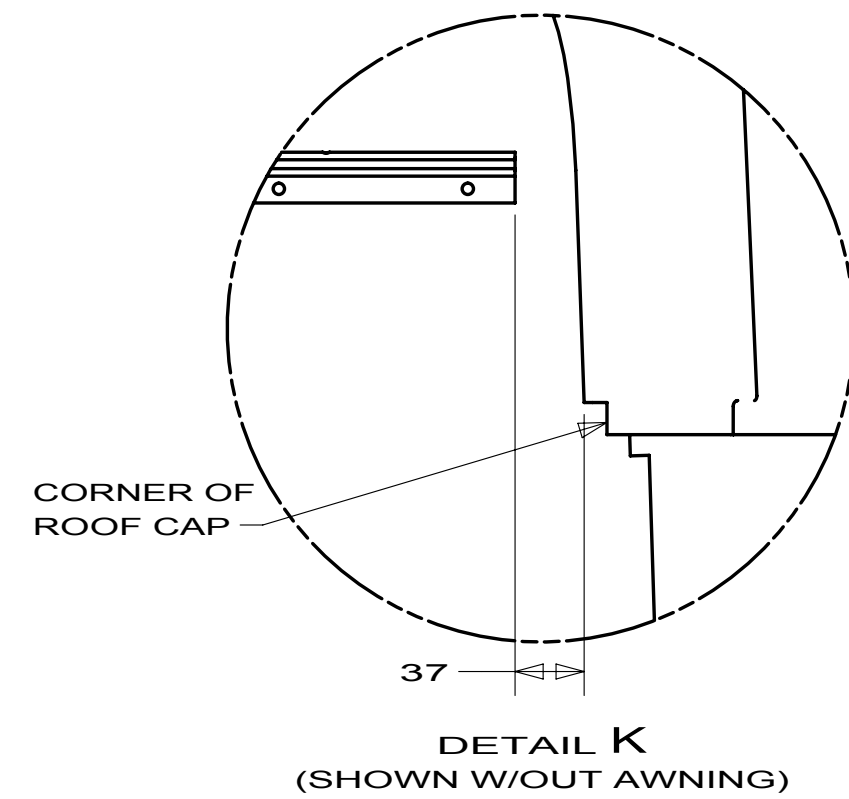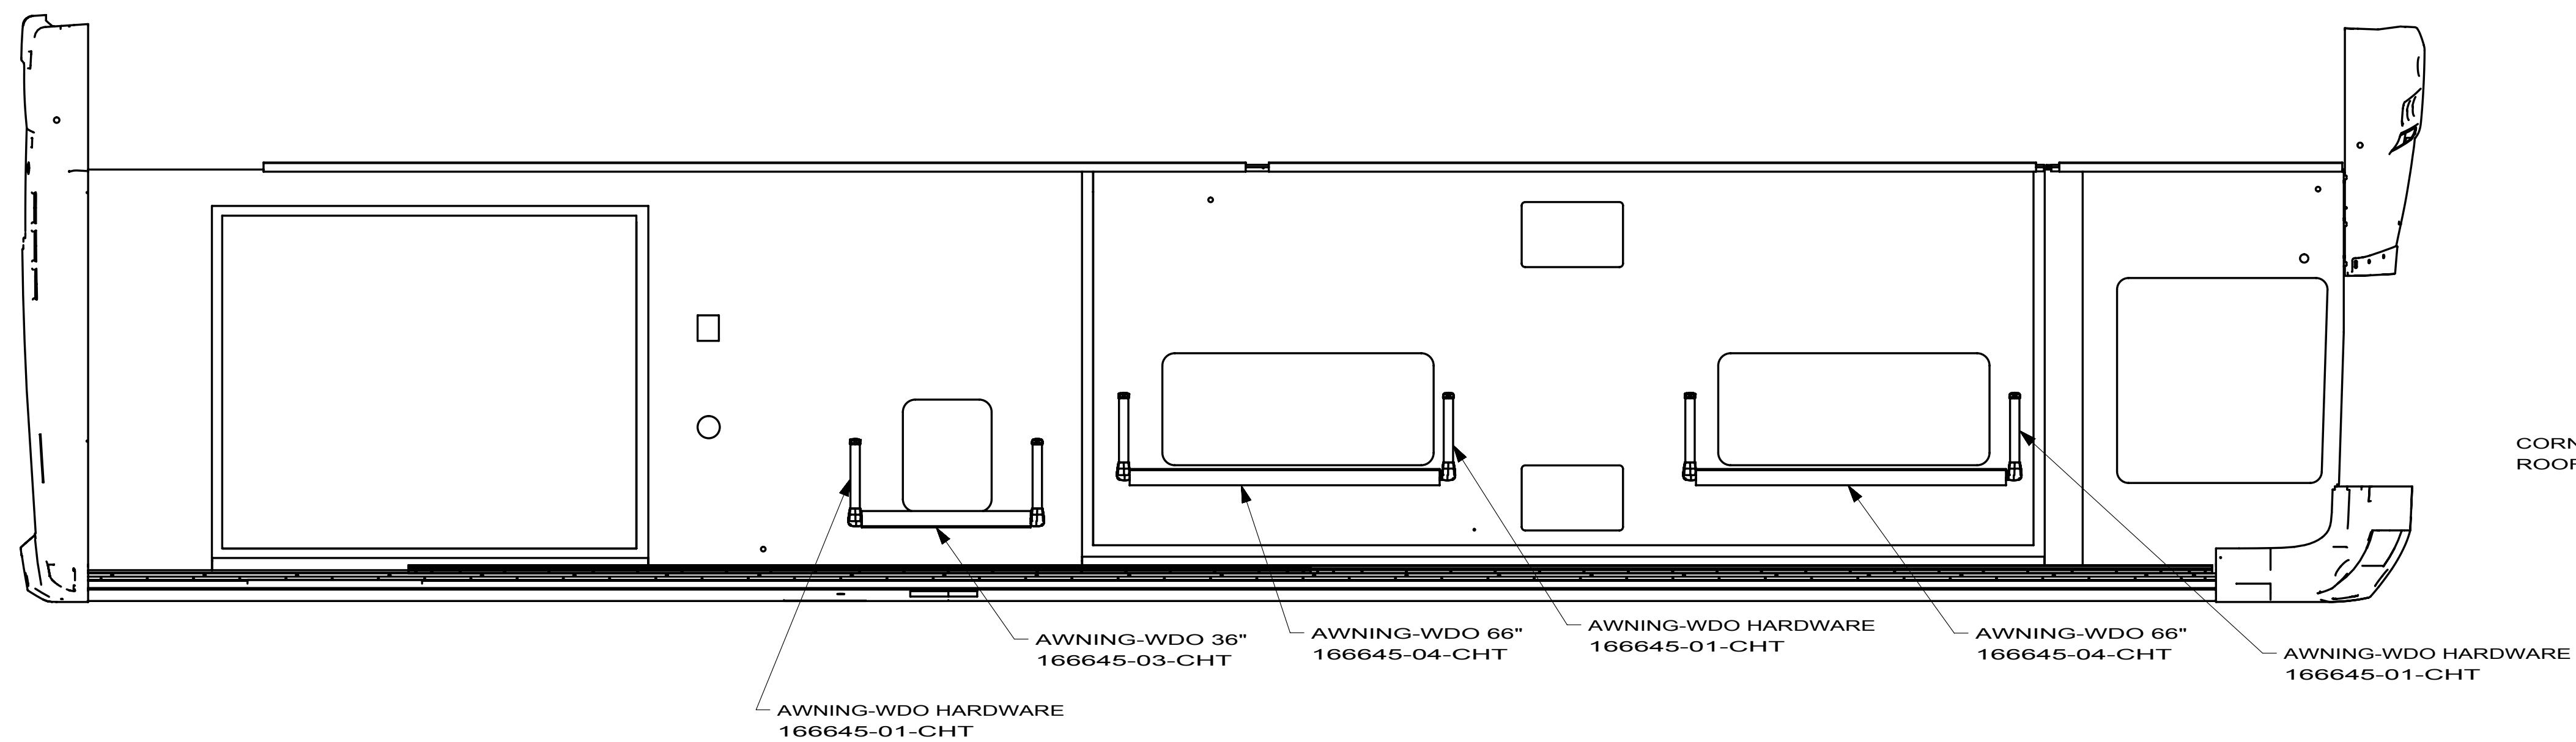

FIRST USED			10 R42AD
TITLE:			DO NOT SCALE DRAWING
TITLE:			AWNING INSTL R-SERIES
SHEET 4	PART NO	169227	REV

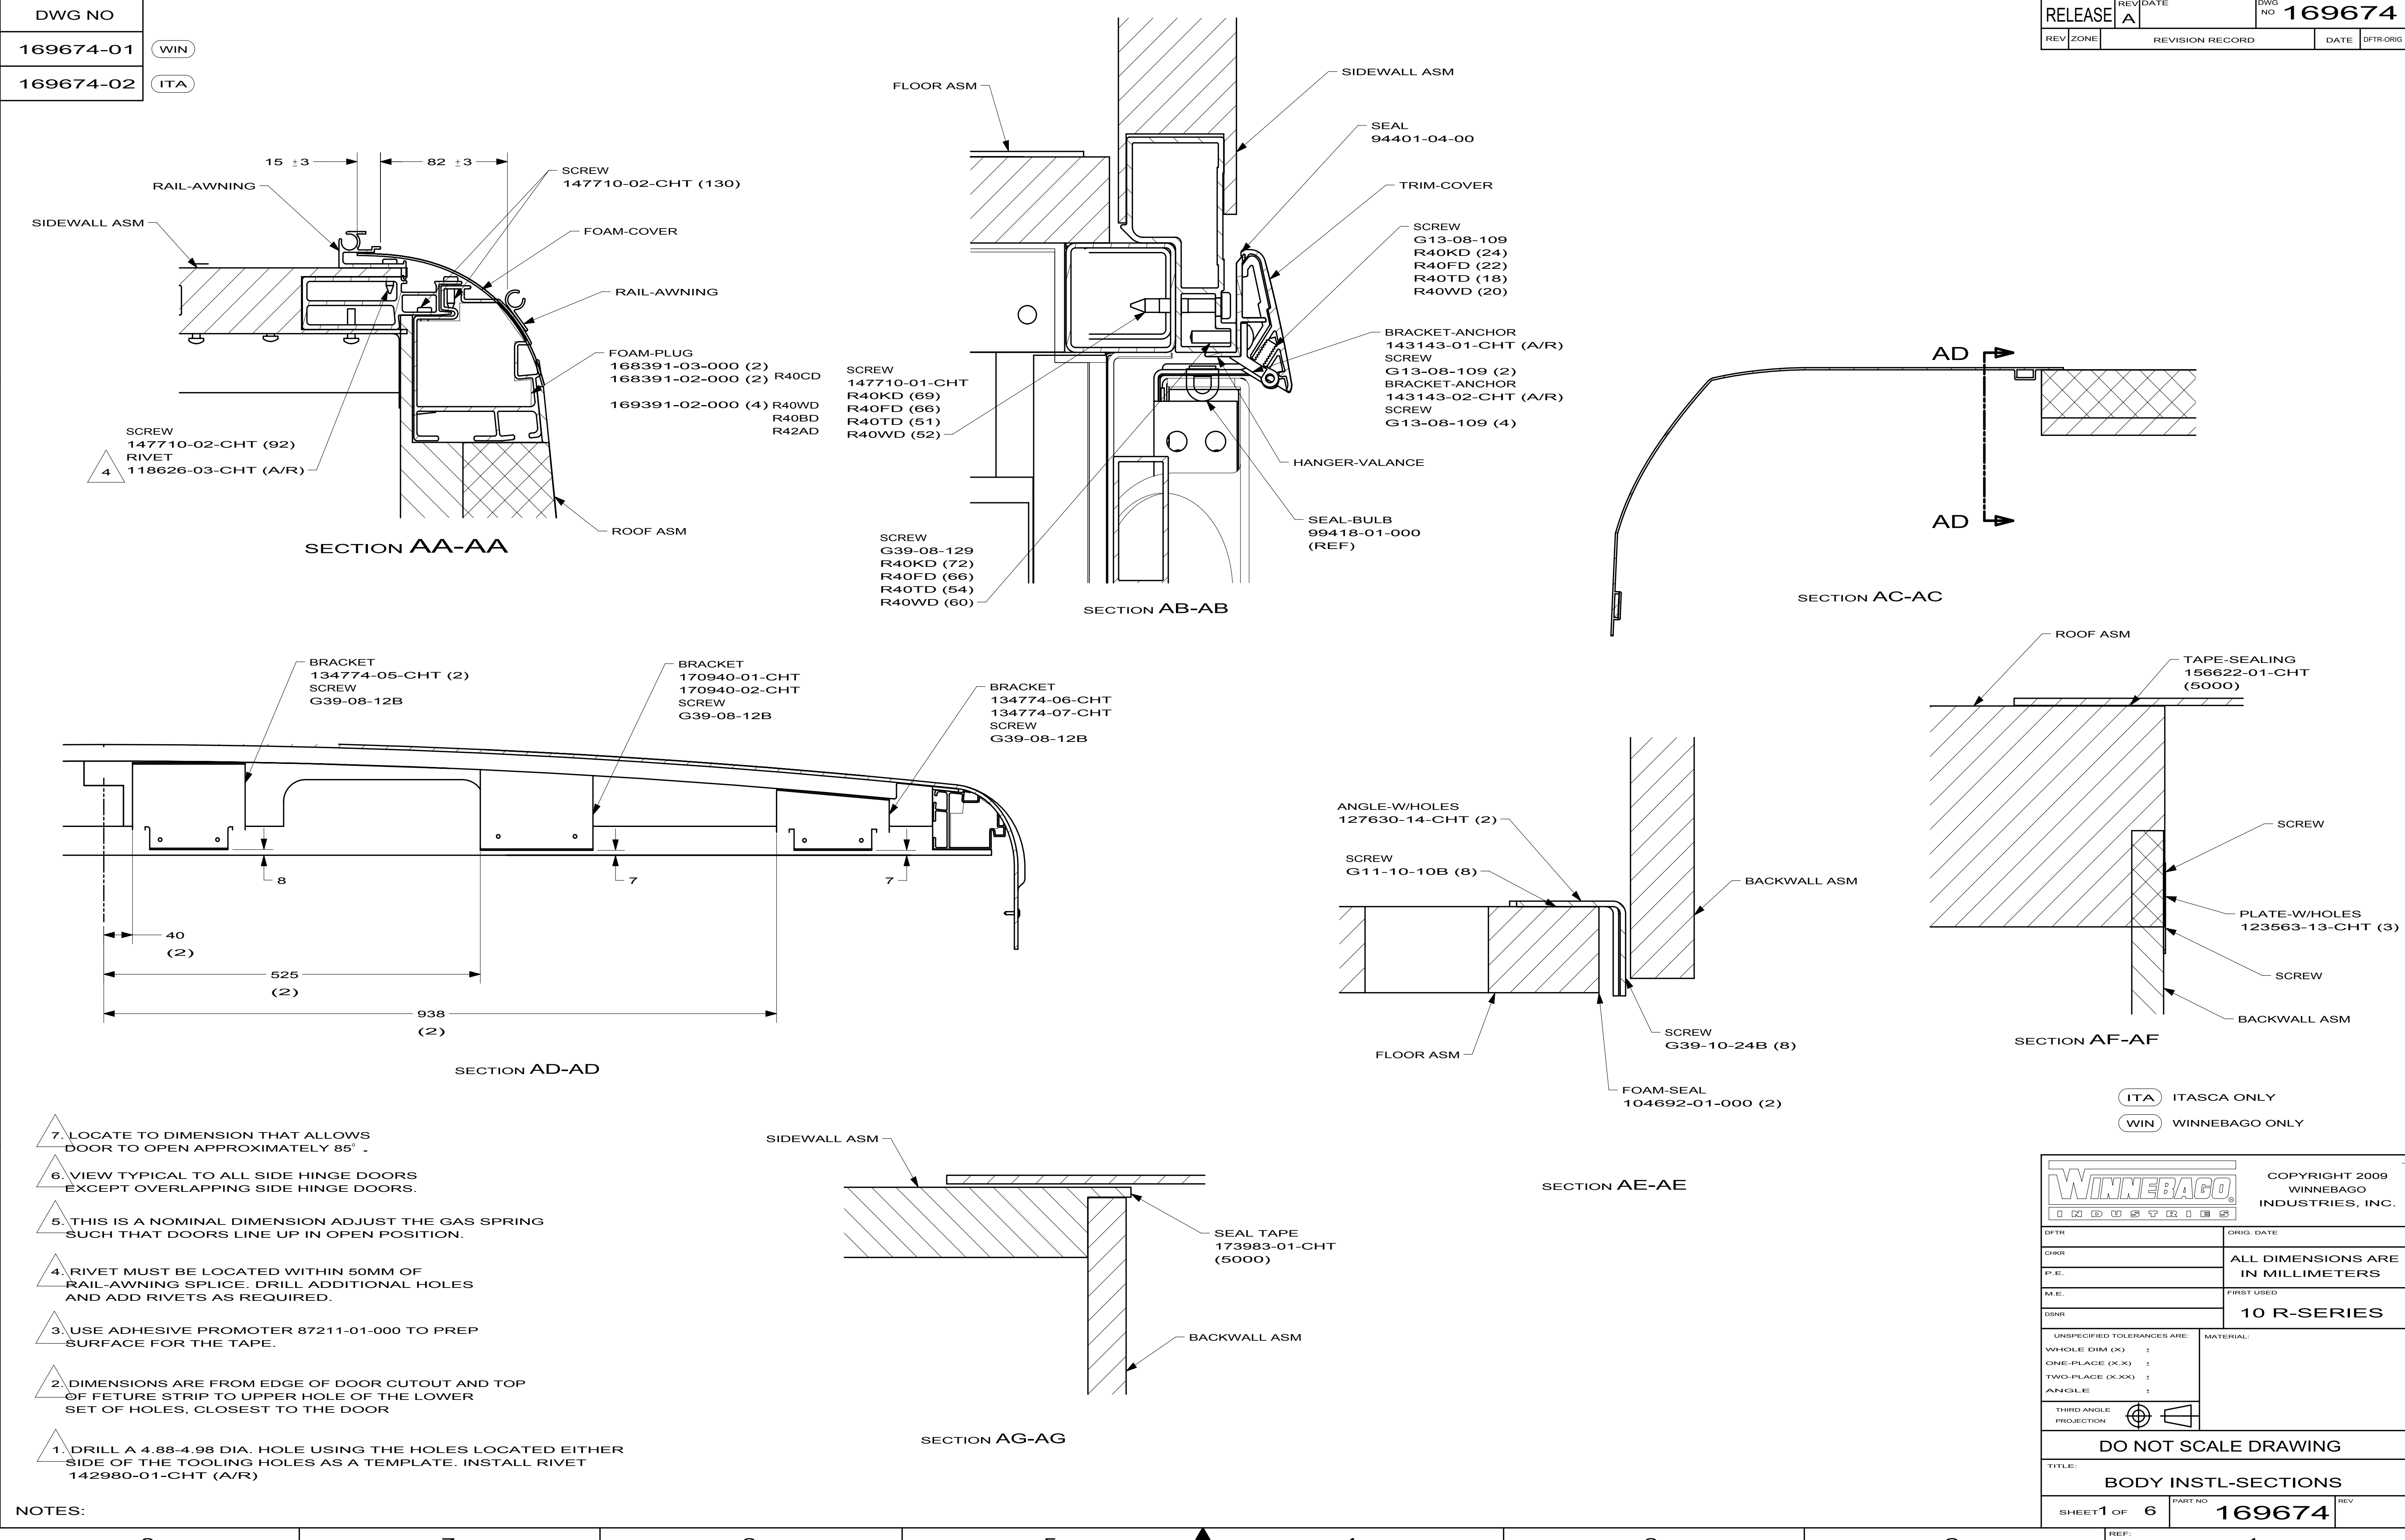

WINNEBAGO INDUSTRIES

COPYRIGHT 2009
WINNEBAGO INDUSTRIES, INC.

DFT-ORIG

CHGR

P.E.

M.E.

DSNR

ORIG. DATE

ALL DIMENSIONS ARE IN MILLIMETERS

FIRST USED

10 R-SERIES

UNSPECIFIED TOLERANCES ARE:

MATERIAL:

THIRD ANGLE PROJECTION







DO NOT SCALE DRAWING

TITLE: BODY INSTL-SECTIONS

SHEET 1 OF 6 PART NO 169674 REV


REF:

1

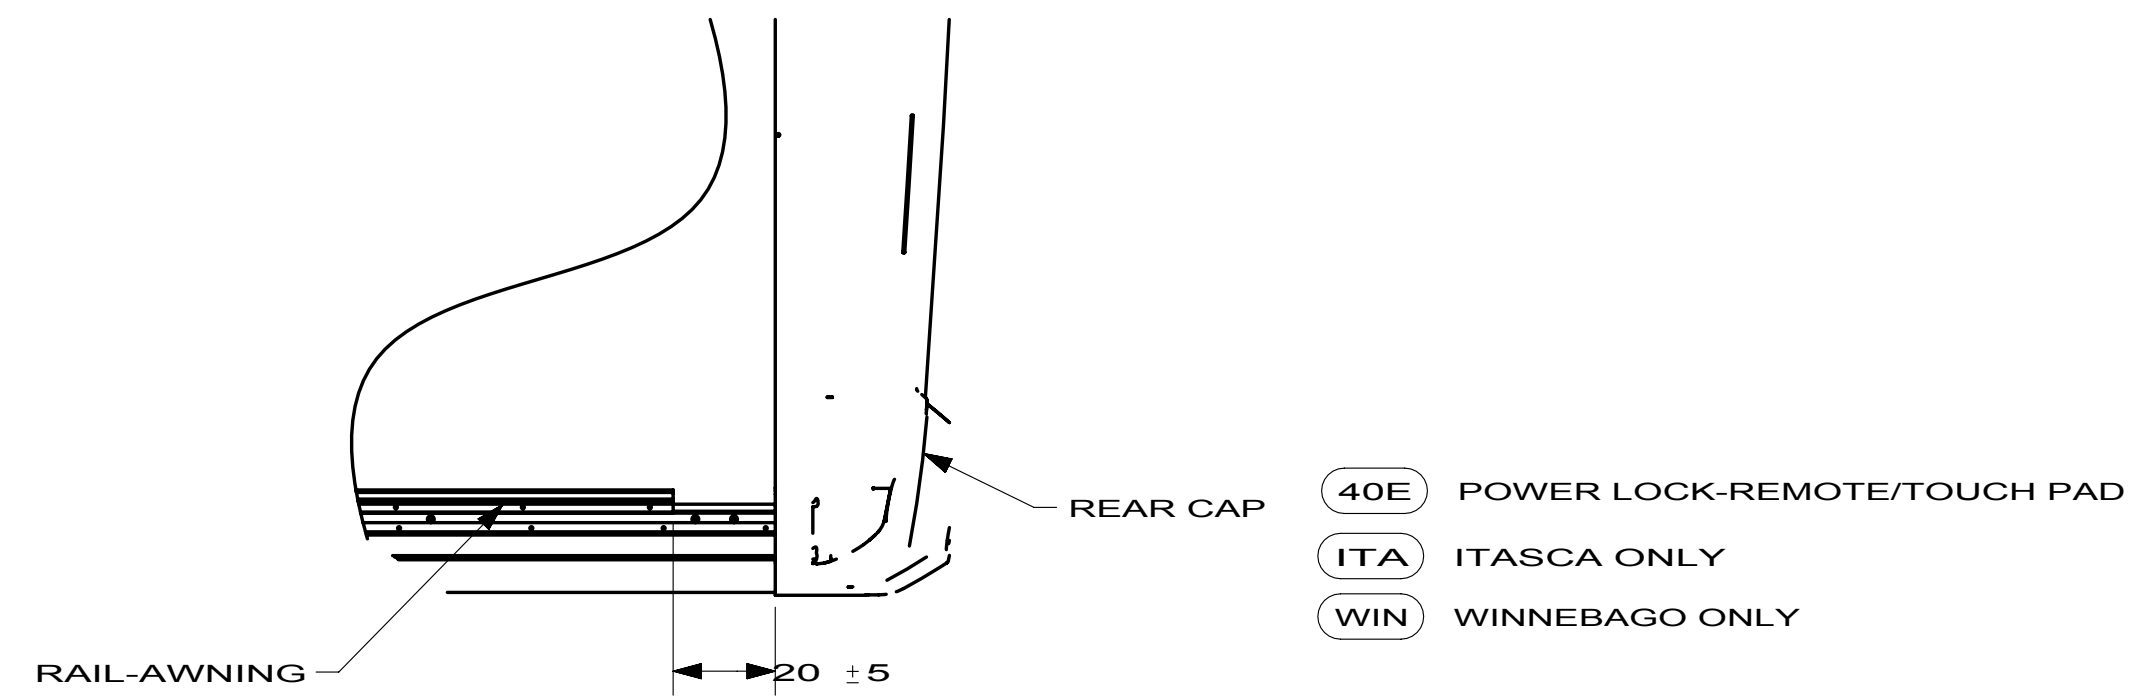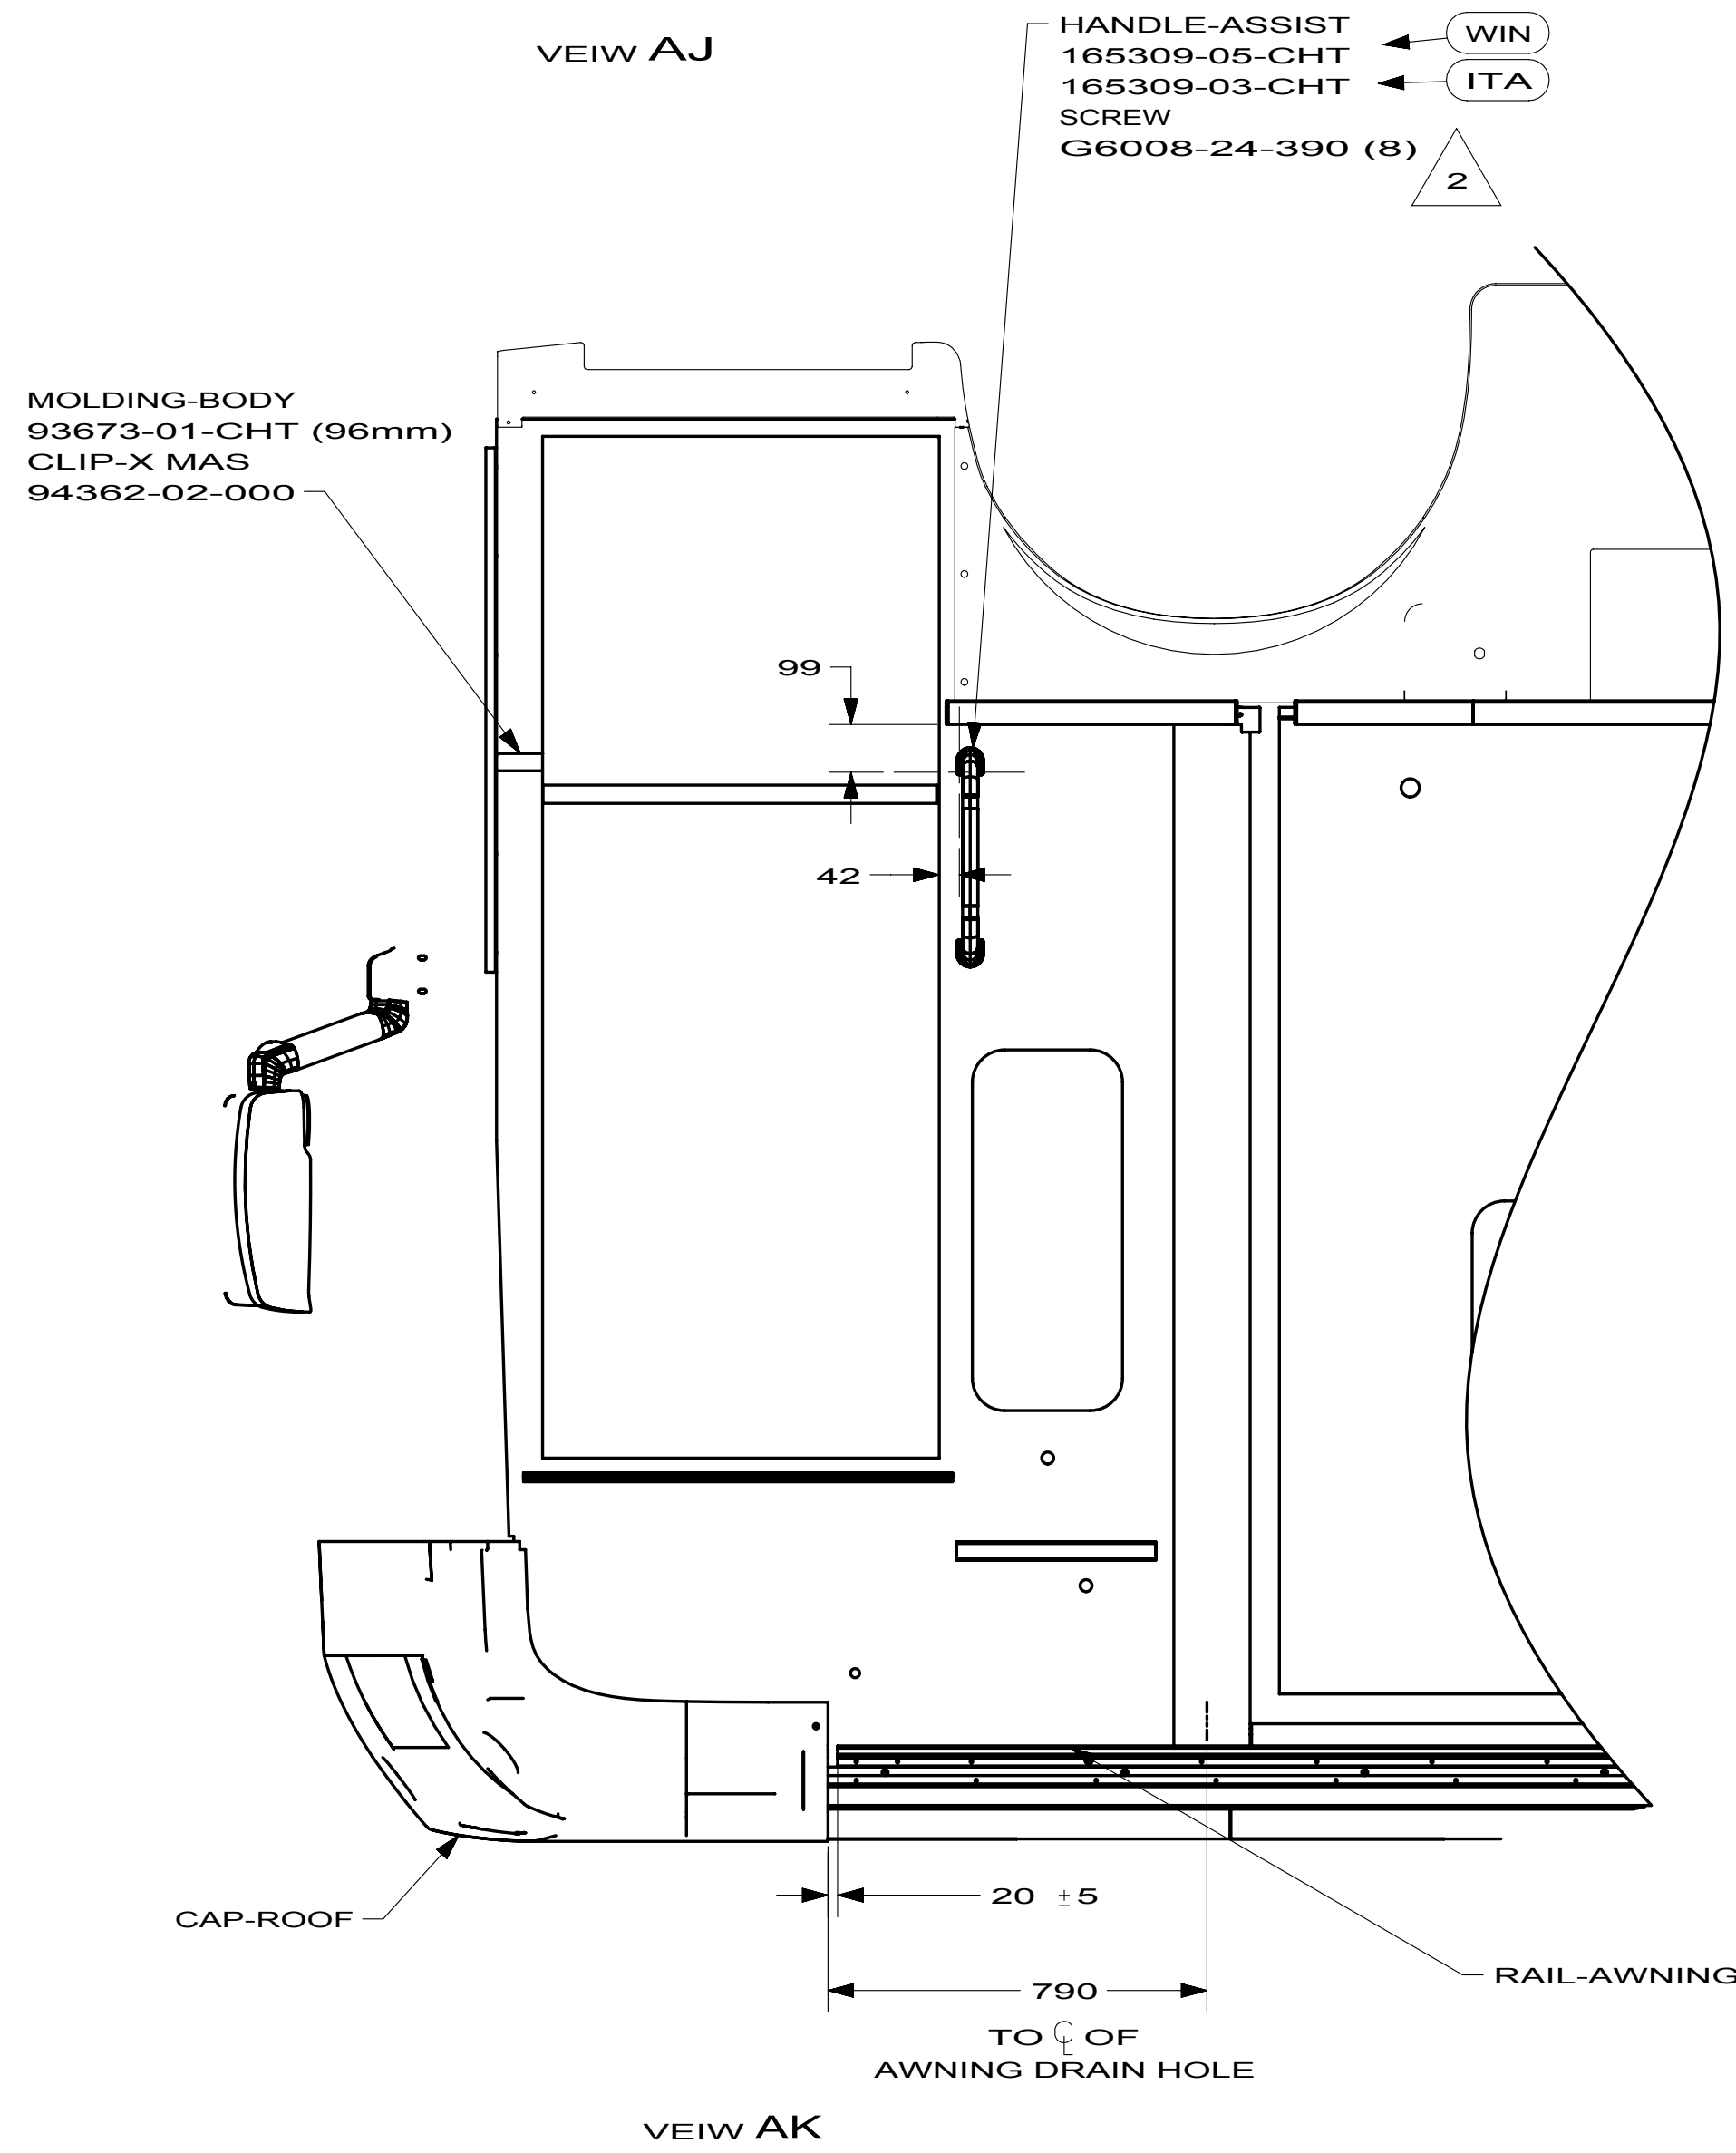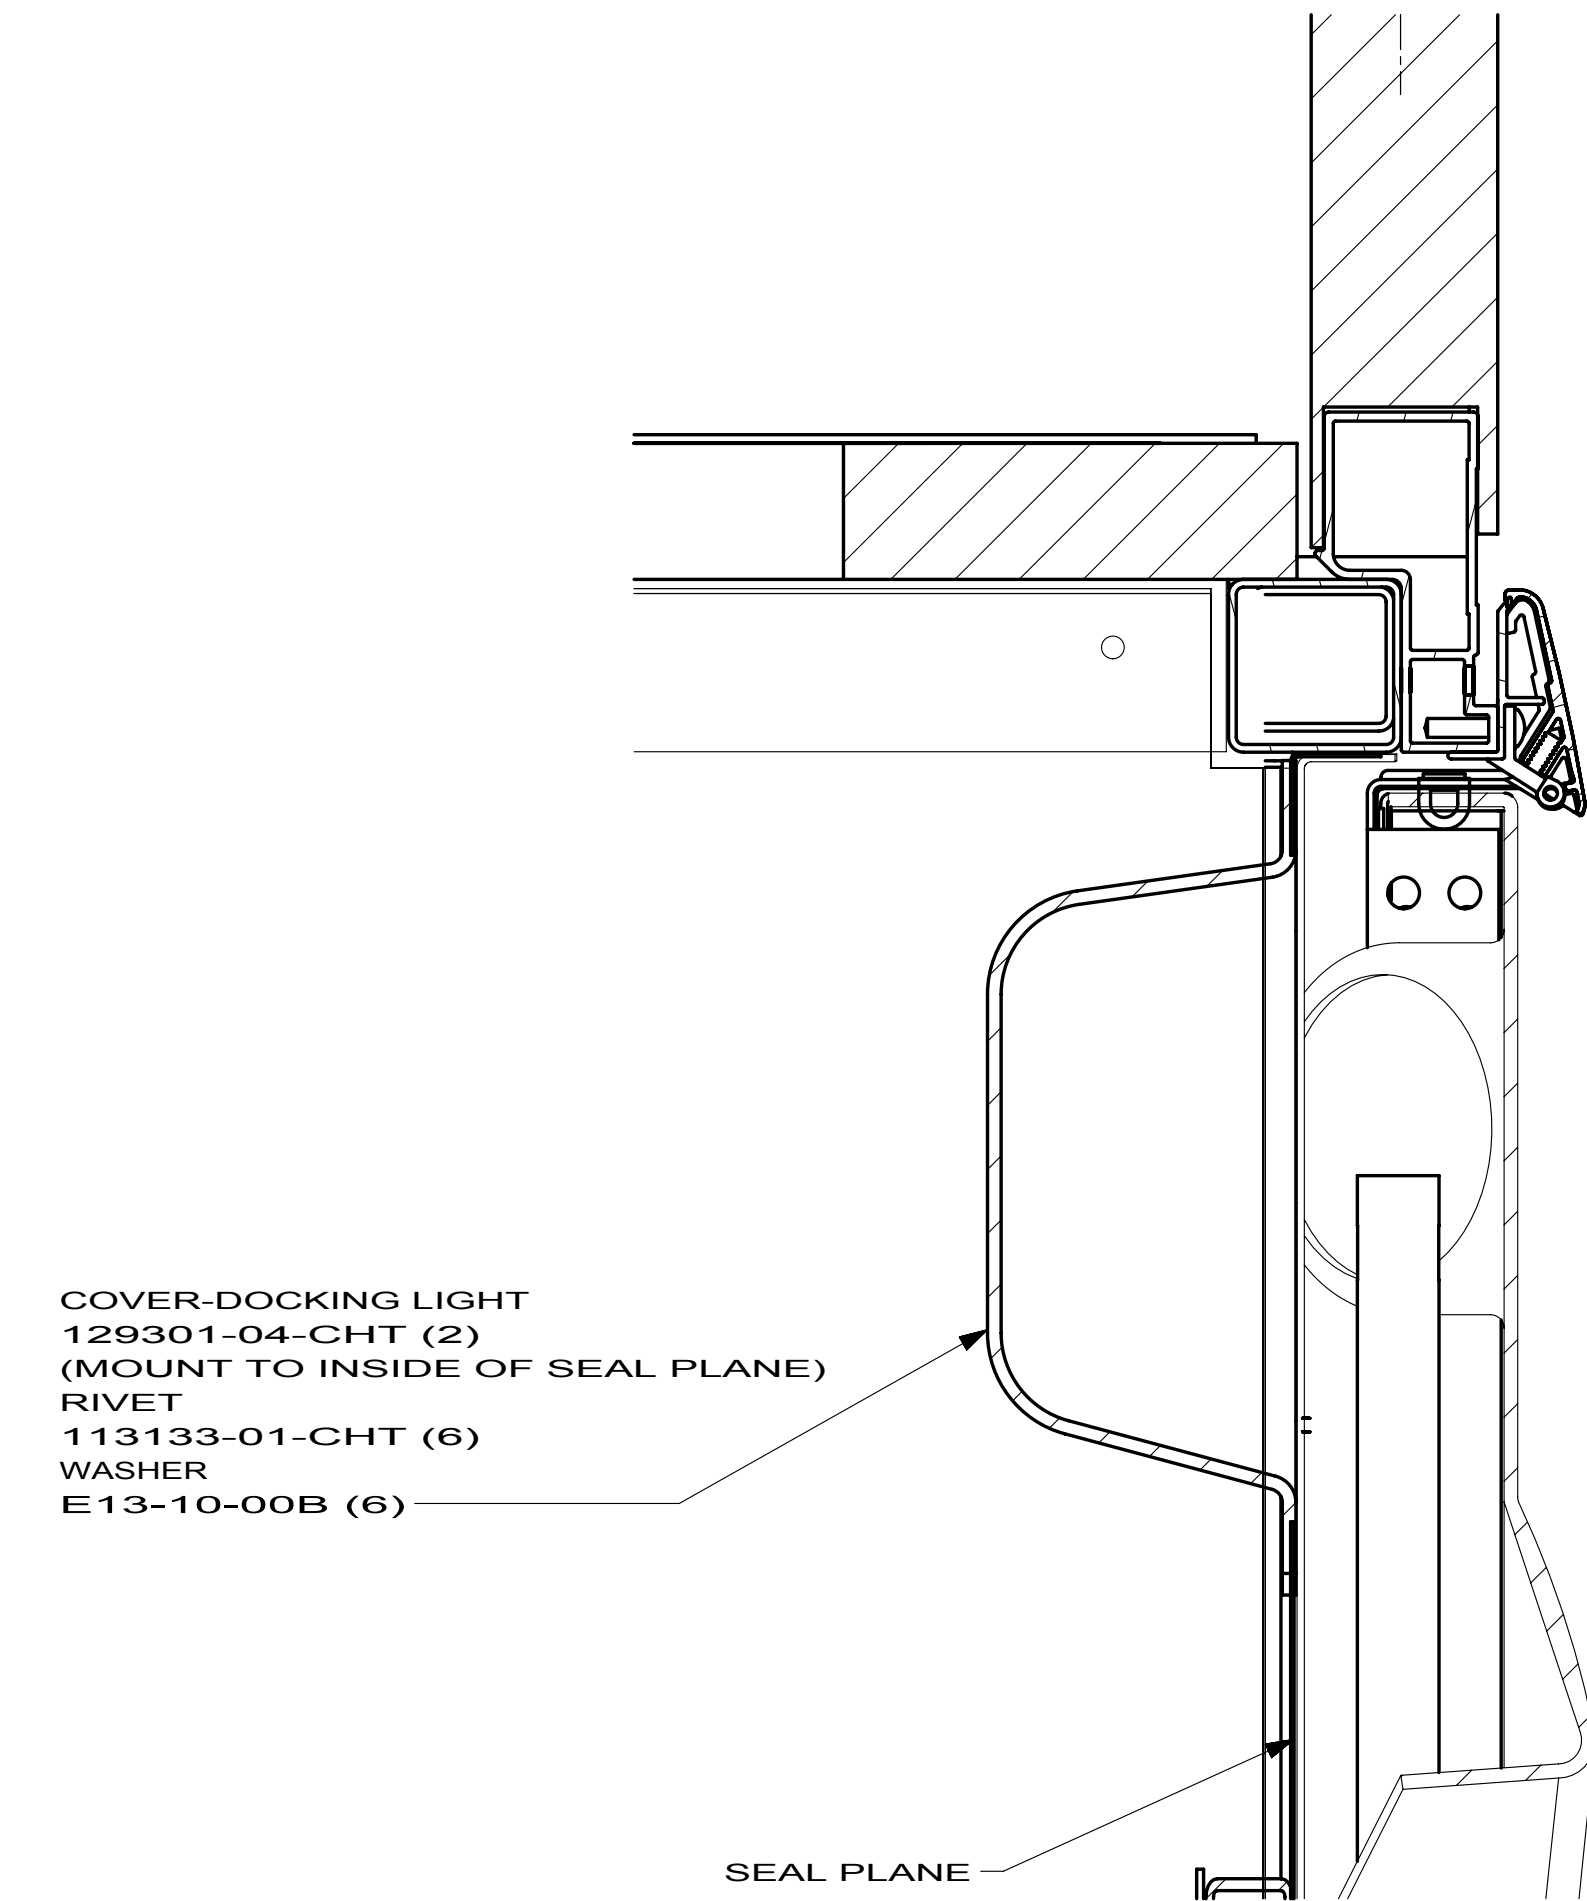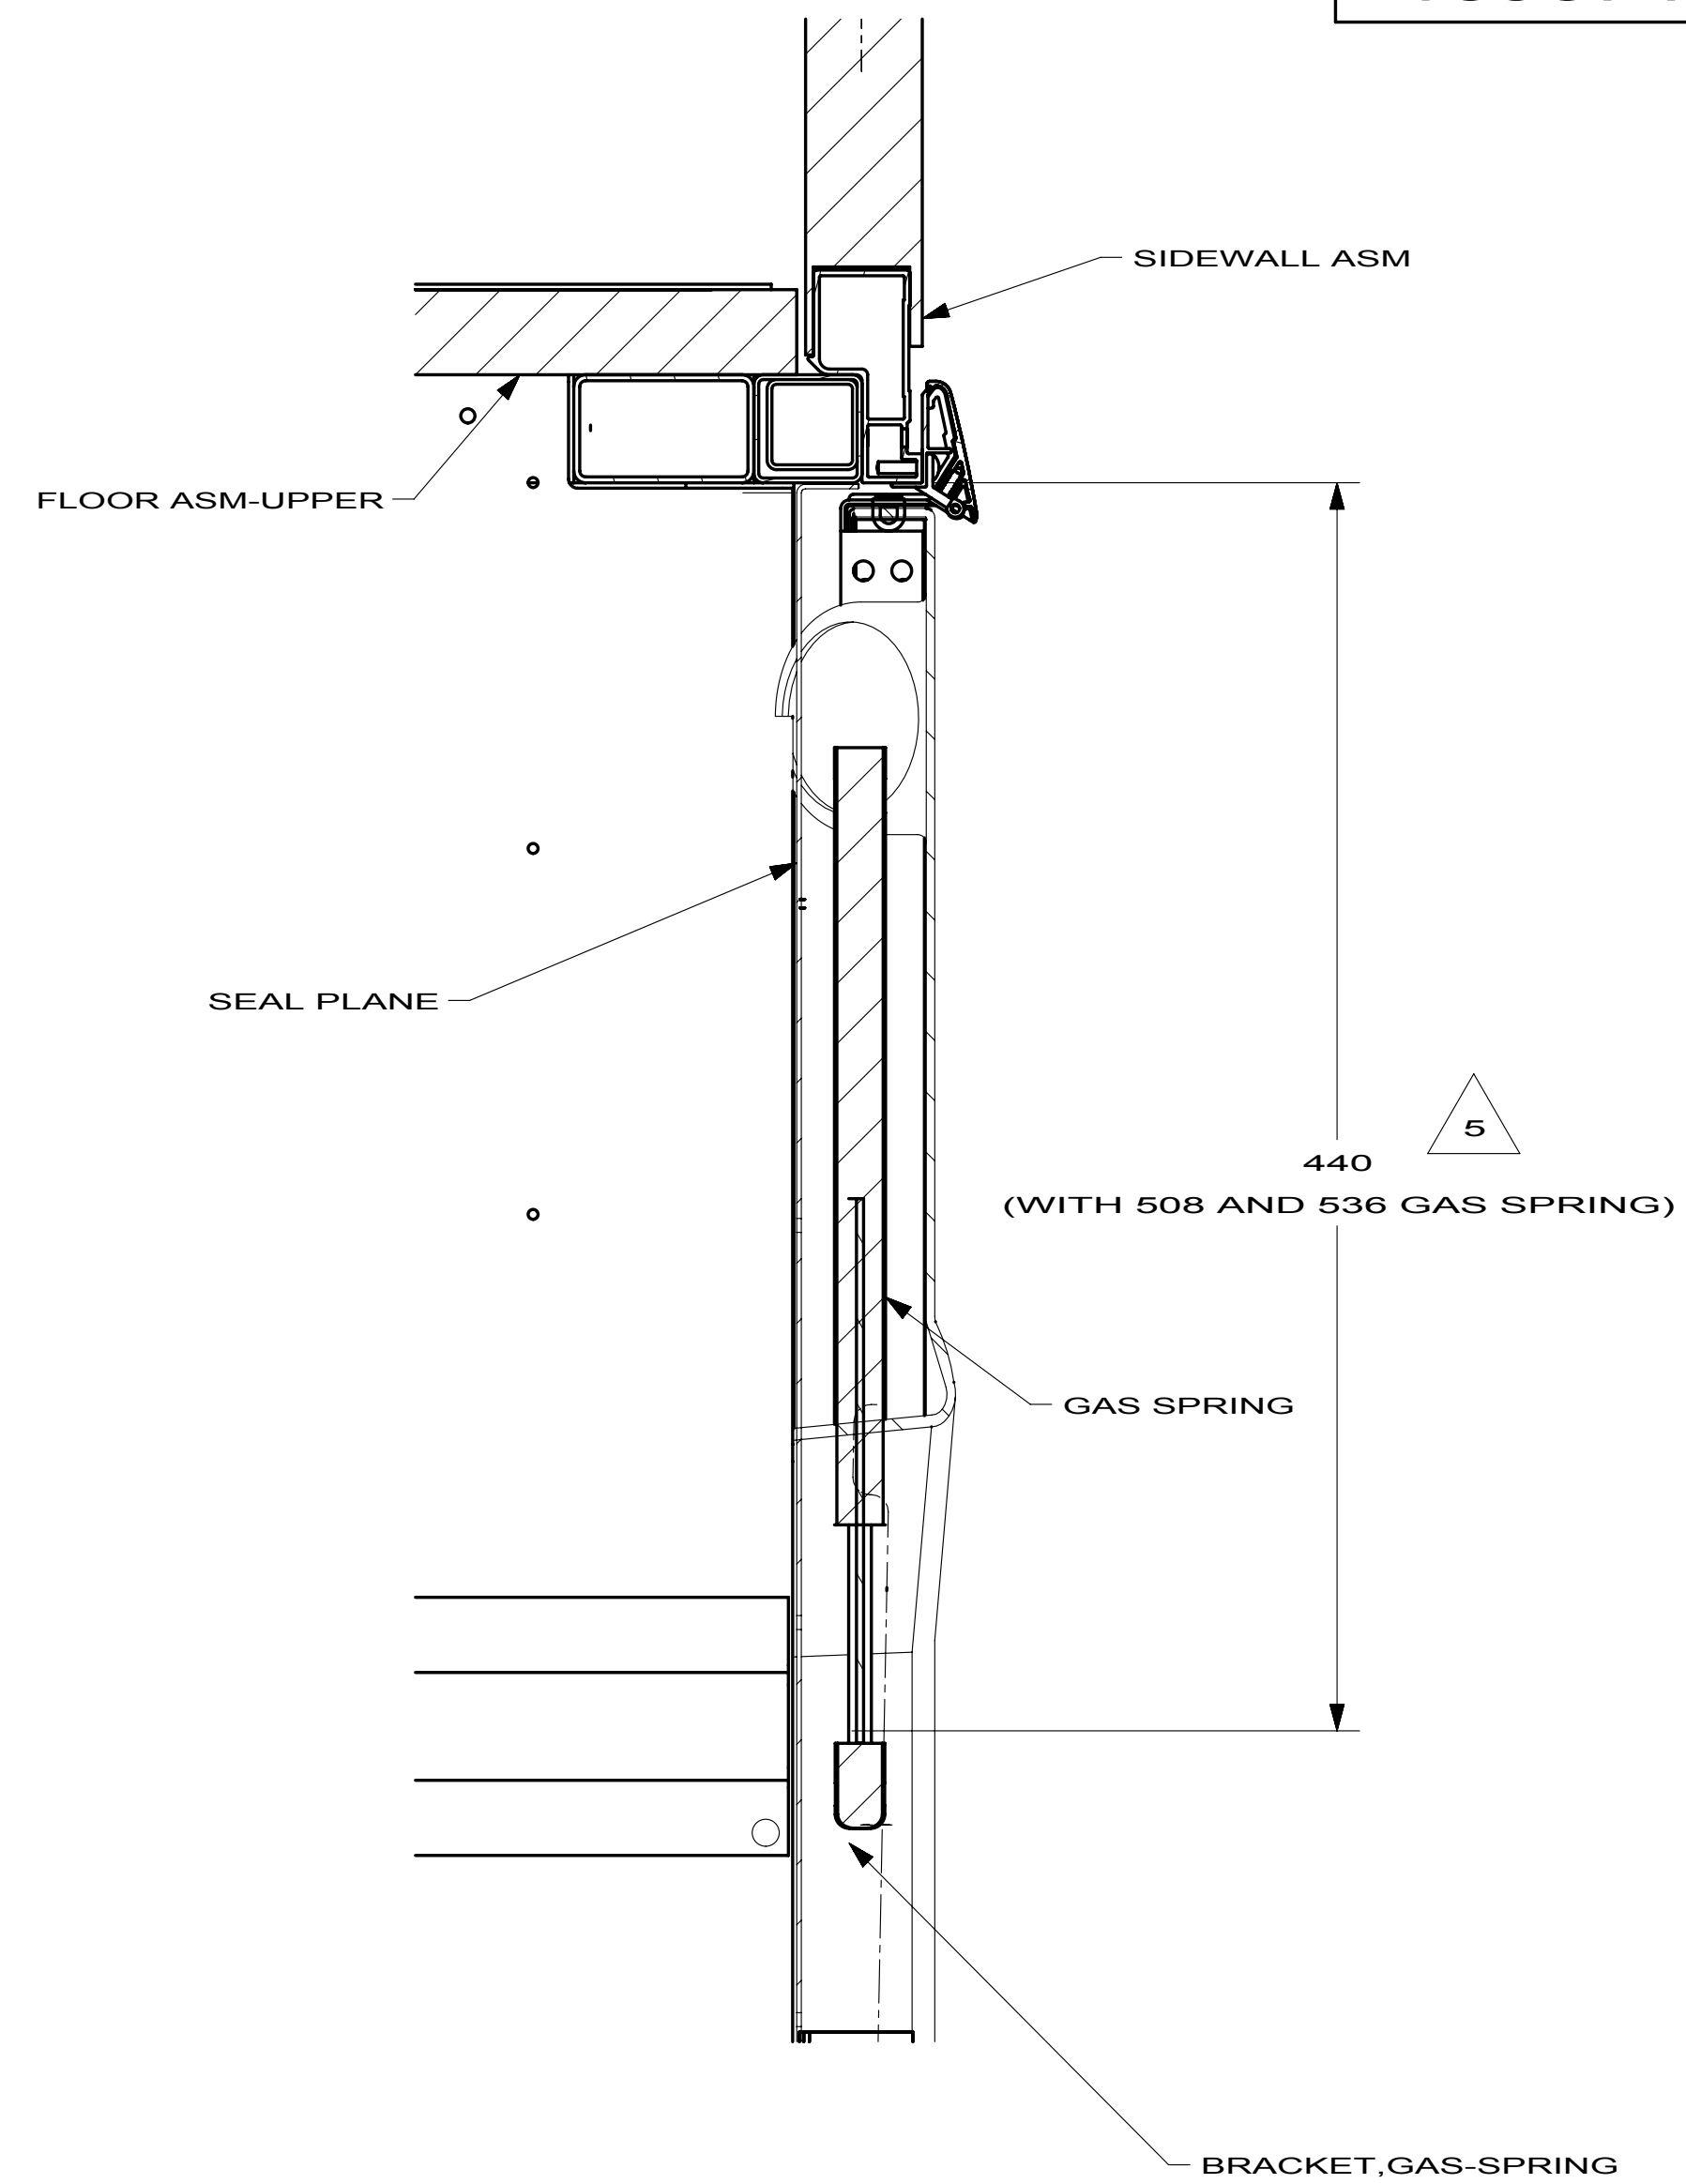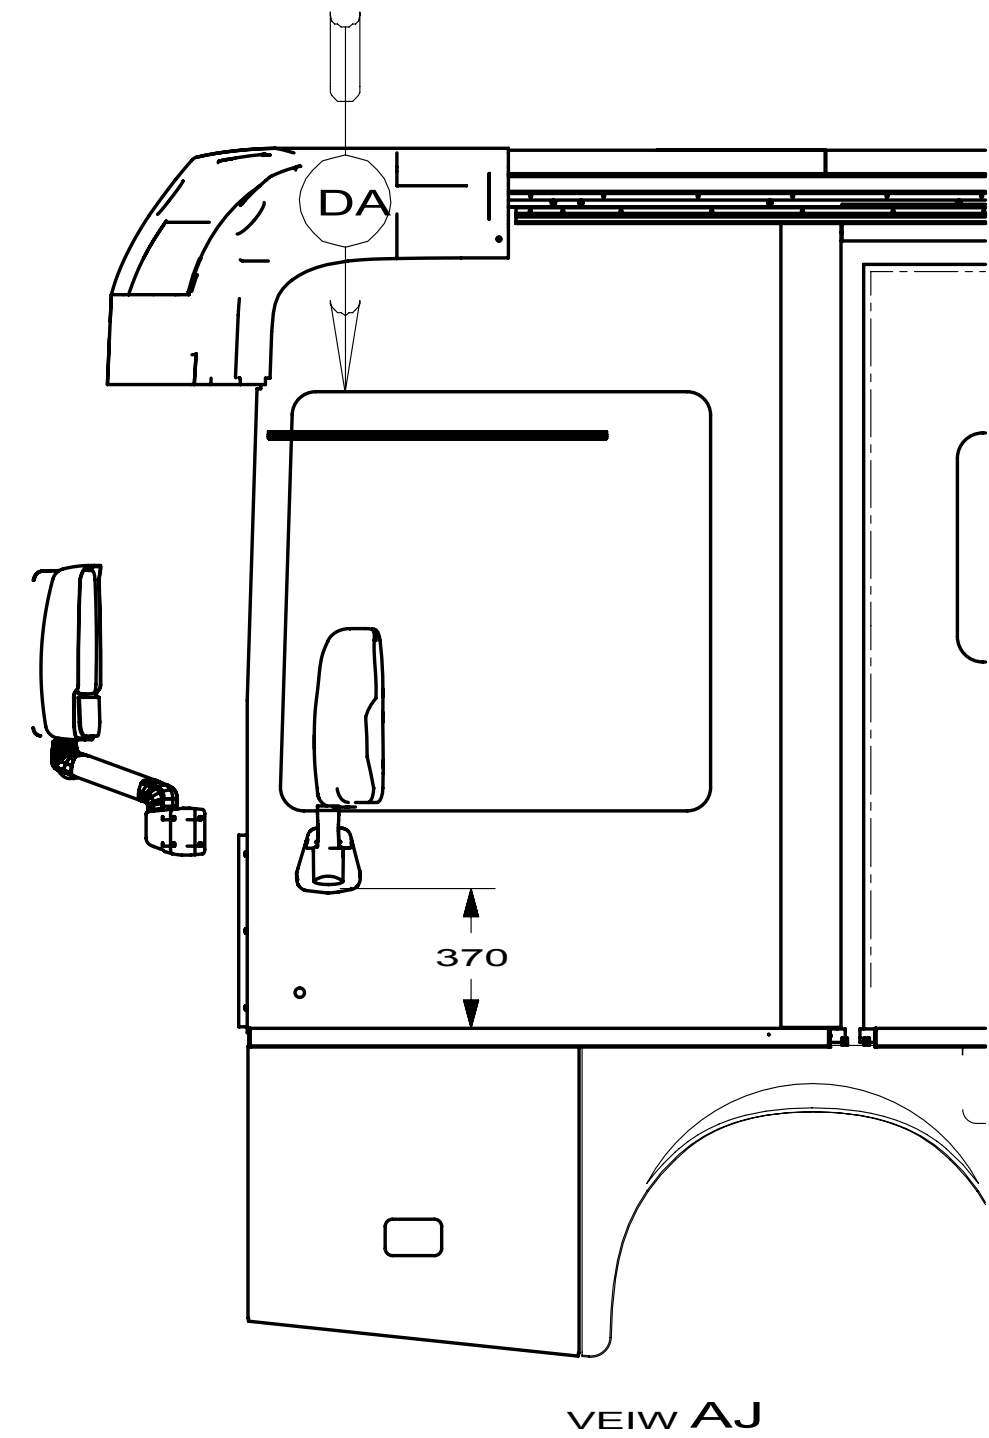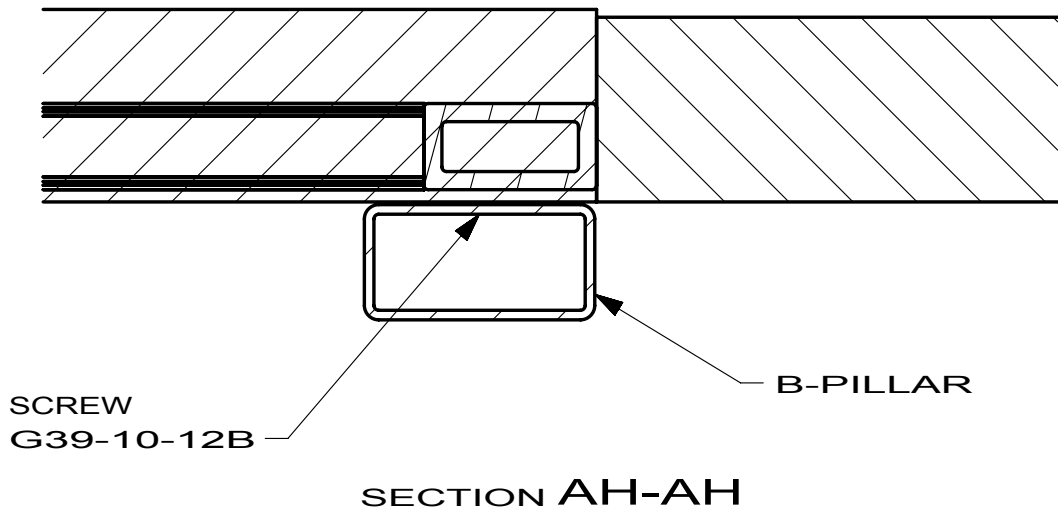


- 40E POWER LOCK-REMOTE/TOUCH PAD
- ITA ITASCA ONLY
- WIN WINNEBAGO ONLY


FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 2	PART NO	REV
	169674	

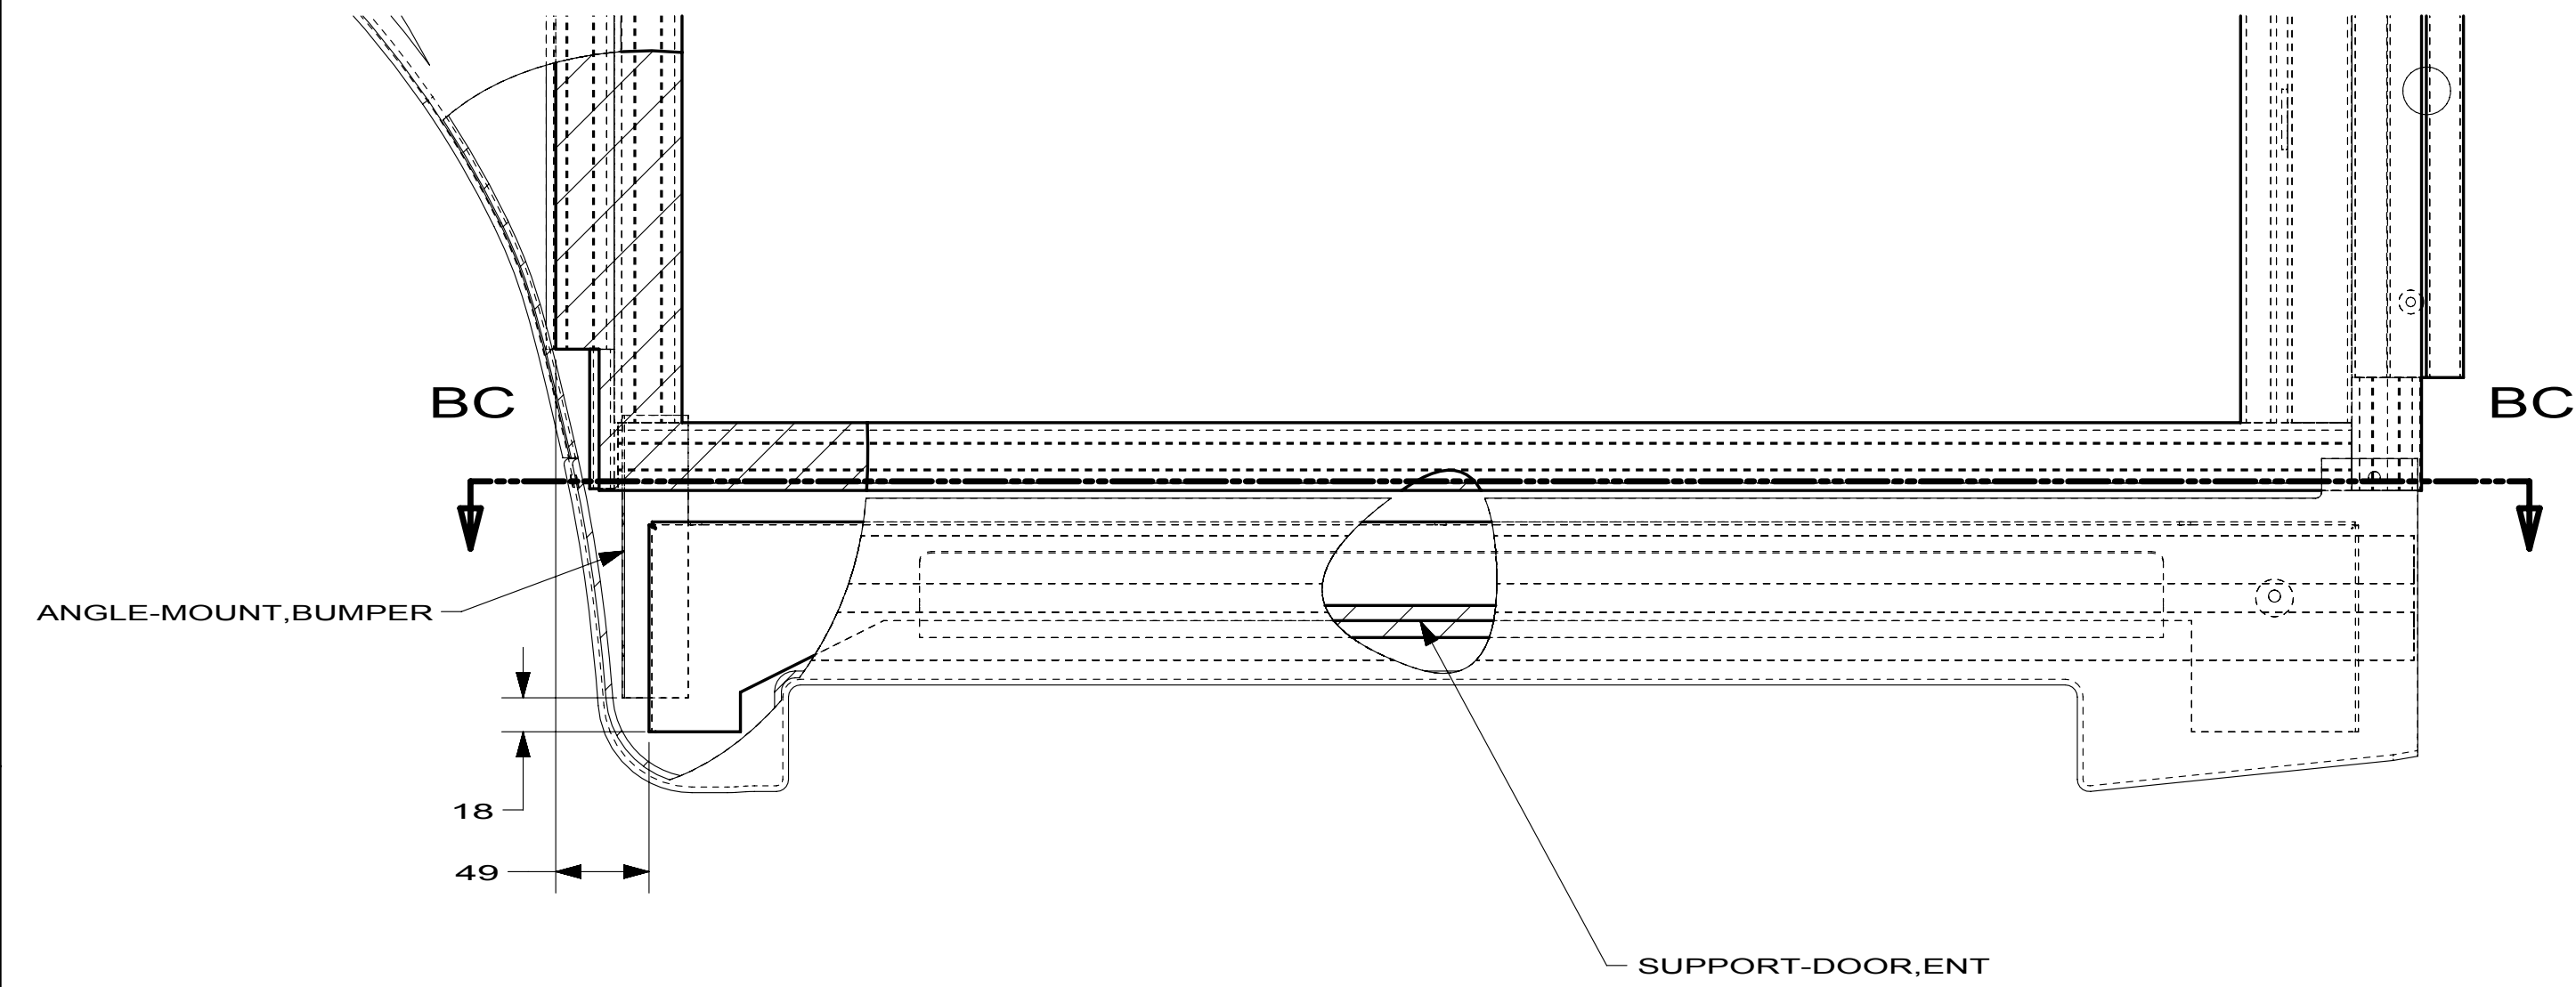


VIEW BB-BB

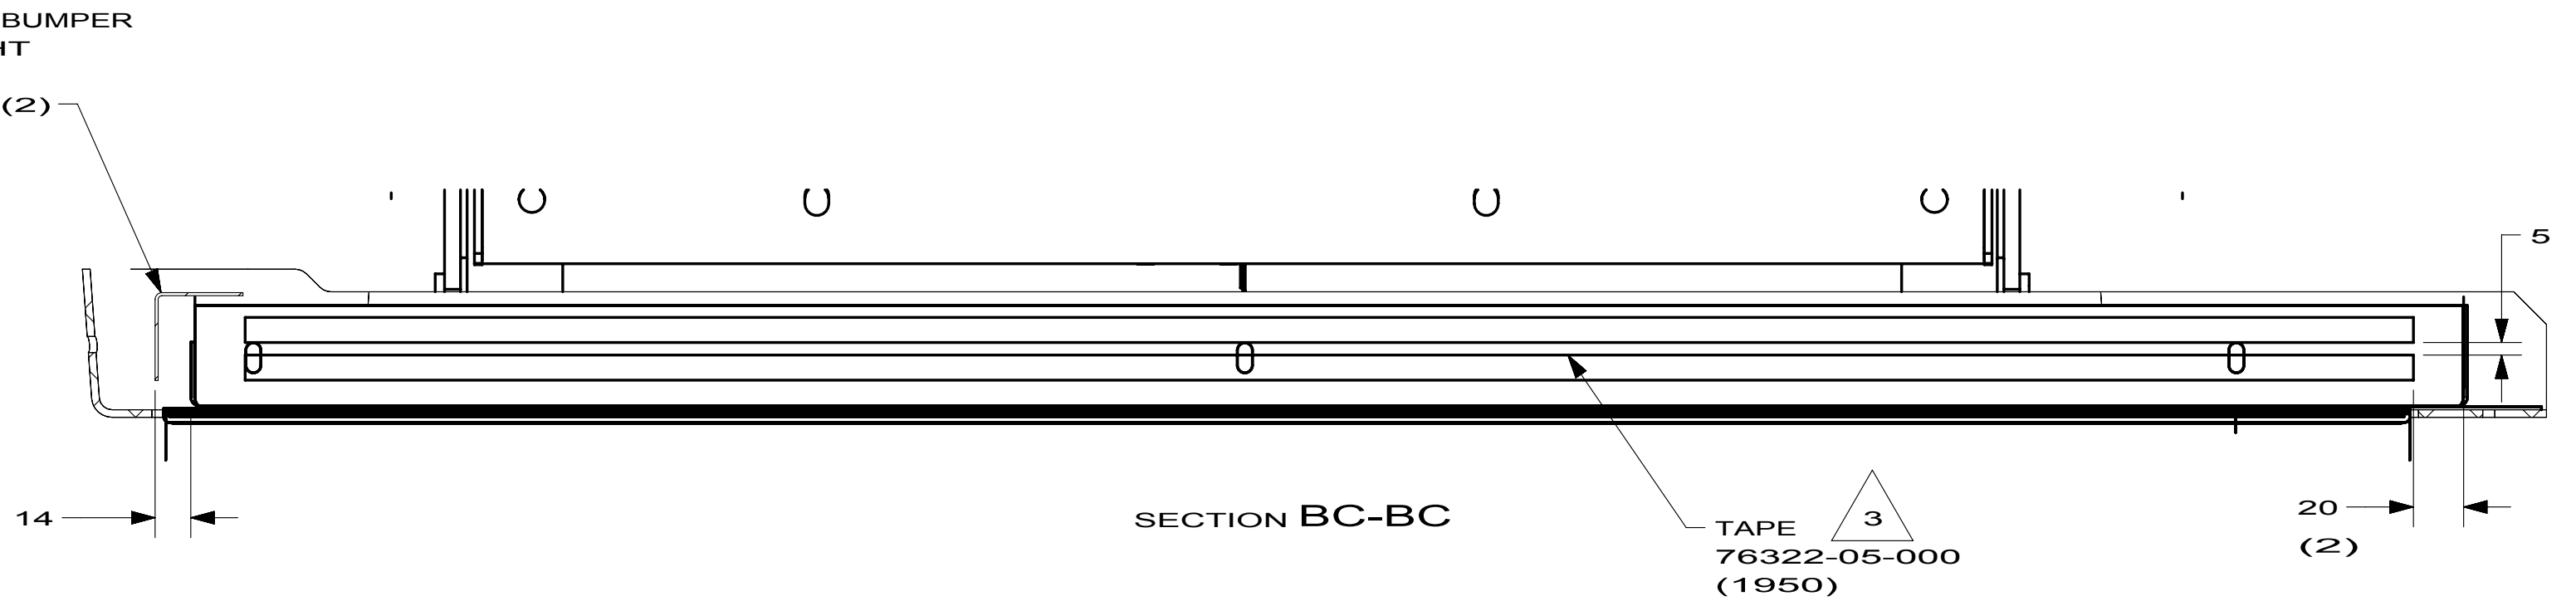

SECTION BC-BC

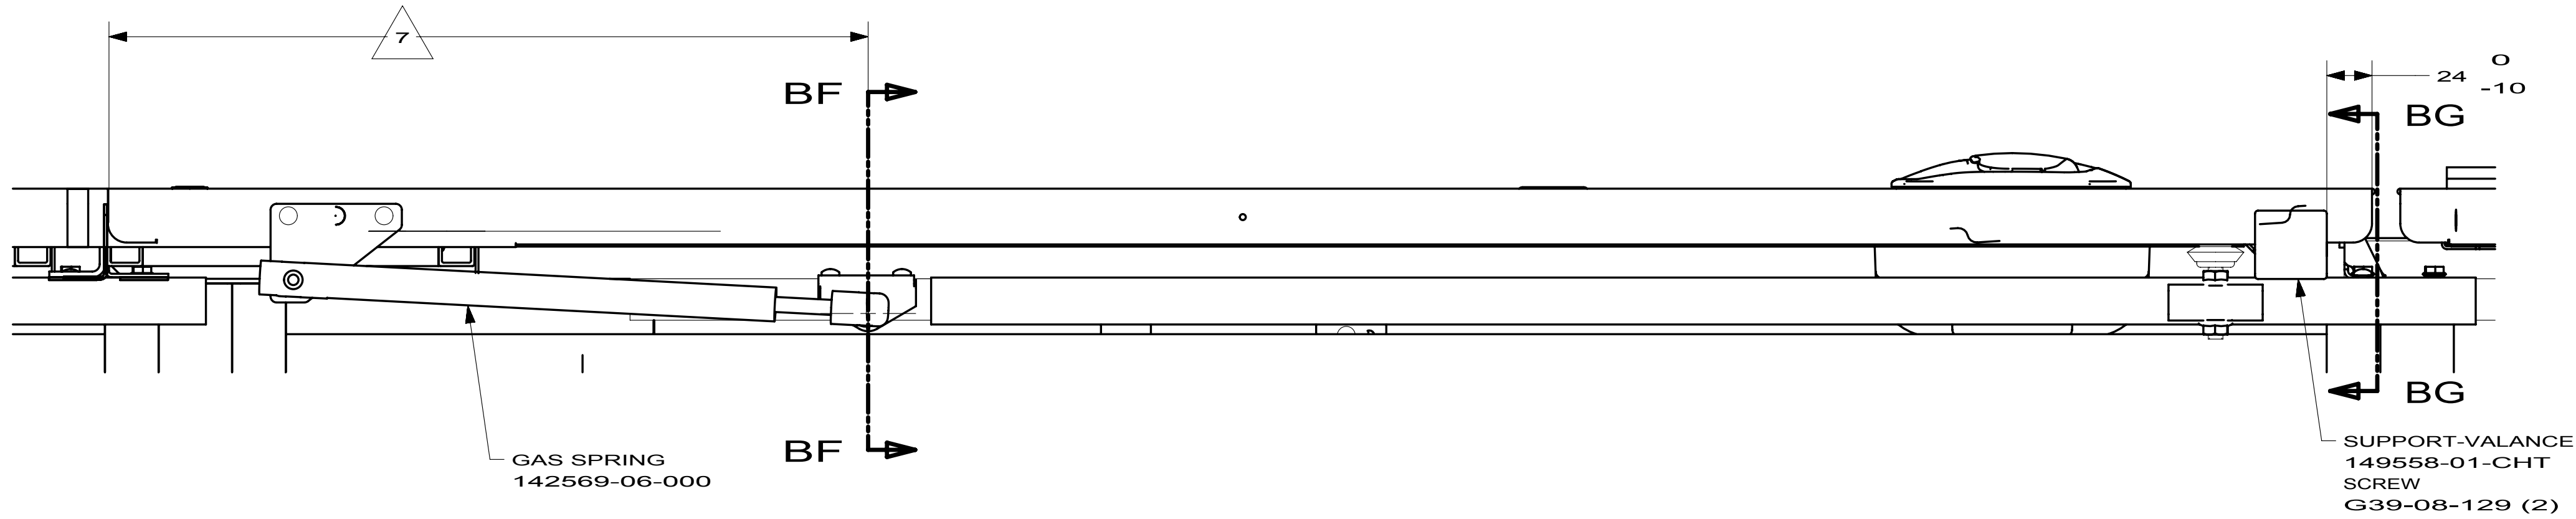


VIEW BE-BE

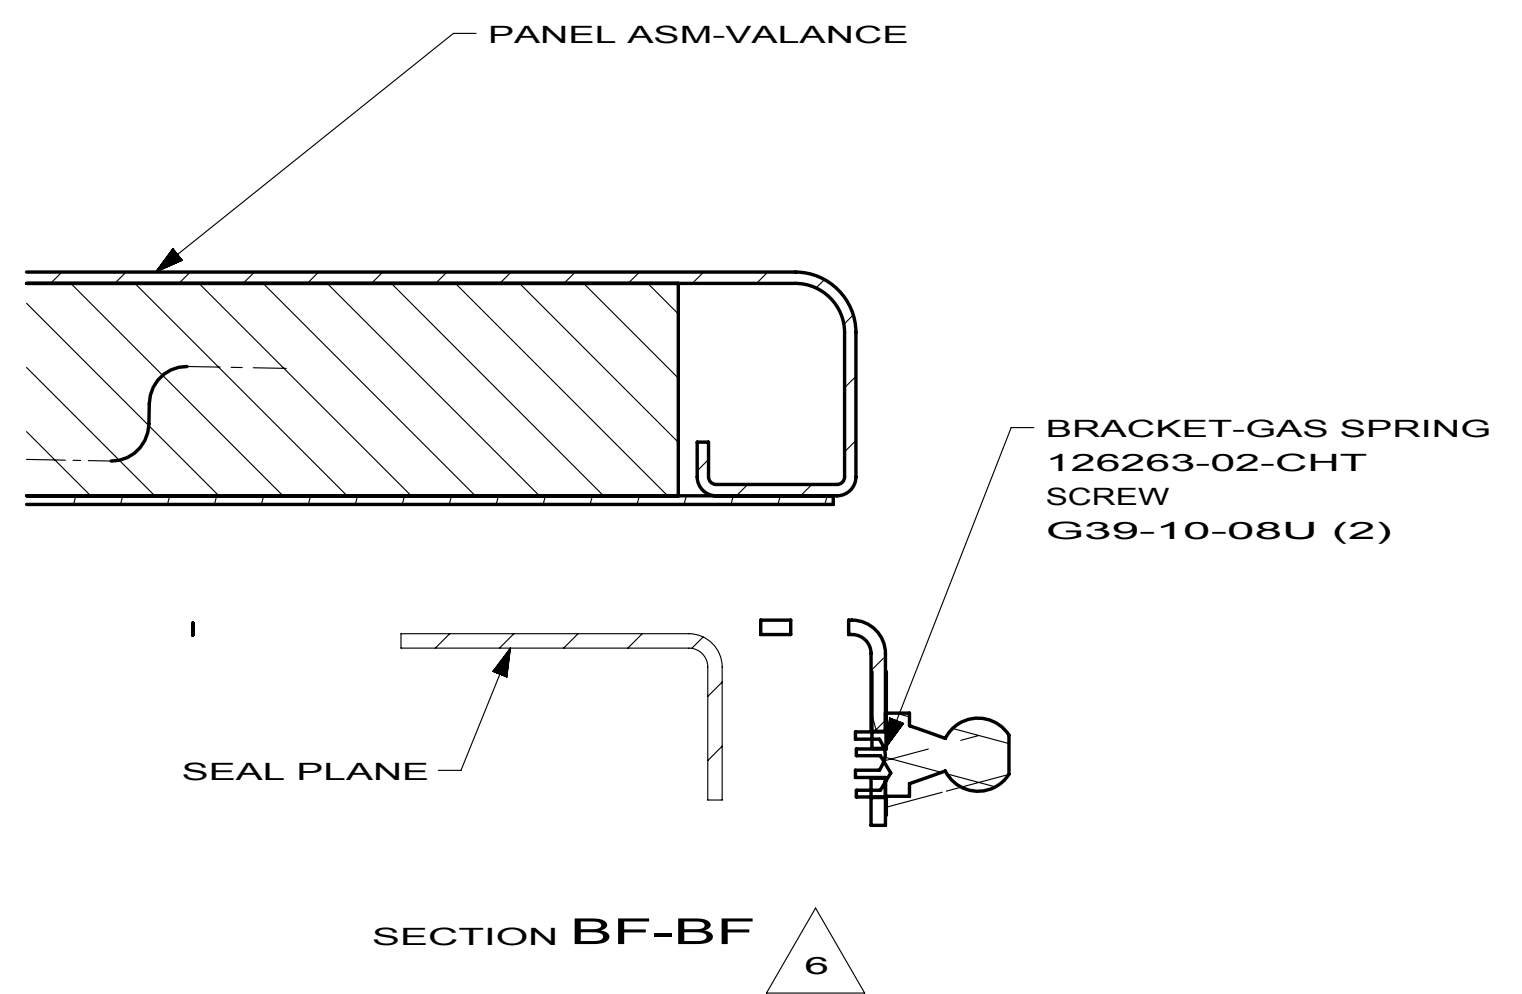

SECTION BF-BF

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 3	PART NO 169674	REV

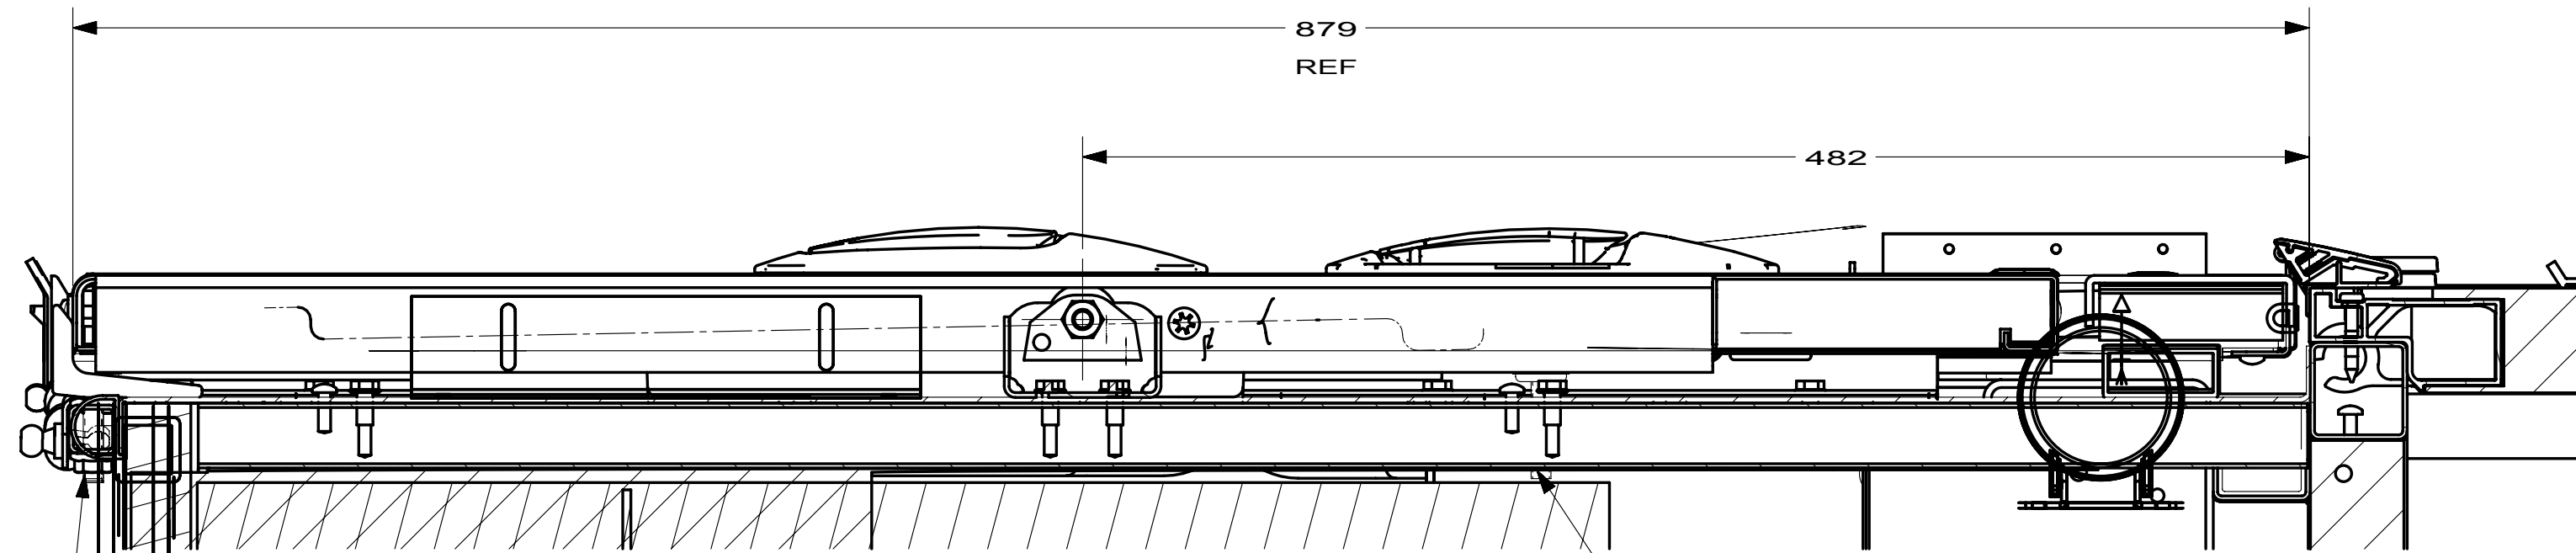


BOLT-HOOD ADJUSTING
(REF)

SECTION BG-BG

6

BOLT-HOOD ADJUSTING
58786-01-000
RIVNUT
63729-03-000
NUT
D39-05-00U

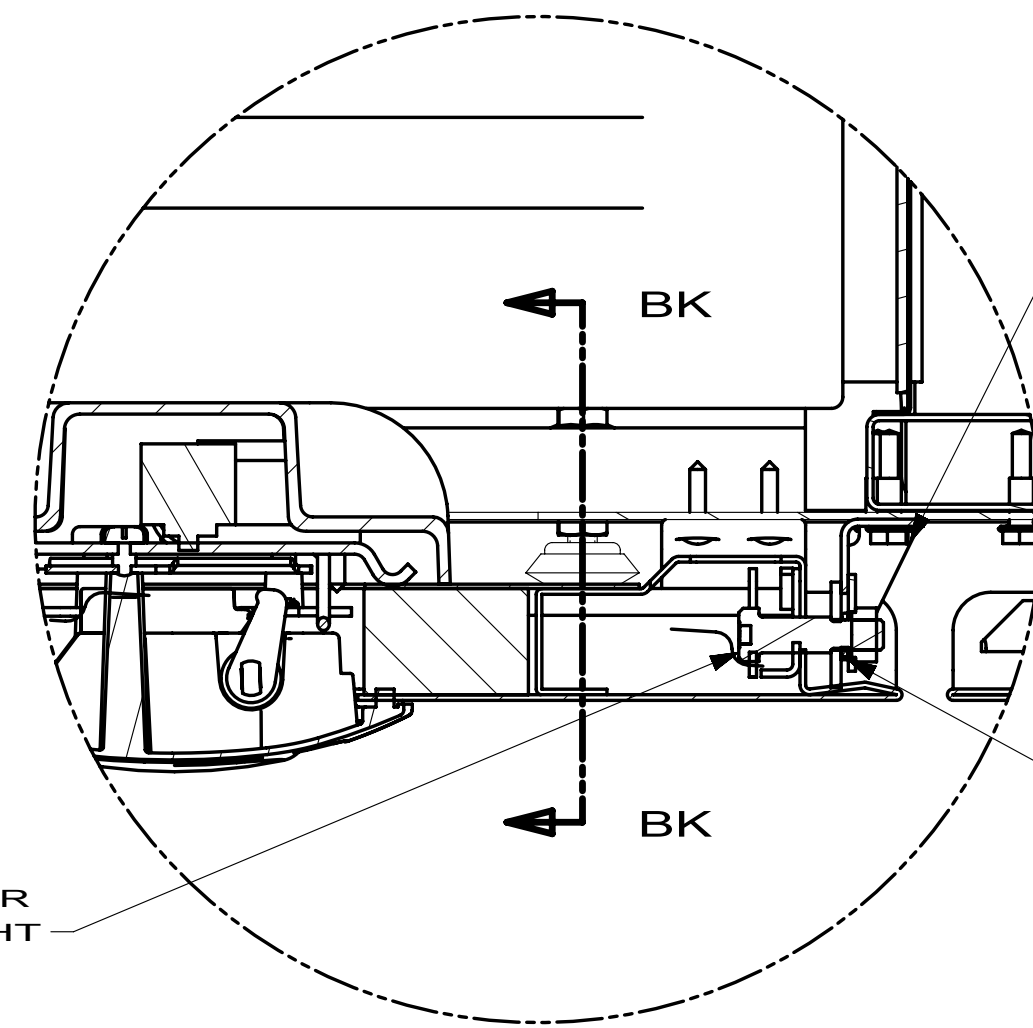


BOLT-STRIKER
149358-01-CHT

MOUNT-STRIKER BOLT
149356-01-CHT
BOLT
G42-04-16U (2)

PLATE ASM-STIKER BOLT
149357-02-CHT

DETAIL BJ

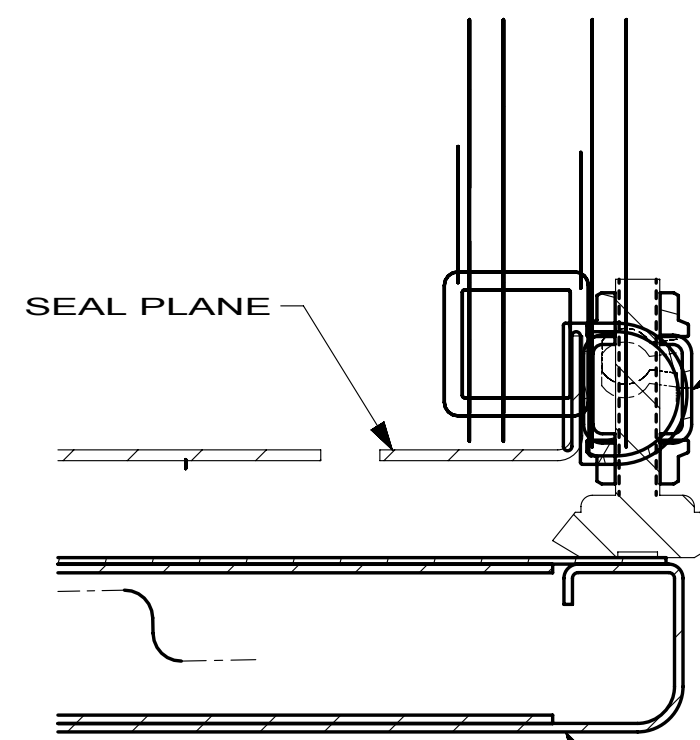

SEAL PLANE

STL-TUBE


BOLT-HOOD ADJUSTING
58786-01-000 (2)
NUT
D39-05-00U (2)

PANEL ASM-VALANCE

SECTION BK-BK

6

PANEL ASM-VALANCE

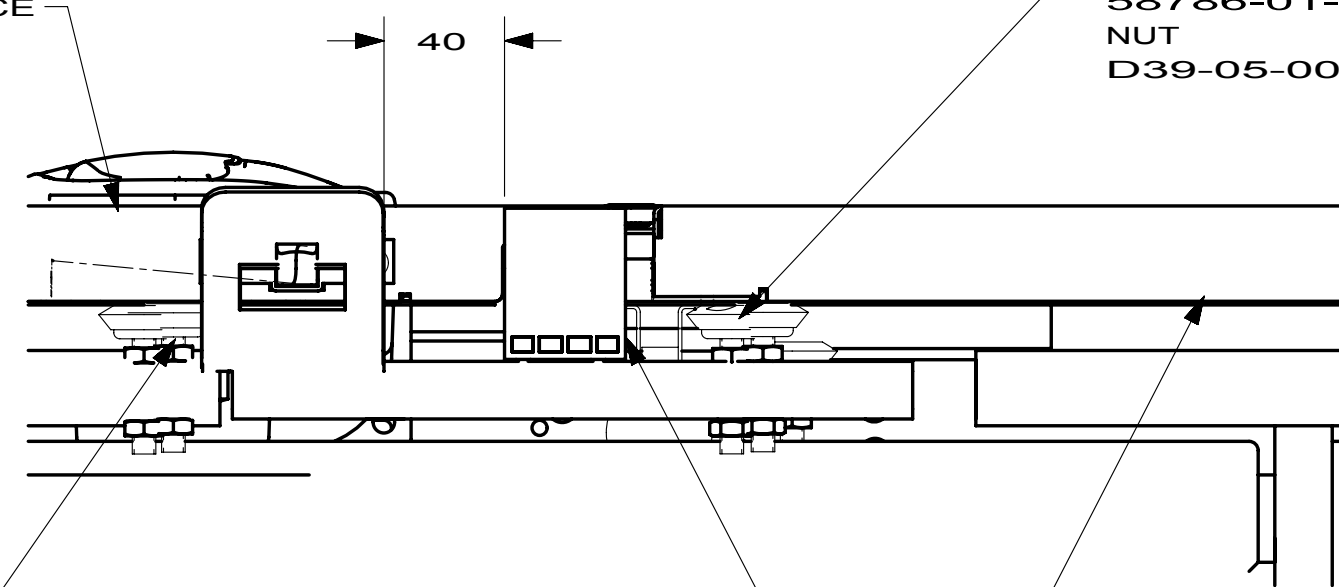

40


BOLT-HOOD ADJUSTING
58786-01-000 (2)
NUT
D39-05-00U (4)

PANEL ASM-VALANCE

MOUNT-STRIKER BOLT
161988-01-CHT
SCREW
G39-10-10T (2)

SUPPORT-VALANCE DOOR
162234-01-CHT
SCREW
G37-08-129 (2)

VIEW BL-BL

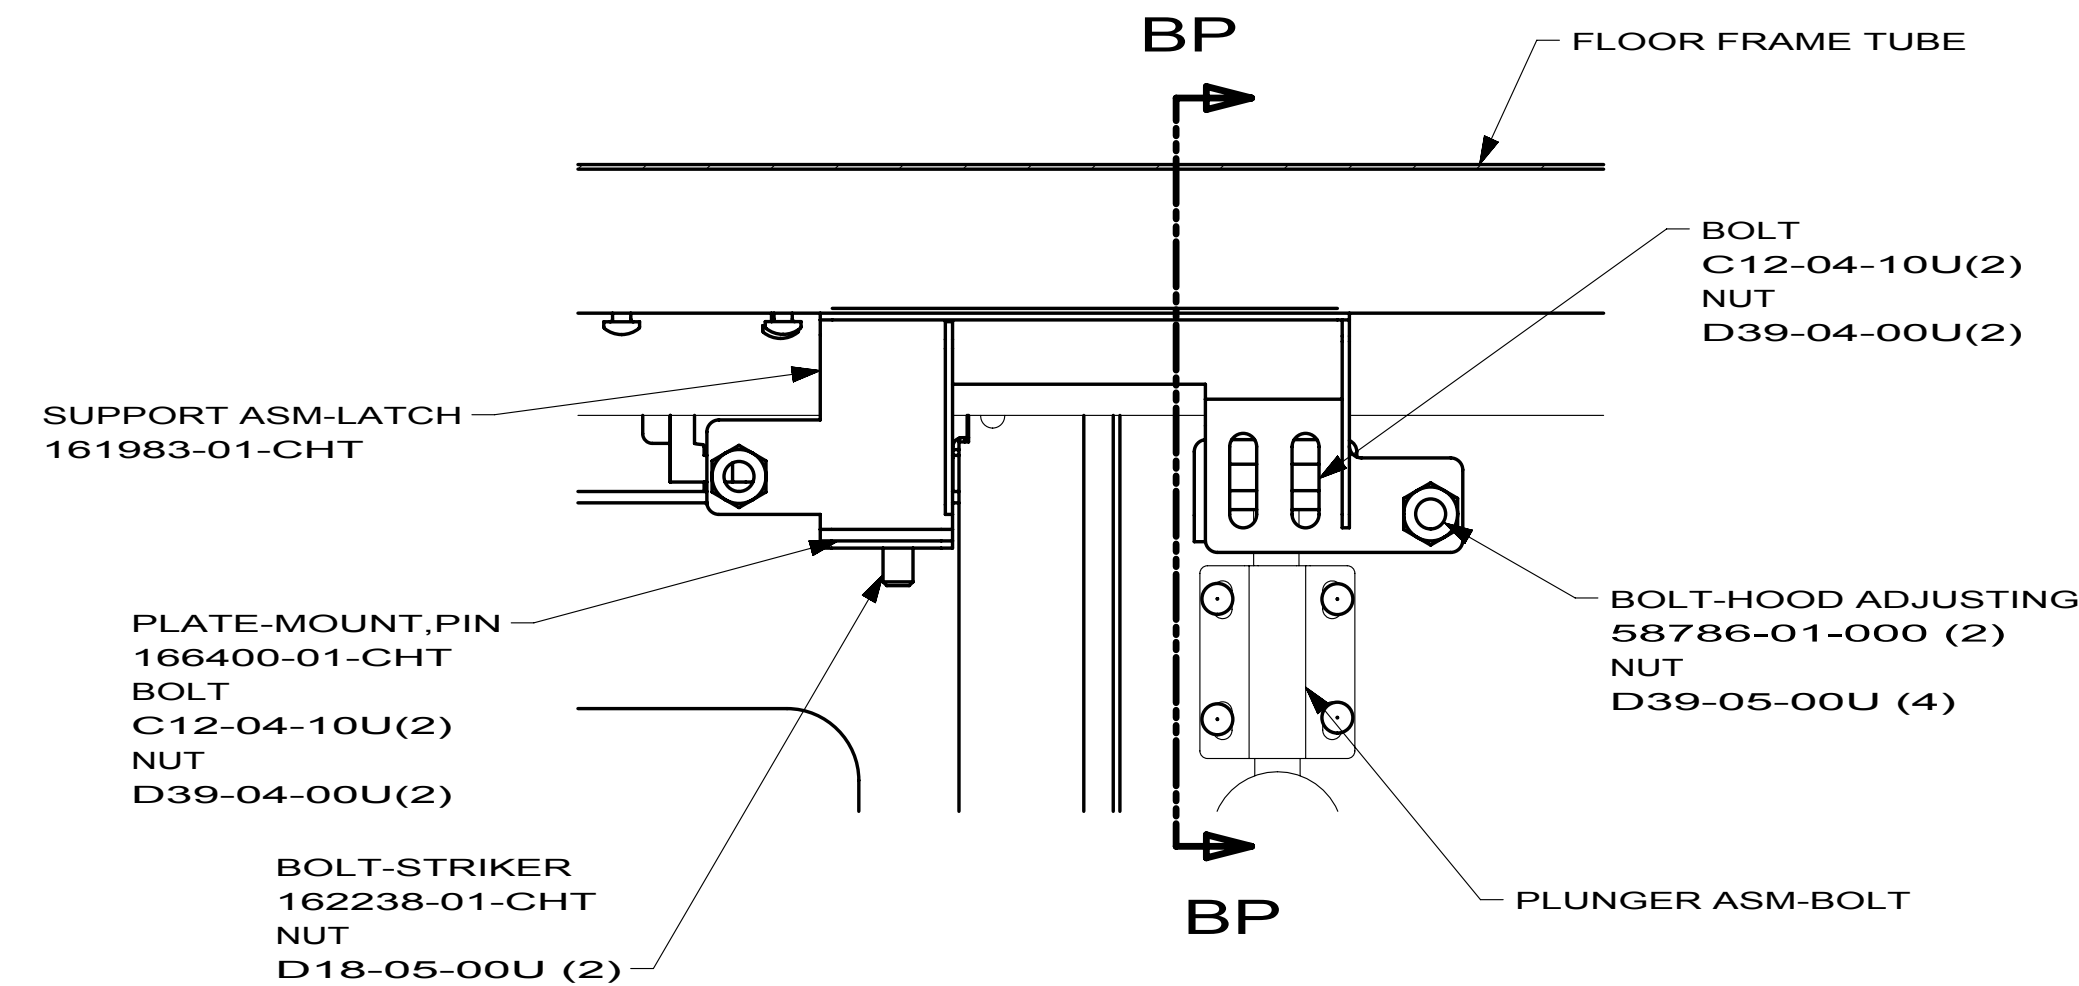

BP

FLOOR FRAME TUBE

BOLT
C12-04-10U(2)
NUT
D39-04-00U(2)

BOLT-HOOD ADJUSTING
58786-01-000 (2)
NUT
D39-05-00U (4)

BP


PLUNGER ASM-BOLT

SUPPORT ASM-LATCH
161983-01-CHT

PLATE-MOUNT,PIN
166400-01-CHT
BOLT
C12-04-10U(2)
NUT
D39-04-00U(2)

BOLT-STRIKER
162238-01-CHT
NUT
D18-05-00U (2)

SECTION BM-BM

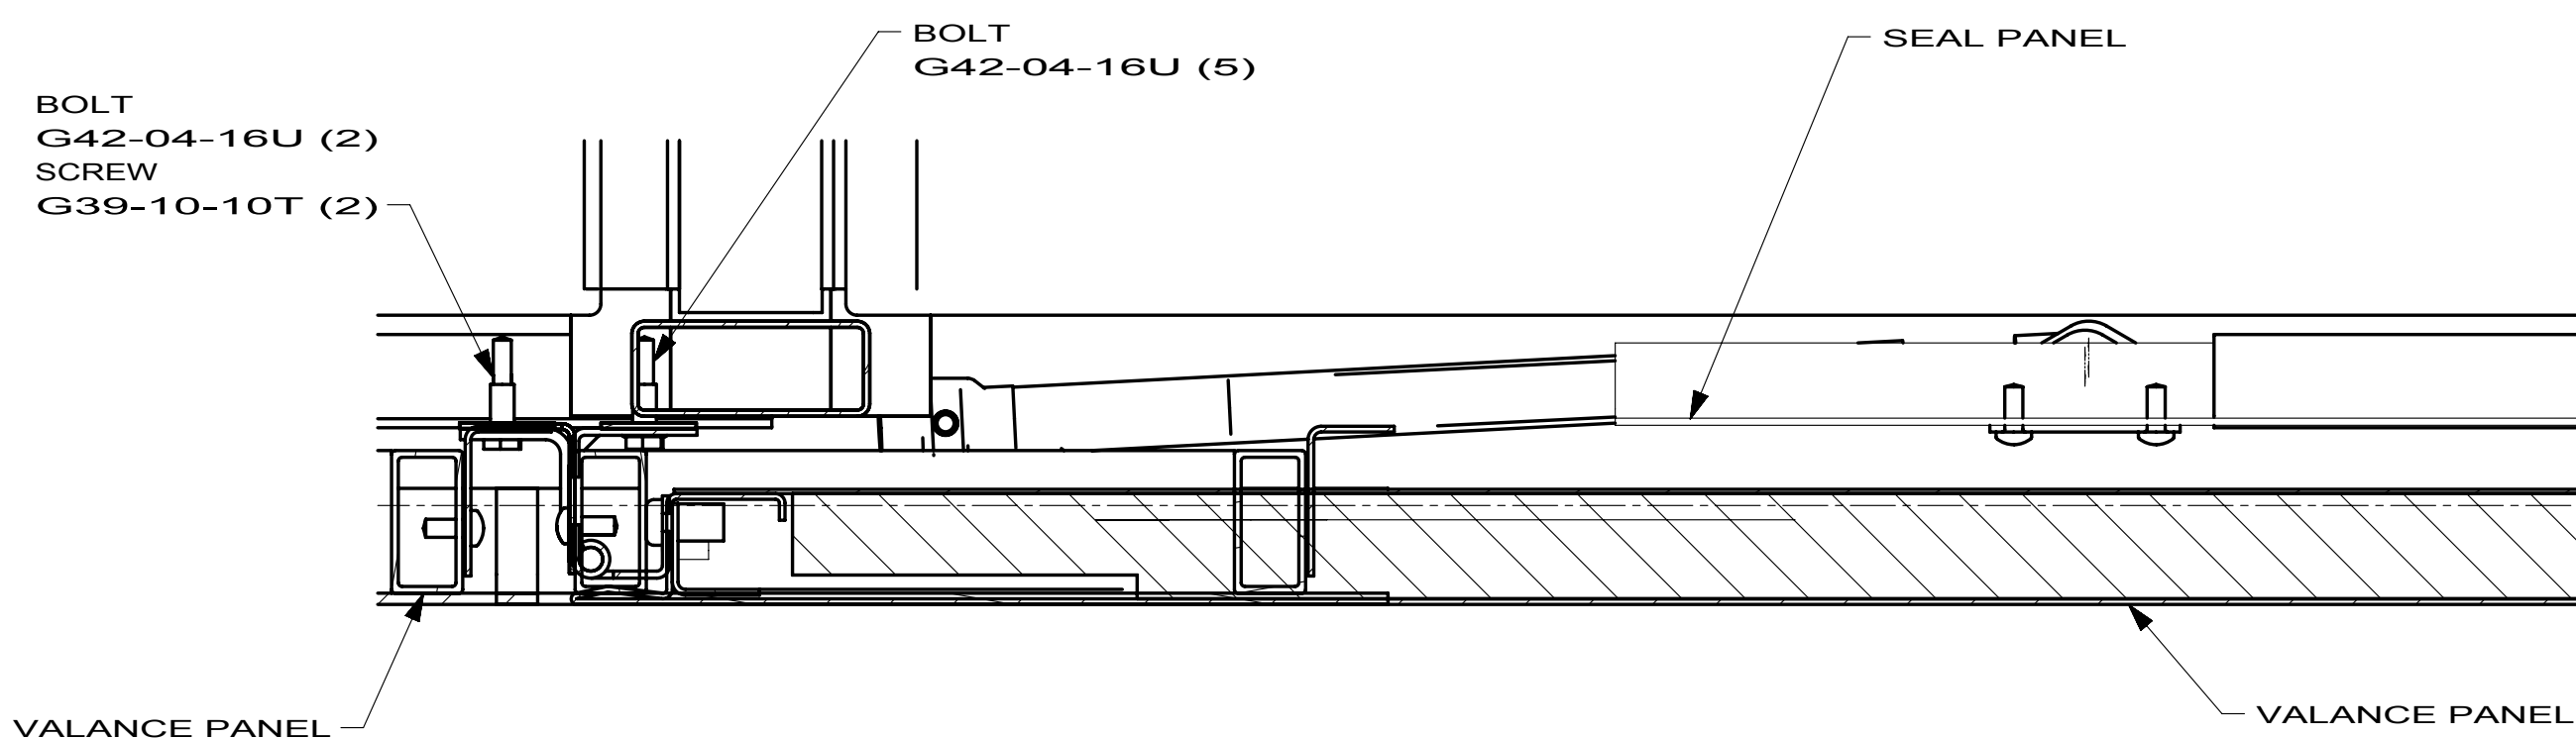

BOLT
G42-04-16U (2)
SCREW
G39-10-10T (2)

BOLT
G42-04-16U (5)

SEAL PANEL

VALANCE PANEL


VALANCE PANEL

SECTION BH-BH


6

DETAIL BJ


FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-SECTIONS		
SHEET 4	PART NO 169674	REV

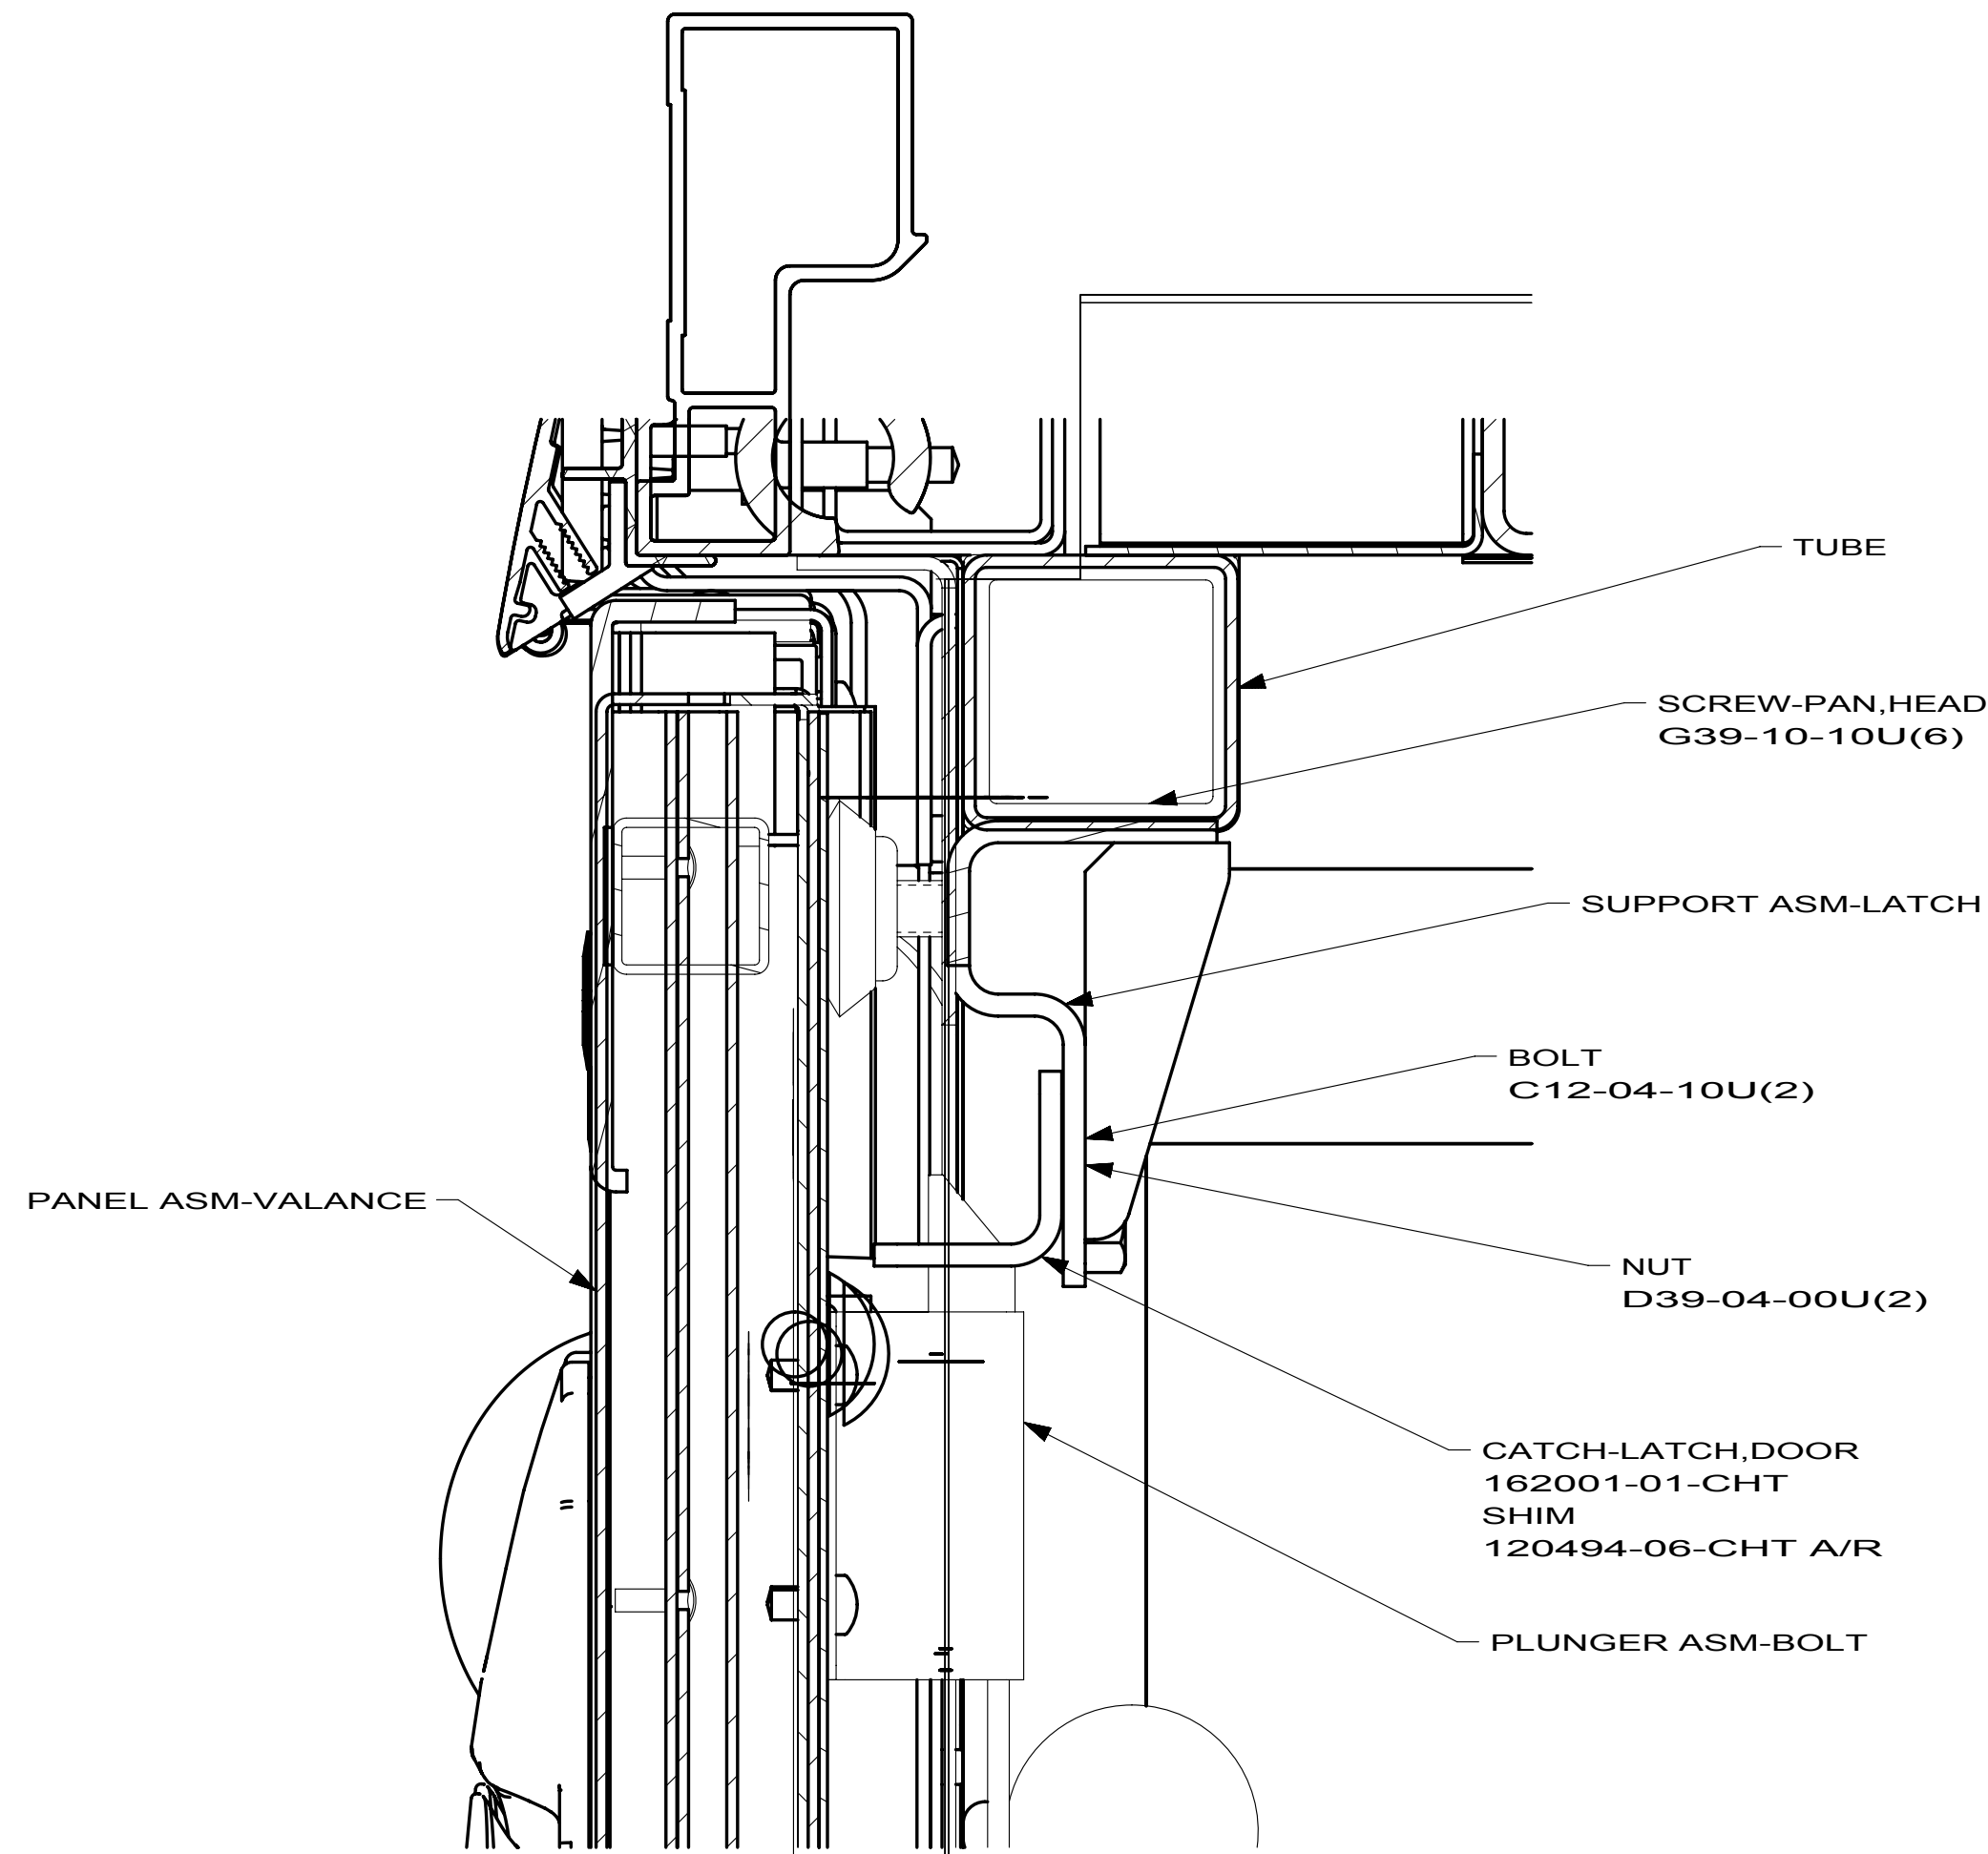


SECTION BP-BP

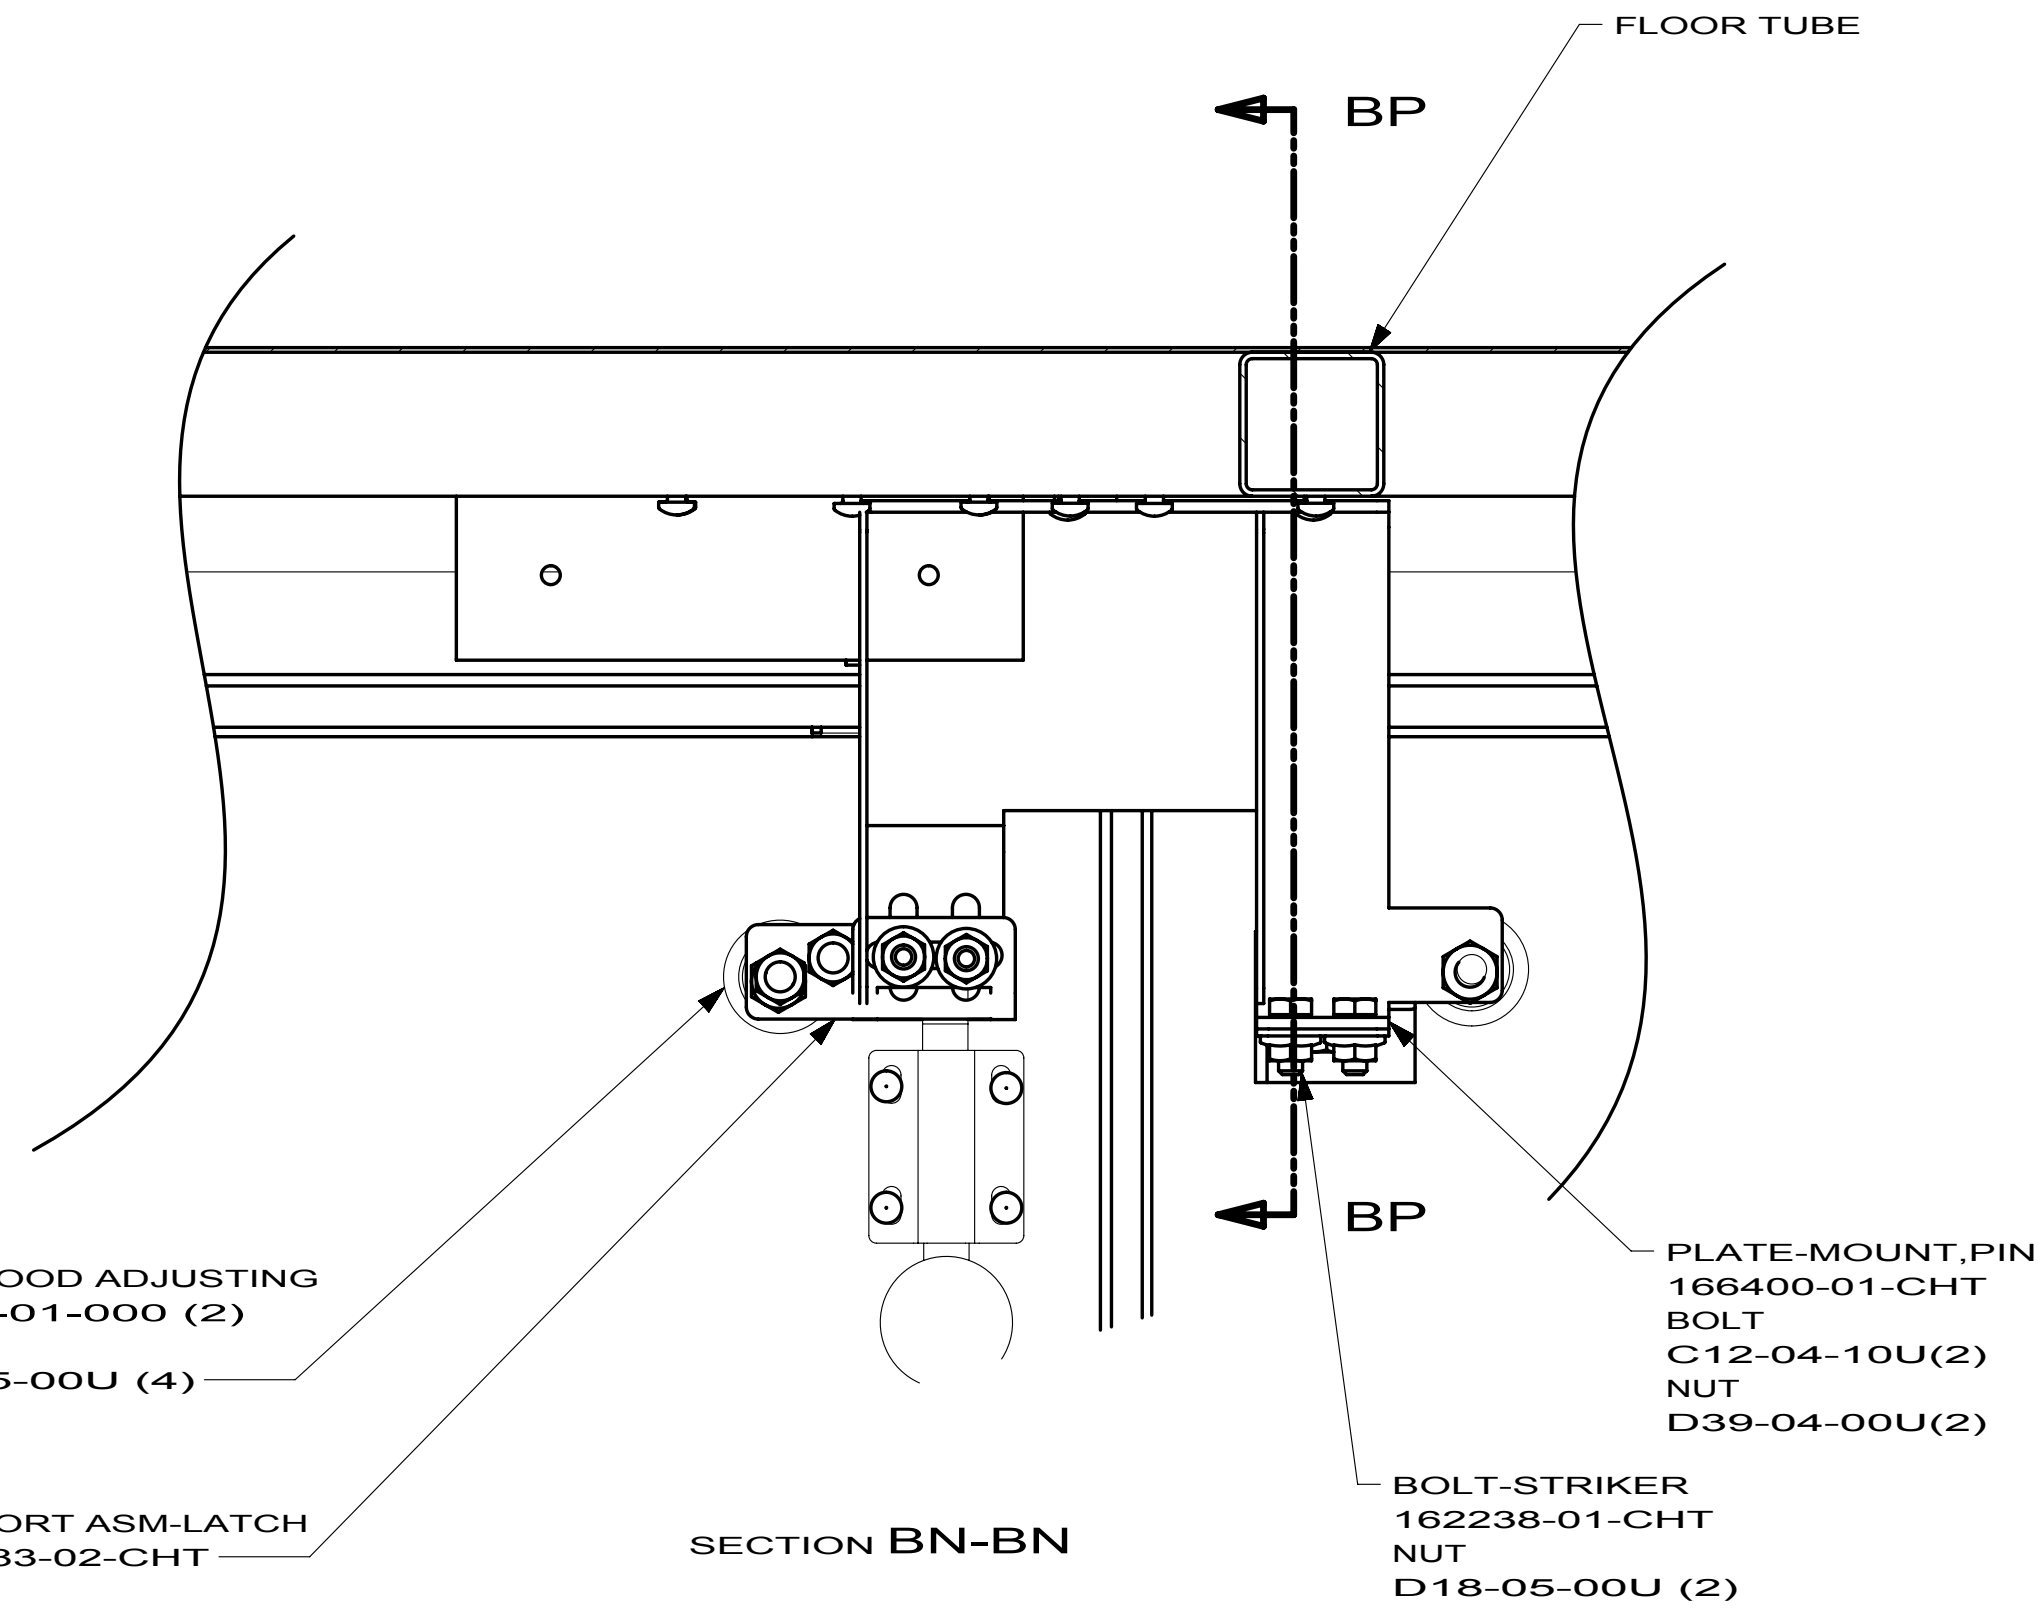

SECTION BN-BN

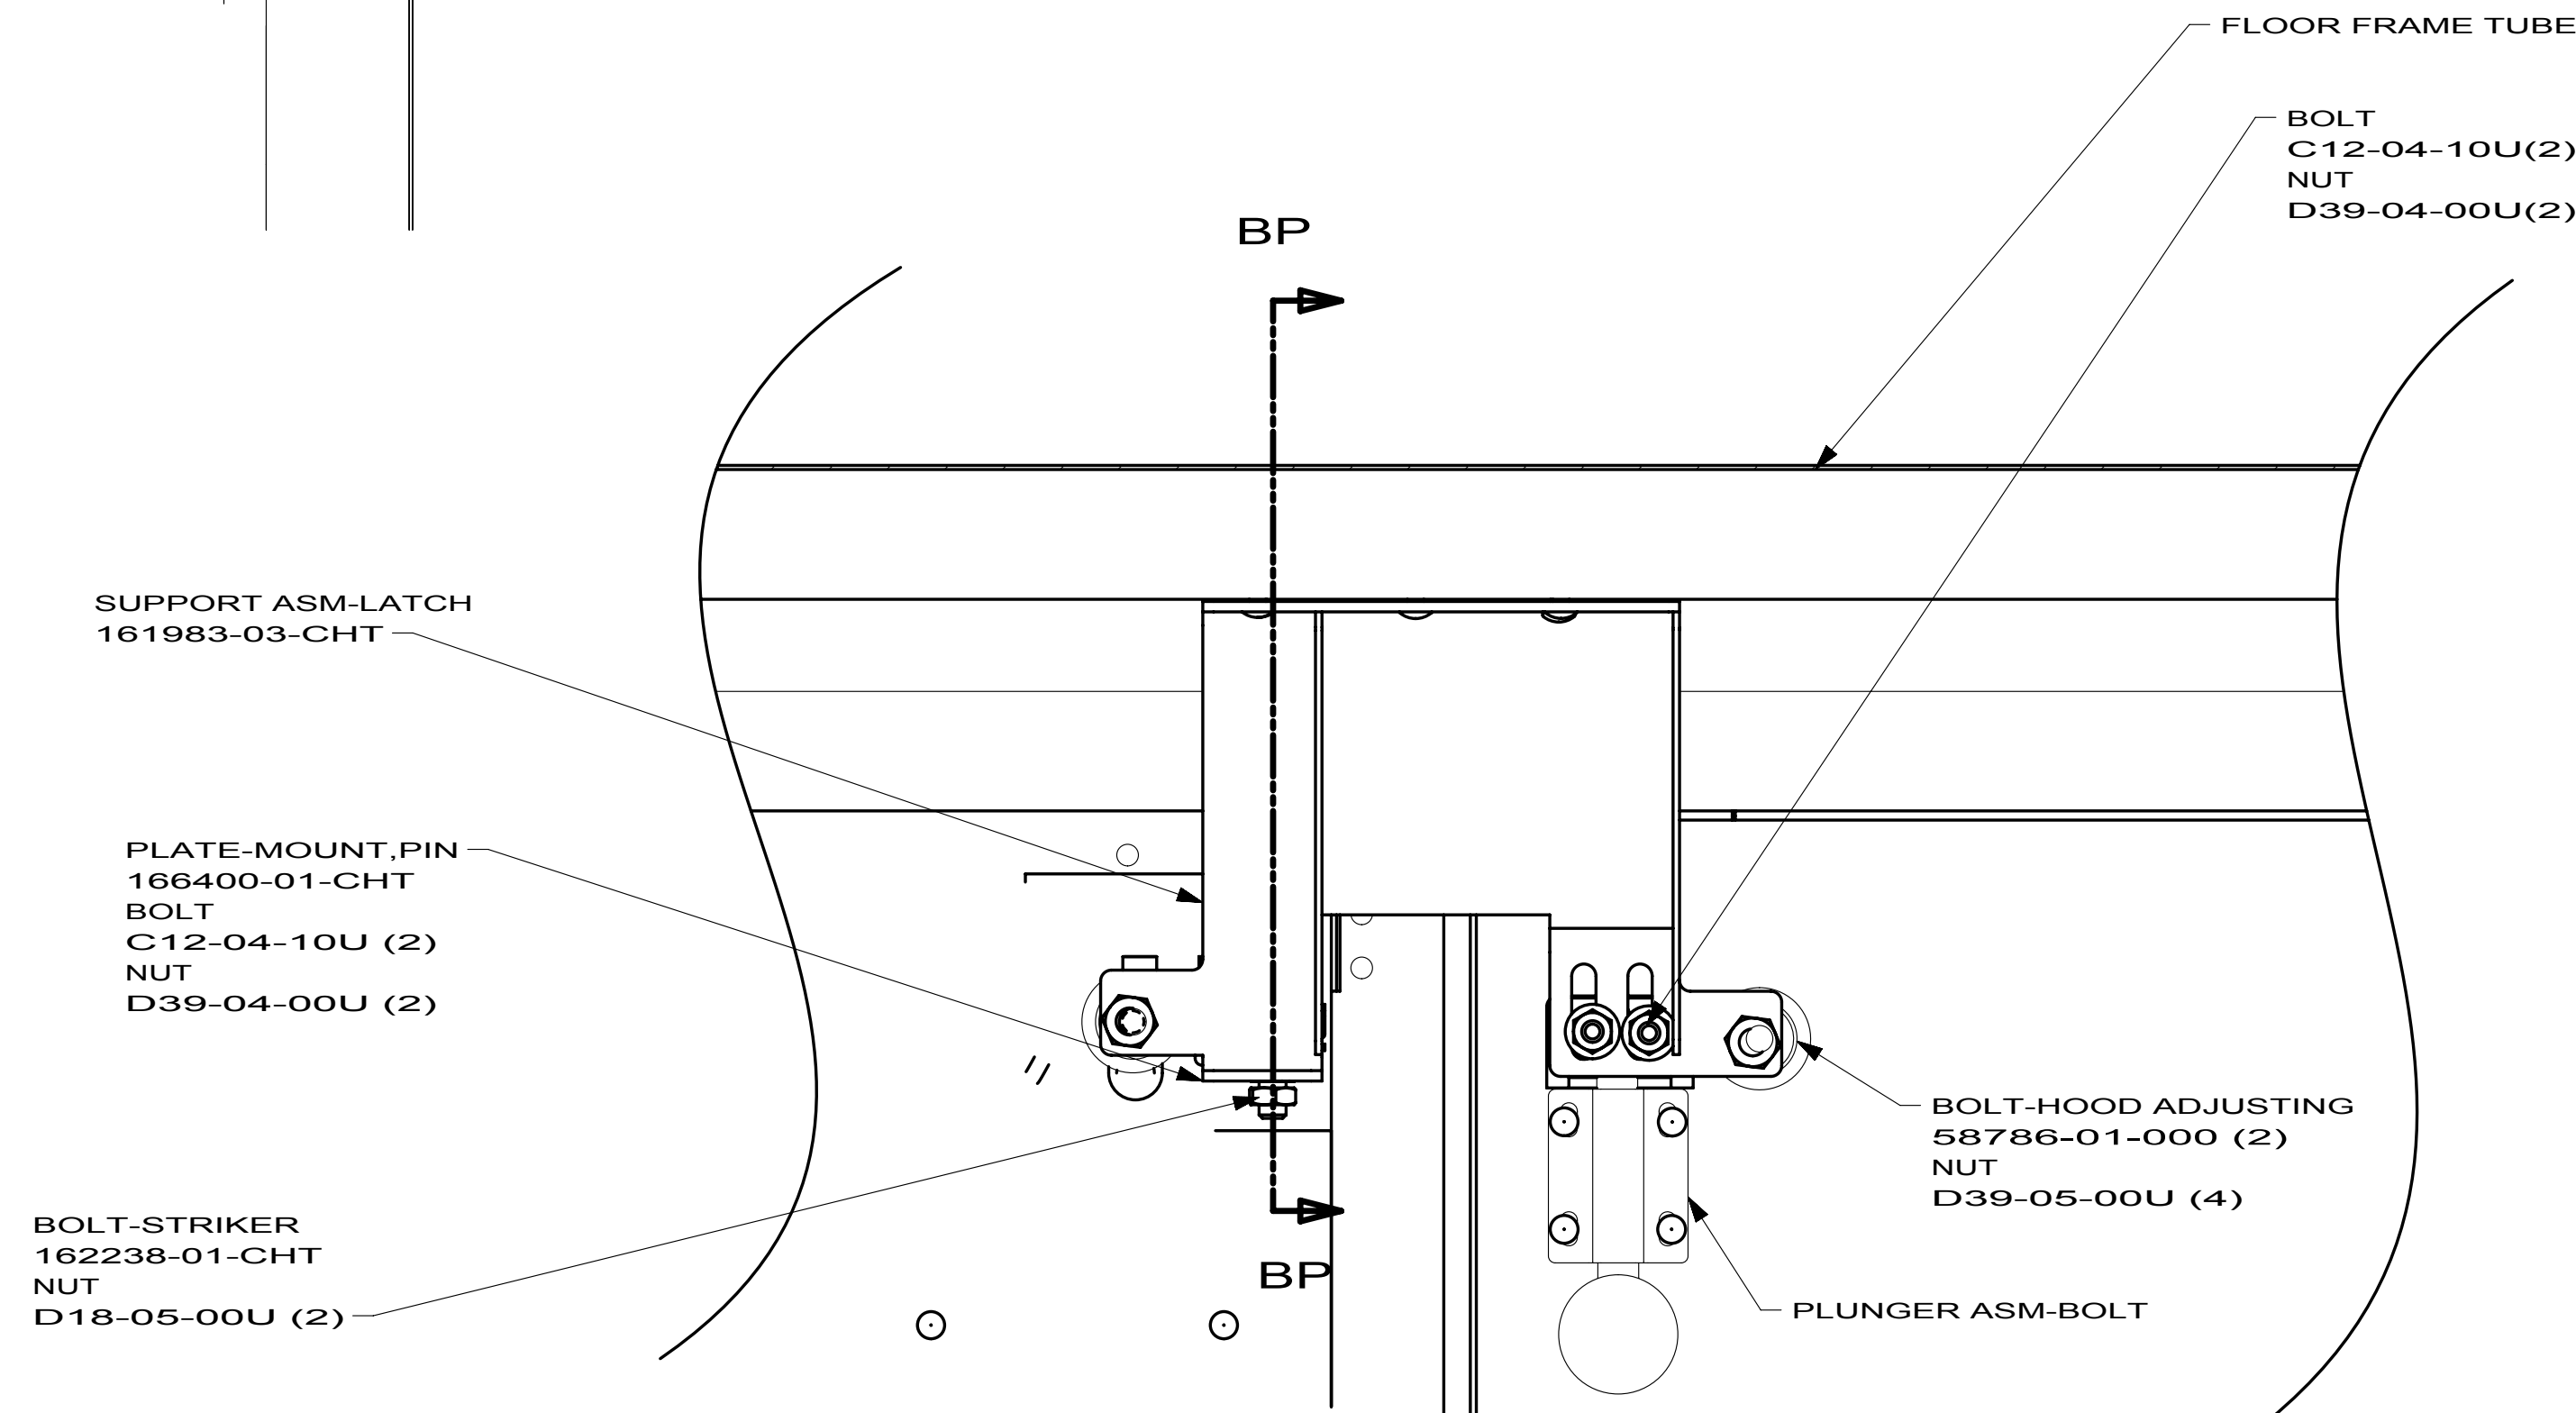


SECTION BR-BR

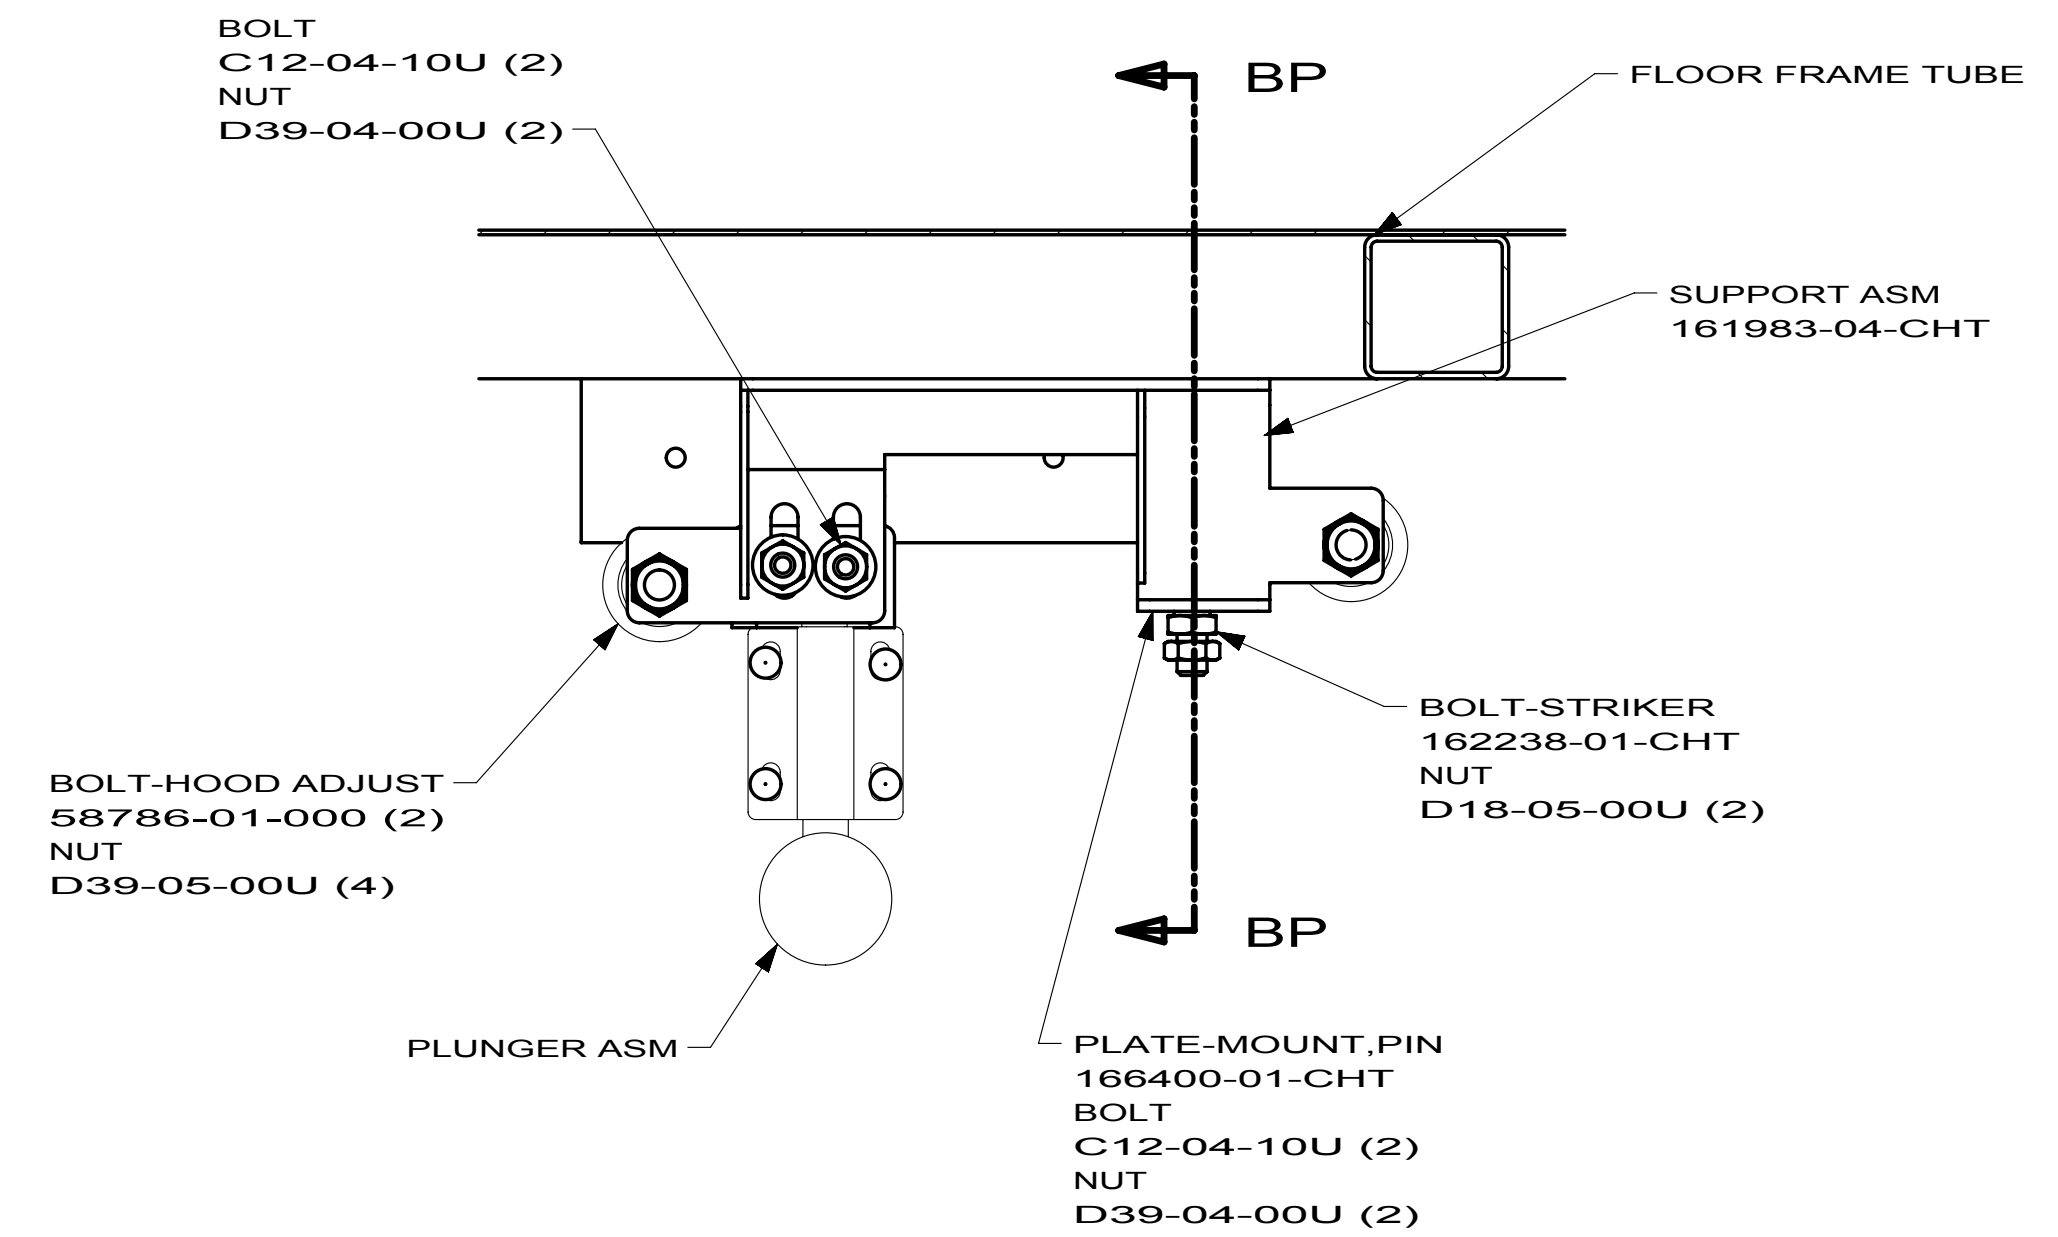


SECTION BS-BS (ROTATED)

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE: BODY INSTL-SECTIONS		
SHEET 5	PART NO 169674	REV

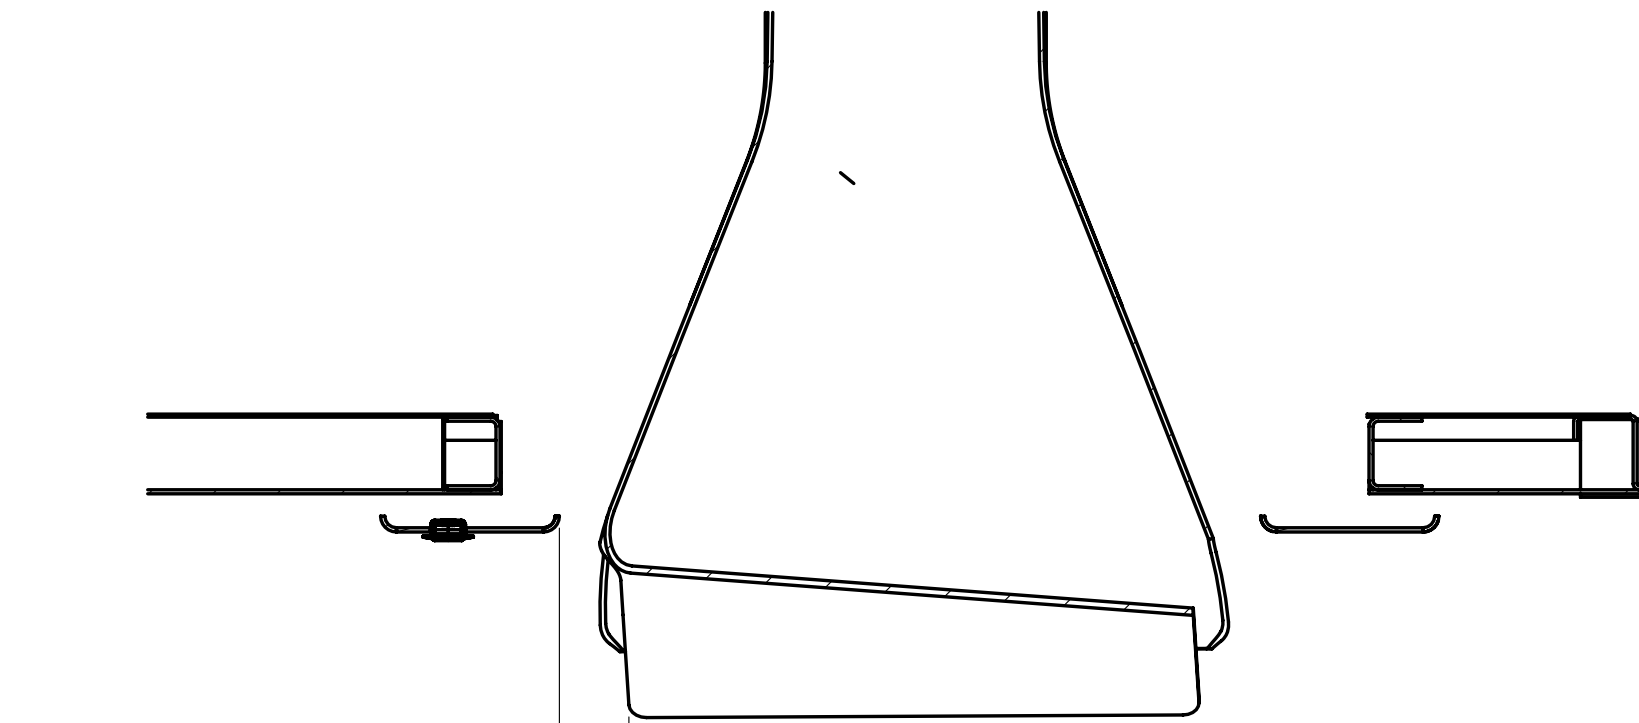

24.0 ± 5 (2)
(STEEL TRIM)
28.5 ± 5 (2)
(FIBERGLASS TRIM)


SECTION BW-BW

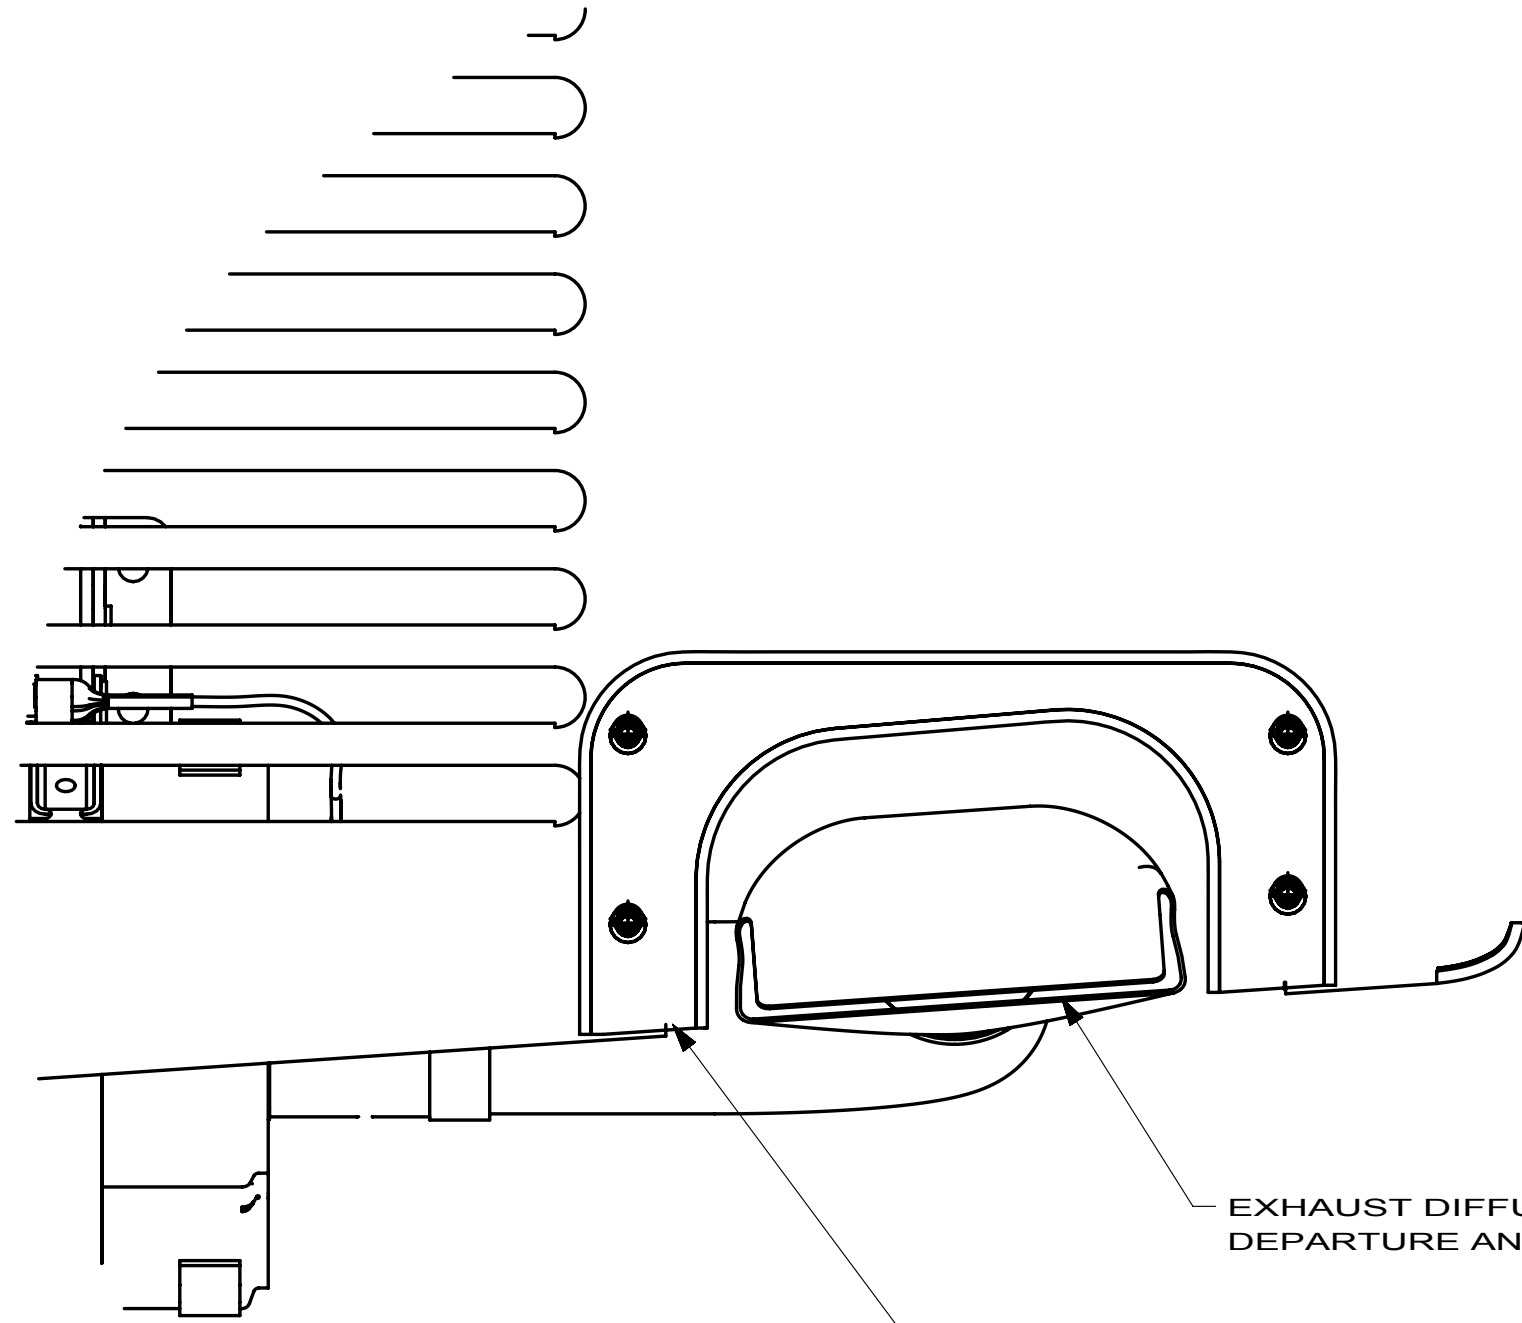


EXHAUST DIFFUSER FOLLOWS
DEPARTURE ANGLE

PANEL-TRIM,DIFFUSER
163769-01-CHT
RETAINER-SCREW
149753-01-CHT (4)
CAP-SCREW,RETAINER
149753-02-CHT (4)


DETAIL BT

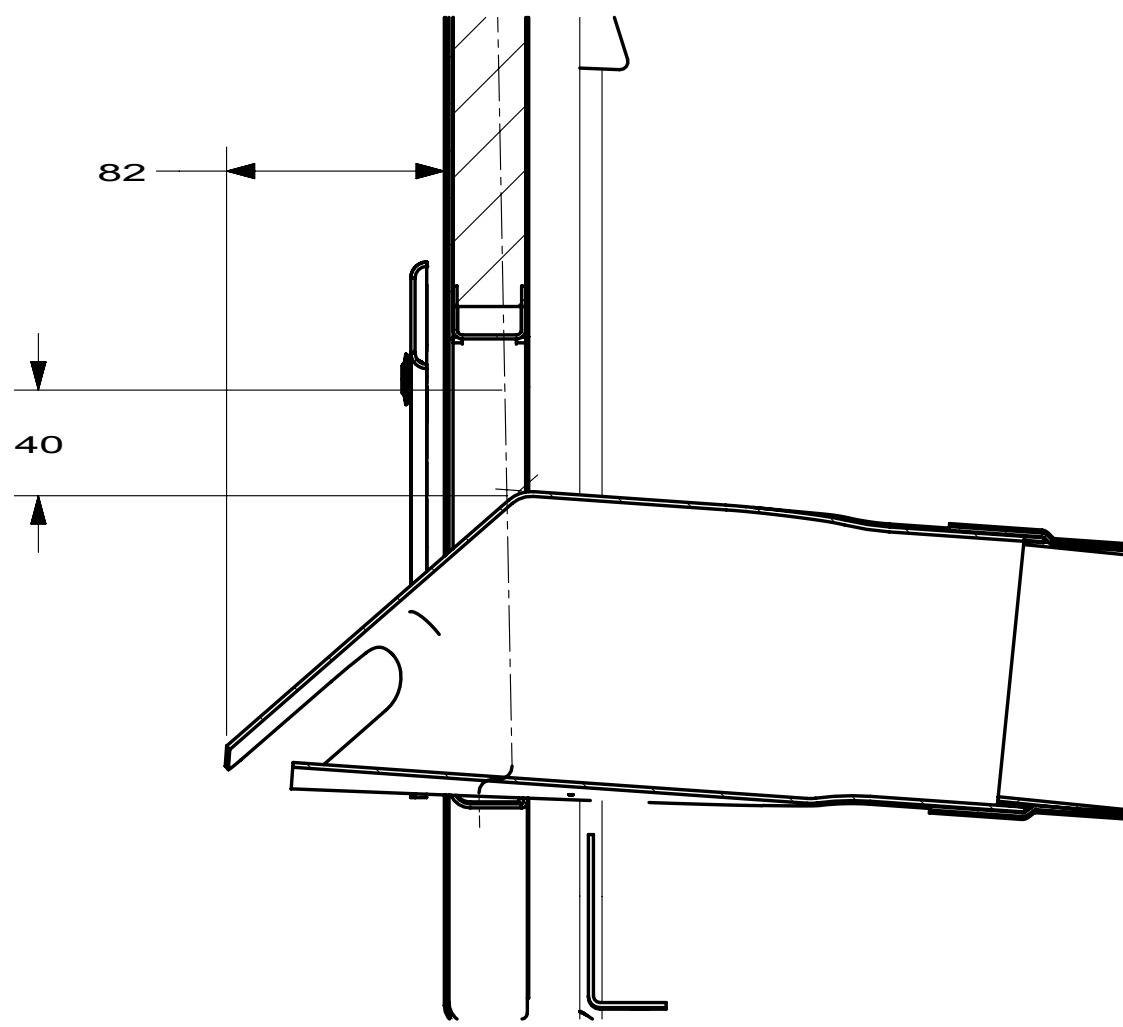

SECTION BX-BX

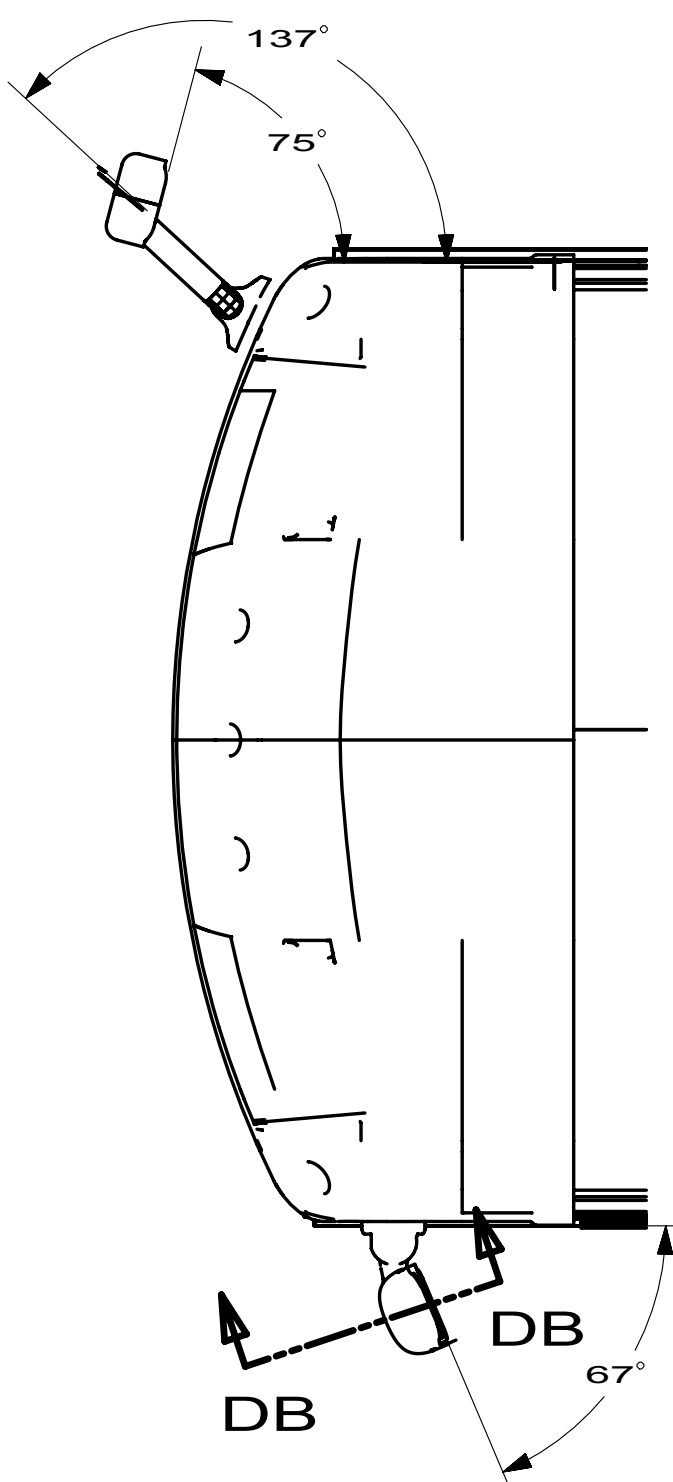

VIEW DA

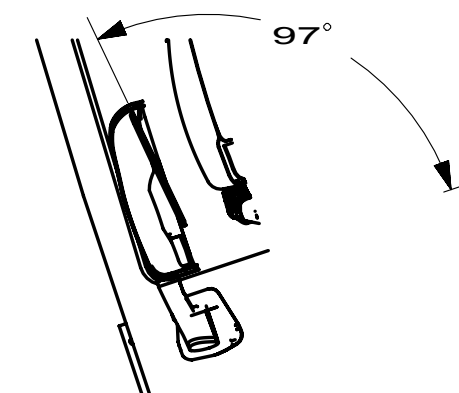

SECTION DB-DB

FIRST USED		
10 R-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
BODY INSTL-SECTIONS		
SHEET 6	PART NO	REV
	169674	

COWL ASM-WINDSHIELD, RH
156708-03-XXX
SCREW
000G55-08-12B (2)
WASHER
000E13-18-00B
NUT
000D29-05-00B

COWL ASM-WINDSHIELD, CENTER
156705-02-XXX
WASHER
000E13-18-00B (3)
NUT
000D29-05-00B (3)

PANEL-TRIM,FRONT
152685-01-01A
GASKET
155091-01-01A
ZEE-ACCESS PANEL,HEADLAMP
152687-01-02B
WASHER
000E13-14-00B (2)
NUT
0MD54U-06-000 (2)

BRACKET ASM-BUMPER
128455-01-02B (2)
SPACER-BUMPER
116617-02-02B (2)
BOLT
000C12-08-24B (2)
WASHER
000E13-22-00B (4)
NUT
000D29-08-00B (4)

HOOD COMPL-FRONT
160635-01-XXX

BRACKET ASM-BUMPER
128455-02-02B (2)
SPACER-BUMPER
116617-02-02B (2)
BOLT
000C12-08-24B (2)
WASHER
000E13-22-00B (4)
NUT
000D29-08-00B (4)

DAMPER
154973-01-000 (2)(UP TO 05-10-10)
154973-02-000 (2)(AFTER 05-11-10)
CLIP
154991-01-01A (4)(UP TO 05-10-10)

BRACKET-BALL STUD
154981-01-02B (2)
SCREW
000G11-10-12B (6)
BALL-STUD-13MM BALL
154990-01-01A (2)(UP TO 04-26-10)
057460-02-000 (2)(AFTER 04-27-10)
NUT
000D29-05-00B (2)

BOLT-HOOD ADJUSTING
058786-04-000 (2)
NUT
000D39-05-00B (4)

BRACKET-STRIKER,HOOD
144209-01-02B (2)
STIKER-DOOR,LUGGAGE
130053-01-01A (2)
WASHER
000E13-10-00B (8)
SCREW
000G19-10-10B (8)
NUT
000D24-10-00B (8)

CABLE ASM-DOOR
155143-02-01A
NUT
000D27-10-00B
SCREW
000G18-06-10B
WASHER
000E13-08-00B

COWL ASM-WINDSHIELD, LH
156708-04-XXX
SCREW
000G55-08-12B (2)
WASHER
000E13-18-00B
NUT
000D29-05-00B

TRIM-PANEL,FIBERGLASS
140447-01-CHT
140447-07-CHT (R42AD)
SCREW
000G60-08-16B (3)

PANEL ASM-FRONT,LOWER
140447-01-CHT
160621-03-CHT (R42AD)


SCREW
000G39-08-08B (4)

GASKET
155091-02-01A

PANEL-TRIM,FRONT
152685-02-01A
GASKET
155091-02-01A
ZEE-ACCESS PANEL,HEADLAMP
152687-01-02B
WASHER
000E13-14-00B (2)
NUT
0MD54U-06-000 (2)

BOLT
000C12-08-56B (2)
WASHER
000E13-21-00B (8)
NUT
000D36-08-00B (2)


FIRST USED		10 R-SERIES,W	
DO NOT SCALE DRAWING			
TITLE: BODY PANEL INSTL-FRONT			
SHEET 1	PART NO	160634	REV

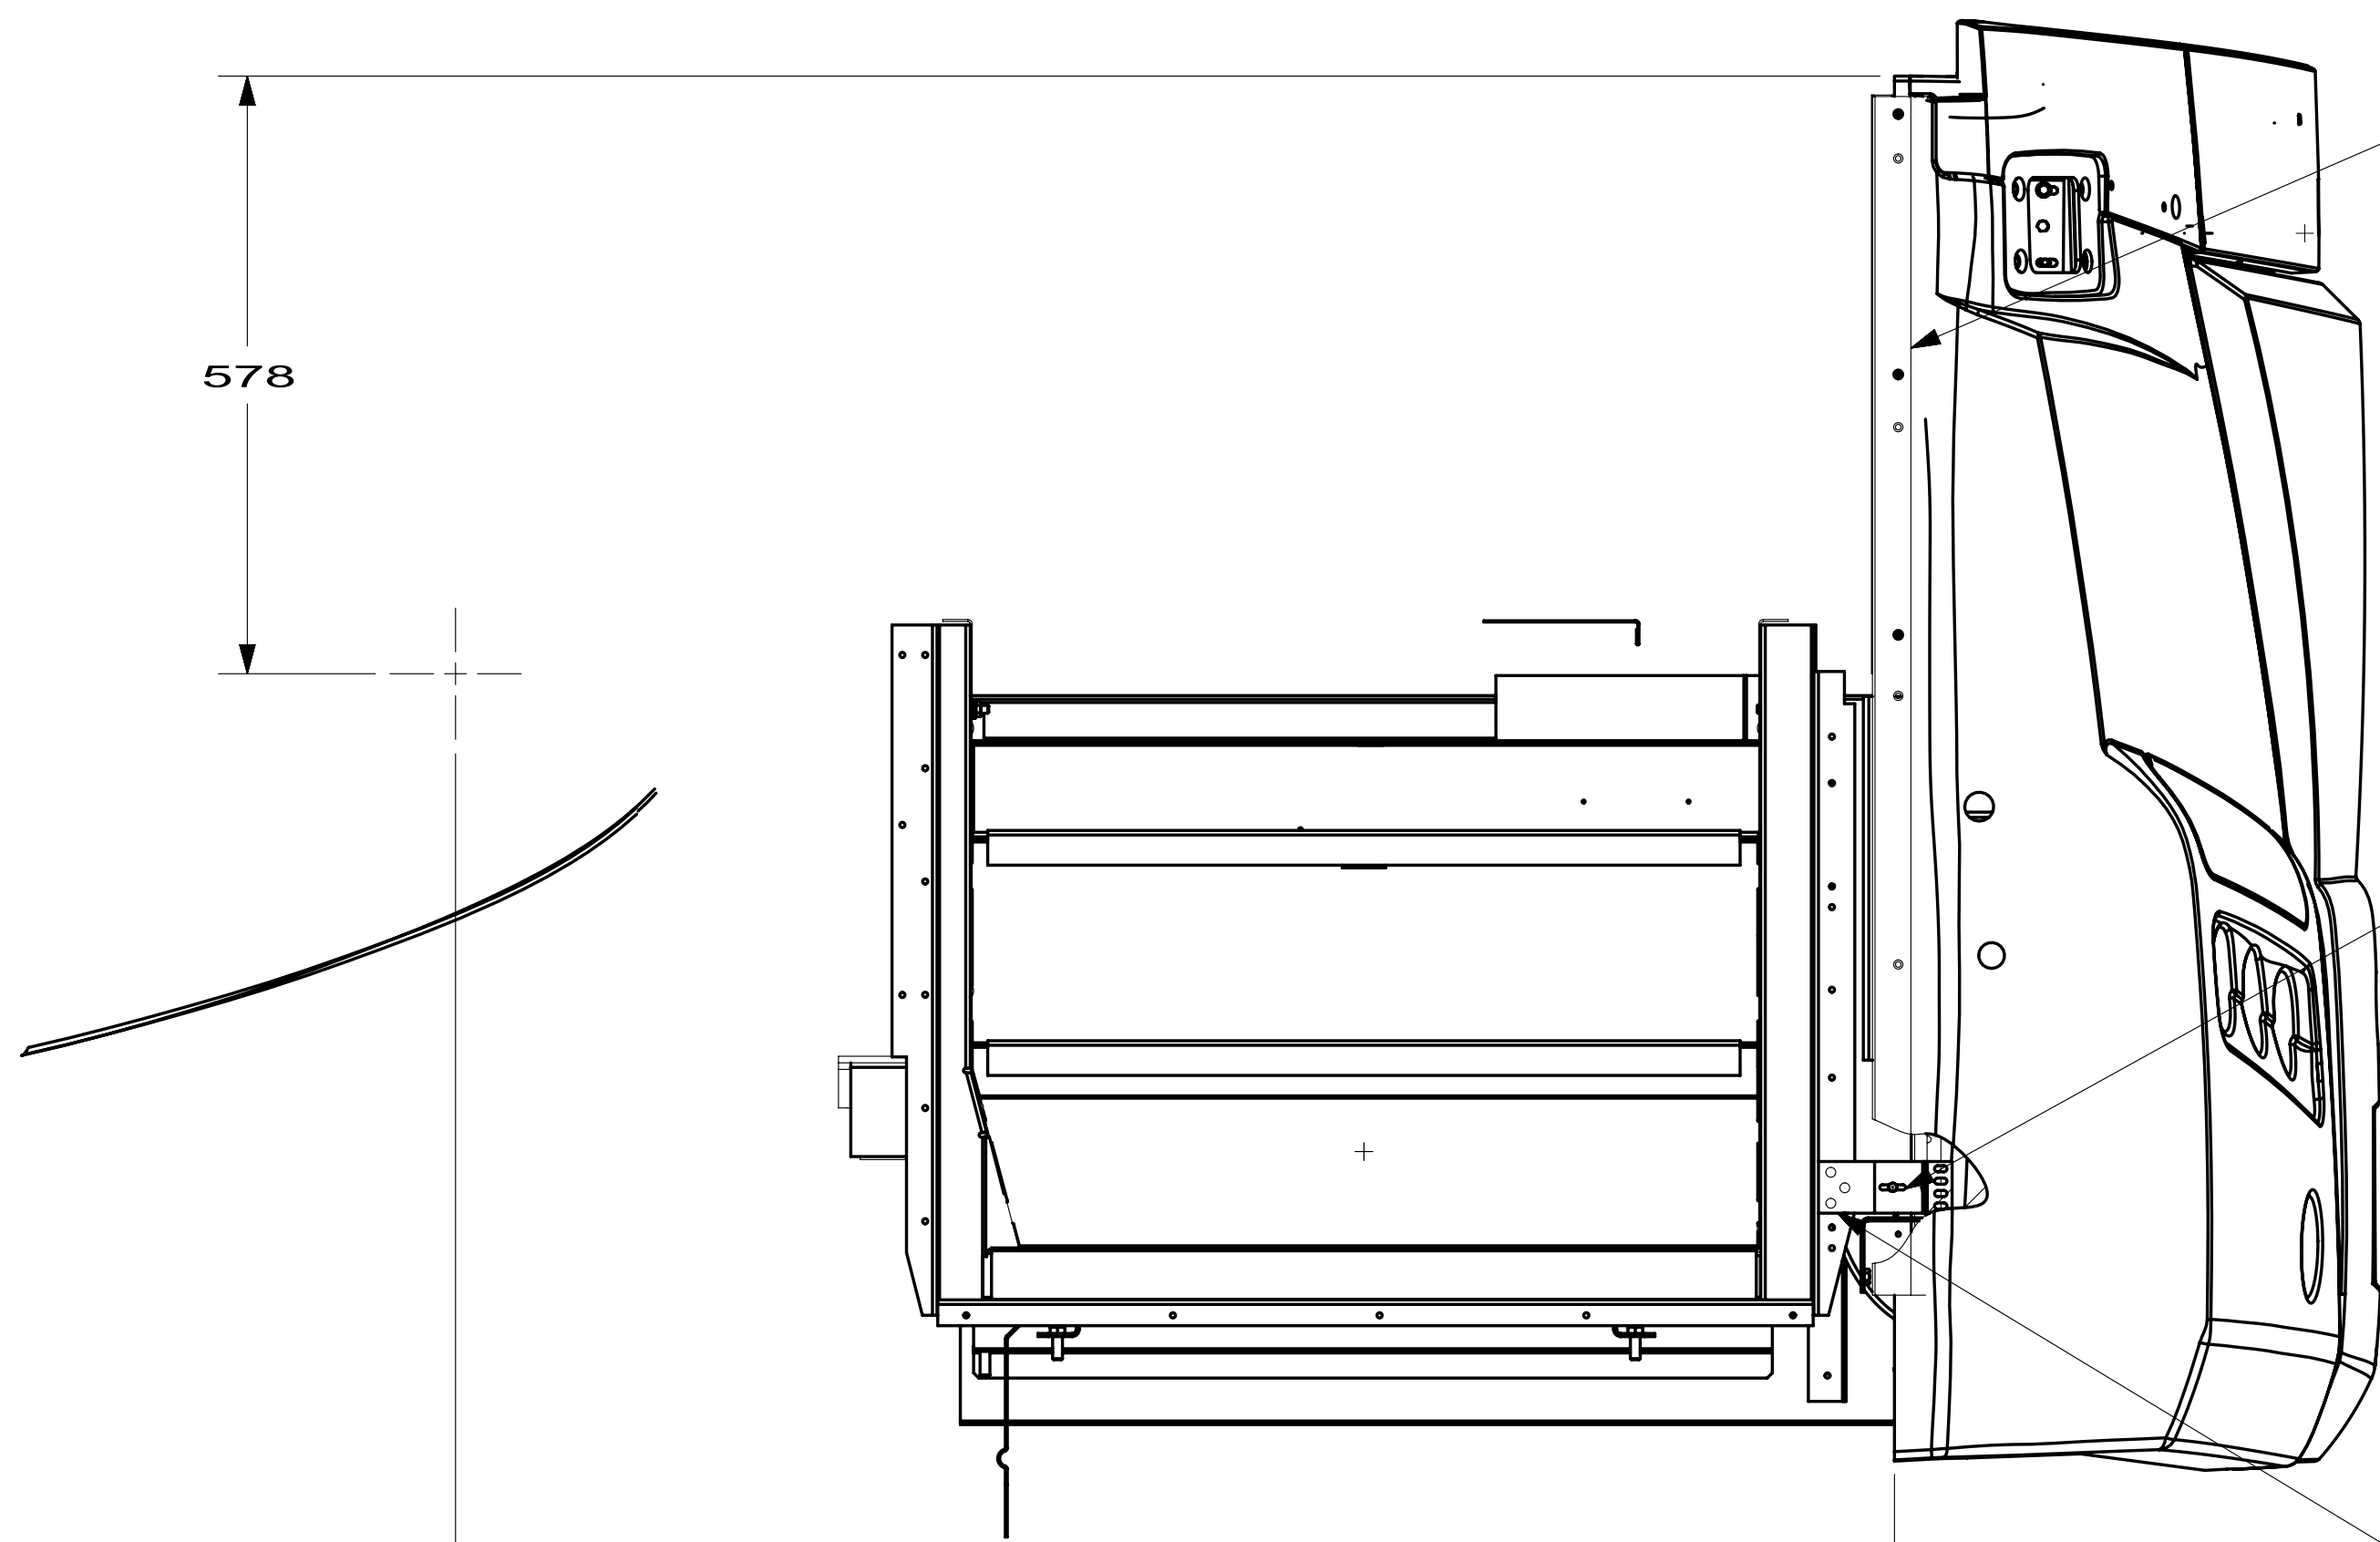

TRIM-PANEL,FIBERGLASS
140447-02-CHT
SCREW
000G60-08-16B (5)

ANGLE-MOUNT,FRONT END
147498-01-02B
SCREW
000G39-08-08B (2)

STRAP-ATTACHMENT
147496-01-CHT
RIVET
000H16-06-06R (3)

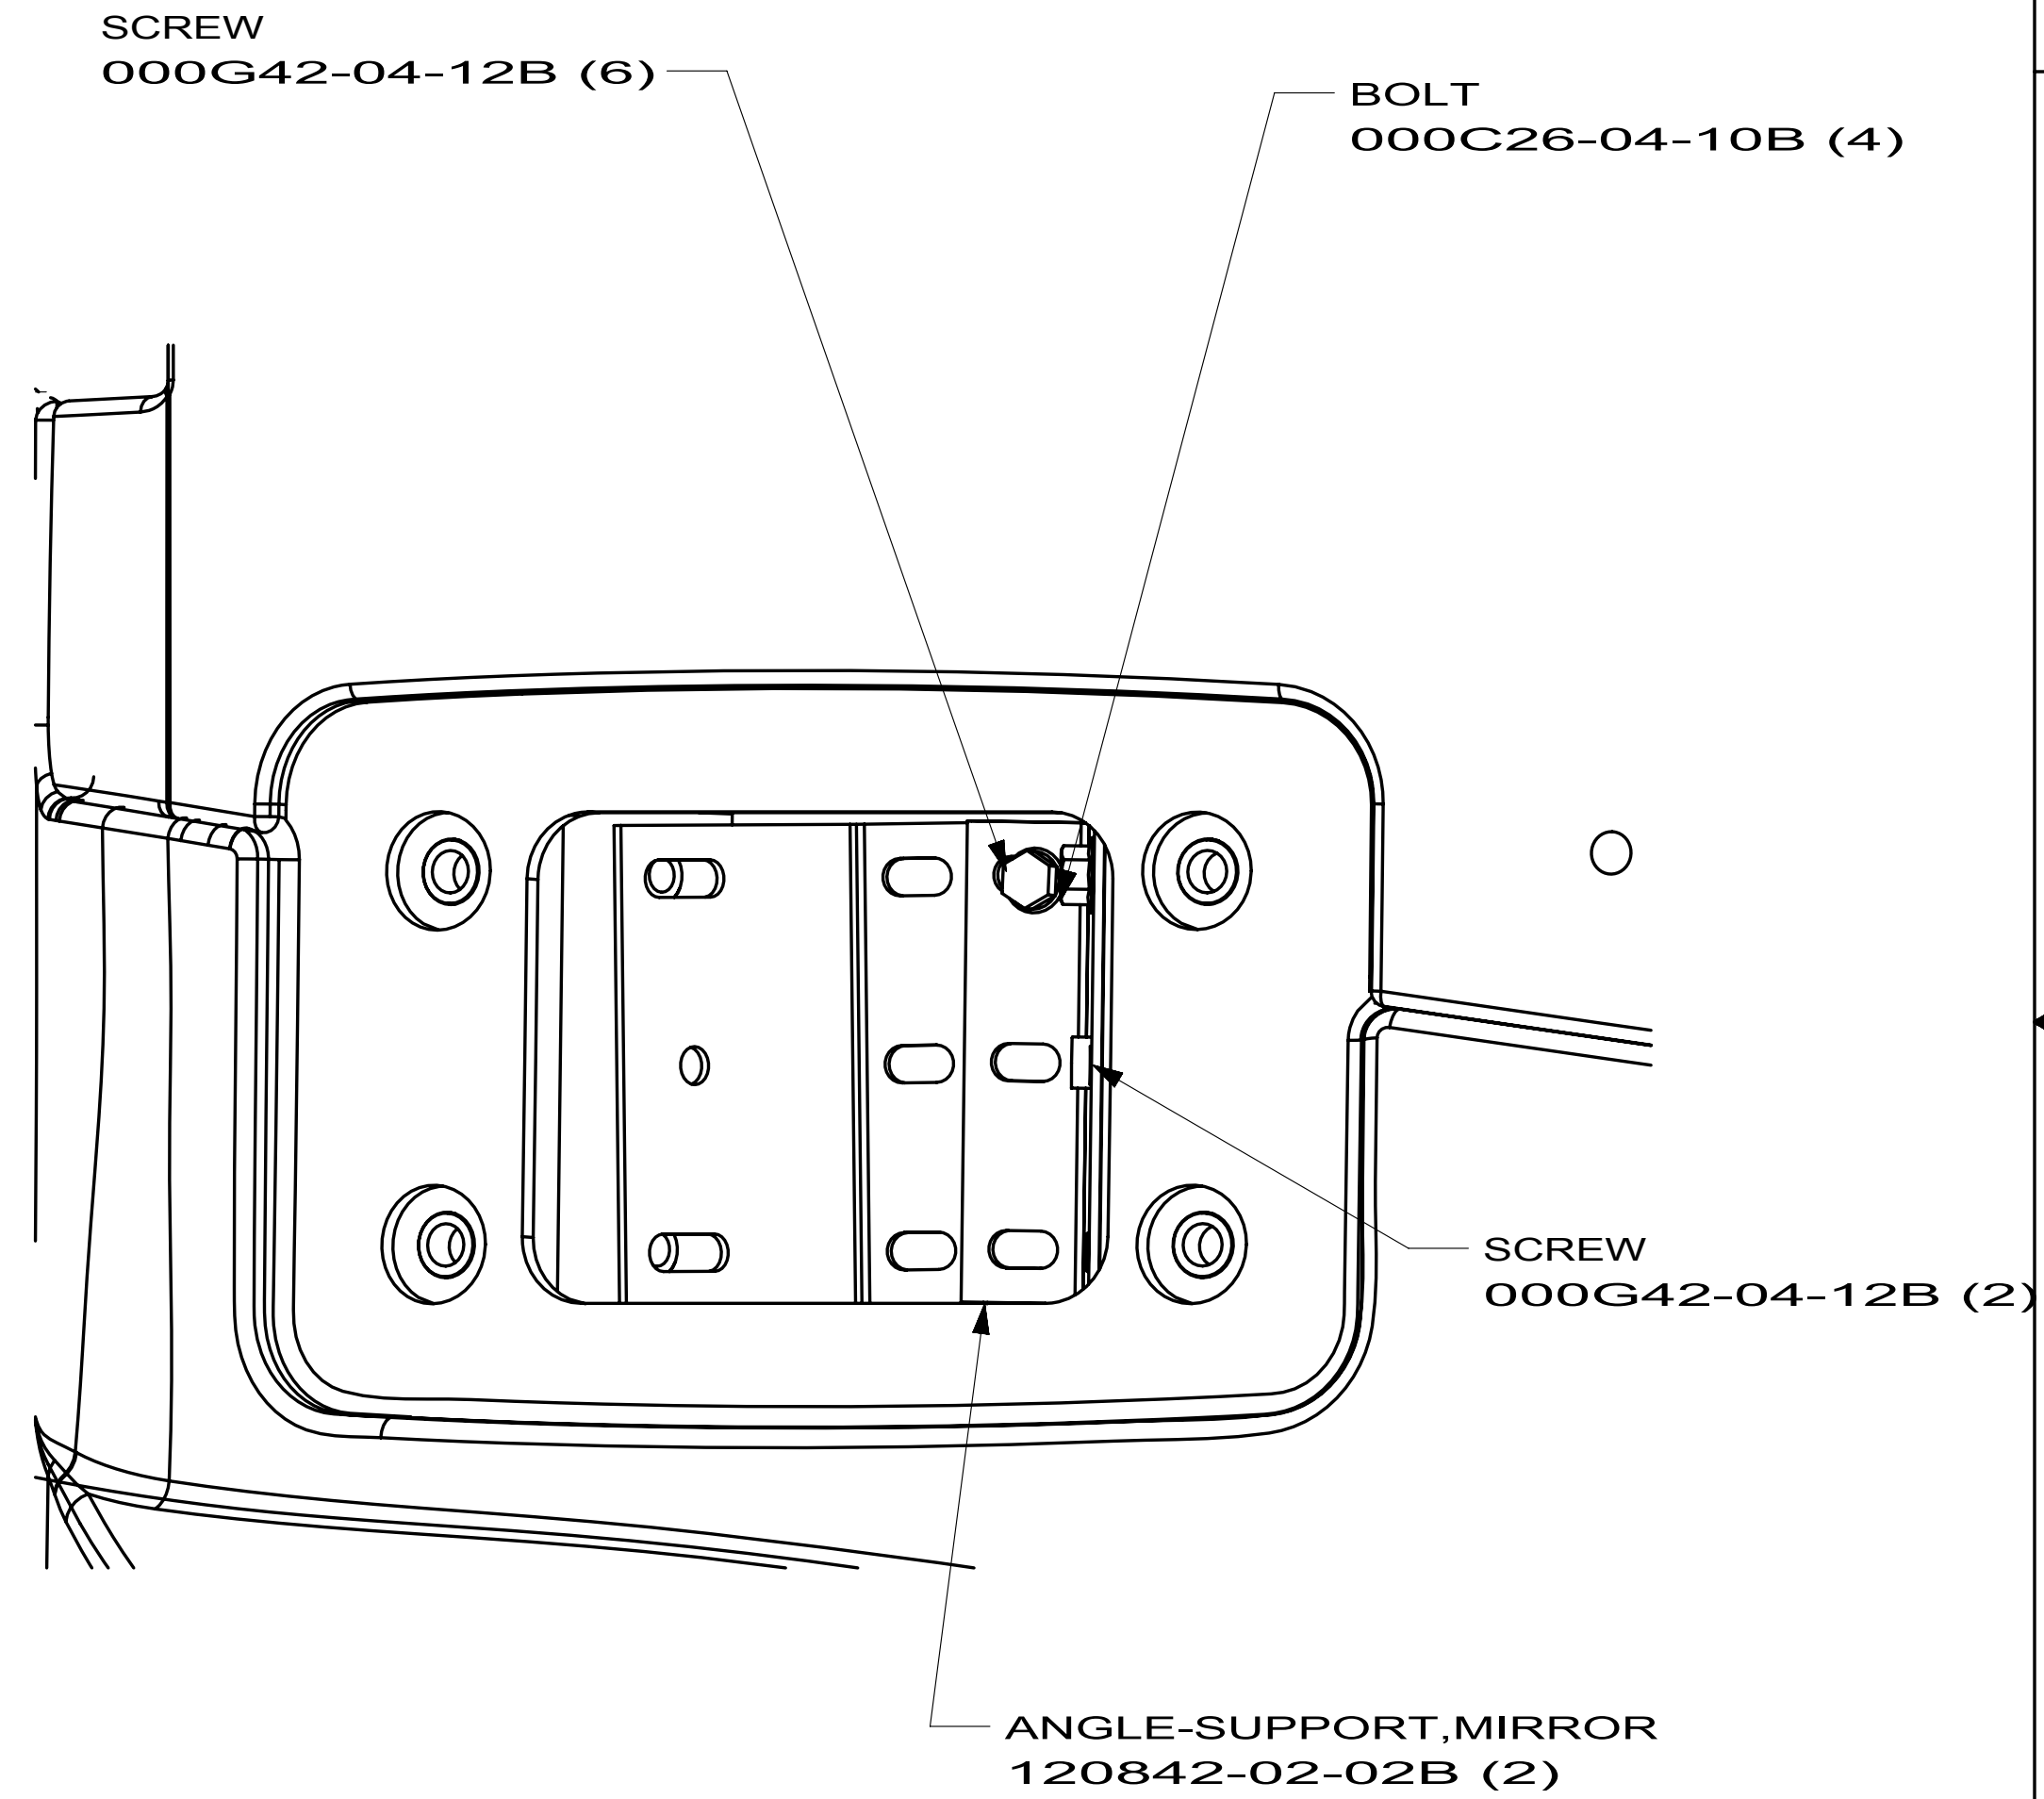

SCREW
000G42-04-12B (6)


BOLT
000C26-04-10B (4)

SCREW
000G42-04-12B (2)

ANGLE-SUPPORT,MIRROR
120842-02-02B (2)

VIEW FB

FIRST USED		10 R-SERIES,W			
DO NOT SCALE DRAWING					
TITLE: BODY PANEL INSTL-FRONT					
SHEET	2	PART NO	160634	REV	

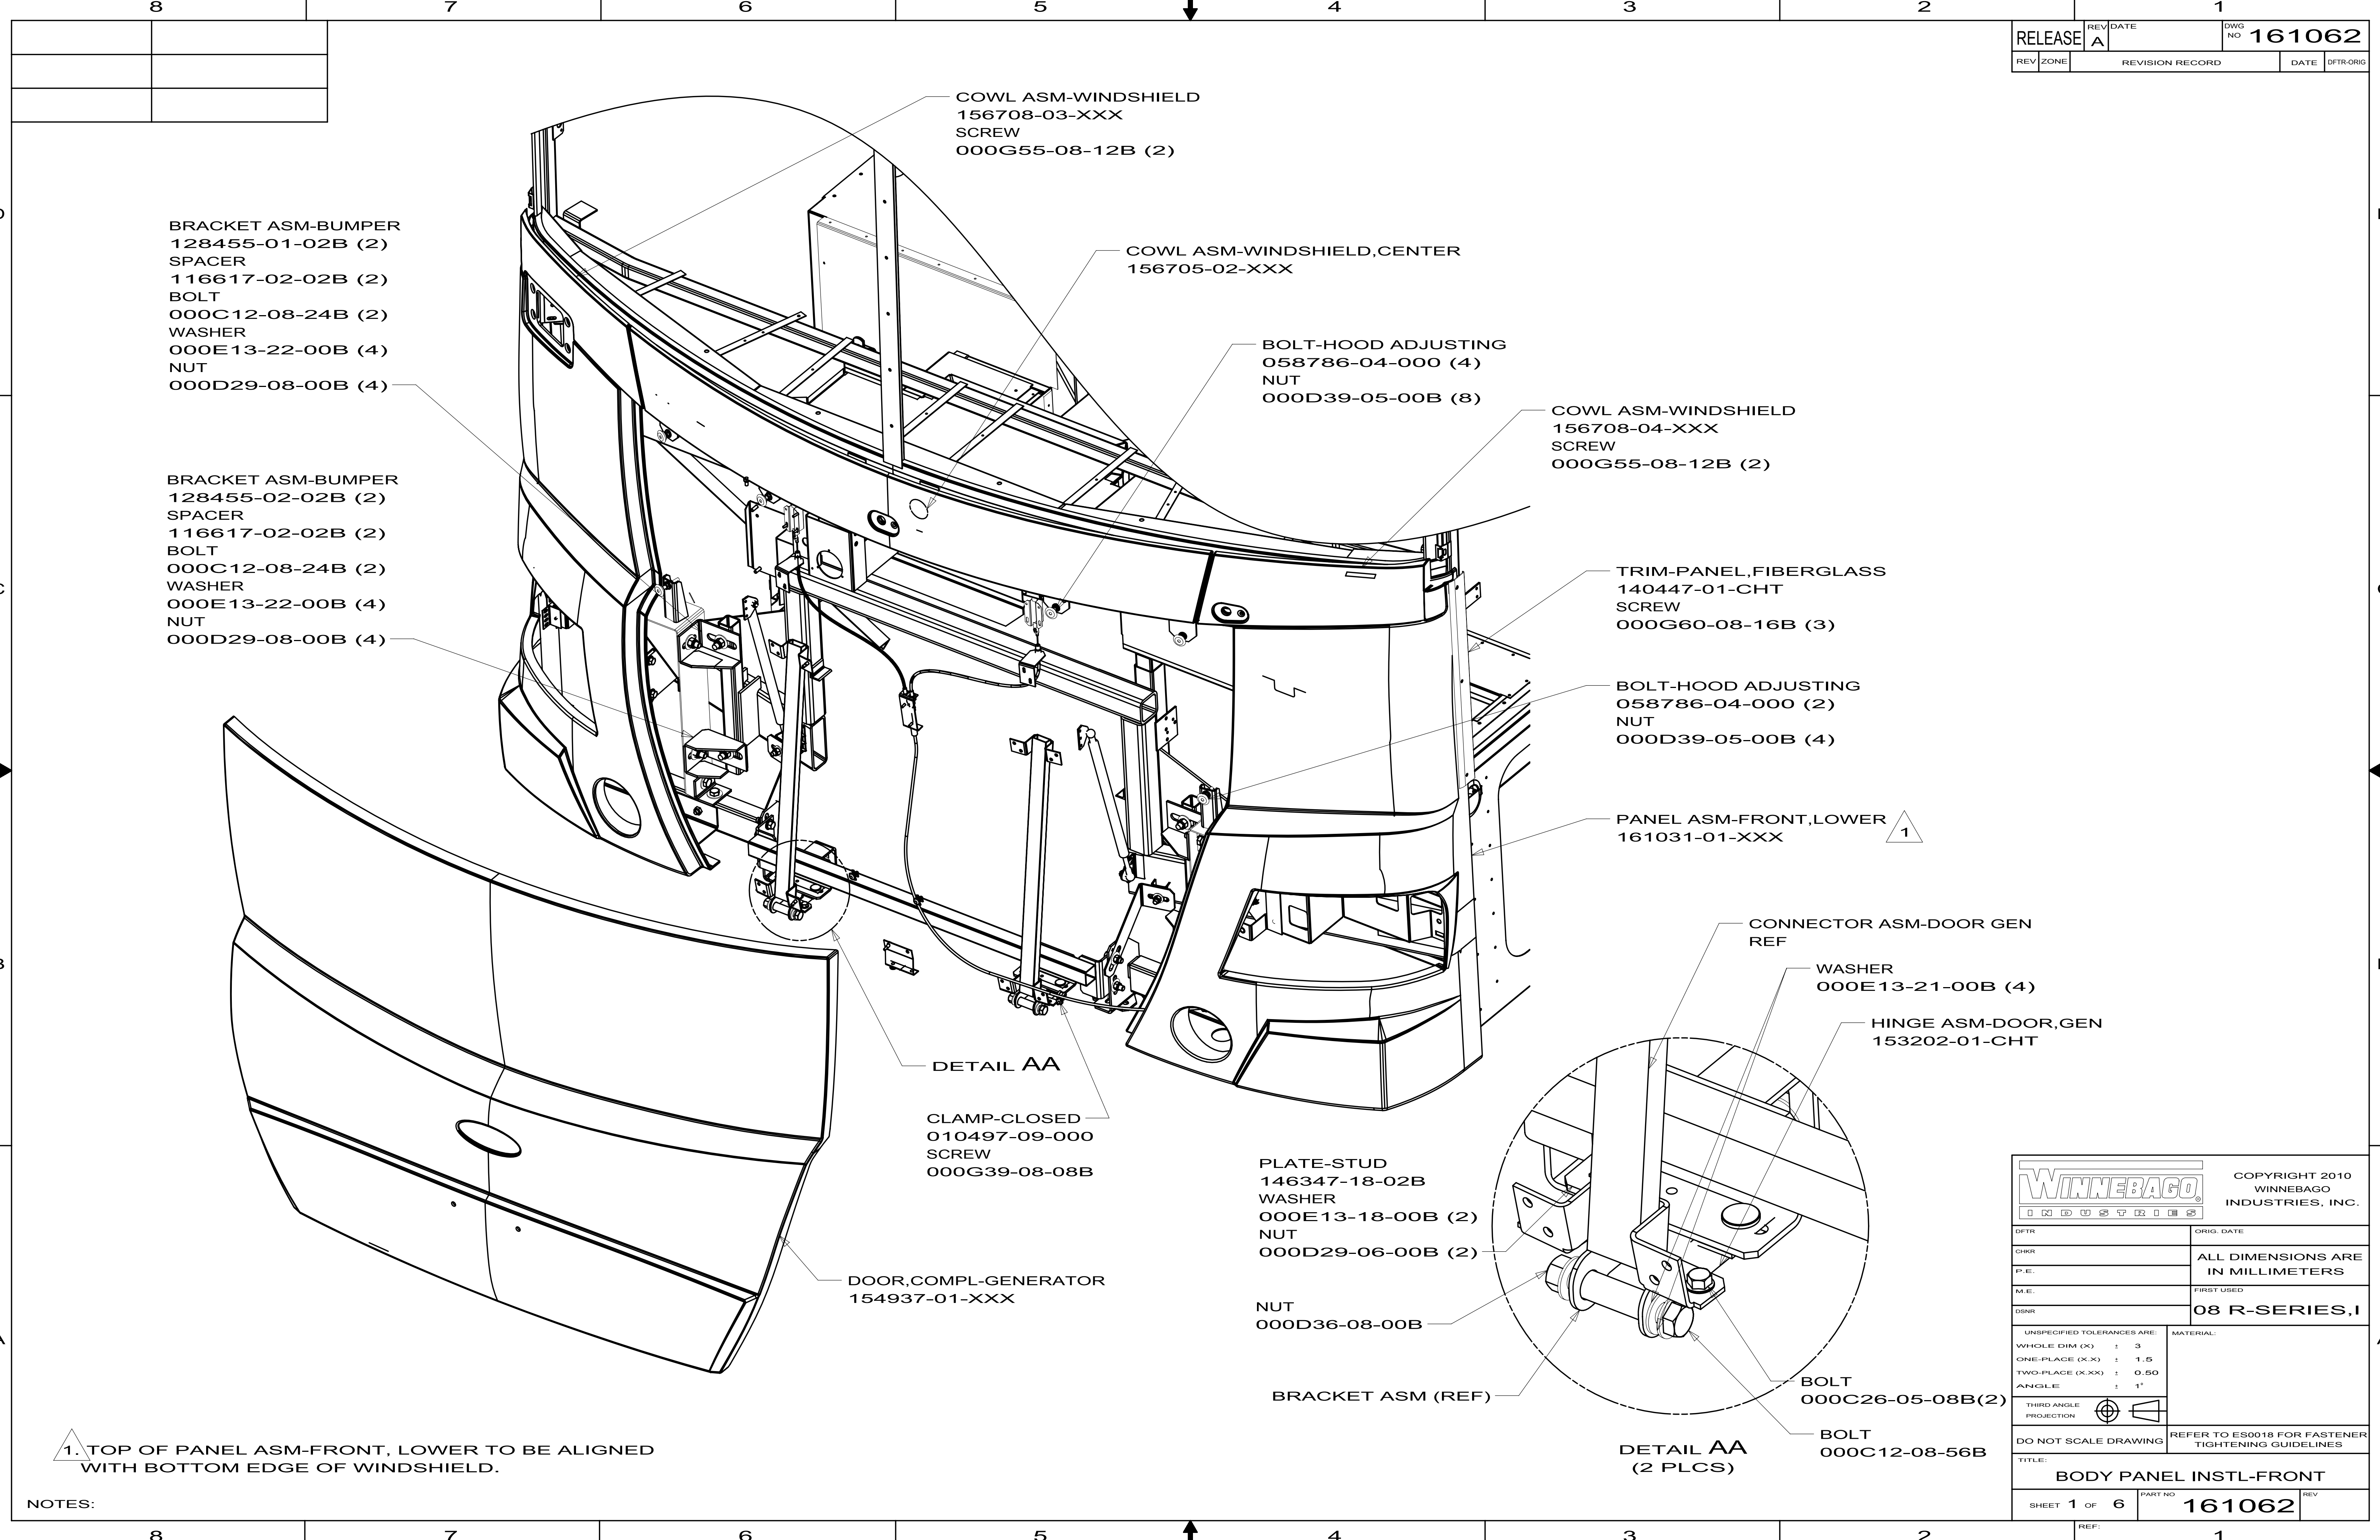

BRACKET ASM-BUMPER
128455-01-02B (2)
SPACER
116617-02-02B (2)
BOLT
000C12-08-24B (2)
WASHER
000E13-22-00B (4)
NUT
000D29-08-00B (4)

BRACKET ASM-BUMPER
128455-02-02B (2)
SPACER
116617-02-02B (2)
BOLT
000C12-08-24B (2)
WASHER
000E13-22-00B (4)
NUT
000D29-08-00B (4)

COWL ASM-WINDSHIELD
156708-03-XXX
SCREW
000G55-08-12B (2)

COWL ASM-WINDSHIELD,CENTER
156705-02-XXX

BOLT-HOOD ADJUSTING
058786-04-000 (4)
NUT
000D39-05-00B (8)

COWL ASM-WINDSHIELD
156708-04-XXX
SCREW
000G55-08-12B (2)

TRIM-PANEL,FIBERGLASS
140447-01-CHT
SCREW
000G60-08-16B (3)

BOLT-HOOD ADJUSTING
058786-04-000 (2)
NUT
000D39-05-00B (4)

PANEL ASM-FRONT,LOWER
161031-01-XXX

DETAIL AA

CLAMP-CLOSED
010497-09-000
SCREW
000G39-08-08B

DOOR,COMPL-GENERATOR
154937-01-XXX

PLATE-STUD
146347-18-02B
WASHER
000E13-18-00B (2)
NUT
000D29-06-00B (2)

NUT
000D36-08-00B

BRACKET ASM (REF)

CONNECTOR ASM-DOOR GEN
REF
WASHER
000E13-21-00B (4)

HINGE ASM-DOOR,GEN
153202-01-CHT


BOLT
000C26-05-08B(2)

BOLT
000C12-08-56B


DETAIL AA
(2 PLCS)

1. TOP OF PANEL ASM-FRONT, LOWER TO BE ALIGNED
WITH BOTTOM EDGE OF WINDSHIELD.

WINNEBAGO INDUSTRIES		COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFTD	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHRR		FIRST USED	
P.E.		08 R-SERIES,I	
M.E.			
DSNR			
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING		REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: BODY PANEL INSTL-FRONT			
SHEET 1 OF 6	PART NO	161062	REV
REF:		1	5/20/2010

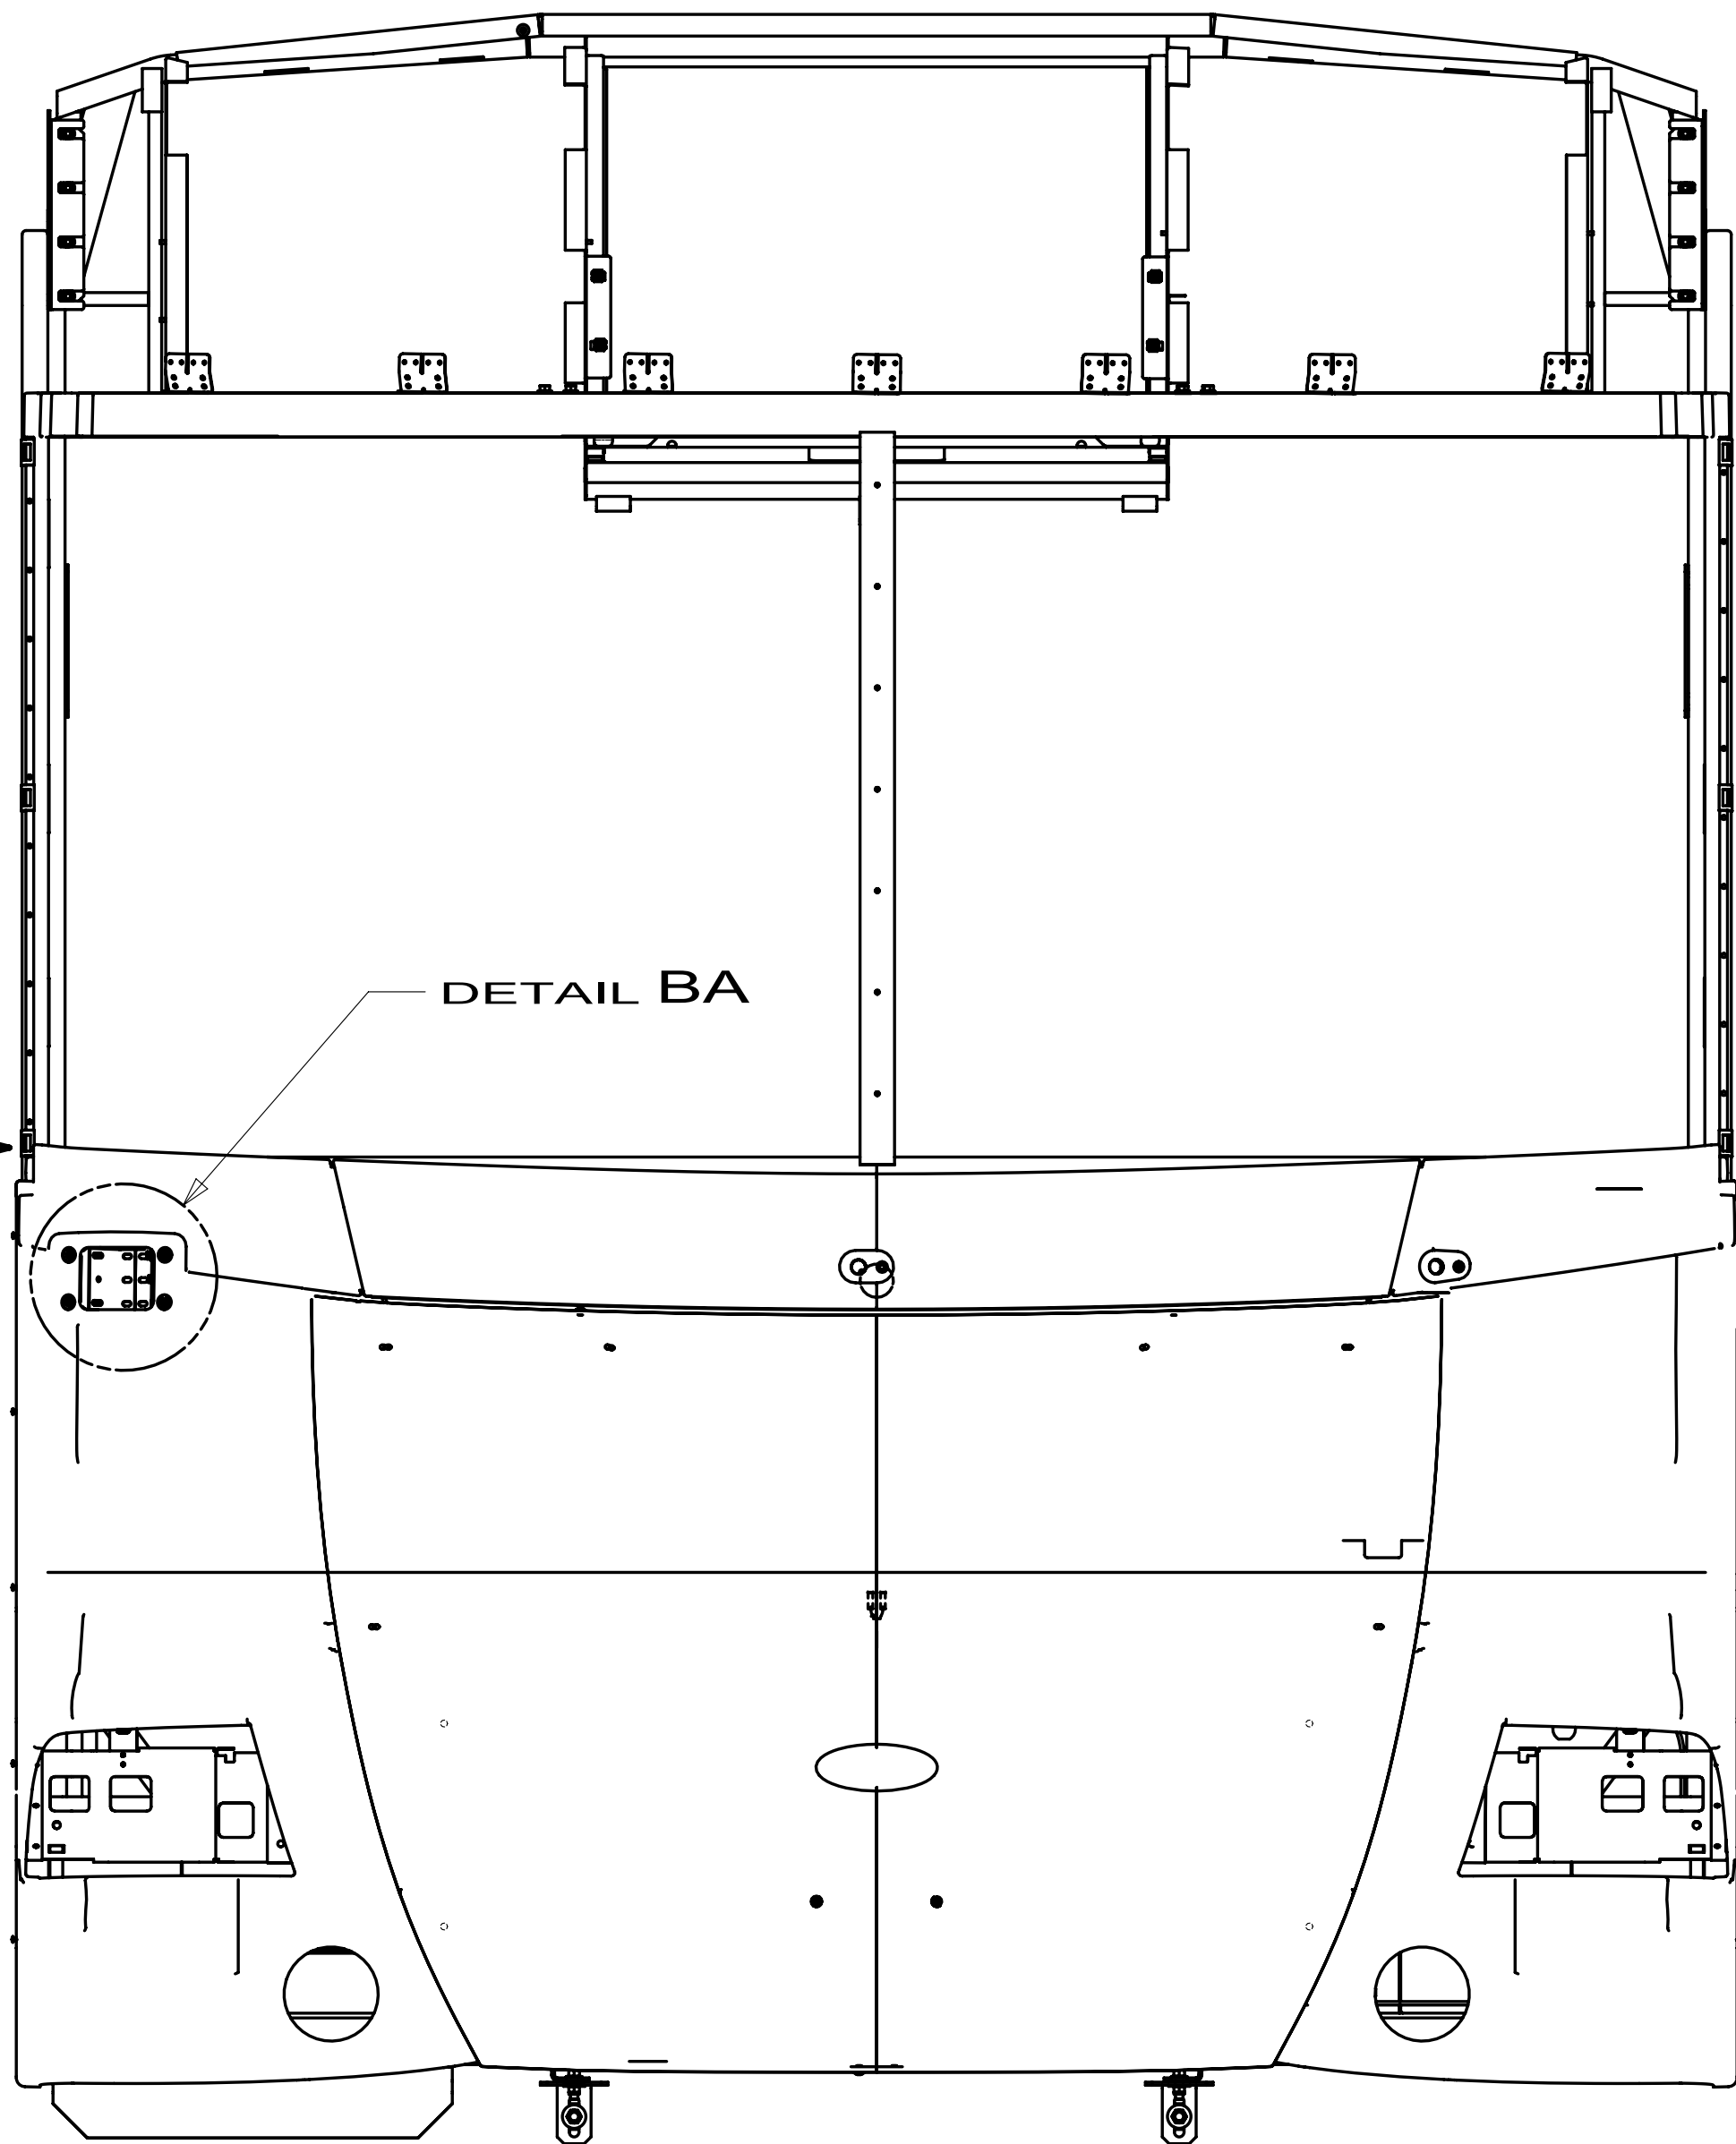

DETAIL BA

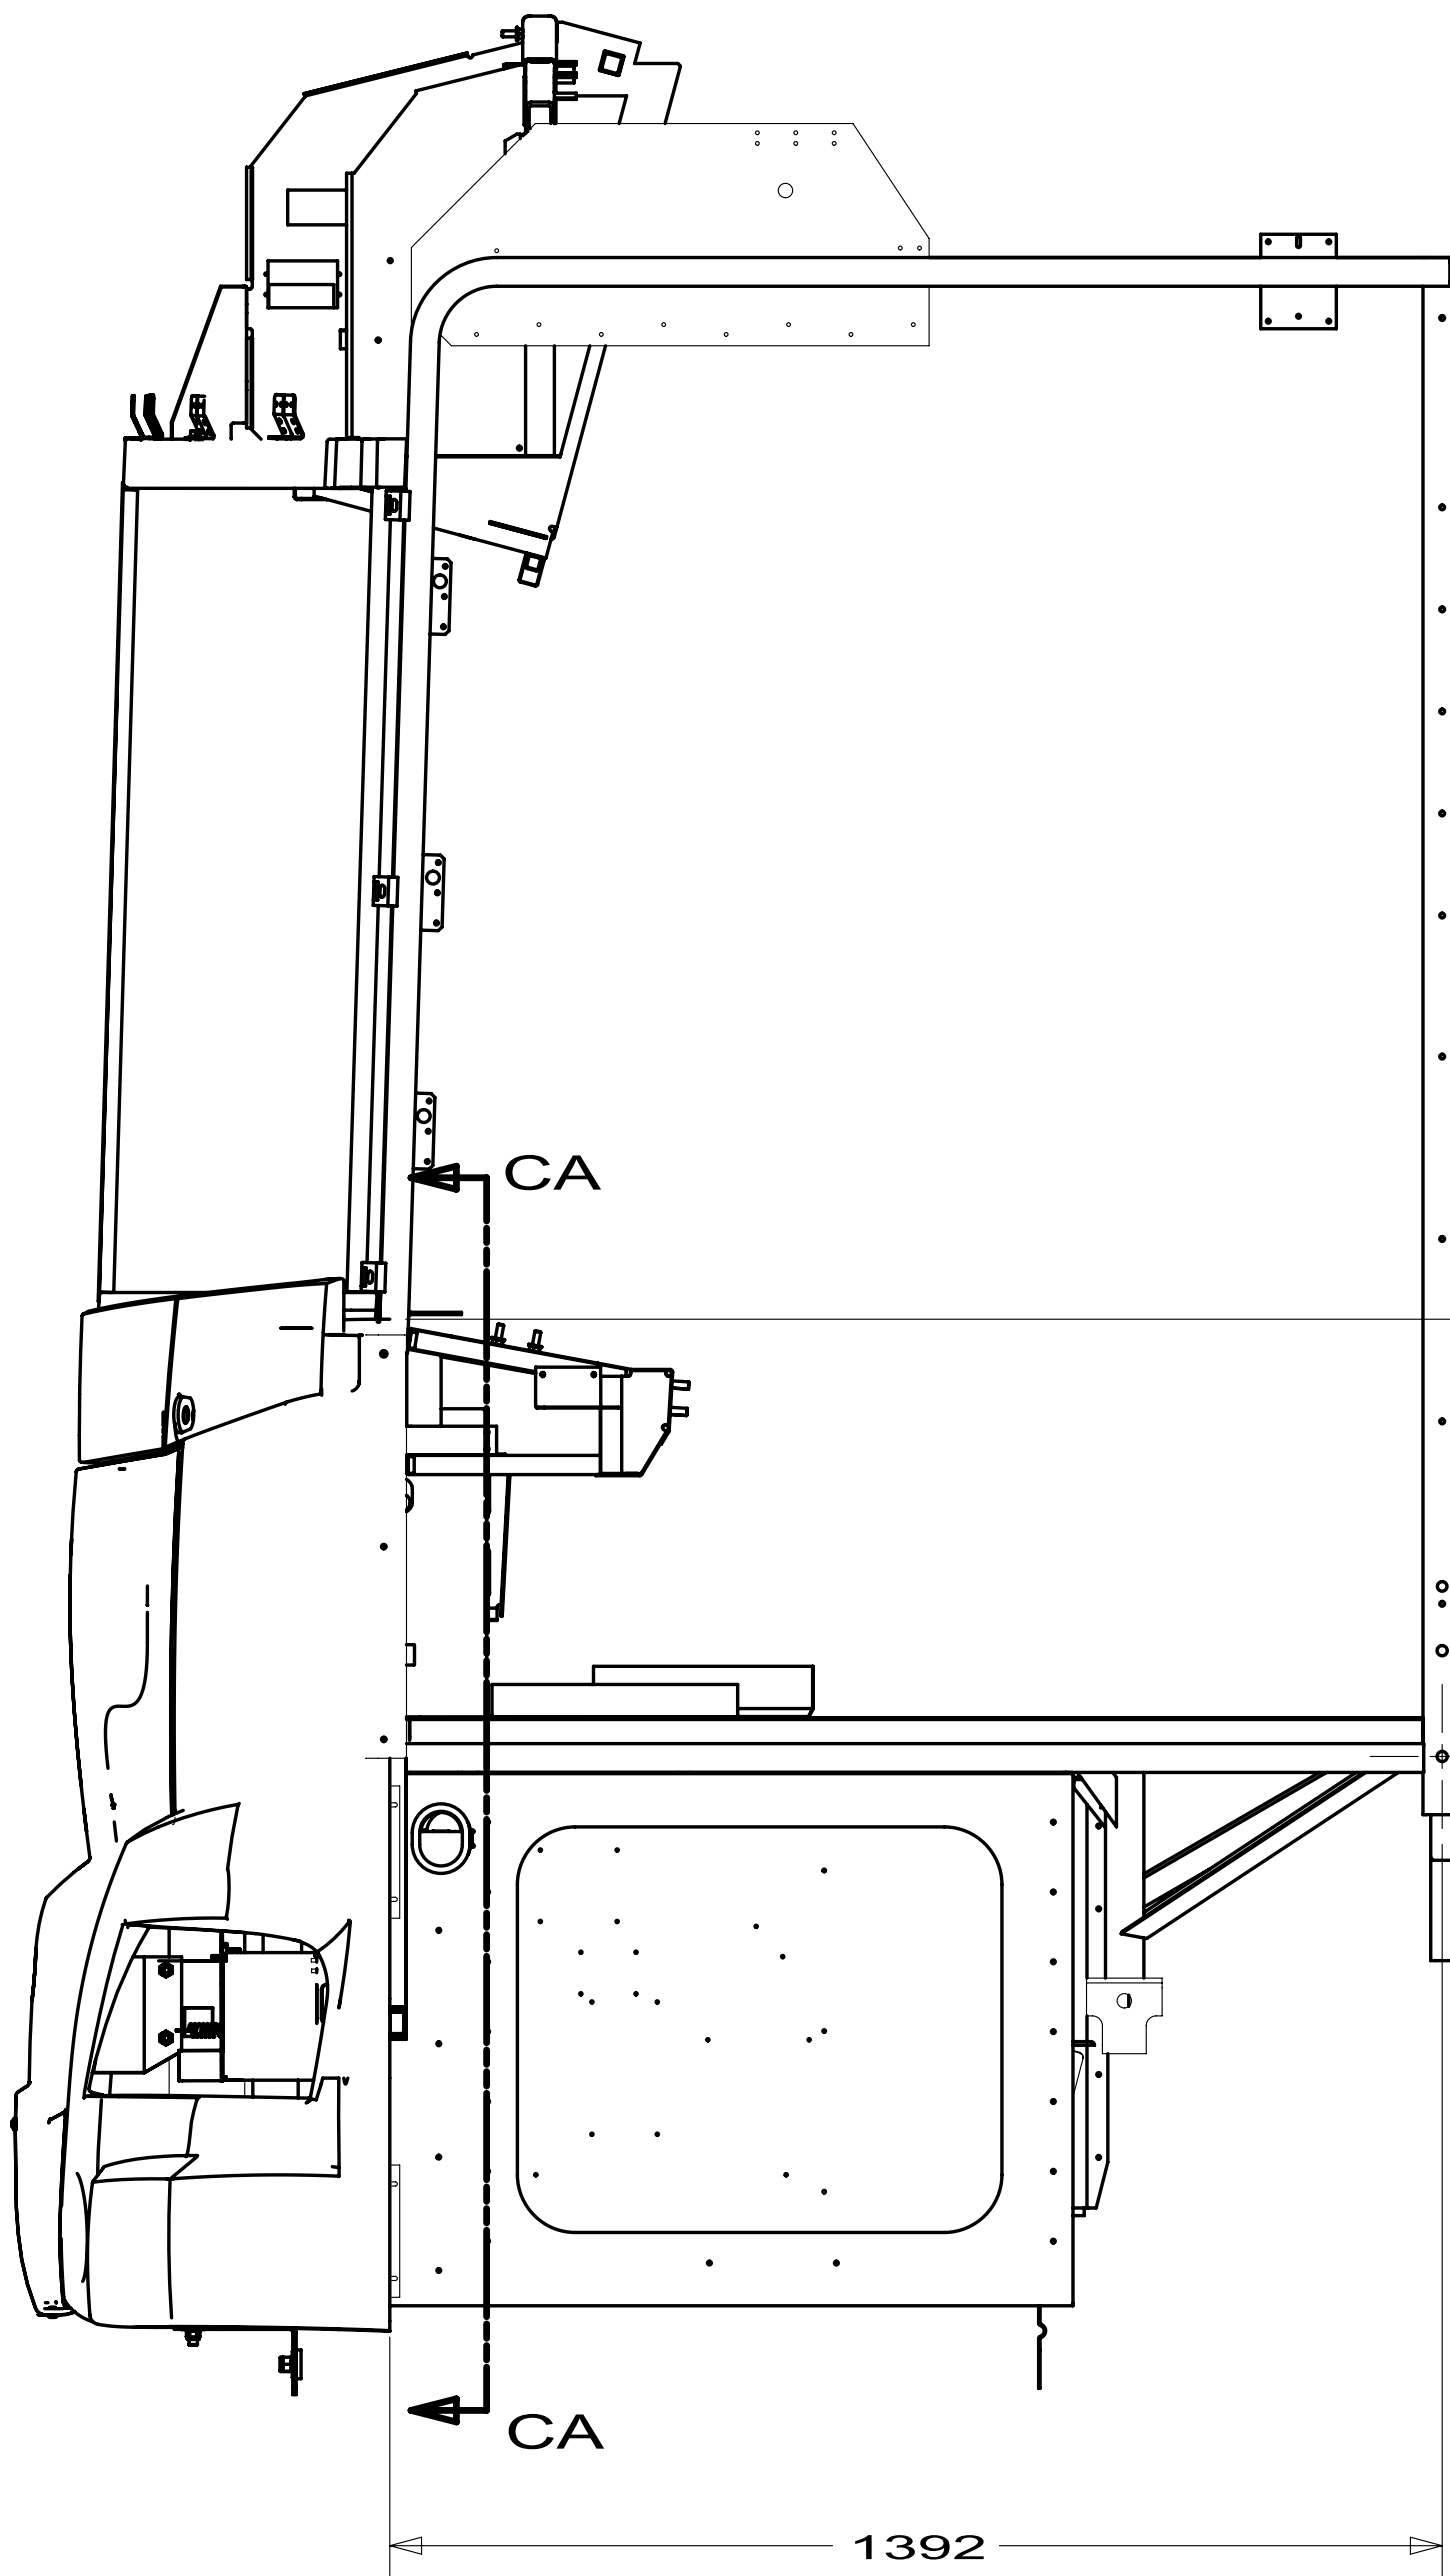

CA

CA

578

1392

DETAIL BC

74C 74L

TRIM-PANEL
140447-02-CHT
SCREW
000G60-08-16B (5)

STEP ASM-ENT


RIVET
000H15-06-03R (3)

STRAP-ATTACHMENT
147496-01-CHT

ANGLE-MOUNT,FRONT END
147498-01-CHT
SCREW
000G39-08-08B (2)

PANEL ASM-FRONT

SECTION BB-BB
(W/O VIDEO CAMERA)

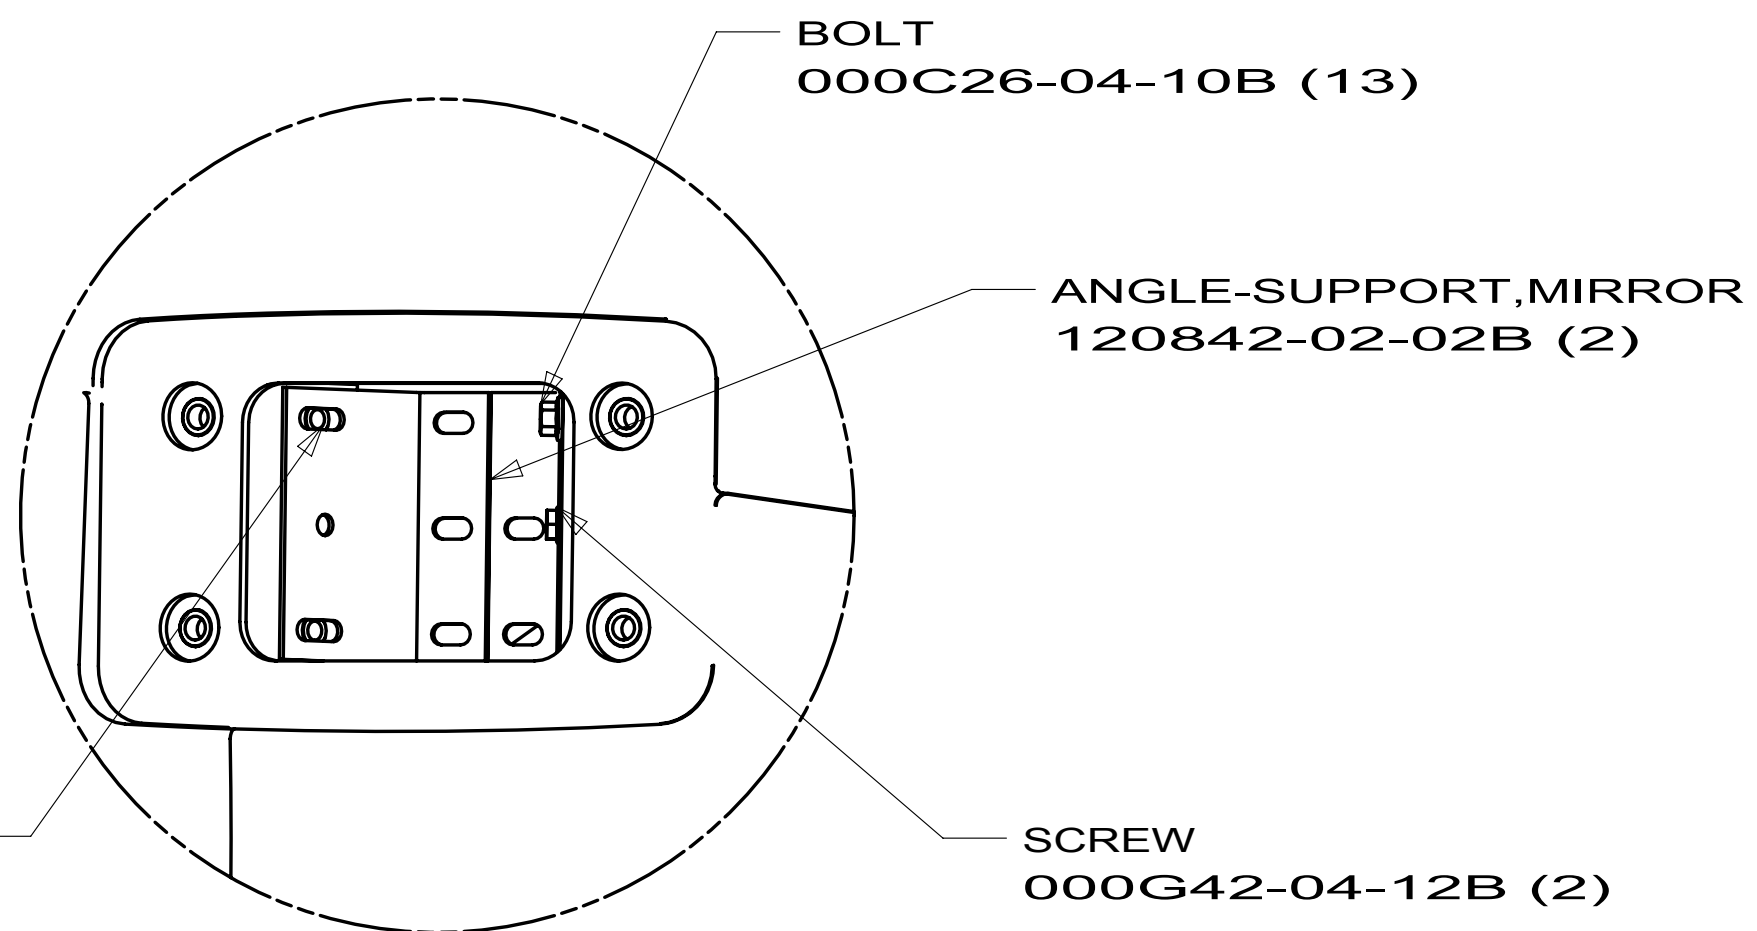


BOLT
000C26-04-10B (13)

ANGLE-SUPPORT,MIRROR
120842-02-02B (2)

SCREW
000G42-04-12B (6)

SCREW
000G42-04-12B (2)

DETAIL BA

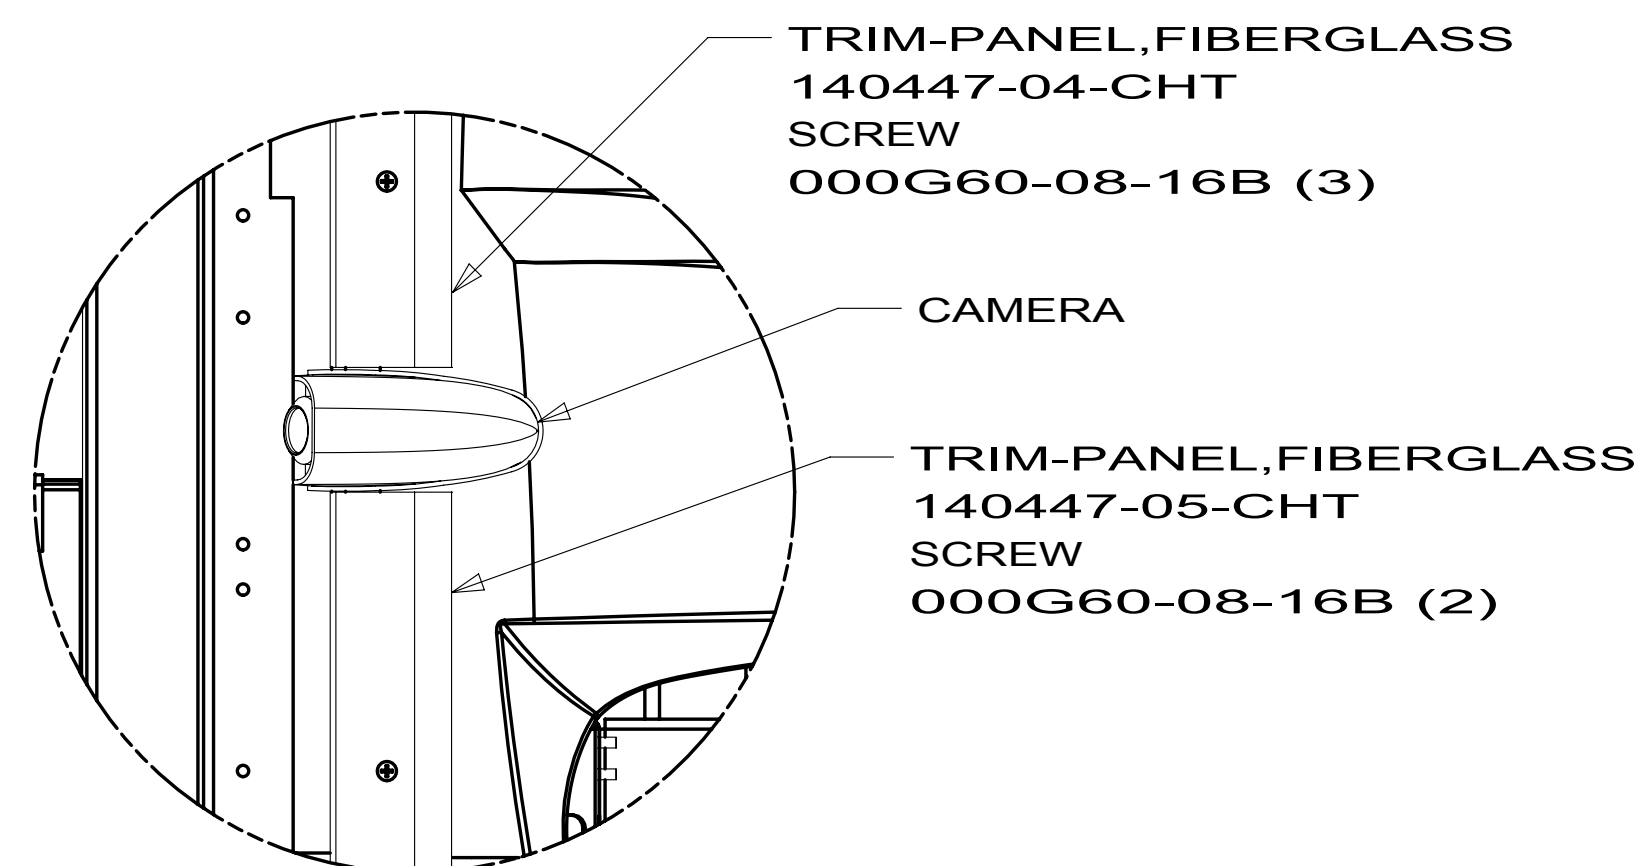

TRIM-PANEL,FIBERGLASS
140447-04-CHT
SCREW
000G60-08-16B (3)

CAMERA

TRIM-PANEL,FIBERGLASS
140447-05-CHT
SCREW
000G60-08-16B (2)

DETAIL BC 74C 74L

74C VIDEO CAMERA SYSTEM
74L VIDEO CAMERA SYS W/COLOR MON

FIRST USED		
08 R-SERIES,I		
DO NOT SCALE DRAWING		
TITLE: BODY PANEL INSTL-FRONT		
SHEET 2	PART NO 161062	REV

DAMPER
154973-01-000 (2)(UP TO 05-10-10)
154973-02-000 (2)(AFTER 05-11-10)
MOUNT,DAMPER
154981-01-02B (2)
BALL-STUD-10MM BALL
154990-01-01A (2)(UP TO 04-26-10)
057460-02-000 (2)(AFTER 04-27-10)
NUT
000D29-05-00B (2)
CLIP-SAFETY
154991-01-01A (4)(UP TO 05-10-10)

SCREW
000G55-08-12B (2)

BRACKET ASM-ADJUSTMENT,LH
152738-02-02B
BOLT
000C26-06-12B (2)

SUPPORT ASM-HEADLAMP,LH
152682-02-02B
SCREW
000G11-10-08B (3)

STRAP-BRACE,LH
155900-02-02B
WASHER
000E13-18-00B
NUT
000D29-06-00B

SPRING-HEADLAMP ADJUSTING
049359-01-000 (2)

BOLT
000C12-05-12B (2)
WASHER
000E13-16-00B (2)
WASHER
000E13-20-00B (2)

BOLT
144904-01-01A (2)
WASHER
000E13-16-00B

NUT
000D29-05-00B (3)
WASHER
000E13-16-00B (3)

SCREW
000G18-08-10B
NUT
000D27-08-00B
WASHER
000E13-08-00B

NUT
000D29-05-00B (2)
WASHER
000E13-20-00B (2)

NUT-SPEED-U
040921-03-000 (6)
SCREW
000G11-10-12B (6)

STRAP-BRACE,RH
155900-01-02B
WASHER
000E13-18-00B
NUT
000D29-06-00B

BRACKET ASM-ADJUSTMENT,RH
152738-01-02B
BOLT
000C26-06-12B (2)

SUPPORT ASM-HEADLAMP,RH
152682-01-02B
SCREW
000G11-10-08B (3)

BOLT
000C26-07-20B (2)
WASHER
000E13-20-00B (2)
NUT
000D29-07-00B (2)

ANGLE-SUPPORT,DOOR
155917-01-02B (2)
WASHER
000E13-22-00B (2)
NUT
000D29-08-00B (2)
SPACER-BUMPER
116617-02-02B (2)

STRIKER-DOOR,LUGGAGE
130053-01-01A (2)
SCREW
000G19-10-10B (4)
NUT
000D24-10-00B (4)
WASHER
000E13-10-00B (8)


STRICKER-DOOR,HOOD
144209-01-02B (2)
SCREW
000G19-10-10B (4)
WASHER
000E13-10-00B (4)

SECTION CA-CA


SECTION CC-CC

SECTION CB-CB

FIRST USED		08 R-SERIES,I	
DO NOT SCALE DRAWING			
TITLE: BODY PANEL INSTL-FRONT			
SHEET 3		PART NO 161062	REV


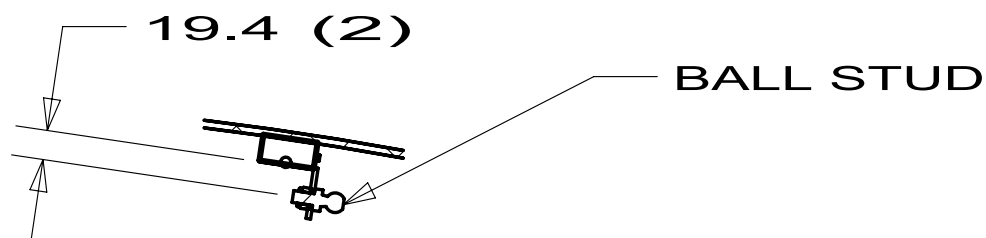


SECTION D-D

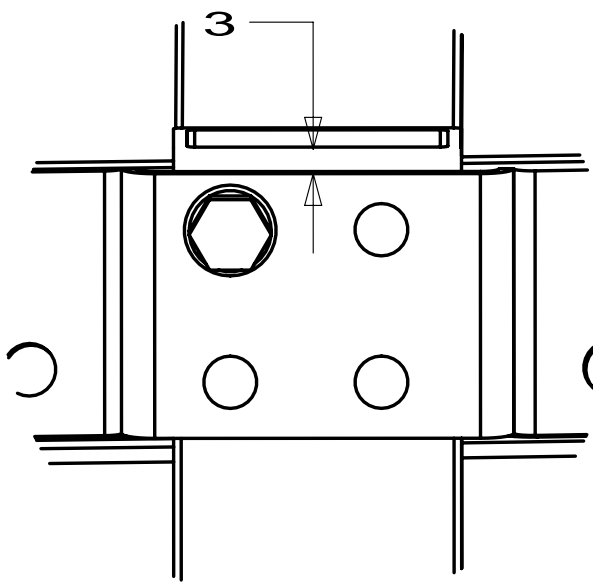

DETAIL B
2 PLCS

DRILL $\varnothing$ 7.0 HOLE TO ALIGN WITH
HOLE IN STEEL (4 PLCS)

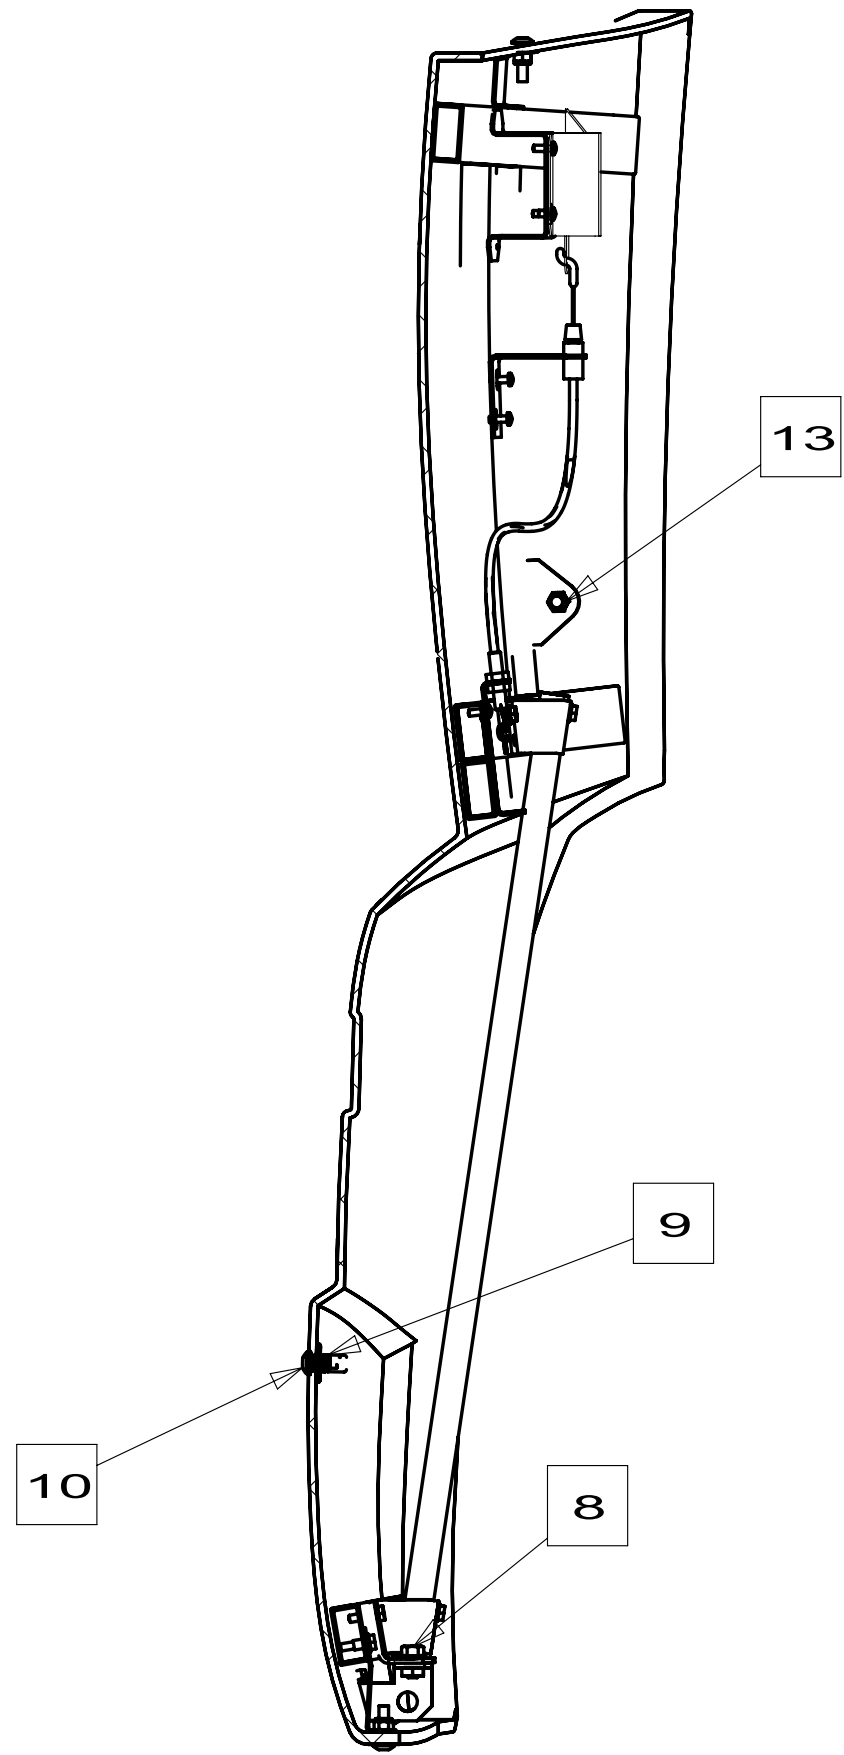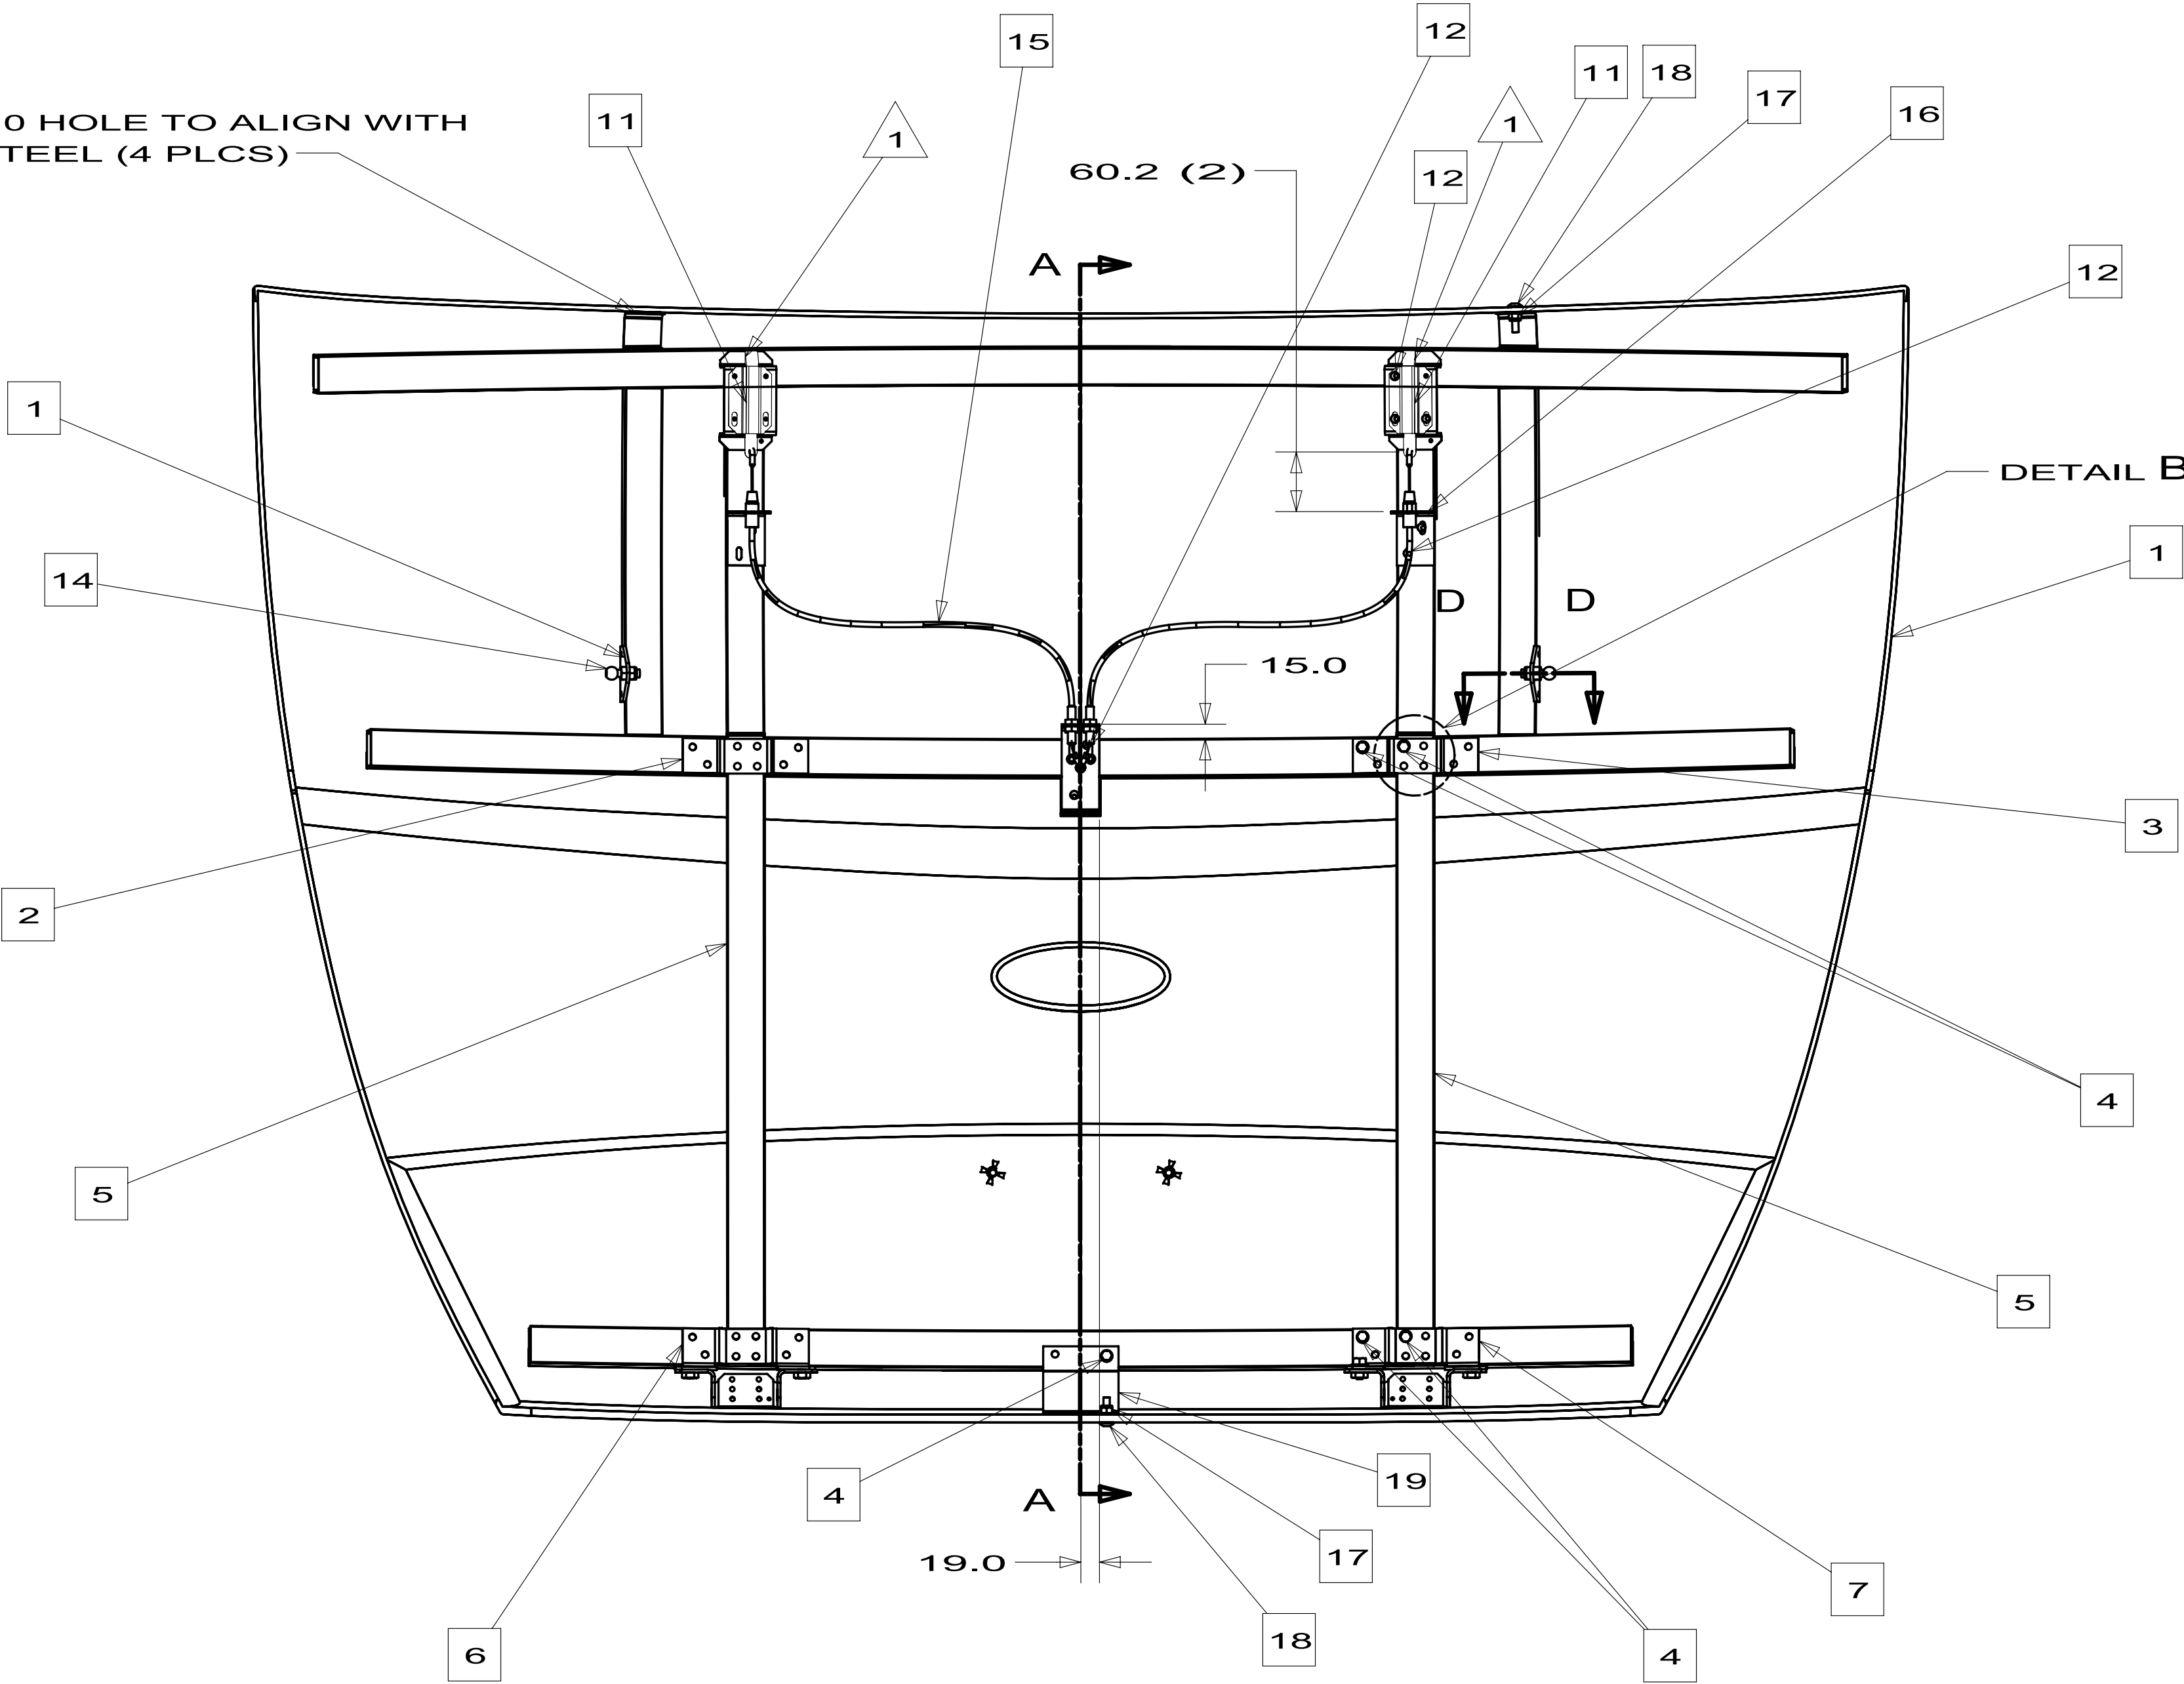

SECTION A-A

19	15638201CHT	ANGLE-DOOR,	1
18	000G500416U	SCREW-MACH	4
17	000D290400U	NUT	4
16	15493601CHT	BRACKET-CAB	2
15	15514301CHT	CABLE ASM-D	1
14	15499001CHT	BALL STUD-1	2
13	000D290500U	NUT	2
12	000G390808U	SCREW-PAN,H	14
11	11390802000	PLUNGER ASM	2
10	000G500412U	SCREW	2
9	08723401000	NUT-JACK	2
8	000C260508U	BOLT	4
7	15319901CHT	STRAP-ATTAC	1
6	15319902CHT	STRAP-ATTAC	1
5	10276751011	EXTR-TUBE	2
4	000G420412U	BOLT	34
3	15319801CHT	STRAP-ATTAC	1
2	15319802CHT	STRAP-ATTAC	1
1	15236502XXX	PANEL-DOOR,	1
ITEM	PART NUMBER	DESCRIPTION	QTY

WINNEBAGO
INDUSTRIES

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG

ORIG. DATE

CHGR

ALL DIMENSIONS ARE
IN MILLIMETERS

P.E.

FIRST USED

M.E.

06 R-ITASCA

DSNR

UNSPECIFIED TOLERANCES ARE:

MATERIAL:

WHOLE DIM (X) : 3

ONE-PLACE (X.X) :

TWO-PLACE (X.XX) :

ANGLE :

THIRD ANGLE
PROJECTION

DO NOT SCALE DRAWING

TITLE:
DOOR COMPL-GENERATOR






SHEET1 OF 1

PART NO
154937

REV


REF:

1

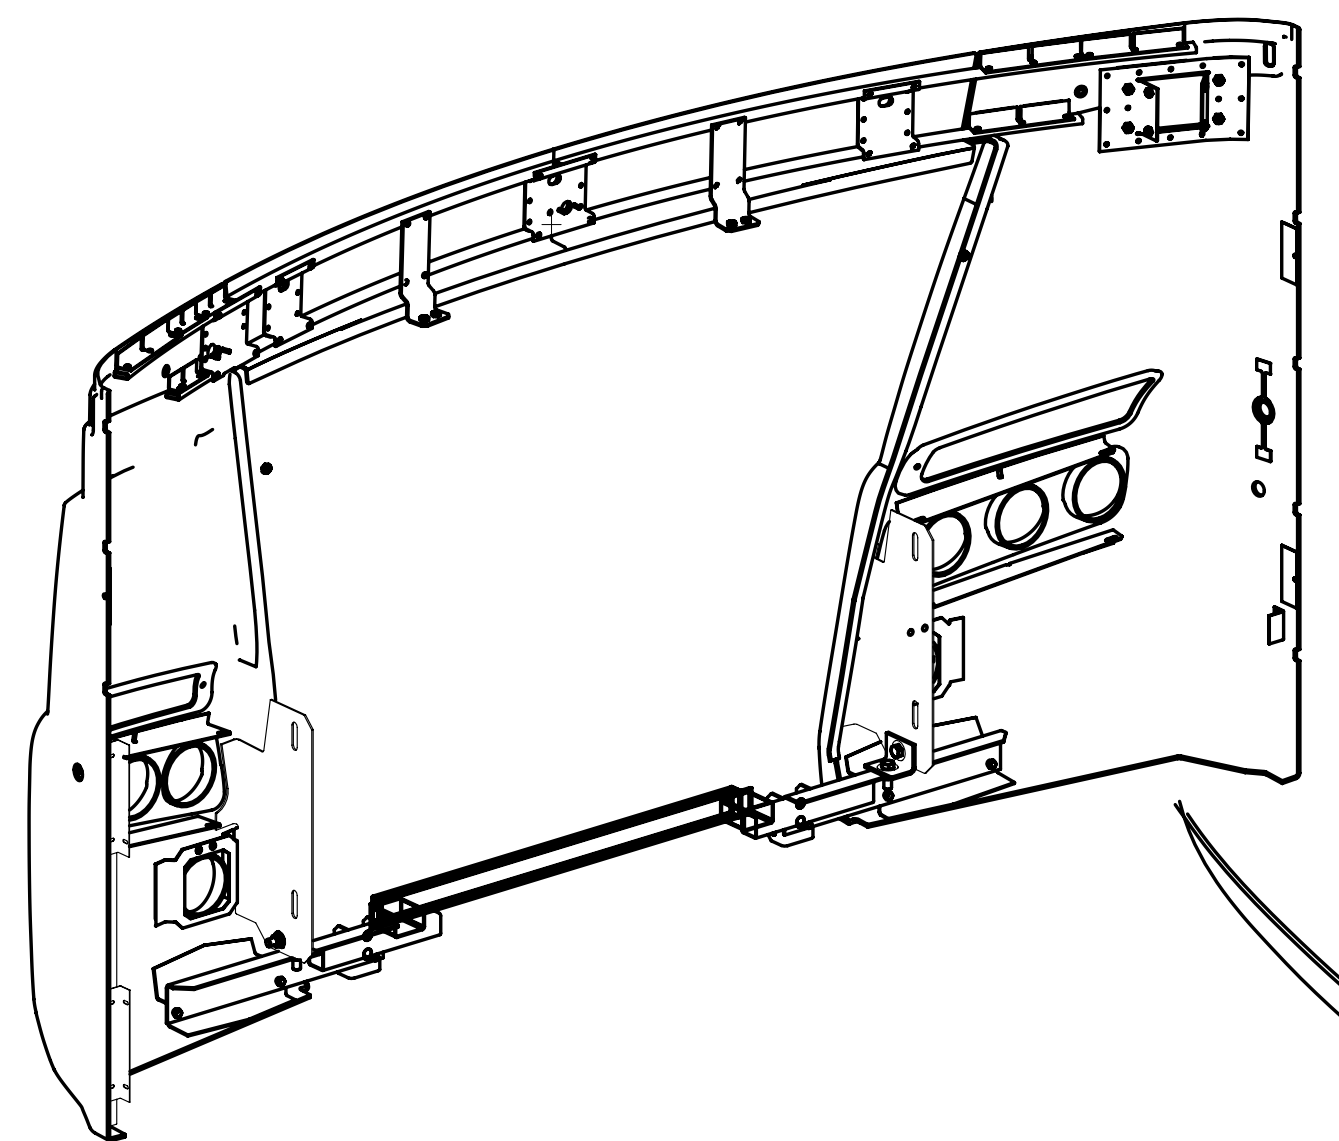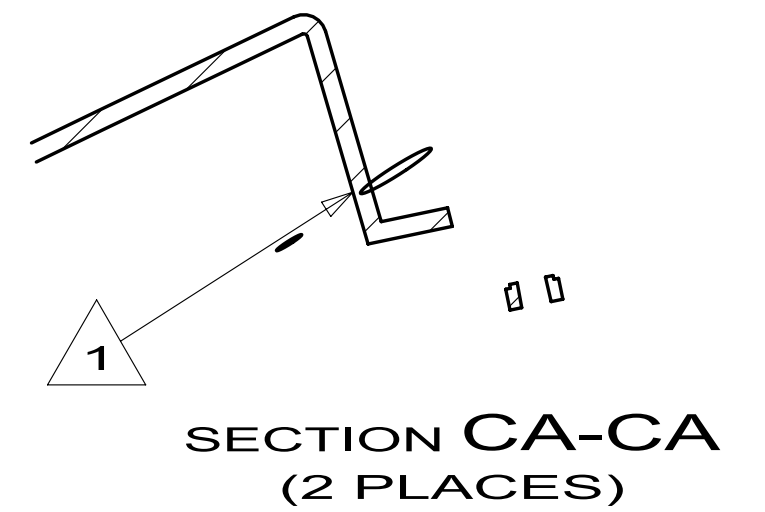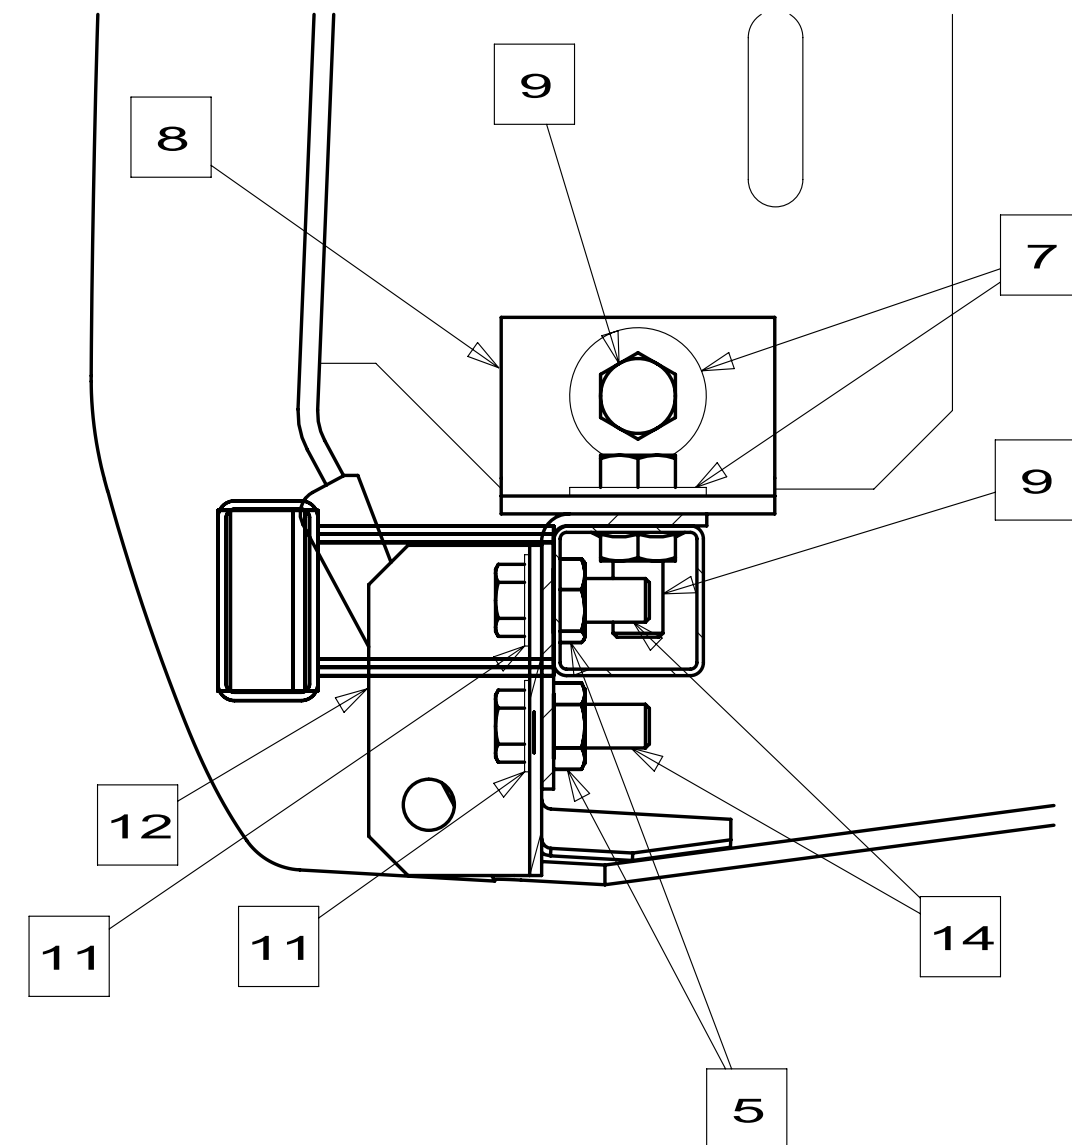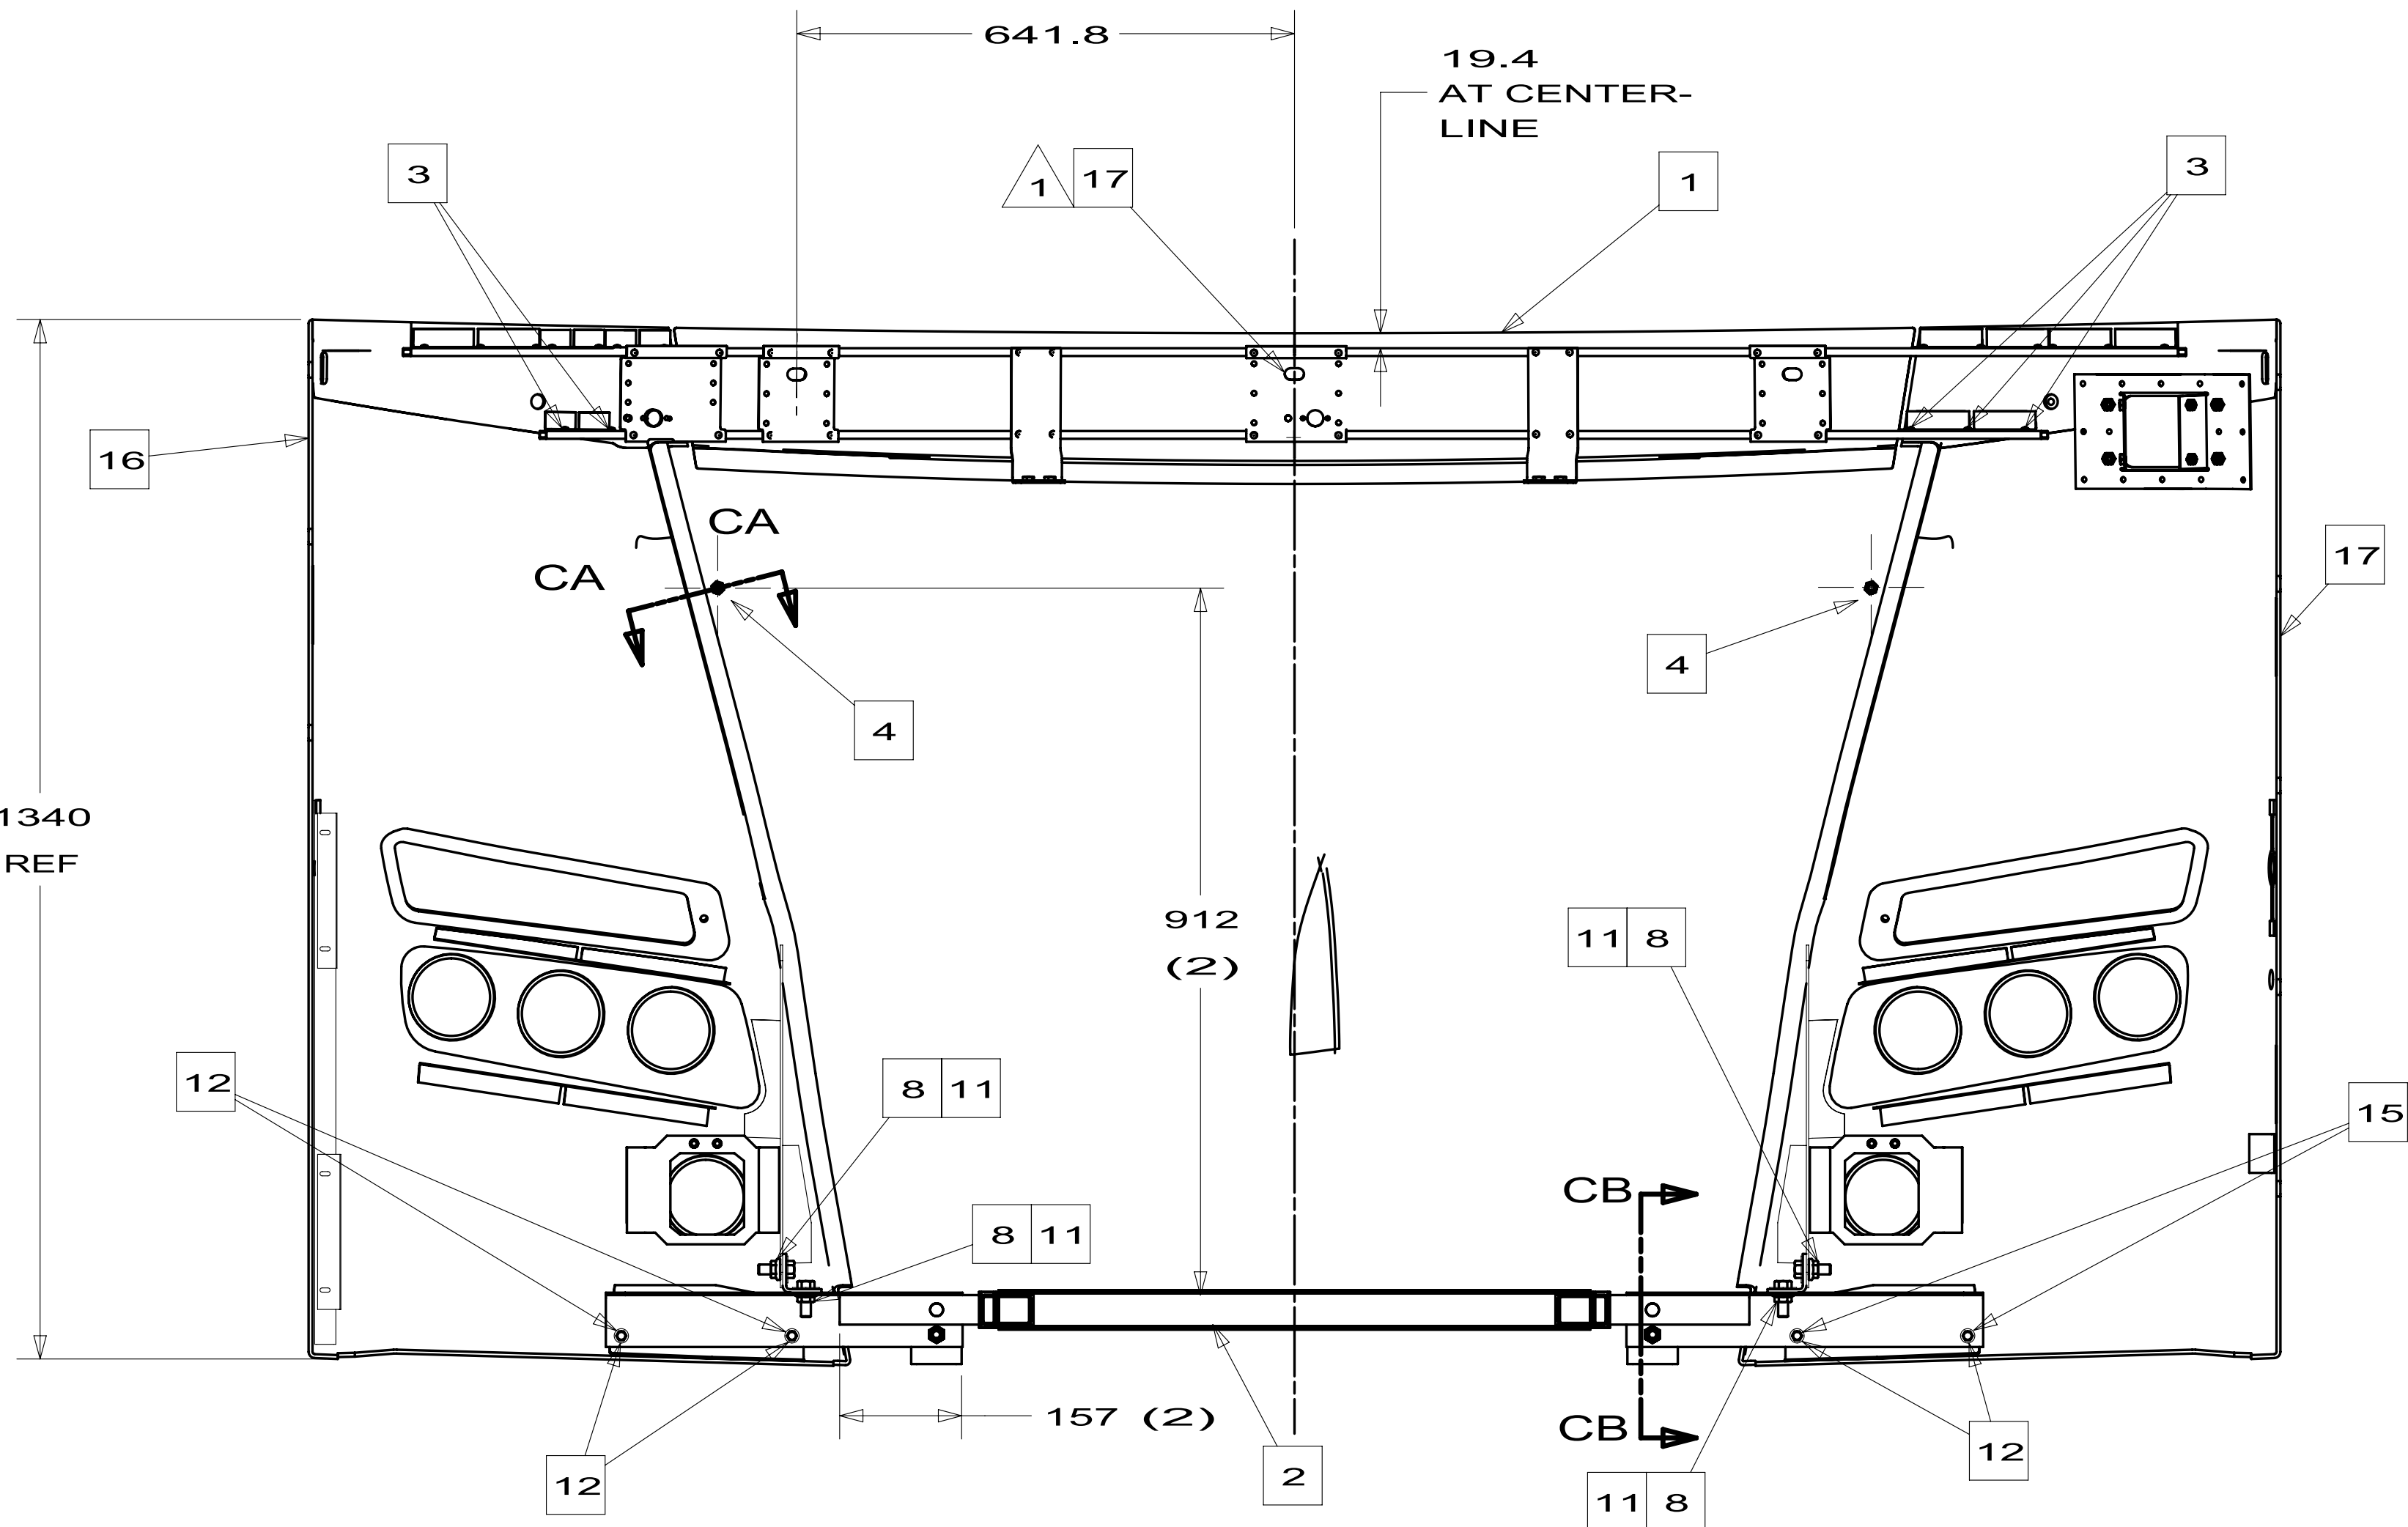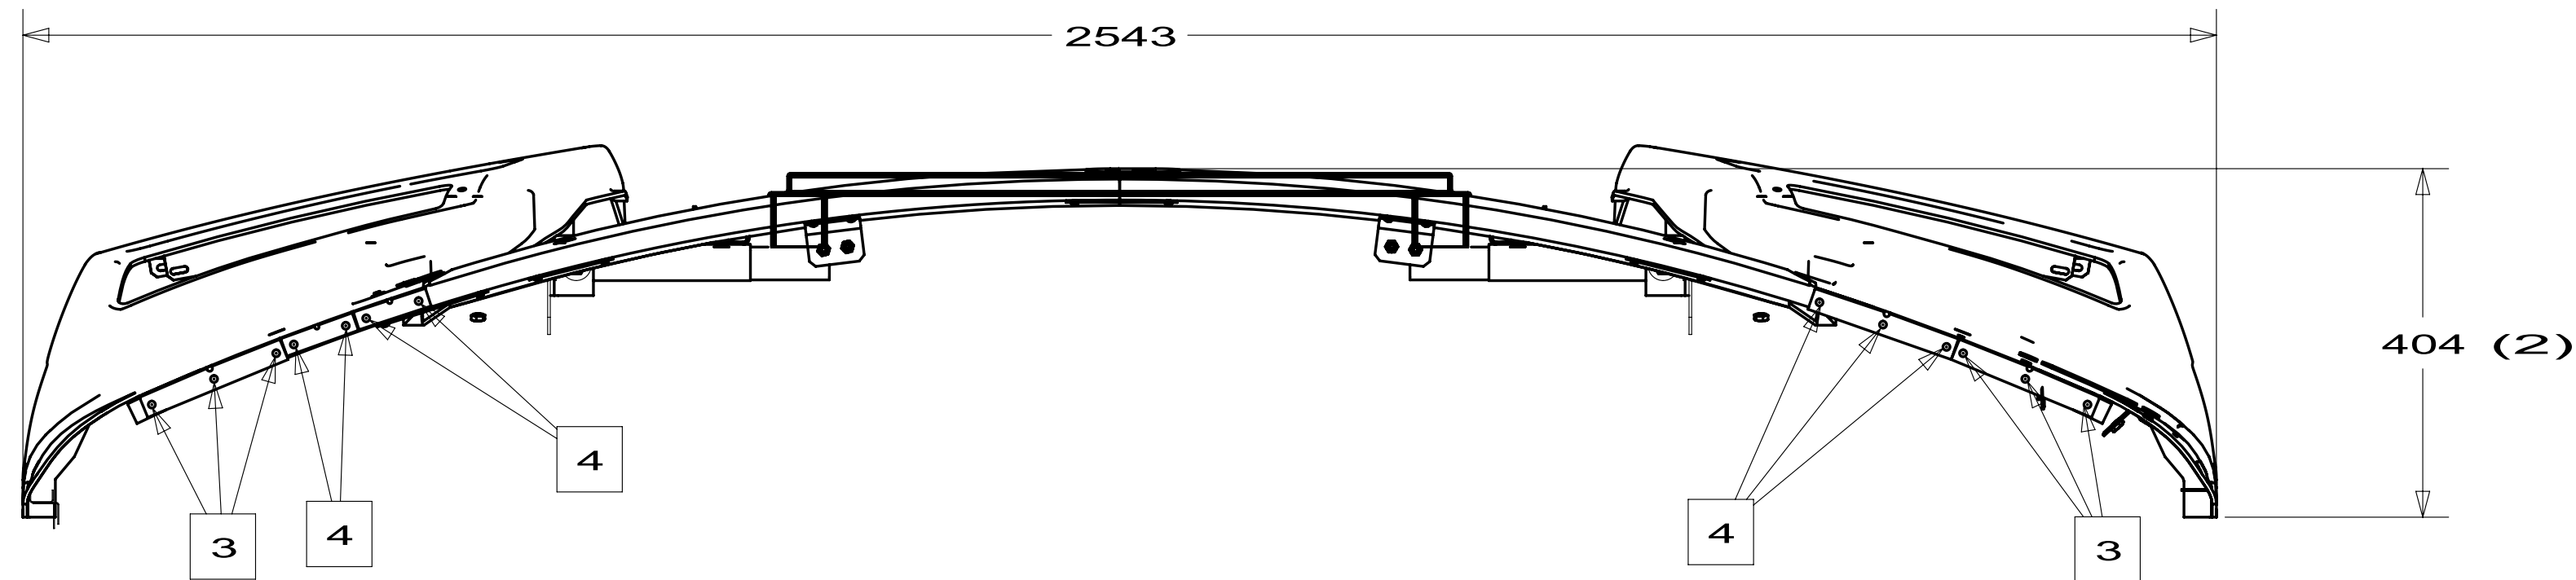


17	15178006XXX	PANEL ASM-FR	1
16	15178008XXX	PANEL ASM-FR	1
15	16061901XXX	SUPPORT ASM	1
14	000C130720B	BOLT - HEX	4
13	000C120416U	BOLT	4
12	000E131400U	WASHER	4
11	000E131900U	WASHER (NARR	4
10	15267001CHT	BRACKET-HING	2
9	000C120824U	BOLT	4
8	000D390800U	NUT	4
7	000E132200U	WASHER	4
6	12845404CHT	ANGLE-BUMPER	2
5	000D610700A	NUT	4
4	16021004CHT	LATCH-HOOD,F	2
3	000G390806U	SCREW-PAN,HE	18
2	15260602CHT	SUPPORT ASM	1
1	16094502XXX	PANEL CENTER	1
ITEM	PART NUMBER	DESCRIPTION	QTY

FIRST USED			
08 G39WL			
DO NOT SCALE DRAWING			
TITLE: PANEL ASM-FRONT,LOWER			
SHEET 1	PART NO 160621	REV	

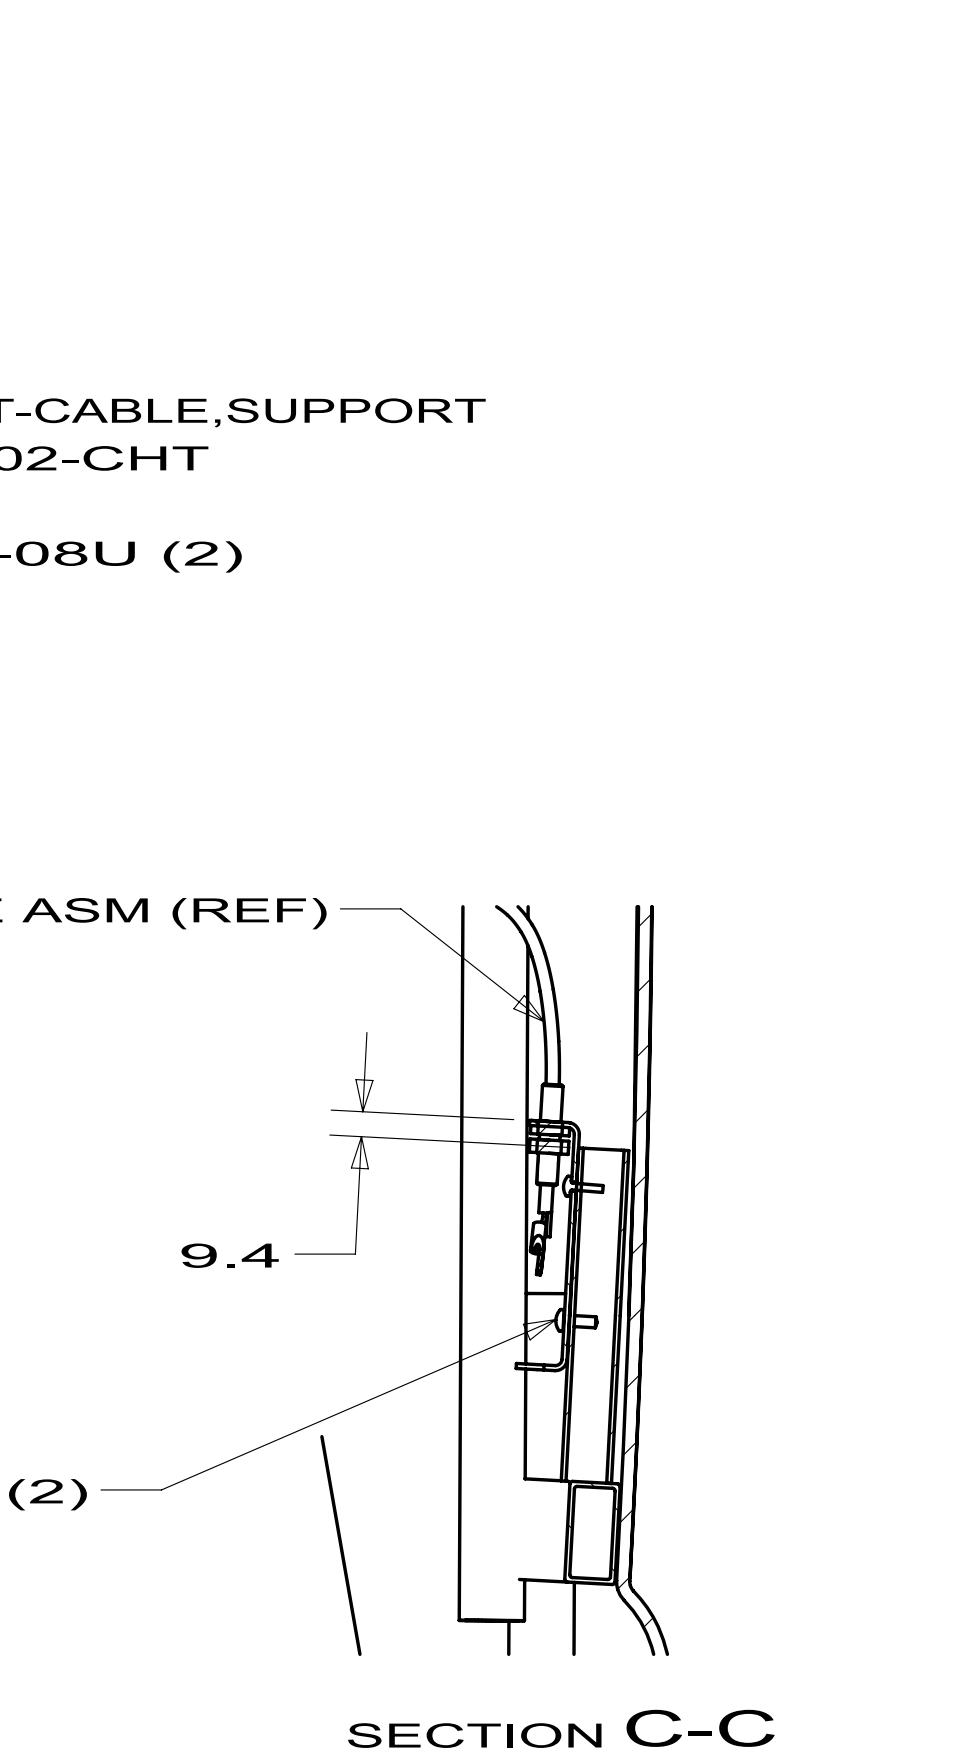

COPYRIGHT 2010 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE
CHGR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	08 R-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°
THIRD ANGLE PROJECTION	WEIGHT: 59.5 LBS
DO NOT SCALE DRAWING REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	
TITLE: HOOD COMPL-FRONT	
SHEET 1 OF 1	PART NO 160635
REF:	1

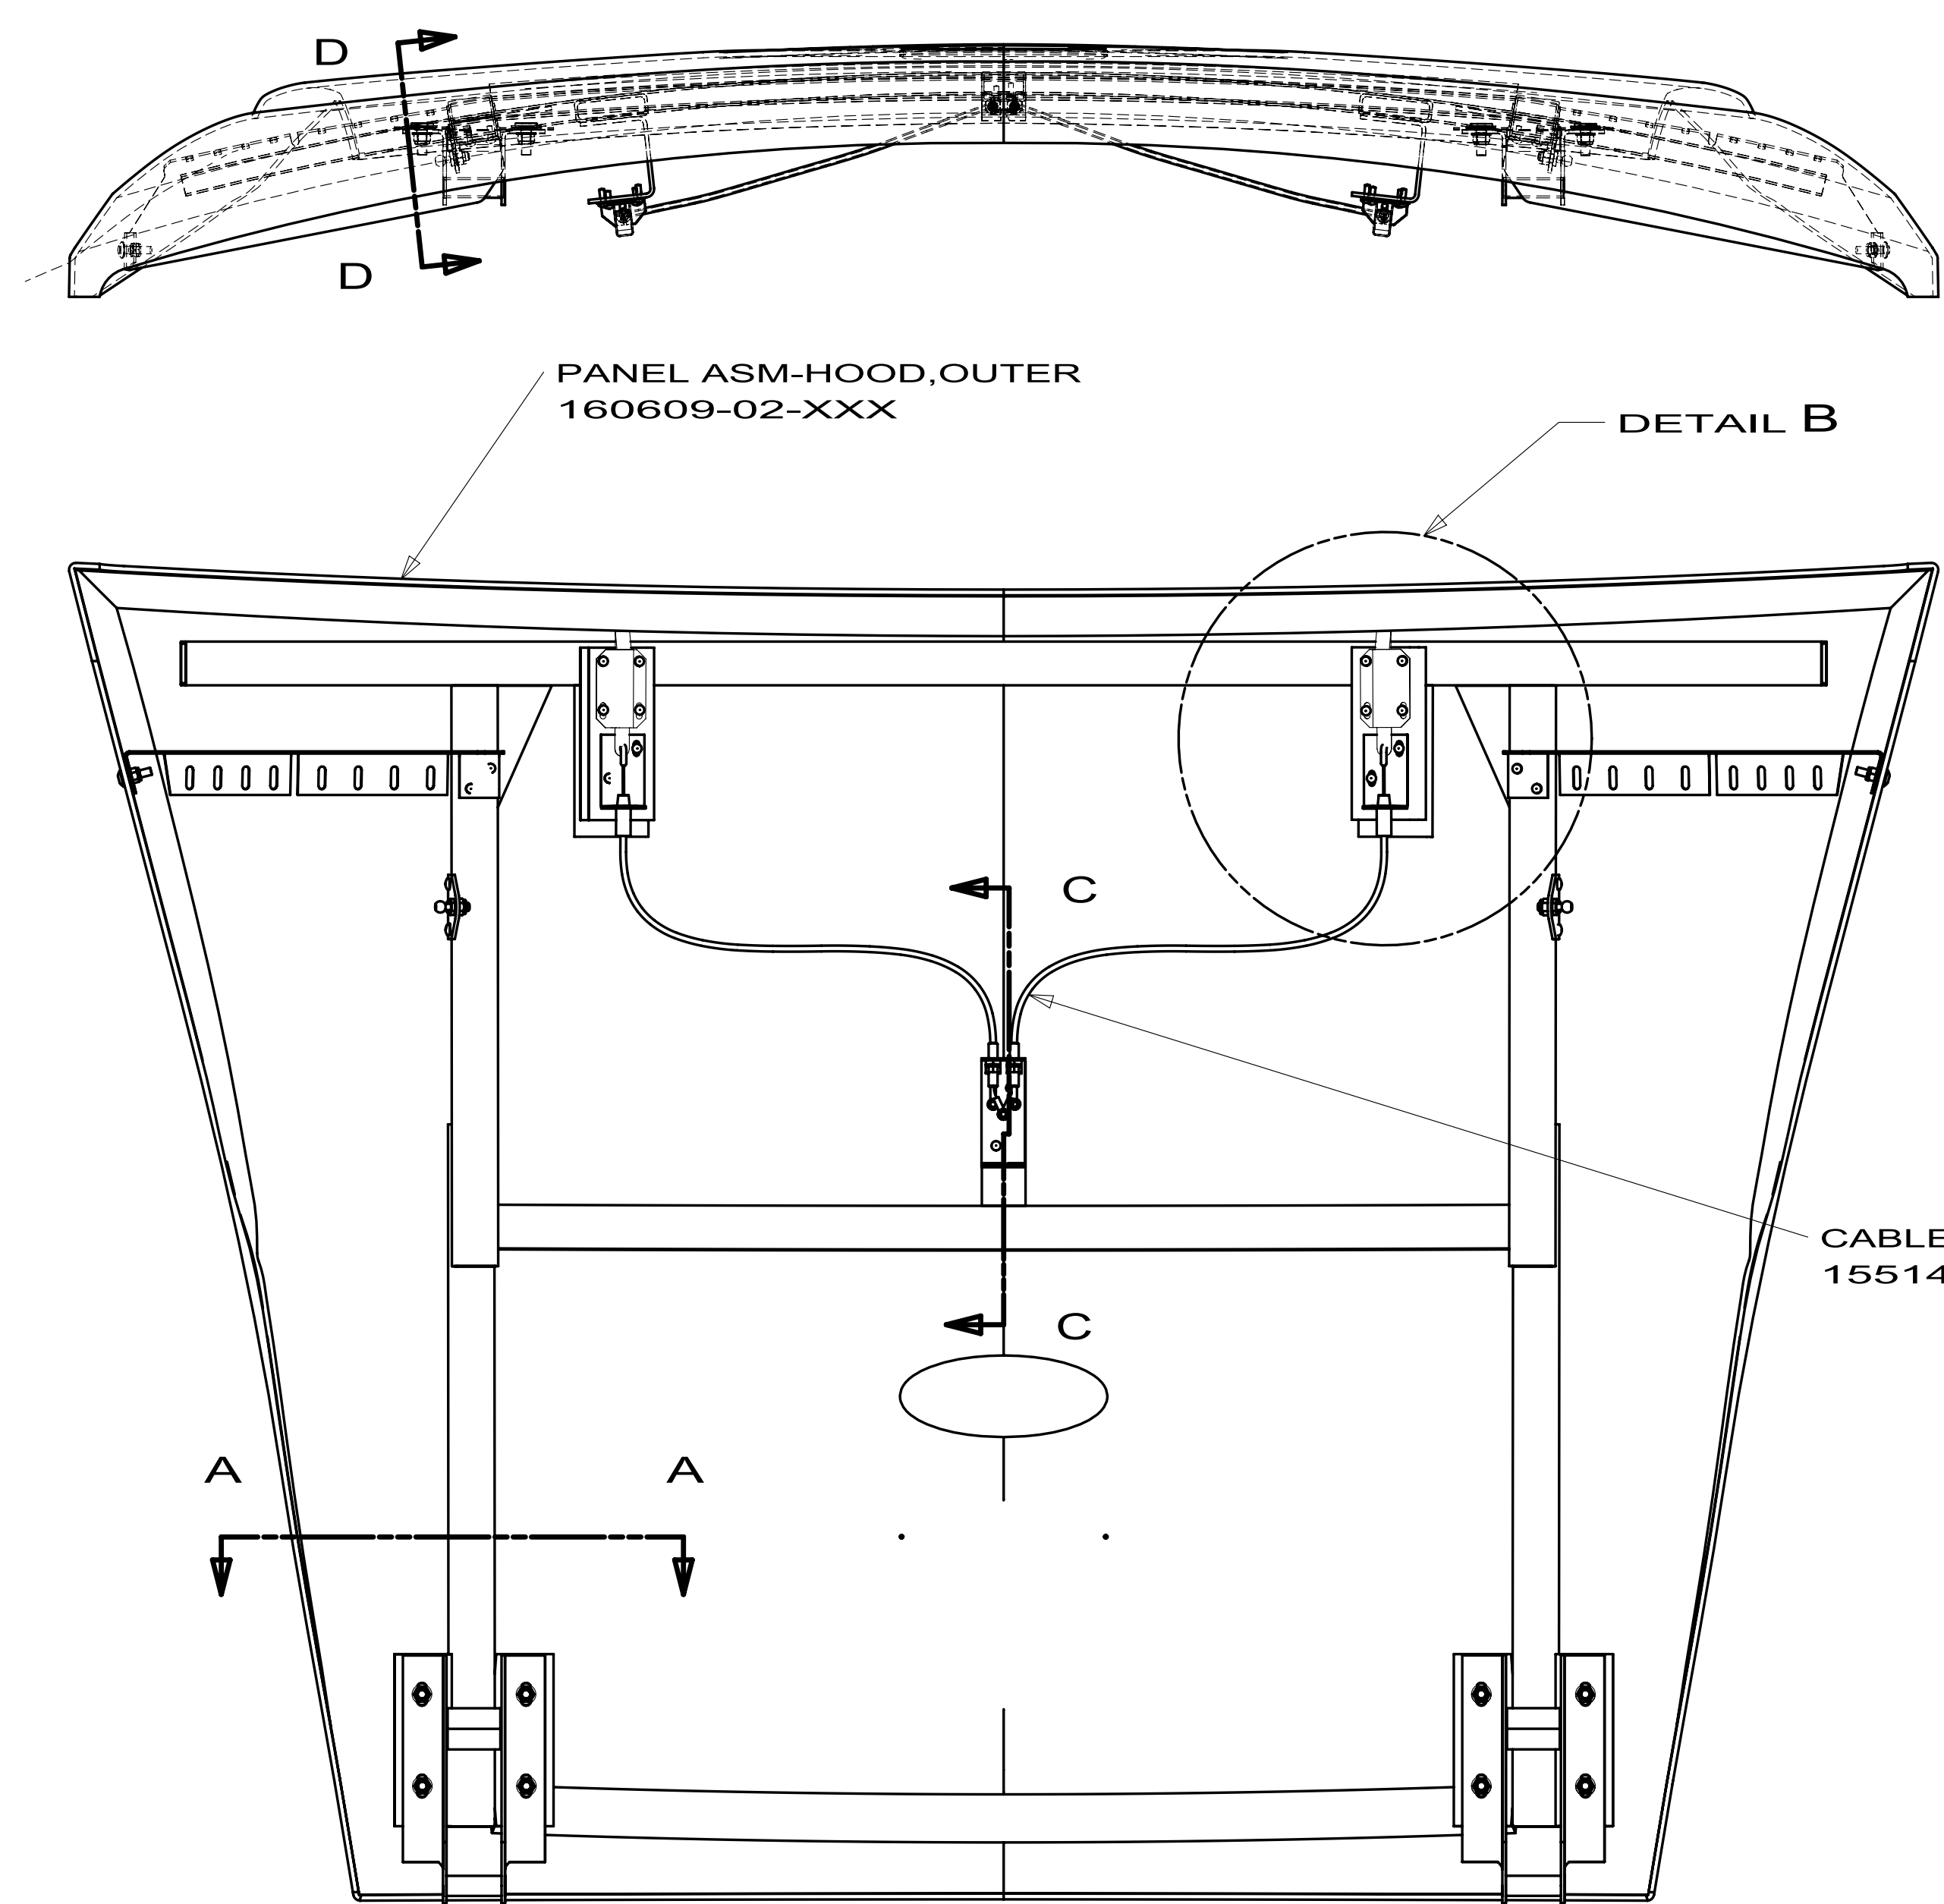

DAMPER MOUNT
154981-01-CHT
BALL STUD
154990-01-CHT(UP TO 04-26-10)
057460-02-000(AFTER 04-27-10)
NUT
D29-05-00U
SCREW
G39-10-12U (3)

2. TIGHTEN NUT UNTIL PIVOT ASM WILL STILL MOVE FREELY.
1. LUBRICATE WITH LITHIUM CREASE.

SECTION D-D (2 PLCS)

D

C

B





A

D

C

B

A

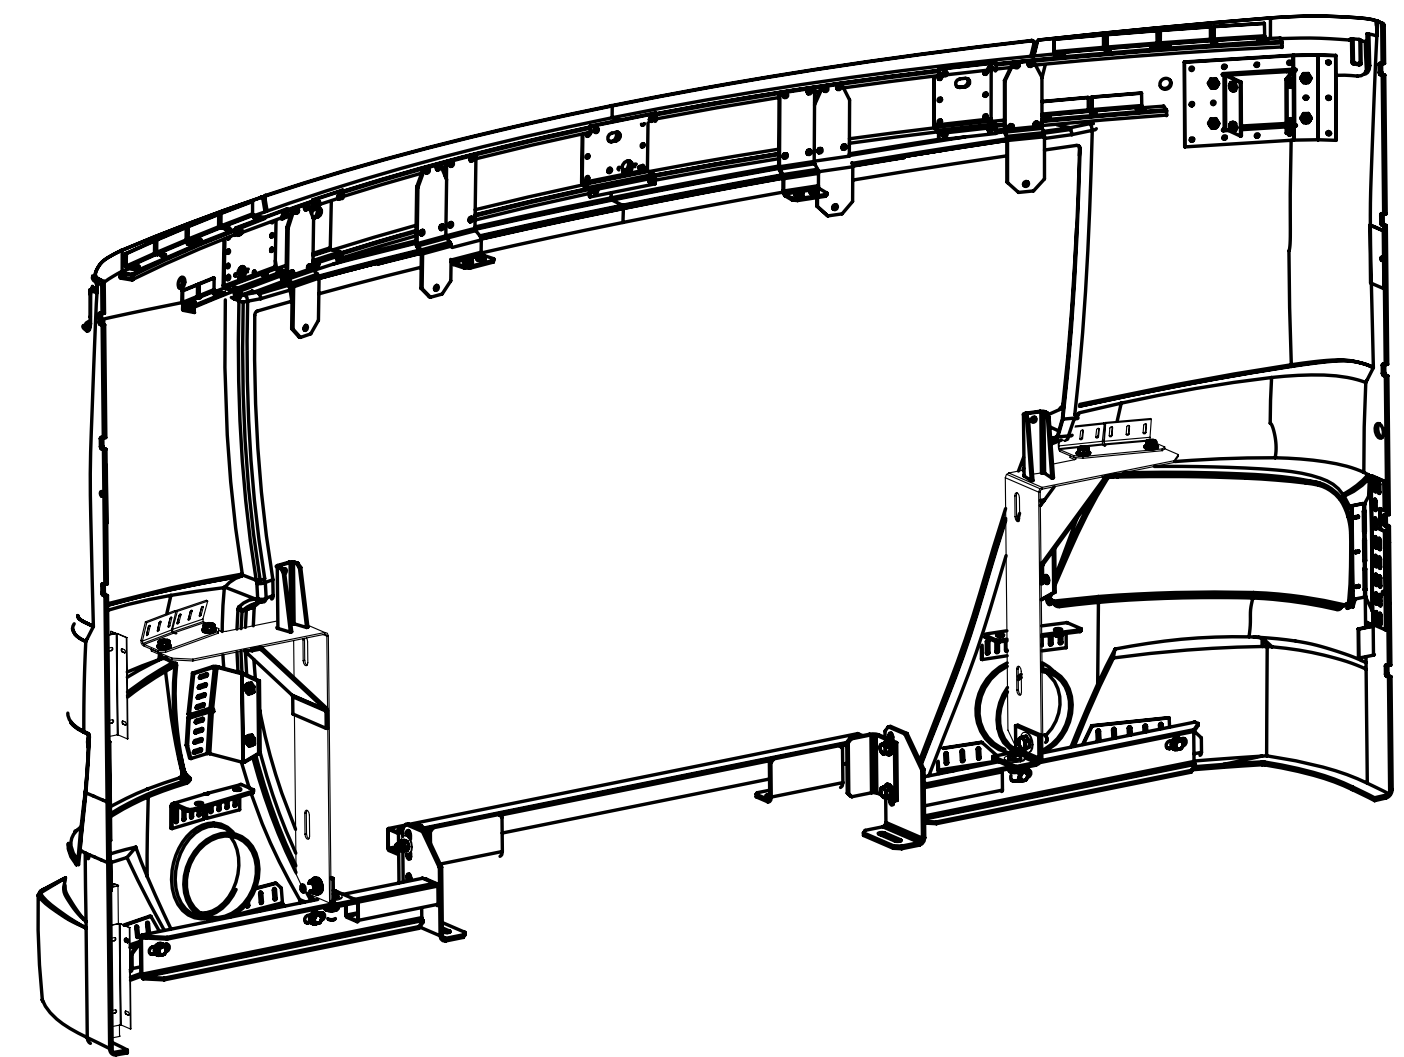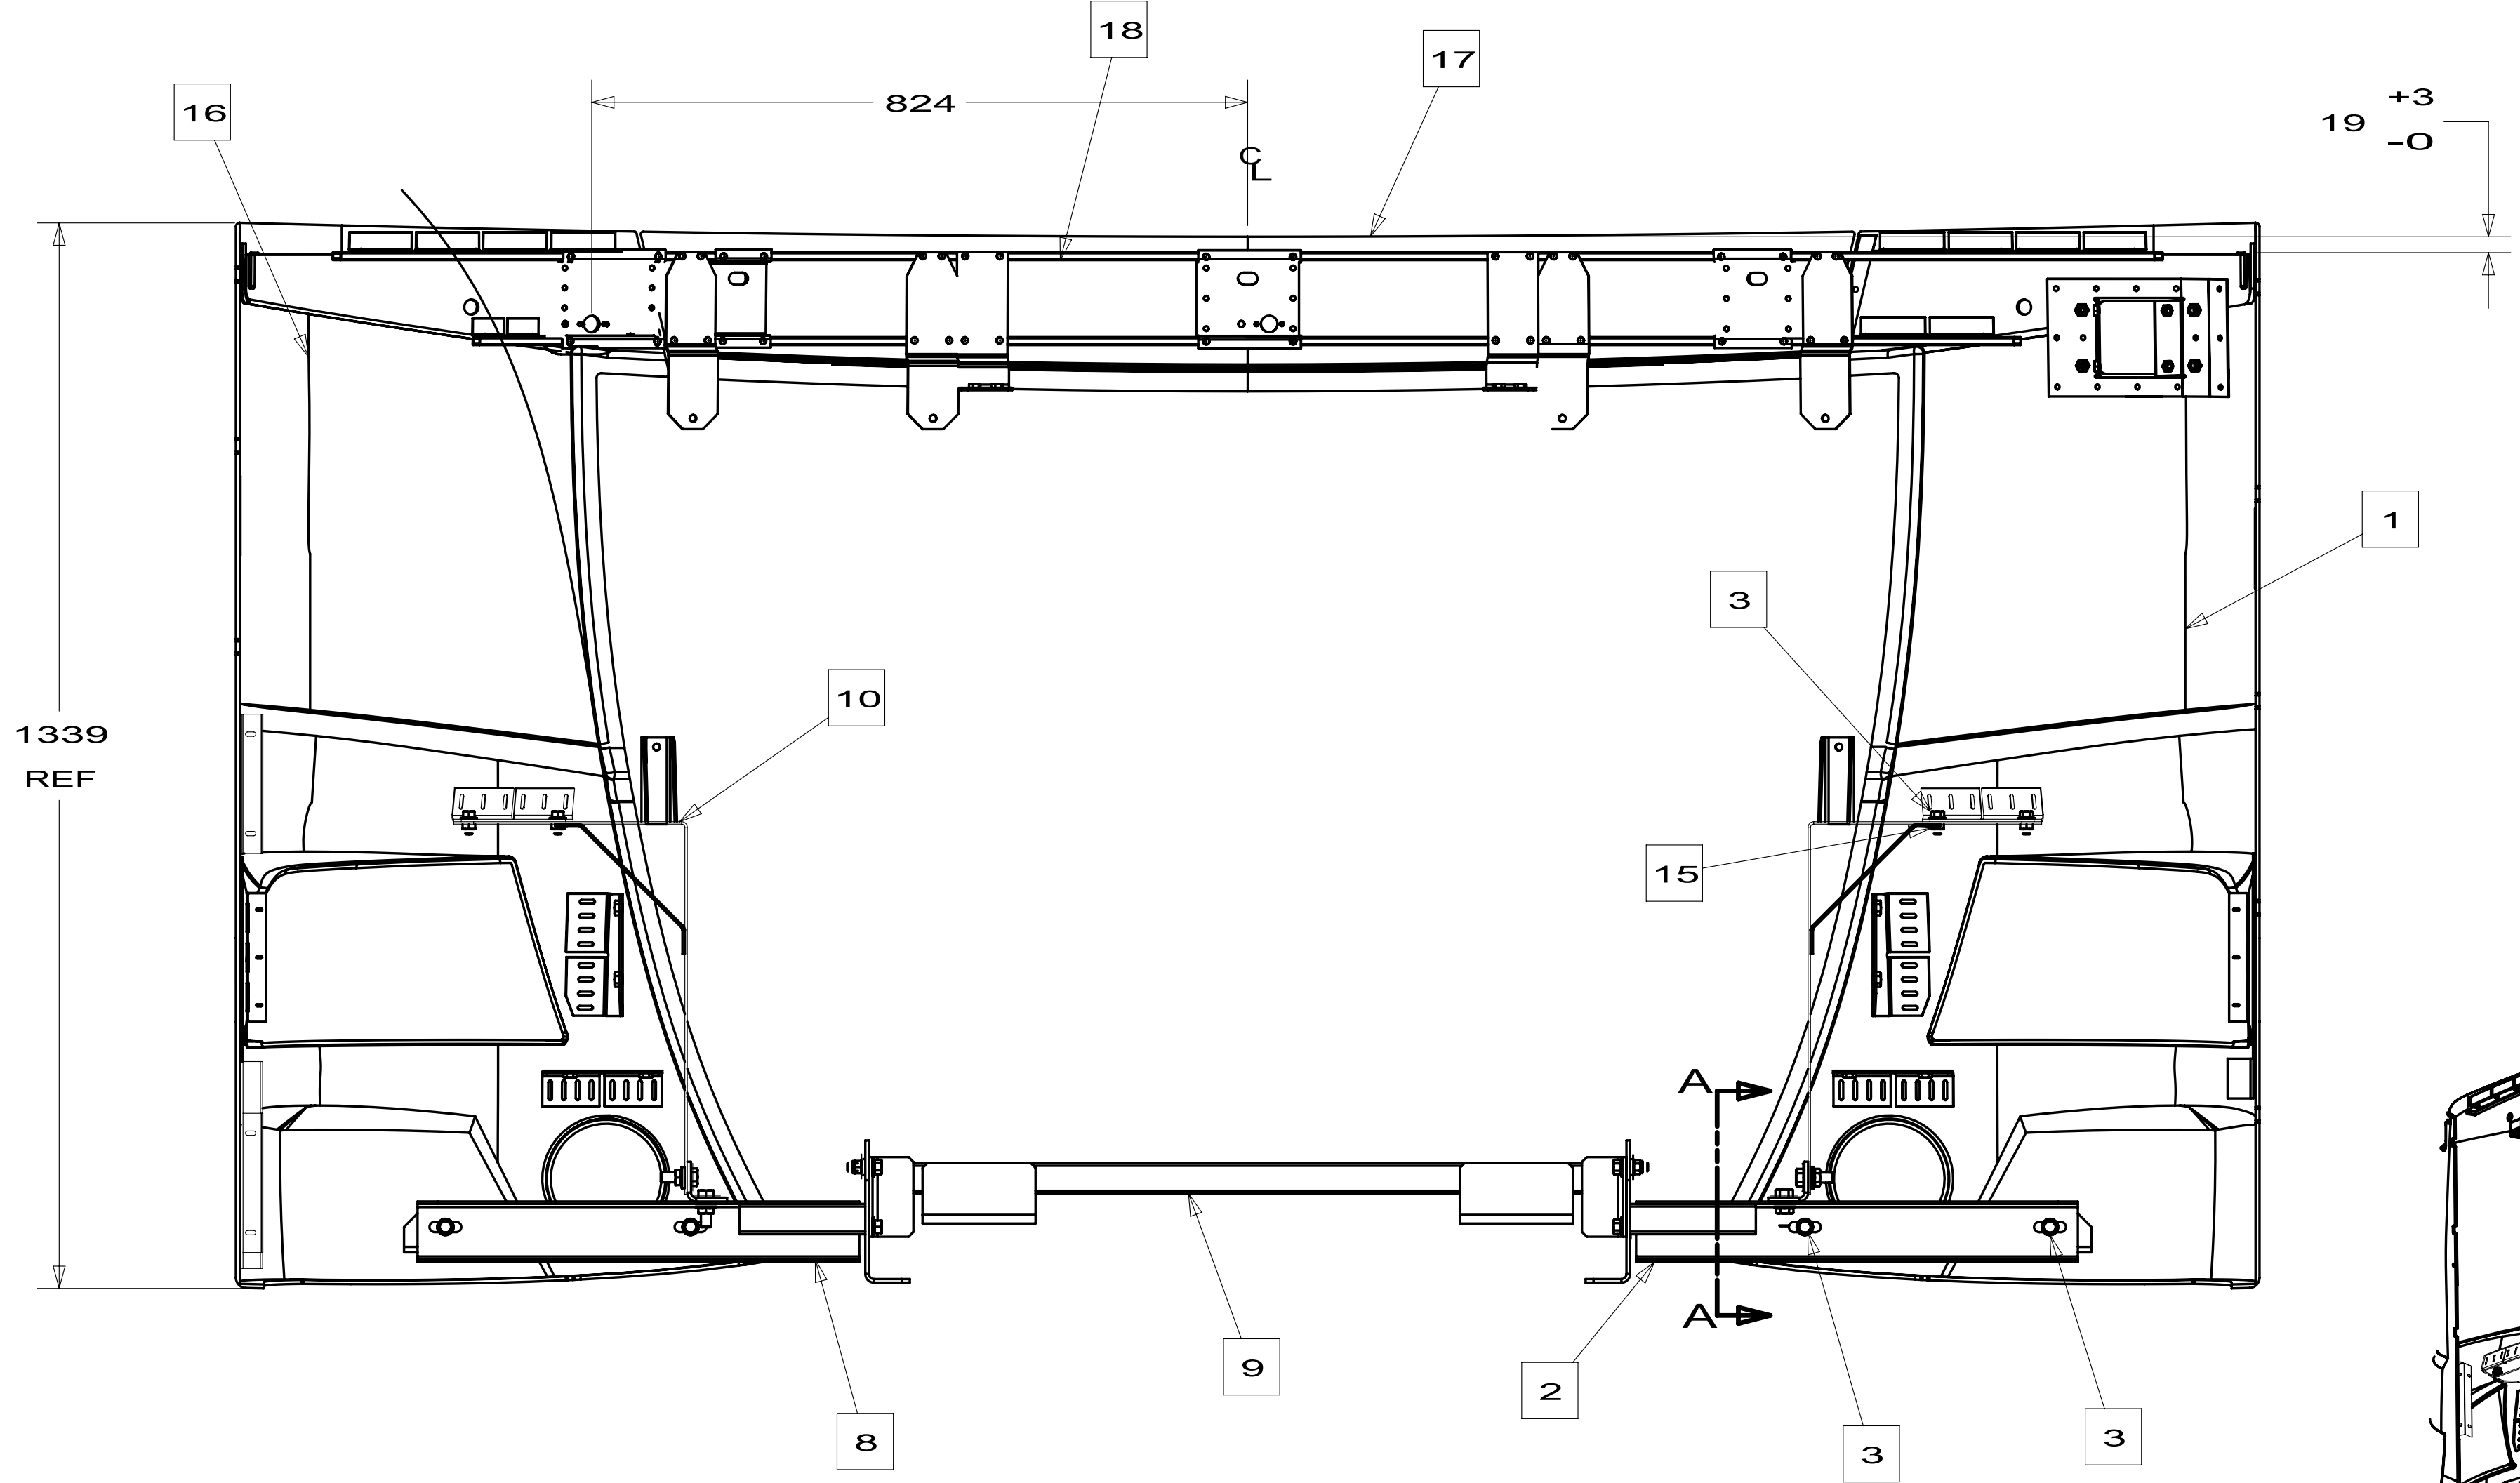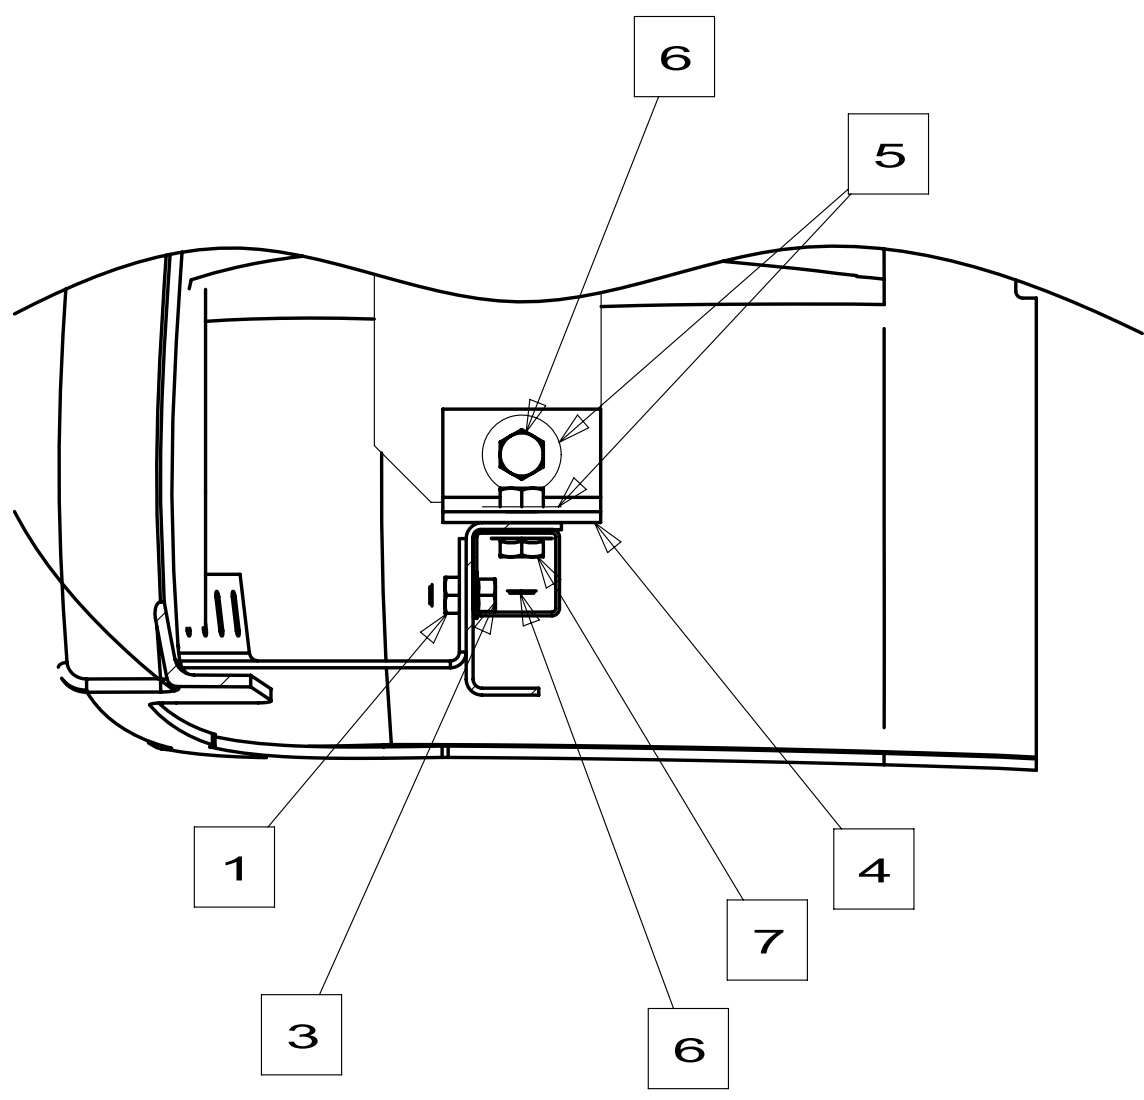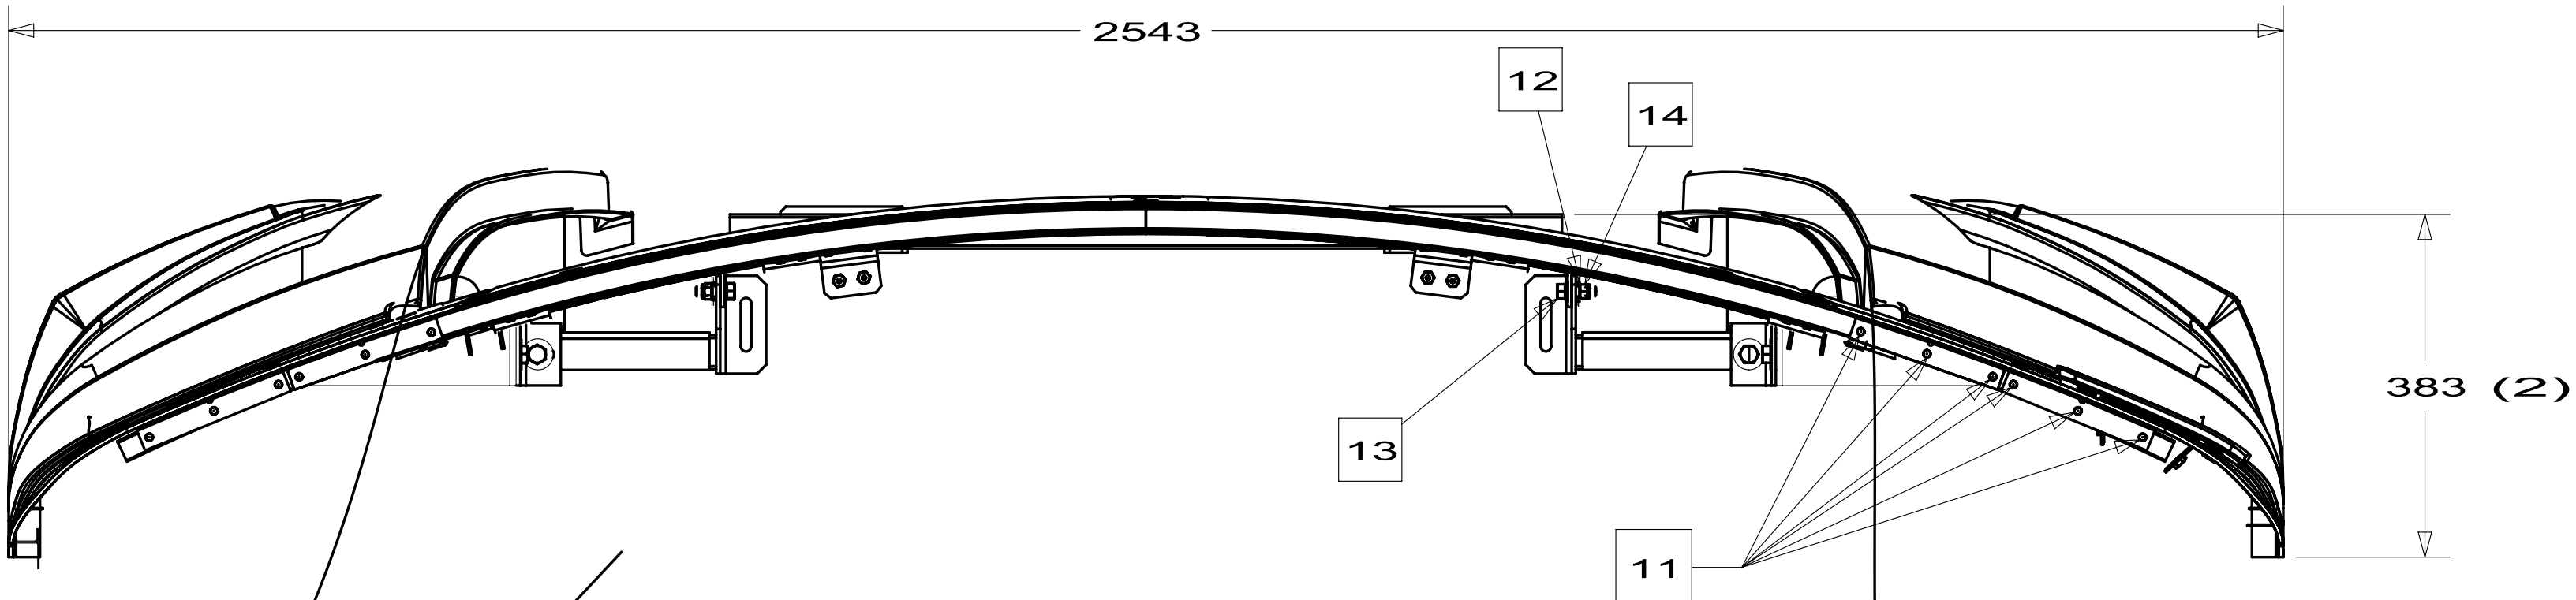

18	15266803XXX	SUPPORT ASM	1
17	15287404XXX	PANEL-CENTE	1
16	15236306XXX	PANEL ASM-F	1
15	15309801CHT	SUPPORT ASM	1
14	000D290700U	NUT	4
13	000C260720U	BOLT	4
12	000E132000U	WASHER	4
11	000G390806U	SCREW-PAN,H	18
10	15309802CHT	SUPPORT ASM	1
9	15320301CHT	CONNECTOR A	1
8	15323702CHT	SUPPORT ASM	1
7	000D390800U	NUT	4
6	000C120824U	BOLT	4
5	000E132200U	WASHER	4
4	12845404CHT	ANGLE-BUMPE	2
3	000C260612U	BOLT	8
2	15323701CHT	SUPPORT ASM	1
1	15236303XXX	PANEL ASM-F	1
ITEM	PART NUMBER	DESCRIPTION	QTY

WINNEBAGO
INDUSTRIES

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG

ORIG. DATE

CHK-OR

ALL DIMENSIONS ARE
IN MILLIMETERS

P.E.

FIRST USED

M.E.

08 R-SERIES,I

DSNR

UNSPECIFIED TOLERANCES ARE:

WHOLE DIM (X) : 1.5

ONE-PLACE (X.X) :

TWO-PLACE (X.XX) :

ANGLE :

THIRD ANGLE
PROJECTION

MATERIAL:

DO NOT SCALE DRAWING

TITLE:
PANEL ASM-FRONT,LOWER

SHEET1 OF 1

PART NO
161031

REV

REF:




1

NOTES:

SEE CHART
FOR COLOR VARIATIONS
OF THIS PART

8		7			
DWG NO	UNIT	A	B	C	D
170911-01	R40CD	676	724	2546	2546
170911-02	R40WD	.	.	.	.
170911-03	R42AD	.	.	.	.
170911-04	R40BD	670	680	1850	1960

1		2		3		4		5		6		7		8	
RELEASE	REV	DATE	DWG NO	170911	1	2	3	4	5	6	7	8	9	10	11
REV	ZONE	REVISION RECORD	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE

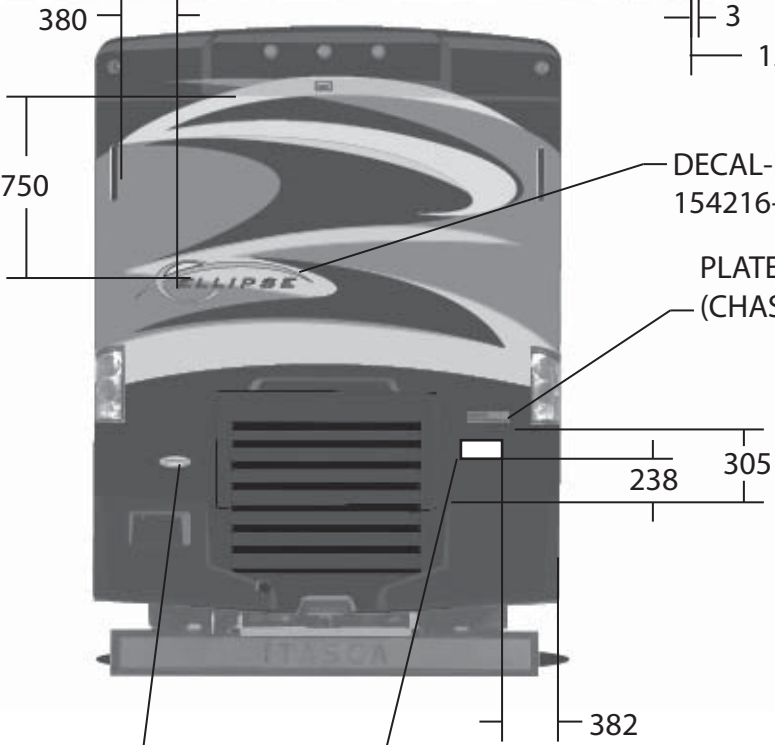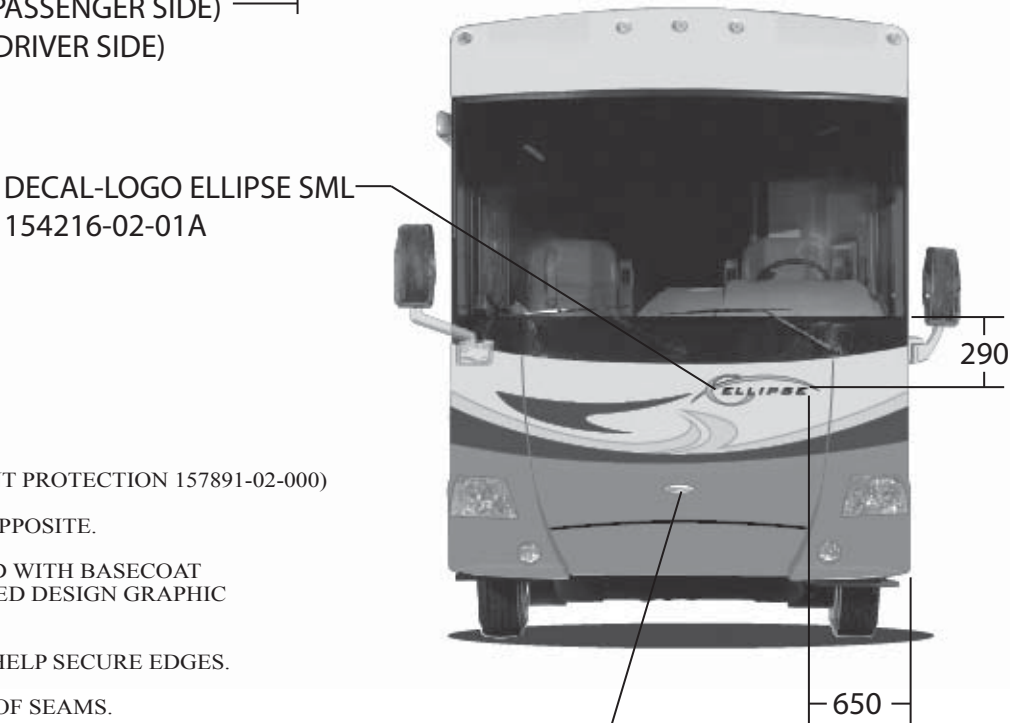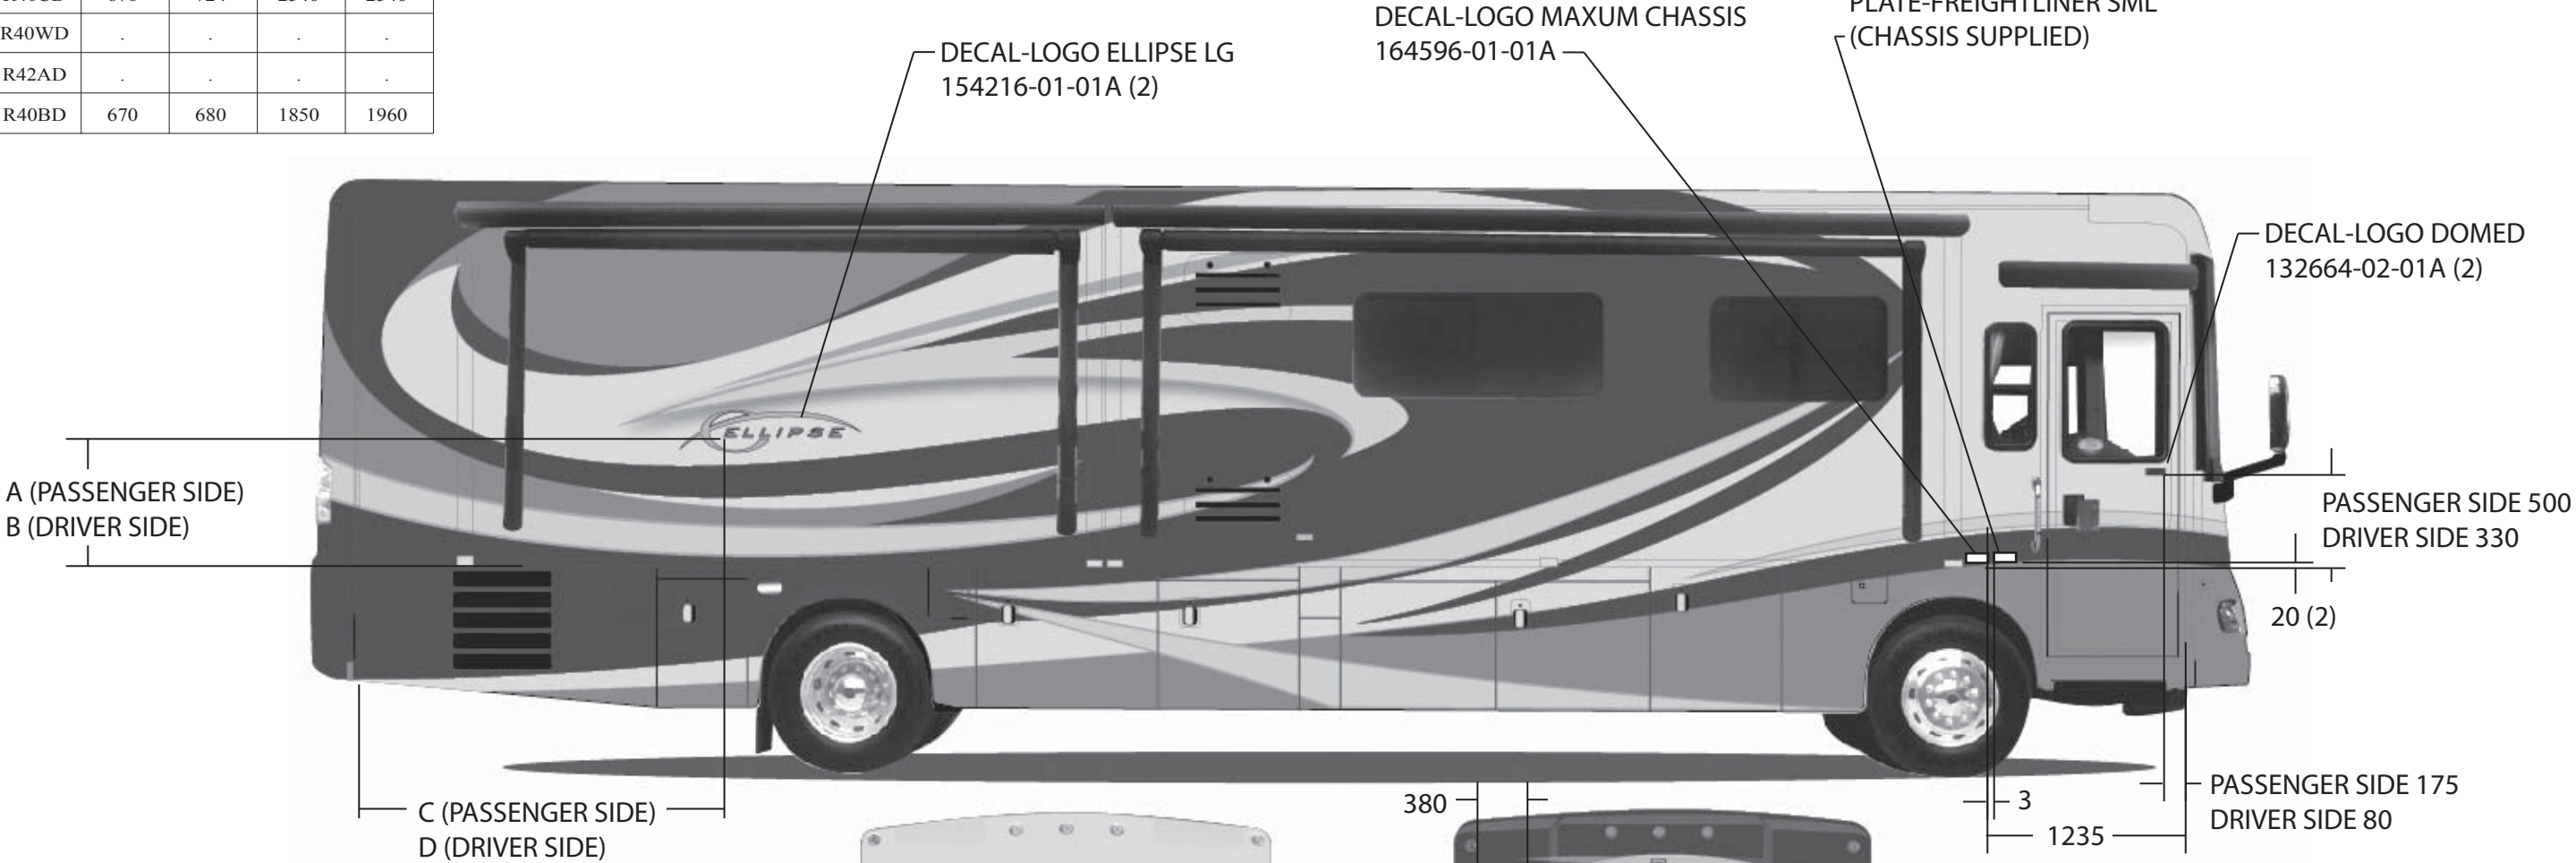

- (24P) MASK FRONT EXT PROTECTIVE
- (27A) EXT FULL BODY PAINT PKG #1
- (92A) EXT FULL BODY PAINT PKG #2
- (24C) EXT FULL BODY PAINT PKG #3
- (24B) EXT FULL BODY PAINT PKG #4
- (24H) EXT FULL BODY PAINT PKG #5
- (24L) EXT FULL BODY PAINT PKG #6

1		2		3		4		5		6		7		8	
WINNEBAGO		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.		ORIG DATE 08/07/08		FIRST USED 10 R ELLIPSE		MATERIAL		SPECIFICATION PRINT DO NOT SCALE		TITLE GRAPHICS INSTL - FBP		SHEET 1 OF 3	
REF		1		08/26/09		170911		REV		1		08/26/09		170911	

- 9. DIE CUT ACRYLIC FILM TO PROTECT UNIT (KIT-PAINT PROTECTION 157891-02-000)
- 8. PASSENGER SIDE OF UNIT SHOWN, DRIVER'S SIDE OPPOSITE.
- 7. END PANELS OF SLIDEOUT ROOMS WILL BE PAINTED WITH BASECOAT AND CLEAR COAT ONLY. THERE WILL BE NO COLORED DESIGN GRAPHIC ELEMENTS PAINTED ON THE END PANELS.
- 6. APPLY SEALER BODY SEAM CLEAR 94401-04-000 TO HELP SECURE EDGES.
- 5. USE 174664-01-000 (100 FT) TO COVER UNSEALED ROOF SEAMS.
- 4. CLEAR COAT TO BE APPLIED ON ENTIRE UNIT TO PROTECT PAINT.
- 3. TOLERANCE FOR DIMENSIONS IS +/-20mm.
LOGO IS TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).
- 2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.
- 1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.

NOTES:

8

7

6

5

4

3

2

1

DWG
NO 170911

D

D

WHITE
#45289-4SILVER FROST MET
#75385BLACK MIST MET
#75377IRON GRAY
#75401

LOGOS CARRYOVER FROM 2009

C

C

→

←

B

B

A

A

REV. C 10/21/08

(27A) 2010 ELLIPSE - BLACK KNIGHT

REV. C 10/21/08

(92A) 2010 ELLIPSE - MINERAL

BRONZED GRAY MET
#75400DP. MAHOGANY MET.
#75404AMBER FIRE PRL MET
#57771-1LT. ALMOND PRL MET
#75226

LOGOS CARRYOVER FROM 2009

REV. E 03/30/09

(24C) 2010 ELLIPSE - MAHOGANY

8

7

6

5

4

3

2

1

FIRST USED		
2010 R-SERIES (ELLIPSE)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	PART NO	REV
2	170911	



REV. C 10/21/08
(24B) 2010 ELLIPSE - SILVER SKY



REV. C 10/21/08
(24H) 2010 ELLIPSE - MAPLE



REV. C 10/21/08
(24L) 2010 ELLIPSE - VERMILLION

FIRST USED		
2010 R-SERIES (ELLIPSE)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE		
GRAPHICS INSTL - FBP		
SHEET	PART NO	REV
3	170911	

8		7			
DWG NO	UNIT	A	B	C	D
170912-01	R40WD	.	.	.	.
170912-02	R40BD	280	90	1840	2800
170912-03	R42AD	195	285	1700	2010
170912-04	---	---	---	---	---
170912-05	R40CD	575	65	730	860

RELEASE		REV	DATE	DWG NO	
A			08--15--08	170912	
REV	ZONE	REVISION RECORD			DATE
					DTR-ORG

D

D

C

C

B

B

A

A

A (PASSENGER SIDE)
B (DRIVER SIDE)

C (PASSENGER SIDE)
D (DRIVER SIDE)

DECAL-LOGO MAXUM CHASSIS
164596-01-01A

DECAL-LOGO DOMED
132664-02-01A (2)

500 (PASSENGER SIDE)
195 (DRIVER SIDE)

20 (2)
PLATE-FREIGHTLINER SML
(CHASSIS SUPPLIED)

175 (PASSENGER SIDE)
80 (DRIVER SIDE)

3

1235

DECAL-LOGO TOUR SML
154229-02-01A

DECAL-LOGO TOUR DOMED LG
154229-01-01A 

PLATE-FREIGHTLINER LG
(CHASSIS SUPPLIED)

(1LU) FRTL 34,320 400HP 8.9L 6 SPD
(1LE) FRTL 44,320 400 6SPD IFS TAG
(24P) MASK FRONT EXT PROTECTIVE
(27A) EXT FULL BODY PAINT PKG #1
(92A) EXT FULL BODY PAINT PKG #2
(24C) EXT FULL BODY PAINT PKG #3
(24B) EXT FULL BODY PAINT PKG #4
(24H) EXT FULL BODY PAINT PKG #5
(24L) EXT FULL BODY PAINT PKG #6

WINNEBAGO		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
		ORIG DATE	08/07/08
		FIRST USED	10 R TOUR
		MATERIAL:	
SPECIFICATION PRINT DO NOT SCALE			
TITLE: GRAPHICS INSTL - FBP			
SHEET	1 OF 3	PART NO	170912
		REV	

DECAL-LOGO W
120700-12-01A (2)
DECAL-LOGO TOUR DOMED LG
154229-01-01A (2) 

DECAL/BEZEL DOMED
151687-01-01A

DECAL/BEZEL DOMED
151687-01-01A

DECAL-HORSEPOWER 400 FLEXSCRIPT
158621-03-01A

 CENTER ON UNIT OR LOGO..

9. DIE CUT ACRYLIC FILM TO PROTECT UNIT (KIT-PAINT PROTECTION 157891-01-000)

8. PASSENGER SIDE OF UNIT SHOWN, DRIVER'S SIDE OPPOSITE.

7. END PANELS OF SLIDEOUT ROOMS WILL BE PAINTED WITH BASECOAT AND CLEAR COAT ONLY. THERE WILL BE NO COLORED DESIGN GRAPHIC ELEMENTS PAINTED ON THE END PANELS.

6. APPLY SEALER BODY SEAM CLEAR 94401-04-000 TO HELP SECURE EDGES.

5. USE 174664-01-000 (100 FT) TO COVER UNSEALED ROOF SEAMS.

4. CLEAR COAT TO BE APPLIED ON ENTIRE UNIT TO PROTECT PAINT.

3. TOLERANCE FOR DIMENSIONS IS +/-20mm.
LOGO IS TO BE +/- 1mm ON A HORIZONTAL PLANE (END TO END).

2. APPLY FILM-URETHANE PROTECTANT 109506-01-000 AT BOTTOM OF ENTRANCE DOOR TO PREVENT SCUFFMARKS.

1. APPLY PROTECTOR 116424-01-000 TO WATER HEATER DOOR LATCH.

NOTES:

8

7

6

5

4

3

2

1

REF

1

08/26/09

BLACK MIST MET
#75377

WHITE DIAMOND PRL
#64003-5

GUNMETAL MET
#33936-1

SANDSTONE BEIGE MET
#43482-3

AMBER FIRE PRL
#57771-1

MOJAVE MIST MET
#64139-1

BRT. PLATINUM MET
#48823-3

SEDONA BRONZE MET
#75399

LOGOS CARRY OVER FROM 2009

LOGOS CARRY OVER FROM 2009

(27A) 2010 TOUR - SILVER STREAK

(92A) 2010 TOUR - BRONZE

SILVER SKY MET
#62444

VERMILLION
#39068


MED. PLATINUM MET
#44094

DK. GRAY MICA
#59271-4


LOGOS CARRY OVER FROM 2009

(24C) 2010 TOUR - DK. GRAY MICA


FIRST USED		
2010 R-SERIES (TOUR)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE:		
GRAPHICS INSTL - FBP		
SHEET	2	PART NO
		170912
		REV

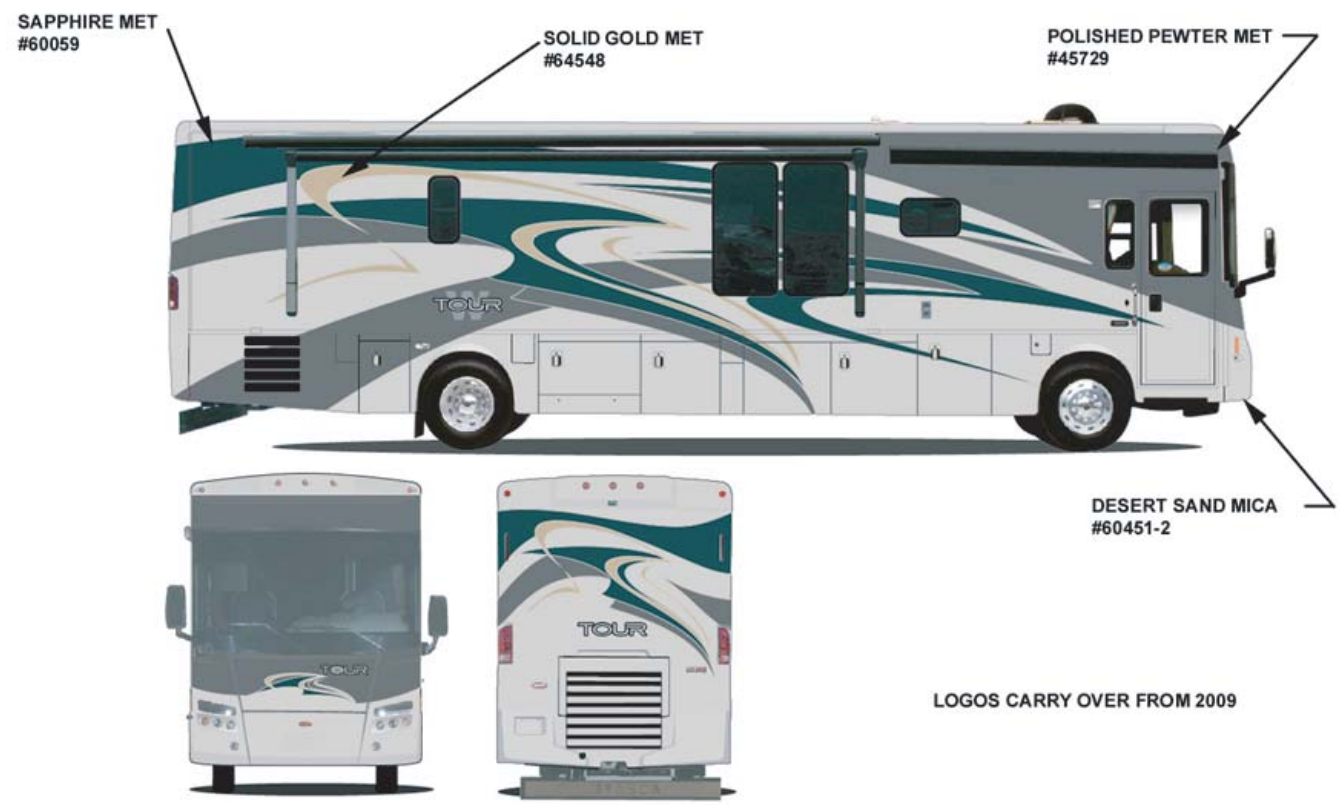

(24B) 2010 TOUR - CADET BLUE



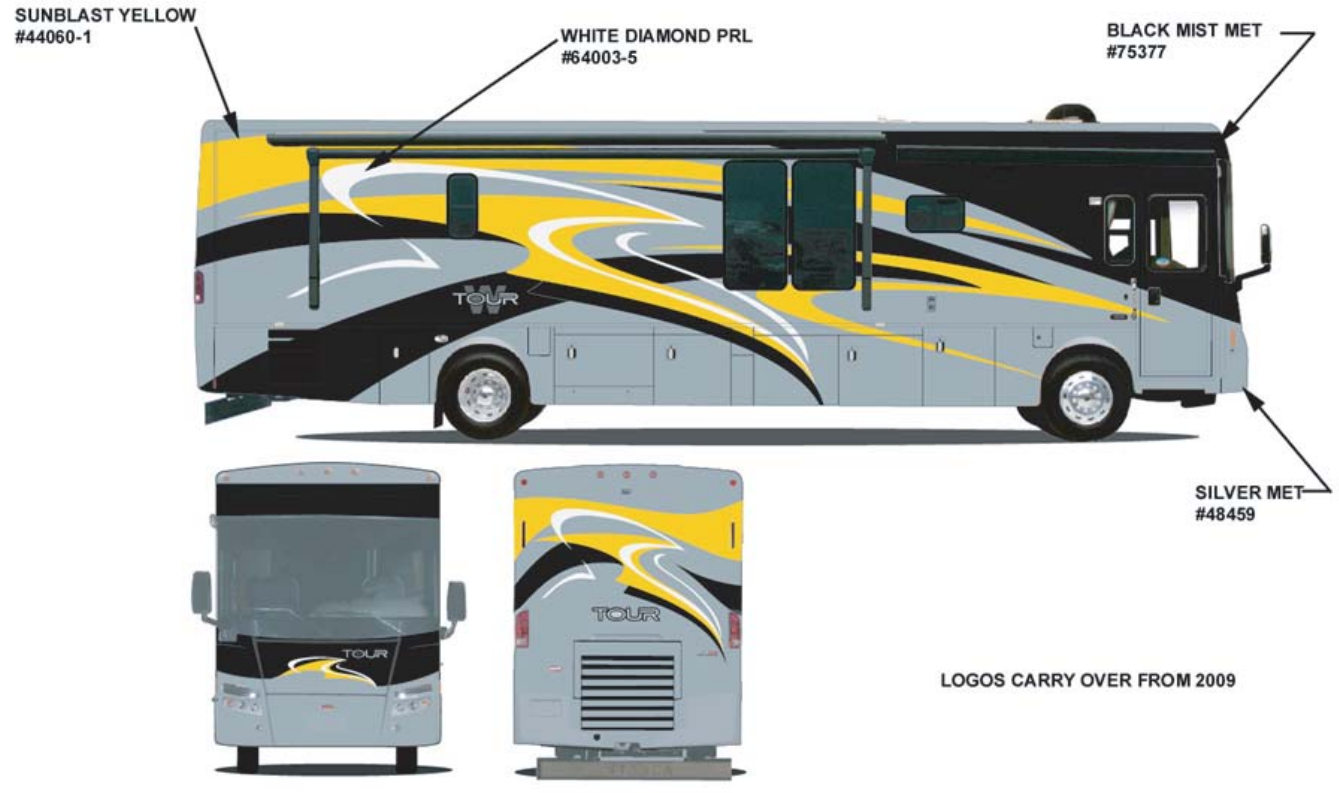


(24L) 2010 TOUR - SUNSPASH

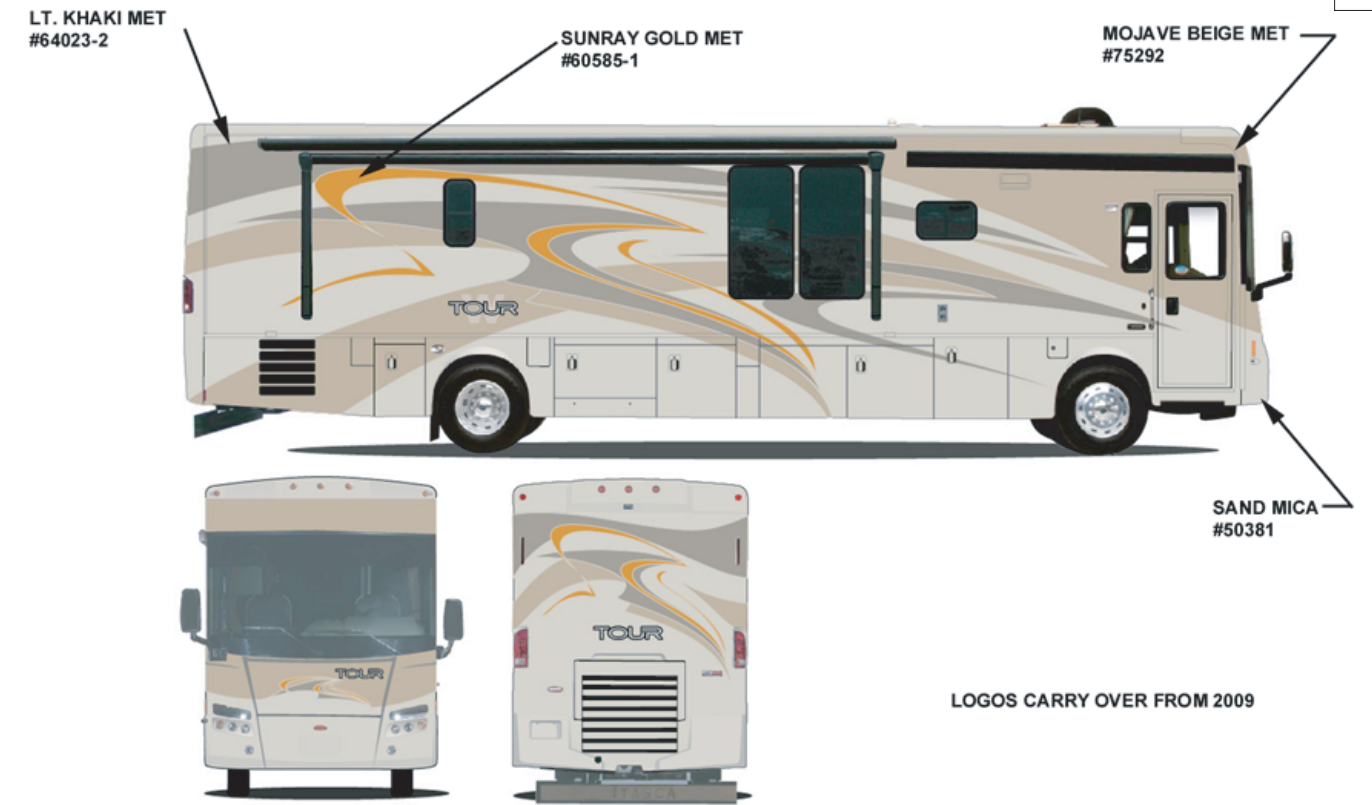

(24H) 2010 TOUR - KALAHARI GOLD


FIRST USED		
2010 R-SERIES (TOUR)		
SPECIFICATION PRINT DO NOT SCALE		
TITLE		
GRAPHICS INSTL - FBP		
SHEET	PART NO	REV
3	170912	

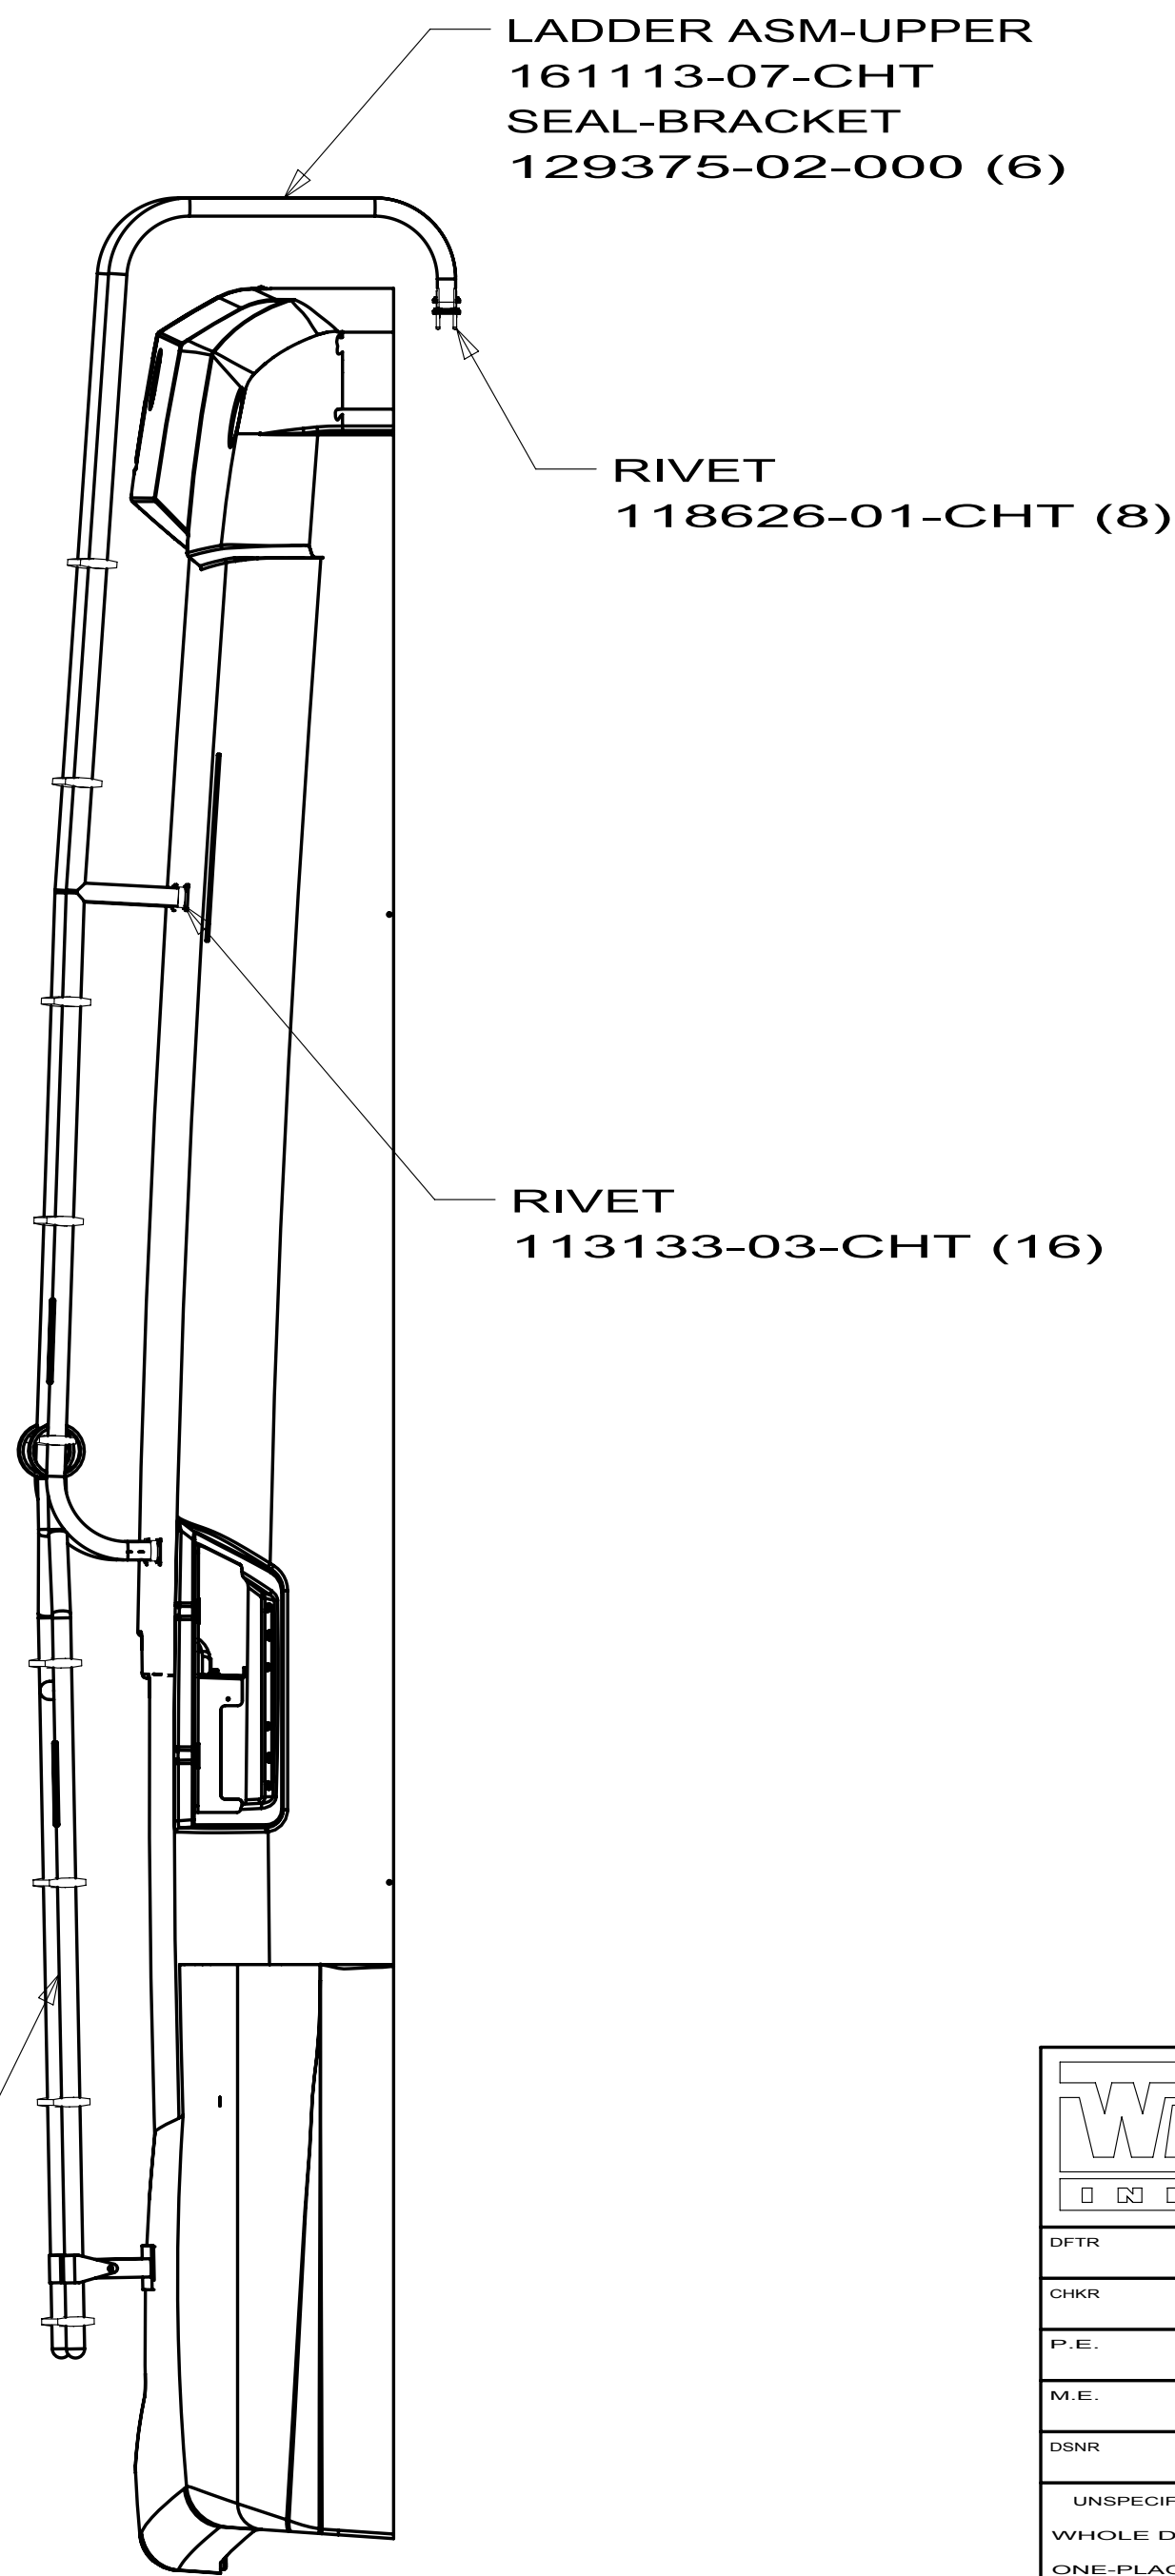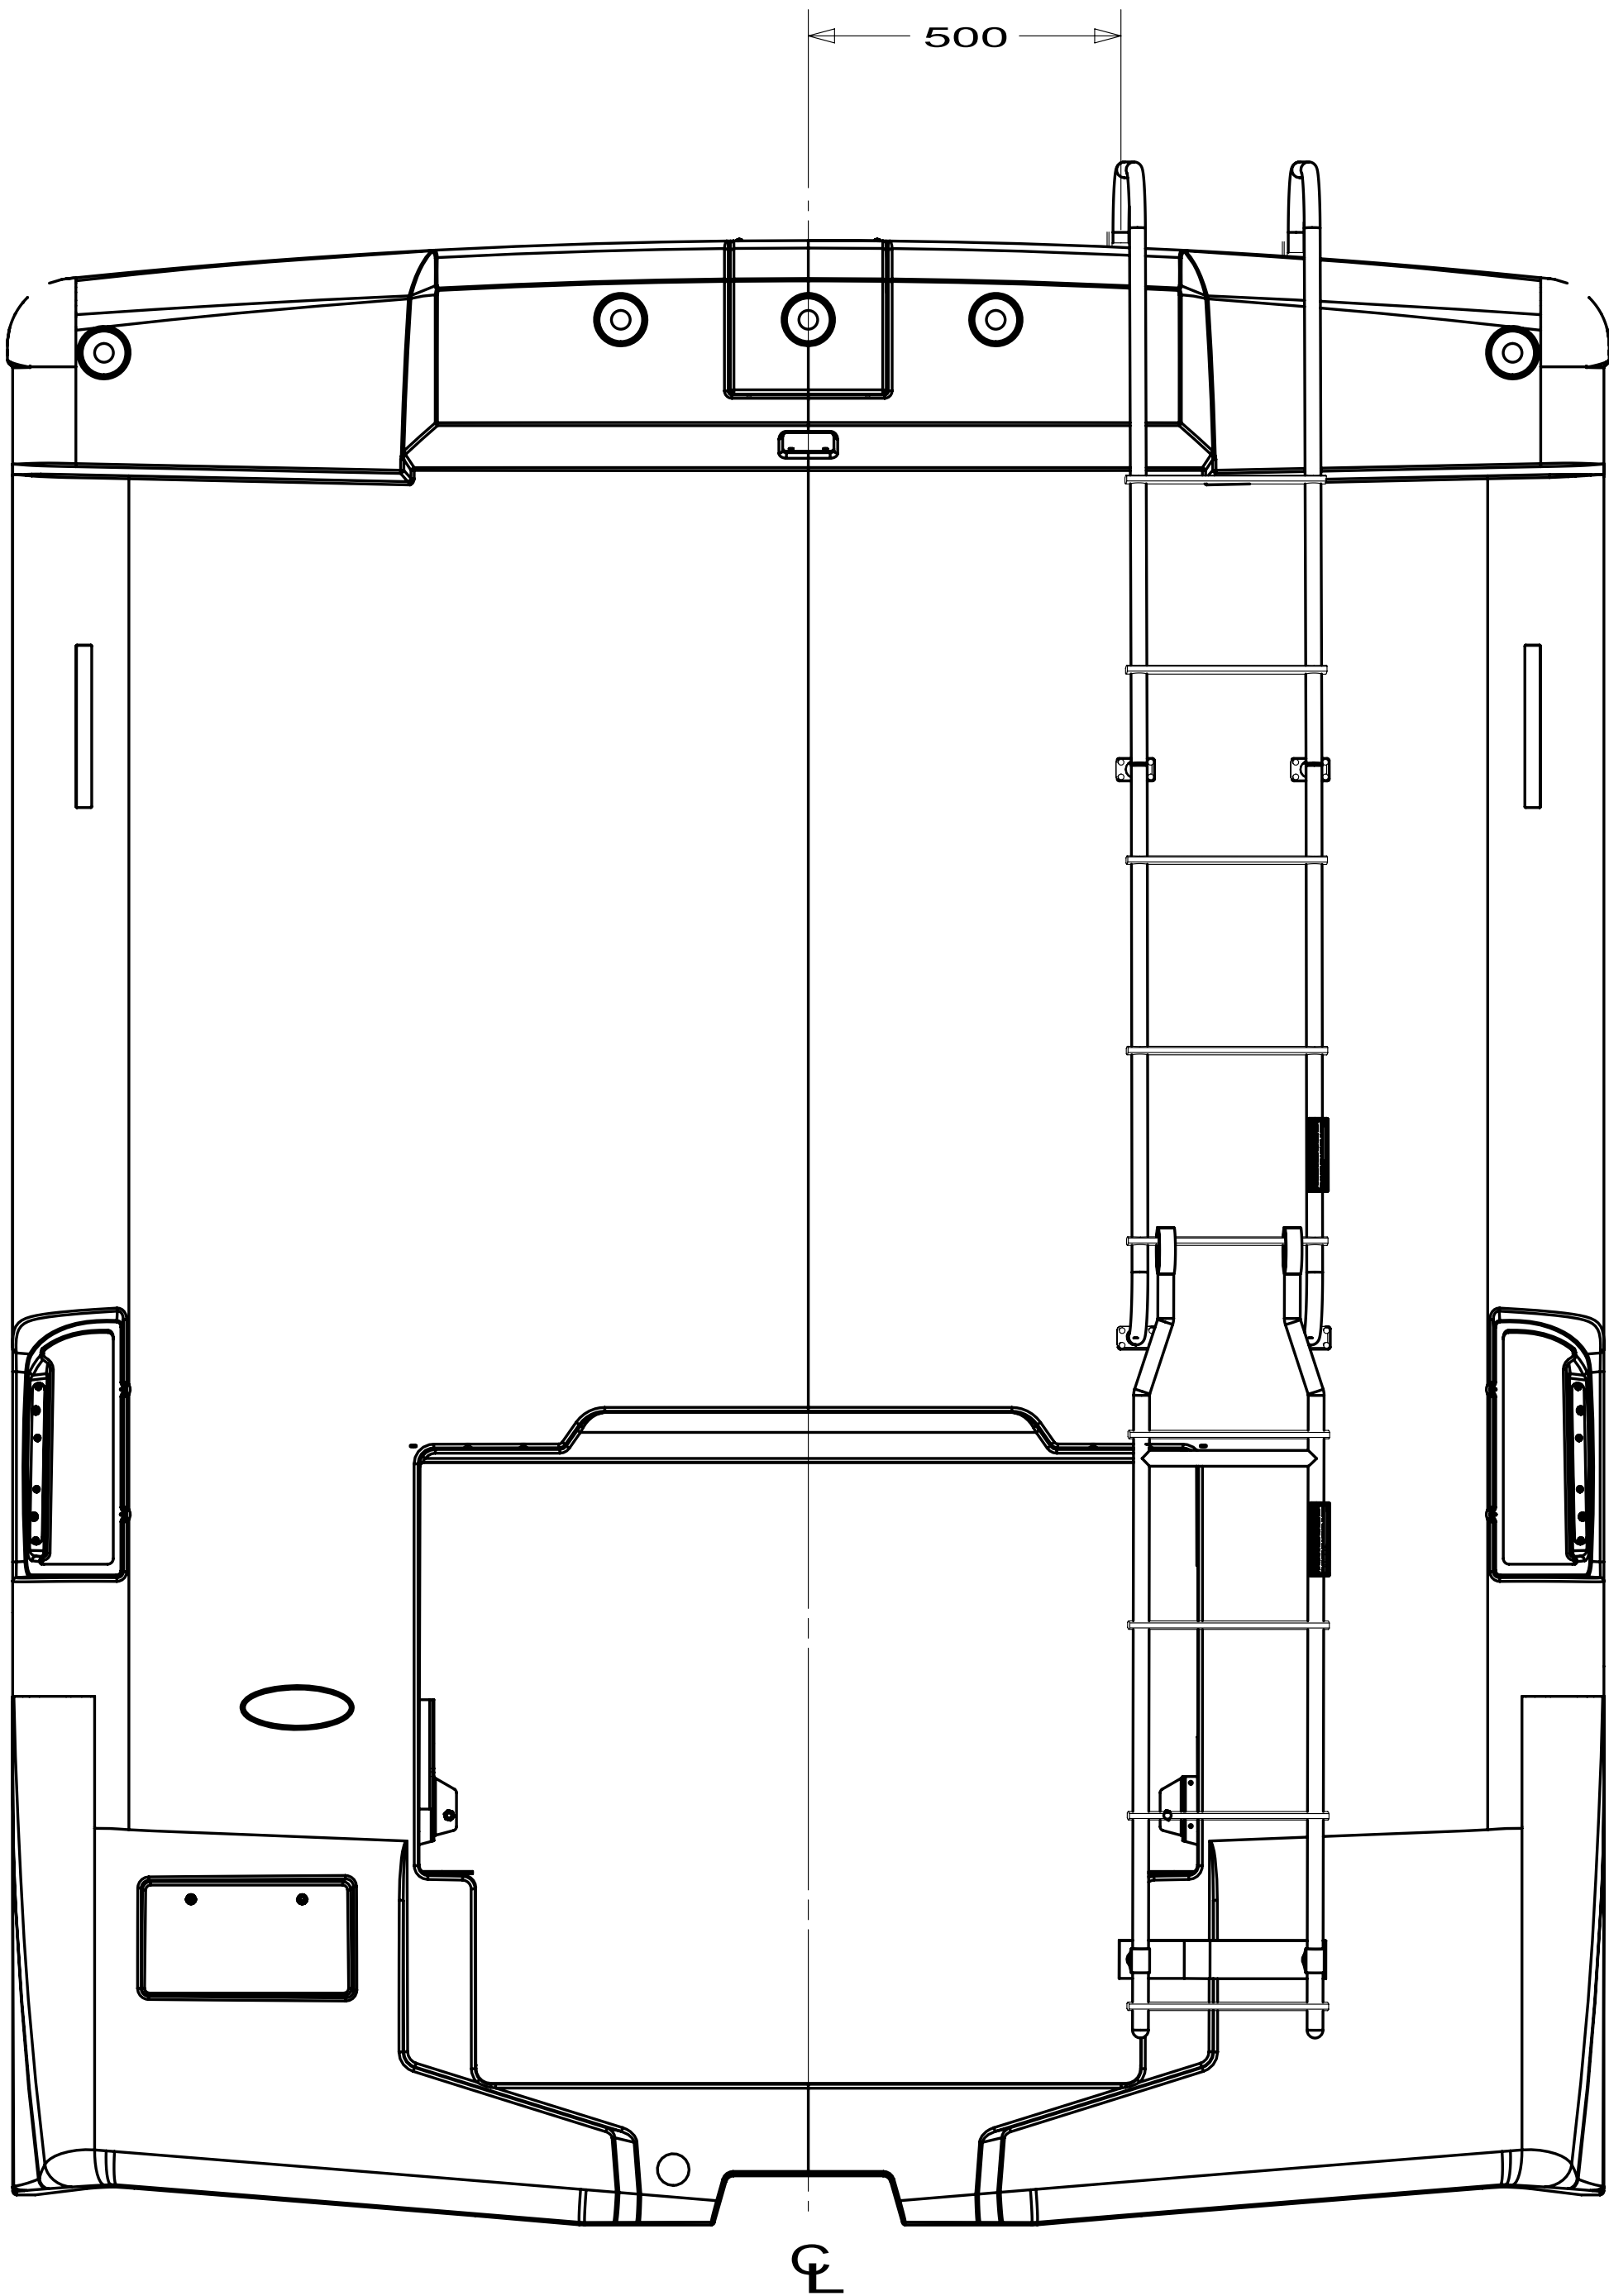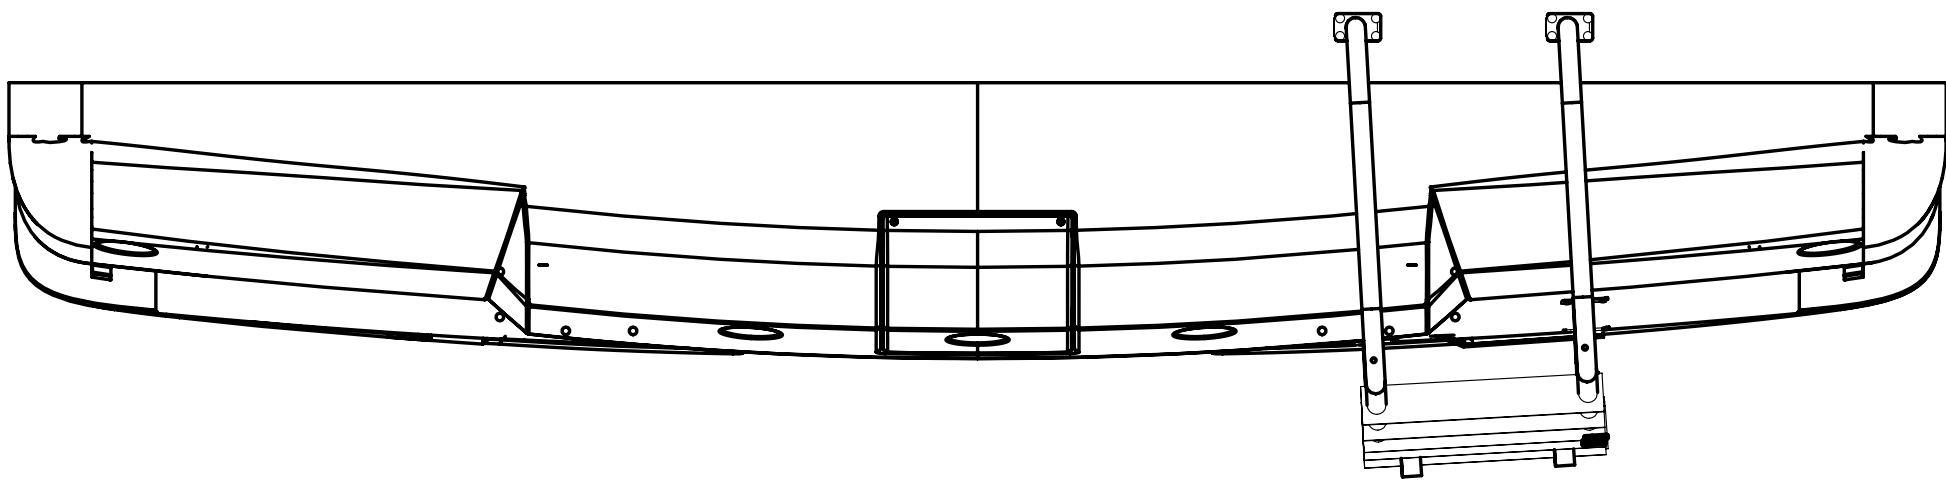

		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFTD		ORIG. DATE	
CHKD		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		08 R-SERIES	
DSNR		WEIGHT: 15.7 LBS	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) : 3			
ONE-PLACE (X.X) : 1.5			
TWO-PLACE (X.XX) : 0.50			
ANGLE : 1°			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: LADDER INSTL			
SHEET 1 OF 1		PART NO 162049	

A


131431-08-02A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	106015-16-700	EA GLASS/FLAT-W/HEAT ELEMENT	709450
	106015-18-700	EA GLASS/CONVEX	709650
	106015-18-701	EA ACTUATOR - CONVEX GLASS	7475410
	106015-18-702	EA MOTOR - FLAT GLASS	7471180
	106015-18-703	EA GLASS/CONVEX-ACT/HOUSING	709651 KIT
	106015-19-700	EA GLASS/FLAT-W/BEZEL/HEAT/ANTI	709645
	131431-03-700	EA LIGHT/TURN SIGNAL - AMBER	7475510
	131431-07-700	EA KIT(SCREW CVR BLK)ROUND/OVAL	748344
	131431-08-700	EA CAP/BASE - BLK - 1 PKG OF 2	Q7095150

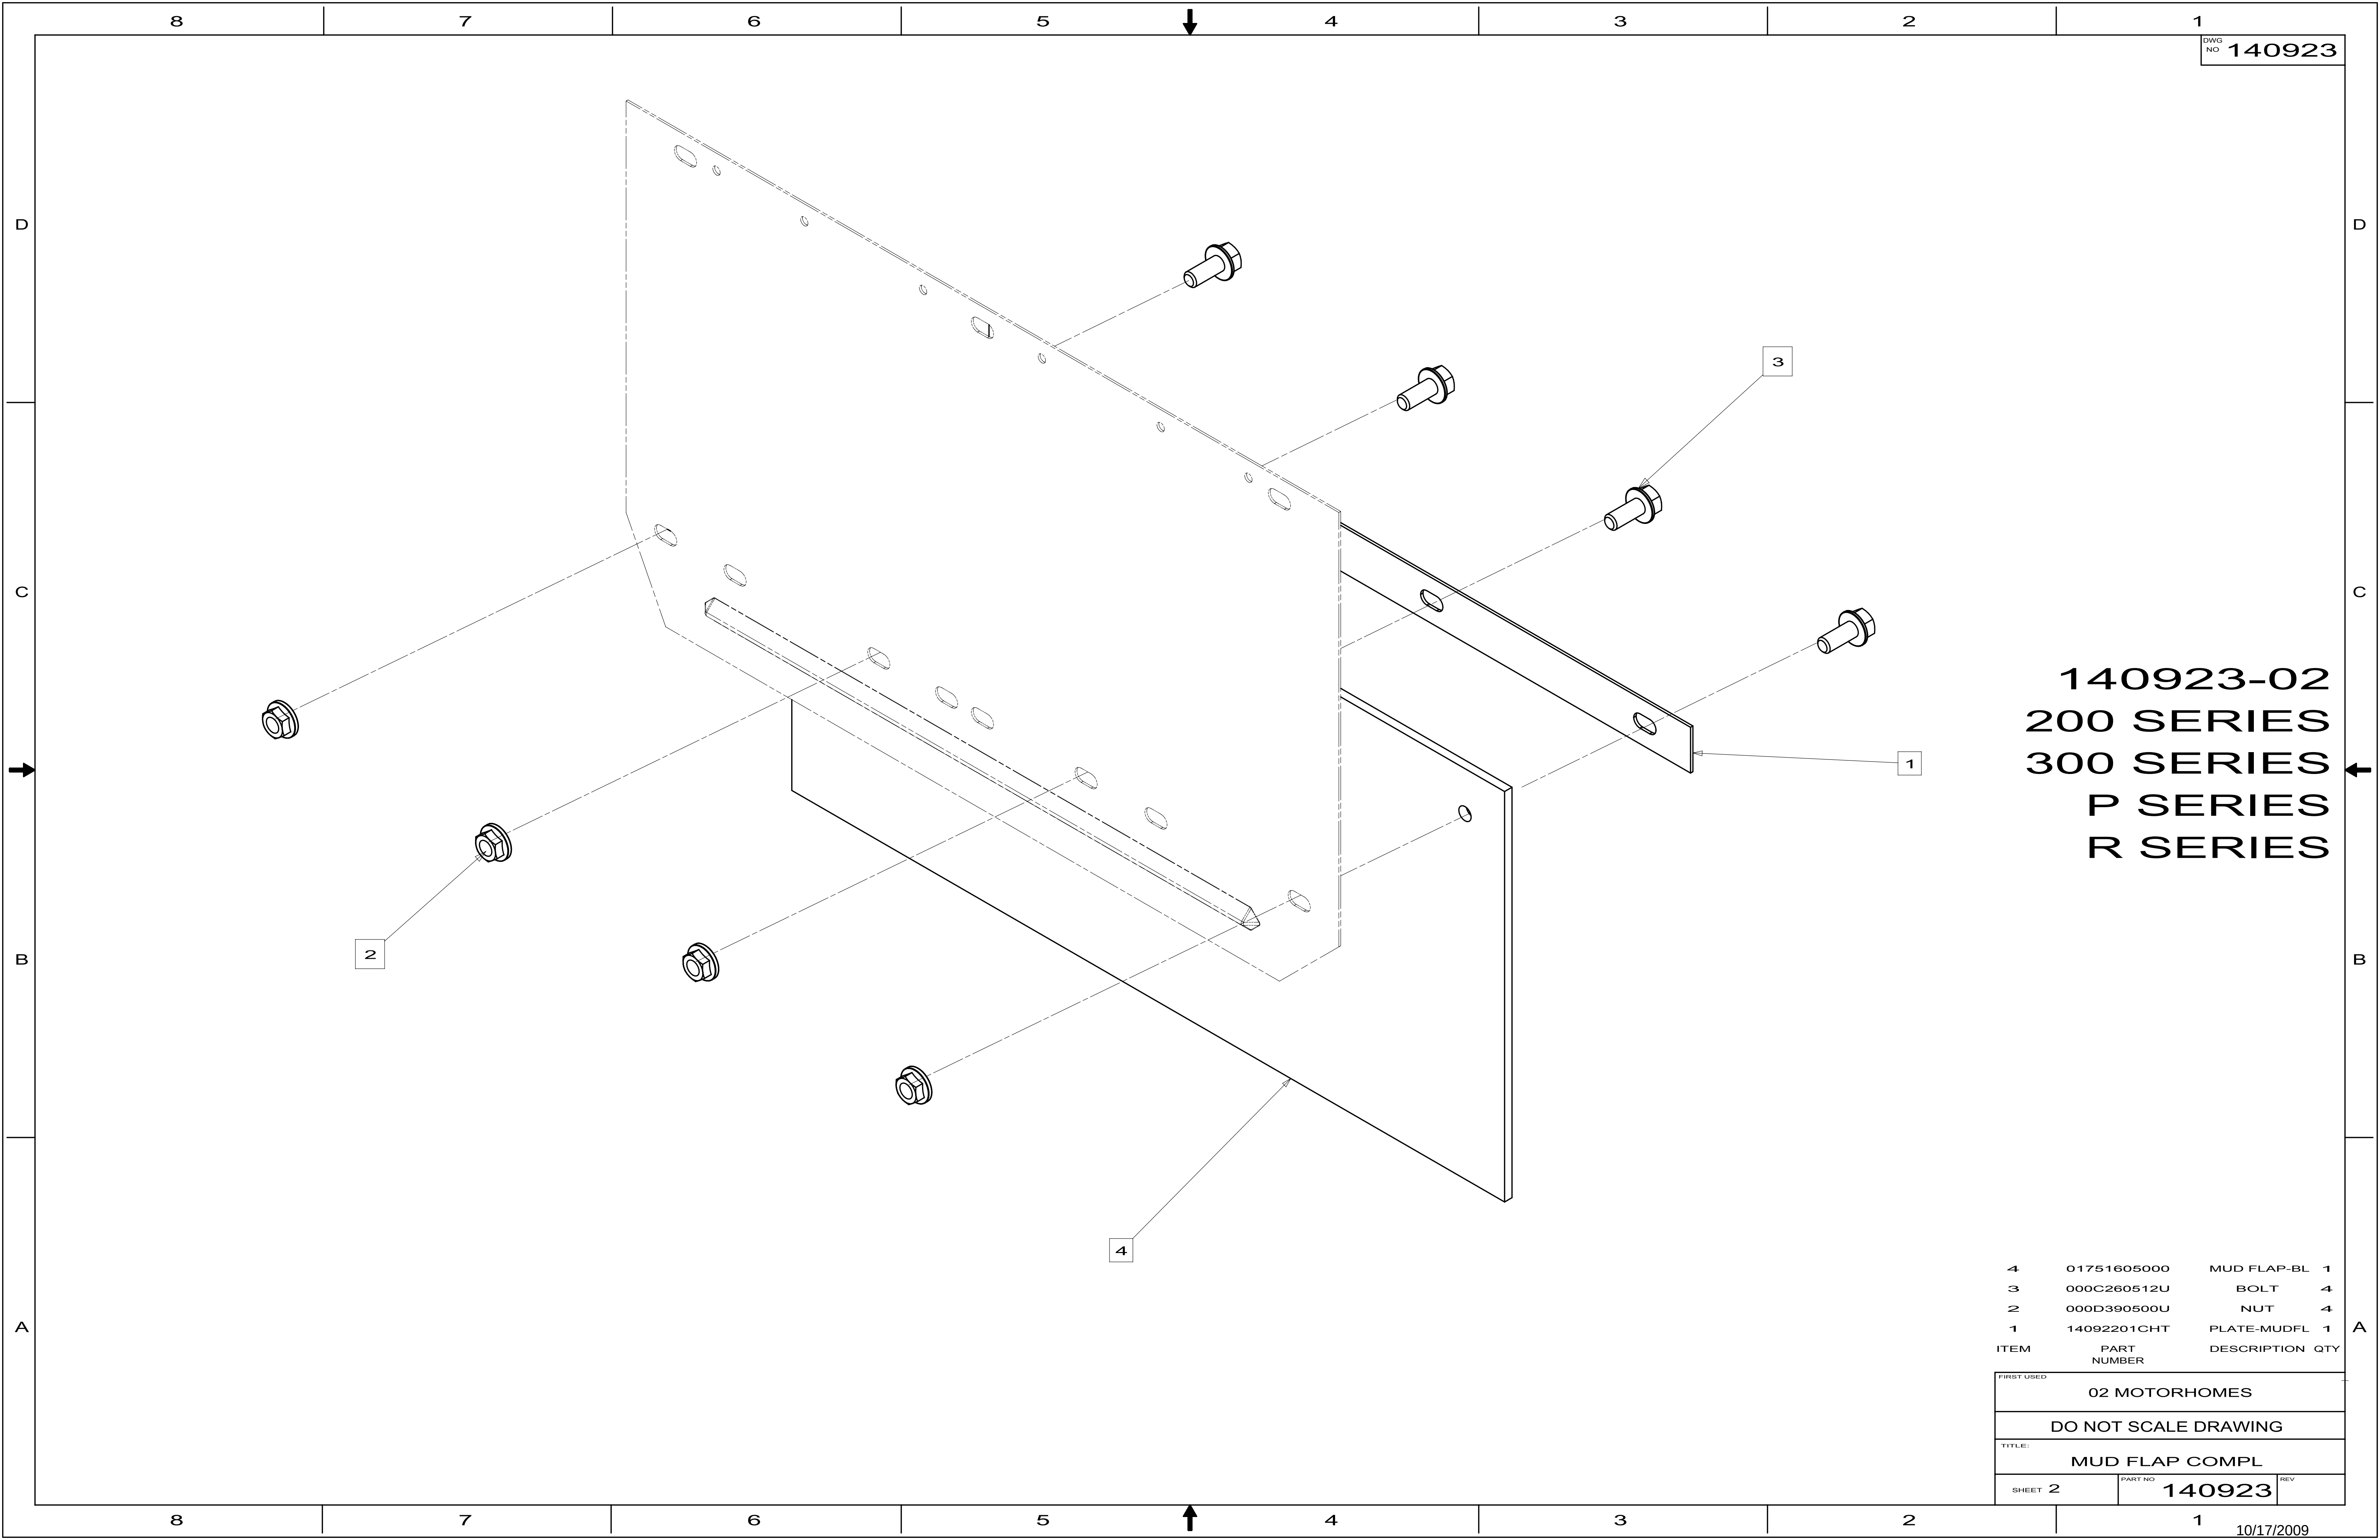

140923-02
200 SERIES
300 SERIES
P SERIES
R SERIES

4	01751605000	MUD FLAP-BL	1
3	000C260512U	BOLT	4
2	000D390500U	NUT	4
1	14092201CHT	PLATE-MUDFL	1
ITEM	PART NUMBER	DESCRIPTION	QTY

FIRST USED			02 MOTORHOMES
DO NOT SCALE DRAWING			
TITLE:			MUD FLAP COMPL
SHEET 2	PART NO	140923	REV

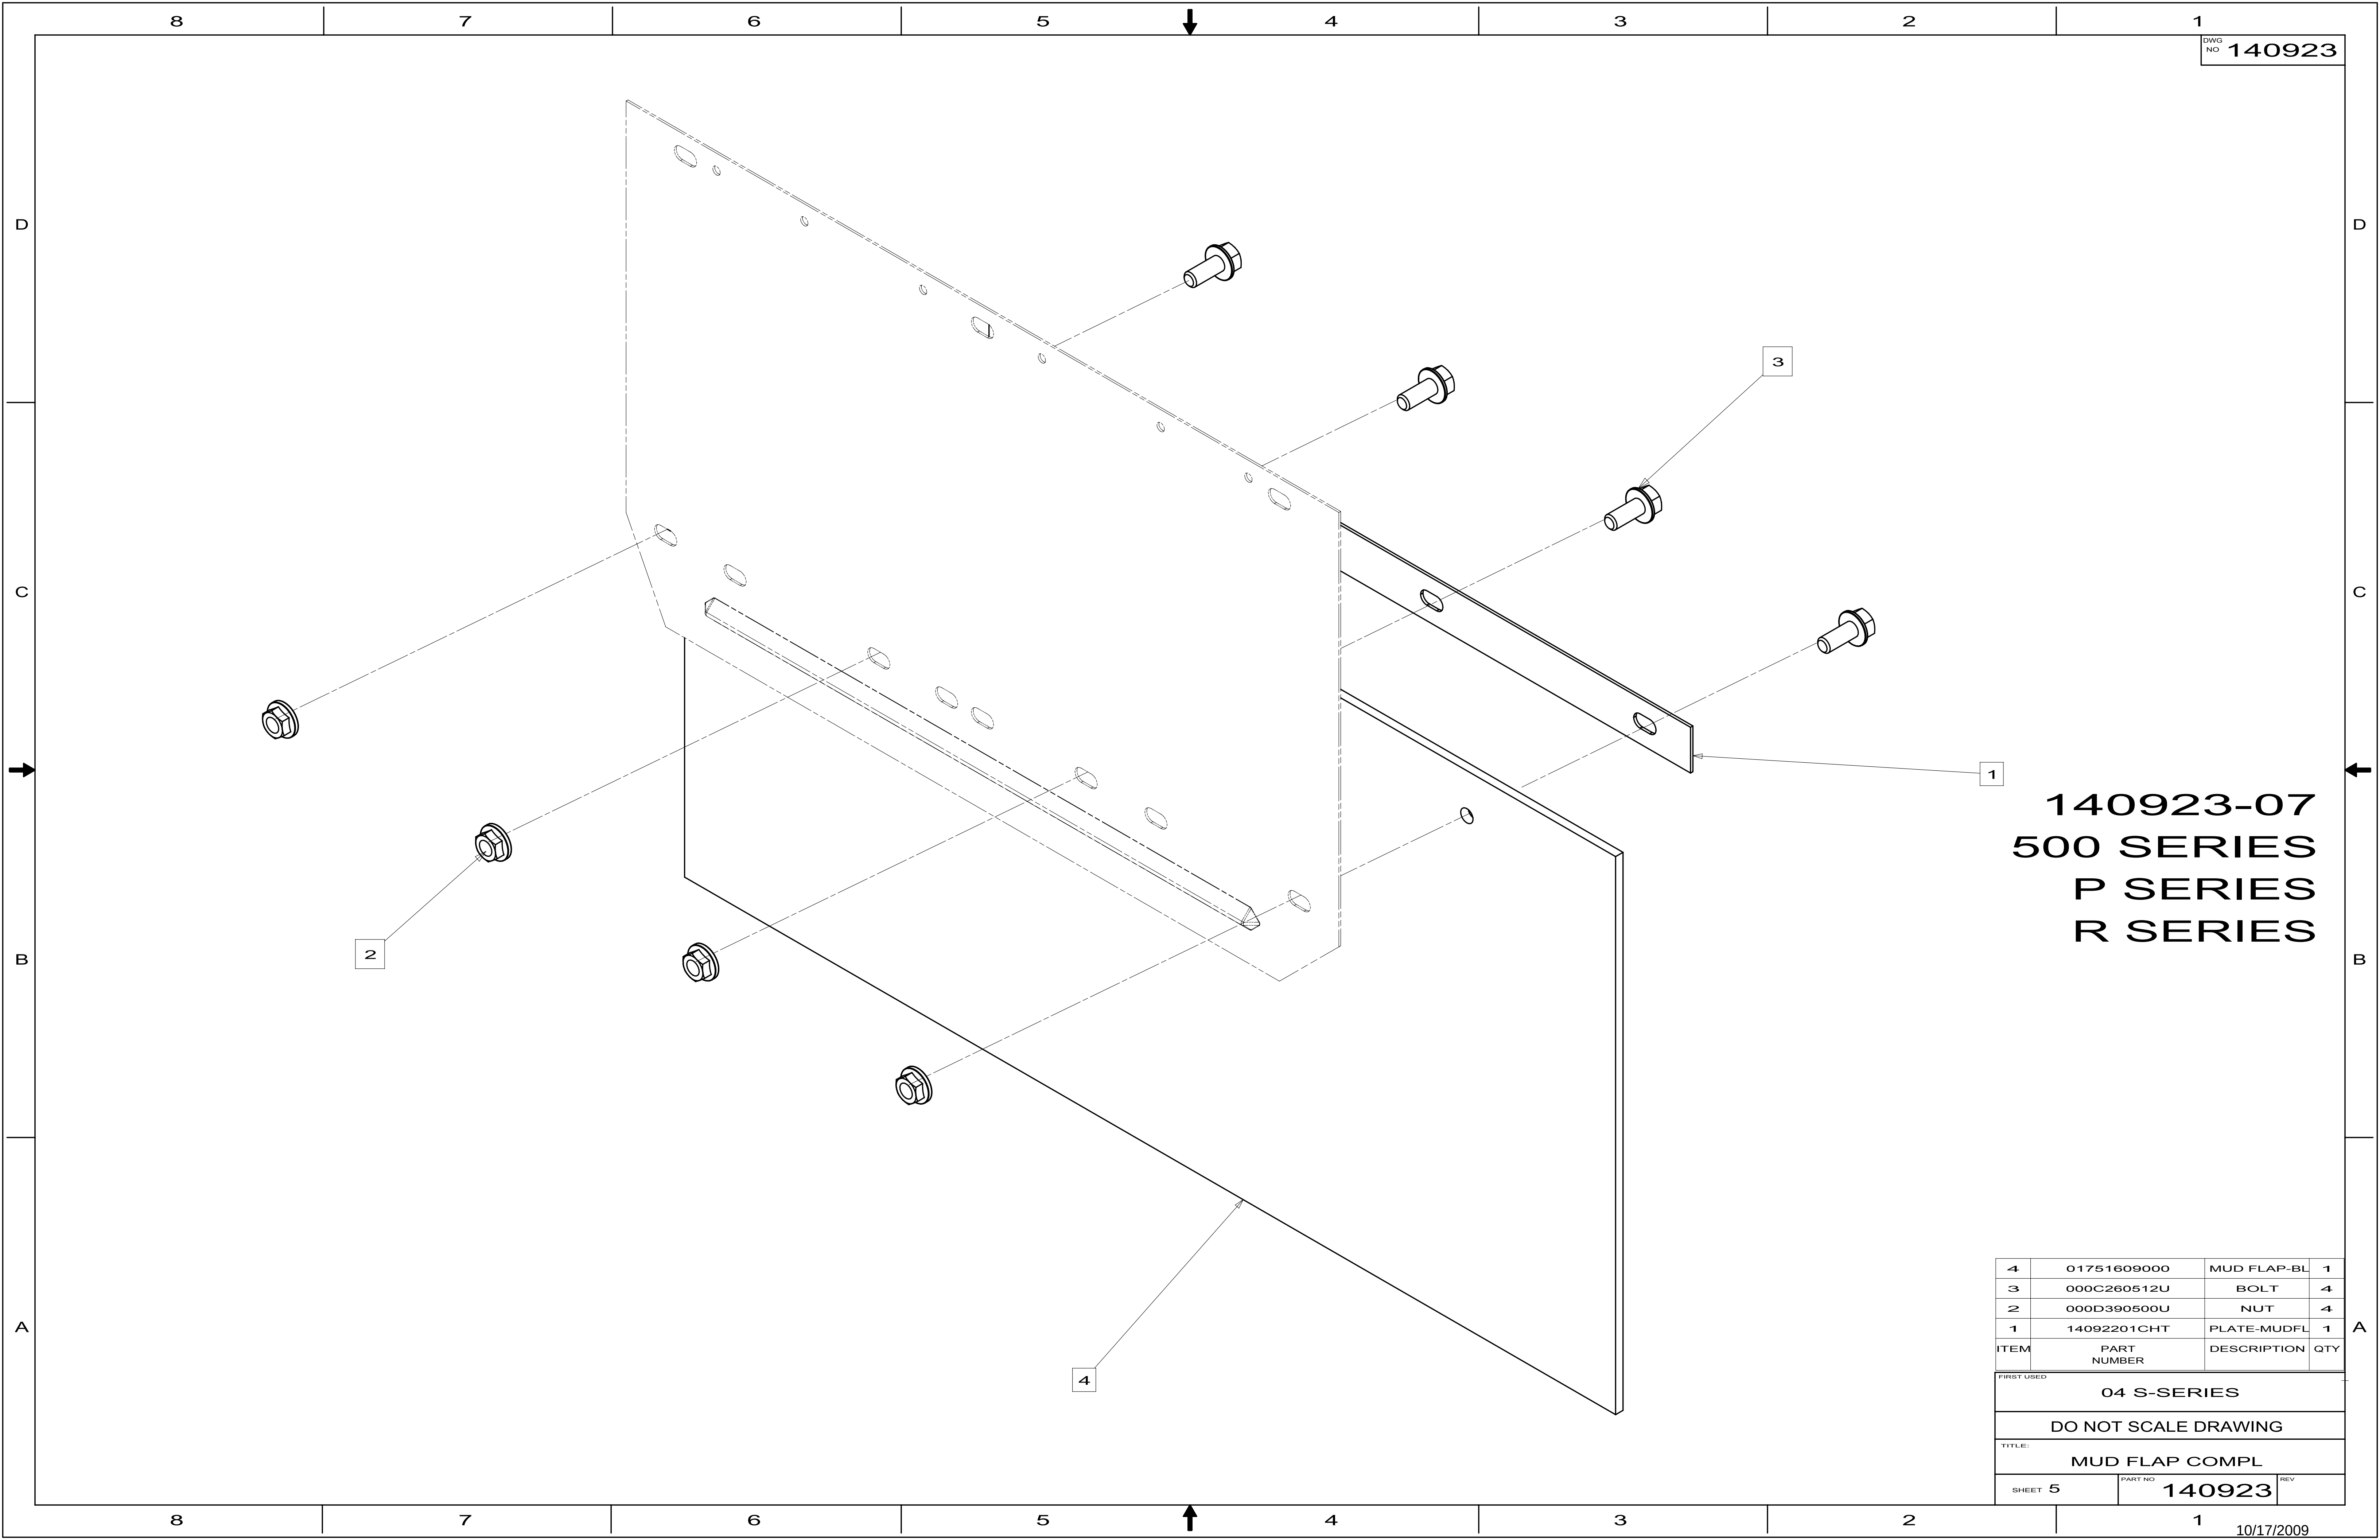


DWG NO 140923


140923-07
500 SERIES
P SERIES
R SERIES

4	01751609000	MUD FLAP-BL	1
3	000C260512U	BOLT	4
2	000D390500U	NUT	4
1	14092201CHT	PLATE-MUDFL	1
ITEM	PART NUMBER	DESCRIPTION	QTY
FIRST USED			
04 S-SERIES			
DO NOT SCALE DRAWING			
TITLE:			
MUD FLAP COMPL			
SHEET 5	PART NO 140923	REV	

KEY	PART NUMBER	U/M	DESCRIPTION	142721-01-02A, 142721-02-02A
				VENDOR NO.
	106015-16-700	EA	GLASS/FLAT-W/HEAT ELEMENT	709450
	106015-18-700	EA	GLASS/CONVEX	709650
	106015-18-701	EA	ACTUATOR - CONVEX GLASS	7475410
	106015-18-702	EA	MOTOR - FLAT GLASS	7471180
	106015-18-703	EA	GLASS/CONVEX-ACT/HOUSING	709651 KIT
	131431-03-700	EA	LIGHT/TURN SIGNAL - AMBER	7475510
	142721-01-700	EA	COVER/CAP - BOTTOM	Q709678
	142721-01-701	EA	CAP - RECTANGULAR (VELVAC)	709557
	142721-01-702	EA	BRACKET/MOUNT - MIRROR	7096800
	142721-01-703	EA	GASKET/MOUNT - MIRROR	7097400
	142721-01-704	EA	SET SCREW - 5/16"-18 X 1.25"	4082140








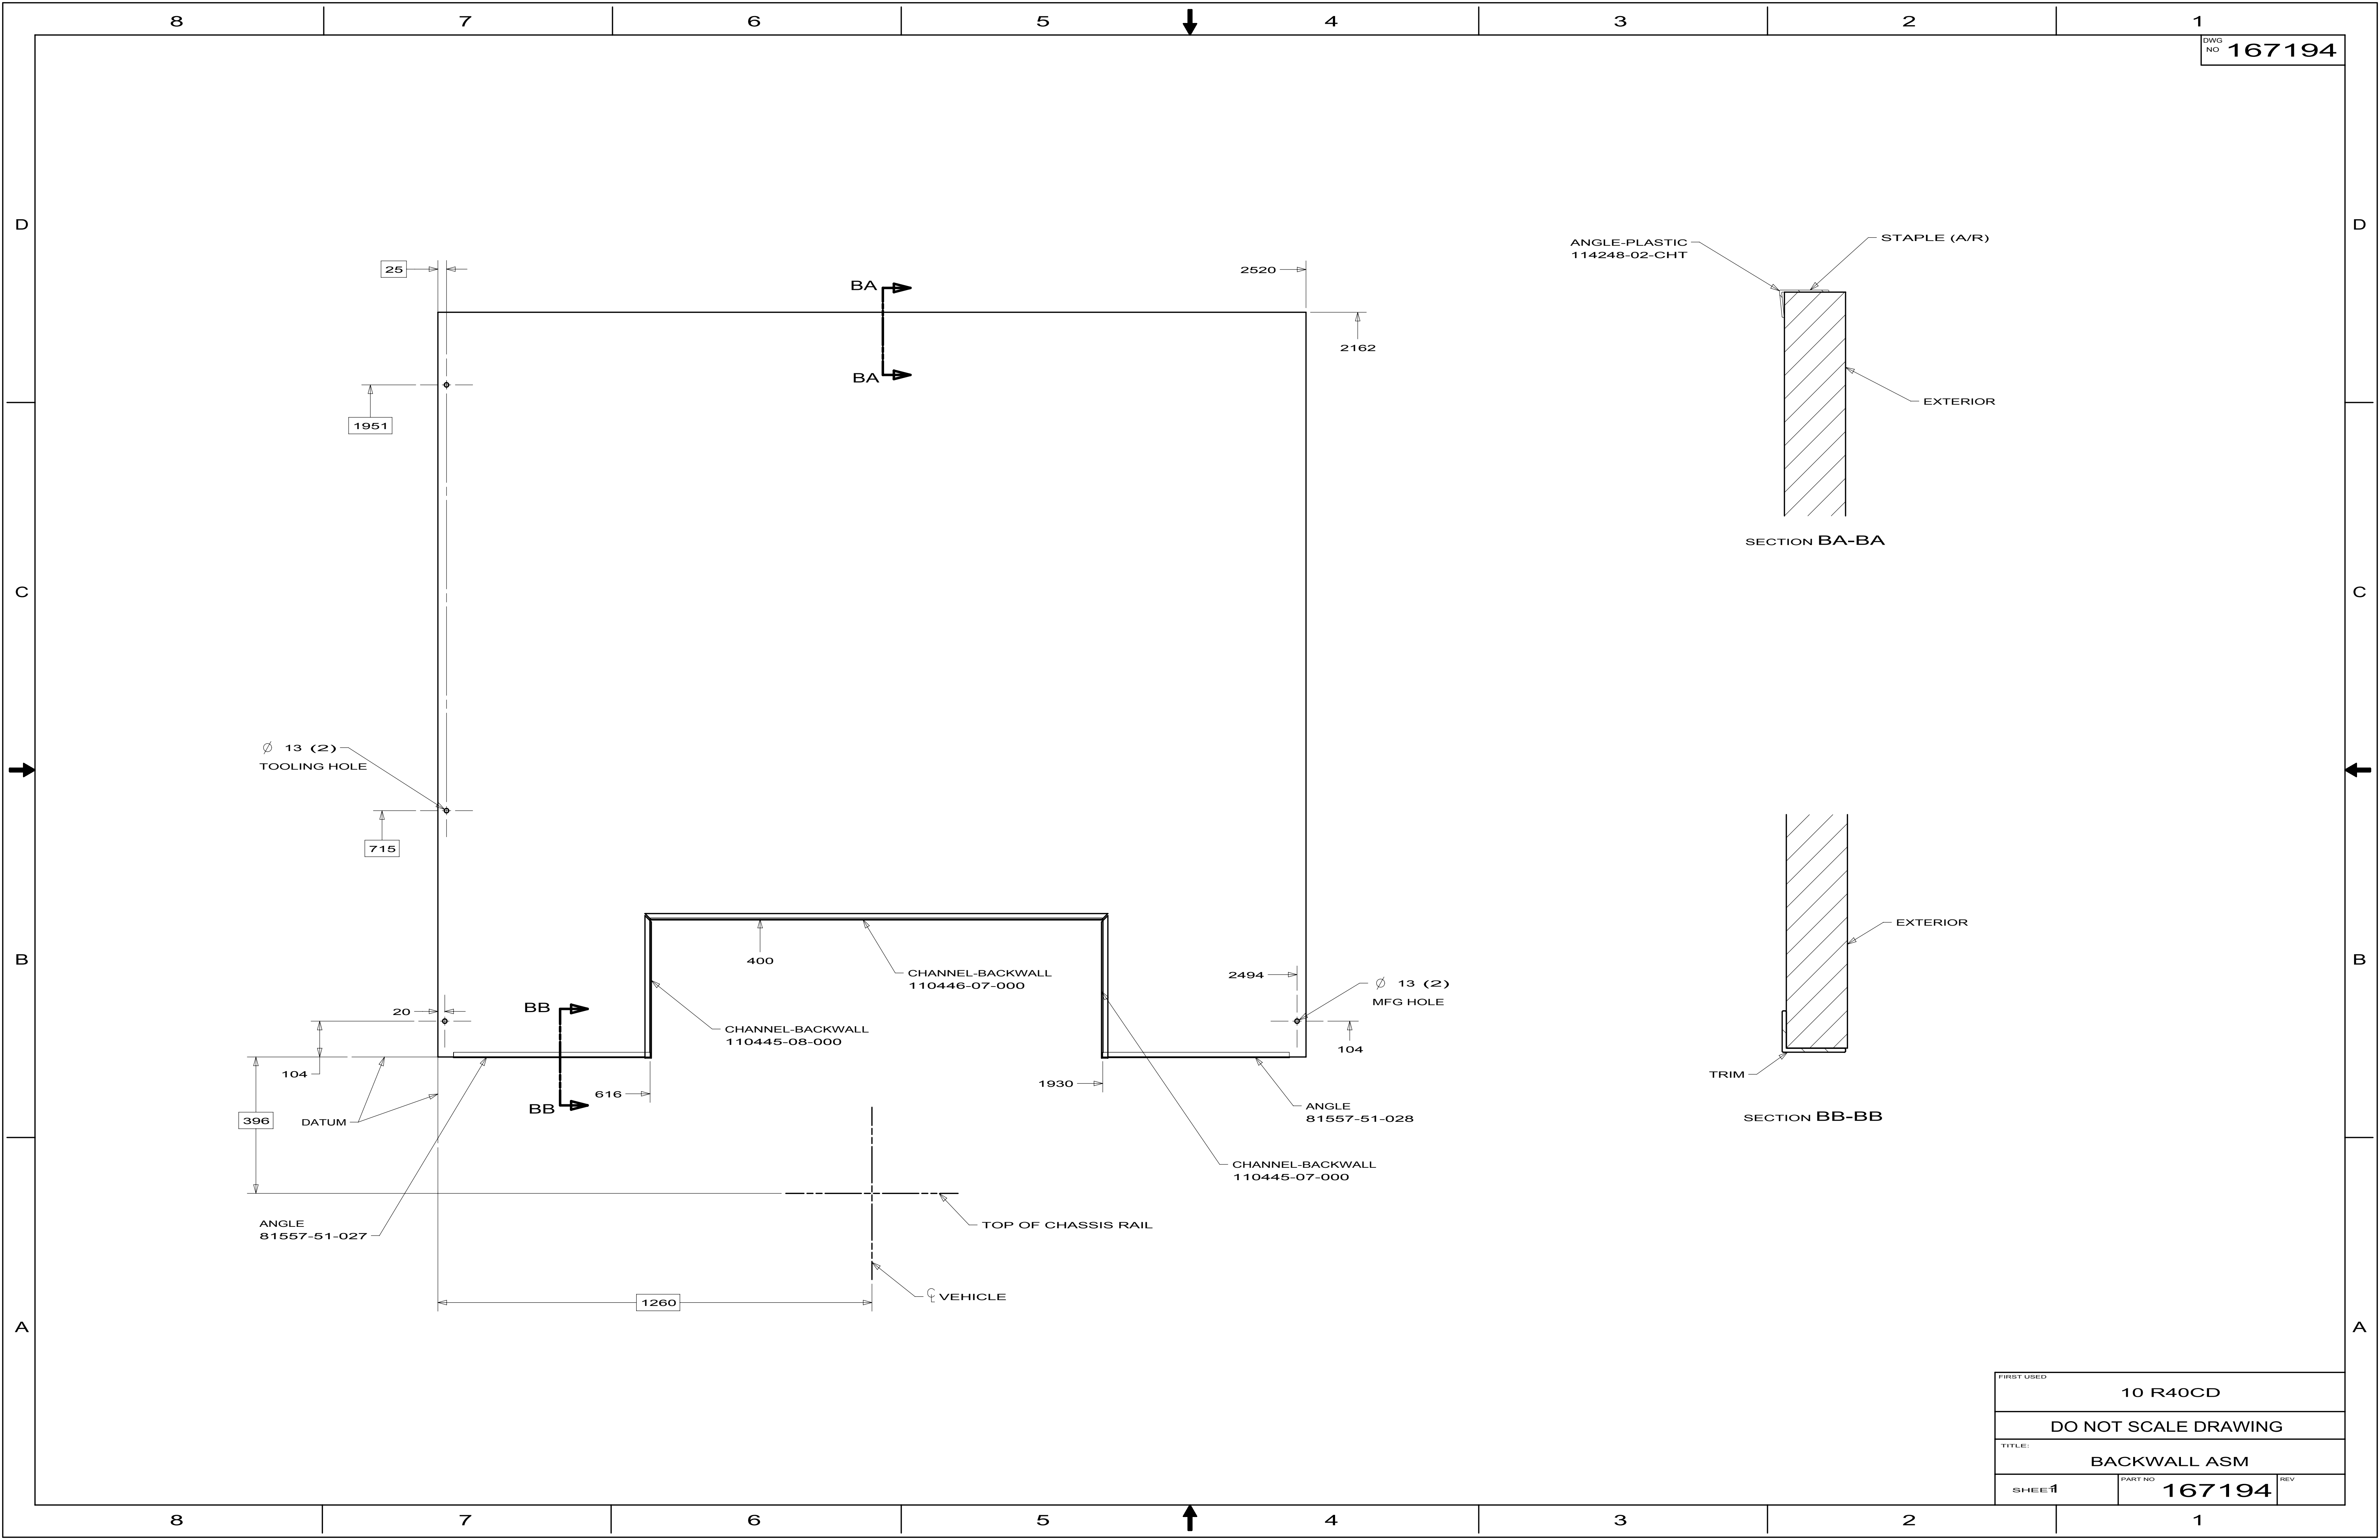


FIRST USED			10 R40CD					
DO NOT SCALE DRAWING								
TITLE:								
BACKWALL ASM								
SHEET1		PART NO		REV				
		167194						

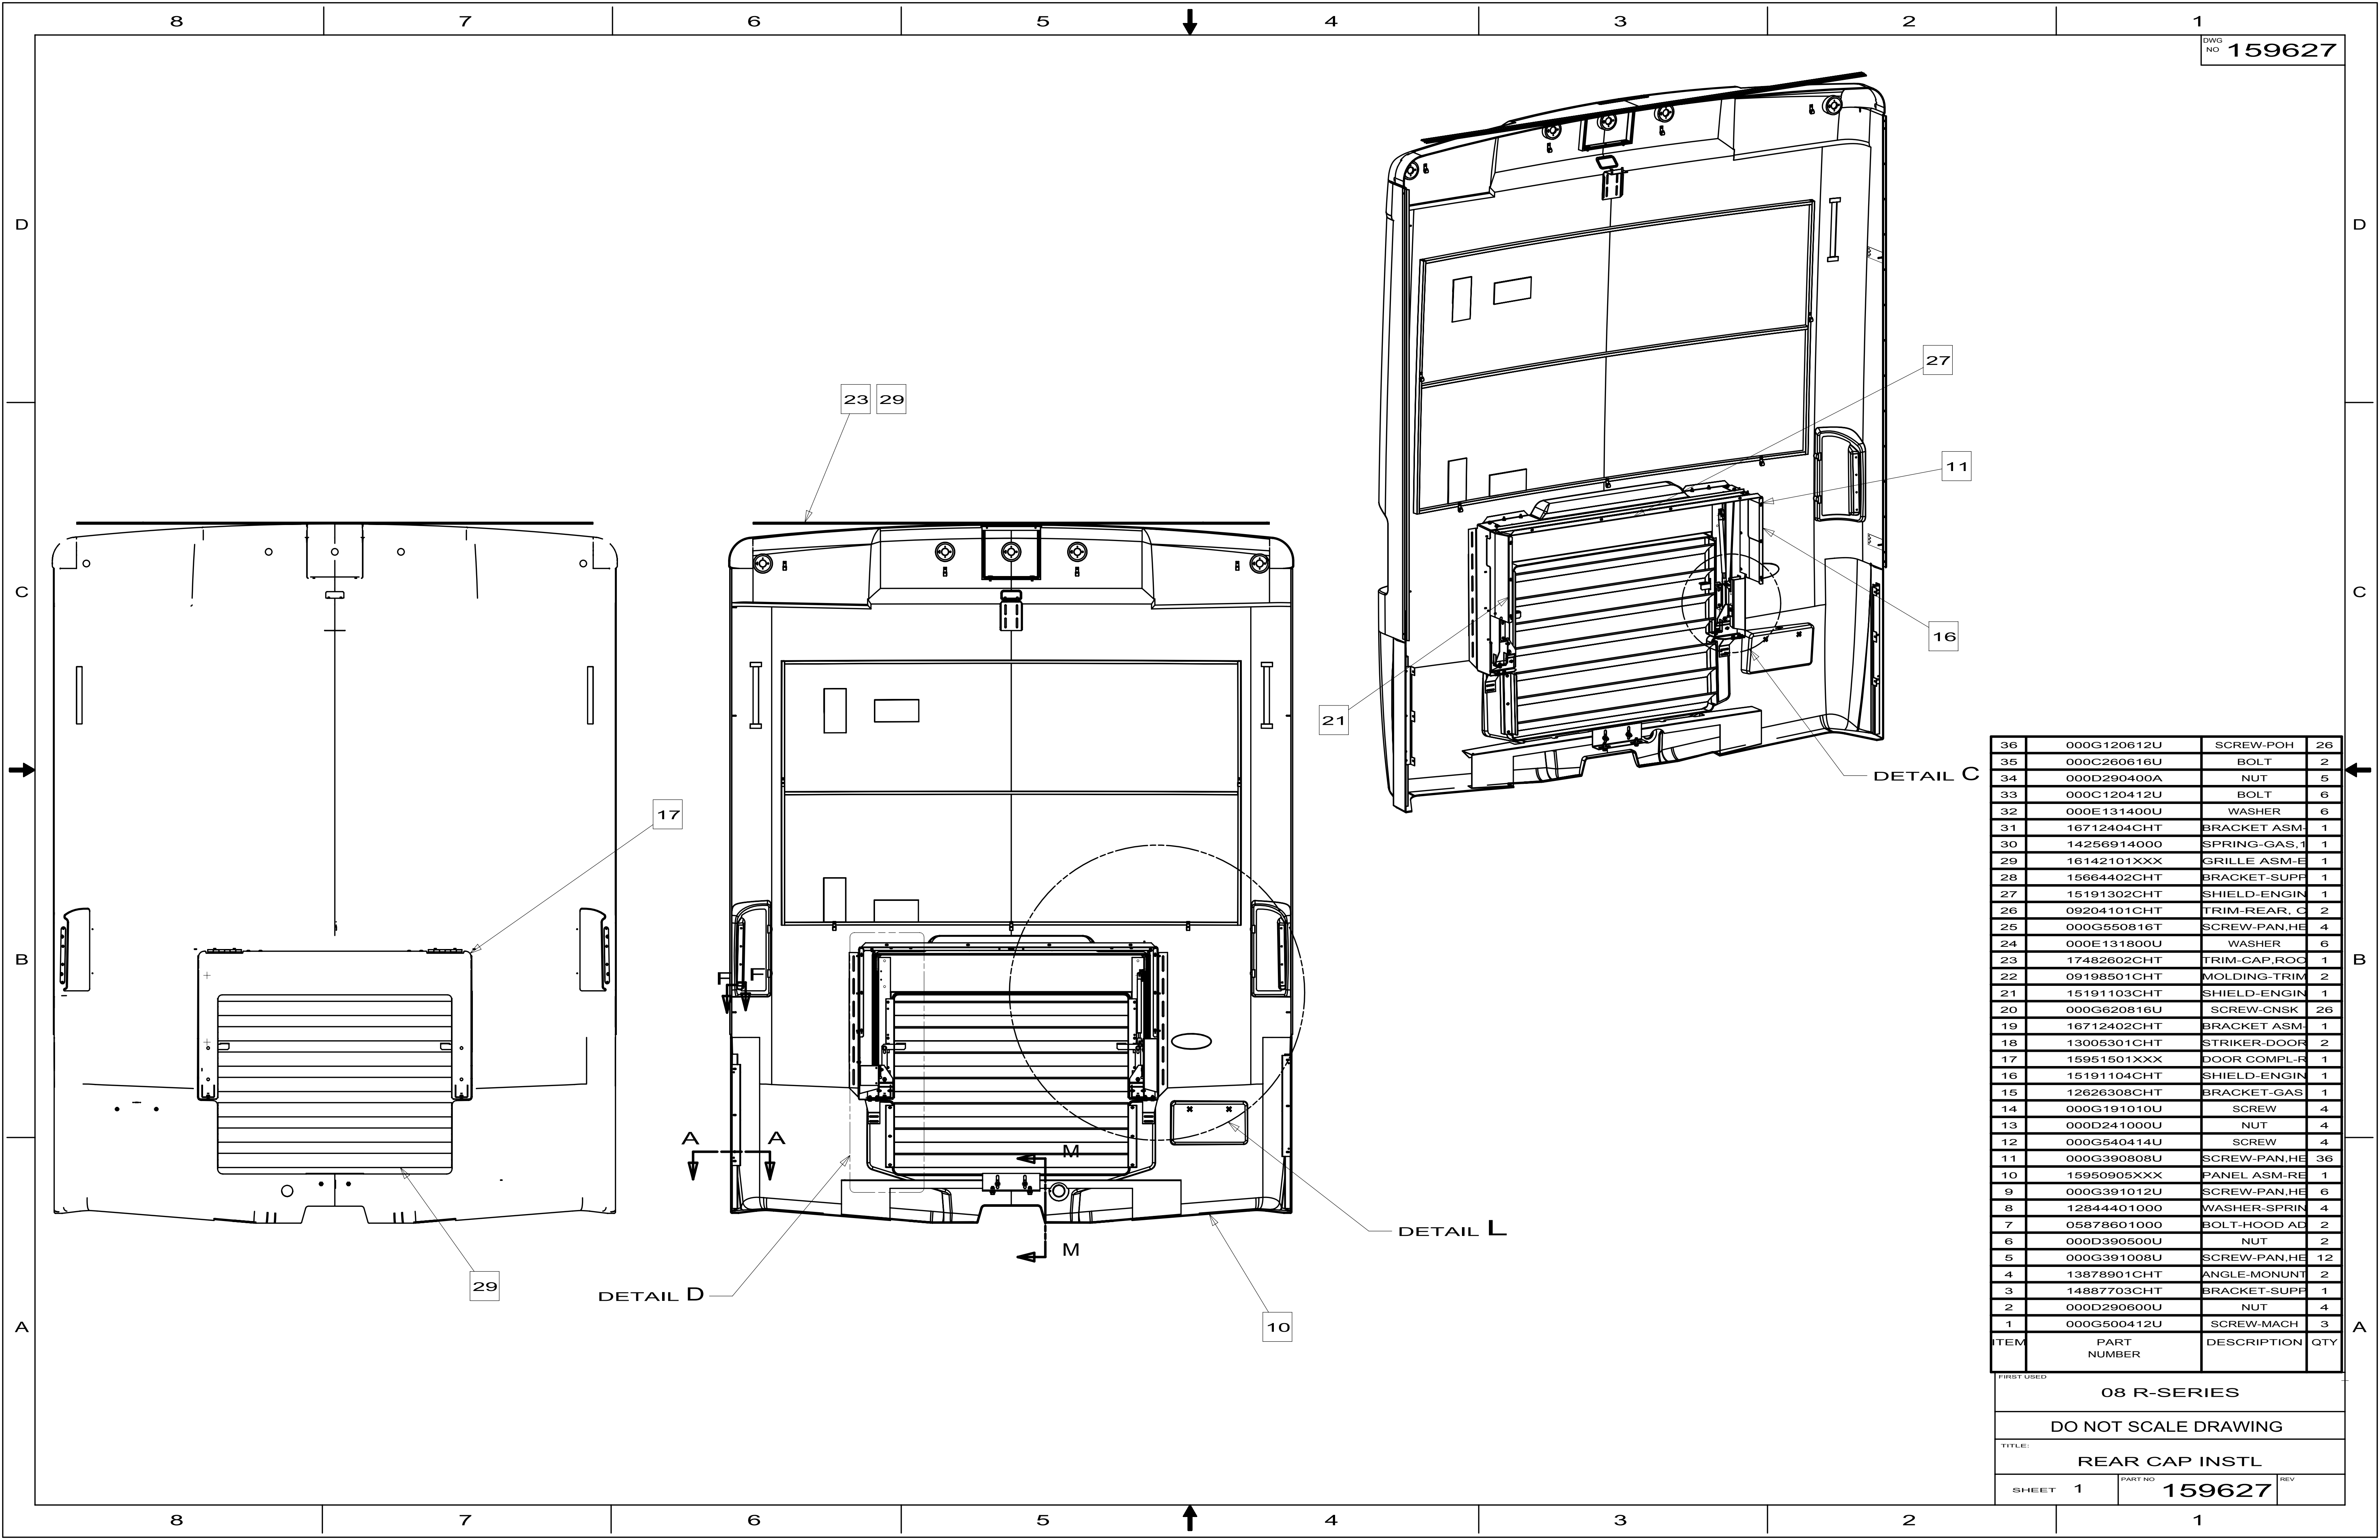


36	000G120612U	SCREW-POH	26
35	000C260616U	BOLT	2
34	000D290400A	NUT	5
33	000C120412U	BOLT	6
32	000E131400U	WASHER	6
31	16712404CHT	BRACKET ASM	1
30	14256914000	SPRING-GAS,1	1
29	16142101XXX	GRILLE ASM-E	1
28	15664402CHT	BRACKET-SUPP	1
27	15191302CHT	SHIELD-ENGIN	1
26	09204101CHT	TRIM-REAR, C	2
25	000G550816T	SCREW-PAN,HE	4
24	000E131800U	WASHER	6
23	17482602CHT	TRIM-CAP,ROC	1
22	09198501CHT	MOLDING-TRIM	2
21	15191103CHT	SHIELD-ENGIN	1
20	000G620816U	SCREW-CNSK	26
19	16712402CHT	BRACKET ASM	1
18	13005301CHT	STRIKER-DOOR	2
17	15951501XXX	DOOR COMPL-R	1
16	15191104CHT	SHIELD-ENGIN	1
15	12626308CHT	BRACKET-GAS	1
14	000G191010U	SCREW	4
13	000D241000U	NUT	4
12	000G540414U	SCREW	4
11	000G390808U	SCREW-PAN,HE	36
10	15950905XXX	PANEL ASM-RE	1
9	000G391012U	SCREW-PAN,HE	6
8	12844401000	WASHER-SPRIN	4
7	05878601000	BOLT-HOOD AD	2
6	000D390500U	NUT	2
5	000G391008U	SCREW-PAN,HE	12
4	13878901CHT	ANGLE-MONUNT	2
3	14887703CHT	BRACKET-SUPP	1
2	000D290600U	NUT	4
1	000G500412U	SCREW-MACH	3
ITEM	PART NUMBER	DESCRIPTION	QTY

FIRST USED			
08 R-SERIES			
DO NOT SCALE DRAWING			
TITLE: REAR CAP INSTL			
SHEET 1	PART NO 159627	REV	

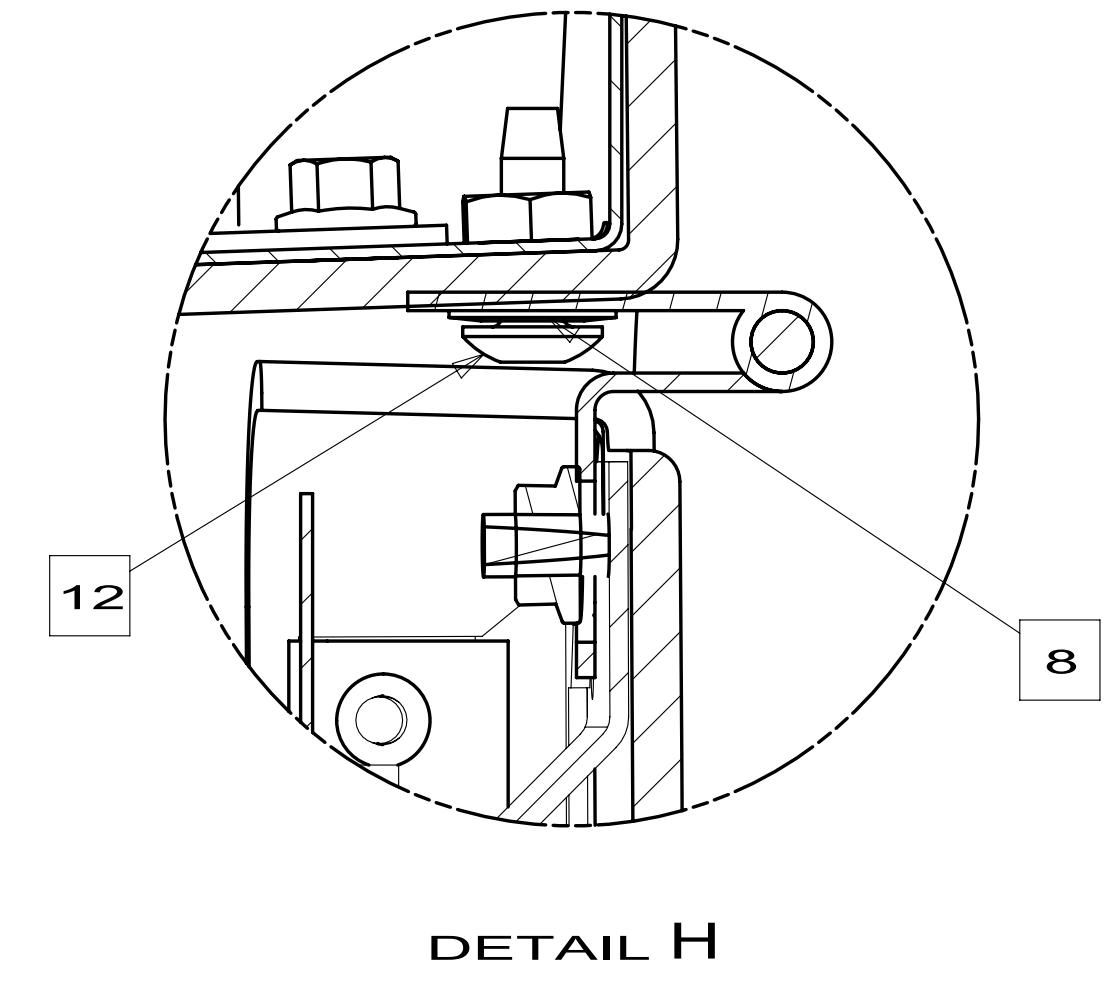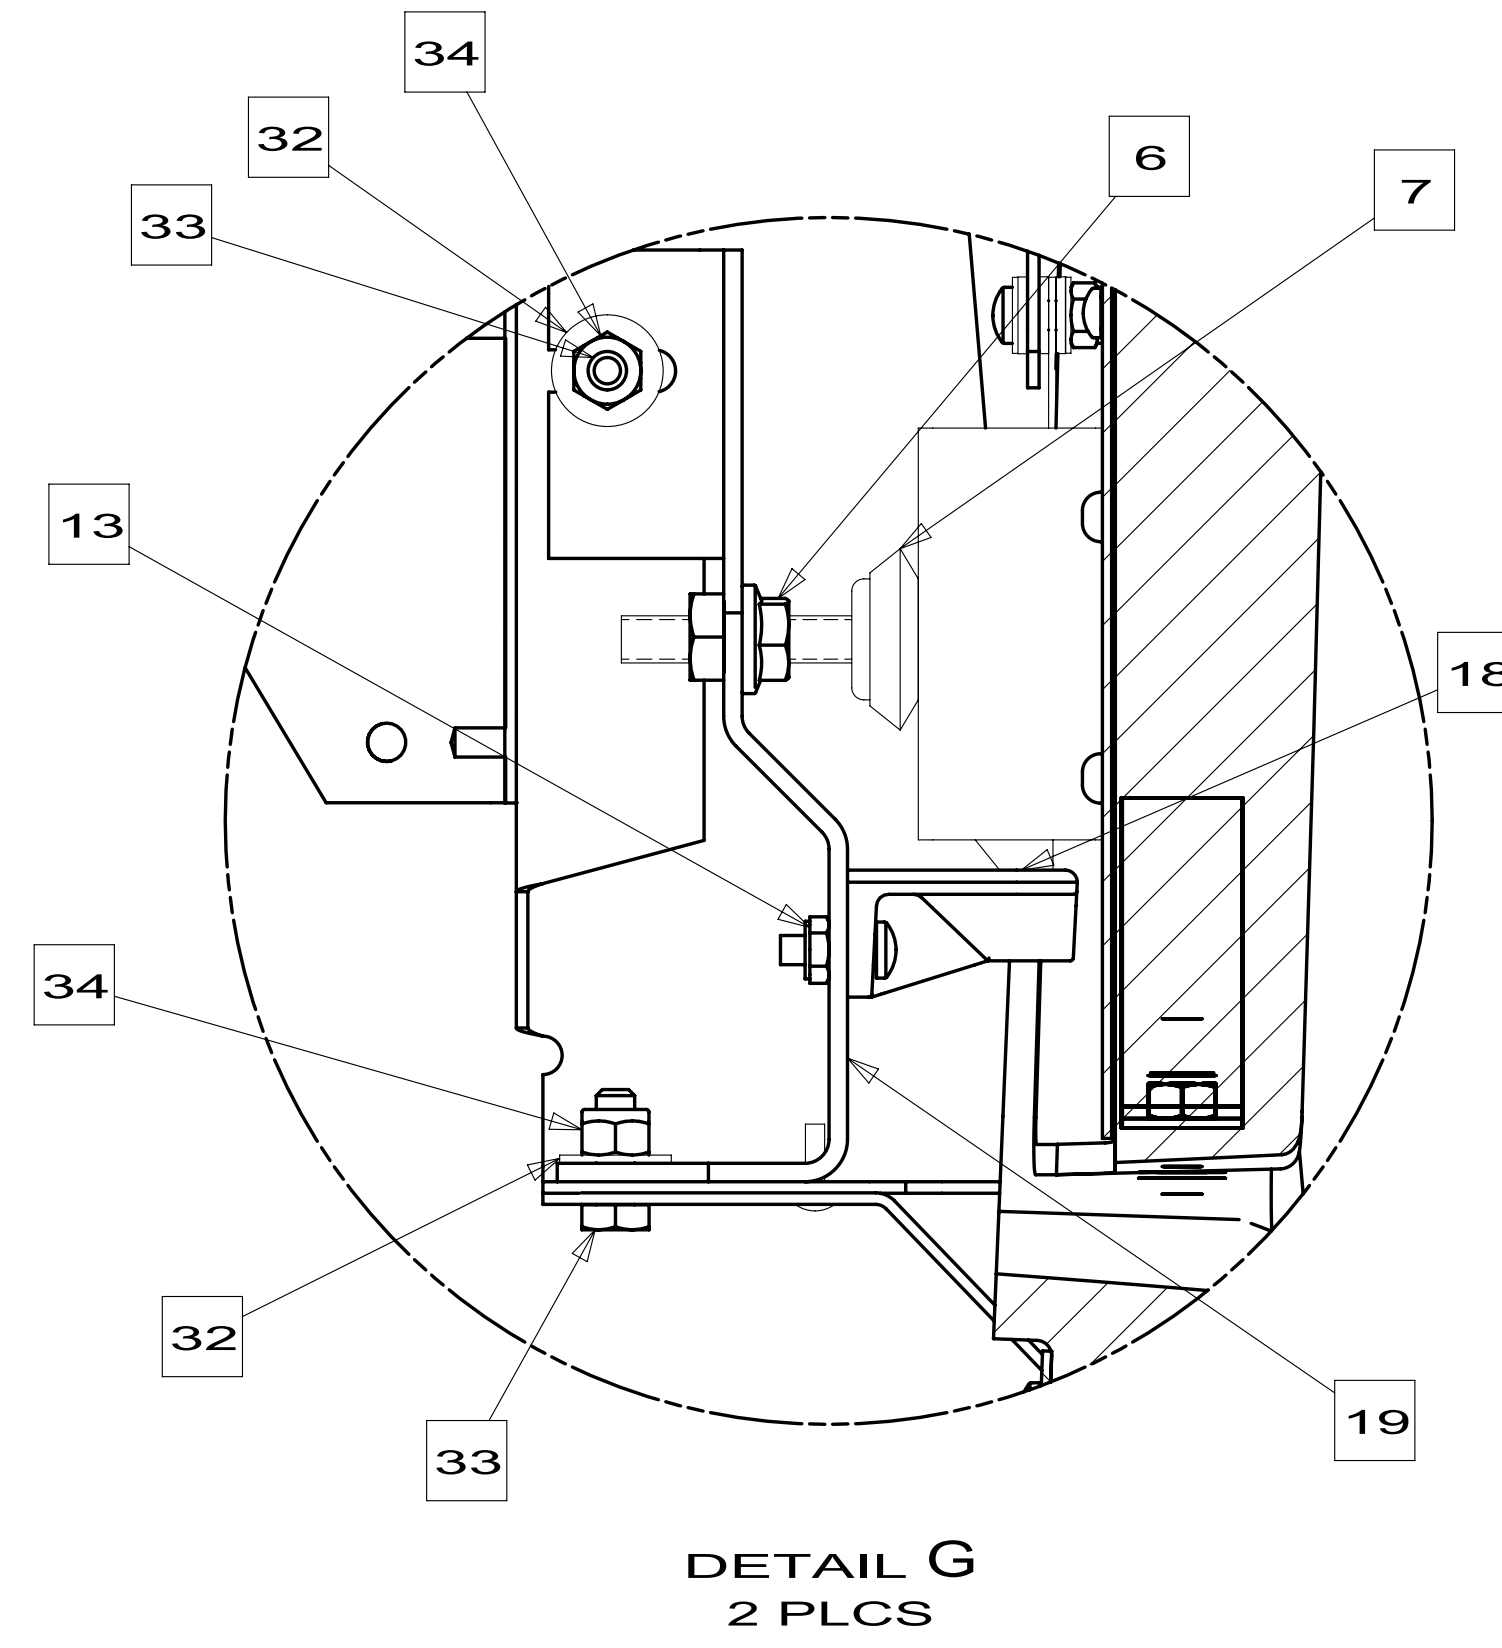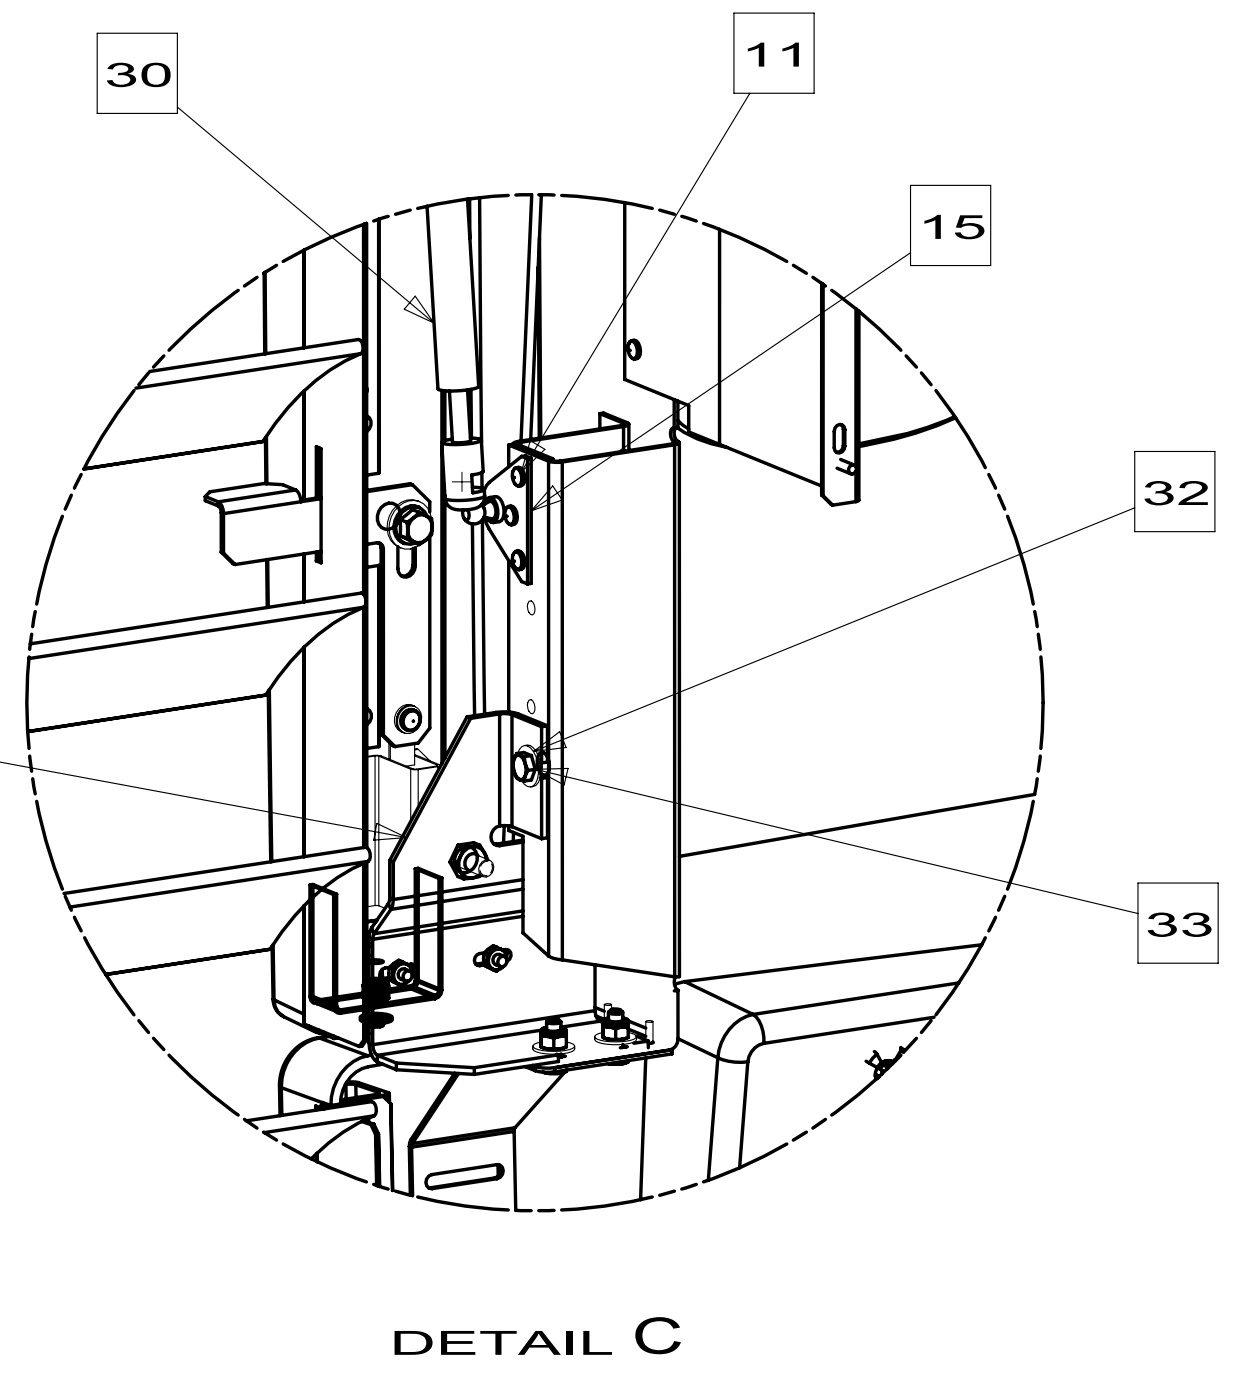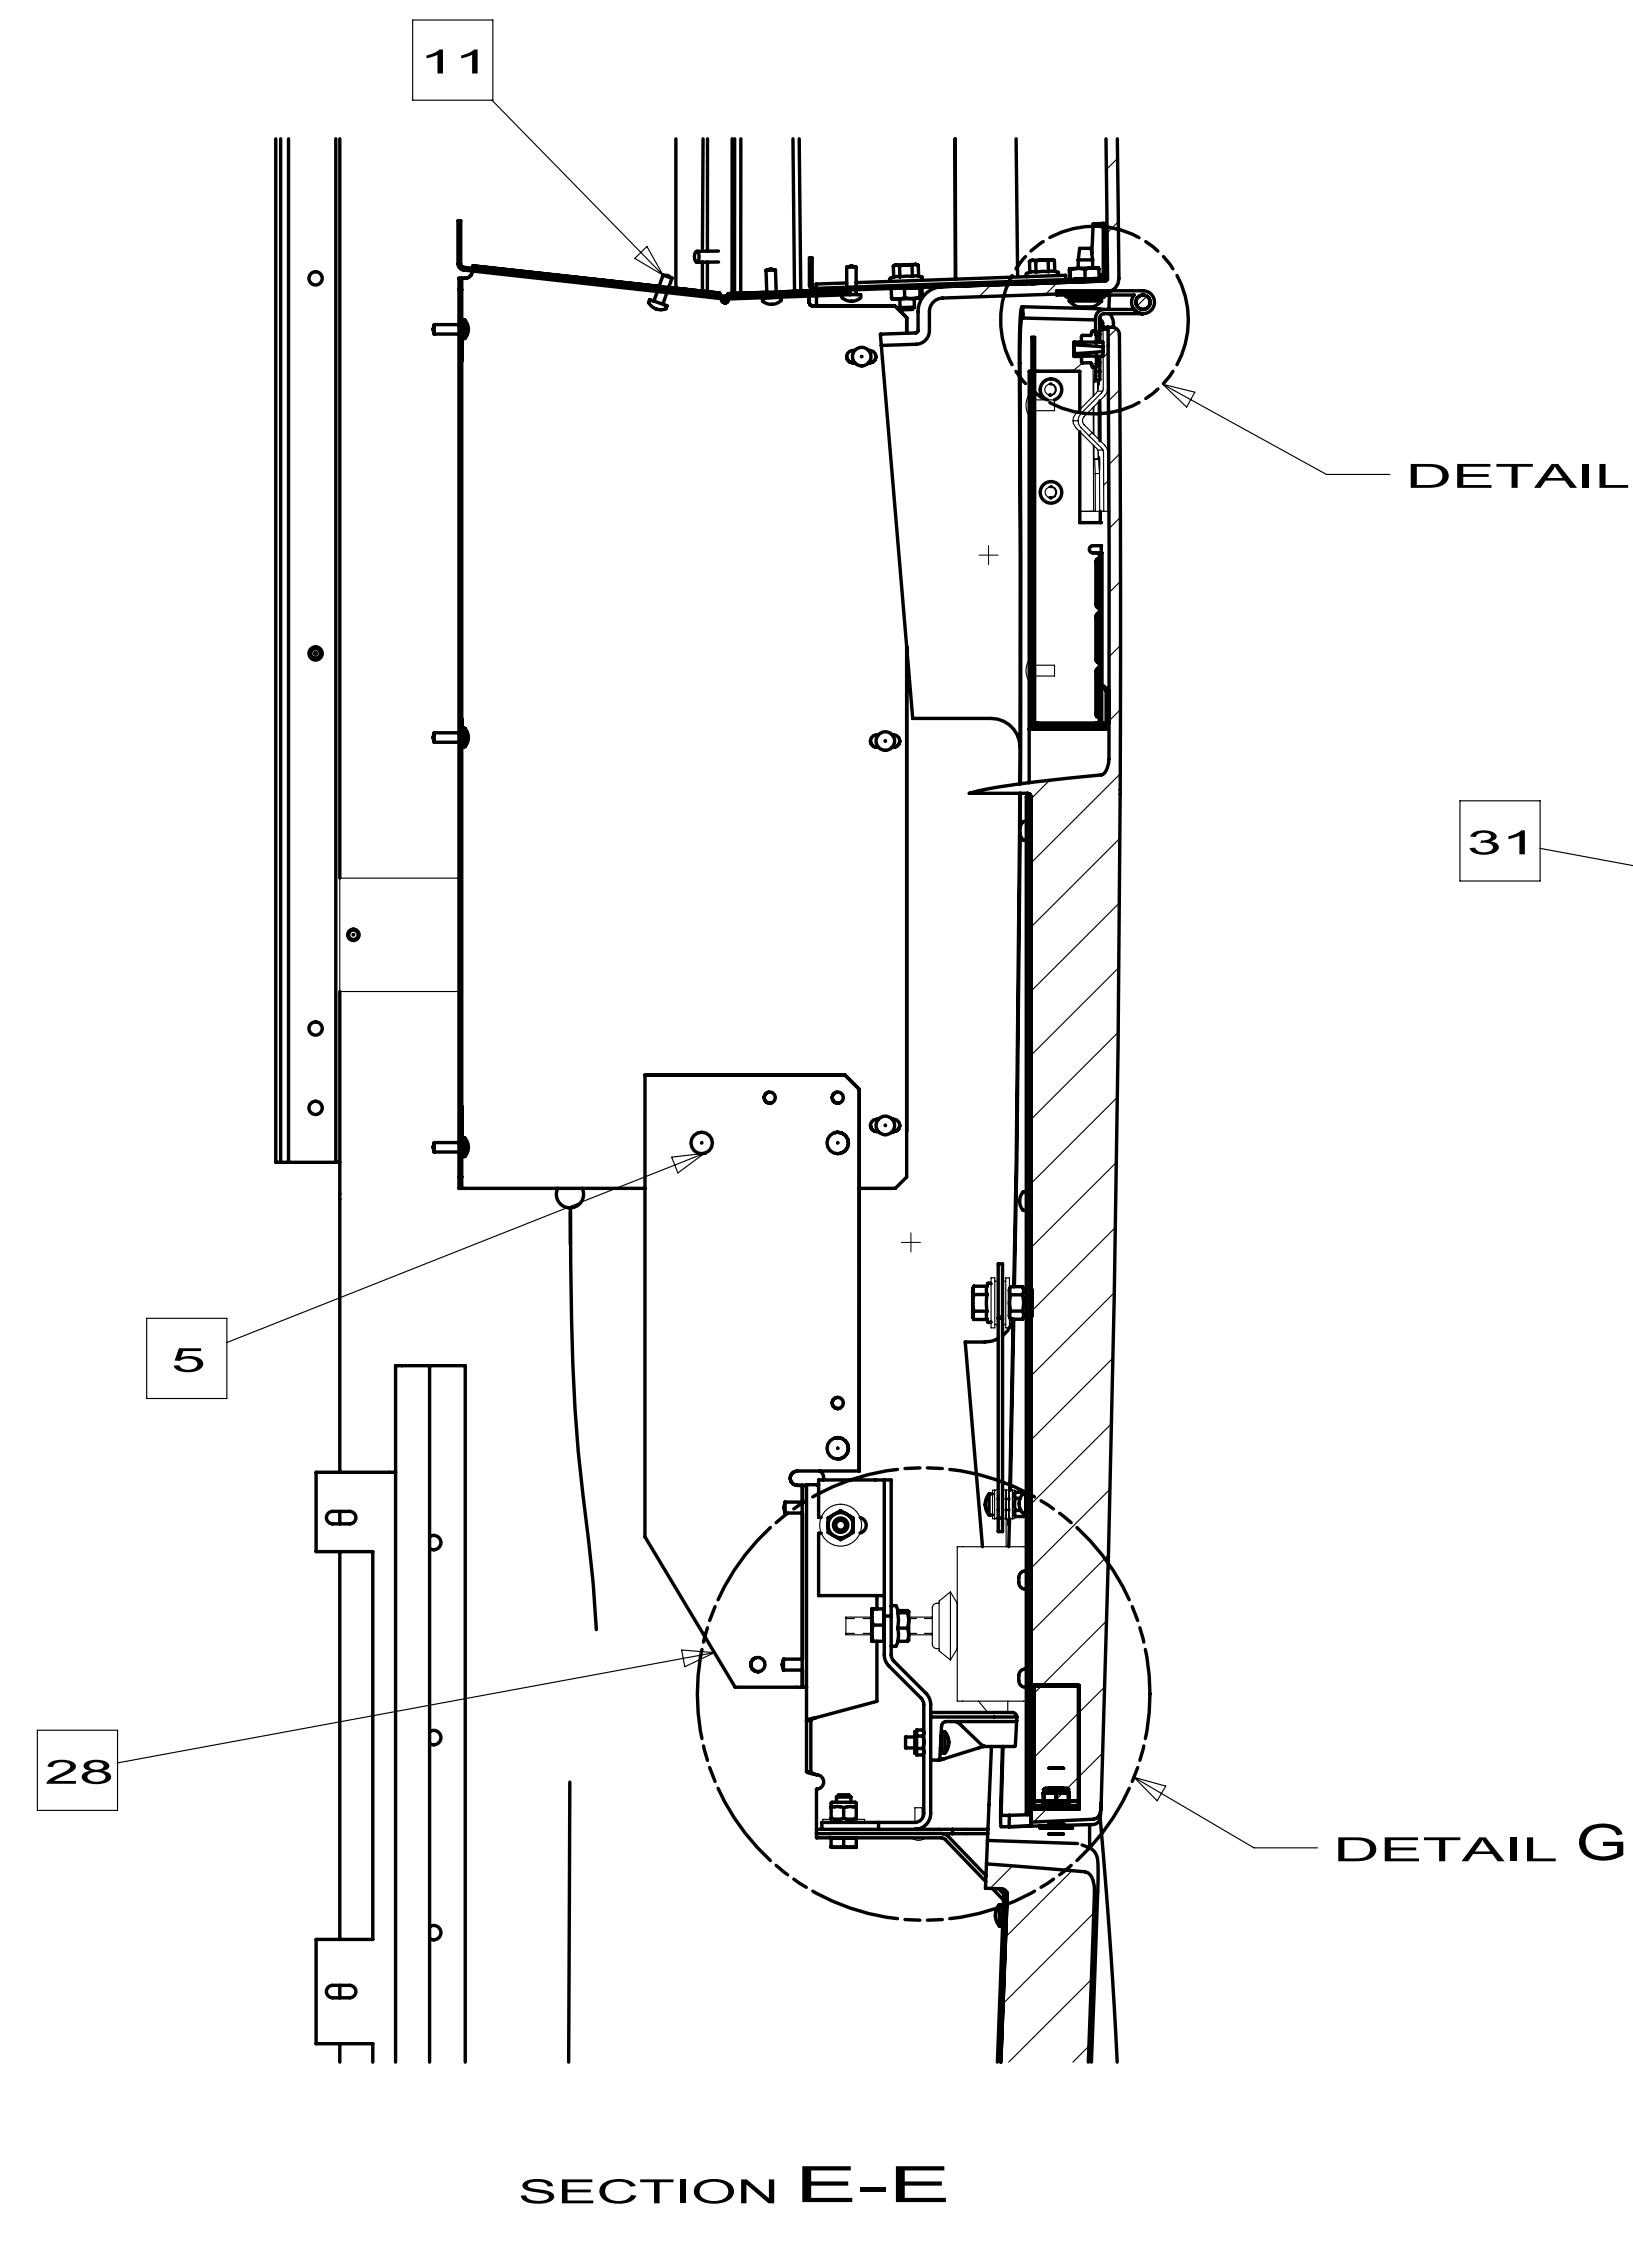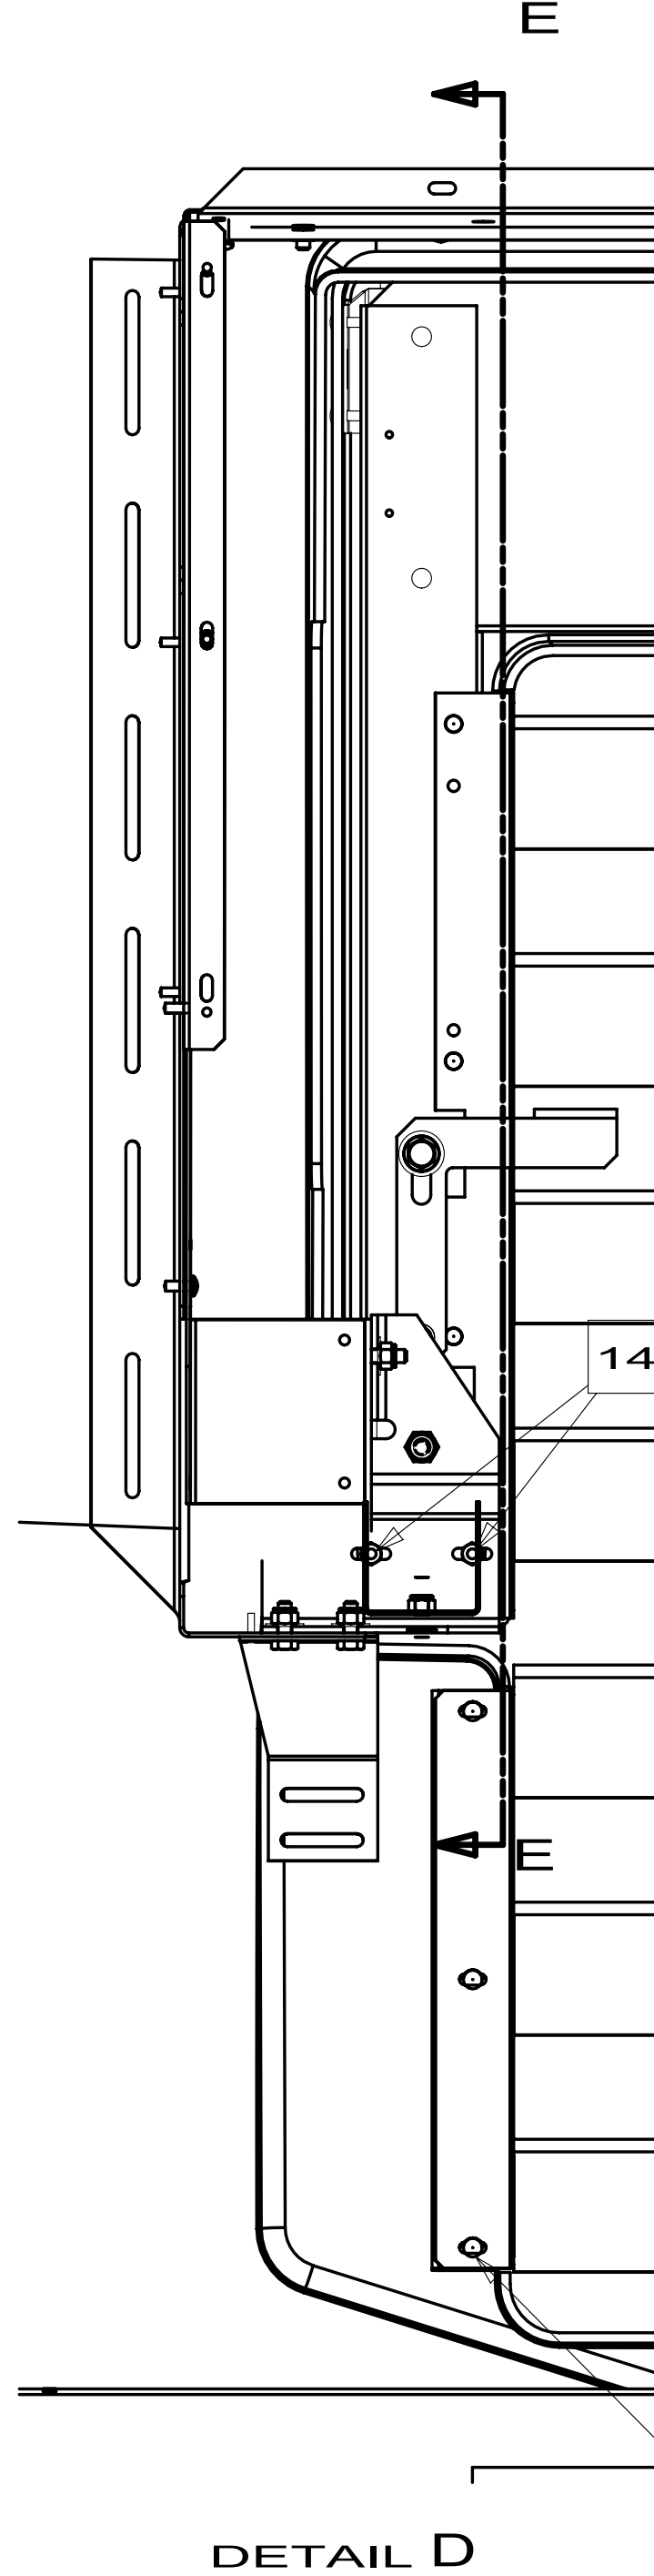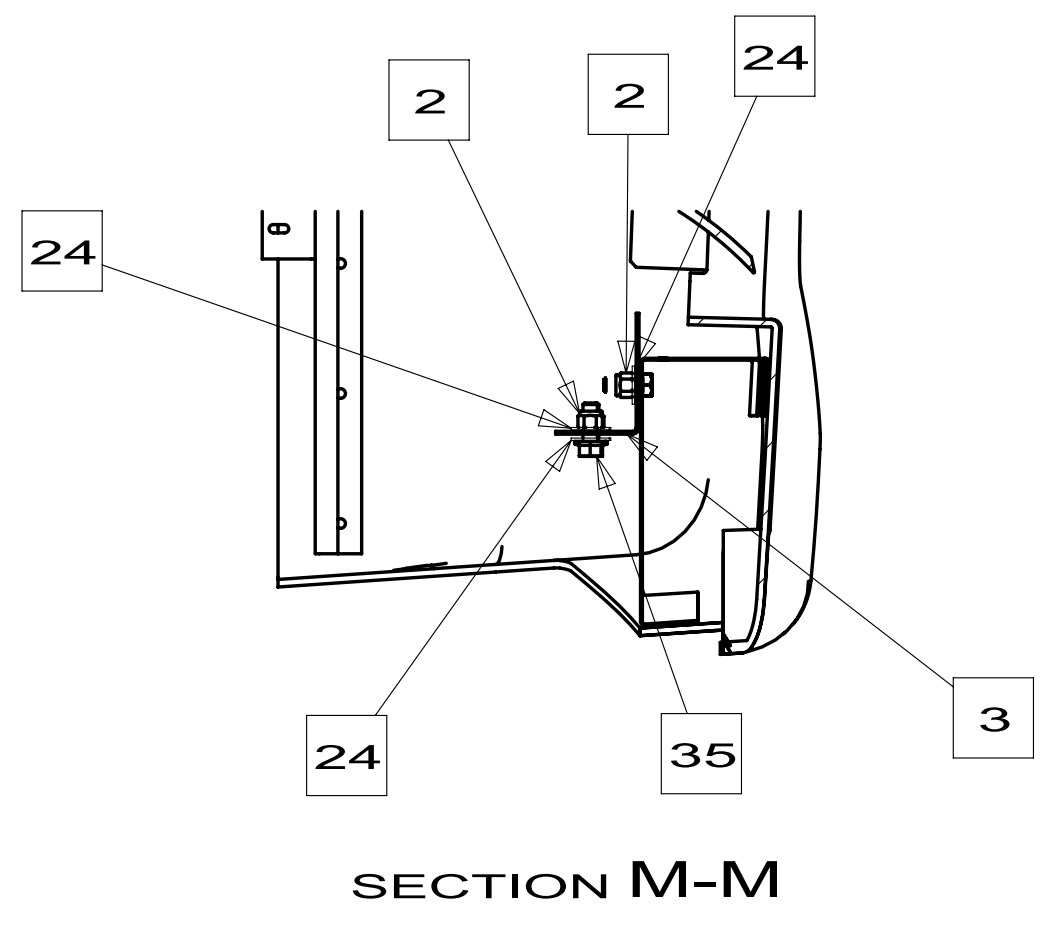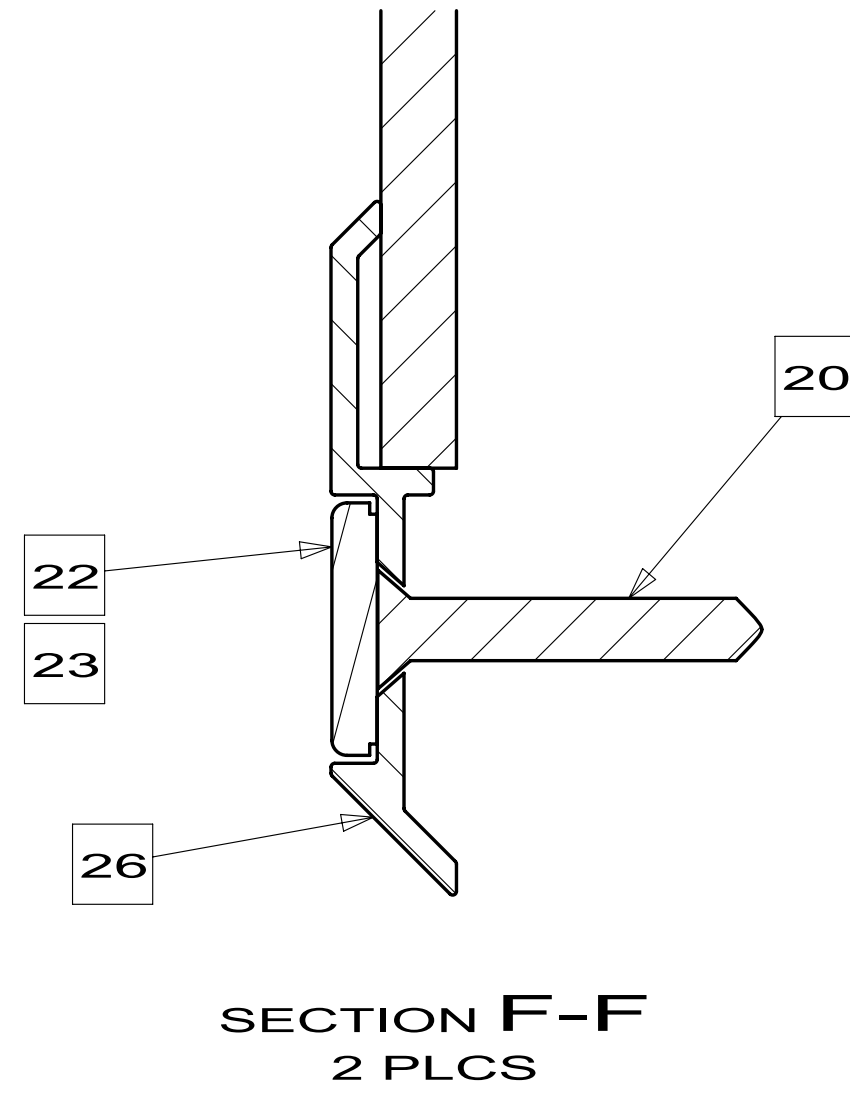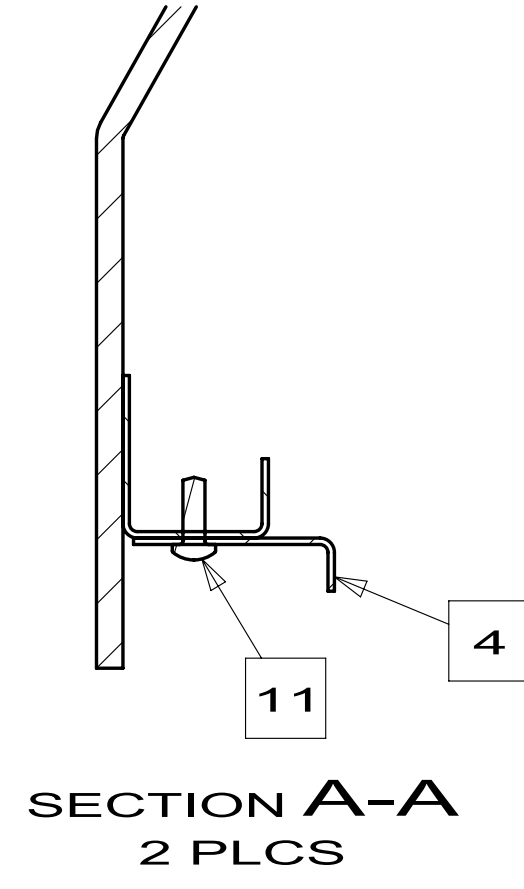

FIRST USED			
08 R-SERIES			
DO NOT SCALE DRAWING			
TITLE:			
REAR CAP INSTL			
SHEET 2	PART NO	159627	REV

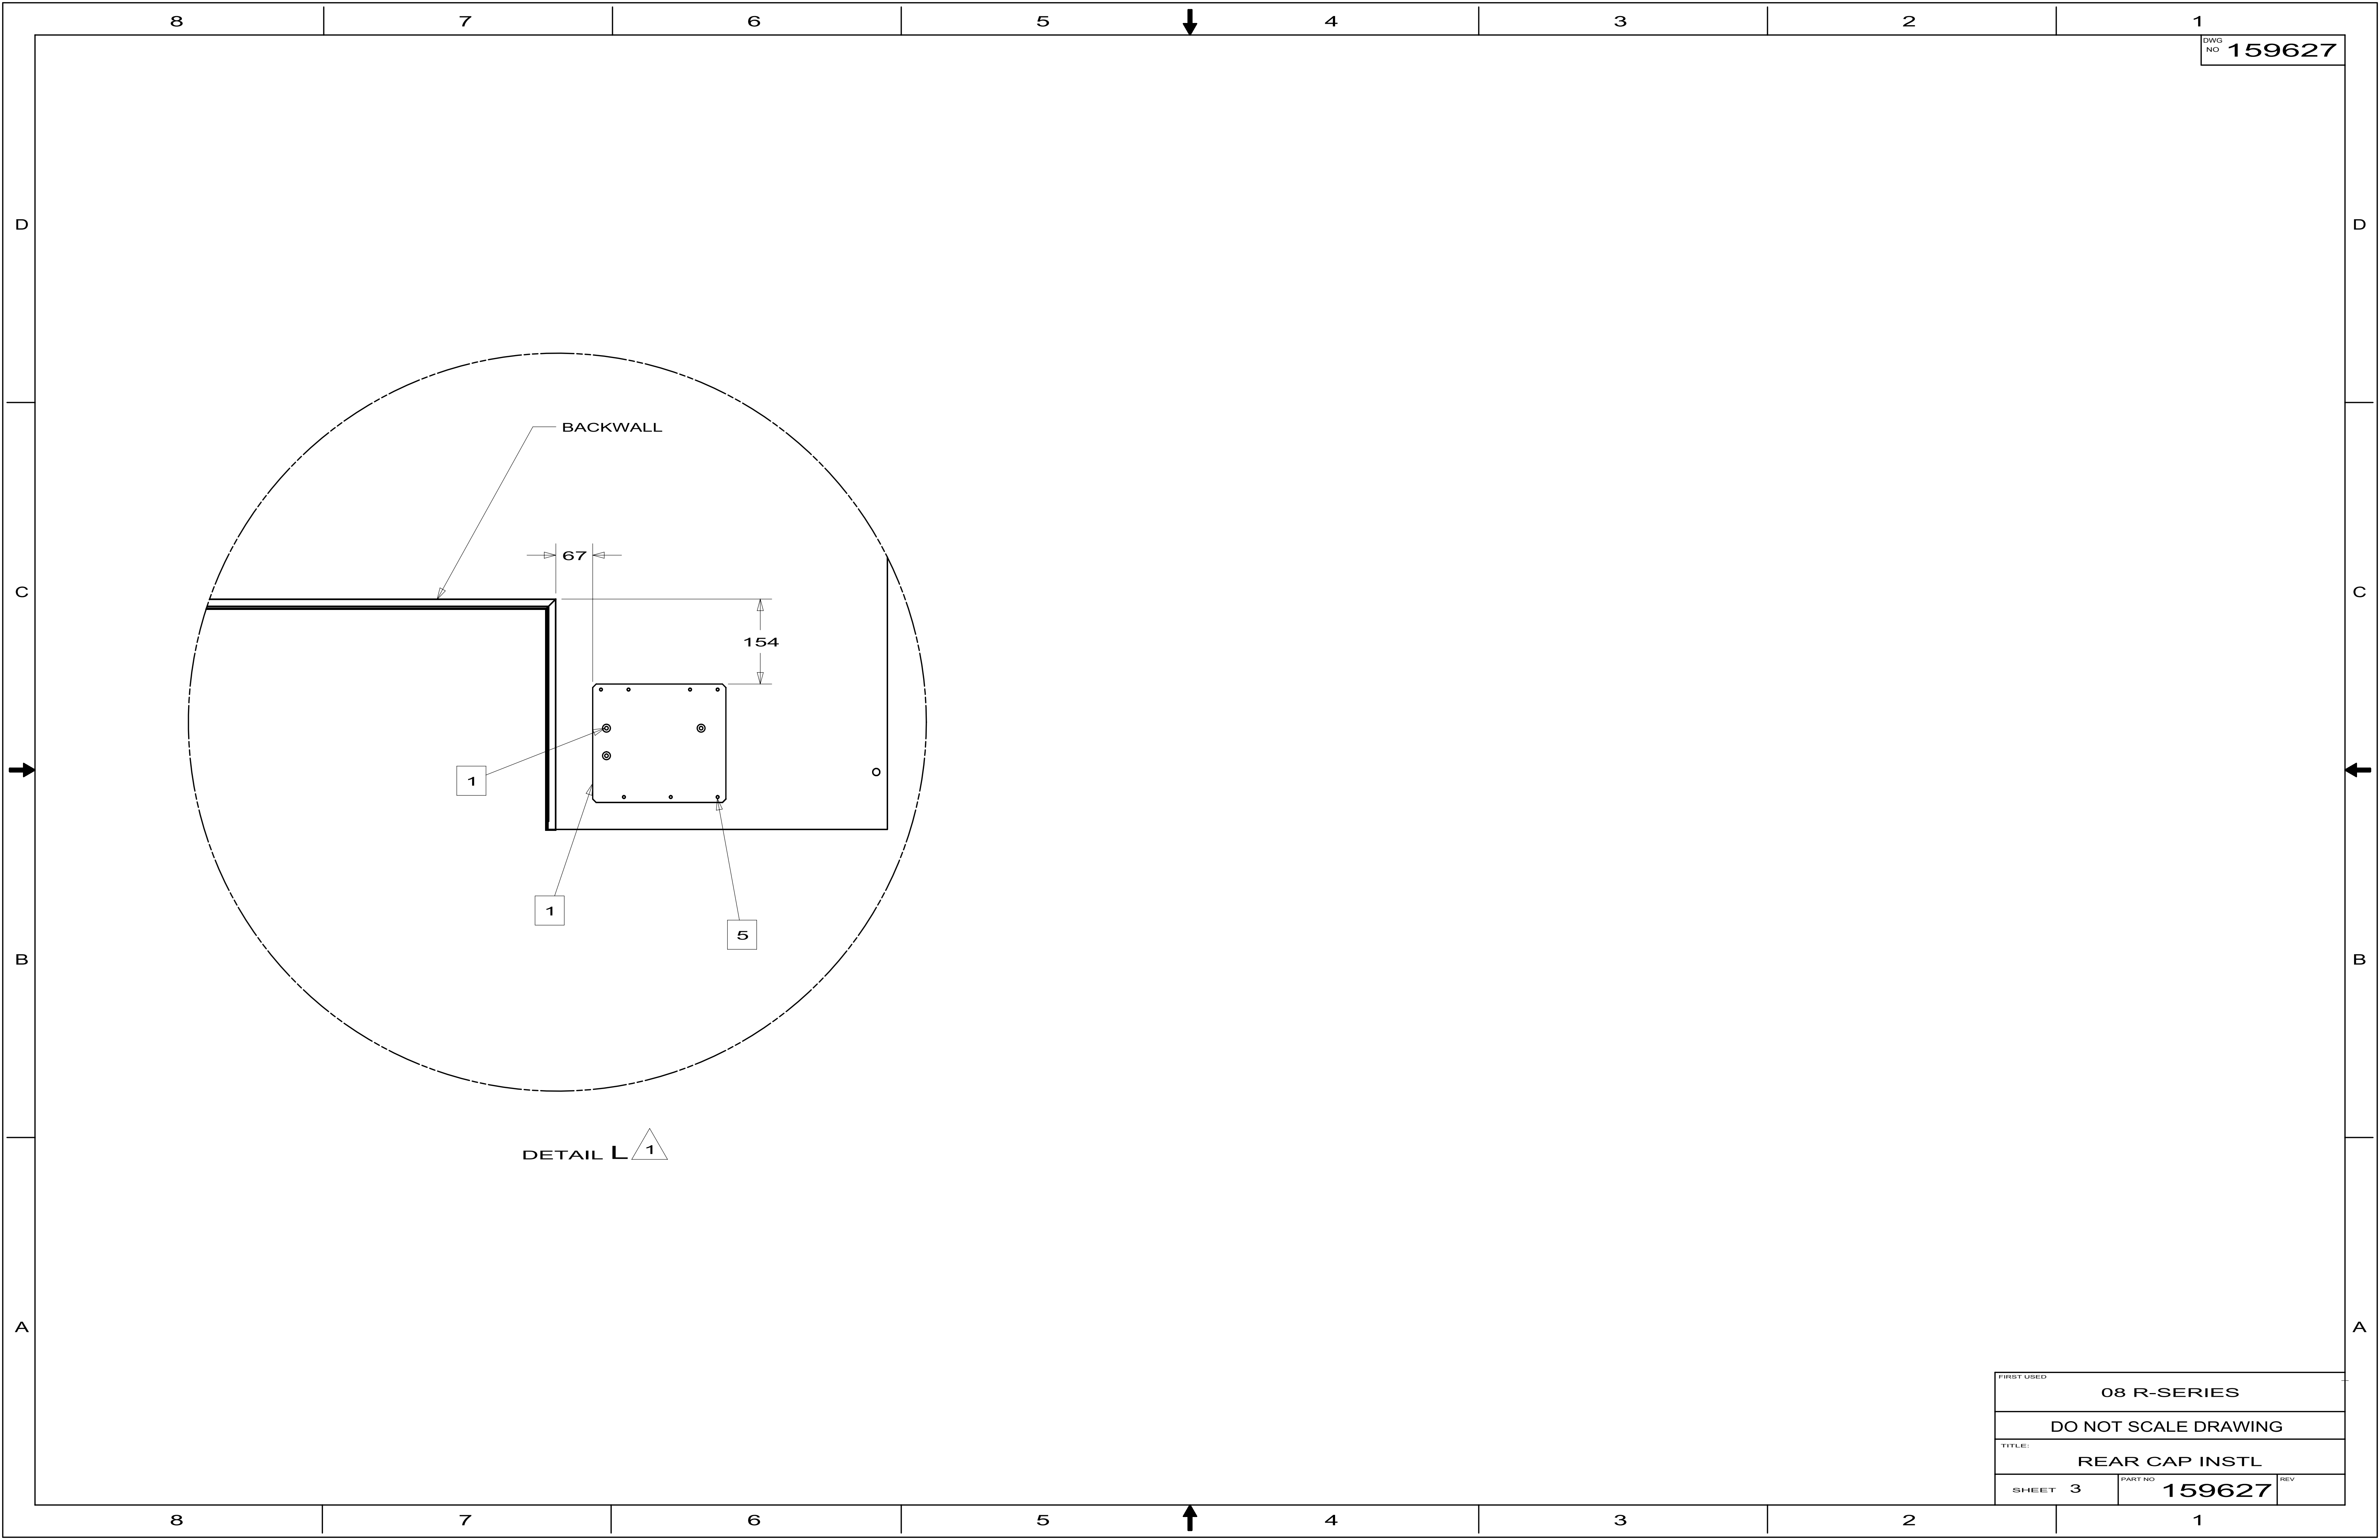

FIRST USED		
08 R-SERIES		
DO NOT SCALE DRAWING		
TITLE:		
REAR CAP INSTL		
SHEET 3	PART NO 159627	REV

D

C

B


A

D

C

B


A

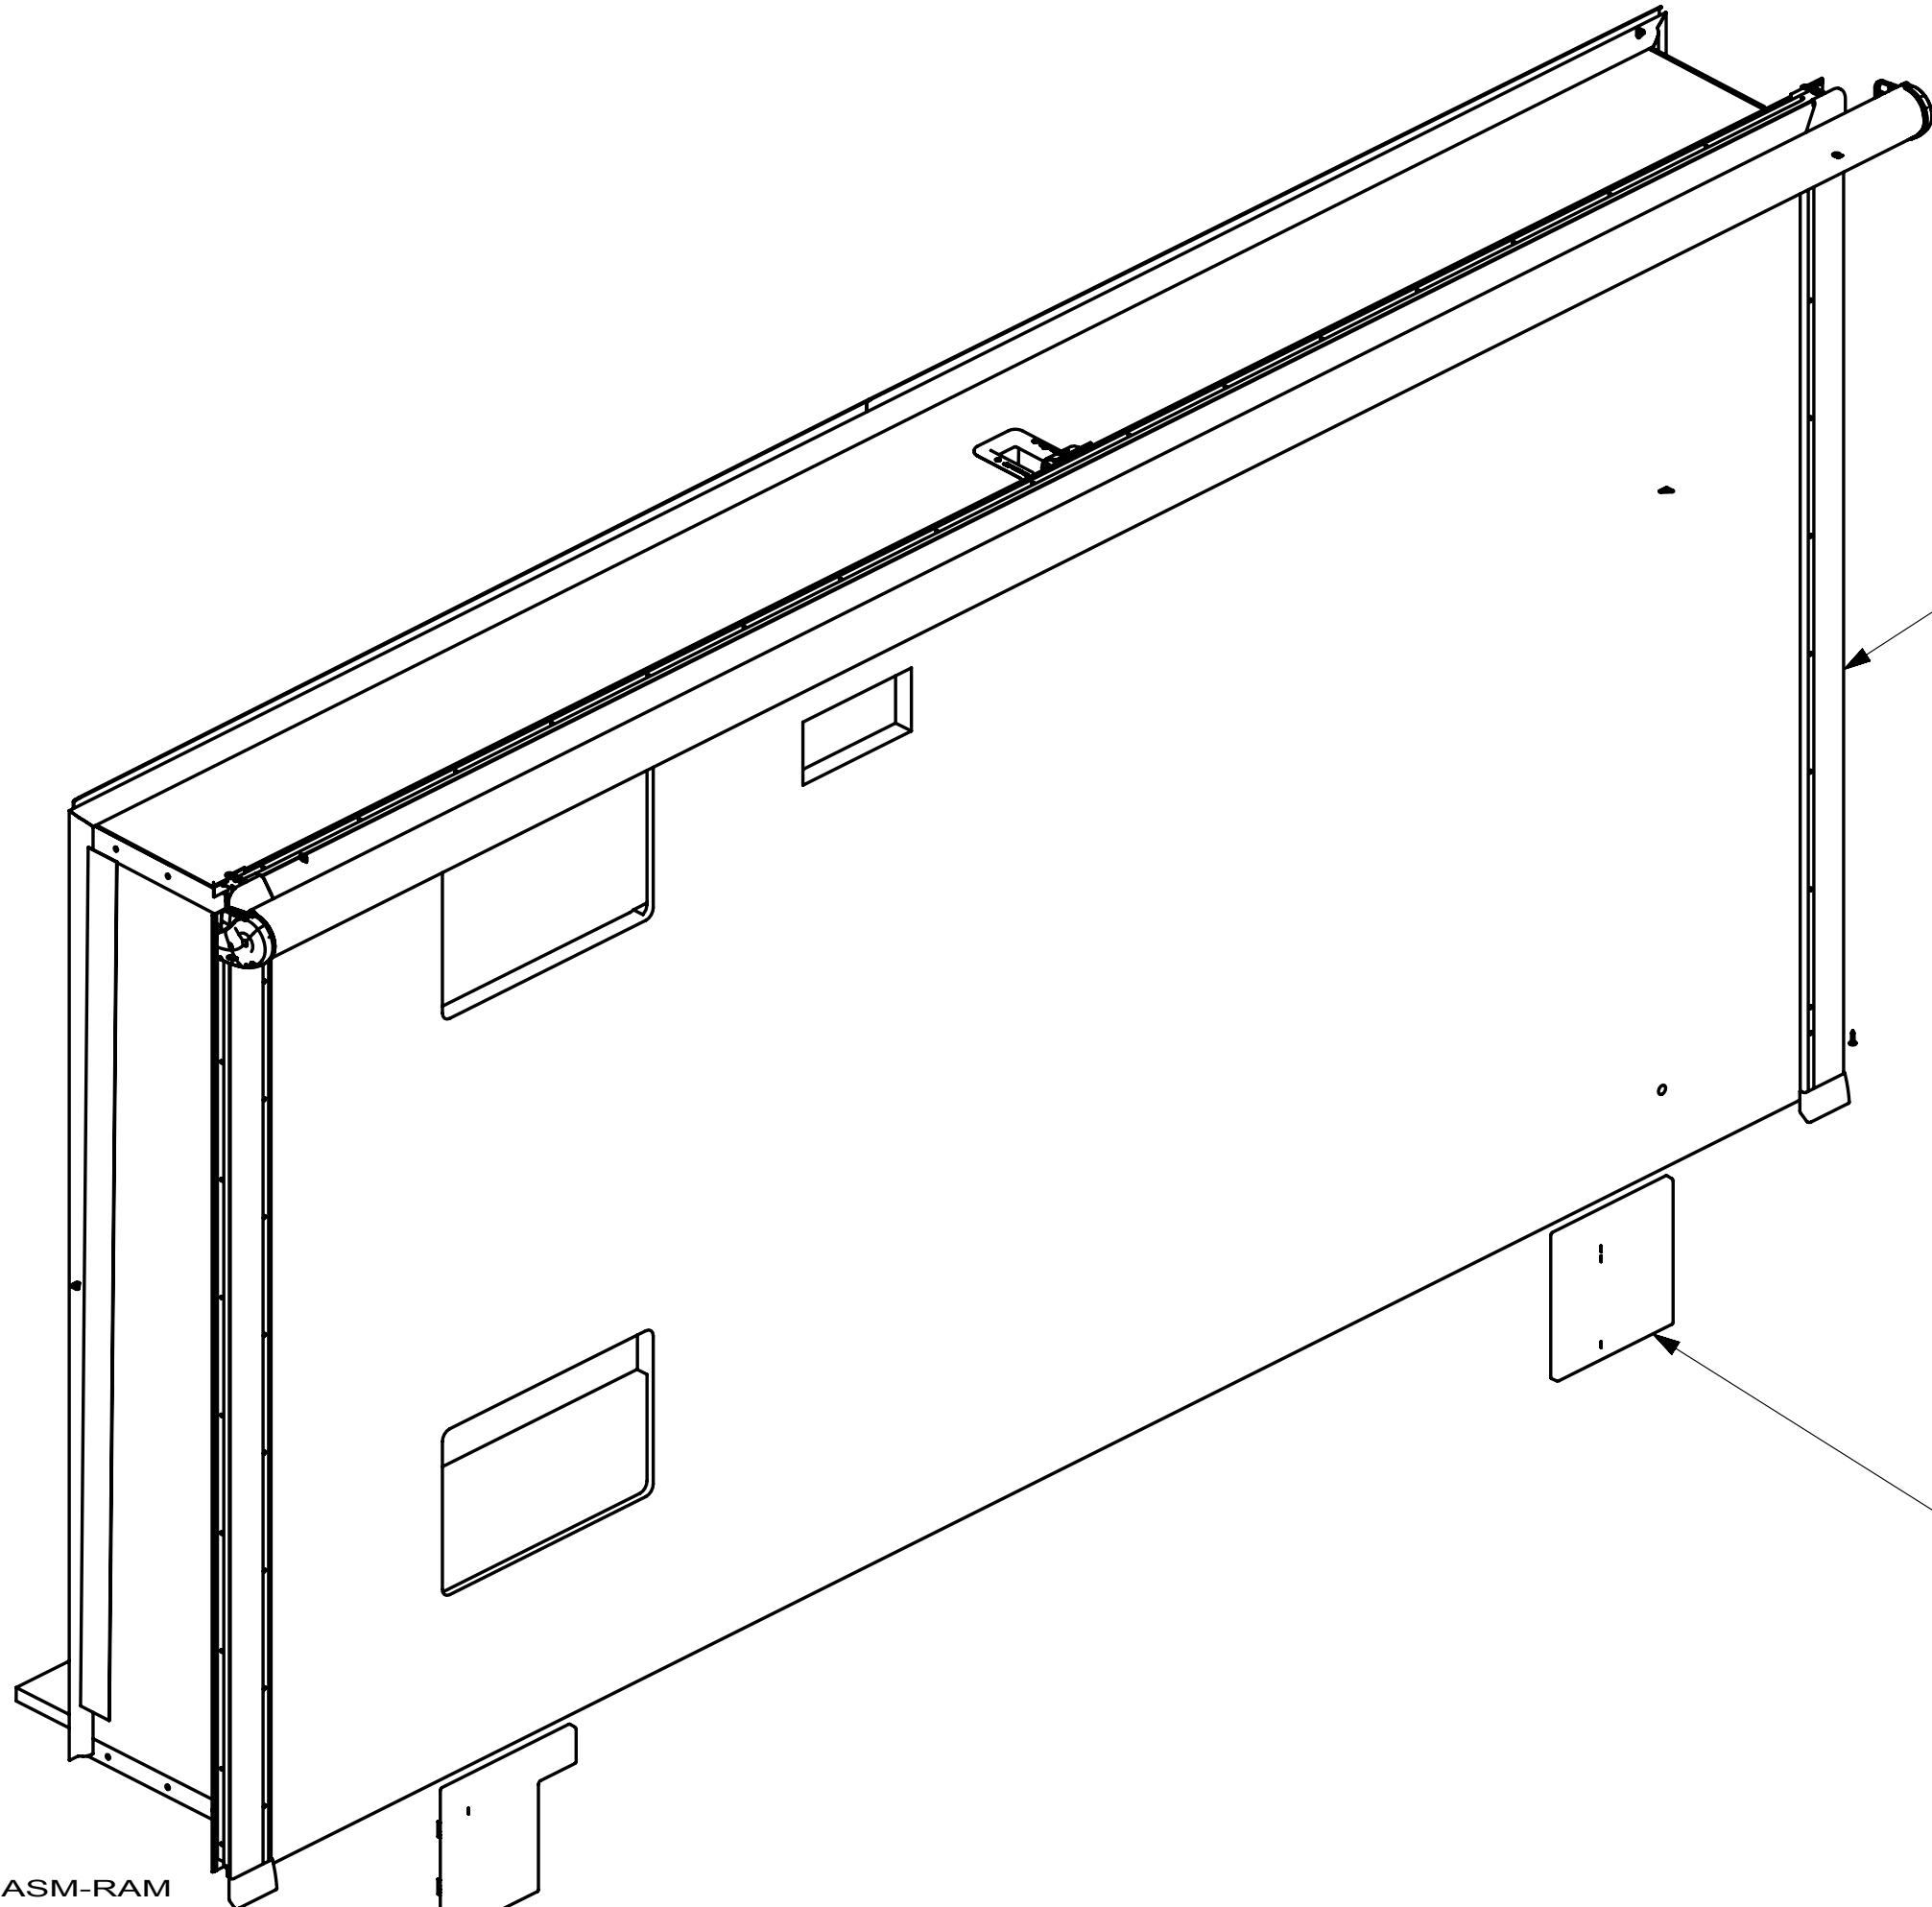

ROOM ASM-SLIDEOUT
169548-11-XXX

COVER ASM-RAM
138077-24-WK0
TAPE-FOAM
076322-22-000
TAPE-DBL SIDED
123816-03-000
BRACKET-MOUNT-COVER
161231-01-02B
BRACKET
161304-01-02B
SCREW
000G39-10-08T(6)
PLATE ASM
136995-08-02B (2)
WASHER
000E13-13-00B(4)
NUT
000D34-04-00B(4)

COVER ASM-RAM
138077-18-WH4
TAPE-FOAM
076322-22-000
TAPE-DBL SIDED
12381603-000
BRACKET-MOUNT-COVER
161231-01-02B
BRACKET
161304-01-02B
SCREW
000G39-10-08T(6)
PLATE ASM
136995-08-02B (2)
WASHER
000E13-13-00B(4)
NUT
000D34-04-00B(4)

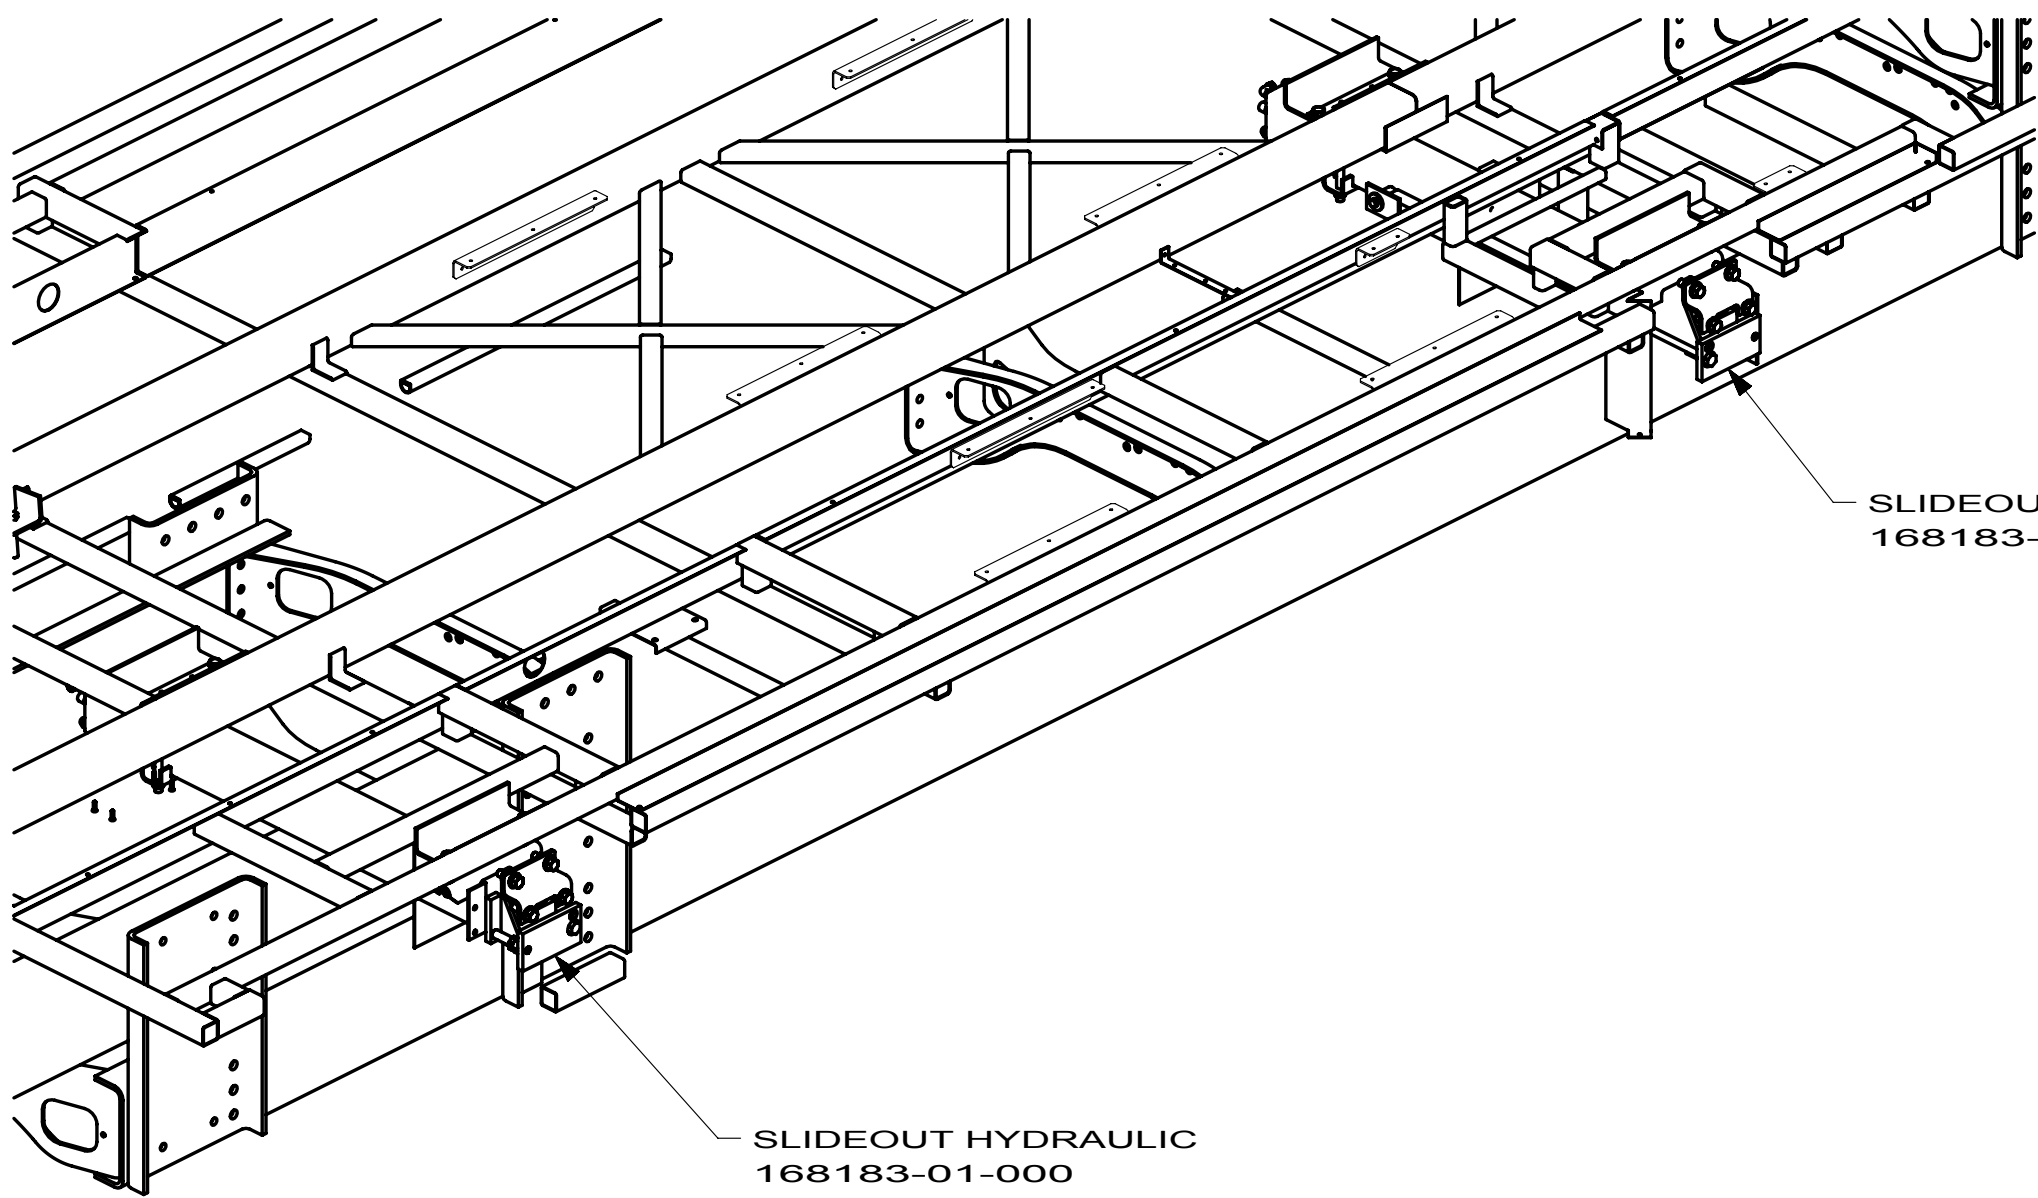

SLIDEOUT-HYDRAULIC
168183-02-000

SLIDEOUT HYDRAULIC
168183-01-000

16. THE VALVES ON THE HYDRAULIC PUMP MUST BE OPEN TO MANUALLY RETRACT ROOM.

15. FOR MANUAL RETRACT REMOVE SET SCREW AND TURN ROD WITH WRENCH 143738-01-000 CLOCKWISE ON EACH ARM EVENLY UNTIL ROOM IS FULLY RETRACTED. ROD MUST BE FULLY UNSCREWED TO ALLOW ROOM TO OPERATE. WRENCH IS LOCATED IN THE INFO CASE.

14. CLAMP OR WIRE TIE ALL HOSEES AT 900mm INTERVALS MAX. & WHERE NECESSARY TO PREVENT HOSES FROM CONTACTING MOVING PARTS OR HEAT PRODUCING ITEMS.

13. ALL HOSES MUST HAVE A 50mm MIN. RADIUS TO AVOID KINKS OR FLOW RESTRICTIONS. COVER ALL HOSES FULL LENGTH BELOW COACH FLOOR WITH CONDUIT 41953-09-000

12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED. (SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	8 (FT-LBS)
5/16 - 18 (.3125)	17 (FT-LBS)
3/8 - 16 (.375)	31 (FT-LBS)
7/16 - 14 (.4375)	50 (FT-LBS)
1/2 - 13 (.500)	76 (FT-LBS)

11. USE POLY-CLEAR 47034-07-000 AND ATTACH IT USING WASHER 44533-01-000 TO PROTECT THE SLIDEOUT FLOOR.

10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST INNER TRIM.

9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.

8. USE SCREW G39-08-08S TO HOLD EACH END OF TRIM.

7. SEE SEALANT MANUAL.

6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

5. LOOSEN JAM NUTS AND ADJSUT BOLT TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

4. THIS IS A NOMINAL DIMENSION: THE PARTS SHOULD BE ADJUSTED AS REQUIRED WITHIN TOLERANCE RANGE.






3. THE RETRACTED LENGTH IS ADJUSTED BY THREADING THE STOP BOLT IN OR OUT UNTIL THE OUTSIDE WALL OF THE ROOM SEALS AGAINST THE SIDEWALL.

2. THE EXTENDED LENGTH IS ADJUSTED BY TURNING THE LOCK NUTS ON THE PISTON RODS IN OR OUT UNTIL THE SLIDEOUT ROOM SEALS AGAINST THE SIDEWALL.

1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:


WINNEBAGO INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT-ORIG		ORIG. DATE	
CHGR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		10 R40BD	
DSNR		MATERIAL:	
UNSPECIFIED TOLERANCES ARE:		THIRD ANGLE PROJECTION	
WHOLE DIM (X) : 3		DO NOT SCALE DRAWING	
ONE-PLACE (X.X) :		TITLE: SLIDEOUT COMPL-FRT,LH	
TWO-PLACE (X.XX) :		SHEET 1 OF 6	
ANGLE :		PART NO 169548	
REF:		REV	

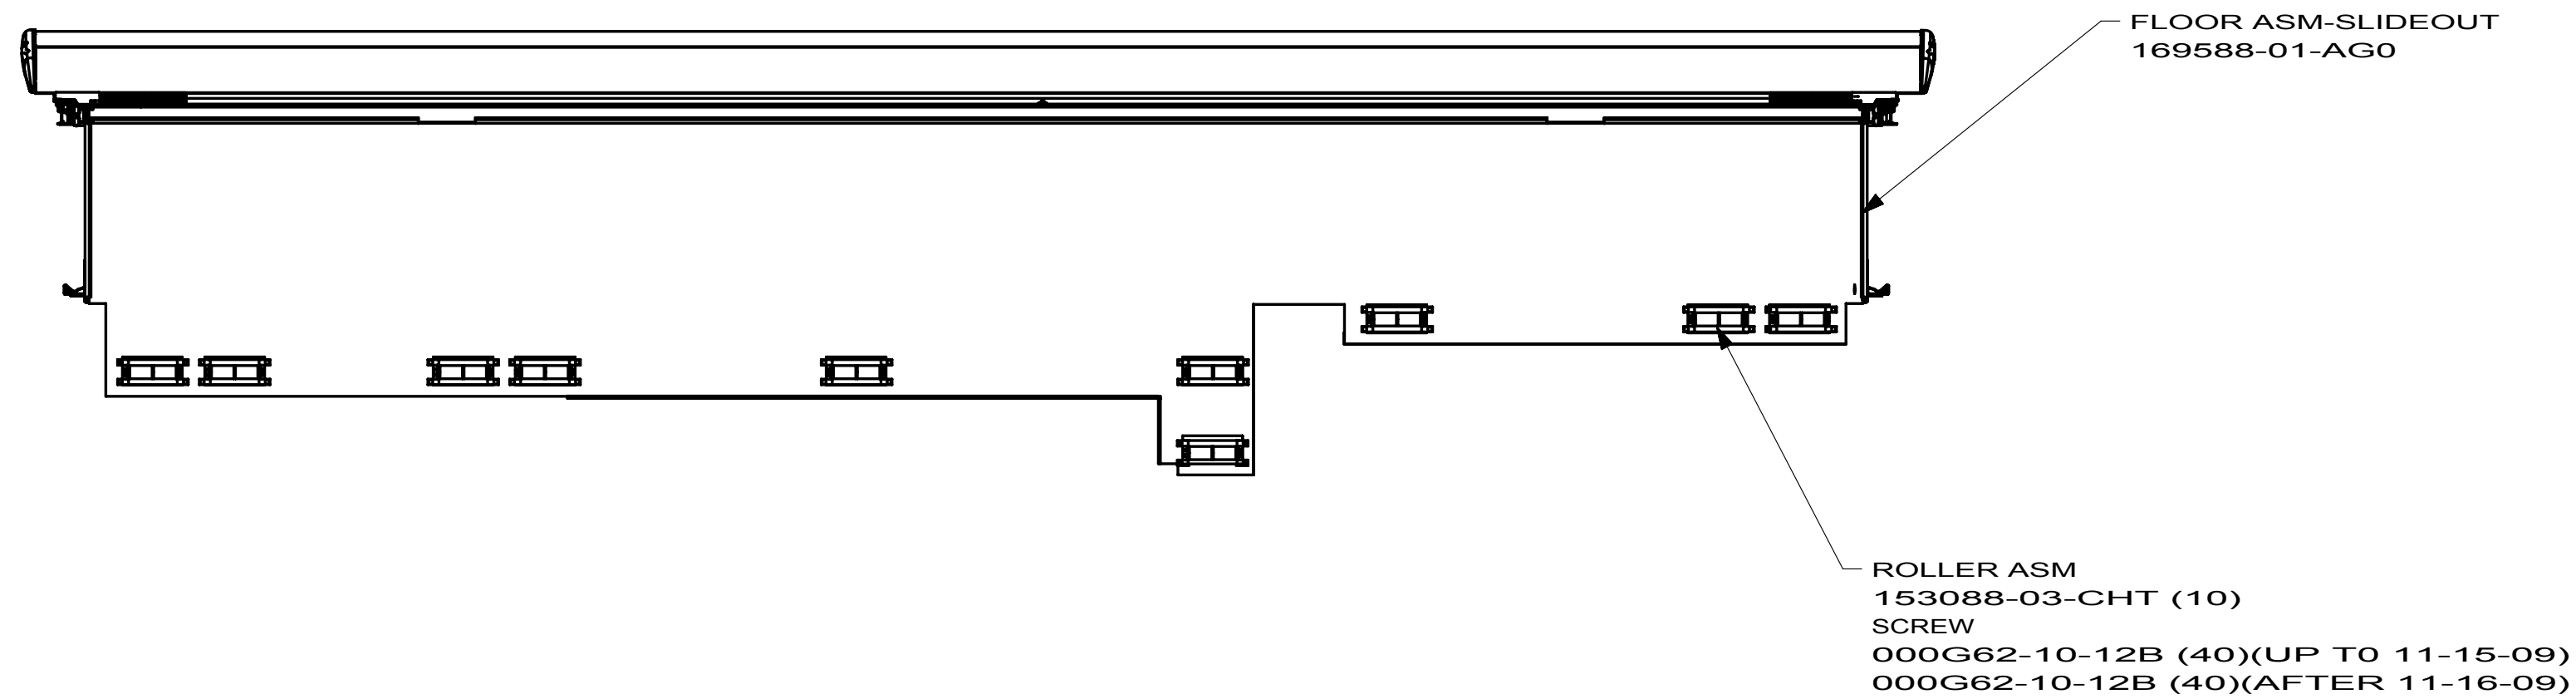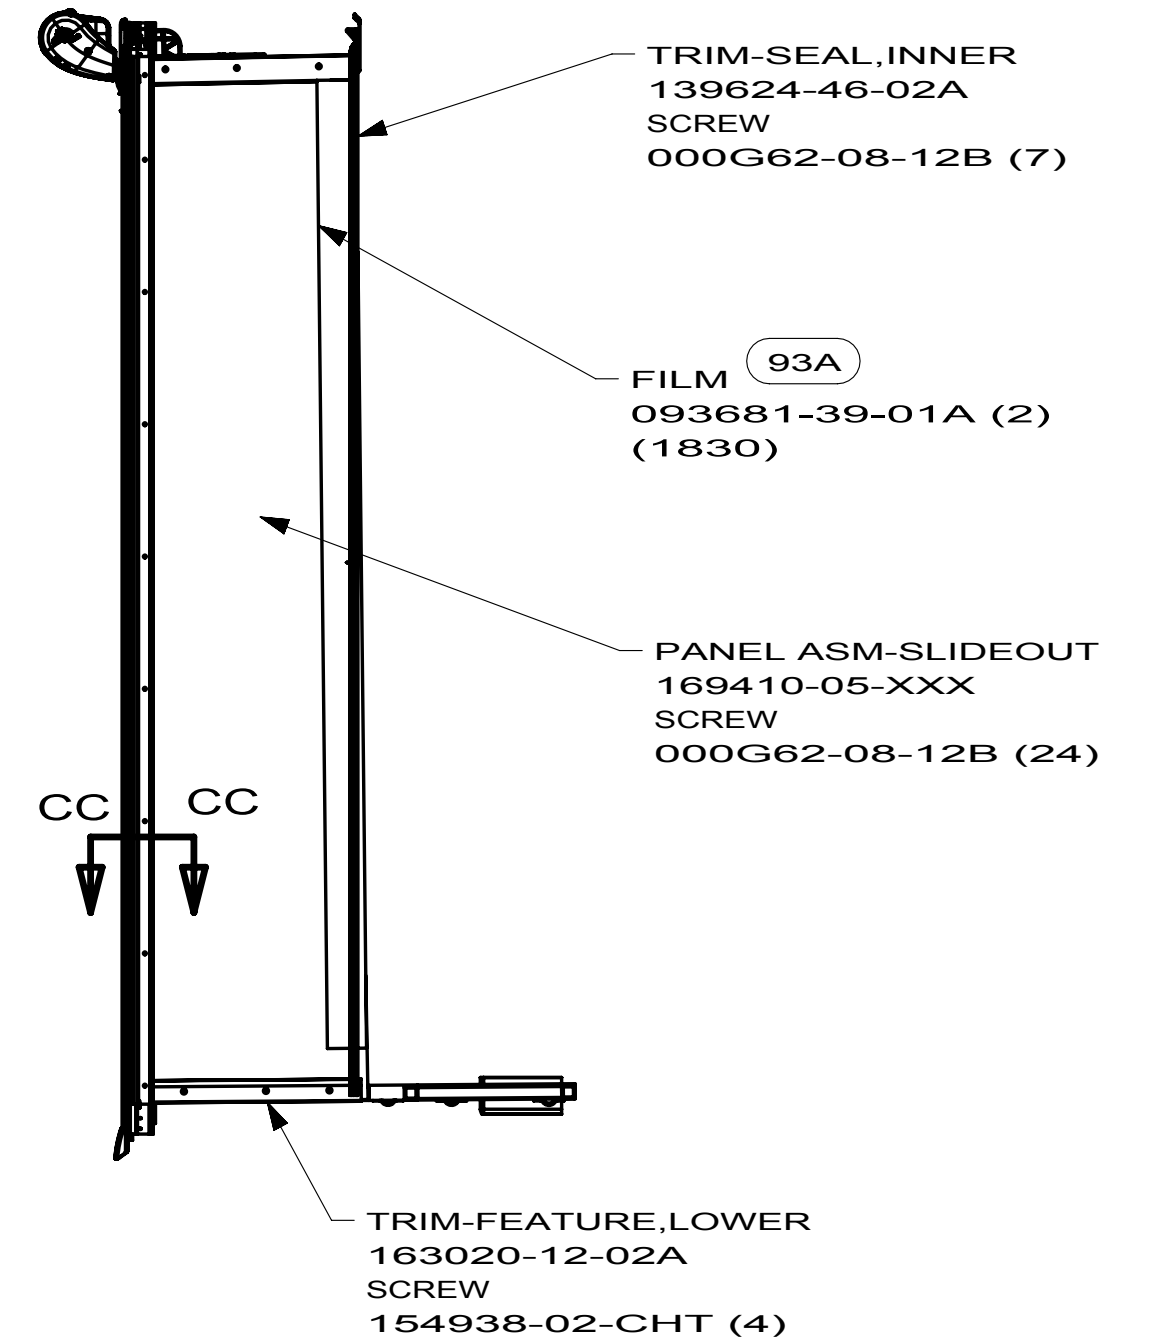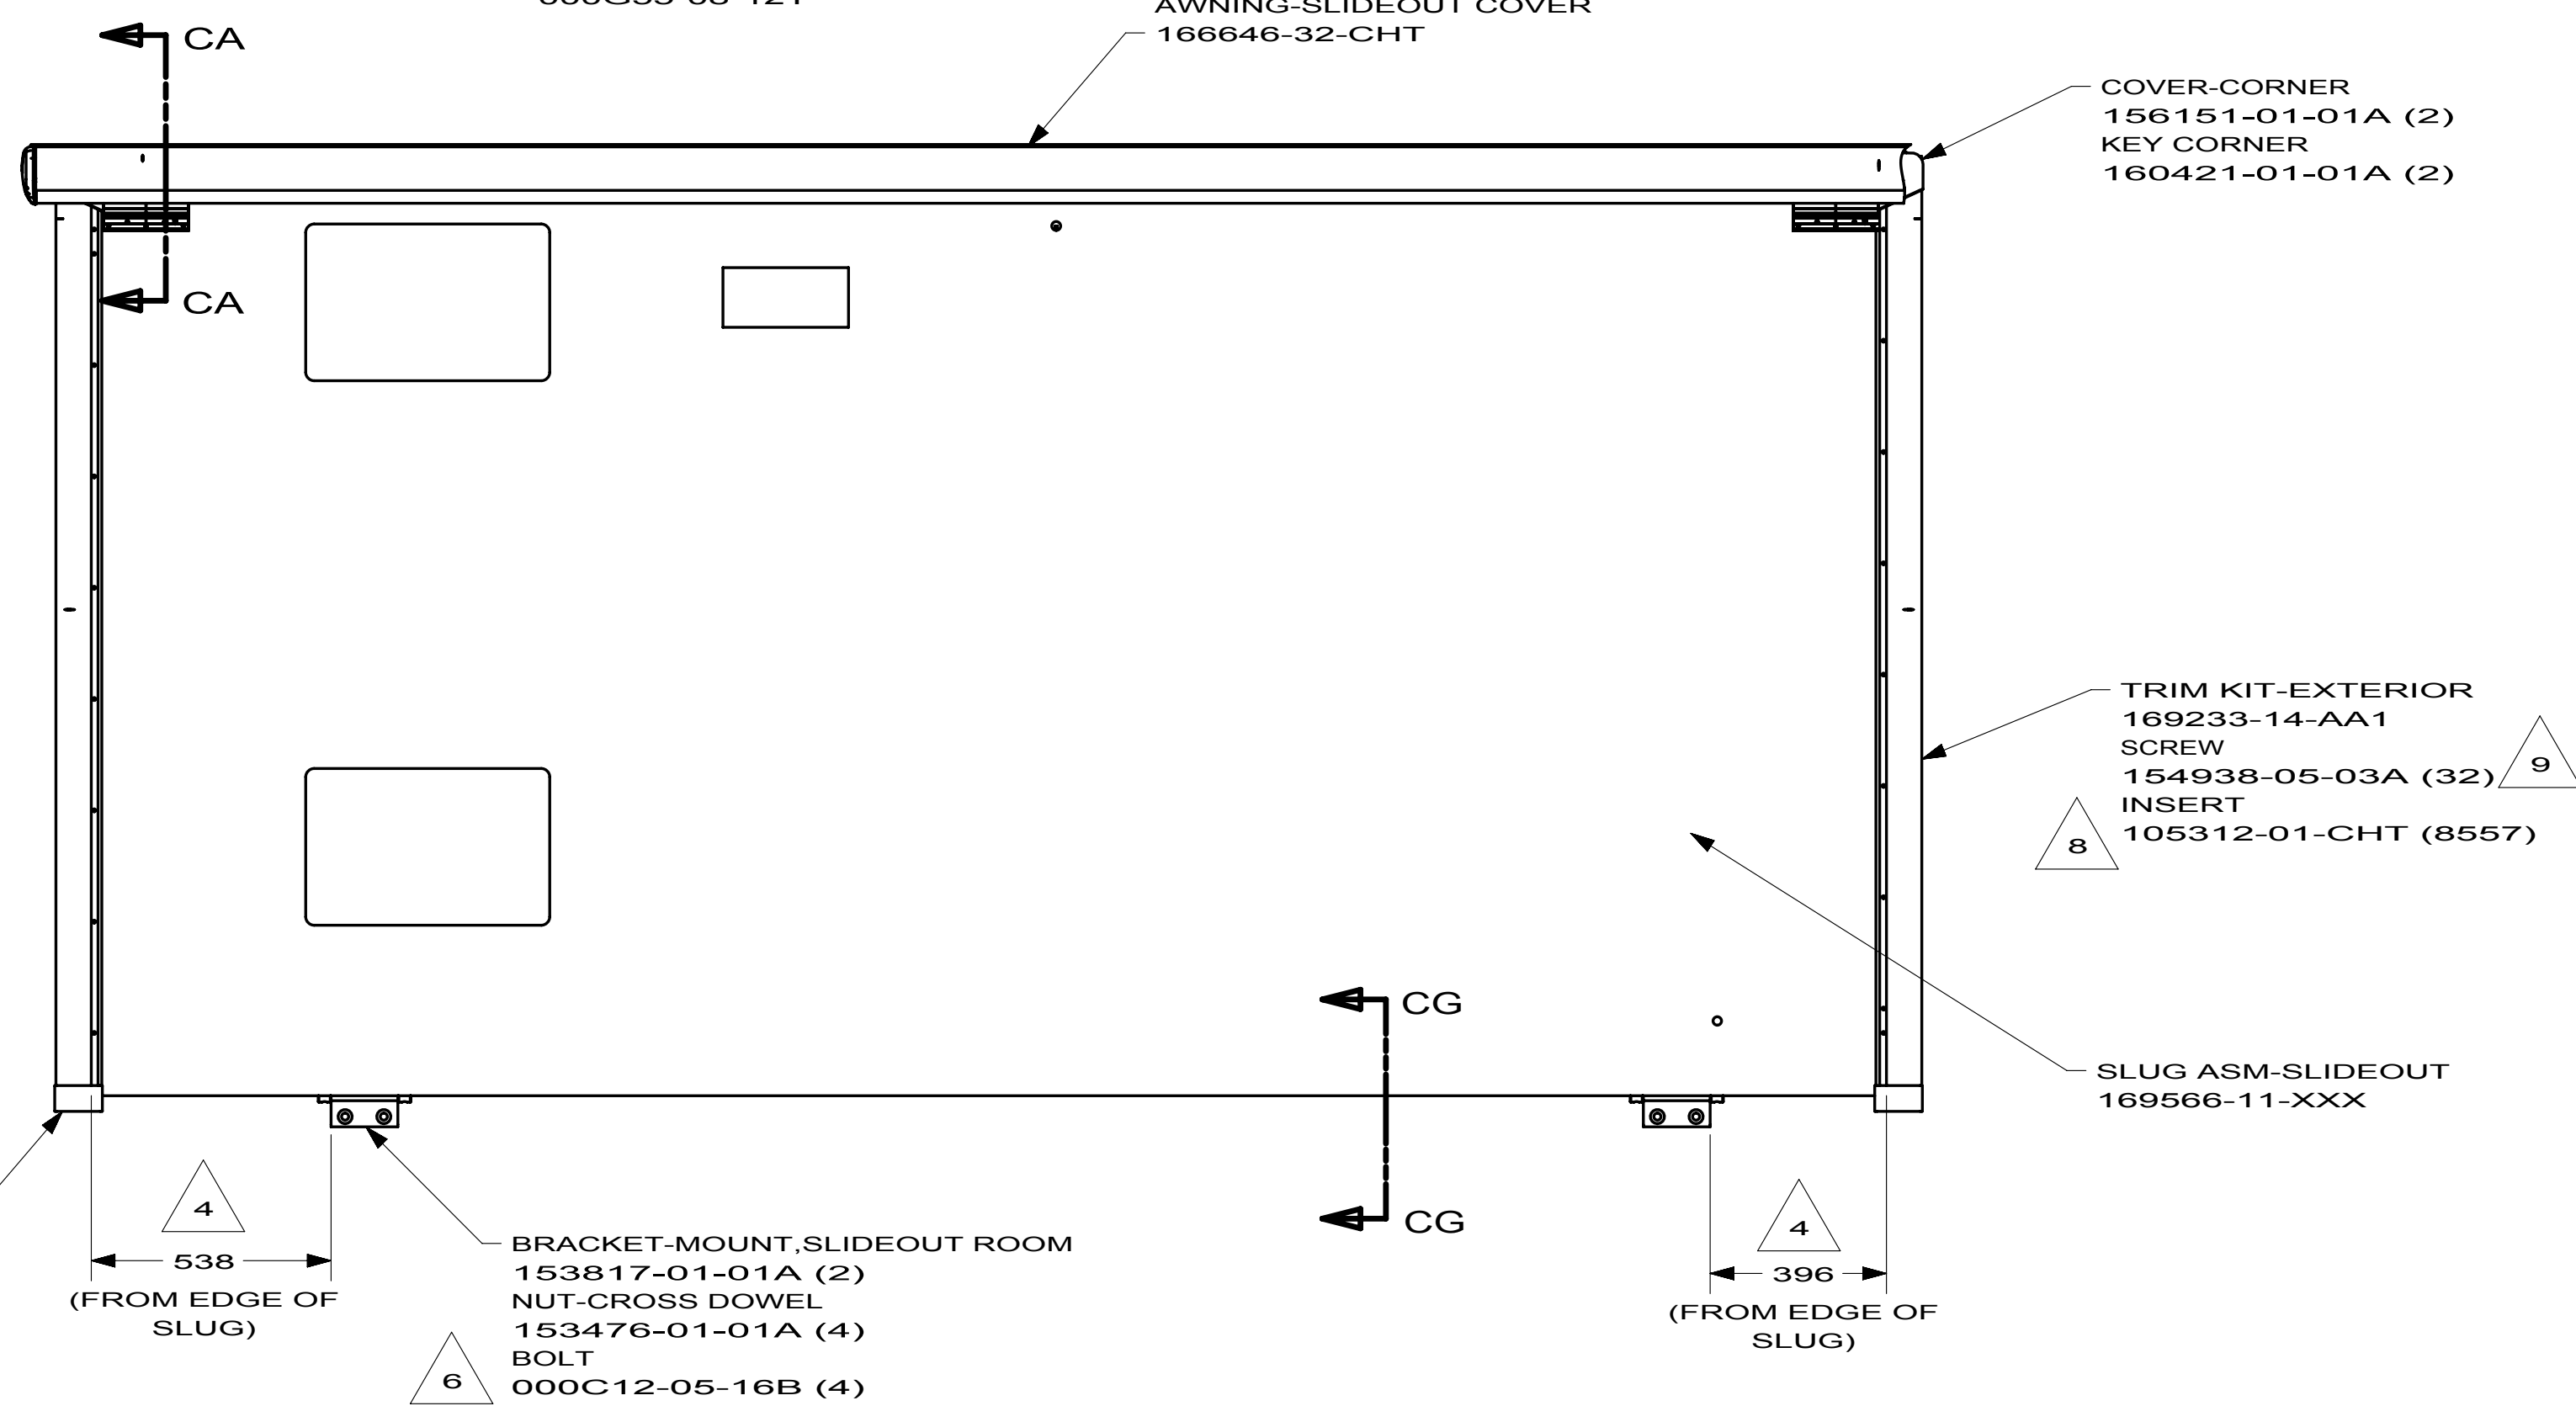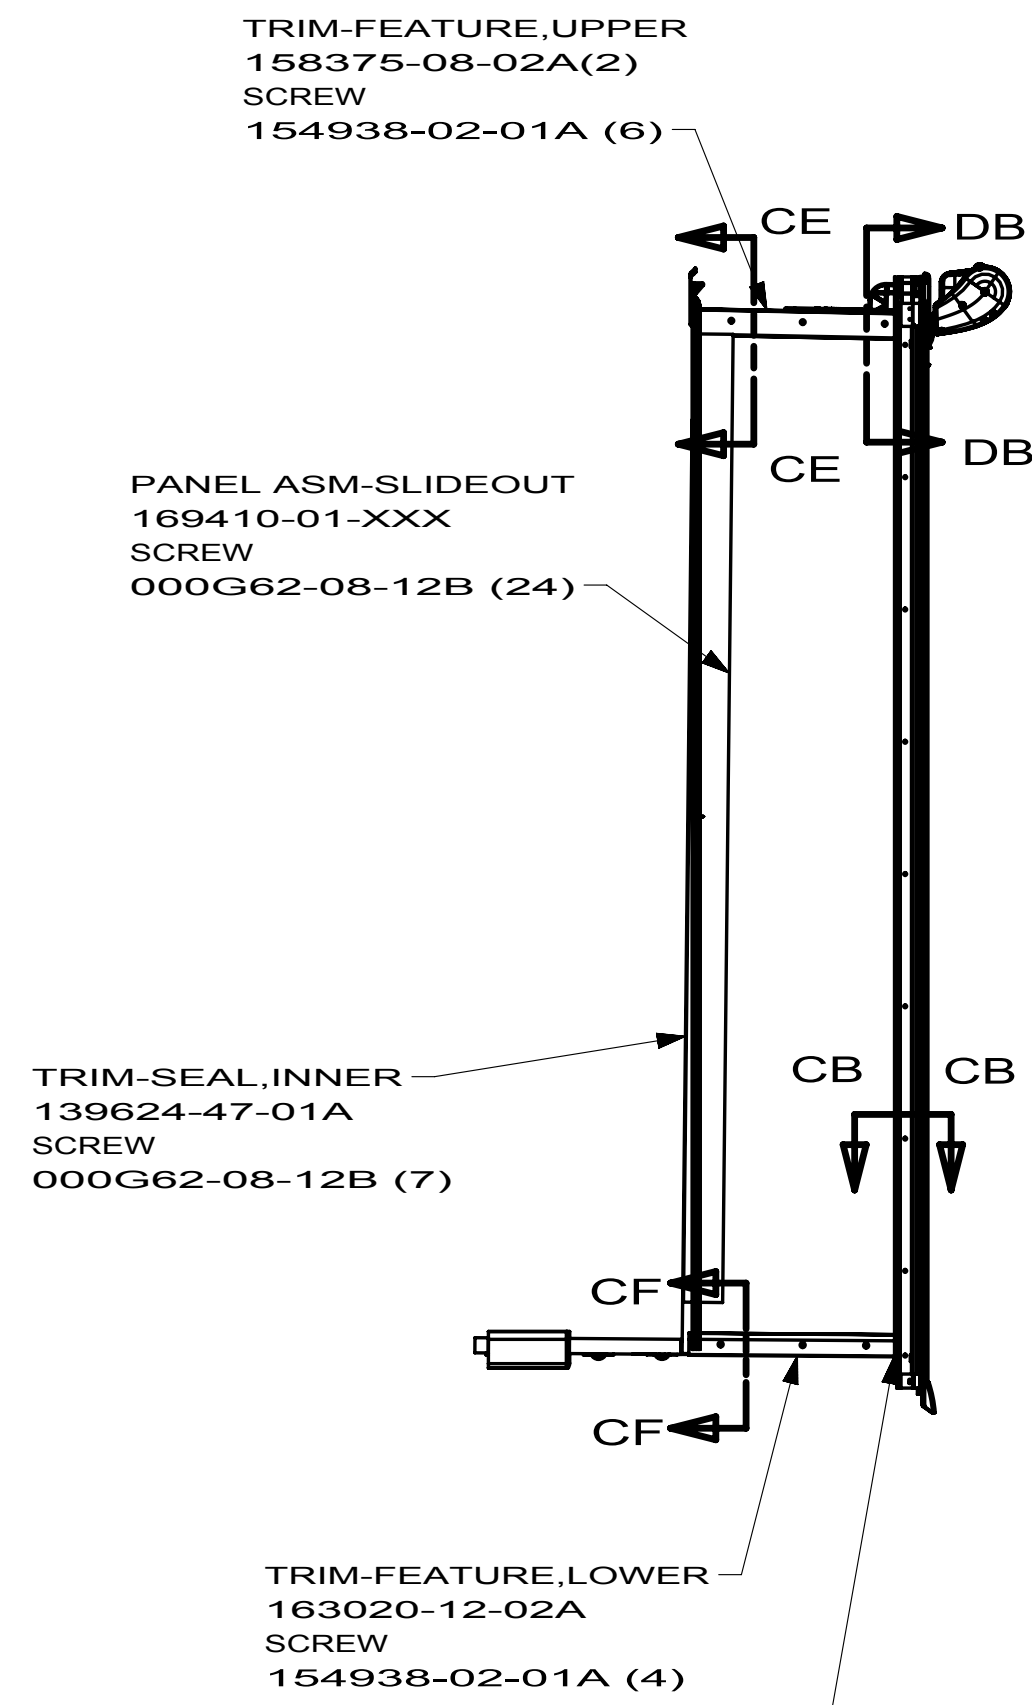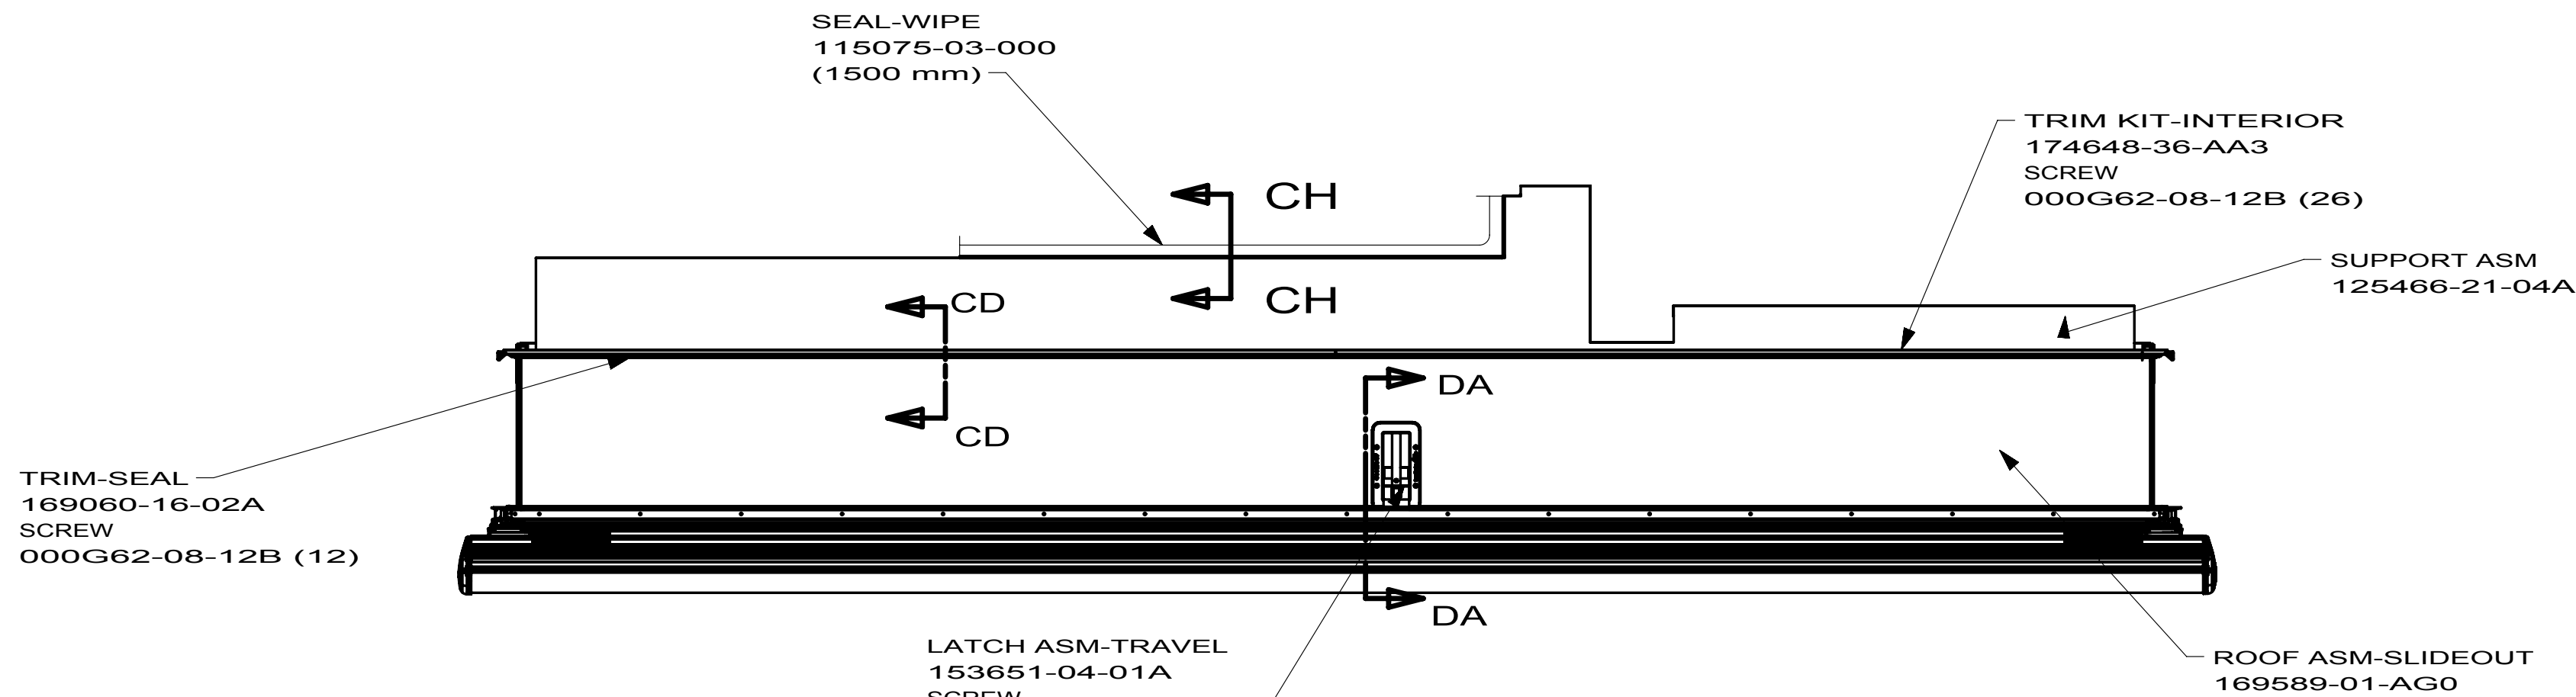


ROOM ASM-SLIDEOUT
169548-11-XXX

- 1LQ FRTL 32,350 400HP 8.9L 6 SPD
1LU FRTL 34,320 400HP 8.9L 6 SPD
93A EXTERIOR PAINT-CDI


FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 2	PART NO 169548	REV

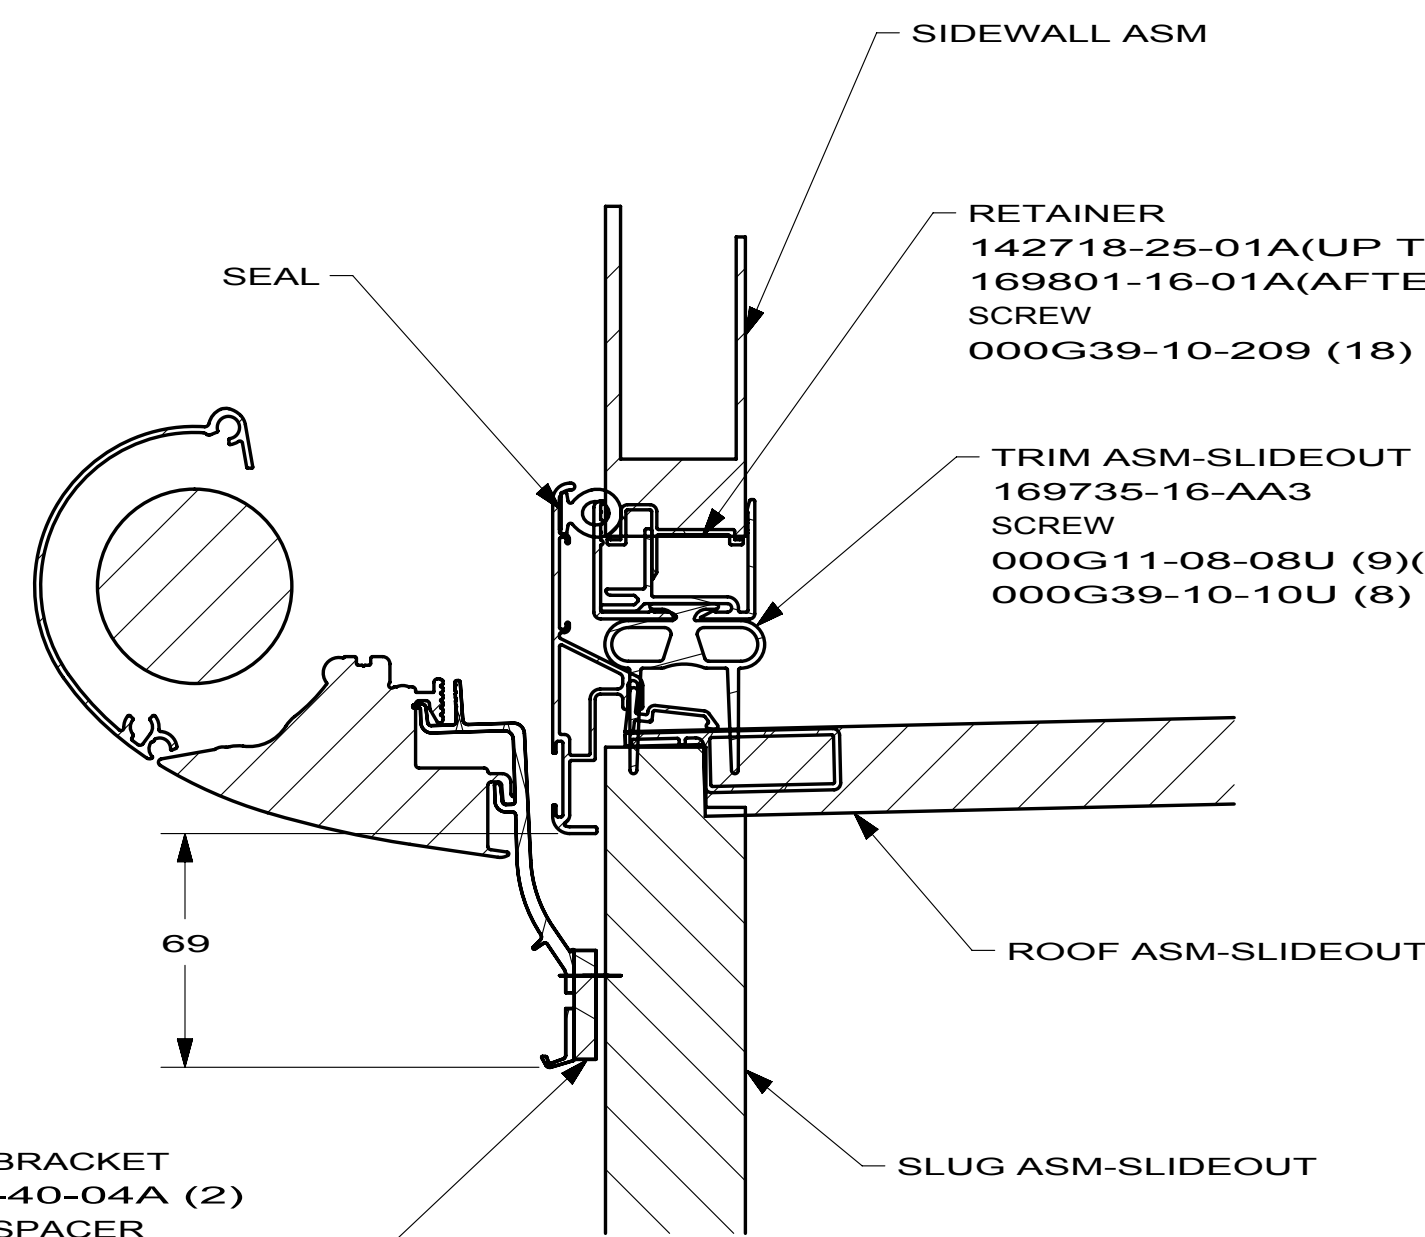


SECTION CA-CA

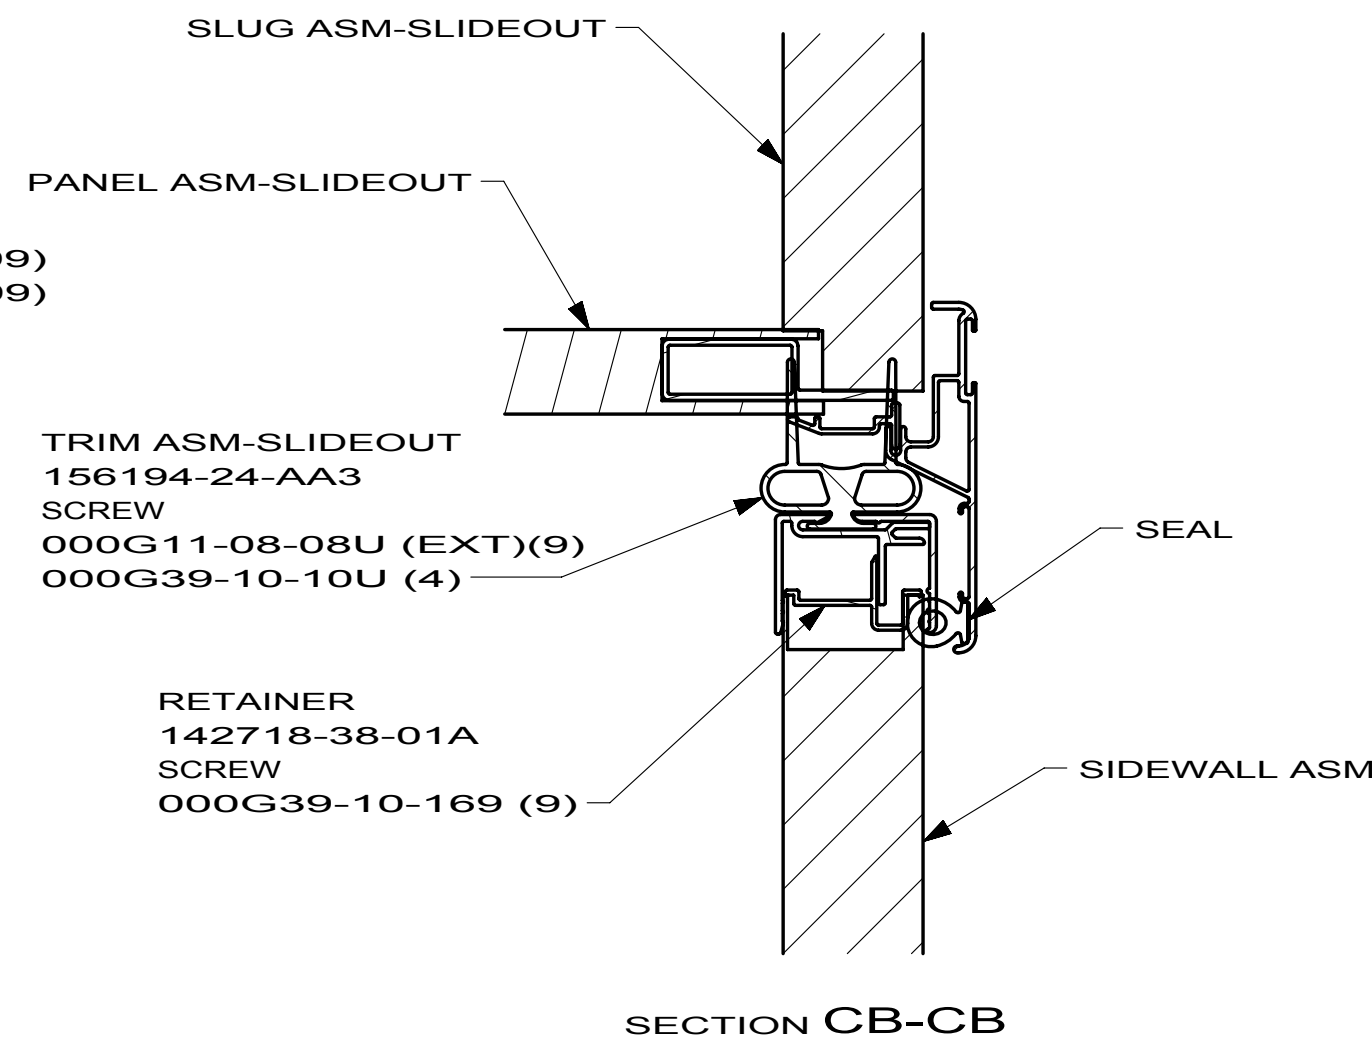

SECTION CB-CB

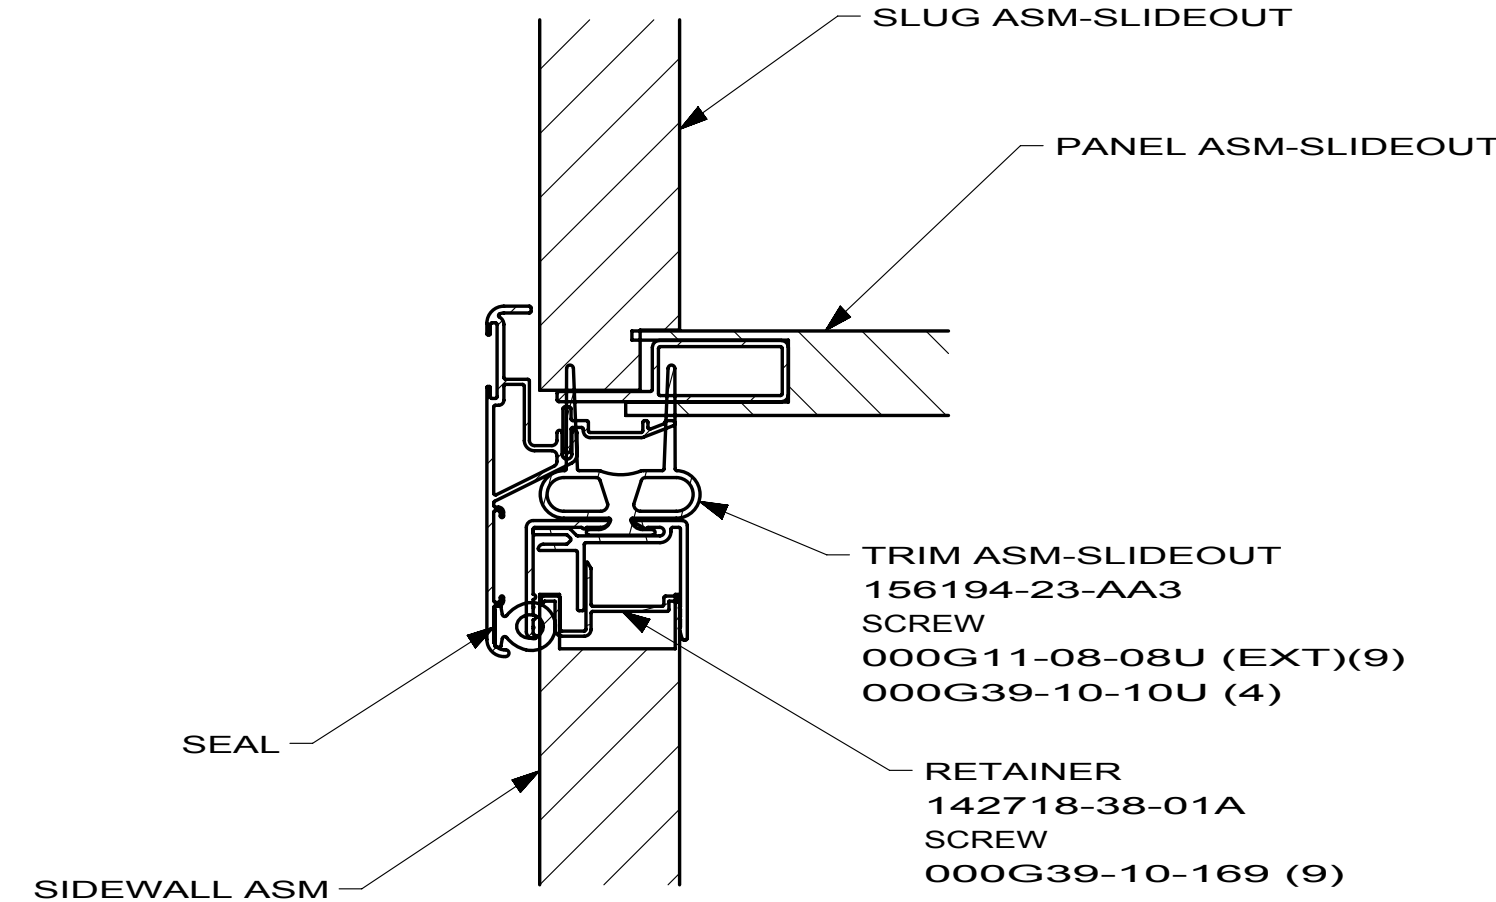


SECTION CC-CC

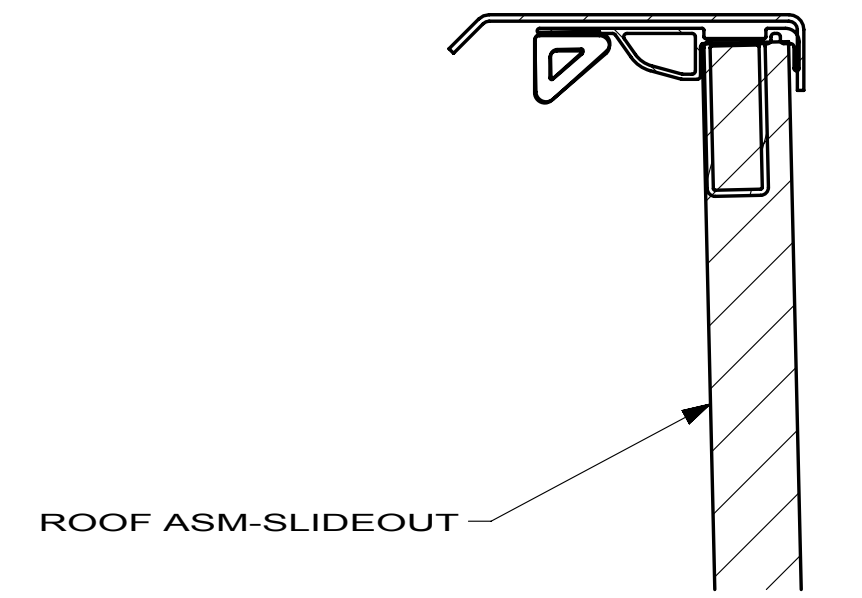


SECTION CD-CD


AWNING BRACKET
166646-40-04A (2)
AWNING SPACER
166646-41-04A (2)
SCREW
000G39-10-24T (10)

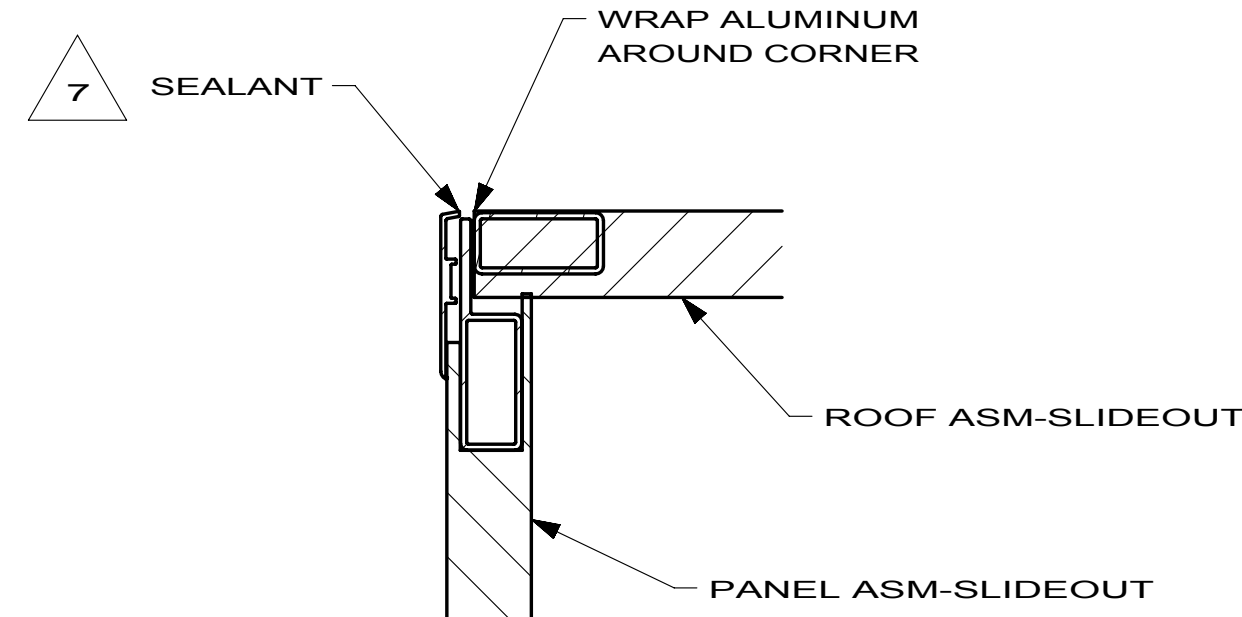


SECTION CE-CE

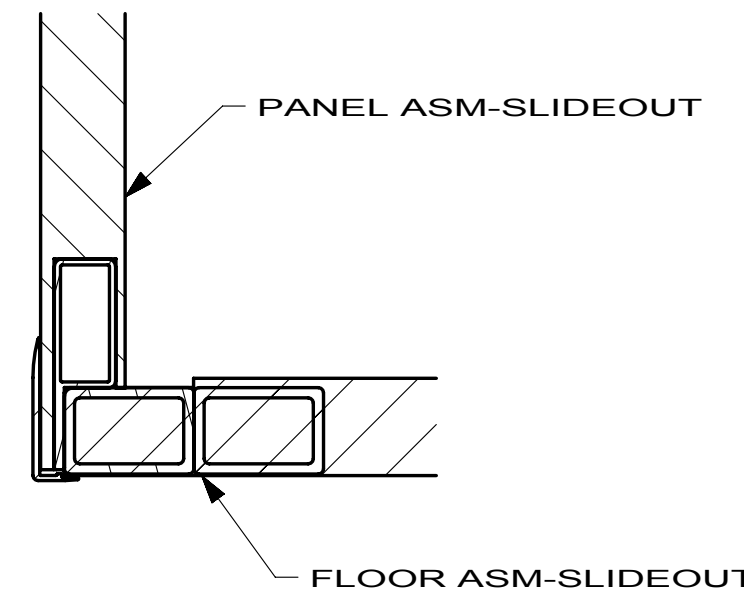


SECTION CF-CF

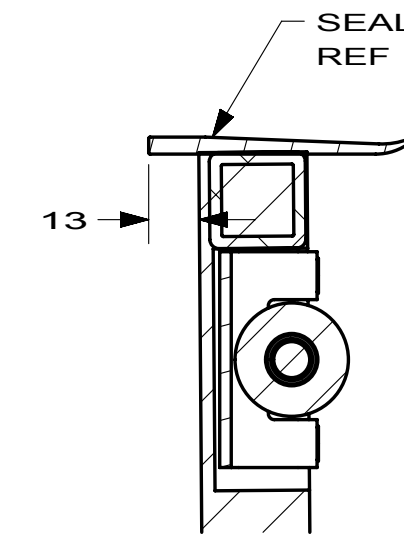

SECTION CH-CH

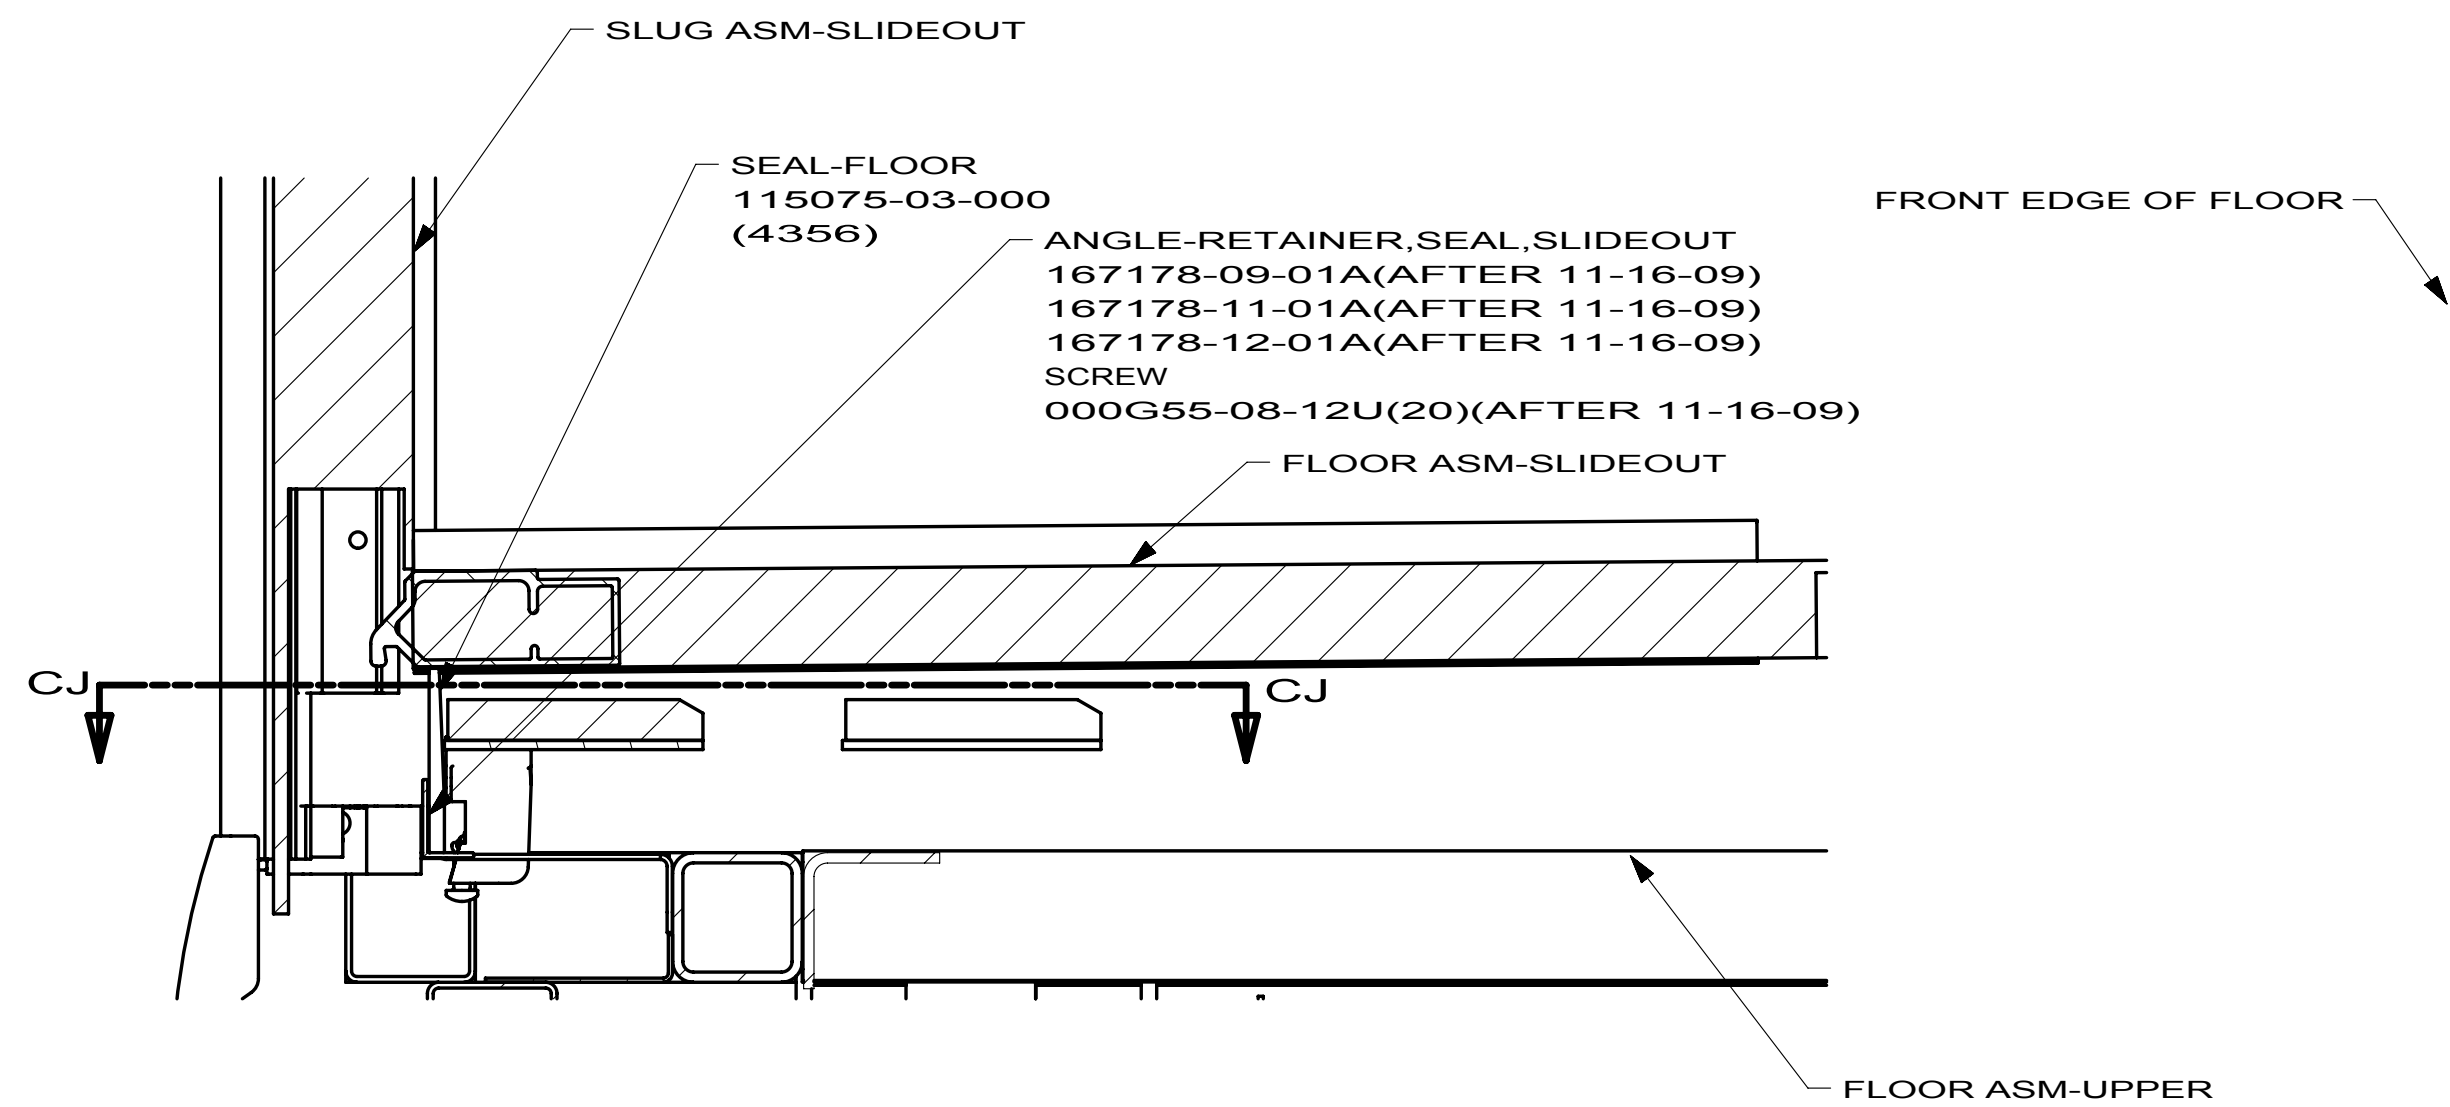

SECTION CG-CG

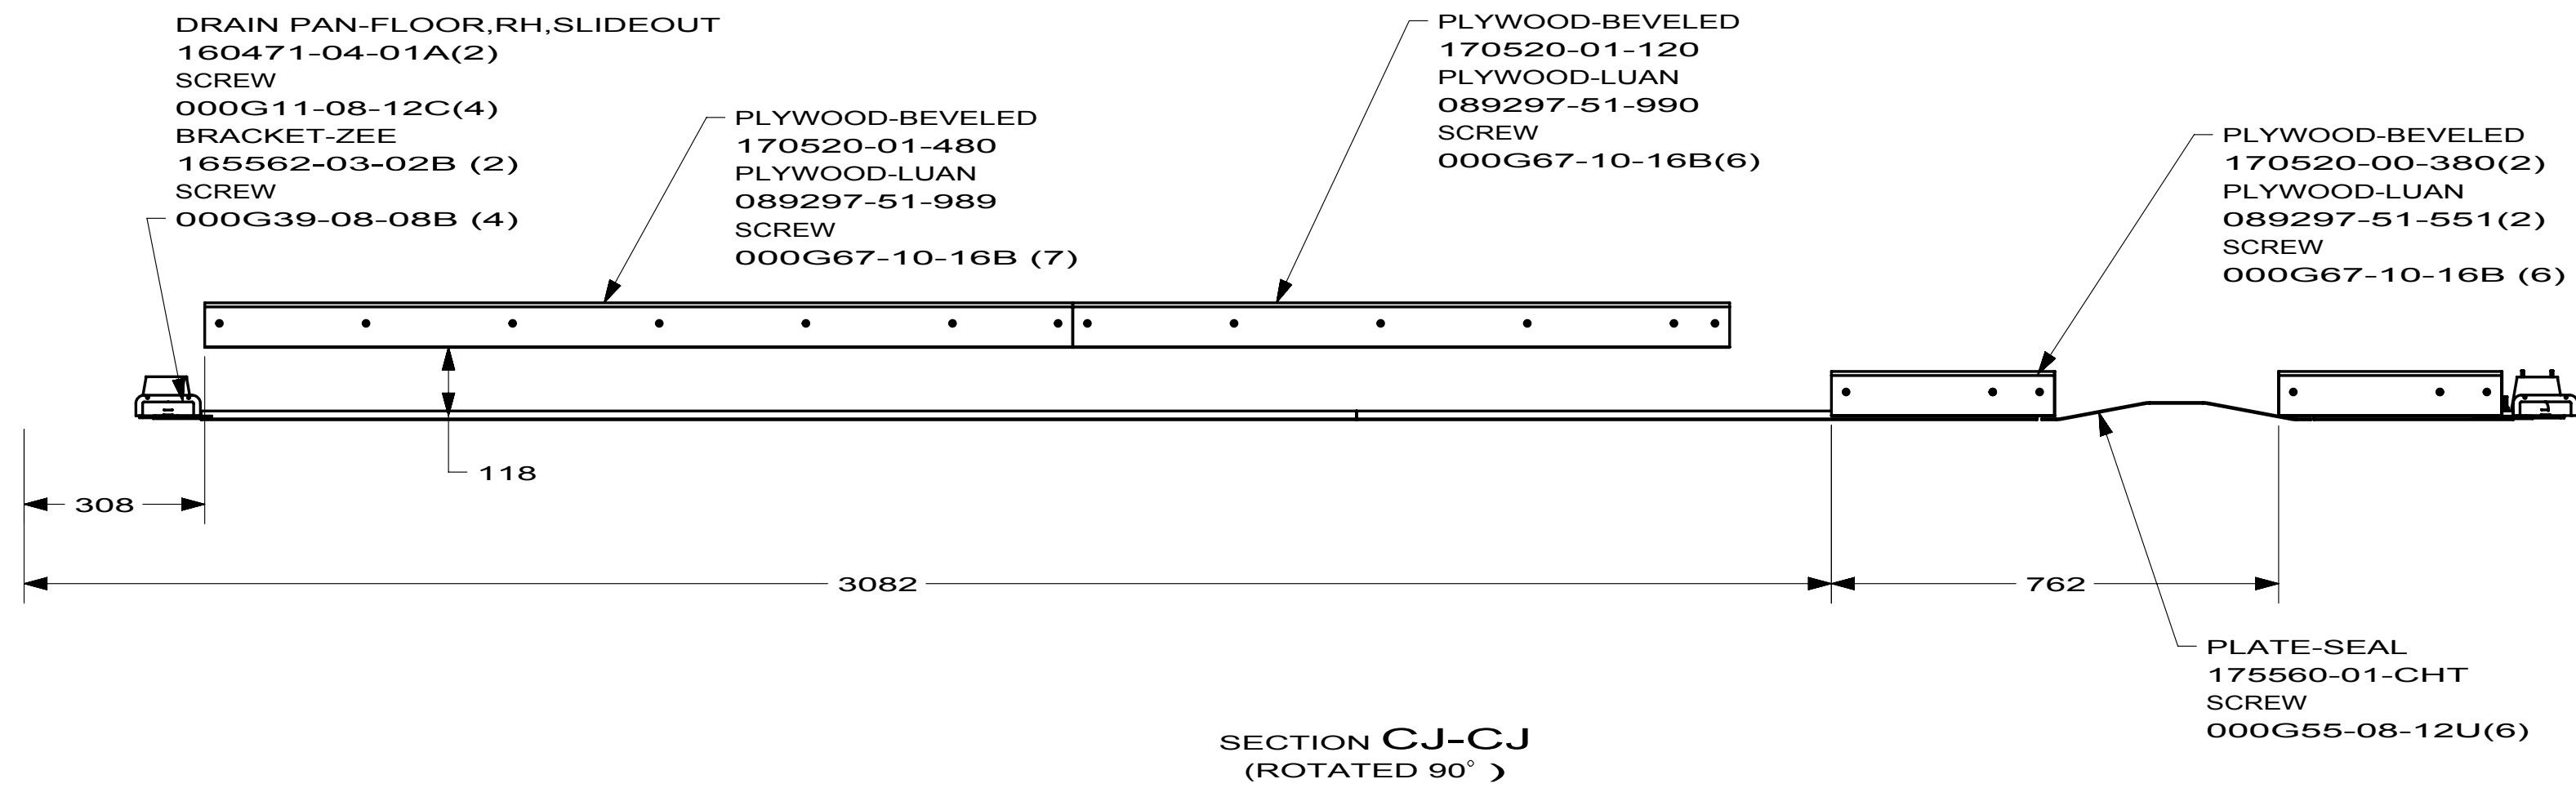

SECTION CJ-CJ
(ROTATED 90°)

FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 3	PART NO 169548	REV

TUBE-DRAIN
155202-01-TKO
WIRE TIE
008543-01-000
NUT SPEED FLAT
044364-02-000
(APPLY SEALANT AROUND
SIDEWALL OPENING
INSTALL TUBE WITH
EXTERIOR HOLE FACING
DOWN.)

ROOF ASM-SLIDEOUT

SLUG ASM-SLIDEOUT

SECTION DA-DA

AWNING

TAPE-UHMW
156015-01-01A


TRIM ASM-SIDEWALL

2192




SECTION DB-DB

ROOF ASM-SLIDEOUT


FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 4	PART NO 169548	REV

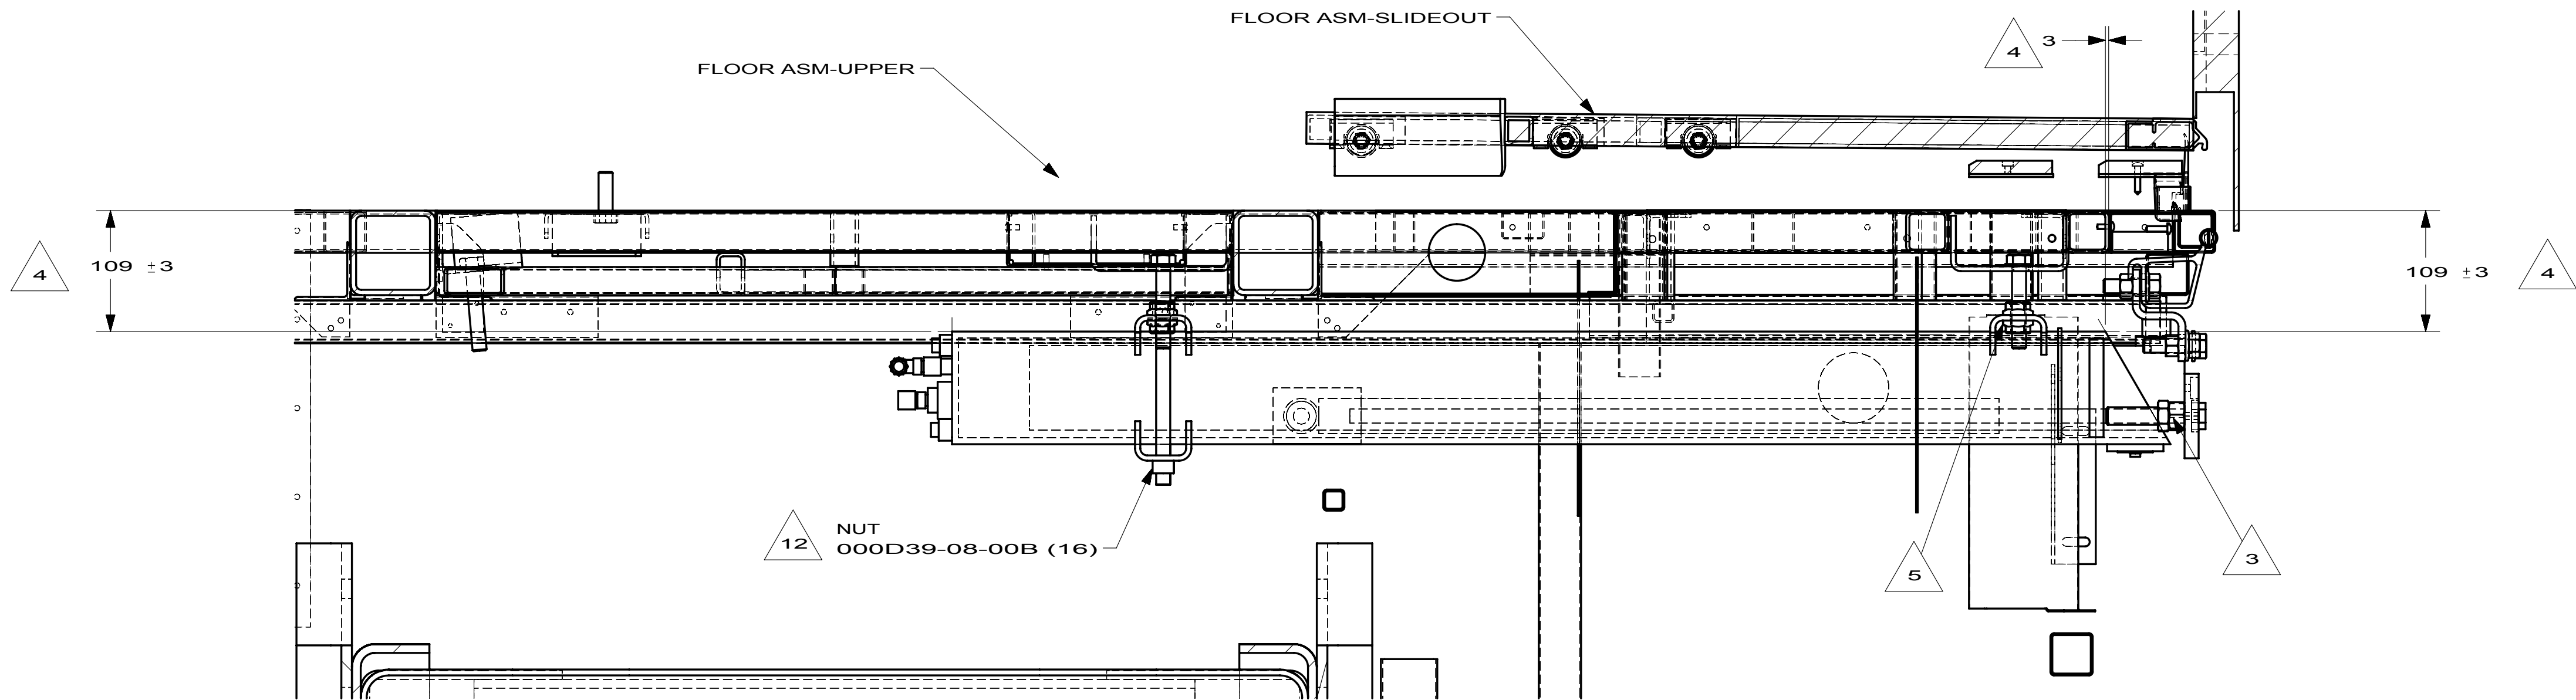


SECTION EA-EA

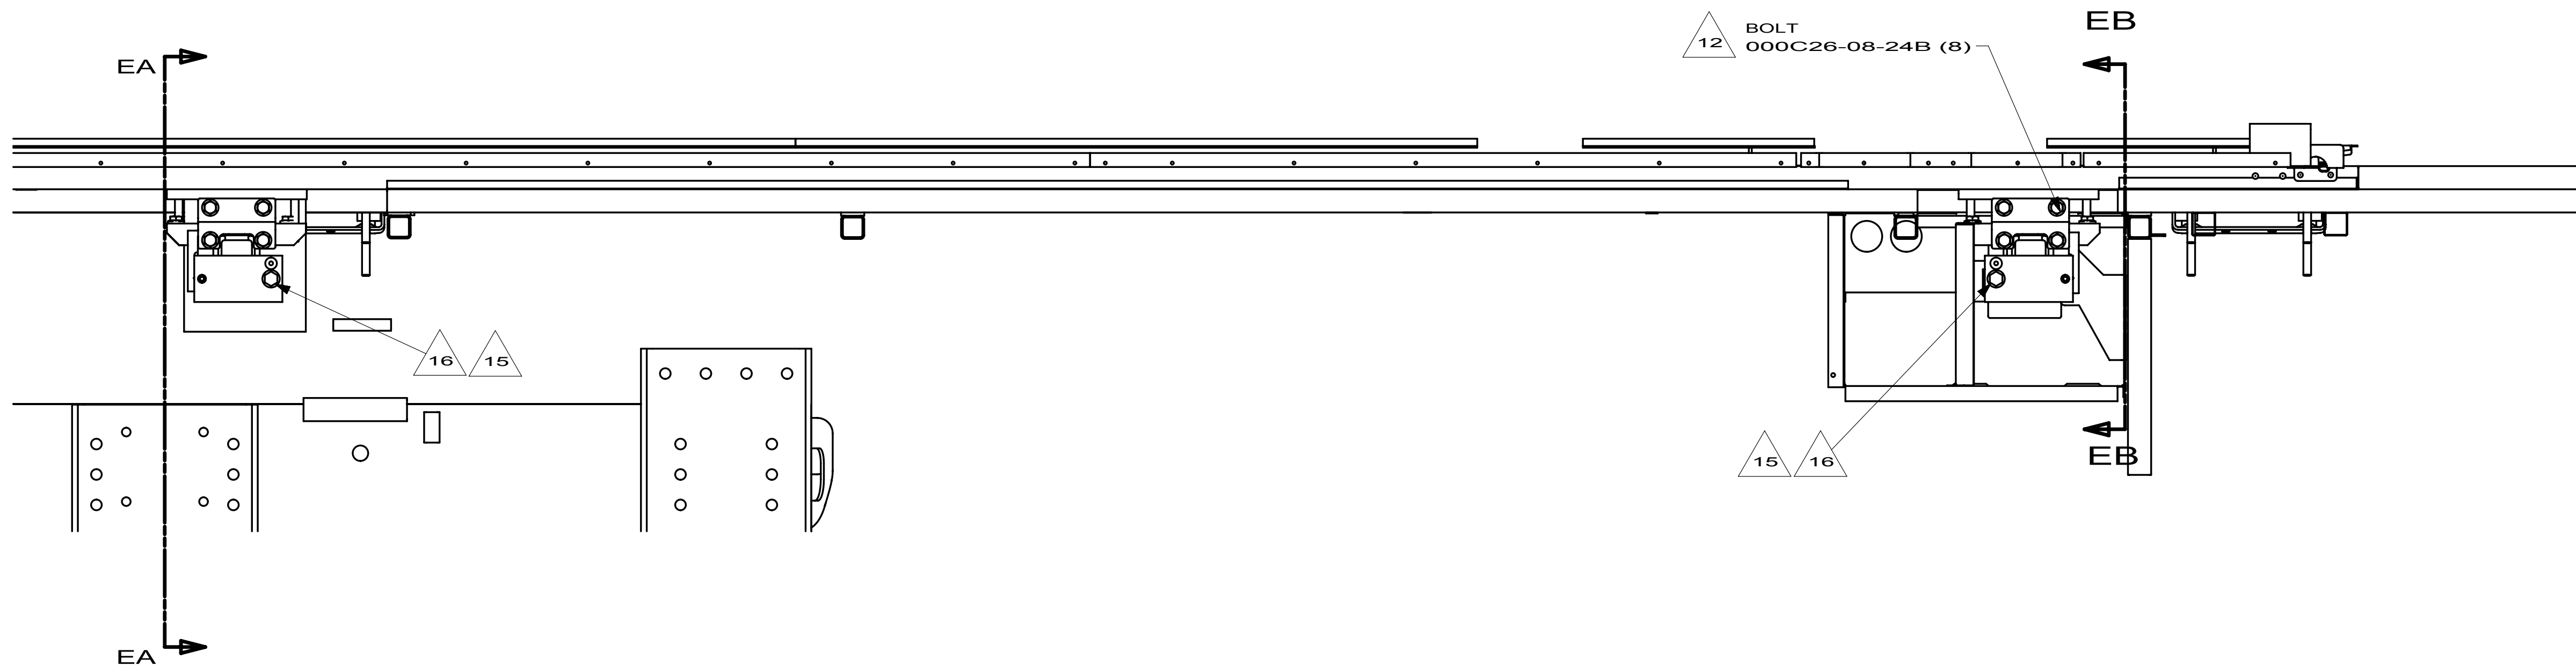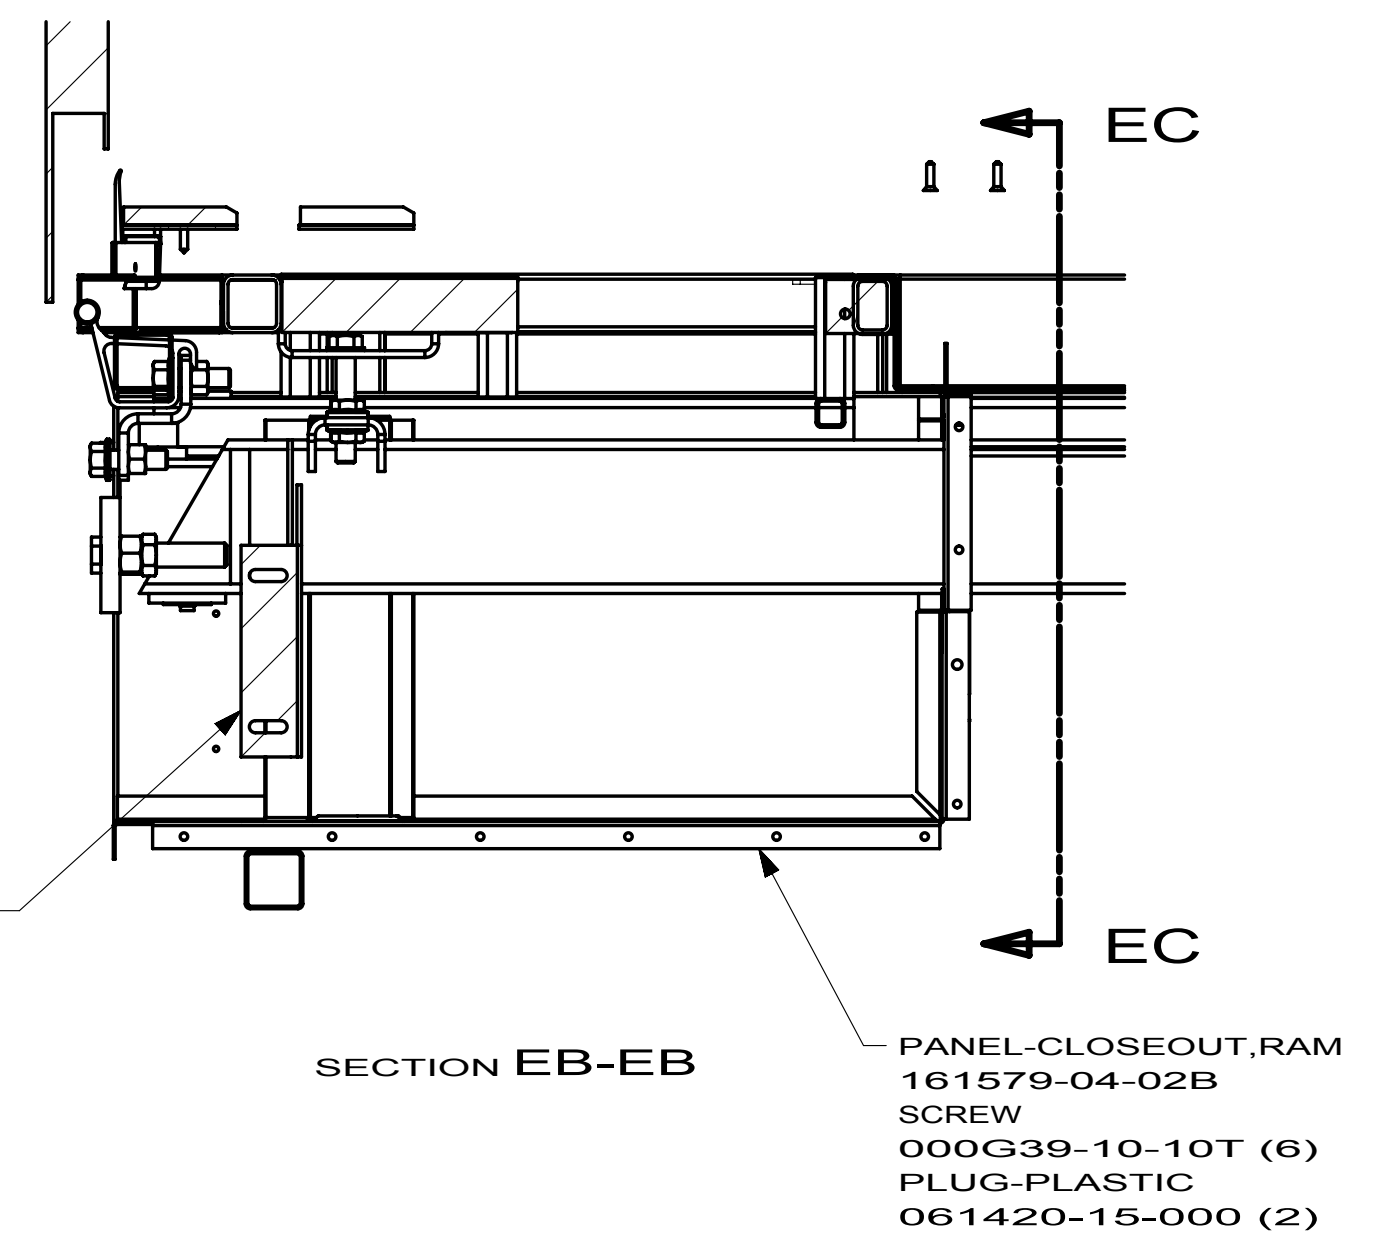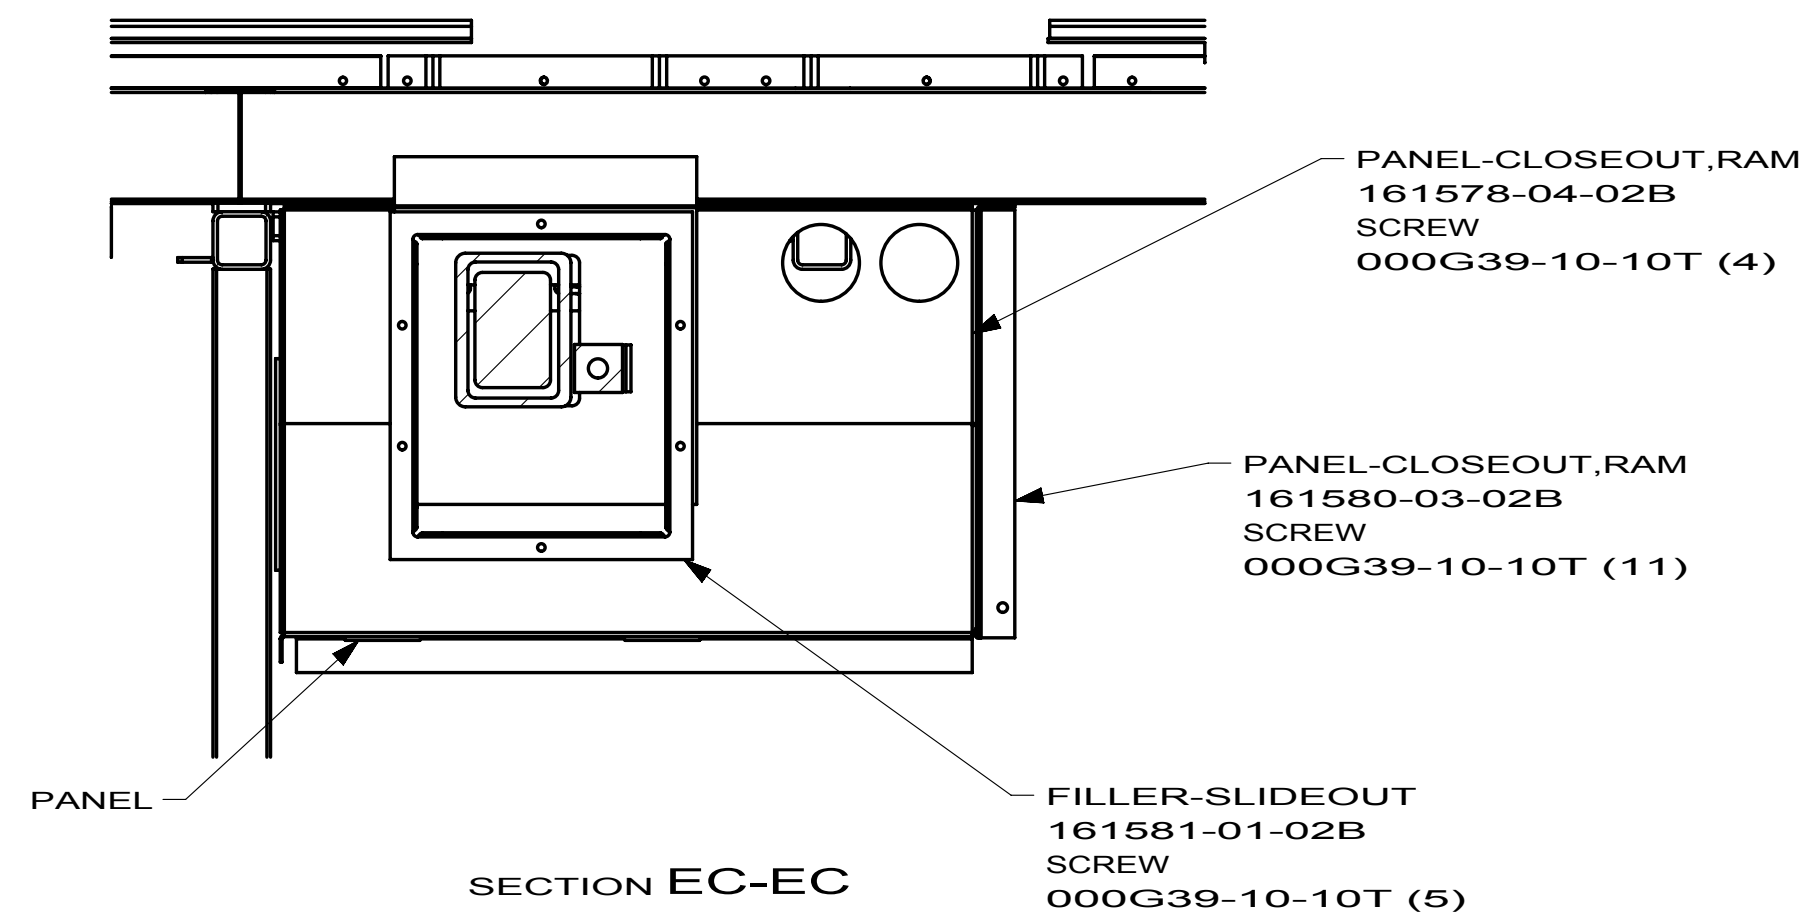

FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FRT,LH		
SHEET 5	PART NO 169548	REV

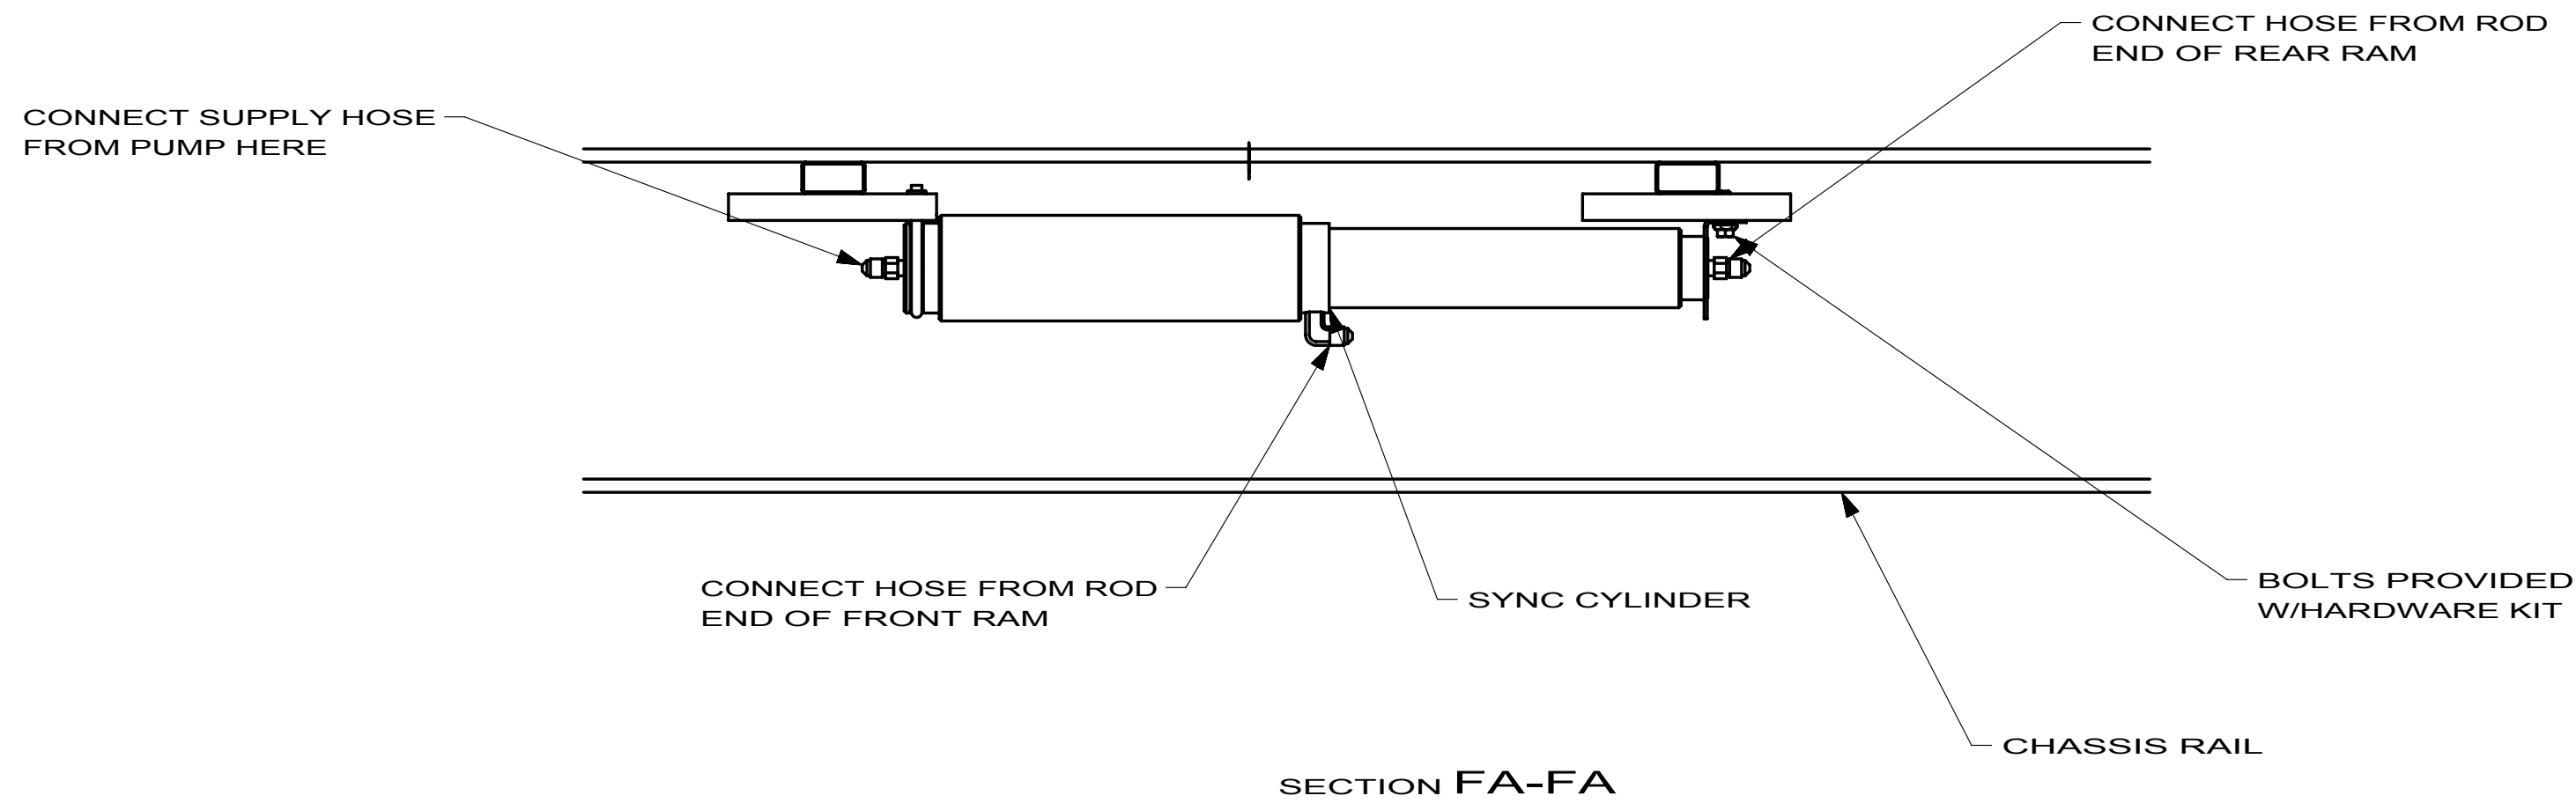

CARRIER-CABLE
01ACHT
SCREW
000G39-10-12T (4)
BOLT
000G18-10-08B (2)
NUT
000D10-10-00B (2)
SUPPORT ASM-WIRE
141019-08-02B
BRACKET-WIRE CARRIER
166484-03-02B
BOLT
000C26-06-12B
NUT
000D39-06-00B
RIVET
113133-01-01A(4)
SCREW
000G39-10-12T(4)
NUT
000D14-08-00U(2)

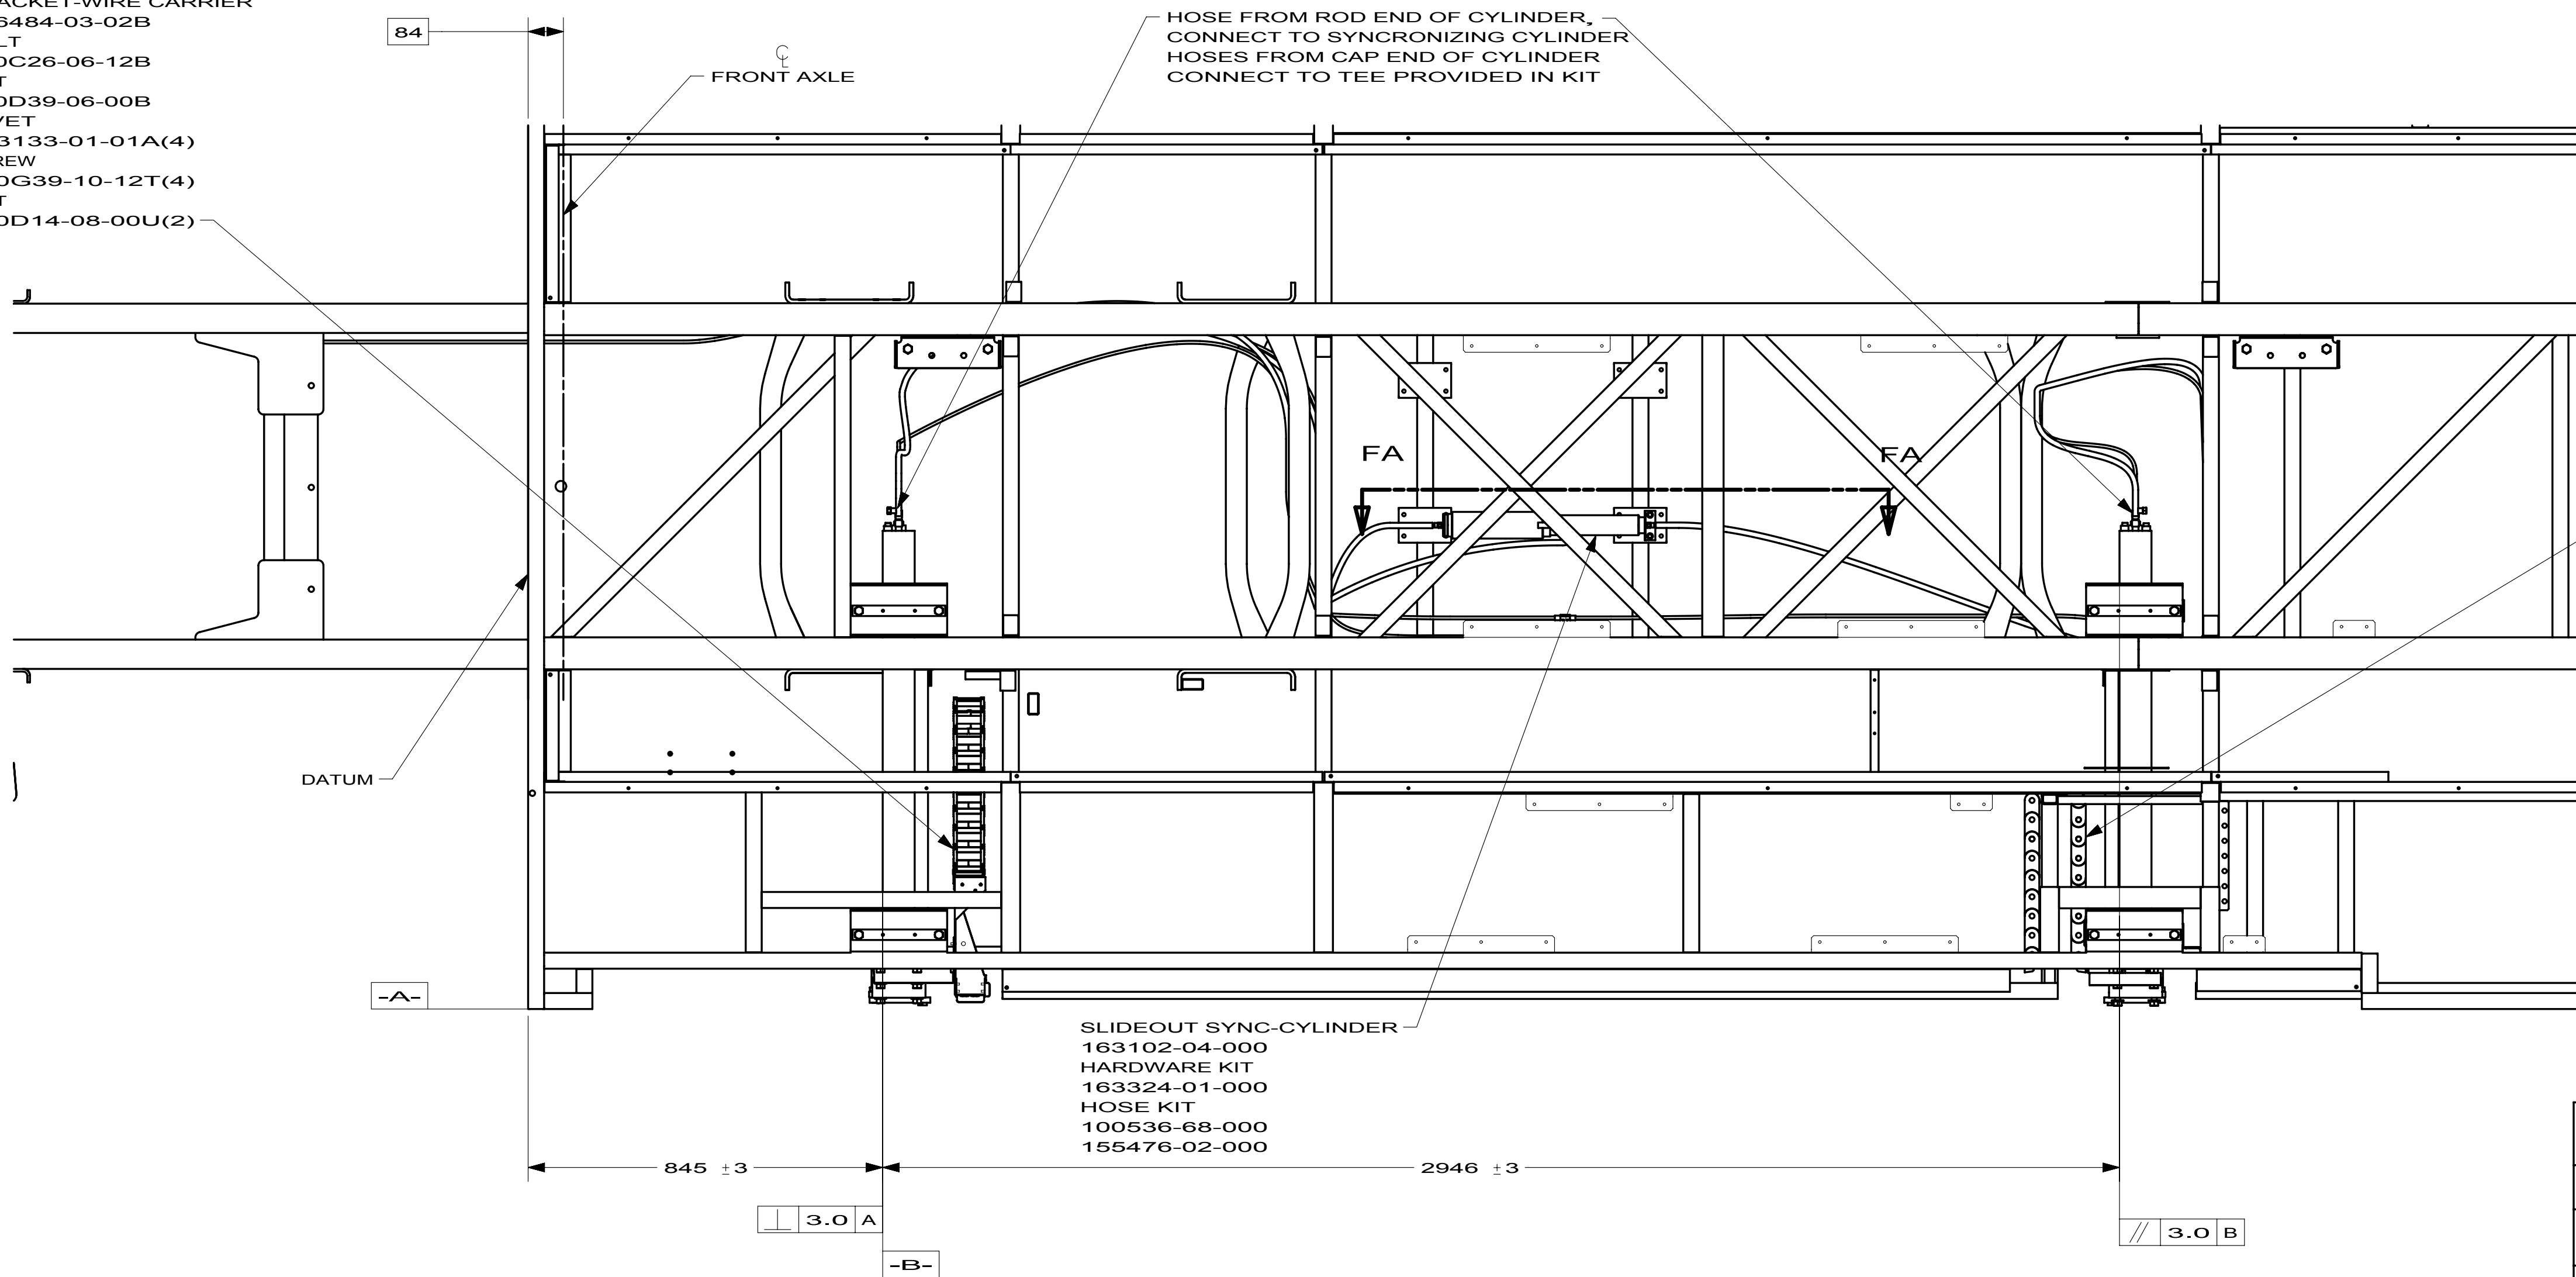

CARRIER-CABLE
143541-02-01A
BRACKET-WIRE CARRIER
166484-02-02B
BRACKET-RAM, GUARD
163490-04-02B
SCREW
G00039-10-12T (4)
NUT
000D14-08-00U(2)

FIRST USED			10 R40BD
DO NOT SCALE DRAWING			
TITLE:			SLIDEOUT COMPL-FRT,LH
SHEET 6	PART NO	169548	REV

DWG NO

169549-01

169549-02

094

19. TRIM PLASTIC CORNERS SO THAT THEY ARE HIDDEN UNDER CARPET

18. SCREW BULB SEAL TO BOTTOM OF FLOOR ASM-UPPER THRU REAR LEG OF SEAL.

17. LOCATE FOAM OVER DRAIN HOLES IN EXTRUSION.

16. THE VALVES ON THE HYDRAULIC PUMP MUST BE OPEN TO MANUALLY RETRACT ROOM.

15. FOR MANUAL RETRACT REMOVE SET SCREW AND TURN ROD WITH WRENCH 143738-01-000 CLOCKWISE ON EACH ARM EVENLY UNTIL ROOM IS FULLY RETRACTED. ROD MUST BE FULLY UNSCREWED TO ALLOW ROOM TO OPERATE. WRENCH IS LOCATED IN THE INFO CASE.

14. CLAMP OR WIRE TIE ALL HOSEES AT 900mm INTERVALS MAX. & WHERE NECESSARY TO PREVENT HOSES FROM CONTACTING MOVING PARTS OR HEAT PRODUCING ITEMS.

13. ALL HOSES MUST HAVE A 50mm MIN. RADIUS TO AVOID KINKS OR FLOW RESTRICTIONS. COVER ALL HOSES FULL LENGTH BELOW COACH FLOOR WITH CONDUIT 41953-09-000

12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED. (SEE TABLE BELOW)

SIZE	TORQUE VALUE (FT-LBS)
1/4 - 20 (.250)	8 (FT-LBS)
5/16 - 18 (.3125)	17 (FT-LBS)
3/8 - 16 (.375)	31 (FT-LBS)
7/16 - 14 (.4375)	50 (FT-LBS)
1/2 - 13 (.500)	76 (FT-LBS)

11. USE POLY-CLEAR 47034-07-000 AND ATTACH IT USING WASHER 44533-01-000 TO PROTECT THE SLIDEOUT FLOOR.

10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST INNER TRIM.

9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW TO INSURE THE THREADS SEAL.

8. USE SCREW G39-08-08S TO HOLD EACH END OF TRIM.

7. SEE SEALANT MANUAL..

6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

5. LOOSEN JAM NUTS AND ADJSUT BOLT TO MOVE ROOM UP OR DOWN TO BE CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.

4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED AS REQUIRED FROM THERE.

3. THE RETRACTED LENGTH IS ADJUSTED BY THREADING THE STOP BOLT IN OR OUT UNTIL THE OUTSIDE WALL OF THE ROOM SEALS AGAINST THE SIDEWALL.

2. THE EXTENDED LENGTH IS ADJUSTED BY TURNING THE LOCK NUTS ON THE PISTON RODS IN OR OUT UNTIL THE SLIDEOUT ROOM SEALS AGAINST THE SIDEWALL.

1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:

ROOM ASM-SLIDEOUT
169549-11-XXX
169549-12-XXX

094

COVER ASM
138077-14-CHT
TAPE-FOAM
076322-22-000
TAPE-DOUBLE SIDED
123816-03-000
COVER-RAM
138077-05-CHT
BRACKET MOUNT COVER
161304-01-CHT
PLATE ASM
136995-08-CHT (2)
SCREW
000G39-10-08T(6)
WASHER
000E13-13-00B(4)
NUT
000D34-04-00B(4)

SEAT BELT INSTL
159417-49-XXX

14W

COVER ASM
138077-24-CHT
TAPE-FOAM
076322-22-000
TAPE-DOUBLE SIDED
123816-03-000
BRACKET MOUNT COVER
161304-01-CHT
PLATE ASM
136995-08-CHT (2)
SCREW
000G39-10-08T(6)
WASHER
000E13-13-00B(4)
NUT
000D34-04-00B(4)

SEAT BELT INSTL
159417-23-XXX

BRACKET ASM-MOUNT
152741-04-CHT (2)

SLIDEOUT HYDRAULIC
161743-02-000

SLIDEOUT HYDRAULIC
161743-02-000

094 WINDOW-SE-GI

14W DINETTE

WINNEBAGO INDUSTRIES

COPYRIGHT 2010
WINNEBAGO INDUSTRIES, INC.

UNSPECIFIED TOLERANCES ARE:
WHOLE DIM (X) : 3
ONE-PLACE (X.X) :
TWO-PLACE (X.XX) :
ANGLE :
THIRD ANGLE
PROJECTION

MATERIAL:

10 R40BD

DO NOT SCALE DRAWING

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

TITLE:
SLIDEOUT COMPL-FT,RH

SHEET 1 OF 4


REF: 1

PART NO 169549

REV

NOTICE
CHANGES TO THIS SHEET
MAY AFFECT OTHERS













2/20/2010

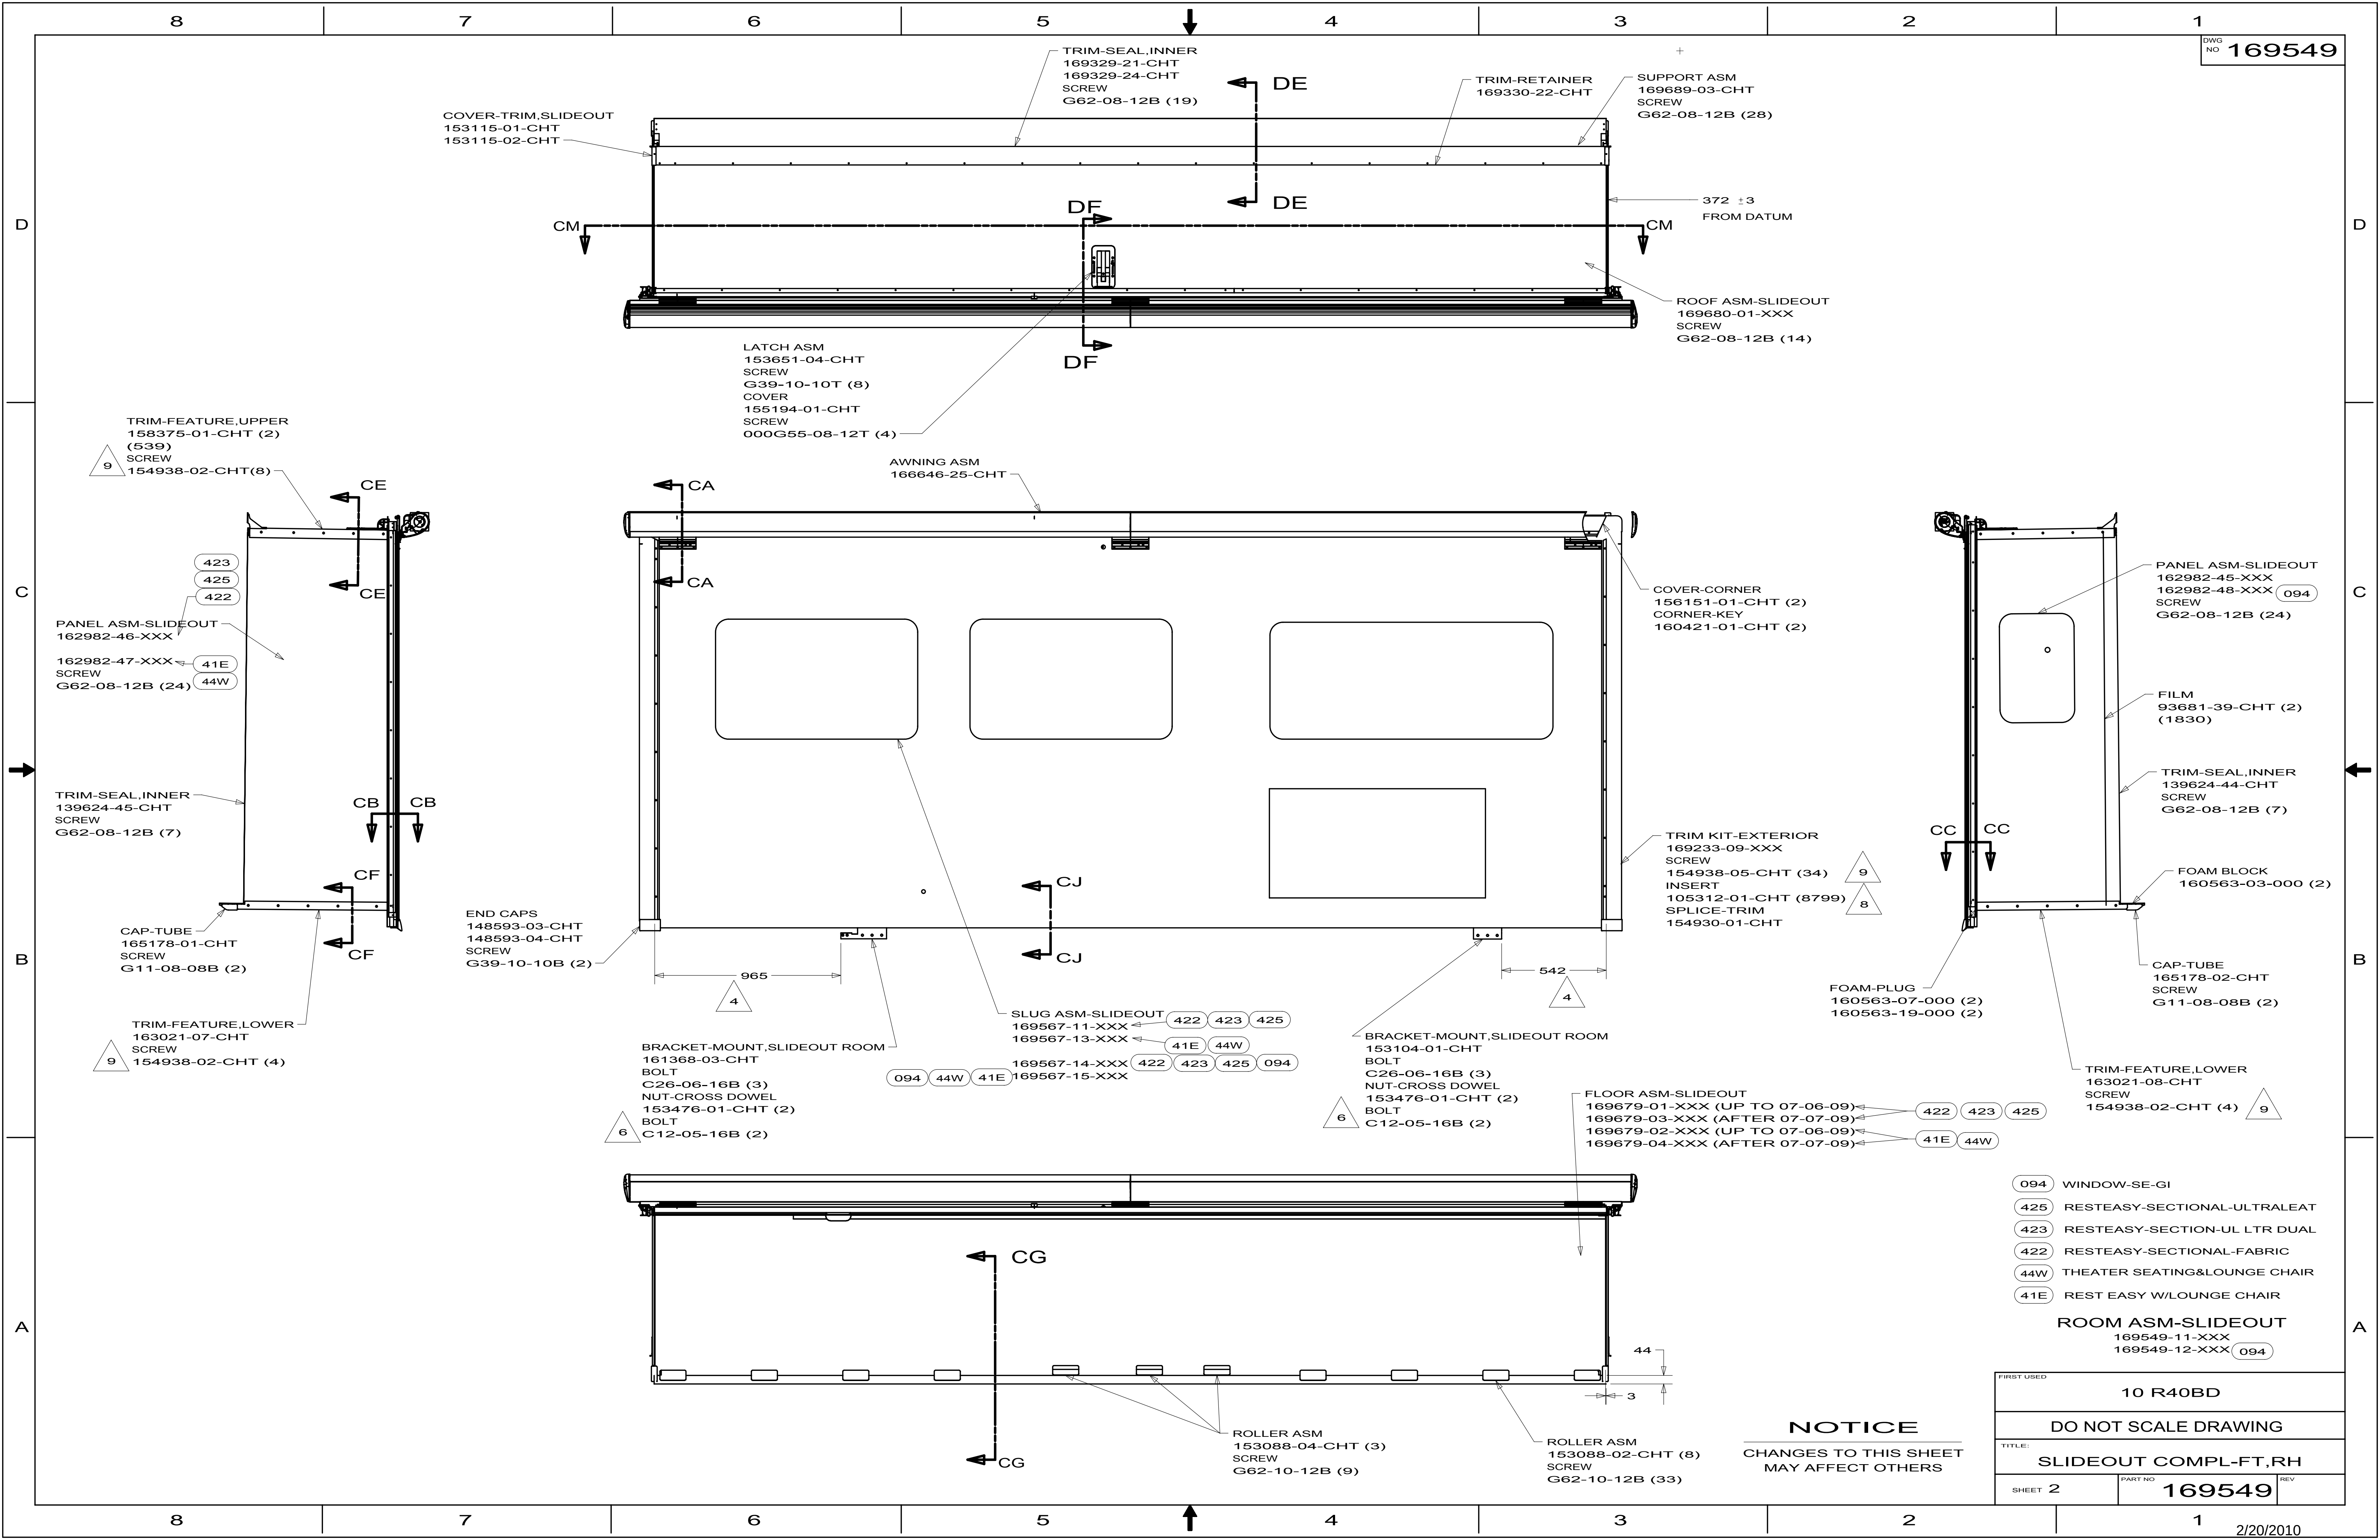


NOTICE

CHANGES TO THIS SHEET
MAY AFFECT OTHERS


FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-FT,RH		
SHEET 2	PART NO 169549	REV

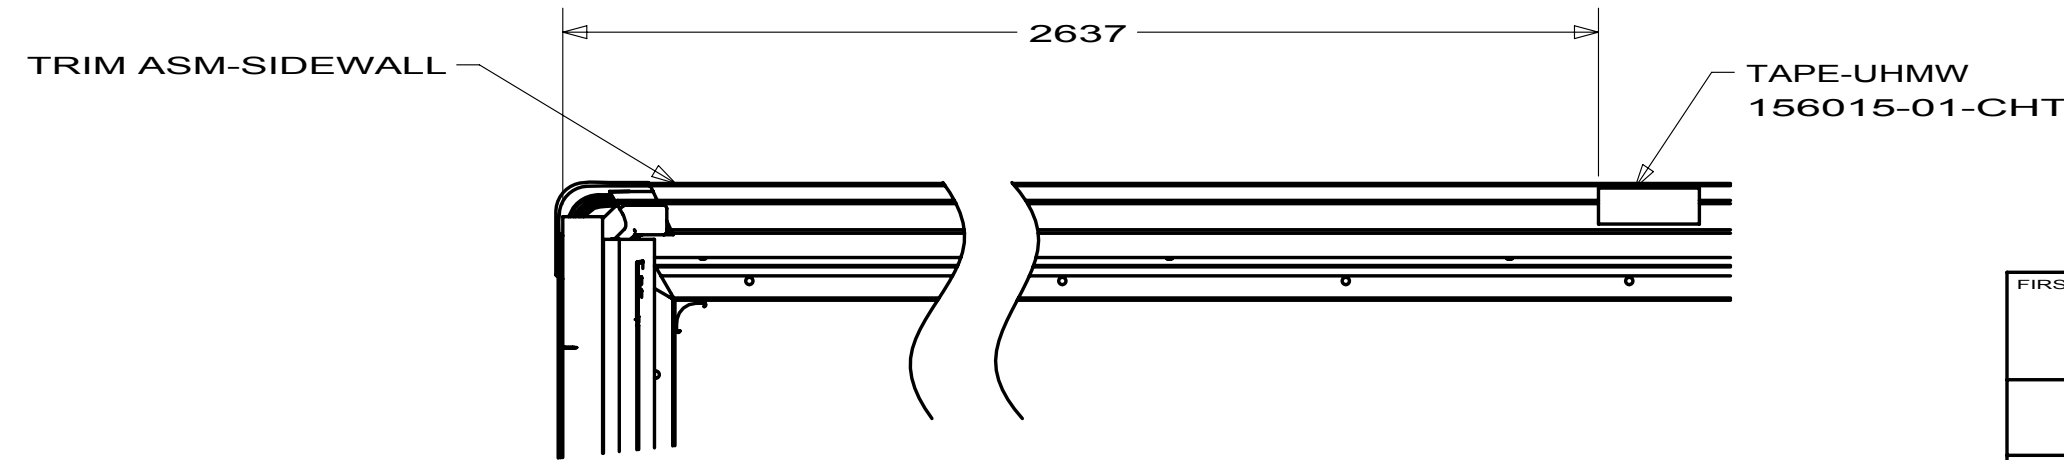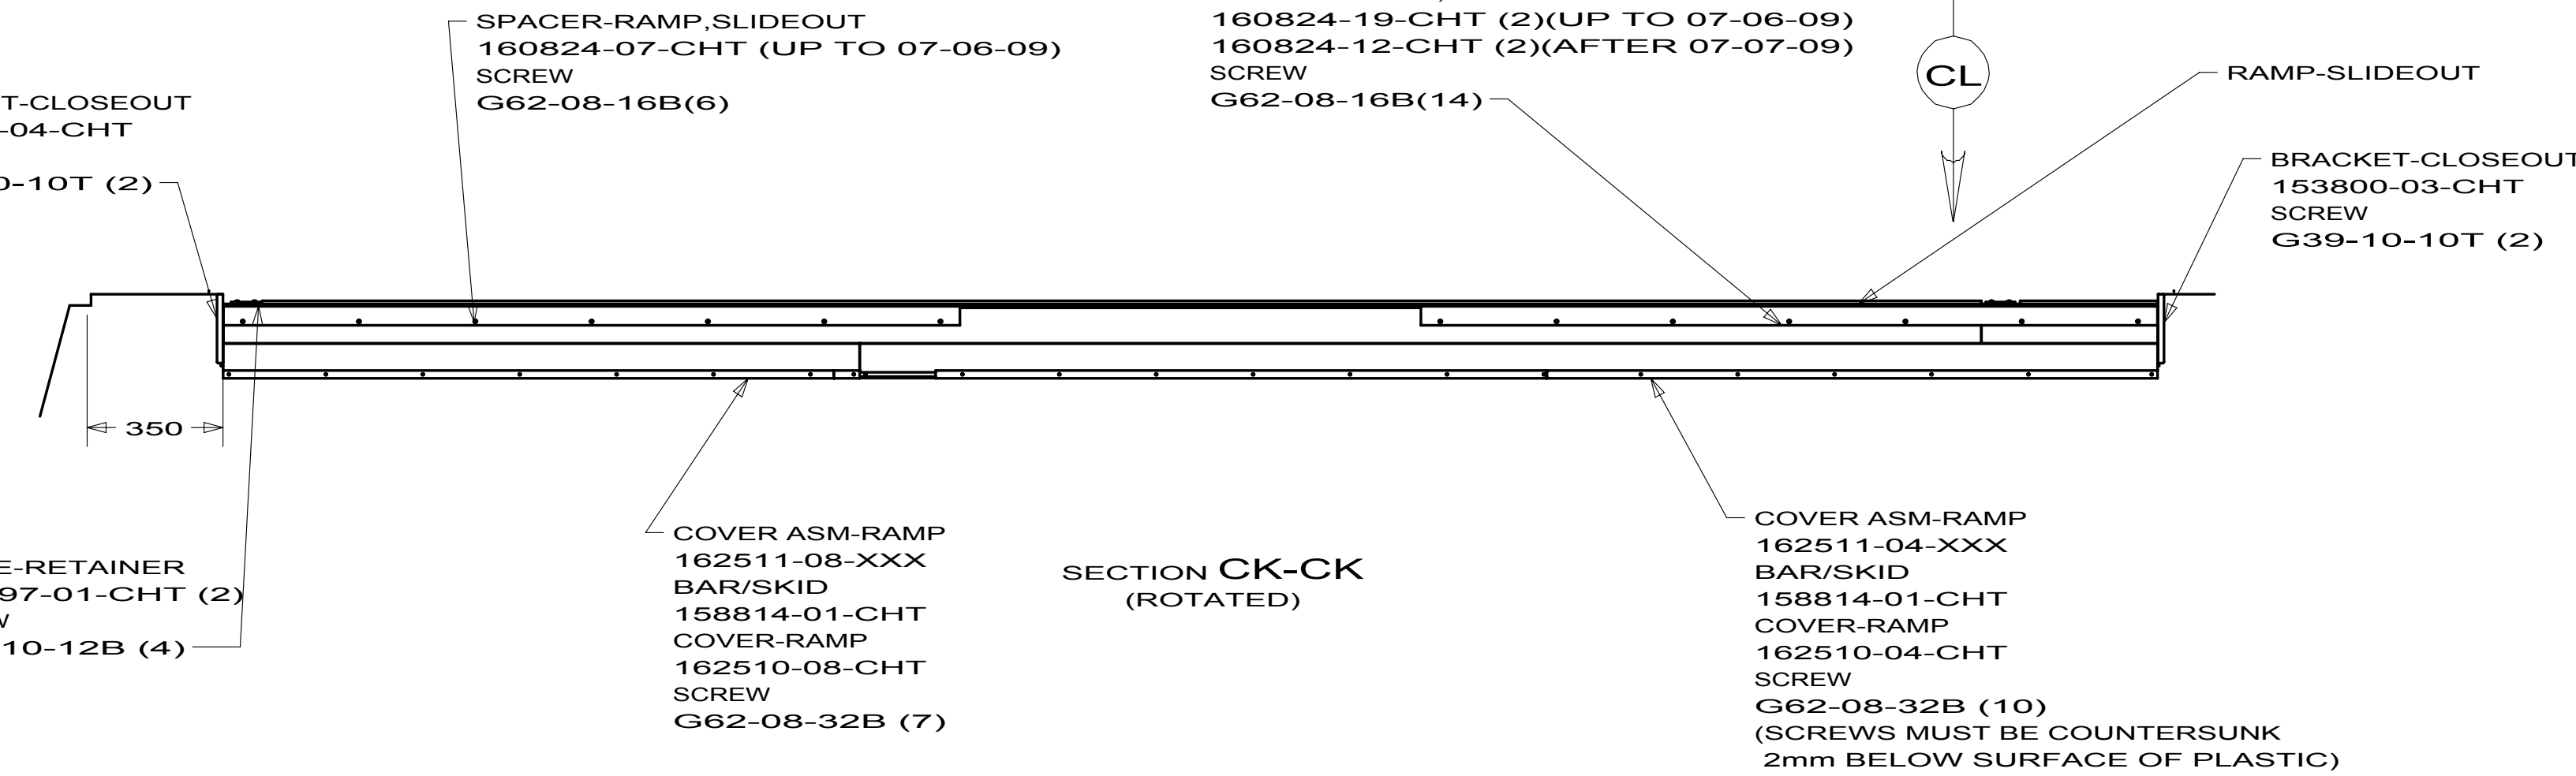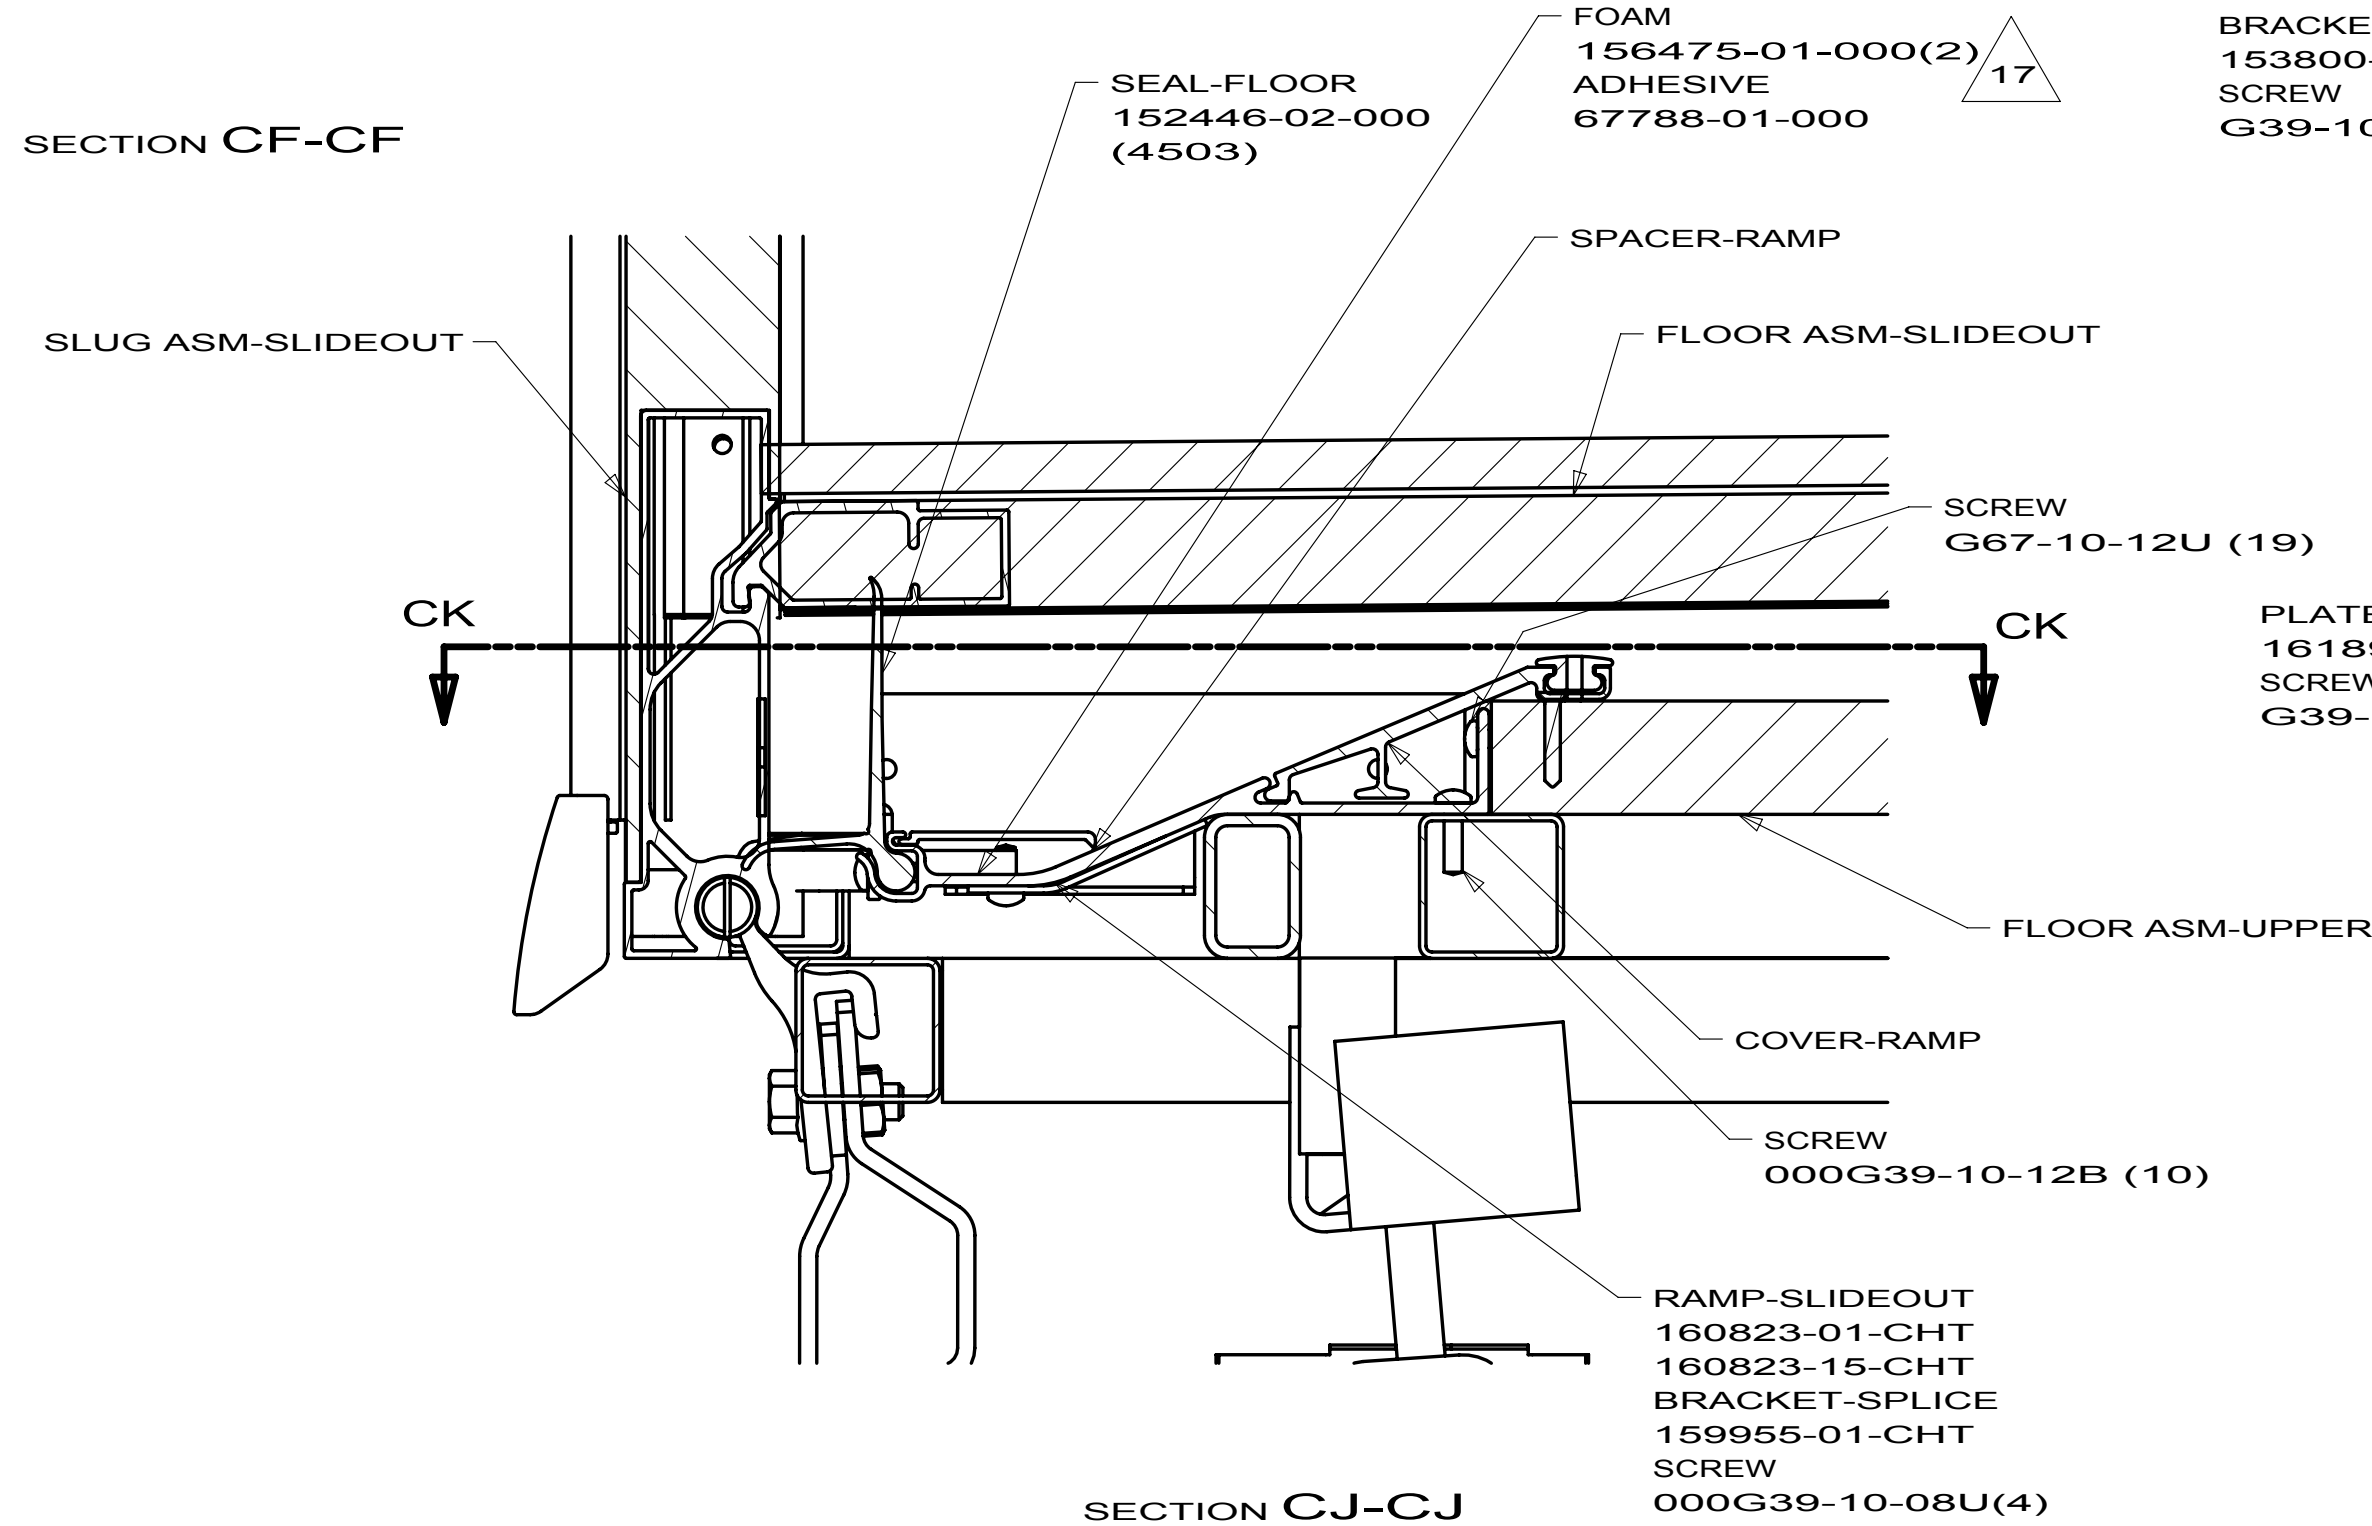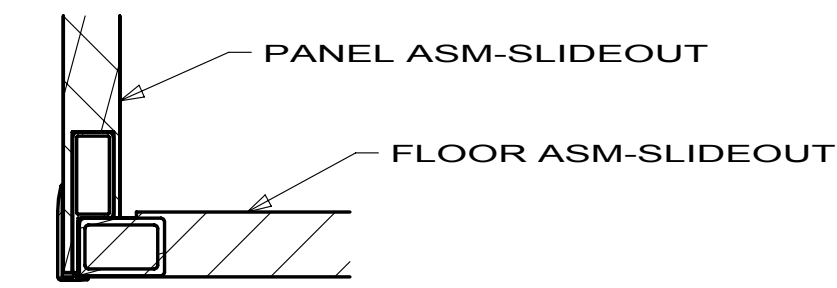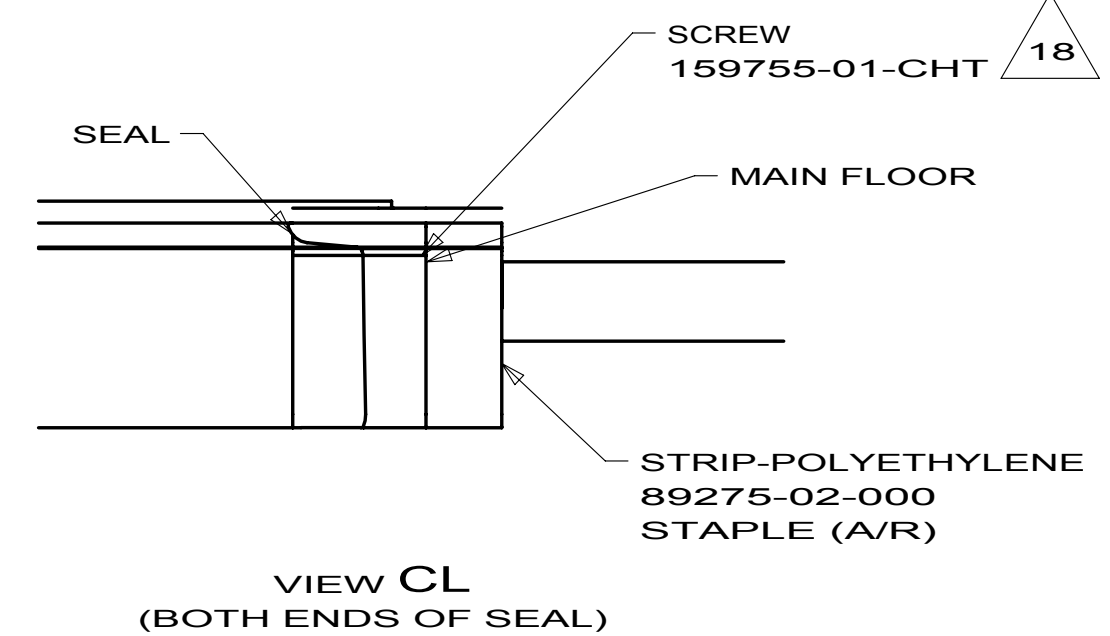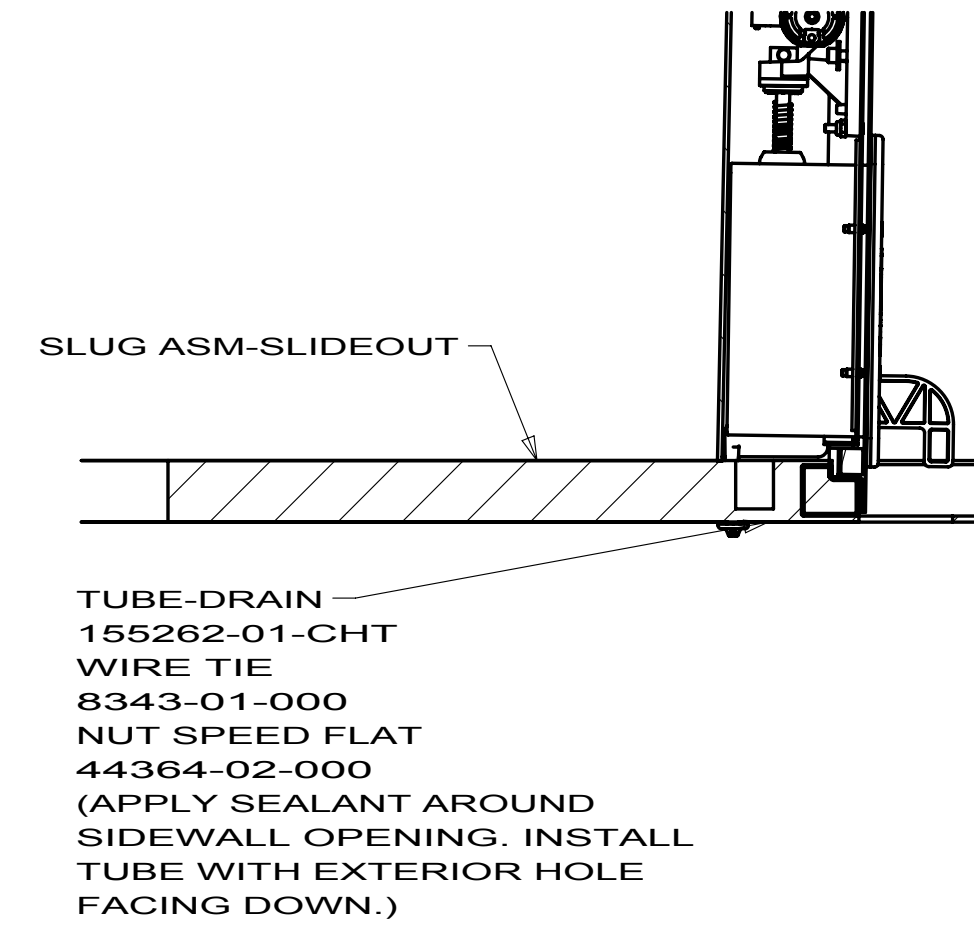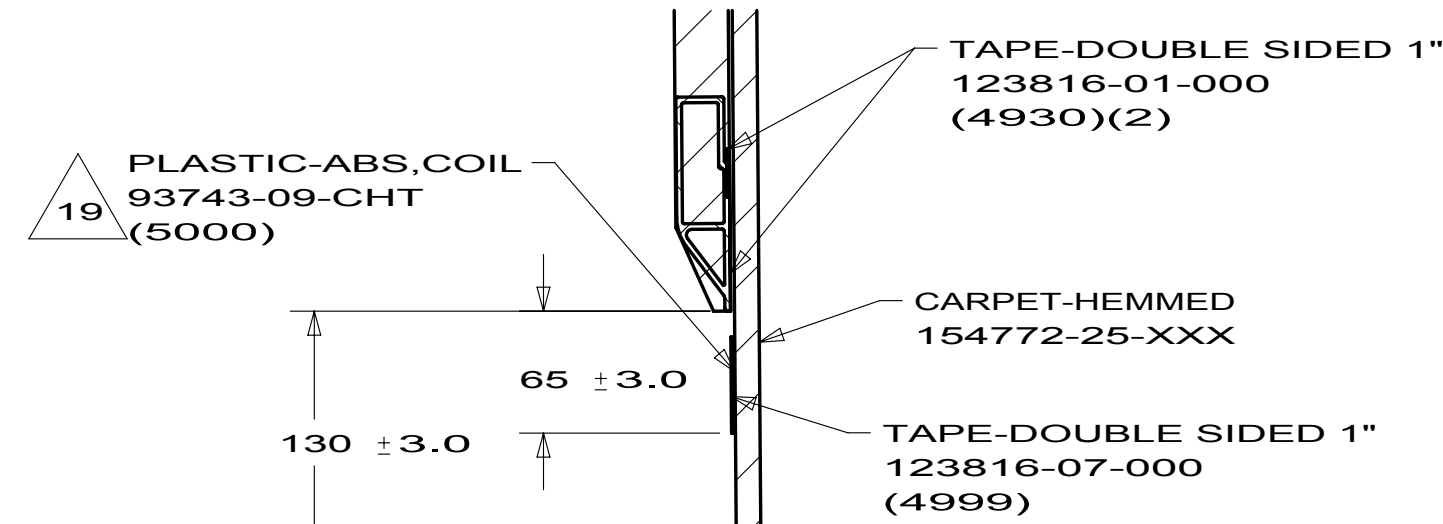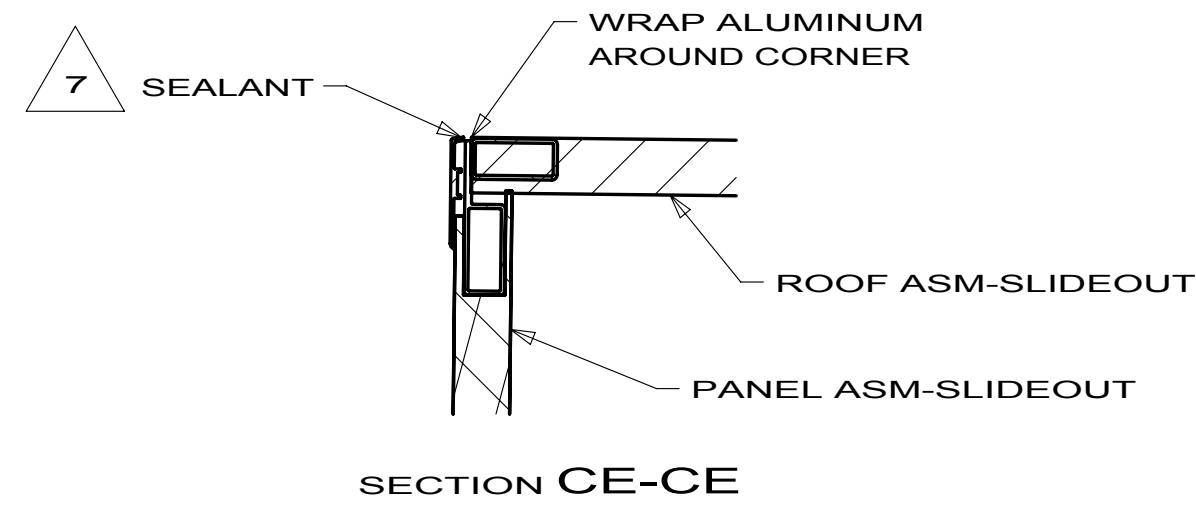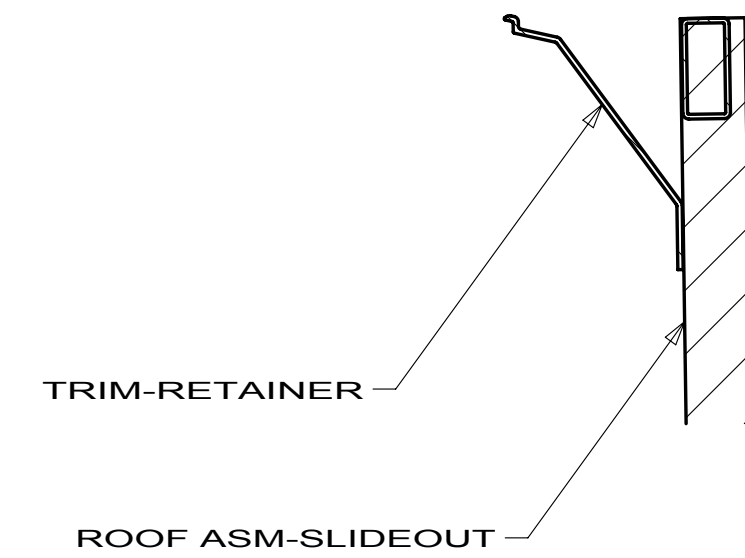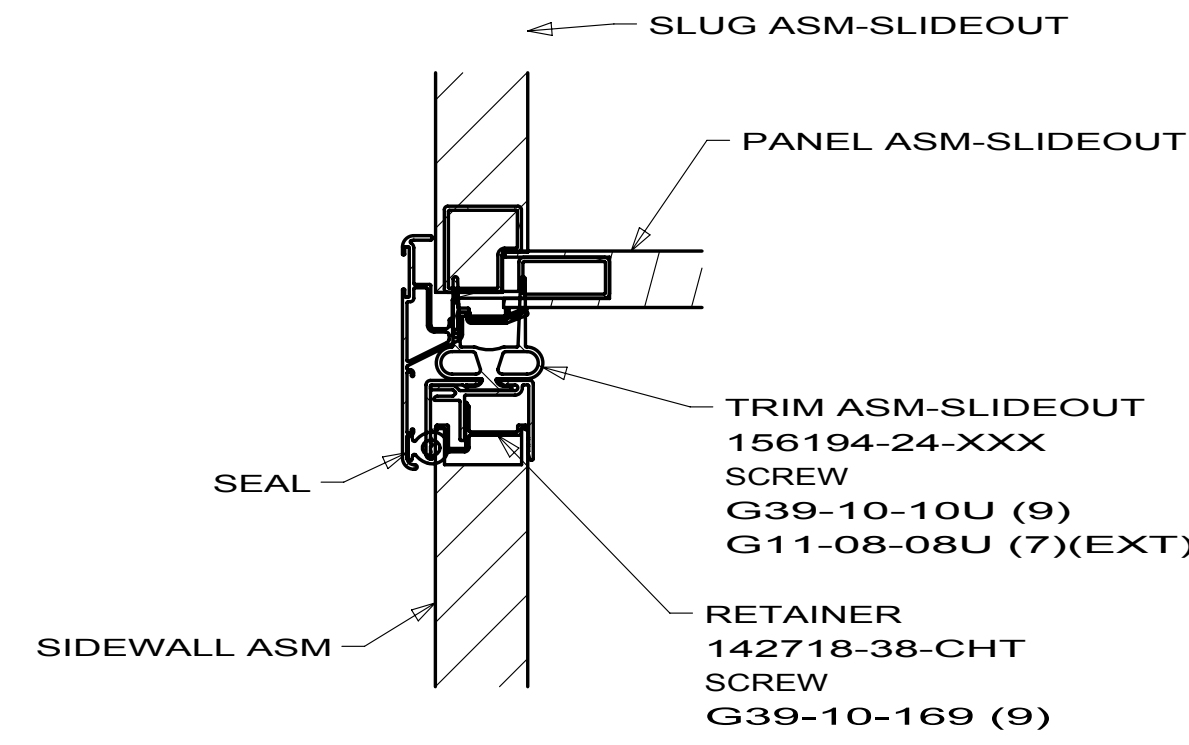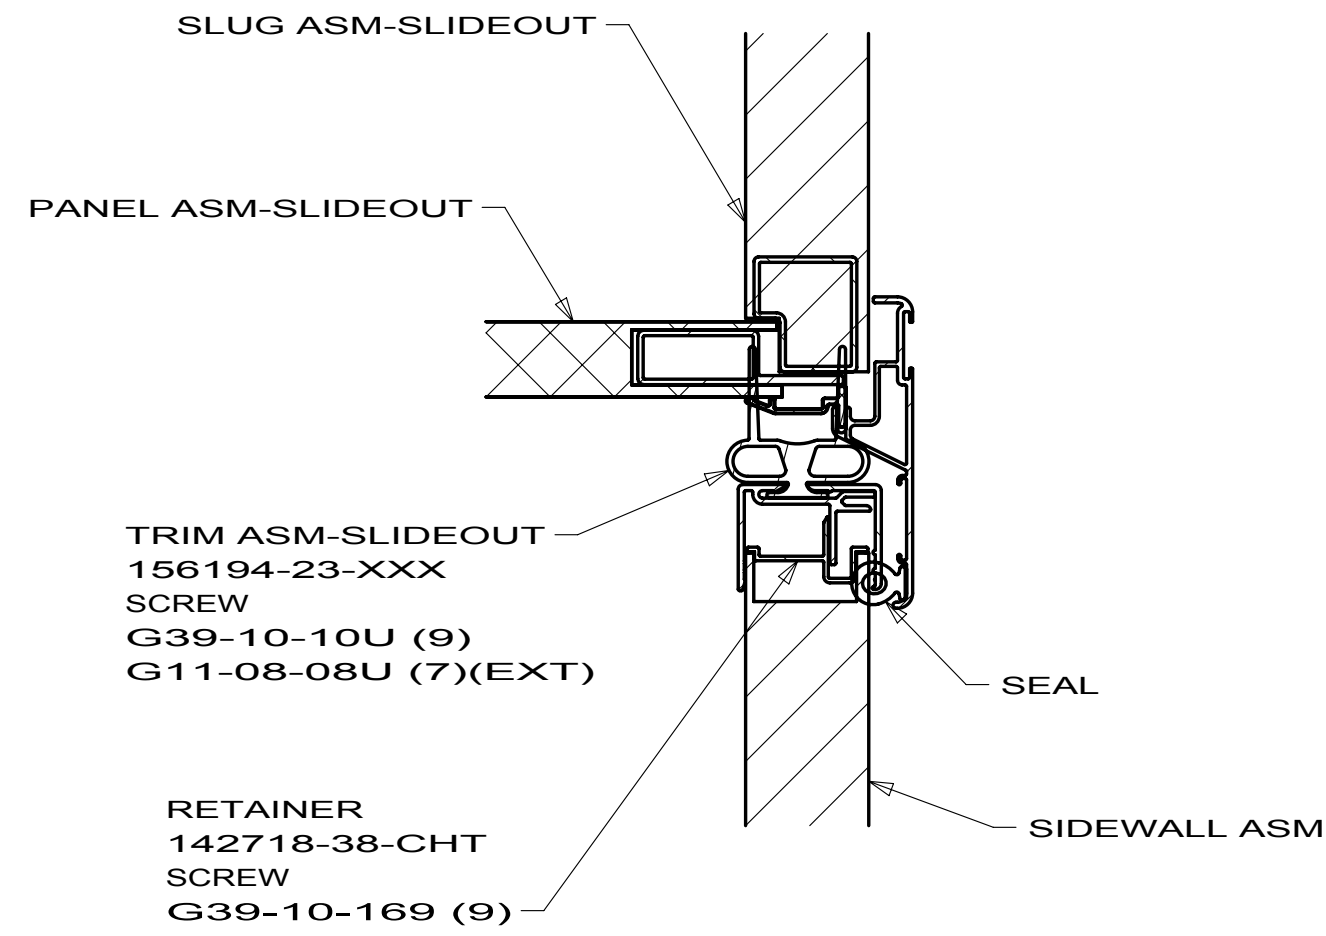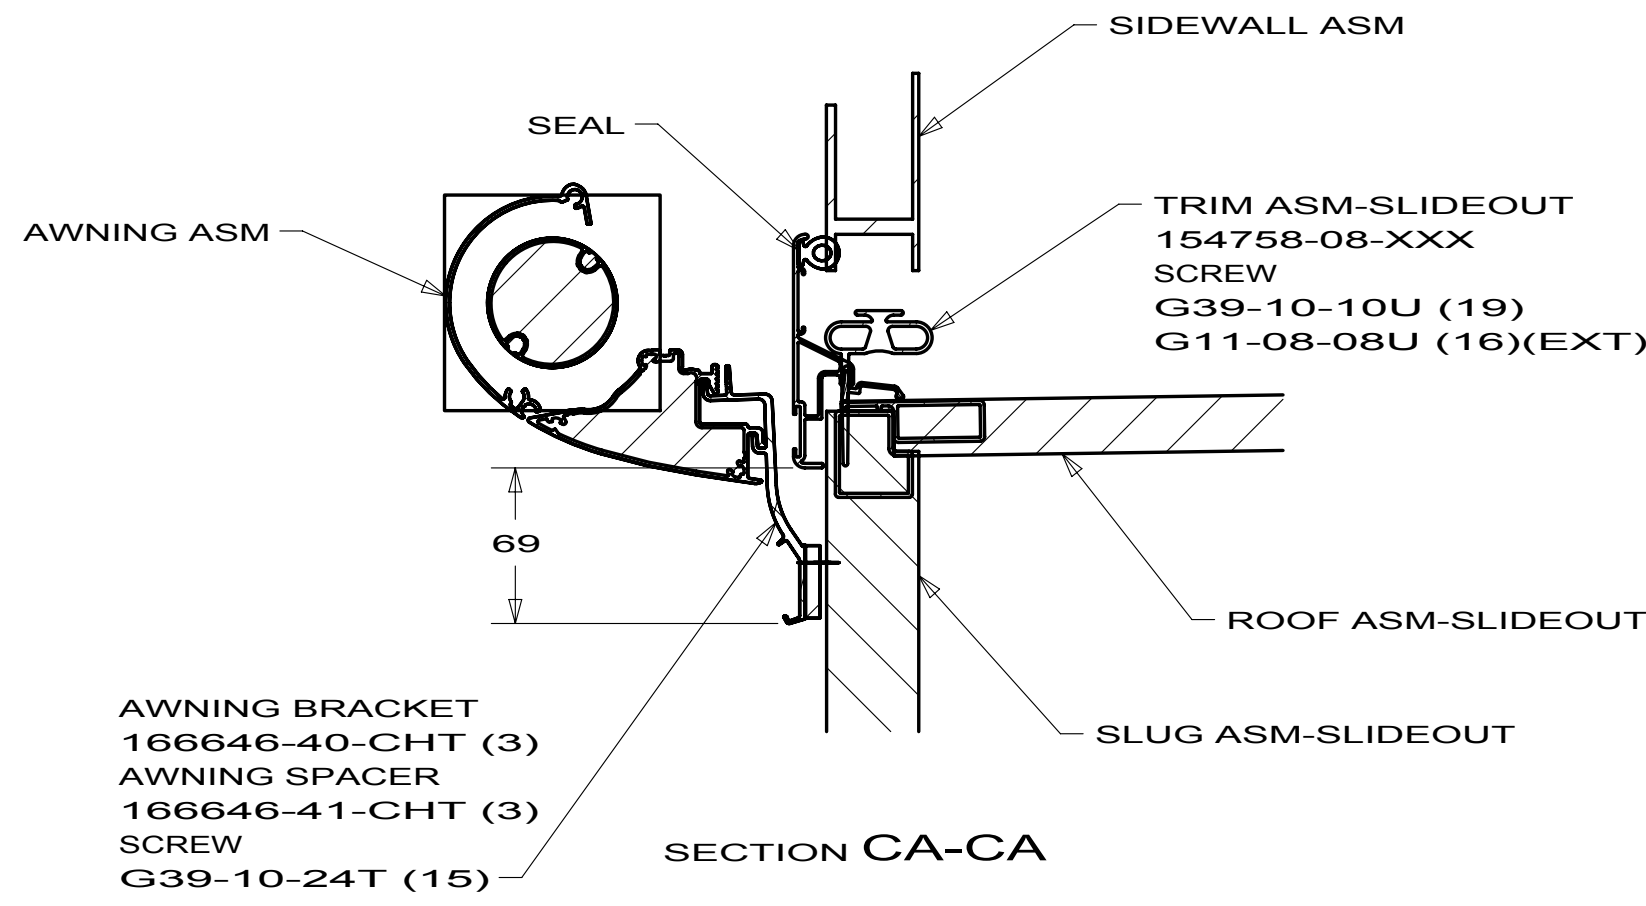

FIRST USED		10 R40BD	
DO NOT SCALE DRAWING			
TITLE:			
SLIDEOUT COMPL-FT,RH			
SHEET 3		PART NO	REV
		169549	

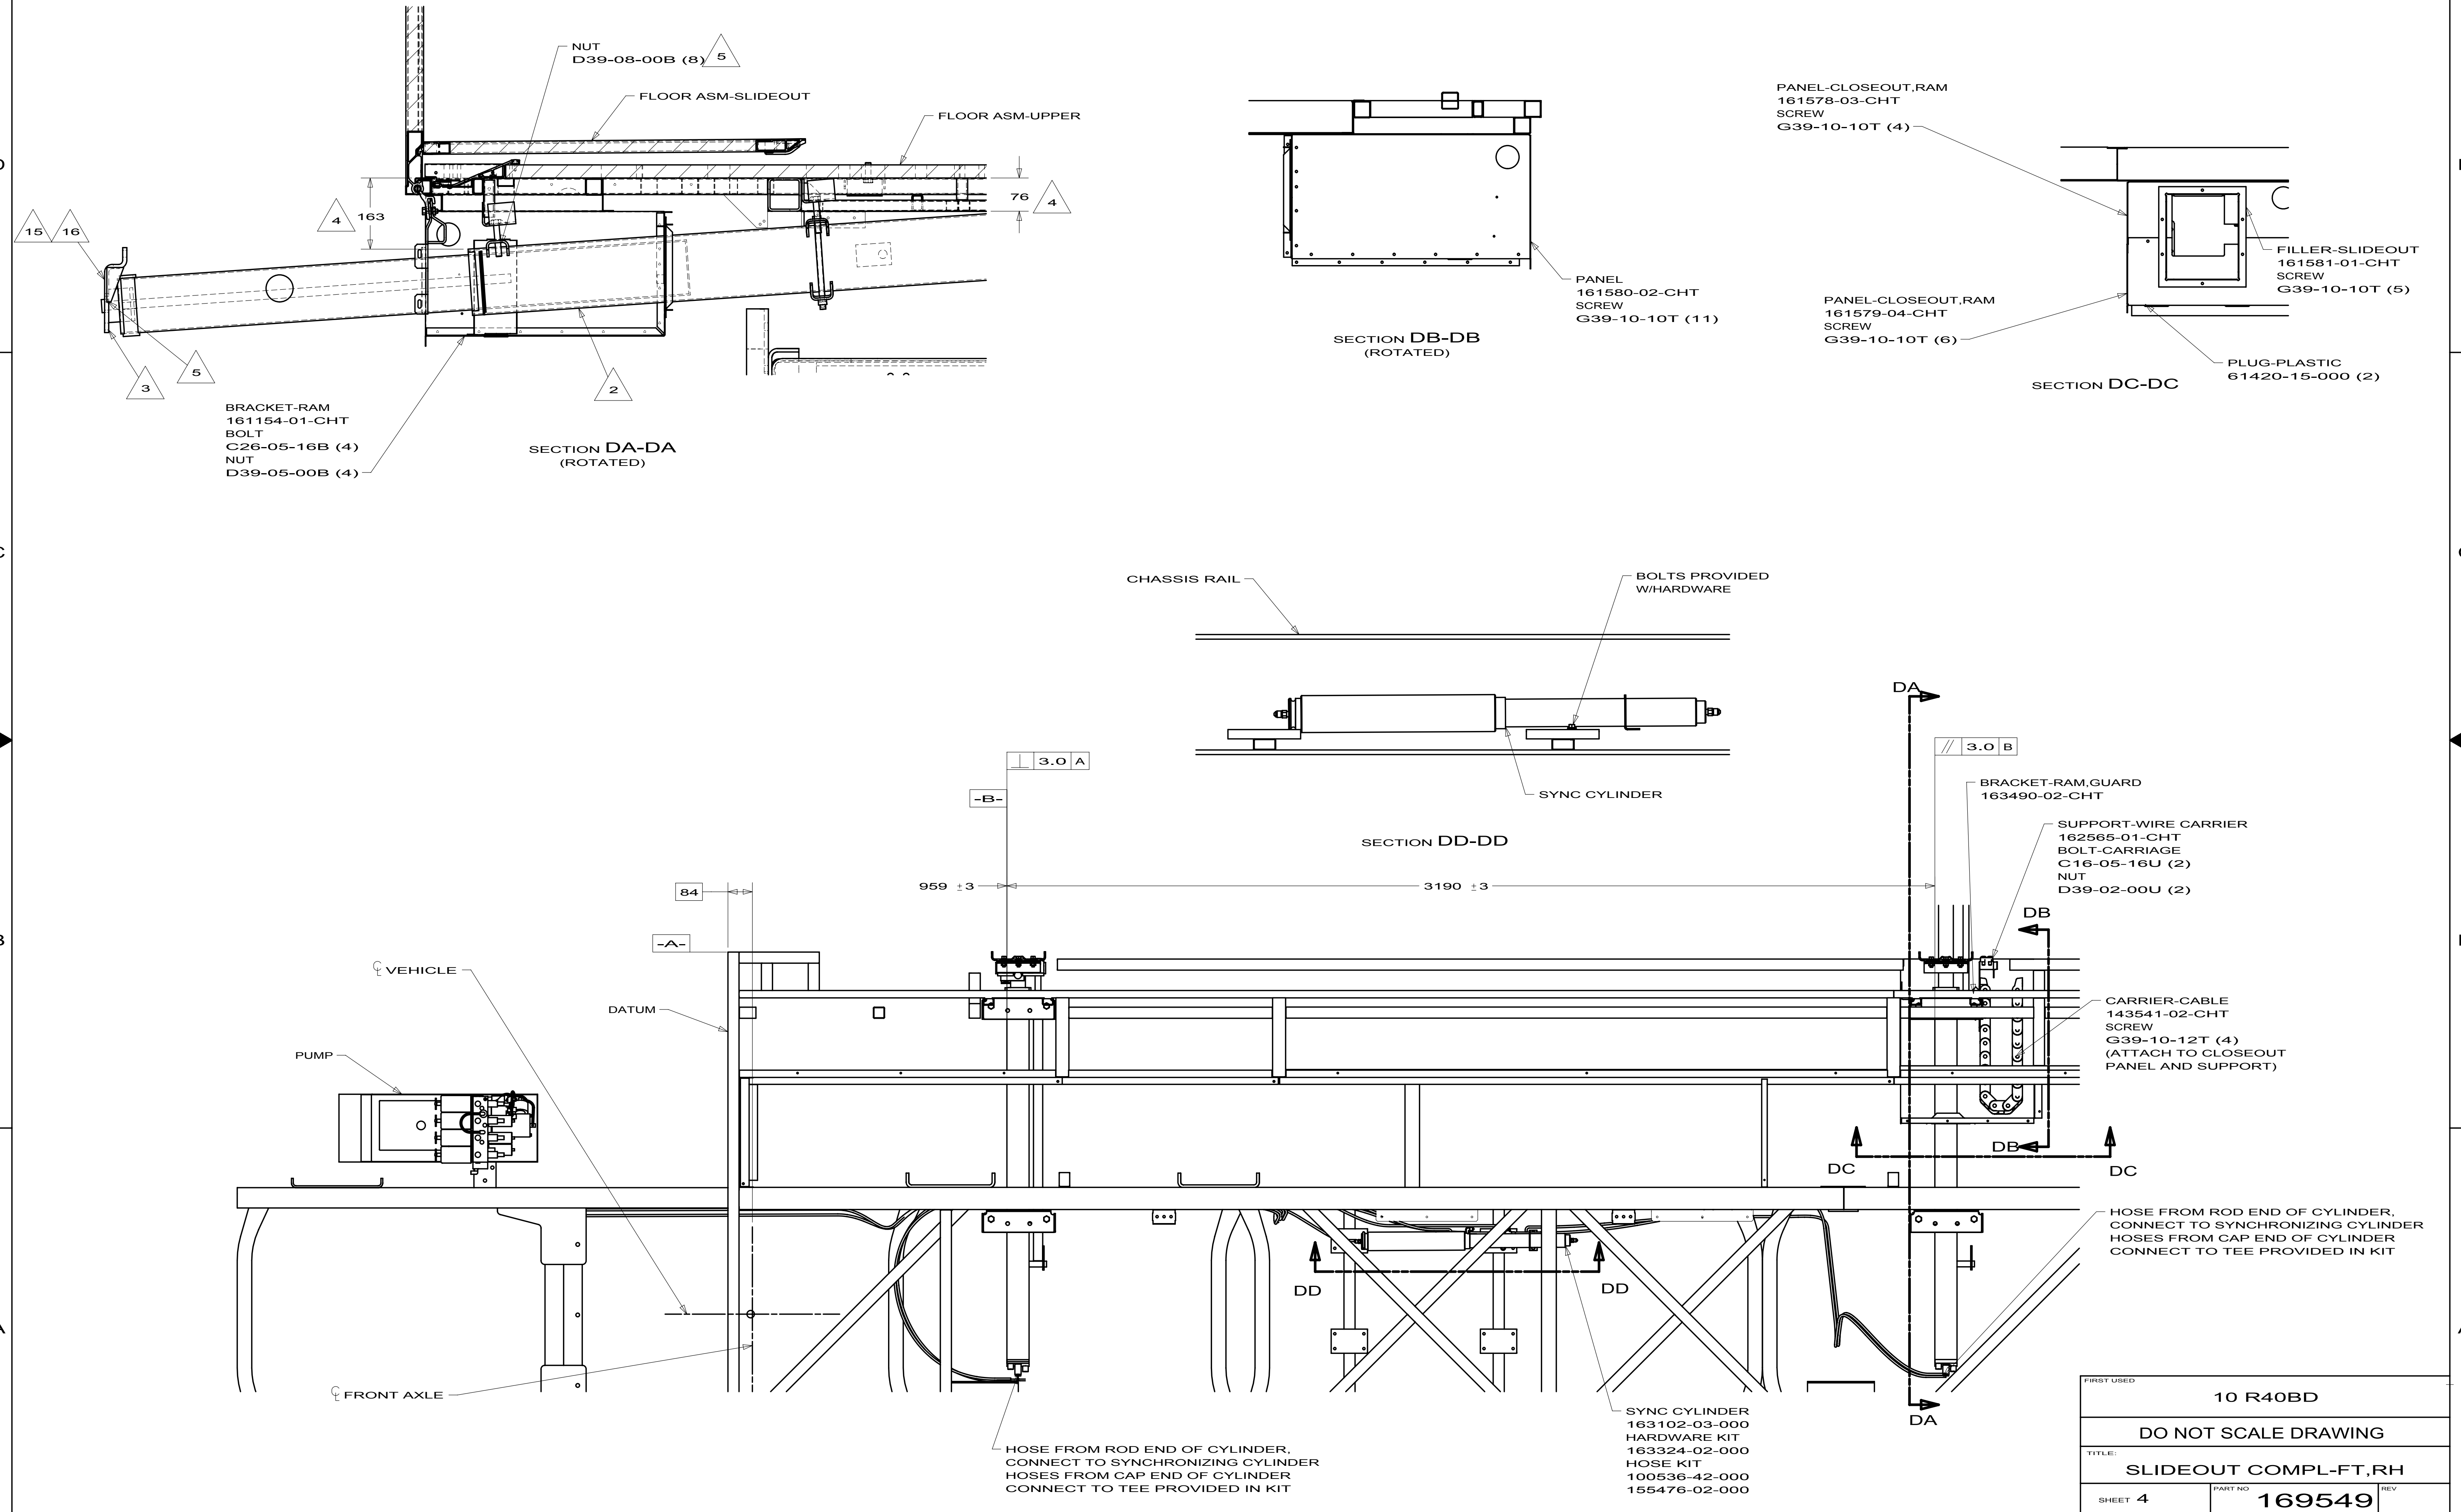

FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE:		
SLIDEOUT COMPL-FT, RH		
SHEET 4	PART NO	REV
	169549	

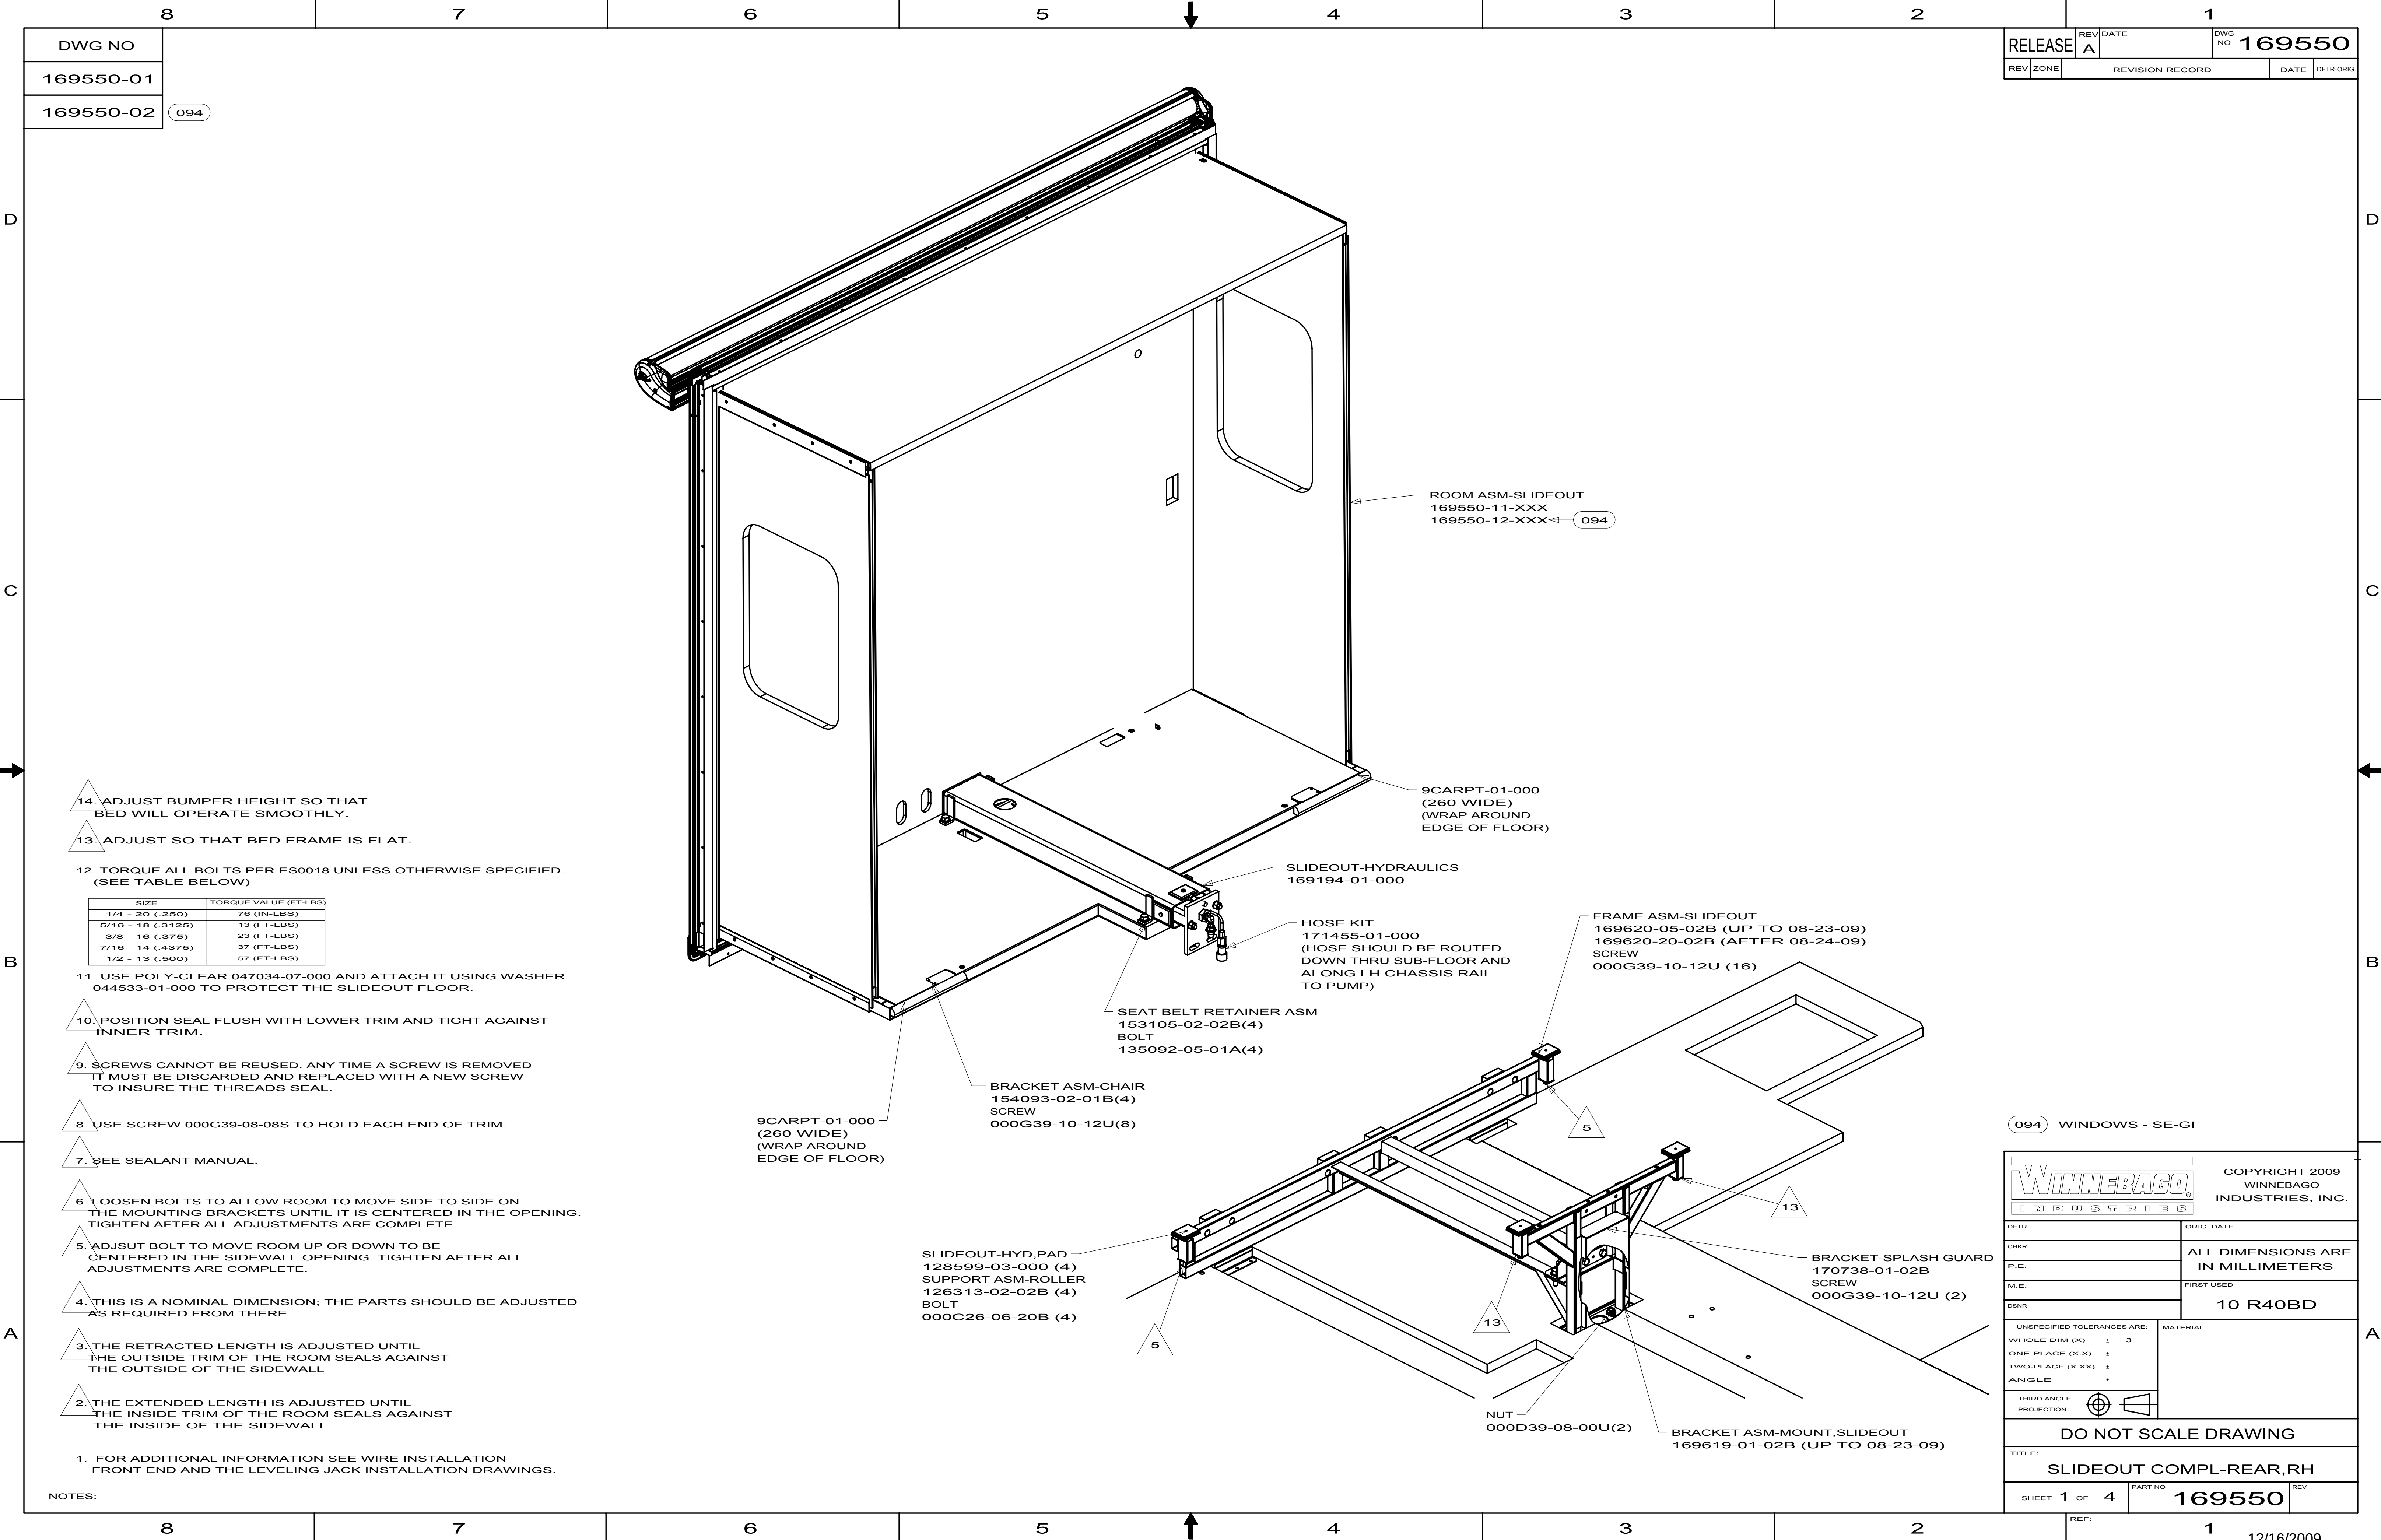

14. ADJUST BUMPER HEIGHT SO THAT
BED WILL OPERATE SMOOTHLY.
13. ADJUST SO THAT BED FRAME IS FLAT.
12. TORQUE ALL BOLTS PER ES0018 UNLESS OTHERWISE SPECIFIED.
(SEE TABLE BELOW)
- | SIZE | TORQUE VALUE (FT-LBS) |
|-------------------|-----------------------|
| 1/4 - 20 (.250) | 76 (IN-LBS) |
| 5/16 - 18 (.3125) | 13 (FT-LBS) |
| 3/8 - 16 (.375) | 23 (FT-LBS) |
| 7/16 - 14 (.4375) | 37 (FT-LBS) |
| 1/2 - 13 (.500) | 57 (FT-LBS) |
11. USE POLY-CLEAR 047034-07-000 AND ATTACH IT USING WASHER
044533-01-000 TO PROTECT THE SLIDEOUT FLOOR.
10. POSITION SEAL FLUSH WITH LOWER TRIM AND TIGHT AGAINST
INNER TRIM.
9. SCREWS CANNOT BE REUSED. ANY TIME A SCREW IS REMOVED
IT MUST BE DISCARDED AND REPLACED WITH A NEW SCREW
TO INSURE THE THREADS SEAL.
8. USE SCREW 000G39-08-08S TO HOLD EACH END OF TRIM.
7. SEE SEALANT MANUAL..
6. LOOSEN BOLTS TO ALLOW ROOM TO MOVE SIDE TO SIDE ON
THE MOUNTING BRACKETS UNTIL IT IS CENTERED IN THE OPENING.
TIGHTEN AFTER ALL ADJUSTMENTS ARE COMPLETE.
5. ADJSUT BOLT TO MOVE ROOM UP OR DOWN TO BE
CENTERED IN THE SIDEWALL OPENING. TIGHTEN AFTER ALL
ADJUSTMENTS ARE COMPLETE.
4. THIS IS A NOMINAL DIMENSION; THE PARTS SHOULD BE ADJUSTED
AS REQUIRED FROM THERE.
3. THE RETRACTED LENGTH IS ADJUSTED UNTIL
THE OUTSIDE TRIM OF THE ROOM SEALS AGAINST
THE OUTSIDE OF THE SIDEWALL.
2. THE EXTENDED LENGTH IS ADJUSTED UNTIL
THE INSIDE TRIM OF THE ROOM SEALS AGAINST
THE INSIDE OF THE SIDEWALL.
1. FOR ADDITIONAL INFORMATION SEE WIRE INSTALLATION
FRONT END AND THE LEVELING JACK INSTALLATION DRAWINGS.

NOTES:

RELEASE		REV	DATE	DWG NO	169550
REV	ZONE	REVISION RECORD		DATE	DTR-ORIG

094 WINDOWS - SE-GI

		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DTR		ORIG. DATE	
CHRR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.		FIRST USED	
M.E.		10 R40BD	
DSNR		MATERIAL:	
UNSPECIFIED TOLERANCES ARE:			
WHOLE DIM (X) : 3			
ONE-PLACE (X.X) :			
TWO-PLACE (X.XX) :			
ANGLE :			
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: SLIDEOUT COMPL-REAR,RH			
SHEET 1 OF 4		PART NO 169550	
REF:		1	

TRIM-SEAL,INNER
169060-02-02A
SCREW
000G62-08-12B (10)

ROOF ASM-SLIDEOUT
169204-02-XXX
SCREW
000G62-08-12B (9)

TRIM-FEATURE,UPPER
158375-04-02A (2)
(735)
SCREW
154938-02-02A (8)

PANEL ASM-SLIDEOUT
162978-09-XXX
162978-31-XXX
SCREW
000G62-08-12B (18)

TRIM-SEAL,INNER
139624-25-02A
SCREW
000G62-08-12B (7)

CB CB

CA

CA

AWNING
(REF)

TRIM KIT EXTERIOR
169233-10-XXX
SCREW
154938-05-03A (36)
INSERT
105312-01-13A (8682)
SCREW
154938-04-02A (28)

SLUG ASM-SLIDEOUT
169567-12-XXX

COVER-CORNER
156151-01-01A (4)
CORNER-KEY
160421-01-01A (4)

CF

CF

TRIM-SEAL,INNER
139624-26-02A
SCREW
000G62-08-12B (7)

PANEL ASM-SLIDEOUT
162978-10-XXX
162978-32-XXX
SCREW
000G62-08-12B (18)

FILM
093681-39-01A
(1830 BOTH SIDES)

TRIM-FEATURE,LOWER
163020-08-02A(2)
SCREW
154938-02-02A (8)

CC

CC

CE

CE

PLUG-PLASTIC BLACK
119845-01-01A
TAPE-DOUBLE SIDED
123816-01-000(76MM)
WRAP TAPE AROUND PLUG TO SECURE IT)

ANGLE-W/HOLES
136002-67-01A (2) (UP TO 08-23-09)
SCREW
000G39-10-10B (8)

FLOOR ASM-SLIDEOUT
169205-02-XXX







LUMBER-RADIUS
163342-00-294 (2)
SCREW
000G39-10-16U(4)

ROOM ASM-SLIDEOUT
169550-11-XXX
169550-12-XXX



094 WINDOWS - SE-GI

93A EXTERIOR PAINT-CDI

FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-REAR,RH		
SHEET 2	PART NO 169550	REV

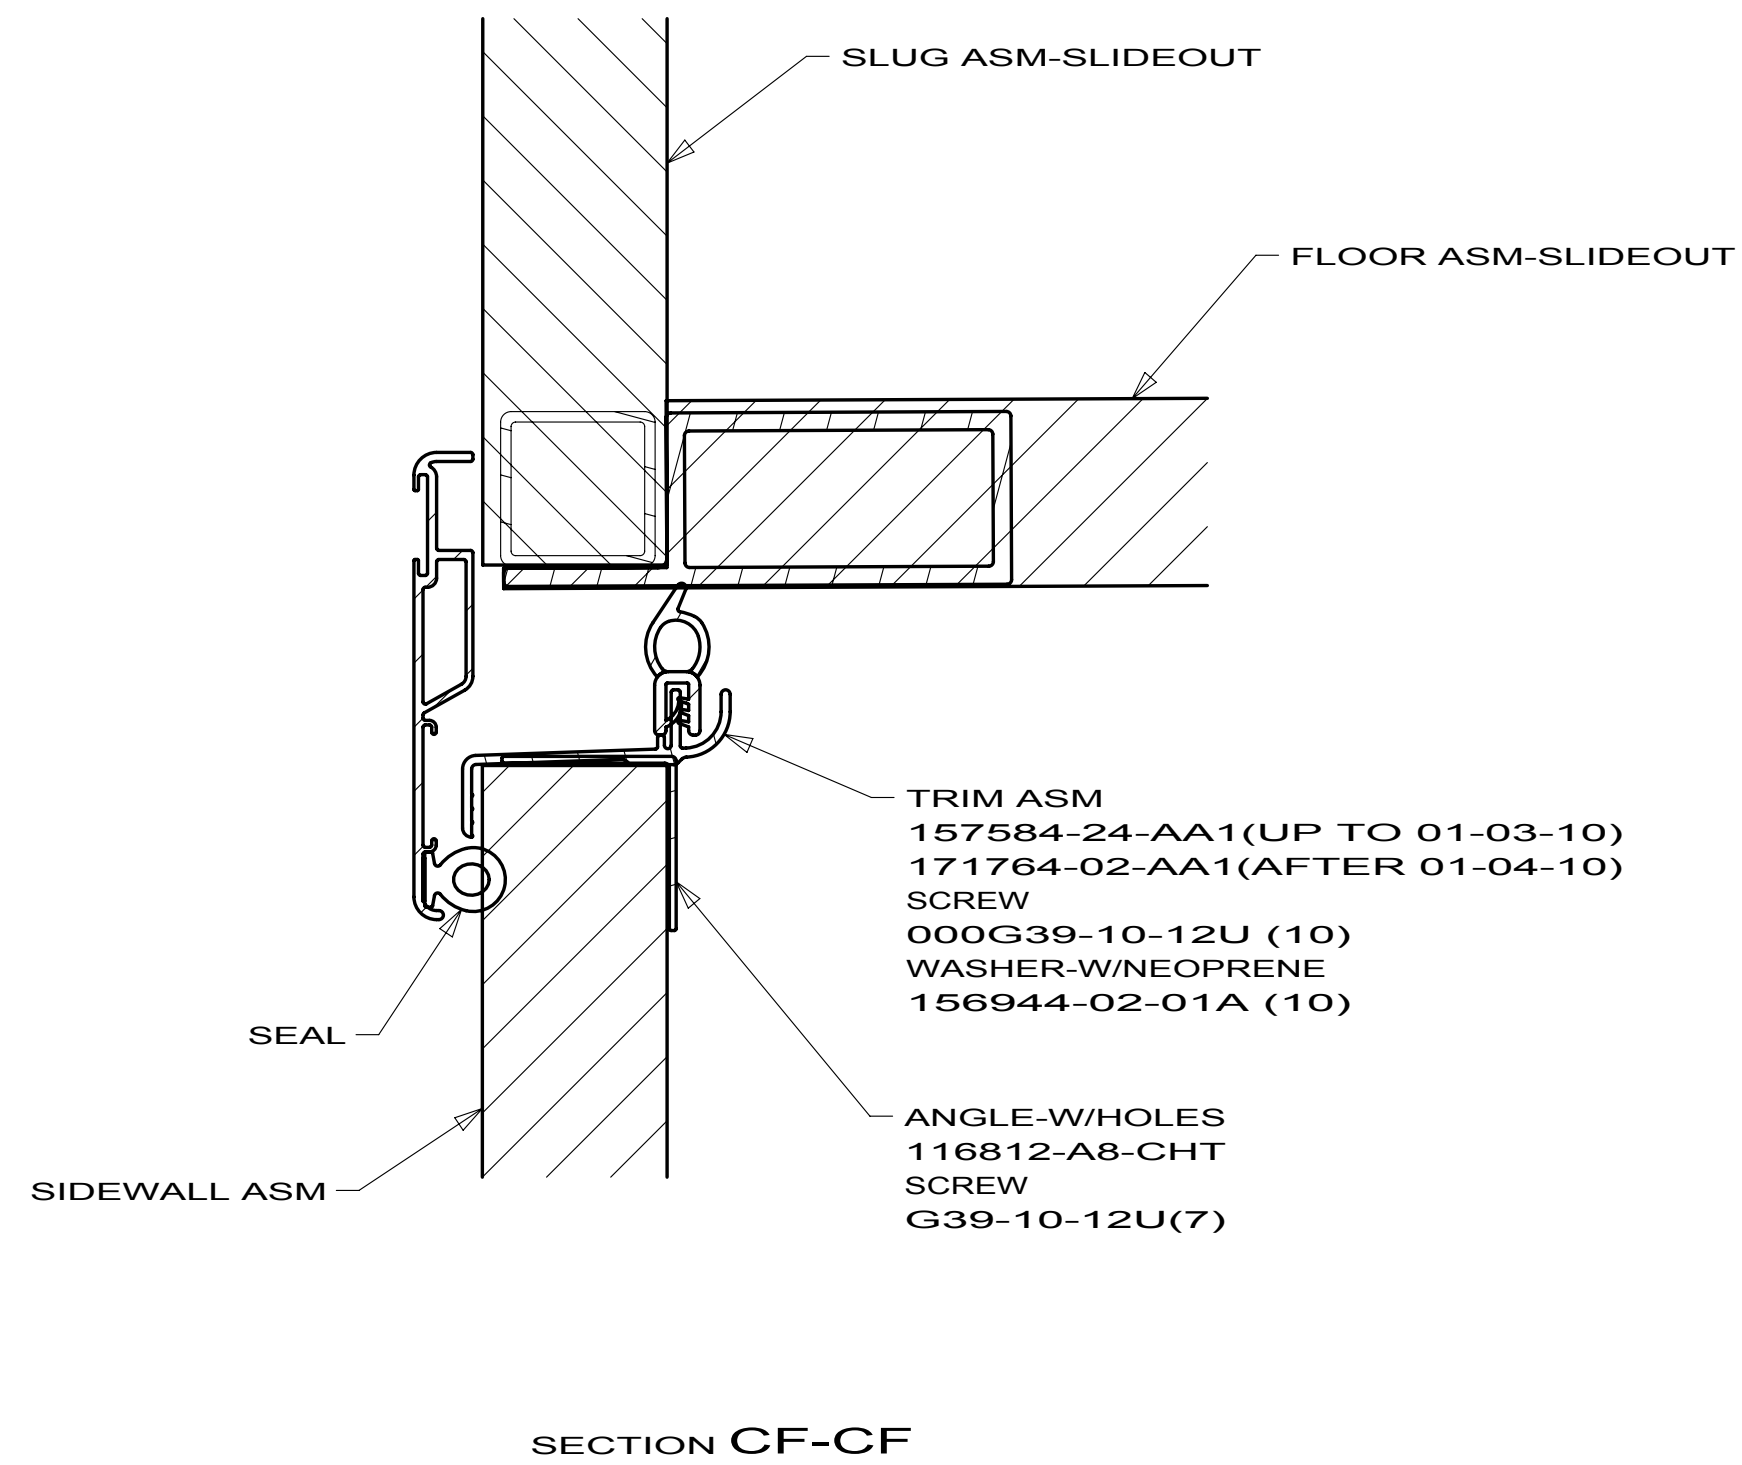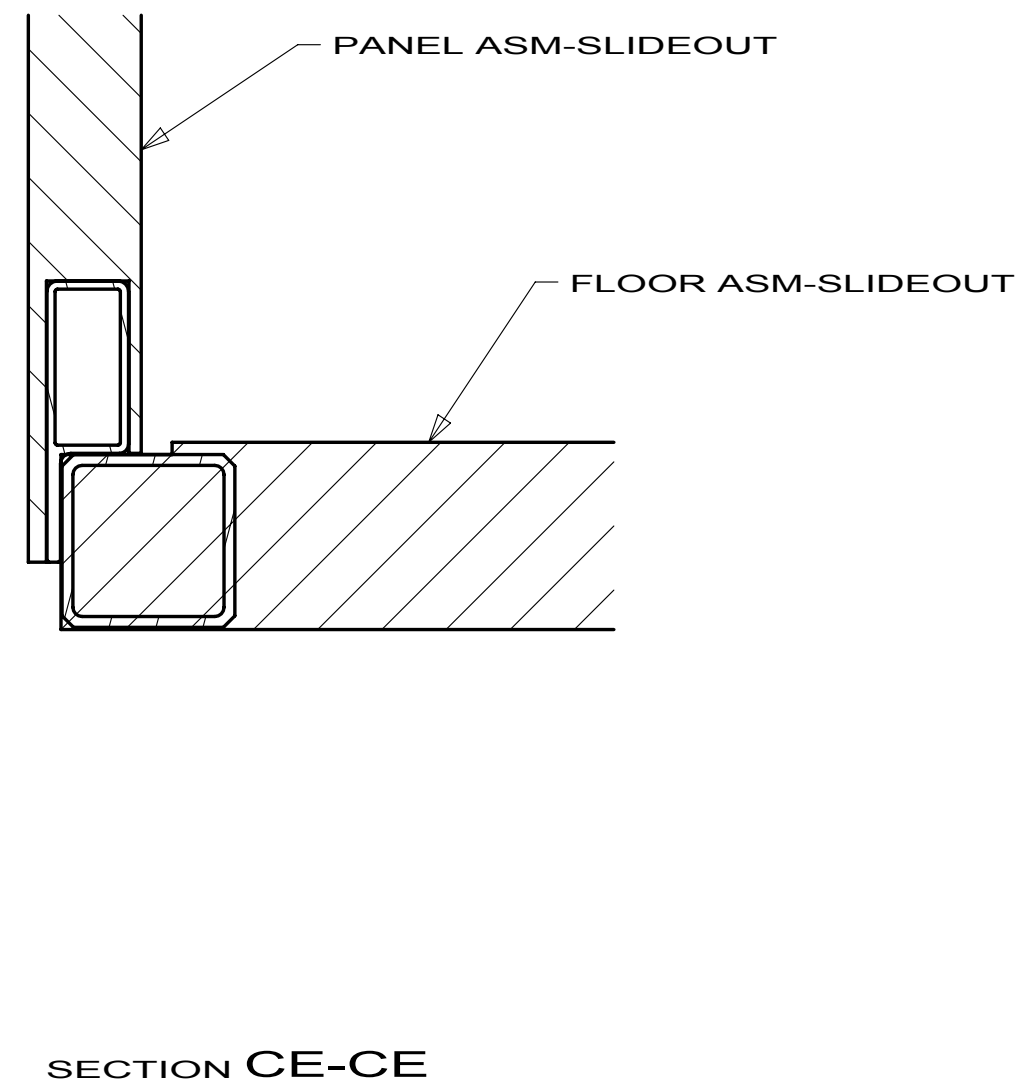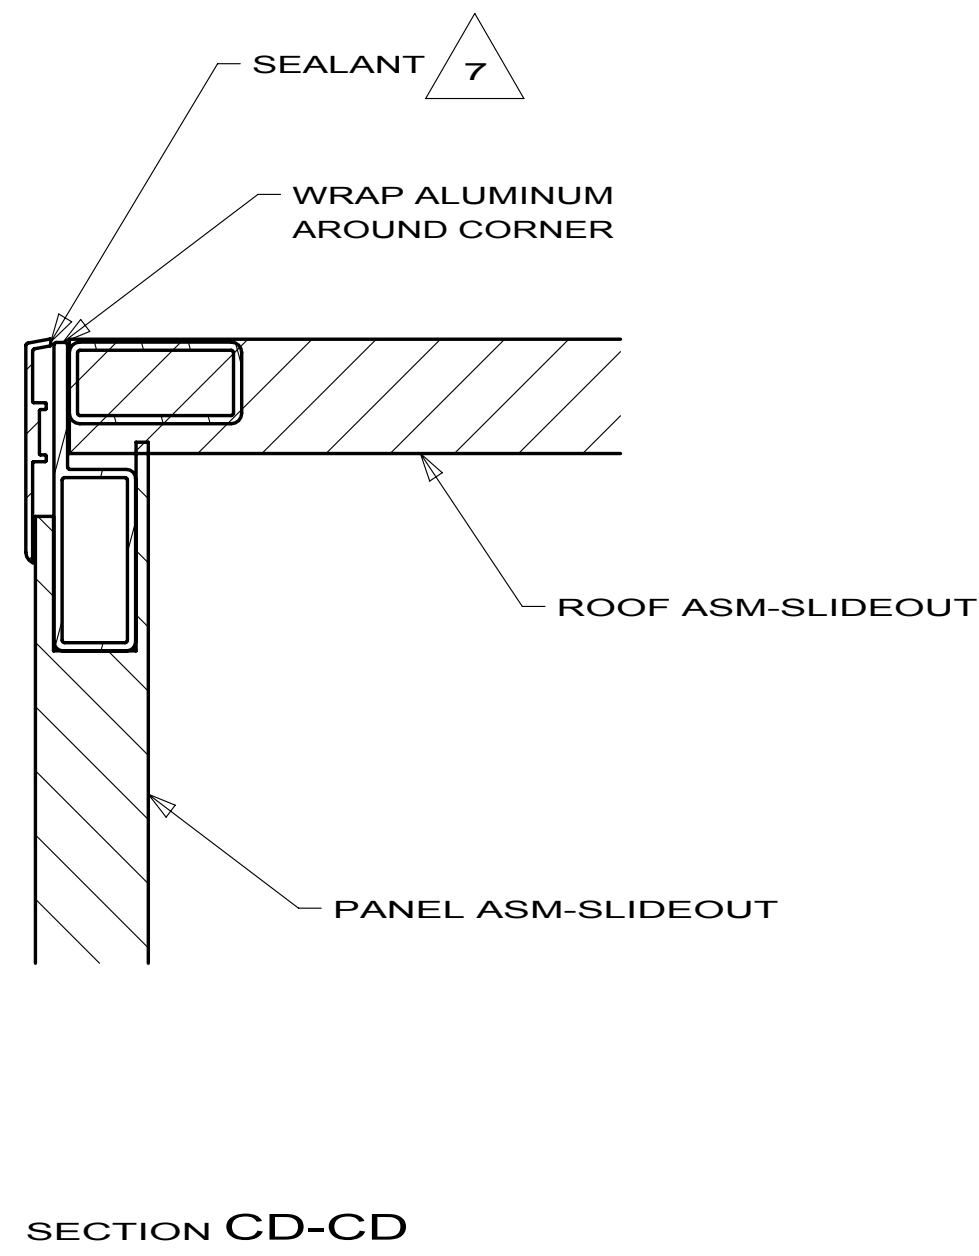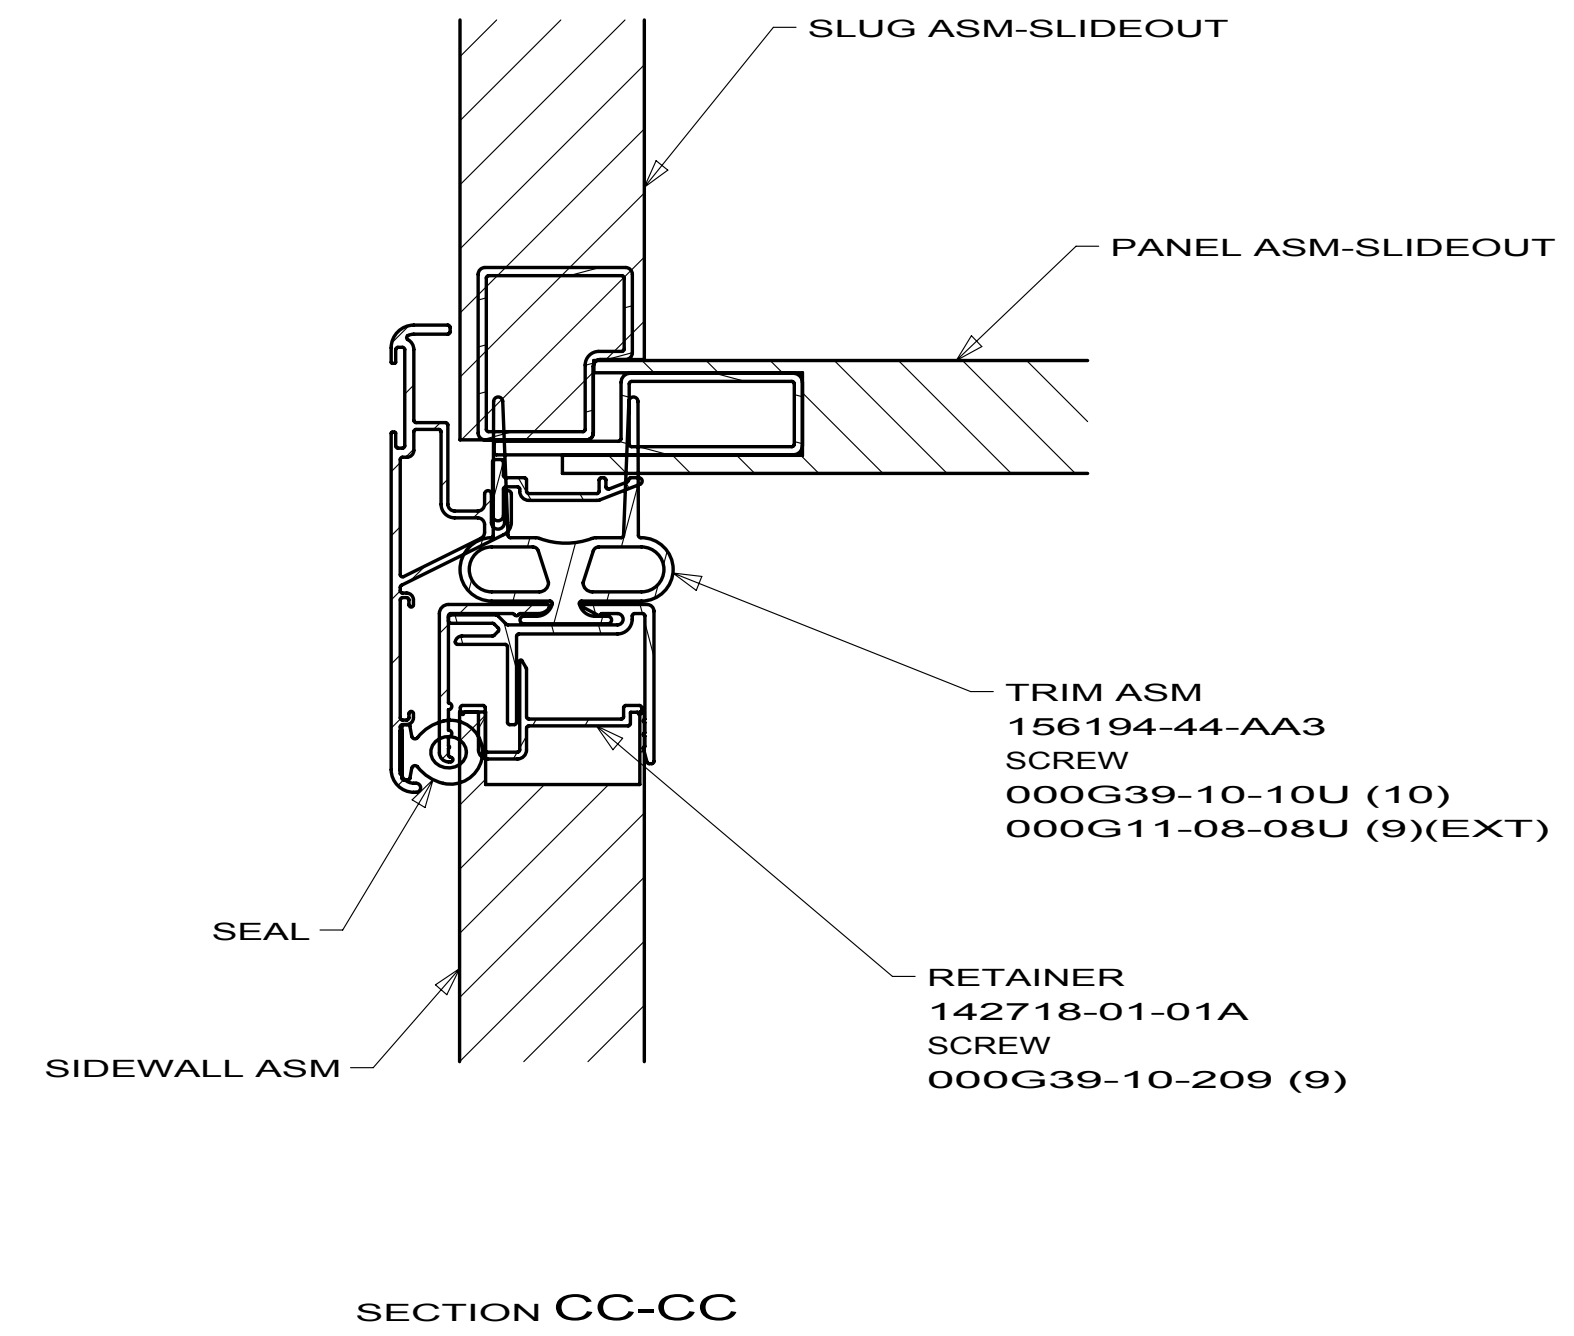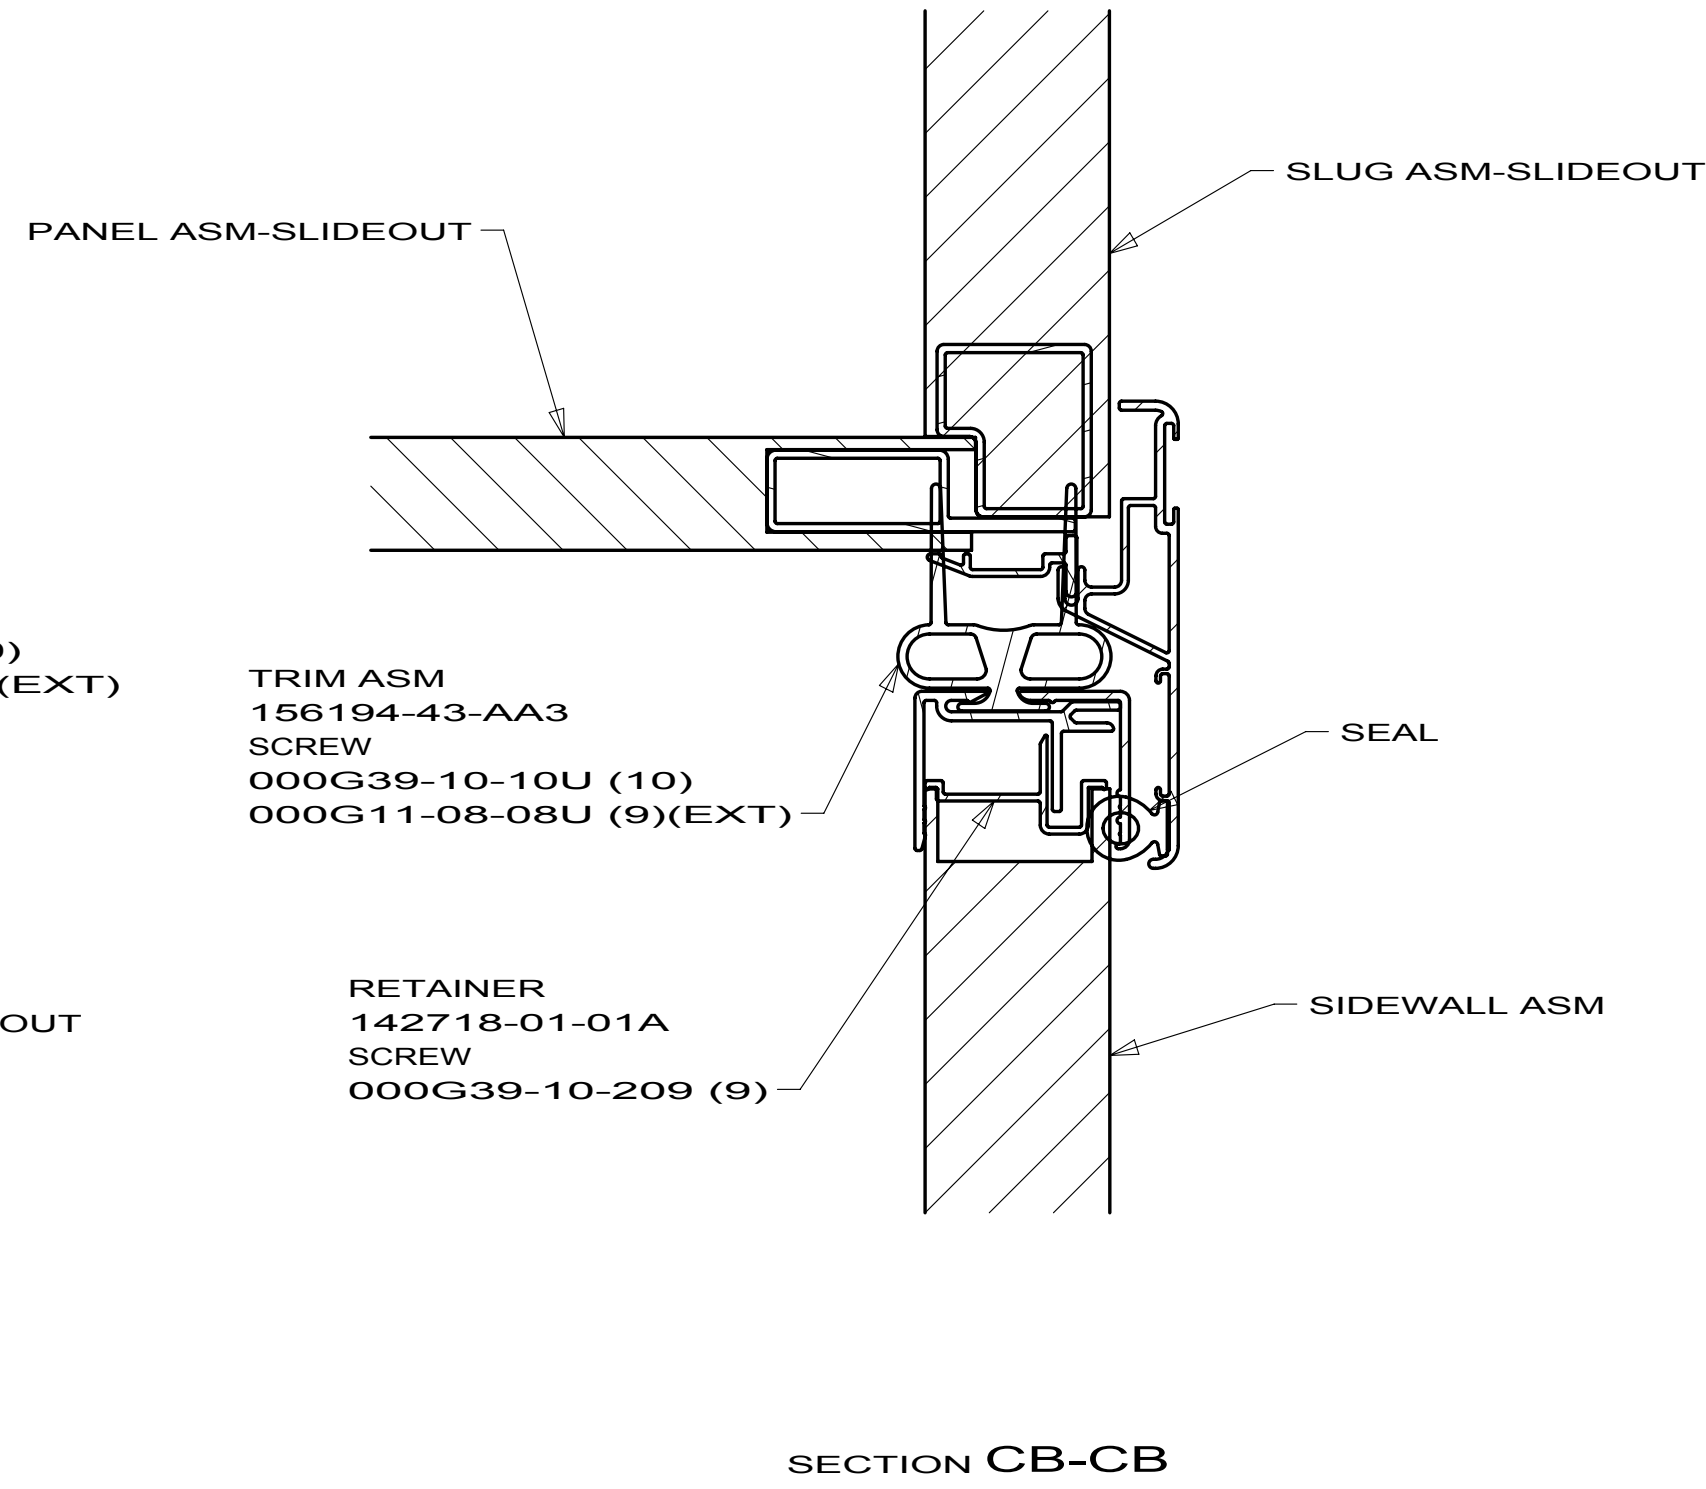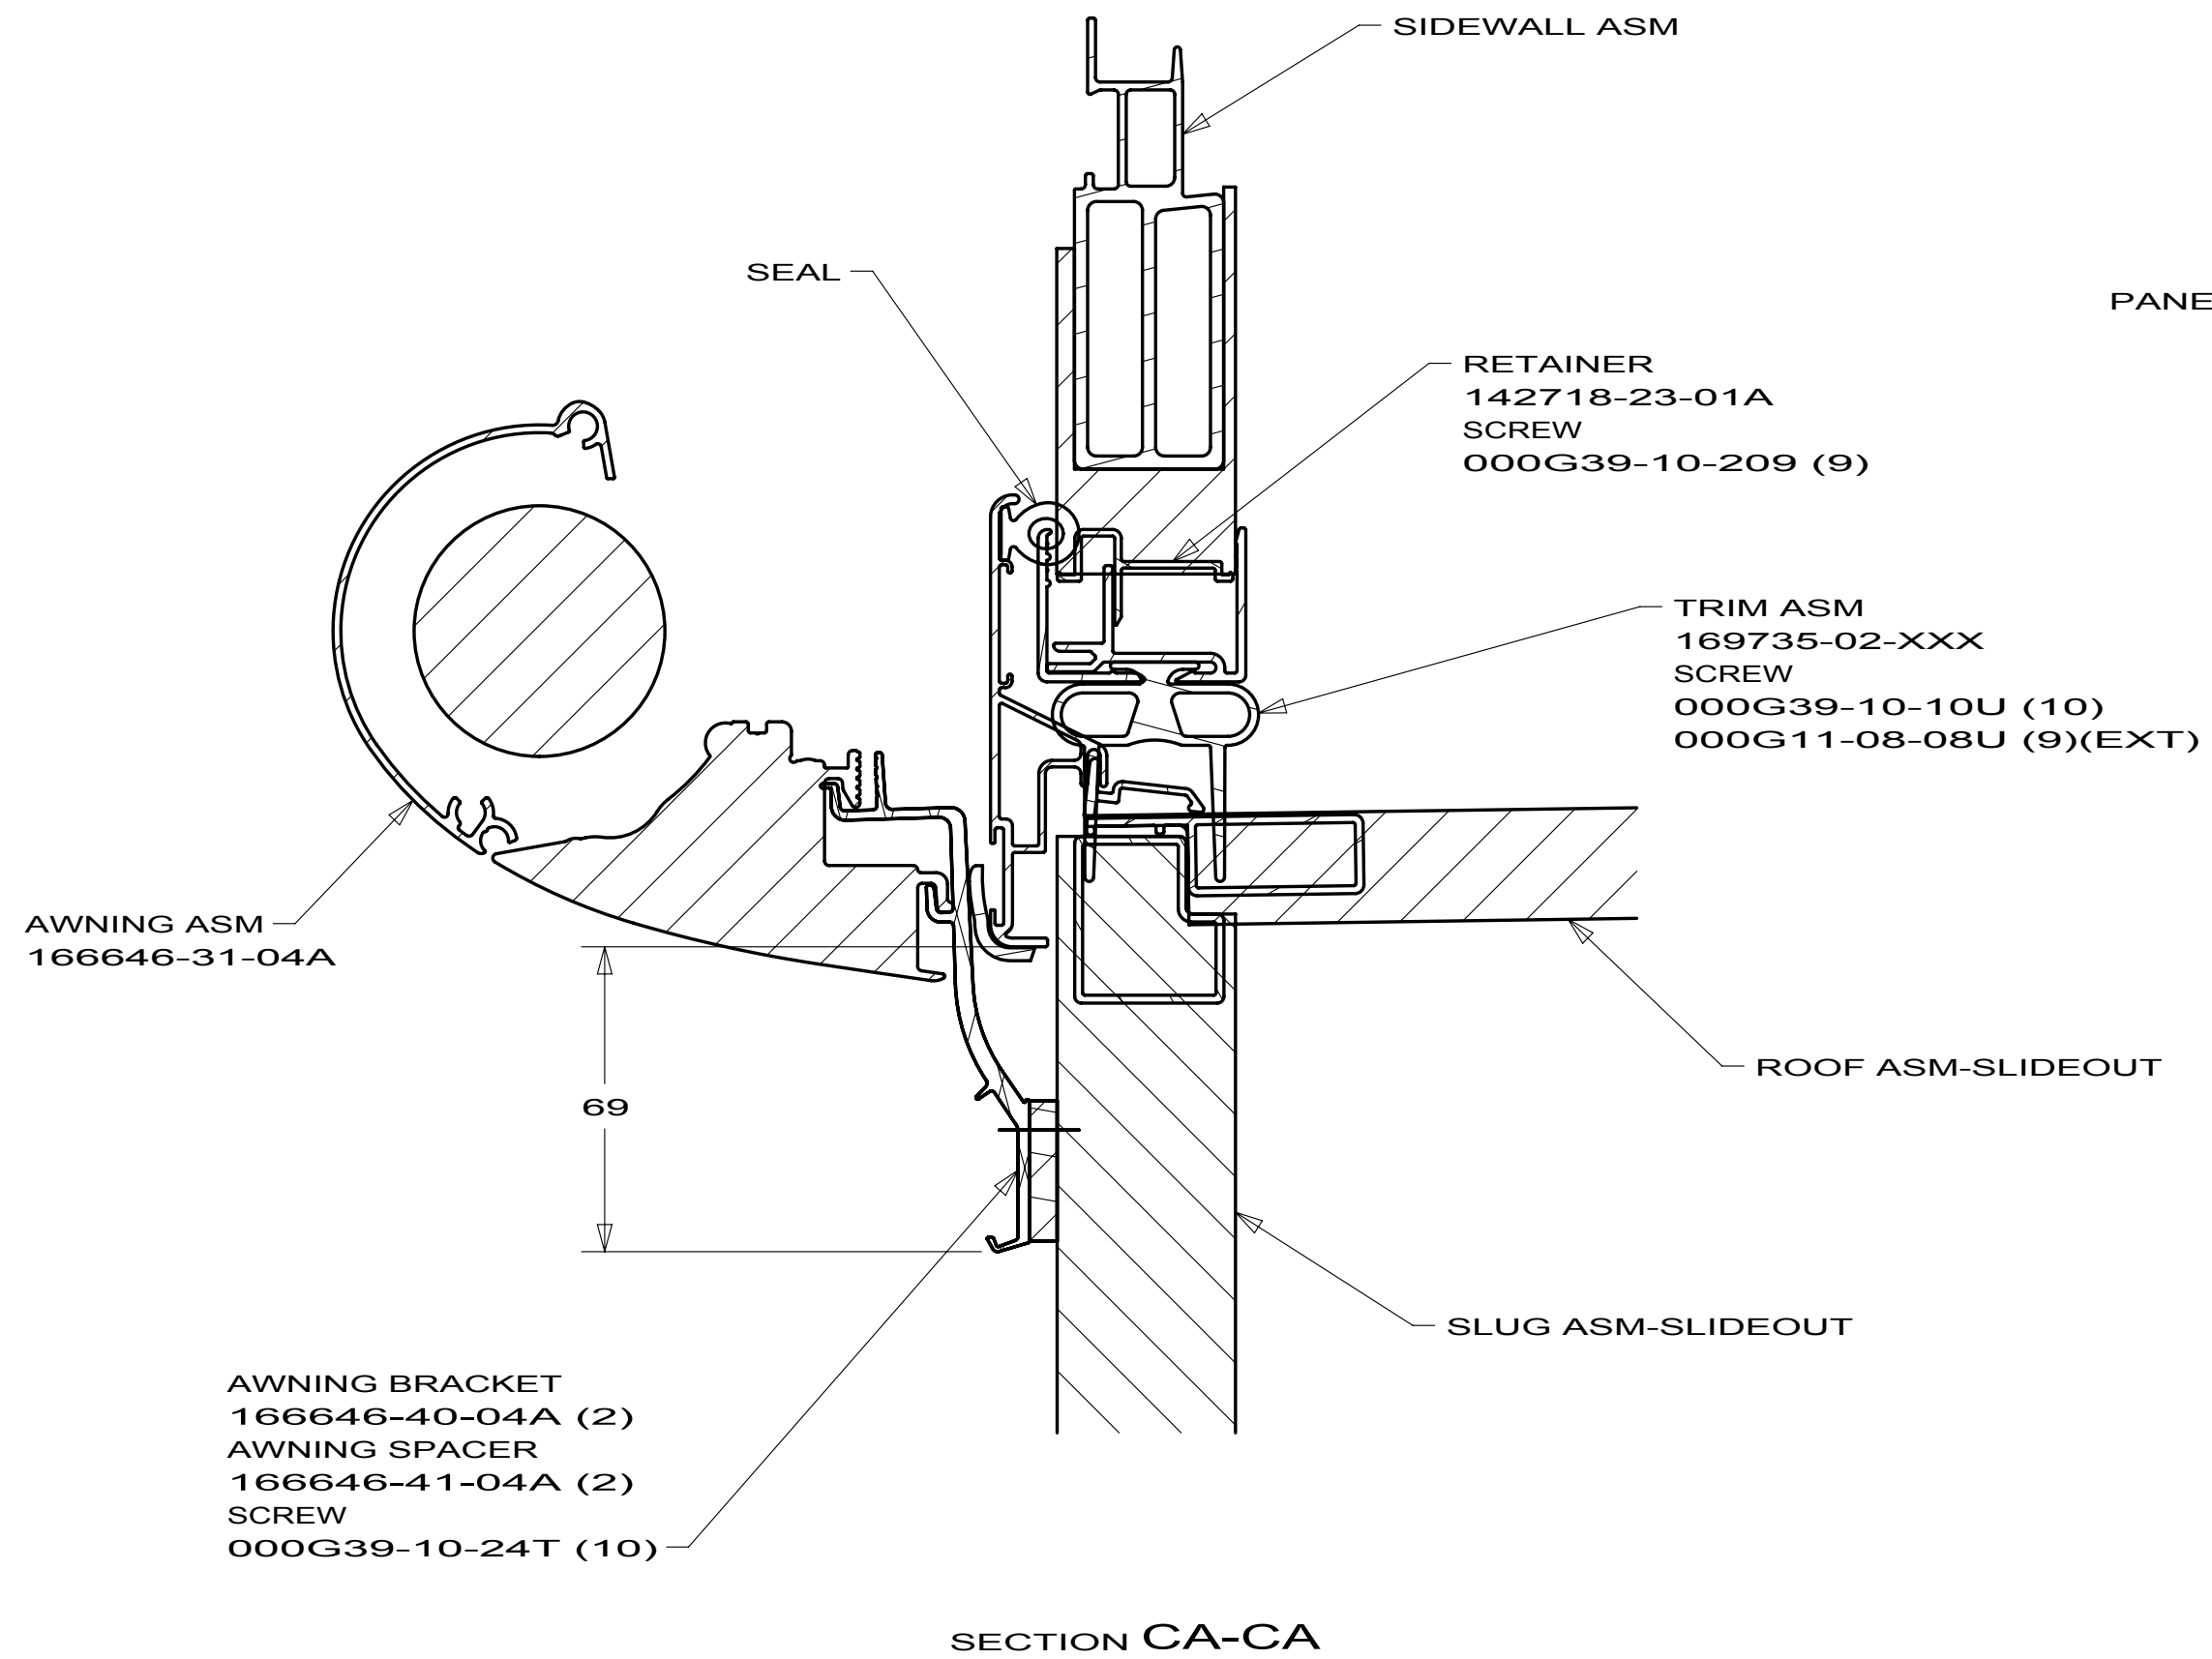




FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-REAR,RH		
SHEET 3	PART NO 169550	REV

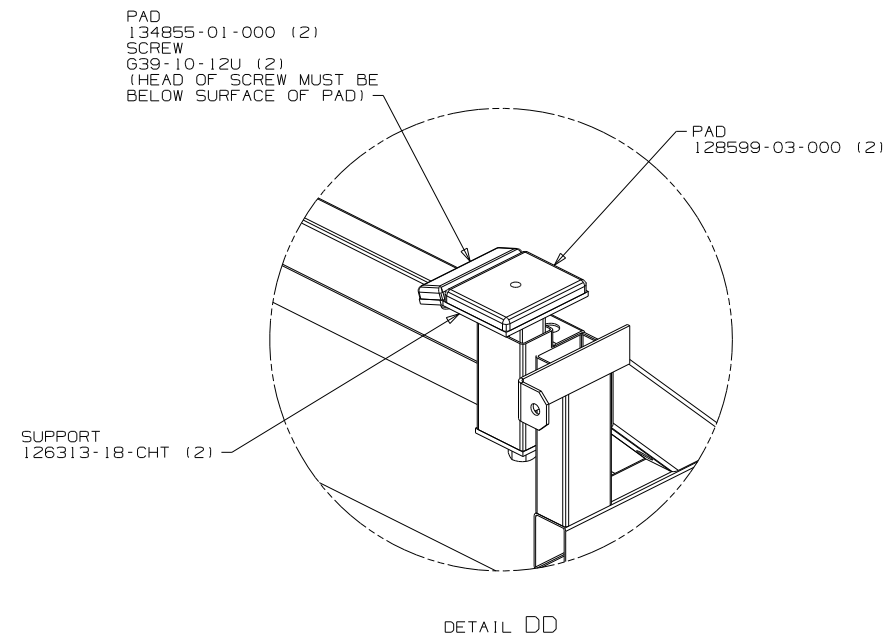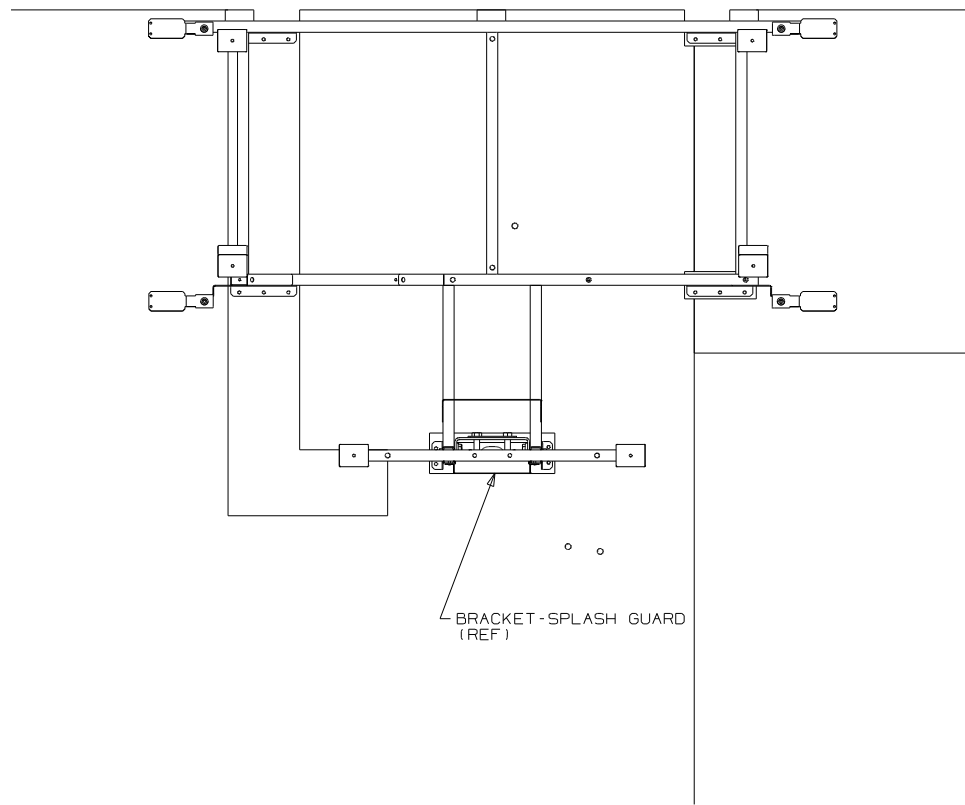

(UP TO 08-03-09)

FIRST USED		10 R40BD	
DO NOT SCALE DRAWING			
TITLE		SLIDEOUT COMPL-REAR,RH	
SHEET 4	A	PART NO 169550	REV K

(AFTER 08-24-09)

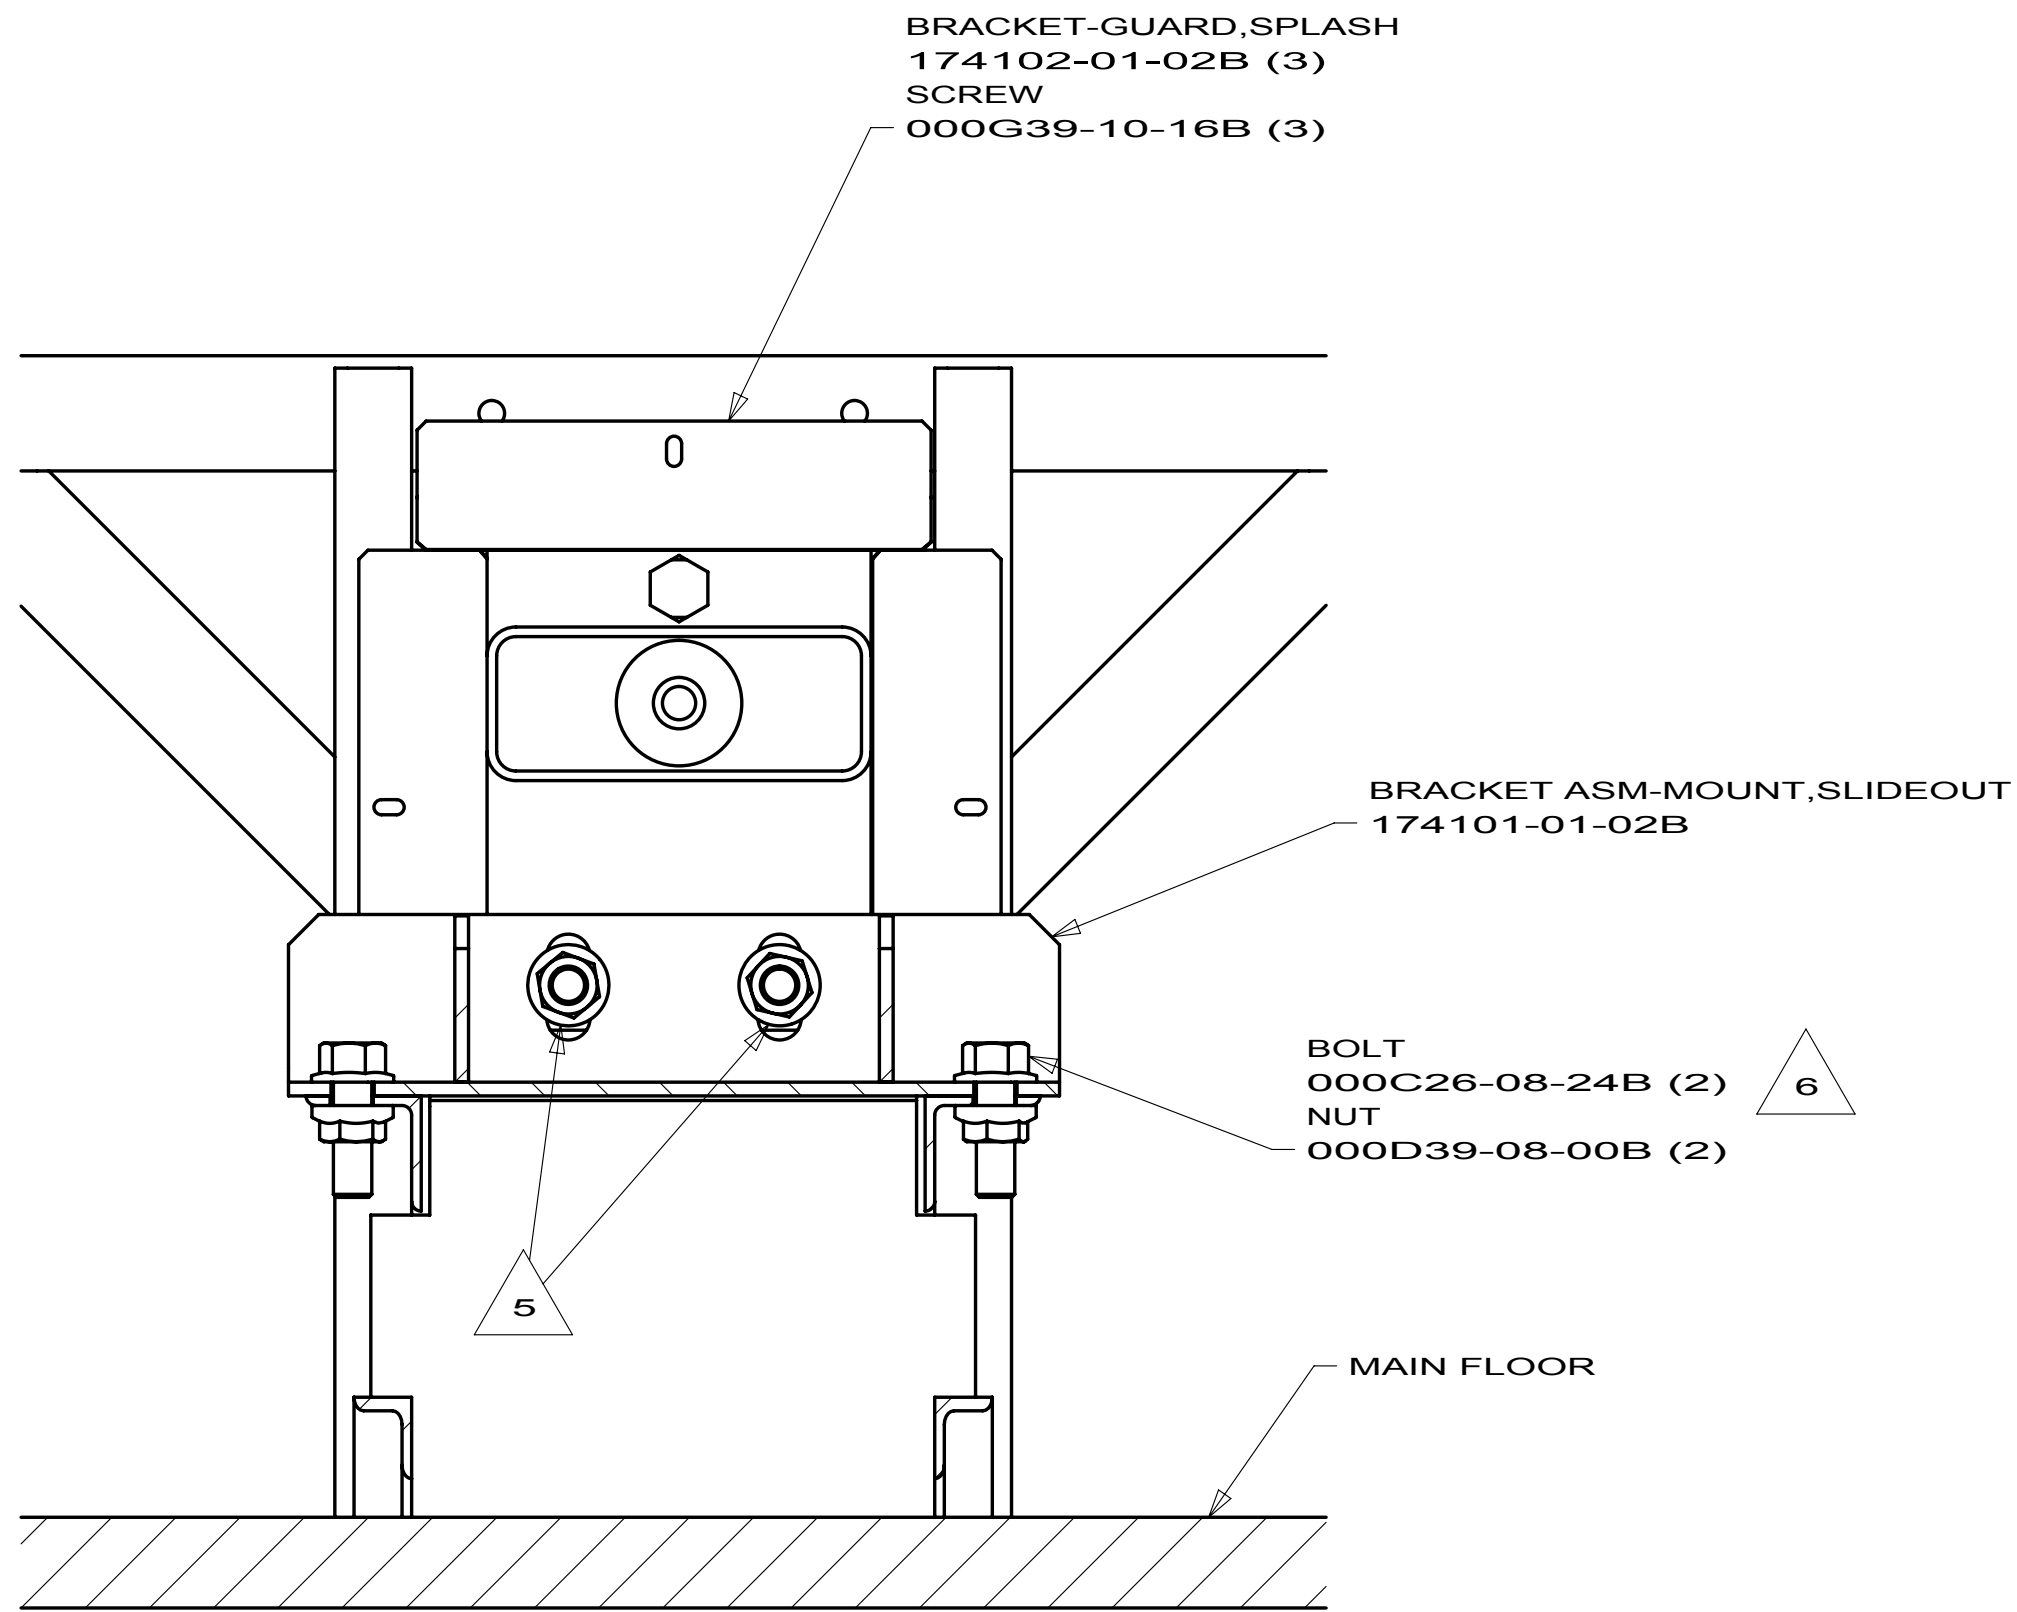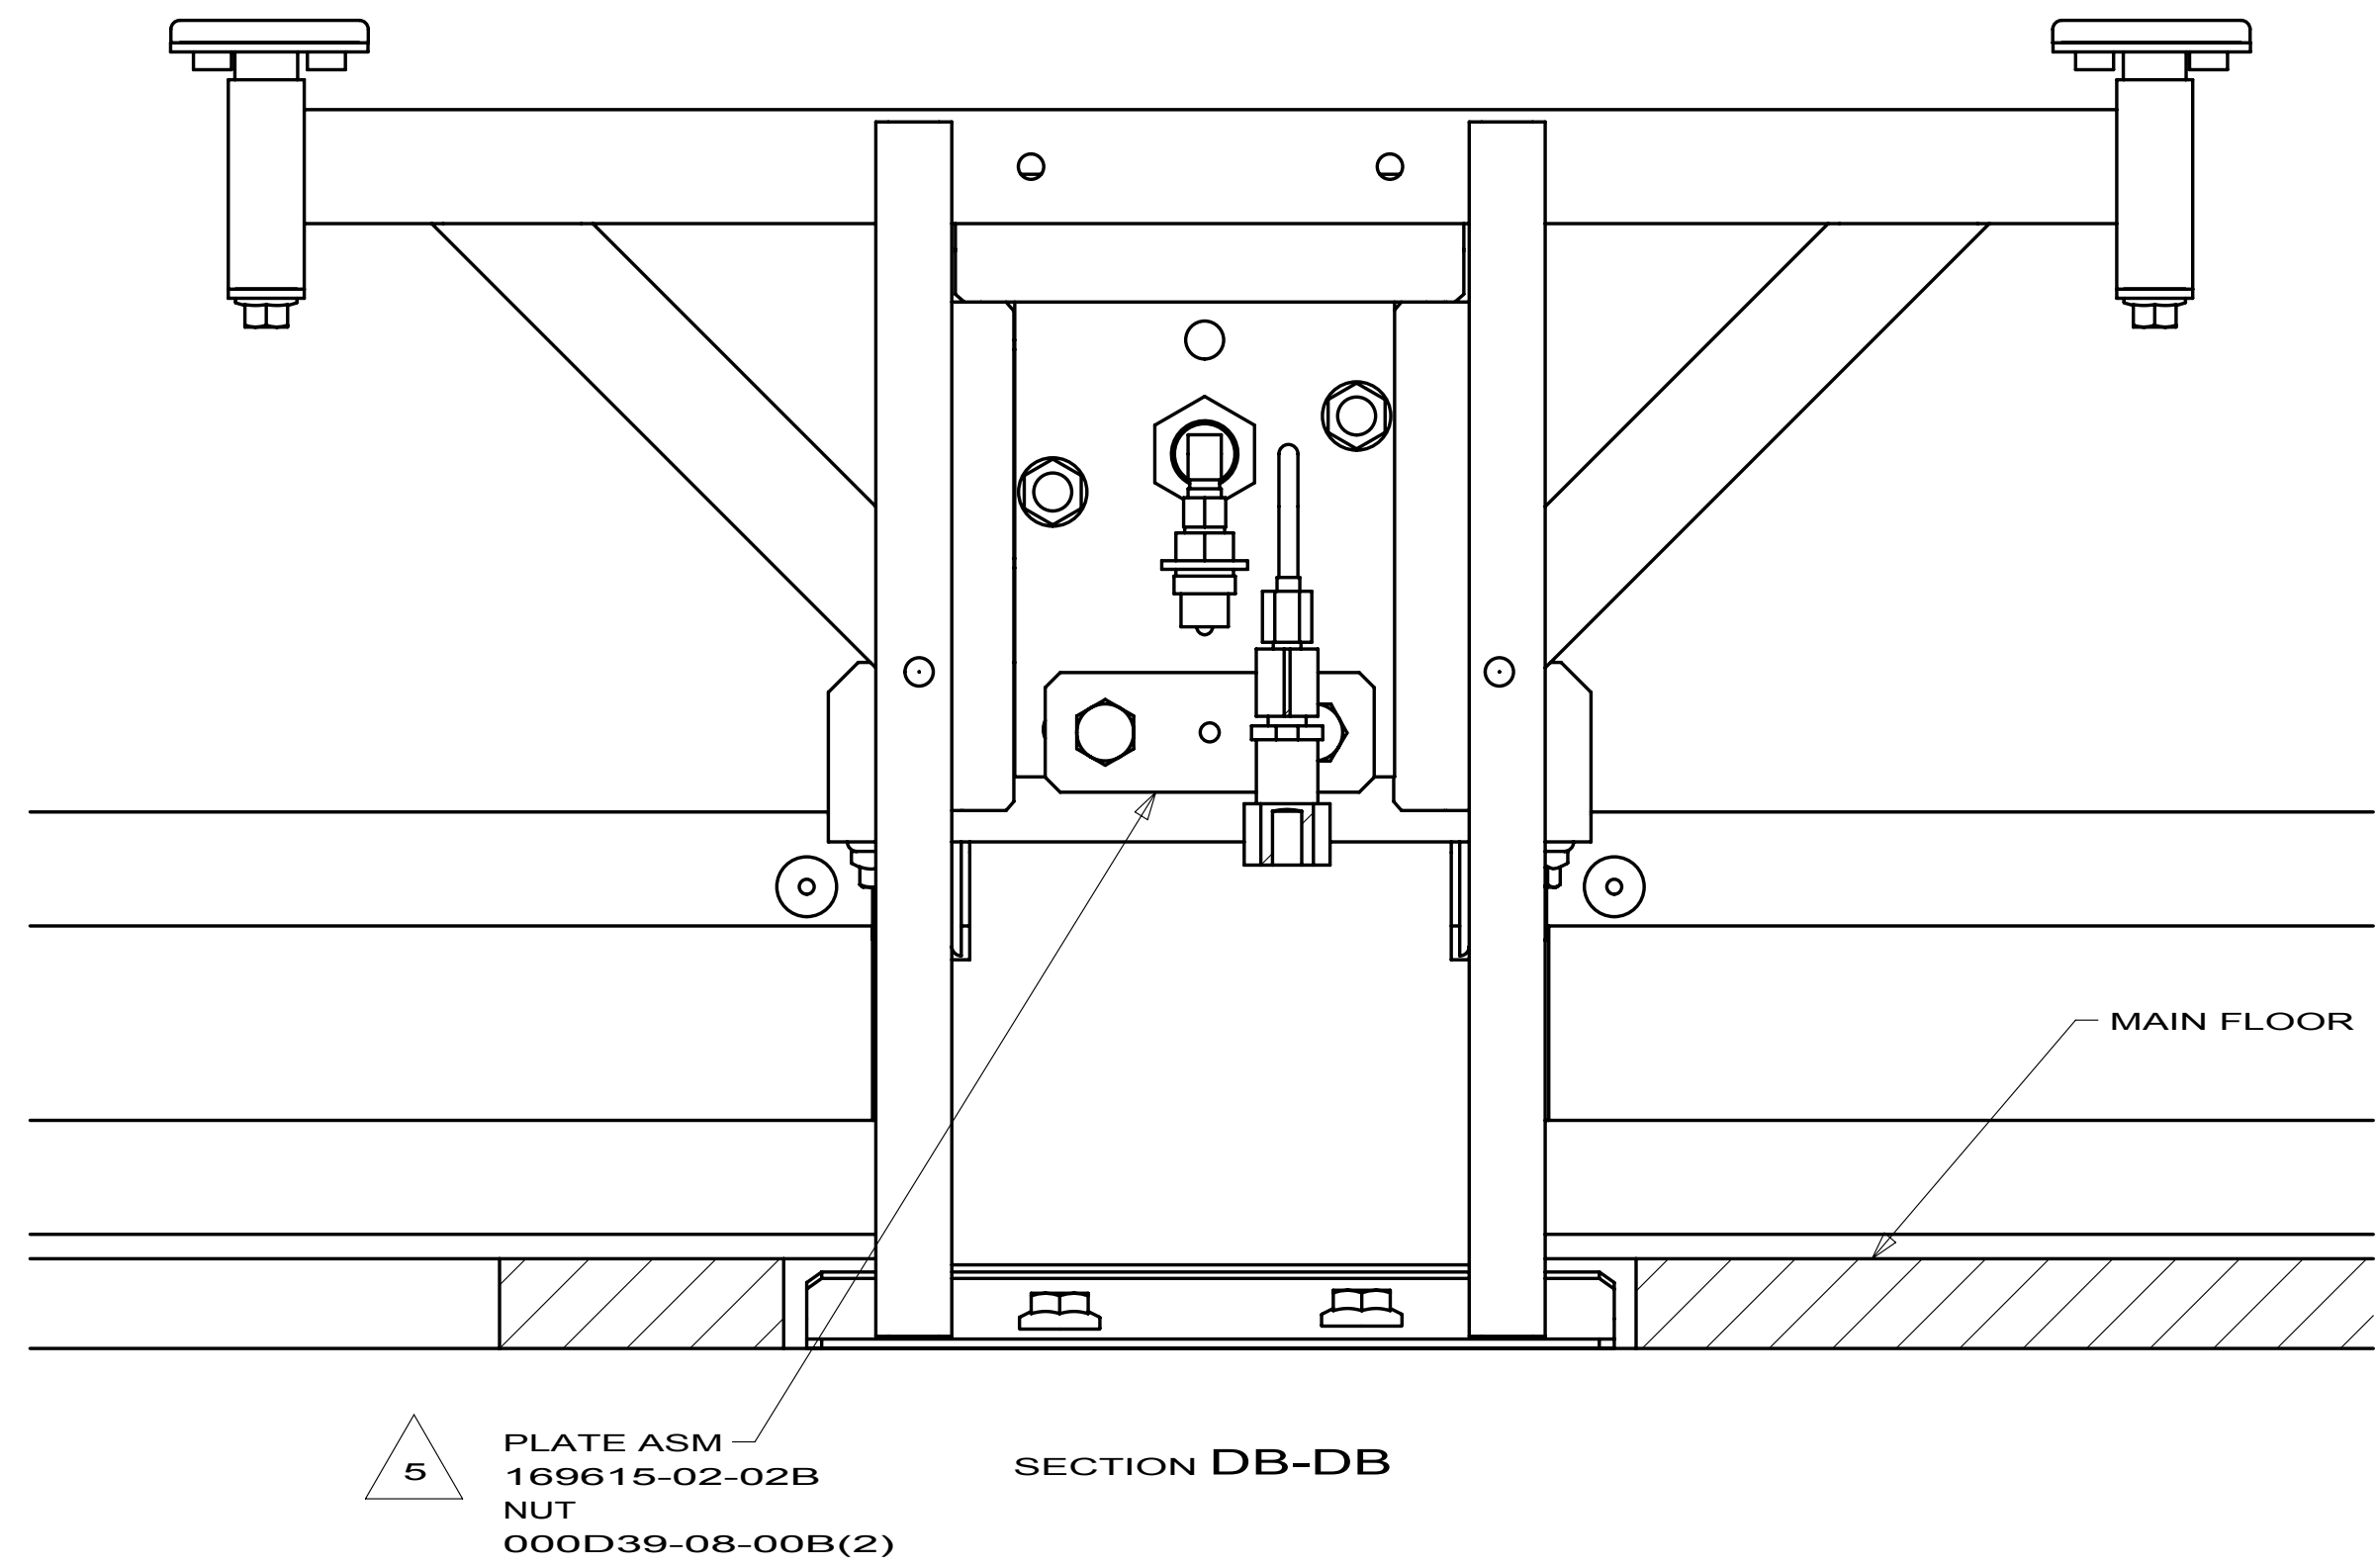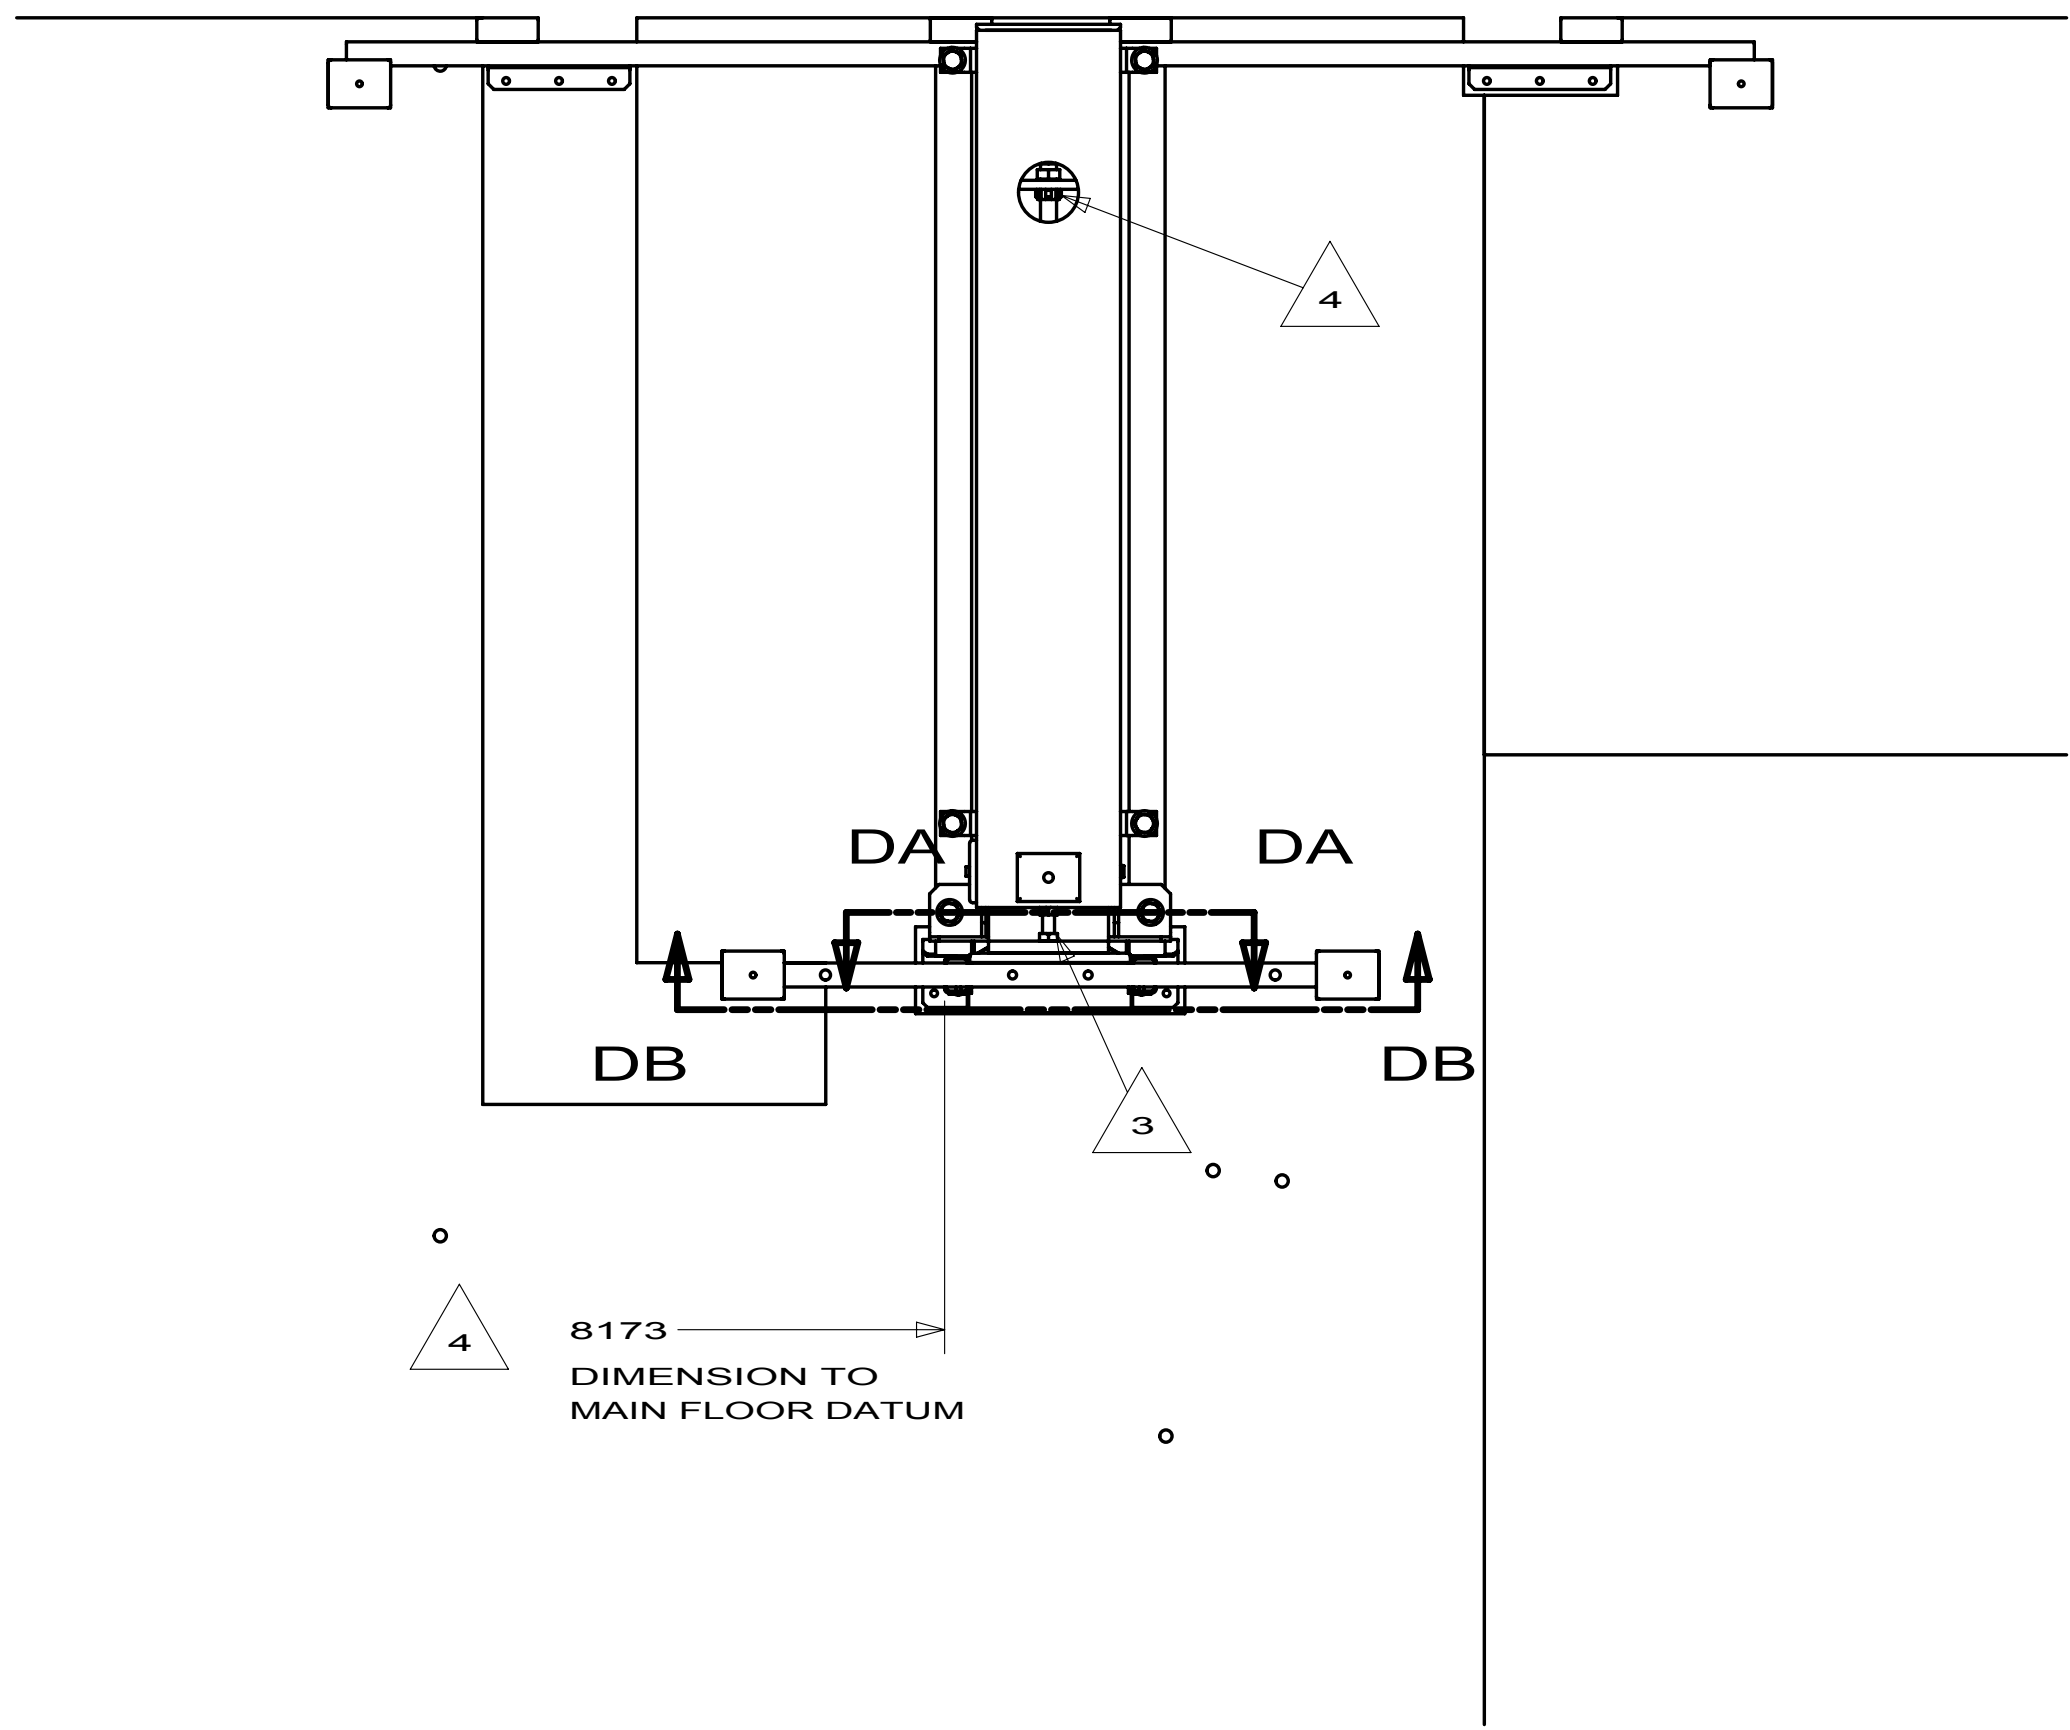


FIRST USED		
10 R40BD		
DO NOT SCALE DRAWING		
TITLE: SLIDEOUT COMPL-REAR,RH		
SHEET 4B	PART NO 169550	REV

153651-02-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT - SWITCH	1812996
	153651-01-702	EA COVER/BOOT - SEAL	1612011
	153651-02-700	EA MOTOR/LH - F/TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223



153651-04-01A			
KEY	PART NUMBER	U/M DESCRIPTION	VENDOR NO.
	153651-01-701	EA LIMIT SWITCH	1812996
	153651-02-700	EA MOTOR "R" - F/LH TRAVEL LOCK	1820131
	153651-02-701	EA BRACKET/MOUNTING - MOTOR	1102223
	153651-04-700	EA COVER/BOOT - SEAL	1612012
	153651-04-701	EA BEZEL F/MAIN HOUSING	1612567

TRIM-SIDEWALL,SLIDEOUT,TOP,LH
169751-01-CHT R40BD
169751-01-CHT R40CD

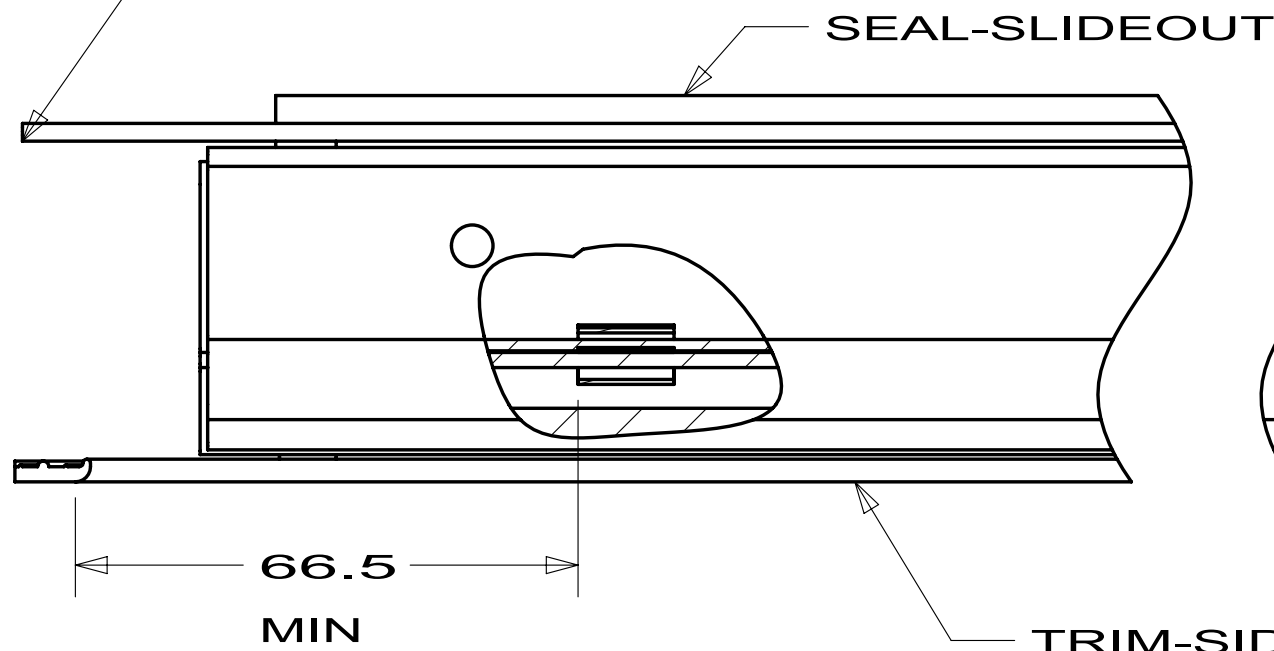



TRIM-SIDEWALL,SLIDEOUT,OUTER,LH
169752-22-CHT

CLIP-S TYPE

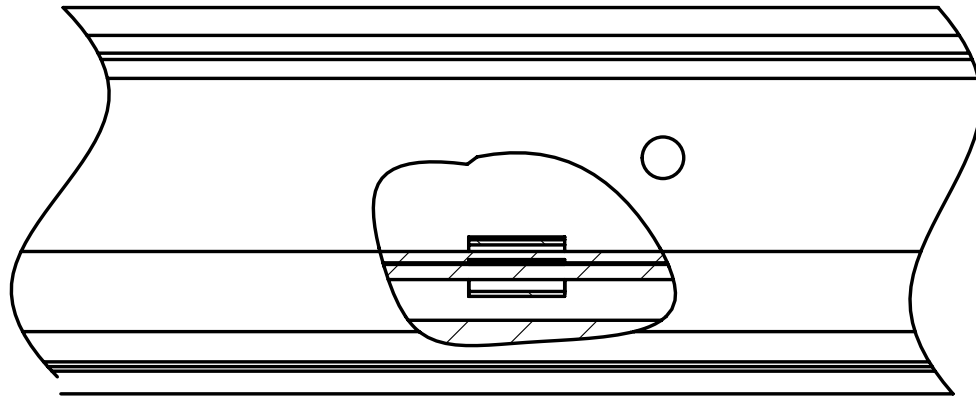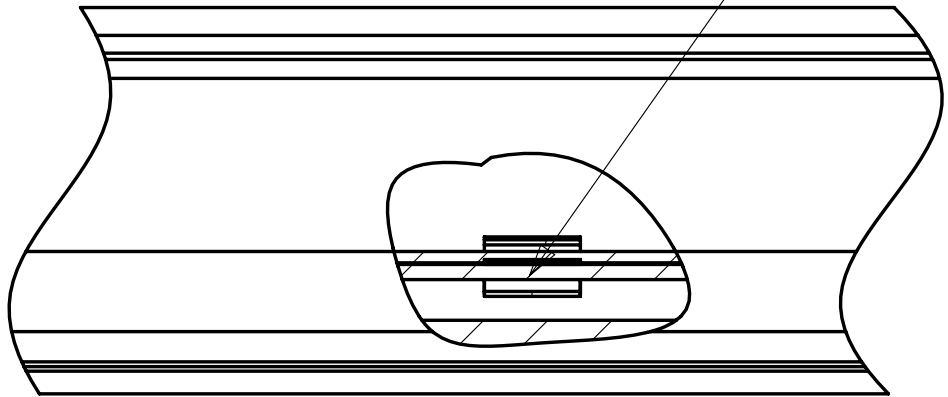

TRIM-SIDEWALL,SLIDEOUT,OUTER,RH
169752-02-CHT

TRIM-SIDEWALL,SLIDEOUT,TOP,RH
169751-22-CHT

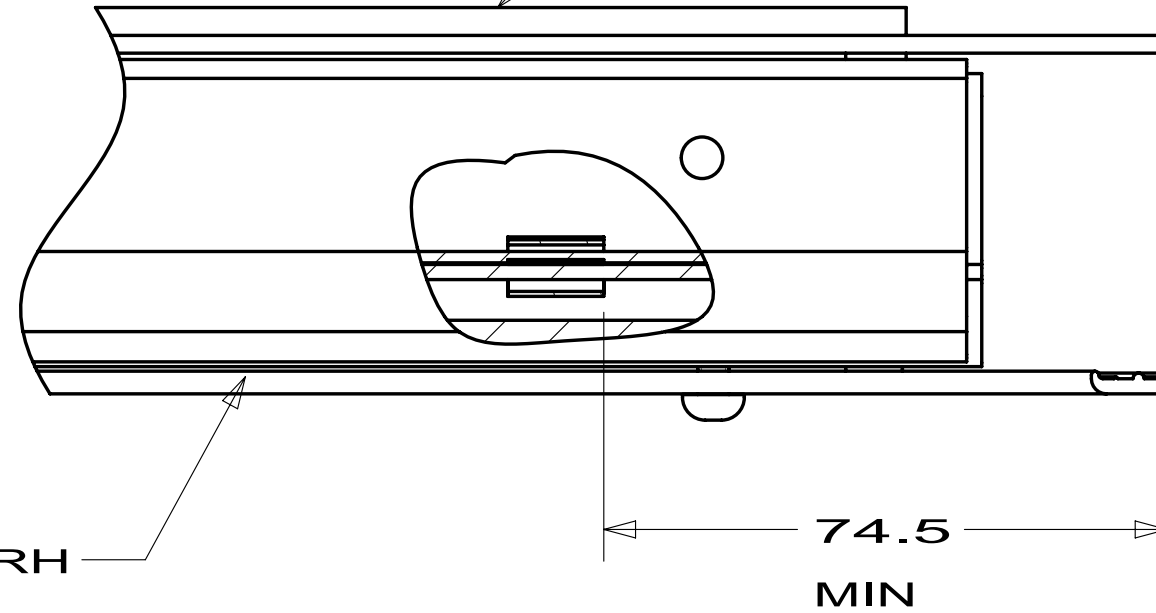

TRIM-SIDEWALL,SLIDEOUT,TOP

RETAINER-SIDEWALL,SLIDEOUT
169801-37-CHT R40BD
169305-01-000 R40CD

SCREW
G39-06-06U (2)

DETAIL D
DETAIL E

CLIP-S TYPE
142549-01-000(4)

EXTR
48597-51-002
RIVET
H15-04-03R (4)


TRIM-SIDEWALL INNER

SEAL-SLIDEOUT
136978-02-CHT


SCREW
G1108-08-170 (4)

TRIM-SIDEWALL,SLIDEOUT,OUTER

VIEW B



SEAL-SLIDEOUT

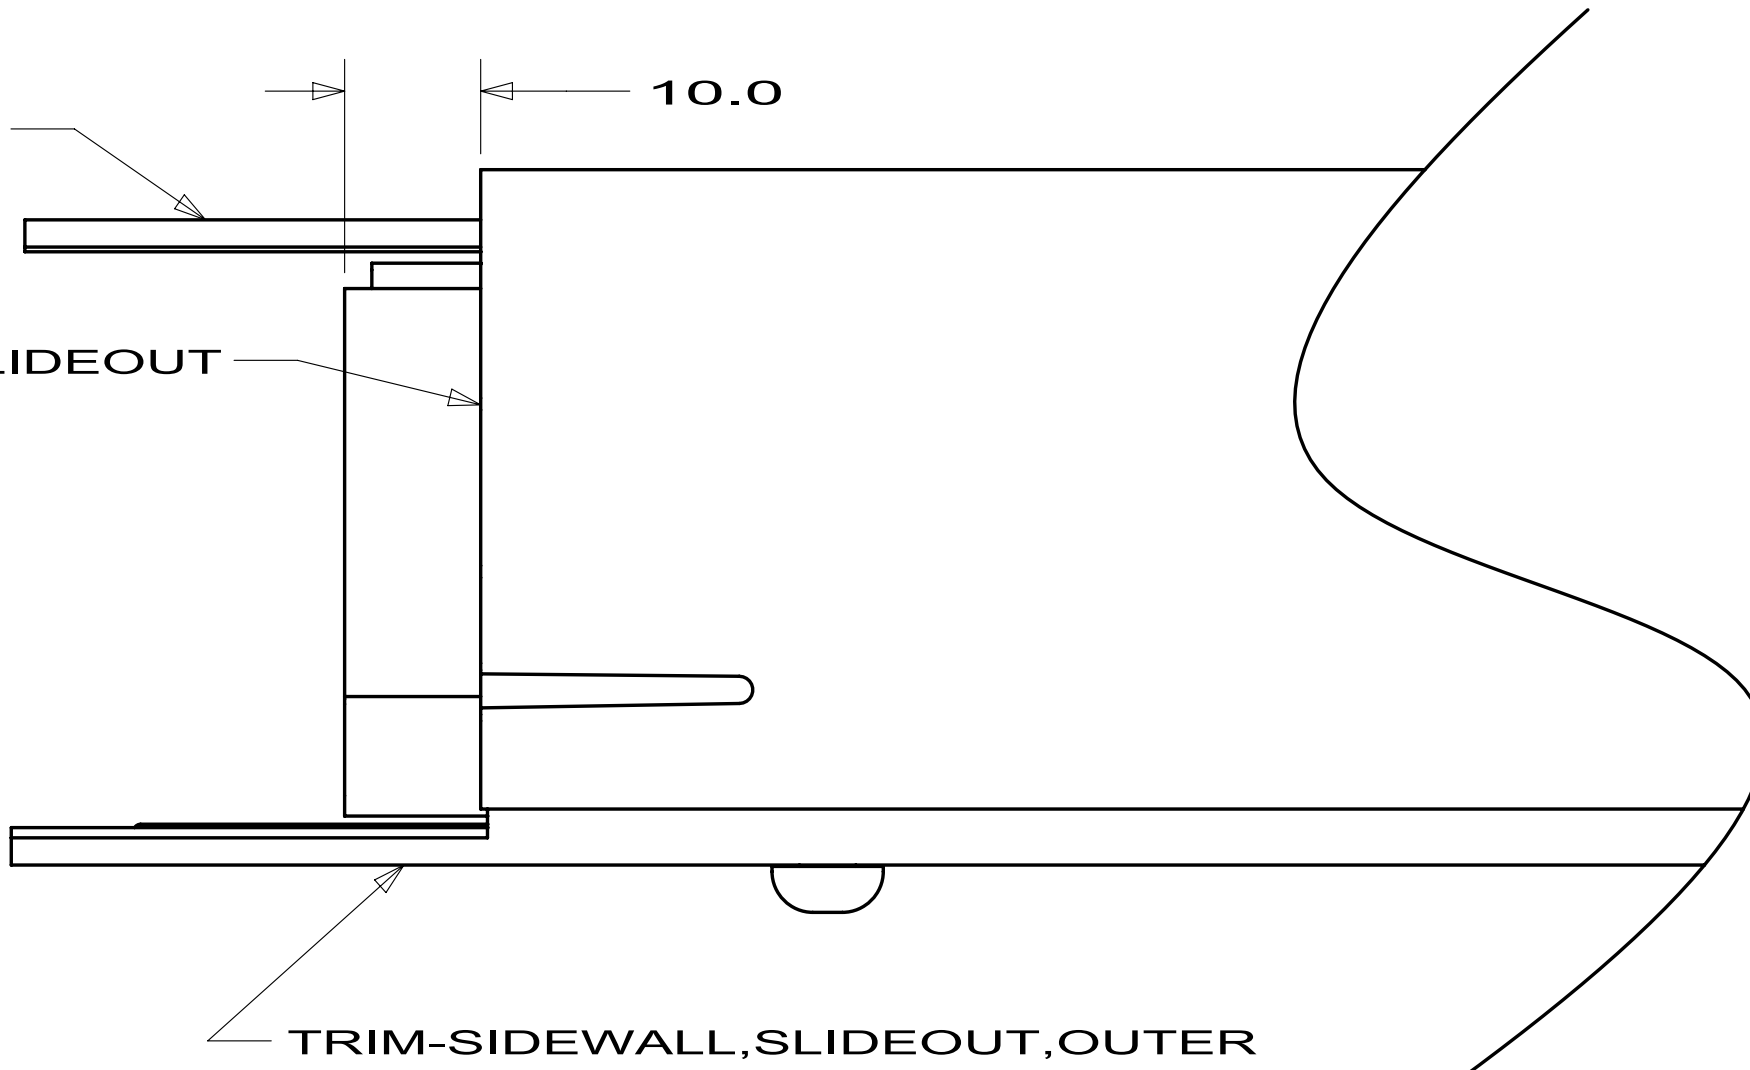

RETAINER-SIDEWALL
(SEE TAB)

TRIM

SEAL

20.0

20.0

VIEW C
BOTH ENDS

RETAINER (3)
(SEE TAB)

- NOTES:
1. APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.
 2. APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 3. LOCATE CLIPS AT EACH END AND SPACED EQUALLY ALONG THE INNER TRIM.
 4. TOLERANCE ON THE CLIP SPACING IS ± 100.0 mm.
 5. OUTER TRIM MUST BE CENTERED ON THE INNER TRIM WITHIN ± 3.0 .
 6. INSTALL SEAL WITH WIPE LEG TO THE OUTSIDE OF THE COACH.
 7. CENTER EXTRUSION ACROSS SPLICE IN TOP TRIM, DRILL 4 3.28 MM(.129 INCH) HOLES AS REQUIRED AND RIVET TOGETHER
 8. USE TRIM SIDEWALL TOP 169751 AND TRIM SIDEWALL OUTER 169752 FOR STANDARD LENGTH ROOMS BUILT TO ES0080.

WINNEBAGO® INDUSTRIES		COPYRIGHT 2009 WINNEBAGO INDUSTRIES, INC.	
DFT-OR		ORIG. DATE	
CHK-OR		ALL DIMENSIONS ARE IN MILLIMETERS	
P.E.			
M.E.			
DSNR		FIRST USED	
		06 G38T	
UNSPECIFIED TOLERANCES ARE:		MATERIAL:	
WHOLE DIM (X) ± 3			
ONE-PLACE (X.X) ± 1.5			
TWO-PLACE (X.XX) ± 0.50			
ANGLE ± 1°			
THIRD ANGLE PROJECTION			
			
DO NOT SCALE DRAWING			
TITLE:			
TRIM ASM-SLIDEOUT, TOP			
SHEET 1 OF 1		PART NO	REV
		154758	

D

D

C




C

B




B

A


A

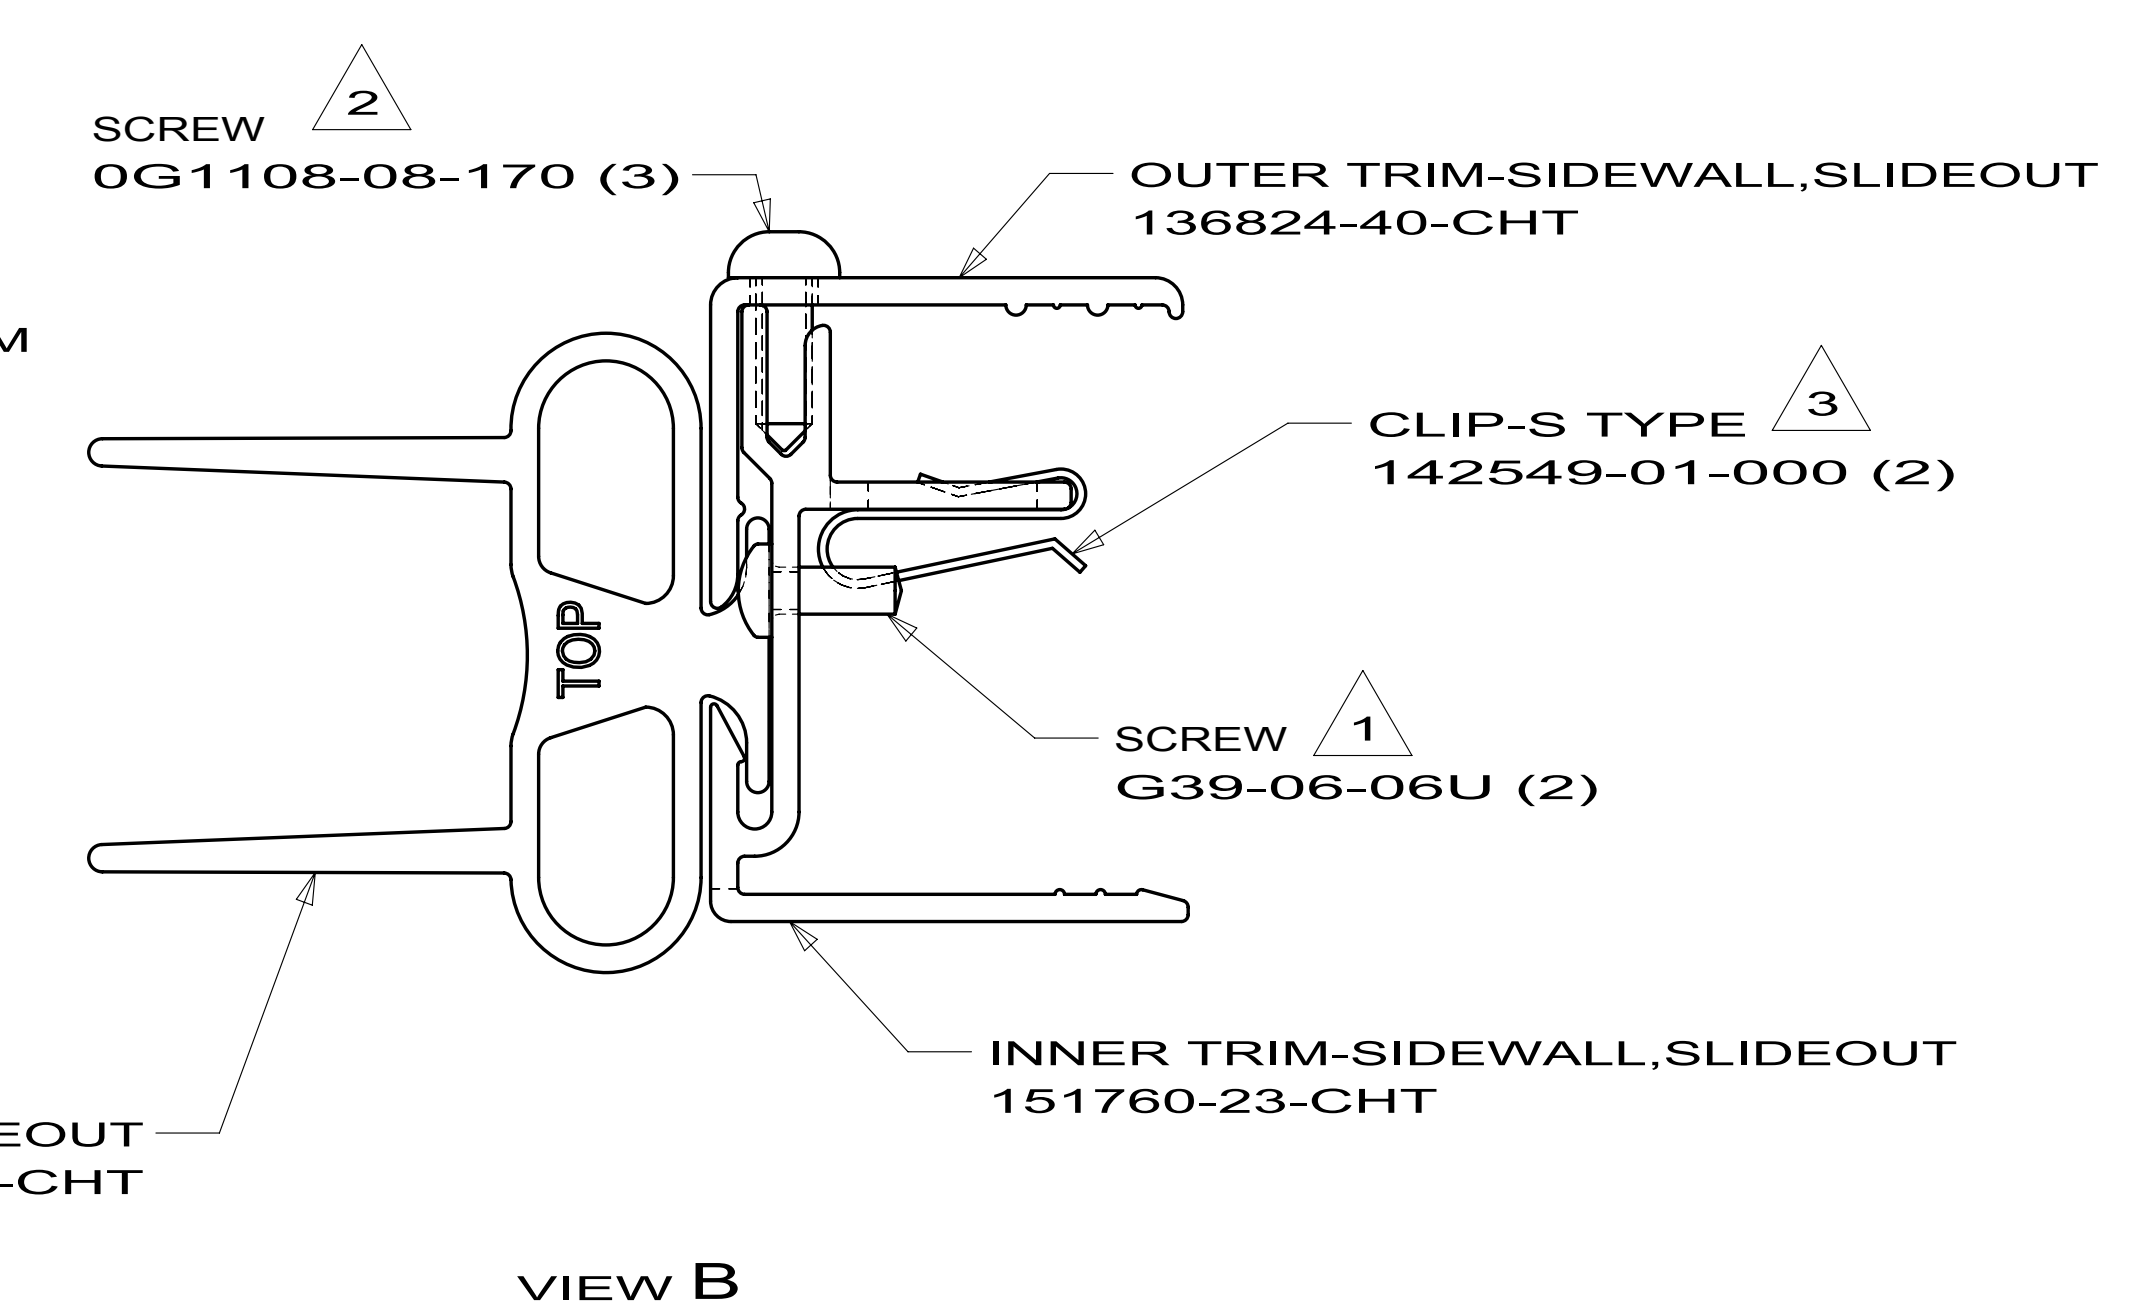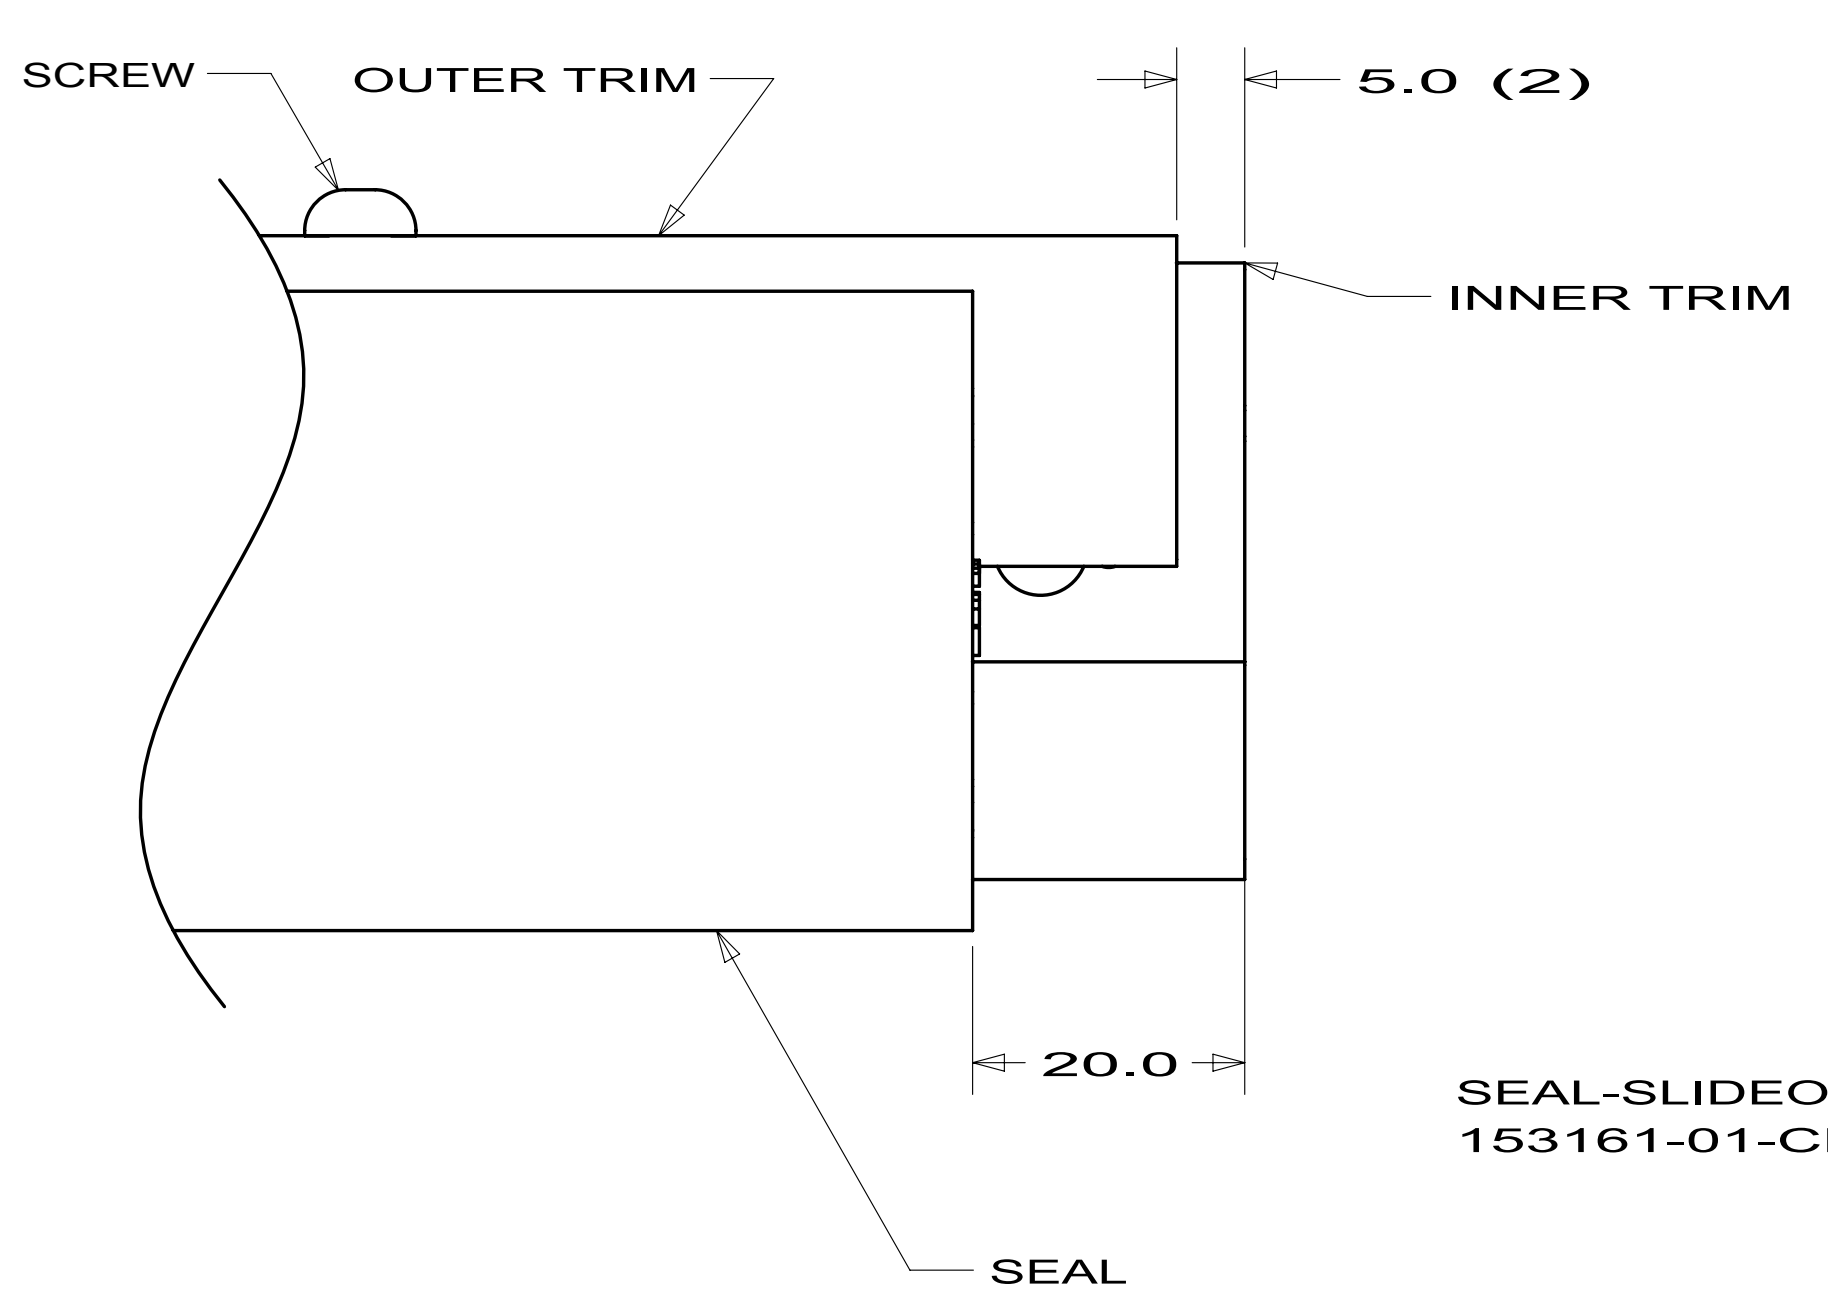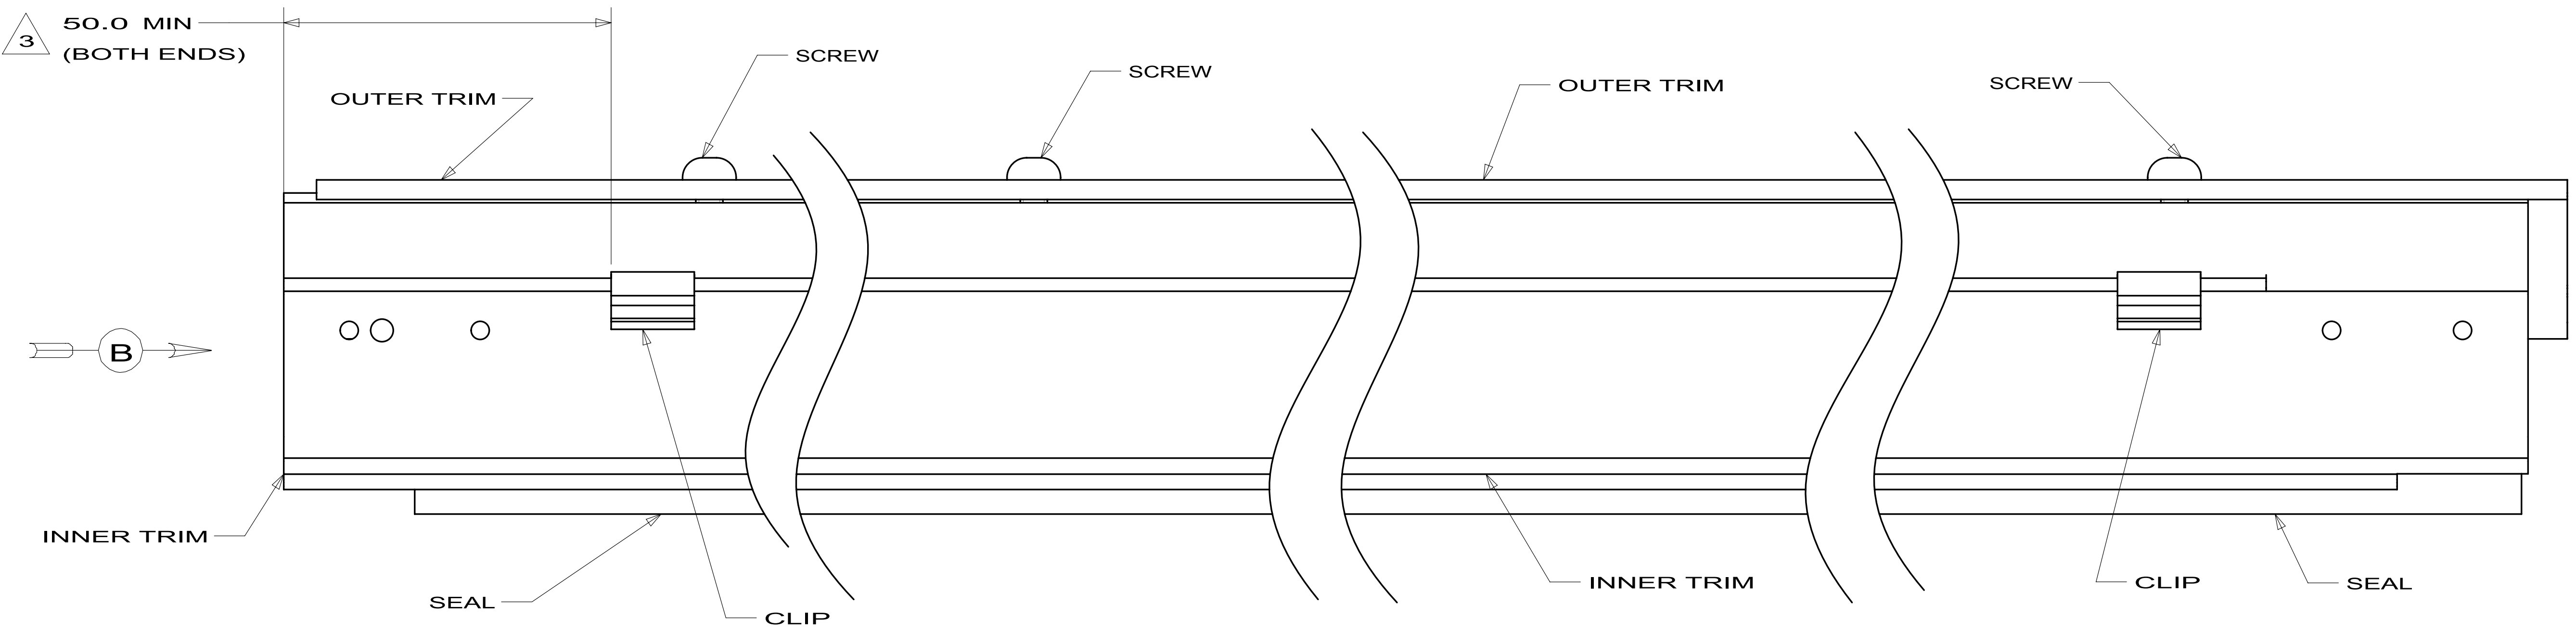

FIRST USED		
FABWELL SDW		
DO NOT SCALE DRAWING		
TITLE: TRIM ASM-SLIDEOUT,SIDE		
SHEET 1	PART NO 156194	REV

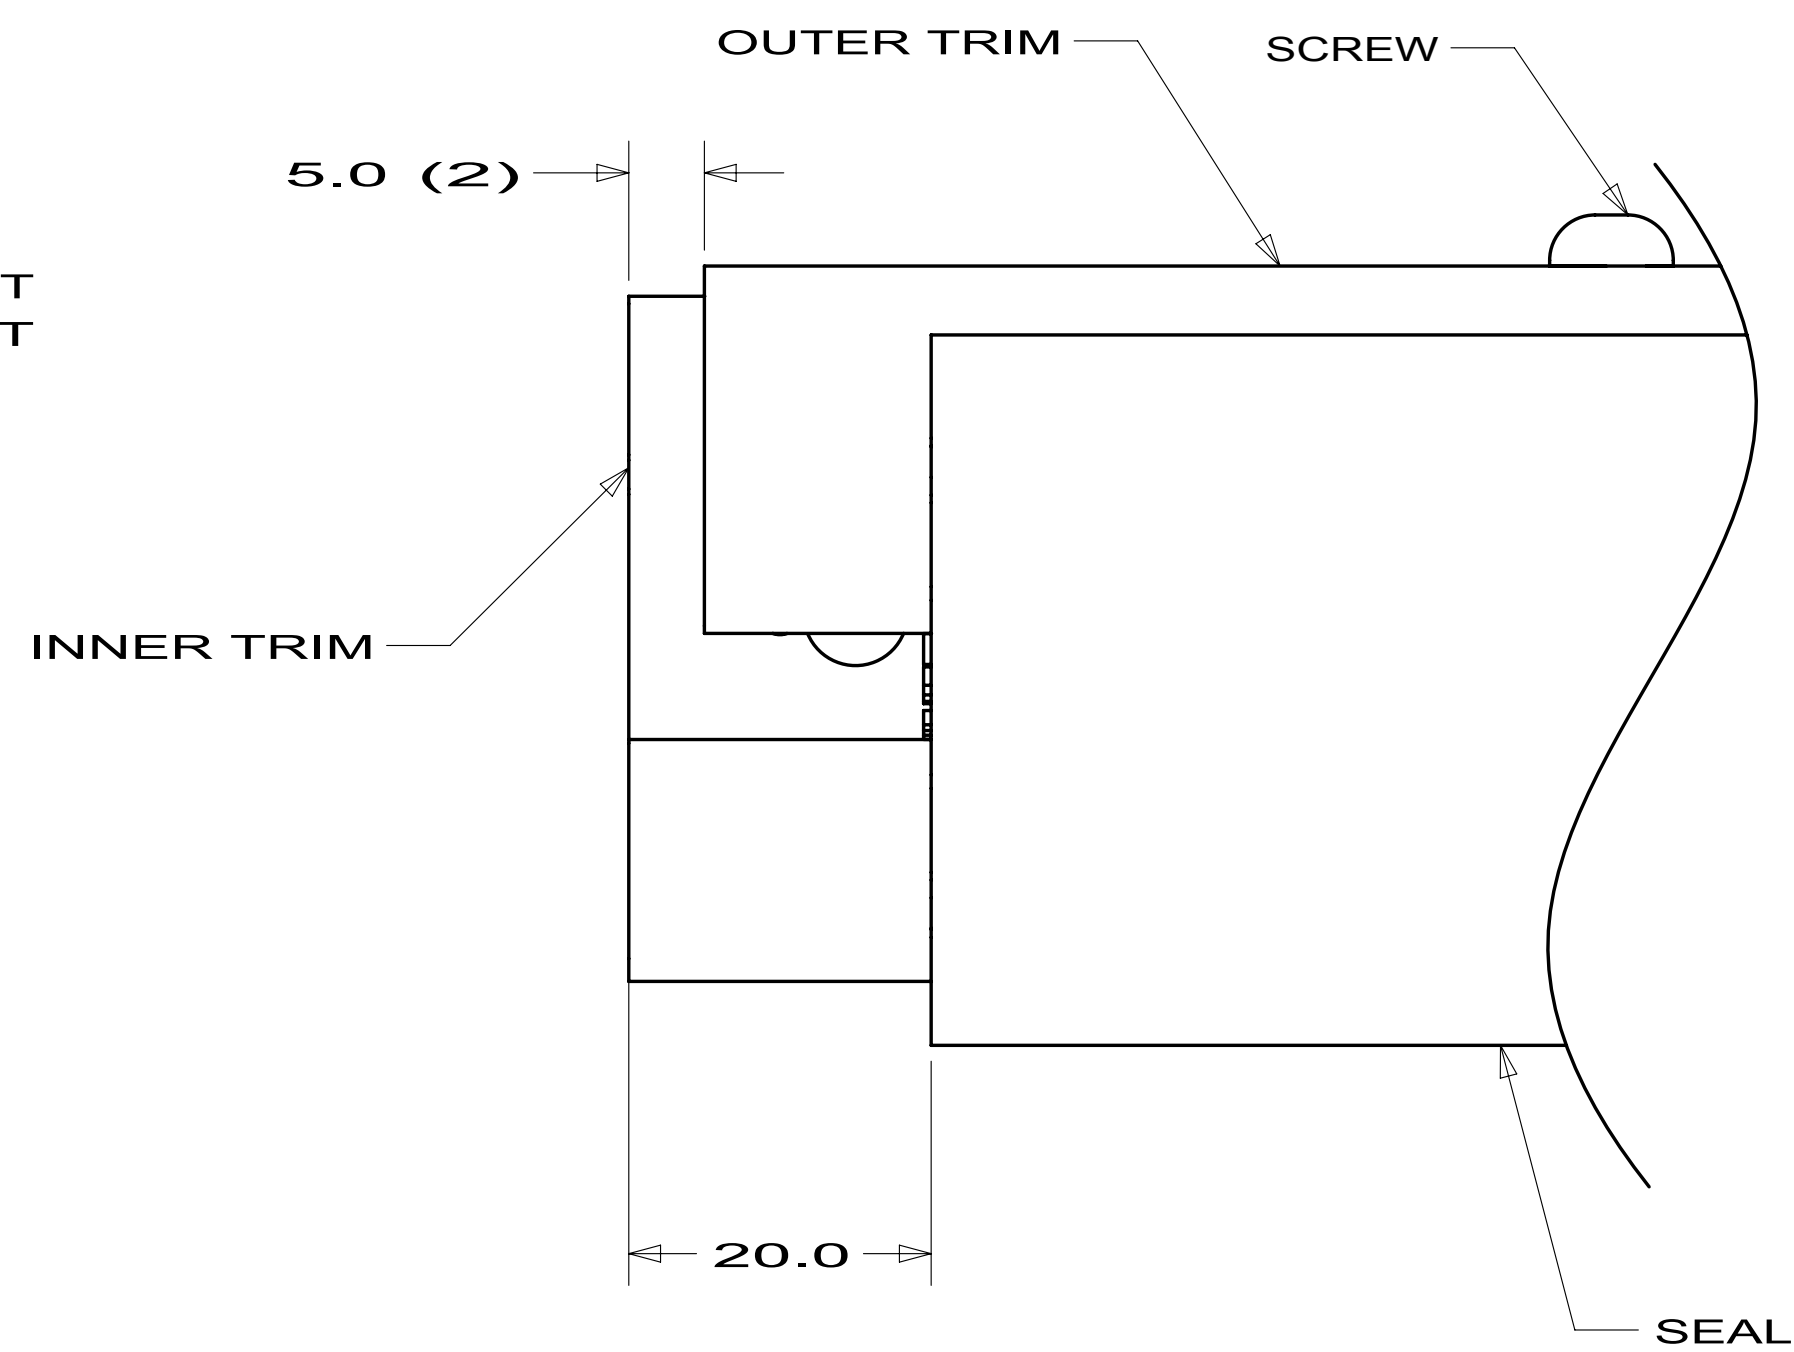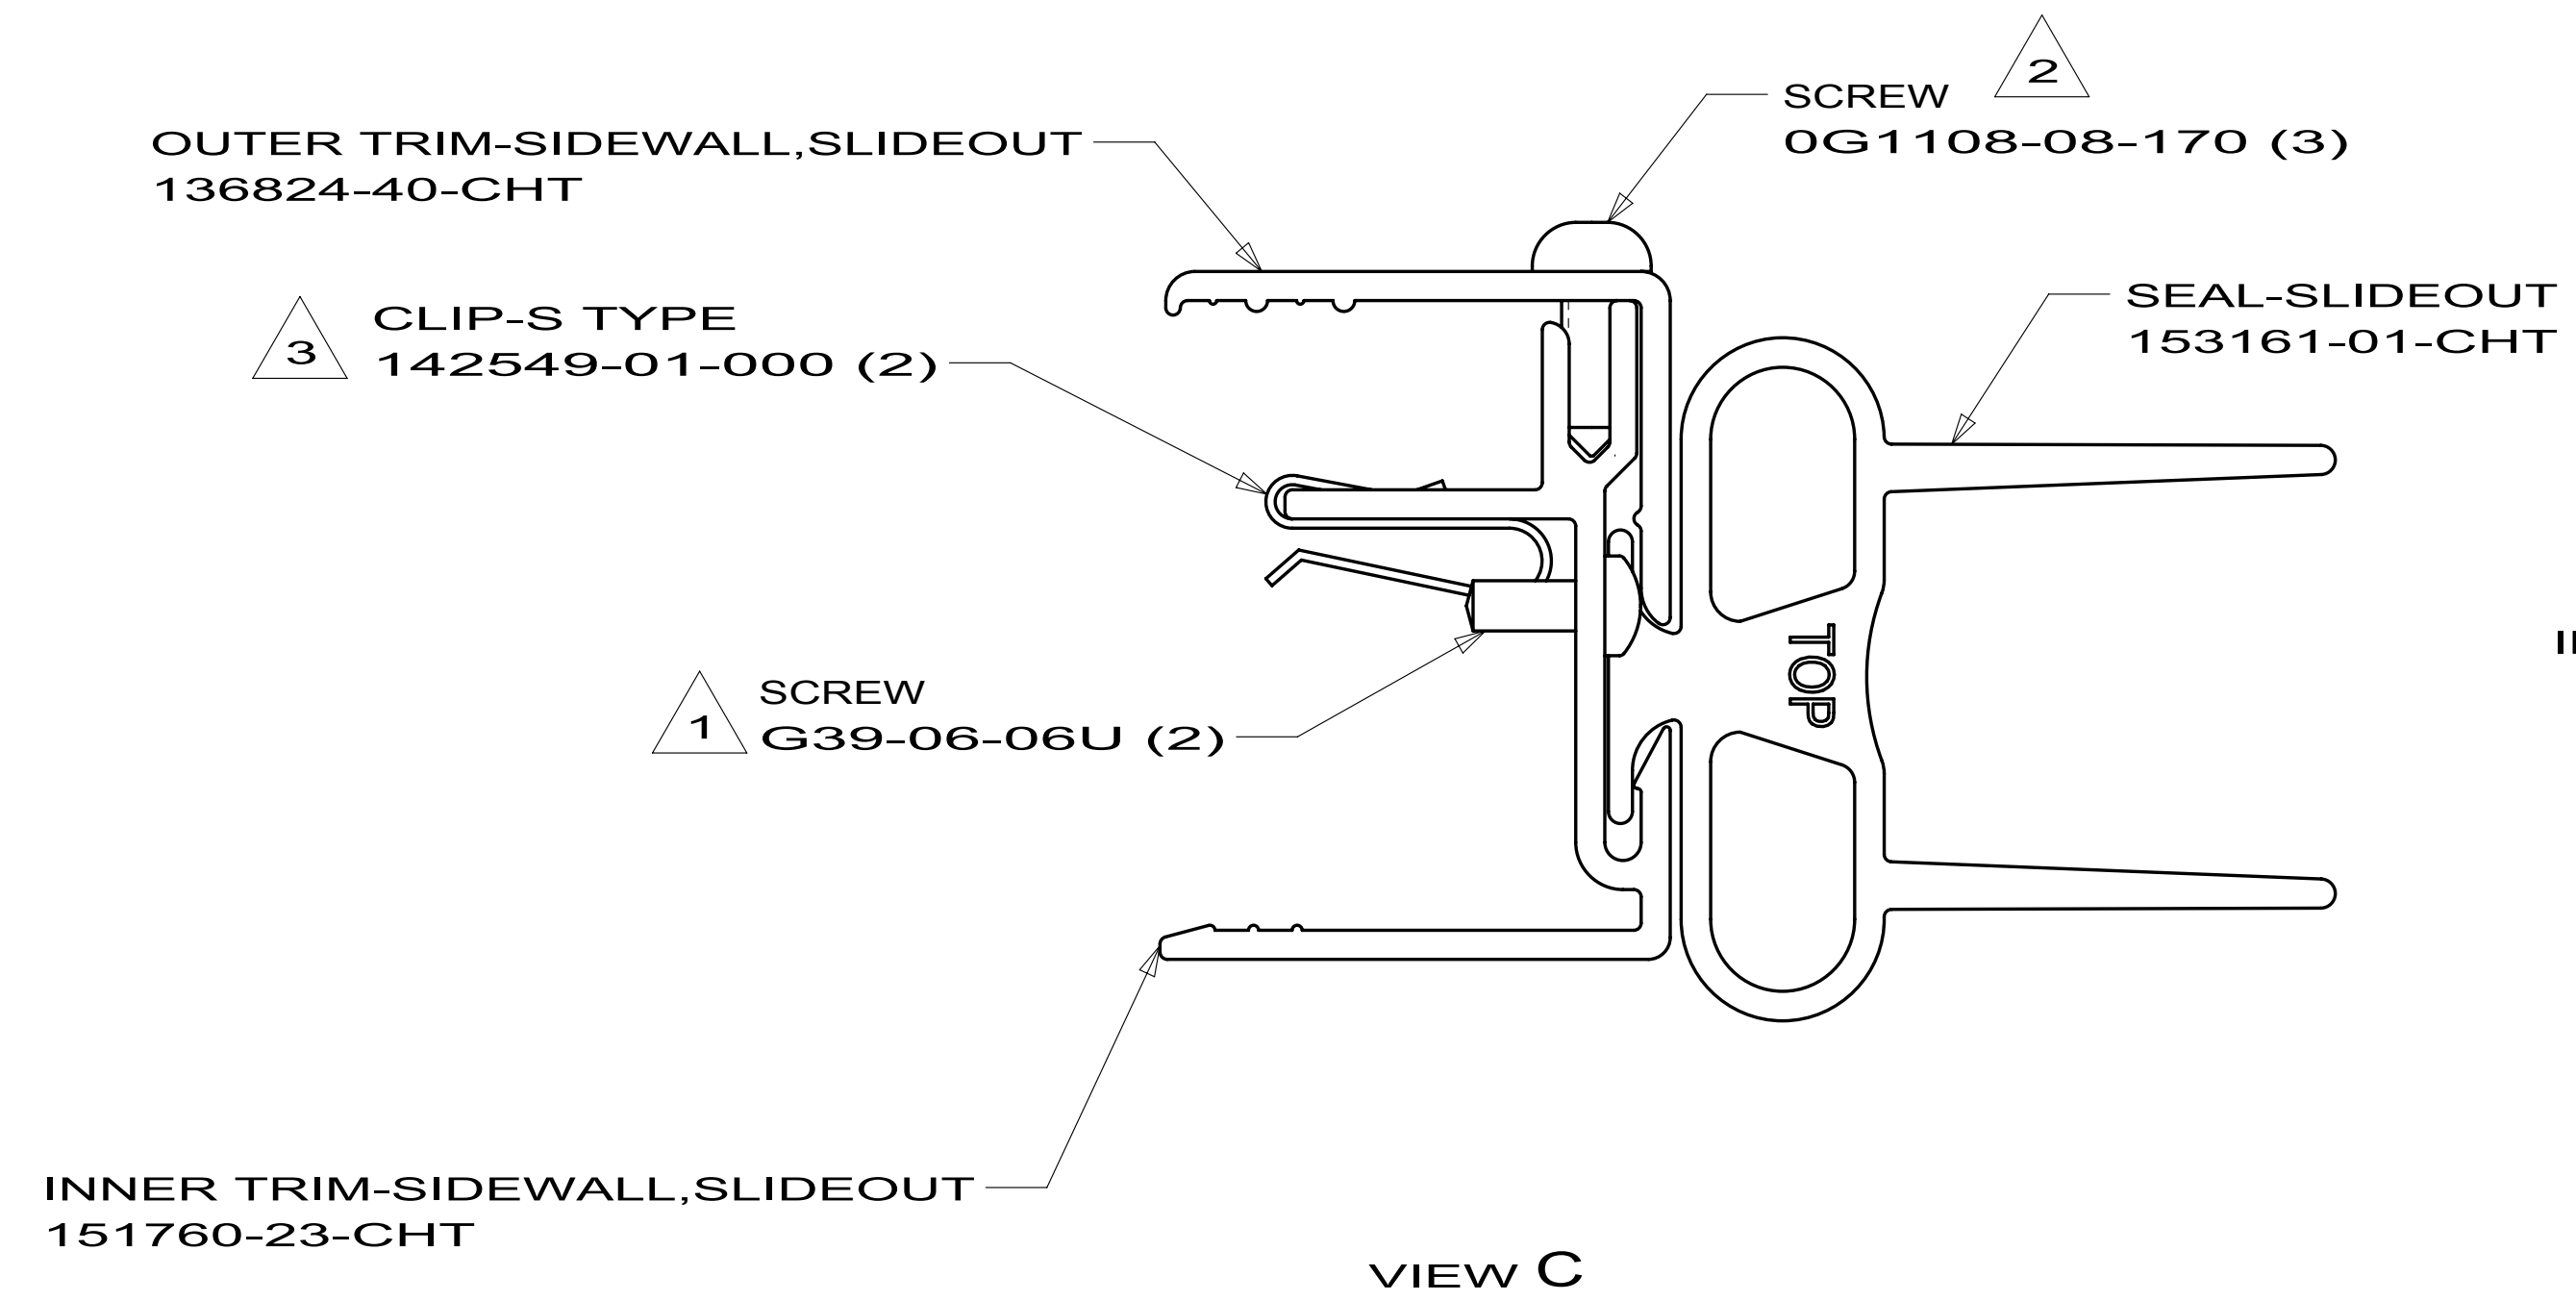
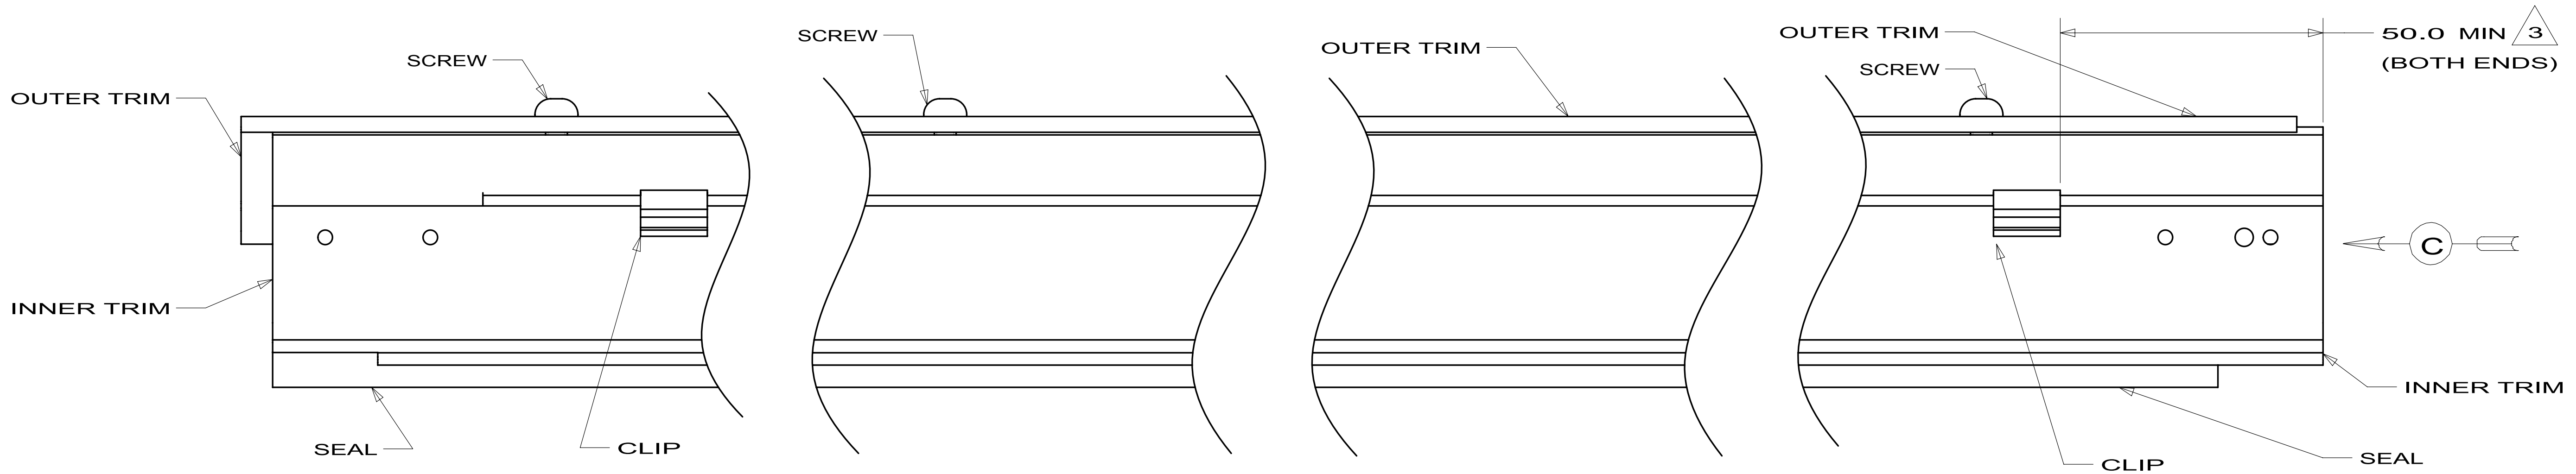


FIRST USED		
FABWELL SDW		
DO NOT SCALE DRAWING		
TITLE: TRIM ASM-SLIDEOUT,SIDE		
SHEET 2	PART NO 156194	REV

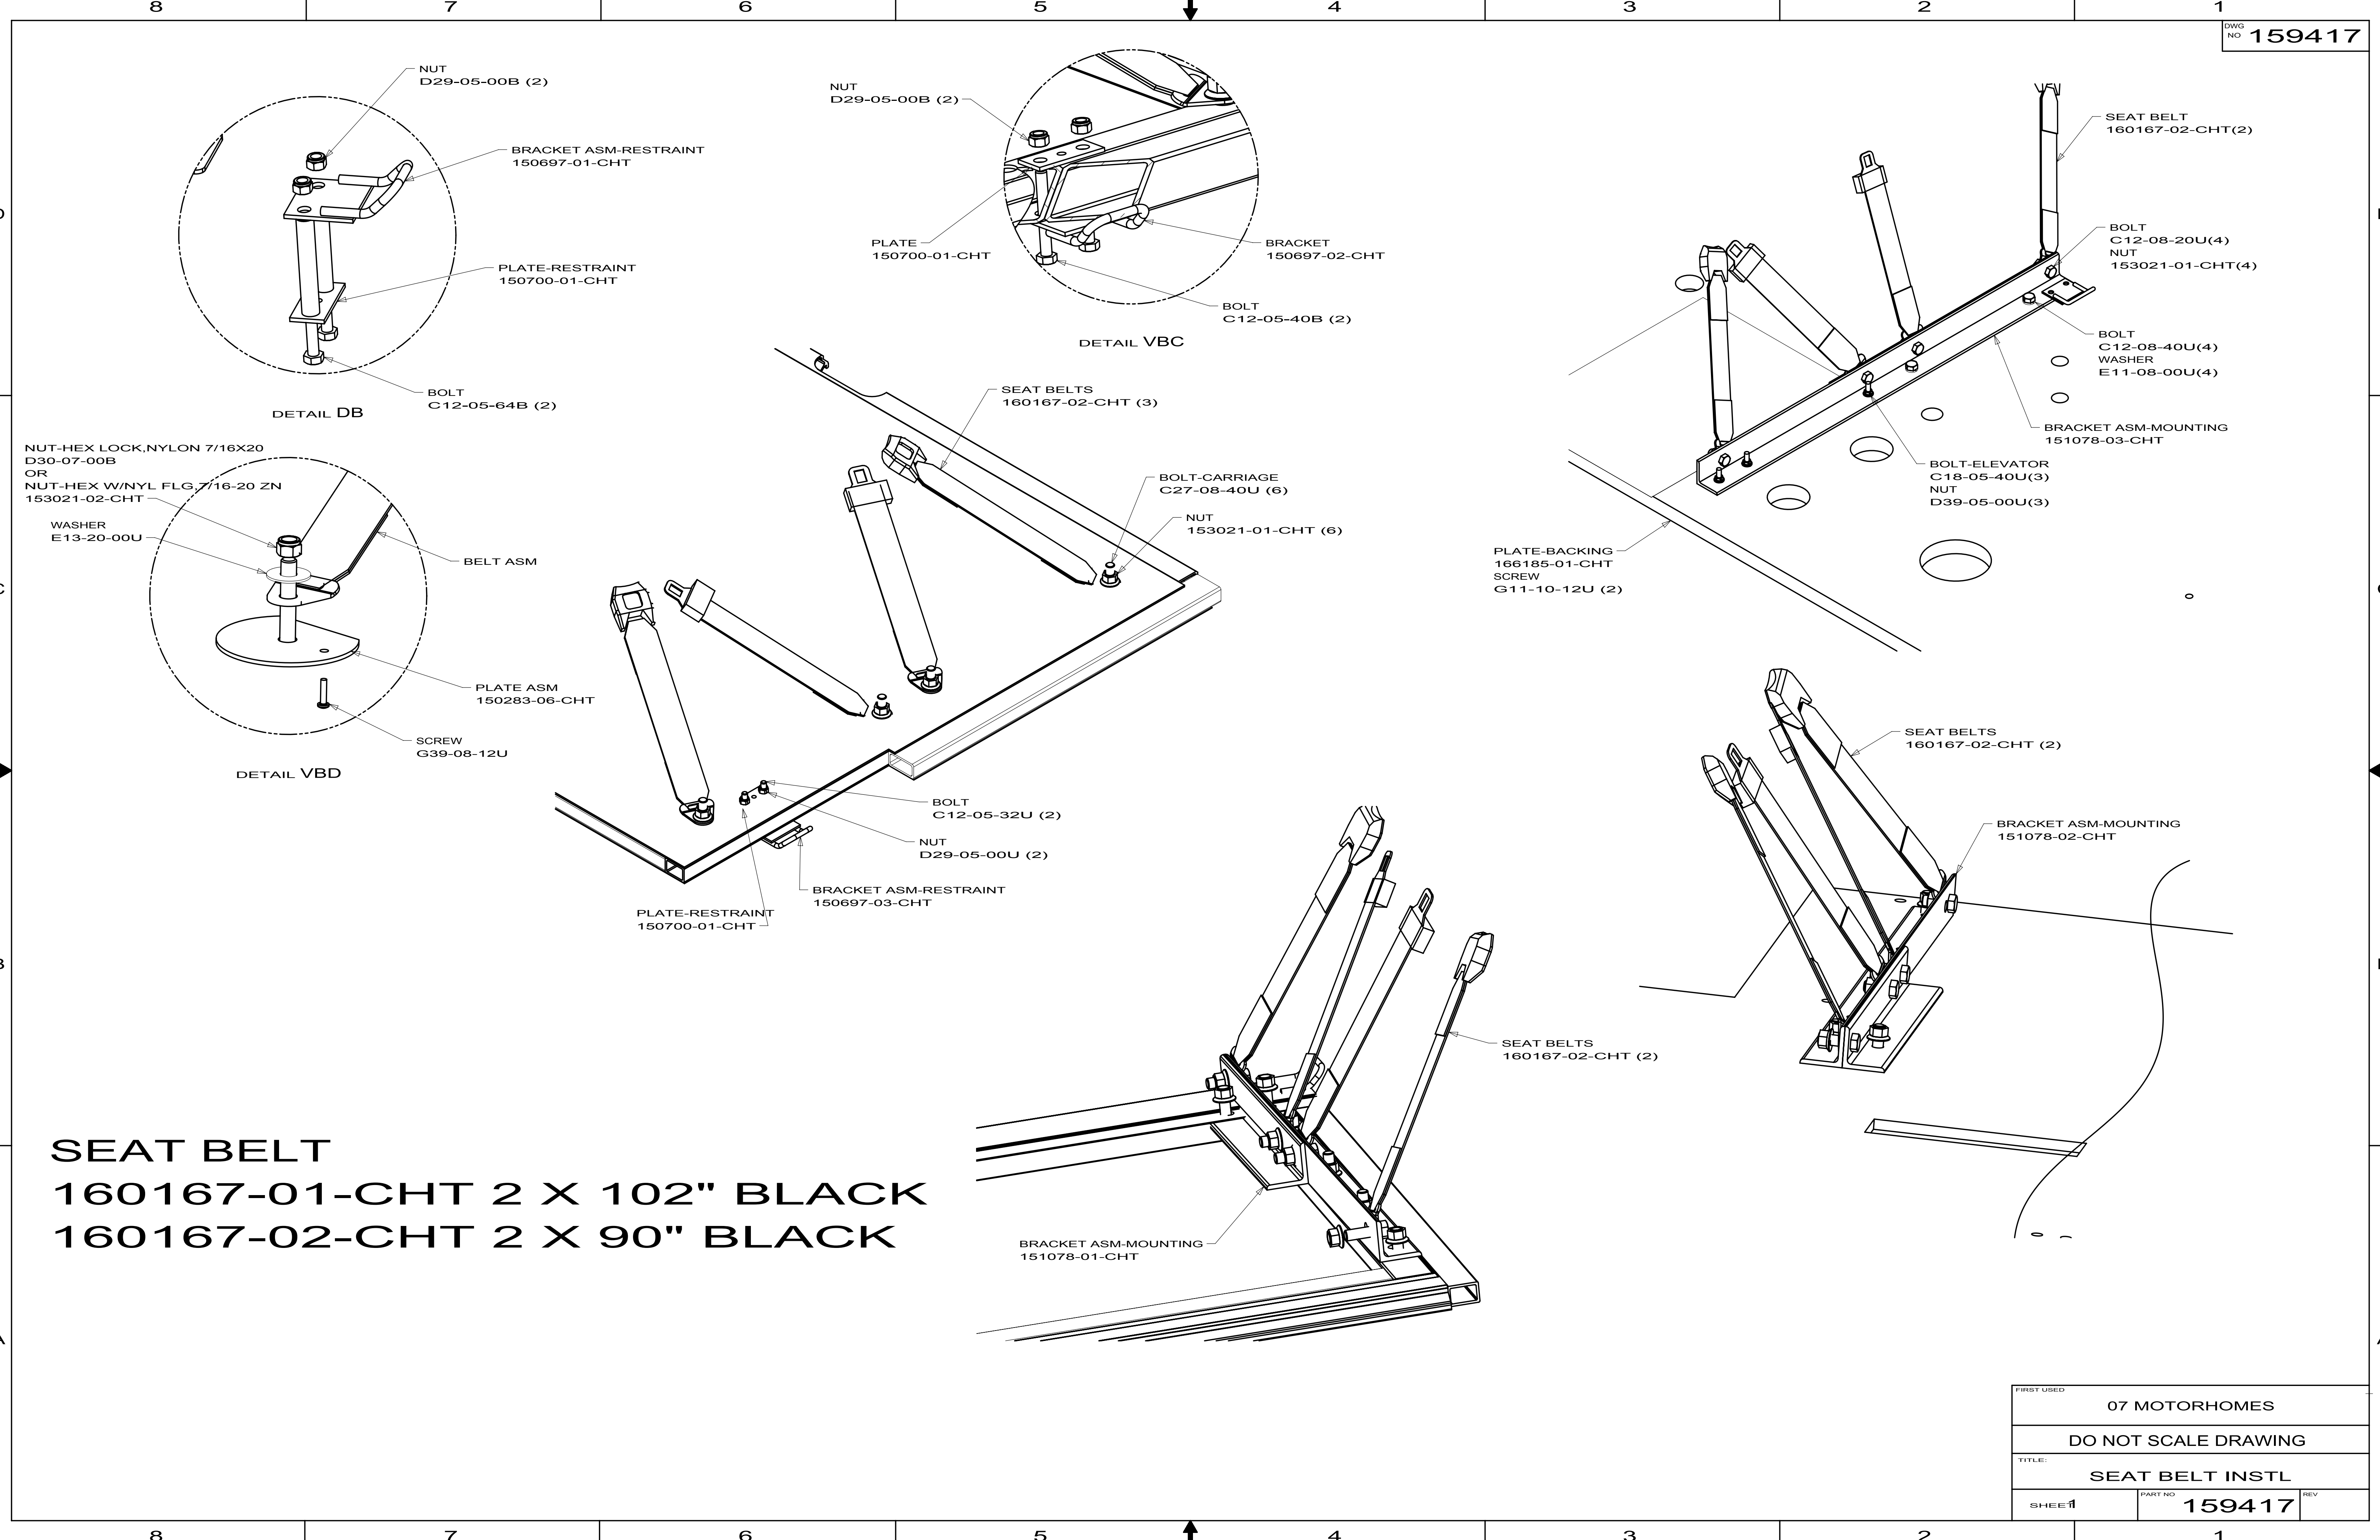


FIRST USED		
07 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
SEAT BELT INSTL		
SHEET 1	PART NO 159417	REV

KEY	PART NUMBER	U/M DESCRIPTION	161743-02-000 VENDOR NO.
	161743-02-700	EA TUBE/FLUID RETURN 1/4" X 36"	RAP90658

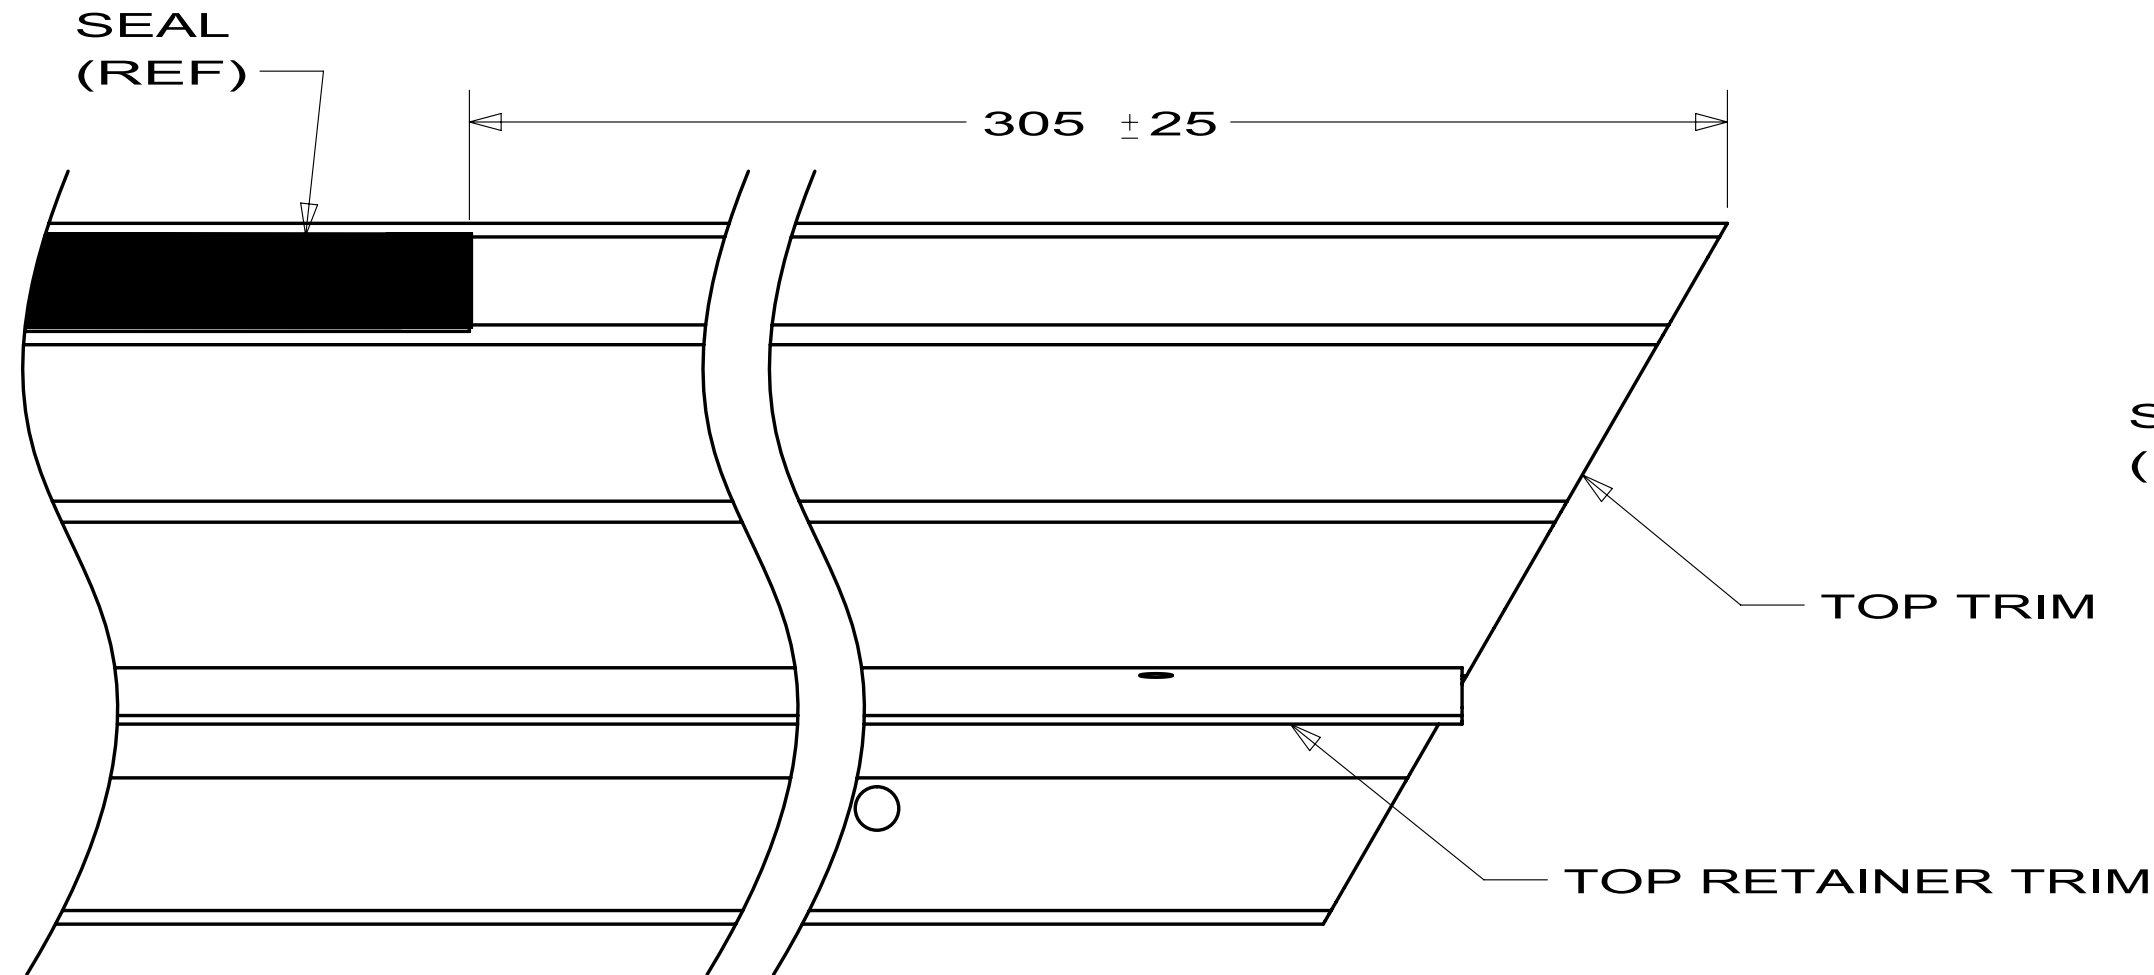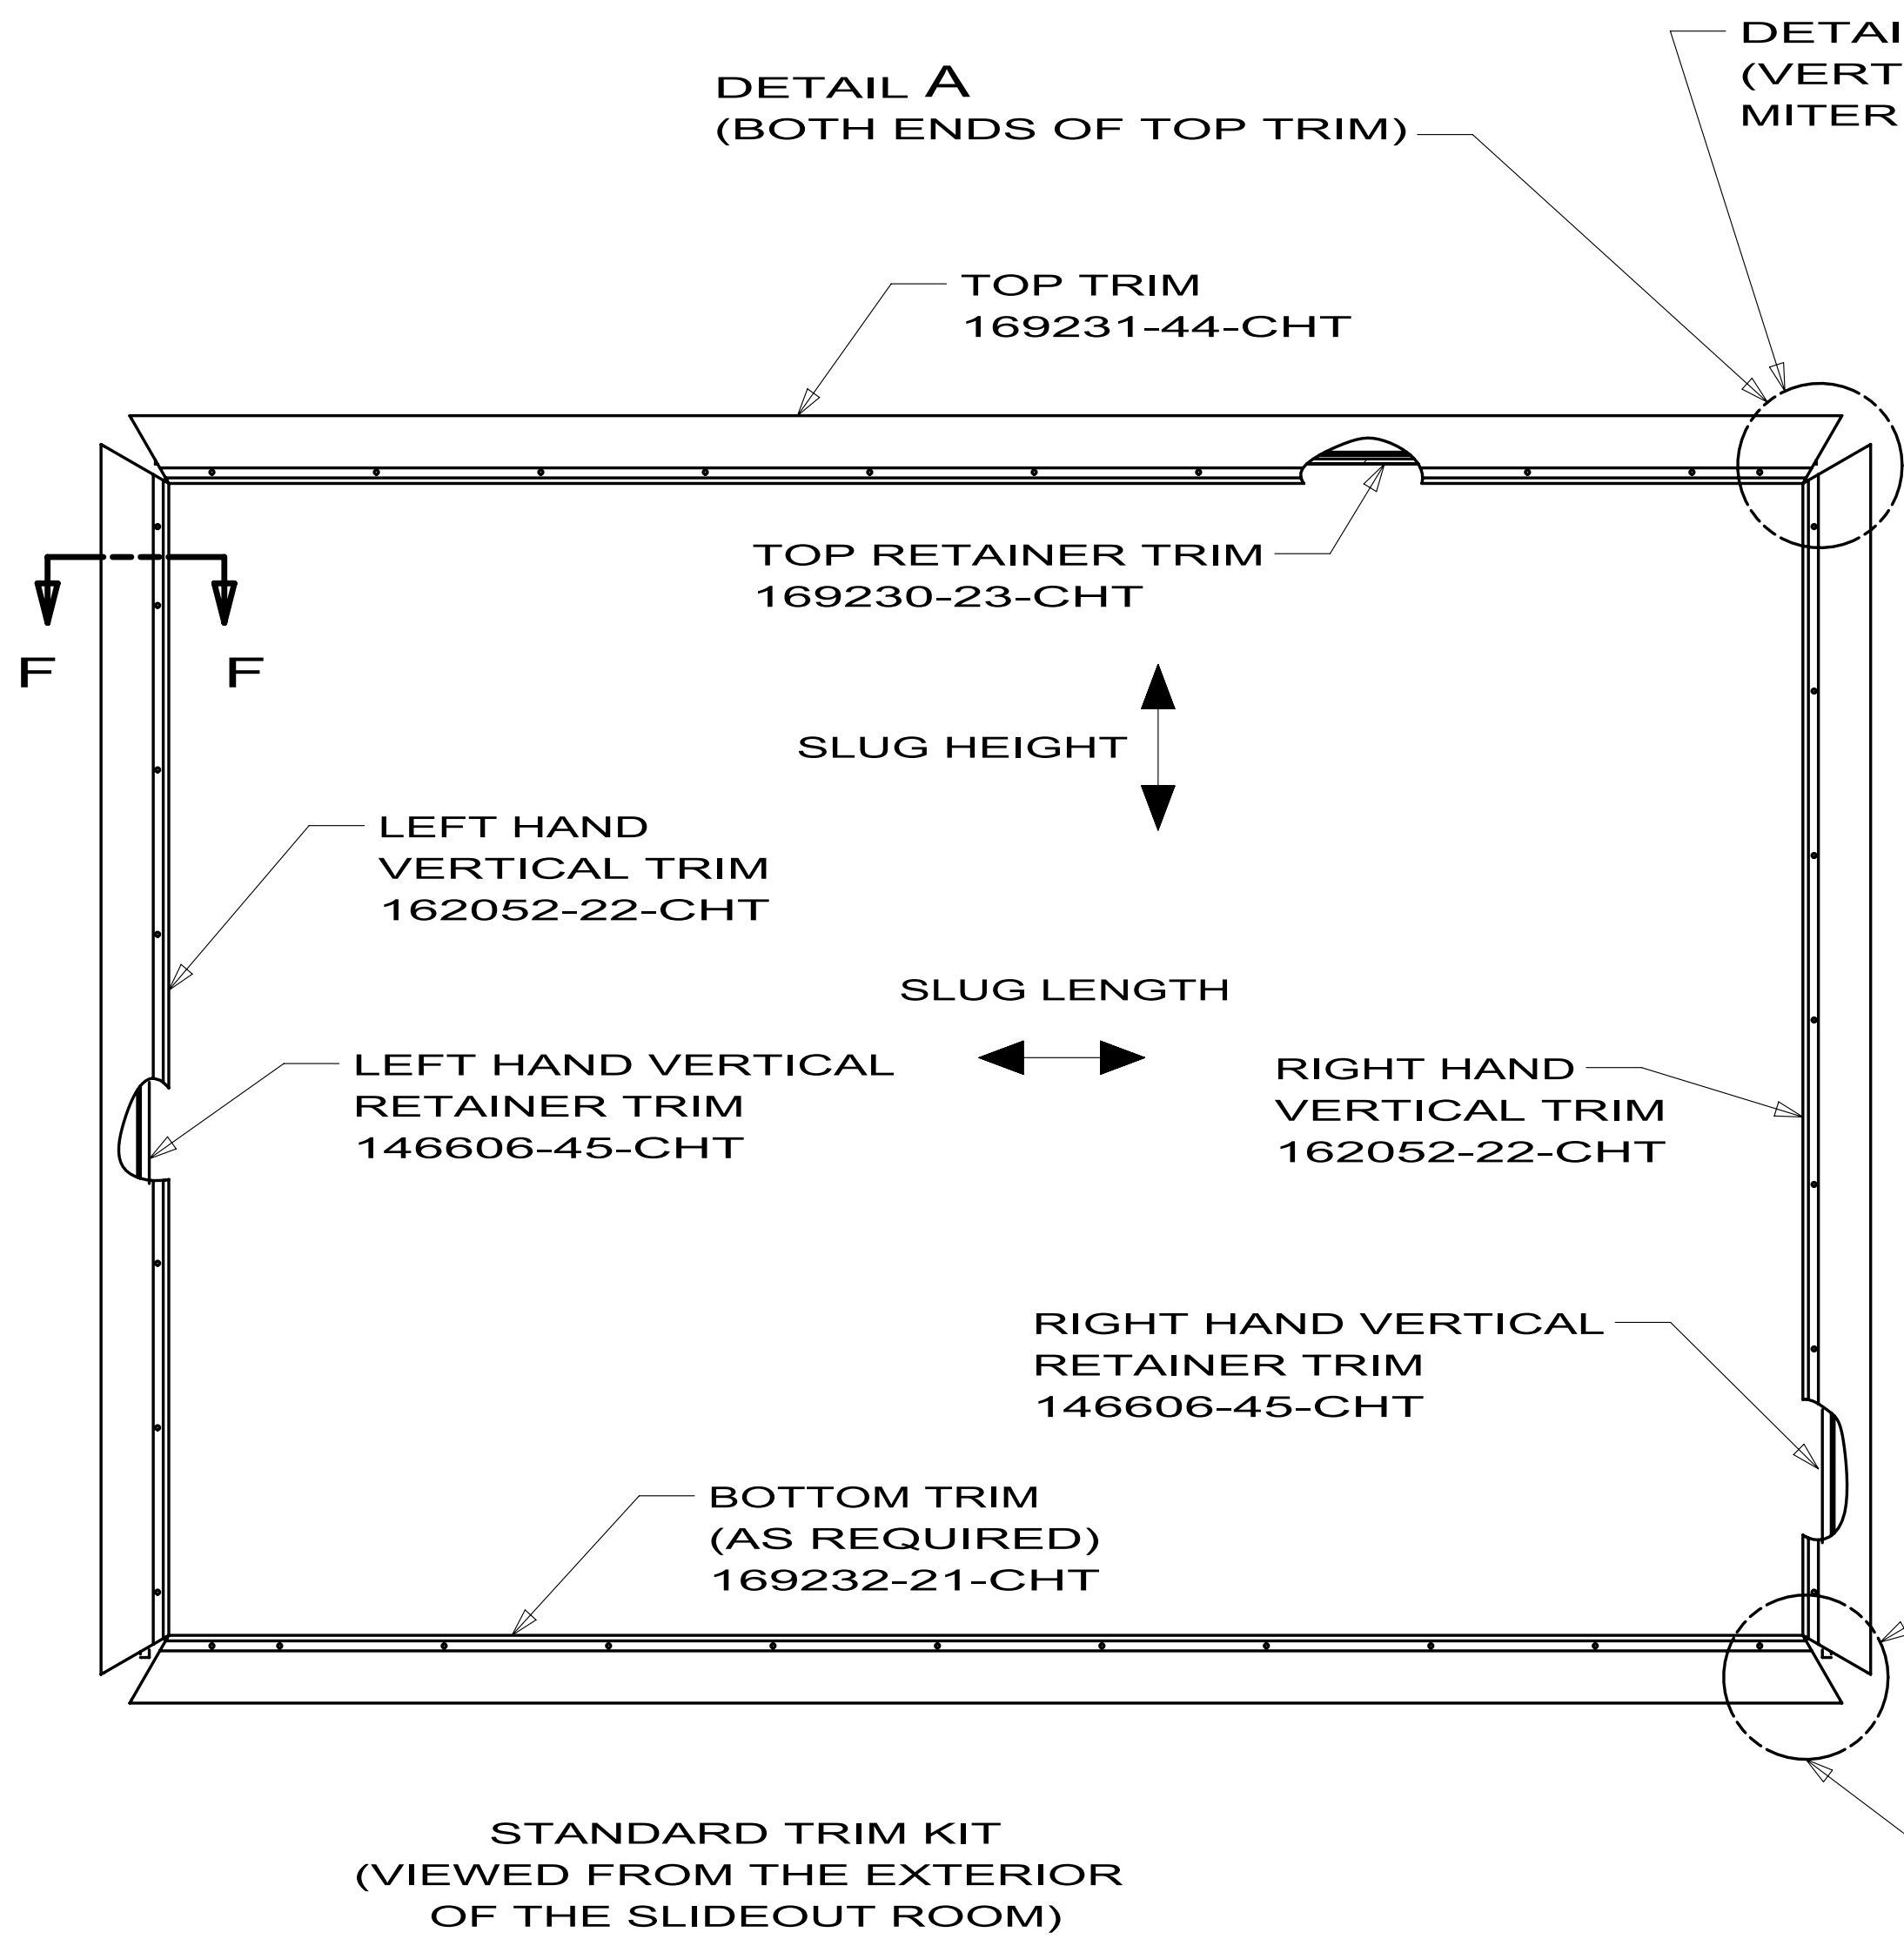

DETAIL A
(TOP TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

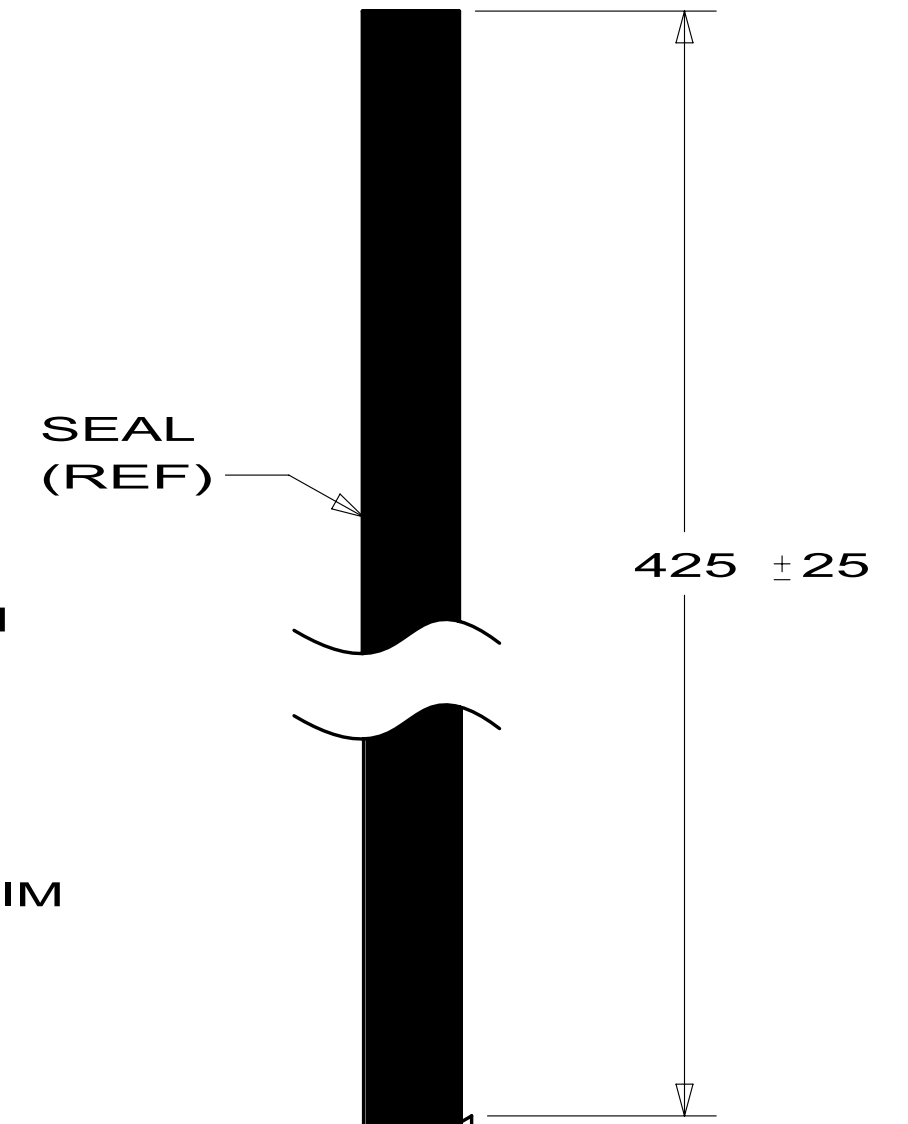

DETAIL B
(ALL MITER CUT VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)


VERTICAL RETAINER TRIM

VERTICAL RETAINER TRIM


VERTICAL TRIM

SEAL
(REF)



DETAIL C
(ALL STRAIGHT CUT VERTICAL TRIM)
(VIEWED FROM THE BACKSIDE OF THE TRIM)

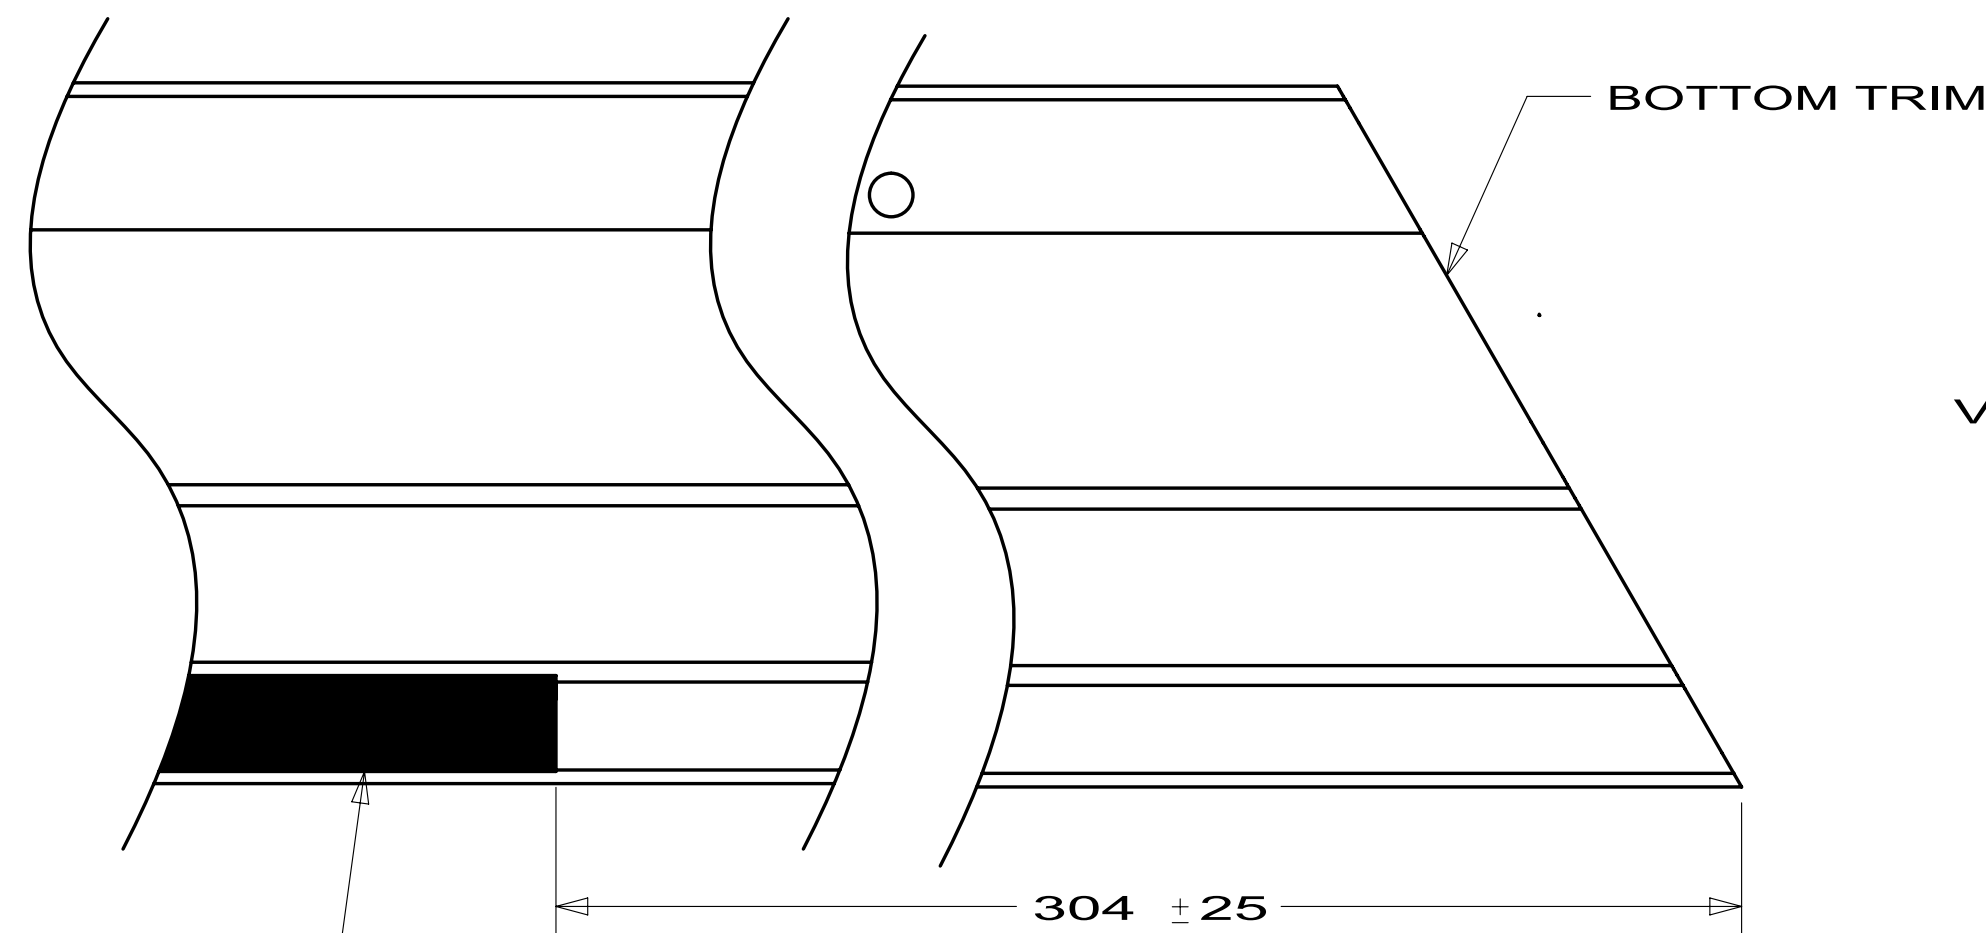

DETAIL D
(BOTTOM TRIM)
VIEWED FROM THE BACKSIDE OF THE TRIM

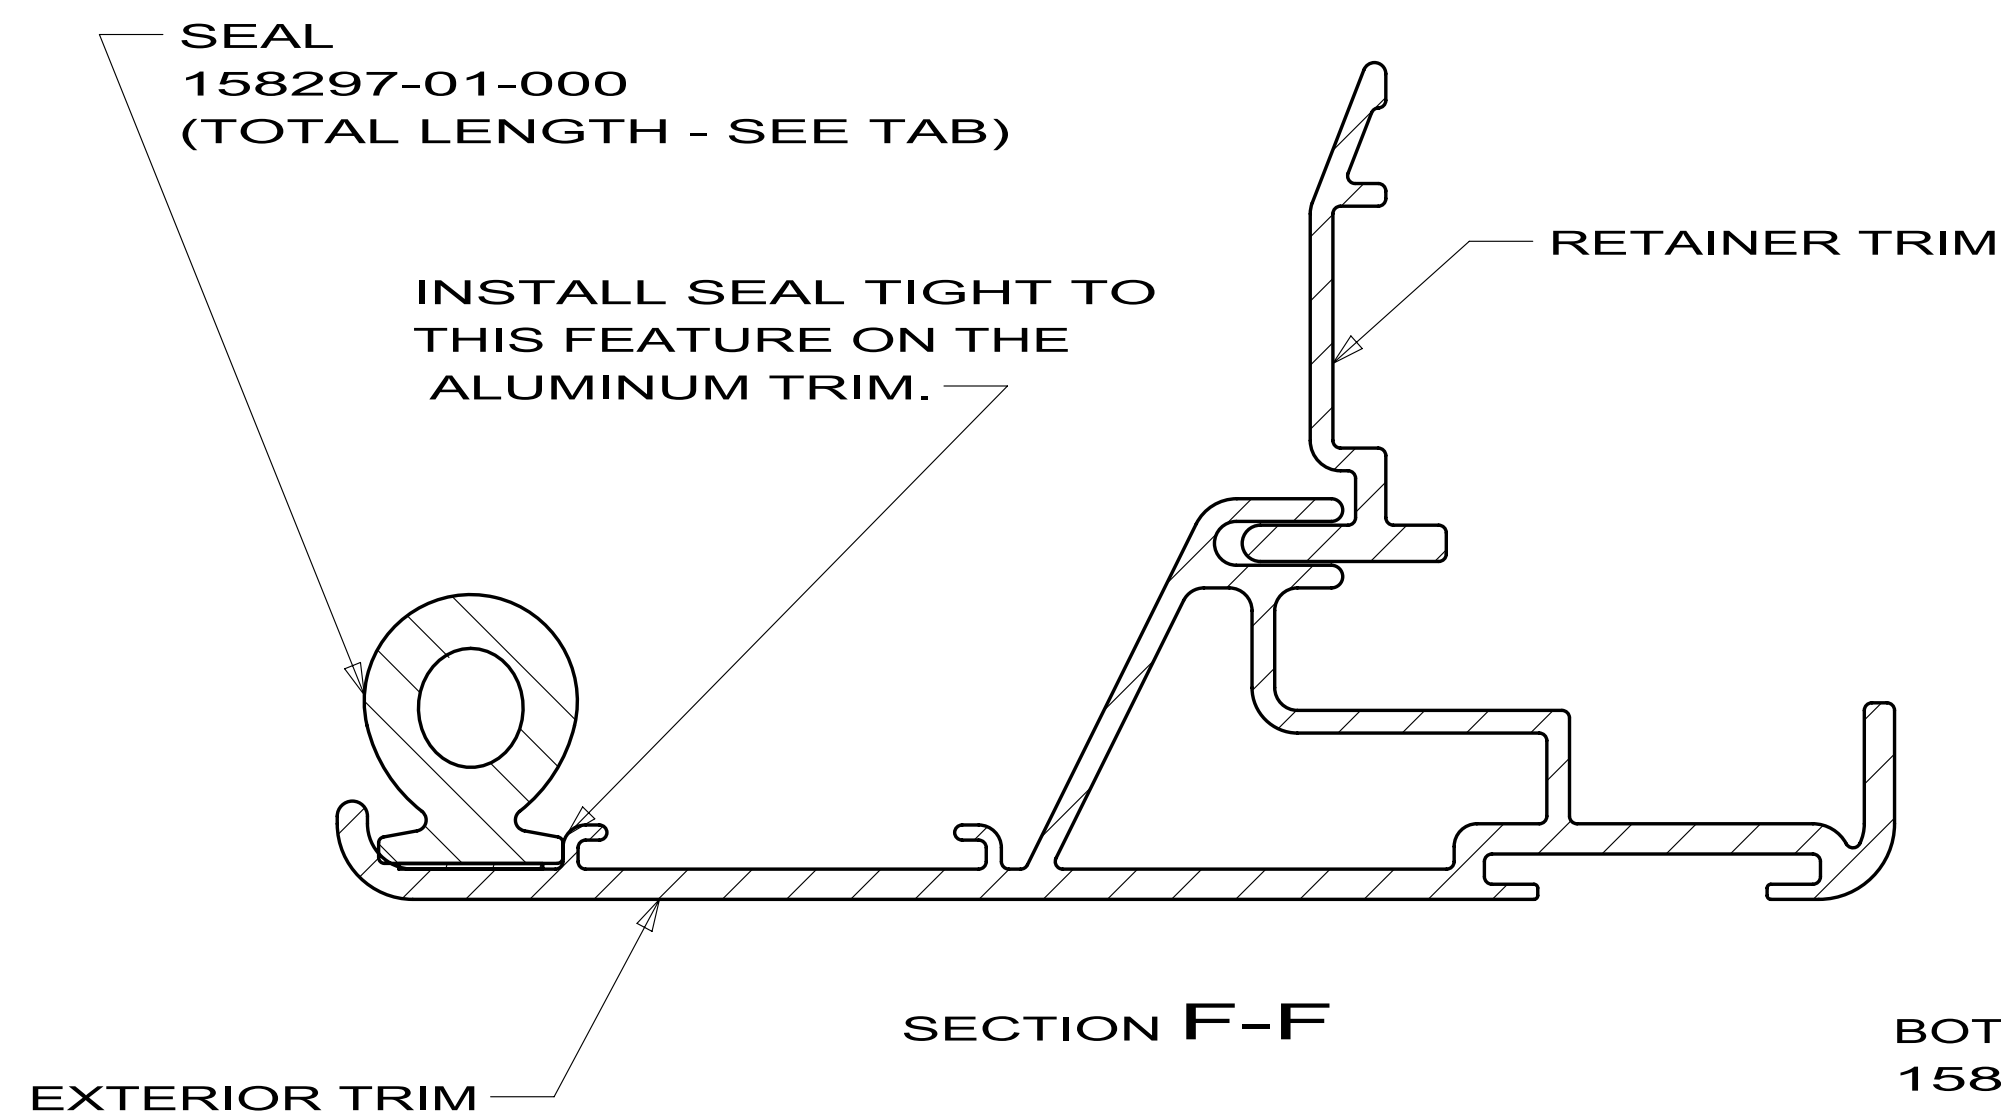

FIRST USED		2010 MOTORHOMES	
DO NOT SCALE DRAWING			
TITLE: TRIM KIT-EXTERIOR,SLIDEOUT			
SHEET 1	PART NO	169233	REV

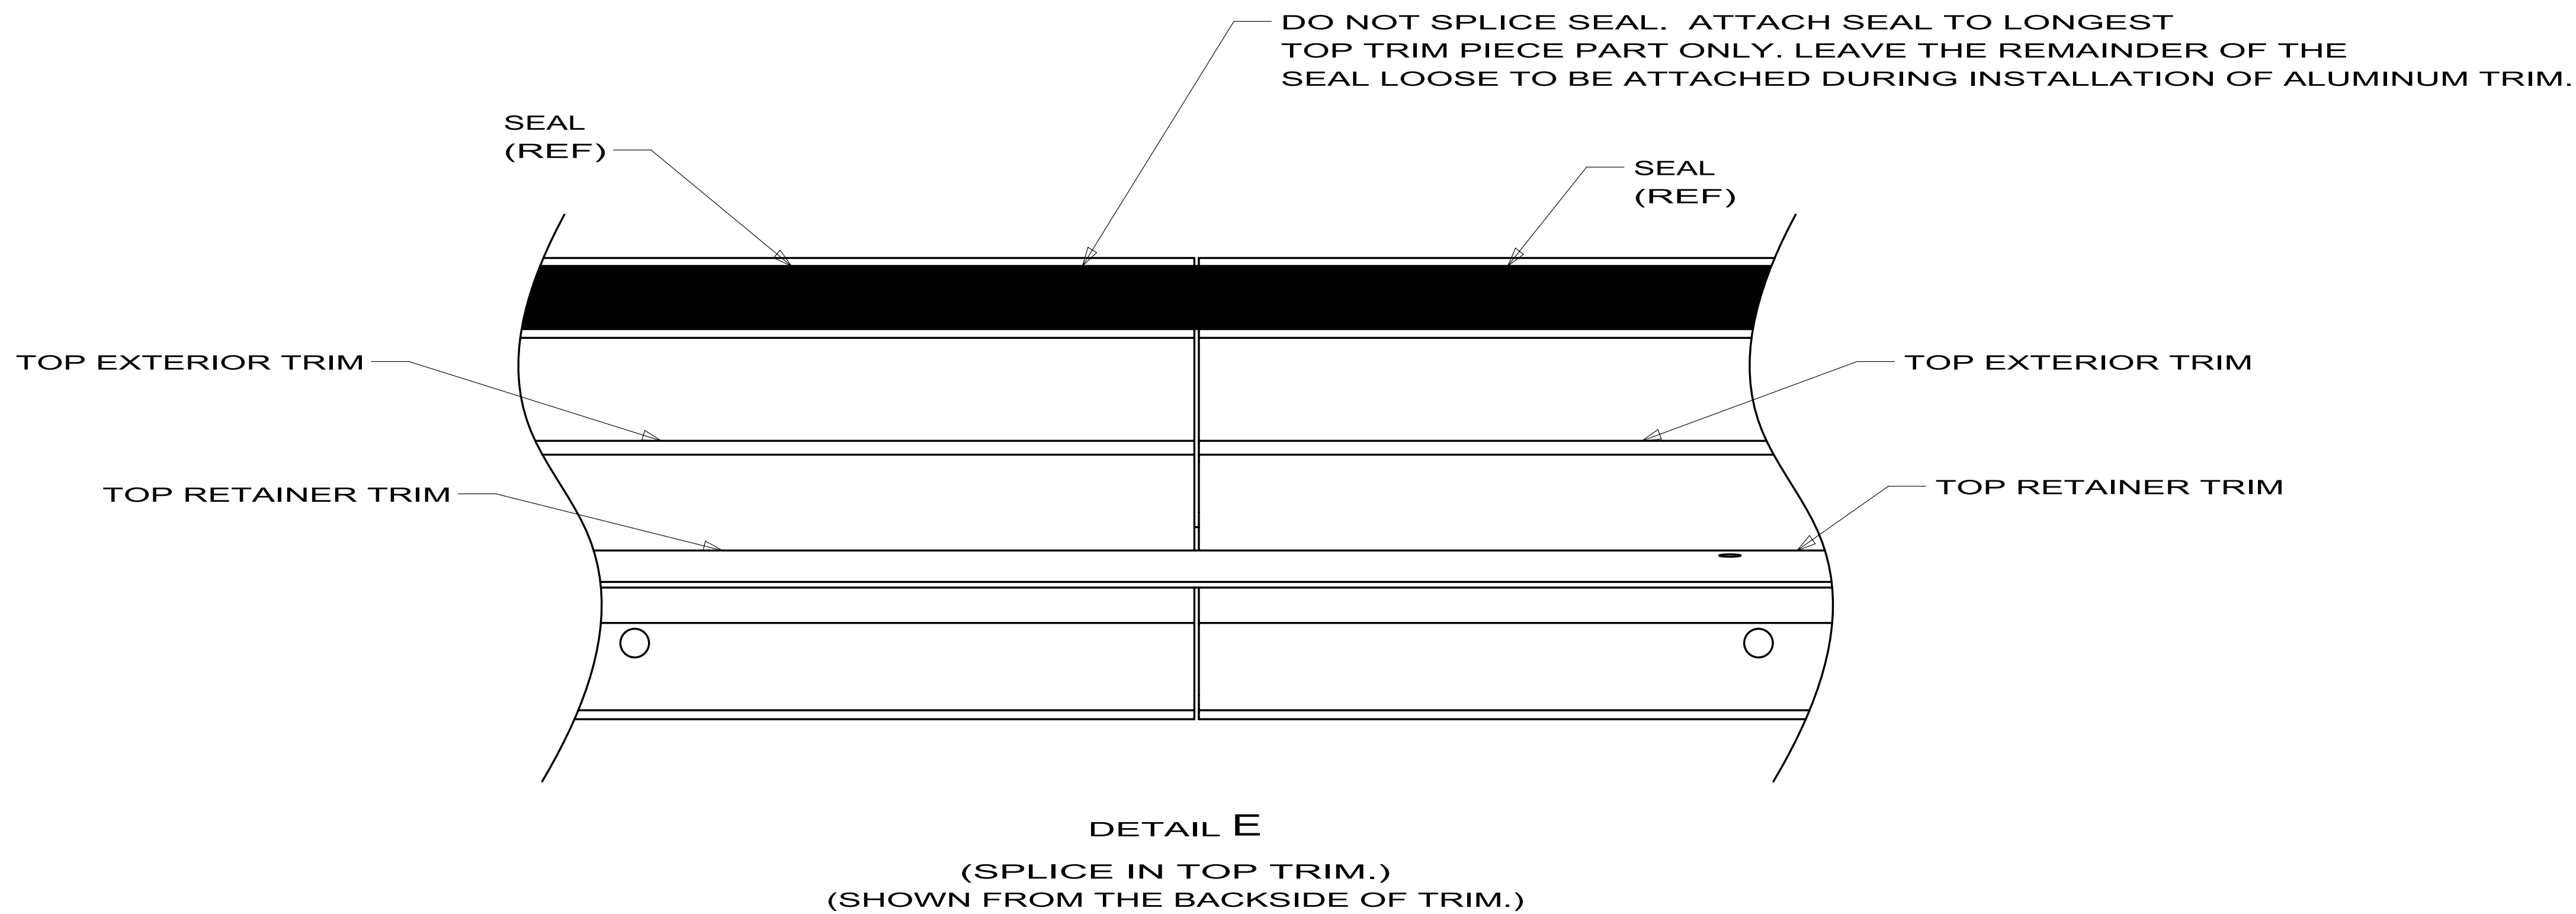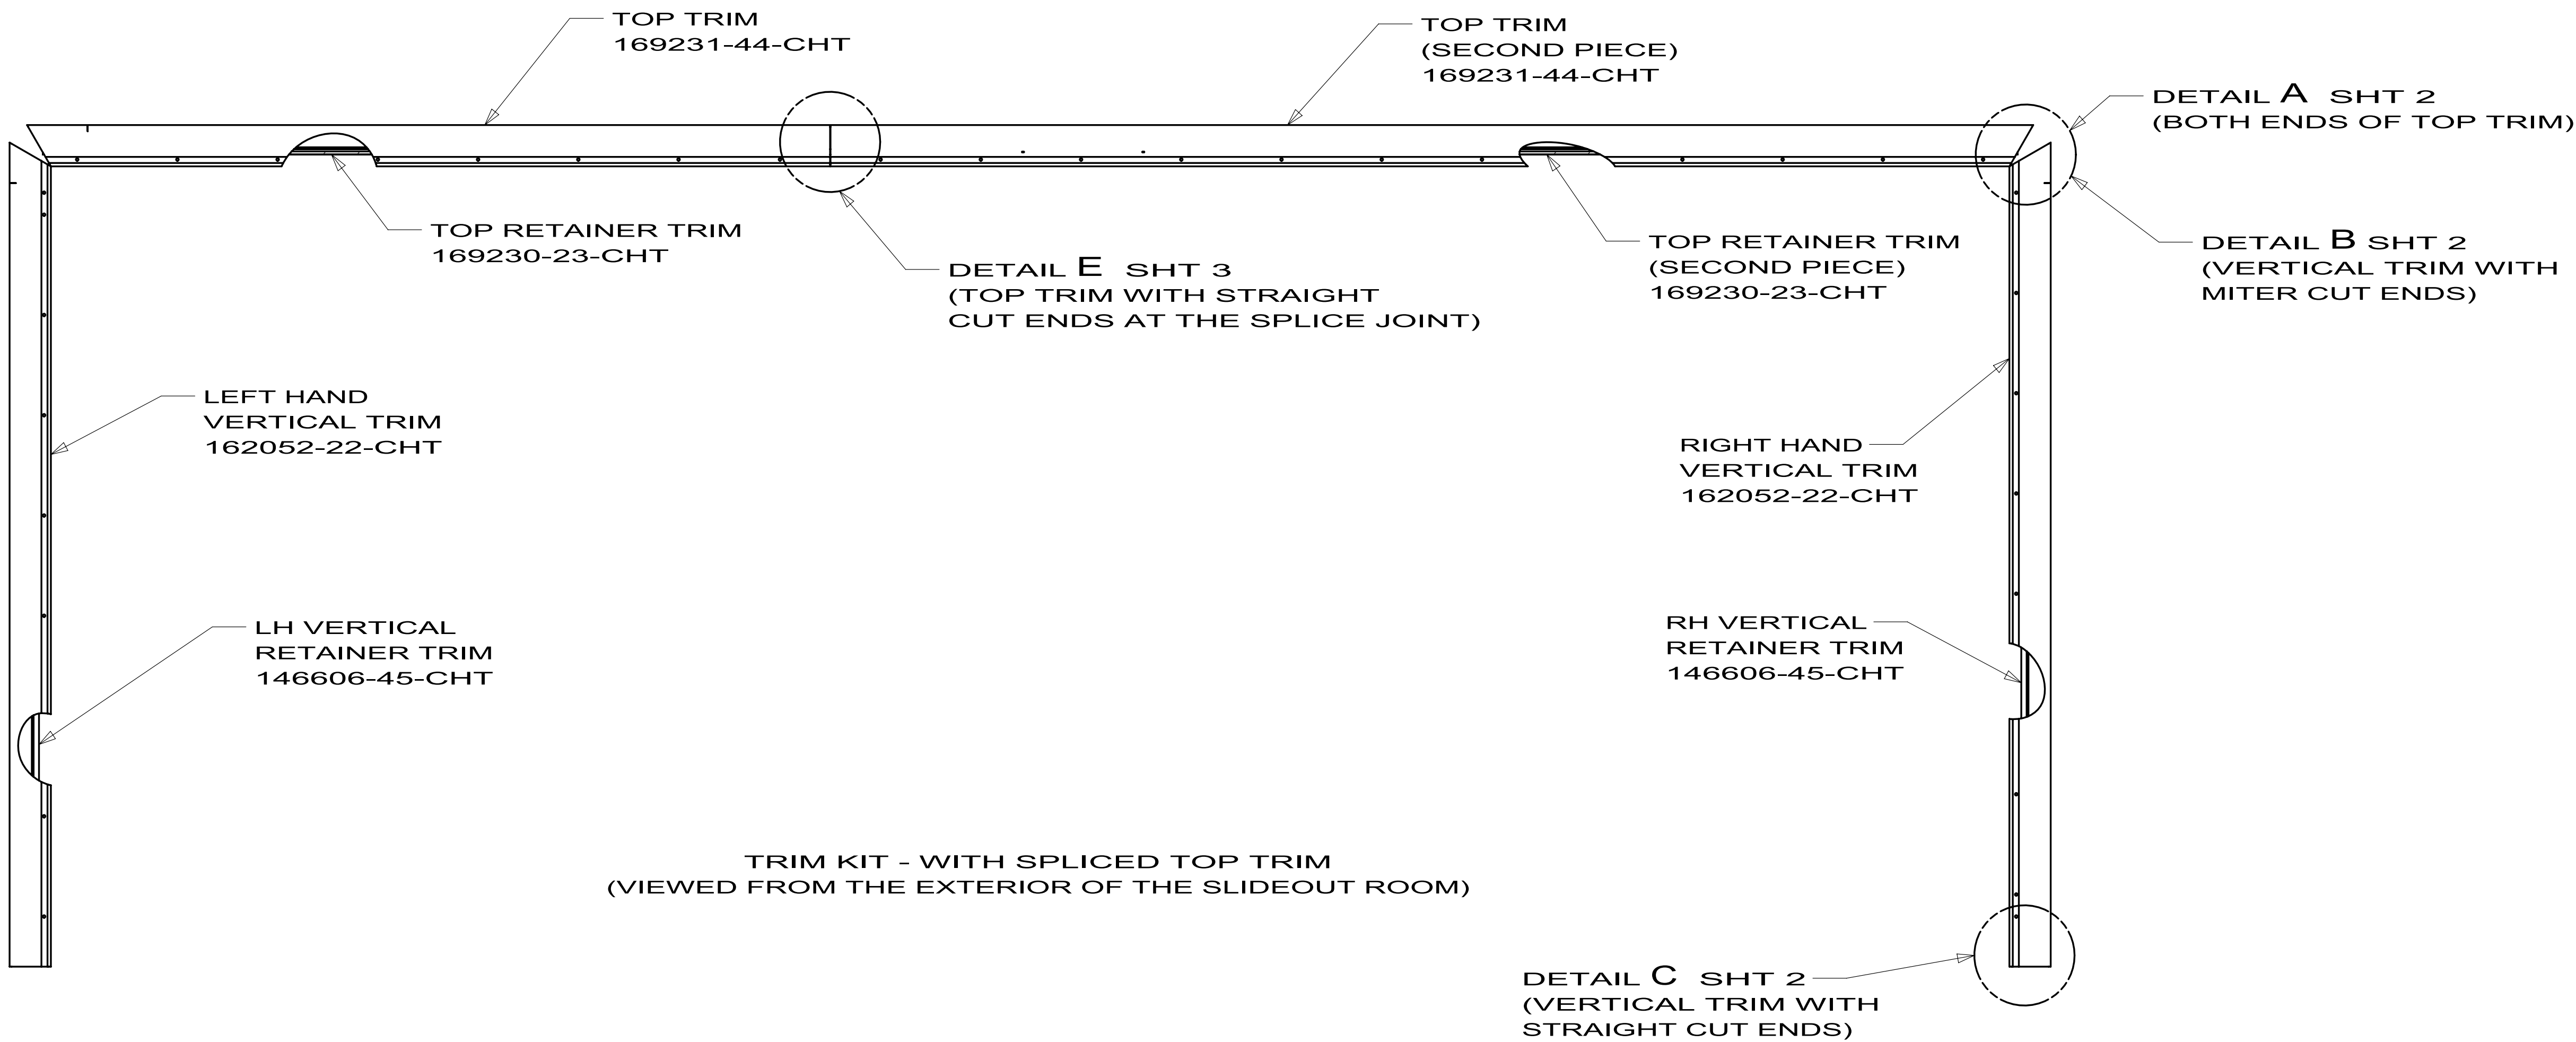

FIRST USED		
2010 MOTORHOMES		
DO NOT SCALE DRAWING		
TITLE:		
TRIM KIT-EXTERIOR,SLIDEOUT		
SHEET 4	PART NO 169233	REV

D

C

B



A

D

C

B

A

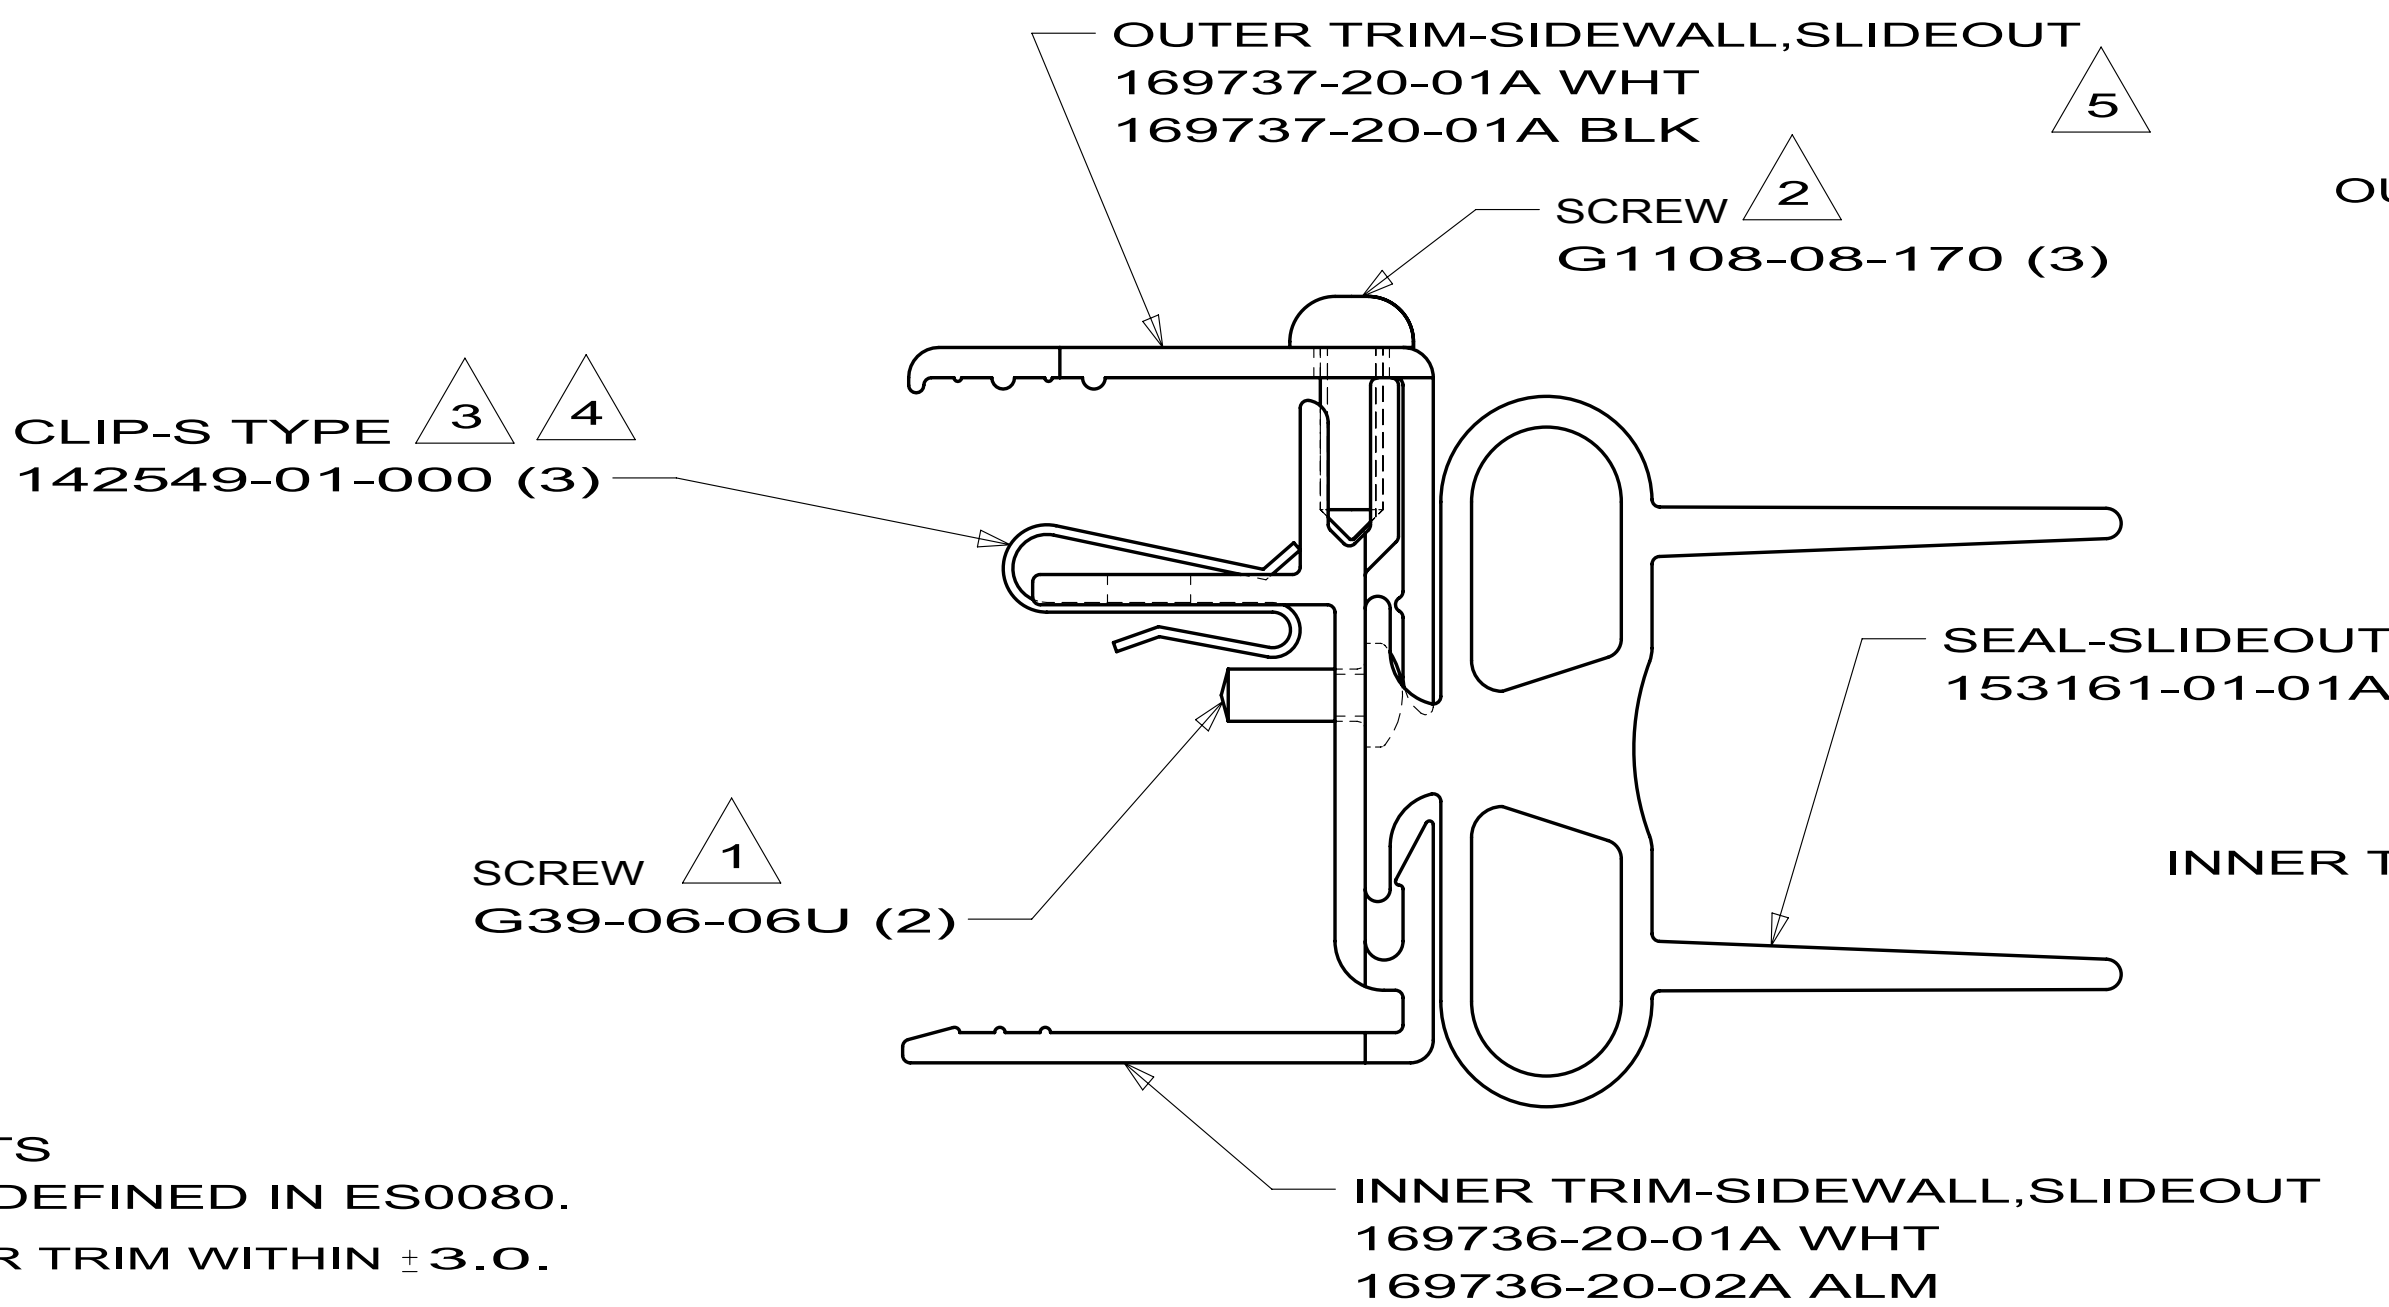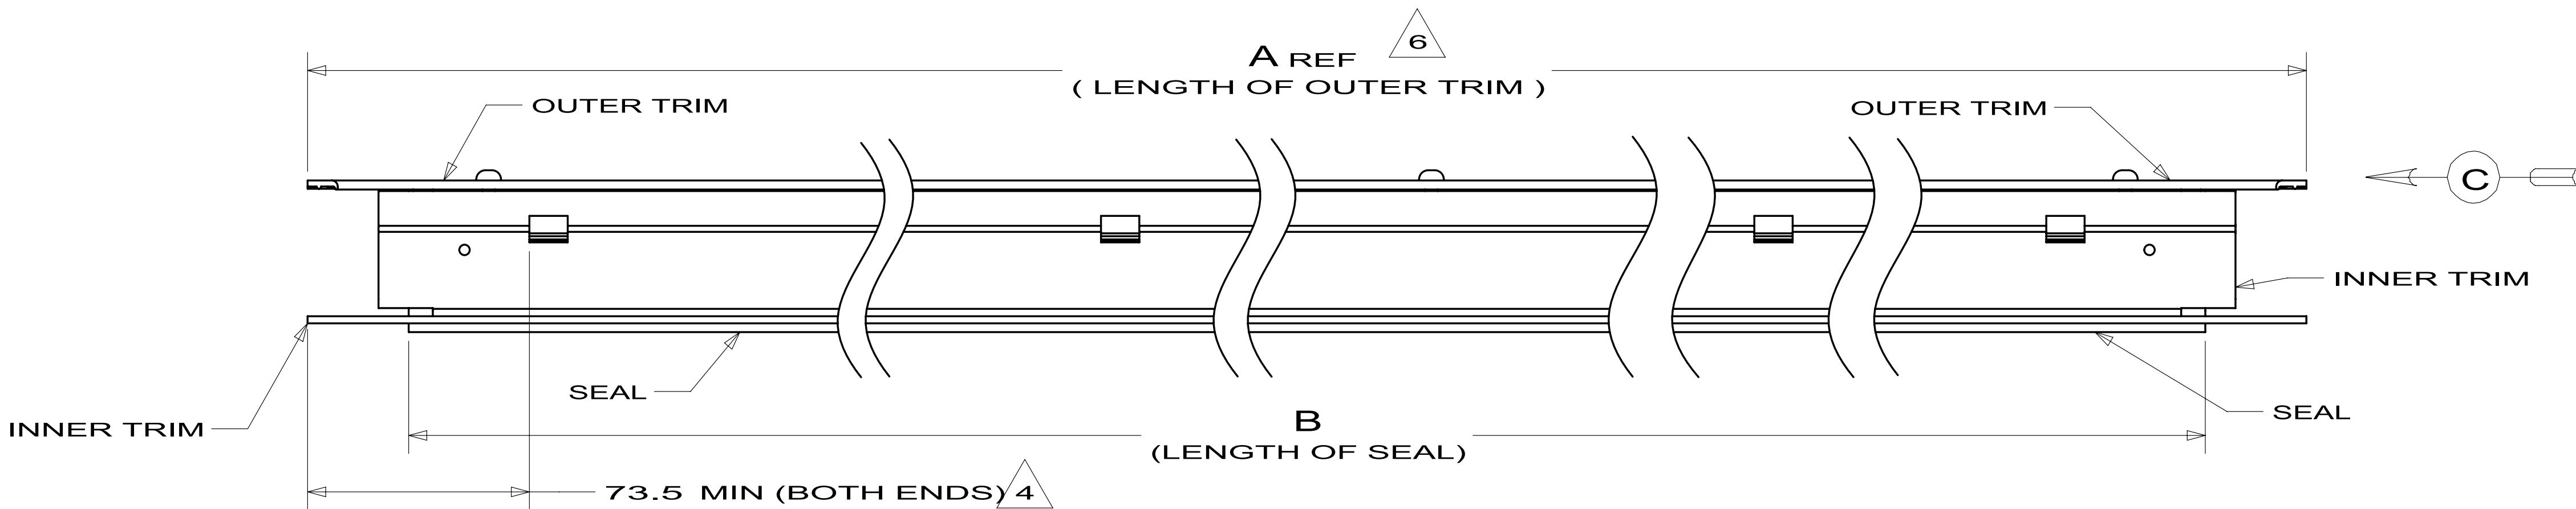

VIEW C

- NOTES:
- 6 LENGTHS SHOULD BE IN 150 mm INCREMENTS PER STANDARD SLIDEOUT ROOM LENGTHS DEFINED IN ES0080.
 - 5 OUTER TRIM MUST BE CENTERED ON THE INNER TRIM WITHIN ± 3.0 .
 - 4 TOLERANCE ON THE CLIP SPACING IS ± 100.0 MM.
 - 3 LOCATE CLIPS AT EACH END AND SPACED EQUALLY ALONG THE INNER TRIM.
 - 2 APPLY SCREWS AT EACH END AND ONE IN THE MIDDLE OF THE OUTER TRIM.
 - 1 APPLY SCREW THROUGH SEAL SO THAT IT HOLDS THE SEAL IN PLACE ON THE INNER TRIM.

COPYRIGHT 2009
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHK-OR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	10 SLIDEOUTS
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	±
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	±
ANGLE	±
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
TITLE: TRIM ASM-SLIDEOUT, TOP, DBL WIPE	
SHEET 1 OF 1	PART NO 169735